



FCC PART 15 SUBPART B TEST REPORT

FCC PART 15B

Report Reference No.: WE09010004

Compiled by

(position+printed name+signature): File administrators Tracy Qi

Supervised by

(position+printed name+signature): Test Engineer Tracy Qi

Approved by

(position+printed name+signature): Manager Jimmy Li

Date of issue: Feb 12, 2009

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name : Ansen Electronics Company

Address: ROOM 73-78,2/F.,SINO INDUSTRIAL PLAZA,9 KAI CHEUNG ROAD,KOWLOON BAY,KOWLOON,HONG KONG

Test specification:

Standard : FCC Part 15B- Unintentional Radiators

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : 7-DAY WIRELESS WEATHER FORECASTER

Trade Mark : /

Model/Type reference: 960900C

Listed Models :

Result: Positive

T E S T R E P O R T

Test Report No. : WE09010004	Feb 12, 2009 Date of issue
--	-------------------------------

Equipment under Test : 7-DAY WIRELESS WEATHER FORECASTER

Model /Type : 960900C

Listed Models :

Applicant : Ansen Electronics Company

Address : ROOM 73-78,2/F.,SINO INDUSTRIAL PLAZA,9 KAI
CHEUNG ROAD,KOWLOON BAY,KOWLOON,HONG
KONG

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Configuration of Tested System	8
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	9
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1.	Conducted Emissions Test	10
4.2.	Radiated Emission Test	13
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>19</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>20</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart B - Unintentional Radiators](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Jan 12, 2009

Testing commenced on : Jan 16, 2009

Testing concluded on : Feb 12, 2009

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : o 120V / 60 Hz o 115V / 60Hz
 o 12 V DC o 24 V DC
 ● Other (specified in blank below)

DC 6V from Adapter

2.3. Short description of the Equipment under Test (EUT)

7-DAY WIRELESS WEATHER FORECASTER

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

o - supplied by the manufacturer

o - supplied by the lab

o Power Cable	Length (m) : /
	Shield : /
	Detachable : /
o Multimeter	Manufacturer : /
	Model No. : /

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **L5C960900C** filing to comply with the FCC Part 15, Subpart B Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: August 02, 2007. Valid time is until March 04, 2009.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is from Aug 24, 2005 to Sept 30, 2009.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date September, 2009.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Renewal No. 5377A on Feb 13, 2009.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the Authorization is valid through April 25, 2009.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

IECEE CB

Shenzhen Huatongwei International Inspection Co Ltd has been assessed and determined to fully comply with the requirements of ISO/IEC 17025: 2005-05, The Basic Rules, IECEE 01: 2006-10 and Rules of Procedure IECEE 02: 2006-10, and the relevant IECEE CB-Scheme Operational Documents. It is therefore entitled to operate as a CB Testing Laboratory under the responsibility of Nemko A/S. This certificate remains valid until May 25th 2009 at which time it will be reissued by the IECEE Executive Secretary upon successful completion of the normally scheduled 3-year Reassessment Program administered by the IECEE CB Scheme.

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until 09 July, 2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	Serial No.	

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~12.75GHz	4.35dB	(1)
Conducted Disturbance	0.15~30MHz	3.29dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test


AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100106	2008/11
2	ARTIFICIAL MAINS	ROHDE & SCHWARZ	ESH2-Z5	100028	2008/11
3	PULSE LIMITER	ROHDE & SCHWARZ	ESHSZ2	100044	2008/11
4	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ES-K1 1.71	N/A	2008/11

Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2008/11
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2008/11
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2008/11
4	TURNTABLE	ETS	2088	2149	2008/11
5	ANTENNA MAST	ETS	2075	2346	2008/11
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2008/11

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

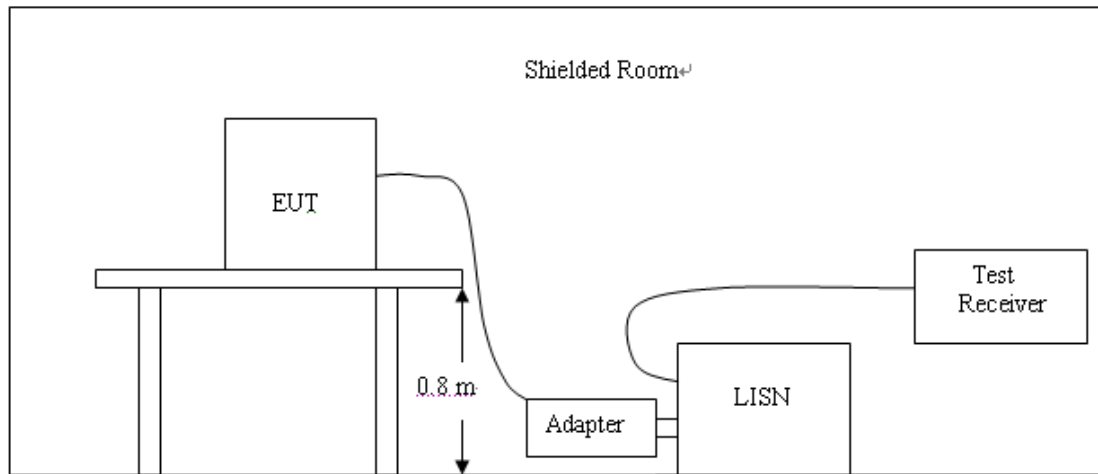

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC6V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :


Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

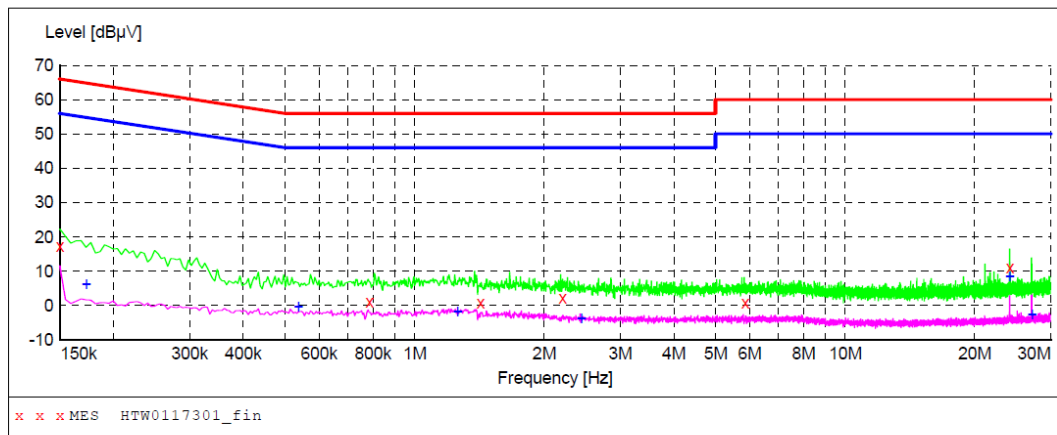**MEASUREMENT RESULT: "HTW0117301_fin"**

1/16/2009 11:34PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	17.20	10.6	66	48.8	QP	L1	GND
0.784500	1.20	10.5	56	54.8	QP	L1	GND
1.423500	0.70	10.6	56	55.3	QP	L1	GND
2.206500	2.10	10.7	56	53.9	QP	L1	GND
5.865000	0.90	10.7	60	59.1	QP	L1	GND
24.135000	11.10	11.3	60	48.9	QP	L1	GND


MEASUREMENT RESULT: "HTW0117301_fin2"

1/16/2009 11:34PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	6.20	10.6	55	48.6	AV	L1	GND
0.537000	-0.40	10.5	46	46.4	AV	L1	GND
1.257000	-1.70	10.6	46	47.7	AV	L1	GND
2.440500	-3.70	10.7	46	49.7	AV	L1	GND
24.135000	8.60	11.3	50	41.4	AV	L1	GND
27.154500	-2.60	11.4	50	52.6	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

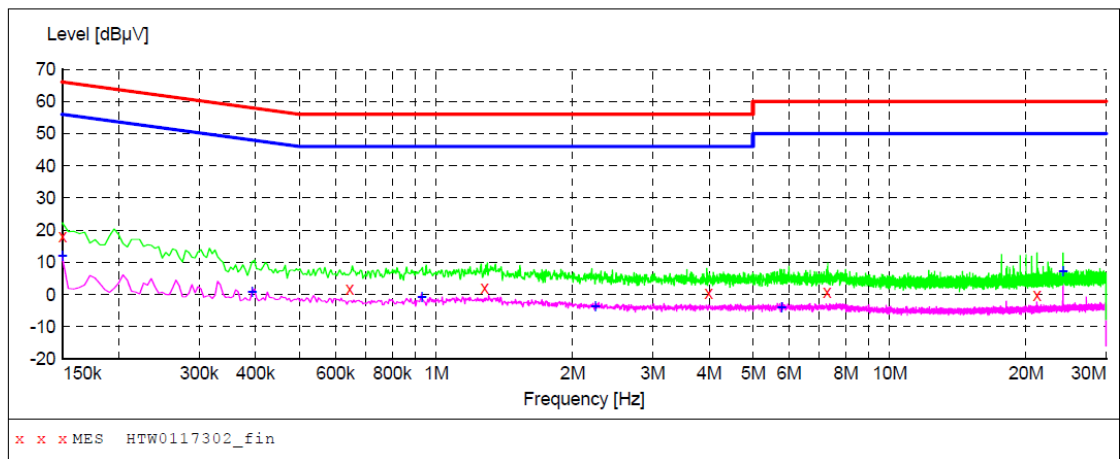**MEASUREMENT RESULT: "HTW0117302_fin"**

1/16/2009 11:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	18.20	10.6	66	47.8	QP	N	GND
0.645000	1.60	10.5	56	54.4	QP	N	GND
1.279500	2.00	10.6	56	54.0	QP	N	GND
3.988500	0.60	10.7	56	55.4	QP	N	GND
7.282500	0.80	10.8	60	59.2	QP	N	GND
21.156000	-0.10	11.2	60	60.1	QP	N	GND

MEASUREMENT RESULT: "HTW0117302_fin2"


1/16/2009 11:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	11.90	10.6	56	44.1	AV	N	GND
0.393000	0.90	10.6	48	47.1	AV	N	GND
0.928500	-0.70	10.6	46	46.7	AV	N	GND
2.242500	-3.70	10.7	46	49.7	AV	N	GND
5.775000	-4.10	10.7	50	54.1	AV	N	GND
24.135000	7.10	11.3	50	42.9	AV	N	GND


4.2. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

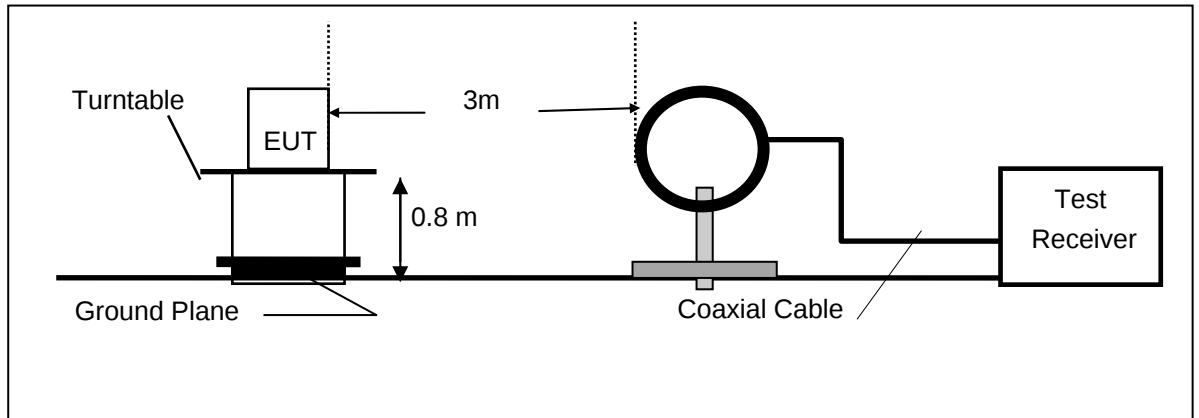

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

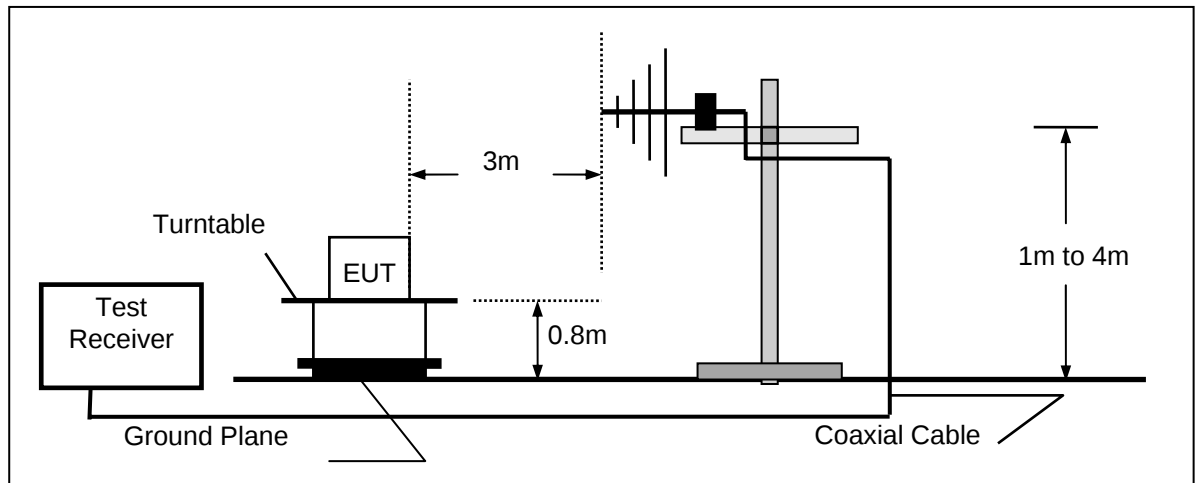

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

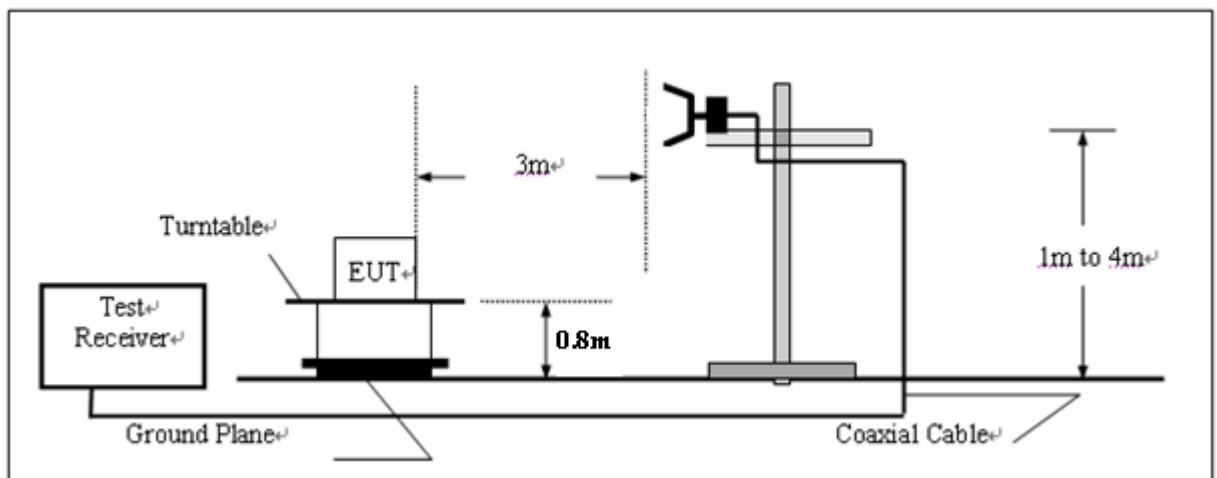

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS


Operation Mode: Normal Operation

Temperature: 20 °C Humidity: 70 % RH

Polarity: Ver. / Hor.


SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	120 kHz	HL562 08

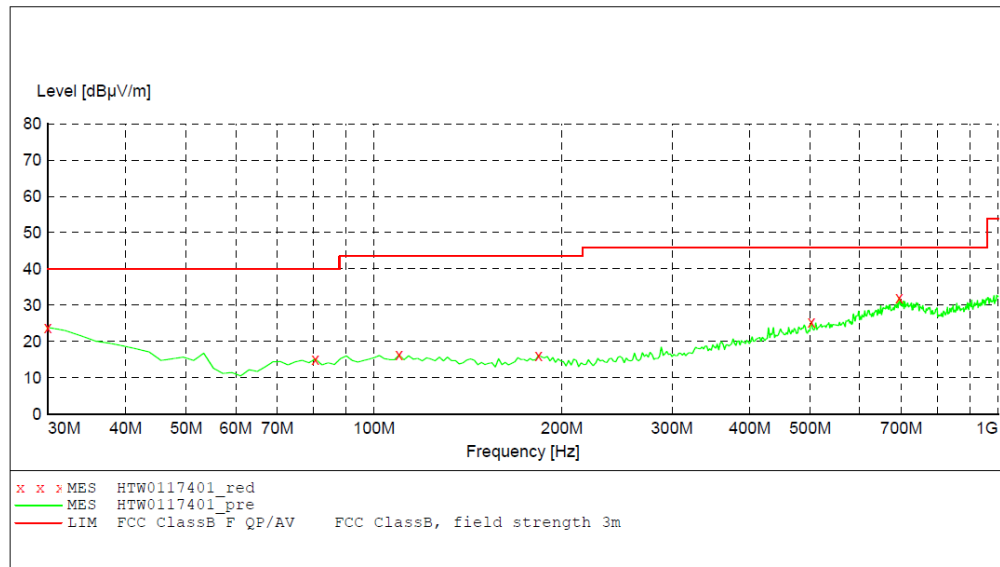***MEASUREMENT RESULT: "HTW0117401_red"***

1/17/2009 11:59PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	23.80	21.2	40.0	16.2	PEAK	100.0	206.00	VERTICAL
80.541082	15.10	11.4	40.0	24.9	PEAK	100.0	181.00	VERTICAL
109.699399	16.30	11.8	43.5	27.2	PEAK	100.0	5.00	VERTICAL
183.567134	16.20	11.4	43.5	27.3	PEAK	100.0	159.00	VERTICAL
502.364729	25.40	20.2	46.0	20.6	PEAK	100.0	206.00	VERTICAL
694.809619	32.00	26.5	46.0	14.0	PEAK	100.0	331.00	VERTICAL

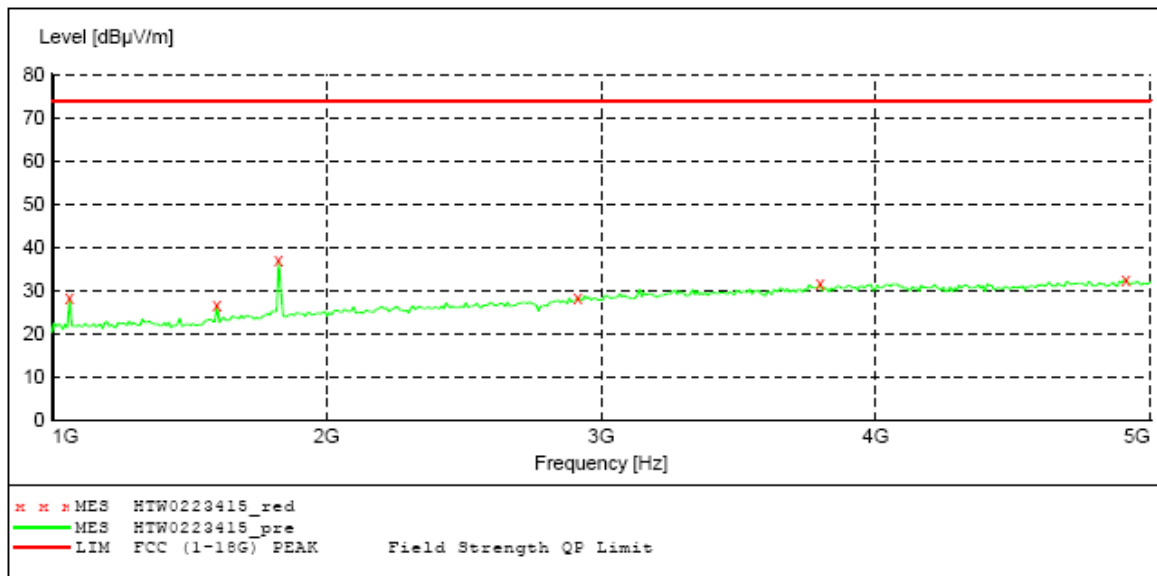

MEASUREMENT RESULT: "HTW0223415_red"

2/23/2009 10:51AM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1064.128257	28.40	-8.8	73.9	45.5	Peak	100.0	87.00	VERTICAL
1601.202405	26.70	-7.4	73.9	47.2	Peak	100.0	175.00	VERTICAL
1825.651303	36.90	-5.8	73.9	37.0	Peak	100.0	102.00	VERTICAL
2915.831663	28.40	-1.8	73.9	45.5	Peak	100.0	191.00	VERTICAL
3797.595190	31.50	1.6	73.9	42.4	Peak	100.0	272.00	VERTICAL
4911.823647	32.60	3.5	73.9	41.3	Peak	100.0	330.00	VERTICAL

Remark:

- (1) Measuring frequencies from 30 MHz to the 5 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz


SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562 08

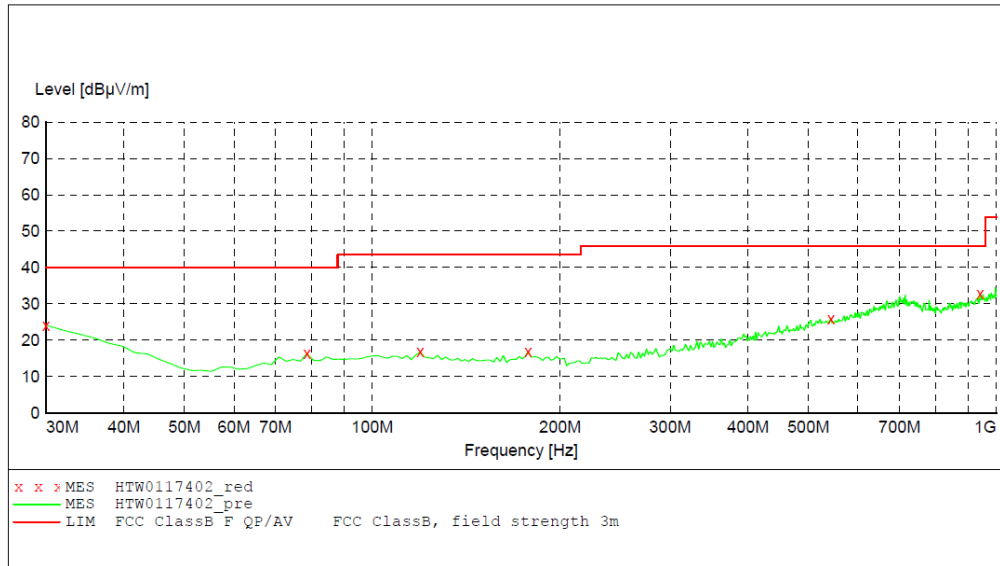**MEASUREMENT RESULT: "HTW0117402_red"**

1/17/2009 12:03AM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.10	21.2	40.0	15.9	PEAK	300.0	232.00	HORIZONTAL
78.597194	16.30	11.3	40.0	23.7	PEAK	300.0	159.00	HORIZONTAL
119.418838	16.80	11.9	43.5	26.7	PEAK	100.0	282.00	HORIZONTAL
177.735471	16.90	11.5	43.5	26.6	PEAK	300.0	58.00	HORIZONTAL
543.186373	26.00	21.3	46.0	20.0	PEAK	100.0	35.00	HORIZONTAL
941.683367	32.80	26.3	46.0	13.2	PEAK	300.0	282.00	HORIZONTAL

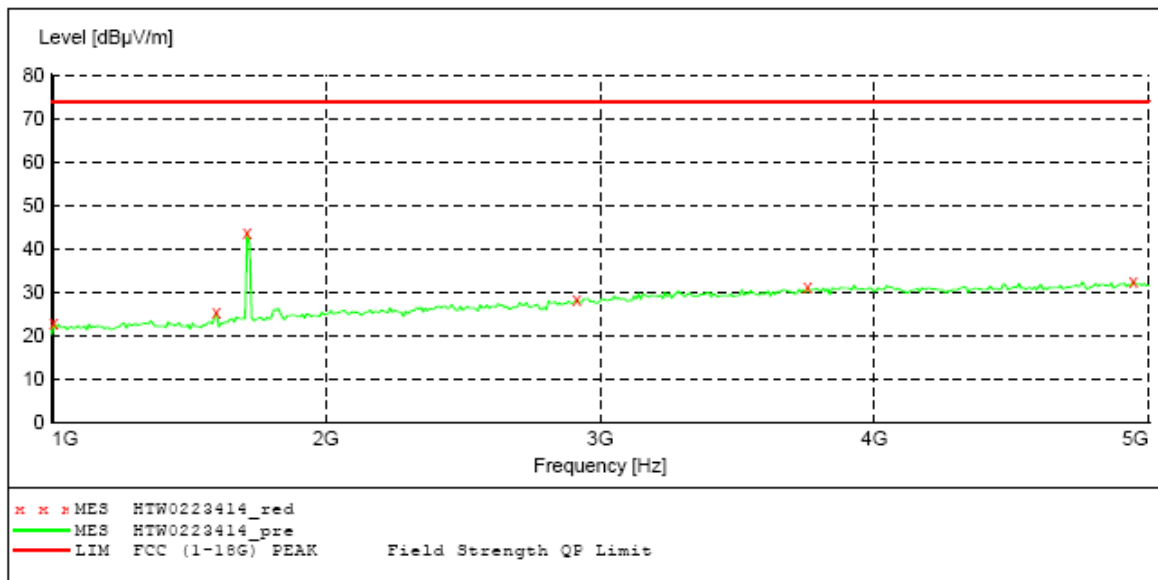

MEASUREMENT RESULT: "HTW0223414_red"



2/23/2009 10:49AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1008.016032	22.90	-9.0	73.9	51.0	Peak	100.0	146.00	HORIZONTAL
1601.202405	25.30	-7.4	73.9	48.6	Peak	100.0	43.00	HORIZONTAL
1713.426854	43.80	-6.3	73.9	30.1	Peak	100.0	51.00	HORIZONTAL
2915.831663	28.30	-1.8	73.9	45.6	Peak	100.0	74.00	HORIZONTAL
3757.515030	31.20	1.5	73.9	42.7	Peak	100.0	265.00	HORIZONTAL
4943.887776	32.50	3.6	73.9	41.4	Peak	100.0	350.00	HORIZONTAL

Remark:

- (1) Measuring frequencies from 30 MHz to the 5 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz

5. Test Setup Photos of the EUT

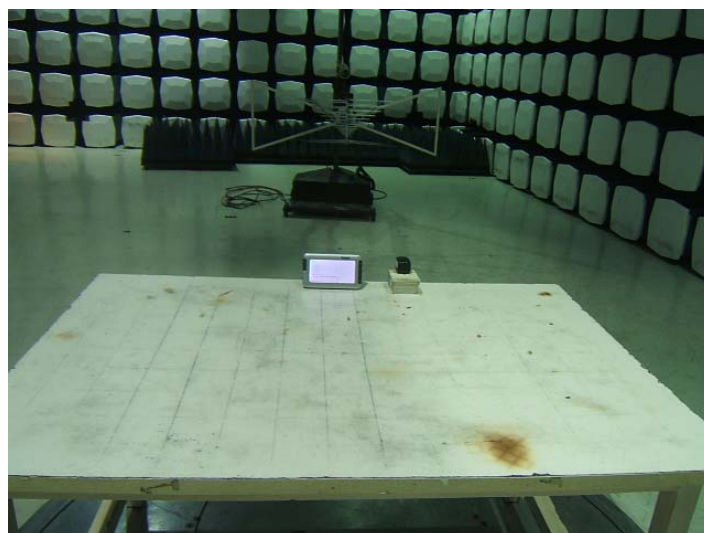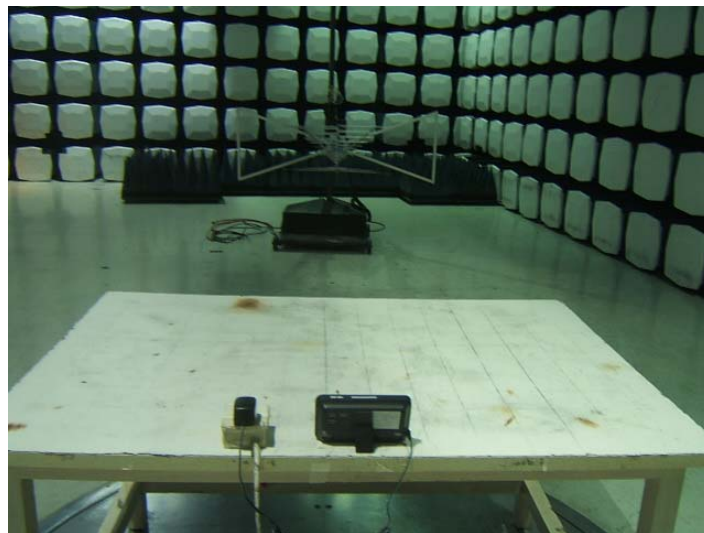

6. External and Internal Photos of the EUT




External Photos







Internal Photos

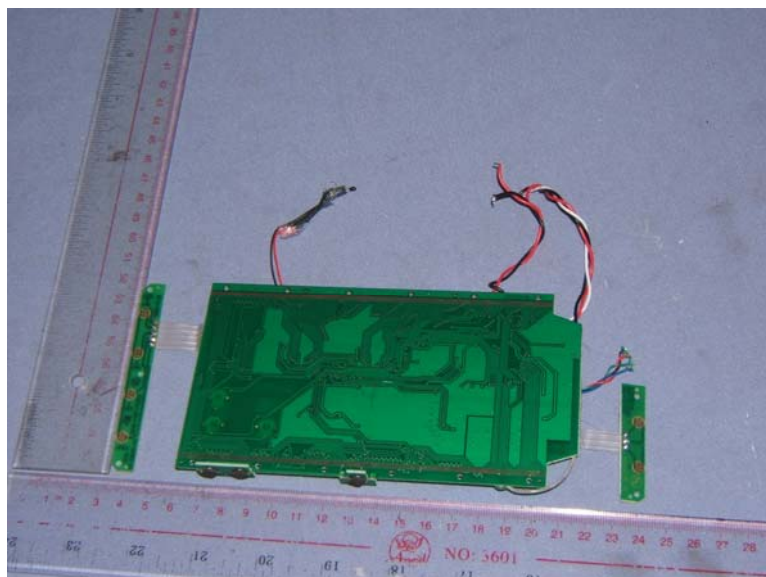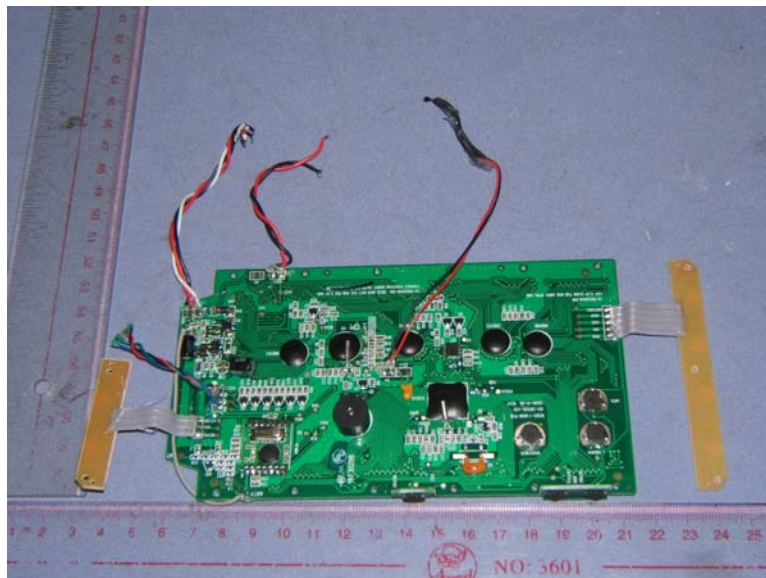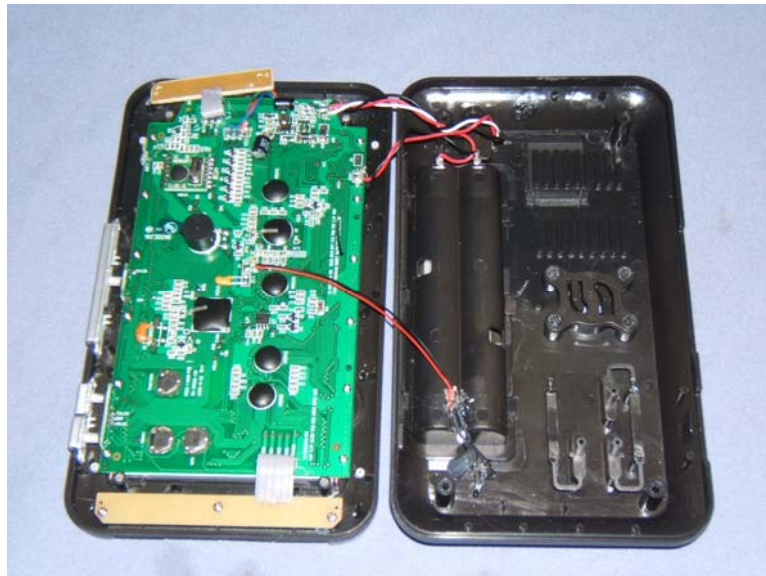

.....End of Report.....