

 RESEARCH IN MOTION	Document Appendices for the BlackBerry 7250 Wireless Handheld Model No. RAR20CN Test Report		Page 1(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

APPENDIX D: PROBE & DIPOLE CALIBRATION DATA

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		2(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

RIM

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1642**

Calibration procedure(s) **QA-CAL-01.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 31, 2004**


Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	5-May-04 (METAS, No 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No 251-00388)	May-05
Reference 20 dB Attenuator	SN: 5086 (20b)	3-May-04 (METAS, No 251-00388)	May-05
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug02)	In house check: Aug05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct03)	In house check: Oct 05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Technician	
Approved by:	Kelly Pokovic	Laboratory Director	

Date issued: September 1, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		3(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Probe ET3DV6

SN:1642

Manufactured: November 7, 2001
Last calibrated: August 28, 2003
Recalibrated: August 31, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		4(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

ET3DV6 SN:1642

August 31, 2004

DASY - Parameters of Probe: ET3DV6 SN:1642

Sensitivity in Free Space

Diode Compression^A

NormX	1.62 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.86 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.61 $\mu\text{V}/(\text{V}/\text{m})^2$

DCP X	96	mV
DCP Y	96	mV
DCP Z	96	mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	9.5	5.3
SAR _{be} [%] With Correction Algorithm	0.1	0.2

Head 1800 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	13.4	8.9
SAR _{be} [%] With Correction Algorithm	0.1	0.1

Sensor Offset

Probe Tip to Sensor Center	2.7 mm
Optical Surface Detection	in tolerance

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A numerical linearization parameter; uncertainty not required


	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		5(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

ET3DV6 SN:1642

August 31, 2004

Frequency Response of E-Field




(TEM-Cell:ifi110, Waveguide R22)

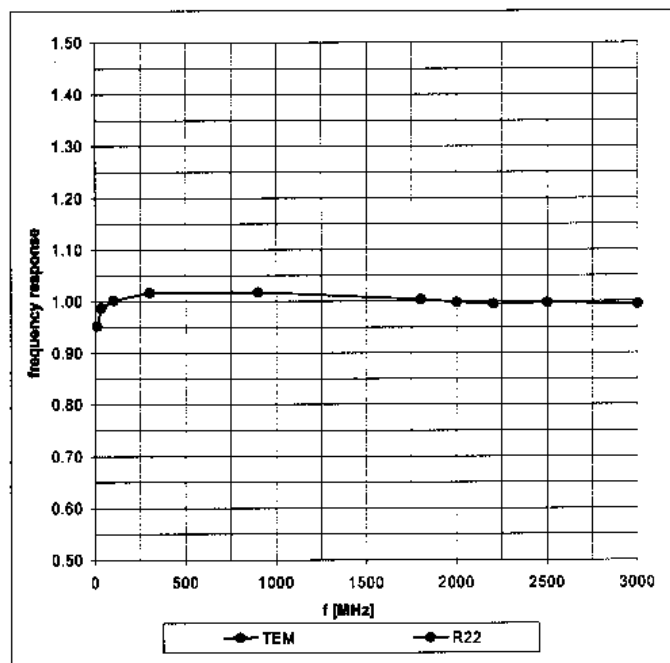

ET3DV6 SN:1642

August 31, 2004

Receiving Pattern (ϕ), $\theta = 0^\circ$

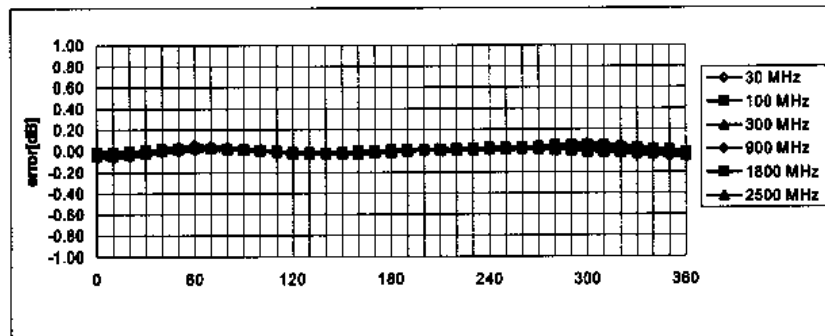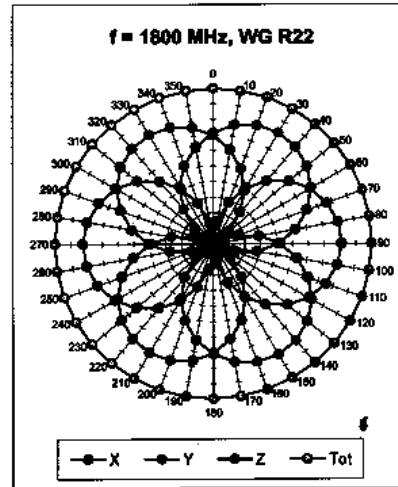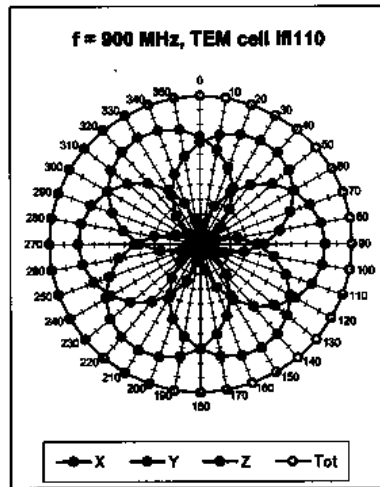


Axial Isotropy Error $< \pm 0.2$ dB

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		7(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

ET3DV6 SN:1642

August 31, 2004

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22)

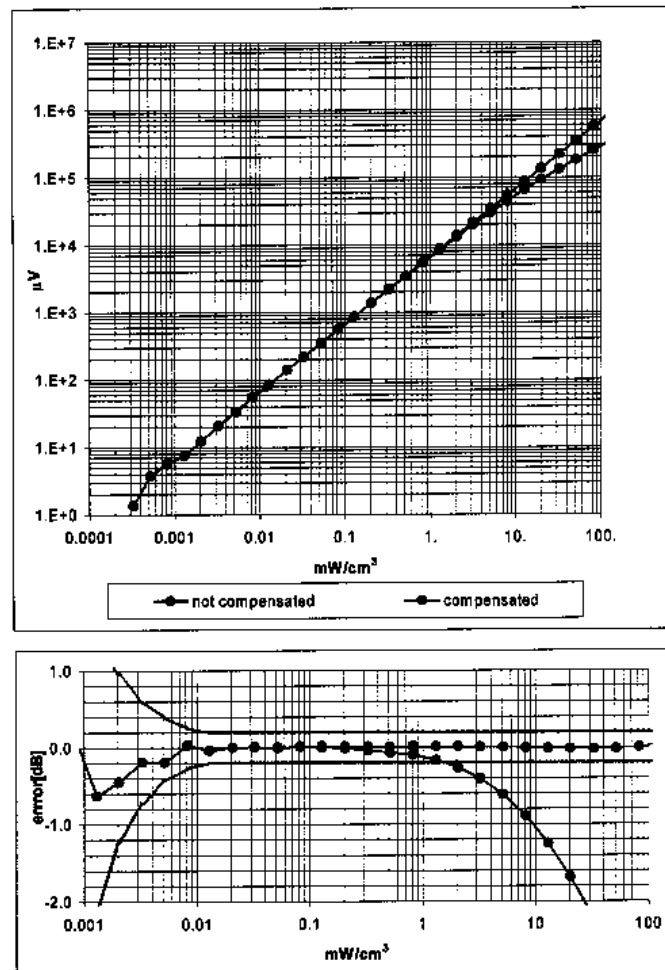


Probe Linearity Error $\leq \pm 0.2$ dB

ET3DV6 SN:1642

August 31, 2004

Conversion Factor Assessment

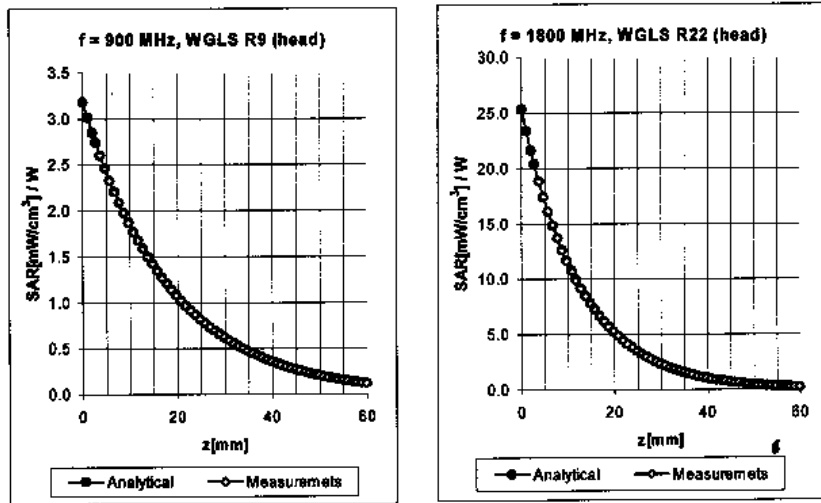

f [MHz]	Validity [MHz] ^a	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	800-1000	Head	41.5 ± 5%	0.97 ± 5%	0.56	1.97	6.57 ± 11.3% (k=2)
1800	1710-1910	Head	40.0 ± 5%	1.40 ± 5%	0.50	2.60	5.38 ± 11.7% (k=2)
800	800-1000	Body	55.0 ± 5%	1.05 ± 5%	0.54	2.08	6.13 ± 11.3% (k=2)
1800	1710-1910	Body	53.3 ± 5%	1.52 ± 5%	0.56	2.78	4.67 ± 11.7% (k=2)

^a The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.


	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		9(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

ET3DV6 SN:1642

August 31, 2004

Deviation from Isotropy in HSL

Error (θ , ϕ), $f = 900$ MHz


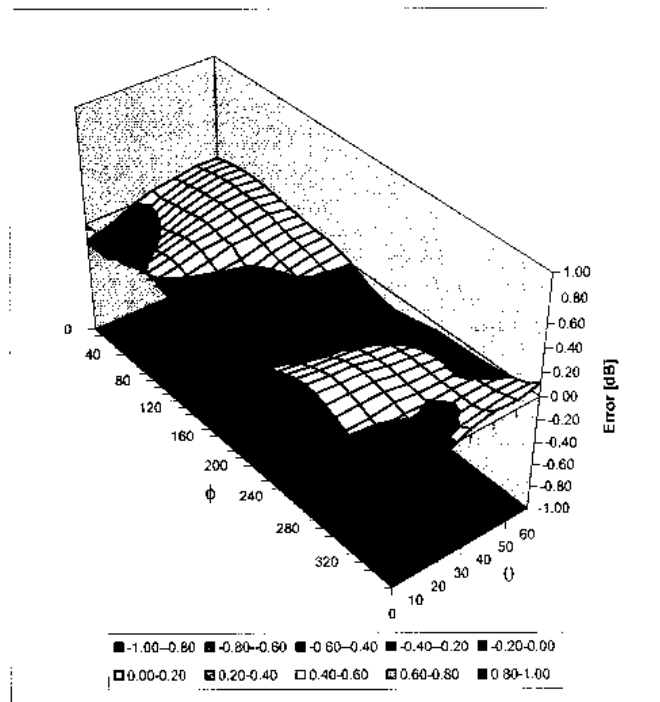


Spherical Isotropy Error $< \pm 0.4$ dB

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		10(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **RIM**

CALIBRATION CERTIFICATE			
Object(s)	D835V2 - SN 446		
Calibration procedure(s)	QA CAL-05 v2 Calibration procedure for dipole validation kits		
Calibration date:	August 21, 2003		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)		
This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.			
All calibrations have been conducted in the closed laboratory facility; environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.			
Calibration Equipment used (M&TE critical for calibration)			
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-82389)	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03
Calibrated by:	Name Juith Mueller	Function Technician	Signature 
Approved by:	Name Katja Pokovic	Function Laboratory Director	Signature 
Date issued: August 22, 2003			
This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed			

	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		11(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zürich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, <http://www.speag.com>

DASY

Dipole Validation Kit

Type: D835V2

Serial: 446

Manufactured: October 24, 2001

Calibrated: August 21, 2003

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 12(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **head simulating solution** of the following electrical parameters at 835 MHz:

Relative Dielectricity	43.3	$\pm 5\%$
Conductivity	0.91 mho/m	$\pm 5\%$

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.7 at 835 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250 mW $\pm 3\%$. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	9.60 mW/g $\pm 16.8\%$ (k=2)¹
averaged over 10 cm ³ (10 g) of tissue:	6.24 mW/g $\pm 16.2\%$ (k=2)¹

¹ validation uncertainty

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		14(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Page 1 of 1

Date/Time: 08/21/03 10:03:51

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN446_SN1507_HSL835_210803.da4

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN446
Program: Dipole Calibration


Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL 835 MHz ($\sigma = 0.91$ mho/m, $\epsilon_r = 43.28$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.7, 6.7, 6.7); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115


Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 55.3 V/m
Power Drift = -0.02 dB
Maximum value of SAR = 2.55 mW/g

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 3.52 W/kg
SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.56 mW/g
Reference Value = 55.3 V/m
Power Drift = -0.02 dB
Maximum value of SAR = 2.56 mW/g

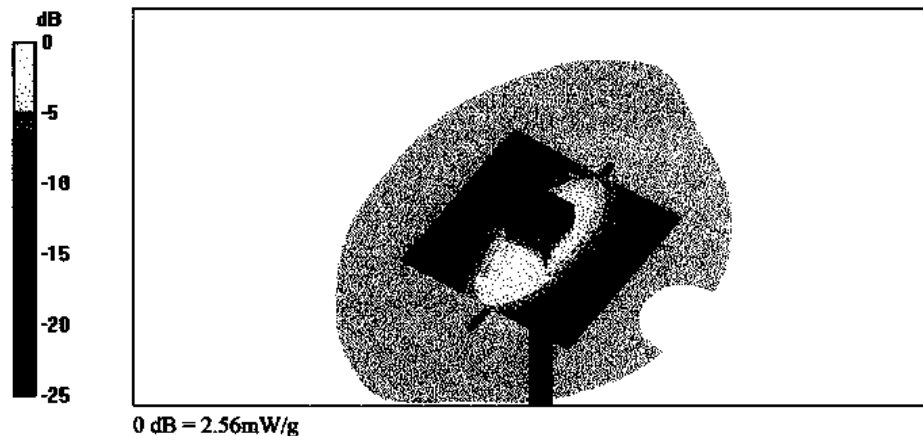

	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		15(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN


446

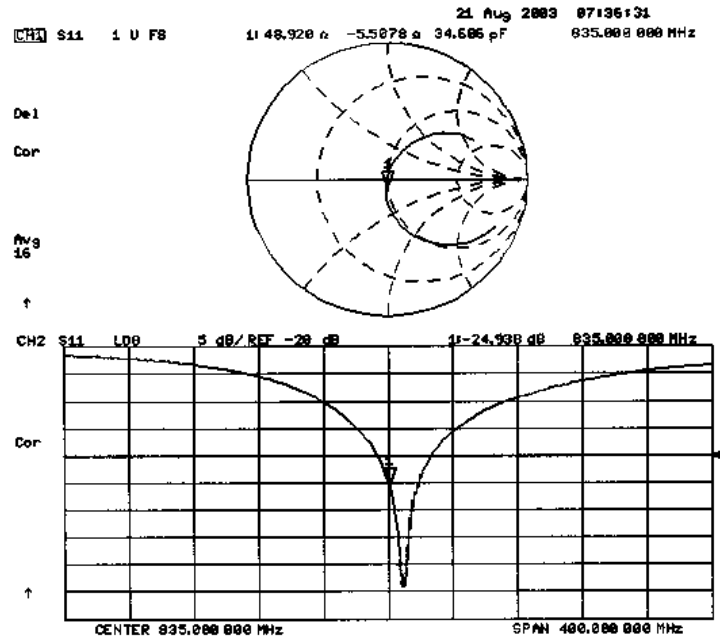

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		16(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **RIM**

CALIBRATION CERTIFICATE			
Object(s)	D1900V2 - SN:545		
Calibration procedure(s)	QA CAL-05.v2 Calibration procedure for dipole validation kits		
Calibration date:	August 22, 2003		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)		
This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.			
All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.			
Calibration Equipment used (M&TE critical for calibration)			
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002 (R&S, No. 20-92389)	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02 (Agilent, No. 20021018)	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02 (METAS, No. 252-0236)	Oct-03
Network Analyzer HP 8753E	US37390585	18-Oct-01 (Agilent, No. 24BR1033101)	In house check: Oct 03
Calibrated by:	Name Judith Mueller	Function Technician	Signature 
Approved by:	Katja Pokovic	Laboratory Director	
Date issued: August 24, 2003			
This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.			

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		17(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, <http://www.speag.com>

DASY

Dipole Validation Kit

Type: D1900V2

Serial: 545

Manufactured: November 15, 2001

Calibrated: August 22, 2003

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 18(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 1900 MHz:

Relative Dielectricity	40.2	± 5%
Conductivity	1.46 mho/m	± 5%

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 5.2 at 1900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250 mW ± 3 %. The results are normalized to 1W input power.

2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	41.2 mW/g ± 16.8 % (k=2) ¹
averaged over 10 cm ³ (10 g) of tissue:	21.3 mW/g ± 16.2 % (k=2) ¹

¹ validation uncertainty

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 19(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.198 ns** (one direction)
Transmission factor: **0.984** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance spacer was in place during impedance measurements.

Feedpoint impedance at 1900 MHz: $\text{Re}\{Z\} = 49.7 \, \Omega$

 $\text{Im}\{Z\} = 0.96 \, \Omega$

Return Loss at 1900 MHz **-39.9 dB**

4. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

5. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Small end caps have been added to the dipole arms in order to improve matching when loaded according to the position as explained in Section 1. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

6. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

 RESEARCH IN MOTION	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		20(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

Page 1 of 1

Date/Time: 08/22/03 15:40:53

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN545_SN1507_HSL1900_220803.da4

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN545
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz ($\sigma = 1.46 \text{ mho/m}$, $\epsilon_r = 40.17$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASy4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

$P_{in} = 250 \text{ mW}$; $d = 10 \text{ mm}$ /Area Scan (81x81x1); Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 93.6 V/m

Power Drift = 0.05 dB

Maximum value of SAR = 11.5 mW/g

$P_{in} = 250 \text{ mW}$; $d = 10 \text{ mm}$ /Zoom Scan (7x7x7)/Cube 0; Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.32 mW/g

Reference Value = 93.6 V/m


Power Drift = 0.05 dB

Maximum value of SAR = 11.5 mW/g

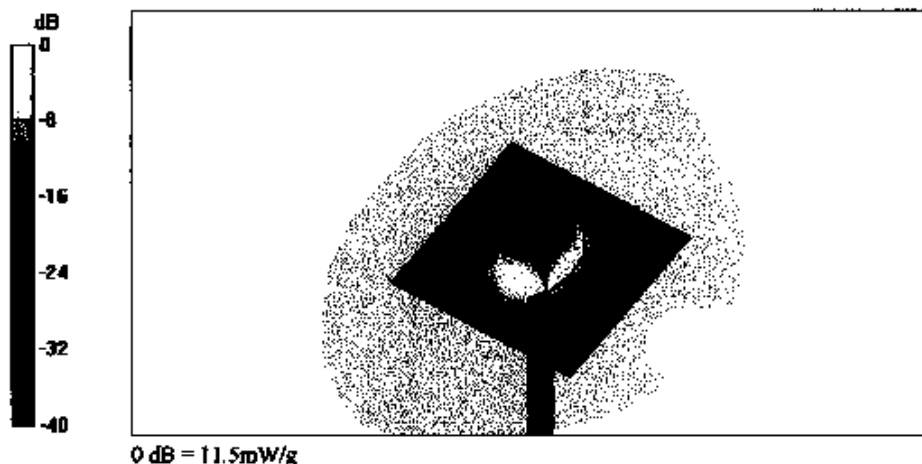

	Document		Page
	Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		21(28)
Author Data	Dates of Test	Test Report No	FCC ID:
Daoud Attayi	Oct. 22 – Nov. 04, 2004	RIM-0110-0411-01	L6ARAR20CN

545

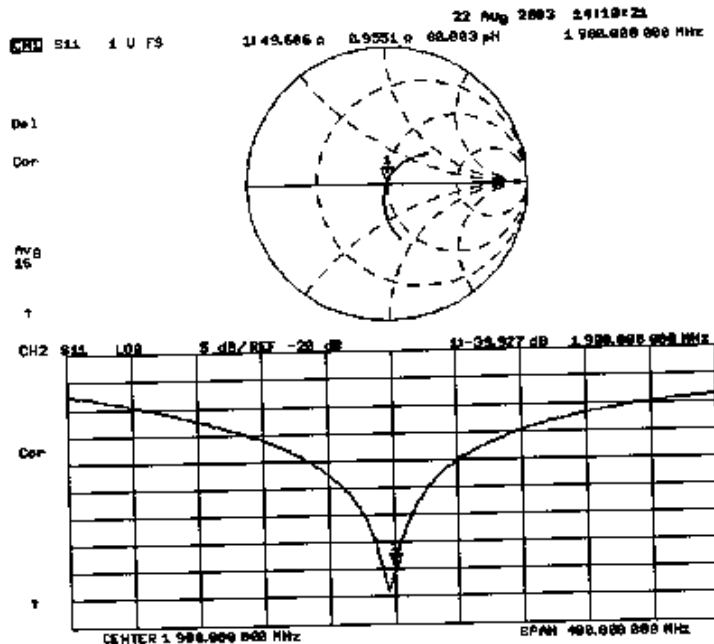

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 22(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

APPENDIX E: SAR SET UP PHOTOS

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 23(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN



Figure E1. Left ear configuration

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 24(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN

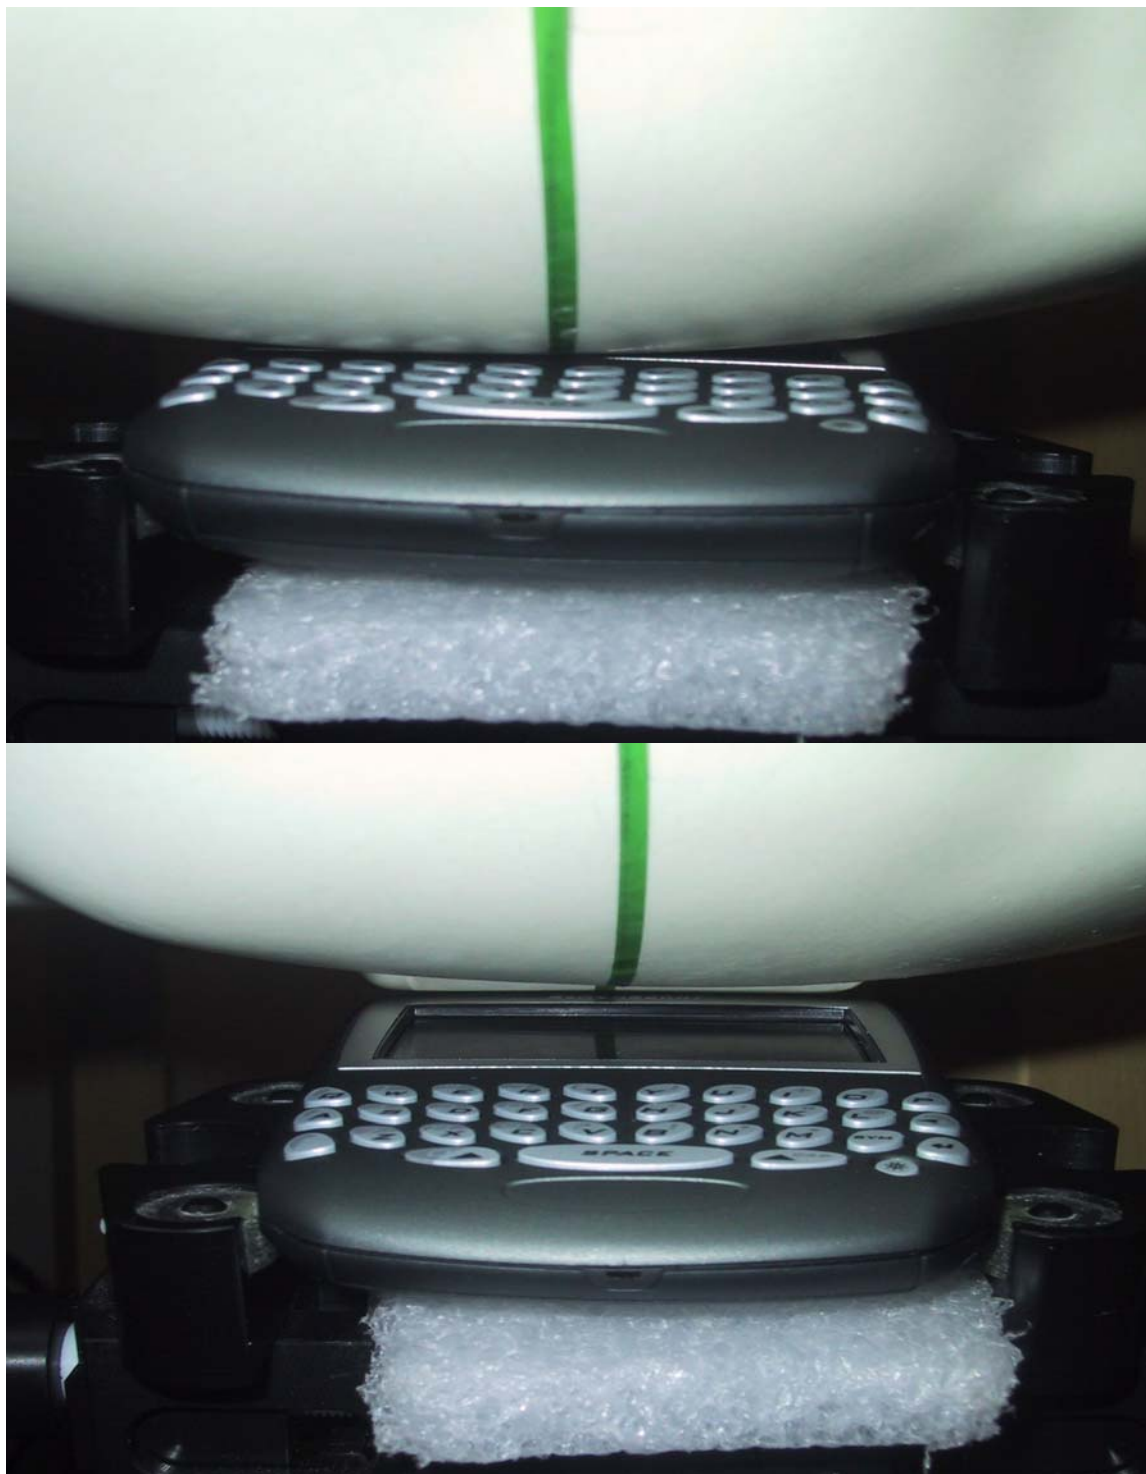


Figure E2. Right ear configuration

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 25(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN



Figure E3. Body worn configuration with the Ruggedized Holster

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 26(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN



Figure E4. Body worn configuration with Plastic and Leather Swivel Holsters

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 27(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN



Figure E5. Body worn configuration with Vertical Foam Holster

 RESEARCH IN MOTION	Document Appendices the BlackBerry 7250 Wireless Handheld Model No. RAR20CN test report		Page 28(28)
Author Data Daoud Attayi	Dates of Test Oct. 22 – Nov. 04, 2004	Test Report No RIM-0110-0411-01	FCC ID: L6ARAR20CN



Figure E6. Body worn configuration with Horizontal Foam Holster