

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 15, Subpart B
&
Industry Canada (IC), ICES-003



A division of Research In Motion Limited

REPORT NO.: RTS-1765-0908-03

PRODUCT MODEL NO.: RCK71CW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6ARCK70CW
IC: 2503A-RCK70CW

DATE: 06 August, 2009

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

Statement of Performance:

The BlackBerry® smartphone, model RCK71CW, part number CER-27168-001 Rev. 2, and accessories when configured and operated per RIM's operation instructions, performs within the requirements of the test standards.

Declaration:

We hereby certify that:


The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:



Savtej Sandhu
Compliance Specialist
Date: 12 August, 2009

Reviewed by:



Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance
Date: 18 August, 2009

Approved by:



Paul G. Cardinal, Ph.D.
Director
Date: 25 August, 2009

	EMI Test Report for the BlackBerry® smartphone Model RCK71CW	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

Table of Contents

A. Scope	4
B. Associated Document.....	4
C. Product Identification.....	4
D. Support Equipment Used for the Testing of the EUT	5
E. Modifications to EUT	6
F. Summary of Results	6
G. Compliance Test Equipment Used	9
APPENDIX 1 - AC LINE CONDUCTED EMISSIONS TEST DATA	10
APPENDIX 2 - RADIATED EMISSIONS TEST DATA	19

	EMI Test Report for the BlackBerry® smartphone Model RCK71CW	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15, Subpart B, October 01, 2008 Class B Digital Devices, Unintentional Radiators
- IC ICES-003 Issue 4, February 2004, Class B Digital Devices, Unintentional Radiators

B. Associated Document

None

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at:

295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services EMI test facilities
305 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

440 Phillip Street
Waterloo, Ontario
Canada, N2L 5R9
Phone: 519 888 7465
Fax: 519 888 6906

The testing was performed on July 27 to August 05, 2009.

 RIM Testing Services	EMI Test Report for the BlackBerry® smartphone Model RCK71CW		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

The sample EUT included:

SAMPLE	MODEL	CER NUMBER	PIN
1	RCK71CW	CER-27168-001 Rev. 2	30C2BF79
2	RCK71CW	CER-27168-001 Rev. 2	30C2BF78
3	RCK71CW	CER-27168-001 Rev. 2	30C1EA2C
4	RCK71CW	CER-27168-001 Rev. 2	30C435AD

AC conducted testing was performed on sample 1.

Radiated Emissions testing was performed on samples 2, 3, and 4.

BlackBerry® smartphone Accessories Tested

- 1) Folding Blade Charger part number HDW-17955-001 with an output voltage of 5.0 volts dc, 700 mA and attached USB cable with a lead length of 1.80 metres.
- 2) Captive Cable Charger part number HDW-17957-003 with an output voltage of 5.0 volts dc, 700 mA and attached USB cable with a lead length of 1.80 metres.
- 3) Bluetooth Headset, part number HDW-23439-001.
- 4) D-X1 Sleeve External Battery Charger, (EBC), part number HDW-19137-001.
- 5) BlackBerry® Remote Stereo Gateway, part number HDW-16007-001.
- 6) USB Y-Cable, part number HDW-19137-002, lead lengths of 26 cm and 11 cm.
- 7) Stereo Headset, part number HDW-14322-003 with a lead length of 1.3 metres.
- 8) Premium Single Button Stereo Headset, part number HDW-15766-005, 1.3 meters long.
- 9) USB Data Cable, part number HDW-06610-013, 0.30 metres long.
- 10) USB Data Cable, part number HDW-06610-009, 1.00 metre long.
- 11) USB Data Cable, part number HDW-06610-005, 1.50 metres long.
- 12) Charging POD, part number HDW-24477-001.
- 13) Visor Mount, part number HDW-23438-001.

D. Support Equipment Used for the Testing of the EUT

- 1) IBM Thinkpad Lenovo T60p laptop, type 8742, product ID 8742C2U

RIM Testing Services	EMI Test Report for the BlackBerry® smartphone Model RCK71CW		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu	

E. Modifications to EUT

No modifications were required on the EUT.

F. Summary of Results

SPECIFICATION		TEST TYPE	Meets Requirement	Test Data APPENDIX
FCC CFR 47	IC			
Part 15, Subpart B	ICES-003	Conducted AC Line Emission	Yes	1
Part 15, Subpart B	ICES-003	Radiated Unintentional Spurious Emissions	Yes	2

a) CONDUCTED AC LINE EMISSIONS

The conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16.

BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.

The following test configurations were measured:

1. The BlackBerry® smartphone, PIN 30C2BF79 in GSM850 idle mode on the Charging Pod with the Stereo Headset attached was connected to the Folding Blade Charger, HDW-17955-001.
2. The BlackBerry® smartphone, PIN 30C2BF79 in CDMA CELL idle mode on the Charging Pod with the BlackBerry® Remote Stereo Gateway attached via 1.5 metre USB Data Cable was connected to the Folding Blade Charger, HDW-17955-001.
3. The BlackBerry® smartphone, PIN 30C2BF79 in PCS1900 idle mode on the Charging Pod with the Premium Single-Button Stereo Headset attached was connected to the Captive Cable Charger, HDW-17957-003.
4. The BlackBerry® smartphone, PIN 30C2BF79 in CDMA PCS idle mode and communicating with the Visor Mount on the Charging Pod was connected to the Captive Cable Charger, HDW-17957-003.

RIM Testing Services	EMI Test Report for the BlackBerry® smartphone Model RCK71CW	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15, Subpart B, and IC ICES-003, Class B limit. The sample EUT had a worse case test margin of 10.71 dB below the QP limit at 0.398 MHz using the quasi-peak detector for the Folding Blade Charger, test configuration 1.

Measurement Uncertainty ± 3.0 dB

To view the test data/plots, see APPENDIX 1.

b) RADIATED EMISSIONS

The radiated emissions from the EUT were measured using the methods outlined in CISPR Recommendation 22. The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remote controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 5.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber. The FCC registration number is **778487** and the Industry Canada(IC) file number is **2503B-1**. The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was in battery charging mode for all configurations. The ac input voltage was 120V, 60Hz.

The following test configurations were measured:

1. The BlackBerry® smartphone, PIN 30C2BF78 in CDMA CELL idle mode was connected to the Folding Blade Charger, HDW-17955-001. The BlackBerry® Remote Stereo Gateway was connected to the Laptop via the 1.0 metre USB Data Cable.
2. The BlackBerry® smartphone, PIN 30C2BF78 in PCS1900 idle mode and communicating with the Bluetooth Headset was connected to the Folding Blade Charger, HDW-17955-001.
3. The BlackBerry® smartphone, PIN 30C2BF78 in Bluetooth Tx mode with the Stereo Headset attached was connected to the Folding Blade Charger, HDW-17955-001.
4. The BlackBerry® smartphone, PIN 30C2BF78 in Bluetooth Tx mode with the Stereo Headset attached was connected to the Captive Cable Charger, HDW-17957-003.

 RIM Testing Services	EMI Test Report for the BlackBerry® smartphone Model RCK71CW	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

5. The BlackBerry® smartphones, PIN 30C1EA2C and PIN 30C435AD in 802.11b Tx mode with the Premium Single-Button Stereo Headset attached was connected to the Captive Cable Charger, HDW-17957-003. The External Battery Charger was connected to the Captive Cable Charger via the USB Y-Cable.
6. The BlackBerry® smartphone, PIN 30C2BF78 in GSM850 idle mode on the Charging Pod was connected to the Laptop in USB high speed mode via the 0.3 metre USB Cable.
7. The BlackBerry® smartphone, PIN 30C2BF78 in GSM850 idle mode was connected to the Laptop in USB high speed mode via the 1.0 metre USB Cable.
8. The BlackBerry® smartphone, PIN 30C2BF78 in CDMA PCS idle mode and communicating with Visor Mount was connected to the Laptop in USB high speed mode via the 1.5 metre USB Cable.

The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart B, and IC ICES-003, Class B limit.

The system met the requirements with a worse case emission test margin of 2.71 dB at 36.610 MHz using test configuration 8.

Sample Calculation:

Field Strength (dB μ V/m) is calculated as follows:

FS = Measured Level (dB μ V) + A.F. (dB/m) + Cable Loss (dB) - Preamp (dB) + Filter Loss (dB)

Measurement Uncertainty ± 4.6 dB

To view the test data see APPENDIX 2.

 RIM Testing Services	EMI Test Report for the BlackBerry® smartphone Model RCK71CW			
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009			Author Data Savtej Sandhu

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Preamplifier	Sonoma	310N/11909A	185831	09-11-07	Radiated Emissions
Preamplifier system	TDK RF Solutions	PA-02	080010	09-11-07	Radiated Emissions
EMC Analyzer	Agilent	E7405A	US40240226	09-11-17	Radiated Emissions
Digital Multimeter	Hewlett Packard	34401A	US36042324	09-10-03	Conducted/Radiated Emissions
Environment Monitor	Control Company	1870	230355190	10-01-30	Radiated Emissions
Environment Monitor	Control Company	1870	80117164	10-01-08	Conducted/Radiated Emissions
L.I.S.N.	Rohde & Schwarz	ENV216	100060	10-04-21	Conducted Emissions
Hybrid Log Antenna	EMC Automation	HLP-3003C	017401	10-09-26	Radiated Emissions
Horn Antenna	EMC Automation	HRN-0118	030101	10-07-22	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	837493/073	09-12-08	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	112394	09-12-08	Radiated/Conducted Emissions
EMI Test Receiver	Rohde & Schwarz	ESIB 40	100255	09-12-03	Radiated/Conducted Emissions
Bluetooth Tester	Rohde & Schwarz	CBT	100368	09-12-09	Radiated Emissions
Bluetooth Tester	Rohde & Schwarz	CBT	100370	09-12-09	Radiated/Conducted Emissions

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 1	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

APPENDIX 1 - AC LINE CONDUCTED EMISSIONS TEST DATA

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 1		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

AC Conducted Emissions Test Results

The measurements were performed by Savtej Sandhu.

Test Configuration 1

The BlackBerry® smartphone PIN 30C2BF79 was tested on July 30, 2009.

The environmental test conditions were: Temperature: 28°C

Pressure: 1012 mb

Relative Humidity: 29%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

Frequency (MHz)	Line	Reading (QP) (dB μ V)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dB μ V)	Limit (AV) (dB μ V)	Margin (QP) Limits (dB)
0.182	N	31.26	10.04	41.30	64.42	54.42	-23.12
0.182	L1	36.82	9.78	46.60	64.42	54.42	-17.82
0.227	L1	31.62	9.88	41.50	62.58	52.58	-21.08
0.371	L1	32.23	9.77	42.00	58.49	48.49	-16.49
0.398	N	37.34	9.86	47.20	57.91	47.91	-10.71
0.497	N	31.71	9.89	41.60	56.06	46.06	-14.46
0.510	L1	31.74	9.66	41.40	56.00	46.00	-14.60
1.113	N	25.57	9.63	35.20	56.00	46.00	-20.80
1.185	L1	24.39	9.51	33.90	56.00	46.00	-22.10
1.487	N	27.10	9.60	36.70	56.00	46.00	-19.30
1.509	L1	27.20	9.50	36.70	56.00	46.00	-19.30
2.306	N	26.59	9.61	36.20	56.00	46.00	-19.80
3.278	L1	25.70	9.60	35.30	56.00	46.00	-20.70
4.425	L1	28.36	9.64	38.00	56.00	46.00	-18.00
4.637	N	28.10	9.60	37.70	56.00	46.00	-18.30
8.826	N	32.85	9.65	42.50	60.00	50.00	-17.50
8.943	L1	35.21	9.79	45.00	60.00	50.00	-15.00
10.451	L1	30.26	9.84	40.10	60.00	50.00	-19.90
10.716	N	28.72	9.68	38.40	60.00	50.00	-21.60

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-1 and figure 1-2 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

AC Conducted Emissions Test Graphs

Test Configuration 1

Figure 1-1: L1 lines


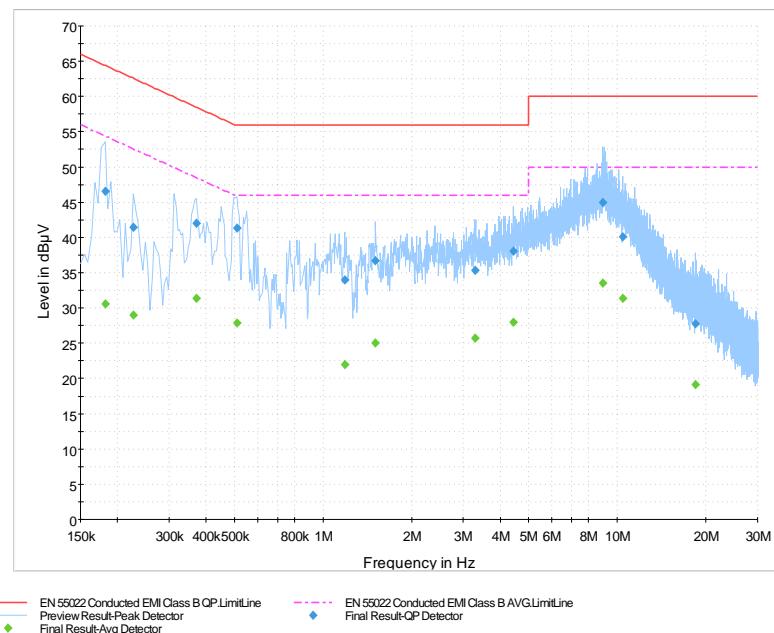


Figure 1-2: N Lines

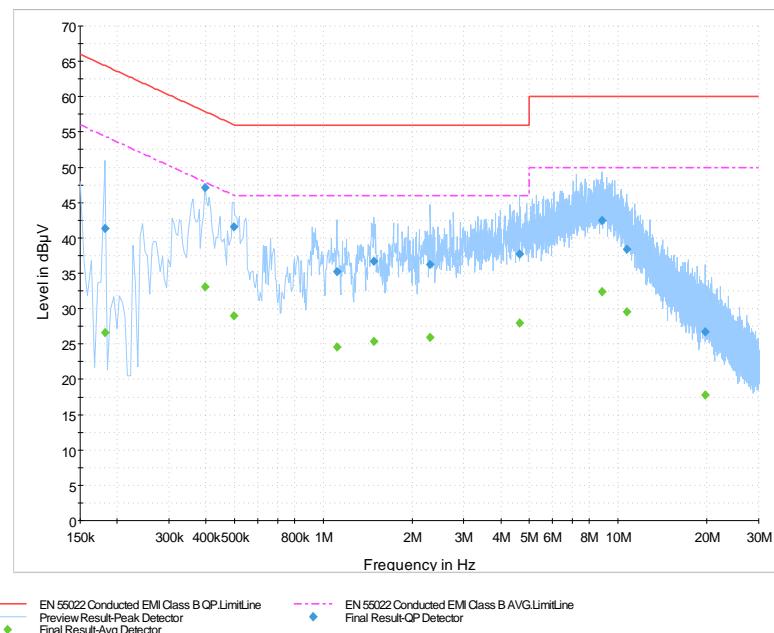

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 1		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

AC Conducted Emissions Test Results cont'd

Test Configuration 2

The BlackBerry® smartphone PIN 30C2BF79 was tested on July 30, 2009.

The environmental test conditions were: Temperature: 28°C

Pressure: 1012 mb

Relative Humidity: 29%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

Frequency (MHz)	Line	Reading (QP) (dB μ V)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dB μ V)	Limit (AV) (dB μ V)	Margin (QP) Limits (dB)
0.155	N	34.15	9.85	44.00	65.75	55.75	-21.75
0.402	L1	34.45	9.75	44.20	57.81	47.81	-13.61
0.402	N	35.04	9.86	44.90	57.81	47.81	-12.91
0.506	N	30.62	9.88	40.50	56.00	46.00	-15.50
0.933	L1	29.67	9.53	39.20	56.00	46.00	-16.80
1.910	L1	27.47	9.53	37.00	56.00	46.00	-19.00
2.117	N	25.77	9.63	35.40	56.00	46.00	-20.60
2.400	N	25.80	9.60	35.40	56.00	46.00	-20.60
2.877	L1	27.22	9.58	36.80	56.00	46.00	-19.20
4.466	L1	29.86	9.64	39.50	56.00	46.00	-16.50
4.857	N	27.90	9.60	37.50	56.00	46.00	-18.50

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 1	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

AC Conducted Emissions Test Graphs

Test Configuration 2

Figure 1-3: L1 lines


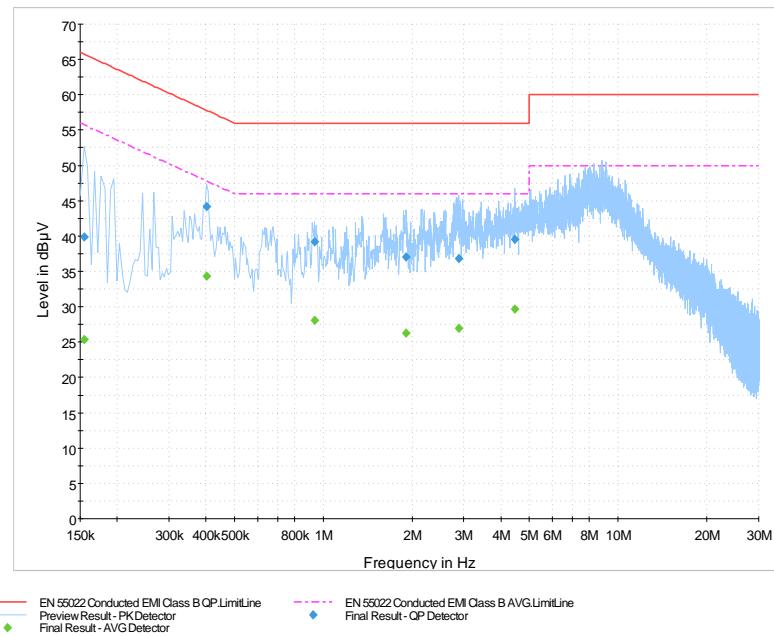


Figure 1-4: N Lines

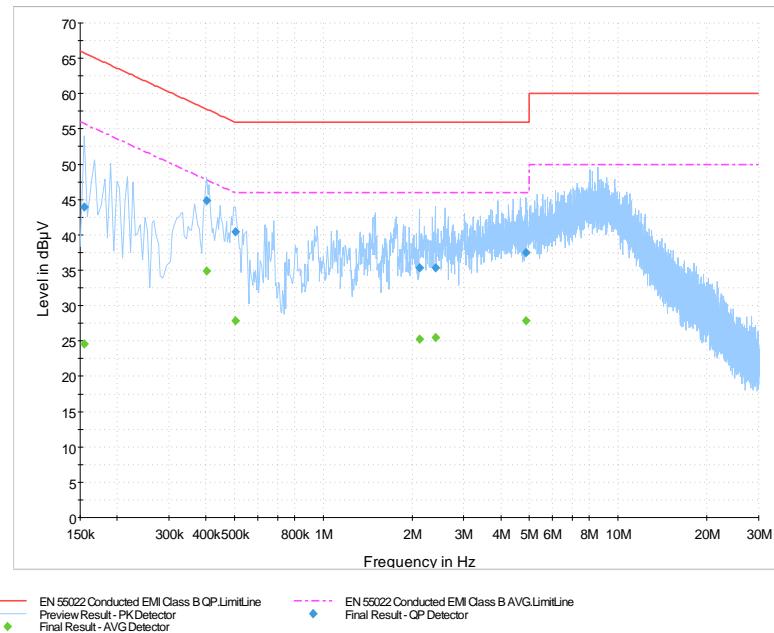

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 1		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

AC Conducted Emissions Test Results cont'd

Test Configuration 3

The BlackBerry® smartphone PIN 30C2BF79 was tested on July 30, 2009.

The environmental test conditions were: Temperature: 28°C

Pressure: 1012 mb

Relative Humidity: 29%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

Frequency (MHz)	Line	Reading (QP) (dB μ V)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dB μ V)	Limit (AV) (dB μ V)	Margin (QP) Limits (dB)
0.272	L1	34.46	9.84	44.30	61.07	51.07	-16.77
0.407	L1	32.25	9.75	42.00	57.72	47.72	-15.72
0.420	N	26.33	9.87	36.20	57.45	47.45	-21.25
0.542	N	29.22	9.88	39.10	56.00	46.00	-16.90
0.542	L1	32.43	9.67	42.10	56.00	46.00	-13.90
0.690	N	25.71	9.79	35.50	56.00	46.00	-20.50
0.830	L1	28.54	9.56	38.10	56.00	46.00	-17.90
0.938	N	25.43	9.67	35.10	56.00	46.00	-20.90
0.942	L1	29.97	9.53	39.50	56.00	46.00	-16.50
1.208	N	26.67	9.63	36.30	56.00	46.00	-19.70
1.869	L1	33.17	9.53	42.70	56.00	46.00	-13.30
1.883	N	28.78	9.62	38.40	56.00	46.00	-17.60
2.463	N	30.00	9.60	39.60	56.00	46.00	-16.40
2.540	L1	33.94	9.56	43.50	56.00	46.00	-12.50
4.169	L1	34.07	9.63	43.70	56.00	46.00	-12.30
4.808	N	27.60	9.60	37.20	56.00	46.00	-18.80
8.858	N	29.45	9.65	39.10	60.00	50.00	-20.90
9.042	L1	33.61	9.79	43.40	60.00	50.00	-16.60
10.563	N	27.92	9.68	37.60	60.00	50.00	-22.40
10.563	L1	31.96	9.84	41.80	60.00	50.00	-18.20

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-5 and figure 1-6 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

AC Conducted Emissions Test Graphs

Test Configuration 3

Figure 1-5: L1 lines


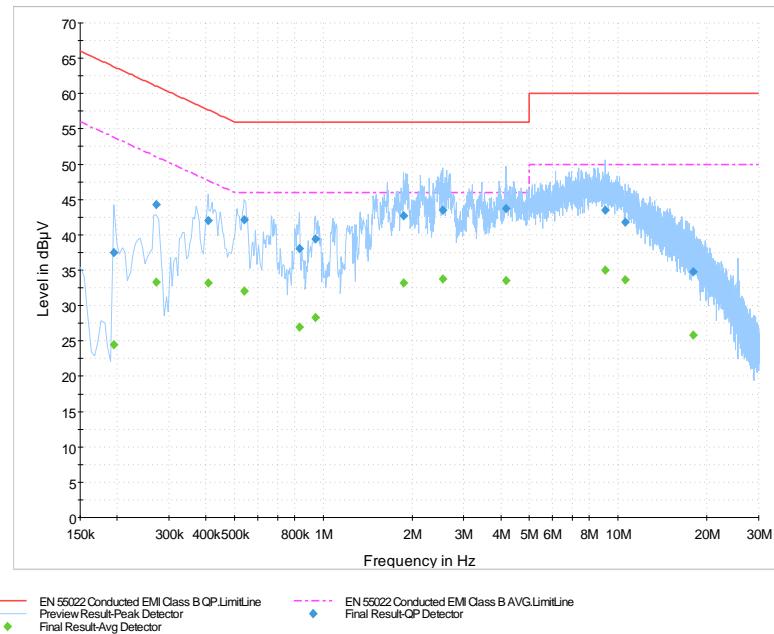


Figure 1-6: N Lines

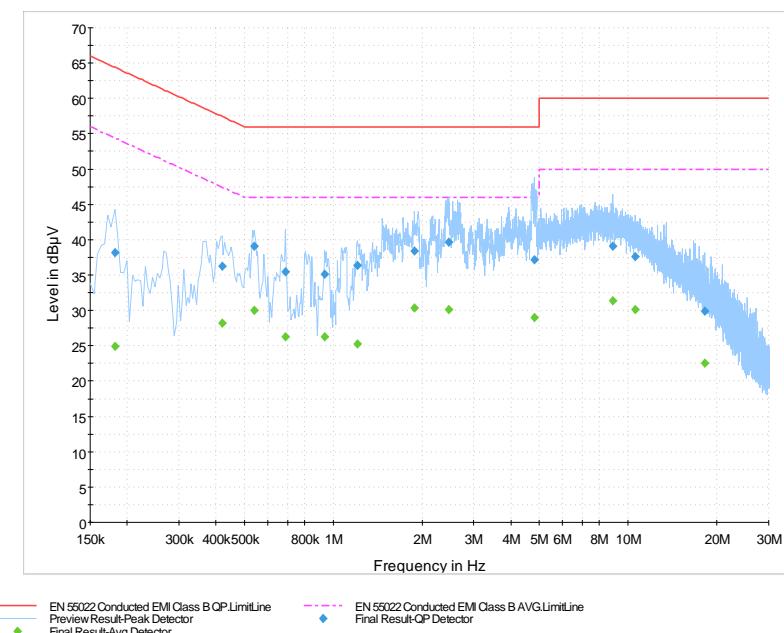

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 1		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

AC Conducted Emissions Test Results cont'd

Test Configuration 4

The BlackBerry® smartphone PIN 30C2BF79 was tested on July 30, 2009.

The environmental test conditions were: Temperature: 28°C

Pressure: 1012 mb

Relative Humidity: 29%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

Frequency (MHz)	Line	Reading (QP) (dB μ V)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dB μ V)	Limit (AV) (dB μ V)	Margin (QP) Limits (dB)
0.276	L1	29.36	9.84	39.20	60.94	50.94	-21.74
0.407	N	26.43	9.87	36.30	57.72	47.72	-21.42
0.416	L1	33.96	9.74	43.70	57.54	47.54	-13.84
0.537	N	29.21	9.88	39.10	56.00	46.00	-16.90
0.537	L1	32.33	9.67	42.00	56.00	46.00	-14.00
0.933	L1	28.37	9.53	37.90	56.00	46.00	-18.10
0.942	N	25.13	9.67	34.80	56.00	46.00	-21.20
1.095	L1	28.59	9.51	38.10	56.00	46.00	-17.90
1.221	N	26.17	9.63	35.80	56.00	46.00	-20.20
1.874	L1	31.67	9.53	41.20	56.00	46.00	-14.80
1.941	N	30.18	9.62	39.80	56.00	46.00	-16.20
2.540	L1	33.84	9.56	43.40	56.00	46.00	-12.60
2.670	N	30.99	9.61	40.60	56.00	46.00	-15.40
3.993	L1	32.66	9.64	42.30	56.00	46.00	-13.70
4.295	N	27.51	9.59	37.10	56.00	46.00	-18.90
8.840	L1	37.81	9.79	47.60	60.00	50.00	-12.40
9.456	N	28.55	9.65	38.20	60.00	50.00	-21.80
10.536	N	27.52	9.68	37.20	60.00	50.00	-22.80
10.865	L1	31.25	9.85	41.10	60.00	50.00	-18.90

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-7 and figure 1-8 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

AC Conducted Emissions Test Graphs

Test Configuration 4

Figure 1-7: L1 lines


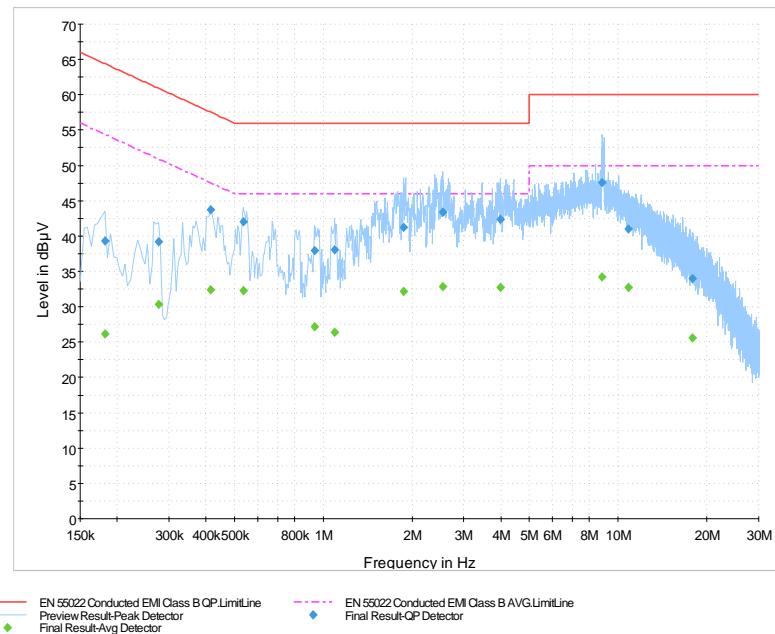


Figure 1-8: N Lines

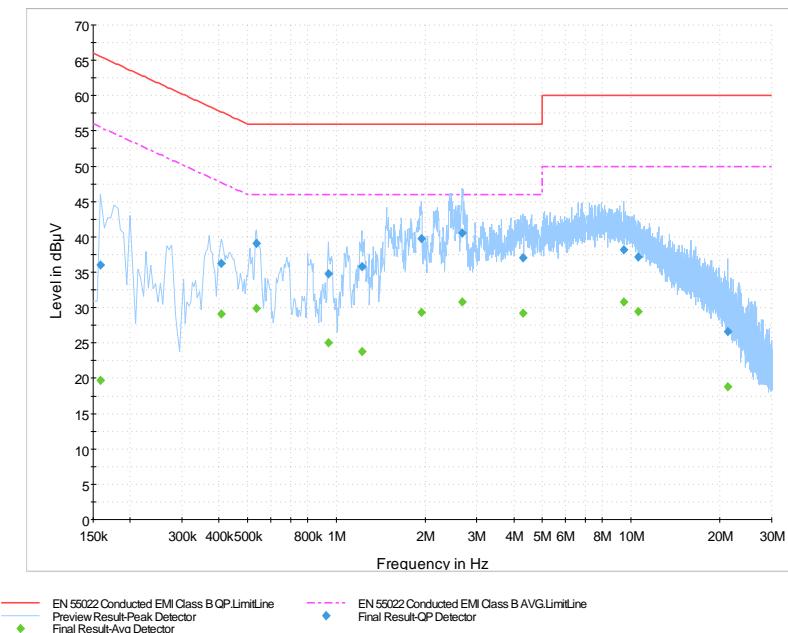

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2	
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009	Author Data Savtej Sandhu

APPENDIX 2 - RADIATED EMISSIONS TEST DATA

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Radiated Emissions Test Results

The measurements were performed by Andrew Fleming.

Test Configuration 1

The environmental test conditions were: Temperature: 25°C

Pressure: 1004 mb

Relative Humidity: 32%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 28, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading +corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
48.025	V	1.96	87	Q.P.	53.52	-21.14	32.38	40.00	-7.62
58.751	V	2.06	352	Q.P.	53.11	-21.49	31.62	40.00	-8.38
118.974	H	2.79	192	Q.P.	51.77	-16.96	34.81	43.50	-8.69
144.038	V	1.40	72	Q.P.	51.00	-17.33	33.67	43.50	-9.83
243.432	H	1.27	265	Q.P.	53.92	-15.37	38.55	46.00	-7.45
365.098	V	2.29	16	Q.P.	40.70	-11.08	29.62	46.00	-16.38
429.069	H	2.16	100	Q.P.	47.67	-8.85	38.82	46.00	-7.18

All other emission levels had a test margin greater than 25 dB.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Radiated Emissions Test Results cont'd

Test Configuration 2

The environmental test conditions were: Temperature: 24°C

Pressure: 1005 mb

Relative Humidity: 34%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 27, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading +corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
38.737	V	1.45	296	Q.P.	40.16	-19.20	20.96	40.00	-19.04
54.823	V	1.42	308	Q.P.	46.89	-21.24	25.65	40.00	-14.35

All emission levels had a test margin greater than 25 dB.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Radiated Emissions Test Results cont'd

Test Configuration 3

The environmental test conditions were: Temperature: 24°C

Pressure: 1006 mb

Relative Humidity: 32%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 28, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+ corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
671.845	H	3.00	353	Q.P.	24.84	-3.64	21.20	46.00	-24.80
730.693	H	1.52	353	Q.P.	24.76	-2.21	22.55	46.00	-23.45
796.558	V	1.58	117	Q.P.	25.10	-1.28	23.82	46.00	-22.18

All other emission levels had a test margin greater than 25 dB.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Radiated Emissions Test Results cont'd

Test Configuration 4

The environmental test conditions were: Temperature: 23°C

Pressure: 1010 mb

Relative Humidity: 32%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 28, 2009.
Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+ corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
134.223	H	1.65	172	Q.P.	50.35	-17.24	33.11	43.50	-10.39
134.247	V	1.46	87	Q.P.	46.56	-17.24	29.32	43.50	-14.18
137.241	H	2.22	183	Q.P.	48.12	-17.21	30.91	43.50	-12.59
211.822	V	1.40	353	Q.P.	43.54	-13.91	29.63	43.50	-13.87
214.867	V	1.41	117	Q.P.	48.45	-14.12	34.33	43.50	-9.17
217.881	V	1.47	91	Q.P.	45.26	-14.28	30.98	46.00	-15.02
429.748	H	1.96	18	Q.P.	39.19	-8.46	30.73	46.00	-15.27
557.836	H	1.79	21	Q.P.	39.48	-6.04	33.44	46.00	-12.56
566.831	V	1.55	155	Q.P.	41.59	-5.83	35.76	46.00	-10.24
566.949	H	1.57	22	Q.P.	43.10	-5.82	37.28	46.00	-8.72
572.667	V	1.44	173	Q.P.	43.45	-5.30	38.15	46.00	-7.85
772.746	H	2.10	156	Q.P.	37.38	-1.12	36.26	46.00	-9.74
781.661	H	1.74	173	Q.P.	38.22	-1.03	37.19	46.00	-8.81
792.869	H	1.95	331	Q.P.	31.11	-0.88	30.23	46.00	-15.77
871.986	H	1.81	162	Q.P.	26.05	1.24	27.29	46.00	-18.71
898.019	V	1.43	43	Q.P.	31.70	1.61	33.31	46.00	-12.69
900.647	V	1.40	315	Q.P.	32.00	1.60	33.60	46.00	-12.40

All other emission levels had a test margin greater than 25 dB.

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Radiated Emissions Test Results cont'd

Test Configuration 5

The environmental test conditions were: Temperature: 23°C

Pressure: 1012 mb

Relative Humidity: 31%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C1EA2C and 30C435AD was tested on July 28, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+ corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
31.023	V	1.40	352	Q.P.	38.20	-17.18	21.02	40.00	-18.98
230.419	H	1.00	136	Q.P.	37.64	-15.34	22.30	46.00	-23.70
882.509	V	3.66	353	Q.P.	24.72	0.47	25.19	46.00	-20.81

All other emission levels had a test margin greater than 25 dB.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Radiated Emissions Test Results cont'd

Test Configuration 6

The environmental test conditions were: Temperature: 24°C

Pressure: 1008 mb

Relative Humidity: 32%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 27, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+ corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
53.668	V	1.55	138	Q.P.	48.71	-21.47	27.24	40.00	-12.76
120.015	H	3.05	81	Q.P.	56.66	-16.98	39.68	43.50	-3.82
134.454	H	2.37	101	Q.P.	52.96	-17.48	35.48	43.50	-8.02
144.066	H	2.15	86	Q.P.	54.58	-17.33	37.25	43.50	-6.25
216.000	H	2.11	290	Q.P.	50.08	-14.57	35.51	43.50	-7.99
240.010	H	1.26	281	Q.P.	52.26	-15.41	36.85	46.00	-9.15
426.667	H	1.85	206	Q.P.	40.39	-8.88	31.51	46.00	-14.49
948.566	V	2.01	172	Q.P.	28.11	1.42	29.53	46.00	-16.47

All other emission levels had a test margin greater than 25 dB.

Radiated Emissions Test Results cont'd

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Test Configuration 7

The environmental test conditions were: Temperature: 24°C

Pressure: 1008 mb

Relative Humidity: 32%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 27, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+ corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
48.004	V	1.77	143	Q.P.	51.23	-21.14	30.09	40.00	-9.91
96.031	H	2.70	175	Q.P.	51.55	-18.39	33.16	43.50	-10.34
143.952	H	3.59	353	Q.P.	51.11	-17.33	33.78	43.50	-9.72
216.008	H	1.56	287	Q.P.	50.58	-14.57	36.01	43.50	-7.49
243.451	H	1.47	67	Q.P.	54.79	-15.37	39.42	46.00	-6.58
304.623	H	1.07	55	Q.P.	41.28	-12.33	28.95	46.00	-17.05
366.455	H	2.38	285	Q.P.	38.54	-11.05	27.49	46.00	-18.51
426.066	H	2.18	106	Q.P.	47.57	-8.89	38.68	46.00	-7.32
527.987	H	1.95	244	Q.P.	41.27	-6.62	34.65	46.00	-11.35
647.988	V	1.89	190	Q.P.	35.95	-4.27	31.68	46.00	-14.32
720.001	V	1.97	341	Q.P.	34.09	-2.31	31.78	46.00	-14.22
960.079	H	1.01	150	Q.P.	32.02	2.06	34.08	54.00	-19.92

All other emission levels had a test margin greater than 25 dB.

Radiated Emissions Test Results cont'd

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RCK71CW APPENDIX 2		
Test Report No. RTS-1765-0908-03	Dates of Test July 27 to August 05, 2009		Author Data Savtej Sandhu

Test Configuration 8

The environmental test conditions were: Temperature: 25°C

Pressure: 1018 mb
Relative Humidity: 22%

FCC CFR 47 Part 15, Subpart B and IC ICES-003, Class B

The BlackBerry® smartphone, PIN 30C2BF78 was tested on July 28, 2009.

Test Distance was 3.0 metres.

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dB μ V)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+ corr) (dB μ V/m)	Limit @ 3.0 m (dB μ V/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
36.630	H	3.44	226	Q.P.	46.59	-18.59	28.00	40.00	-12.00
36.610	V	1.51	180	Q.P.	55.88	-18.59	37.29	40.00	-2.71
110.340	H	2.91	147	Q.P.	51.27	-16.97	34.30	43.50	-9.20
182.870	H	1.77	247	Q.P.	49.80	-16.21	33.59	43.50	-9.91
215.970	H	1.49	278	Q.P.	50.02	-14.19	35.83	43.50	-7.67
215.970	V	2.17	353	Q.P.	45.18	-14.19	30.99	43.50	-12.51
244.140	H	1.40	302	Q.P.	45.10	-14.99	30.11	46.00	-15.89
245.150	V	1.67	353	Q.P.	40.81	-14.98	25.83	46.00	-20.17
304.360	H	1.03	71	Q.P.	39.88	-11.97	27.91	46.00	-18.09
365.060	H	2.30	266	Q.P.	39.16	-10.56	28.60	46.00	-17.40
426.370	V	1.40	353	Q.P.	43.25	-8.53	34.72	46.00	-11.28
428.930	H	2.20	98	Q.P.	45.60	-8.48	37.12	46.00	-8.88
528.010	H	1.87	255	Q.P.	42.92	-6.10	36.82	46.00	-9.18
720.020	V	1.75	42	Q.P.	32.76	-1.85	30.91	46.00	-15.09
943.780	V	2.89	167	Q.P.	26.55	1.87	28.42	46.00	-17.58
972.790	V	1.97	172	Q.P.	27.65	2.93	30.58	54.00	-23.42

All other emission levels had a test margin greater than 25 dB.