

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 1(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR ACCURACY VERIFICATION

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 2(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

Date/Time: 6/21/2010 3:11:01 PM

Test Laboratory: RIM Testing Services

DipoleValidation_835MHz_Amb_Tem_22.8_Liq_Tem_22.0C_06_21_10

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASy4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 109.1 V/m ; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 14.3 W/kg


SAR(1 g) = 9.63 mW/g ; SAR(10 g) = 6.32 mW/g

Maximum value of SAR (measured) = 10.4 mW/g

d=15mm, Pin=1000mW/Area Scan (31x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 10.4 mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 3(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

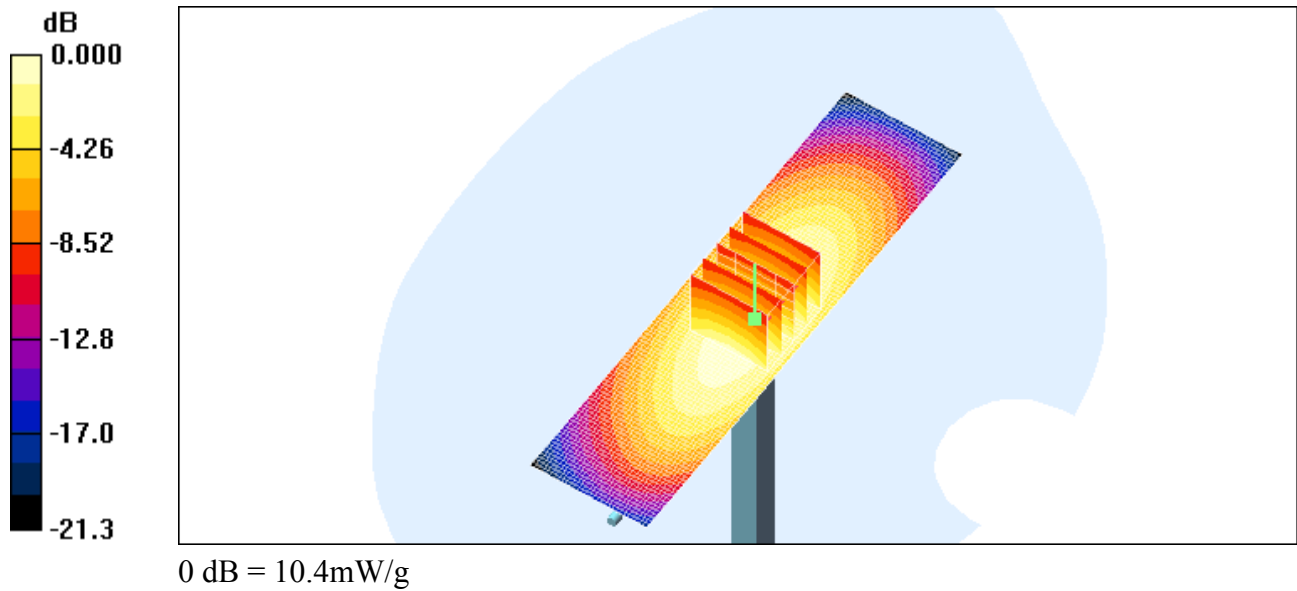

	Document			Page
	Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			4(11)
Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10 – June 24, 2010	RTS-1689-1007-26	L6ARCM70UW	2503A-RCM70UW

Date/Time: 6/22/2010 5:42:48 PM

Test Laboratory: RIM Testing Services

DipoleValidation_835MHz_Amb_Tem_23.1_Liq_Tem_22.5C_06_22_10

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.857 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement

grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 106.1 V/m ; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 8.83 mW/g ; SAR(10 g) = 5.77 mW/g


Maximum value of SAR (measured) = 9.52 mW/g

d=15mm, Pin=1000mW/Area Scan (31x121x1): Measurement grid: $dx=15\text{mm}$,

$dy=15\text{mm}$

Maximum value of SAR (interpolated) = 9.46 mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 5(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

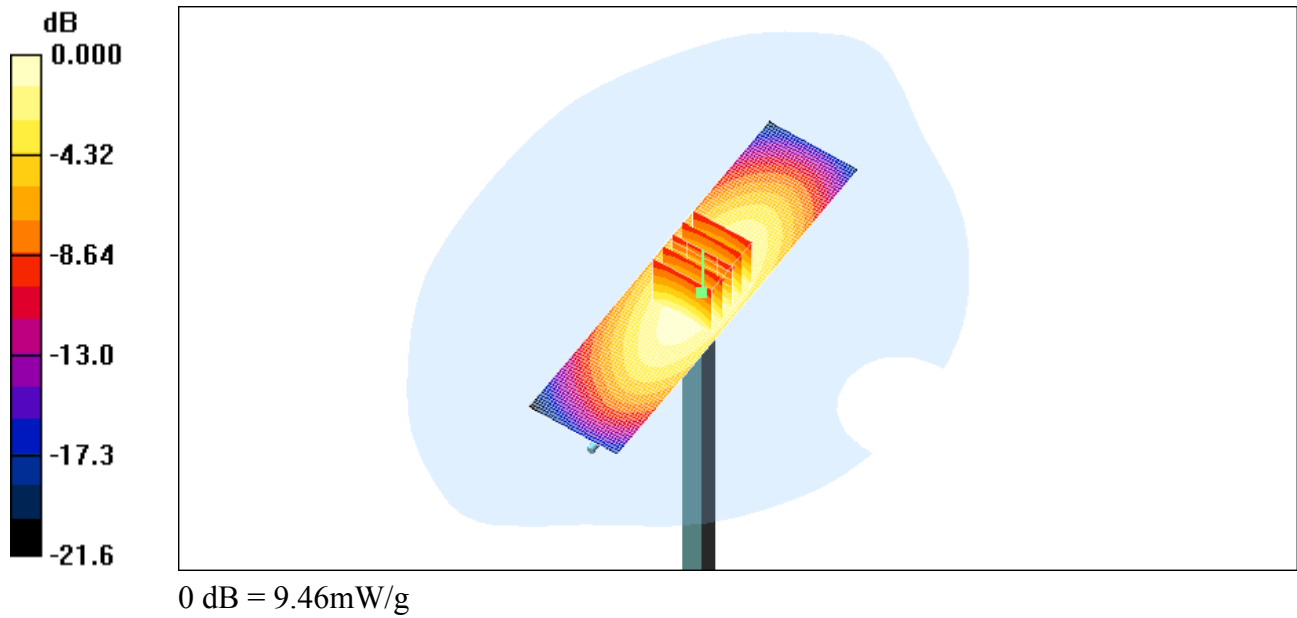

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 6(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

Date/Time: 6/10/2010 5:28:53 PM

Test Laboratory: RIM Testing Services

DipoleValidation_1900MHz_Amb_Tem_23.2_Liq_Tem_22.3_C_06_10_10

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 182.0 V/m; Power Drift = 0.015 dB
Peak SAR (extrapolated) = 76.4 W/kg
SAR(1 g) = 41.4 mW/g; SAR(10 g) = 21.4 mW/g
Maximum value of SAR (measured) = 46.8 mW/g

d=15mm, Pin=1000mW/Area Scan (31x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 46.8 mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 7(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

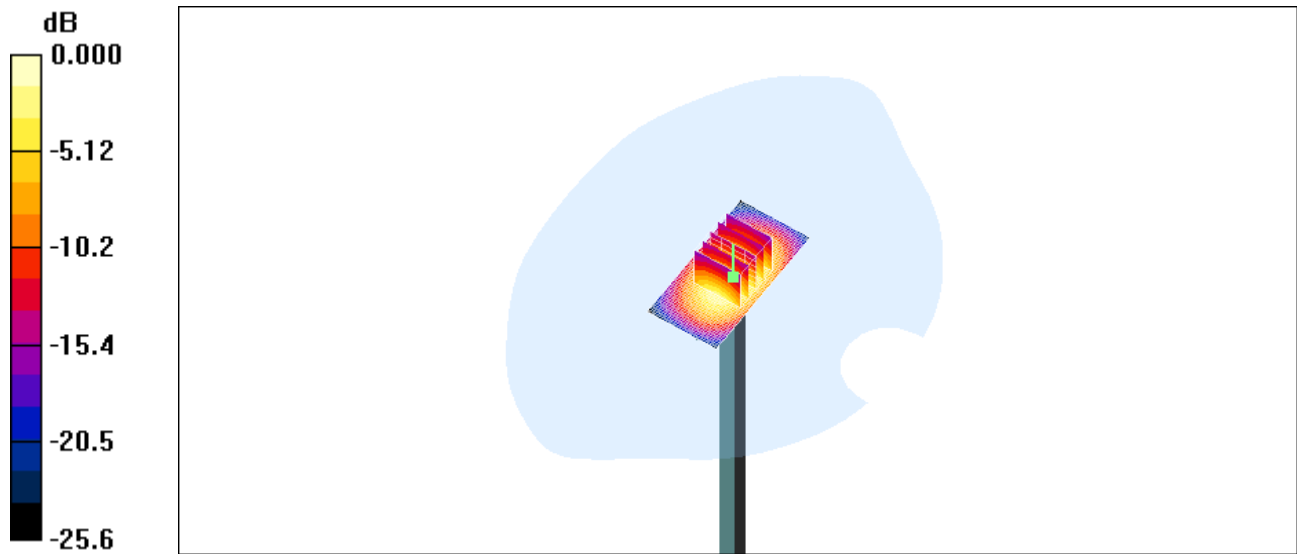

0 dB = 46.8mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 8(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

Date/Time: 6/14/2010 11:17:07 AM

Test Laboratory: RIM Testing Services

DipoleValidation_1900MHz_Amb_Tem_23.4_Liq_Tem_22.0C_06_14_10

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement

grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 179.5 V/m ; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 74.4 W/kg

SAR(1 g) = 40.5 mW/g ; SAR(10 g) = 21 mW/g



Maximum value of SAR (measured) = 45.0 mW/g

d=15mm, Pin=1000mW/Area Scan (31x61x1): Measurement grid: $dx=15\text{mm}$,

$dy=15\text{mm}$

Maximum value of SAR (interpolated) = 46.5 mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 9(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

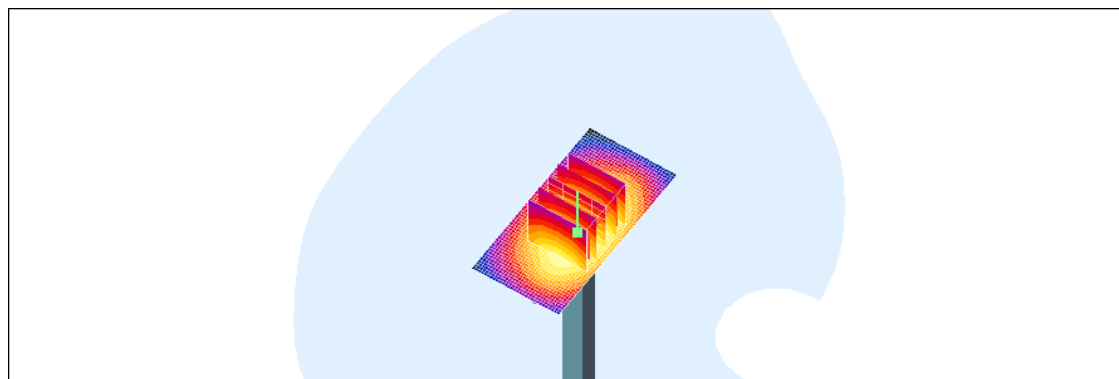

0 dB = 46.5mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 10(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

Date/Time: 6/16/2010 11:46:25 PM

Test Laboratory: RIM Testing Services

DipoleValidation_2450MHz_Amb_Tem_23.2_Liq_Tem_22.6_C_06_16_10

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:747

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=1000mW/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 184.6 V/m ; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 112.4 W/kg
SAR(1 g) = 54 mW/g; SAR(10 g) = 24.8 mW/g
Maximum value of SAR (measured) = 61.9 mW/g

d=15mm, Pin=1000mW/Area Scan (31x51x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 65.9 mW/g

	Document Appendix A for the BlackBerry® Smartphone Model RCM72UW SAR Report			Page 11(11)
Author Data Andrew Becker	Dates of Test June 10 – June 24, 2010	Test Report No RTS-1689-1007-26	FCC ID: L6ARCM70UW	IC ID 2503A-RCM70UW

