



Document

Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR ReportPage
1(66)

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 2(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 1:10:45 AM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_low_chan_amb_temp_23.1_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 825$ MHz; $\sigma = 0.842$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.988 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 10.3 V/m; Power Drift = 0.029 dB
 Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 0.898 mW/g; SAR(10 g) = 0.642 mW/g

Maximum value of SAR (measured) = 0.937 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

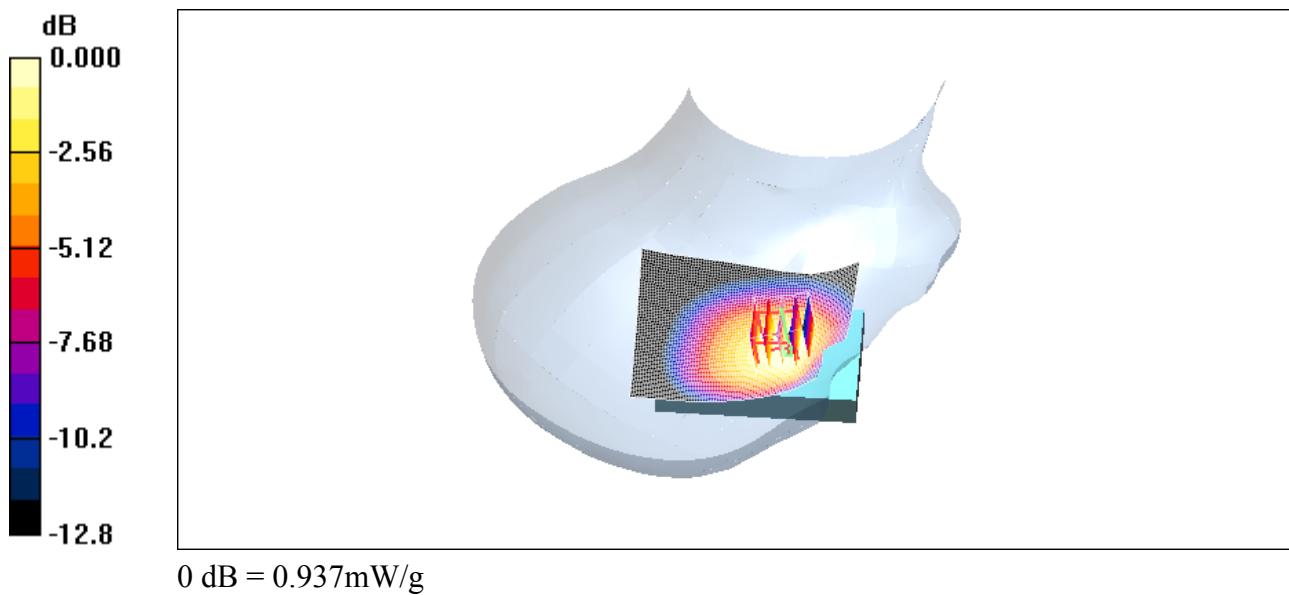

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 4(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 12:53:34 AM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_mid_chan_amb_temp_23.3_liq_temp_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.861$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.06 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.083 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.968 mW/g; SAR(10 g) = 0.691 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.00 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

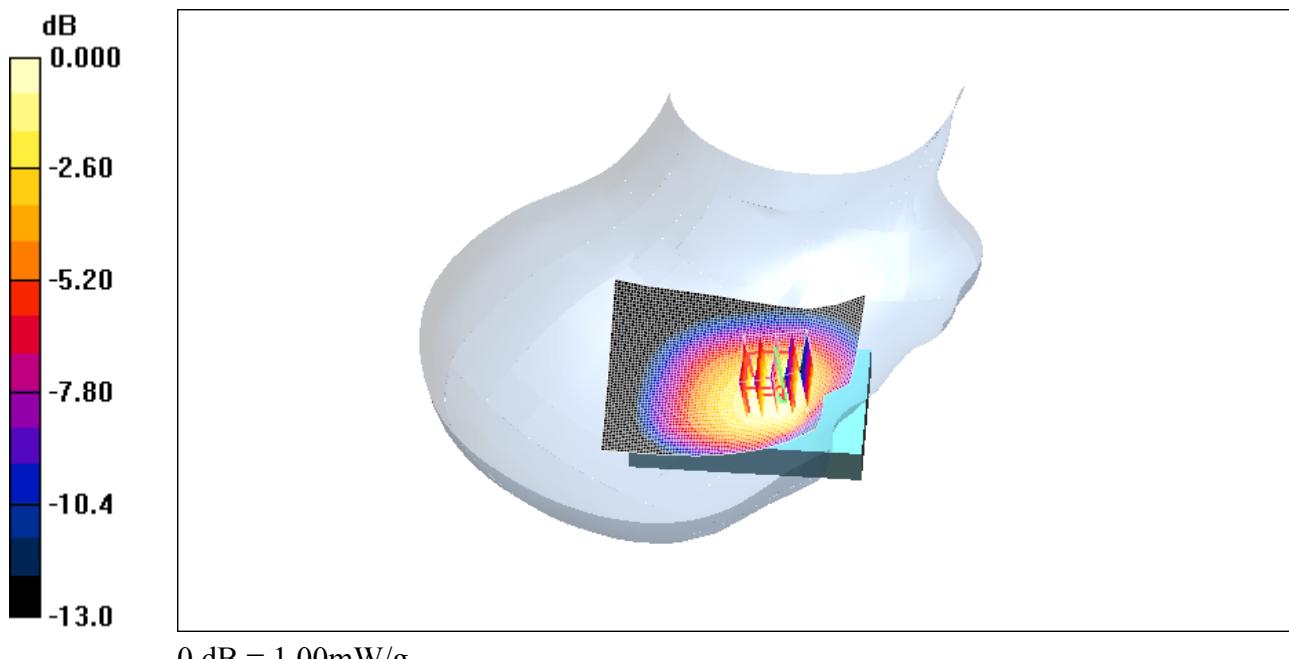

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 6(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 1:28:50 AM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_high_chan_amb_temp_23.0_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.21 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.062 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.786 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.15 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

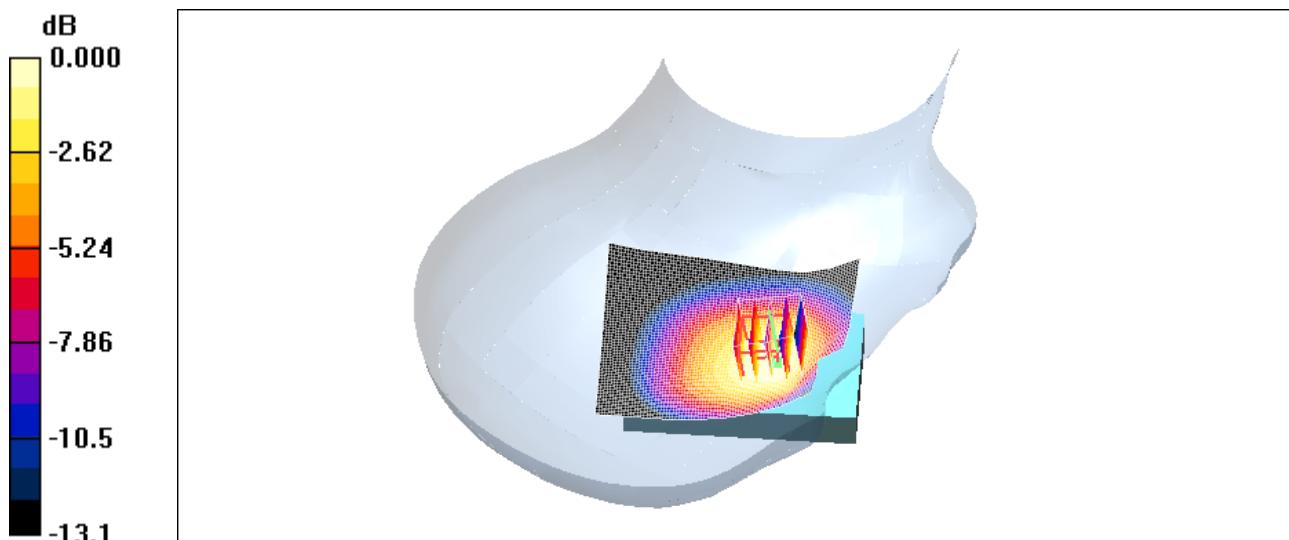

0 dB = 1.15mW/g

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 8(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 10:00:25 AM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE850_high_chan_amb_temp_22.9_liq_temp_2
2.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.608 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = 0.105 dB


Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.440 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.610 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

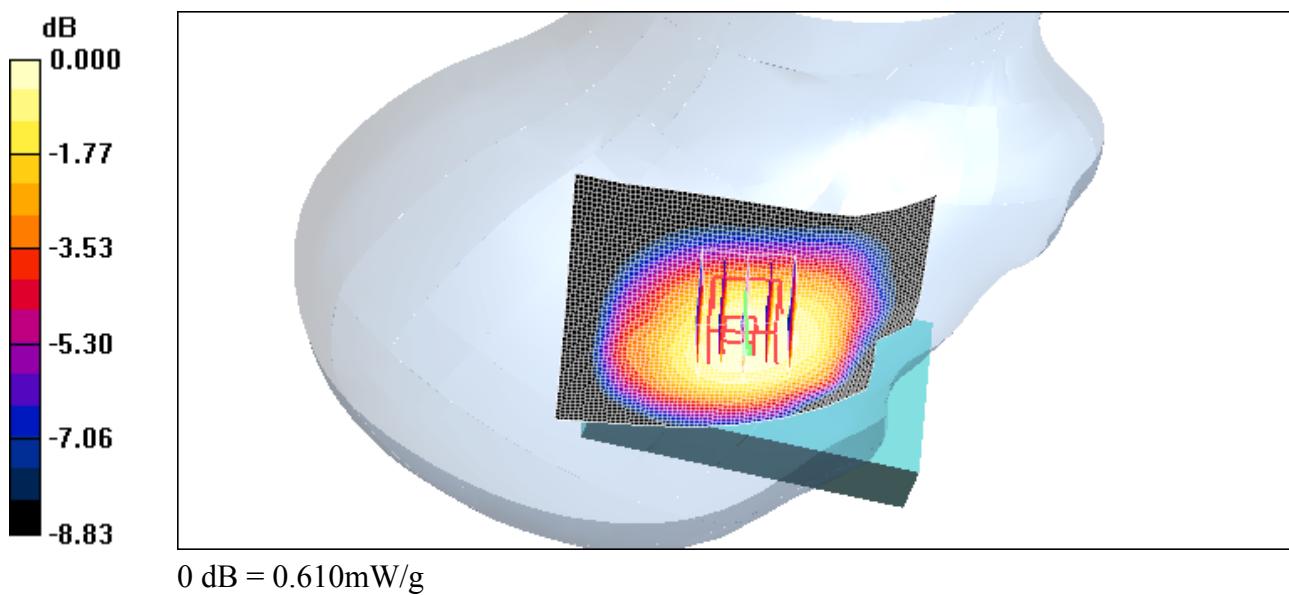

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 10(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 9:42:25 AM

Test Laboratory: RIM Testing Services

RightHandSide_GSM850_high_chan_amb_temp_23.3_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.980 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.52 V/m; Power Drift = 0.048 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.633 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.927 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

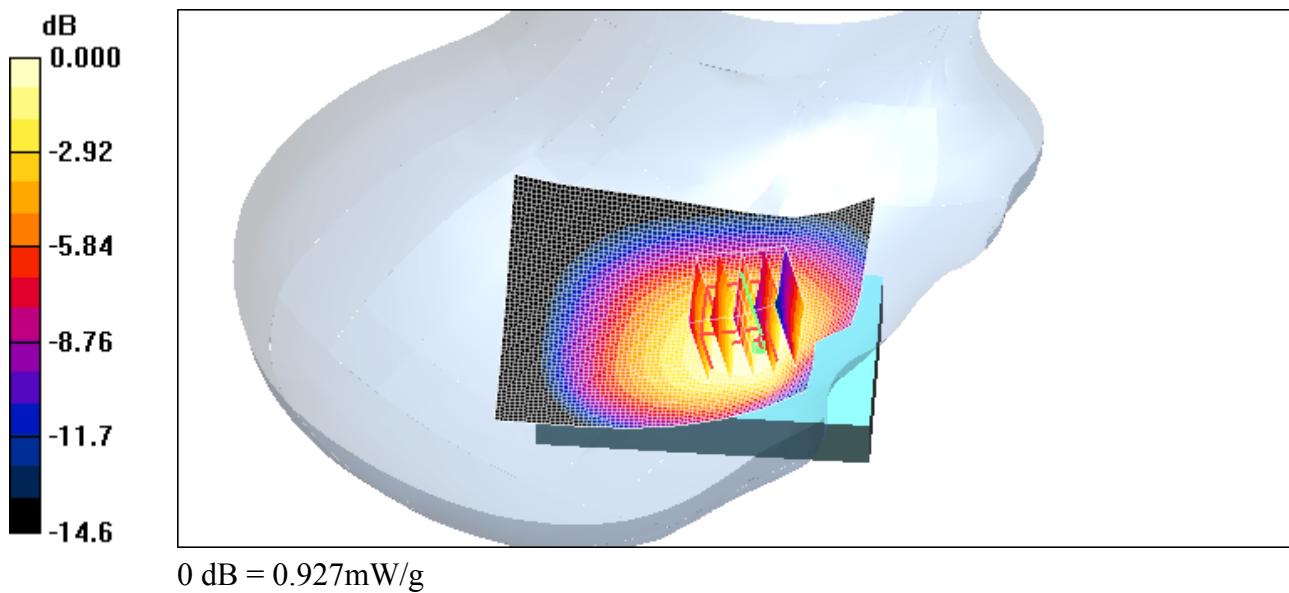

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 12(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 10:31:39 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_low_chan_amb_temp_22.6_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 825$ MHz; $\sigma = 0.842$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.899 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.26 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.584 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

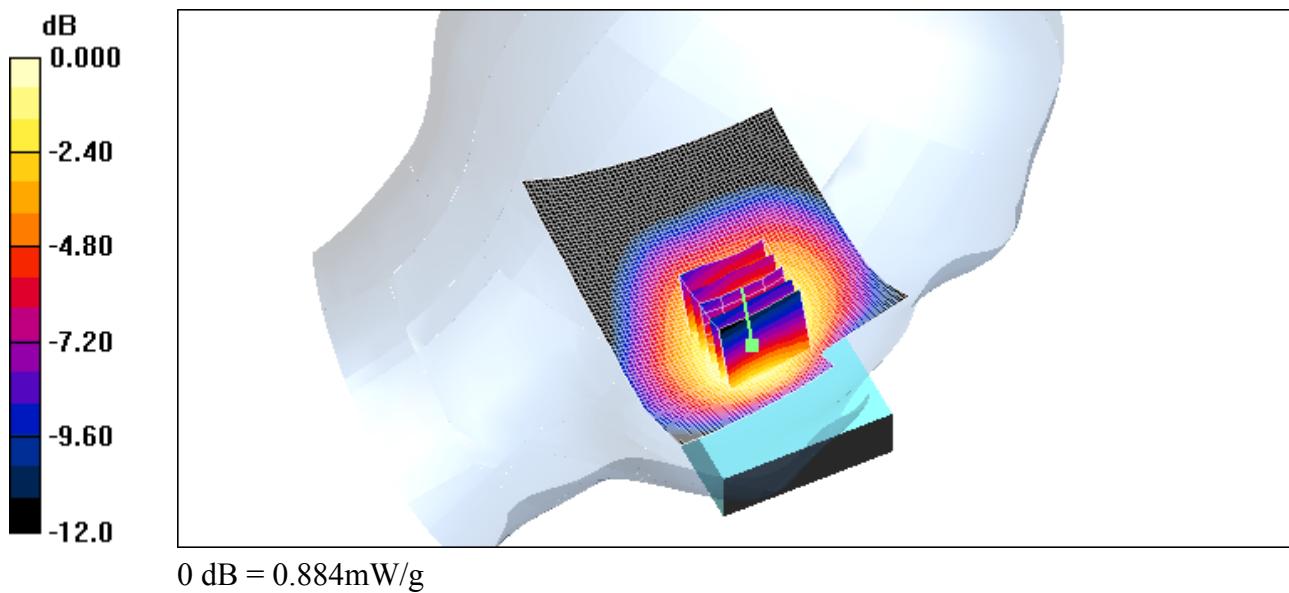

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 14(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 10:50:53 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_mid_chan_amb_temp_22.8_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.861$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.936 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.08 V/m; Power Drift = 0.053 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.617 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.933 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

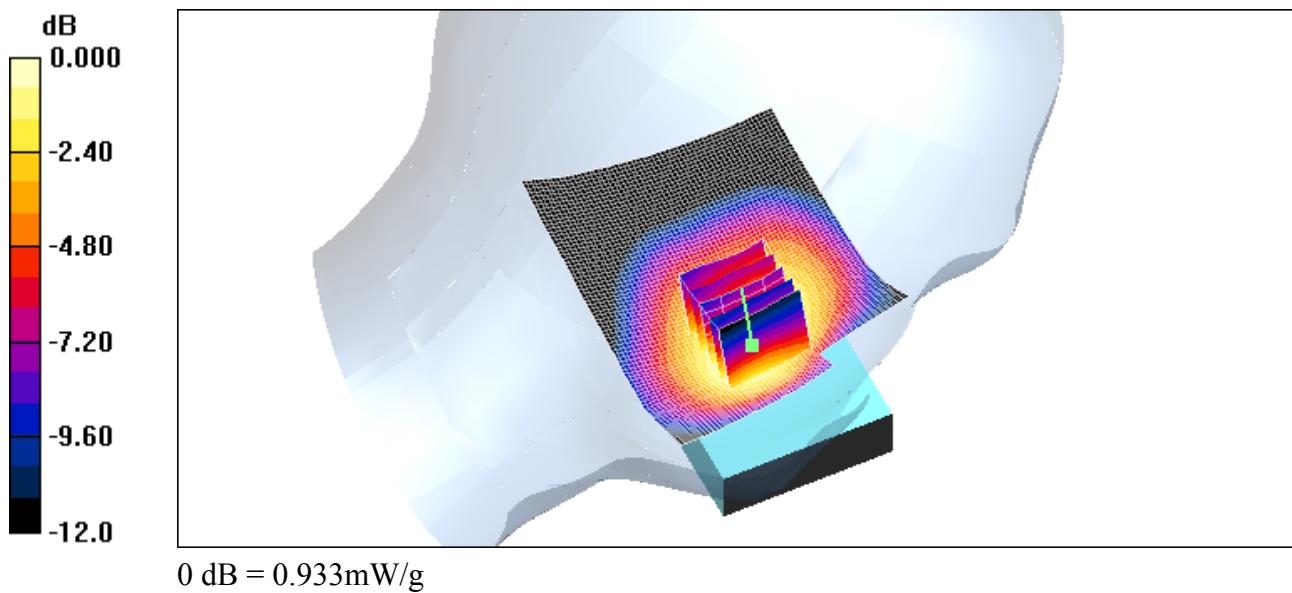

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 16(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 11:07:34 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_high_chan_amb_temp_23.0_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.07 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.88 V/m; Power Drift = 0.004 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.708 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.08 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

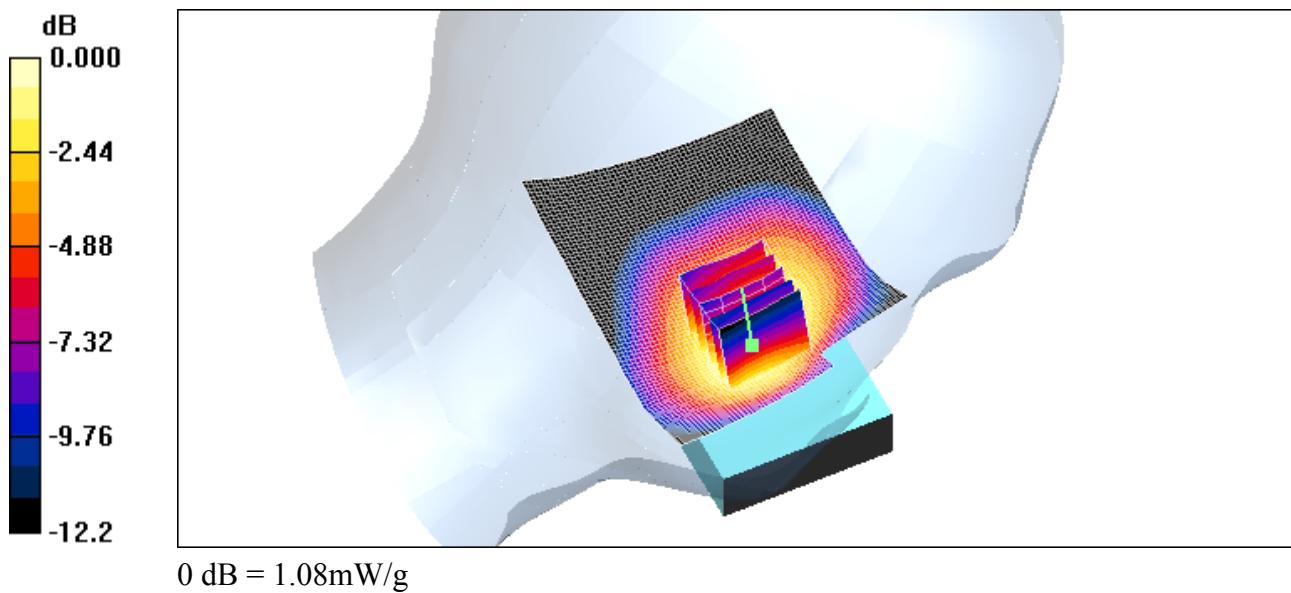

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 18(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/23/2010 11:46:32 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE850_high_chan_amb_temp_23.5_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.674 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = 0.107 dB


Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.634 mW/g; SAR(10 g) = 0.479 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.668 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

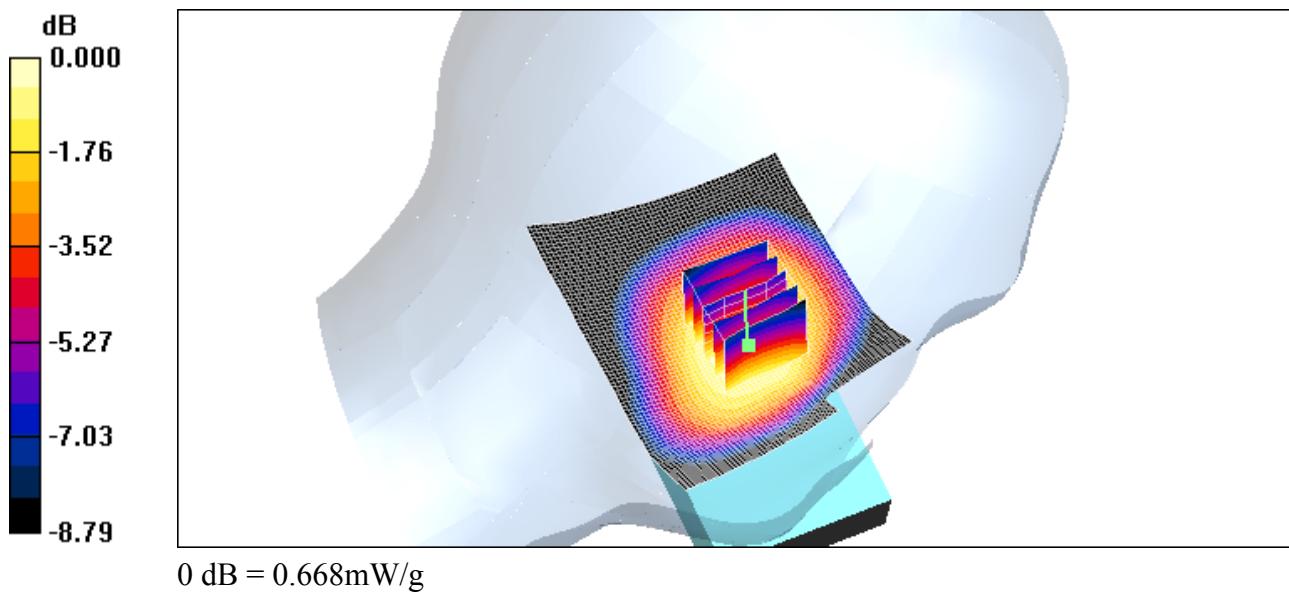

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 20(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 4:44:32 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_low_chan_amb_temp_22.9_liq_temp_2 1.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.28$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.860 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 11.3 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.709 mW/g; SAR(10 g) = 0.350 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.794 mW/g

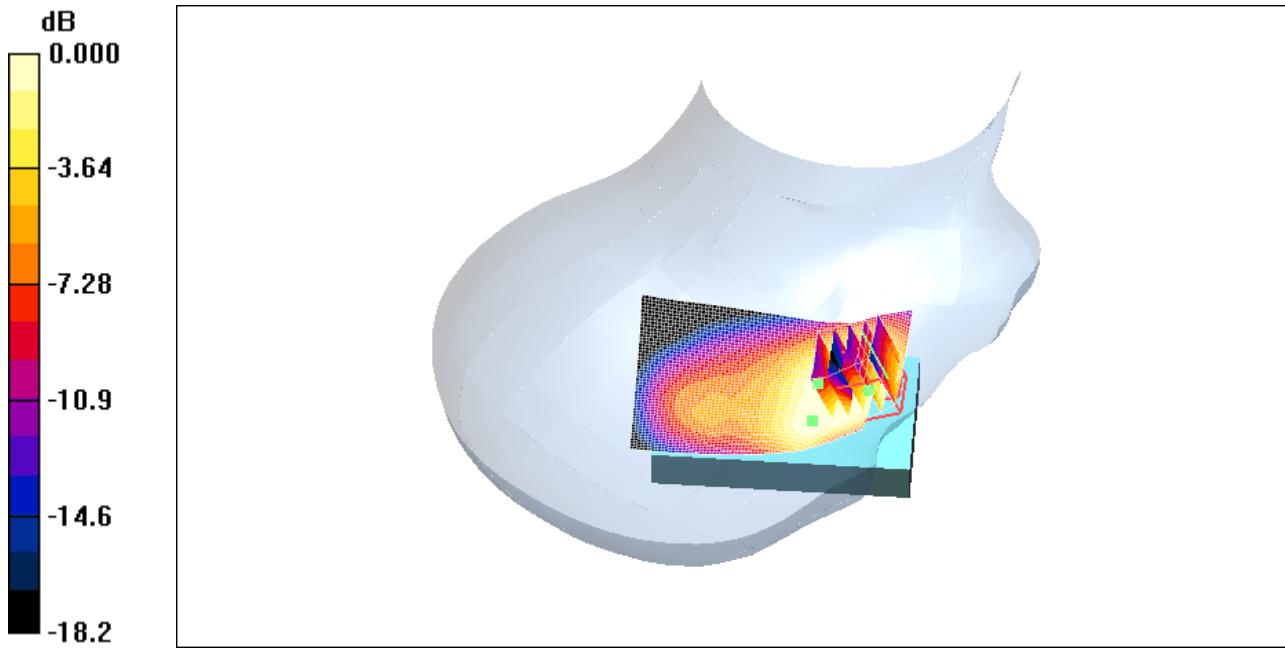Author Data
Andrew BeckerDates of Test
June 10– June 24 & July 15, 2010Test Report No
RTS-1689-1007-38FCC ID:
L6ARCN70UWIC ID
2503A-RCN70UW

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 22(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 4:59:01 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_mid_chan_amb_temp_23.1_liq_temp_2 2.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.948 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.010 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.389 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.903 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

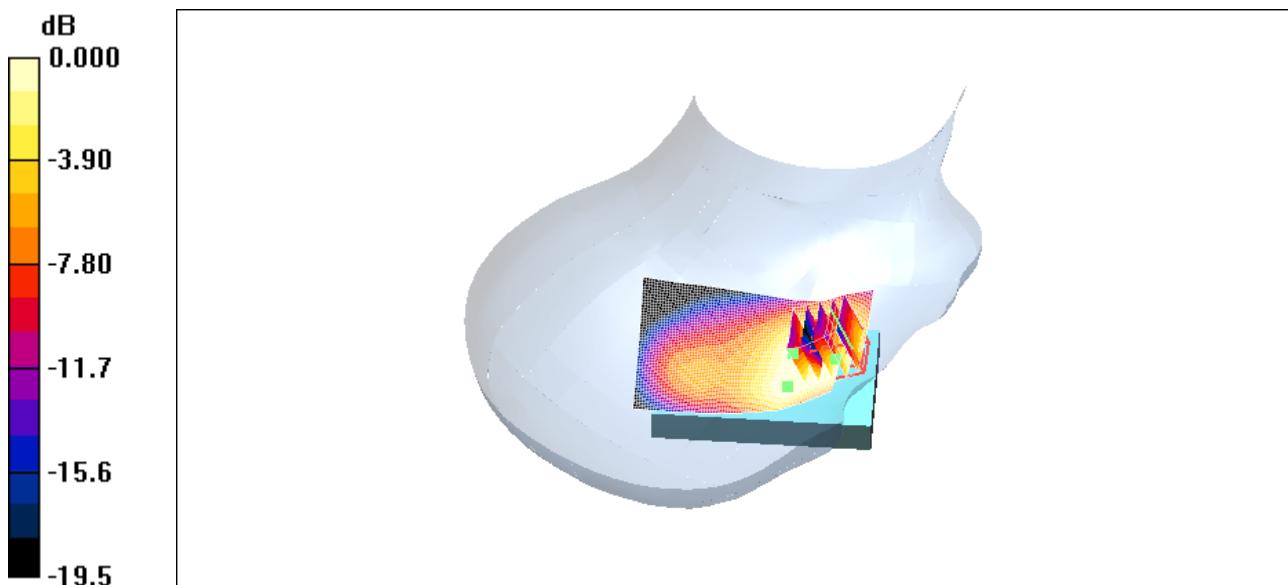

0 dB = 0.903mW/g

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 24(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 5:12:28 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_high_chan_amb_temp_23.2_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.946 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = 0.051 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.556 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.932 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

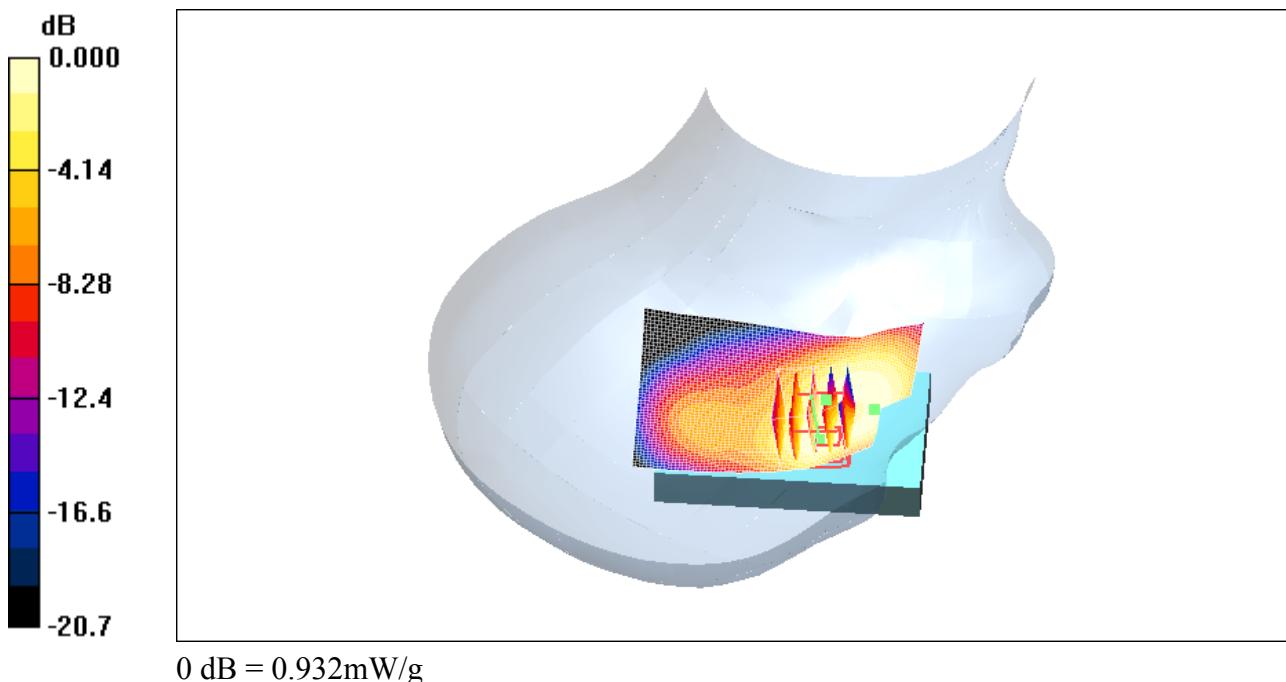

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 26(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 5:31:27 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_band_IV_high_chan_amb_temp_23.1_liq_temph_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.386 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = 0.028 dB


Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.203 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.378 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

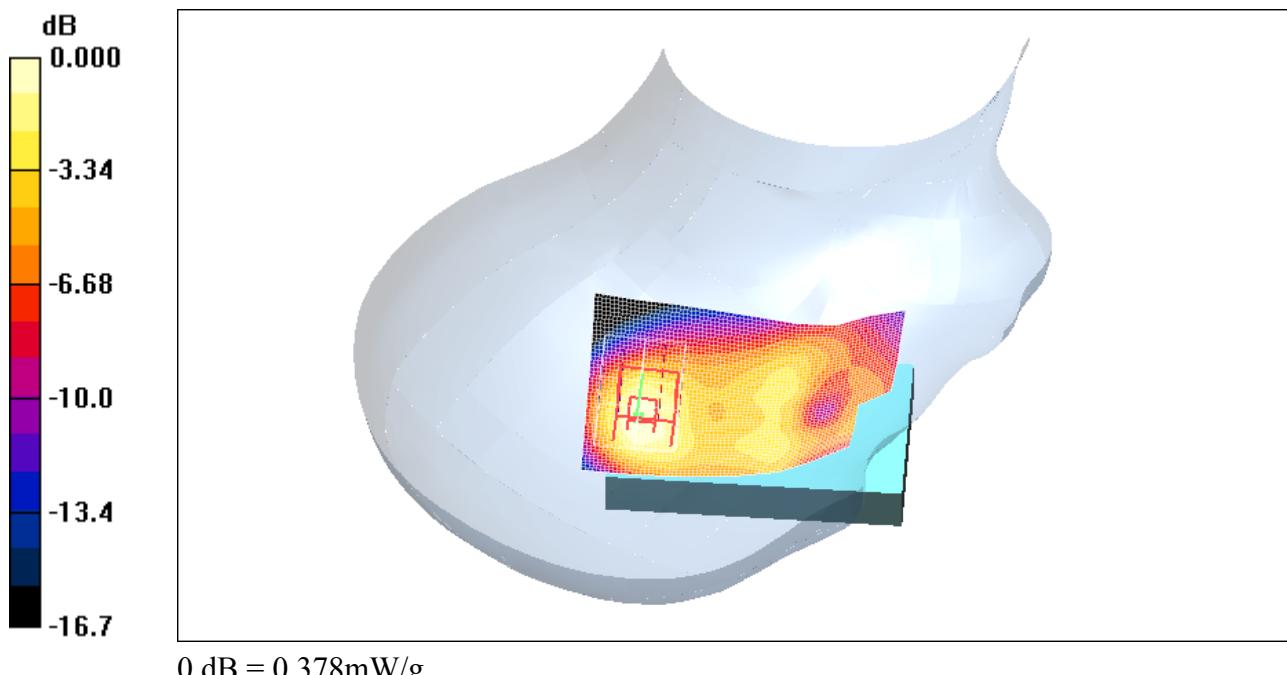

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>		Page 28(66)		
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 2:56:39 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_UMTS_band_IV_low_chan_amb_temp_22.5_liq_temp_21.
4C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.28$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.02 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.043 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.548 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.03 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

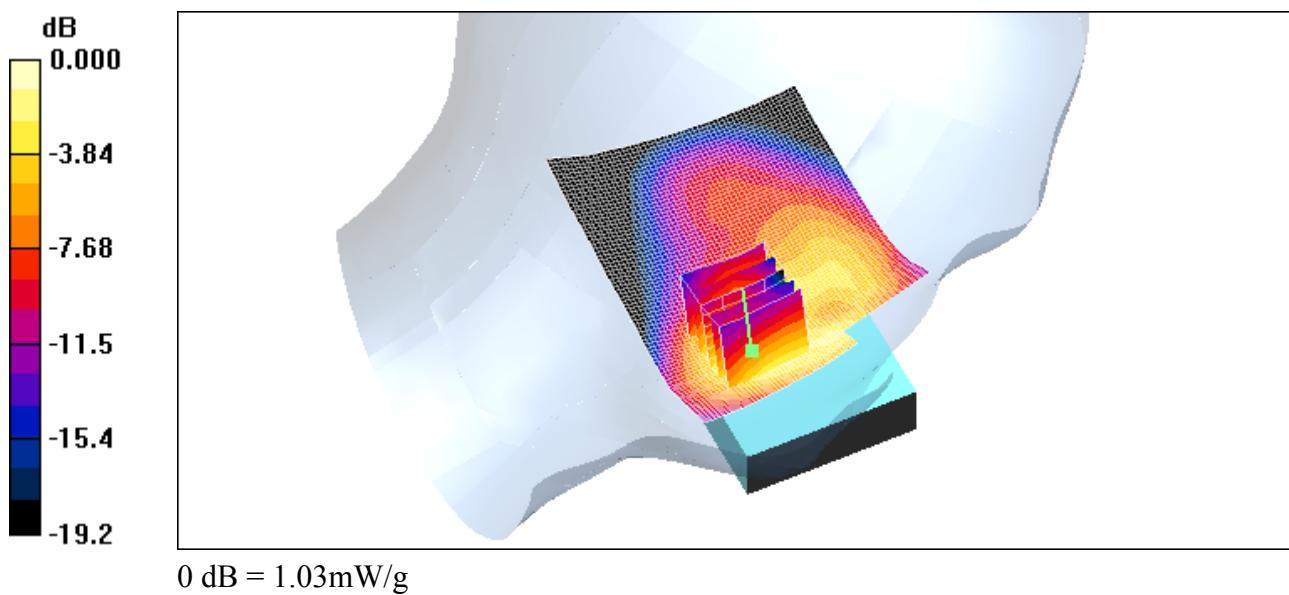

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 30(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 3:15:10 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_IV_mid_chan_amb_temp_22.9_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.3$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.23 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.001 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.651 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.23 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

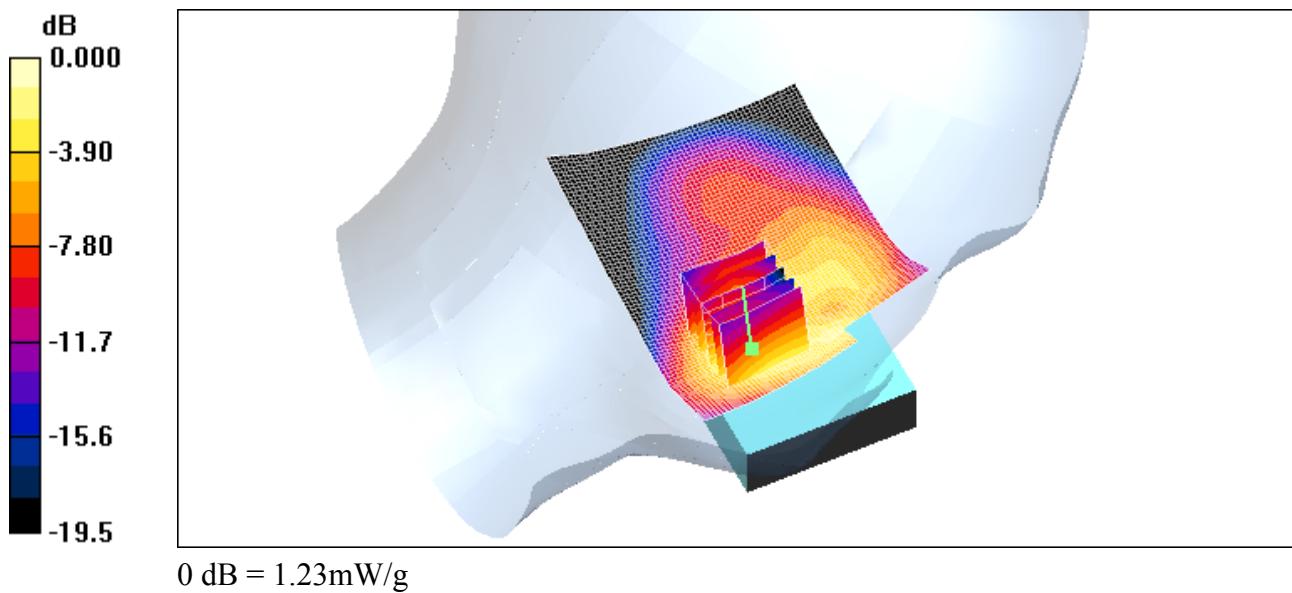

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 32(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 3:29:41 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_UMTS_band_IV_high_chan_amb_temp_22.9_liq_temp_2
1.7C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.30 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.081 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.688 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.31 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

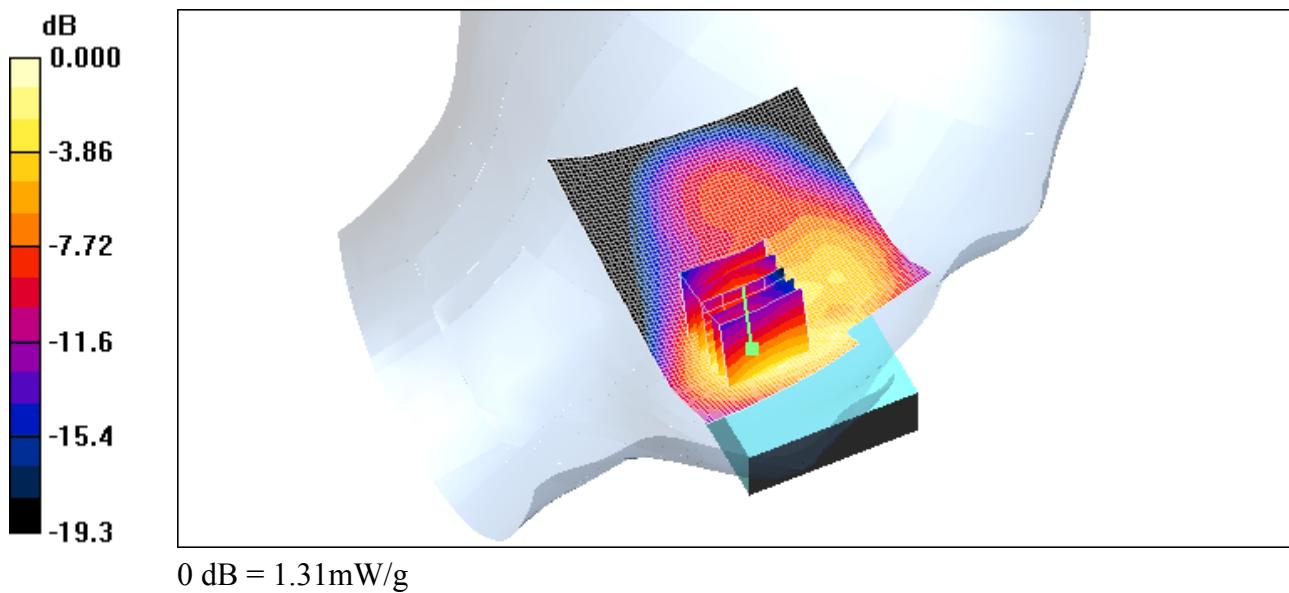

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 34(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 3:46:12 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_UMTS_band_IV_high_chan_amb_temp_22.8_liq_tem
p_21.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.375 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.196 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 0.368 mW/g



Document

Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR ReportPage
35(66)

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

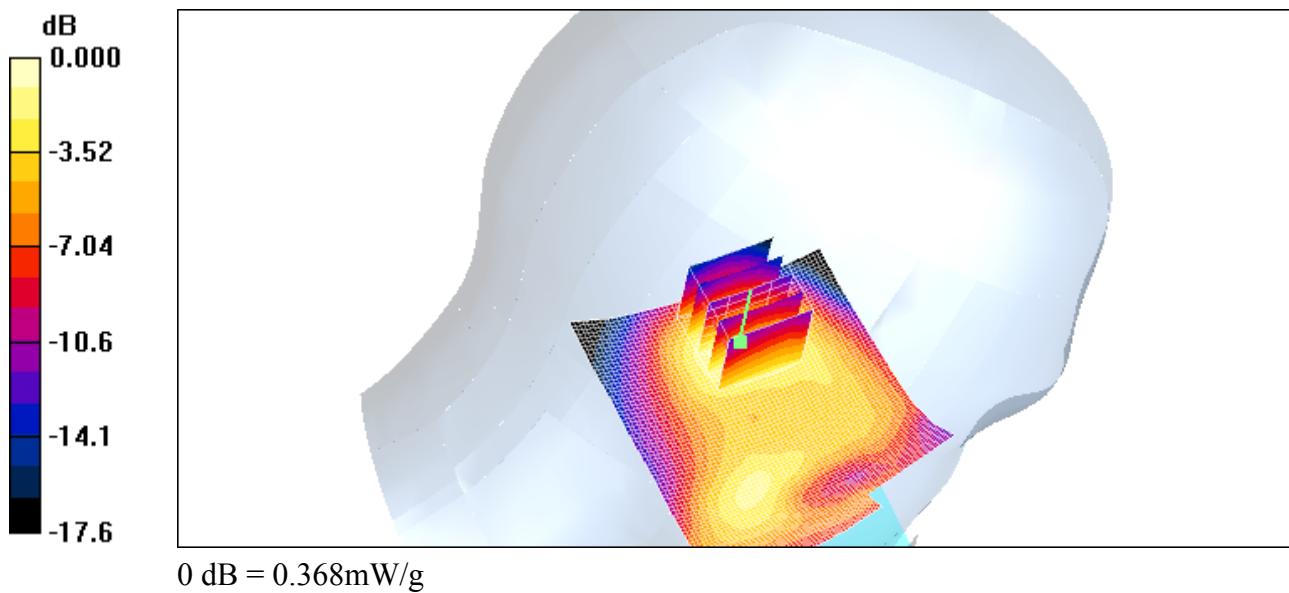

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 36(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 7/15/2010 8:01:19 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band

IV_high_chan_amb_temp_22.8_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 228EB762

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.47 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.054 dB


Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.34 mW/g; SAR(10 g) = 0.773 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.47 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

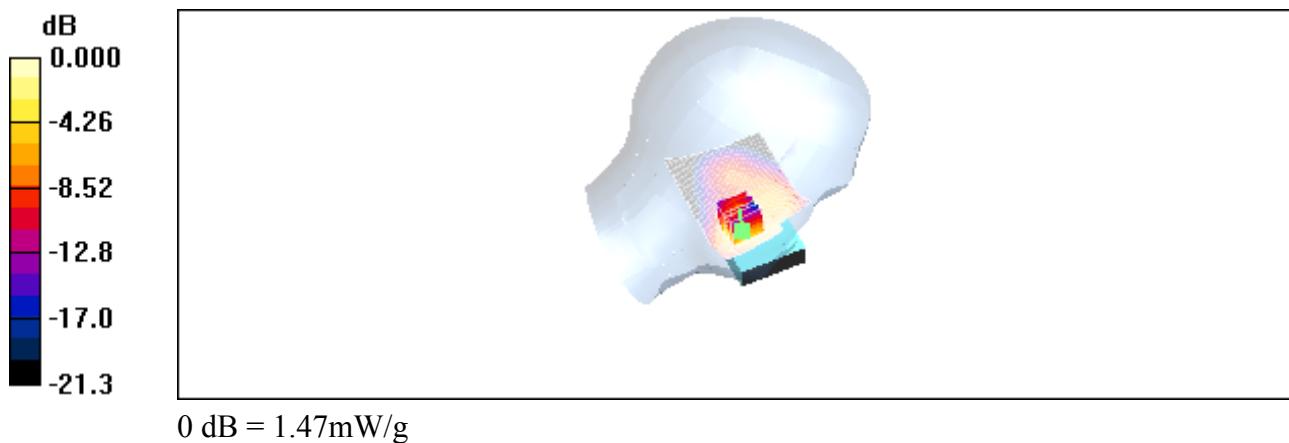

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 38(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 7/15/2010 8:30:55 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_high_chan_amb_temp_22.8_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 228EB762

Communication System: WCDMA FDD IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.993 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.424 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 1.03 mW/g



Document

Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR ReportPage
39(66)

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

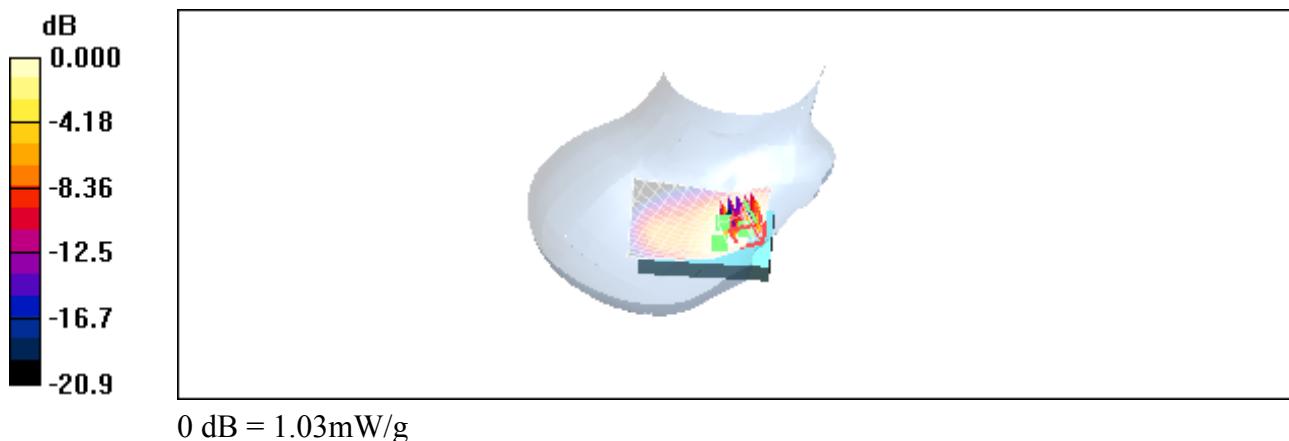

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 40(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 11:11:55 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_amb_temp_23.0_liq_temp_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.530 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.5 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.509 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

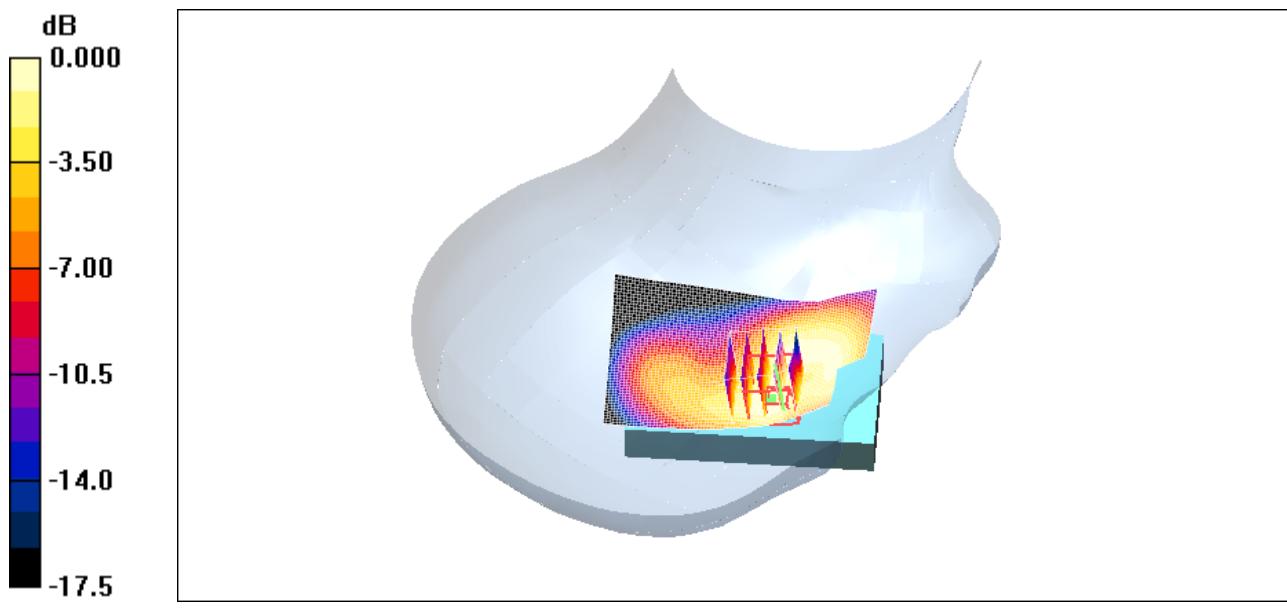



Document

Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR ReportPage
42(66)

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

Date/Time: 6/15/2010 11:29:53 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE1900_mid_chan_amb_temp_22.8_liq_temp_2
1.8C****DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE**

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.303 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.0 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

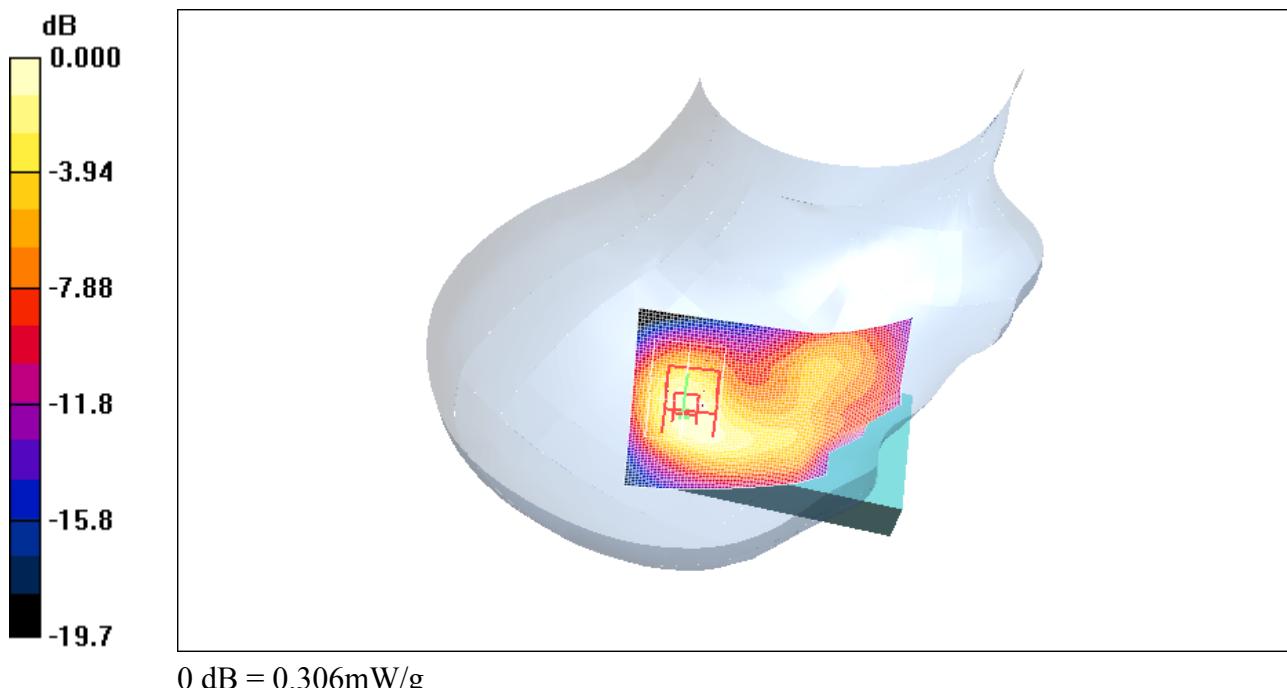

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 44(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/16/2010 12:22:17 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_low_chan_amb_temp_23.2_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.28$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.00 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.073 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.888 mW/g; SAR(10 g) = 0.512 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.971 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

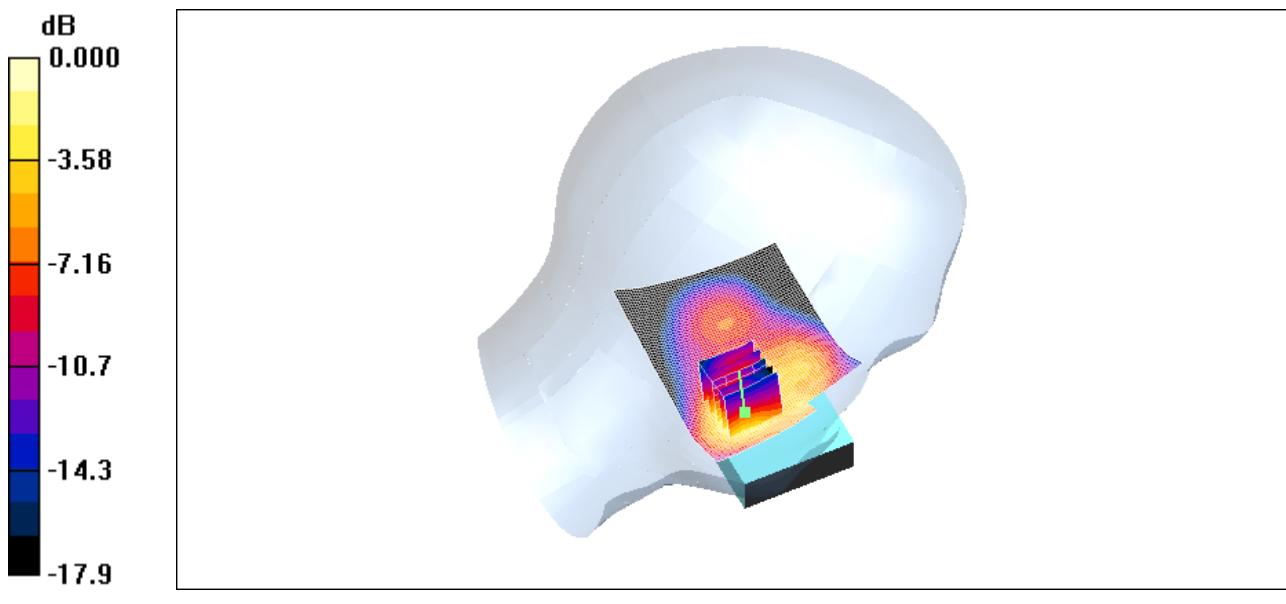

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 46(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/15/2010 11:46:59 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_mid_chan_amb_temp_22.6_liq_temp_21.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.947 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.7 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.474 mW/g

Maximum value of SAR (measured) = 0.926 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

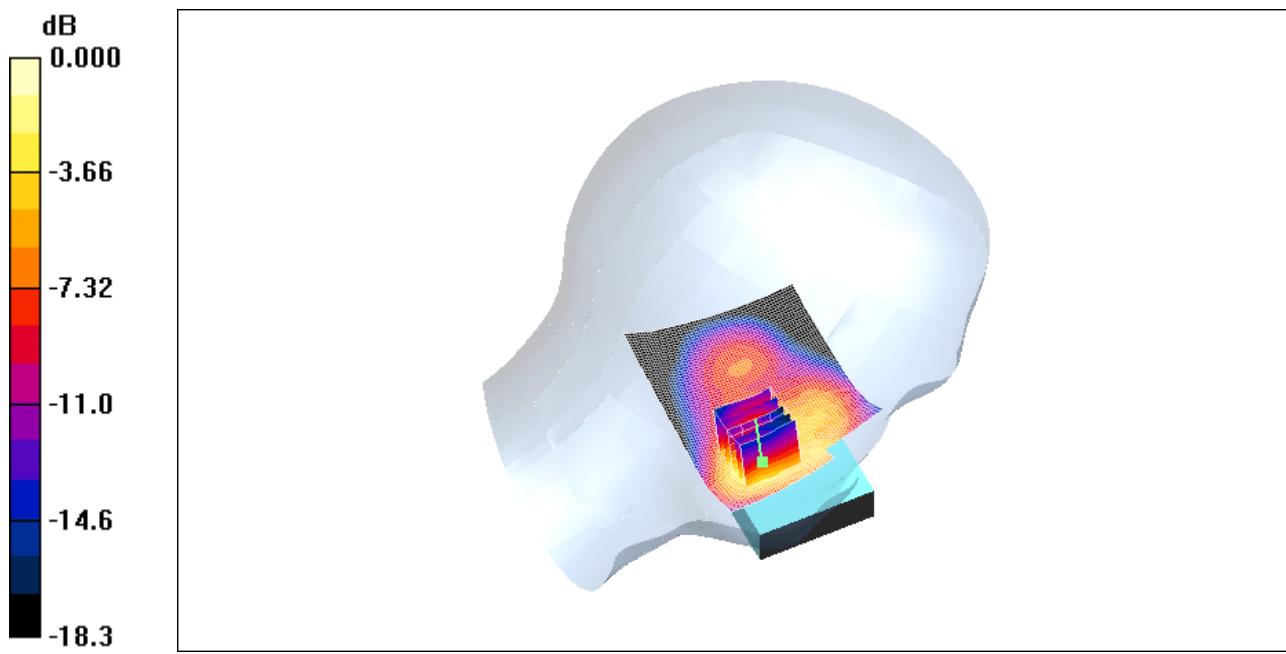

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 48(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/16/2010 12:40:09 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_high_chan_amb_temp_22.8_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.823 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.83 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.800 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

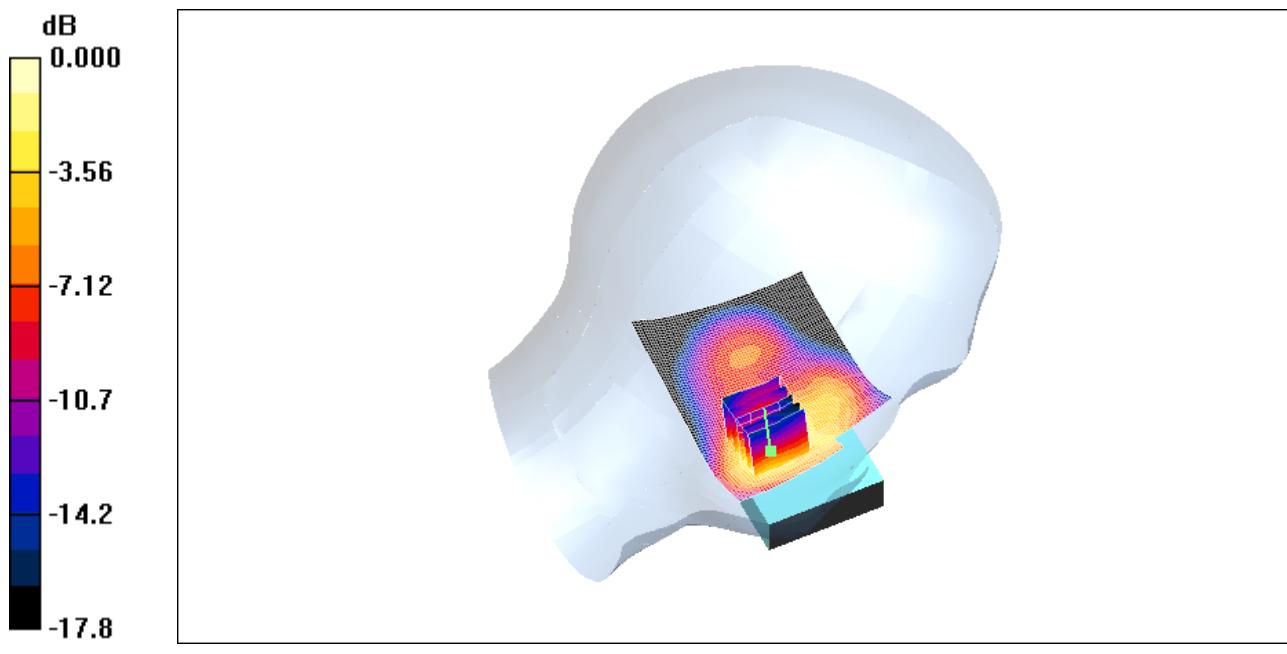

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 50(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/16/2010 1:00:00 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE1900_low_chan_amb_temp_22.5_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.28$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.307 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.043 dB


Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.164 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.315 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

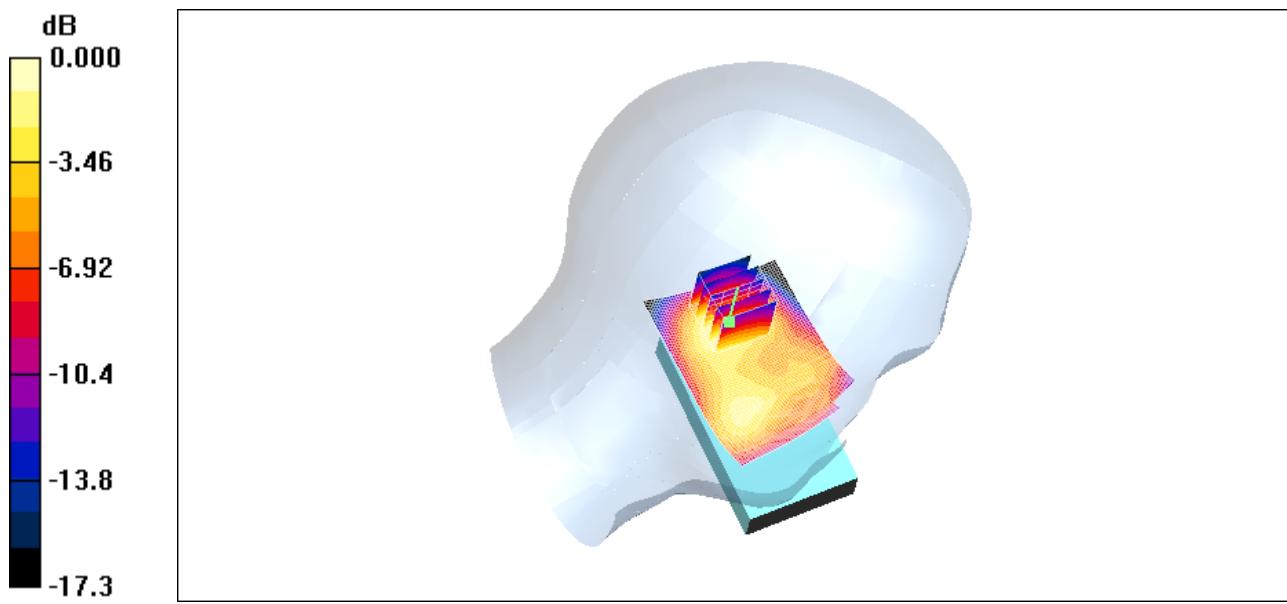

0 dB = 0.315mW/g

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 52(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/16/2010 1:20:20 AM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_low_chan_amb_temp_22.4_liq_temp_21.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.28$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.854 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.70 V/m; Power Drift = 0.101 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.440 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.825 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

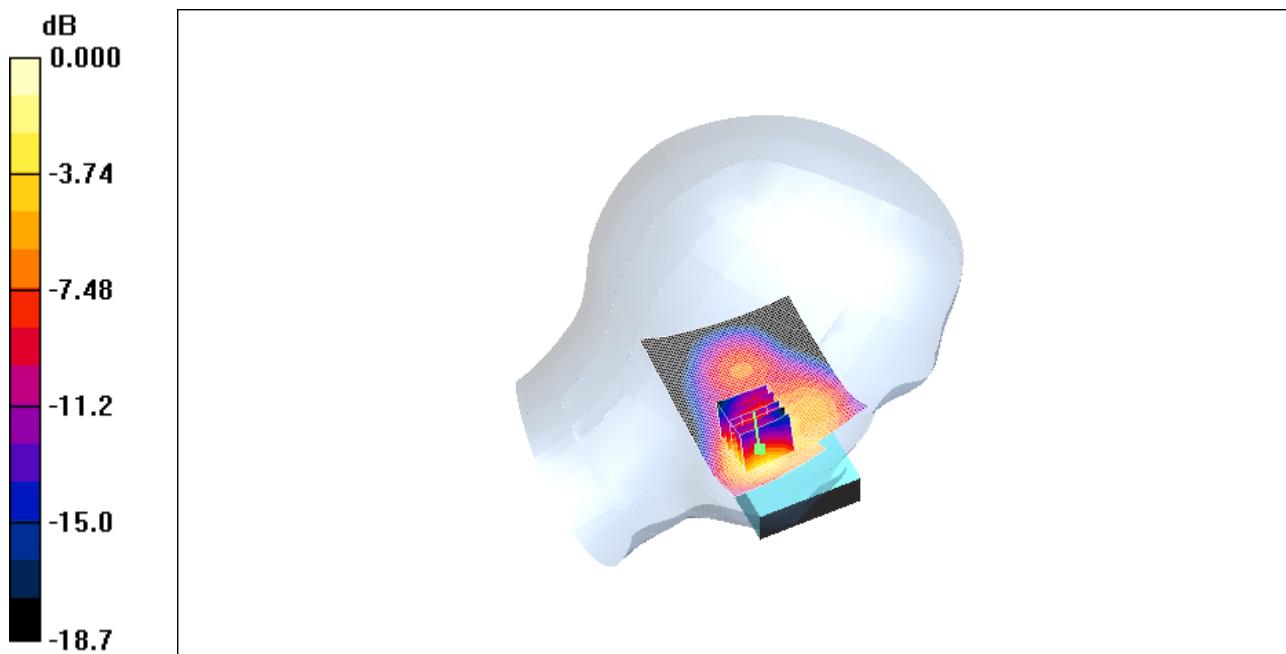

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 54(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/17/2010 12:47:32 AM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_low_chan_amb_temp_22.6_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.76 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.096 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.47 V/m; Power Drift = -0.096 dB


Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.049 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.097 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

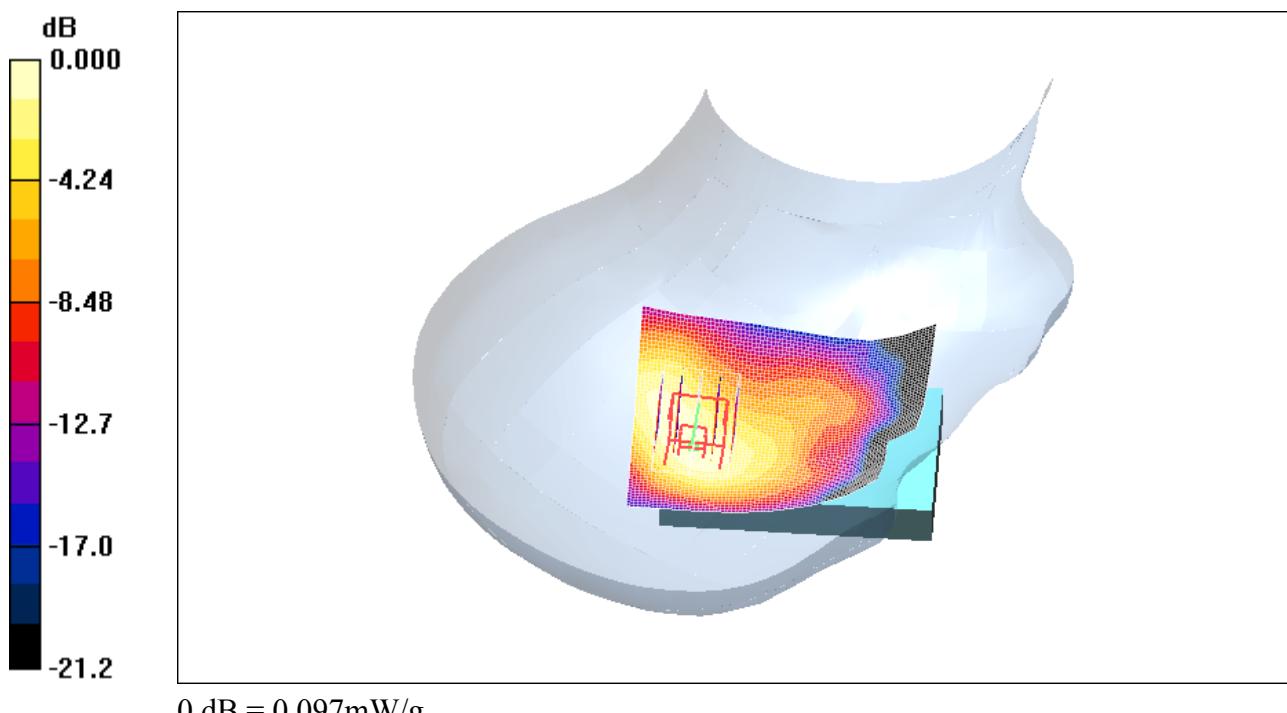

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 56(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/17/2010 1:08:07 AM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_mid_chan_amb_temp_22.4_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.105 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.50 V/m; Power Drift = -0.045 dB


Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.055 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.106 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

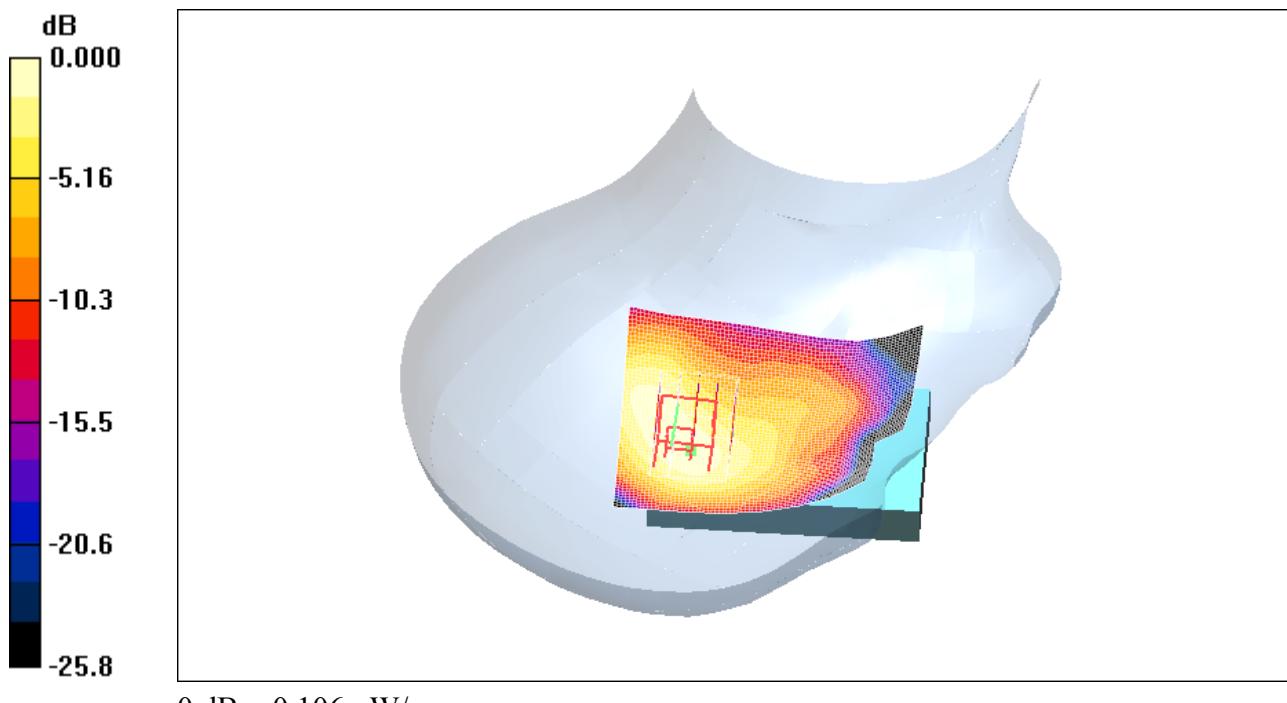

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 58(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/17/2010 1:24:14 AM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_high_chan_amb_temp_22.7_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.111 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.83 V/m; Power Drift = 0.067 dB


Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.055 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.108 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

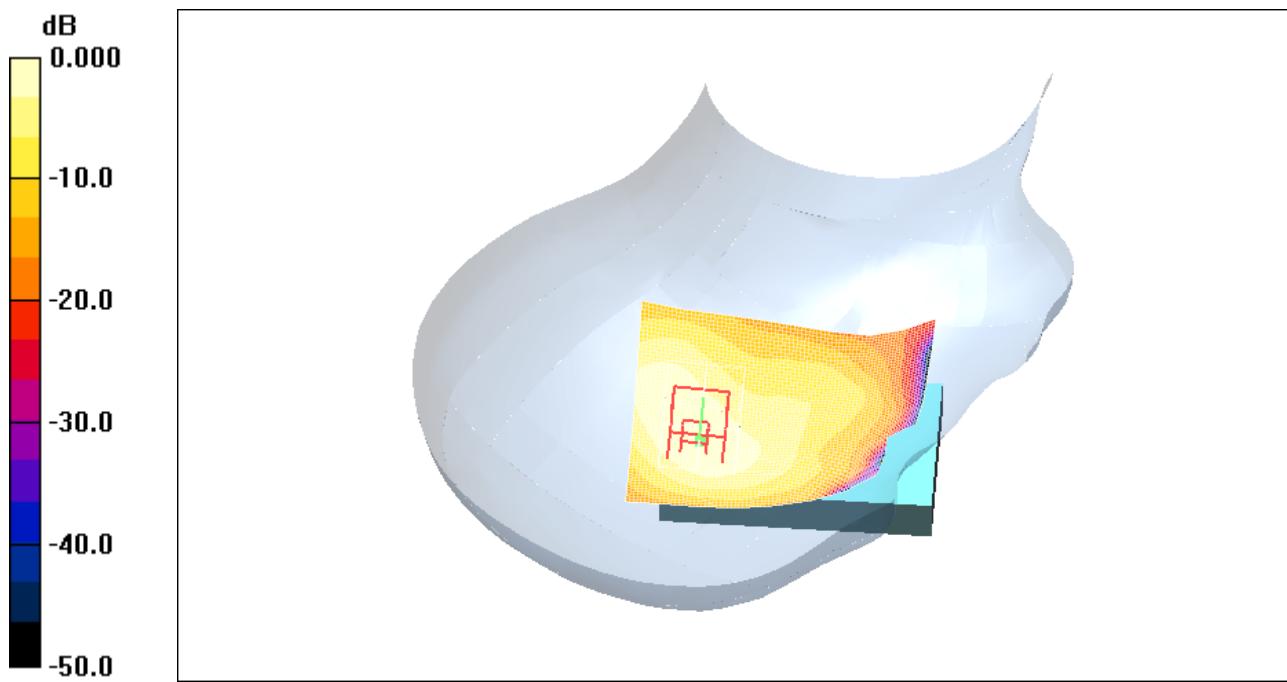

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 60(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/17/2010 1:42:57 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11b_high_chan_amb_temp_23.3_liq_temp_22.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.117 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.88 V/m; Power Drift = -0.019 dB


Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.059 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.120 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

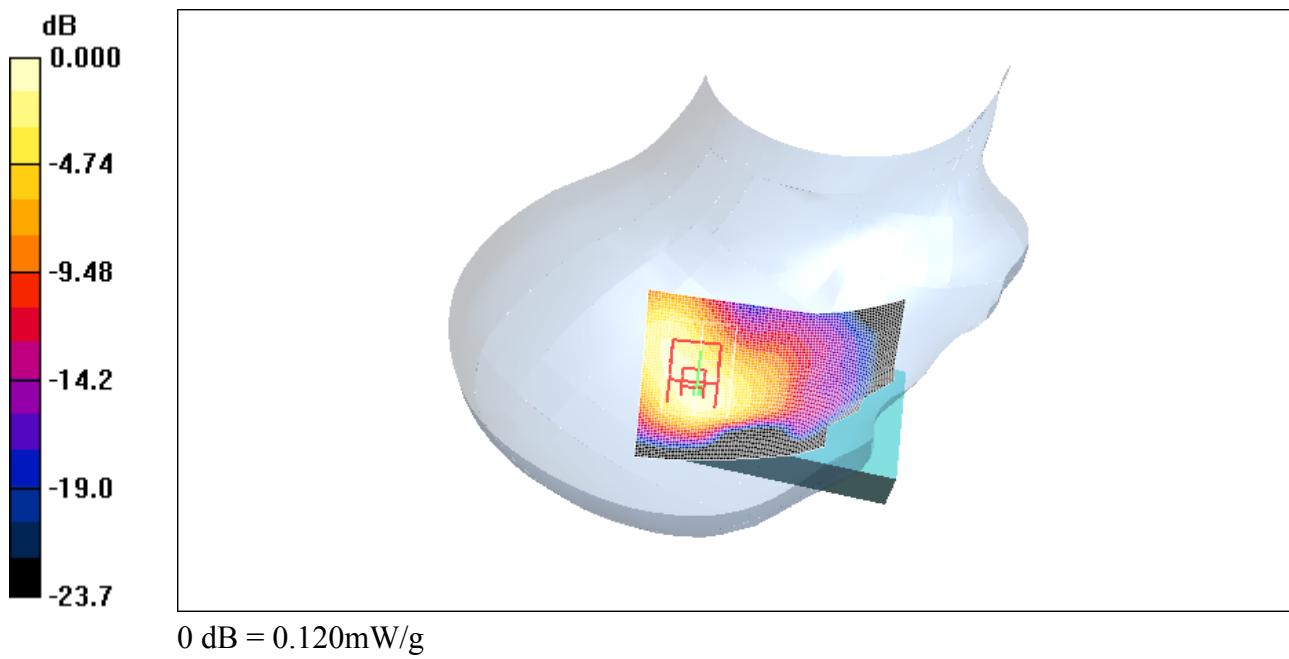

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 62(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/17/2010 2:20:49 AM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_high_chan_amb_temp_22.9_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.140 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.23 V/m; Power Drift = 0.215 dB


Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.068 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.140 mW/g

Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW
-------------------------------------	--	---	------------------------------	-------------------------------

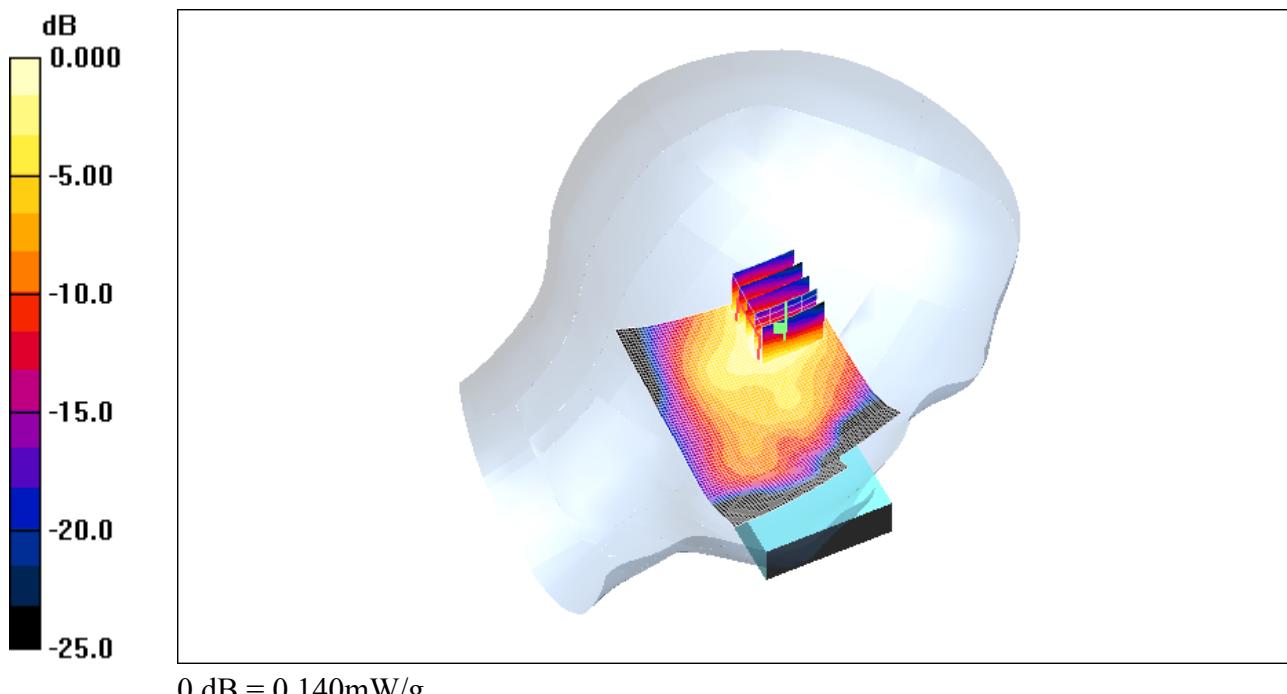

 <p>Document Appendix B for the BlackBerry® Smartphone Model RCN72UW SAR Report</p>				Page 64(66)
Author Data Andrew Becker	Dates of Test June 10– June 24 & July 15, 2010	Test Report No RTS-1689-1007-38	FCC ID: L6ARCN70UW	IC ID 2503A-RCN70UW

Date/Time: 6/17/2010 2:01:17 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11b_high_chan_amb_temp_22.6_liq_temp_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 226DC9FE

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.140 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.79 V/m; Power Drift = 0.116 dB


Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.065 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.130 mW/g

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

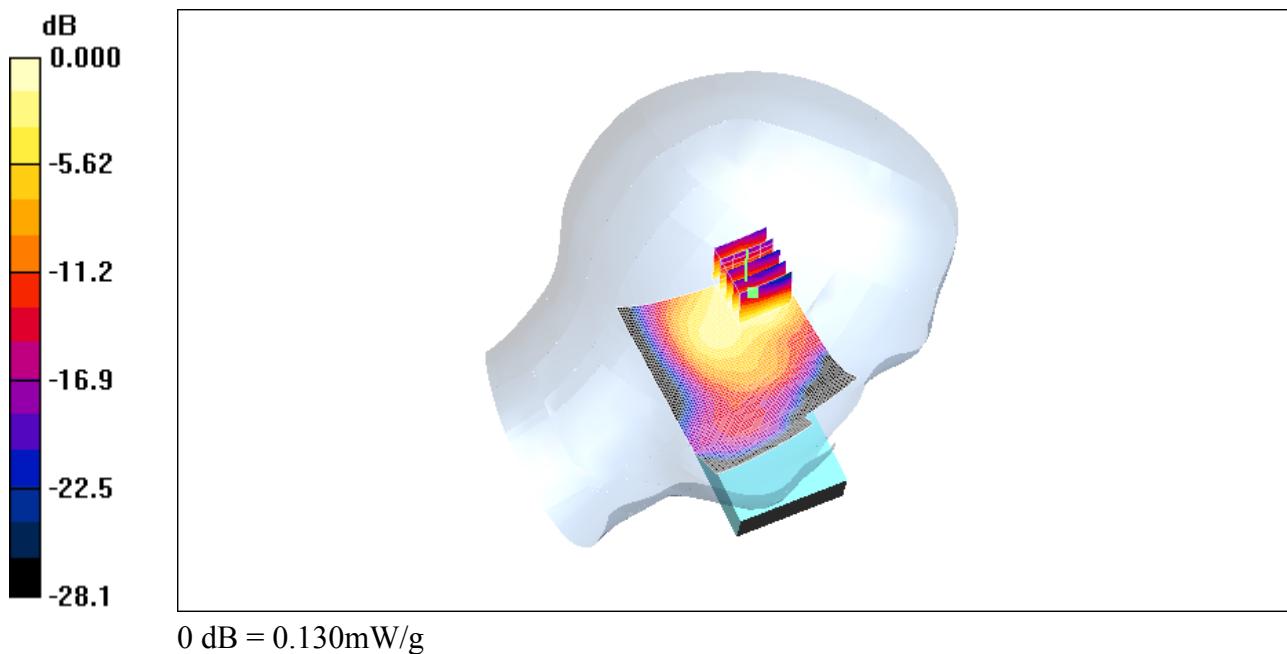

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	June 10– June 24 & July 15, 2010	RTS-1689-1007-38	L6ARCN70UW	2503A-RCN70UW

Z axis plot for the worst case head configuration: