

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 1(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 2(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 17/02/2010 5:31:57 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[Vertical_Holster_Back_GPRS850_low_chan_amb_temp_22.6C_liq_temp_21.4C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.933 \text{ mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.907 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.2 V/m; Power Drift = -0.058 dB

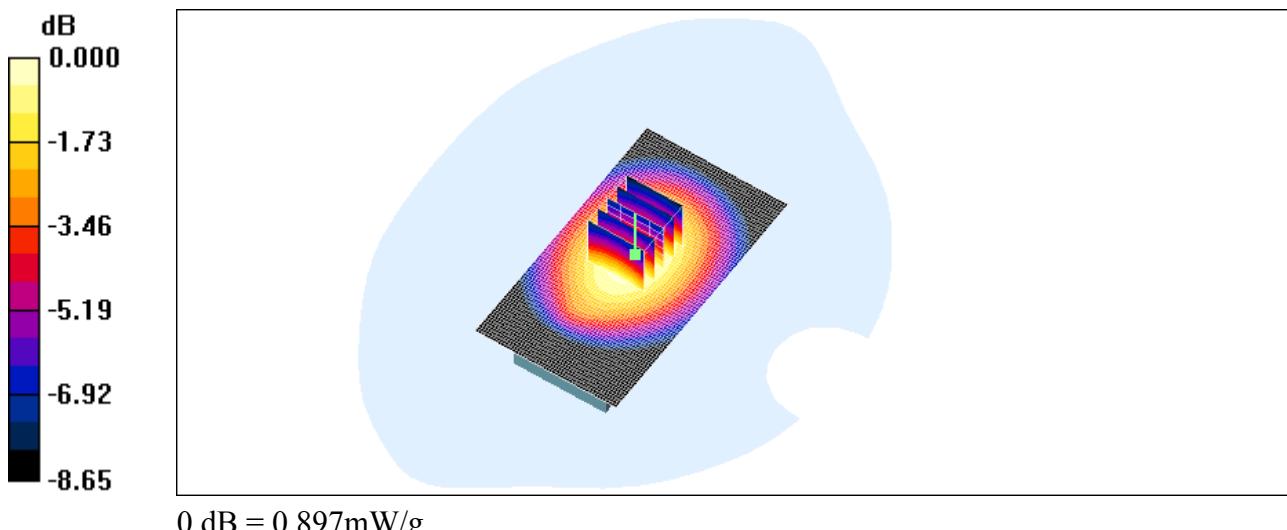
Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.618 mW/g

Maximum value of SAR (measured) = 0.897 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
3(54)Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 4(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 17/02/2010 5:48:56 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[Vertical_Holster_Back_GPRS850_mid_chan_amb_temp_22.5C_liq_temp_21.3C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: GPRS 850; Frequency: 836.8 MHz; Duty Cycle: 1:4.2

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.06 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 34.6 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.995 mW/g; SAR(10 g) = 0.728 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.05 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
5(54)

Author Data

Andrew Becker

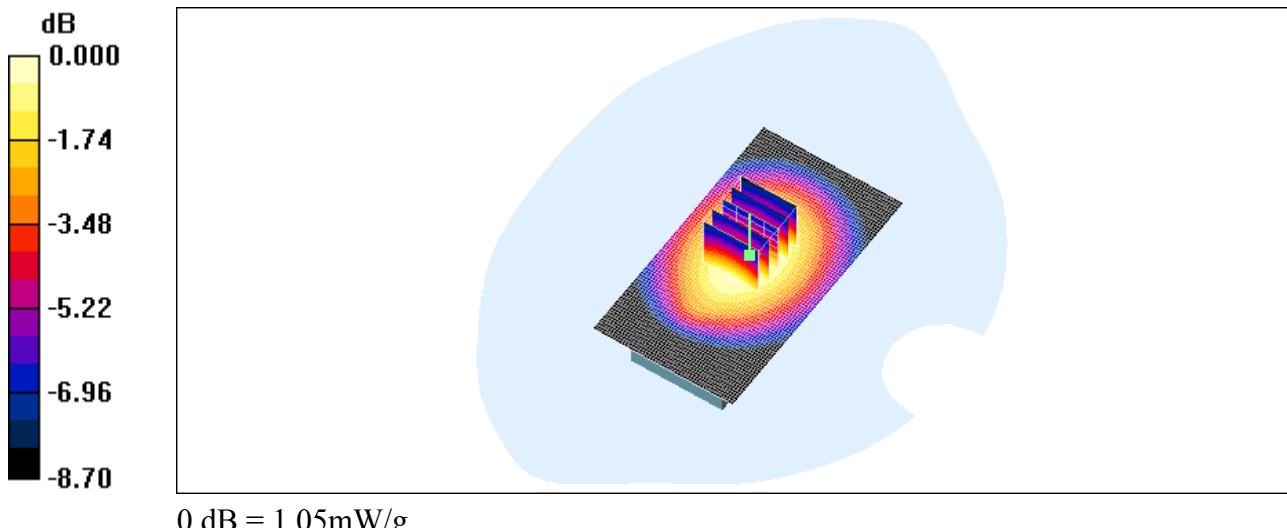
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

0 dB = 1.05mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 6(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39 FCC ID: L6ARCV70UW

Date/Time: 17/02/2010 6:07:15 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[Vertical_Holster_Back_GPRS850_high_chan_amb_temp_22.4C_liq_temp_21.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.13 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 35.9 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 1.34 W/kg

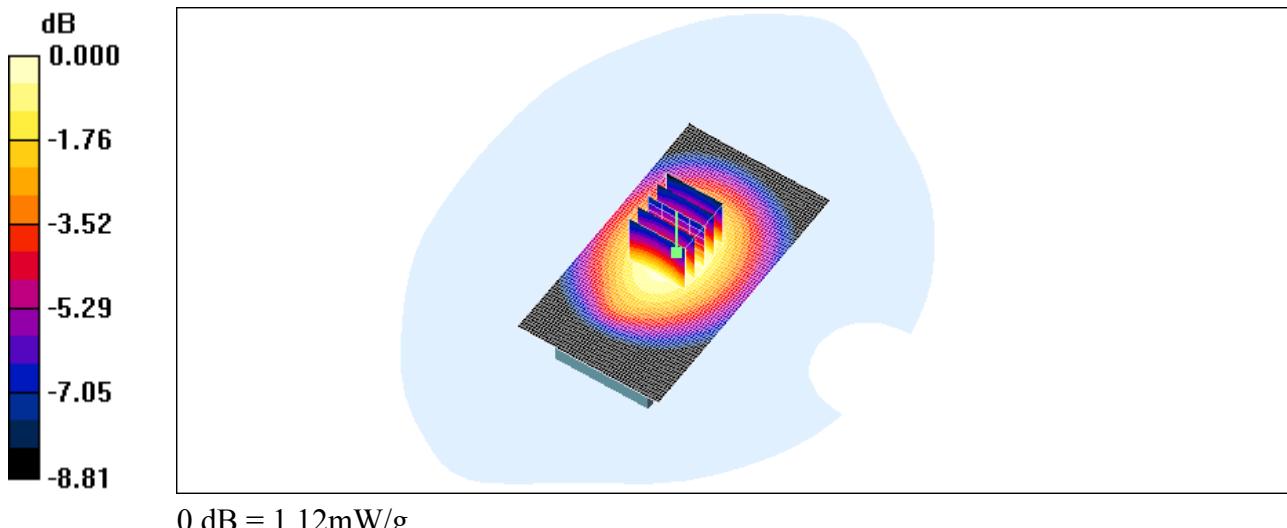
SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.775 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.12 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
7(54)Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 8(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39 FCC ID: L6ARCV70UW

Date/Time: 17/02/2010 6:43:22 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[Vertical_Holster_Front_GPRS850_high_chan_amb_temp_22.4C_liq_temp_21.2C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.889 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 31.2 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.03 W/kg

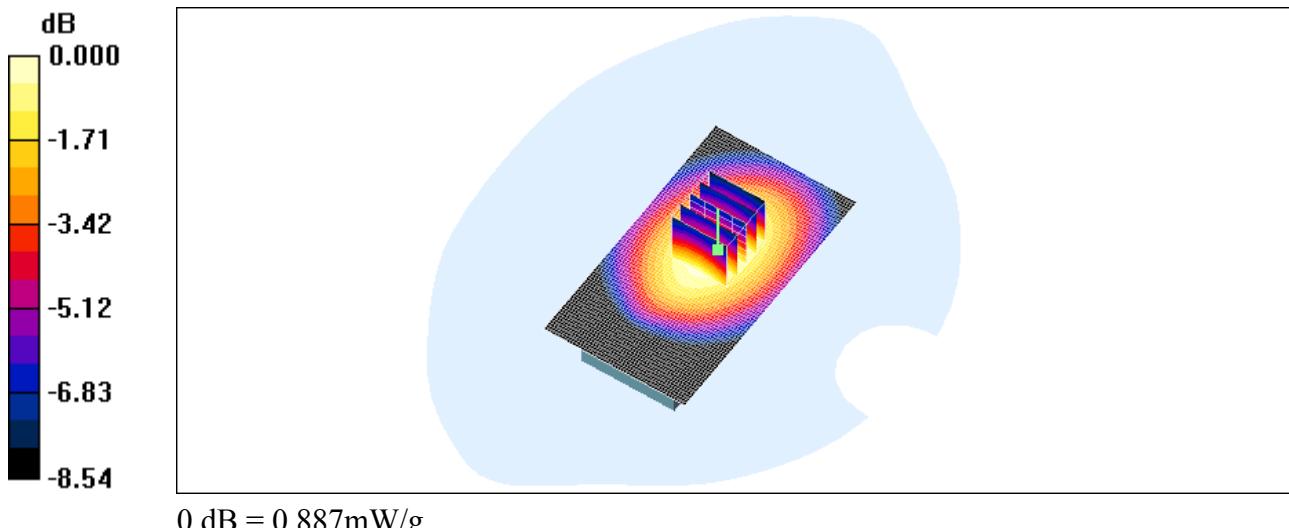
SAR(1 g) = 0.836 mW/g; SAR(10 g) = 0.619 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.887 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
9(54)Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 10(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 17/02/2010 6:26:11 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_HS#2_Back_GPRS850_high_chan_amb_temp_22.4C_liq_temp_21.2C_da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.885 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 31.8 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.840 mW/g; SAR(10 g) = 0.614 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.896 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
11(54)

Author Data

Andrew Becker

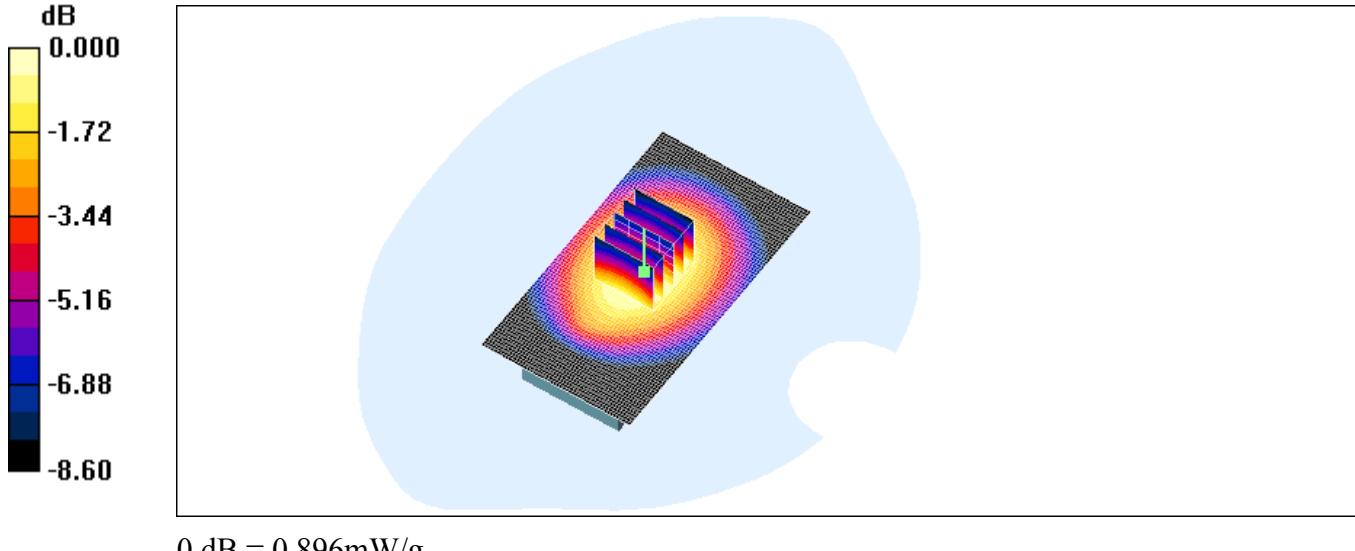
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 12(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 17/02/2010 7:57:41 PM

Test Laboratory: RIM TESTING SERVICES

File Name: [25mm_Spacer_GPRS850_high_chan_amb_temp_22.5C_liq_temp_21.3C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.668 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.1 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.465 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.665 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
13(54)

Author Data

Andrew Becker

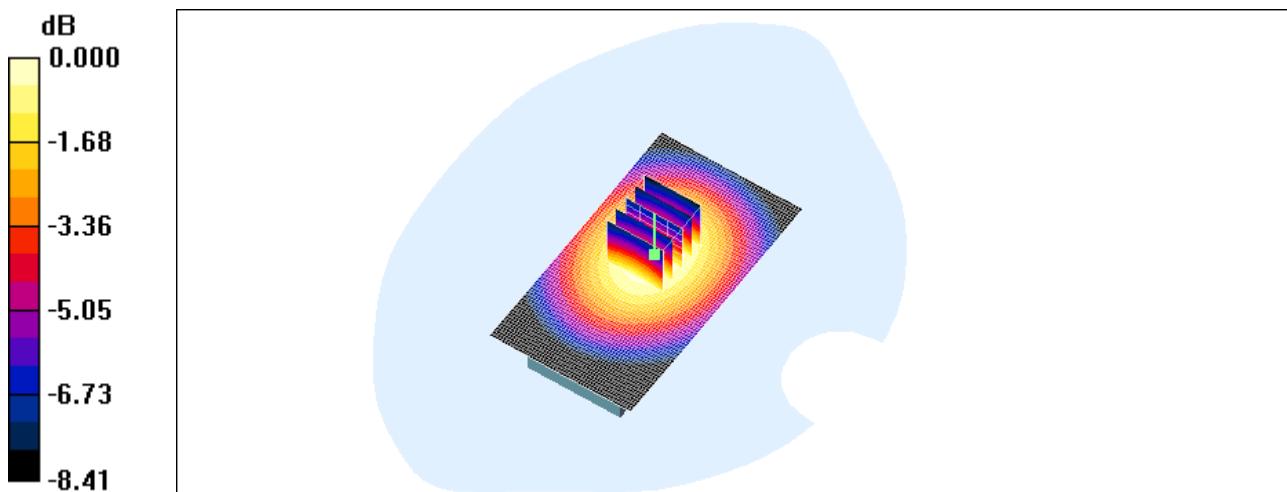
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

0 dB = 0.665mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 14(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 25/01/2010 9:27:45 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Back_UMTS_band_V_low_chan_amb_temp_23.3C_liq_temp_21.8C.d
a4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.883 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 31.1 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.611 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.879 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**

Page

15(54)

Author Data

Andrew Becker

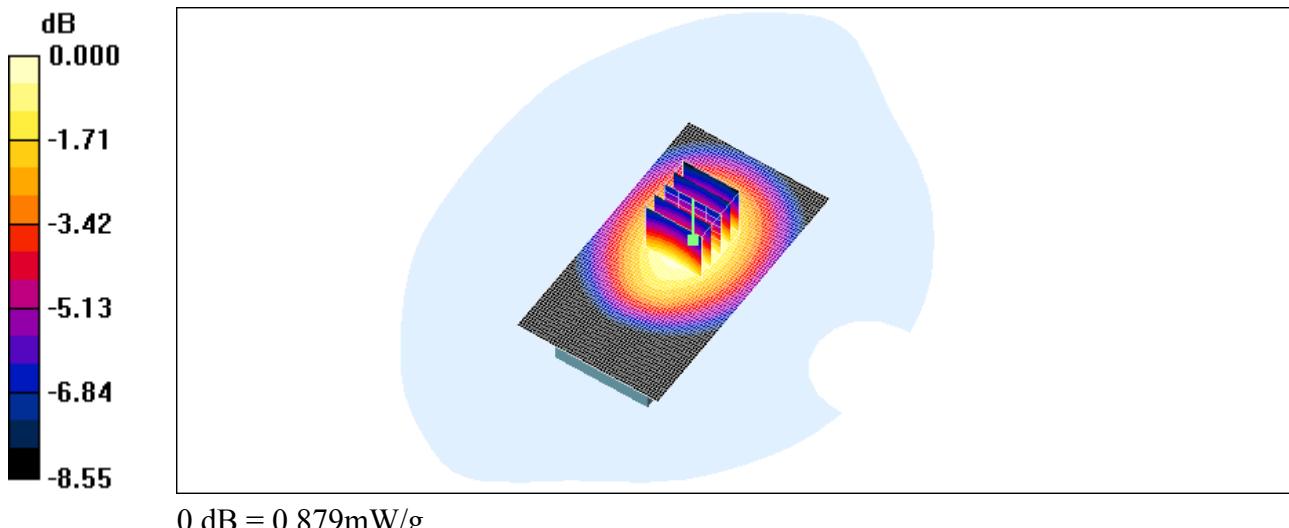
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

 <p>Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report</p>		<p>Page 16(54)</p>	
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39	FCC ID: L6ARCV70UW

Date/Time: 25/01/2010 9:45:44 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Back_UMTS_band_V_mid_chan_amb_temp_23.3C_liq_temp_21.8C.d
a4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.01 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 32.9 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.699 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.00 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**

Page

17(54)

Author Data

Andrew Becker

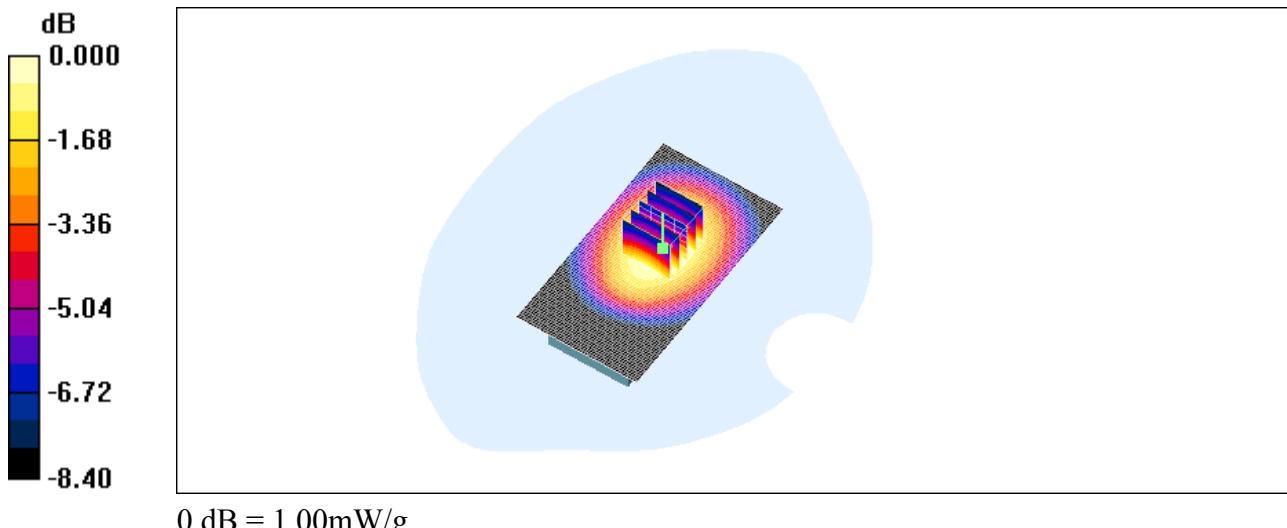
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 18(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 09/02/2010 9:59:00 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Back_UMTS_band_V_mid_chan_amb_temp_23.2C_liq_temp_21.1C.d
a4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.08 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

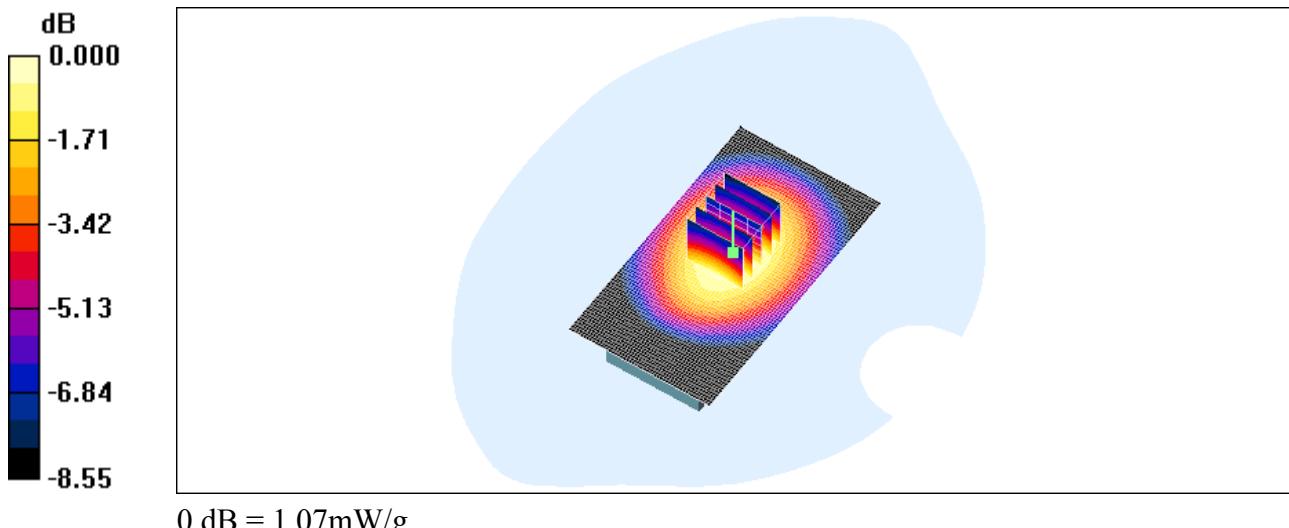
Reference Value = 34.7 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.746 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.07 mW/g

Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 20(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 25/01/2010 10:01:04 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical Holster Back UMTS band V high chan amb temp 23.3C liq temp 21.8C.
da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.928 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 31.5 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.09 W/kg

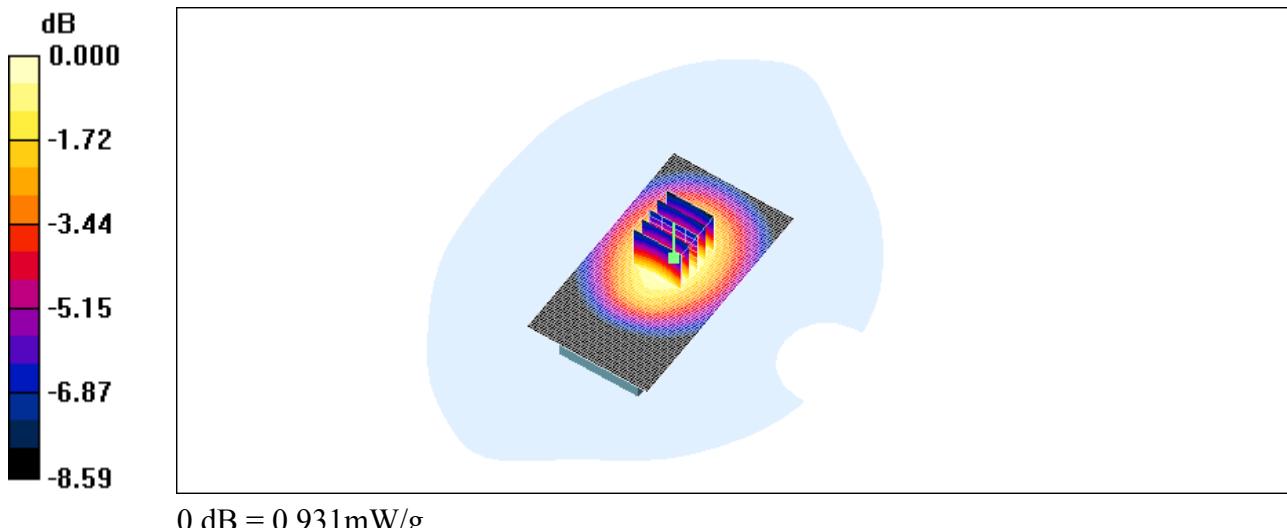
SAR(1 g) = 0.874 mW/g; SAR(10 g) = 0.641 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.931 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
21(54)Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 22(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39 FCC ID: L6ARCV70UW

Date/Time: 25/01/2010 10:39:20 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical Holster Back Headset1 UMTS band V mid chan amb temp 23.3C liq te
mp 21.8C.da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.678 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.792 W/kg

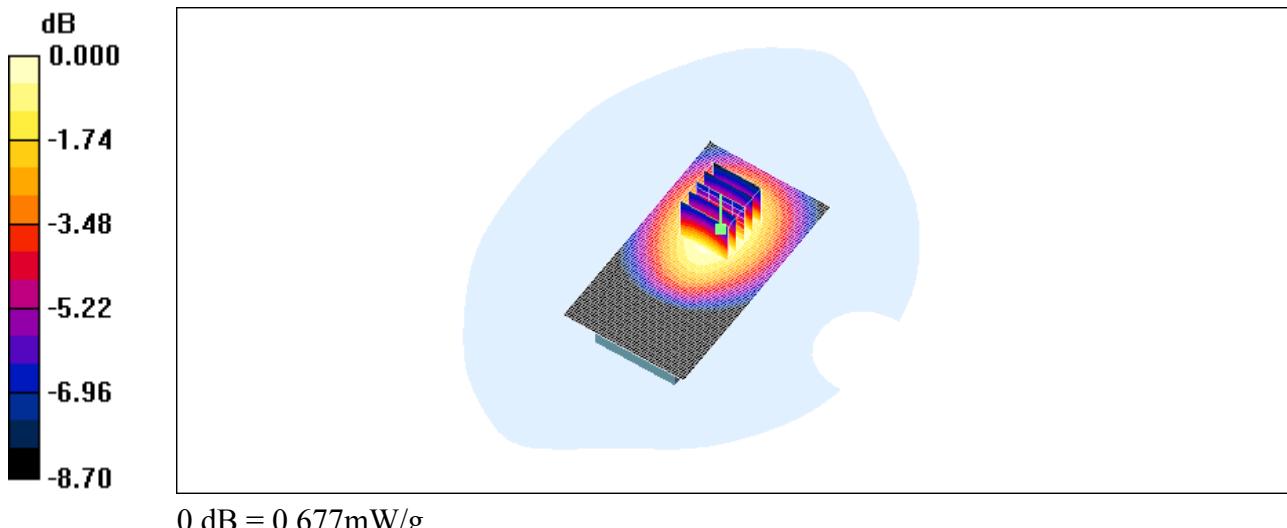
SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.469 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.677 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
23(54)Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

 <p>Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report</p>		<p>Page 24(54)</p>	
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39	FCC ID: L6ARCV70UW

Date/Time: 1/25/2010 10:58:40 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Back_Headset2_UMTS_band_V_mid_chan_amb_temp_23.3C_liq_te
mp_21.8C.da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/3/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.871 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 29.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.604 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.868 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
25(54)

Author Data

Andrew Becker

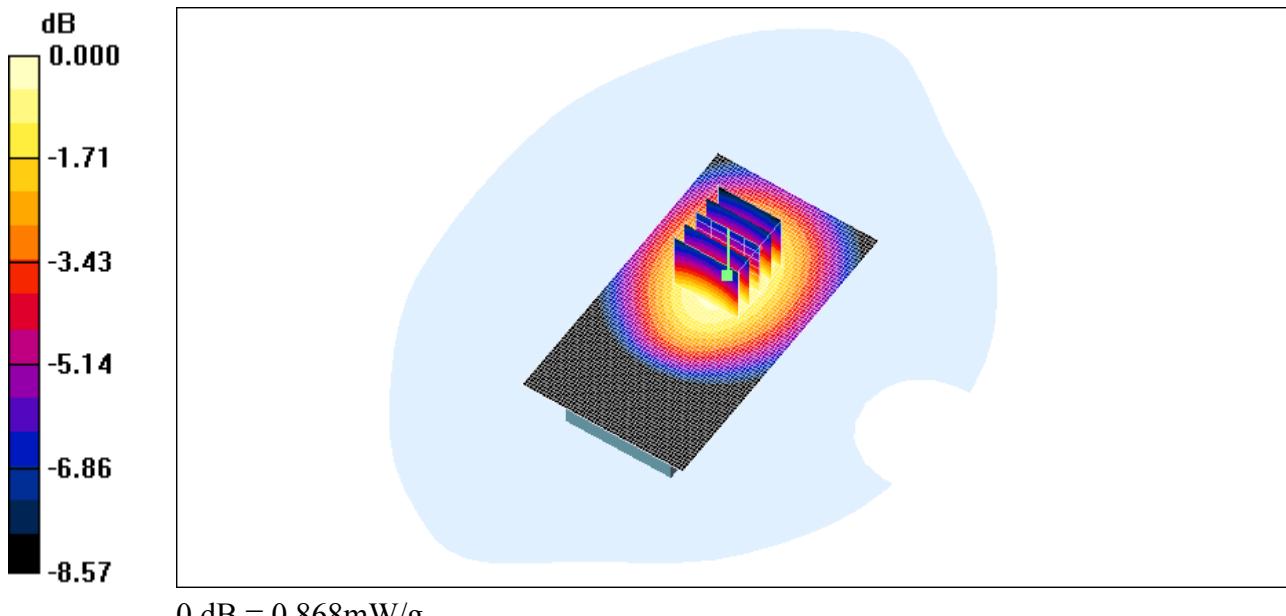
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 26(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 25/01/2010 11:20:56 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Back_Headset3_UMTS_band_V_mid Chan_amb temp 23.3C_liq te
mp 21.8C.da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.896 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 30.2 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.622 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.903 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
27(54)

Author Data

Andrew Becker

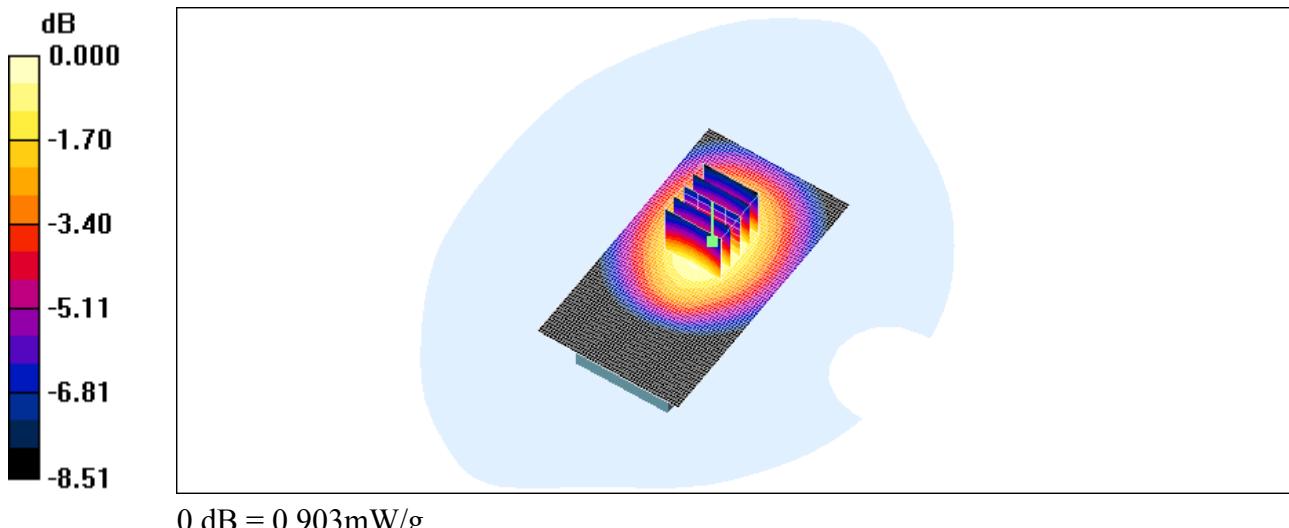
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

 Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report			
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39	Page 28(54) FCC ID: L6ARCV70UW

Date/Time: 25/01/2010 11:42:41 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[25mm_Spacer_Back_UMTS_band_V_mid_chan_amb_temp_23.3C_liq_temp_21.8C.da](#)
4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21B5BE43

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.87, 5.87, 5.87); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.612 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.429 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.610 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
29(54)

Author Data

Andrew Becker

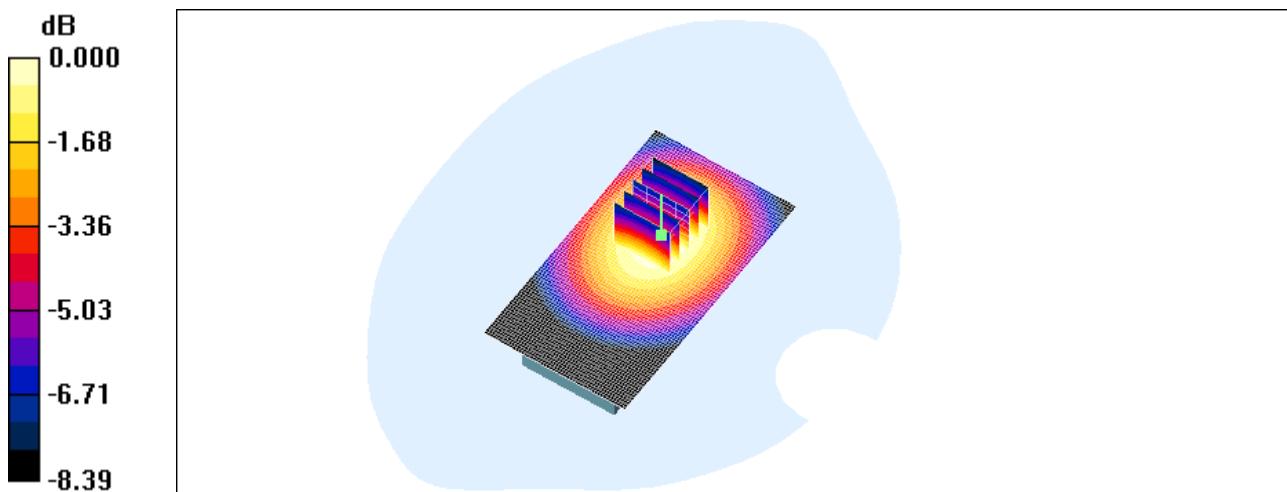
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

0 dB = 0.610mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 30(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 12/02/2010 4:09:00 PM

Test Laboratory: RIM TESTING SERVICES

**Vertical_Holster_Back_GPRS1900_mid_chan_amb_temp_22.6C_liq_tm
p_21.4C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.69, 4.69, 4.69); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.572 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.33 V/m; Power Drift = -0.389 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.317 mW/g

Maximum value of SAR (measured) = 0.577 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
31(54)

Author Data

Andrew Becker

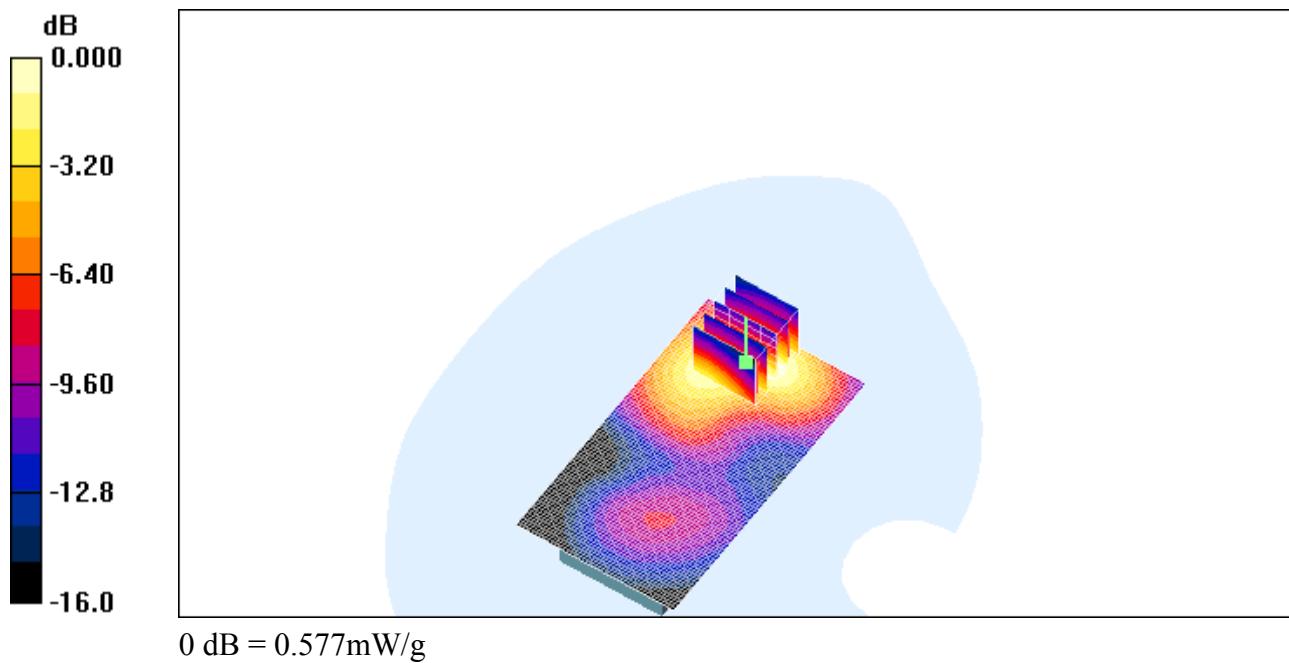
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 32(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 12/02/2010 4:54:08 PM

Test Laboratory: RIM TESTING SERVICES

Vertical_Holster_Front_GPRS1900_mid_chan_amb_temp_22.5C_liq_tem_21.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.69, 4.69, 4.69); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.189 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.23 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.194 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
33(54)

Author Data

Andrew Becker

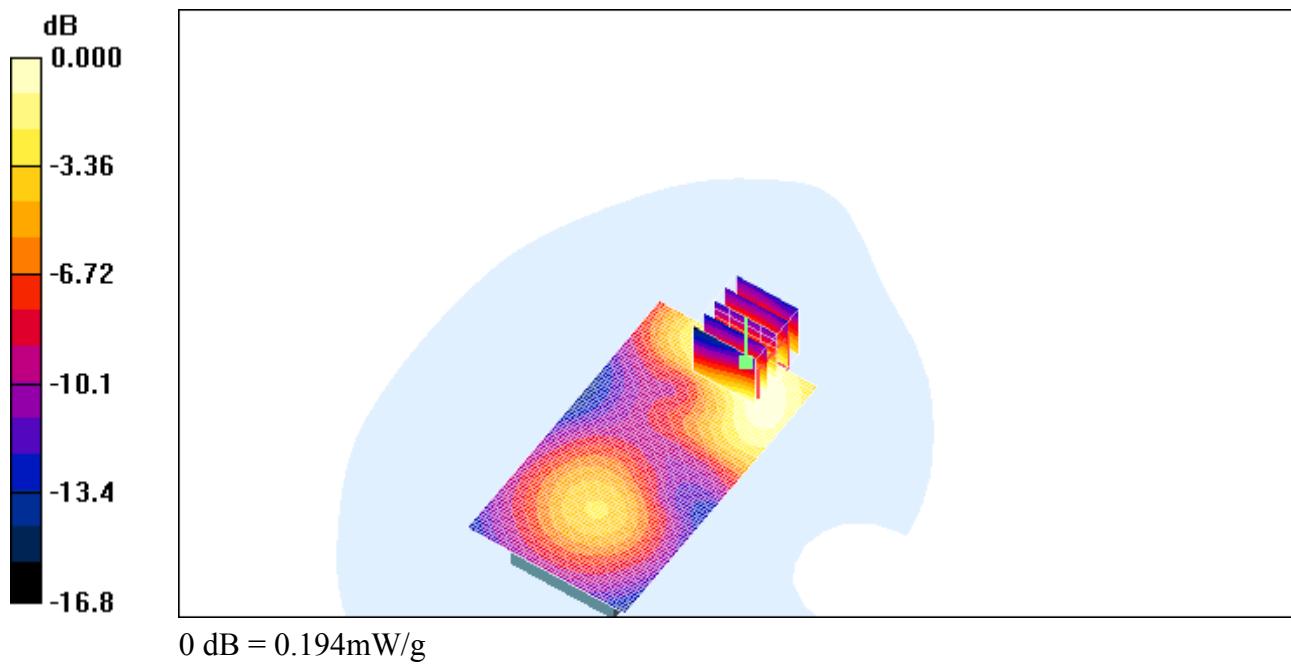
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 34(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 12/02/2010 4:32:39 PM

Test Laboratory: RIM TESTING SERVICES

Vertical_Holster_HS#3_Back_GPRS1900_mid_chan_amb_temp_22.4C_liq_temp_21.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.69, 4.69, 4.69); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.573 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$,
 $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.35 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.575 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
35(54)

Author Data

Andrew Becker

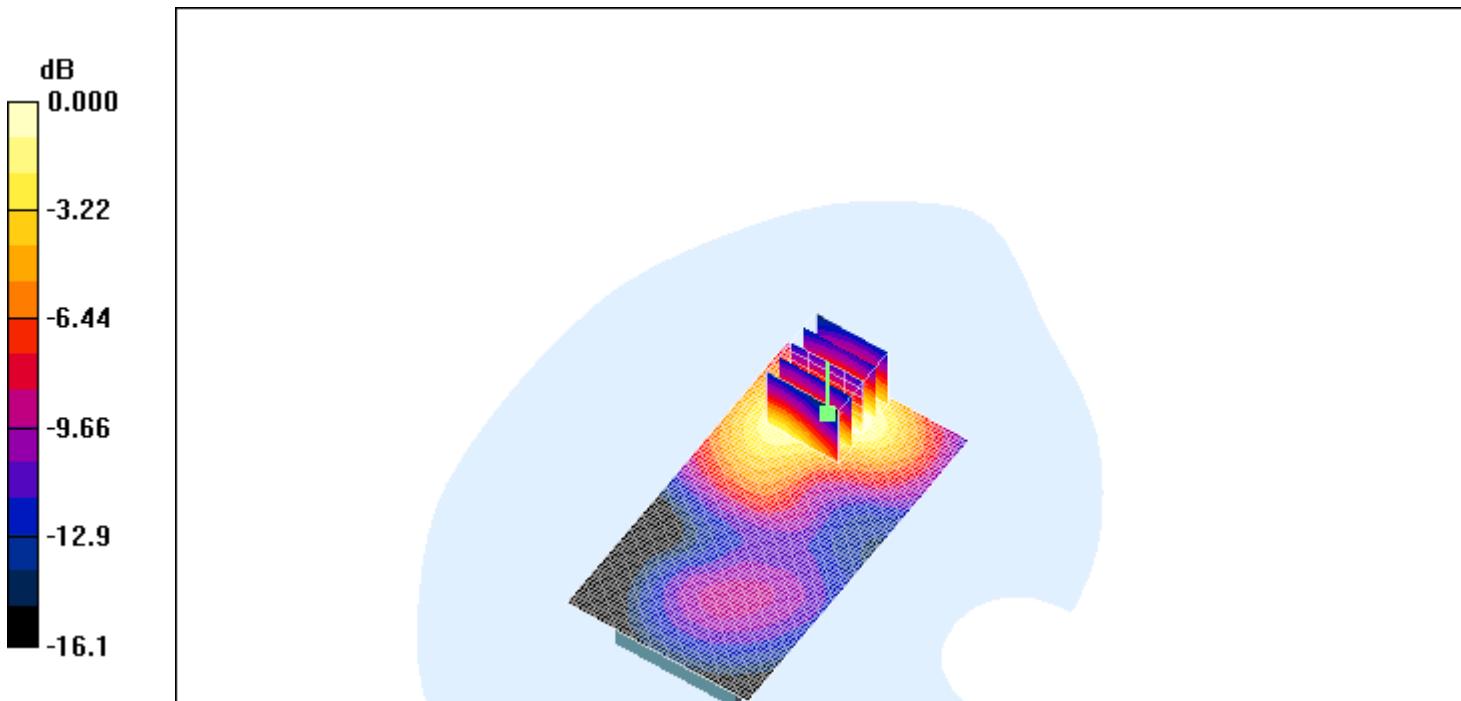
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

0 dB = 0.575mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 36(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 12/02/2010 5:08:58 PM

Test Laboratory: RIM TESTING SERVICES

**25mm_space_back_GPRS1900_mid_chan_amb_temp_22.6C_liq_temp_
21.4C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.69, 4.69, 4.69); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 03/03/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.272 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 4.86 V/m; Power Drift = 0.073 dB
 Peak SAR (extrapolated) = 0.344 W/kg
SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.154 mW/g
 Maximum value of SAR (measured) = 0.271 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
37(54)

Author Data

Andrew Becker

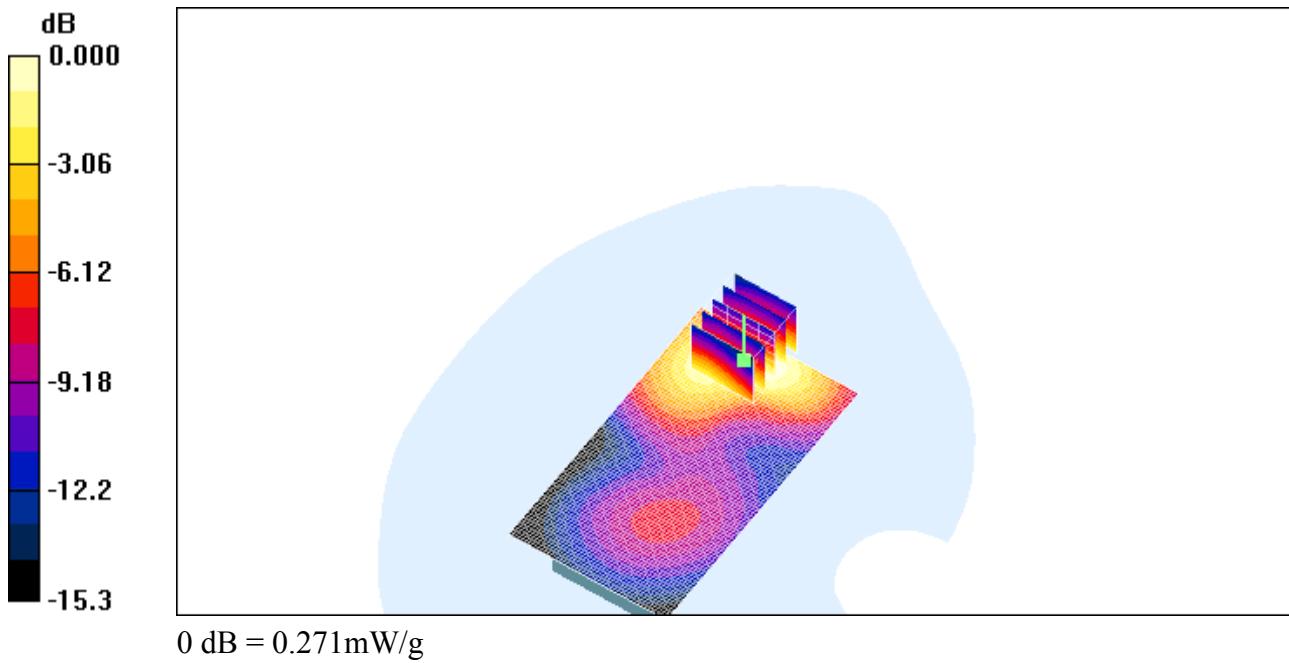
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 38(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 2/24/2010 6:11:32 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Back_UMTS_band_II_mid_chan_amb_temp_22.7C_liq_temp_21.2C.d
a4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.77, 4.77, 4.77); Calibrated: 3/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/3/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.657 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.99 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (measured) = 0.655 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
39(54)

Author Data

Andrew Becker

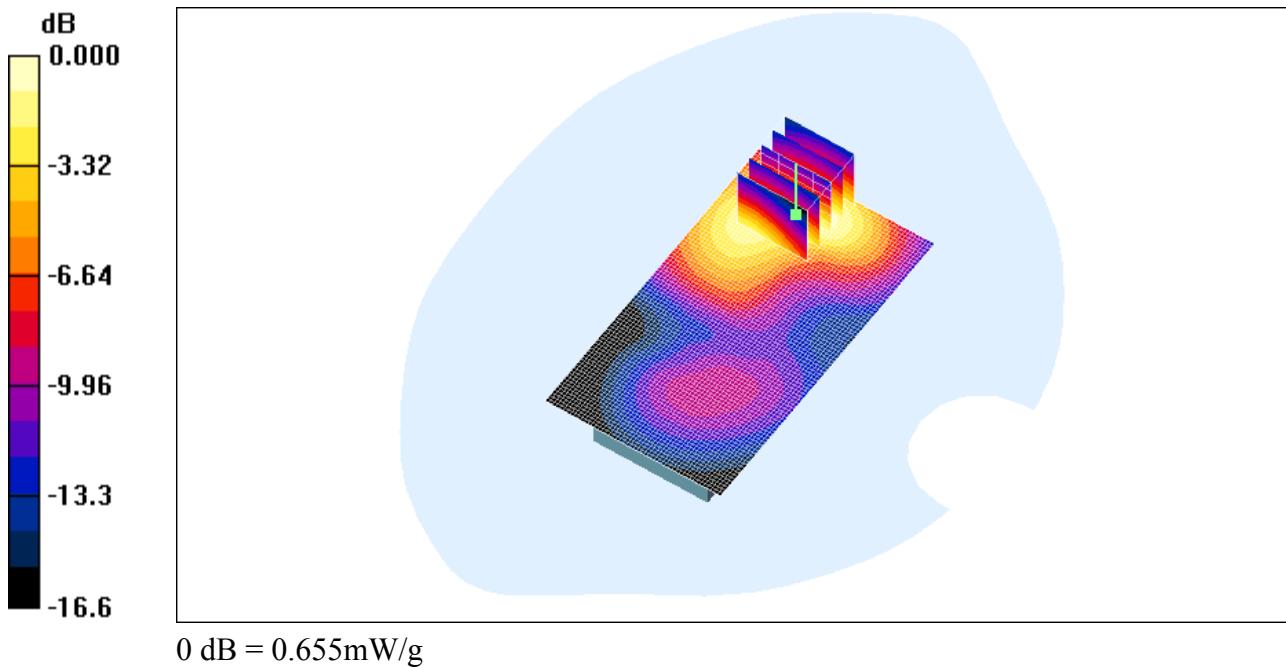
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 40(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 2/24/2010 6:26:51 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_Front_UMTS_band_II_mid_chan_amb_temp_22.6C_liq_temp_20.8C_da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.77, 4.77, 4.77); Calibrated: 3/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/3/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.206 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.64 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.206 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
41(54)

Author Data

Andrew Becker

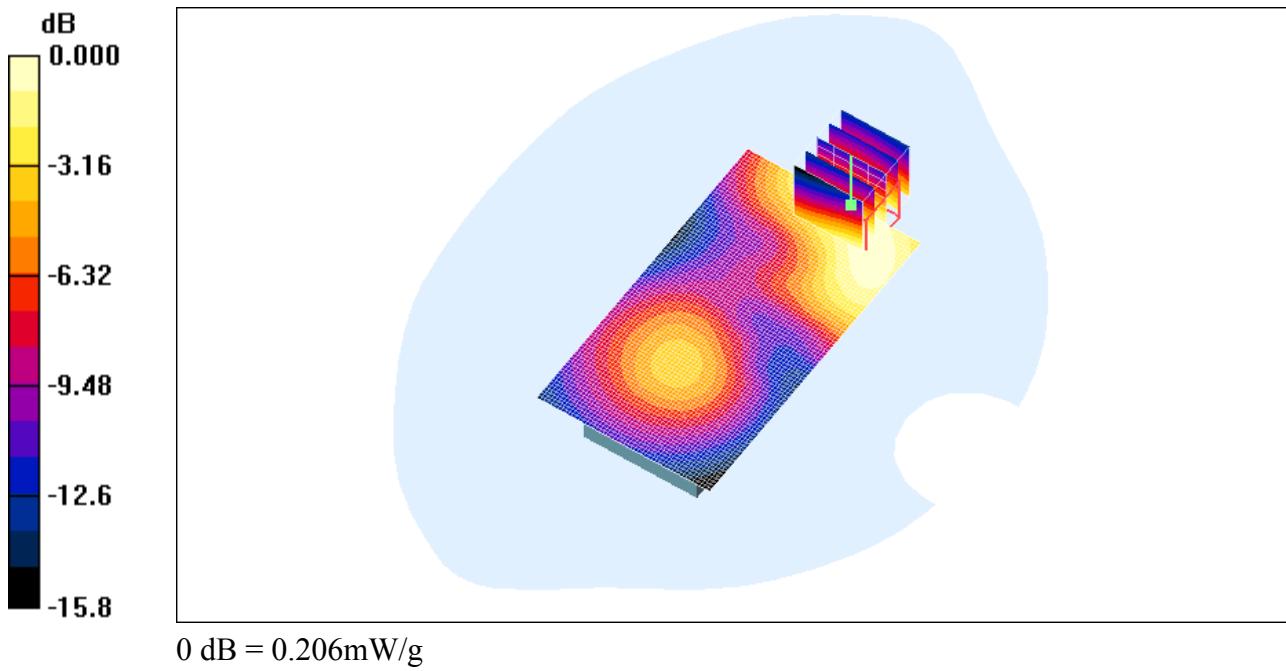
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 42(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 2/24/2010 6:41:58 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_HS#2_Back_UMTS_band_II_mid_chan_amb_temp_22.5C_liq_temp_20.7C.da4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.77, 4.77, 4.77); Calibrated: 3/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/3/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.706 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.87 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 0.945 W/kg

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.711 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
43(54)

Author Data

Andrew Becker

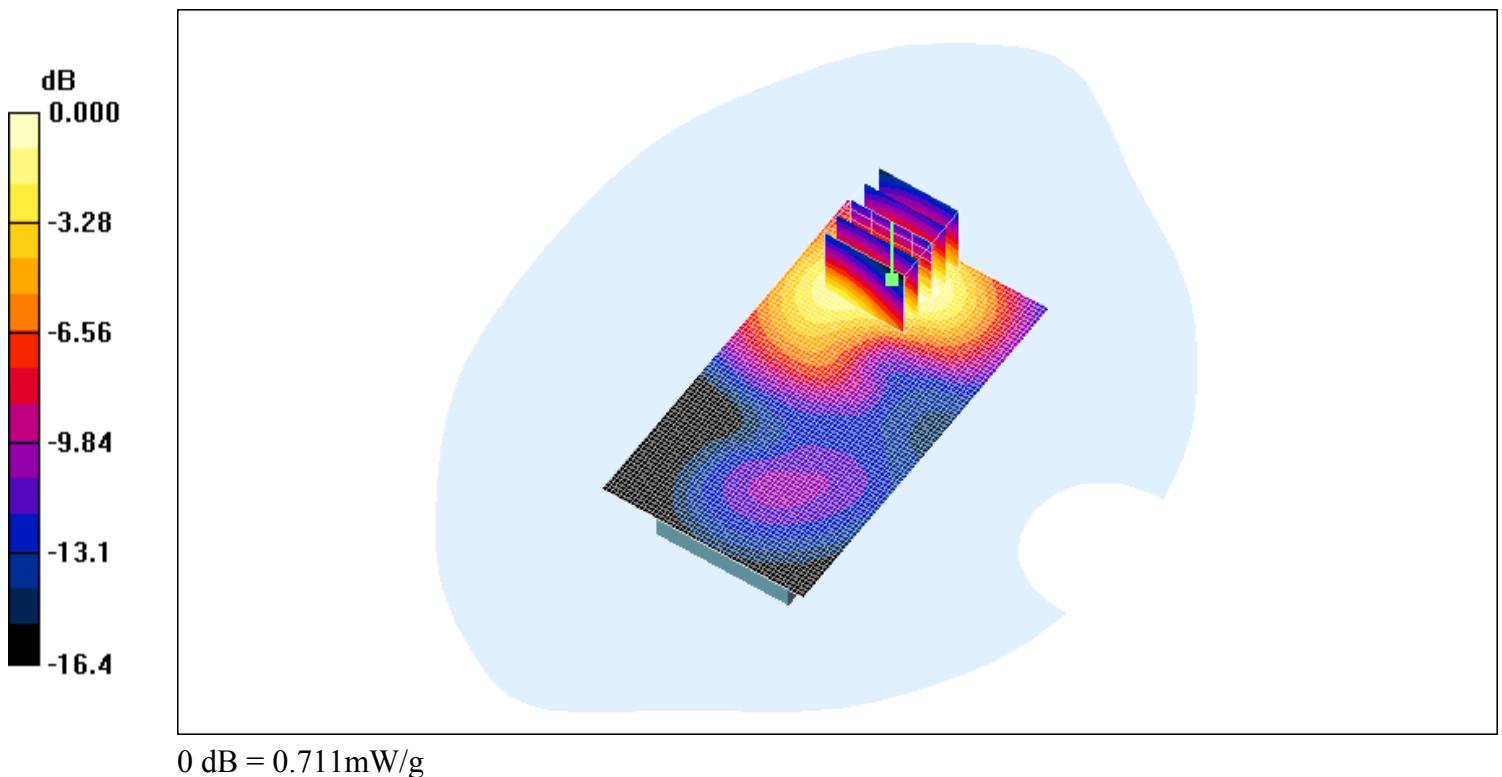
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 44(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 2/24/2010 6:57:39 PM

Test Laboratory: RIM TESTING SERVICES

File Name:

[25mm_Spacer_UMTS_band_II_mid_chan_amb_temp_22.5C_liq_temp_20.7C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.77, 4.77, 4.77); Calibrated: 3/10/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/3/2009
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.329 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.90 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.320 mW/g

Author Data

Andrew Becker

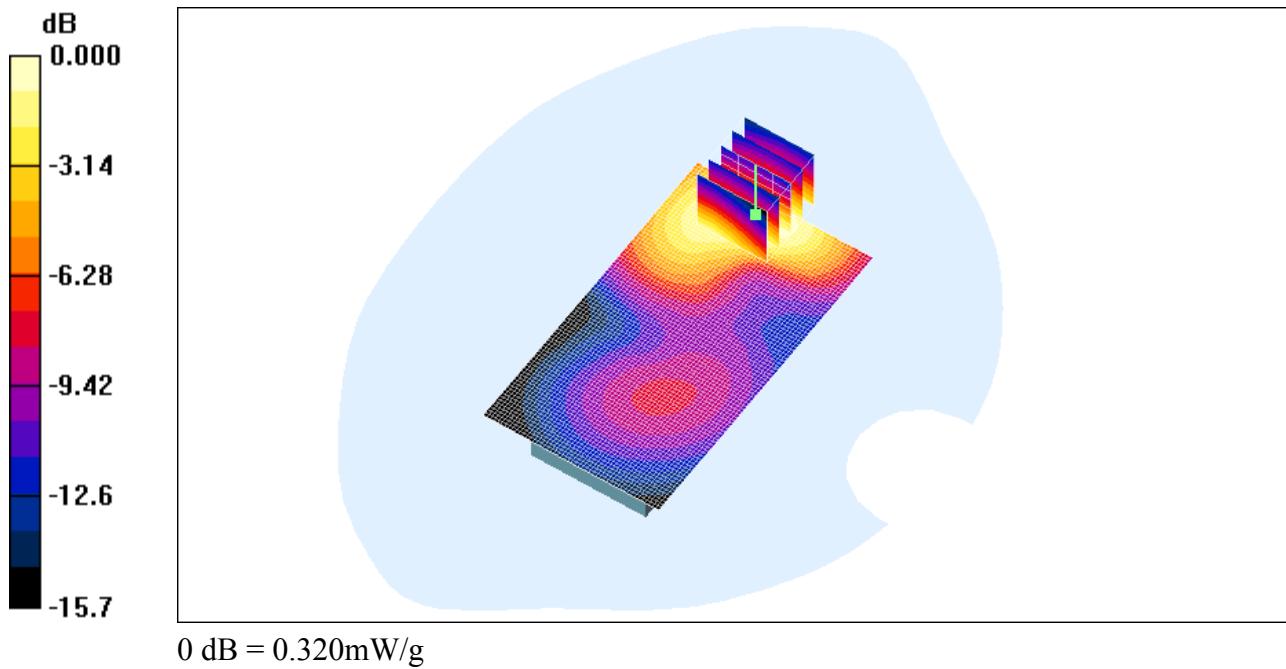
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 46(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39 FCC ID: L6ARCV70UW

Date/Time: 2/26/2010 4:12:10 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[Vertical_Holster_Back_802.11b_low_chan_amb_temp_23.4C_liq_temp_20.5C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.300 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

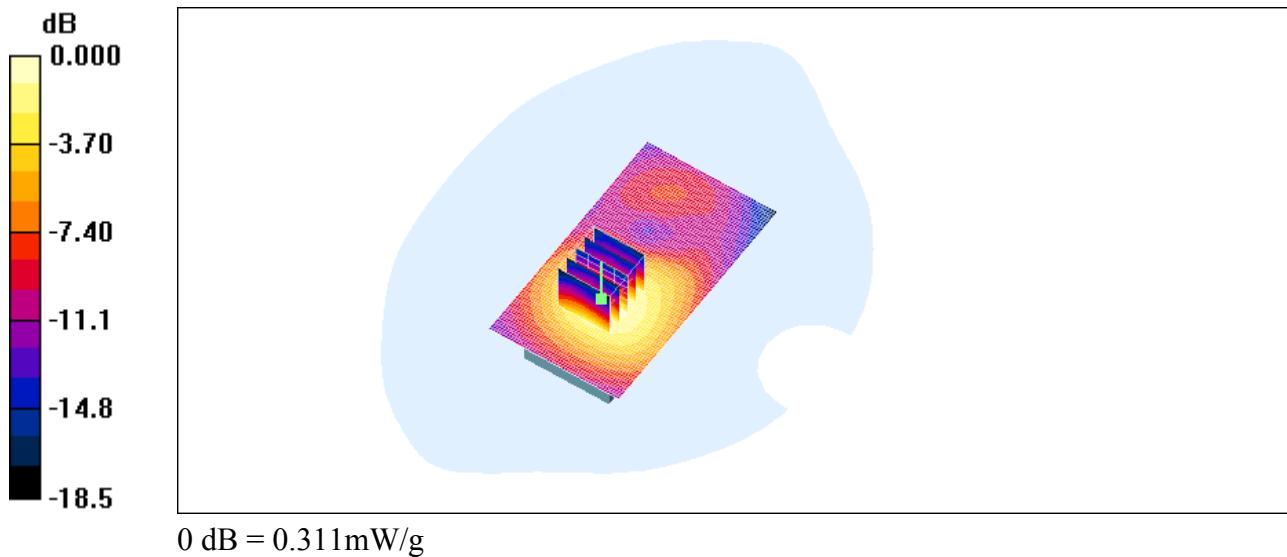
Reference Value = 7.81 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.158 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.311 mW/g

Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 48(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39 FCC ID: L6ARCV70UW

Date/Time: 2/26/2010 4:31:03 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[Vertical_Holster_Front_802.11b_low_chan_amb_temp_23.4C_liq_temp_20.5C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.086 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.63 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.042 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.086 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**

Page

49(54)

Author Data

Andrew Becker

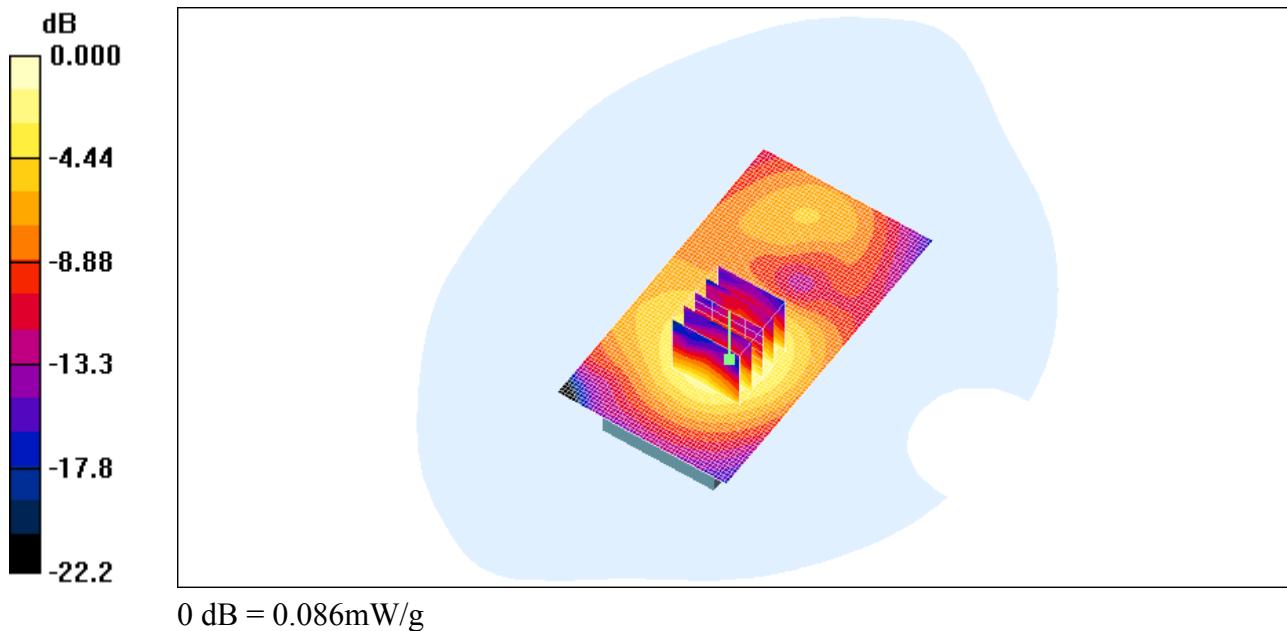
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 50(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39

Date/Time: 2/26/2010 5:04:53 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

Vertical_Holster_HS#2_Back_802.11b_low_chan_amb_temp_23.4C_liq_temp_20.5C.da
4

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.231 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.09 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.123 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.234 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
51(54)

Author Data

Andrew Becker

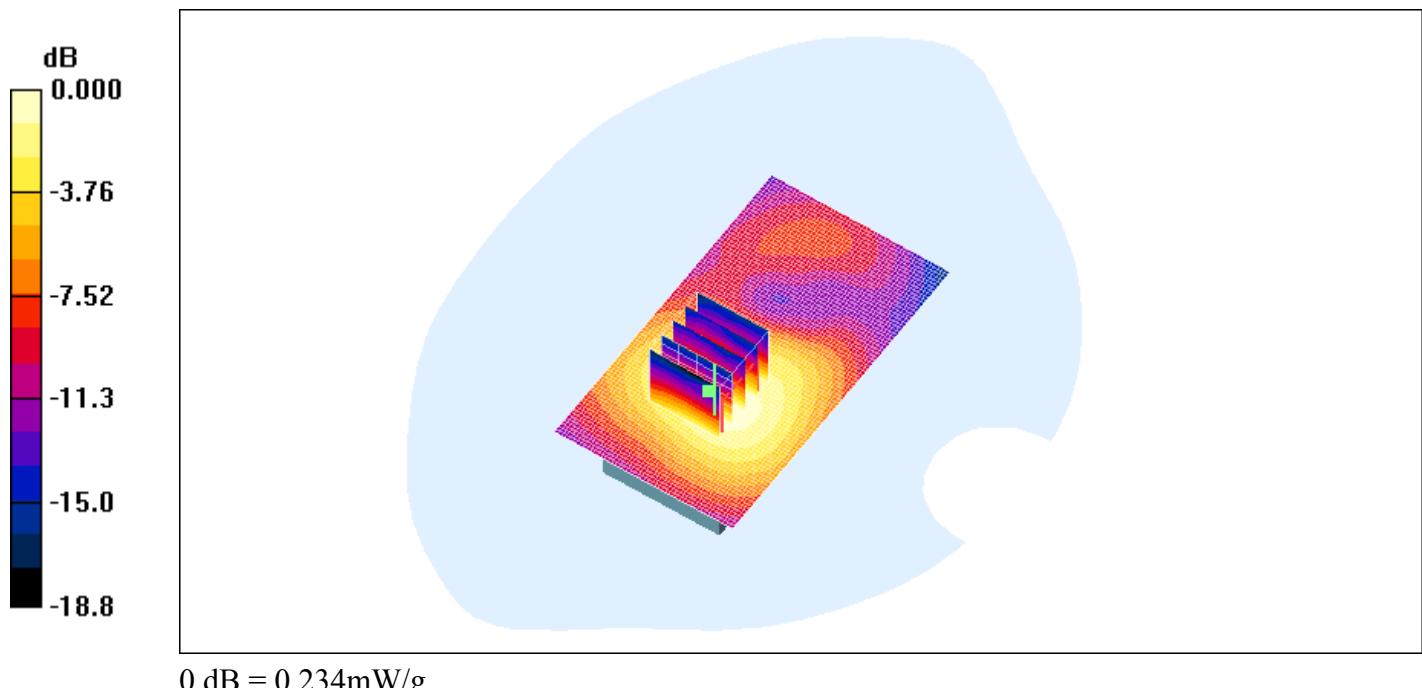
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

	Document Appendix C for the BlackBerry® Smartphone Model RCV71UW SAR Report	Page 52(54)
Author Data Andrew Becker	Dates of Test January 21 – March 3, 2010	Test Report No RTS-2474-1002-39 FCC ID: L6ARCV70UW

Date/Time: 2/26/2010 5:23:45 AM

Test Laboratory: RIM TESTING SERVICES

File Name:

[25mm_Spacer_Back_802.11b_low_chan_amb_temp_23.4C_liq_temp_20.5C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 21D09DED

Program Name: Compliance Testing: (Body worn)

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.11, 4.11, 4.11); Calibrated: 11/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.156 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.18 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.087 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.153 mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
53(54)

Author Data

Andrew Becker

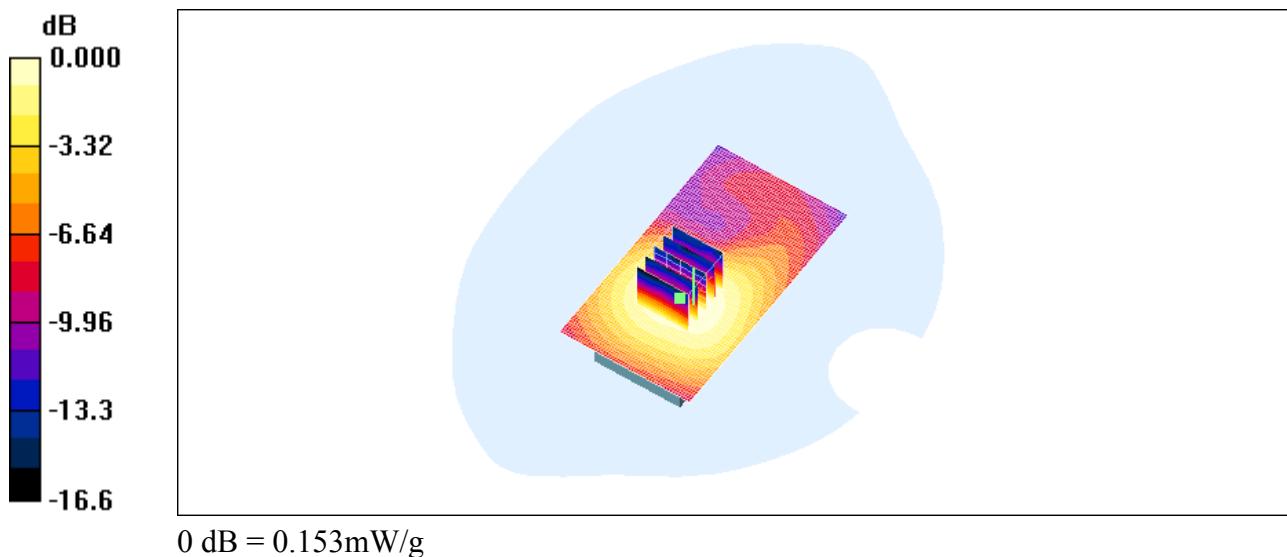
Dates of Test

January 21 – March 3, 2010

Test Report No

RTS-2474-1002-39

FCC ID:

L6ARCV70UW

0 dB = 0.153mW/g



Document

**Appendix C for the BlackBerry® Smartphone Model
RCV71UW SAR Report**Page
54(54)Author Data
Andrew BeckerDates of Test
January 21 – March 3, 2010Test Report No
RTS-2474-1002-39FCC ID:
L6ARCV70UW**Z axis plot for the worst case body configuration:**