

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 1(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 2(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/7/2011 9:37:48 PM, Date/Time: 3/7/2011 9:43:45 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_GPRS850_mid_chan_amb_temp_23.6C_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 850; Frequency: 836.8 MHz; Communication System

PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.426 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.106 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.331 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 3(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.466 mW/g

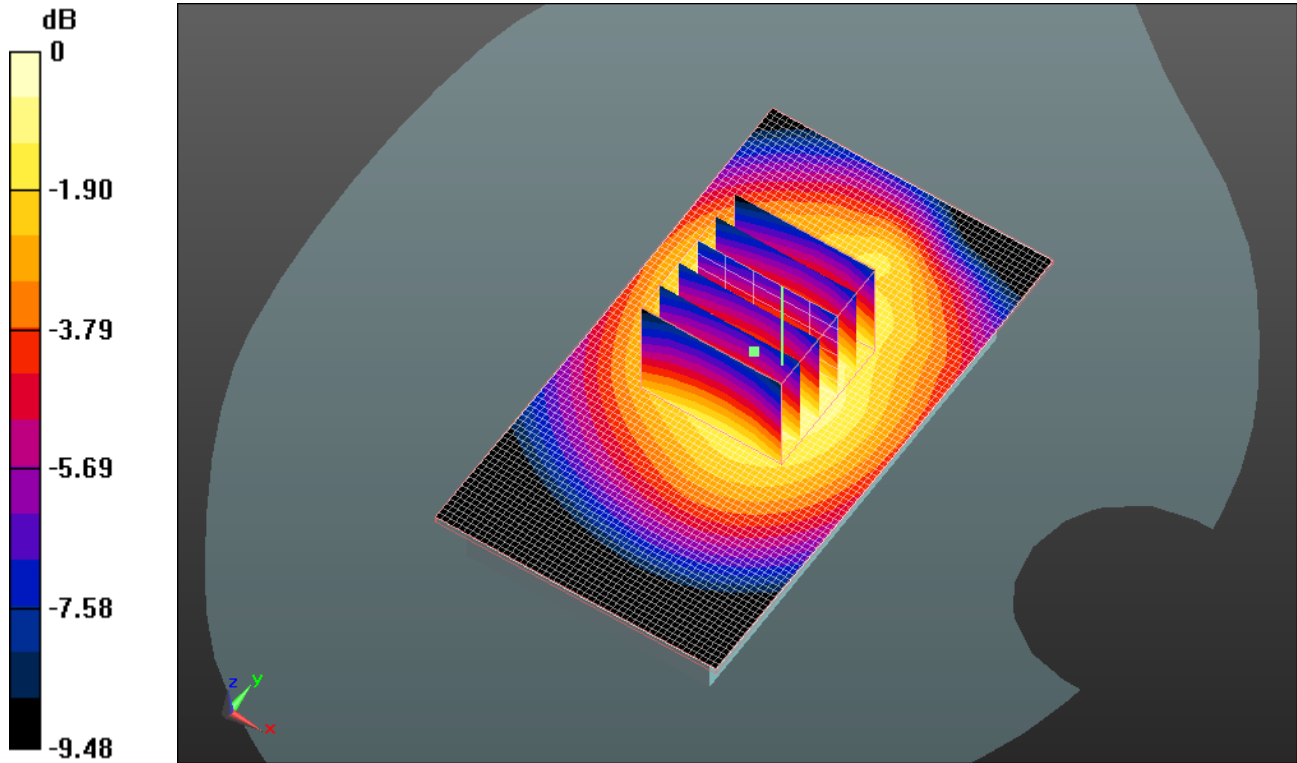

0 dB = 0.470mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 4(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/7/2011 10:08:13 PM, Date/Time: 3/7/2011 10:14:38 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Front_GPRS850_mid_chan_amb_temp_23.7C_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 850; Frequency: 836.8 MHz; Communication System

PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.334 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x7x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.871 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.253 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.333 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 5(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

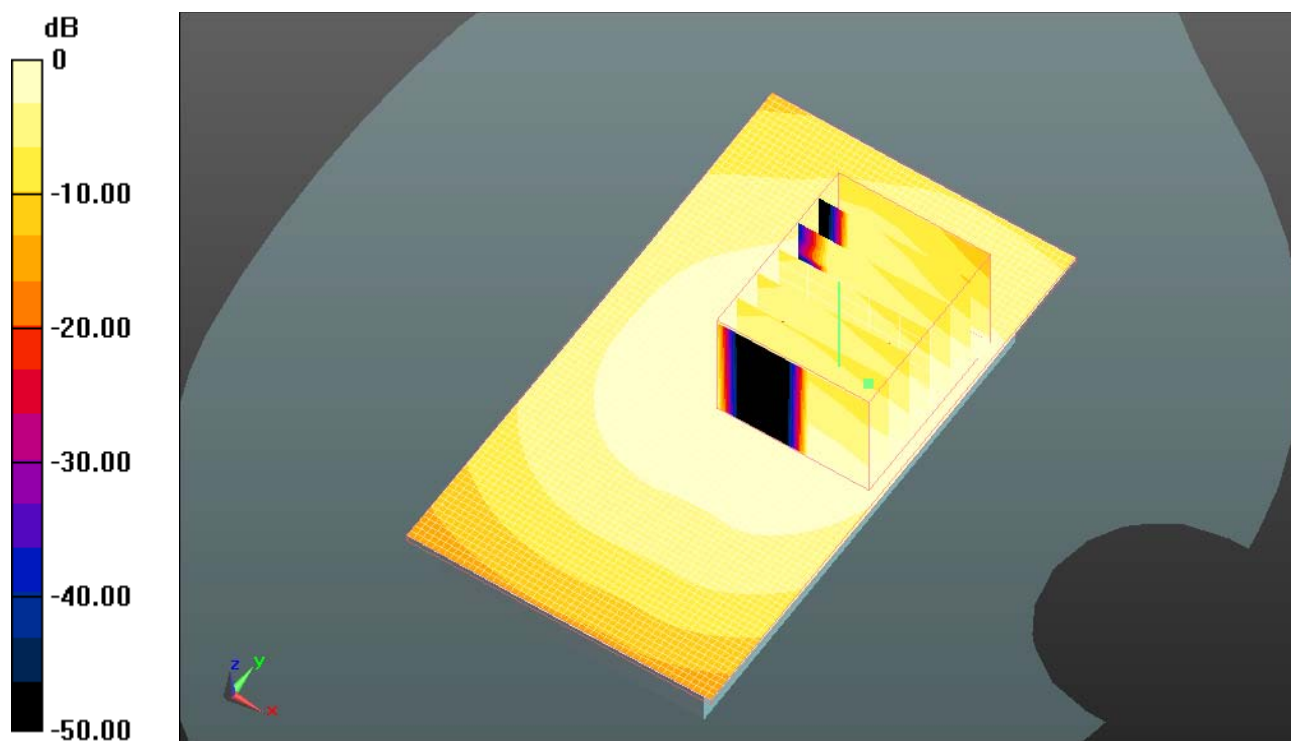

0 dB = 0.330mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 6(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/7/2011 9:54:20 PM, Date/Time: 3/7/2011 10:00:12 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_GPRS850_mid_chan_amb_temp_23.7C_liq_tem p_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 850; Frequency: 836.8 MHz; Communication System

PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.419$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.446 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.210 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.309 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.429 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 7(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

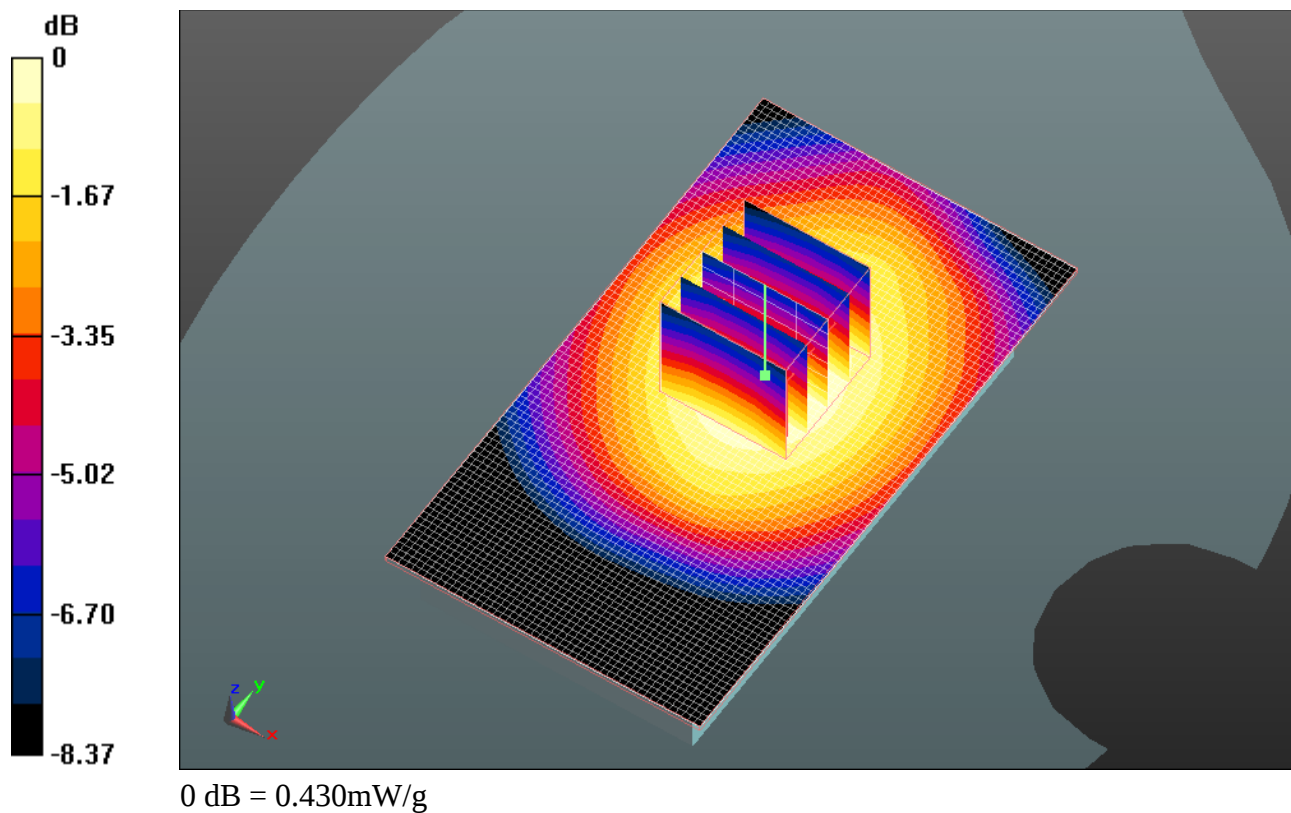

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 8(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

Date/Time: 3/7/2011 10:27:01 PM, Date/Time: 3/7/2011 10:32:58 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_HS#3_GPRS850_mid_chan_amb_temp_23.6C_liq
_temp_22.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 850; Frequency: 836.8 MHz; Communication System

PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.424 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.464 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.299 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.426 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 9(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

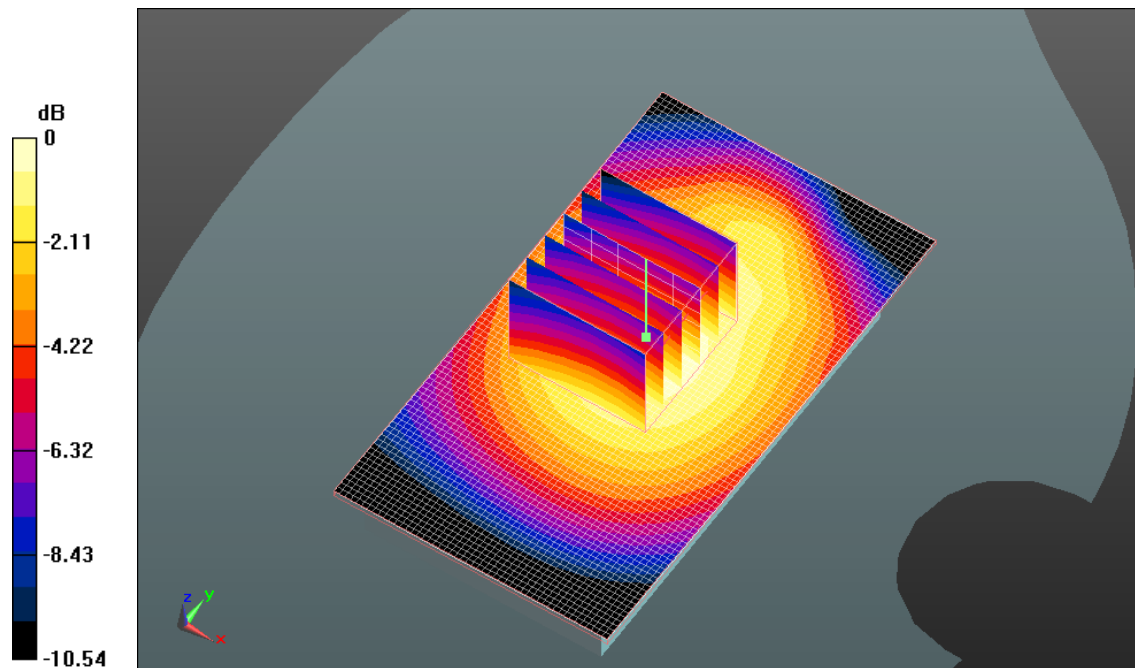

0 dB = 0.430mW/g

	Document				Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				10(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/7/2011 10:44:10 PM, Date/Time: 3/7/2011 10:56:33 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_GPRS850_3_Slots_mid_chan_amb_temp_23.5C_1
iq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 850 (3 slots); Frequency: 836.8 MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.575 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.855 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.447 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.628 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 11(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

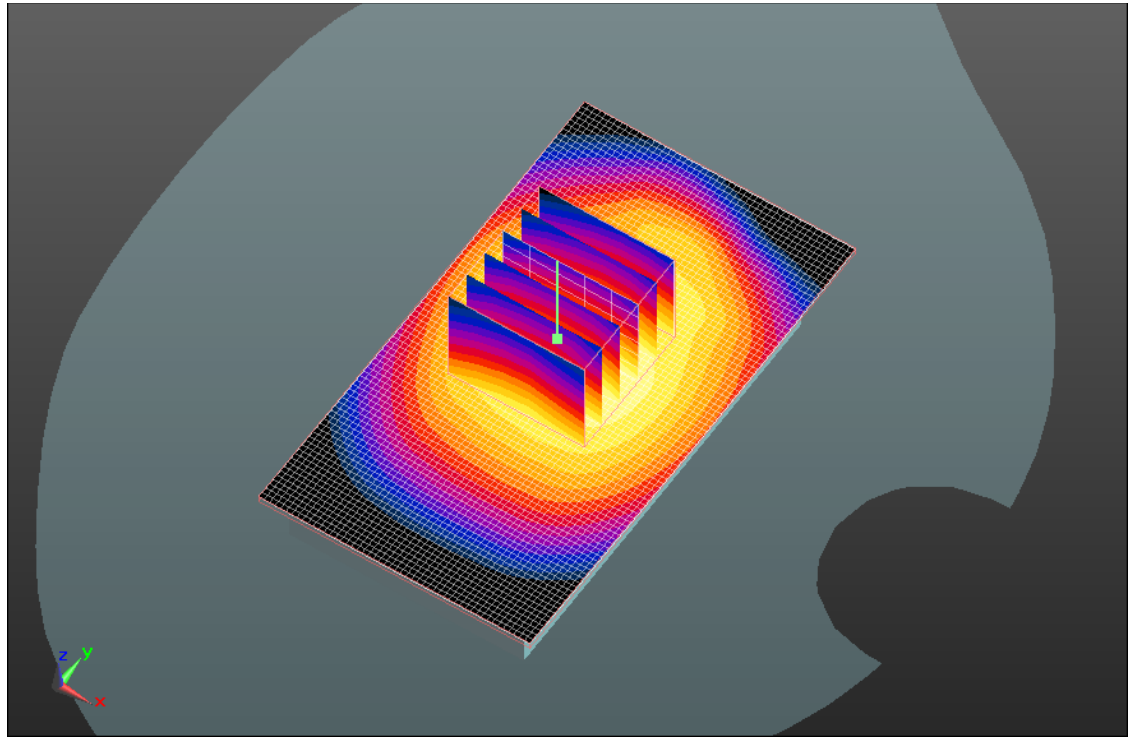

0 dB = 0.630mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			12(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/7/2011 11:07:05 PM, Date/Time: 3/7/2011 11:13:02 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_GPRS850_4_Slots_mid_chan_amb_temp_23.5C_l
iq_temp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 850 (4 slots); Frequency: 836.8 MHz; Communication System PAR: 3.18 dB

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.455 mW/g

Configuration/Body/Zoom Scan (5x5x7) (7x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.442 V/m; Power Drift = 0.32 dB


Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.341 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.505 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 13(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

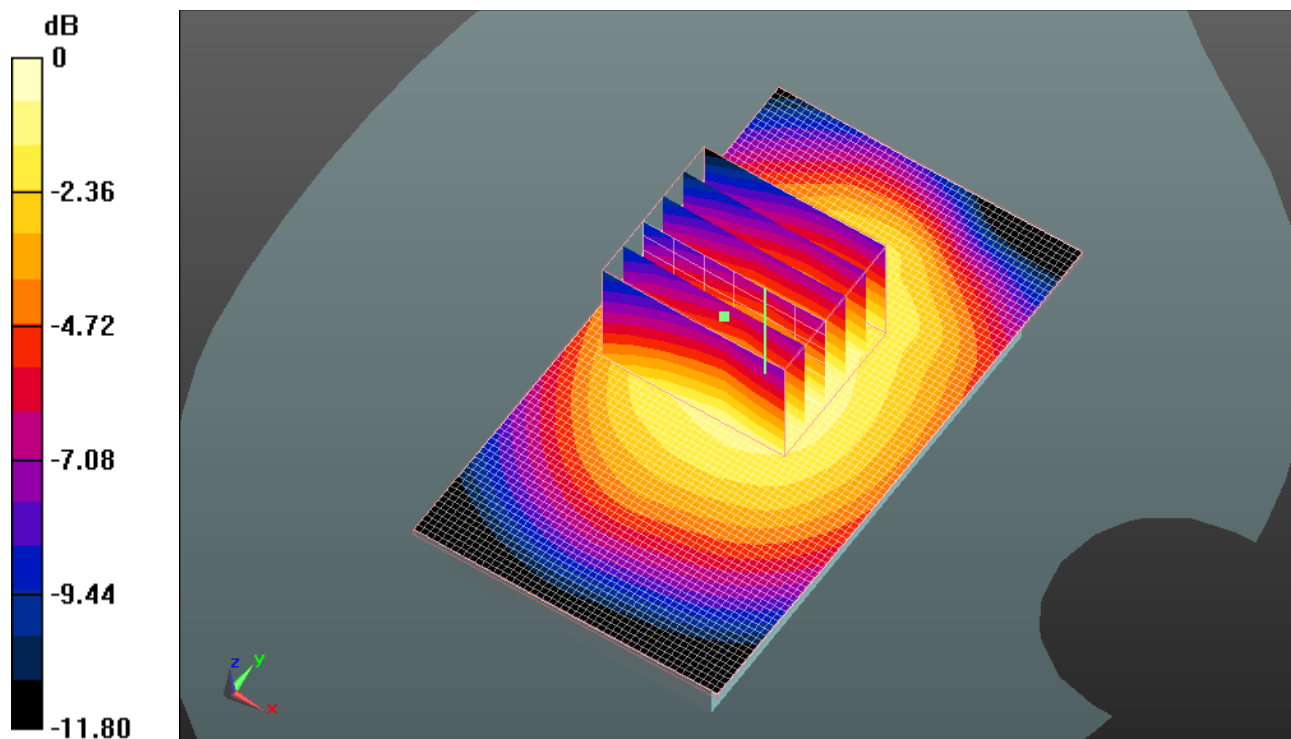

0 dB = 0.500mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 14(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 4/21/2011 10:53:53 AM, Date/Time: 4/21/2011 11:01:03 AM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_GPRS850_mid_chan_amb_temp_23.4_liq_temp_2 2.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: GPRS 850 (3 slots); Frequency: 836.8 MHz; Communication System PAR: 4.472 dB

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 53.625$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.3, 6.3, 6.3); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.467 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.360 V/m; Power Drift = -0.50 dB


Peak SAR (extrapolated) = 1.278 W/kg

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.411 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.533 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 15(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

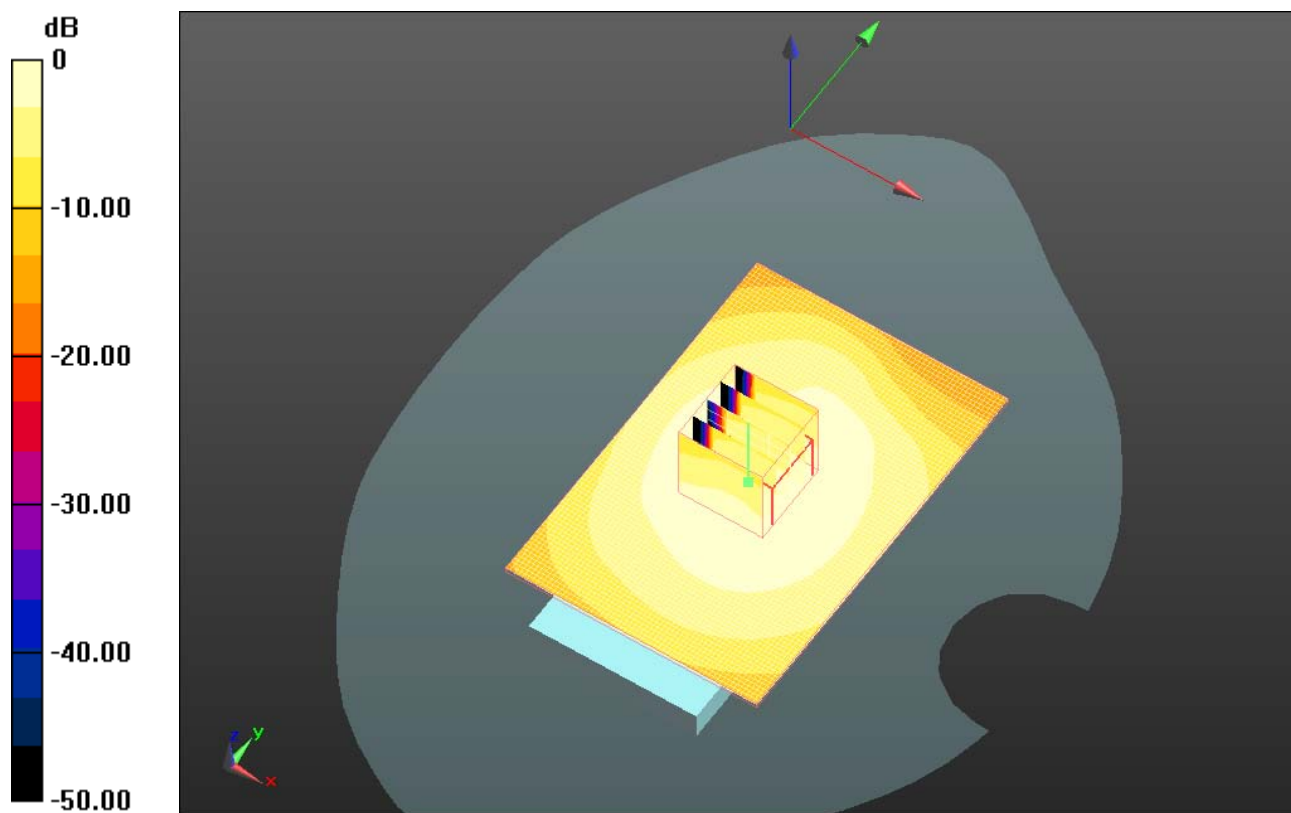

0 dB = 0.530mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 16(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

Date/Time: 3/7/2011 11:34:42 PM, Date/Time: 3/7/2011 11:40:38 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_CDMA800_mid_chan_amb_temp_23.5C_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Communication System
PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.424$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.823 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 28.348 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.042 W/kg

SAR(1 g) = 0.777 mW/g; SAR(10 g) = 0.566 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.825 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 17(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

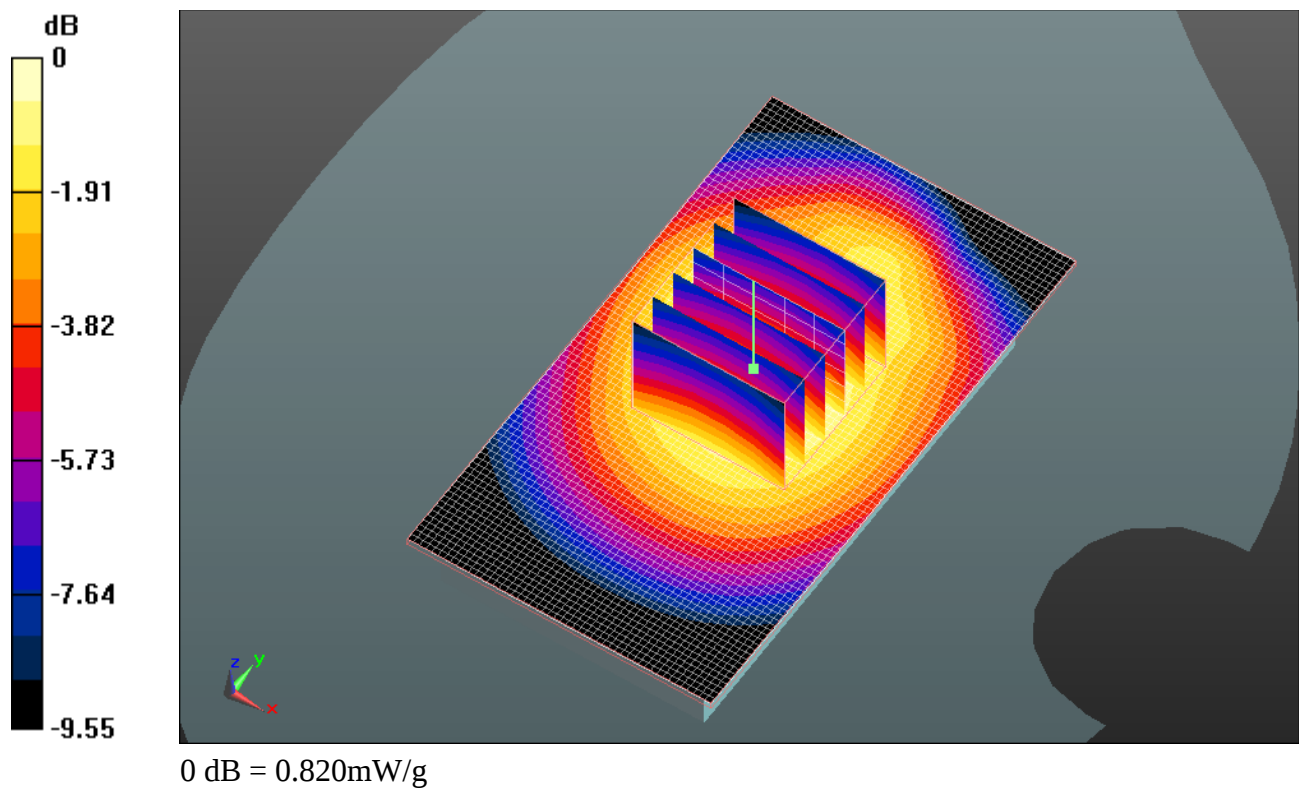

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 18(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

Date/Time: 3/7/2011 11:55:55 PM, Date/Time: 3/8/2011 12:05:21 AM

Test Laboratory: RIM Testing Services

15mm_Spacer_Front_CDMA800_mid_chan_amb_temp_23.4C_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Communication System
PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.424$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.452 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.359 V/m; Power Drift = 0.24 dB


Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.333 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.472 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 19(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

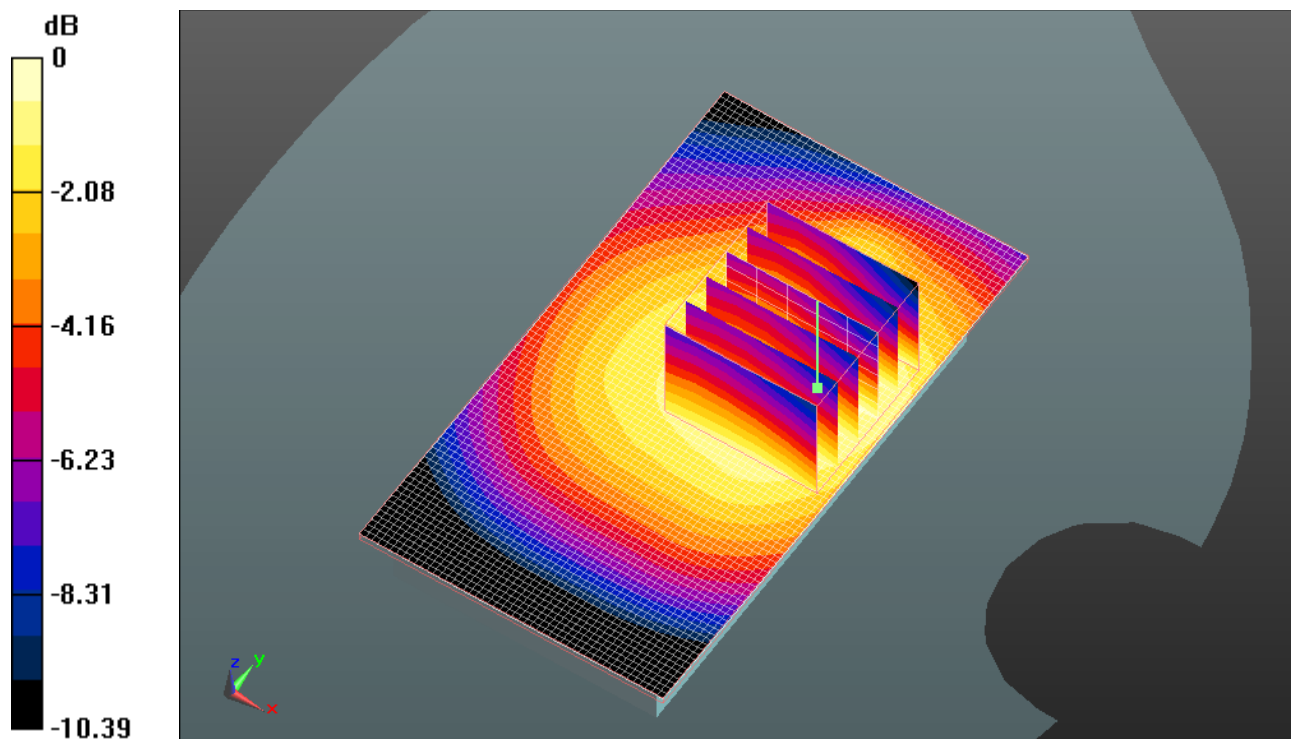

0 dB = 0.470mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			20(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/8/2011 12:15:54 AM, Date/Time: 3/8/2011 12:21:51 AM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_HS#3_CDMA800_mid_chan_amb_temp_23.4C_liq
_temp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 800; Frequency: 836.52 MHz; Communication System
PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.424$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm,
dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.829 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 28.020 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.051 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.570 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 21(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

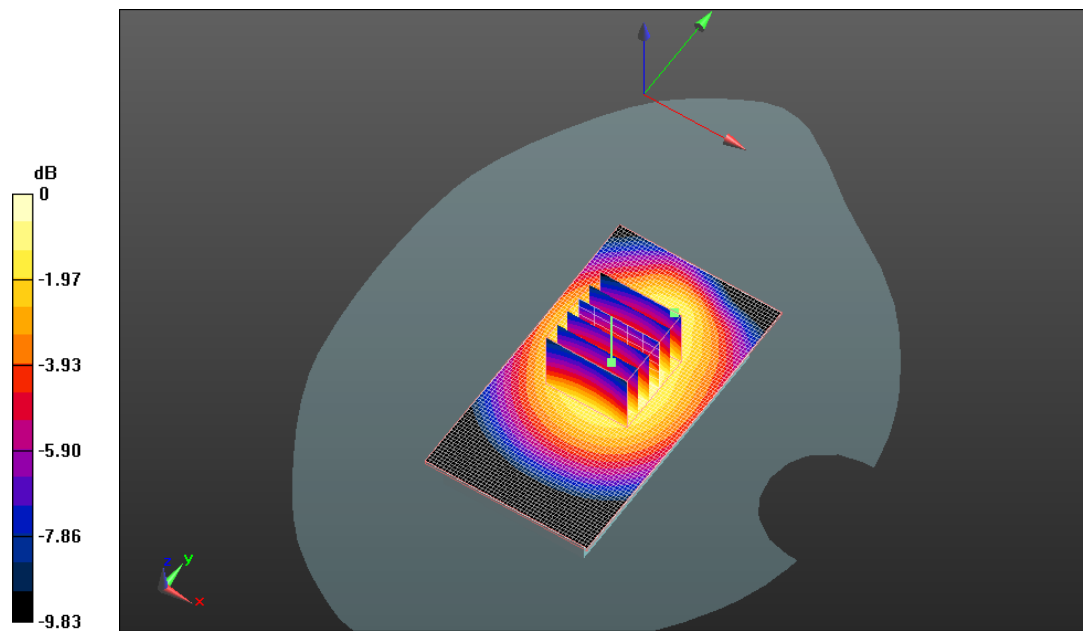

0 dB = 0.820mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			22(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 4/18/2011 4:01:08 PM, Date/Time: 4/18/2011 4:08:00 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_CDMA1900_mid_chan_amb_temp_23.1_liq_temp_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Frequency: 1880 MHz; Communication System
PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ mho/m}$; $\epsilon_r = 51.198$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.805 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.346 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.170 W/kg

SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.438 mW/g

Maximum value of SAR (measured) = 0.792 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 23(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

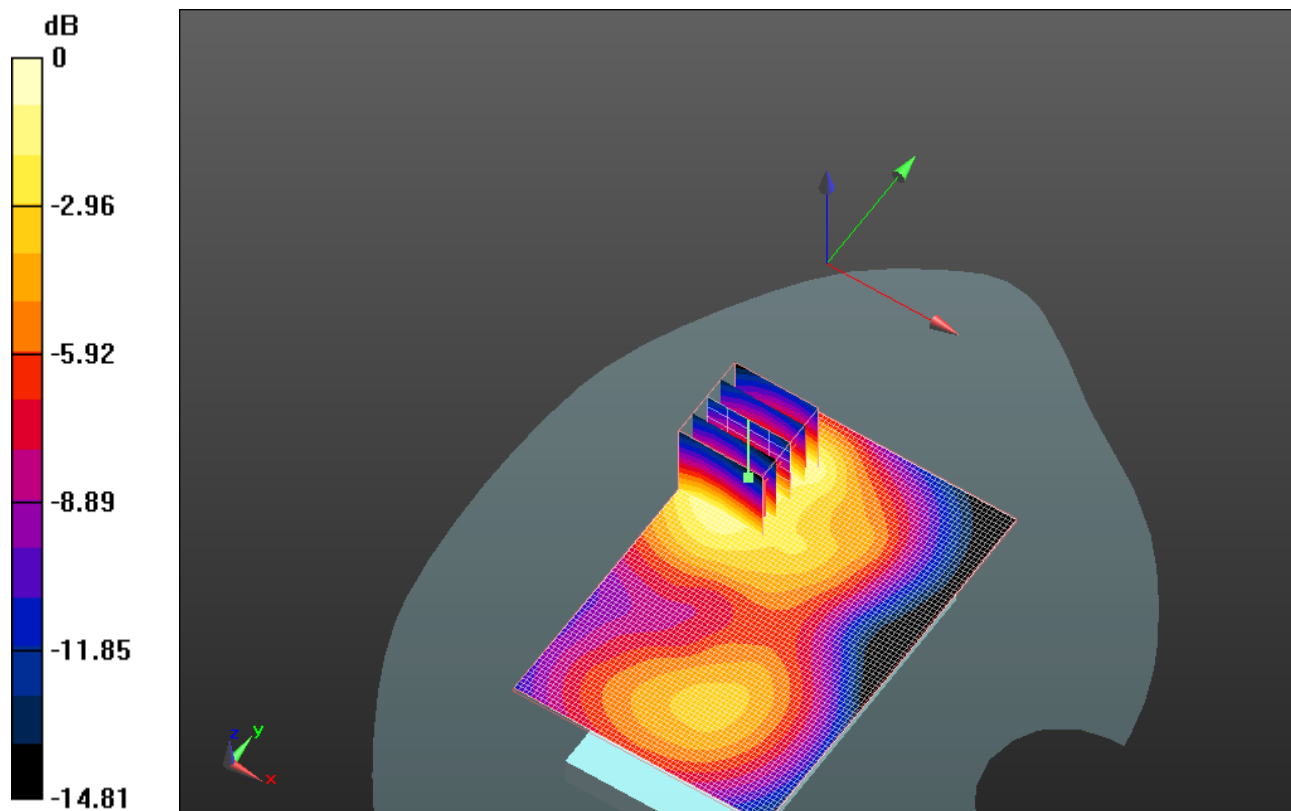

0 dB = 0.790mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			24(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 4/18/2011 4:21:48 PM, Date/Time: 4/18/2011 4:28:40 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Front_CDMA1900_mid_chan_amb_temp_23.2_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ mho/m}$; $\epsilon_r = 51.198$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.561 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.338 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.305 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 25(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

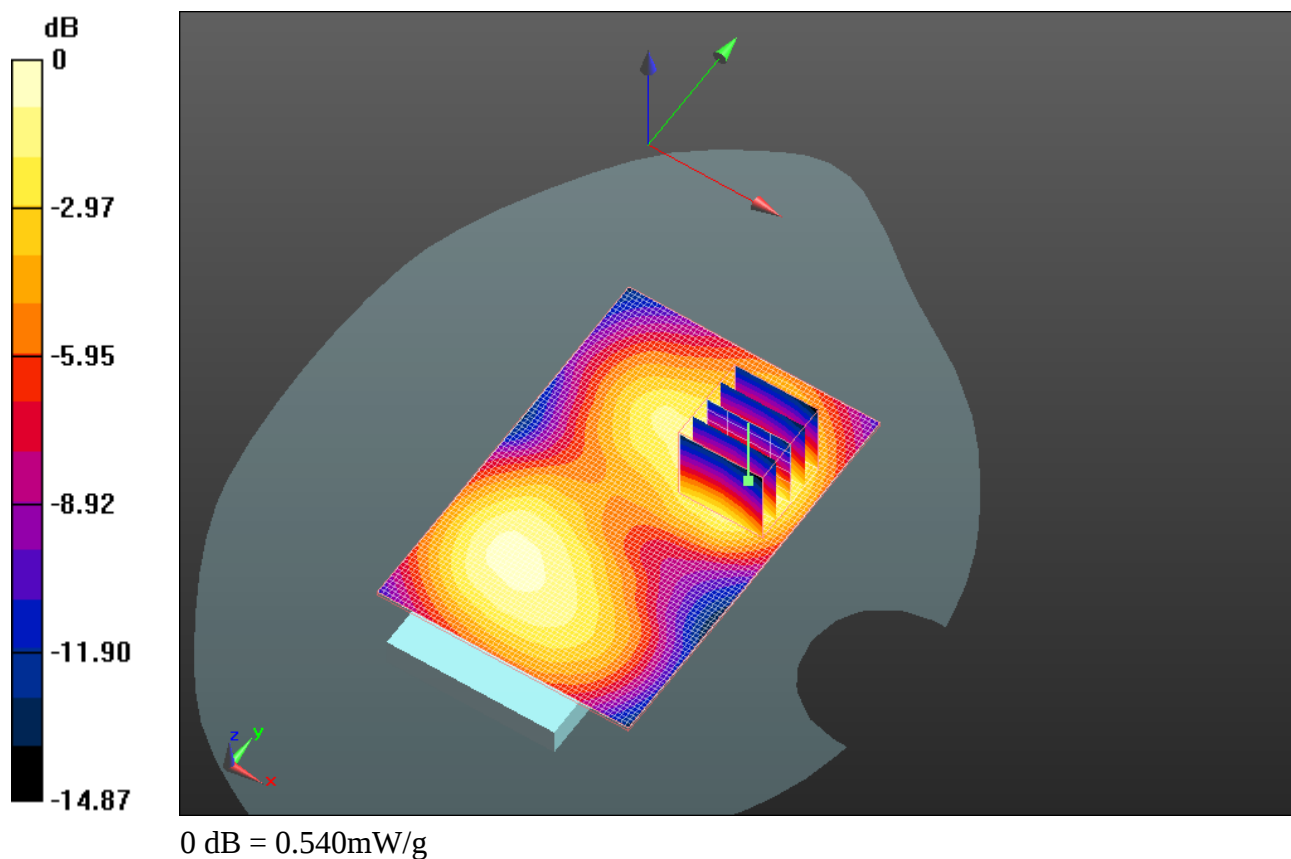

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 26(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 4/18/2011 4:51:45 PM, Date/Time: 4/18/2011 4:58:40 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_Headset_CDMA1900_mid_chan_amb_temp_23.1_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: CDMA 1900; Frequency: 1880 MHz; Communication System
PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ mho/m}$; $\epsilon_r = 51.198$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.796 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 10.572 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.130 W/kg

SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.798 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 27(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

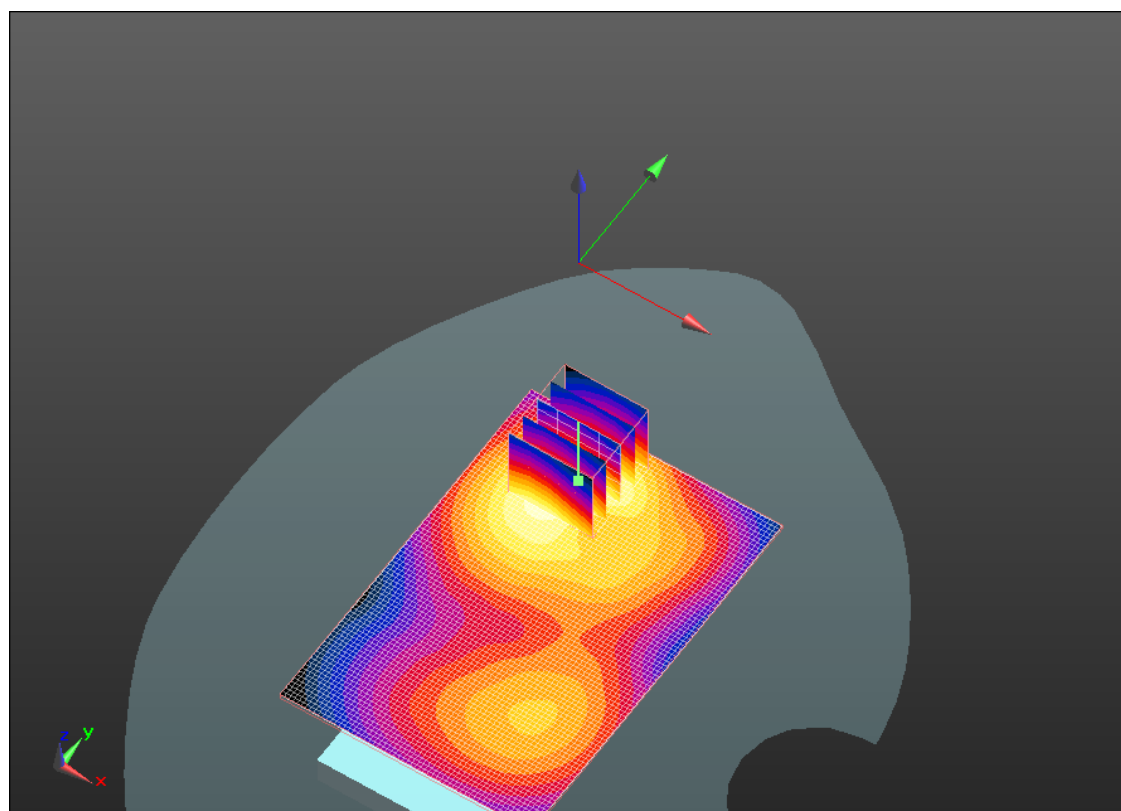

0 dB = 0.800mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 28(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 4/20/2011 7:20:26 PM, Date/Time: 4/20/2011 7:27:22 PM, Date/Time: 4/20/2011 7:34:08 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_CDMA800_mid_chan_amb_temp_23.2_liq_temp_2 2.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: CDMA 800; Frequency: 836.52 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 53.627$;
 $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.3, 6.3, 6.3); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.827 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 29.446 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.040 W/kg

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.578 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 29(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Maximum value of SAR (measured) = 0.827 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (6x9x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 29.446 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.031 W/kg

SAR(1 g) = 0.779 mW/g; SAR(10 g) = 0.576 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.821 mW/g

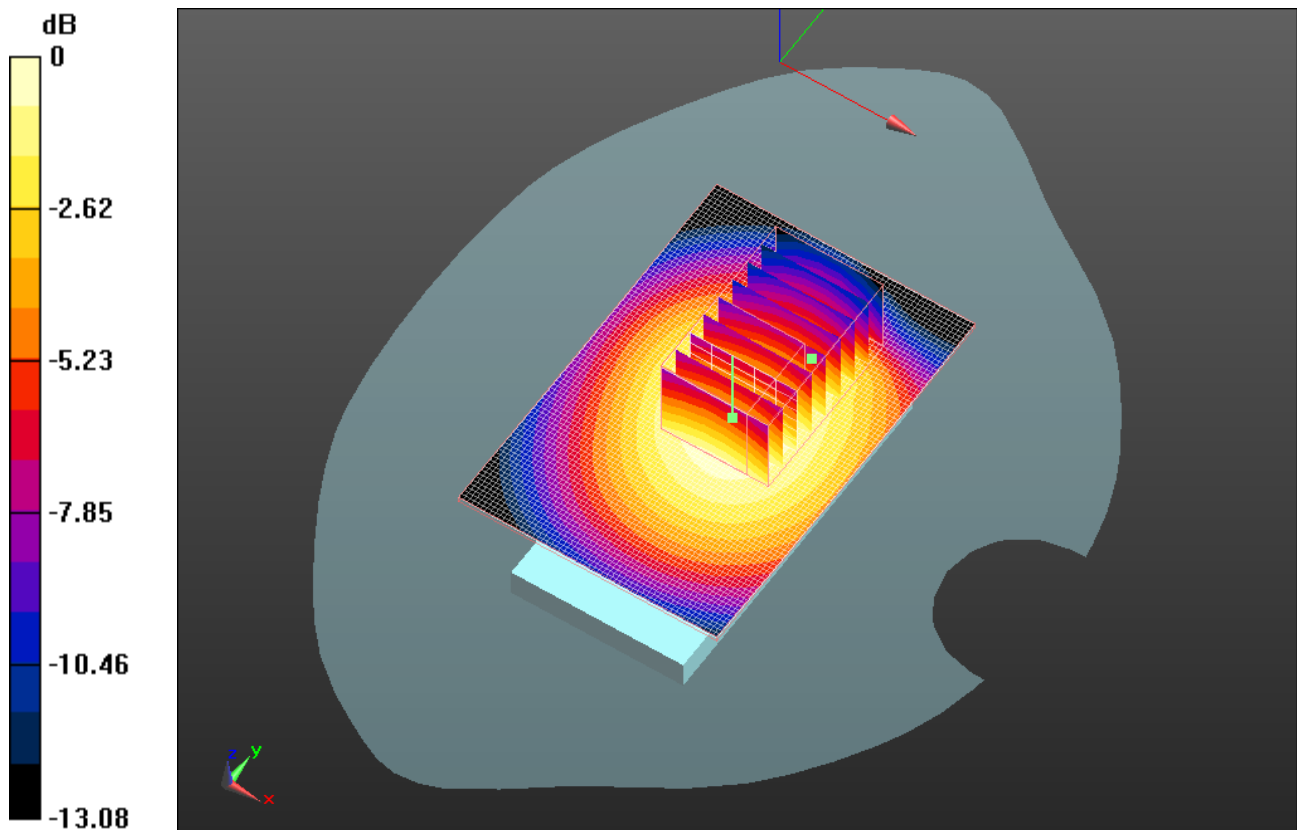

0 dB = 0.820mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 30(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 4/21/2011 11:20:51 AM, Date/Time: 4/21/2011 11:27:59 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_CDMA800_mid_chan_amb_temp_23.3_liq_temp_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E46EDD

Communication System: CDMA 800; Frequency: 836.52 MHz; Communication System
PAR: 0 dB

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.976$ mho/m; $\epsilon_r = 53.627$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.3, 6.3, 6.3); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.670 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.409 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.474 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.670 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 31(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

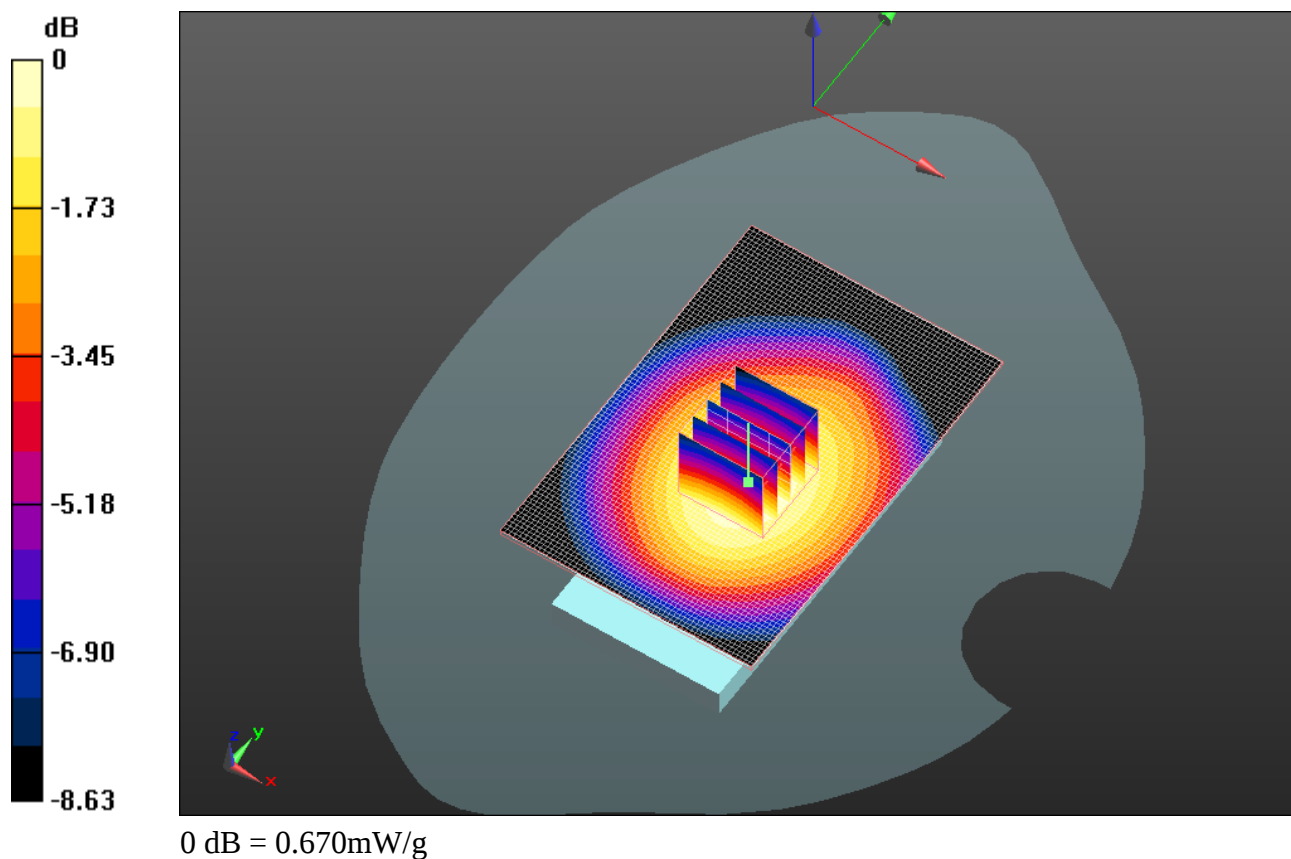

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 32(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 5:56:18 PM, Date/Time: 2/28/2011 6:02:09 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_GPRS1900_mid_chan_amb_temp_23.4C_liq_tem
p_22.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900; Frequency: 1880 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$,
 $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.613 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.011 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 33(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

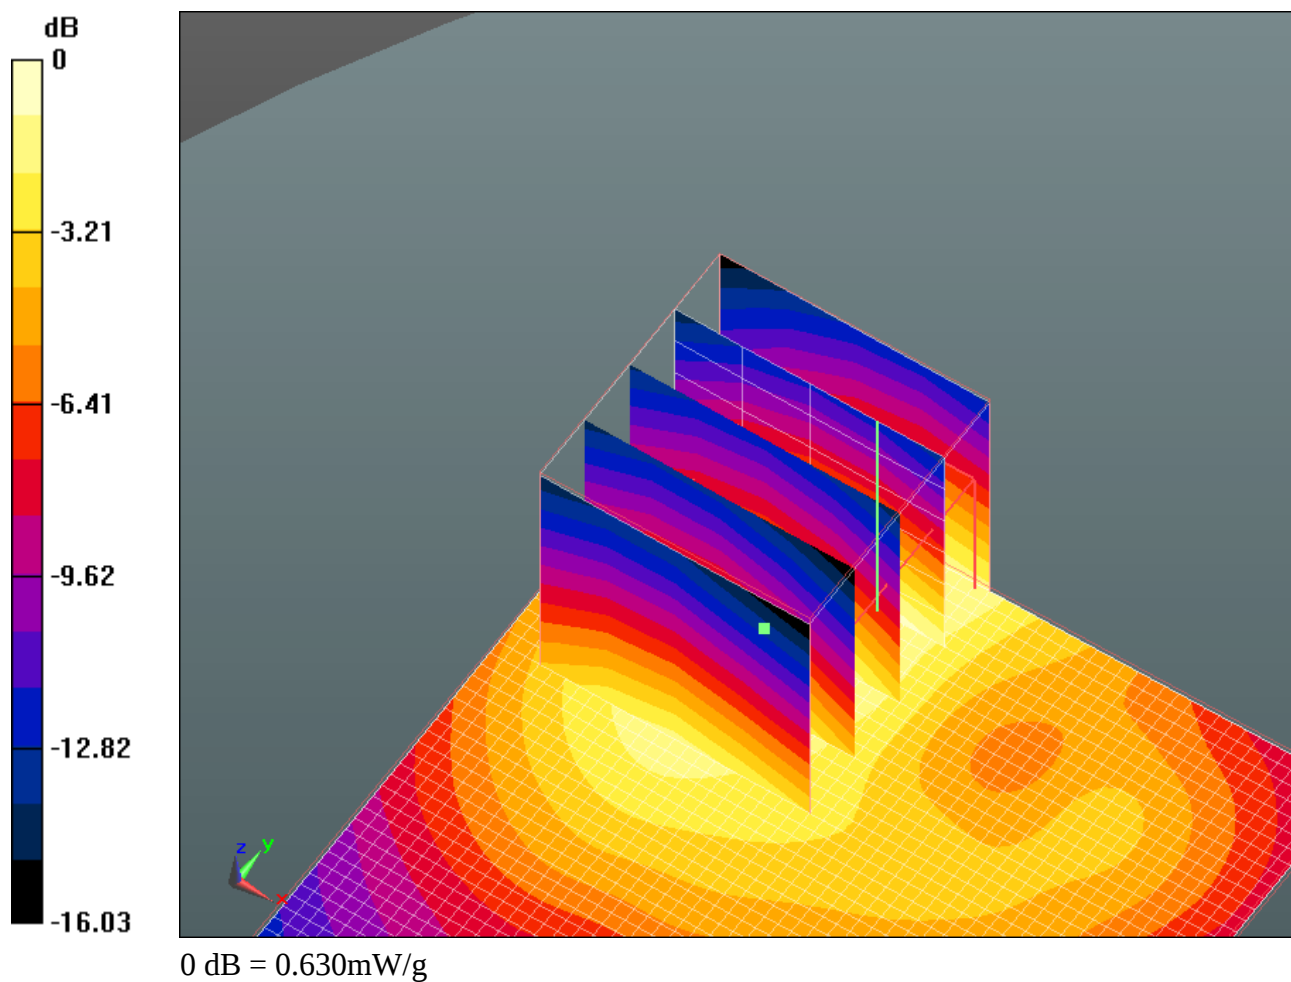

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 34(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 2/28/2011 6:11:07 PM, Date/Time: 2/28/2011 6:17:02 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_GPRS1900_mid_chan_amb_temp_23.5C_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900; Frequency: 1880 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.490 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 5.805 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.279 mW/g

Maximum value of SAR (measured) = 0.509 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 35(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

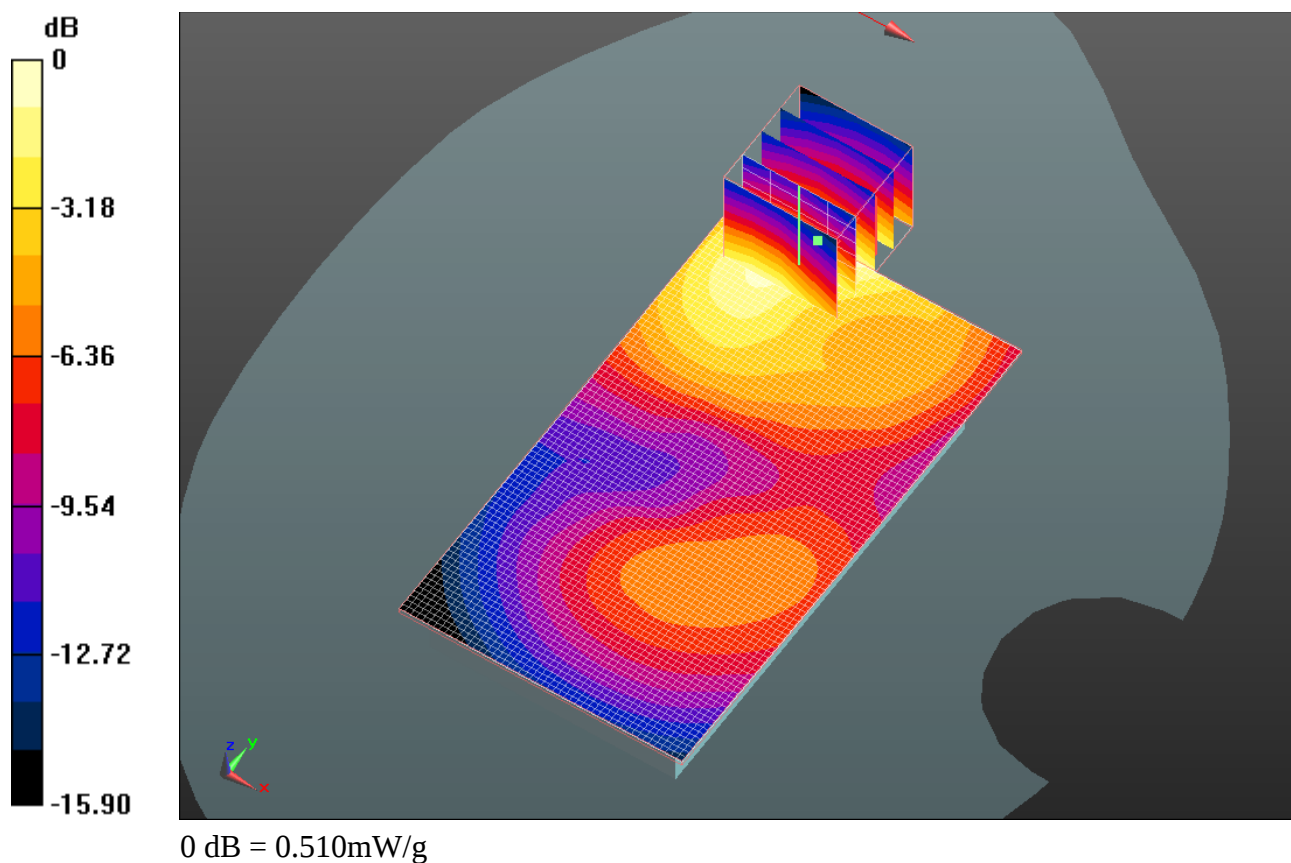

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 36(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

Date/Time: 2/28/2011 6:26:50 PM, Date/Time: 2/28/2011 6:32:46 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Front_GPRS1900_mid_chan_amb_temp_23.6C_liq_tem
p_22.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900; Frequency: 1880 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$,
 $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.379 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.675 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.379 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 37(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

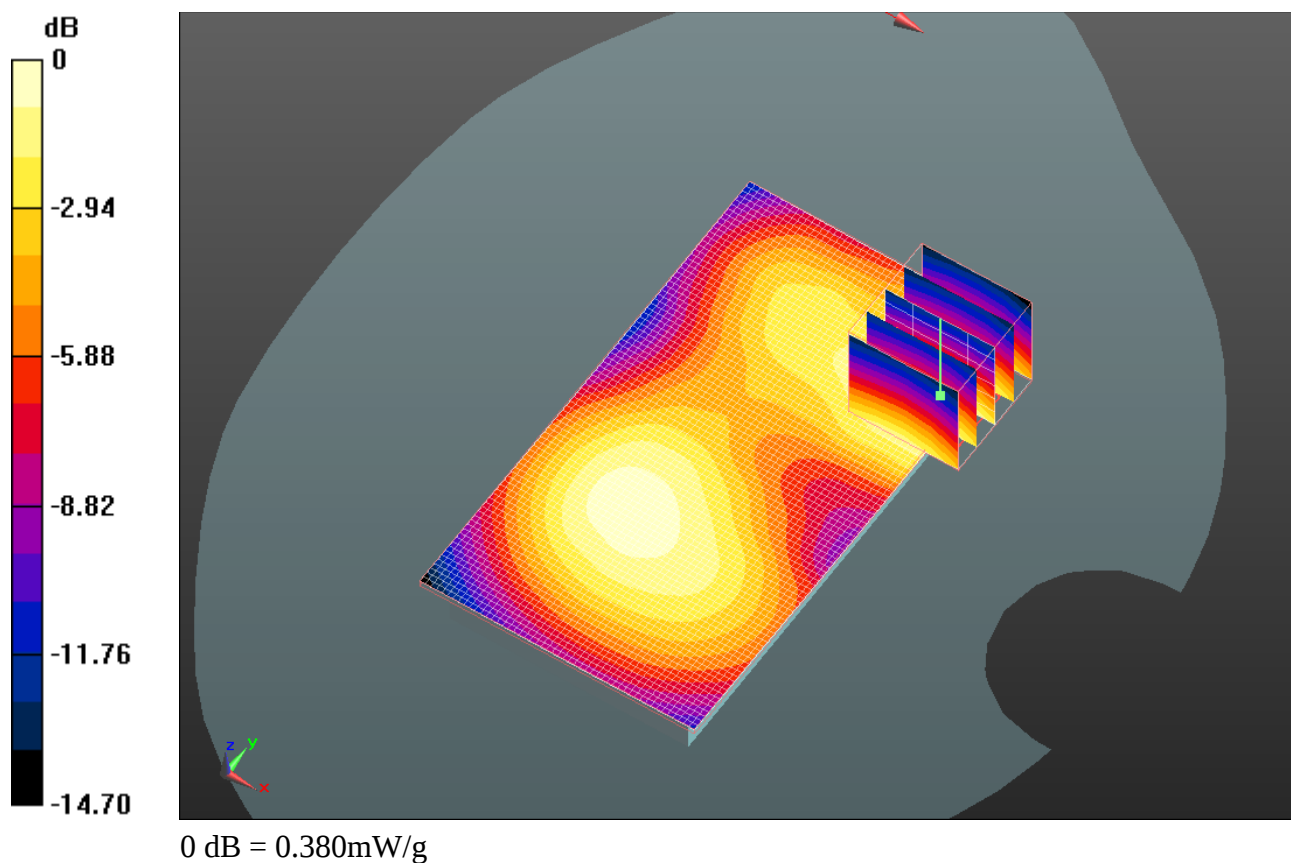

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 38(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 6:42:37 PM, Date/Time: 2/28/2011 6:48:31 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_HS#1_GPRS1900_mid_chan_amb_temp_23.5C_li
q_temp_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900; Frequency: 1880 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$,
 $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.632 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.318 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.338 mW/g

Maximum value of SAR (measured) = 0.637 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 39(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

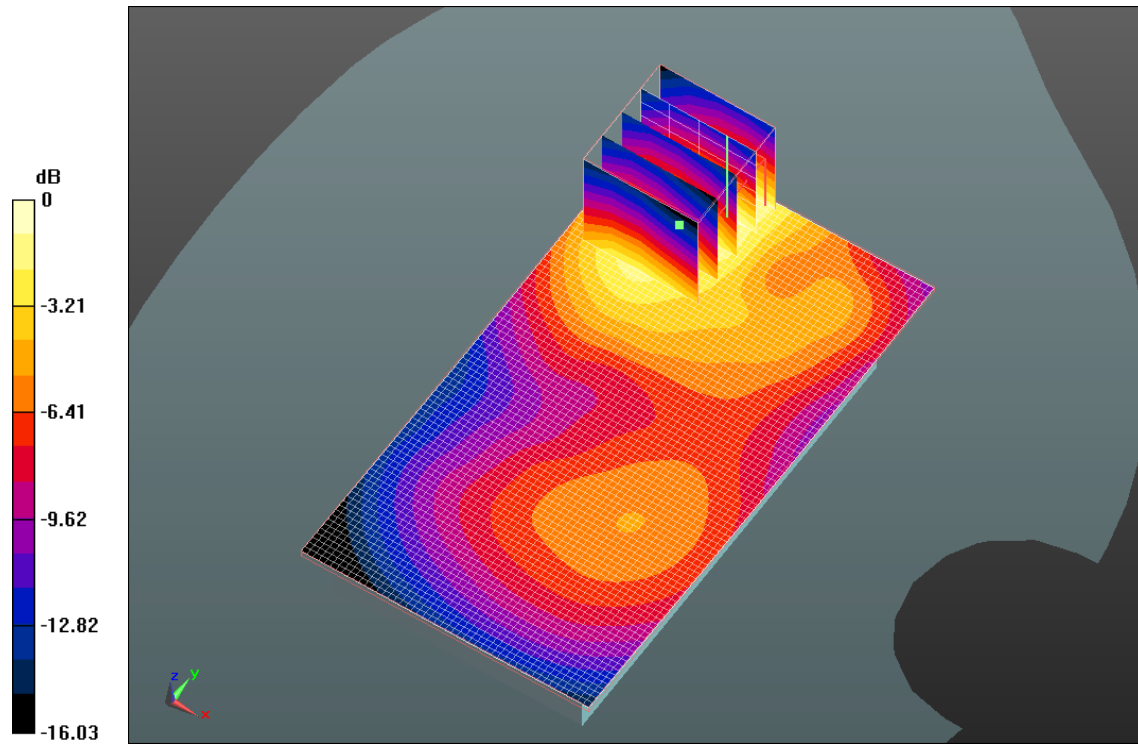

0 dB = 0.640mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 40(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 6:57:51 PM, Date/Time: 2/28/2011 7:03:47 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_HS#2_GPRS1900_mid_chan_amb_temp_23.4C_li
q_temp_22.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900; Frequency: 1880 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$,
 $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.632 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.851 V/m; Power Drift = 0.22 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.628 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 41(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

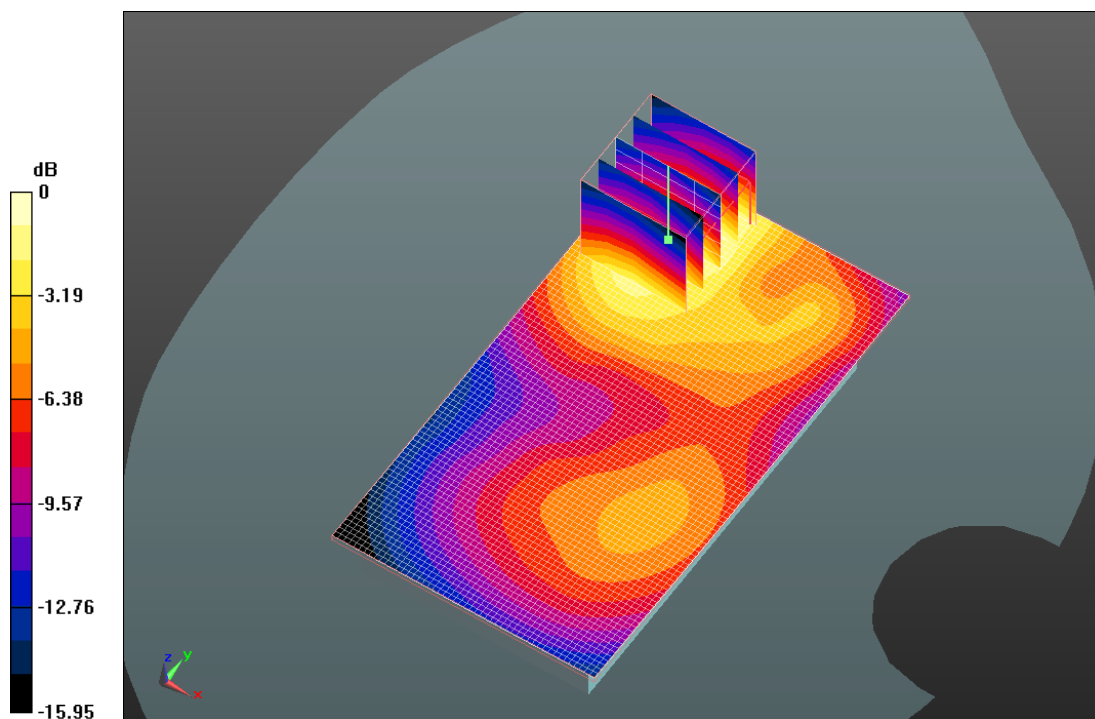

0 dB = 0.630mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 42(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 7:50:56 PM, Date/Time: 2/28/2011 7:56:52 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_HS#3_GPRS1900_mid_chan_amb_temp_23.3C_li
q_temp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900; Frequency: 1880 MHz; Communication System
PAR: 6.232 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$,
 $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.619 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.864 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.001 W/kg

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.350 mW/g

Maximum value of SAR (measured) = 0.666 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 43(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

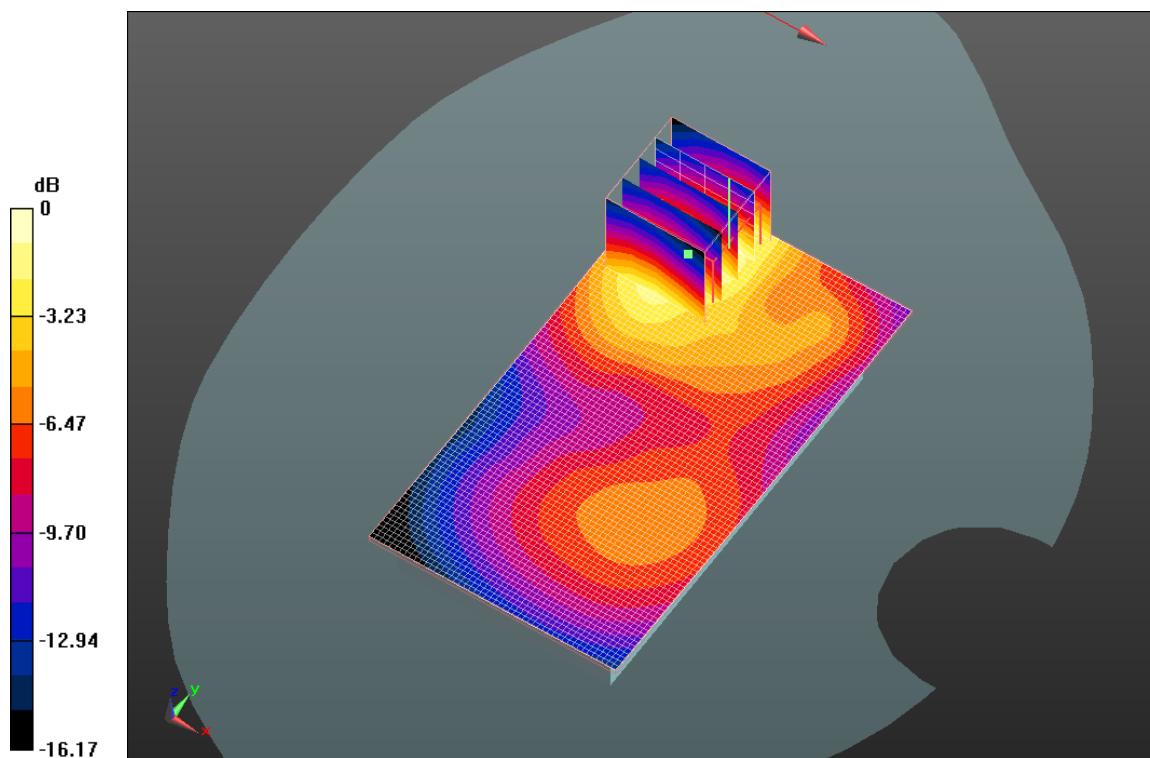

0 dB = 0.670mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 44(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 8:20:02 PM, Date/Time: 2/28/2011 8:25:57 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_HS#3_GPRS1900_3_Slots_mid_chan_amb_temp_23.4C_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900 (3-slots); Frequency: 1880 MHz; Communication System PAR: 4.472 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.494 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 6.992 V/m; Power Drift = -0.33 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 45(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

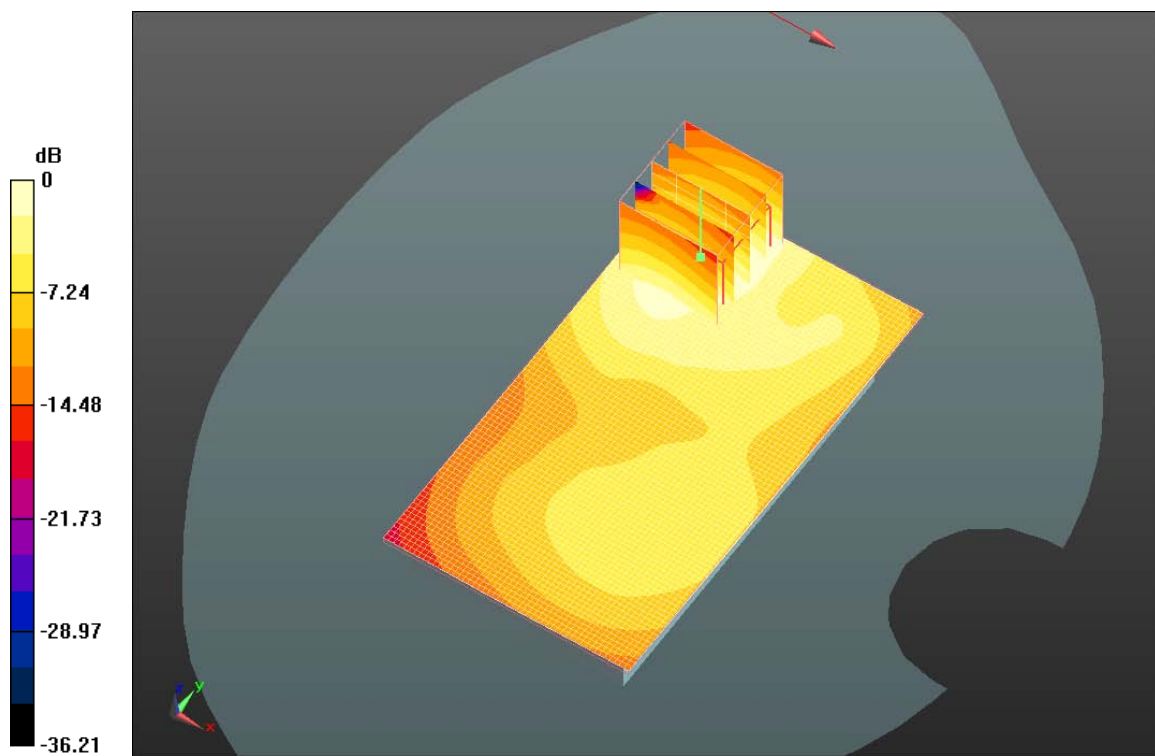

0 dB = 0.460mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			46(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 8:54:13 PM, Date/Time: 2/28/2011 9:00:09 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_HS#3_GPRS1900_4_Slots_mid_chan_amb_temp_23.4C_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: GPRS 1900 (4-slots); Frequency: 1880 MHz; Communication System PAR: 3.222 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.537 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.098 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 47(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

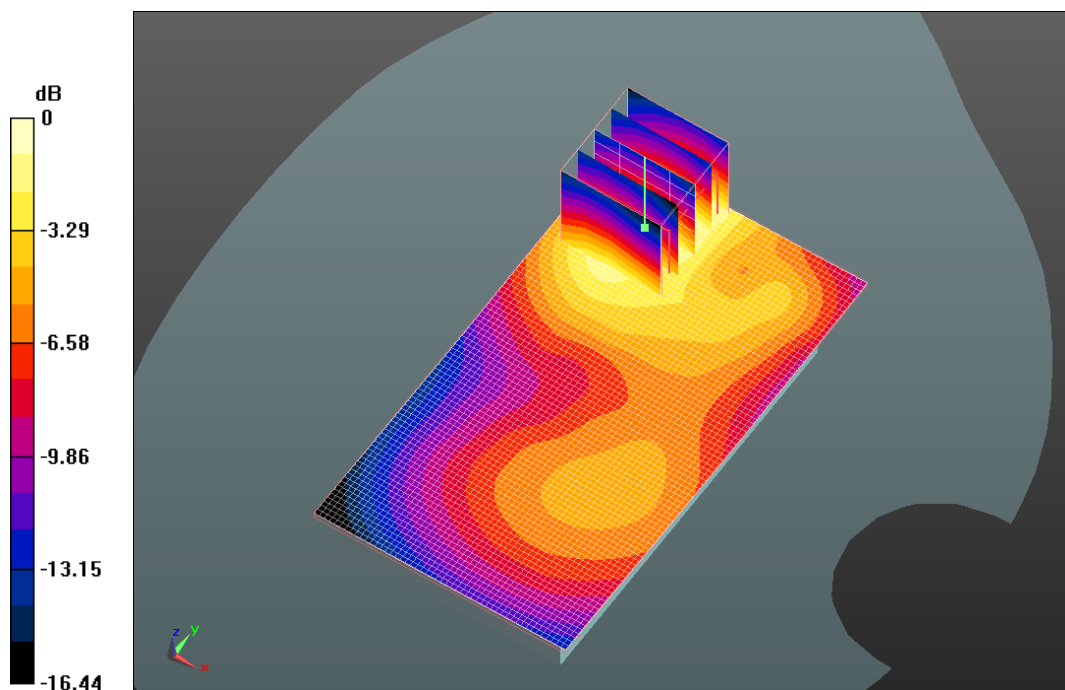

0 dB = 0.540mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 48(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

Date/Time: 3/3/2011 7:31:41 PM, Date/Time: 3/3/2011 7:37:35 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_802.11b_mid_chan_amb_temp_23.3C_liq_temp_2
1.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.009$ mho/m; $\epsilon_r = 50.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.491 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.960 V/m; Power Drift = 2.88 dB


Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.251 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.570 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 49(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

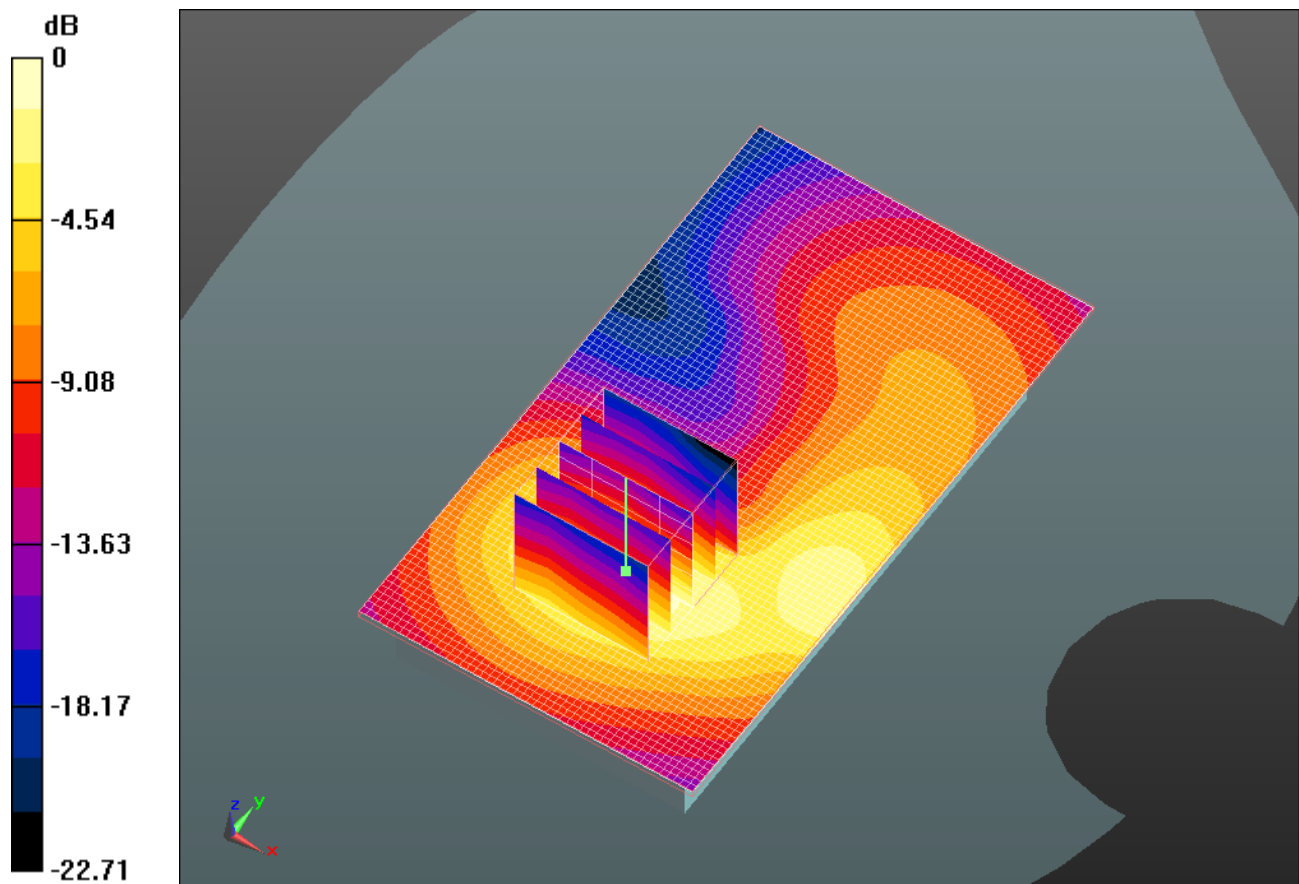

0 dB = 0.570mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 50(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/3/2011 7:50:20 PM, Date/Time: 3/3/2011 7:56:08 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_802.11b_mid_chan_amb_temp_23.3C_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 2.009 \text{ mho/m}$; $\epsilon_r = 50.212$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.510 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.412 V/m; Power Drift = -0.38 dB


Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.243 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.544 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 51(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

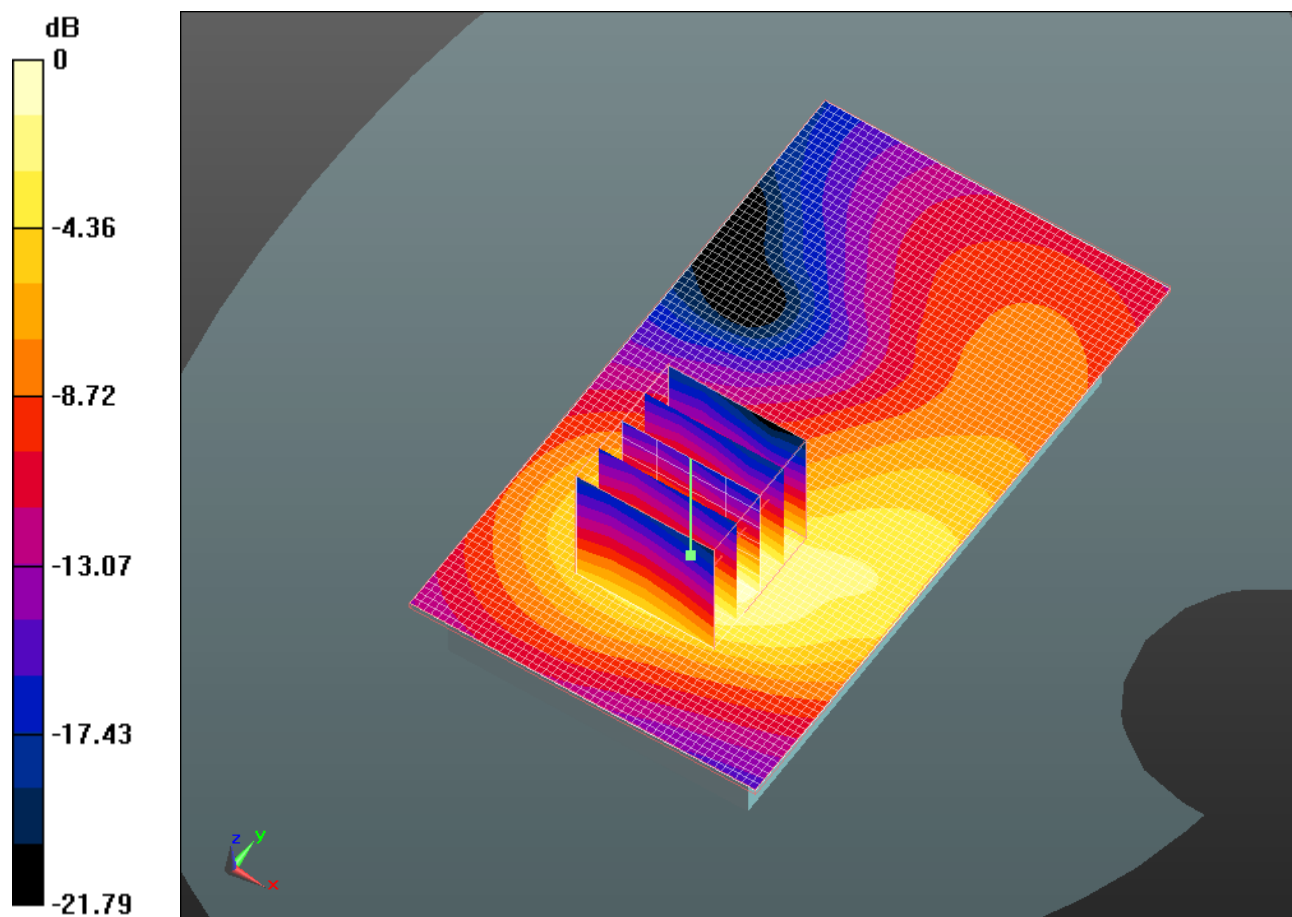

0 dB = 0.540mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 52(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/3/2011 10:36:49 PM, Date/Time: 3/3/2011 10:42:40 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_802.11b_mid_chan_amb_temp_23.2C_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 2.009 \text{ mho/m}$; $\epsilon_r = 50.212$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.043 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.941 V/m; Power Drift = -0.23 dB


Peak SAR (extrapolated) = 0.071 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.021 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.041 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 53(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

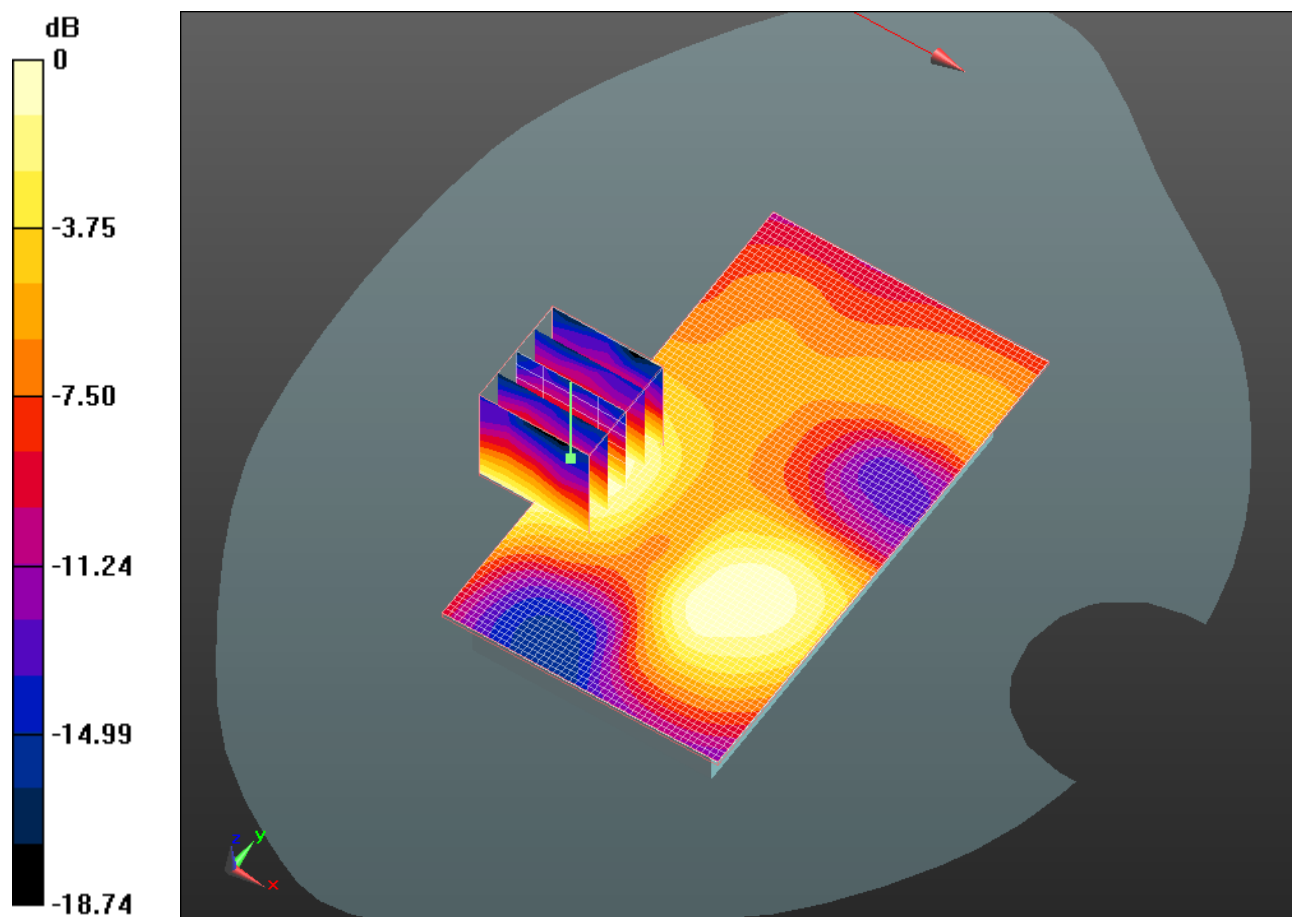

0 dB = 0.040mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			54(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/3/2011 10:51:08 PM, Date/Time: 3/3/2011 10:56:57 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_HS#3_802.11b_mid_chan_amb_temp_23.1C_liq_
temp_21.7C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.009$ mho/m; $\epsilon_r = 50.212$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.481 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.599 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.228 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.502 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 55(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

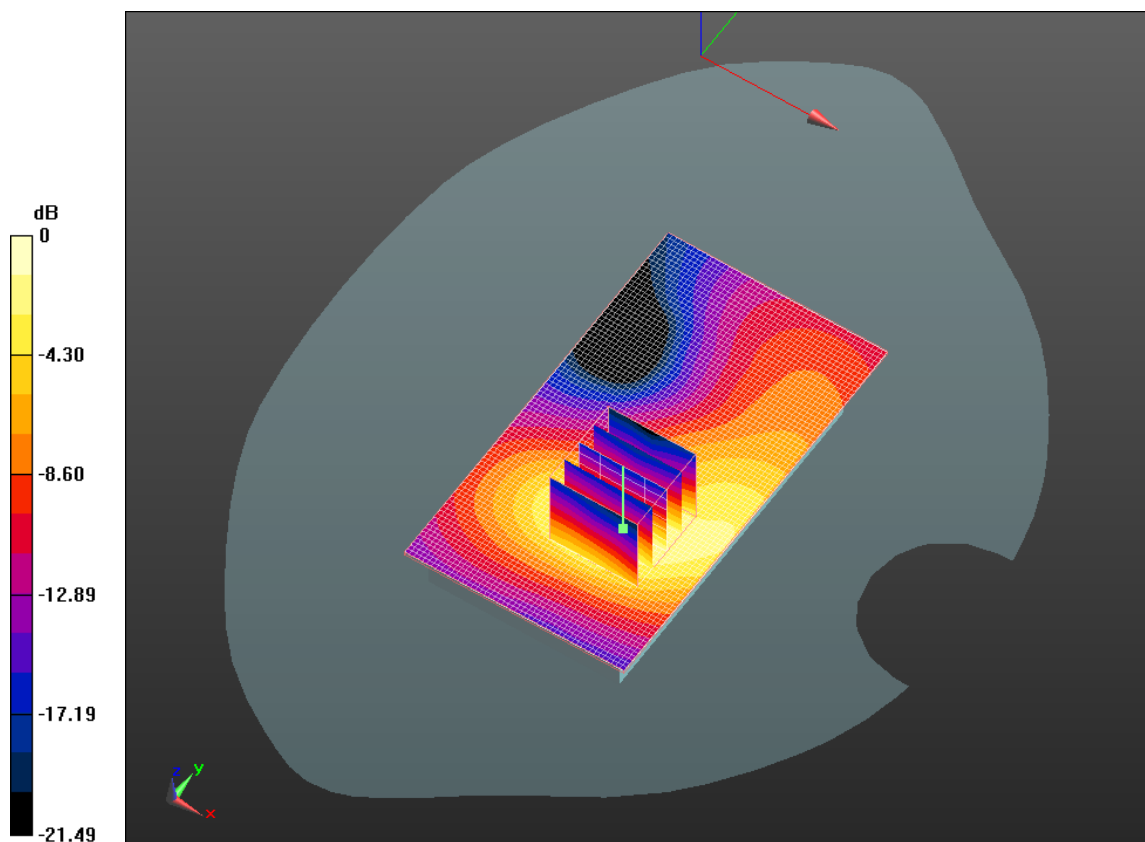

0 dB = 0.500mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 56(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/4/2011 12:16:02 AM, Date/Time: 3/4/2011 12:21:55 AM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_Bluetooth_mid_chan_amb_temp_23.3C_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.016$ mho/m; $\epsilon_r = 50.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.000212 mW/g

Configuration/Body/Zoom Scan (5x5x7) (7x7x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.928 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.00232 W/kg

SAR(1 g) = 6.98e-005 mW/g; SAR(10 g) = 1.59e-005 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00127 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 57(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

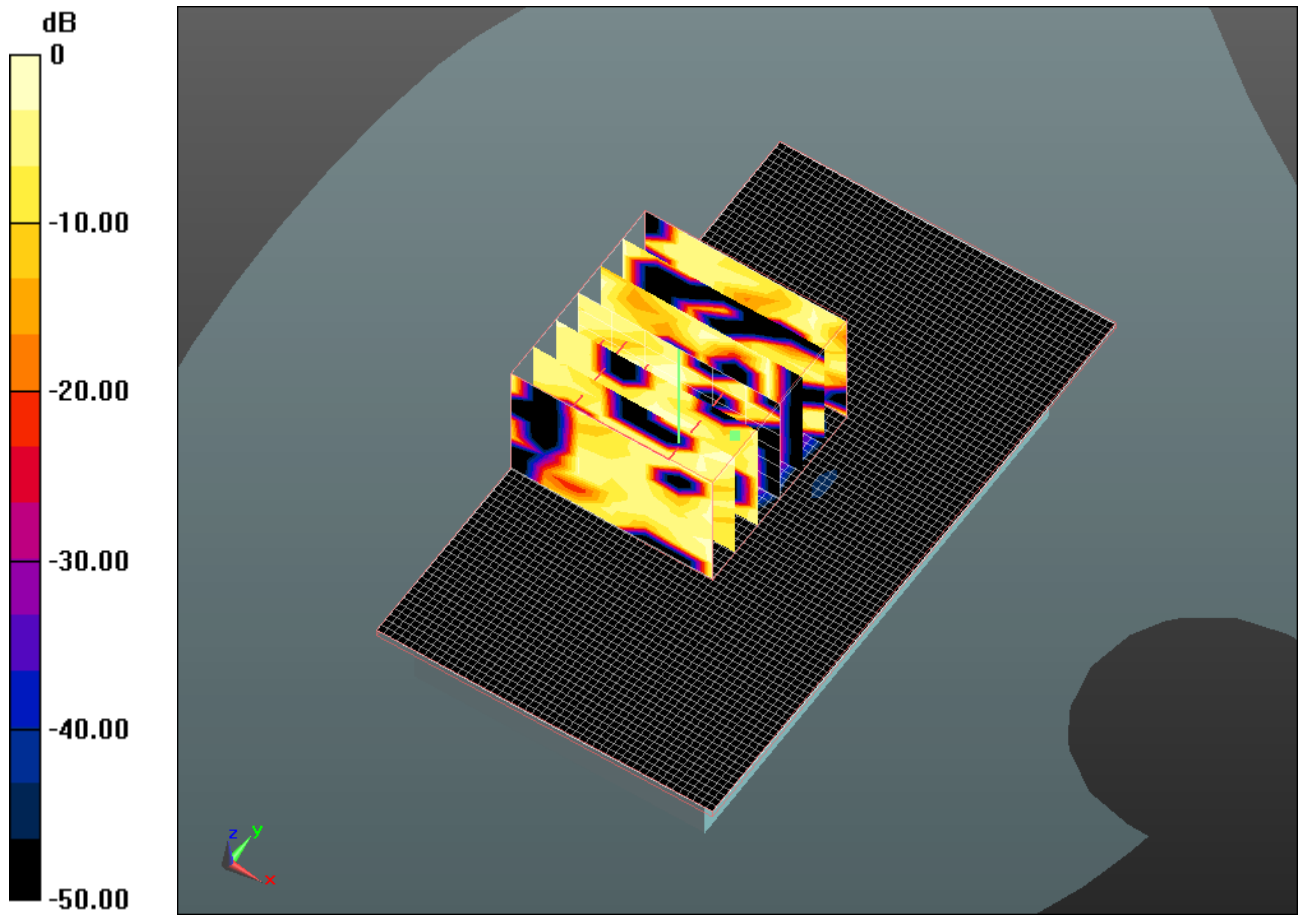

0 dB = 0.0013mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 58(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/4/2011 12:35:30 AM, Date/Time: 3/4/2011 12:41:21 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_Bluetooth_mid_chan_amb_temp_23.3C_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.016$ mho/m; $\epsilon_r = 50.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00099 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.807 V/m; Power Drift = 0.61 dB


Peak SAR (extrapolated) = 0.00244 W/kg

SAR(1 g) = 0.000169 mW/g; SAR(10 g) = 3.51e-005 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00099 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 59(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

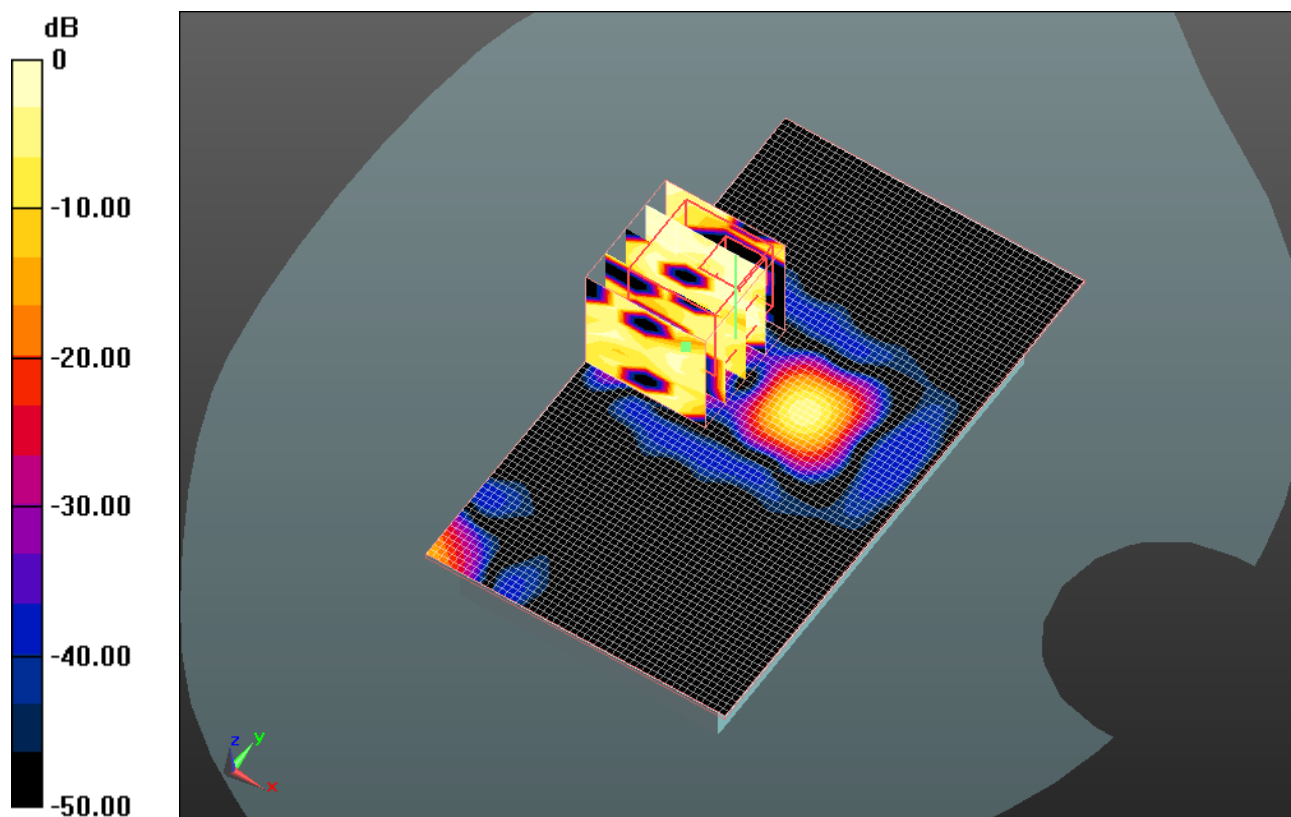

0 dB = 0.00099mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 60(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/4/2011 12:57:06 AM, Date/Time: 3/4/2011 1:08:18 AM

Test Laboratory: RIM Testing Services

Vertical_Holster_Front_Bluetooth_mid_chan_amb_temp_23.2C_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441 \text{ MHz}$; $\sigma = 2.016 \text{ mho/m}$; $\epsilon_r = 50.206$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.000786 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.652 V/m; Power Drift = 1.97 dB


Peak SAR (extrapolated) = 0.000995 W/kg

SAR(1 g) = 8.69e-005 mW/g; SAR(10 g) = 1.61e-005 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.000995 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 61(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

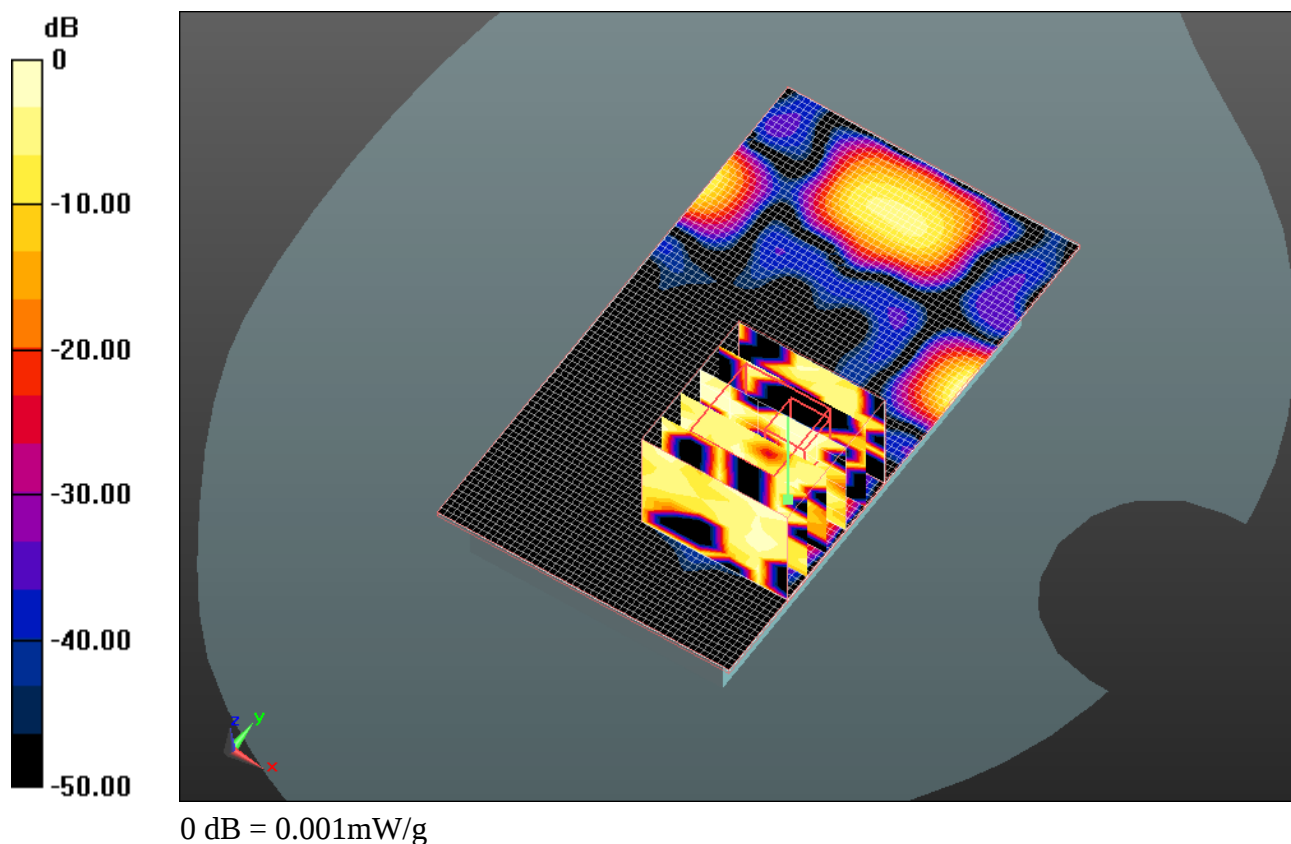

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 62(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/4/2011 1:18:44 AM, Date/Time: 3/4/2011 1:24:36 AM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_HS#3_Bluetooth_mid_chan_amb_temp_23.2C_li
q_temp_21.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32D4BD0D

Communication System: Bluetooth; Frequency: 2441 MHz; Communication System

PAR: 0 dB

Medium parameters used (interpolated): $f = 2441 \text{ MHz}$; $\sigma = 2.016 \text{ mho/m}$; $\epsilon_r = 50.206$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.43, 4.43, 4.43); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.00018 mW/g

Configuration/Body/Zoom Scan (5x5x7) (6x6x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.843 V/m; Power Drift = 0.88 dB


Peak SAR (extrapolated) = 0.00102 W/kg

SAR(1 g) = 0.000123 mW/g; SAR(10 g) = 1.58e-005 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00102 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 63(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

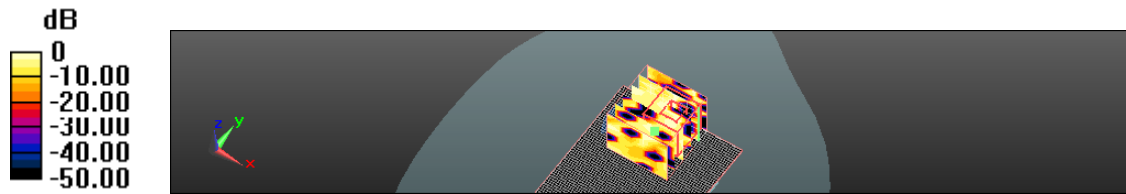

0 dB = 0.001mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			64(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 2:21:48 PM, Date/Time: 5/25/2011 2:35:40 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_802.11a_low_band_chan_36_amb_temp_23.2_liq_
temp_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5180 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 5.433 \text{ mho/m}$; $\epsilon_r = 46.596$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.79, 4.79, 4.79); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.171 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube
0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 6.094 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.268 W/kg
SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.028 mW/g
Maximum value of SAR (measured) = 0.159 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 65(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

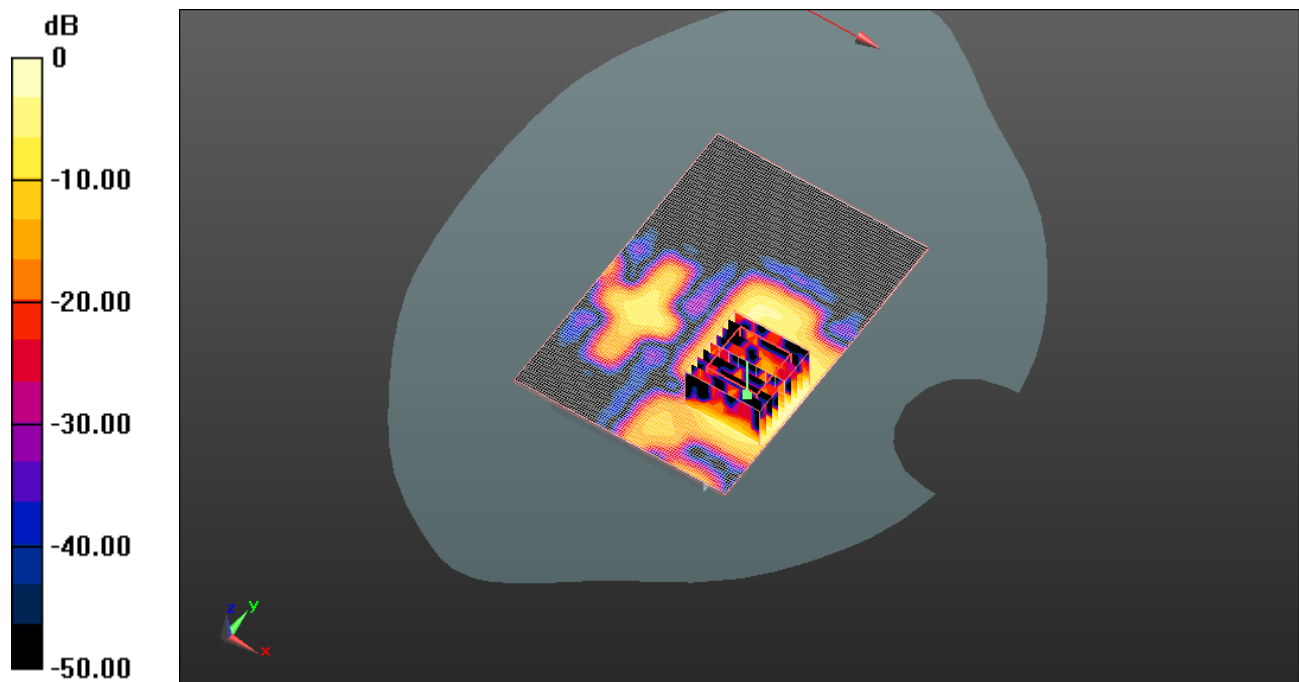

0 dB = 0.160mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			66(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 3:08:20 PM, Date/Time: 5/25/2011 3:21:48 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_802.11a_mid_band_chan_52_amb_temp_23.0_liq
_temp_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.56 \text{ mho/m}$; $\epsilon_r = 46.305$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.79, 4.79, 4.79); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.190 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube

0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$


Reference Value = 6.385 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 67(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

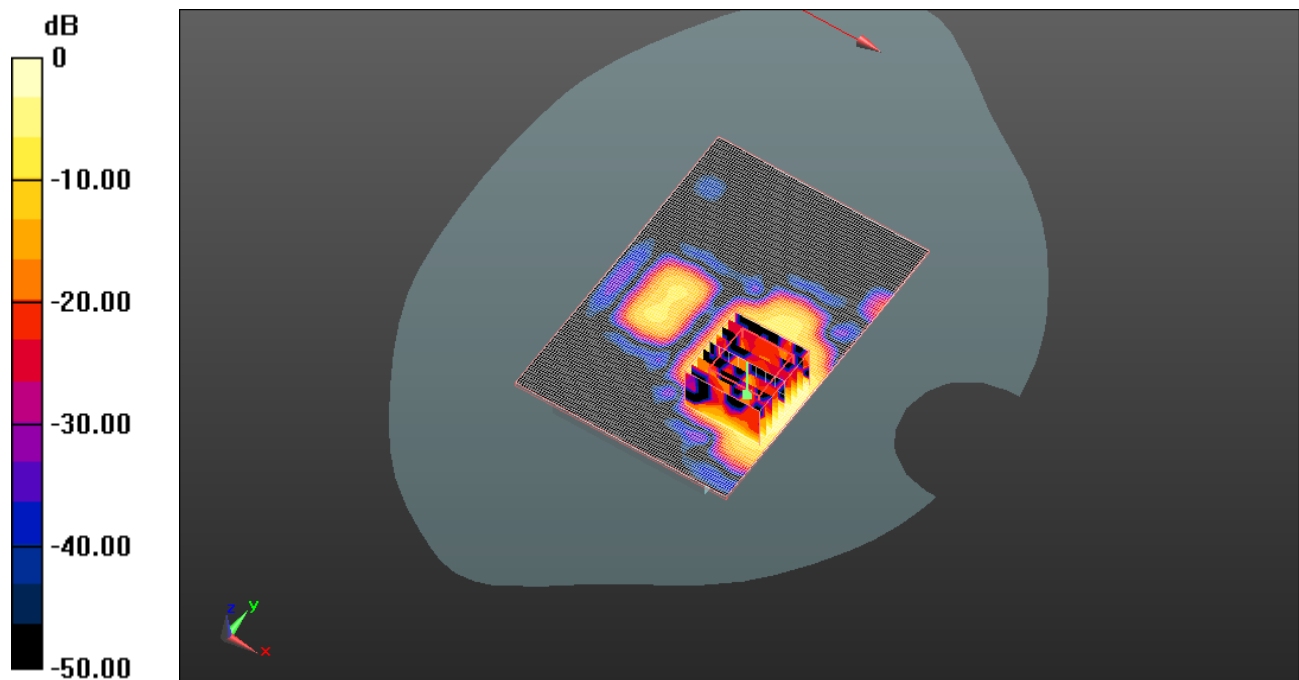

0 dB = 0.190mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			68(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 3:56:17 PM, Date/Time: 5/25/2011 4:09:46 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_802.11a_upper_band_chan_104_amb_temp_23.3
_liq_temp_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Upper Band;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 6.002 \text{ mho/m}$; $\epsilon_r = 47.104$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.29, 4.29, 4.29); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.241 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube
0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 6.685 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.413 W/kg
SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.045 mW/g
Maximum value of SAR (measured) = 0.240 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 69(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

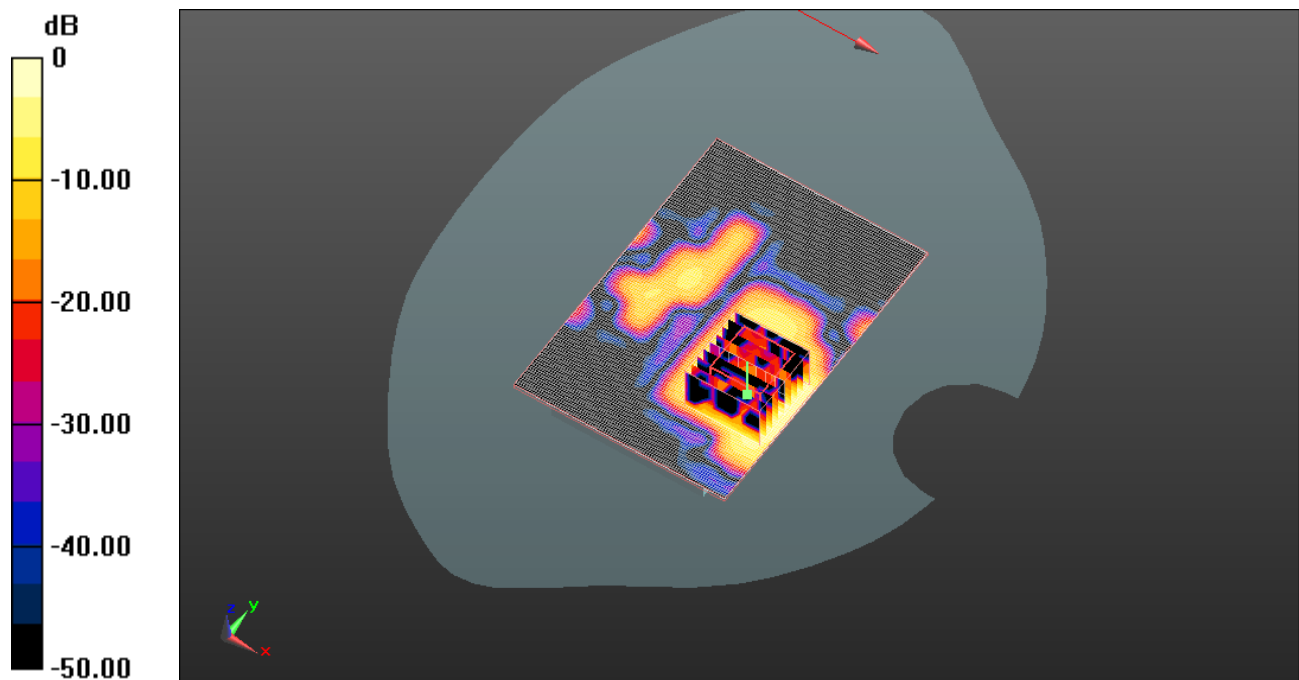

0 dB = 0.240mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			70(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 4:50:30 PM, Date/Time: 5/25/2011 5:04:00 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_802.11a_upper_band_chan_149_amb_temp_23.4
_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5745 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.37 \text{ mho/m}$; $\epsilon_r = 45.121$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.08, 4.08, 4.08); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.185 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube
0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 5.405 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.277 W/kg
SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.029 mW/g
Maximum value of SAR (measured) = 0.168 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 71(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

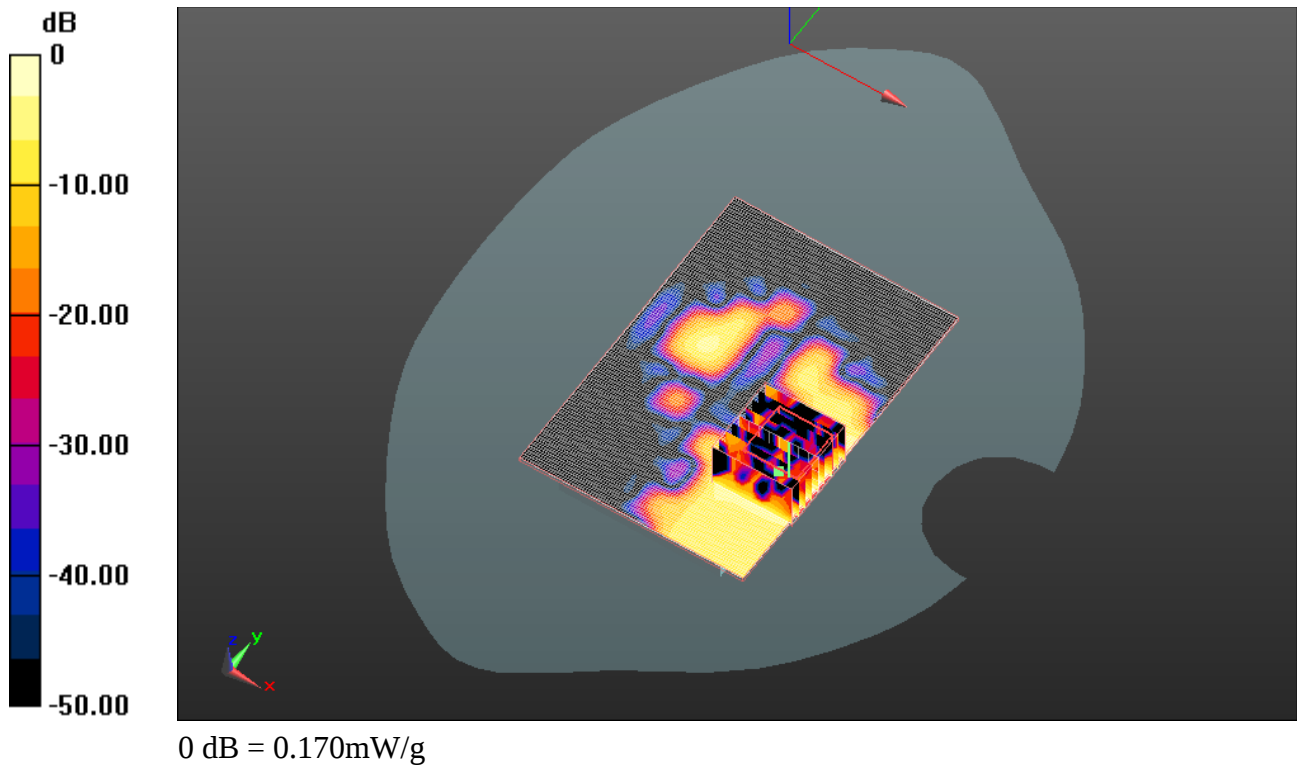

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			72(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 5:32:01 PM, Date/Time: 5/25/2011 5:45:26 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_802.11a_upper_band_chan_104_amb_temp_23.
4_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 6.002 \text{ mho/m}$; $\epsilon_r = 47.104$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.29, 4.29, 4.29); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.193 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube
0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 5.547 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 0.762 W/kg
SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.037 mW/g
Maximum value of SAR (measured) = 0.194 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 73(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

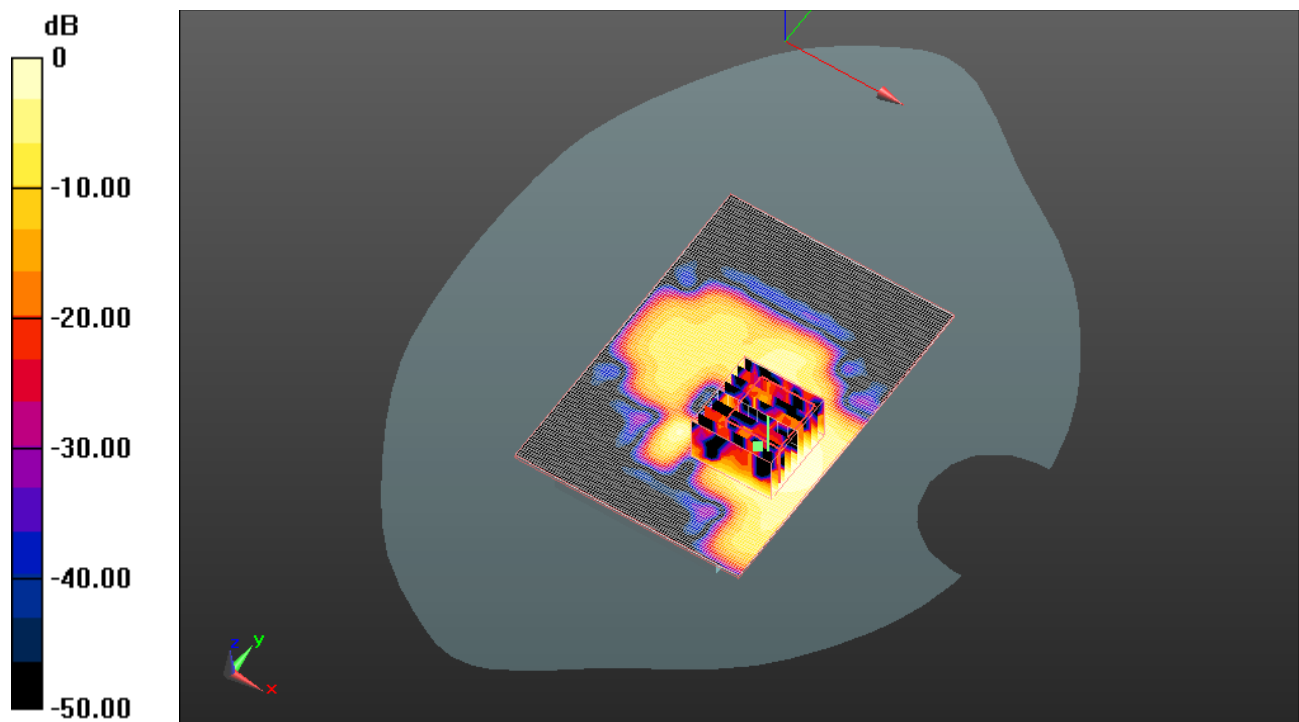

0 dB = 0.190mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			74(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 6:22:13 PM, Date/Time: 5/25/2011 6:35:42 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Front_802.11a_upper_band_chan_104_amb_temp_23.5
_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 6.002 \text{ mho/m}$; $\epsilon_r = 47.104$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.29, 4.29, 4.29); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.016 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube
0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 1.641 V/m; Power Drift = 1.65 dB
Peak SAR (extrapolated) = 0.103 W/kg
SAR(1 g) = 0.00965 mW/g; SAR(10 g) = 0.00171 mW/g
Maximum value of SAR (measured) = 0.020 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 75(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

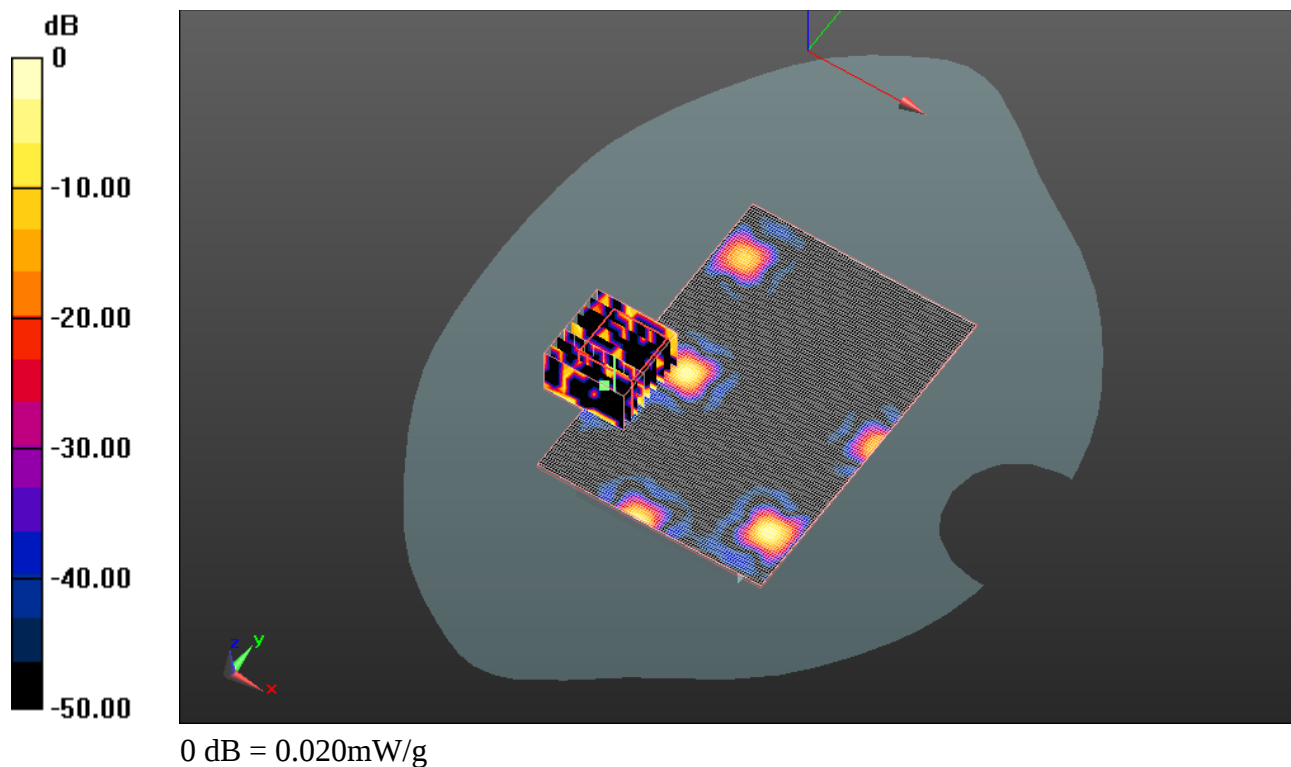

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			76(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 5/25/2011 7:04:03 PM, Date/Time: 5/25/2011 7:17:33 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_Headset_802.11a_upper_band_chan_104_amb_temperatures_liq_temp_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 32E895E6

Communication System: 802.11a ; Communication System Band: Low and Mid Bands;
Frequency: 5520 MHz; Communication System PAR: 0 dB
Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 6.002 \text{ mho/m}$; $\epsilon_r = 47.104$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 - SN3548; ConvF(4.29, 4.29, 4.29); Calibrated: 1/20/2011
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - 2/Area Scan (91x131x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.249 mW/g

Configuration/Touch position - 2/Zoom Scan (4x4x2.5mm) (9x9x5)/Cube
0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 7.172 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.197 W/kg
SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.043 mW/g
Maximum value of SAR (measured) = 0.238 mW/g


	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 77(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

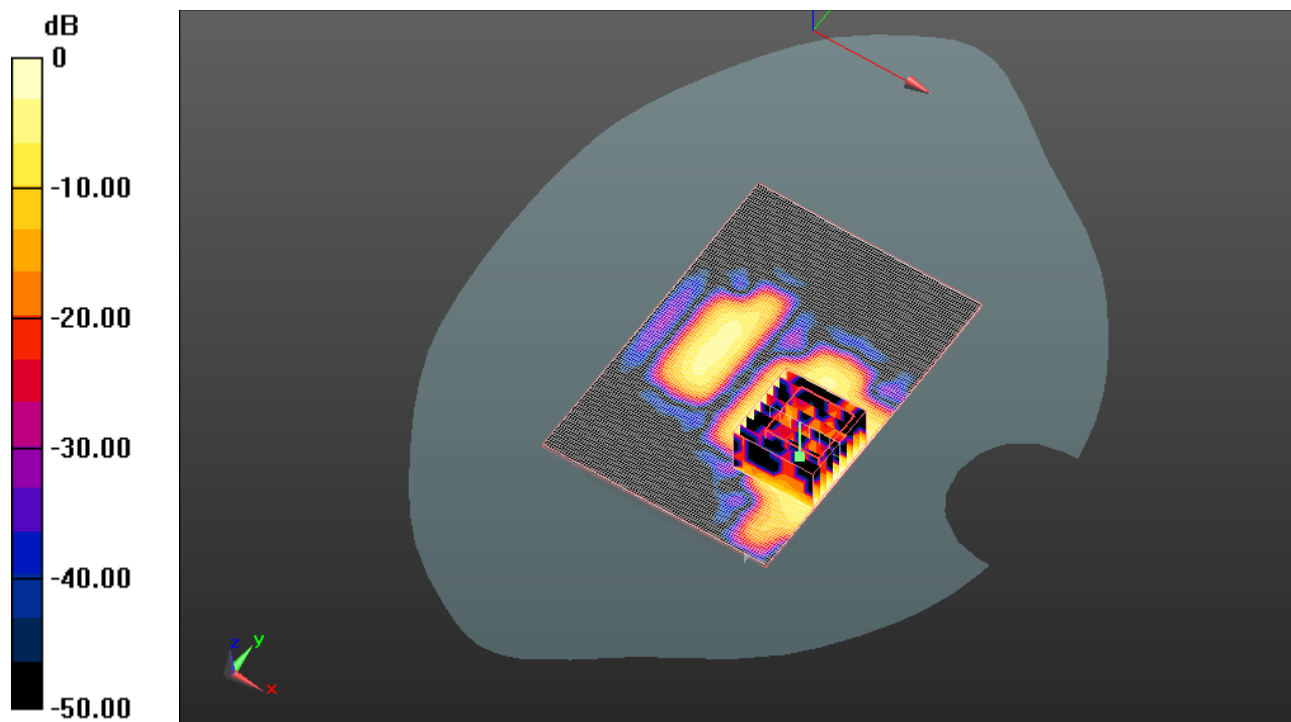

0 dB = 0.240mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 78(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Z axis plot for the worst case body configuration:

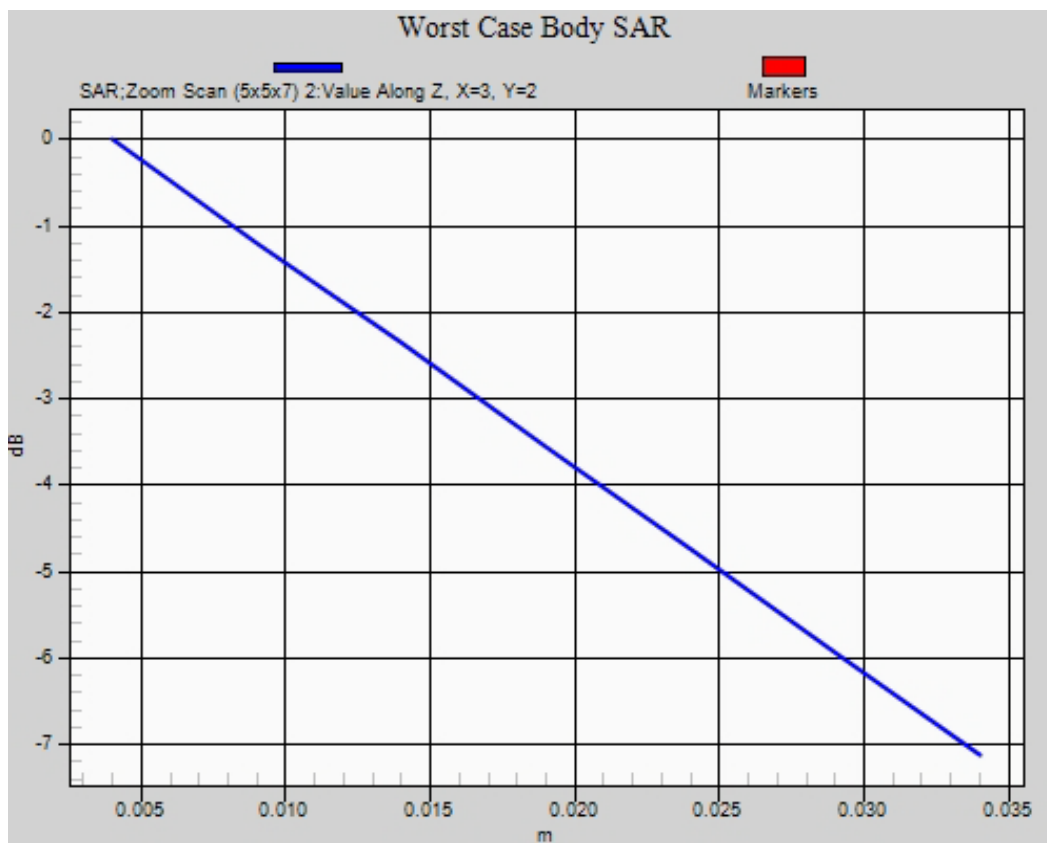

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 79(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/8/2011 6:23:27 PM, Date/Time: 3/8/2011 6:29:24 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_UMTS_band_V_mid_chan_amb_temp_23.2C_liq_t
emp_21.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.425$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.713 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.188 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.508 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 80(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.732 mW/g

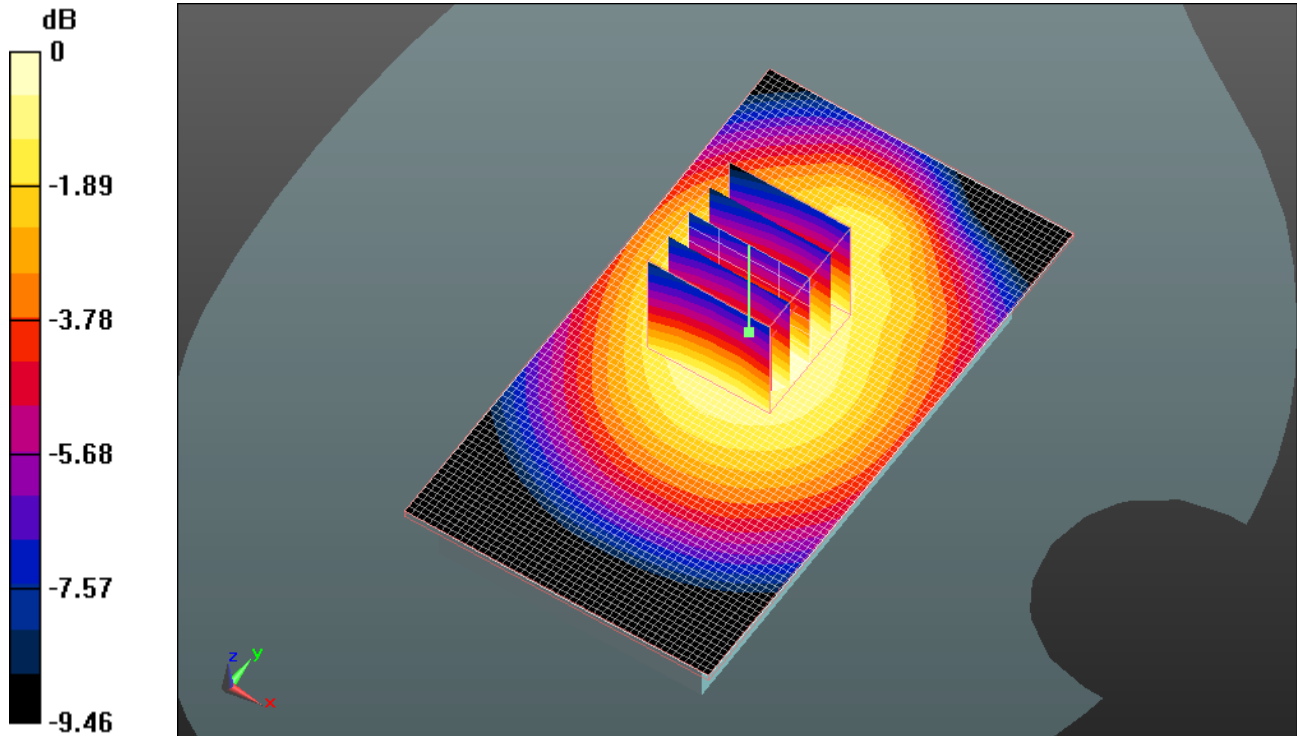

0 dB = 0.730mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 81(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 3/8/2011 6:37:33 PM, Date/Time: 3/8/2011 6:43:29 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_UMTS_band_V_mid_chan_amb_temp_23.2C_liq
_temp_21.8C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.425$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.662 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.082 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.457 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.650 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 82(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

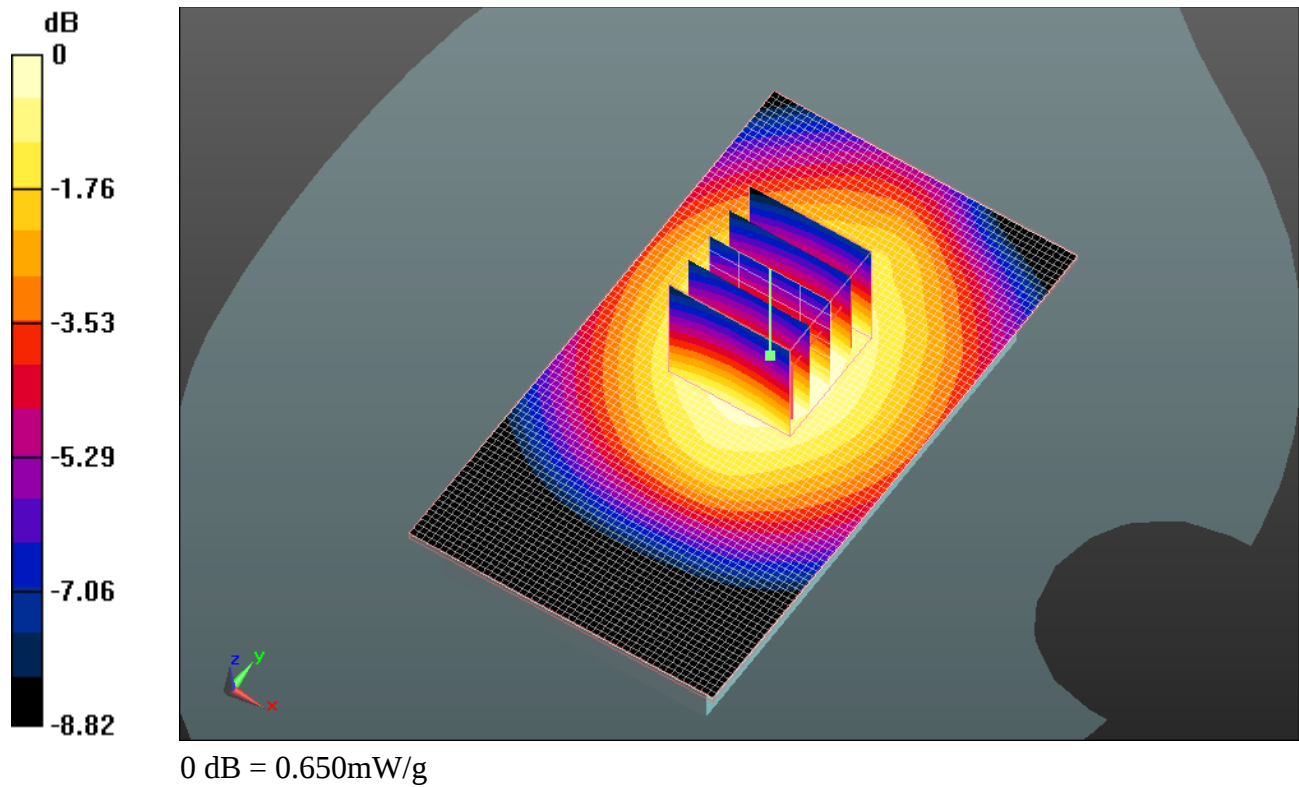

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 83(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/8/2011 6:55:11 PM, Date/Time: 3/8/2011 7:01:08 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Front_UMTS_band_V_mid_chan_amb_temp_23.2C_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.425$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.448 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.941 V/m; Power Drift = 0.33 dB


Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.306 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.441 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 84(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

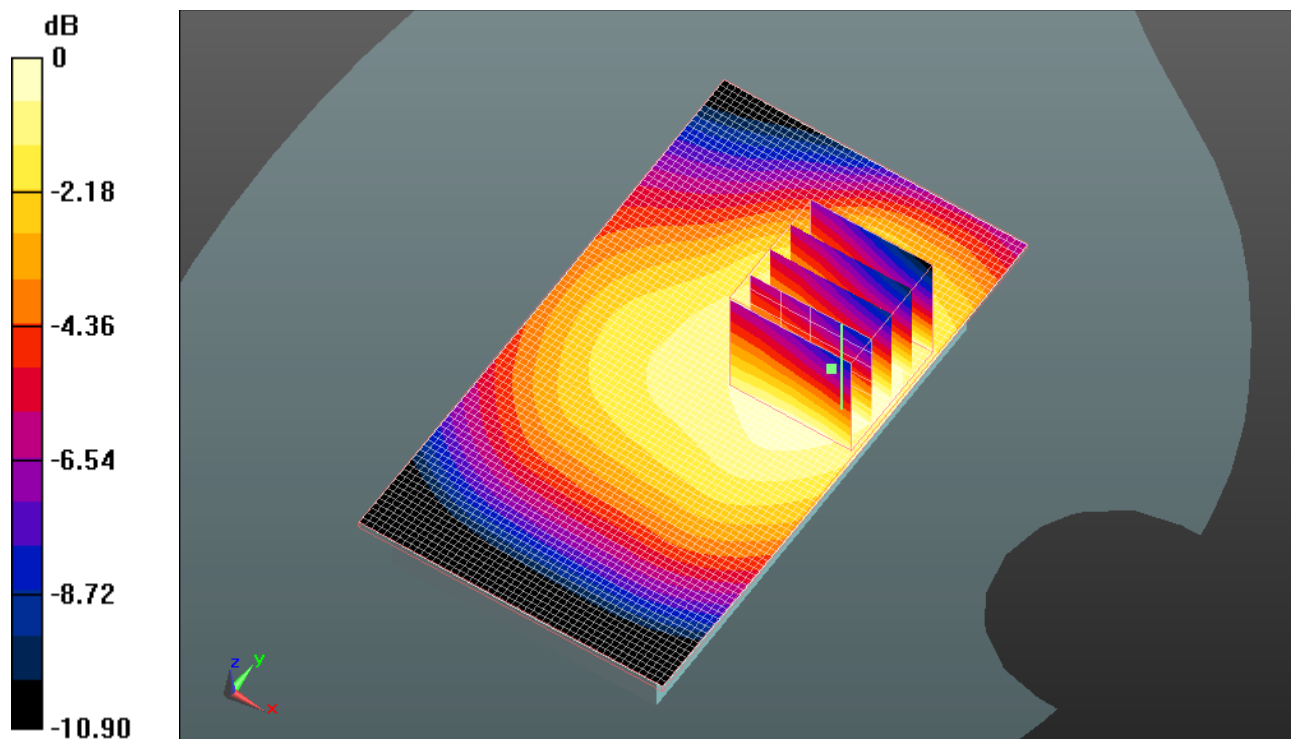

0 dB = 0.440mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 85(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/8/2011 7:09:10 PM, Date/Time: 3/8/2011 7:15:06 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_HS#1_UMTS_band_V_mid_chan_amb_temp_23.1
C_liq_temp_21.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.425$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.684 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.045 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.477 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 86(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.697 mW/g

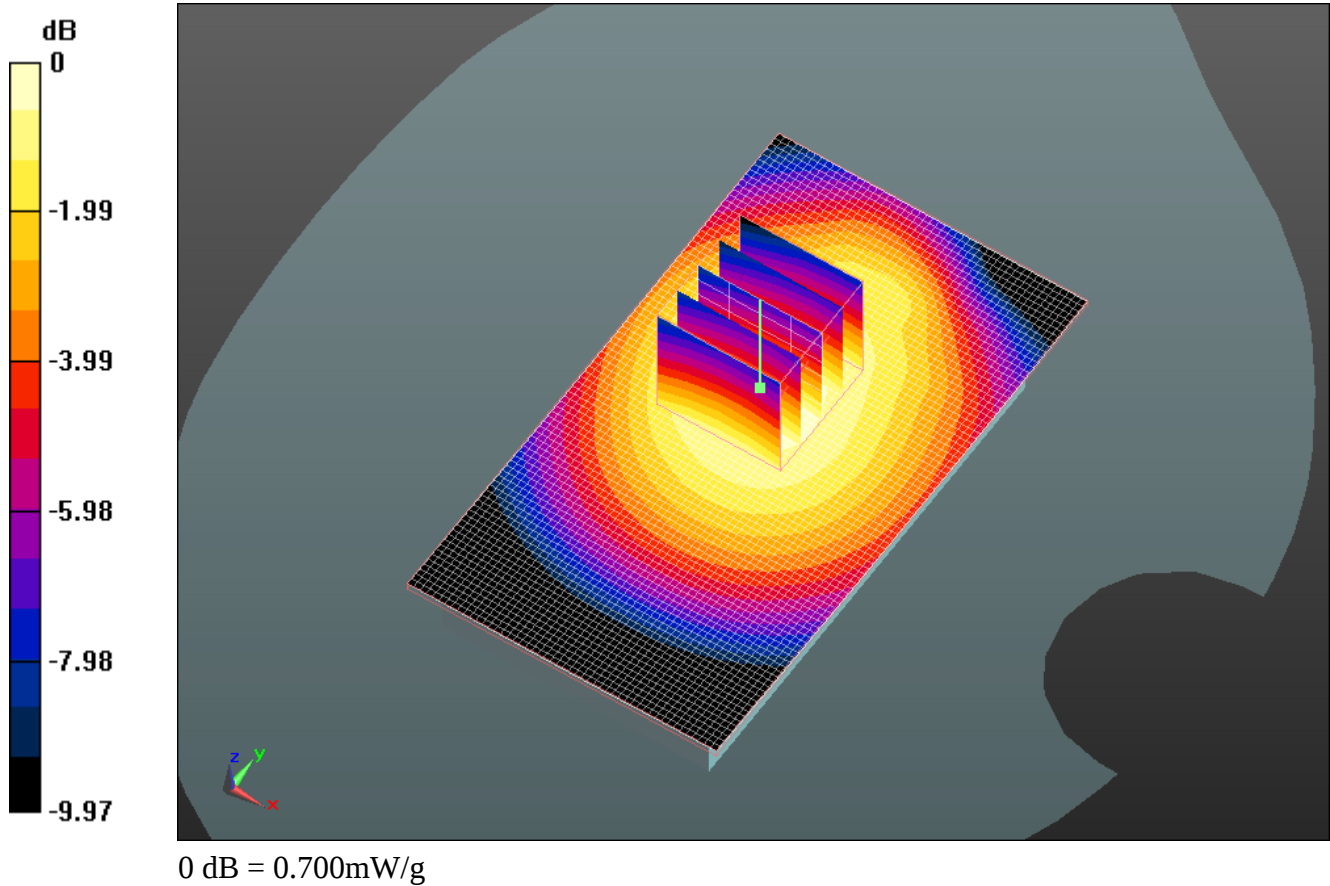

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 87(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/8/2011 7:22:54 PM, Date/Time: 3/8/2011 7:28:52 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_HS#2_UMTS_band_V_mid_chan_amb_temp_23.3
C_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4 \text{ MHz}$; $\sigma = 1.016 \text{ mho/m}$; $\epsilon_r = 52.425$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.611 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.501 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.426 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 88(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.618 mW/g

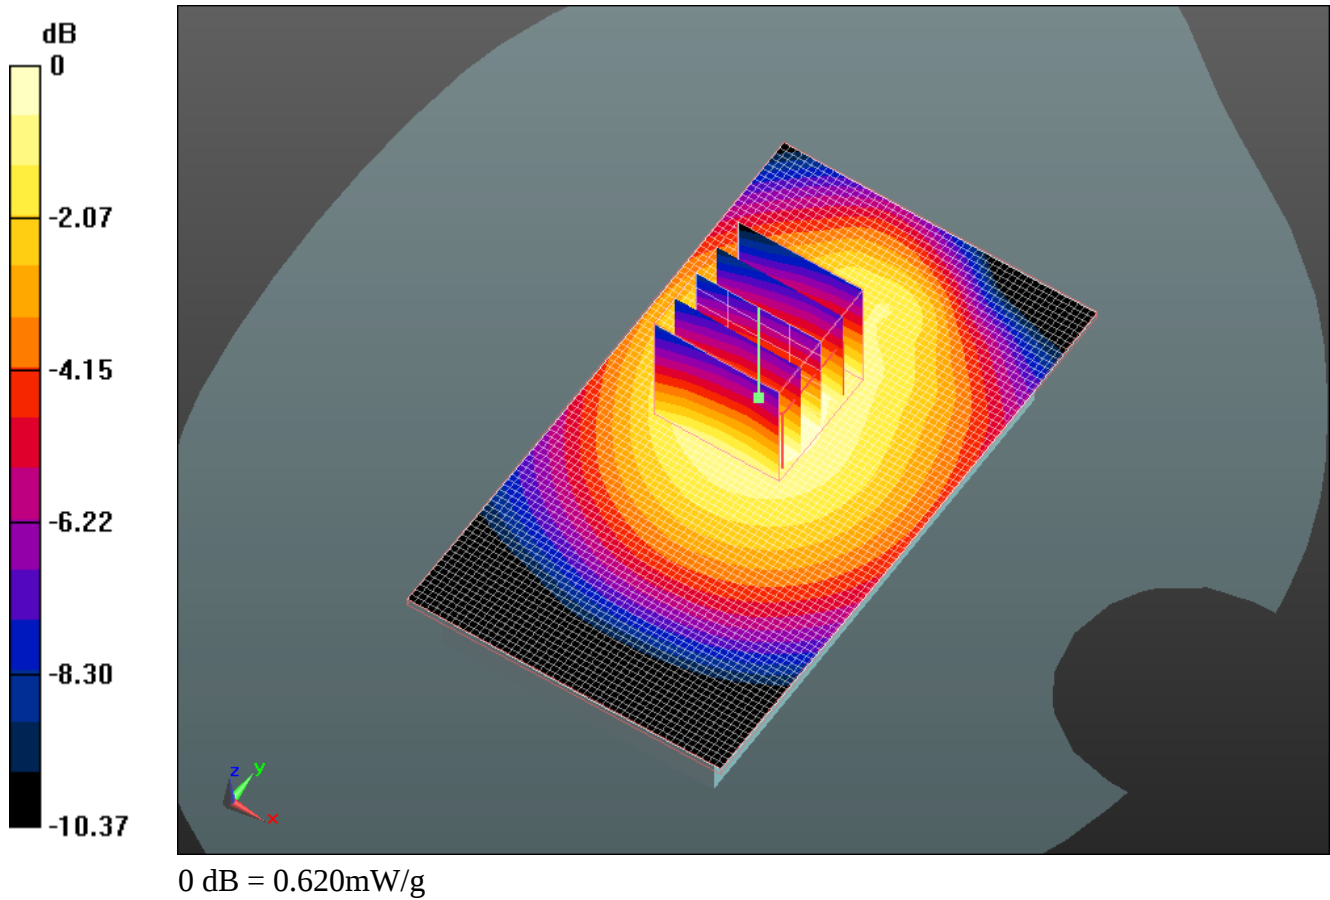

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 89(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 3/8/2011 7:36:06 PM, Date/Time: 3/8/2011 7:42:02 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_HS#3_UMTS_band_V_mid_chan_amb_temp_23.3
C_liq_temp_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.425$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.646 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.142 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.449 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 90(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.648 mW/g

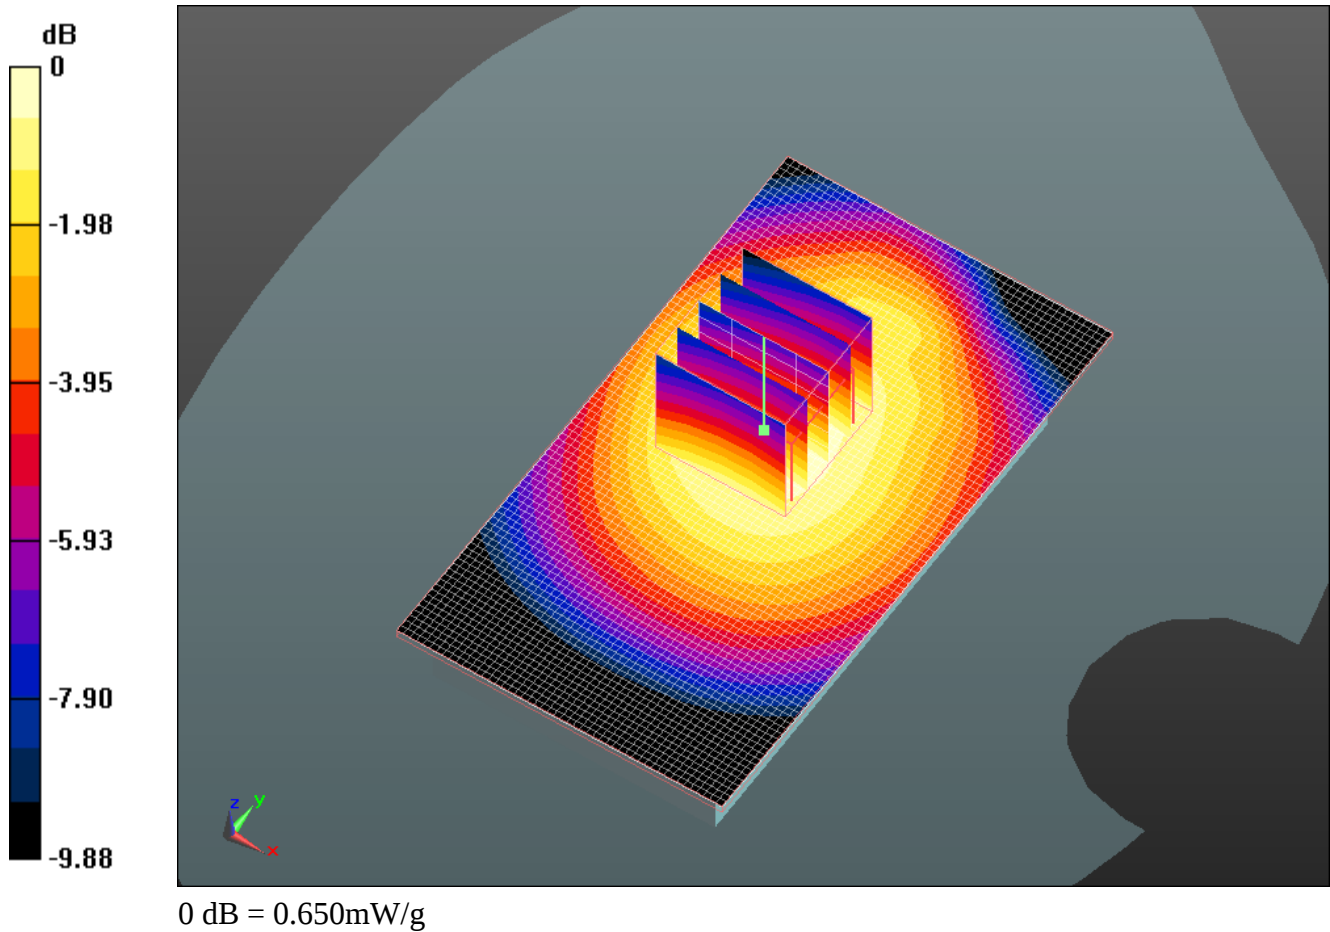

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 91(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 4/20/2011 8:19:18 PM, Date/Time: 4/20/2011 8:26:24 PM, Date/Time: 4/20/2011 8:32:22 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_UMTS_band_V_mid_chan_amb_temp_23.4_liq_temper_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 836.4 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 53.628$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.3, 6.3, 6.3); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.800 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 28.611 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.559 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 92(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Maximum value of SAR (measured) = 0.788 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) 2 (7x9x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 28.611 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.004 W/kg

SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.557 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.795 mW/g

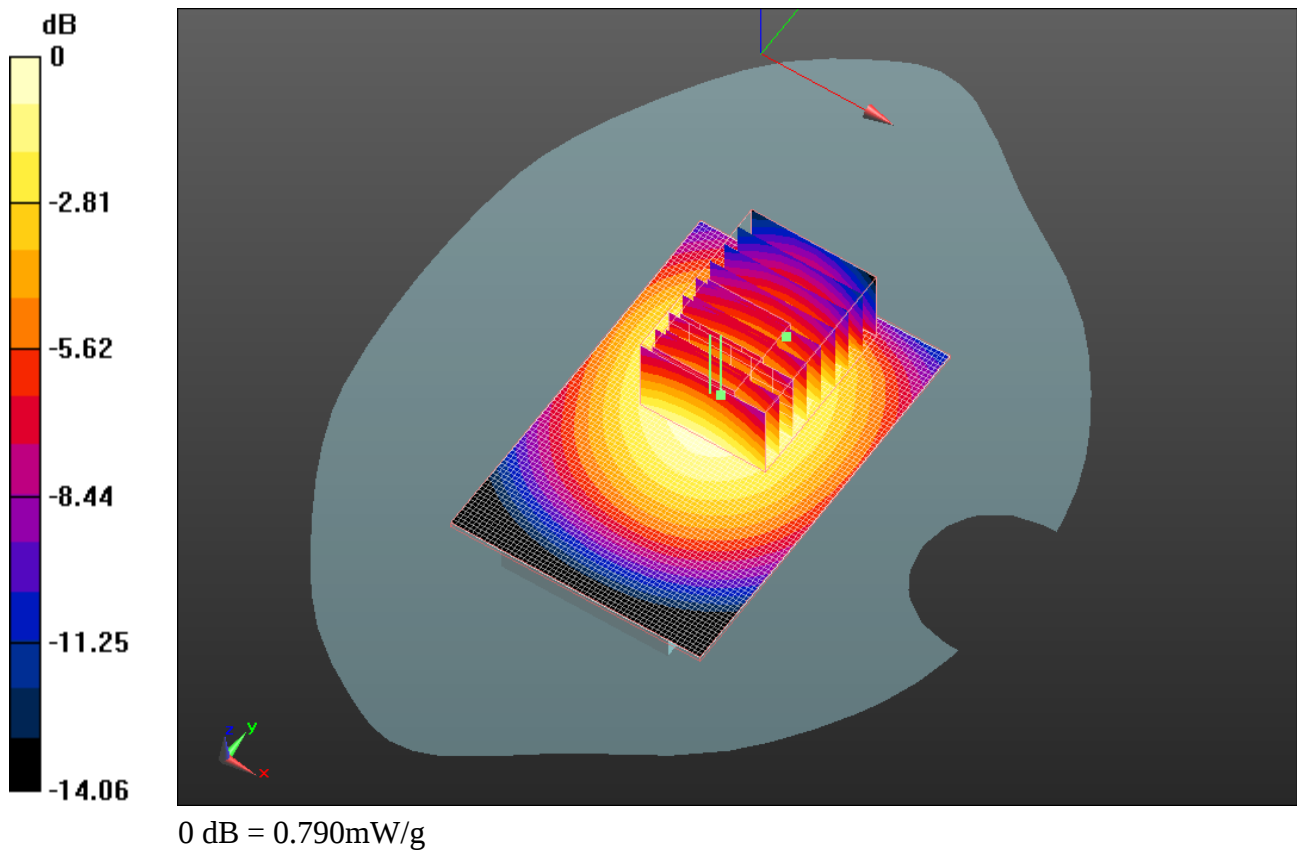

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 93(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW
		IC ID 2503A-RDU70CW 2503A-RDE70UW		

Date/Time: 2/28/2011 11:07:39 PM, Date/Time: 2/28/2011 11:13:36 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_UMTS_band_II_low_chan_amb_temp_23.3C_liq_t
emp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.539$ mho/m; $\epsilon_r = 51.464$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.877 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.566 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.293 W/kg

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.461 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.887 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 94(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

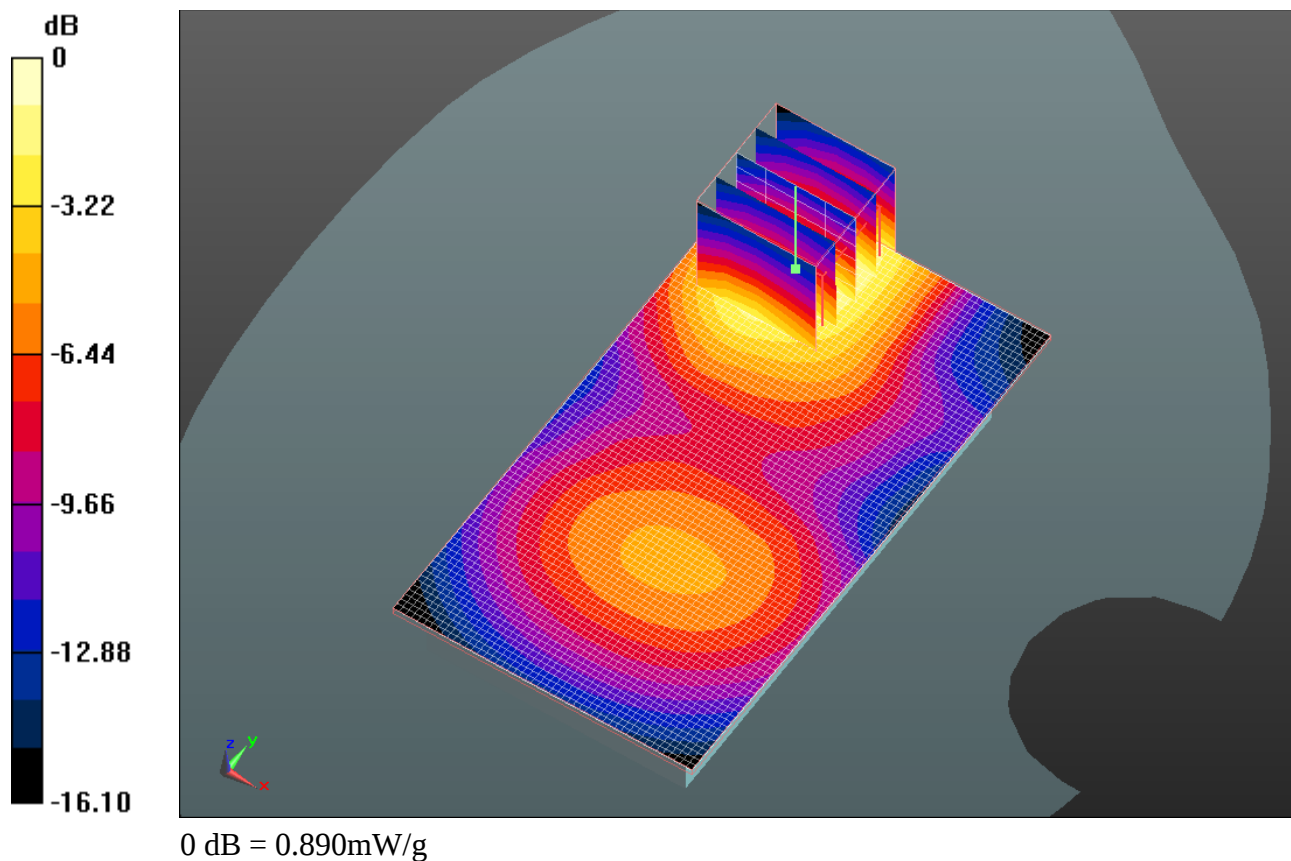

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 95(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 2/28/2011 10:53:59 PM, Date/Time: 2/28/2011 10:59:55 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_UMTS_band_II_mid_chan_amb_temp_23.4C_liq_t
emp_22.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.077 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.511 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.679 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.577 mW/g

Maximum value of SAR (measured) = 1.115 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 96(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

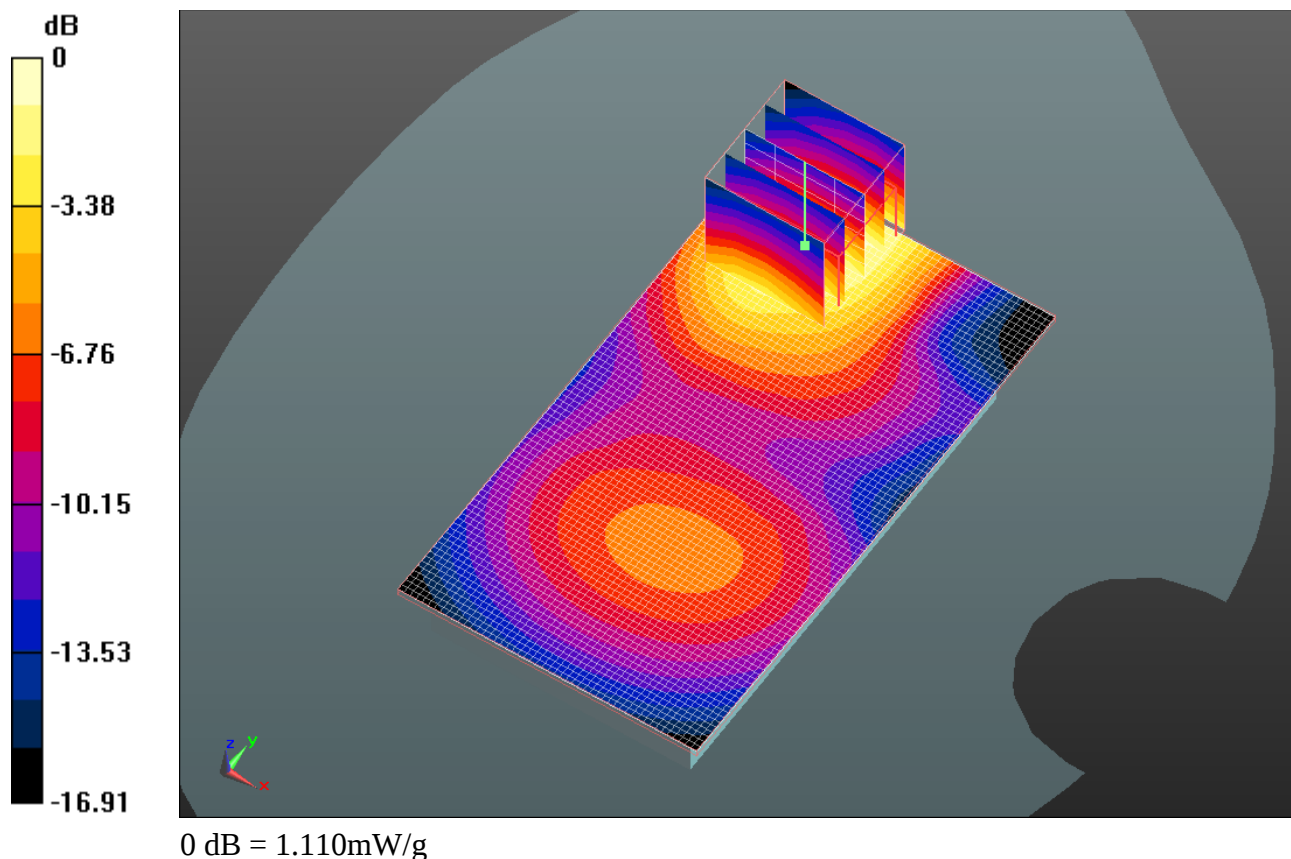

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 97(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 2/28/2011 11:20:33 PM, Date/Time: 2/28/2011 11:26:27 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Back_UMTS_band_II_high_chan_amb_temp_23.5C_liq_t
emp_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 51.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.052 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.338 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.630 W/kg

SAR(1 g) = 0.996 mW/g; SAR(10 g) = 0.547 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.090 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 98(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

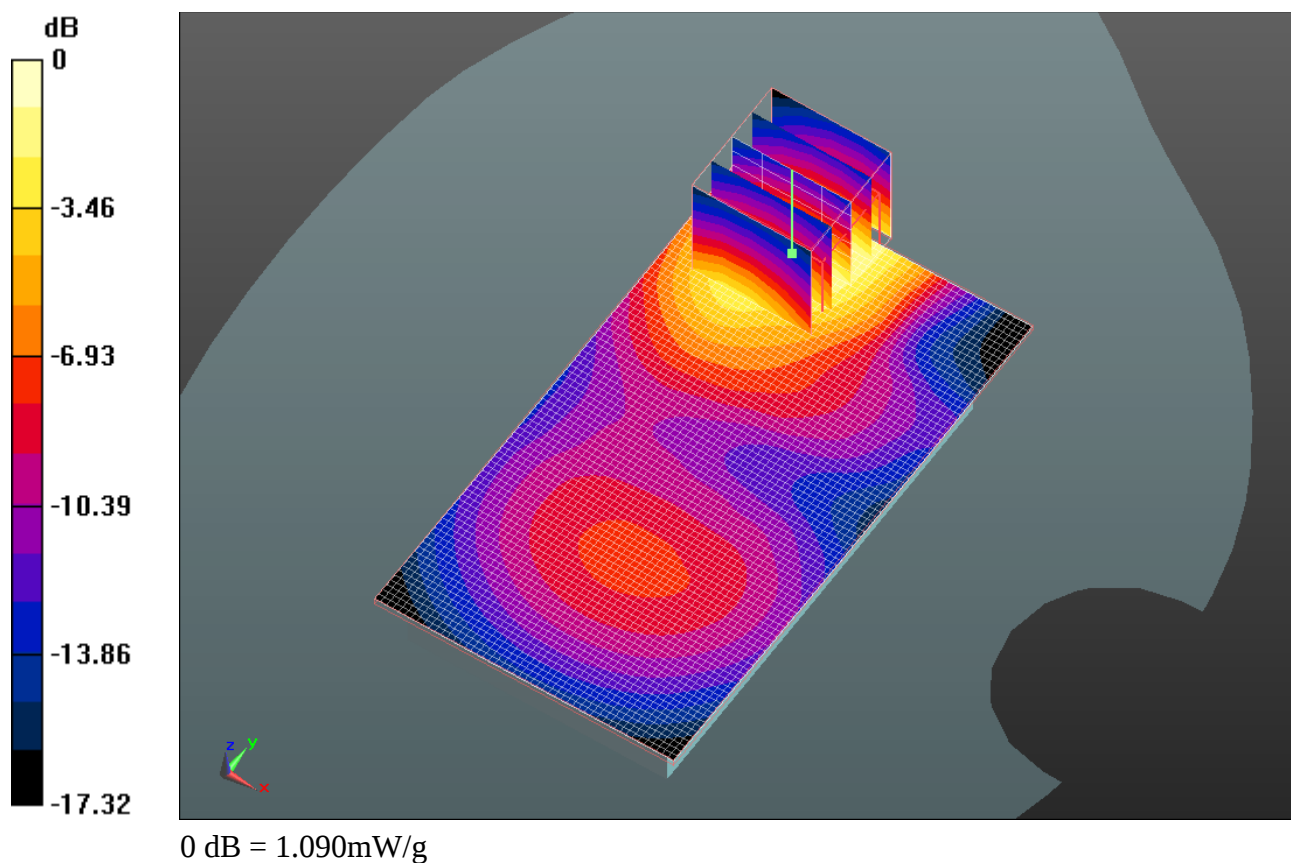

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 99(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW	

Date/Time: 2/24/2011 11:41:00 PM, Date/Time: 2/24/2011 11:46:50 PM

Test Laboratory: RIM Testing Services

**Vertical_Holster_Back_UMTS_band_II_mid_chan_amb_temp_23.4C_liq_
temp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.468 \text{ mho/m}$; $\epsilon_r = 50.743$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.58, 4.58, 4.58); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.619 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.214 V/m; Power Drift = 0.74 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 0.665 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 100(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

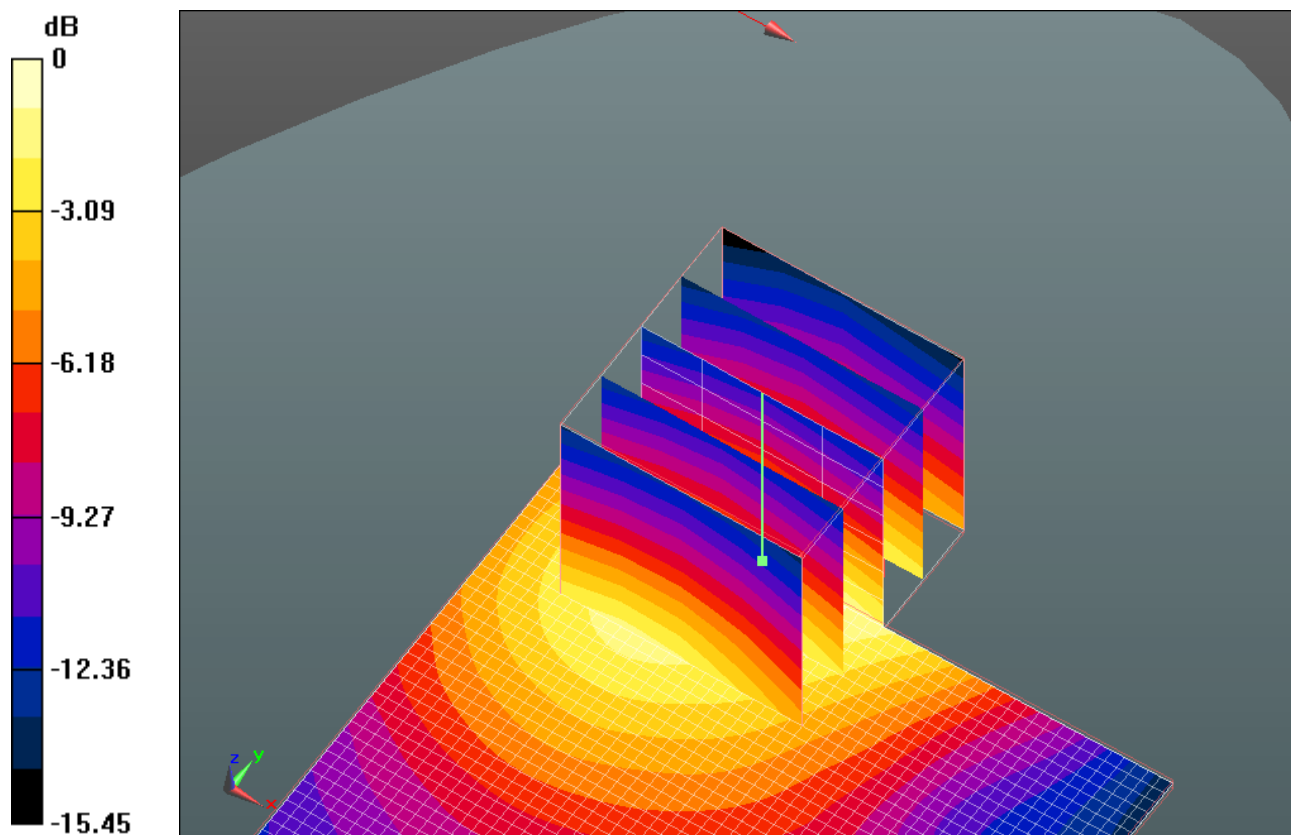

0 dB = 0.670mW/g

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			101(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 11:34:58 PM, Date/Time: 2/28/2011 11:40:54 PM

Test Laboratory: RIM Testing Services

**15mm_Spacer_Front_UMTS_band_II_mid_chan_amb_temp_23.5C_liq_t
emp_22.1C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.560 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.803 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.534 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 102(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

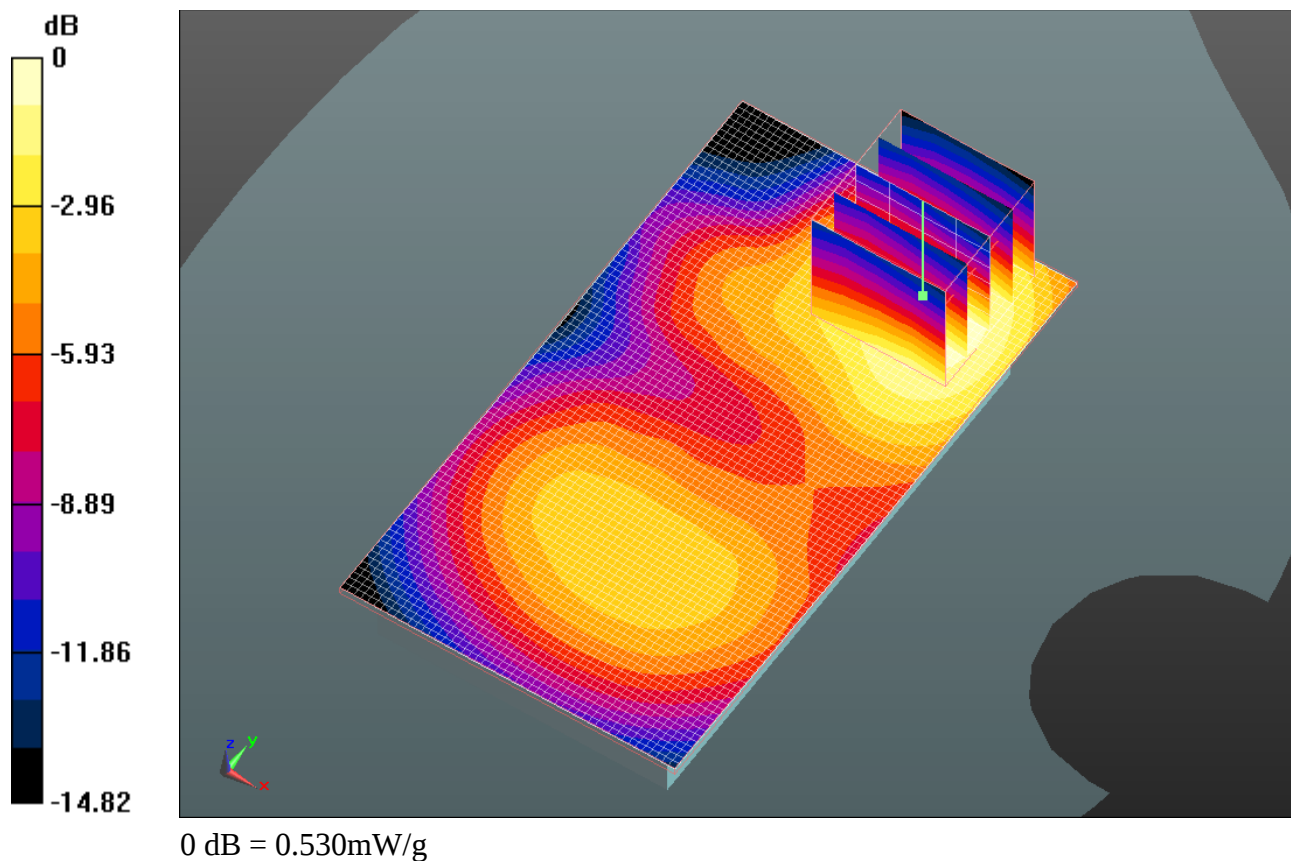

	Document			Page
	Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			103(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 2/28/2011 11:48:33 PM, Date/Time: 2/28/2011 11:54:25 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_HS#1_UMTS_band_II_mid_chan_amb_temp_23.5
C_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2618EEE2

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.567 \text{ mho/m}$; $\epsilon_r = 51.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 4/19/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.142 mW/g

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$



Reference Value = 14.353 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.628 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.567 mW/g

Maximum value of SAR (measured) = 1.109 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 104(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

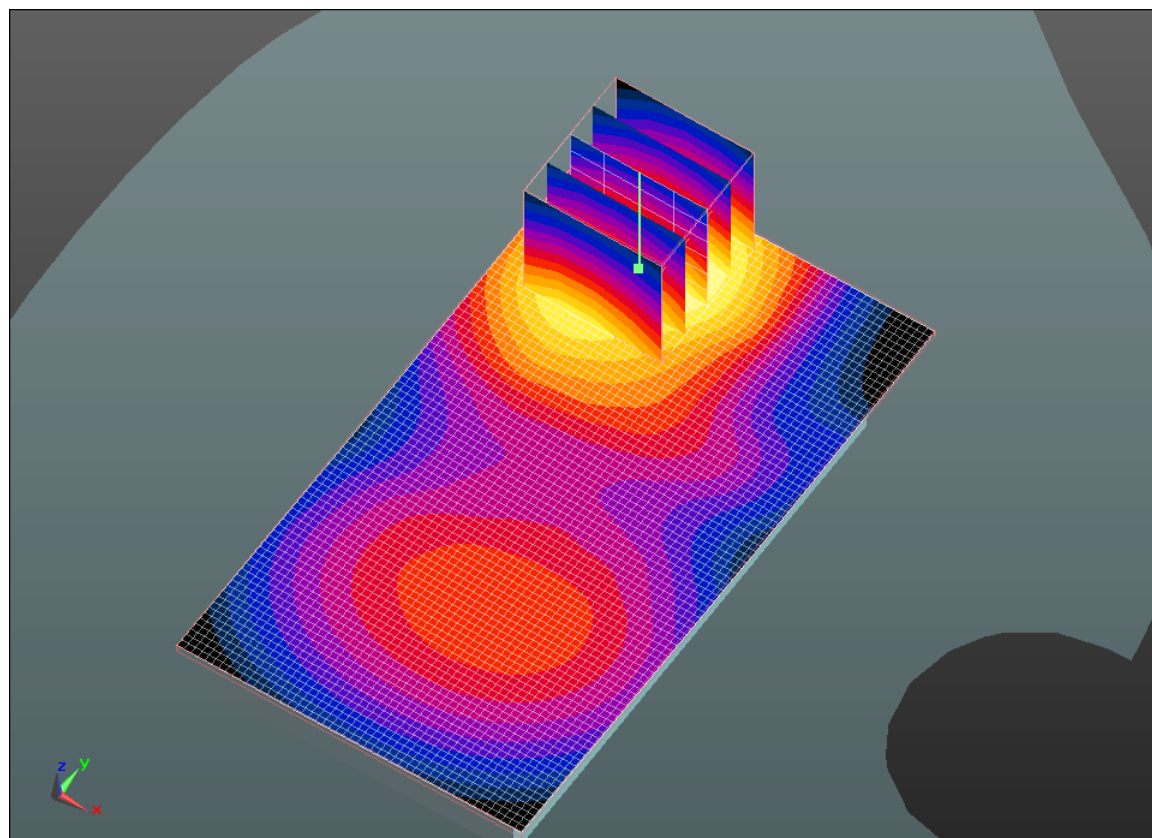

0 dB = 1.110mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1				Page 105(107)
	Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Date/Time: 4/18/2011 5:18:56 PM, Date/Time: 4/18/2011 5:25:48 PM

Test Laboratory: RIM Testing Services

15mm_Spacer_Back_UMTS_band_II_mid_chan_amb_temp_23.1_liq_temperatures_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 272B6150

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.517 \text{ mho/m}$; $\epsilon_r = 51.198$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.88, 4.88, 4.88); Calibrated: 1/13/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position -/Area Scan (61x91x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.665 mW/g

Configuration/Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.823 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.966 W/kg

SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.662 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 106(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

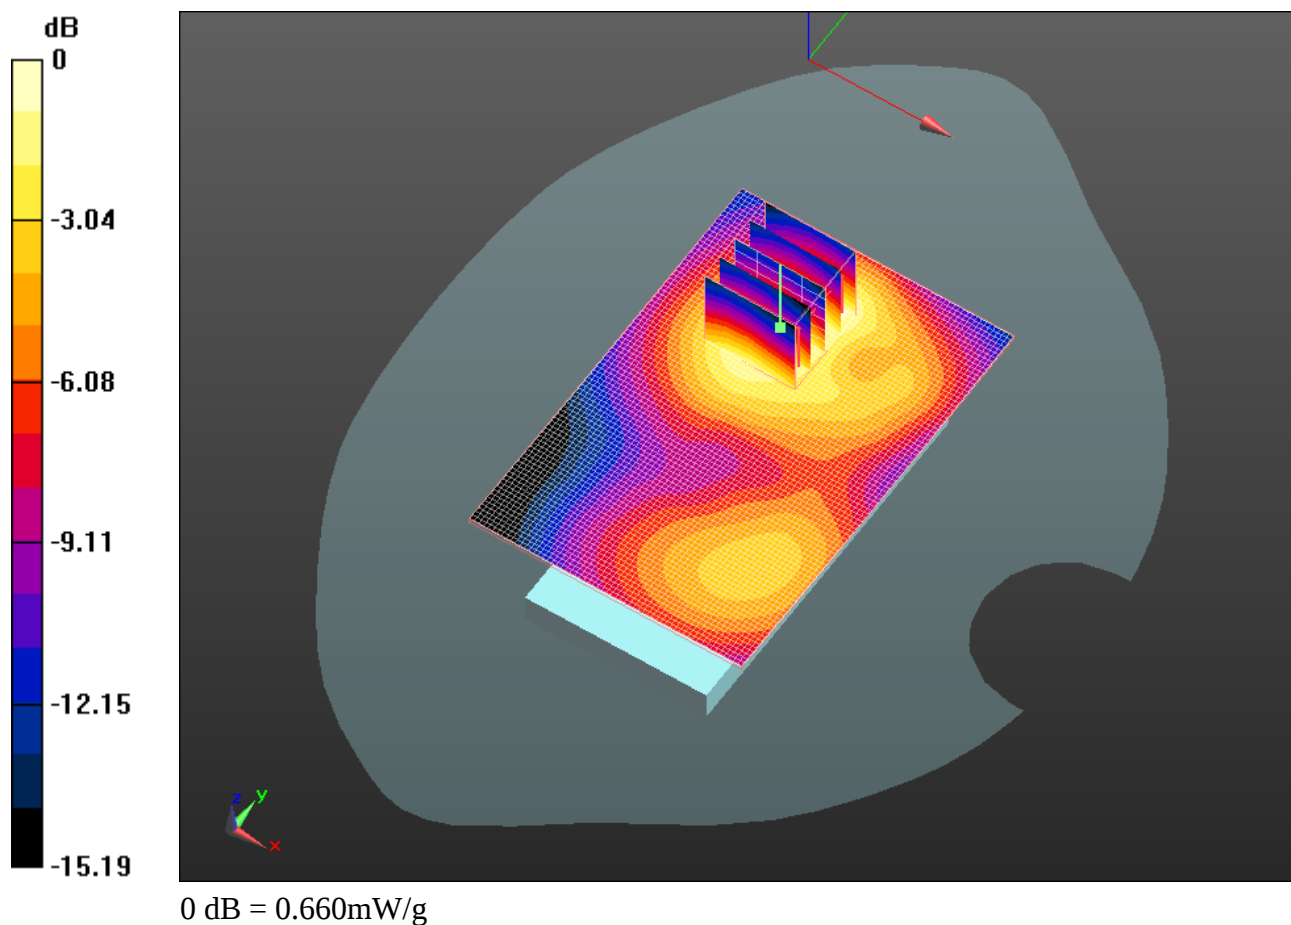

	Document Appendix C for the BlackBerry® Smartphone Model RDU71CW/RDE71UW SAR Report Rev1			Page 107(107)
Author Data Andrew Becker	Dates of Test Feb 7 – May 25, July 18, 2011	Test Report No RTS-3933-1105-11A RTS-2580-1106-03 Rev1	FCC ID: L6ARDU70CW L6ARDE70UW	IC ID 2503A-RDU70CW 2503A-RDE70UW

Z axis plot for the worst case body configuration:

