

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 1(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 2(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 9:57:40 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE850_4_Slots_mid_chan_amb_temp_23.3_liq_tem
p_21.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (4 slots); Frequency: 836.8 MHz; Duty Cycle: 1:2.1
Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.825 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.77 V/m; Power Drift = -0.208 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.794 mW/g; SAR(10 g) = 0.582 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.831 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 3(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

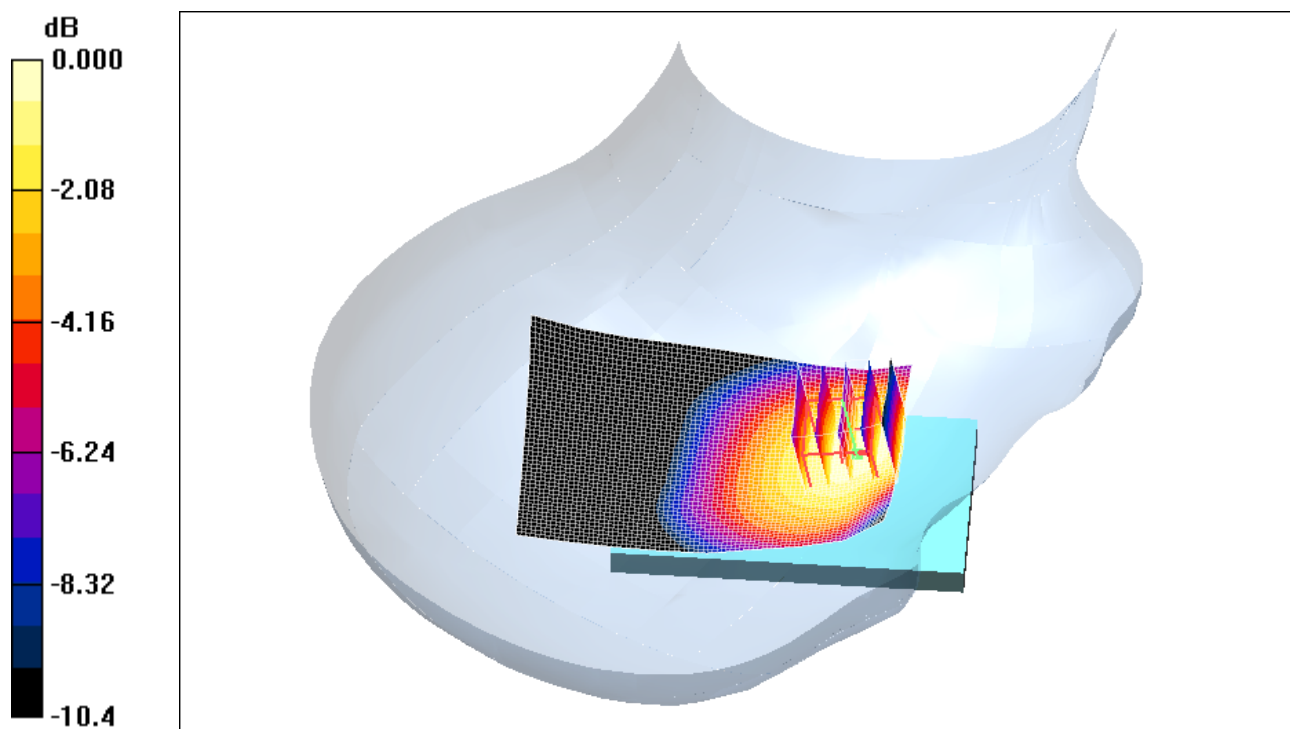

0 dB = 0.831mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 4(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 9:42:57 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE850_3_Slots_mid_chan_amb_temp_23.3_liq_tem
p_21.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (3 slots); Frequency: 836.8 MHz; Duty Cycle: 1:2.8
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.821 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.69 V/m; Power Drift = -0.047 dB


Peak SAR (extrapolated) = 0.955 W/kg

SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.551 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.798 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 5(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

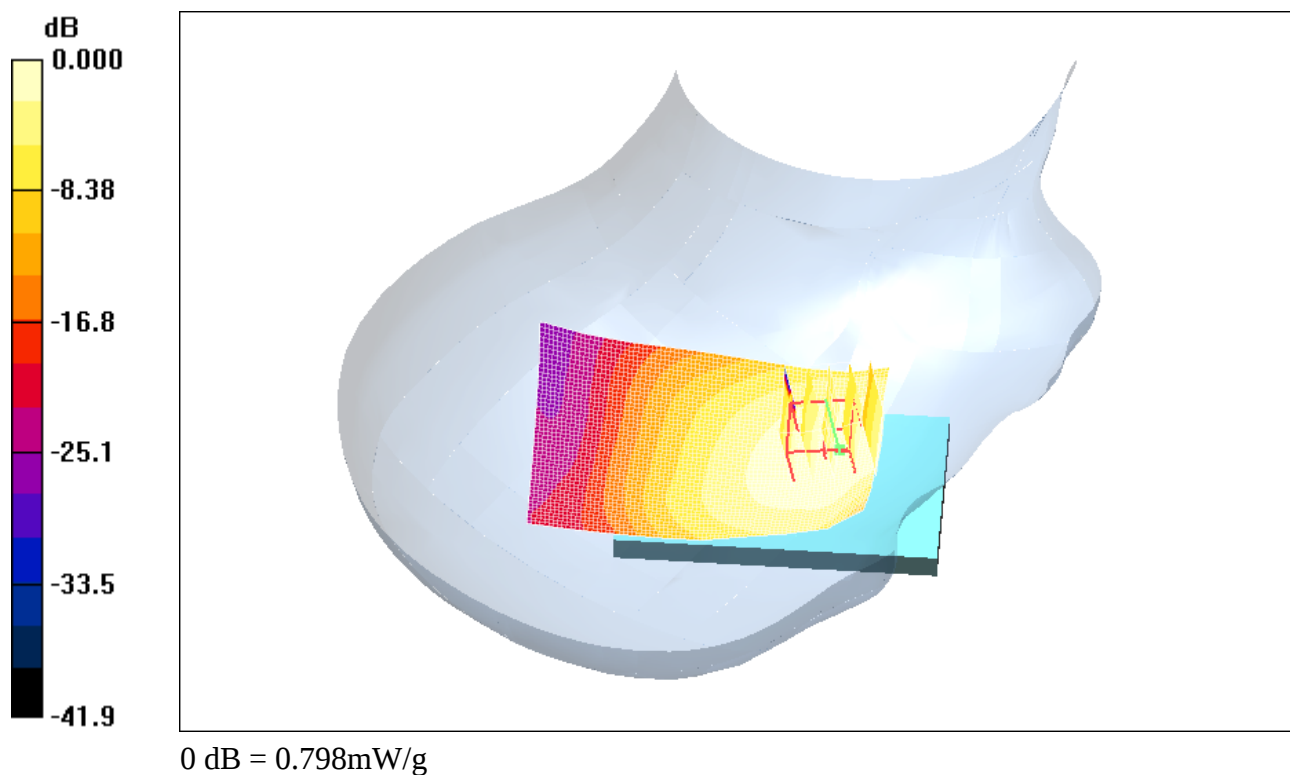

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			6(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 8:57:23 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_low_chan_amb_temp_23.2_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (2slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.893 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.777 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.47 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.526 mW/g

Maximum value of SAR (measured) = 0.757 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 7(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

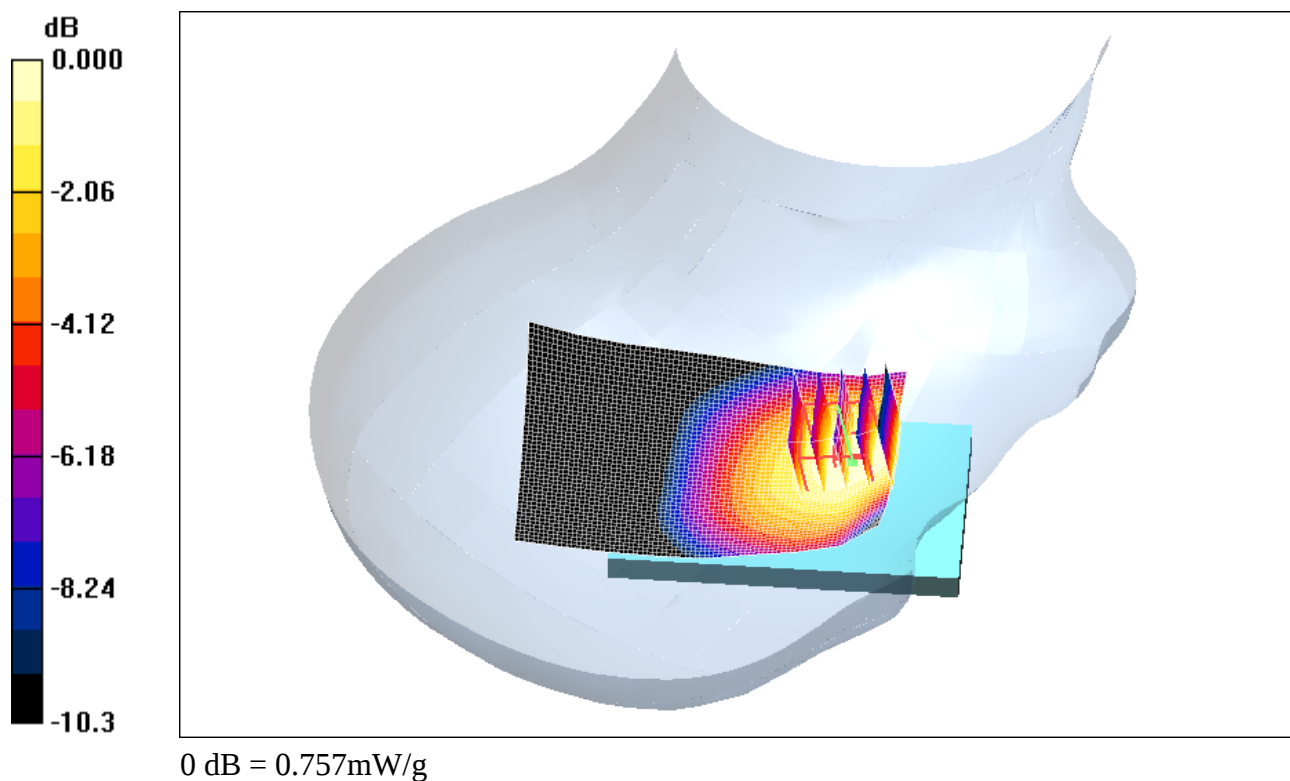

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 8(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 8:39:28 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_mid_chan_amb_temp_23.4_liq_temp_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.924 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.95 V/m; Power Drift = -0.203 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.612 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.876 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 9(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

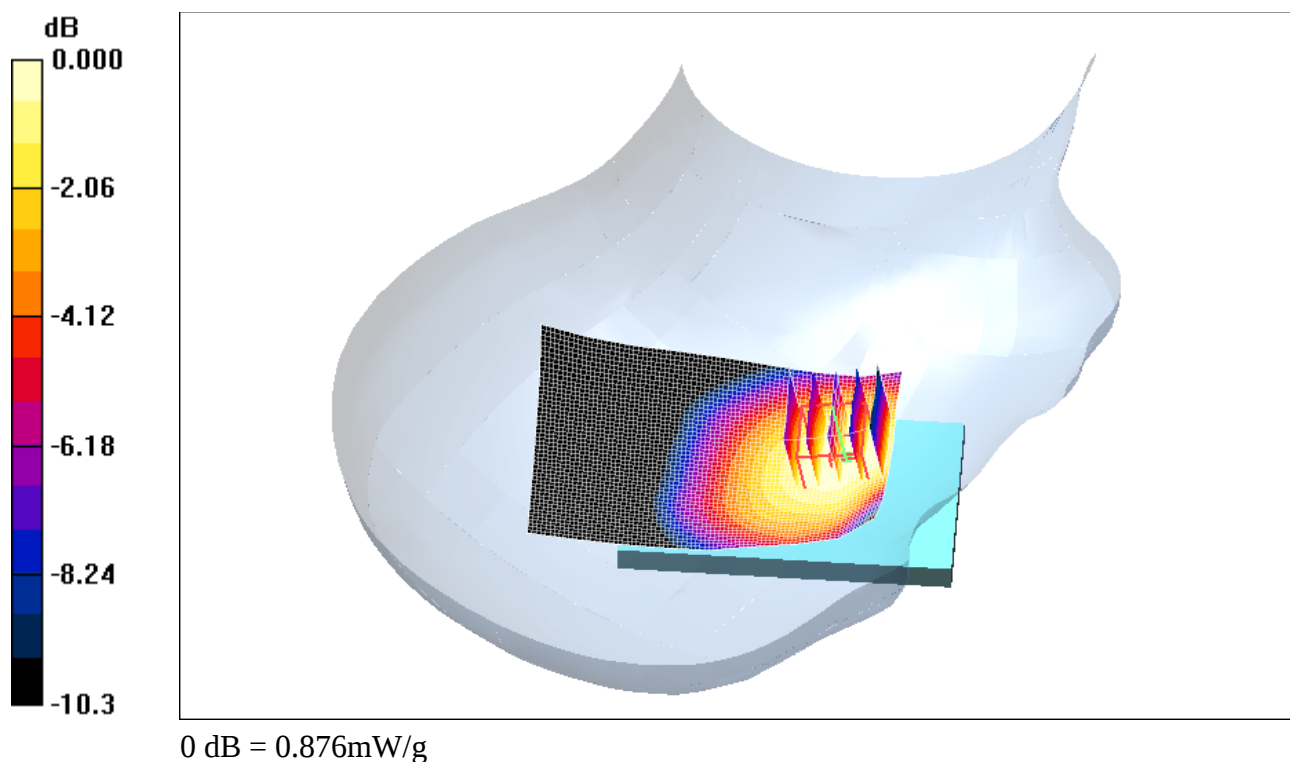

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 10(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 9:13:11 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_high_chan_amb_temp_23.2_liq_temp_21.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (2slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.917 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.923 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.03 V/m; Power Drift = -0.039 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.613 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.891 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 11(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

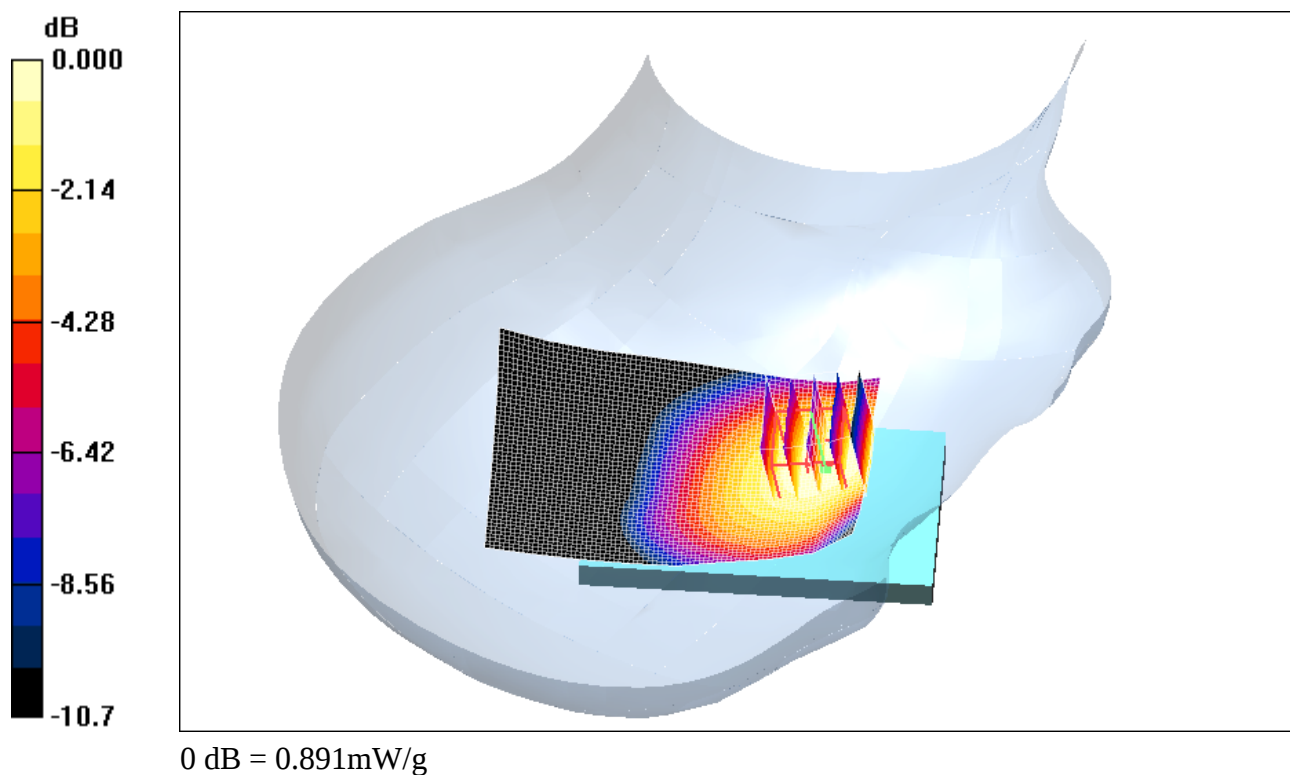

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			12(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 10:18:53 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE850_mid_chan_Amb_Tem_23.3_Liq_Tem_21
.6C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.461 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.2 V/m ; Power Drift = -0.087 dB


Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.433 mW/g ; SAR(10 g) = 0.329 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.451 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 13(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

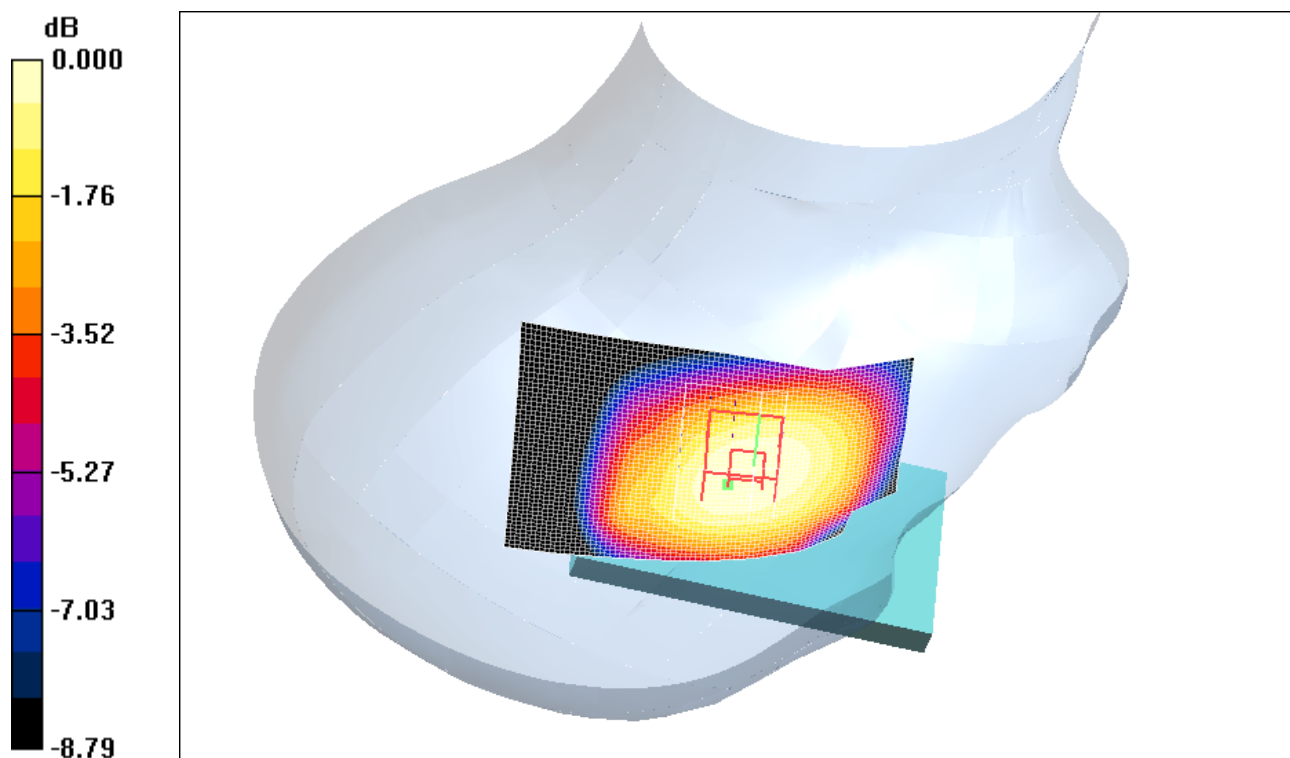

0 dB = 0.451mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 14(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 10:33:59 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM850_mid_chan_amb_temp_23.3_liq_temp_21.6C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.8$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.802 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.44 V/m; Power Drift = -0.411 dB


Peak SAR (extrapolated) = 0.940 W/kg

SAR(1 g) = 0.736 mW/g; SAR(10 g) = 0.540 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.784 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 15(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

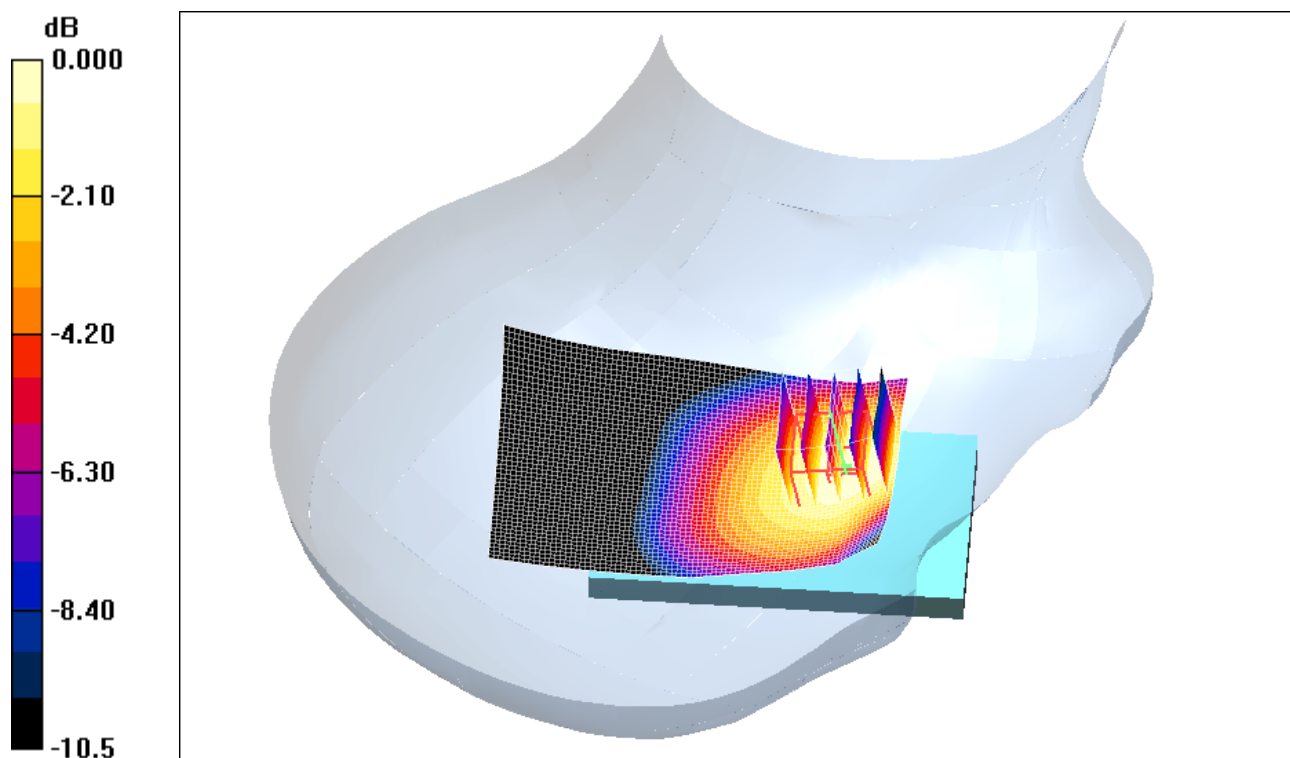

0 dB = 0.784mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 16(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 12:26:12 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_4_Slots_mid_chan_amb_temp_23.1_liq_temp_21.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (4 slots); Frequency: 836.8 MHz; Duty Cycle: 1:2.1
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.699 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.97 V/m; Power Drift = 0.053 dB


Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.517 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.716 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 17(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

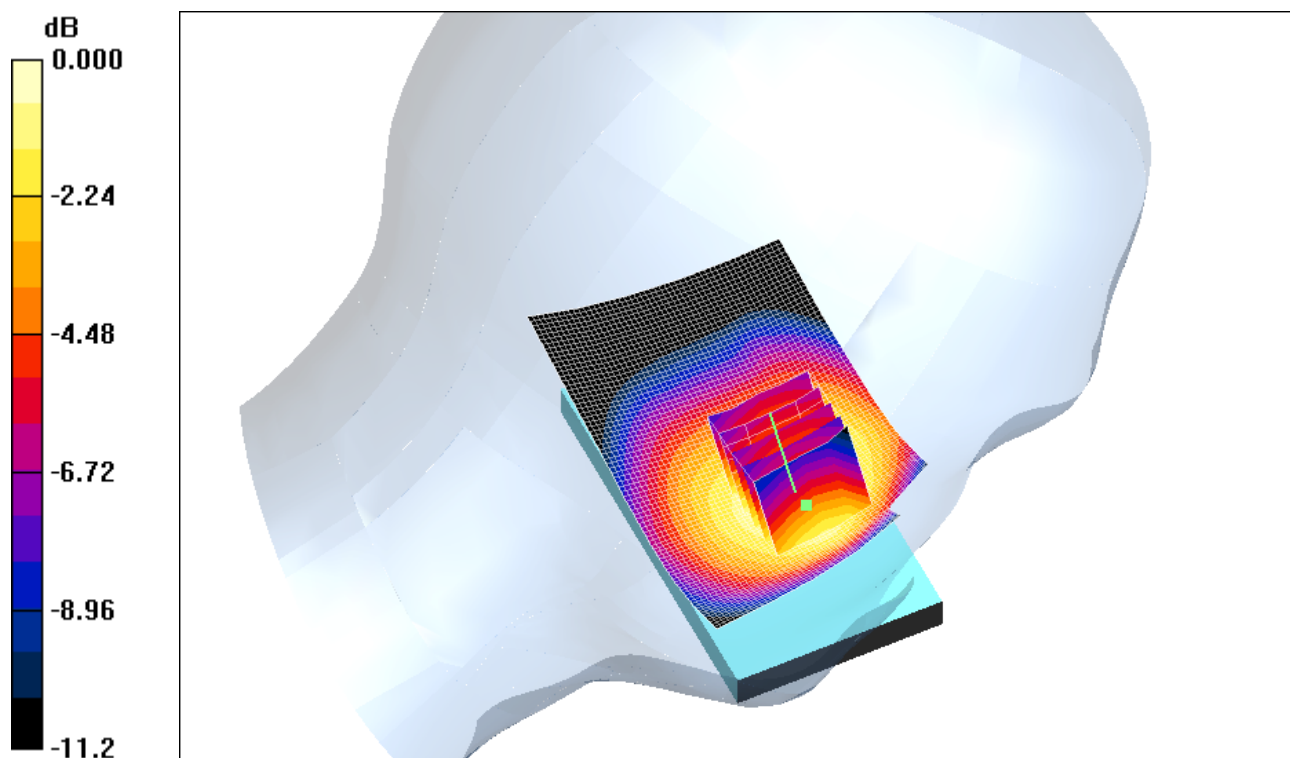

0 dB = 0.716mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 18(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 12:07:55 AM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_3_Slots_mid_chan_amb_temp_23.1_liq_temp_21.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (3 slots); Frequency: 836.8 MHz; Duty Cycle: 1:2.8
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.735 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.42 V/m ; Power Drift = -0.543 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.743 mW/g ; SAR(10 g) = 0.530 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.718 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 19(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

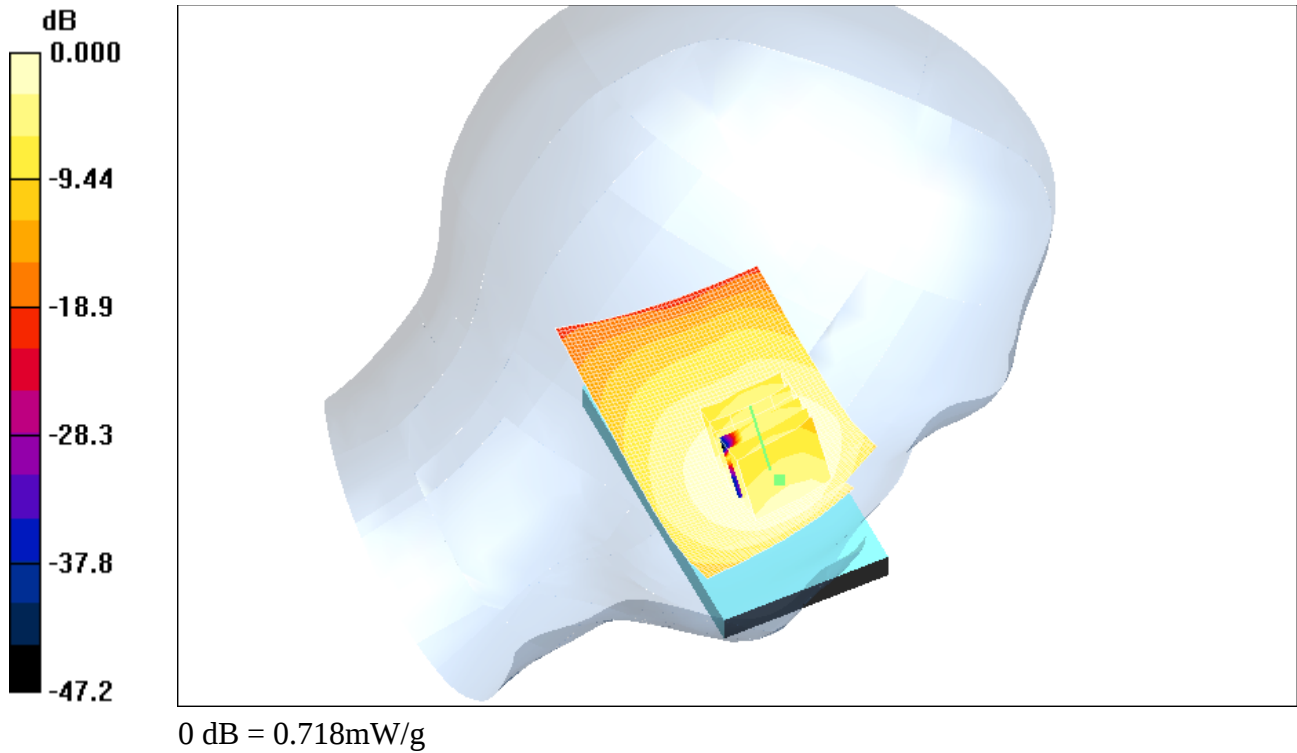

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			20(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/27/2011 11:31:52 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_mid_chan_amb_temp_23.1_liq_temp_21.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.820 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.80 V/m ; Power Drift = -0.125 dB


Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.754 mW/g ; SAR(10 g) = 0.574 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.789 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 21(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

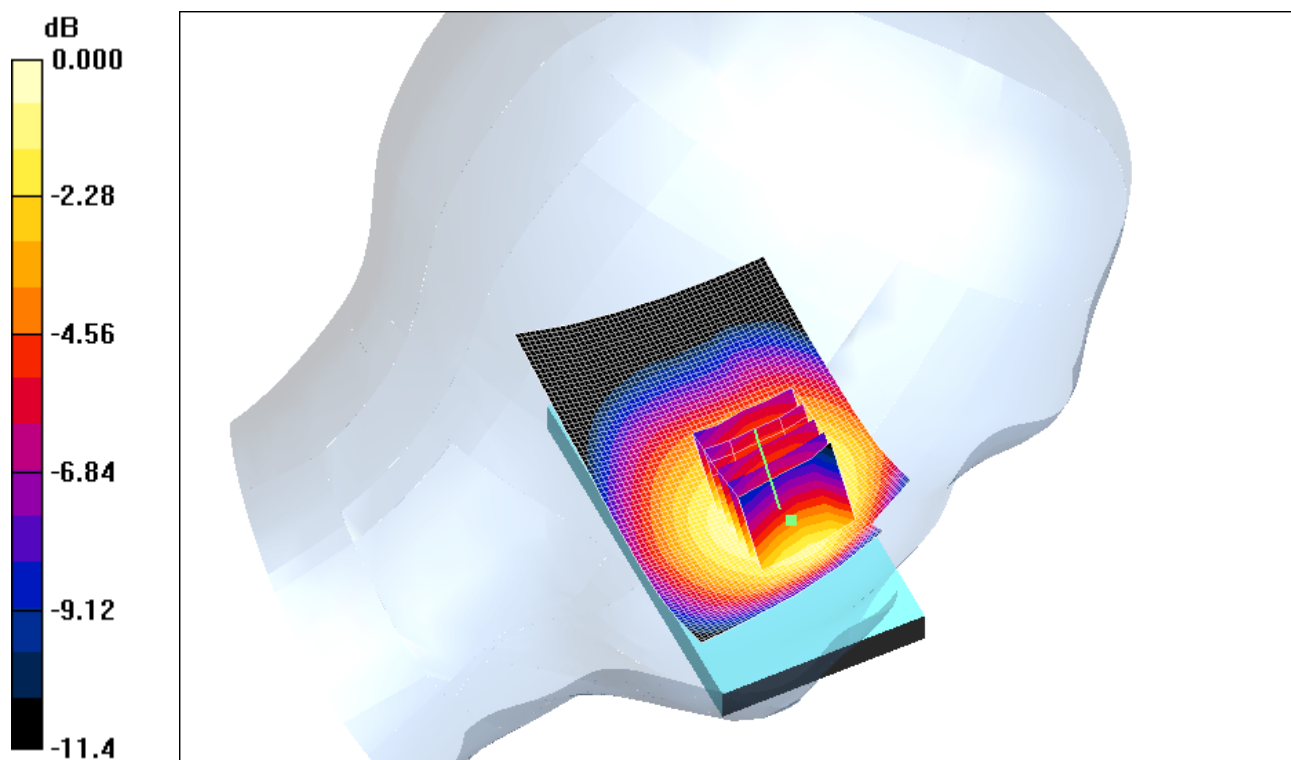

0 dB = 0.789mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 22(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 12:41:39 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE850_mid_chan_Amb_Tem_23.2_Liq_Tem_21.5_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.431 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.8 V/m ; Power Drift = 0.082 dB


Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.403 mW/g ; SAR(10 g) = 0.306 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.420 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 23(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

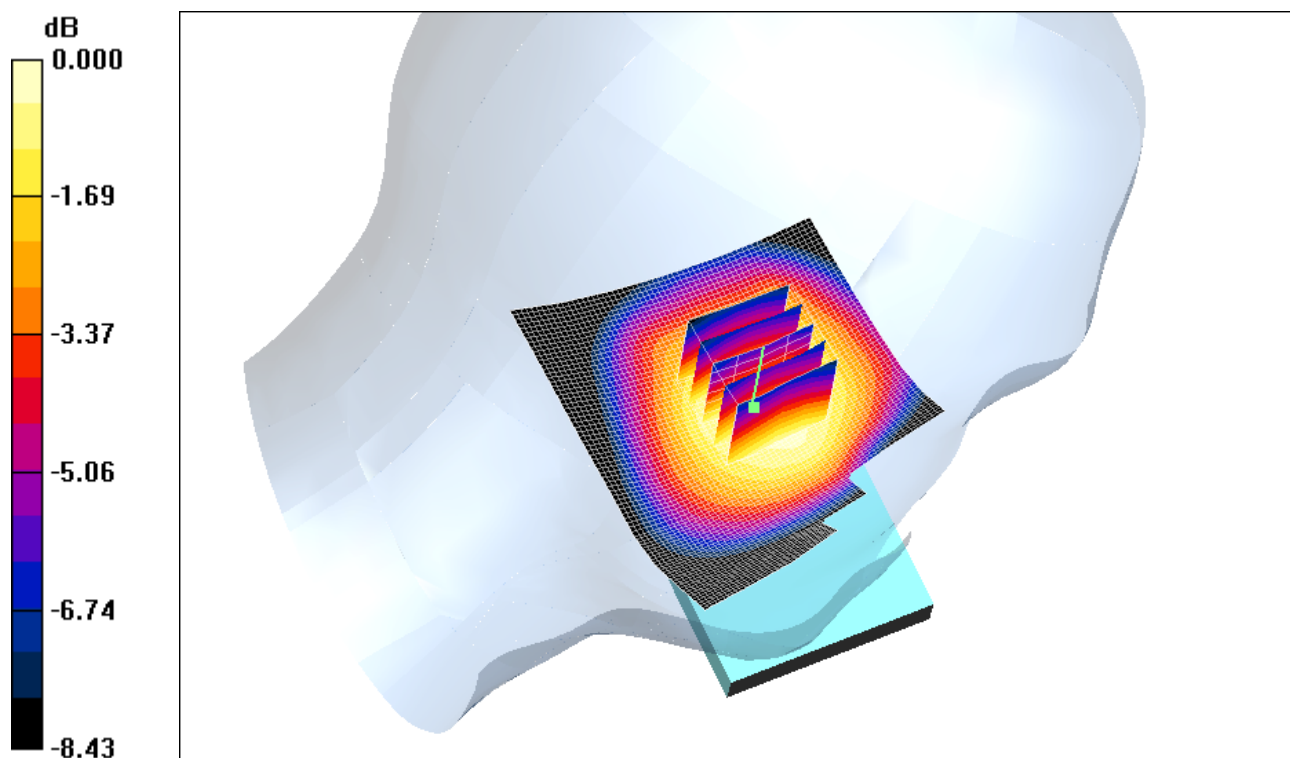

0 dB = 0.420mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report				Page 24(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW	

Date/Time: 1/28/2011 12:57:13 AM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM850_mid_chan_amb_temp_23.1_liq_temp_21.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: GSM 850; Frequency: 836.8 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.722 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.62 V/m ; Power Drift = -0.314 dB


Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.683 mW/g ; SAR(10 g) = 0.517 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.717 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 25(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

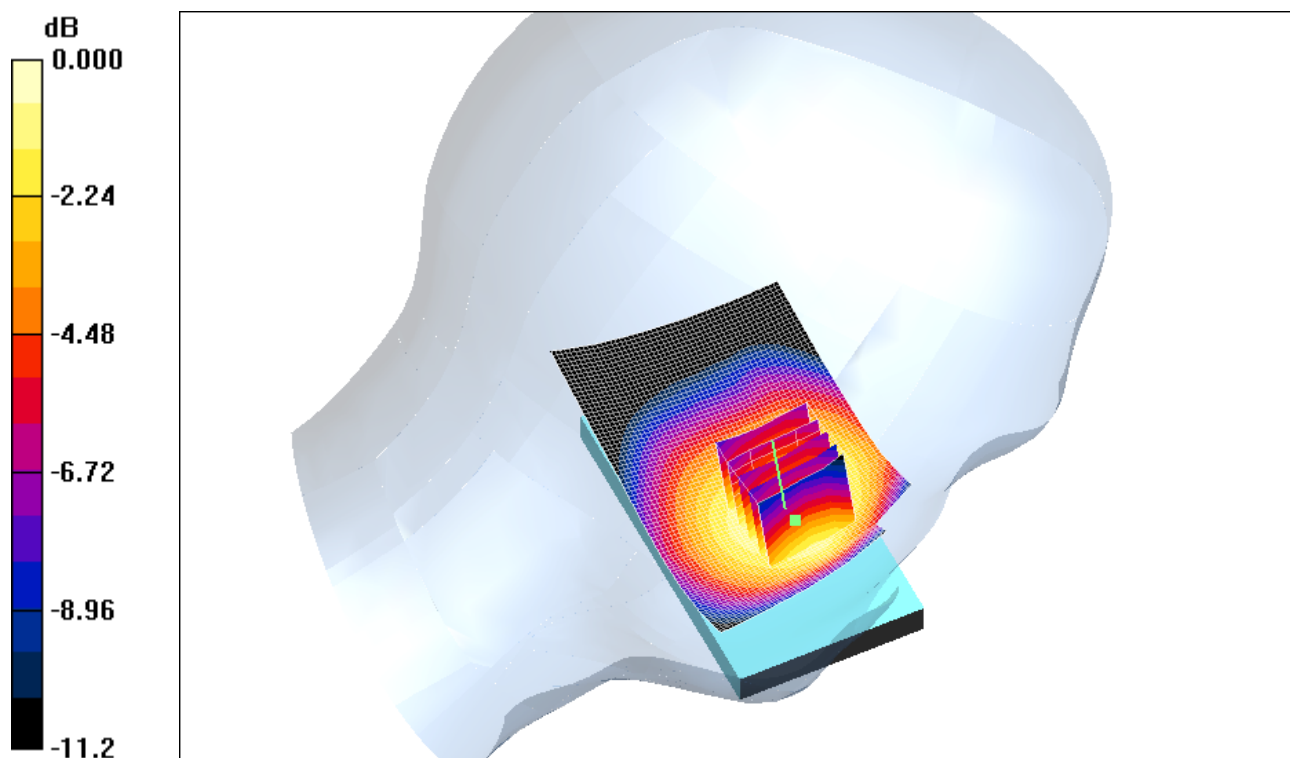

0 dB = 0.717mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 26(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 3:46:58 PM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA800_mid_chan_amb_temp_23.3_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.748 mW/g

Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.41 V/m; Power Drift = -0.403 dB


Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.684 mW/g; SAR(10 g) = 0.509 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.727 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 27(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

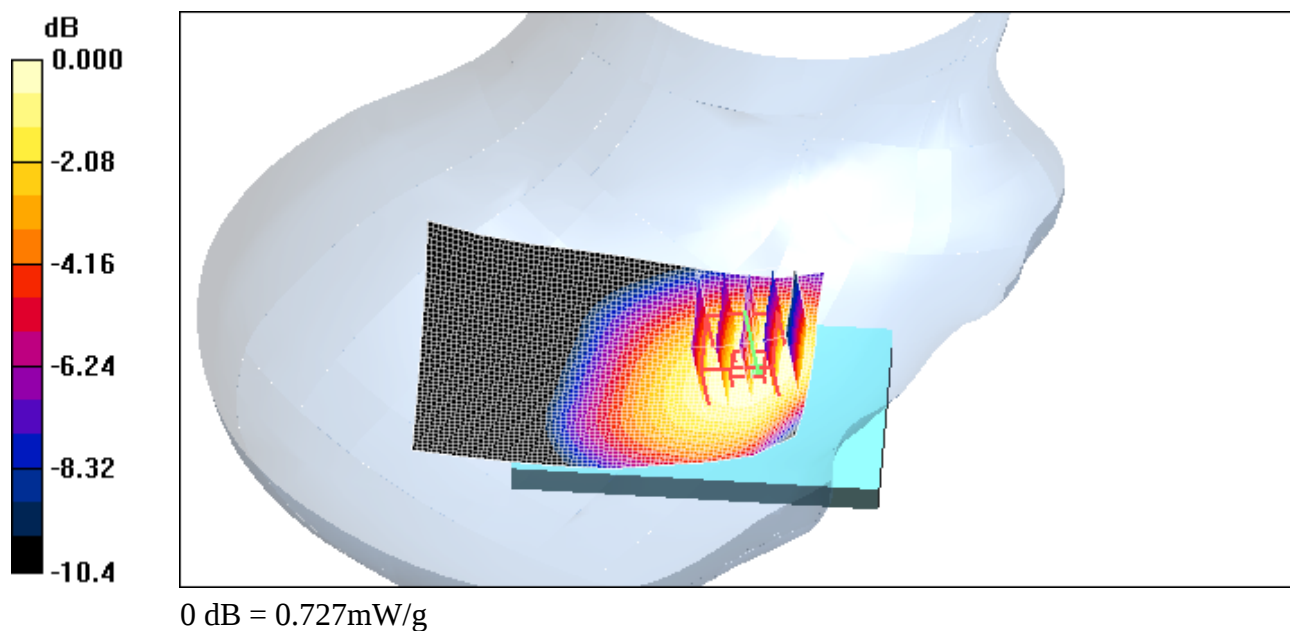

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 28(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 4:03:03 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_CDMA800_mid_chan_amb_temp_23.2_liq_temp_22
.0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.389 mW/g

Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.085 dB


Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.280 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.388 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 29(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

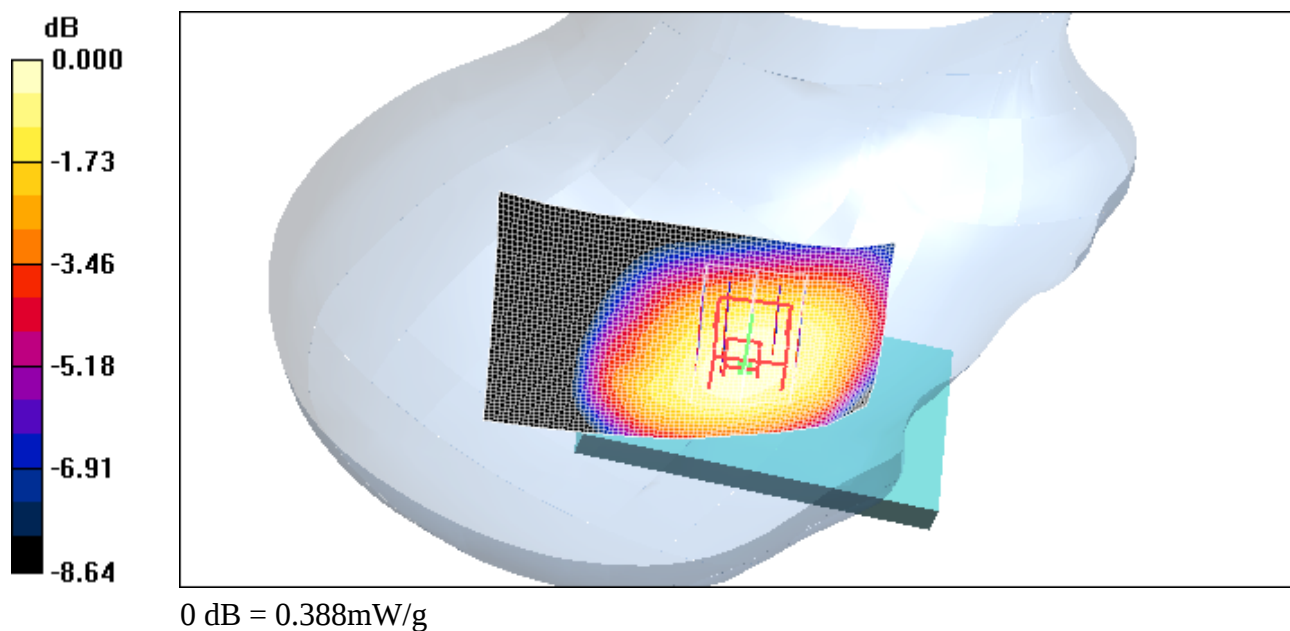

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			30(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 4:18:46 PM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA800_mid_chan_amb_temp_23.2_liq_temp_22.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.659 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.34 V/m; Power Drift = -0.182 dB


Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.470 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.647 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 31(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

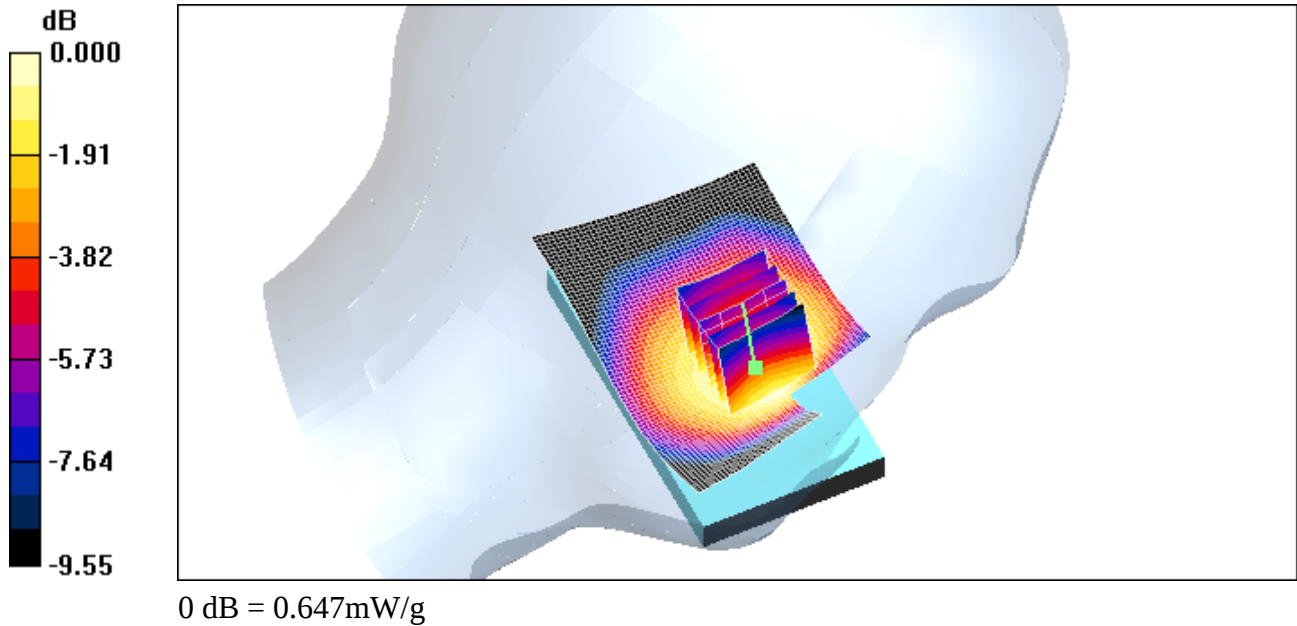

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 32(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/28/2011 4:36:27 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_CDMA800_mid_chan_amb_temp_23.2_liq_temp_22.
0C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 800; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.01, 6.01, 6.01); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.355 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.018 dB


Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.255 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.352 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 33(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

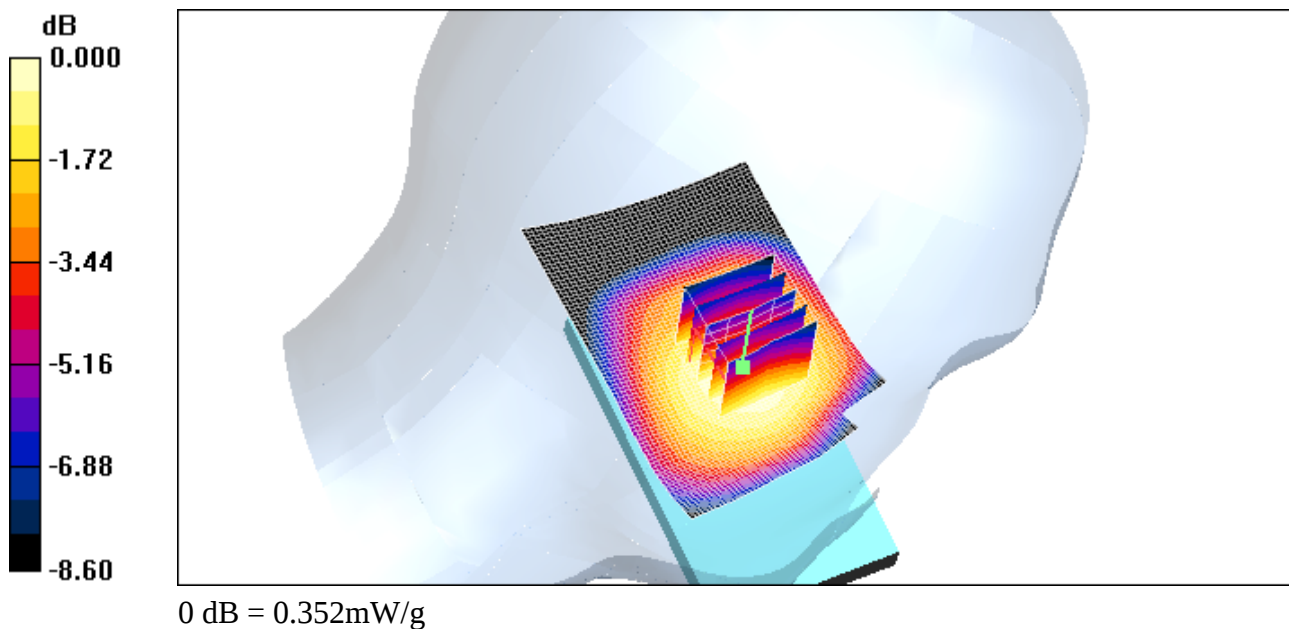

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			34(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/20/2011 1:40:37 PM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA1900_low_chan_Amb_Tem_23.5_Liq_Tem_22.1 C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.29 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.09, 5.09, 5.09); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.983 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.68 V/m; Power Drift = -0.153 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.898 mW/g; SAR(10 g) = 0.506 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.971 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 35(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

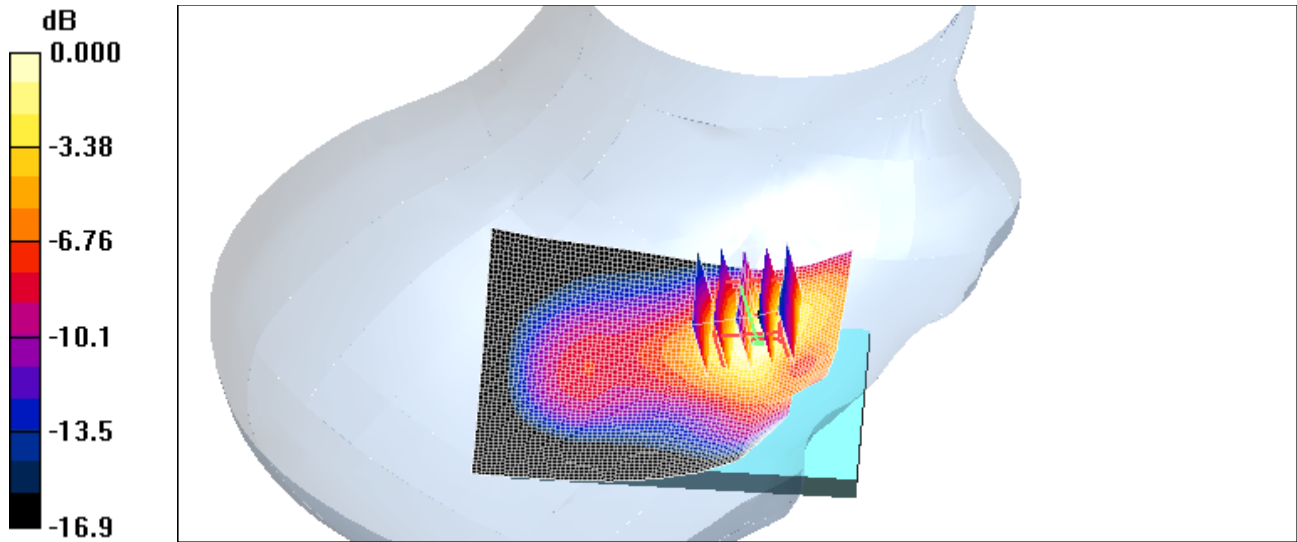

0 dB = 0.971mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			36(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/20/2011 1:24:26 PM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA1900_mid_chan_Amb_Tem_23.8_Liq_Tem_22.3 C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.09, 5.09, 5.09); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.924 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.74 V/m; Power Drift = -0.177 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.463 mW/g
Maximum value of SAR (measured) = 0.867 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 37(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

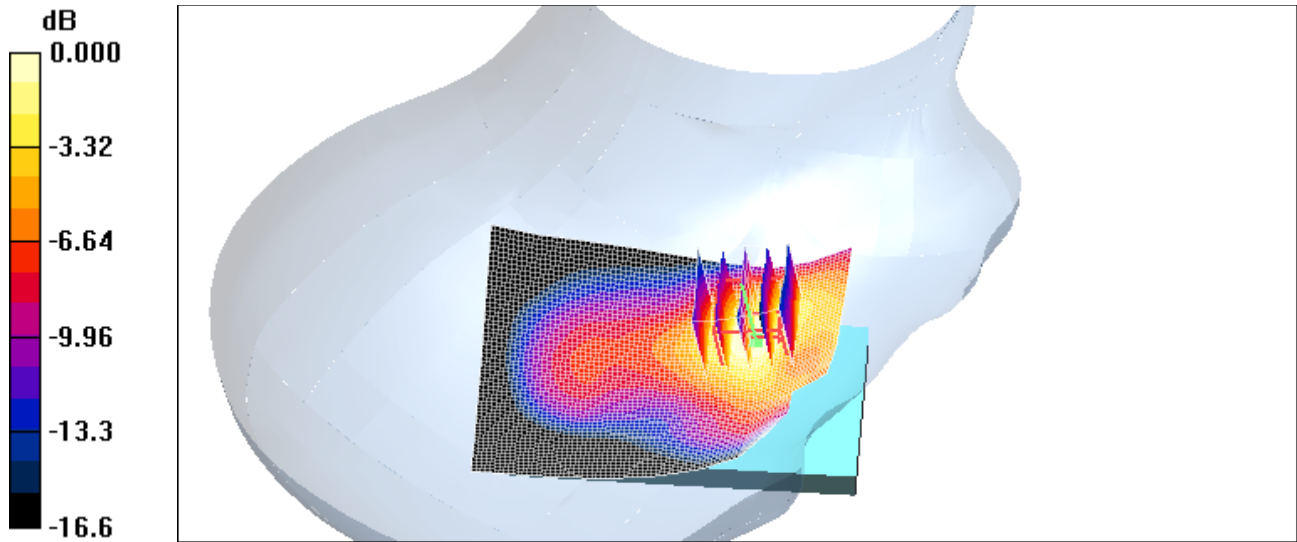

0 dB = 0.867mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			38(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/20/2011 1:57:36 PM

Test Laboratory: RIM Testing Services

RightHandSide_CDMA1900_high_chan_Amb_Tem_23.5_Liq_Tem_22.0 C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 1900; Frequency: 1908.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.5 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.09, 5.09, 5.09); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.968 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.32 V/m; Power Drift = -0.121 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.485 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.922 mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			39(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

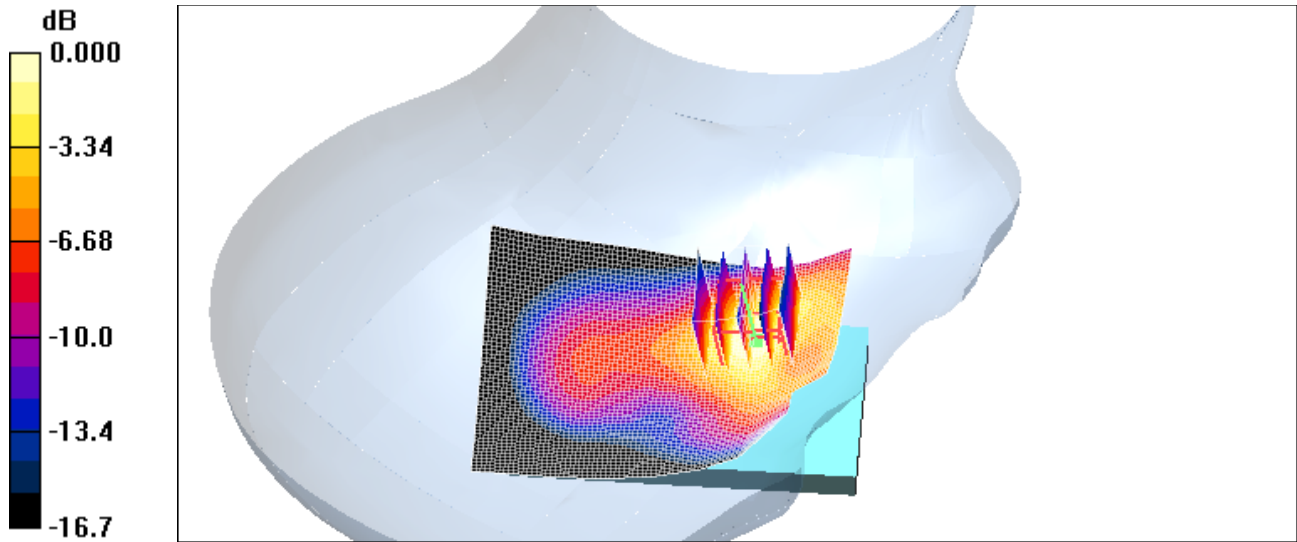

0 dB = 0.922mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			40(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/20/2011 2:38:06 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_CDMA1900_mid_chan_Amb_Tem_23.8_Liq_Tem_2 2.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section
Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.09, 5.09, 5.09); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.354 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.5 V/m; Power Drift = -0.017 dB
Peak SAR (extrapolated) = 0.433 W/kg
SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.164 mW/g
Maximum value of SAR (measured) = 0.301 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 41(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

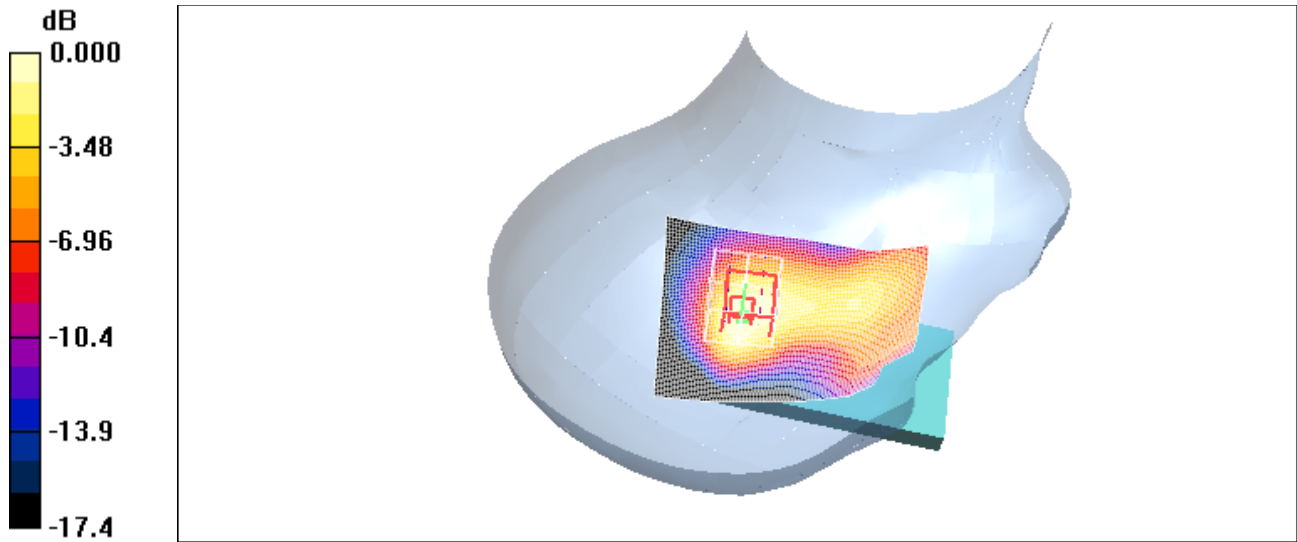

0 dB = 0.301mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			42(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/20/2011 3:00:51 PM

Test Laboratory: RIM Testing Services

LeftHandSide_CDMA1900_mid_chan_Amb_Tem_23.4_Liq_Tem_21.9_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section
Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.09, 5.09, 5.09); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.406 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.38 V/m; Power Drift = -0.168 dB
Peak SAR (extrapolated) = 0.526 W/kg
SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.221 mW/g
Maximum value of SAR (measured) = 0.394 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 43(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

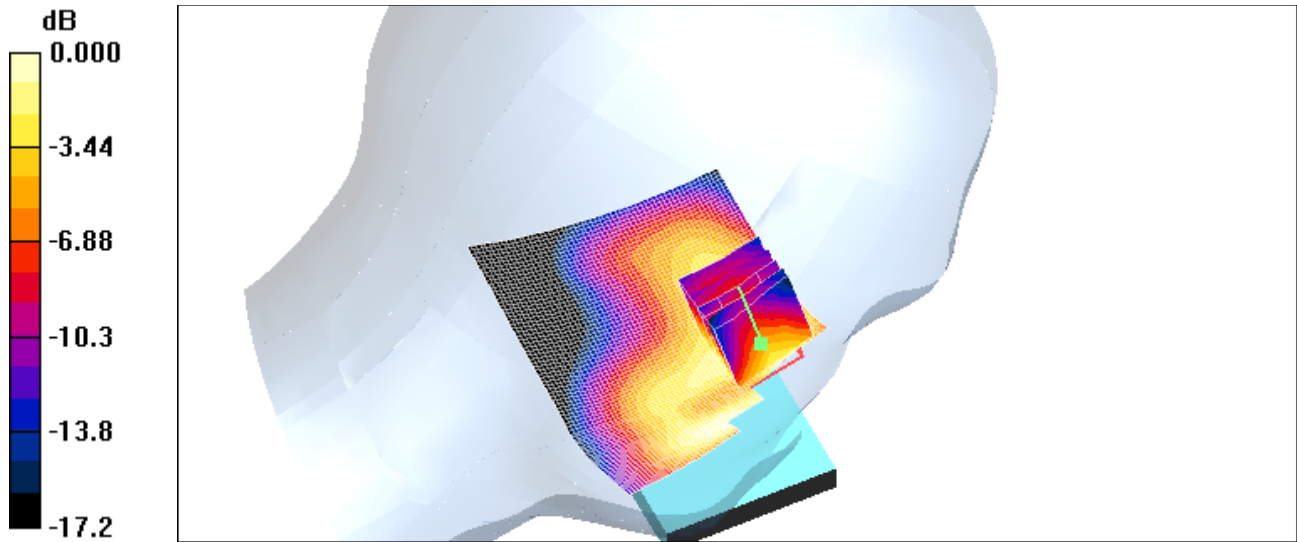

0 dB = 0.394mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			44(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/20/2011 3:19:22 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_CDMA1900_mid_chan_Amb_Tem_23.0_Liq_Tem_21 **.8_C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(5.09, 5.09, 5.09); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.306 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.1 V/m; Power Drift = 0.147 dB
Peak SAR (extrapolated) = 0.407 W/kg
SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.164 mW/g
Maximum value of SAR (measured) = 0.288 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 45(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

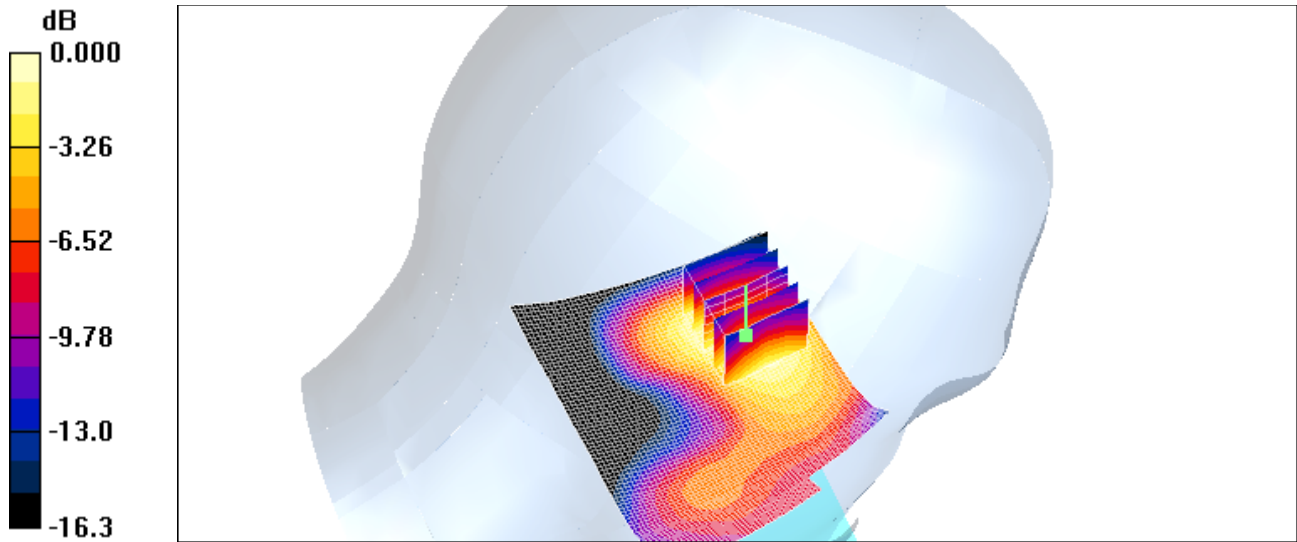

0 dB = 0.288mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 46(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 6:53:54 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_4_Slots_low_chan_Amb_Tem_23.6_Liq_Tem_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900(4 slots); Frequency: 1850.2 MHz;Duty Cycle: 1:2.1

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.845 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.80 V/m; Power Drift = 0.210 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.418 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.816 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 47(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

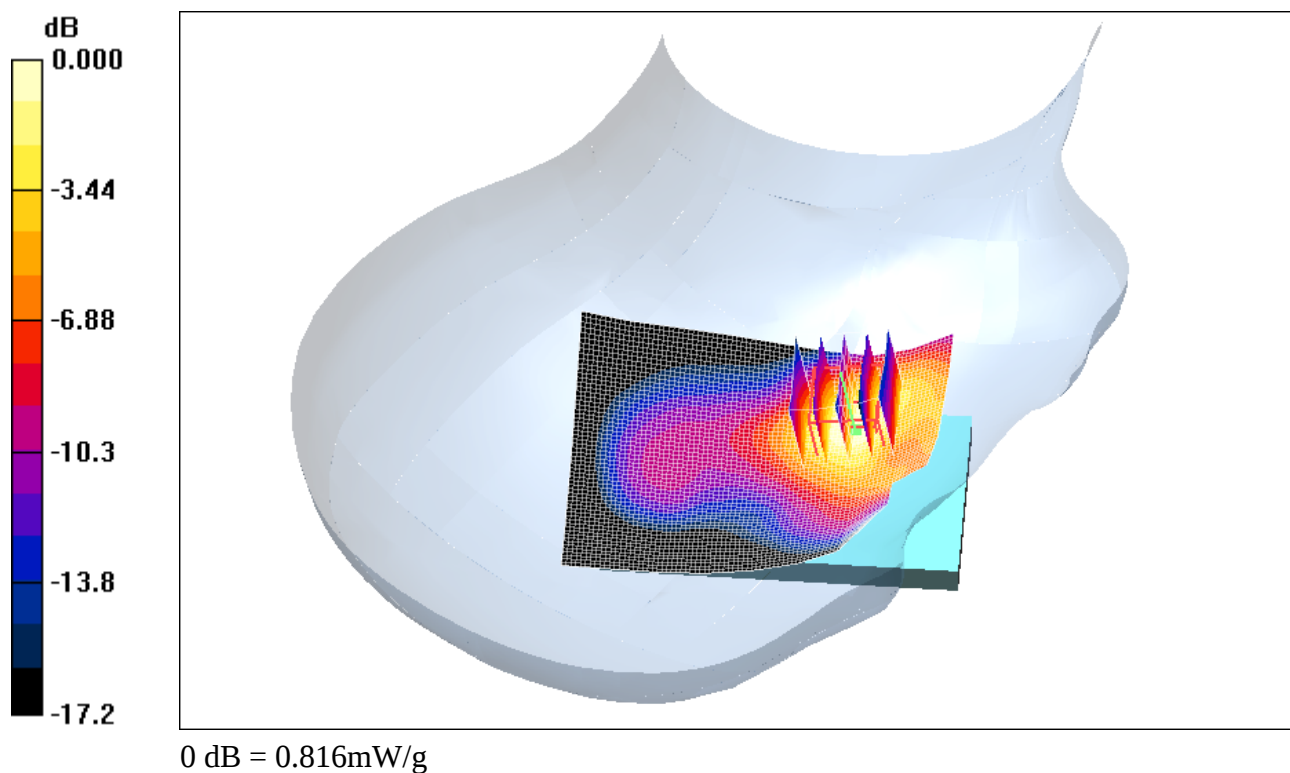

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report				Page 48(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW	

Date/Time: 1/25/2011 6:25:44 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_3_Slots_low_chan_Amb_Tem_23.8_Liq_Tem_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900(3 slots); Frequency: 1850.2 MHz;Duty Cycle: 1:4.2

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.804 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.90 V/m; Power Drift = -0.149 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.396 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.772 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 49(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

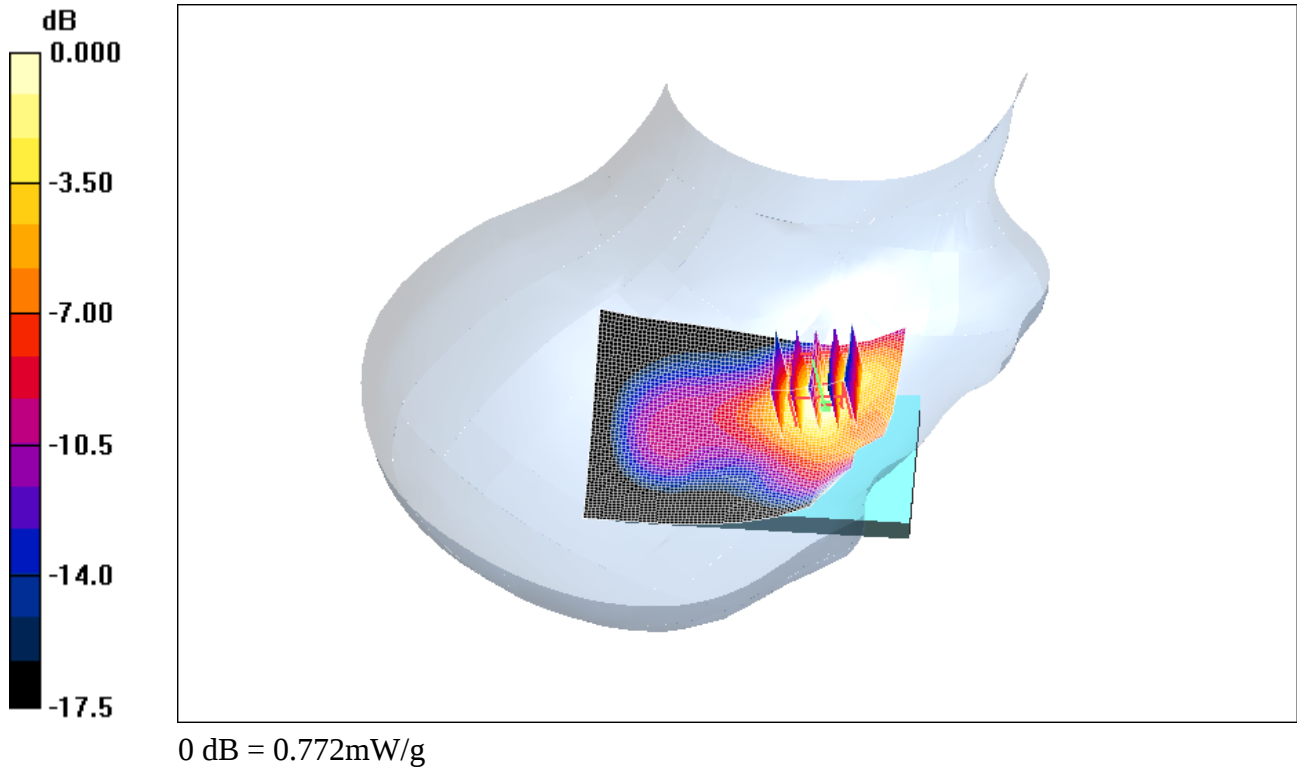

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			50(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 5:14:56 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_low_chan_Amb_Tem_23.6_Liq_Tem_21.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.811 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.41 V/m ; Power Drift = 0.247 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.715 mW/g ; SAR(10 g) = 0.403 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.779 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 51(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

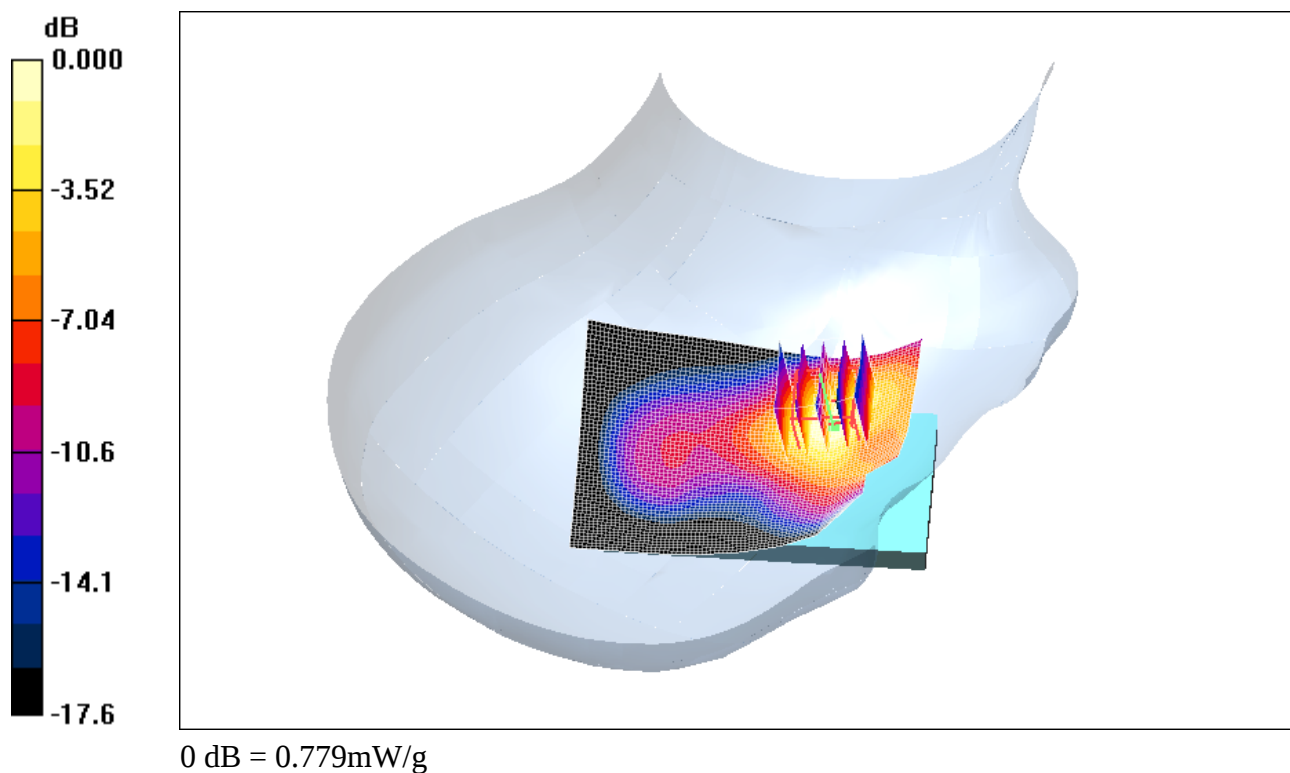

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 52(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 5:33:23 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_mid_chan_Amb_Tem_23.7_Liq_Tem_22.0
C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.811 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.61 V/m; Power Drift = -0.058 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.361 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.716 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 53(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

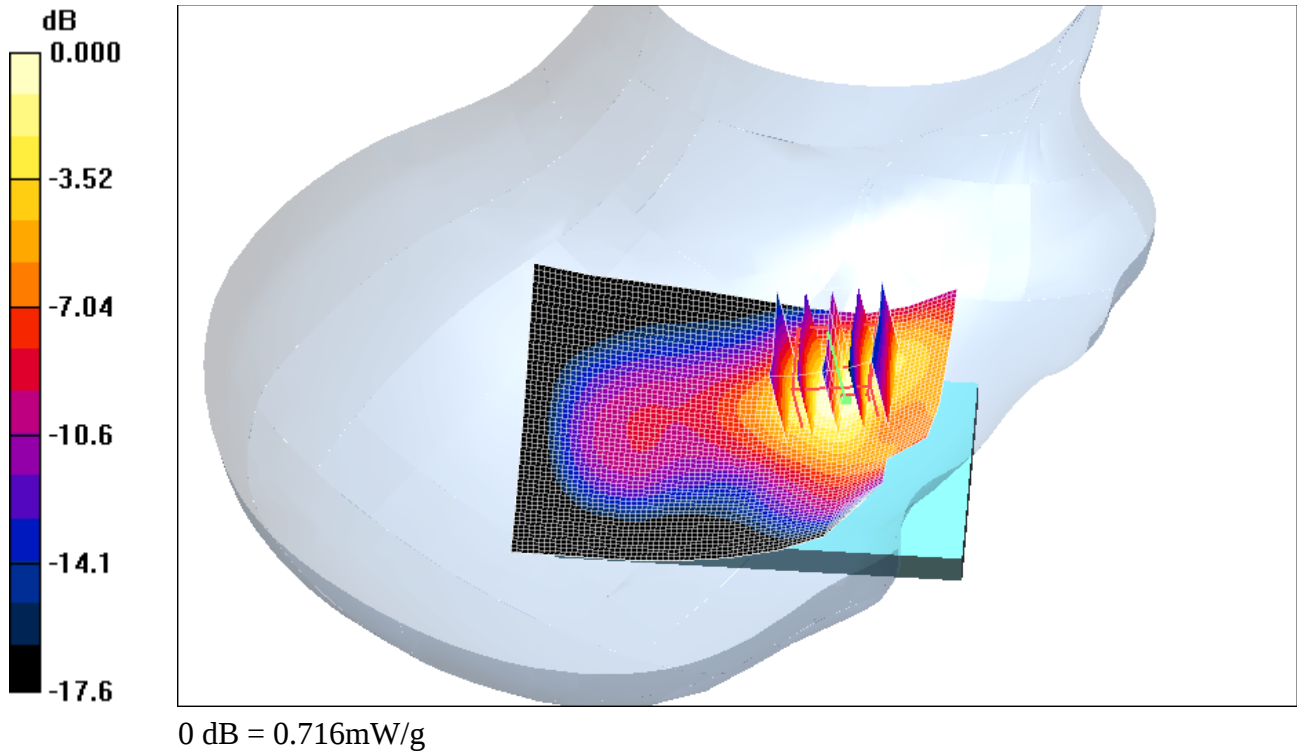

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			54(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 5:52:53 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE1900_high_chan_Amb_Tem_23.7_Liq_Tem_22.0

C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.34 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.733 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.57 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.647 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.712 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 55(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

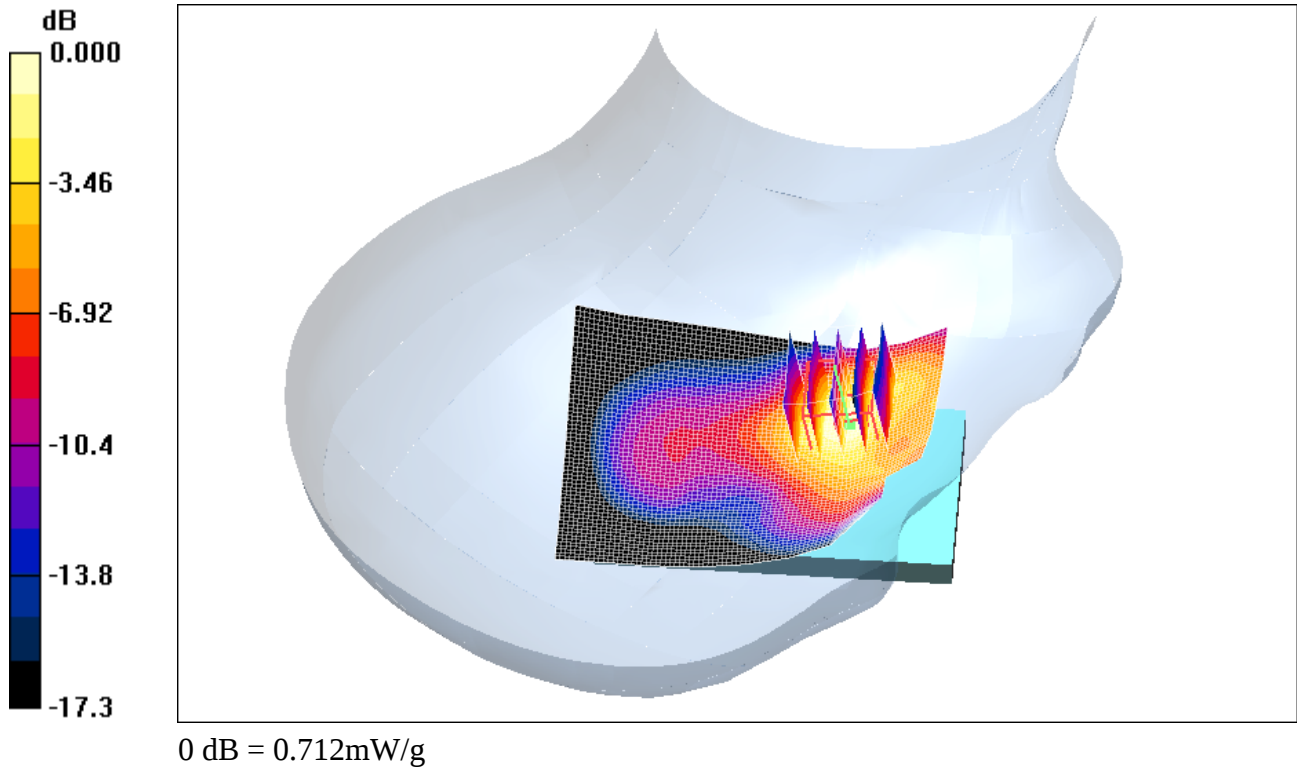

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 56(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 8:06:24 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_EDGE1900_low_chan_Amb_Tem_23.9_Liq_Tem_2 1.9C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.190 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.6 V/m; Power Drift = 0.062 dB


Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.095 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.171 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 57(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

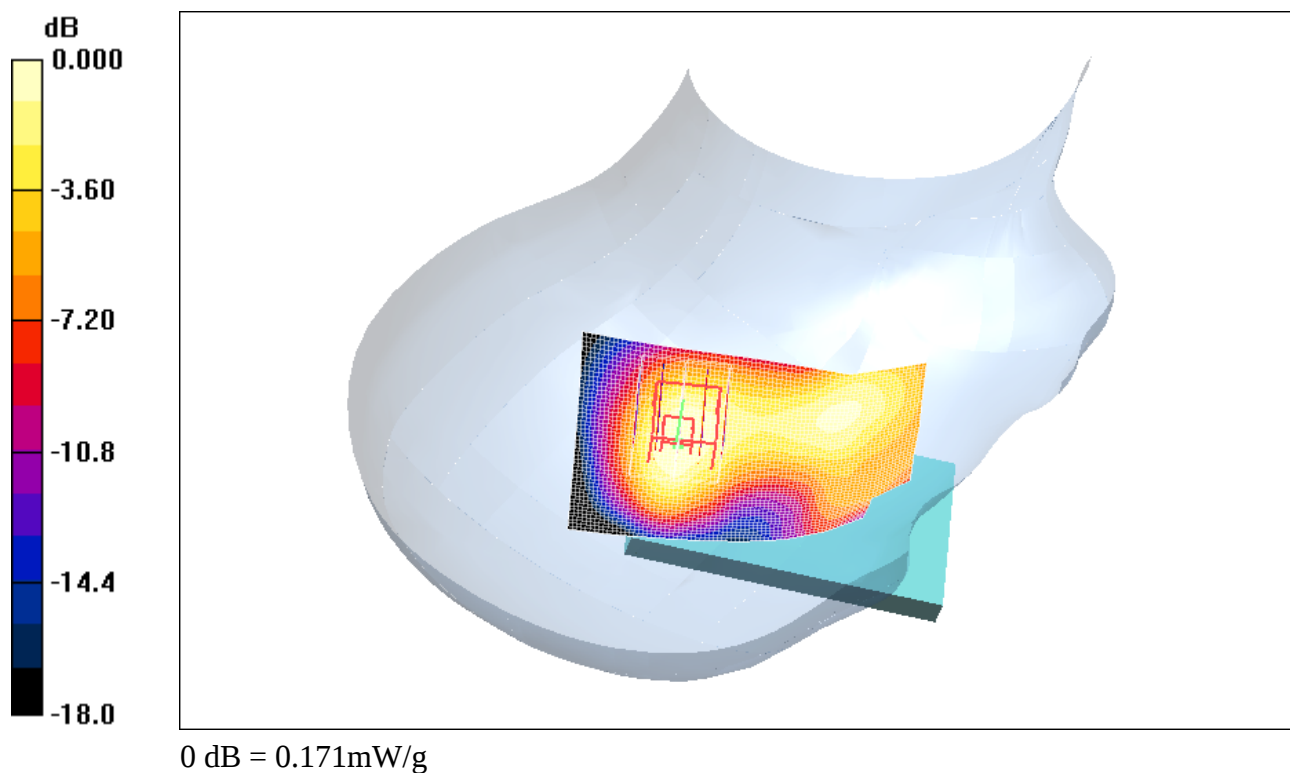

	Document				Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report				58(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW	

Date/Time: 1/25/2011 8:22:25 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM1900_low_chan_Amb_Tem_23.5_Liq_Tem_21.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.723 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.38 V/m ; Power Drift = -0.133 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.642 mW/g ; SAR(10 g) = 0.357 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.716 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 59(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

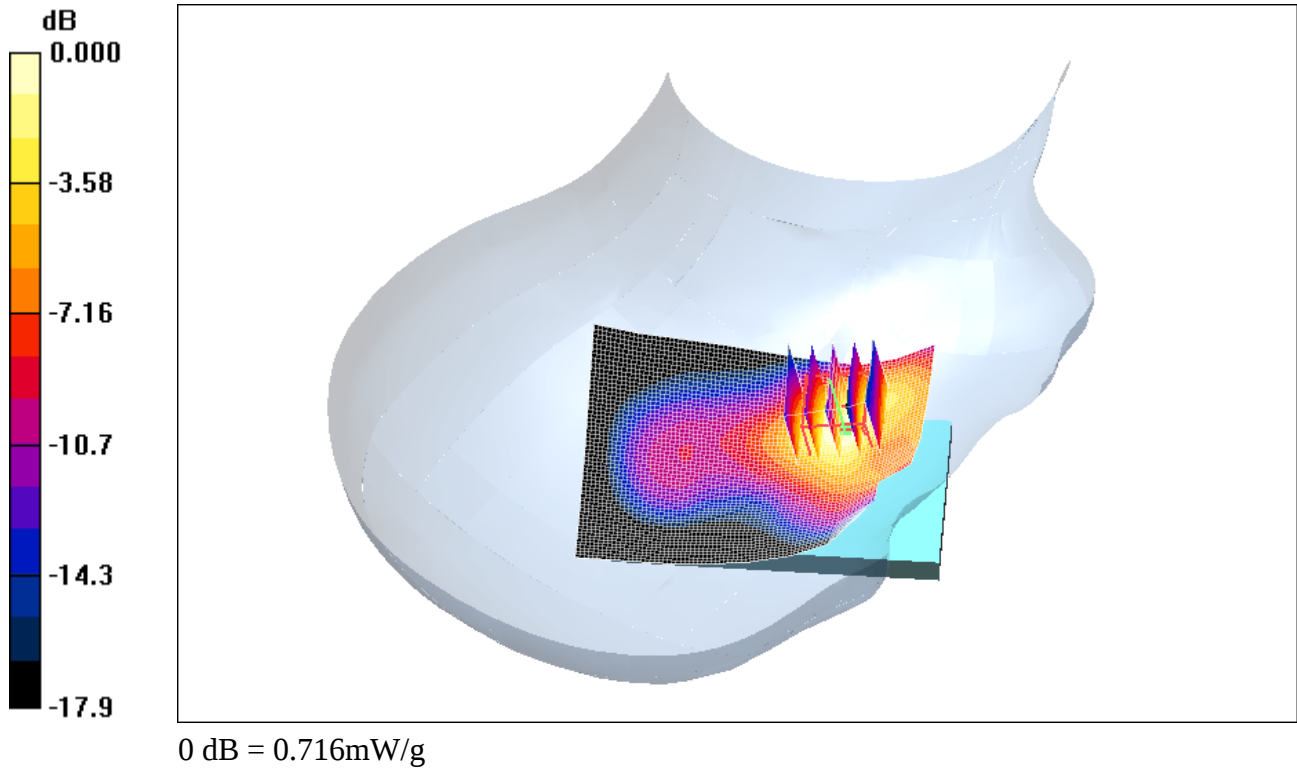

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 60(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 10:01:15 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_4_Slots_high_chan_Amb_Tem_23.3_Liq_Tem_21.6_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900(4 slots); Frequency: 1909.8 MHz;Duty Cycle: 1:2.1

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.335 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.59 V/m; Power Drift = -0.052 dB
Peak SAR (extrapolated) = 0.419 W/kg
SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.185 mW/g
Maximum value of SAR (measured) = 0.313 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 61(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

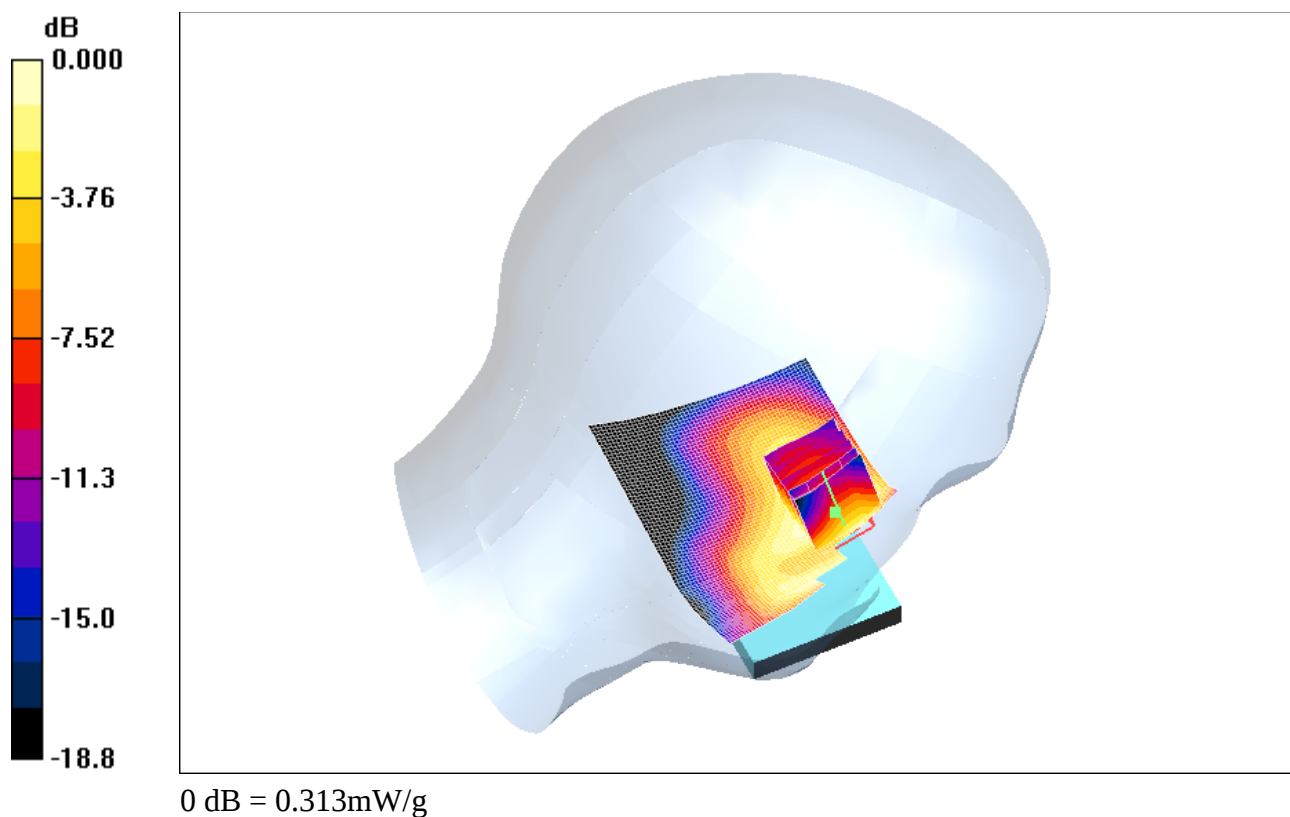

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			62(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 9:47:41 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_3_Slots_high_chan_Amb_Tem_23.4_Liq_Tem_21.7_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900(3 slots); Frequency: 1909.8 MHz;Duty Cycle: 1:2.8

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.331 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.56 V/m; Power Drift = -0.105 dB
Peak SAR (extrapolated) = 0.413 W/kg
SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.185 mW/g
Maximum value of SAR (measured) = 0.309 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 63(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

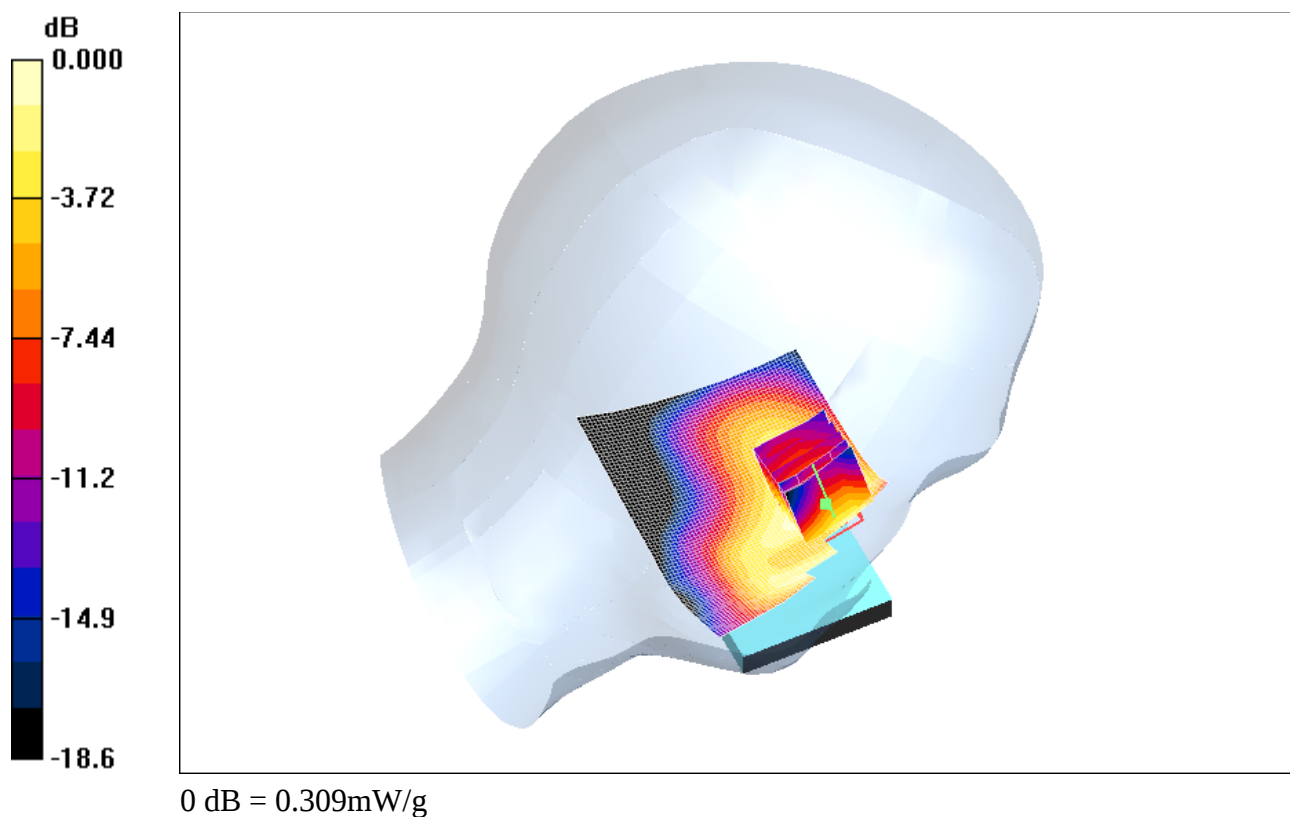

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			64(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 8:53:33 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_low_chan_Amb_Tem_23.8_Liq_Tem_22.1_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.313 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.46 V/m ; Power Drift = -0.179 dB


Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.278 mW/g ; SAR(10 g) = 0.175 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.301 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 65(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

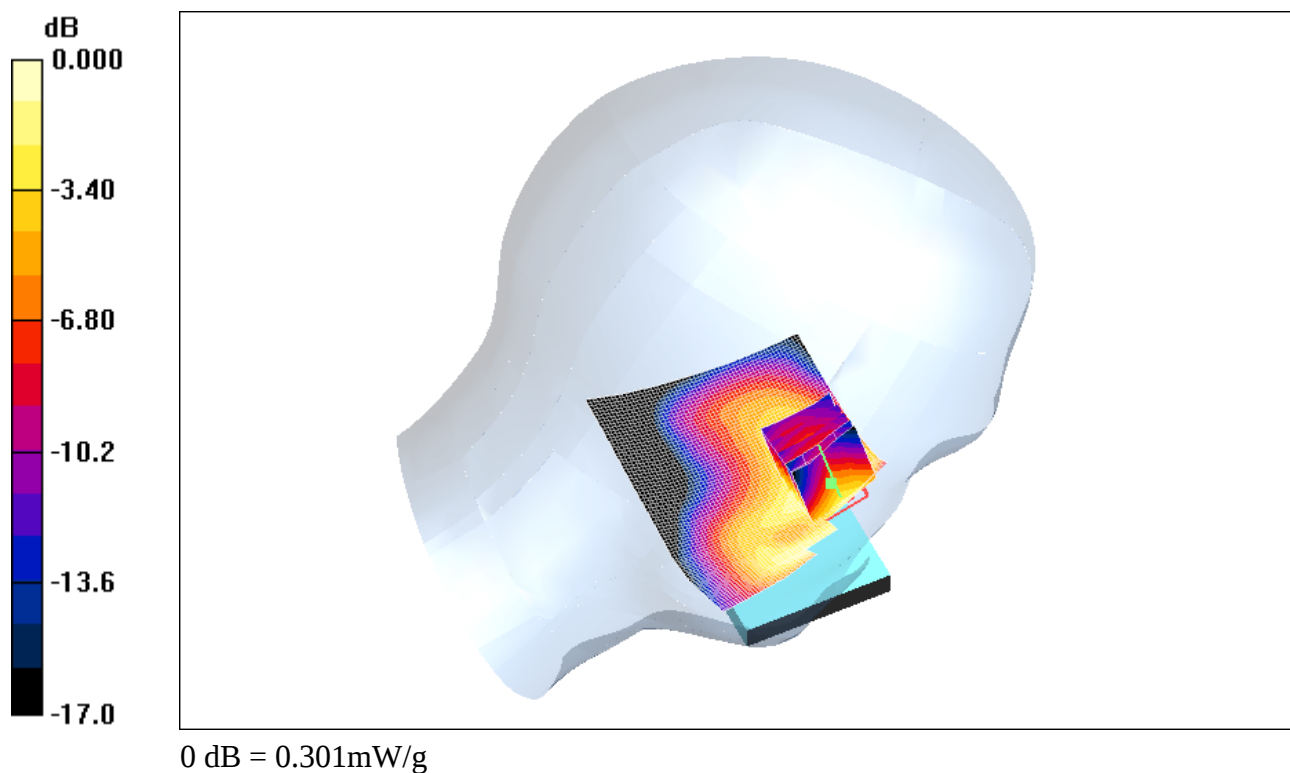

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			66(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 9:12:58 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_mid_chan_Amb_Tem_23.9_Liq_Tem_22.2_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.274 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.73 V/m; Power Drift = 0.224 dB
Peak SAR (extrapolated) = 0.366 W/kg
SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.165 mW/g
Maximum value of SAR (measured) = 0.281 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report				Page 67(91)
	Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

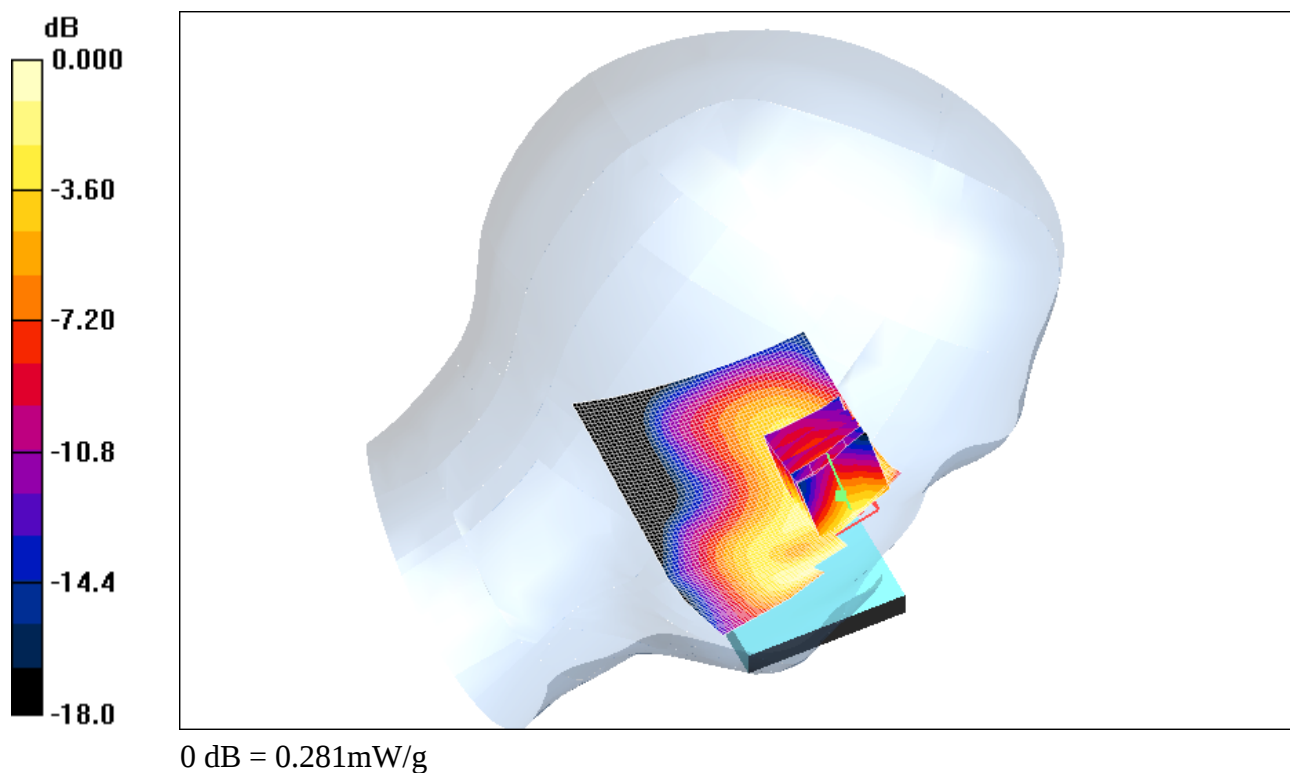

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			68(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 9:27:26 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_high_chan_Amb_Tem_23.9_Liq_Tem_22.2_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.333 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 4.62 V/m; Power Drift = -0.504 dB
Peak SAR (extrapolated) = 0.410 W/kg
SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.185 mW/g
Maximum value of SAR (measured) = 0.308 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 69(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

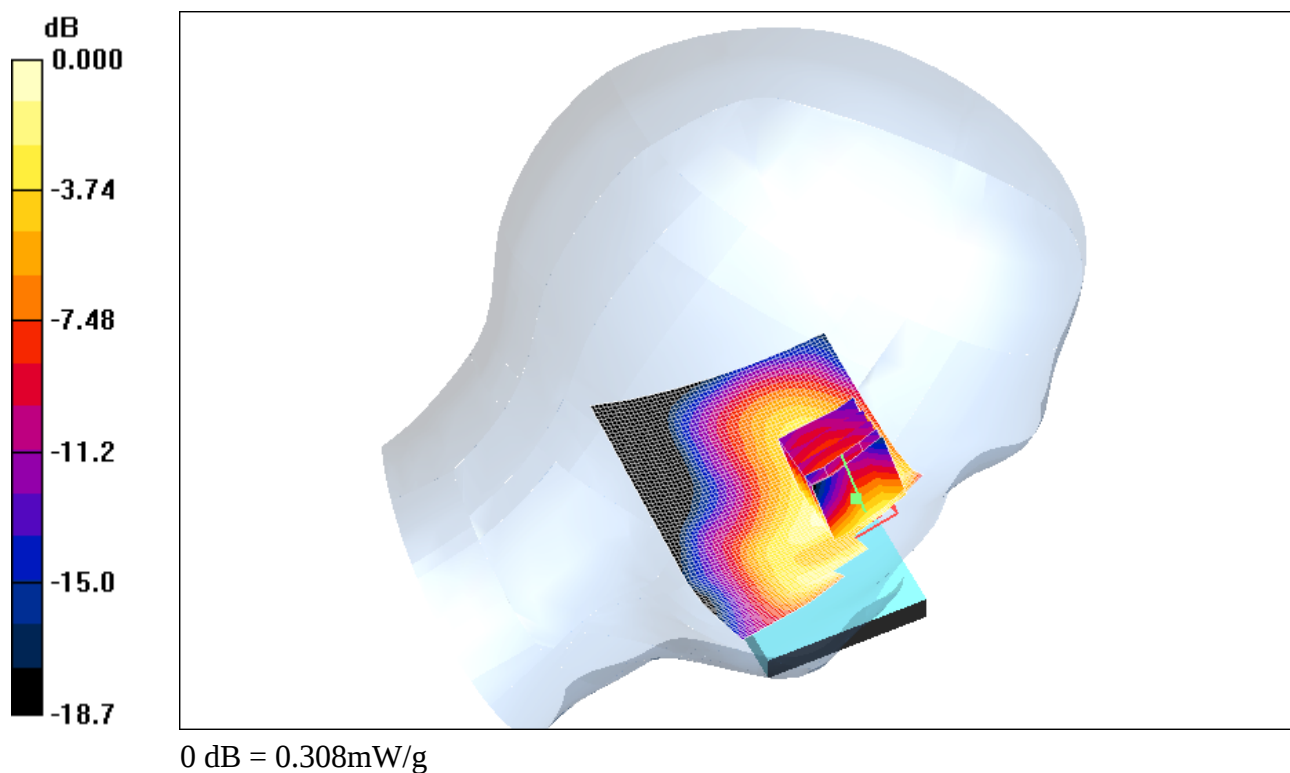

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			70(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 10:16:50 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE1900_mid_chan_Amb_Tem_23.4_Liq_Tem_21.7_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.32 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.180 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.84 V/m; Power Drift = 0.133 dB
Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.093 mW/g
Maximum value of SAR (measured) = 0.164 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 71(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

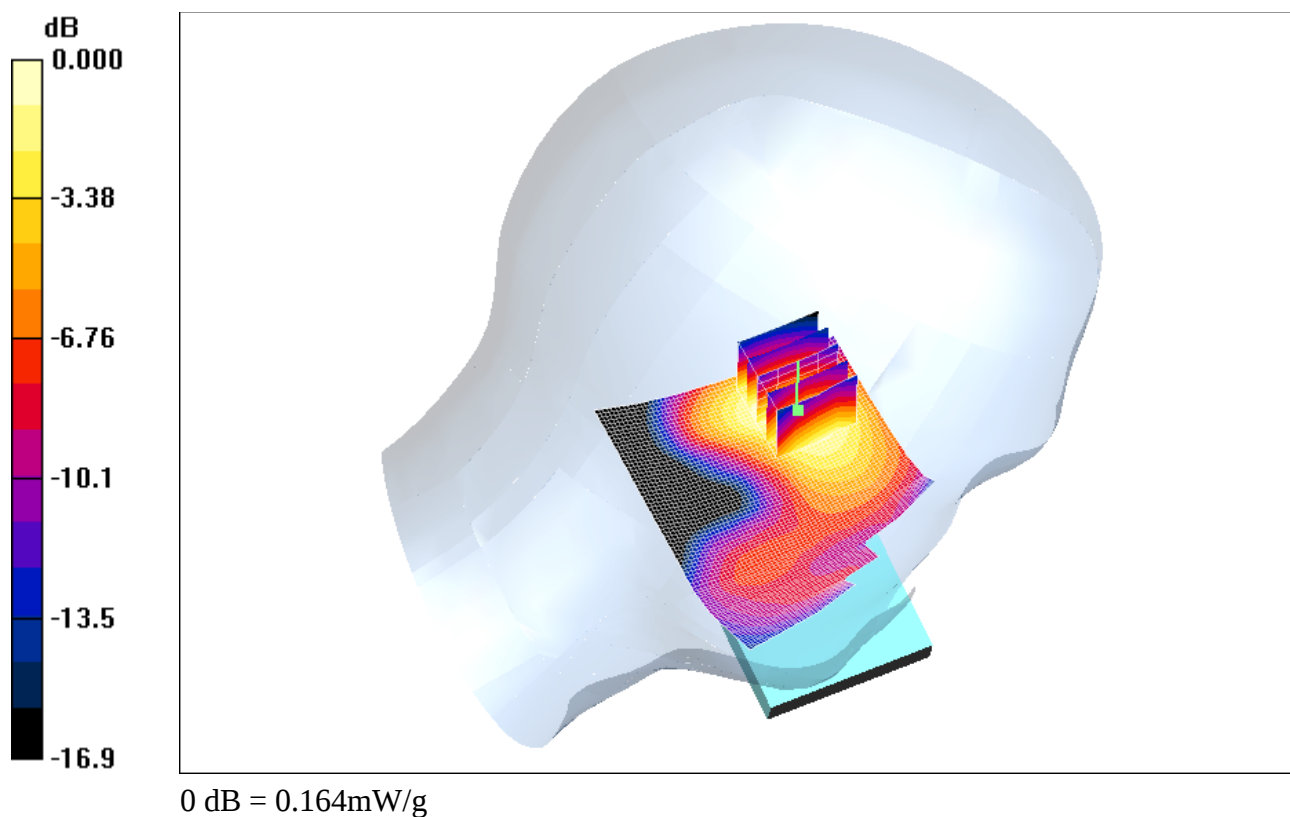

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			72(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/25/2011 10:32:17 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_high_chan_Amb_Tem_23.6_Liq_Tem_21.9_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(4.99, 4.99, 4.99); Calibrated: 3/9/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.282 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 4.67 V/m; Power Drift = 0.169 dB
Peak SAR (extrapolated) = 0.352 W/kg
SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.157 mW/g
Maximum value of SAR (measured) = 0.270 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 73(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

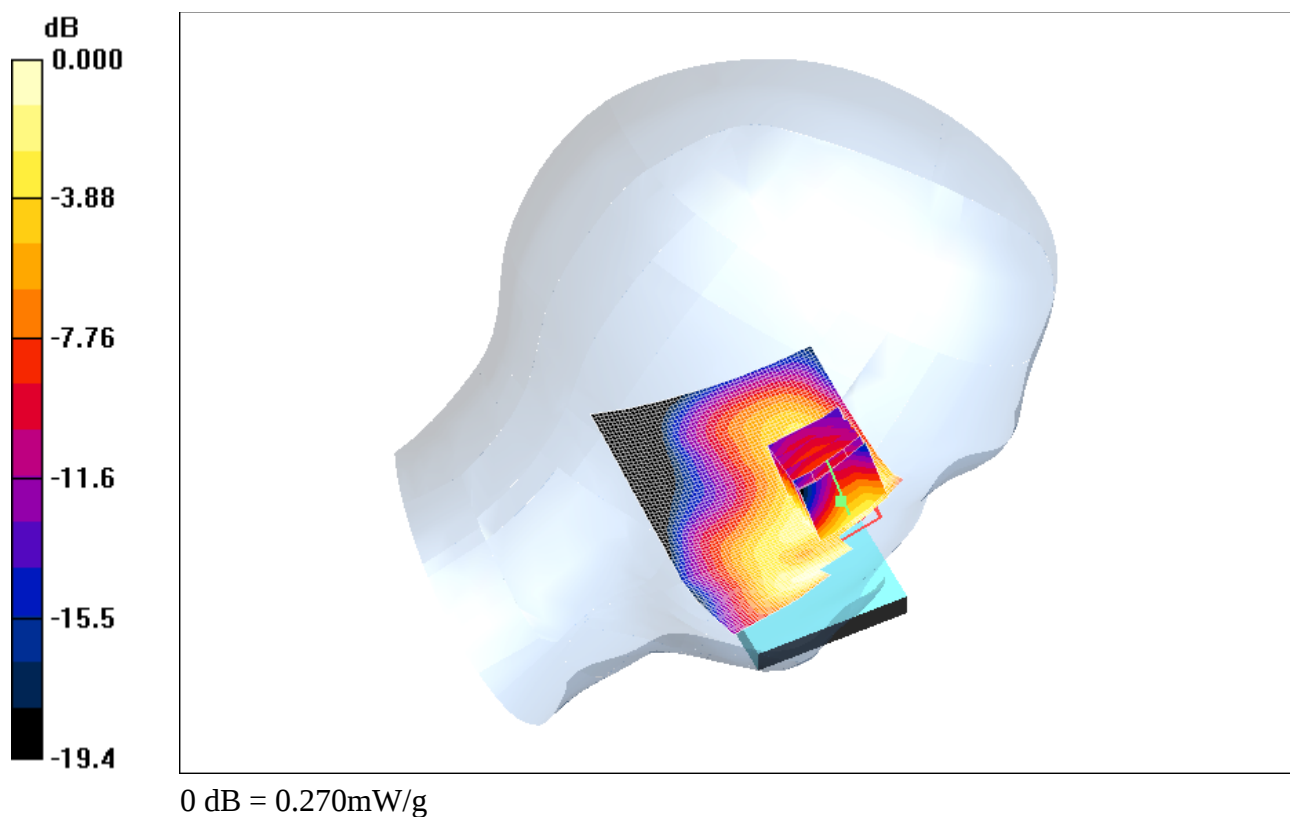

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 74(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/14/2011 9:32:53 PM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_high_chan_Amb_Tem_23.7_Liq_Tem_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.42, 4.42, 4.42); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.173 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.88 V/m; Power Drift = 0.889 dB


Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.083 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.199 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 75(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

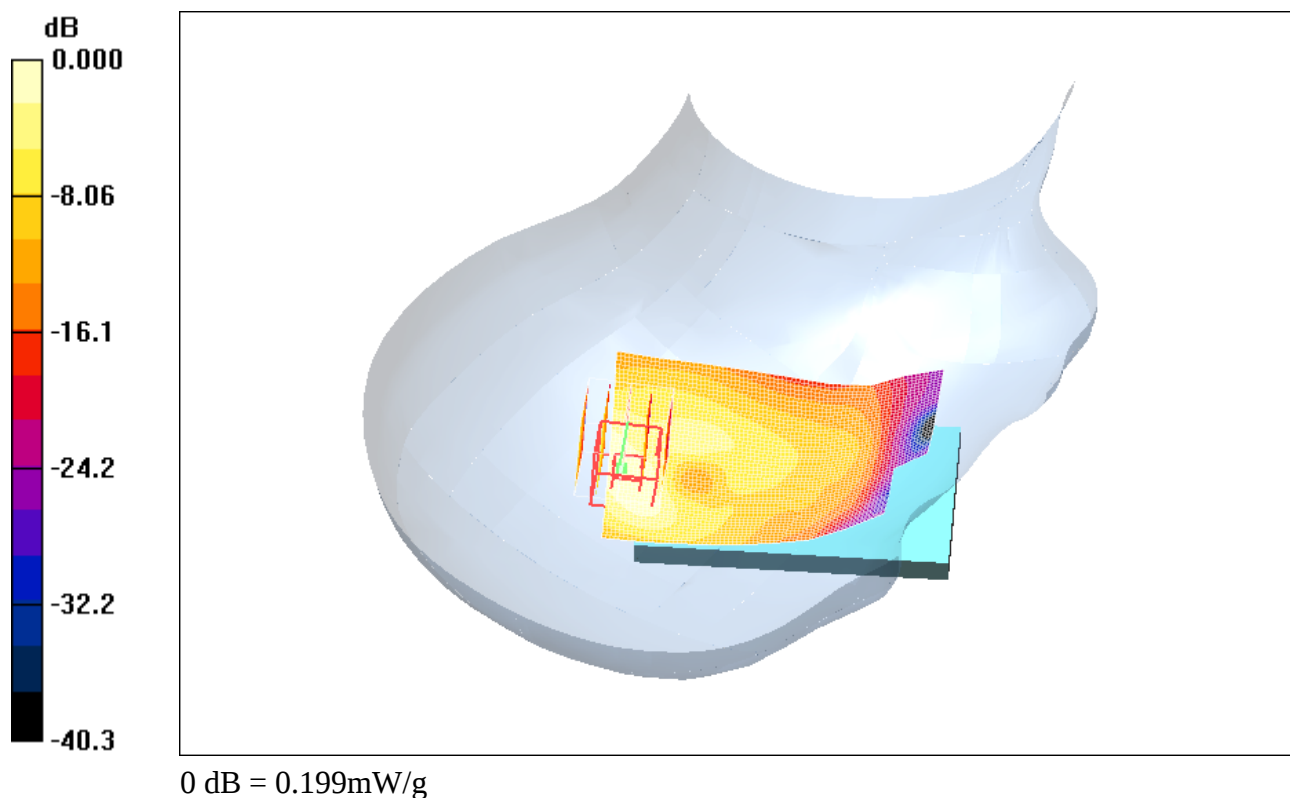

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 76(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/14/2011 9:46:19 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11b_high_chan_Amb_Tem_23.5_Liq_Tem_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: 802.11 b (2450); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.42, 4.42, 4.42); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.263 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.39 V/m; Power Drift = -0.206 dB


Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.099 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.269 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 77(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

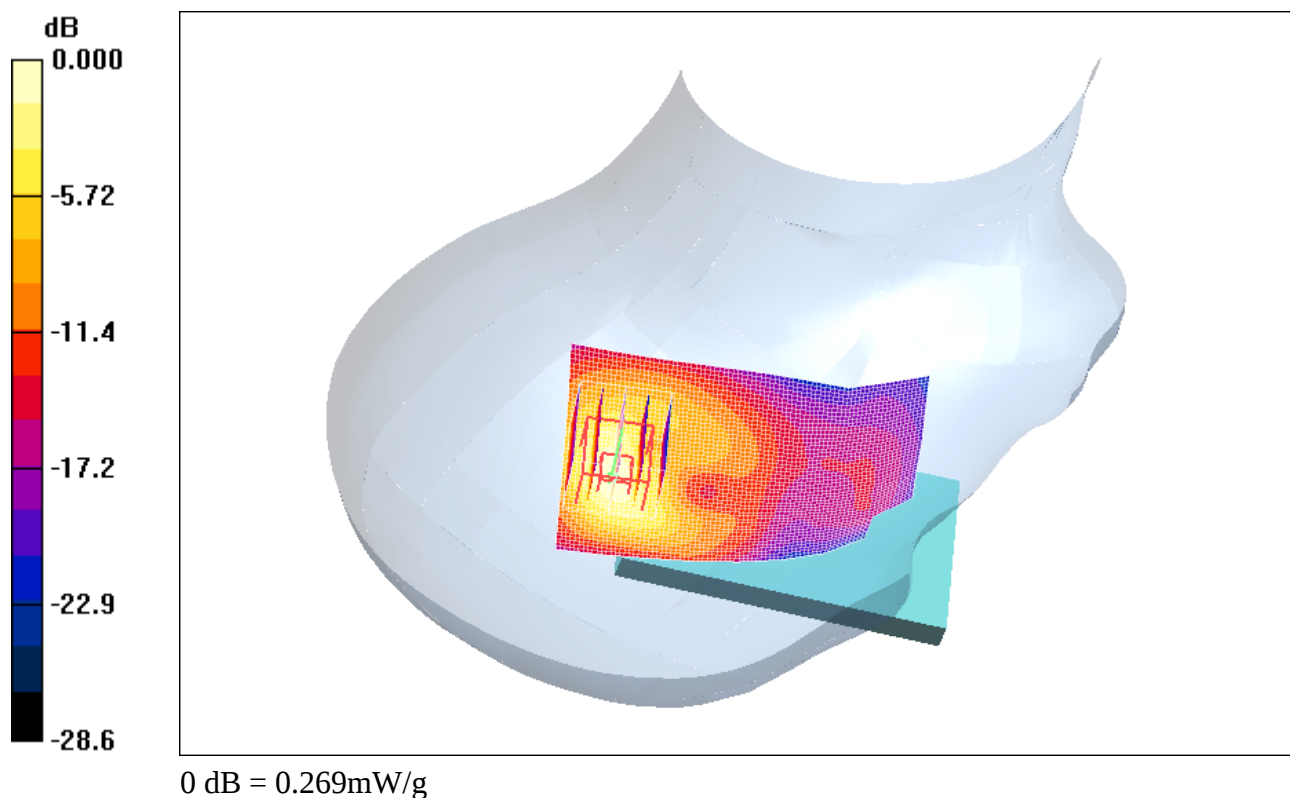

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			78(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/14/2011 8:57:08 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_high_chan_Amb_Tem_23.8_Liq_Tem_22.5_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.42, 4.42, 4.42); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.290 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.72 V/m; Power Drift = -0.094 dB


Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.119 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.303 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 79(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

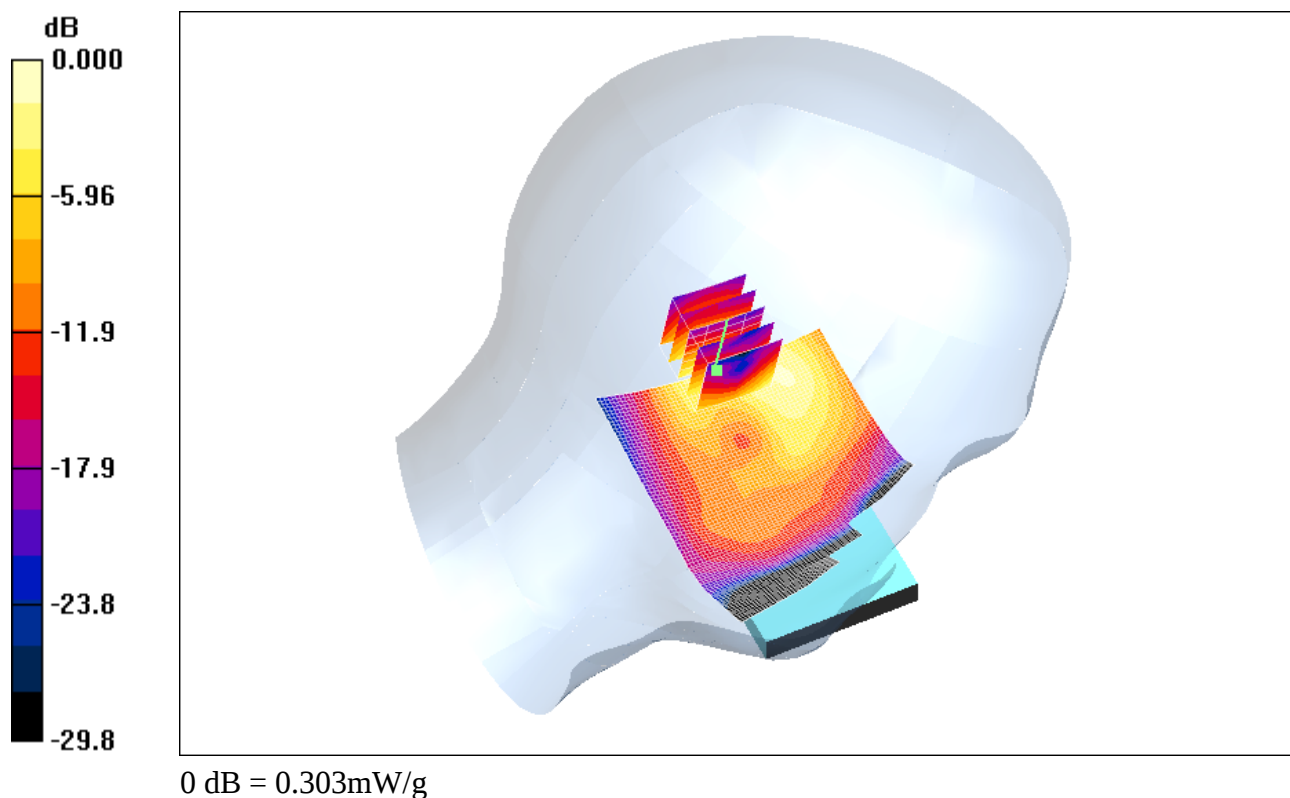

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 80(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 1/14/2011 9:18:41 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11b_high_chan_Amb_Tem_23.8_Liq_Tem_22.4_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 329A77DF

Communication System: 802.11 b (2450); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1644; ConvF(4.42, 4.42, 4.42); Calibrated: 11/16/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 5/17/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.367 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.82 V/m; Power Drift = -0.115 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.386 mW/g; SAR(10 g) = 0.153 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.388 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 81(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

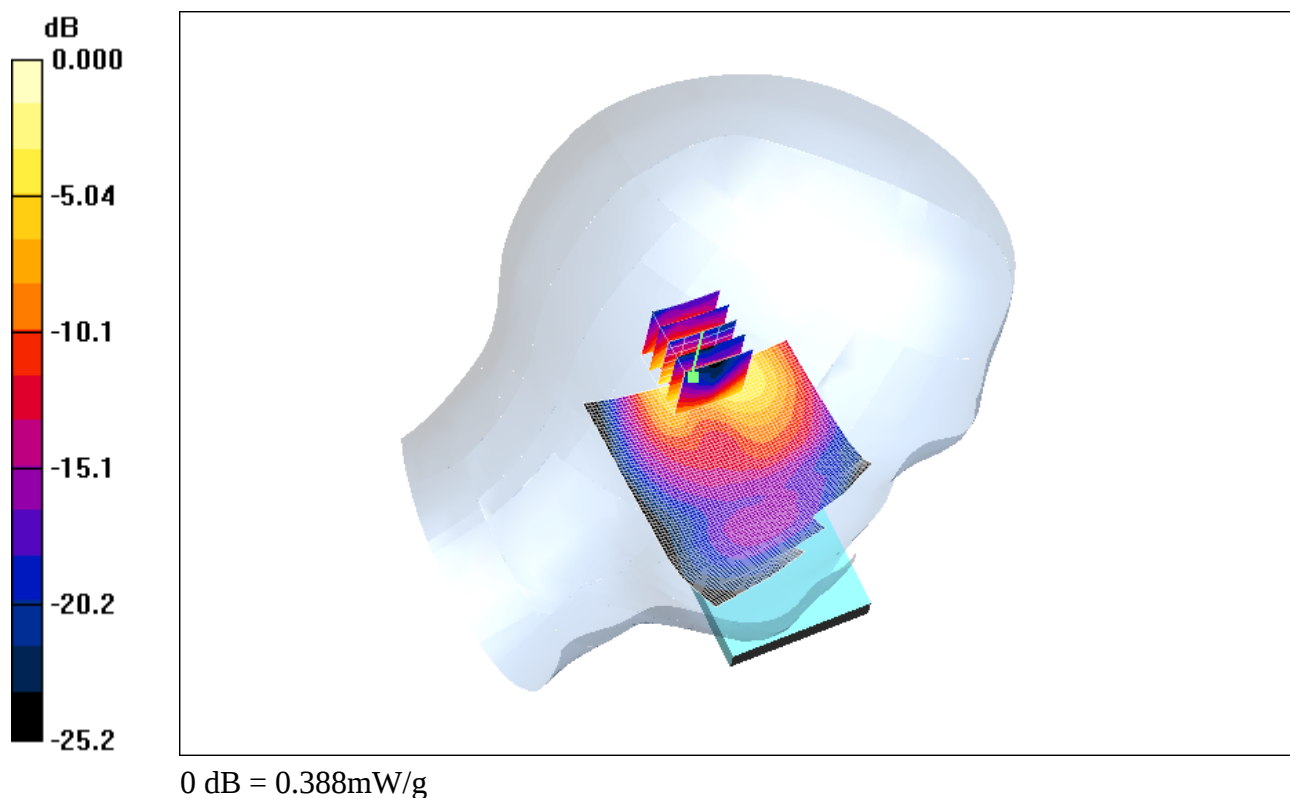

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 82(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

RDQ71UW

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 83(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 3/31/2011 10:30:32 PM, Date/Time: 3/31/2011 10:36:14 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_IV_mid_chan_amb_temp_23.5_liq_temp_2

2.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 26FF048A

Communication System: WCDMA FDD IV; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1732.6

MHz; Communication System PAR: 3.4 dB

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.21$ mho/m; $\epsilon_r = 37.811$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASYS2, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.673 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.914 V/m; Power Drift = -0.51 dB


Peak SAR (extrapolated) = 1.137 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.340 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 84(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.735 mW/g

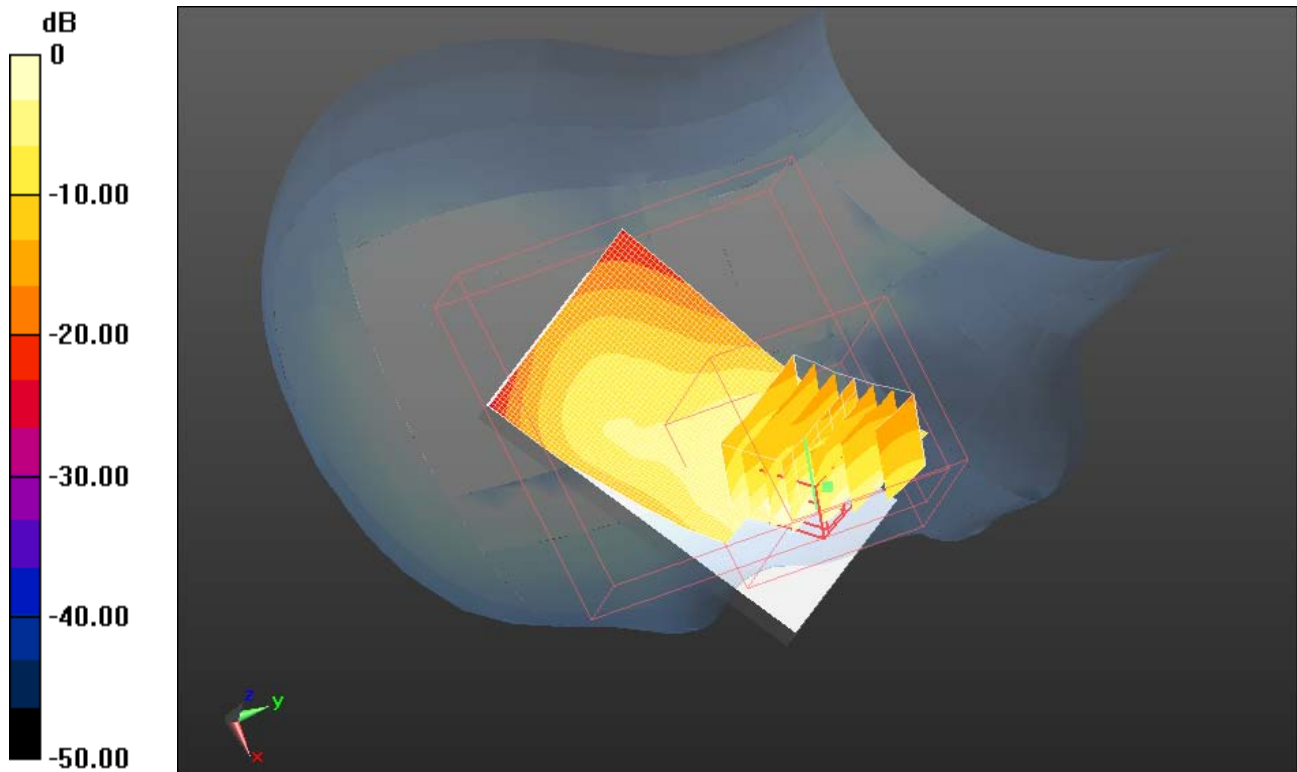

0 dB = 0.740mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 85(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 3/31/2011 10:51:33 PM, Date/Time: 3/31/2011 10:56:45 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_band_IV_mid_chan_amb_temp_23.5_liq_temper_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 26FF048A

Communication System: WCDMA FDD IV; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1732.6

MHz; Communication System PAR: 3.4 dB

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.21$ mho/m; $\epsilon_r = 37.811$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.229 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.144 V/m; Power Drift = 0.26 dB


Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.130 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 86(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.210 mW/g

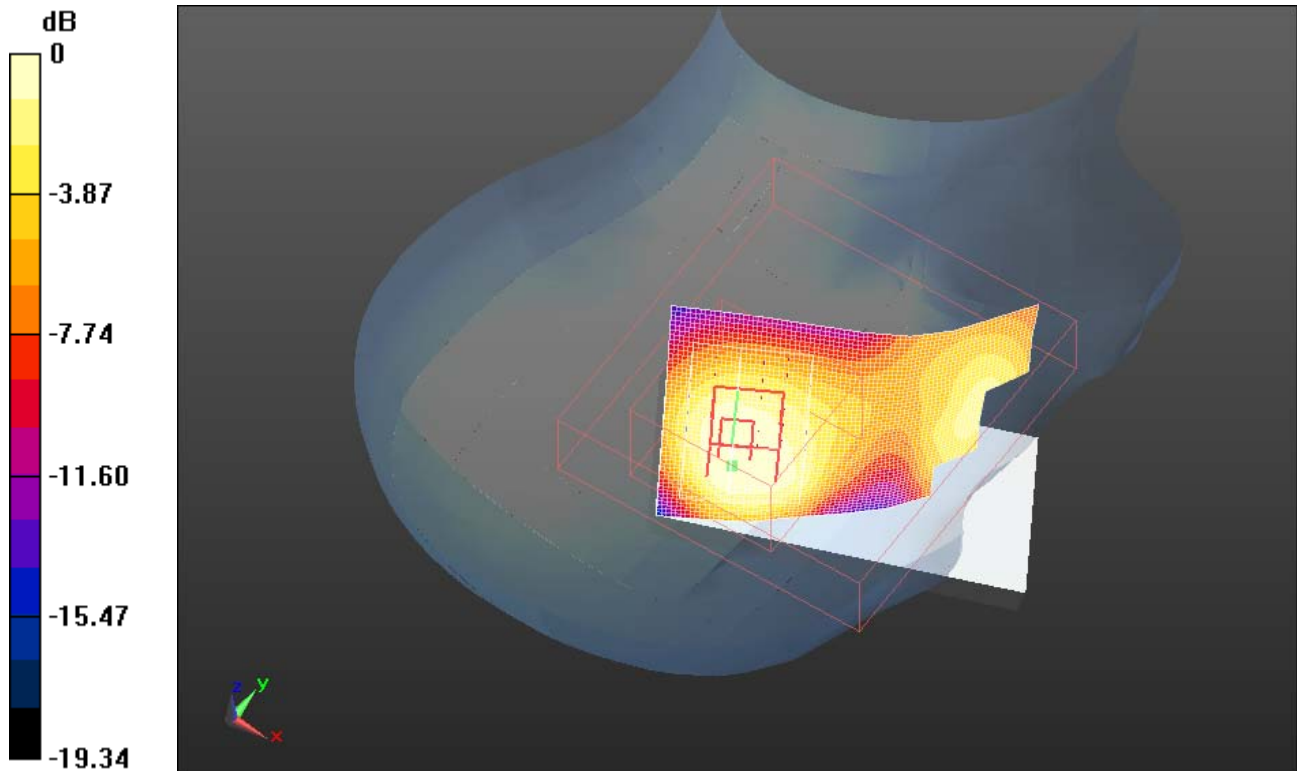

0 dB = 0.210mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report				Page 87(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW	

Date/Time: 3/31/2011 11:57:28 PM, Date/Time: 4/1/2011 12:02:12 AM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_IV_mid_chan_amb_temp_23.4_liq_temp_22
.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 26FF048A

Communication System: WCDMA FDD IV; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1732.6 MHz; Communication System PAR: 3.4 dB
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.21$ mho/m; $\epsilon_r = 37.811$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.519 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (7x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.185 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.231 mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			88(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.511 mW/g

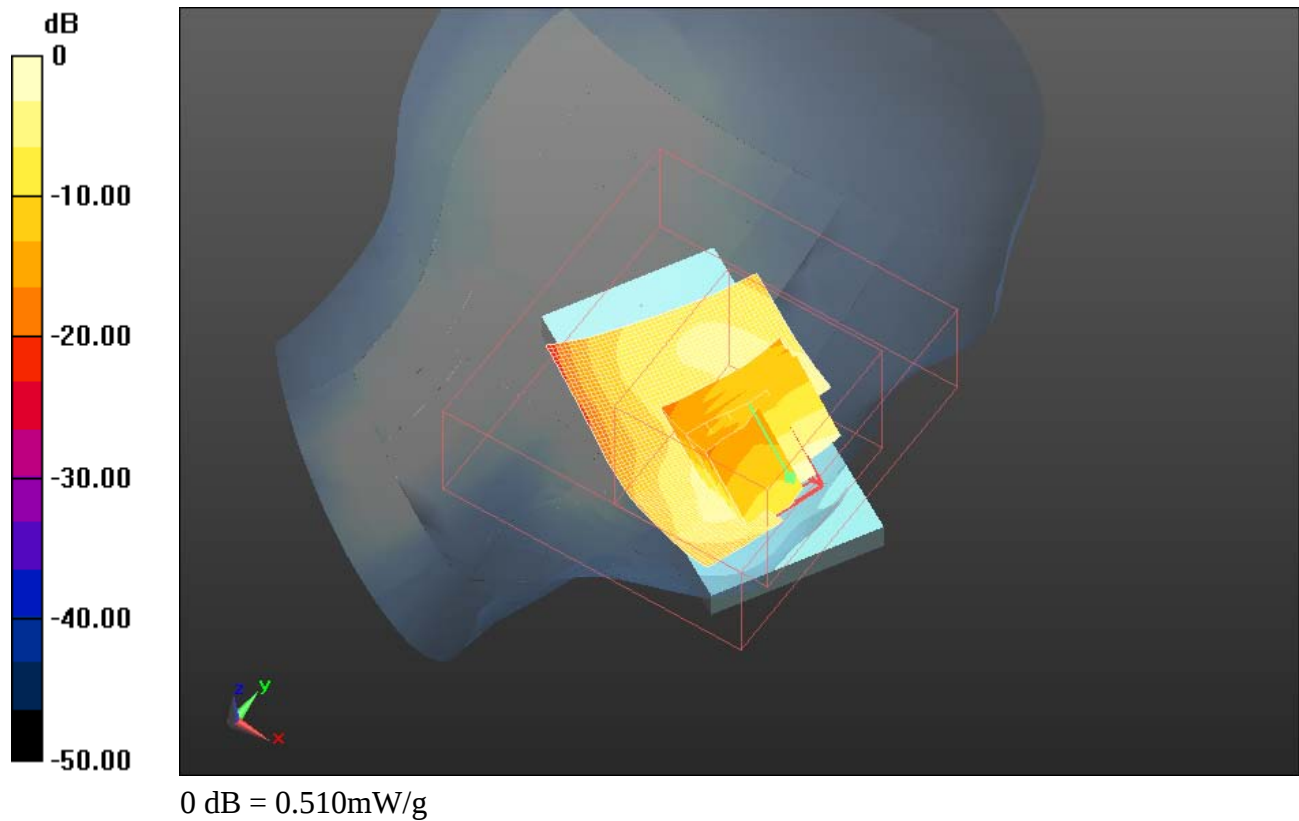

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 89(91)
Author Data Hang Wang	Dates of Test Jan 14 – June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Date/Time: 4/1/2011 12:16:50 AM, Date/Time: 4/1/2011 12:21:52 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_band_IV_mid_chan_amb_temp_23.4_liq_tem p_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 26FF048A

Communication System: WCDMA FDD IV; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1732.6 MHz; Communication System PAR: 3.4 dB
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.21$ mho/m; $\epsilon_r = 37.811$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.26, 5.26, 5.26); Calibrated: 1/13/2011
 - Modulation Compensation: **Not calibrated**
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/21/2011
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.4 (2829)

Configuration/Touch position - Mid/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.226 mW/g

Configuration/Touch position - Mid/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.194 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.122 mW/g

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			90(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.211 mW/g

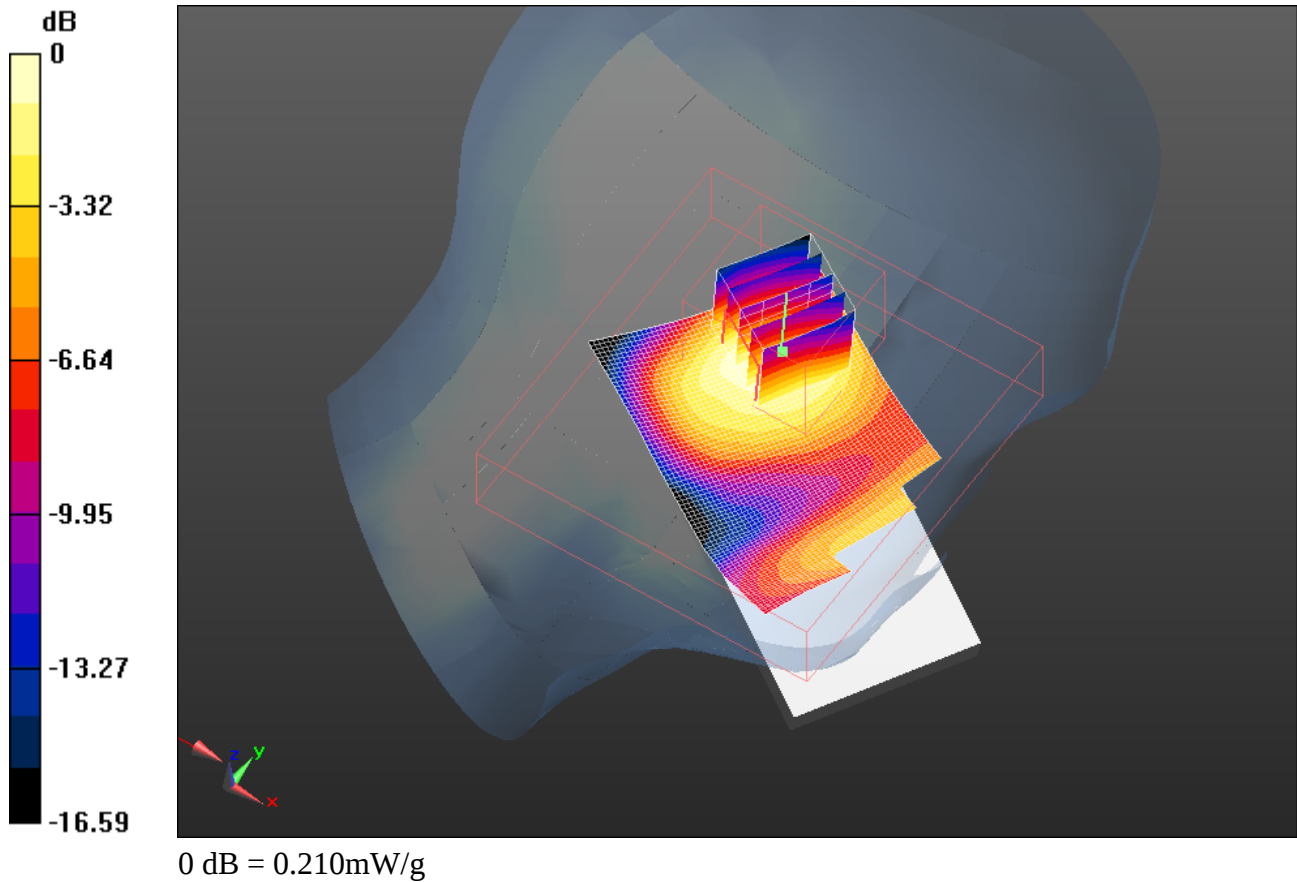

	Document Appendix B for the BlackBerry® Smartphone Model RDH71CW/RDQ71UW SAR Report			Page 91(91)
Author Data Hang Wang	Dates of Test Jan 14 –June 09, 2011	Test Report No RTS-2605-1102-05B	FCC ID: L6ARDH70CW L6ARDQ70UW	IC ID 2503A-RDH70CW 2503A-RDQ70UW

Z axis plot for the worst case head configuration:

