

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Part 15 Subpart C and E
&
Industry Canada (IC) RSS-210, RSS-GEN



A division of Research In Motion Limited

REPORT NO.: RTS-5385-1108-55

PRODUCT MODEL NO.: REC71UW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6AREC70UW
IC: 2503A-REC70UW

DATE: September 05, 2011

| | | | |
|---|--|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

Statement of Performance:

The BlackBerry® smartphone, model REC71UW, part number CER-41249-001 Rev1, and its accessories perform within the requirements of the test standards when configured and operated under RIM's operation instructions.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Testing performed by:



Nielven Olis
Regulatory Compliance Associate
Date: September 09, 2011

Documented by:



Savtej S. Sandhu
Regulatory Compliance Specialist
Date: September 09, 2011

Reviewed by:



Heng Lin
Regulatory Compliance Specialist
Date: September 12, 2011

Reviewed and Approved by:



Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance
Date: September 13, 2011

| | | |
|---|--|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

Table of Contents

| | |
|---|-----|
| A. Scope..... | 4 |
| B. Associated Documents | 4 |
| C. Product Identification..... | 4 |
| D. Support Equipment Used for the Testing of the EUT | 5 |
| E. Test Results Chart | 6 |
| F. Summary of Results..... | 8 |
| G. Compliance Test Equipment Used..... | 15 |
| APPENDIX 1 – AC CONDUCTED EMISSIONS TEST DATA/PLOTS | 16 |
| APPENDIX 2 – BLUETOOTH AND 802.11b/g/n RADIATED EMISSIONS TEST DATA | 23 |
| APPENDIX 3 – 802.11a RADIATED EMISSIONS TEST DATA | 40 |
| APPENDIX 4 – BLUETOOTH CONDUCTED EMISSIONS TEST DATA/PLOTS | 46 |
| APPENDIX 5 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS | 70 |
| APPENDIX 6 – 802.11a CONDUCTED EMISSIONS TEST DATA/PLOTS | 92 |
| APPENDIX 7 – NEAR FIELD COMMUNICATIONS TEST DATA/PLOTS | 114 |

| | | |
|---|--|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

A. Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

- o FCC CFR 47 Part 15, Subpart C, October, 2010
- o FCC CFR 47 Part 15, Subpart E, October, 2010
- o Industry Canada, RSS-210, Issue 8, December 2010, Licence-exempt Radio Apparatus
- o Industry Canada, RSS-GEN, Issue 3, December 2010, General Requirements and Information for the Certification of Radio Apparatus

B. Associated Documents

None

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at:

295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

| | |
|--|---------------------|
| RIM Testing Services EMI test facilities | |
| 305 Phillip Street | 440 Phillip Street |
| Waterloo, Ontario | Waterloo, Ontario |
| Canada, N2L 3W8 | Canada, N2L 5R9 |
| Phone: 519 888 7465 | Phone: 519 888 7465 |
| Fax: 519 888 6906 | Fax: 519 888 6906 |

The testing was performed from July 28 to August 19, 2011.

| | | | |
|---|--|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

The sample EUT included:

| SAMPLE | MODEL | CER NUMBER | PIN | SOFTWARE |
|--------|---------|--------------------|----------|---|
| 1 | REC71UW | CER-41249-001 Rev1 | 27DD7A76 | V7.0.0.285 (Platform 9.0.0.84) Bundle 1423 |
| 2 | REC71UW | CER-41249-001 Rev1 | 27DD7ADB | V7.0.0.285 (Platform 9.0.0.84) Bundle 1423 |
| 3a | REC71UW | CER-41249-001 Rev1 | 27DD79E2 | V7.0.0.285 (Platform 9.0.0.84) Bundle 1423 |
| 3b | REC71UW | CER-41249-001 Rev1 | 27DD79E2 | MFI Bundle |

AC Line Conducted Emissions testing was performed on sample 1.

Radiated Emissions testing was performed on samples 1 and 2.

Conducted Emissions testing was performed on sample 3a and 3b.

Near Field Communications testing was performed on sample 2.

BlackBerry® smartphone Accessories Tested

- 1) Alt. Fixed Blade Charger, part number HDW-24481-001 (model number PSM04A-050QRIM) with an output voltage of 5.0 volts dc.
- 2) Captive Cable Charger, part number HDW-17957-003, with an output voltage of 5.0 volts dc, 750 mA.
- 3) Premium Stereo Headset, part number HDW-15766-005, with a lead length of 1.1 metres.
- 4) Alt. 1 Stereo Headset, part number HDW-24529-001, with a lead length of 1.1 metres.
- 5) Alt. USB Data Cable, part number HDW-28109-003, 1.20 metres long.

D. Support Equipment Used for the Testing of the EUT

No support equipment used. See section G. *Compliance Test Equipment Used*.

| | | | |
|---|--|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

E. Test Results Chart

| SPECIFICATION | | TEST TYPE | Meets Requirements | TEST DATA |
|----------------------------|--------------------|--|--------------------|-----------|
| FCC CFR 47 | IC | | | APPENDIX |
| Part 15.207 | RSS-210 RSS-GEN | Conducted AC Line Emission | Pass | 1 |
| Part 15.209 Part 15.247 | RSS-210 RSS-GEN | BT Radiated Spurious Emissions | Pass | 2 |
| Part 15.209 Part 15.247 | RSS-210 RSS-GEN | BT Radiated Band Edge Compliance | Pass | 2 |
| Part 15.209 Part 15.247 | RSS-210 RSS-GEN | 802.11b/g/n Radiated Spurious Emissions | Pass | 2 |
| Part 15.209 Part 15.247 | RSS-210 RSS-GEN | 802.11b/g/n Radiated Band Edge Compliance | Pass | 2 |
| Part 15.209 Part 15.407 | RSS-210 RSS-GEN | 802.11a Radiated Spurious Emissions | Pass | 3 |
| Part 15.209 Part 15.407 | RSS-210 RSS-GEN | 802.11a Radiated Band Edge Compliance | Pass | 3 |
| Part 15.247(a) | RSS-210 | BT, 20 dB Bandwidth | Pass | 4 |
| Part 15.247(a) | RSS-210 | BT, Carrier Frequency Separation | Pass | 4 |
| Part 15.247(a) | RSS-210 | BT, Number of Hopping Frequencies | Pass | 4 |
| Part 15.247(a) | RSS-210 | BT, Time of Occupancy (Dwell Time) | Pass | 4 |
| Part 15.247(b) | RSS-210 | BT, Maximum Peak Conducted Output Power | Pass | 4 |
| Part 15.247(c) | RSS-210 | BT, Band-Edge Compliance of RF Conducted Emissions | Pass | 4 |
| Part 15.247(c) | RSS-210 | BT, Spurious RF Conducted Emissions | Pass | 4 |
| Part 15.247(b) | RSS-210 | 802.11b/g/n, 6 dB Bandwidth | Pass | 5 |
| Part 15.247(b) | RSS-210 | 802.11b/g/n, Maximum Conducted Output Power | Pass | 5 |
| Part 15.247(b) | RSS-210 | 802.11b/g/n, Band-Edge | Pass | 5 |
| Part 15.247(b) | RSS-210 | 802.11b/g/n, Peak Power Spectral Density | Pass | 5 |
| Part 15.247(b) | RSS-210 | 802.11b/g/n, Spurious RF Conducted Emissions | Pass | 5 |

| | | | |
|---|--|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

Test Results Chart cont'd

| SPECIFICATION | | TEST TYPE | Meets Requirements | TEST DATA |
|-------------------------------|--------------------|--|--------------------|-----------|
| FCC CFR 47 | IC | | | APPENDIX |
| Part 15.407 | RSS-210 | 802.11a, 6 dB Bandwidth | Pass | 6 |
| Part 15.407 | RSS-210 | 802.11a, Maximum Conducted Output Power | Pass | 6 |
| Part 15.407 | RSS-210 | 802.11a, Band-Edge | Pass | 6 |
| Part 15.407 | RSS-210 | 802.11a, Peak Power Spectral Density | Pass | 6 |
| Part 15.407 | RSS-210 | 802.11a, Spurious RF Conducted Emissions | Pass | 6 |
| Part 15.209 Part 15.225(a) | RSS-210 RSS-GEN | Near Field Communications, Radiated Emissions | Pass | 7 |
| Part 15.225(e) | RSS-210 | Near Field Communications, Occupied Bandwidth | Pass | 7 |
| Part 15.225(e) | RSS-210 | Near Field Communications, Frequency Stability | Pass | 7 |

| | | |
|---|--|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

F. Summary of Results

1) AC LINE CONDUCTED EMISSIONS

The conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16. BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.

The following test configurations were measured:

| Test Configuration | Operating Mode(s) | Charger + Accessories |
|--------------------|---------------------------------|---|
| 1 | Bluetooth Tx + Audio Playing | Alt. Fixed Blade Charger + Premium Stereo Headset + USB Cable 1.20m |
| 2 | 802.11b Tx + Video Playing | Captive Cable Charger + Alt. 1 Stereo Headset |

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15, Subpart C and IC RSS-210 limits. The sample EUT had a worst case test margin of 3.11 dB below the QP limit at 0.186 MHz and 20.63 dB below the AVE limit at 0.528 MHz with the Captive Cable Charger in Test Configuration 2.

See APPENDIX 1 for the test data.

Measurement Uncertainty ± 3.0 dB

| | | | |
|---|--|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

2) BLUETOOTH AND 802.11b/g/n RADIATED EMISSIONS

a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 25.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a semi-anechoic chamber (SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The SAC with floor absorber's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was measured in standalone configuration with Bluetooth transmitting in single frequency mode at low channel (0), middle channel (39) and high channel (78) for packet type "DH5", "2-DH5" and "3-DH5". The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart C, 15.247 and RSS-210.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 1, 6 & 11 at 1 Mbps for 802.11b mode, at 6 Mbps for 802.11g mode, and at MCS 0 for 802.11n mode. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.247 and RSS-210.

The Bluetooth harmonics were investigated up to the 10th harmonic. The worst case test margin was 4.32 dB below the accepted limit at 4803.608 MHz.

The 802.11b/g/n harmonics were investigated up to the 10th harmonic. The sample EUT emissions were in the noise floor (NF).

See APPENDIX 2 for the test data.

b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for Bluetooth and 802.11b/g/n as per the requirements of 15.247, 15.209, and RSS-210/RSS-GEN.

Measurement Uncertainty ± 4.6 dB

See APPENDIX 2 for the test data

| | | |
|---|--|---|
|  RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

3) 802.11a RADIATED EMISSIONS

a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 40.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a semi-anechoic chamber (SAC) with floor absorbers above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The SAC with floor absorber's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 36, 48, 56, 100, 140 and 157 at 6 Mbps for 802.11a mode. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart E, 15.407 and RSS-210/RSS-GEN.

The 802.11a harmonics were investigated up to the 10th harmonic. The sample EUT emissions were in the noise floor (NF).

See APPENDIX 3 for the test data.

b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for 802.11a as per the requirements of 15.407, 15.209 and RSS-210/ RSS-GEN.

See APPENDIX 3 for the test data

Measurement Uncertainty ±4.6 dB

| | | |
|---|--|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

4) BLUETOOTH RF CONDUCTED EMISSIONS

The Bluetooth conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 20 dB Bandwidth

The BlackBerry® smartphone met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR. The worst case 20 dB Bandwidth was 0.927 MHz for channels 0 and 78 in normal data rate mode and 1.313 MHz for channel 39 in EDR mode.

See APPENDIX 4 for the test data.

b) Carrier Frequency Separation

The BlackBerry® smartphone met the requirements of the carrier frequency separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. The result includes both normal data rate and EDR.

See APPENDIX 4 for the test data.

c) Number of Hopping Frequencies

The BlackBerry® smartphone met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. The number of hopping channels measured was 79.

See APPENDIX 4 for the test data.

d) Time of Occupancy (Dwell Time)

The EUT met the requirements of the dwell time as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in DH1, DH3 and DH5 modes. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements.

See APPENDIX 4 for the test data.

e) Maximum Peak Conducted Output Power

The BlackBerry® smartphone met the requirements of the maximum peak conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR. The worst case Conducted Output Power level was 8.50 dBm (0.00708 W) for Channel 78 in normal data rate mode and 6.17 dBm (0.00414 W) for channel 78 in EDR mode.

See APPENDIX 4 for the test data.

| | | | |
|---|--|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

f) Band-Edge Compliance of RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the band-edge compliance of RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 0 and 78 were measured in frequency hopping (Euro/US) mode and single frequency mode. The result includes both normal data rate and EDR.

See APPENDIX 4 for the test data.

g) Spurious RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 10 MHz to 26 GHz. Low channel (0), middle channel (39) and high channel (78) were measured in single frequency mode and frequency hopping (Euro/US) mode. The result includes both normal data rate and EDR.

See APPENDIX 4 for the test data.

5) 802.11b/g/n RF CONDUCTED EMISSIONS

The 802.11b/g/n conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 6dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. The worst case 6 dB Bandwidth was 11.17 MHz for channel 6 in 802.11b mode, 16.63 MHz for channels 1 and 11 in 802.11g mode, and 17.80 MHz for channel 1 in 802.11n mode.

See APPENDIX 5 for the test data.

b) Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. The worst case Conducted Output Power level was 18.84 dBm (76.56 mW) for channel 11 in 802.11b mode, 17.32 dBm (53.95 mW) for channel 6 in 802.11g mode, and 17.33 dBm (54.08 mW) for channel 6 in 802.11n mode.

See APPENDIX 5 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.247(b) and RSS-210. Low channel (1) and high channel (11) were measured.

See APPENDIX 5 for the test data.

| | | | |
|---|--|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured.

See APPENDIX 5 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 30 MHz to 26 GHz. Low channel (1), middle channel (6) and high channel (11) were measured.

See APPENDIX 5 for the test data.

6) 802.11a RF CONDUCTED EMISSIONS

The 802.11a conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart E.

a) 6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157 and 161 were measured. The worst case 6 dB Bandwidth was 16.53 MHz for channel 44, 100, 140, 149, 157 and 161 in 802.11a mode.

See APPENDIX 6 for the test data.

b) Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157 and 161 were measured. The worst case Conducted Output Power level was 16.54 dBm (45.08 mW) for channel 149 in 802.11a mode.

See APPENDIX 6 for the test data

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 36, 48, 52, 64, 149 and 161 were measured.

See APPENDIX 6 for the test data.

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 149, 157 and 161 were measured.

See APPENDIX 6 for the test data.

| | | |
|---|--|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. The frequency range measured was 30 MHz to 40 GHz. Channels 44, 60 and 157 were measured.

See APPENDIX 6 for the test data.

7) Near Field Communications (NFC)

The Near Field Communications emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) Radiated Emissions

The BlackBerry® smartphone was measured in standalone configuration transmitting at 13.56 MHz. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.209, 15.225(a) and RSS-210/RSS-GEN.

The NFC emissions were investigated from 9 kHz to 1 GHz. The sample EUT has a field strength measurement of 58.50 dBuV/m.

See APPENDIX 7 for the test data.

b) Occupied Bandwidth

The EUT met the requirements of the Occupied bandwidth as per 47 CFR 15 C and RSS-210. The EUT was measured in test mode with modulation on and transmitting at 13.56 MHz.

See APPENDIX 7 for the test data.

c) Frequency Stability

The EUT met the requirements of the Frequency Stability as per 47 CFR 15.225(e) and RSS-210. The EUT was measured in test mode with modulation on and transmitting at 13.56 MHz.

See APPENDIX 7 for the test data.

**Test Report No.**
RTS-5385-1108-55**Dates of Test**
July 28 to August 19, 2011**FCC ID:** L6AREC70UW
IC: 2503A-REC70UW

G. Compliance Test Equipment Used

| <u>UNIT</u> | <u>MANUFACTURER</u> | <u>MODEL</u> | <u>SERIAL NUMBER</u> | <u>CAL DUE DATE</u> (YY MM DD) | <u>USE</u> |
|-----------------------|---------------------|--------------|----------------------|-----------------------------------|------------------------------------|
| EMI Test Receiver | Rohde & Schwarz | ESIB 40 | 100255 | 11-11-28 | Conducted/Radiated Emissions |
| EMI Test Receiver | Rohde & Schwarz | ESU 40 | 100162 | 11-11-29 | Conducted/Radiated Emissions |
| Hybrid Log Antenna | EMC Automation | HLP-3003C | 017401 | 12-01-13 | Radiated Emissions |
| Horn Antenna | CMT | LHA 0180 | R52734-001 | 12-01-21 | Radiated Emissions |
| Horn Antenna | ETS-Lindgren | 3117 | 47563 | 13-08-04 | Radiated Emissions |
| Preamplifier | Rohde & Schwarz | TS-ANA4-SP | 001 | 11-12-01 | Radiated Emissions |
| Preamplifier | Sonoma | 310N/11909A | 185831 | 11-11-14 | Radiated Emissions |
| Preamplifier | Rohde & Schwarz | TS-ANA-SP | 001 | 11-12-01 | Radiated Emissions |
| L.I.S.N. | Rohde & Schwarz | ENV216 | 100060 | 11-12-10 | Conducted Emissions |
| Environment Monitor | Omega | iTHX-SD | 0380561 | 11-10-13 | Radiated Emissions |
| EMC Analyzer | Agilent | E7405A | US40240226 | 11-12-10 | Radiated Emissions |
| Spectrum Analyzer | HP | 8563E | 3745A08112 | 11-09-30 | RF Conducted Emissions |
| DC Power Supply | HP | 6632B | US37472178 | 11-08-30 | RF Conducted Emissions |
| Environment Monitor | Omega | iTHX-SD | 0340060 | 11-10-13 | RF Conducted Emissions |
| Temperature Probe | Control Company | 23609-234 | 21352860 | 11-09-14 | Frequency Stability |
| Environmental Chamber | Test Equity | 107 | 0900246 | N/R | Frequency Stability |
| Bluetooth Tester | Rohde & Schwarz | CBT | 119549 | 11-12-08 | RF Conducted Emissions |
| Bluetooth Tester | Rohde & Schwarz | CBT35 | 100368 | 11-11-27 | Radiated Emissions |
| Bluetooth Tester | Rohde & Schwarz | CBT35 | 100370 | 11-11-29 | Radiated Emissions |
| Power Meter | Agilent | N1911A | MY45100951 | 11-08-30 | RF Conducted / Frequency Stability |
| Power Sensor | Agilent | N1921A | MY45241383 | 11-09-01 | RF Conducted / Frequency Stability |
| Digital Multimeter | Hewlett Packard | 34401A | US36042324 | 11-10-28 | Conducted/Radiated Emissions |
| Environment Monitor | Omega | iTHX-SD | 0380567 | 11-10-13 | Radiated Emissions |
| Active Loop Antenna | ETS-Lindgren | 6507 | 00126538 | 13-08-09 | Radiated Emissions |

| | | |
|---|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 1 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

APPENDIX 1 – AC CONDUCTED EMISSIONS TEST DATA/PLOTS

| | | | |
|---|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 1 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

AC Conducted Emission Test Results

The following tests were performed by Adam Rusinek.

Test Configuration 1

The BlackBerry® smartphone was tested on August 12, 2011.

The environmental test conditions were: Temperature: 25 °C
Relative Humidity: 42 %

| Frequency (MHz) | Line | Reading (QP) (dB μ V) | Correction Factor (dB) | Corrected Reading (QP) (dB) | Limit (QP) (dB μ V) | Margin (QP) Limits (dB) |
|--------------------|------|---------------------------------|------------------------------|--------------------------------------|-------------------------------|----------------------------------|
| 0.150 | L1 | 49.60 | 11.20 | 60.80 | 66.00 | -5.20 |
| 0.150 | N | 43.21 | 11.23 | 54.44 | 66.00 | -11.56 |
| 0.164 | N | 42.37 | 11.14 | 53.51 | 65.30 | -11.79 |
| 0.173 | N | 41.09 | 11.08 | 52.17 | 64.80 | -12.63 |
| 0.182 | L1 | 41.84 | 10.99 | 52.82 | 64.40 | -11.58 |
| 0.204 | N | 37.90 | 10.85 | 48.75 | 63.40 | -14.65 |
| 0.213 | N | 36.84 | 10.79 | 47.63 | 63.10 | -15.47 |
| 0.218 | L1 | 41.89 | 10.73 | 52.63 | 62.90 | -10.27 |
| 0.240 | L1 | 41.81 | 10.58 | 52.38 | 62.10 | -9.72 |
| 0.245 | N | 34.87 | 10.57 | 45.44 | 61.90 | -16.46 |
| 0.285 | L1 | 36.53 | 10.26 | 46.79 | 60.70 | -13.91 |
| 0.465 | L1 | 32.48 | 9.93 | 42.41 | 56.60 | -14.19 |
| 0.555 | L1 | 24.95 | 9.88 | 34.83 | 56.00 | -21.17 |
| 10.095 | N | 28.75 | 9.98 | 38.73 | 60.00 | -21.27 |
| 11.585 | L1 | 33.85 | 10.00 | 43.86 | 60.00 | -16.14 |



Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

AC Conducted Emissions Test Results cont'd

Test Configuration 1

| Frequency (MHz) | Line | Reading (AV) (dB μ V) | Correction Factor (dB) | Corrected Reading (AV) (dB) | Limit (AV) (dB μ V) | Margin (AV) Limits (dB) |
|--------------------|------|---------------------------------|------------------------------|--------------------------------------|-------------------------------|----------------------------------|
| 0.150 | L1 | 27.03 | 11.20 | 38.24 | 56.00 | -17.76 |
| 0.150 | N | 20.93 | 11.23 | 32.17 | 56.00 | -23.83 |
| 0.164 | N | 20.03 | 11.14 | 31.17 | 55.30 | -24.13 |
| 0.218 | L1 | 18.16 | 10.73 | 28.90 | 52.90 | -24.00 |
| 0.240 | L1 | 19.89 | 10.58 | 30.47 | 52.10 | -21.63 |
| 0.465 | L1 | 19.35 | 9.93 | 29.28 | 46.60 | -17.32 |
| 10.095 | N | 17.69 | 9.98 | 27.67 | 50.00 | -22.33 |
| 11.585 | L1 | 23.26 | 10.00 | 33.26 | 50.00 | -16.74 |

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak and the average detectors.

See figure 1-1 and figure 1-2 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

AC Conducted Emissions Test Graphs

Test Configuration 1

Figure 1-1: L1 lines


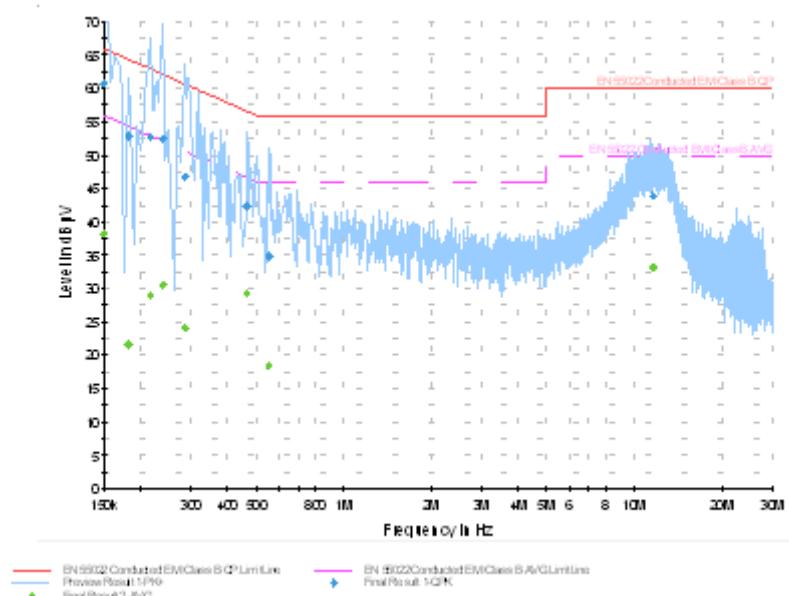


Figure 1-2: N Lines



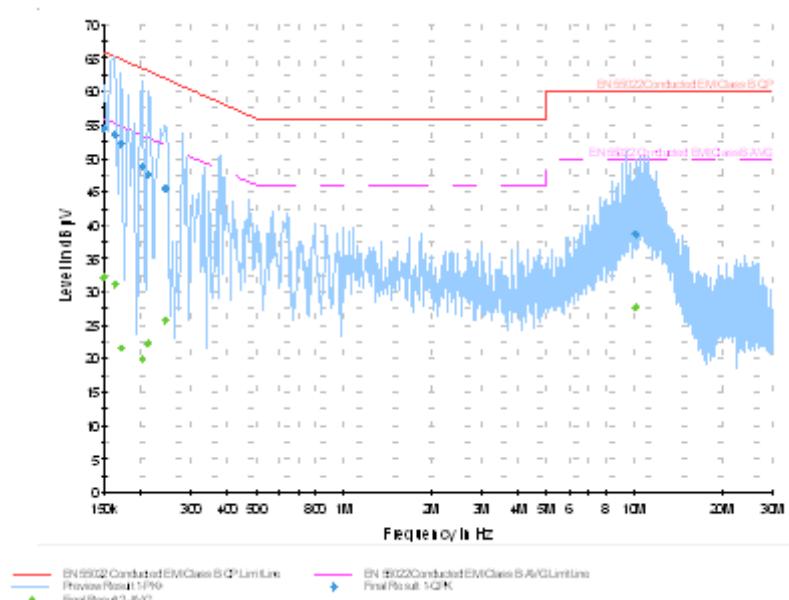

EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 1

Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

AC Conducted Emission Test Results

Test Configuration 2

The BlackBerry® smartphone was tested on August 22, 2011.

The environmental test conditions were: Temperature: 25 °C
Relative Humidity: 42 %

| Frequency (MHz) | Line | Reading (QP) (dB μ V) | Correction Factor (dB) | Corrected Reading (QP) (dB) | Limit (QP) (dB μ V) | Margin (QP) Limits (dB) |
|--------------------|------|---------------------------------|------------------------------|--------------------------------------|-------------------------------|----------------------------------|
| 0.155 | L1 | 42.44 | 11.17 | 53.61 | 65.80 | -12.19 |
| 0.159 | N | 44.41 | 11.17 | 55.58 | 65.50 | -9.92 |
| 0.164 | L1 | 41.66 | 11.11 | 52.77 | 65.30 | -12.53 |
| 0.168 | N | 43.20 | 11.11 | 54.31 | 65.10 | -10.79 |
| 0.177 | L1 | 44.63 | 11.02 | 55.65 | 64.60 | -8.95 |
| 0.177 | N | 42.53 | 11.05 | 53.57 | 64.60 | -11.03 |
| 0.186 | L1 | 50.14 | 10.95 | 61.09 | 64.20 | -3.11 |
| 0.231 | N | 38.68 | 10.66 | 49.34 | 62.40 | -13.06 |
| 0.276 | N | 36.08 | 10.34 | 46.43 | 60.90 | -14.47 |
| 0.321 | L1 | 31.84 | 10.13 | 41.97 | 59.70 | -17.73 |
| 0.528 | N | 26.43 | 9.90 | 36.33 | 56.00 | -19.67 |
| 1.203 | L1 | 27.95 | 9.80 | 37.75 | 56.00 | -18.25 |
| 12.048 | L1 | 26.25 | 10.02 | 36.27 | 60.00 | -23.73 |

| | | | | | | |
|--|---|--|--|--|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 1 | | | | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | | | | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

AC Conducted Emissions Test Results cont'd

Test Configuration 2

| Frequency (MHz) | Line | Reading (AV) (dB μ V) | Correction Factor (dB) | Corrected Reading (AV) (dB) | Limit (AV) (dB μ V) | Margin (AV) Limits (dB) |
|--------------------|------|---------------------------------|------------------------------|--------------------------------------|-------------------------------|----------------------------------|
| 0.159 | N | 21.64 | 11.17 | 32.82 | 55.50 | -22.68 |
| 0.168 | N | 19.53 | 11.11 | 30.64 | 55.10 | -24.46 |
| 0.177 | L1 | 22.87 | 11.02 | 33.89 | 54.60 | -20.71 |
| 0.186 | L1 | 20.76 | 10.95 | 31.71 | 54.20 | -22.49 |
| 0.321 | L1 | 15.40 | 10.13 | 25.53 | 49.70 | -24.17 |
| 0.528 | N | 15.46 | 9.90 | 25.37 | 46.00 | -20.63 |
| 1.203 | L1 | 14.42 | 9.80 | 24.23 | 46.00 | -21.78 |
| 12.048 | L1 | 16.48 | 10.02 | 26.51 | 50.00 | -23.50 |

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak and the average detectors.

See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

AC Conducted Emissions Test Graphs

Test Configuration 2

Figure 1-3: L1 lines


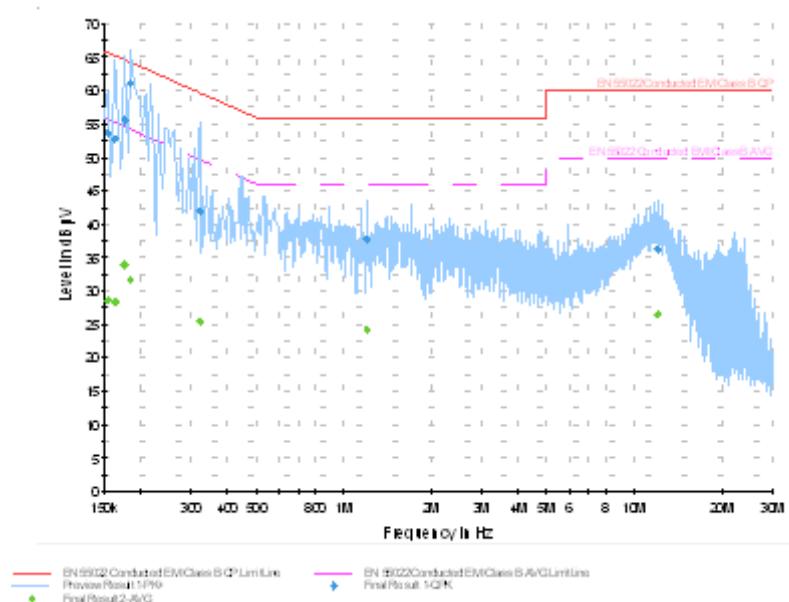


Figure 1-4: N Lines

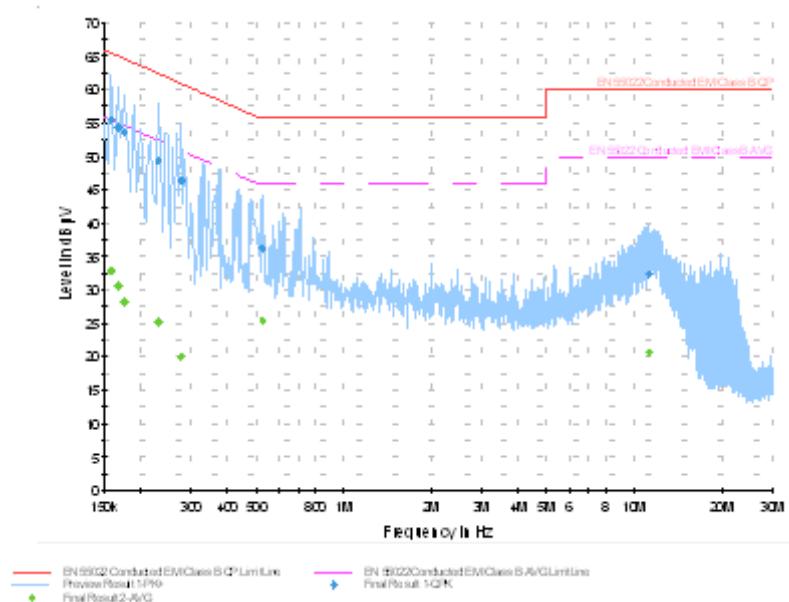

| | | |
|---|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 2 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

APPENDIX 2 – BLUETOOTH AND 802.11b/g/n RADIATED EMISSIONS TEST DATA

| | | | |
|---|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 2 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

Radiated Emissions Test Results
Bluetooth Band

Date of Test: July 28, 2011

Measurements were performed by Nielven Olis.

The environmental test conditions were: Temperature: 23 °C
Relative Humidity: 41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone in Bluetooth Tx mode was in vertical upside down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types “DH5”, “2-DH5” and “3-DH5”.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: July 27, August 02 and 18, 2011

Measurements were performed by Shuo Wang.

The environmental test conditions were: Temperature: 25 - 26 °C
Relative Humidity: 36 - 41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone in Bluetooth Tx mode was in vertical upside down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types “DH5”, “2-DH5” and “3-DH5”.



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 2

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Radiated Emissions Test Results cont'd
Bluetooth Band cont'd

| Frequency (MHz) | Channel | Packet Type | Antenna | | Test Angle (Deg.) | RBW / VBW | Measured Level (dB μ V) | Correction Factor for preamp/antenna/ cables/ filter (dB/m) | Field Strength Level (reading+corr) (dB μ V/m) | Limit @ 3.0 m (dB μ V/m) | Test Margin (dB) |
|--------------------|---------|----------------|---------------|--------------------|-------------------------|---------------|-----------------------------------|---|---|------------------------------------|------------------------|
| | | | Pol. (V/H) | Height (metres) | | | | | | | |
| 4803.608 | 0 | DH5 | V | 4.00 | 126.00 | 1MHz/ 3MHz | 42.23 | 17.62 | 59.85 | 74.00 | -14.15 |
| 4803.608 | 0 | DH5 | V | 4.00 | 126.00 | 1MHz/ 10Hz | 32.06 | 17.62 | 49.68 | 54.00 | -4.32 |
| 9607.496 | 0 | DH5 | H | 2.07 | 106.00 | 1MHz/ 3MHz | 36.10 | 19.67 | 55.77 | 74.00 | -18.23 |
| 9607.496 | 0 | DH5 | H | 2.07 | 106.00 | 1MHz/ 10Hz | 24.25 | 19.67 | 43.92 | 54.00 | -10.08 |
| 12009.272 | 0 | DH5 | H | 2.45 | 149.00 | 1MHz/ 3MHz | 36.27 | 23.65 | 59.92 | 74.00 | -14.08 |
| 12009.272 | 0 | DH5 | H | 2.45 | 149.00 | 1MHz/ 10Hz | 22.71 | 23.65 | 46.36 | 54.00 | -7.64 |
| 19214.816 | 0 | DH5 | H | 2.83 | 148.00 | 1MHz/ 3MHz | 40.72 | 14.73 | 55.45 | 74.00 | -18.55 |
| 19214.816 | 0 | DH5 | H | 2.83 | 148.00 | 1MHz/ 10Hz | 29.42 | 14.73 | 44.15 | 54.00 | -9.85 |
| 24019.088 | 0 | DH5 | H | 4.00 | 84.00 | 1MHz/ 3MHz | 38.19 | 18.42 | 56.61 | 74.00 | -17.39 |
| 24019.088 | 0 | DH5 | H | 4.00 | 84.00 | 1MHz/ 10Hz | 25.48 | 18.42 | 43.90 | 54.00 | -10.10 |
| 19214.880 | 0 | 2DH5 | H | 2.25 | 140.00 | 1MHz/ 3MHz | 41.06 | 14.73 | 55.79 | 74.00 | -18.21 |
| 19214.880 | 0 | 2DH5 | H | 2.25 | 140.00 | 1MHz/ 10Hz | 27.67 | 14.73 | 44.61 | 54.00 | -9.39 |
| 24021.448 | 0 | 2DH5 | V | 1.14 | 100.00 | 1MHz/ 3MHz | 38.86 | 18.41 | 57.27 | 74.00 | -16.73 |
| 24021.448 | 0 | 2DH5 | V | 1.14 | 100.00 | 1MHz/ 10Hz | 30.18 | 18.41 | 48.59 | 54.00 | -5.41 |
| 19217.200 | 0 | 3DH5 | V | 1.19 | 141.00 | 1MHz/ 3MHz | 38.64 | 14.73 | 53.37 | 74.00 | -20.63 |
| 19217.200 | 0 | 3DH5 | V | 1.19 | 141.00 | 1MHz/ 10Hz | 28.70 | 14.73 | 43.43 | 54.00 | -10.57 |
| 24022.206 | 0 | 3DH5 | V | 1.17 | 92.00 | 1MHz/ 3MHz | 33.95 | 18.41 | 52.36 | 74.00 | -21.64 |
| 24022.206 | 0 | 3DH5 | V | 1.17 | 92.00 | 1MHz/ 10Hz | 26.20 | 18.41 | 44.61 | 54.00 | -9.39 |
| 4881.368 | 39 | DH5 | V | 2.05 | 155.00 | 1MHz/ 3MHz | 37.38 | 17.77 | 55.15 | 74.00 | -18.85 |
| 4881.368 | 39 | DH5 | V | 2.05 | 155.00 | 1MHz/ 10Hz | 28.22 | 17.77 | 45.99 | 54.00 | -8.01 |



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 2

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Radiated Emissions Test Results cont'd
Bluetooth Band cont'd

| Frequency (MHz) | Channel | Packet Type | Antenna | | Test Angle (Deg.) | RBW / VBW | Measured Level (dB μ V) | Correction Factor for preamp/antenna/ cables/ filter (dB/m) | Field Strength Level (reading+corr) (dB μ V/m) | Limit @ 3.0 m (dB μ V/m) | Test Margin (dB) |
|--------------------|---------|----------------|---------------|--------------------|-------------------------|---------------|-----------------------------------|---|---|------------------------------------|------------------------|
| | | | Pol. (V/H) | Height (metres) | | | | | | | |
| 7322.456 | 39 | DH5 | V | 1.36 | 130.00 | 1MHz/ 3MHz | 37.15 | 16.19 | 53.34 | 74.00 | -20.66 |
| 7322.456 | 39 | DH5 | V | 1.36 | 130.00 | 1MHz/ 10Hz | 24.72 | 16.19 | 40.91 | 54.00 | -13.09 |
| 9764.704 | 39 | DH5 | H | 2.01 | 106.00 | 1MHz/ 3MHz | 38.42 | 19.39 | 57.81 | 74.00 | -16.19 |
| 9764.704 | 39 | DH5 | H | 2.01 | 106.00 | 1MHz/ 10Hz | 26.22 | 19.39 | 45.61 | 54.00 | -8.39 |
| 12206.088 | 39 | DH5 | H | 1.82 | 60.00 | 1MHz/ 3MHz | 35.47 | 25.22 | 60.69 | 74.00 | -13.31 |
| 12206.088 | 39 | DH5 | H | 1.82 | 60.00 | 1MHz/ 10Hz | 23.22 | 25.22 | 48.44 | 54.00 | -5.56 |
| 14645.152 | 39 | DH5 | H | 2.18 | 99.00 | 1MHz/ 3MHz | 34.60 | 26.88 | 61.48 | 74.00 | -12.52 |
| 14645.152 | 39 | DH5 | H | 2.18 | 99.00 | 1MHz/ 10Hz | 20.05 | 26.88 | 46.93 | 54.00 | -7.07 |
| 24408.324 | 39 | DH5 | V | 2.07 | 179.00 | 1MHz/ 3MHz | 36.77 | 18.66 | 55.43 | 74.00 | -18.57 |
| 24408.324 | 39 | DH5 | V | 2.07 | 179.00 | 1MHz/ 10Hz | 27.88 | 18.66 | 46.54 | 54.00 | -7.46 |
| 7323.440 | 39 | 2DH5 | V | 1.27 | 99.00 | 1MHz/ 3MHz | 35.93 | 16.17 | 52.10 | 74.00 | -21.90 |
| 7323.440 | 39 | 2DH5 | V | 1.27 | 99.00 | 1MHz/ 10Hz | 23.49 | 16.17 | 39.66 | 54.00 | -14.34 |
| 9763.616 | 39 | 2DH5 | H | 1.99 | 116.00 | 1MHz/ 3MHz | 34.88 | 19.39 | 54.27 | 74.00 | -19.73 |
| 9763.616 | 39 | 2DH5 | H | 1.99 | 116.00 | 1MHz/ 10Hz | 21.87 | 19.39 | 41.26 | 54.00 | -12.74 |
| 12204.328 | 39 | 2DH5 | H | 1.16 | 89.00 | 1MHz/ 3MHz | 33.16 | 25.21 | 58.37 | 74.00 | -15.63 |
| 12204.328 | 39 | 2DH5 | H | 1.16 | 89.00 | 1MHz/ 10Hz | 21.70 | 25.21 | 46.91 | 54.00 | -7.09 |
| 24411.262 | 39 | 2DH5 | V | 2.17 | 165.00 | 1MHz/ 3MHz | 34.26 | 18.67 | 52.93 | 74.00 | -21.07 |
| 24411.262 | 39 | 2DH5 | V | 2.17 | 165.00 | 1MHz/ 10Hz | 26.74 | 18.67 | 45.41 | 54.00 | -8.59 |
| 7322.832 | 39 | 3DH5 | V | 1.17 | 144.00 | 1MHz/ 3MHz | 33.97 | 16.18 | 50.15 | 74.00 | -23.85 |
| 7322.832 | 39 | 3DH5 | V | 1.17 | 144.00 | 1MHz/ 10Hz | 21.91 | 16.18 | 38.09 | 54.00 | -15.91 |



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 2

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Radiated Emissions Test Results cont'd
Bluetooth Band cont'd

| Frequency (MHz) | Channel | Packet Type | Antenna | | Test Angle (Deg.) | RBW / VBW | Measured Level (dB μ V) | Correction Factor for preamp/antenna/ cables/ filter (dB/m) | Field Strength Level (reading+corr) (dB μ V/m) | Limit @ 3.0 m (dB μ V/m) | Test Margin (dB) |
|--------------------|---------|----------------|---------------|--------------------|-------------------------|---------------|-----------------------------------|---|---|------------------------------------|------------------------|
| | | | Pol. (V/H) | Height (metres) | | | | | | | |
| 12204.008 | 39 | 3DH5 | H | 2.46 | 88.00 | 1MHz/ 3MHz | 33.29 | 25.21 | 58.50 | 74.00 | -15.50 |
| 12204.008 | 39 | 3DH5 | H | 2.46 | 88.00 | 1MHz/ 10Hz | 20.52 | 25.21 | 45.73 | 54.00 | -8.27 |
| 4959.648 | 78 | DH5 | V | 4.00 | 126.00 | 1MHz/ 3MHz | 40.00 | 18.79 | 58.79 | 74.00 | -15.21 |
| 4959.648 | 78 | DH5 | V | 4.00 | 126.00 | 1MHz/ 10Hz | 30.18 | 18.79 | 48.97 | 54.00 | -5.03 |
| 7439.480 | 78 | DH5 | V | 1.29 | 105.00 | 1MHz/ 3MHz | 40.08 | 16.21 | 56.29 | 74.00 | -17.71 |
| 7439.480 | 78 | DH5 | V | 1.29 | 105.00 | 1MHz/ 10Hz | 29.27 | 16.21 | 45.48 | 54.00 | -8.52 |
| 9919.736 | 78 | DH5 | H | 1.86 | 141.00 | 1MHz/ 3MHz | 37.05 | 20.43 | 57.48 | 74.00 | -16.52 |
| 9919.736 | 78 | DH5 | H | 1.86 | 141.00 | 1MHz/ 10Hz | 24.93 | 20.43 | 45.36 | 54.00 | -8.64 |
| 12400.784 | 78 | DH5 | H | 2.50 | 108.00 | 1MHz/ 3MHz | 37.74 | 24.02 | 61.76 | 74.00 | -12.24 |
| 12400.784 | 78 | DH5 | H | 2.50 | 108.00 | 1MHz/ 10Hz | 25.53 | 24.02 | 49.55 | 54.00 | -4.45 |
| 4960.600 | 78 | 2DH5 | V | 1.92 | 120.00 | 1MHz/ 3MHz | 38.65 | 18.81 | 57.46 | 74.00 | -16.54 |
| 4960.600 | 78 | 2DH5 | V | 1.92 | 120.00 | 1MHz/ 10Hz | 27.87 | 18.81 | 46.68 | 54.00 | -7.32 |
| 7440.296 | 78 | 2DH5 | V | 1.30 | 106.00 | 1MHz/ 3MHz | 37.45 | 16.21 | 53.66 | 74.00 | -20.34 |
| 7440.296 | 78 | 2DH5 | V | 1.30 | 106.00 | 1MHz/ 10Hz | 24.01 | 16.21 | 40.22 | 54.00 | -13.78 |
| 9919.752 | 78 | 2DH5 | V | 2.94 | 186.00 | 1MHz/ 3MHz | 32.62 | 20.43 | 53.05 | 74.00 | -20.95 |
| 9919.752 | 78 | 2DH5 | V | 2.94 | 186.00 | 1MHz/ 10Hz | 21.64 | 20.43 | 42.07 | 54.00 | -11.93 |
| 12400.576 | 78 | 2DH5 | H | 2.49 | 106.00 | 1MHz/ 3MHz | 35.62 | 24.02 | 59.64 | 74.00 | -14.36 |
| 12400.576 | 78 | 2DH5 | H | 2.49 | 106.00 | 1MHz/ 10Hz | 22.59 | 24.02 | 46.61 | 54.00 | -7.39 |
| 4960.024 | 78 | 3DH5 | V | 1.75 | 138.00 | 1MHz/ 3MHz | 39.19 | 18.80 | 57.99 | 74.00 | -16.01 |
| 4960.024 | 78 | 3DH5 | V | 1.75 | 138.00 | 1MHz/ 10Hz | 26.48 | 18.80 | 45.28 | 54.00 | -8.72 |

All other emissions had a test margin of greater than 25.0 dB.

| | | | | | | | | | |
|--|---|--|--|--|--|--|--|---|--|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 2 | | | | | | | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | | | | | | | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

Band-Edge Compliance of RF Radiated Emissions Test Results
Bluetooth Band

Date of test: August 15, 2011

Measurements were performed by Nielven Olis.

The environmental test conditions were: Temperature: 23 ° C
Relative Humidity: 41 %

The BlackBerry® smartphone was in standalone, vertical position and pattern type “Static PBRS” in “DH5”, “2-DH5” and “3-DH5” modulation during the measurements.

The test distance was 3.0 metres.

| Channel | Freq. (MHz) | Rx Antenna Type | POL. | Detector | VBW | Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------------------------------|----------------|--------------------|------|----------|-------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
| Low Channel, Packet Type DH5 | | | | | | | | | | |
| 0 | 2402 | Horn | V | PK | 1 MHz | 95.94 | 43.73 | 52.21 | 74 | -21.79 |
| 0 | 2402 | Horn | H | PK | 1 MHz | 100.98 | 44.02 | 56.96 | 74 | -17.04 |
| 0 | 2402 | Horn | V | AV | 10 Hz | 63.75 | 43.73 | 20.02 | 54 | -33.98 |
| 0 | 2402 | Horn | H | AV | 10 Hz | 67.35 | 44.02 | 23.33 | 54 | -30.67 |
| High Channel, Packet Type DH5 | | | | | | | | | | |
| 78 | 2480 | Horn | V | PK | 1 MHz | 97.06 | 49.95 | 47.11 | 74 | -26.89 |
| 78 | 2480 | Horn | H | PK | 1 MHz | 99.27 | 49.83 | 49.44 | 74 | -24.56 |
| 78 | 2480 | Horn | V | AV | 10 Hz | 65.50 | 49.95 | 15.55 | 54 | -38.45 |
| 78 | 2480 | Horn | H | AV | 10 Hz | 65.84 | 49.83 | 16.01 | 54 | -37.99 |
| Low Channel, Packet Type 2-DH5 | | | | | | | | | | |
| 0 | 2402 | Horn | V | PK | 1 MHz | 94.48 | 42.26 | 52.22 | 74 | -21.78 |
| 0 | 2402 | Horn | H | PK | 1 MHz | 99.18 | 42.85 | 56.33 | 74 | -17.67 |
| 0 | 2402 | Horn | V | AV | 10 Hz | 62.35 | 42.26 | 20.09 | 54 | -33.91 |
| 0 | 2402 | Horn | H | AV | 10 Hz | 64.89 | 42.85 | 22.04 | 54 | -31.96 |
| High Channel, Packet Type 2-DH5 | | | | | | | | | | |
| 78 | 2480 | Horn | V | PK | 1 MHz | 95.46 | 49.08 | 46.38 | 74 | -27.62 |
| 78 | 2480 | Horn | H | PK | 1 MHz | 97.61 | 48.22 | 49.39 | 74 | -24.61 |
| 78 | 2480 | Horn | V | AV | 10 Hz | 62.97 | 49.08 | 13.89 | 54 | -40.11 |
| 78 | 2480 | Horn | H | AV | 10 Hz | 64.11 | 48.22 | 15.89 | 54 | -38.11 |



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 2

Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Band-Edge Compliance of RF Radiated Emissions Test Results cont'd
Bluetooth Band

| Channel | Freq. (MHz) | Rx Antenna Type | POL. | Detector | VBW | Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------------------------------|----------------|--------------------|------|----------|-------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
| Low Channel, Packet Type 3-DH5 | | | | | | | | | | |
| 0 | 2402 | Horn | V | PK | 1 MHz | 93.94 | 42.08 | 51.86 | 74 | -22.14 |
| 0 | 2402 | Horn | H | PK | 1 MHz | 98.70 | 42.41 | 56.29 | 74 | -17.71 |
| 0 | 2402 | Horn | V | AV | 10 Hz | 61.77 | 42.08 | 19.69 | 54 | -34.31 |
| 0 | 2402 | Horn | H | AV | 10 Hz | 64.32 | 42.41 | 21.91 | 54 | -32.09 |
| High Channel, Packet Type 3-DH5 | | | | | | | | | | |
| 78 | 2480 | Horn | V | PK | 1 MHz | 94.72 | 47.09 | 47.63 | 74 | -26.37 |
| 78 | 2480 | Horn | H | PK | 1 MHz | 96.90 | 47.46 | 49.44 | 74 | -24.56 |
| 78 | 2480 | Horn | V | AV | 10 Hz | 62.36 | 47.09 | 15.27 | 54 | -38.73 |
| 78 | 2480 | Horn | H | AV | 10 Hz | 63.47 | 47.46 | 16.01 | 54 | -37.99 |

See figures 2-1 to 2-12 for the plots of the Bluetooth band-edge compliance.

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-1: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 DH5, Channel 0, Pol: V, Detector: PK

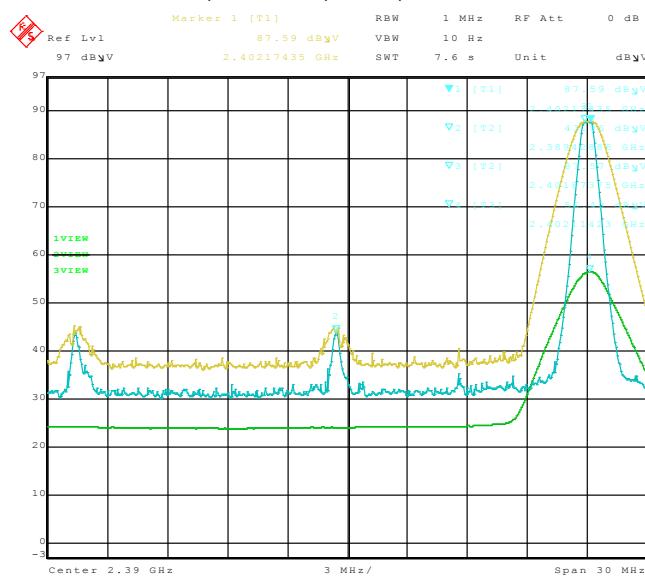


Figure 2-2: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 DH5, Channel 0, Pol: H, Detector: PK

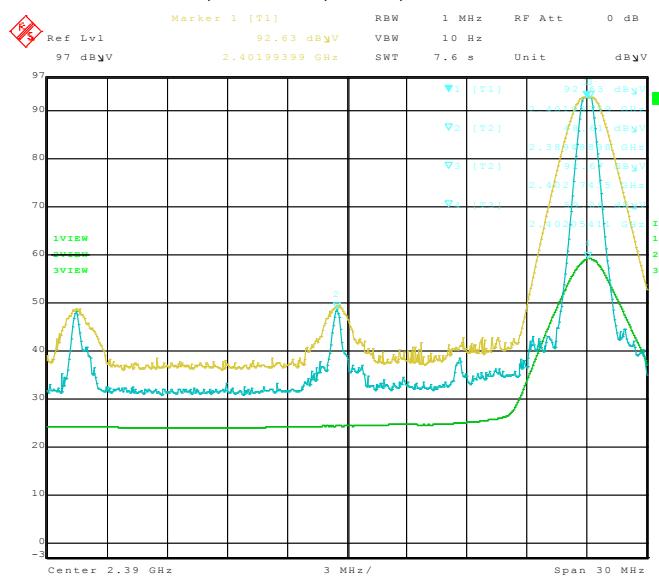


Figure 2-3: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 DH5, Channel 78, Pol: V, Detector: PK


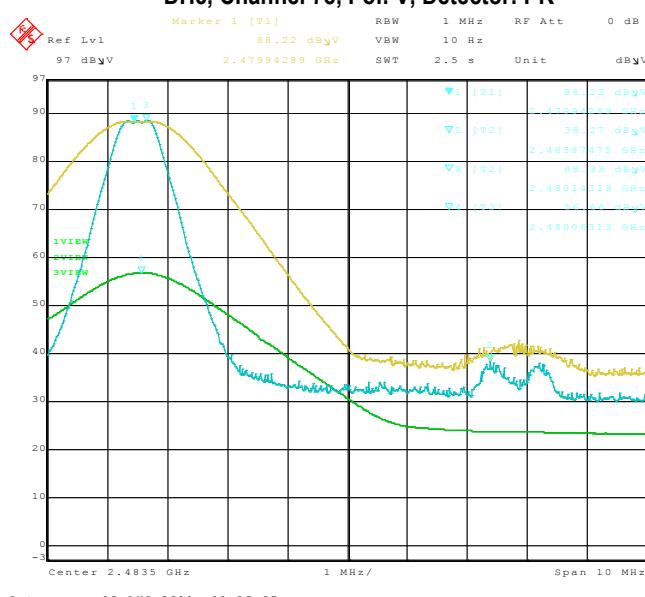


Figure 2-4: Band-Edge Compliance of RF Rad. Emissions

Bluetooth, Single freq., Static PBRS,
 DH5, Channel 78, Pol: H, Detector: PK

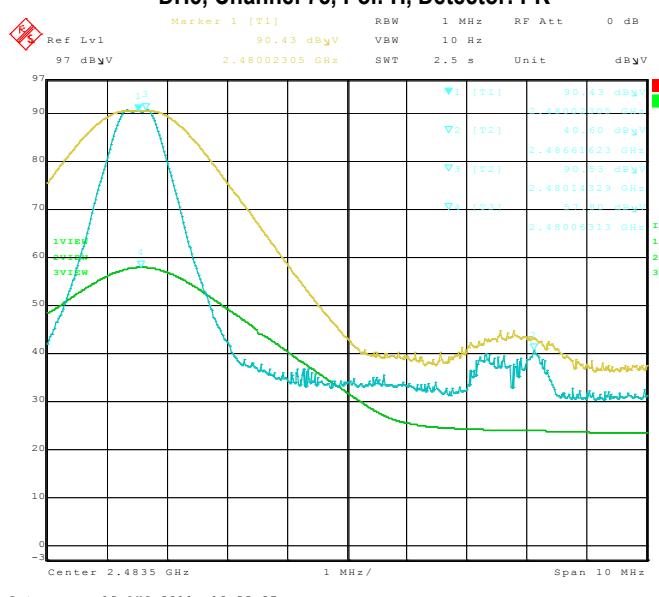

Test Report No.
 RTS-5385-1108-55


Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd


Figure 2-5: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 0, Pol: V, Detector: PK

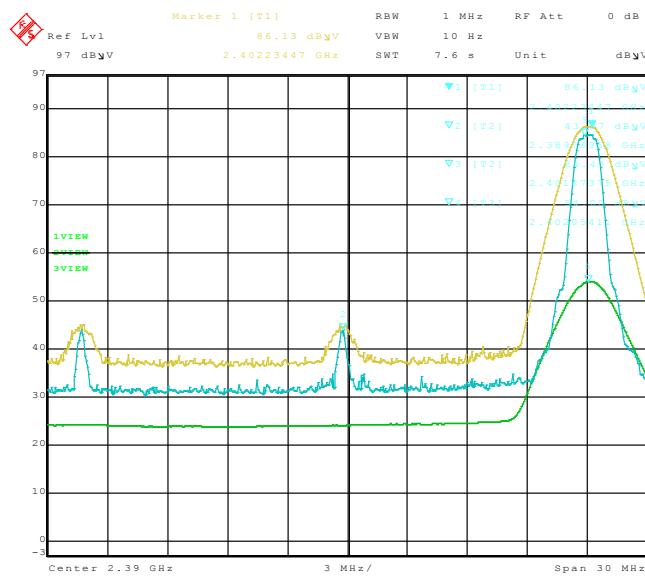

Date: 15.AUG.2011 10:30:16


Figure 2-7: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 78, Pol: V, Detector: PK

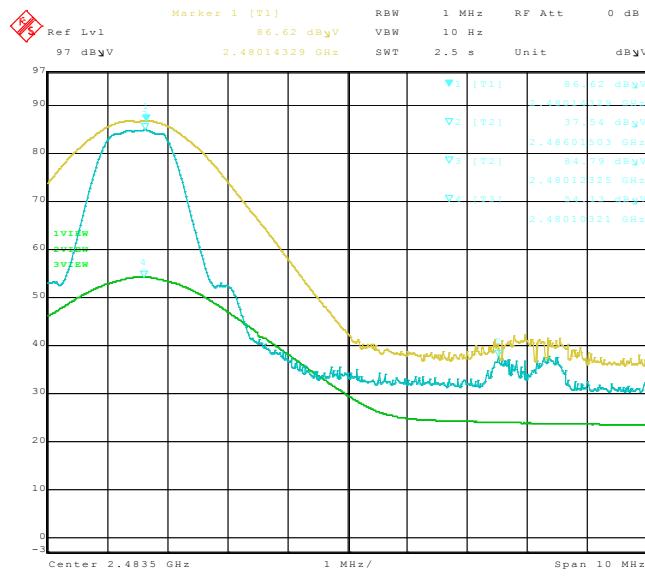

Date: 15.AUG.2011 11:12:15


Figure 2-6: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 0, Pol: H, Detector: PK

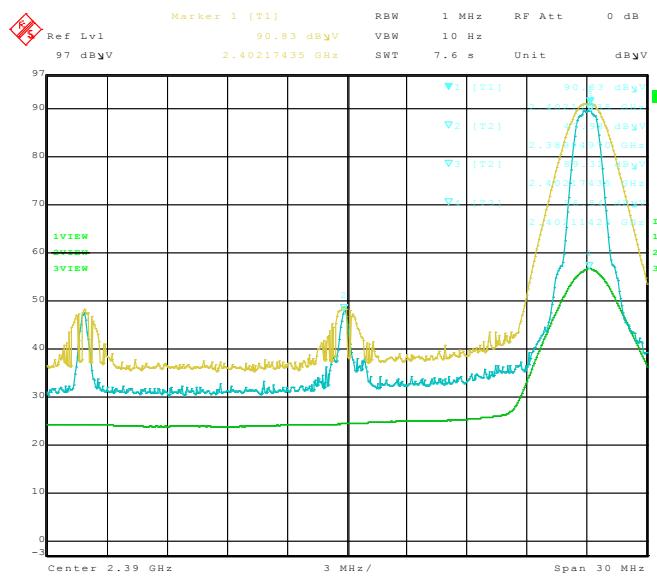

Date: 15.AUG.2011 10:46:19

Figure 2-8: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 2-DH5, Channel 78, Pol: H, Detector: PK

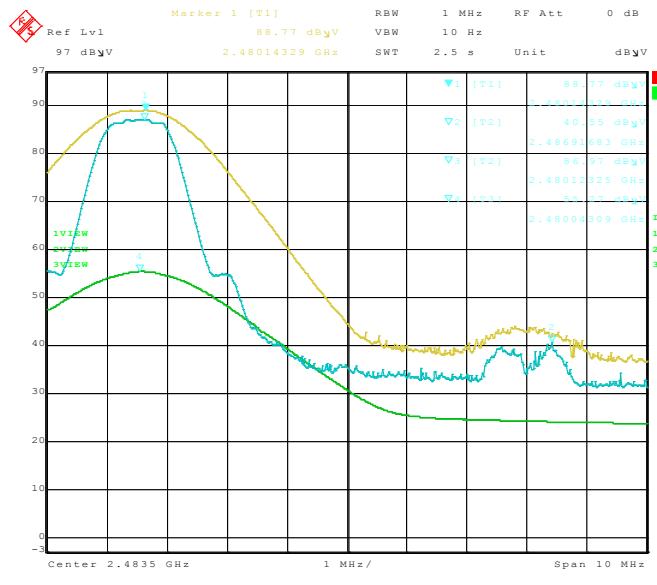

Date: 15.AUG.2011 10:57:06

Test Report No.
 RTS-5385-1108-55


Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd


Figure 2-9: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 0, Pol: V, Detector: PK

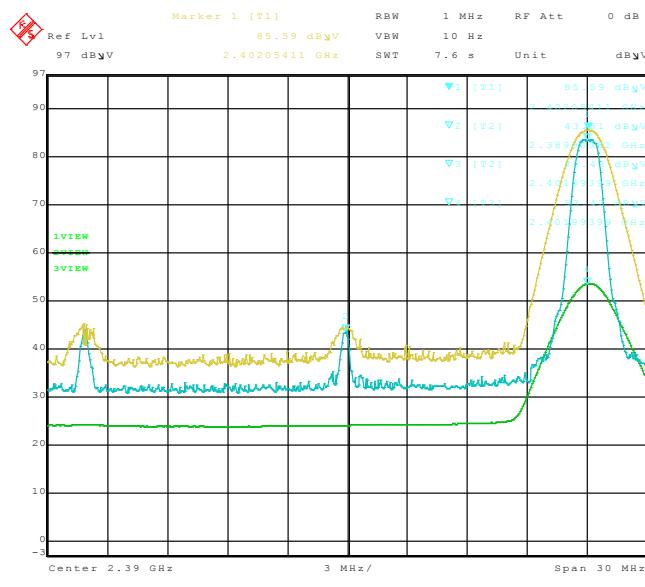

Date: 15.AUG.2011 10:39:22


Figure 2-11: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 78, Pol: V, Detector: PK

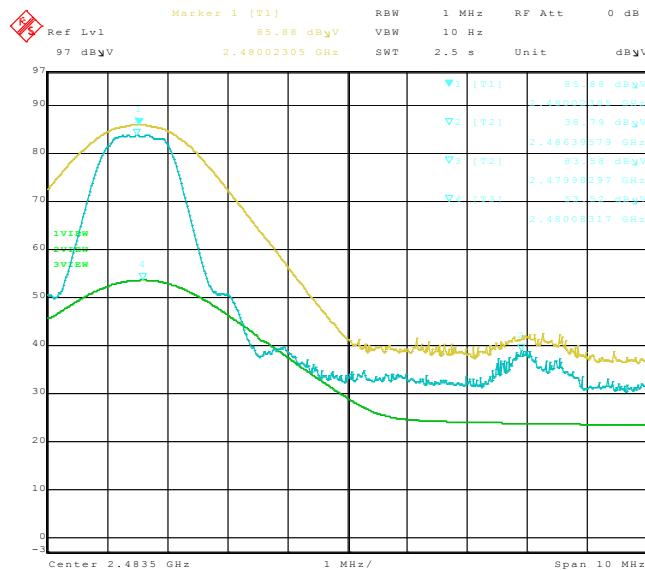

Date: 15.AUG.2011 11:09:04


Figure 2-10: Band-Edge Compliance of RF Rad. Emissions.

Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 0, Pol: H, Detector: PK

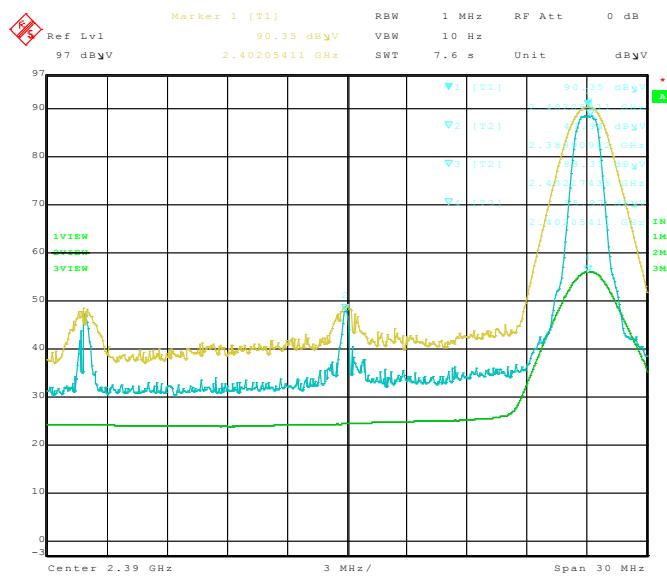

Date: 15.AUG.2011 10:43:29

Figure 2-12: Band-Edge Compliance of RF Rad. Emissions.
 Bluetooth, Single freq., Static PBRS,
 3-DH5, Channel 78, Pol: H, Detector: PK

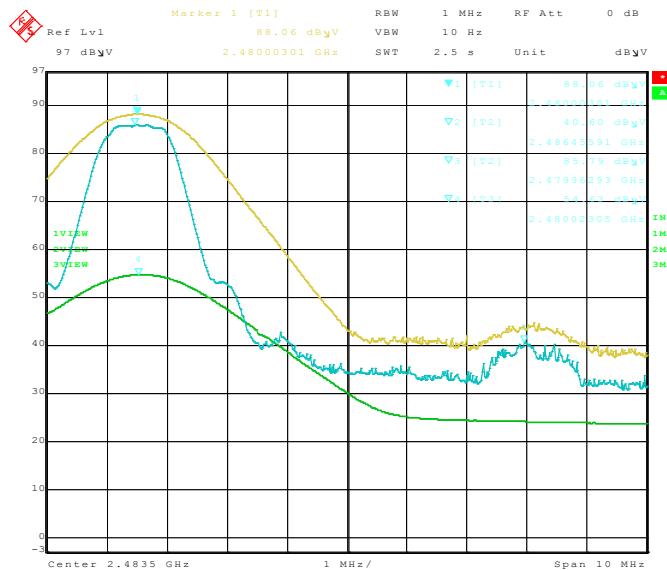

Date: 15.AUG.2011 11:02:59

| | | | |
|---|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 2 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

Radiated Emissions Test Results cont'd
802.11b/g/n Band

Date of Test: July 28 and August 10, 2011

The environmental test conditions were: Temperature: 23 - 26 °C
Relative Humidity: 38 - 41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11b Tx mode at 1 Mbps on channels 1, 6 and 11, in 802.11g Tx mode at 6 Mbps on channels 1, 6 and 11, and in 802.11n Tx mode at MCS 0 on channels 1, 6 and 11.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: August 08 and 19, 2011

The environmental test conditions were: Temperature: 24 - 25 °C
Relative Humidity: 38 - 41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 25GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11b Tx mode at 1 Mbps on channels 1, 6 and 11, in 802.11g Tx mode at 6 Mbps on channels 1, 6 and 11, and in 802.11n Tx mode at MCS 0 on channels 1, 6 and 11.

All emissions had a test margin of greater than 25.0 dB.

| | | | |
|--|---|---|--|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 2 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions

Date of Tests: August 15, 2011

Measurements performed by Nielven Olis.

The environmental test conditions were: Temperature: 23 °C
Relative Humidity: 41 %

802.11b Band

The measurements were performed on BlackBerry® smartphone in standalone, vertical configuration on channels 1 and 11 for 802.11b mode at 1 Mbps.

The test distance was 3 metres.

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW For Peak | Peak Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-----------------|--|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 1 | 2412.00 | Horn | V | PK | 1 MHz | 104.13 | 51.88 | 52.25 | 74 | -21.75 |
| 1 | 2412.00 | Horn | H | PK | 1 MHz | 103.78 | 51.42 | 52.36 | 74 | -21.64 |
| 1 | 2412.00 | Horn | V | AV | 10 Hz | 96.29 | 51.88 | 44.41 | 54 | -9.59 |
| 1 | 2412.00 | Horn | H | AV | 10 Hz | 95.94 | 51.42 | 44.52 | 54 | -9.48 |

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW For Peak | Peak Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-----------------|--|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 11 | 2480.00 | Horn | V | PK | 1 MHz | 102.05 | 52.36 | 49.69 | 74 | -24.31 |
| 11 | 2480.00 | Horn | H | PK | 1 MHz | 103.63 | 53.62 | 50.01 | 74 | -23.99 |
| 11 | 2480.00 | Horn | V | AV | 10 Hz | 94.39 | 52.36 | 42.03 | 54 | -11.97 |
| 11 | 2480.00 | Horn | H | AV | 10 Hz | 95.87 | 53.62 | 42.25 | 54 | -11.75 |



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 2

Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11g Band

The measurements were performed on the BlackBerry® smartphone in standalone, vertical configuration on channels 1 and 11 for 802.11g mode at 6 Mbps.

The test distance was 3 metres.

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW For Peak | Peak Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-----------------|--|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 1 | 2412.00 | Horn | V | PK | 1 MHz | 100.06 | 39.15 | 60.91 | 74 | -13.09 |
| 1 | 2412.00 | Horn | H | PK | 1 MHz | 103.06 | 37.30 | 65.76 | 74 | -8.24 |
| 1 | 2412.00 | Horn | V | AV | 10 Hz | 73.09 | 39.15 | 33.94 | 54 | -20.06 |
| 1 | 2412.00 | Horn | H | AV | 10 Hz | 75.03 | 37.30 | 37.73 | 54 | -16.27 |

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW For Peak | Peak Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-----------------|--|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 11 | 2480.00 | Horn | V | PK | 1 MHz | 102.29 | 41.45 | 60.84 | 74 | -13.16 |
| 11 | 2480.00 | Horn | H | PK | 1 MHz | 103.55 | 42.74 | 60.81 | 74 | -13.19 |
| 11 | 2480.00 | Horn | V | AV | 10 Hz | 74.38 | 41.45 | 32.93 | 54 | -21.07 |
| 11 | 2480.00 | Horn | H | AV | 10 Hz | 75.31 | 42.74 | 32.57 | 54 | -21.43 |



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 2

Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11n Band

The measurements were performed on the BlackBerry® smartphone in standalone, vertical configuration on channels 1 and 11 for 802.11n mode at MCS 0.

The test distance was 3 metres.

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW For Peak | Peak Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-----------------|--|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 1 | 2412.00 | Horn | V | PK | 1 MHz | 103.13 | 34.77 | 68.36 | 74 | -5.64 |
| 1 | 2412.00 | Horn | H | PK | 1 MHz | 102.35 | 36.94 | 65.41 | 74 | -8.59 |
| 1 | 2412.00 | Horn | V | AV | 10 Hz | 74.64 | 34.77 | 39.87 | 54 | -14.13 |
| 1 | 2412.00 | Horn | H | AV | 10 Hz | 74.17 | 36.94 | 37.23 | 54 | -16.77 |

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW For Peak | Peak Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-----------------|--|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 11 | 2480.00 | Horn | V | PK | 1 MHz | 101.42 | 40.83 | 60.59 | 74 | -13.41 |
| 11 | 2480.00 | Horn | H | PK | 1 MHz | 103.29 | 41.68 | 61.61 | 74 | -12.39 |
| 11 | 2480.00 | Horn | V | AV | 10 Hz | 73.76 | 40.83 | 32.93 | 54 | -21.07 |
| 11 | 2480.00 | Horn | H | AV | 10 Hz | 74.92 | 41.68 | 33.24 | 54 | -20.76 |

See figures 2-13 to 2-16 for the plots of the 802.11b band-edge compliance.

See figures 2-17 to 2-20 for the plots of the 802.11g band-edge compliance.

See figures 2-21 to 2-24 for the plots of the 802.11n band-edge compliance.

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-13: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 1, 2412 MHz, Max Pol: V,
Detector: PK

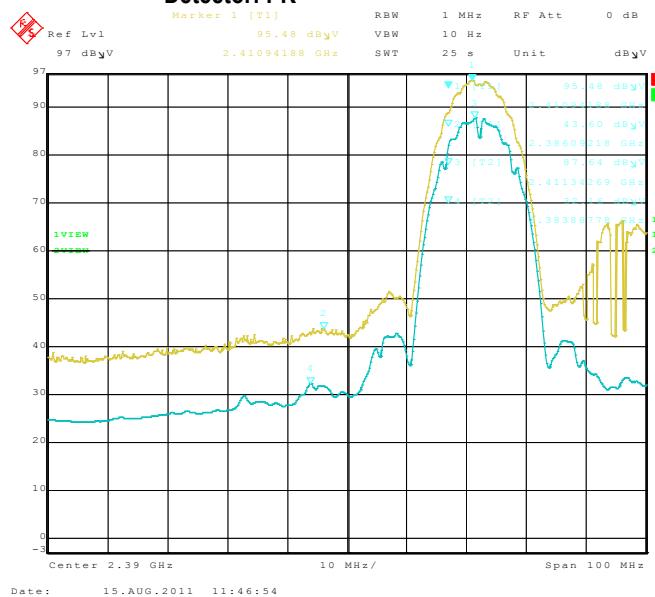


Figure 2-14: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 1, 2412 MHz, Max Pol: H,
Detector: PK

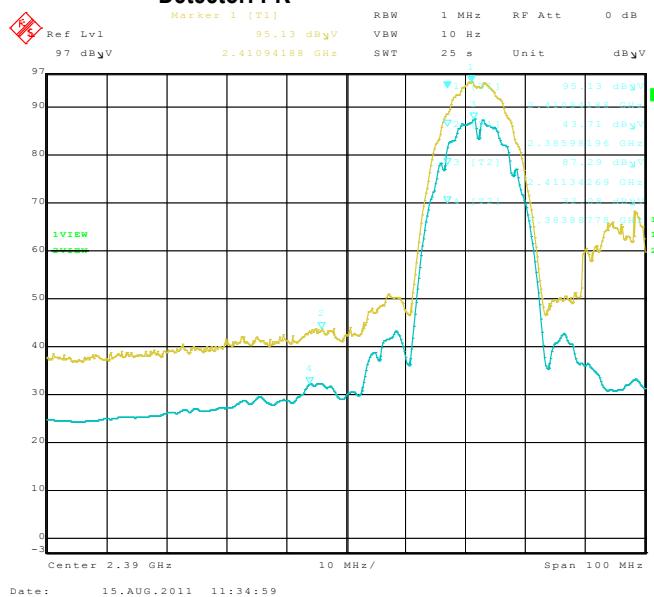


Figure 2-15: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 11, 2462 MHz, Max Pol: V,
Detector: PK


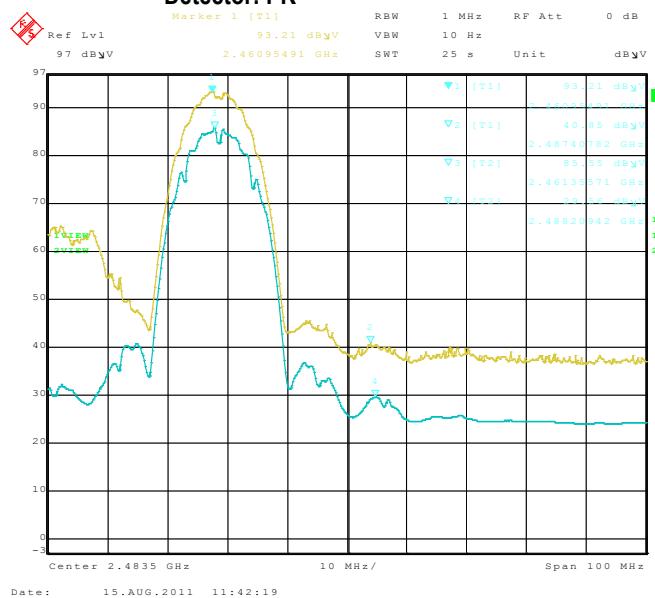


Figure 2-16: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 11, 2462 MHz, Max Pol: H,
Detector: PK

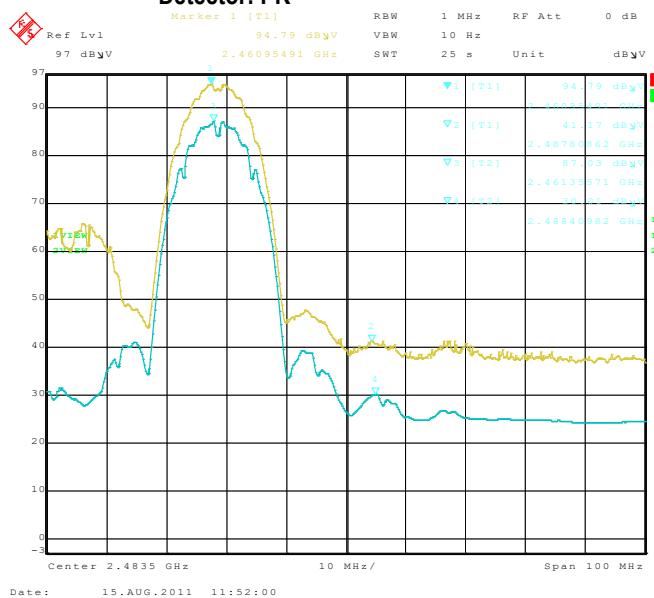

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Figure 2-17: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 1, 2412 MHz, Max Pol: V,
 Detector: PK

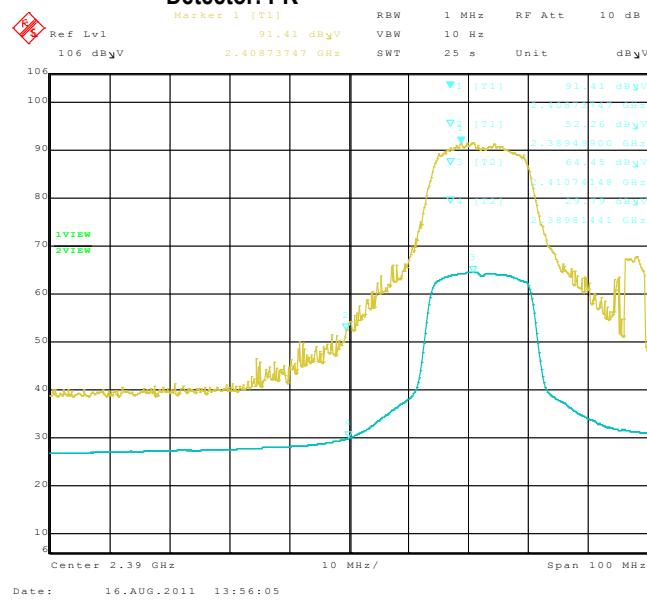


Figure 2-18: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 1, 2412 MHz, Max Pol: H,
 Detector: PK

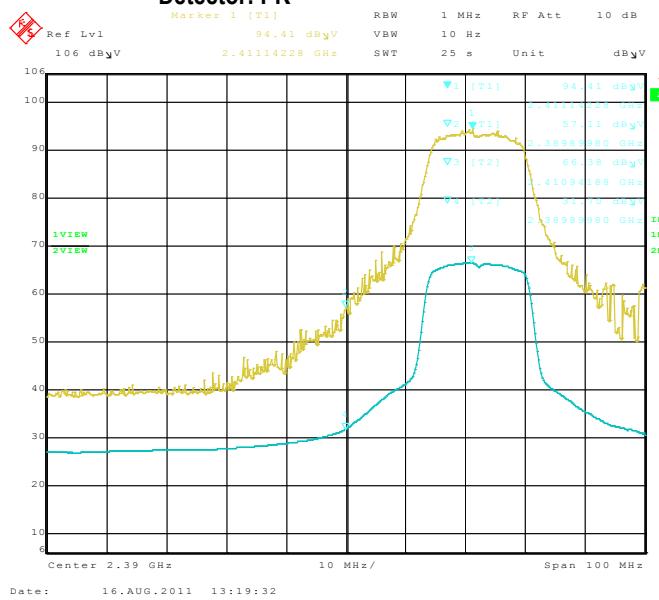


Figure 2-19: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 11, 2462 MHz, Max Pol: V,
 Detector: PK


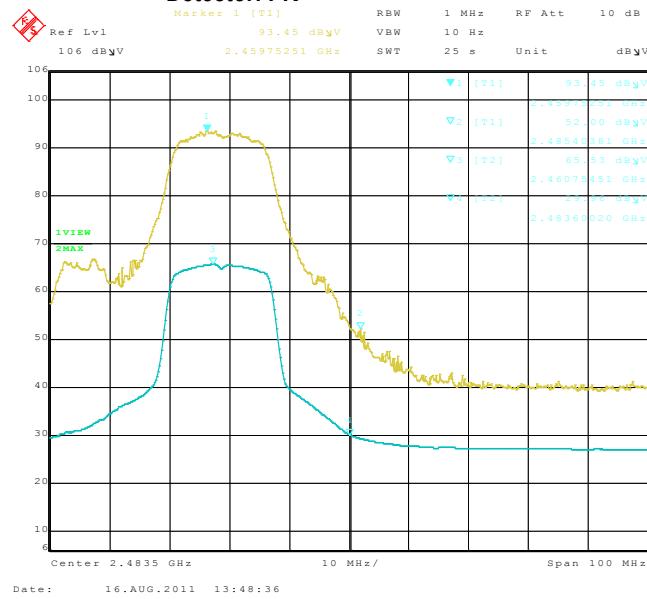


Figure 2-20: Band-Edge Compliance of RF Radiated Emission
 802.11g, Channel 11, 2462 MHz, Max Pol: H,
 Detector: PK

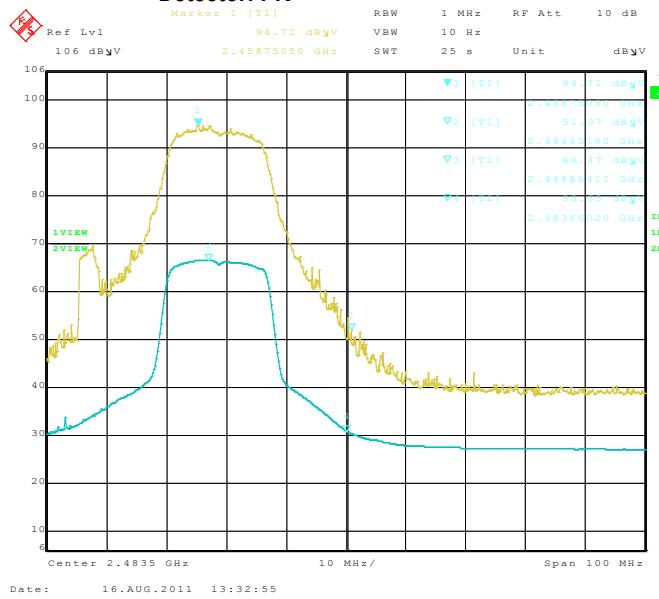

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

Figure 2-21: Band-Edge Compliance of RF Radiated Emission
 802.11n, Channel 1, 2412 MHz, Max Pol: V,
 Detector: PK

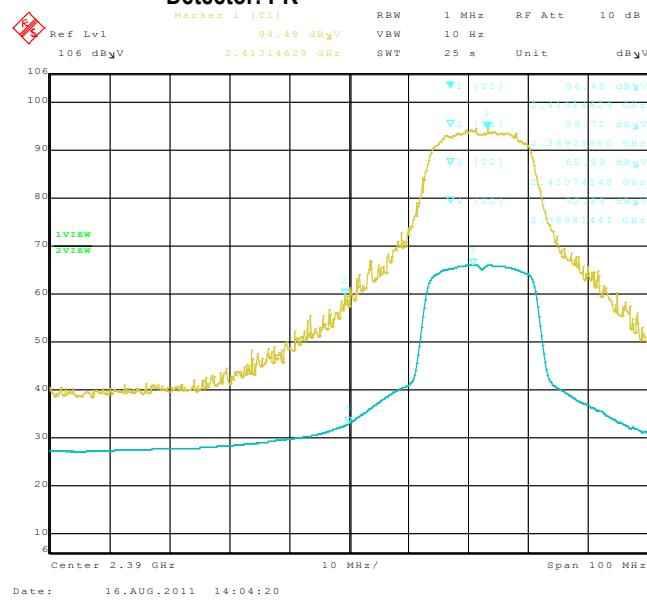


Figure 2-22: Band-Edge Compliance of RF Radiated Emission
 802.11n, Channel 1, 2412 MHz, Max Pol: H,
 Detector: PK

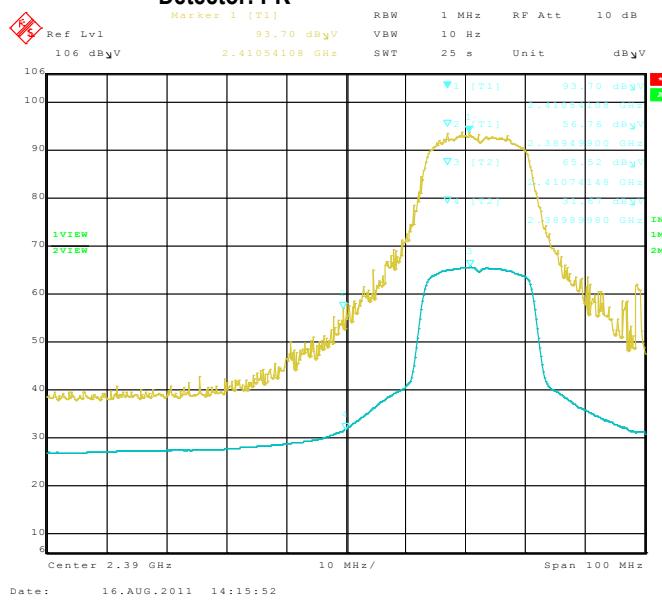


Figure 2-23: Band-Edge Compliance of RF Radiated Emission
 802.11n, Channel 11, 2462 MHz, Max Pol: V,
 Detector: PK


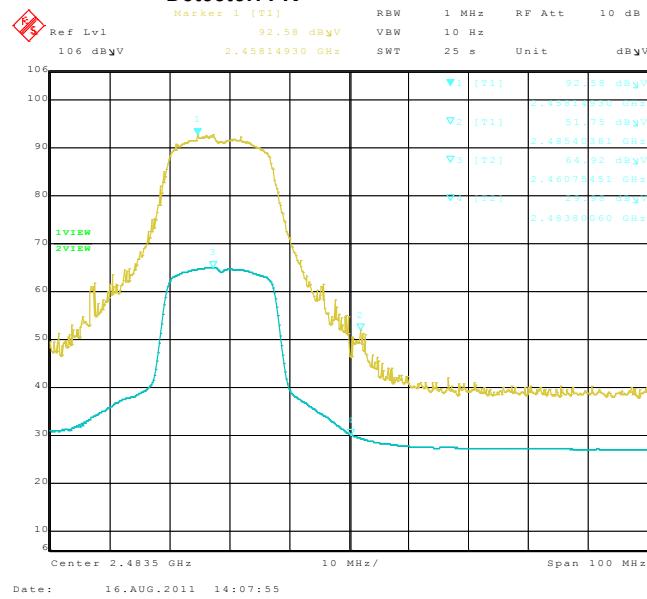


Figure 2-24: Band-Edge Compliance of RF Radiated Emission
 802.11n, Channel 11, 2462 MHz, Max Pol: H,
 Detector: PK

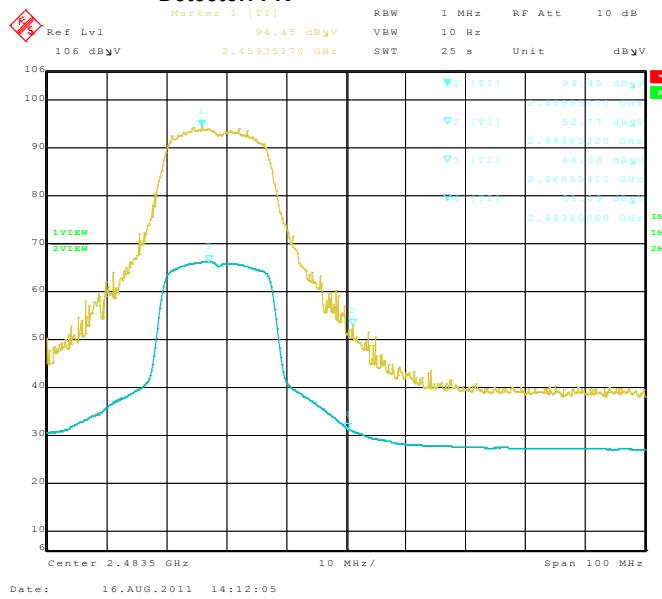

| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 3 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

APPENDIX 3 – 802.11a RADIATED EMISSIONS TEST DATA

| | | | |
|---|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 3 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

Radiated Emissions Test Results
802.11a Band

Date of Test: August 10 and 16, 2011

Measurements were performed by Nielven Olis.

The environmental test conditions were: Temperature: 23 - 25 °C
Relative Humidity: 38 - 42 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11a Tx mode at 6 Mbps on channels 36, 48, 56, 100, 140 and 157.

All emissions had a test margin of greater than 25.0 dB.

Date of Test: August 08 and 19, 2011

Measurements were performed by Shuo Wang.

The environmental test conditions were: Temperature: 25 °C
Relative Humidity: 41 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 1GHz to 40GHz.

The BlackBerry® smartphone was in USB up position.

The frequency sweep measurements were performed in 802.11a Tx mode at 6 Mbps on channels 36, 48, 56, 100, 140 and 157.

All emissions had a test margin of greater than 25.0 dB.

| | | | |
|--|---|---|--|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 3 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

802.11a Band-Edge Compliance of RF Radiated Emissions

Date of Tests: August 16, 2011

Measurements performed by Nielven Olis.

The environmental test conditions were: Temperature: 25 °C
Relative Humidity: 38 %

The measurements were performed on BlackBerry® smartphone in standalone, vertical configuration on channels 36, 48, 56, 100, 140 and 157 for 802.11a mode at 6 Mbps.

The test distance was 3 metres.

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW | Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 36 | 5180.0 | Horn | V | PK | 1 MHz | 102.77 | 44.70 | 58.07 | 74 | -15.93 |
| 36 | 5180.0 | Horn | H | PK | 1 MHz | 104.67 | 47.12 | 57.55 | 74 | -16.45 |
| 36 | 5180.0 | Horn | V | AV | 10 Hz | 76.71 | 44.70 | 32.01 | 54 | -21.99 |
| 36 | 5180.0 | Horn | H | AV | 10 Hz | 78.15 | 47.12 | 31.03 | 54 | -22.97 |

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW | Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 64 | 5320.0 | Horn | V | PK | 1 MHz | 102.01 | 41.47 | 60.54 | 74 | -13.46 |
| 64 | 5320.0 | Horn | H | PK | 1 MHz | 105.70 | 44.57 | 61.13 | 74 | -12.87 |
| 64 | 5320.0 | Horn | V | AV | 10 Hz | 77.93 | 41.47 | 36.46 | 54 | -17.54 |
| 64 | 5320.0 | Horn | H | AV | 10 Hz | 80.42 | 44.57 | 35.85 | 54 | -18.15 |



EMI Test Report for the BlackBerry® smartphone Model REC71UW
APPENDIX 3

Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW | Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 100 | 5500.0 | Horn | V | PK | 1 MHz | 108.77 | 43.80 | 64.97 | 74 | -9.03 |
| 100 | 5500.0 | Horn | H | PK | 1 MHz | 108.18 | 44.67 | 63.51 | 74 | -10.49 |
| 100 | 5500.0 | Horn | V | AV | 10 Hz | 81.99 | 43.80 | 38.19 | 54 | -15.81 |
| 100 | 5500.0 | Horn | H | AV | 10 Hz | 81.51 | 44.67 | 36.84 | 54 | -17.16 |

| Channel | Freq. (MHz) | Rx Antenna | | Detector | VBW | Corrected Reading (dBuV/m) | Delta Marker (dB) | Corrected Band edge (dBuV/m) | Limit (dBuV/m) | Diff. To Limit (dB) |
|---------|----------------|------------|------|----------|-------|----------------------------------|-------------------------|------------------------------------|-------------------|---------------------------|
| | | Type | POL. | | | | | | | |
| 161 | 5805.0 | Horn | V | PK | 1 MHz | 106.12 | 42.36 | 63.76 | 74 | -10.24 |
| 161 | 5805.0 | Horn | H | PK | 1 MHz | 105.59 | 41.95 | 63.64 | 74 | -10.36 |
| 161 | 5805.0 | Horn | V | AV | 10 Hz | 81.53 | 42.36 | 39.17 | 54 | -14.83 |
| 161 | 5805.0 | Horn | H | AV | 10 Hz | 81.13 | 41.95 | 39.18 | 54 | -14.82 |

See figures 3-1 to 3-8 for the plots of the 802.11a band-edge compliance.


Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW


802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-1: Band-Edge Compliance of RF Radiated Emission
802.11a, Channel 36, 5180 MHz
Pol: V, Detector: PK

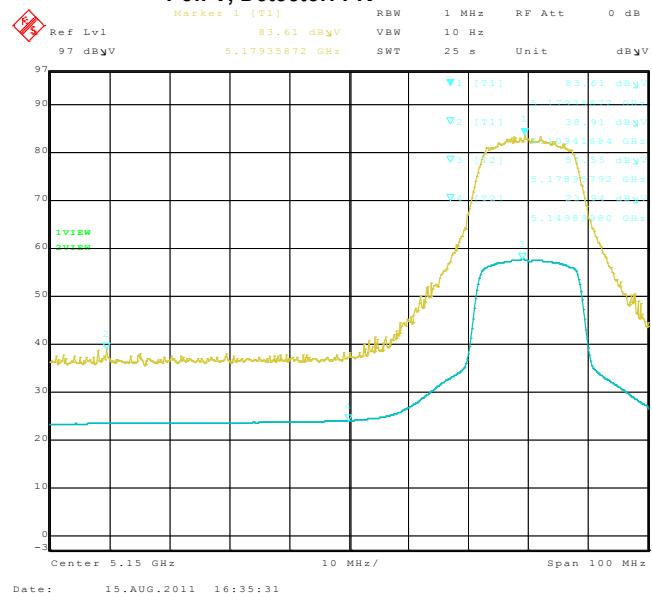


Date: 15.AUG.2011 16:35:31

Figure 3-2: Band-Edge Compliance of RF Radiated Emission
802.11a, Channel 36, 5180 MHz
Pol: H, Detector: PK

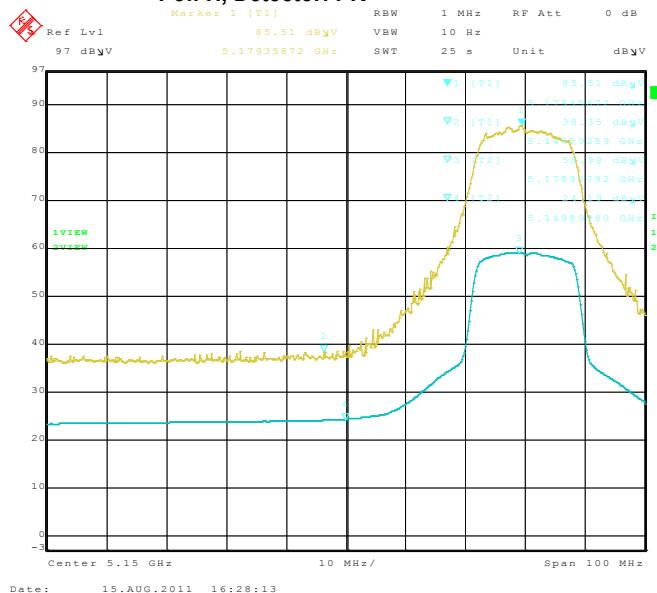


Date: 15.AUG.2011 16:28:13

Figure 3-3: Band-Edge Compliance of RF Radiated Emission
802.11a, Channel 64, 5320 MHz
Pol: V, Detector: PK

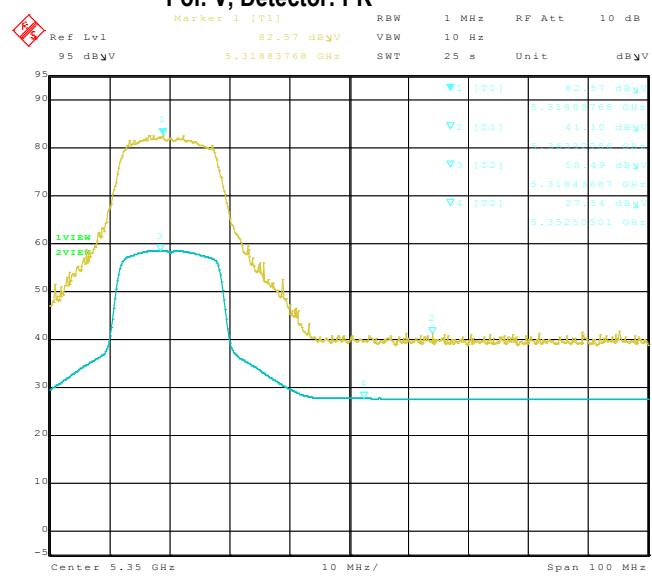

Date: 26.SEP.2011 11:59:53

Figure 3-4: Band-Edge Compliance of RF Radiated Emission
802.11a, Channel 64, 5320 MHz
Pol: H, Detector: PK

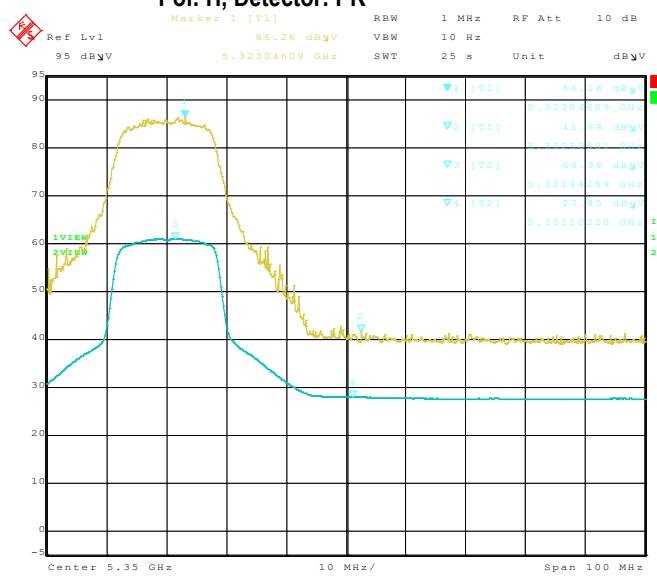

Date: 26.SEP.2011 11:51:29

Test Report No.
 RTS-5385-1108-55

Dates of Test
 July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11a Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 3-5: Band-Edge Compliance of RF Radiated Emission
802.11a, Channel 100, 5500 MHz
Pol: V, Detector: PK

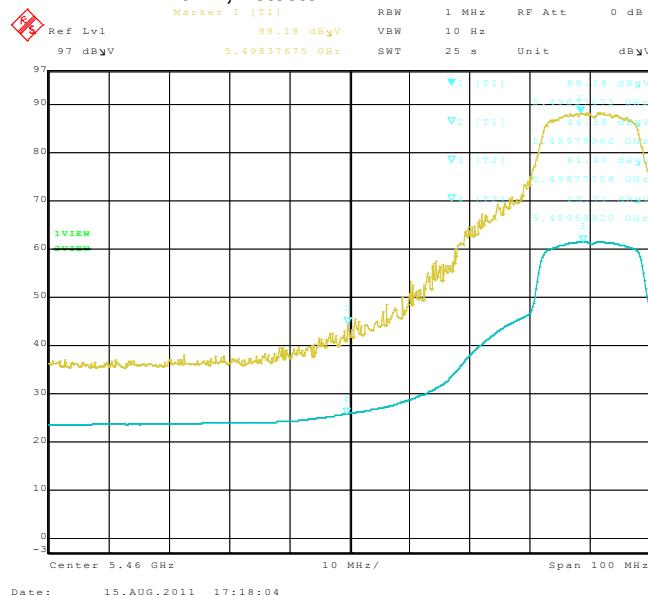


Figure 3-6: Band-Edge Compliance of RF Radiated Emission.
802.11a, Channel 100, 5500 MHz
Pol: H, Detector: PK

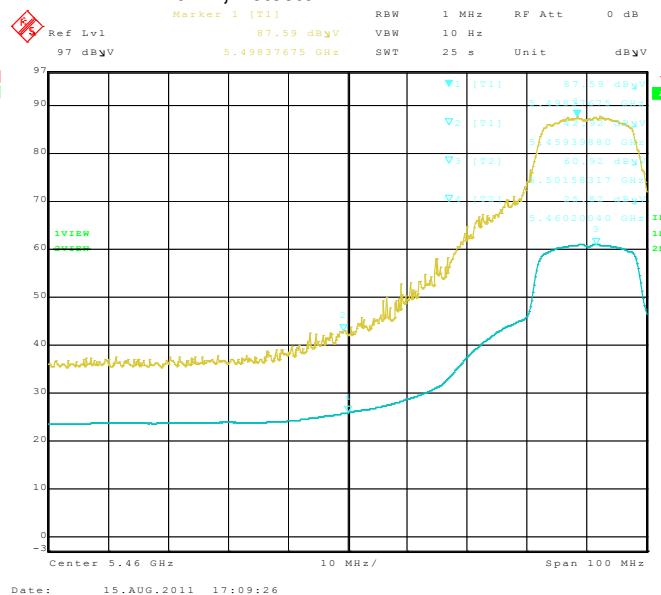


Figure 3-7: Band-Edge Compliance of RF Radiated Emission.
802.11a, Channel 161, 5805 MHz
Pol: V, Detector: PK


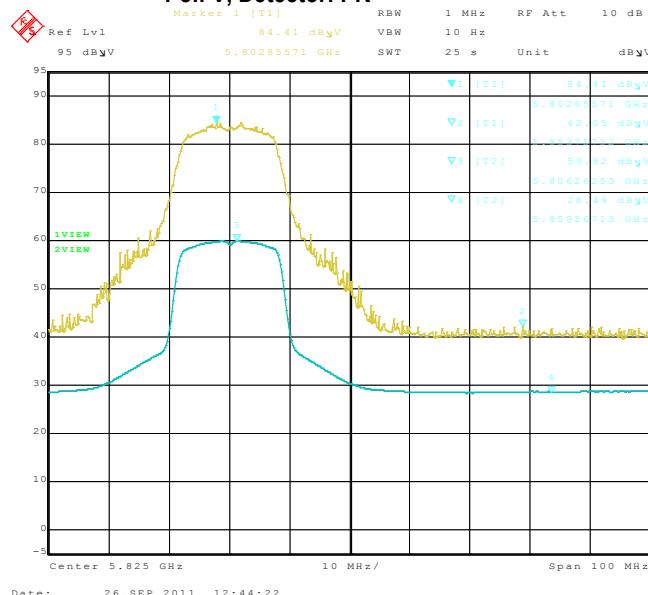


Figure 3-8: Band-Edge Compliance of RF Radiated Emission.
802.11a, Channel 161, 5805 MHz
Pol: H, Detector: PK

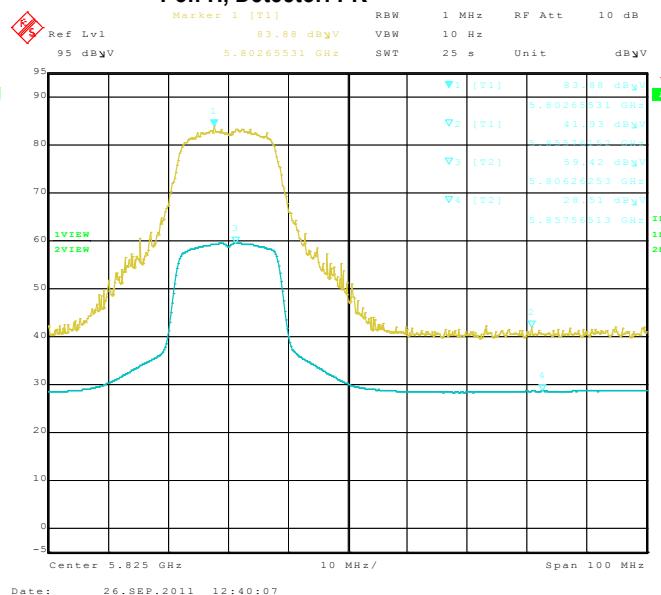

| | | |
|--|---|---|
| RIM Testing Services™ | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

APPENDIX 4 – BLUETOOTH CONDUCTED EMISSIONS TEST DATA/PLOTS

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |


Bluetooth RF Conducted Emission Test Results

Bluetooth power output from BlackBerry® smartphone was at maximum for all the recorded measurements shown below.

The measurements were performed by Kevin Guo.

Date of test: August 16, 2011

Test Setup Diagram

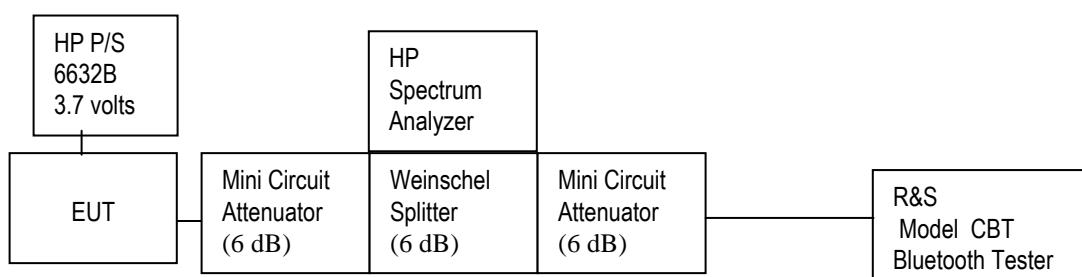

A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

The environmental test conditions were: Temperature: 24 °C
Relative Humidity: 42 %

Bluetooth RF Conducted Emission Test Results cont'd

20 dB Bandwidth

The EUT met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode.

Using pattern type "Static PBRS" and packet type "DH5" during the measurements.

| Bluetooth Channel | Limit (MHz) | Measured Level (MHz) |
|-------------------|-------------|----------------------|
| 0 | ≤1.0 | 0.927 |
| 39 | ≤1.0 | 0.920 |
| 78 | ≤1.0 | 0.927 |

See figures 4-1 to 4-3 for the plots of the 20 dB bandwidth measurements.

Figure 4-1: 20 dB Bandwidth


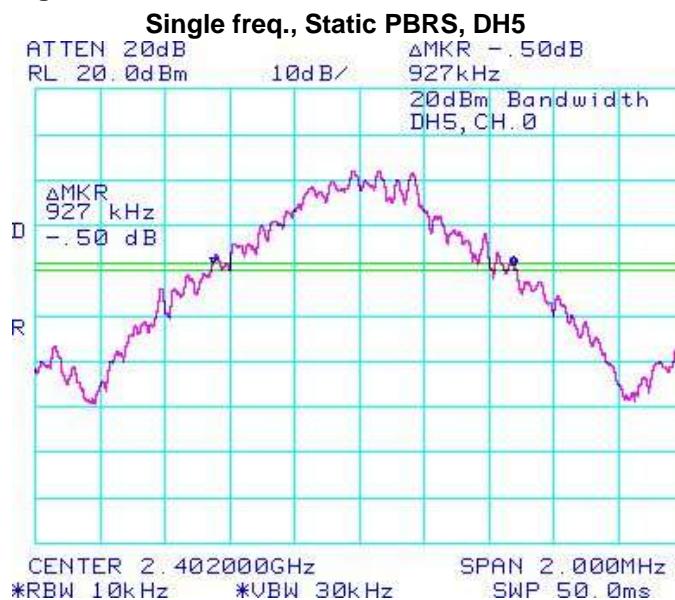



Figure 4-2: 20 dB Bandwidth

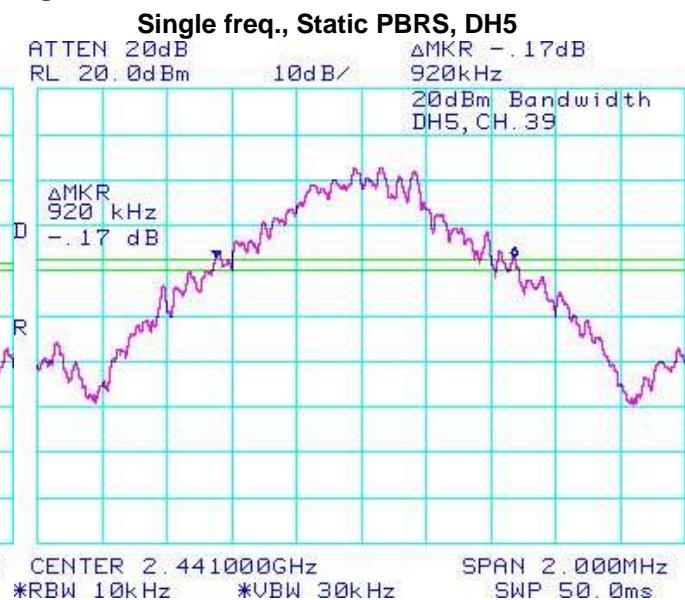

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-3: 20 dB Bandwidth

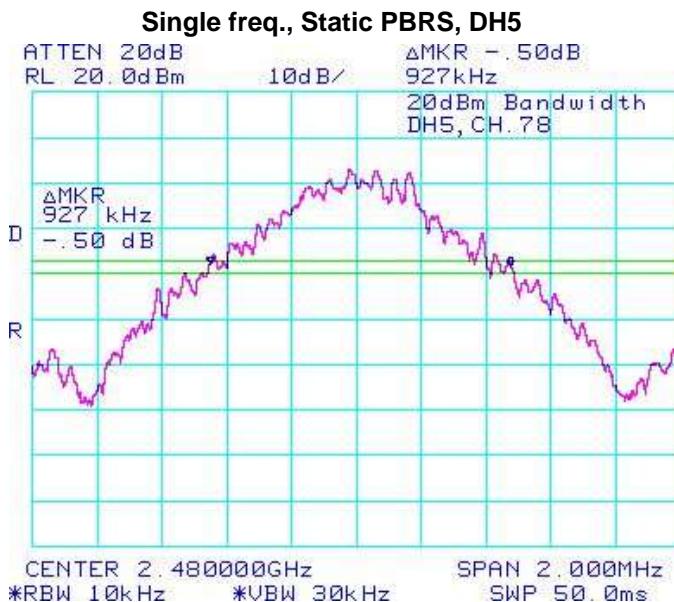

Using Pattern type “Static PBRS” and packet type “3-DH5” during the measurements.

| Bluetooth Channel | Limit (MHz) | Measured Level (MHz) |
|-------------------|-------------|----------------------|
| 0 | ≤1.5 | 1.310 |
| 39 | ≤1.5 | 1.313 |
| 78 | ≤1.5 | 1.243 |

See figures 4-4 to 4-6 for the plots of the 20 dB bandwidth measurements.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-4: 20 dB Bandwidth

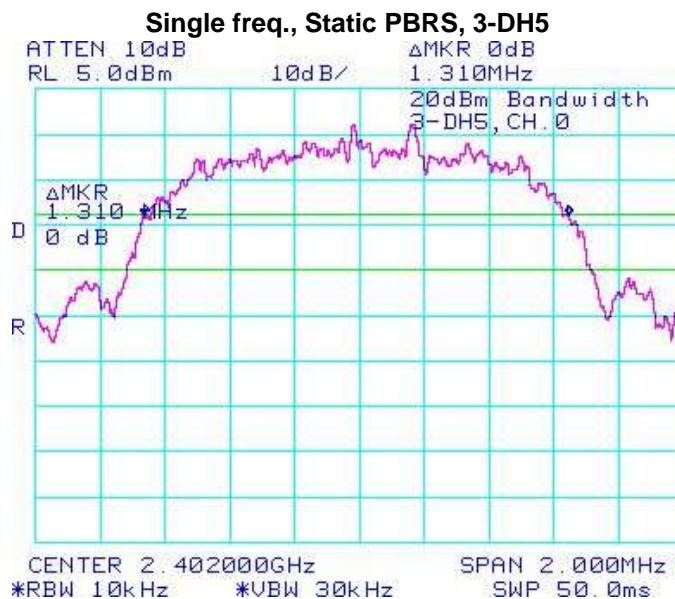


Figure 4-5: 20 dB Bandwidth


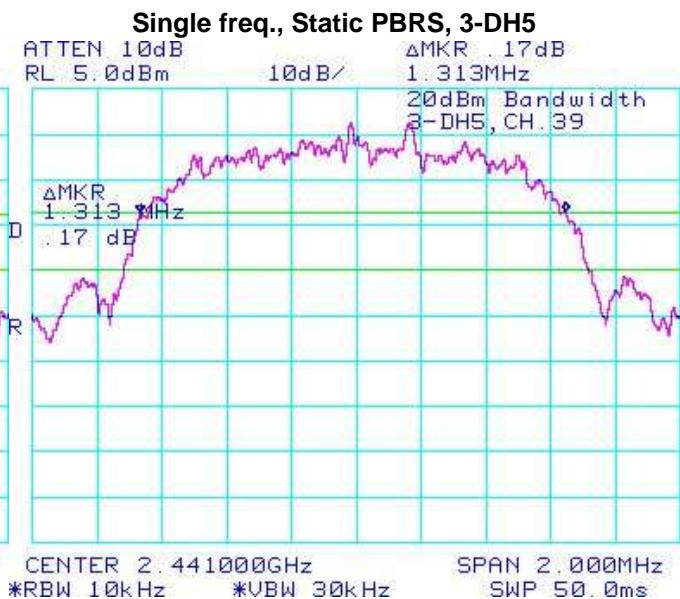


Figure 4-6: 20 dB Bandwidth

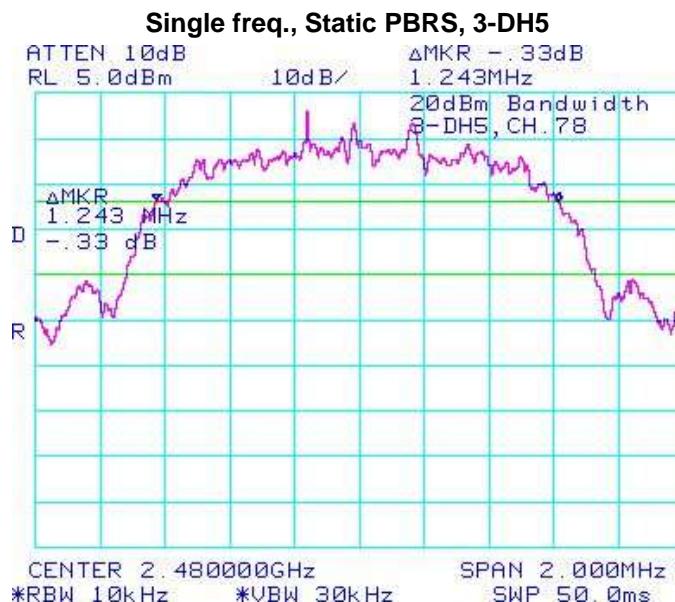

Bluetooth RF Conducted Emission Test Results cont'd

Carrier Frequency Separation


The EUT met the requirements of the Carrier Frequency Separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type "Static PBRS" and packet type "DH5" during the measurements.

| Bluetooth Channels | Limit (MHz) | Measured Level (MHz) |
|--------------------|----------------------------|----------------------|
| 38 to 39 | ≥ 0.025 or 20 dB bandwidth | 1.000 |

See figure 4-7 for the plot of the Carrier Frequency Separation measurement.

Figure 4-7: Carrier Frequency Separation, Freq. Hopping, Static PBRS, DH5, Channels 38 to 39

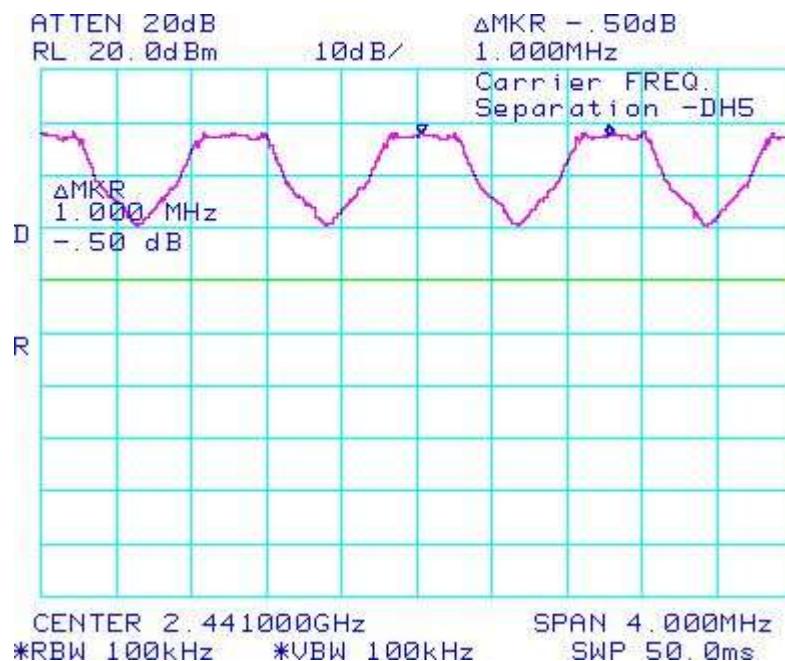

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |


Bluetooth RF Conducted Emission Test Results cont'd

Using Pattern type "Static PBRS" and packet type "3-DH5" during the measurements.

| Bluetooth Channels | Limit (MHz) | Measured Level (MHz) |
|--------------------|---------------------------------|----------------------|
| 38 to 39 | ≥ 0.025 or 20 dB bandwidth | 1.000 |

See figure 4-8 for the plot of the Carrier Frequency Separation measurement.

Figure 4-8: Carrier Frequency Separation, Freq. Hopping, Static PBRS, 3-DH5, Channels 38 to 39

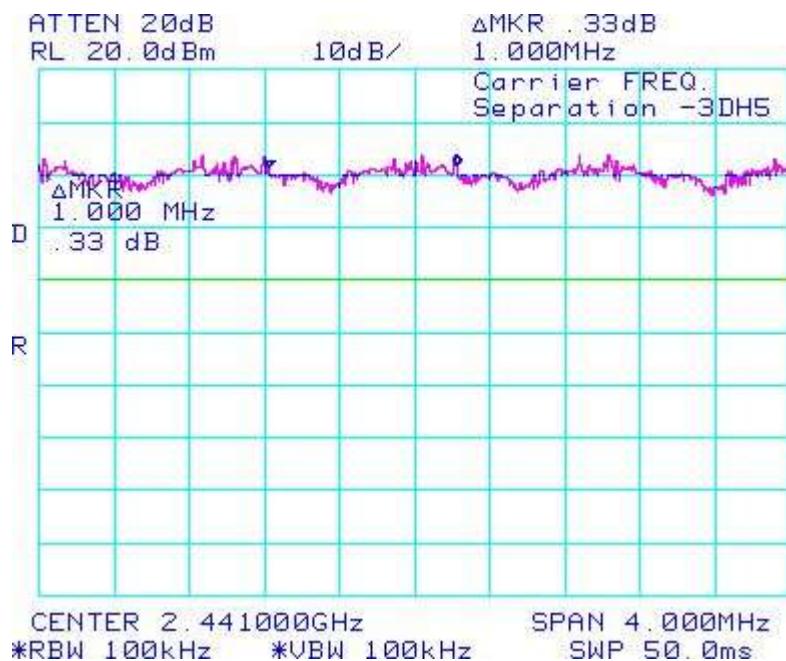

Bluetooth RF Conducted Emission Test Results cont'd

Number of Hopping Frequencies

The EUT met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type "Static PBRS" and packet type "DH5" during the measurements.

| Limit (CH) | Number of Hopping Frequencies (CH) |
|------------|------------------------------------|
| ≥75 | 79 |

See figures 4-9 to 4-12 for the plots of the number of hopping frequencies.

Figure 4-9: Number of Hopping Frequencies
Static PBRS, DH5


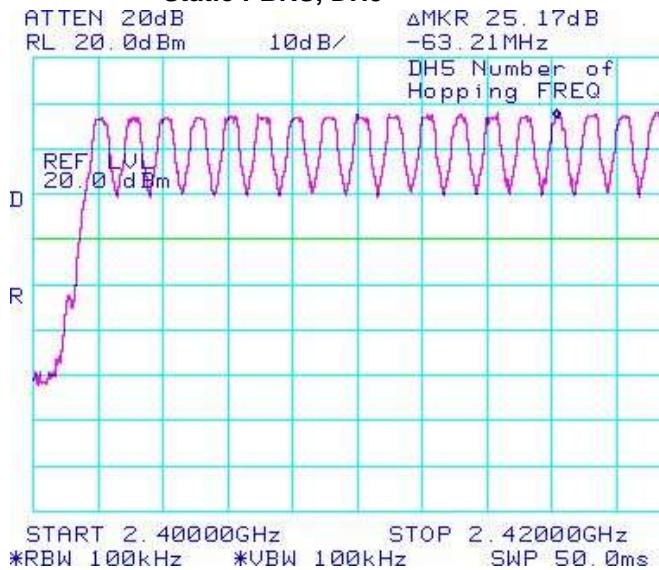


Figure 4-10: Number of Hopping Frequencies
Static PBRS, DH5

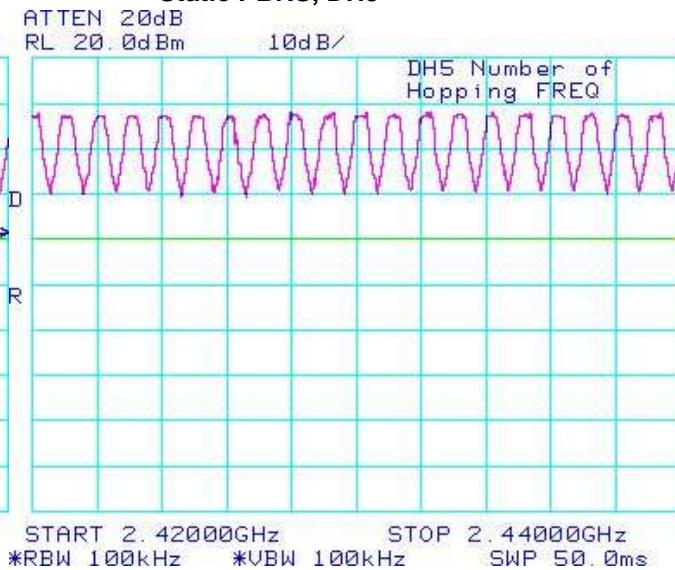

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-11: Number of Hopping Frequencies

Static PBRS, DH5


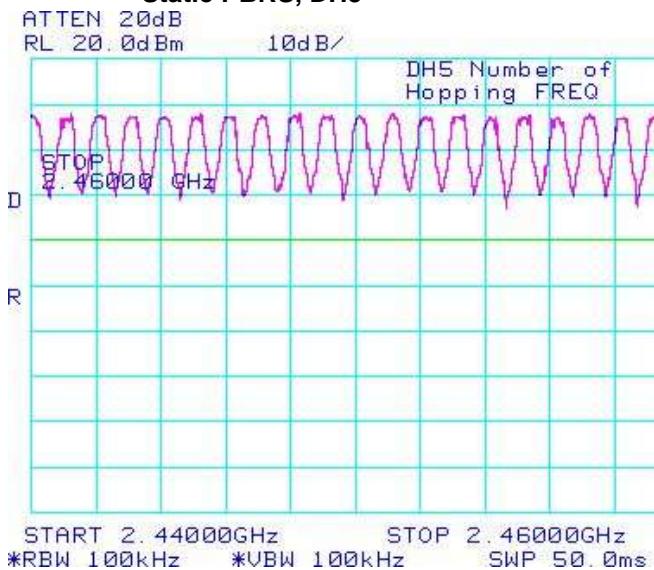


Figure 4-12: Number of Hopping Frequencies

Static PBRS, DH5

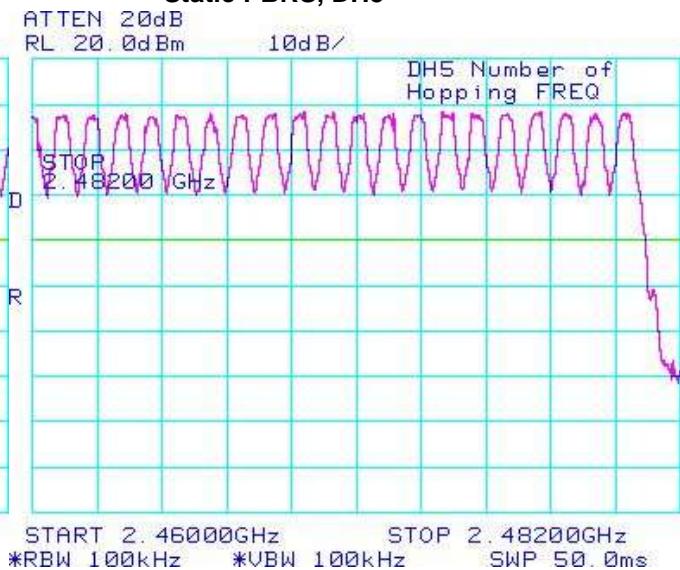

Time of Occupancy (Dwell Time)

The EUT met the requirements of the time of occupancy (dwell time) as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in packet types DH1, DH3 and DH5. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements. The frequency hopping is 1600 hops per second for a dwell time of 625 μ sec for 79 channels.

A DH1 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 800 hops per second with 79 channels which is 10.127 times per second. As per 15.247(a) (iii) "The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed". Therefore for 31.6 seconds (79x0.4) there are 320.0 times of appearance.

A DH3 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 400 hops per second with 79 channels which is 5.06 times per second. Therefore for 31.6 seconds there are 159.9 times of appearance.

A DH5 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 266.7 hops per second with 79 channels which is 3.38 times per second. Therefore for 31.6 seconds there are 106.8 times of appearance.

Bluetooth RF Conducted Emission Test Results cont'd

| Bluetooth Channel | Mode | Tx Time (ms) | Dwell Time/31.6 sec. (msec.) | Limit (msec.) | Margin (msec.) |
|-------------------|------|--------------|------------------------------|---------------|----------------|
| 0 | DH1 | 0.4070 | 0.4070 x 320.0 = 130.24 | 400 | 269.76 |
| 39 | DH1 | 0.4125 | 0.4125 x 320.0 = 132.00 | 400 | 268.00 |
| 78 | DH1 | 0.4015 | 0.4015 x 320.0 = 128.48 | 400 | 271.52 |
| 0 | DH3 | 1.6650 | 1.6650 x 159.9 = 266.23 | 400 | 133.77 |
| 39 | DH3 | 1.6650 | 1.6650 x 159.9 = 266.23 | 400 | 133.77 |
| 78 | DH3 | 1.6650 | 1.6650 x 159.9 = 266.23 | 400 | 133.77 |
| 0 | DH5 | 2.9100 | 2.9100 x 106.8 = 310.79 | 400 | 89.21 |
| 39 | DH5 | 2.9100 | 2.9100 x 106.8 = 310.79 | 400 | 89.21 |
| 78 | DH5 | 2.9200 | 2.9200 x 106.8 = 311.86 | 400 | 88.14 |

See figures 4-13 to 4-21 for the plots of the dwell time.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-13: Time of Occupancy (Dwell Time)


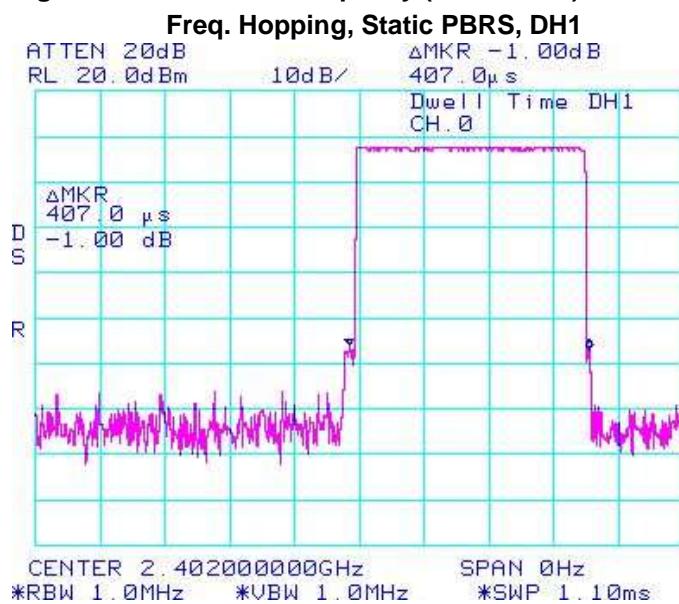


Figure 4-14: Time of Occupancy (Dwell Time)

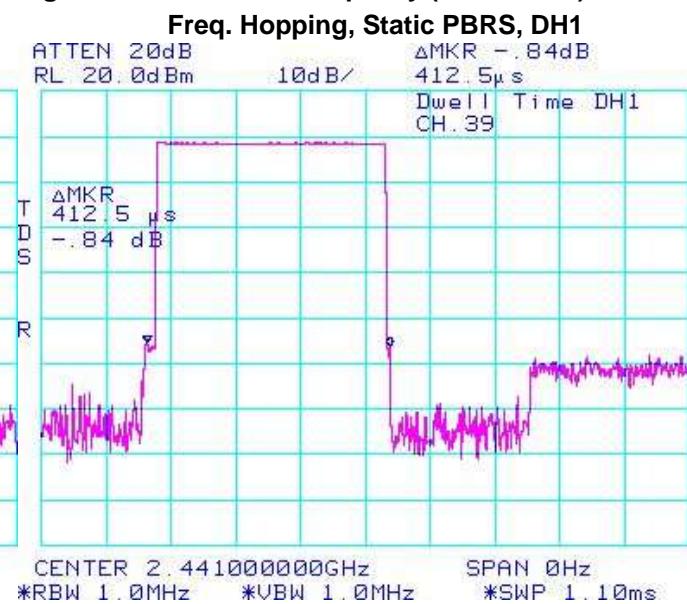

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-15: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH1

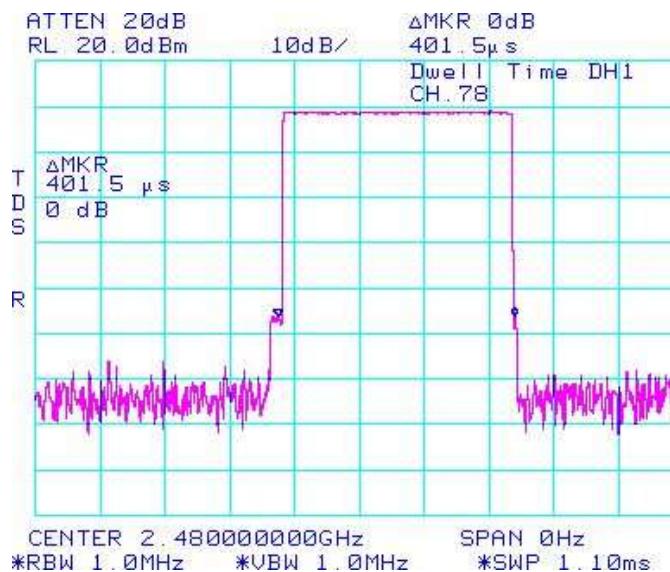


Figure 4-16: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH3

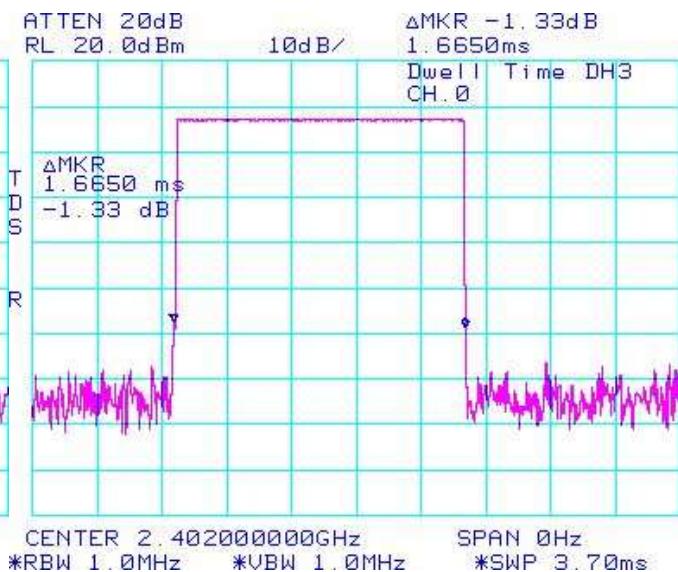


Figure 4-17: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH3


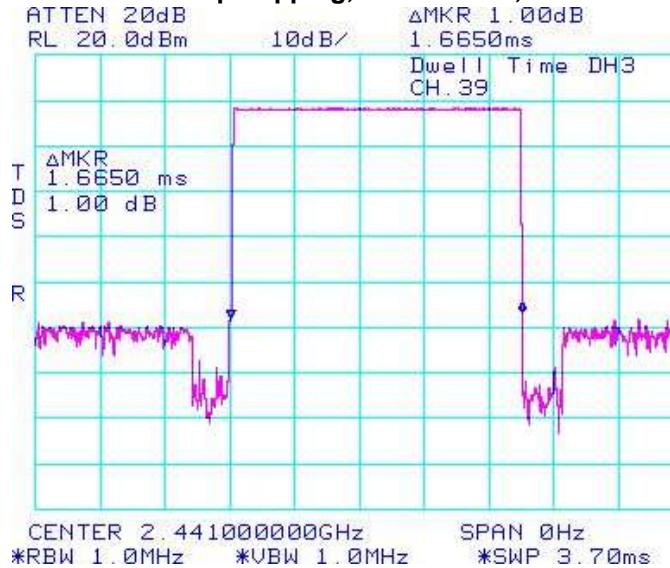


Figure 4-18 : Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH3

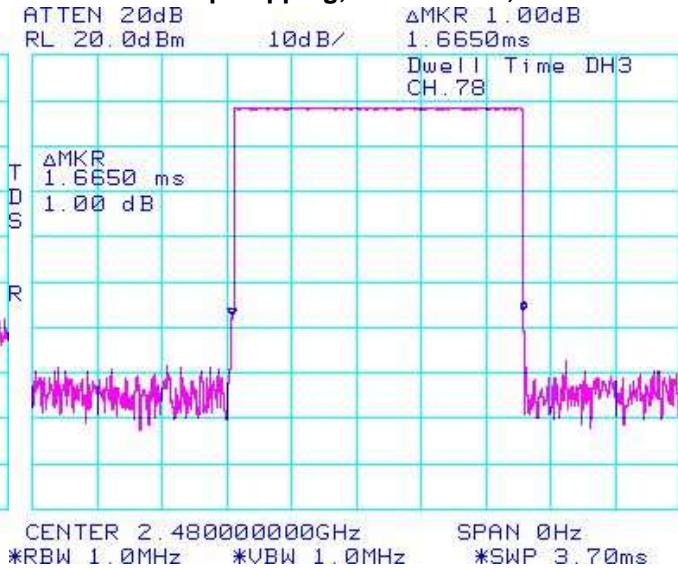

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-19: Time of Occupancy (Dwell Time)

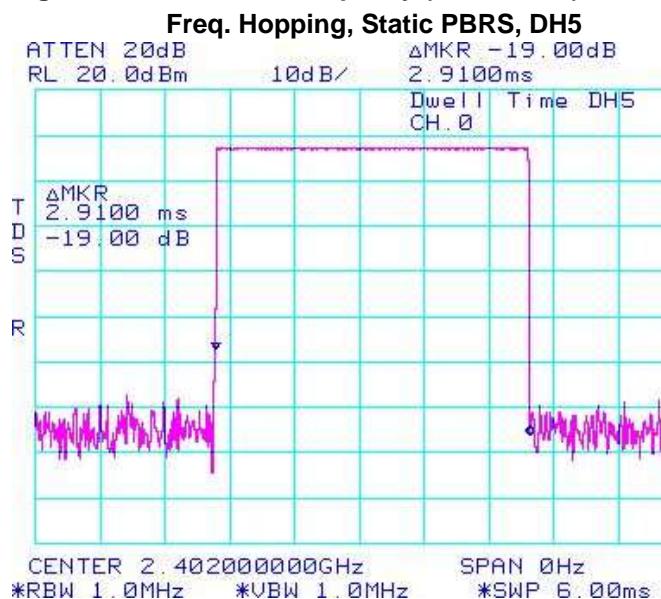


Figure 4-20: Time of Occupancy (Dwell Time)


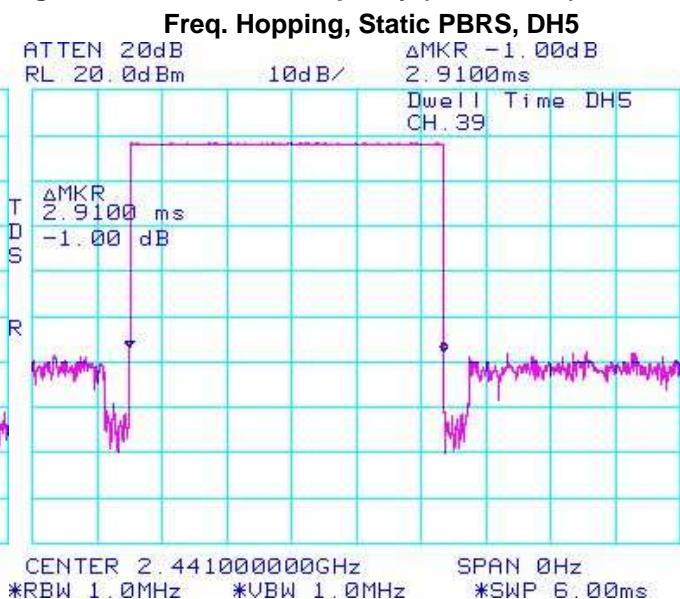


Figure 4-21: Time of Occupancy (Dwell Time)

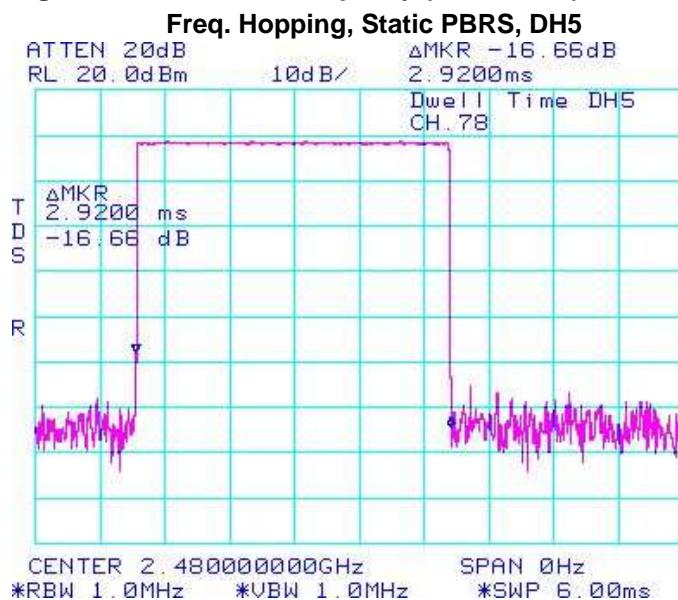

Bluetooth RF Conducted Emission Test Results cont'd

Maximum Peak Conducted Output Power

The EUT met the requirements of the maximum peak conducted output power of class 1 as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode during the measurements. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the coaxial cable loss and attenuators in the test circuit.

Using pattern type "Static PBRS" and packet type "DH5" during the measurements.

| Bluetooth Channel | Measured Level (dBm) | Measured Level (W) | Class 1 Limit (dBm) |
|-------------------|----------------------|--------------------|---------------------|
| 0 | 6.67 | 0.00465 | 0.0 to 20.0 |
| 39 | 8.33 | 0.00681 | 0.0 to 20.0 |
| 78 | 8.50 | 0.00708 | 0.0 to 20.0 |

See figures 4-22 to 4-24 for the plots of the maximum peak conducted output power.

Figure 4-22: Max. Peak Conducted Output Power

Single Freq., Static PBRS, DH5


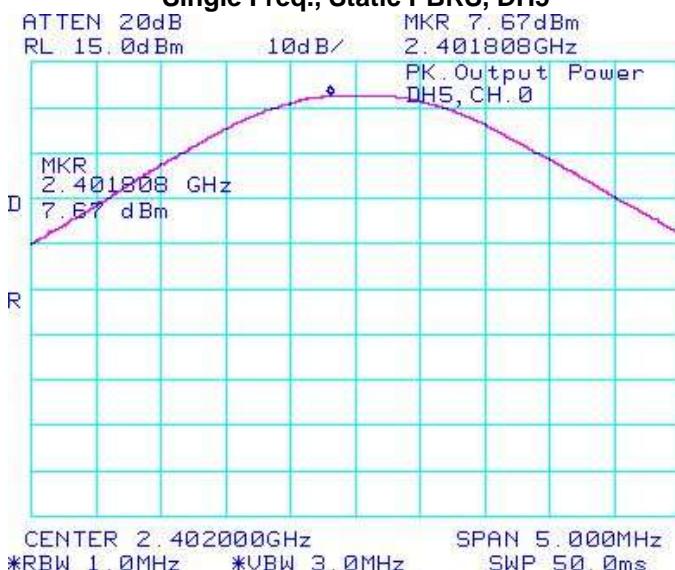


Figure 4-23: Max. Peak Conducted Output Power


Single Freq., Static PBRS, DH5

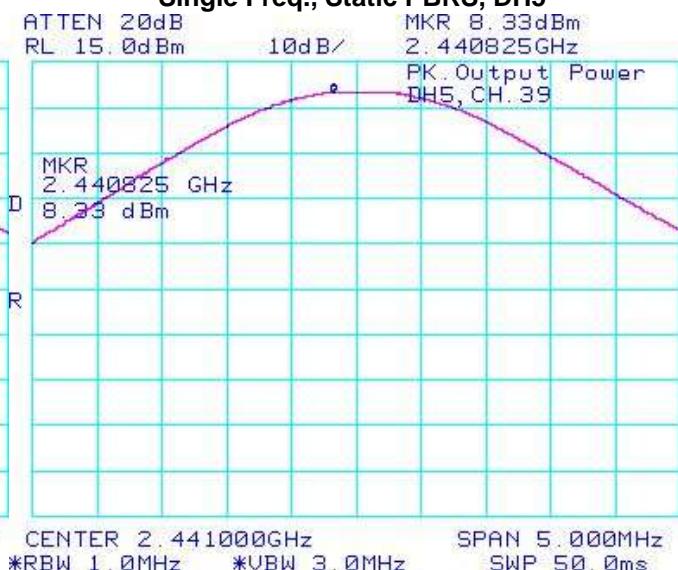

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-24: Max. Peak Conducted Output Power

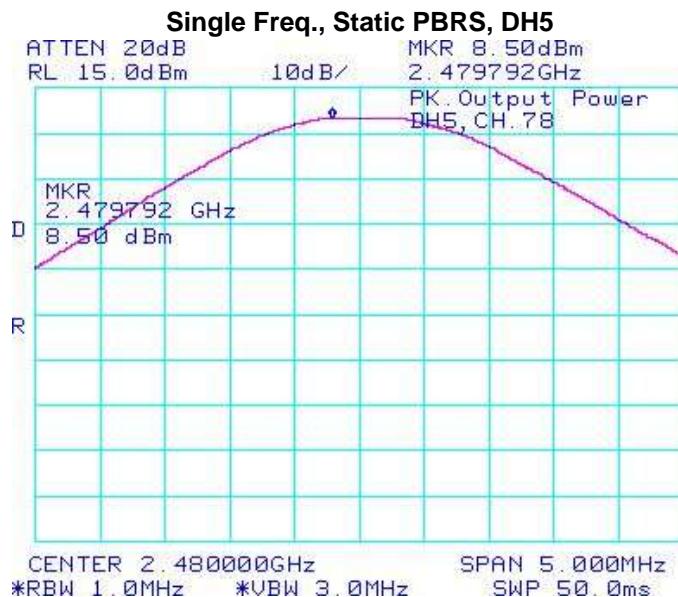

Using Pattern type “Static PBRS” and packet type “3-DH5” during the measurements.

| Bluetooth Channel | Measured Level (dBm) | Measured Level (W) | Class 1 Limit (dBm) |
|-------------------|----------------------|--------------------|---------------------|
| 0 | 5.33 | 0.00341 | 0.0 to 20.0 |
| 39 | 6.00 | 0.00398 | 0.0 to 20.0 |
| 78 | 6.17 | 0.00414 | 0.0 to 20.0 |

See figures 4-25 to 4-27 for the plots of the maximum peak conducted output power.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-25: Max. Peak Conducted Output Power

Single Freq., Static PBRS, 3-DH5

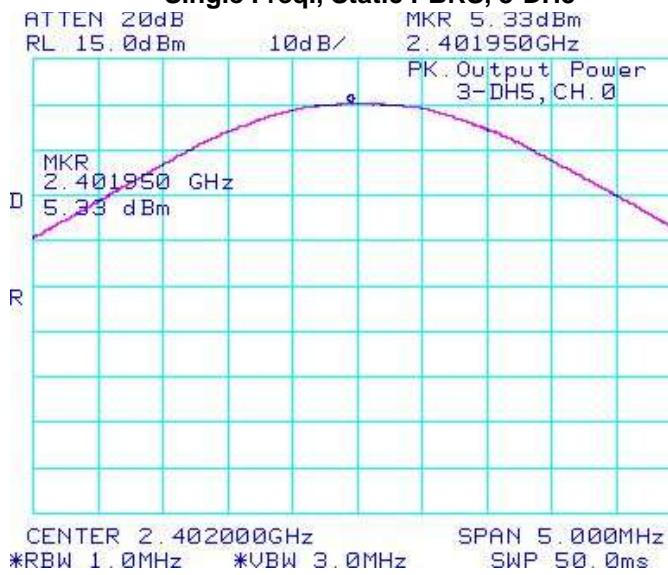


Figure 4-26: Max. Peak Conducted Output Power

Single Freq., Static PBRS, 3-DH5


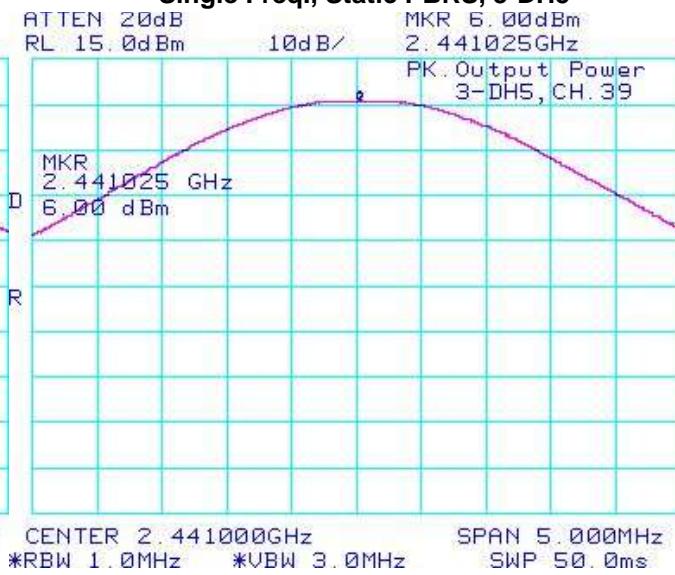


Figure 4-27: Max. Peak Conducted Output Power

Single Freq., Static PBRS, 3-DH5

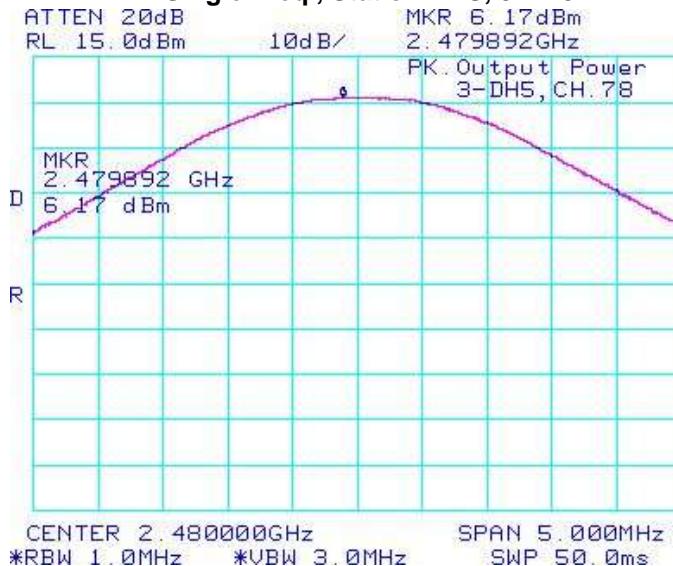

Bluetooth RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Low channel (0) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode.

Using pattern type "Static PBRS" and packet type "DH5" during the measurements.

| Bluetooth Channel | Operating Mode | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-------------------|------------------|----------------------|-------------|-------------|
| 0 | Single Frequency | -39.17 | -20 | -19.17 |
| 78 | Single Frequency | -38.50 | -20 | -18.50 |
| 0 | Hopping | -38.67 | -20 | -18.67 |
| 78 | Hopping | -40.00 | -20 | -20.00 |

See figures 4-28 to 4-31 for the plots of the band edge compliance measurements.

Figure 4-28: Band Edge Compliance


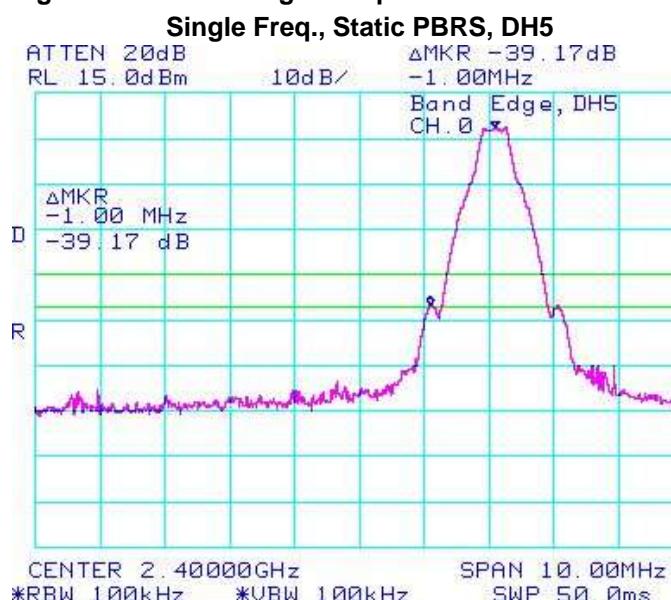


Figure 4-29: Band Edge Compliance

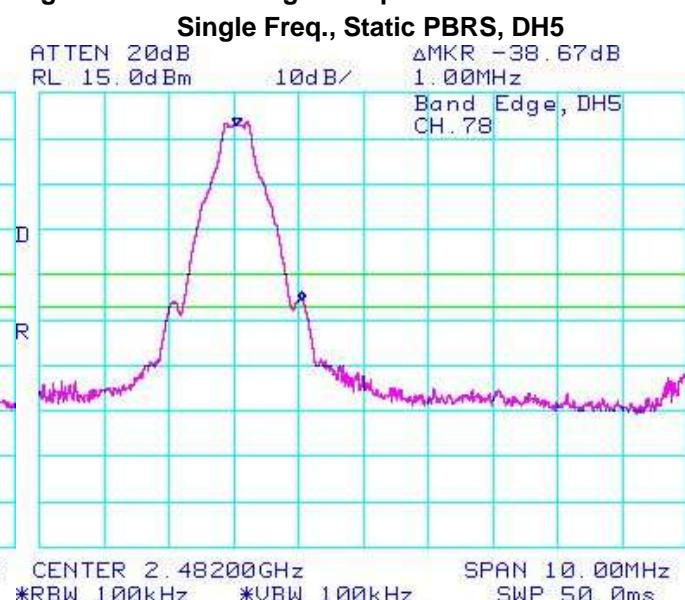

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-30: Band Edge Compliance


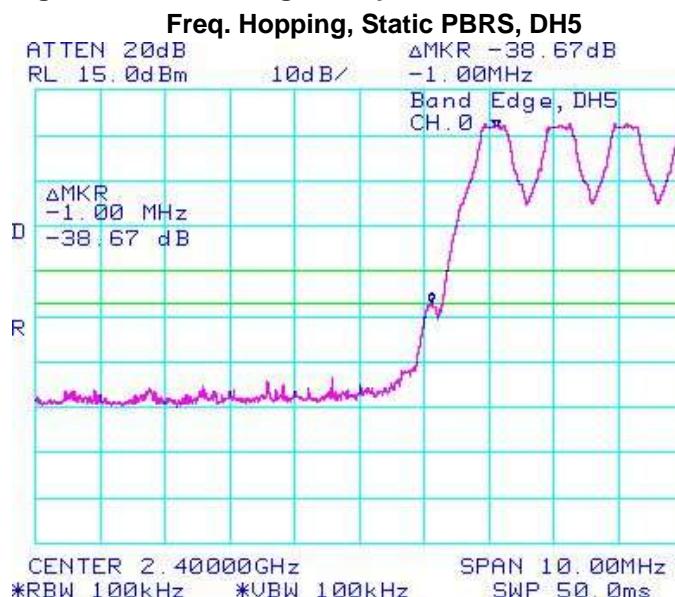


Figure 4-31: Band Edge Compliance

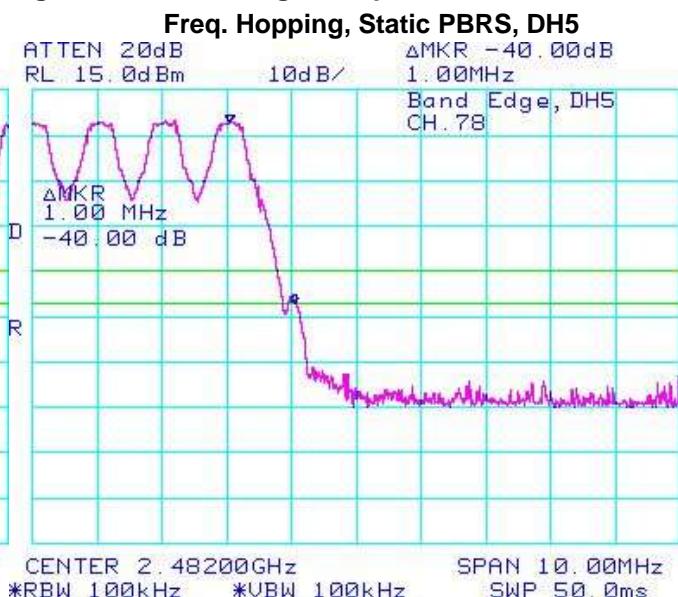

Using pattern type "Static PBRS" and packet type "3-DH5" during the measurements.

| Bluetooth Channel | Operating Mode | Measured Level (dBc) | Limit (dBc) | Margin (dB) |
|-------------------|------------------|----------------------|-------------|-------------|
| 0 | Single Frequency | -32.66 | -20 | -12.66 |
| 78 | Single Frequency | -38.17 | -20 | -18.17 |
| 0 | Hopping | -33.00 | -20 | -13.00 |
| 78 | Hopping | -39.16 | -20 | -19.16 |

See figures 4-32 to 4-35 for the plots of the band edge compliance measurements.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-32: Band Edge Compliance

Single Freq., Static PBRS, 3-DH5

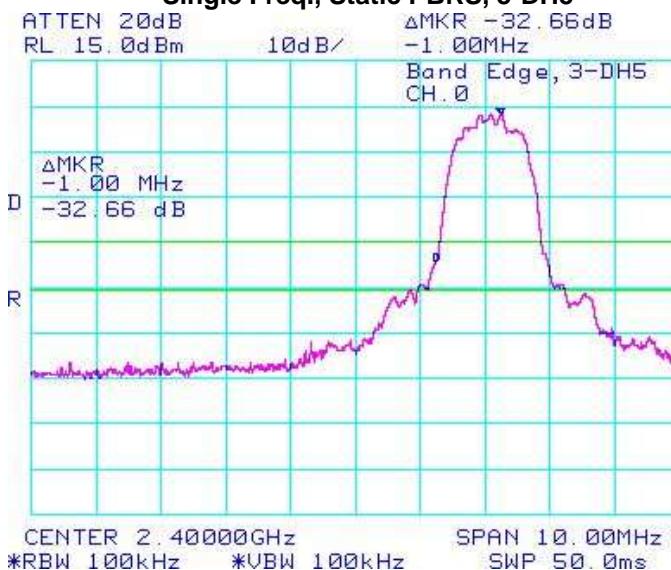


Figure 4-33: Band Edge Compliance

Single Freq., Static PBRS, 3-DH5

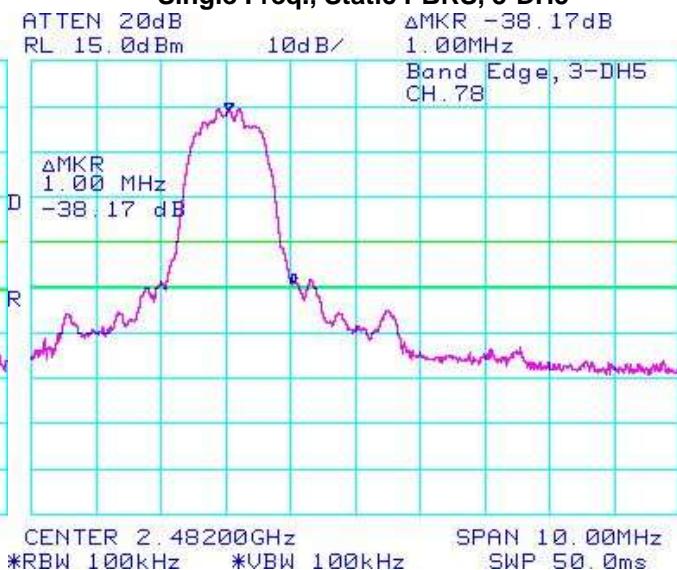


Figure 4-34: Band Edge Compliance

Freq. Hopping, Static PBRS, 3-DH5


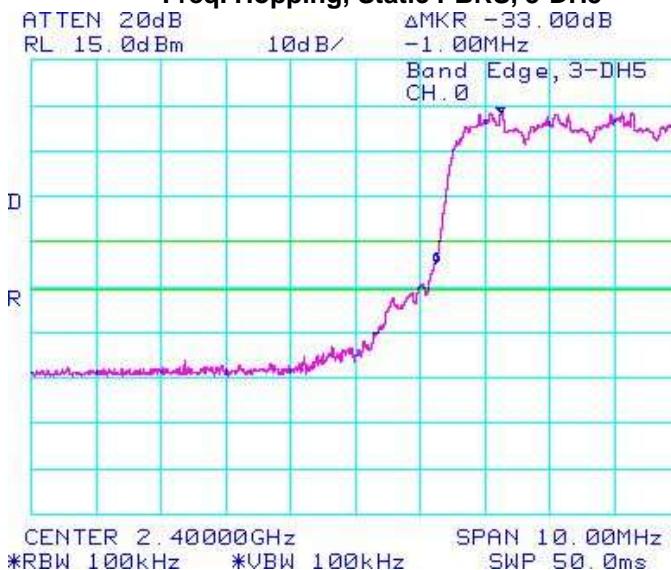


Figure 4-35: Band Edge Compliance

Freq. Hopping, Static PBRS, 3-DH5

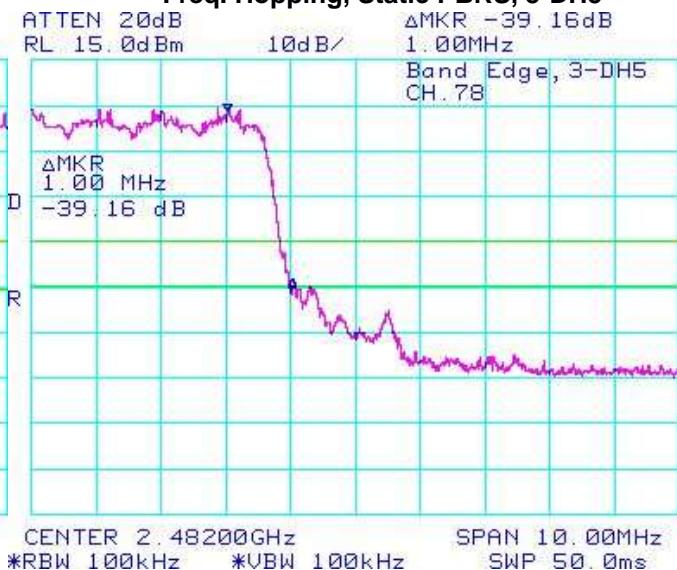

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

Bluetooth RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Low channel (0), mid channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

Using pattern type “Static PBRS” and packet type “DH5” during the measurements.

| Bluetooth Channel | Channel Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from carrier (dBc) | Limit (dBc) |
|-------------------|---------------------|---------------------------|--|-------------|
| 0 | 6.67 | -42.50 | -49.17 | -20 |
| 39 | 8.33 | -44.00 | -52.33 | -20 |
| 78 | 8.50 | -43.50 | -52.00 | -20 |
| Hopping mode | 6.67 | -44.83 | -51.50 | -20 |

See figures 4-36 to 4-39 for the plots of the spurious RF conducted emissions.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-36: Spurious RF Conducted Emissions

Single Freq., Static PBRS, DH5,


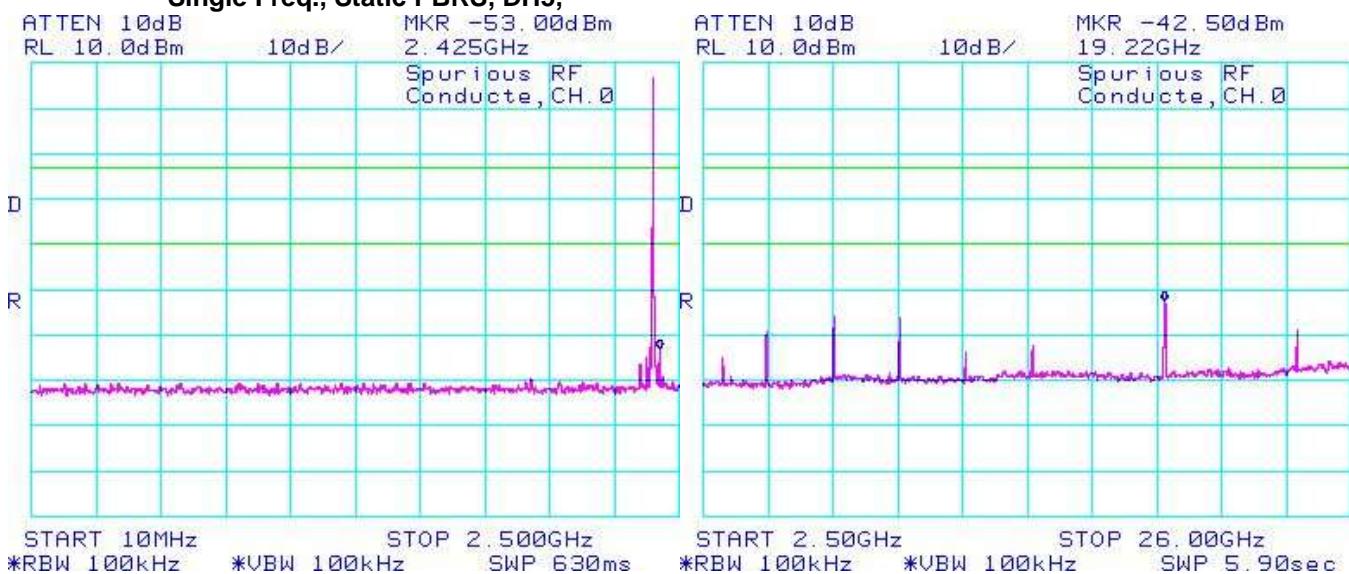


Figure 4-37: Spurious RF Conducted Emissions

Single Freq., Static PBRS, DH5

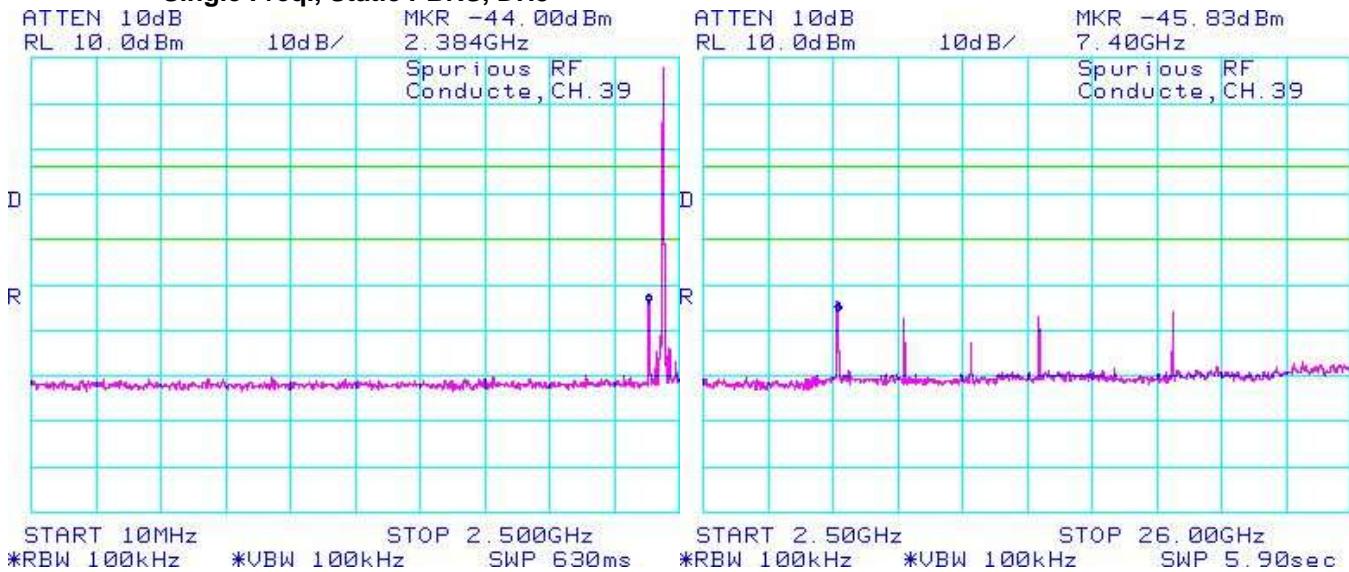

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-38: Spurious RF Conducted Emissions

Single Freq., Static PBRS, DH5


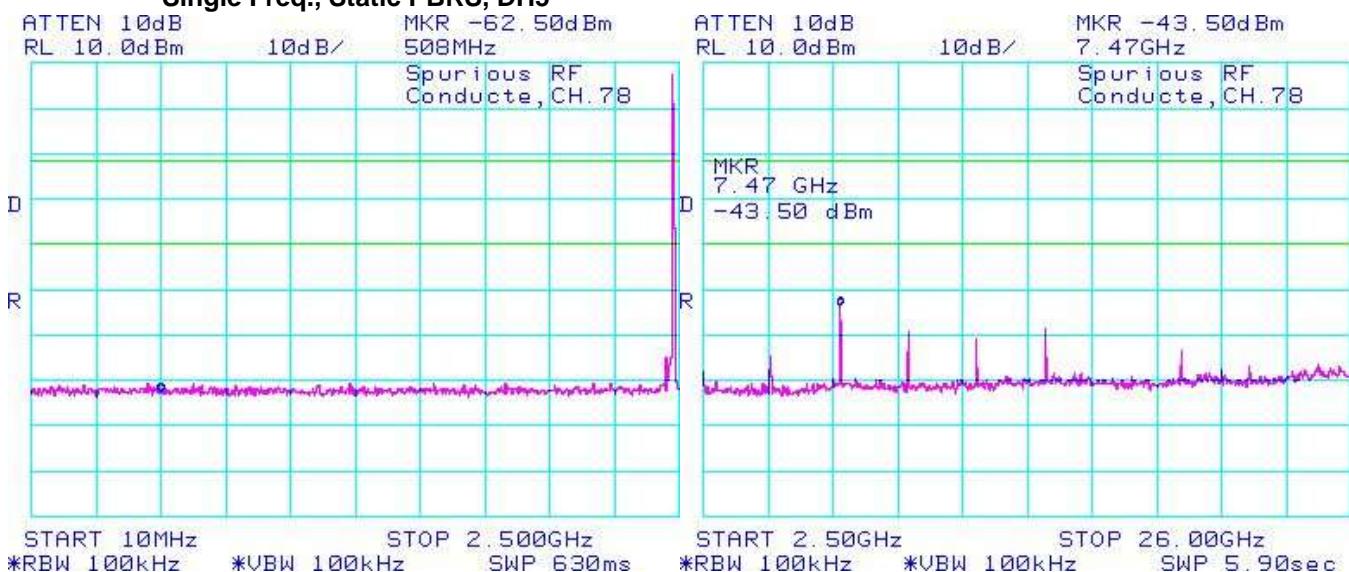


Figure 4-39: Spurious RF Conducted Emissions

Freq. Hopping, Static PBRS, DH5

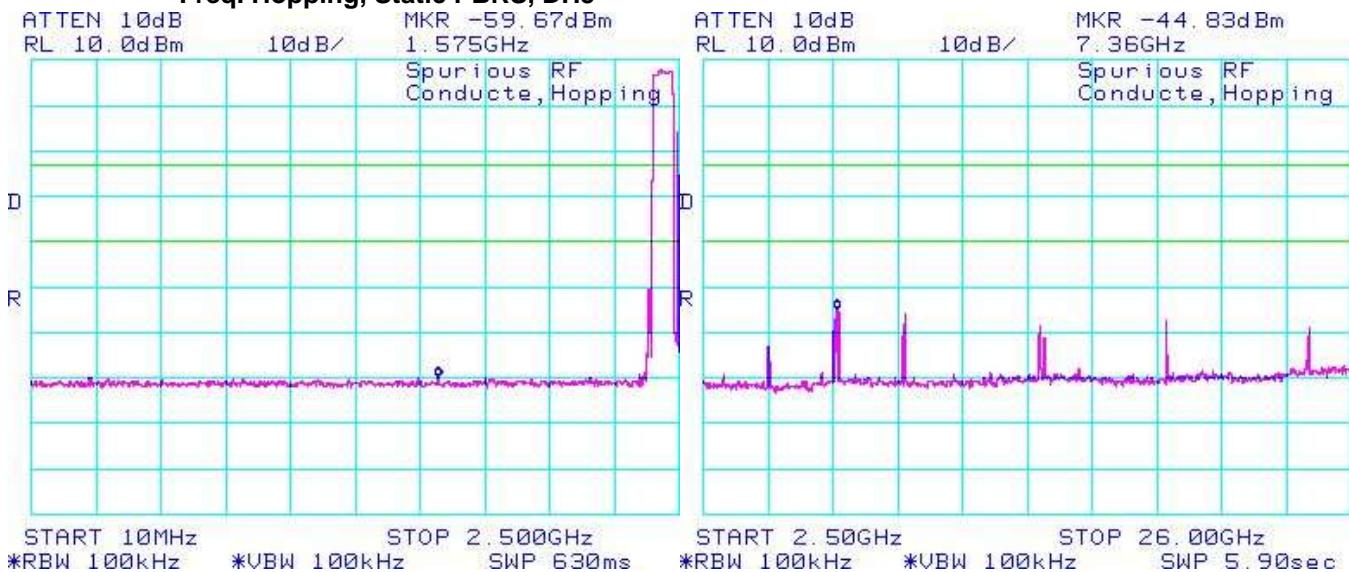

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 4 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type “Static PBRS” and packet type “3-DH5” during the measurements.

| Bluetooth Channel | Channel Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from carrier (dBc) | Limit (dBc) |
|-------------------|---------------------|---------------------------|--|-------------|
| 0 | 5.33 | -49.00 | -54.33 | -20 |
| 39 | 6.00 | -43.17 | -49.17 | -20 |
| 78 | 6.17 | -41.33 | -47.50 | -20 |
| Hopping mode | 5.33 | -49.83 | -55.16 | -20 |

See figures 4-40 to 4-43 for the plots of the spurious RF conducted emissions.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-40 : Spurious RF Conducted Emissions

Single Freq., Static PBRS, 3-DH5


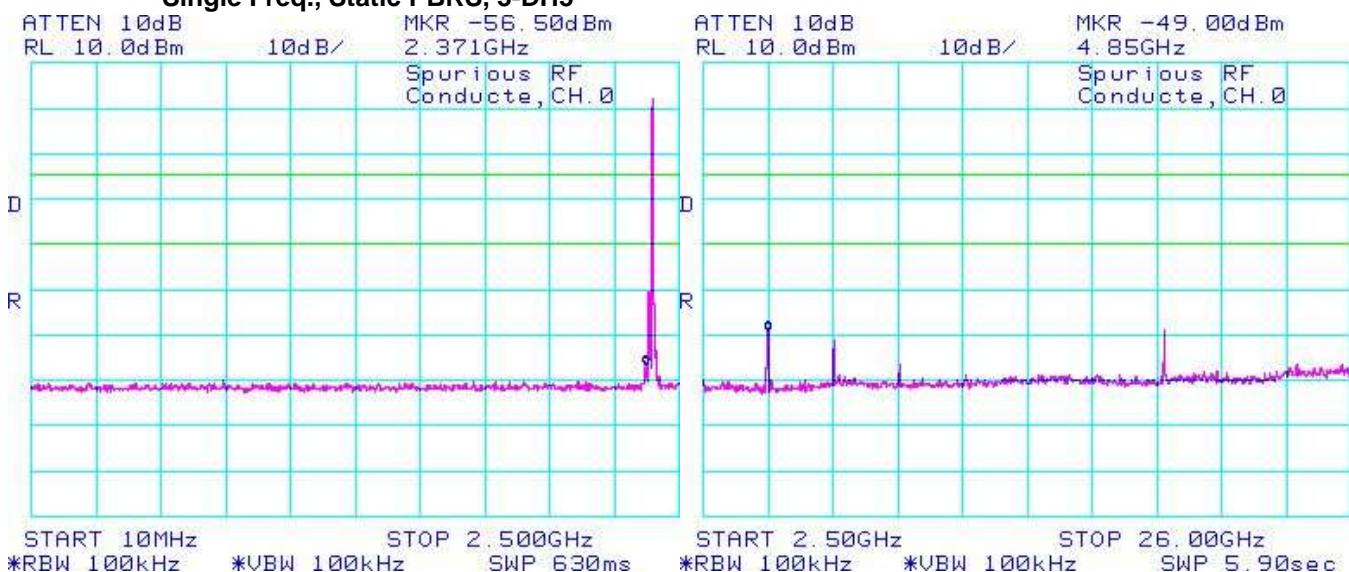


Figure 4-41: Spurious RF Conducted Emissions

Single Freq., Static PBRS, 3-DH5

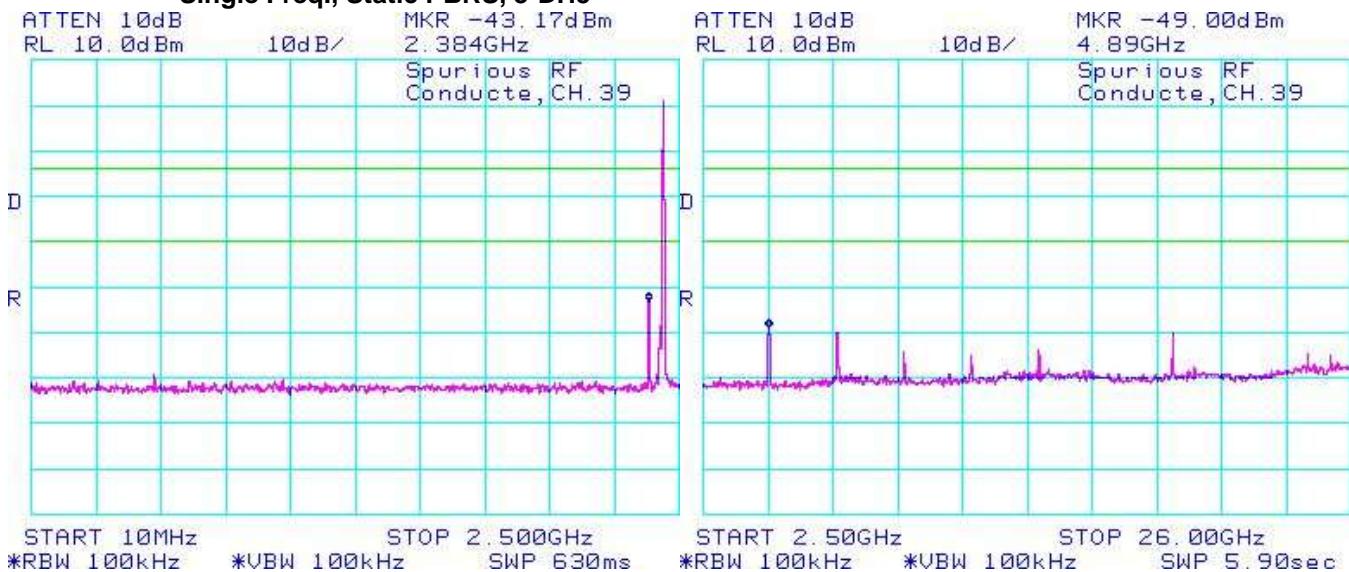

Bluetooth RF Conducted Emission Test Results cont'd

Figure 4-42: Spurious RF Conducted Emissions

Single Freq., Static PBRS, 3-DH5


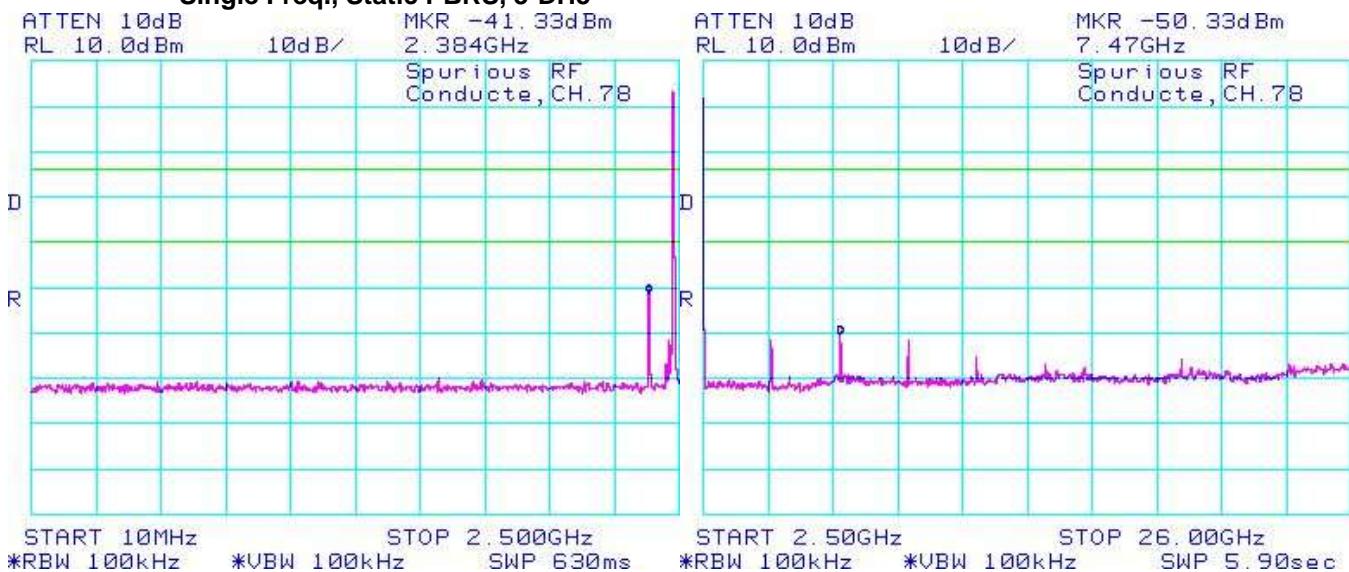


Figure 4-43 : Spurious RF Conducted Emissions

Freq. Hopping, Static PBRS, 3-DH5

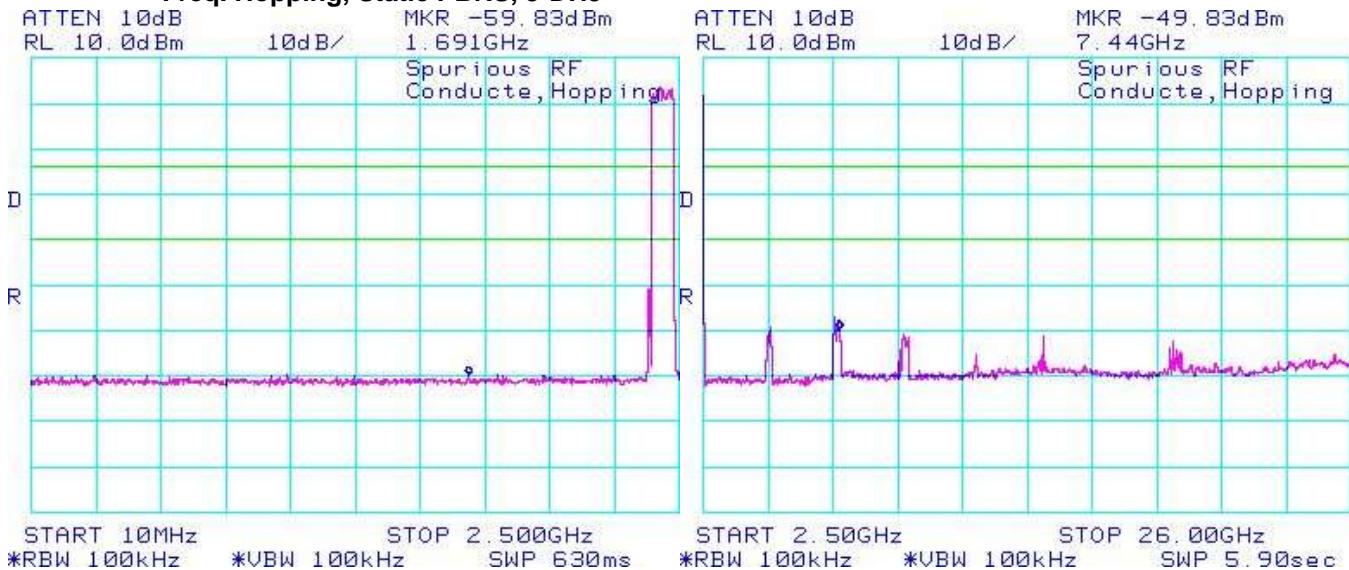


| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

APPENDIX 5 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS

| | | |
|---|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results

Test Setup Diagram

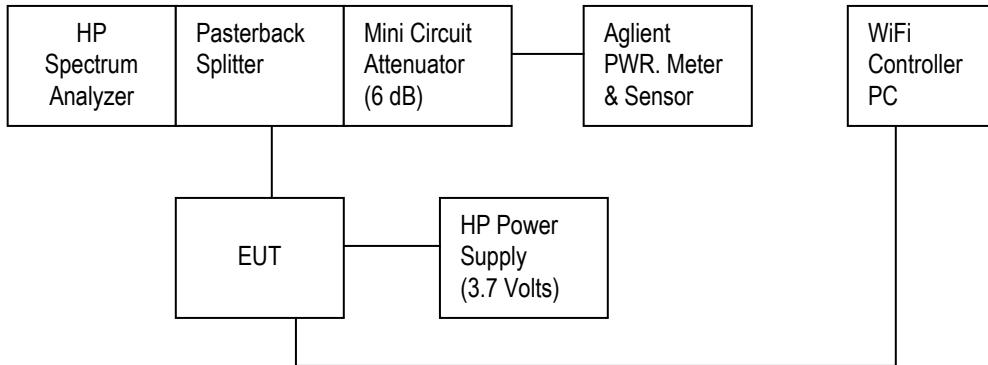

A reference offset of 20.4 dB was applied to the spectrum analyzer and 6.6 dB was applied to the Power Meter reference level for the attenuators and coaxial cable loss in the test circuit.

Date of test: August 05, 2011

The measurements on the BlackBerry® smartphone were performed by Maurice Battler.

The environmental test conditions were:

Temperature: 24 °C
Relative Humidity: 34 %

| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results cont'd

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a)(2) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.

| Channel | Data Rate | Limit (kHz) | Measured Level (MHz) |
|---------|-----------|-------------|----------------------|
| 1 | 1 Mbps | ≥ 500 | 10.17 |
| | 5.5 Mbps | ≥ 500 | 10.60 |
| | 11 Mbps | ≥ 500 | 10.73 |
| | 6 Mbps | ≥ 500 | 16.40 |
| | 24 Mbps | ≥ 500 | 16.53 |
| | 54 Mbps | ≥ 500 | 16.63 |
| | MCS 0 | ≥ 500 | 17.03 |
| | MCS 4 | ≥ 500 | 17.73 |
| | MCS 7 | ≥ 500 | 17.80 |
| 6 | 1 Mbps | ≥ 500 | 10.13 |
| | 5.5 Mbps | ≥ 500 | 10.63 |
| | 11 Mbps | ≥ 500 | 11.17 |
| | 6 Mbps | ≥ 500 | 16.43 |
| | 24 Mbps | ≥ 500 | 16.57 |
| | 54 Mbps | ≥ 500 | 16.57 |
| | MCS 0 | ≥ 500 | 17.63 |
| | MCS 4 | ≥ 500 | 17.70 |
| | MCS 7 | ≥ 500 | 17.77 |
| 11 | 1 Mbps | ≥ 500 | 10.17 |
| | 5.5 Mbps | ≥ 500 | 10.50 |
| | 11 Mbps | ≥ 500 | 11.13 |
| | 6 Mbps | ≥ 500 | 16.40 |
| | 24 Mbps | ≥ 500 | 16.63 |
| | 54 Mbps | ≥ 500 | 16.60 |
| | MCS 0 | ≥ 500 | 17.03 |
| | MCS 4 | ≥ 500 | 17.63 |
| | MCS 7 | ≥ 500 | 17.77 |

802.11b/g/n RF Conducted Emission Test Results cont'd

See figures 5-1 to 5-9 for the plots of the 6 dB bandwidth measurements for Channels 1, 6, and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

Figure 5-1: 6 dB Bandwidth

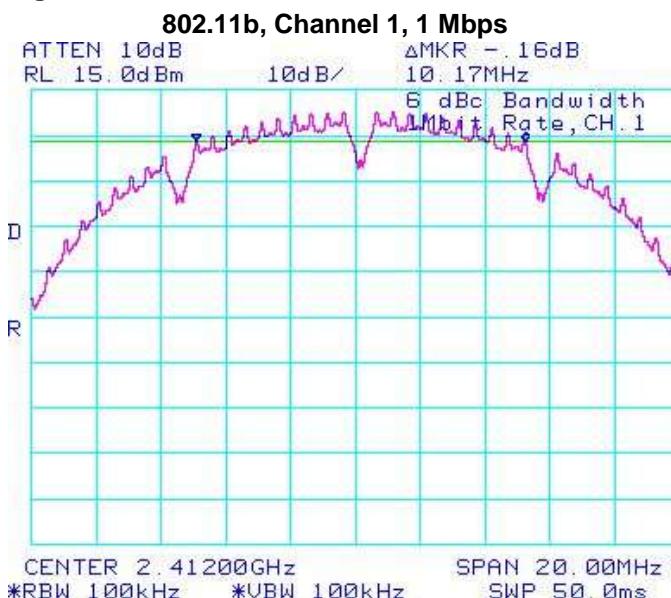


Figure 5-2: 6 dB Bandwidth

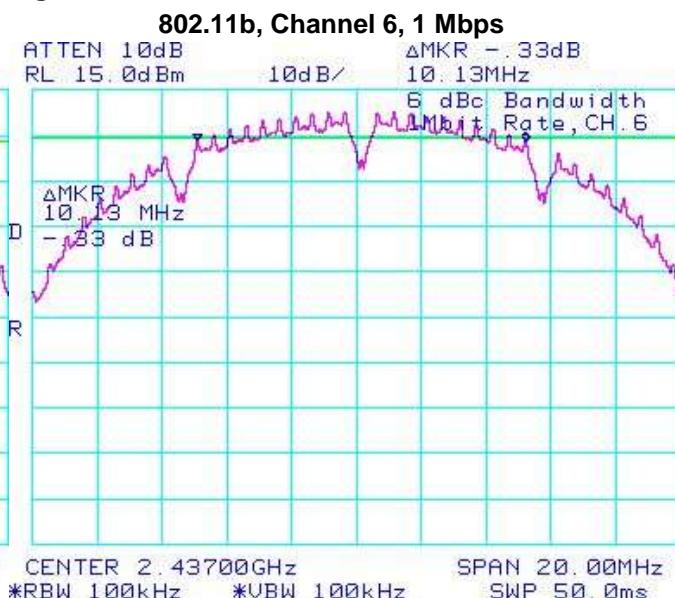


Figure 5-3: 6 dB Bandwidth


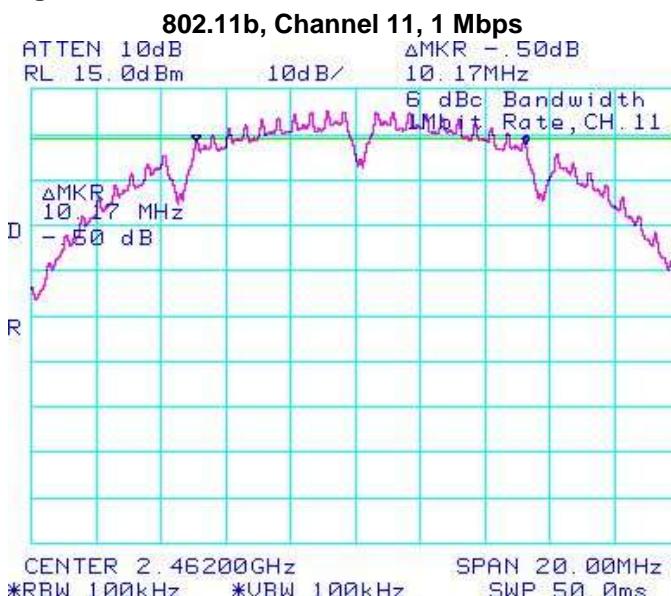


Figure 5-4: 6 dB Bandwidth

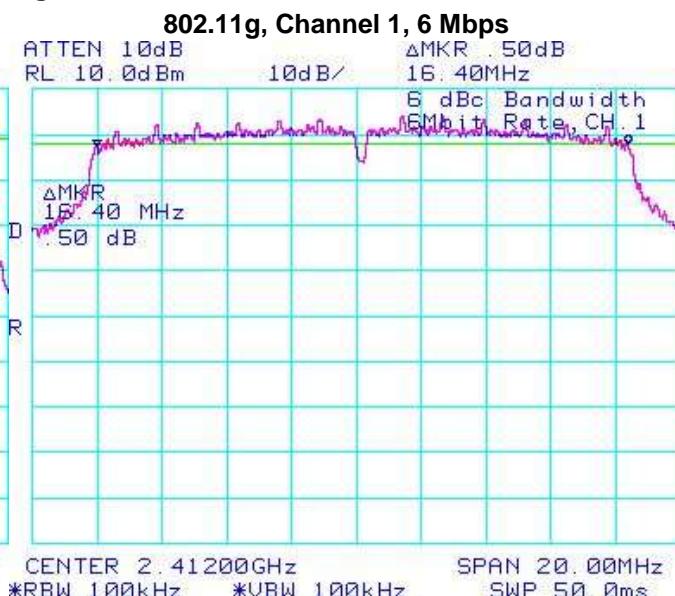

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-5: 6 dB Bandwidth

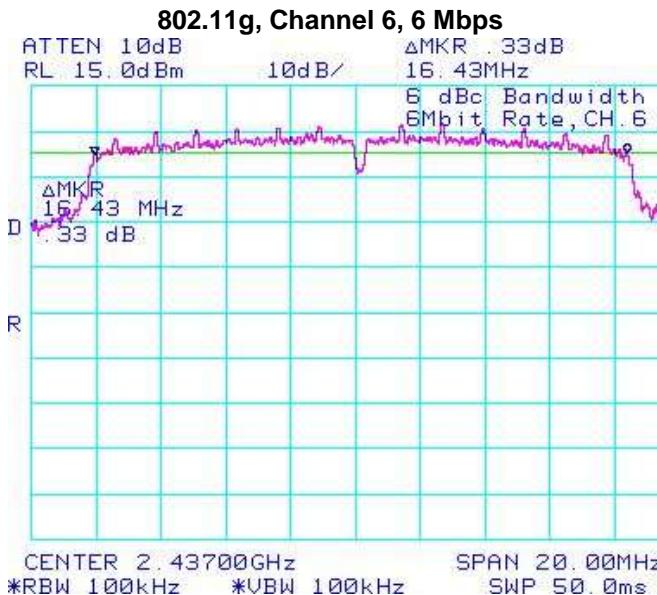


Figure 5-6: 6 dB Bandwidth

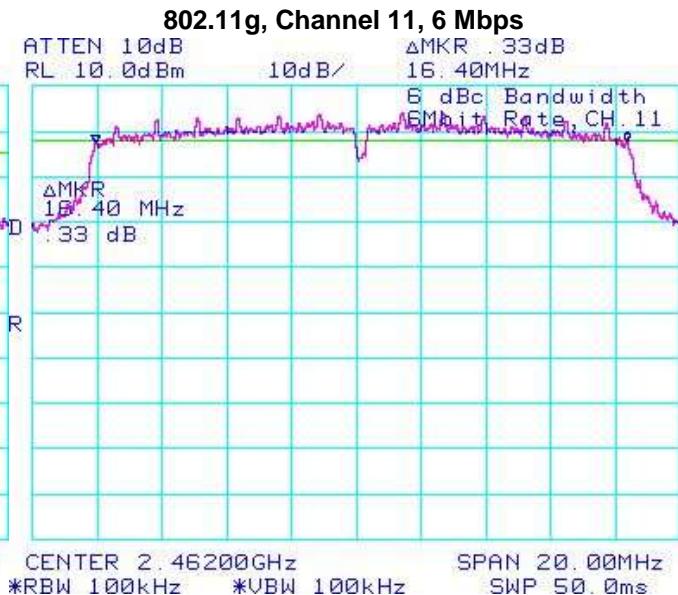


Figure 5-7: 6 dB Bandwidth



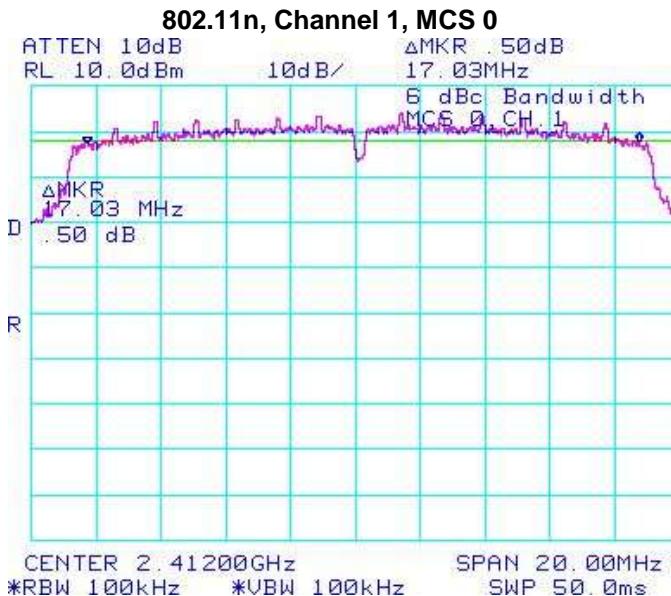


Figure 5-8: 6 dB Bandwidth

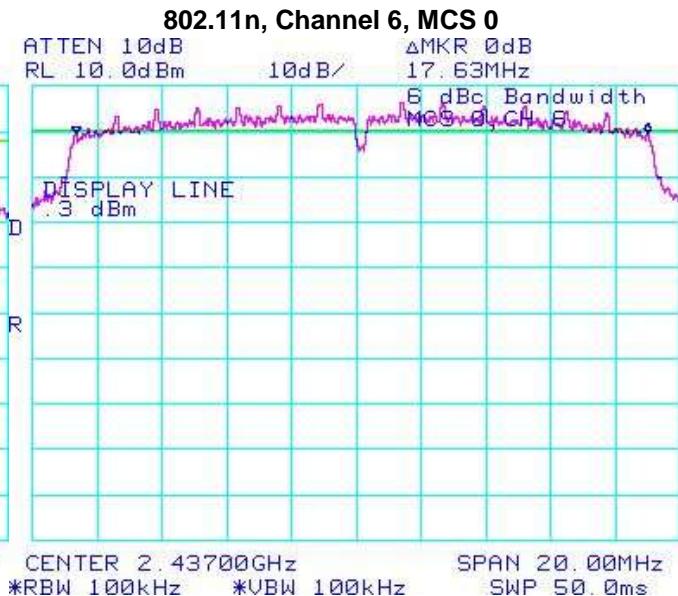

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

Figure 5-9: 6 dB Bandwidth

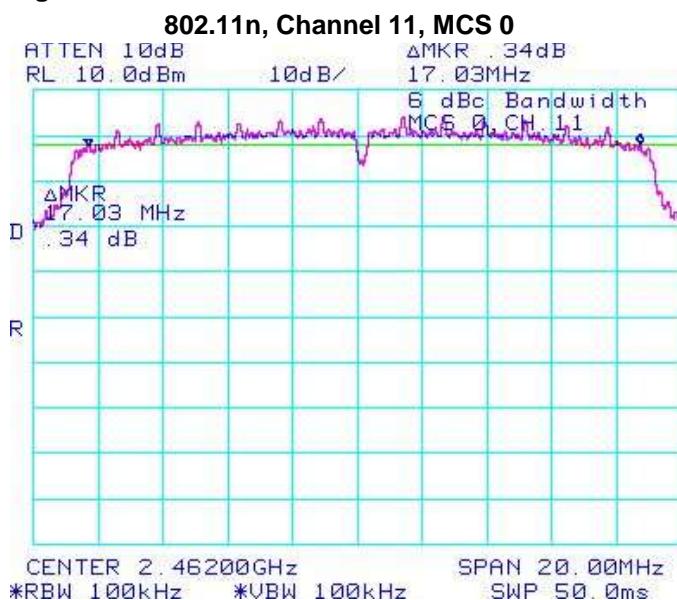

| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results cont'd

Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power of class 1 as per 47 CFR 15.247(b)(3) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4 and 7 for 802.11n mode using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 18.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

| Channel | Data Rate | Class 2 Limit (W) | Measured Level (dBm) | Measured Level (mW) |
|---------|-----------|-------------------|----------------------|---------------------|
| 1 | 1 Mbps | < 1.00 | 18.25 | 66.83 |
| | 5.5 Mbps | < 1.00 | 18.09 | 64.42 |
| | 11 Mbps | < 1.00 | 18.06 | 63.97 |
| | 6 Mbps | < 1.00 | 14.73 | 29.72 |
| | 24 Mbps | < 1.00 | 14.09 | 25.64 |
| | 54 Mbps | < 1.00 | 13.83 | 24.15 |
| | MCS 0 | < 1.00 | 14.67 | 29.31 |
| | MCS 4 | < 1.00 | 13.98 | 25.00 |
| | MCS 7 | < 1.00 | 12.73 | 18.75 |
| 6 | 1 Mbps | < 1.00 | 18.58 | 72.11 |
| | 5.5 Mbps | < 1.00 | 18.49 | 70.63 |
| | 11 Mbps | < 1.00 | 18.44 | 69.82 |
| | 6 Mbps | < 1.00 | 17.32 | 53.95 |
| | 24 Mbps | < 1.00 | 14.39 | 27.48 |
| | 54 Mbps | < 1.00 | 14.01 | 25.18 |
| | MCS 0 | < 1.00 | 17.33 | 54.08 |
| | MCS 4 | < 1.00 | 14.21 | 26.36 |
| | MCS 7 | < 1.00 | 12.97 | 19.82 |

| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results cont'd

| Channel | Data Rate | Class 2 Limit (W) | Measured Level (dBm) | Measured Level (mW) |
|---------|-----------|-------------------|----------------------|---------------------|
| 11 | 1 Mbps | < 1.00 | 18.84 | 76.56 |
| | 5.5 Mbps | < 1.00 | 18.75 | 74.99 |
| | 11 Mbps | < 1.00 | 18.73 | 74.64 |
| | 6 Mbps | < 1.00 | 15.28 | 33.73 |
| | 24 Mbps | < 1.00 | 14.60 | 28.84 |
| | 54 Mbps | < 1.00 | 14.17 | 26.12 |
| | MCS 0 | < 1.00 | 15.23 | 33.34 |
| | MCS 4 | < 1.00 | 14.47 | 27.99 |
| | MCS 7 | < 1.00 | 13.22 | 20.99 |

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Channels 1 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4 and 7 for 802.11n mode.

| Channel | Data Rate | Limit (dBc) | Measured Level (dBc) | Margin (dBc) |
|---------|-----------|-------------|----------------------|--------------|
| 1 | 1 Mbps | < -20 | -45.00 | -25.00 |
| | 5.5 Mbps | < -20 | -47.50 | -27.50 |
| | 11 Mbps | < -20 | -47.00 | -27.00 |
| | 6 Mbps | < -20 | -27.50 | -7.50 |
| | 24 Mbps | < -20 | -29.83 | -9.83 |
| | 54 Mbps | < -20 | -29.00 | -9.00 |
| | MCS 0 | < -20 | -25.17 | -5.17 |
| | MCS 4 | < -20 | -27.00 | -7.00 |
| | MCS 7 | < -20 | -29.17 | -9.17 |
| 11 | 1 Mbps | < -20 | -52.83 | -32.83 |
| | 5.5 Mbps | < -20 | -56.00 | -36.00 |
| | 11 Mbps | < -20 | -55.30 | -35.30 |
| | 6 Mbps | < -20 | -38.17 | -18.17 |
| | 24 Mbps | < -20 | -43.33 | -23.33 |
| | 54 Mbps | < -20 | -43.67 | -23.67 |
| | MCS 0 | < -20 | -35.50 | -15.50 |
| | MCS 4 | < -20 | -41.50 | -21.50 |
| | MCS 7 | < -20 | -45.50 | -25.50 |

See figures 5-10 to 5-15 for the plots of the band edge compliance measurements for Channels 1 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-10: Band Edge Compliance

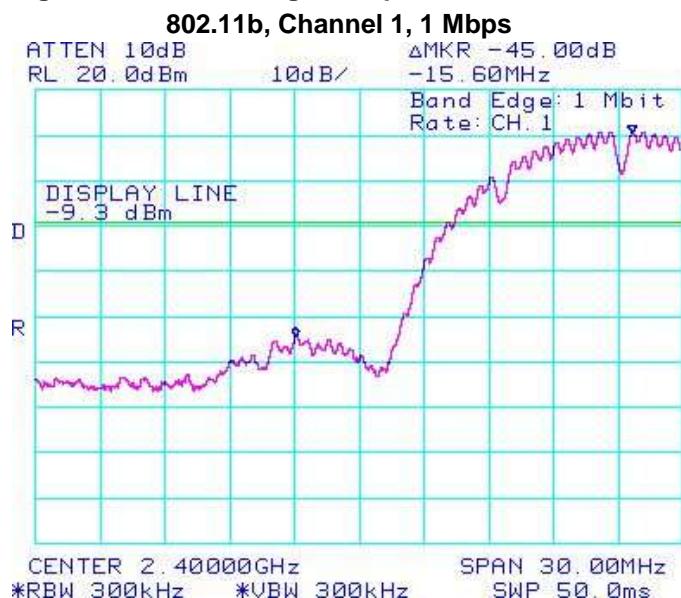


Figure 5-11: Band Edge Compliance

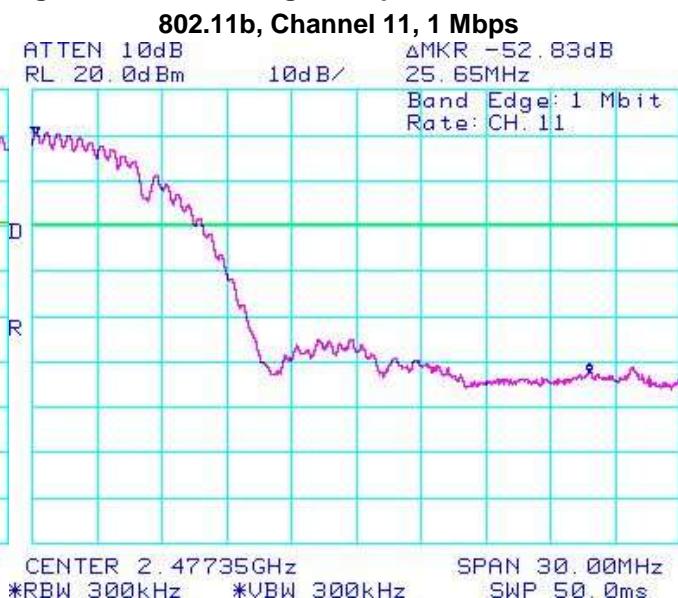


Figure 5-12: Band Edge Compliance


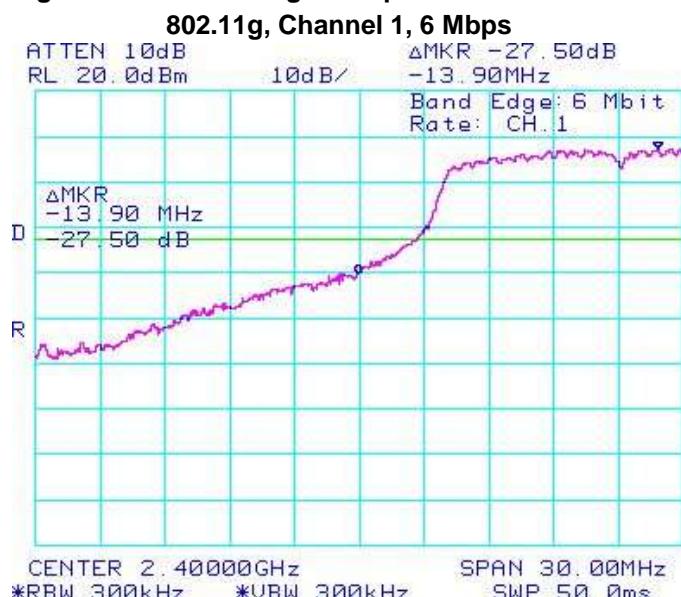


Figure 5-13: Band Edge Compliance

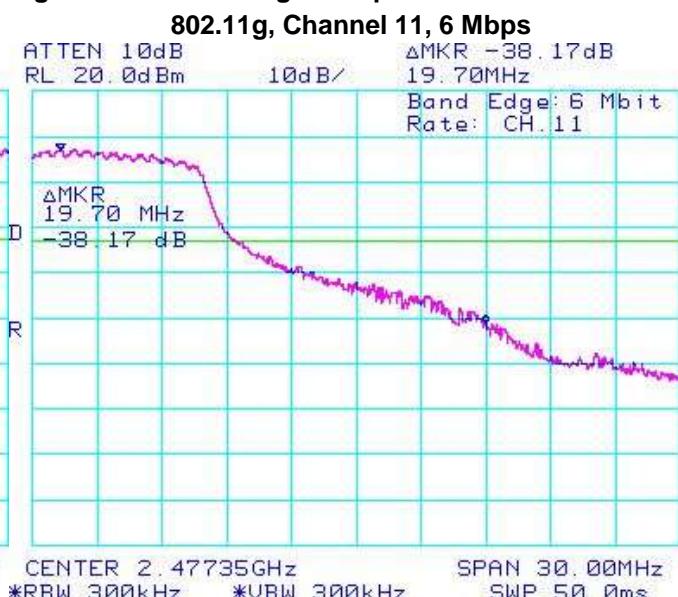

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-14: Band Edge Compliance

802.11n, Channel 1, MCS 0


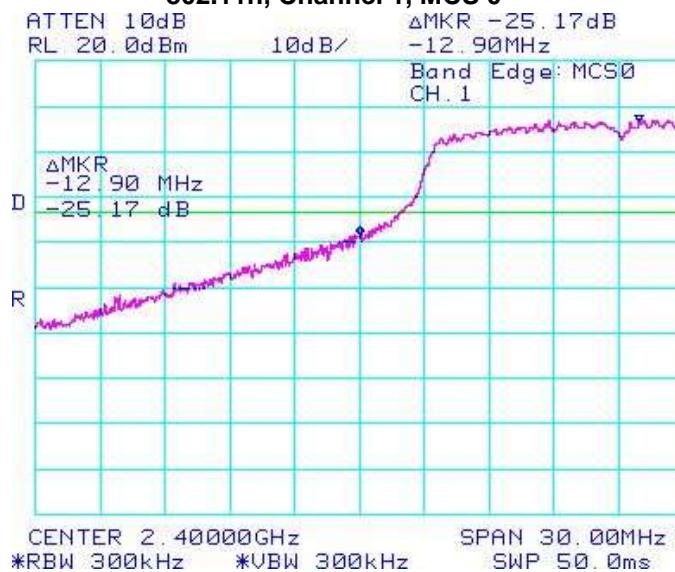


Figure 5-15: Band Edge Compliance

802.11n, Channel 11, MCS 0

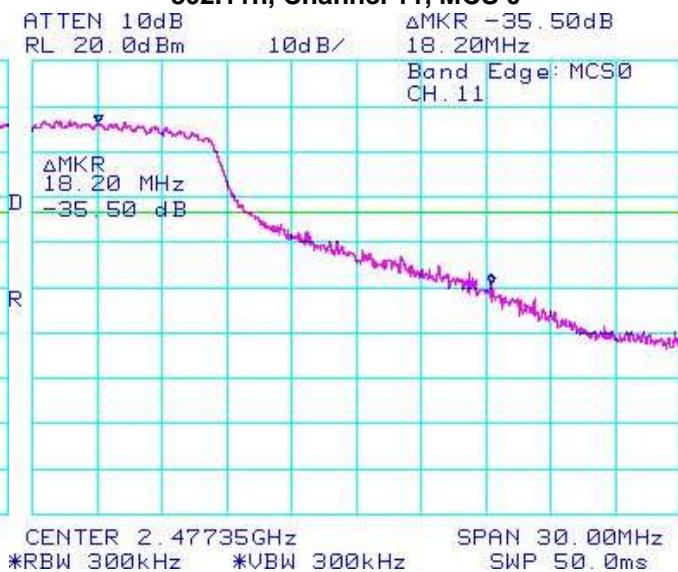

| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results cont'd

Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.247(d) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.

| Channel | Data Rate | Limit (dBm) | Measured Level (dBm) | Margin (dBm) |
|---------|-----------|-------------|----------------------|--------------|
| 1 | 1 Mbps | < 8.00 | -2.17 | -10.17 |
| | 5.5 Mbps | < 8.00 | -4.17 | -12.17 |
| | 11 Mbps | < 8.00 | -3.17 | -11.17 |
| | 6 Mbps | < 8.00 | -9.00 | -17.00 |
| | 24 Mbps | < 8.00 | -9.33 | -17.33 |
| | 54 Mbps | < 8.00 | -10.17 | -18.17 |
| | MCS 0 | < 8.00 | -8.17 | -16.17 |
| | MCS 4 | < 8.00 | -10.00 | -18.00 |
| | MCS 7 | < 8.00 | -11.50 | -19.50 |
| 6 | 1 Mbps | < 8.00 | -1.67 | -9.67 |
| | 5.5 Mbps | < 8.00 | -3.67 | -11.67 |
| | 11 Mbps | < 8.00 | -3.33 | -11.33 |
| | 6 Mbps | < 8.00 | -6.67 | -14.67 |
| | 24 Mbps | < 8.00 | -9.17 | -17.17 |
| | 54 Mbps | < 8.00 | -9.80 | -17.80 |
| | MCS 0 | < 8.00 | -5.67 | -13.67 |
| | MCS 4 | < 8.00 | -8.50 | -16.50 |
| | MCS 7 | < 8.00 | -9.83 | -17.83 |
| 11 | 1 Mbps | < 8.00 | -2.67 | -10.67 |
| | 5.5 Mbps | < 8.00 | -3.67 | -11.67 |
| | 11 Mbps | < 8.00 | -3.17 | -11.17 |
| | 6 Mbps | < 8.00 | -8.50 | -16.50 |
| | 24 Mbps | < 8.00 | -9.33 | -17.33 |
| | 54 Mbps | < 8.00 | -9.83 | -17.83 |
| | MCS 0 | < 8.00 | -8.00 | -16.00 |
| | MCS 4 | < 8.00 | -8.67 | -16.67 |
| | MCS 7 | < 8.00 | -9.83 | -17.83 |

802.11b/g/n RF Conducted Emission Test Results cont'd

See figures 5-16 to 5-24 for the plots of the peak power spectral density for Channels 1, 6 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 for 802.11n mode.

Figure 5-16: Peak Power Spectral Density

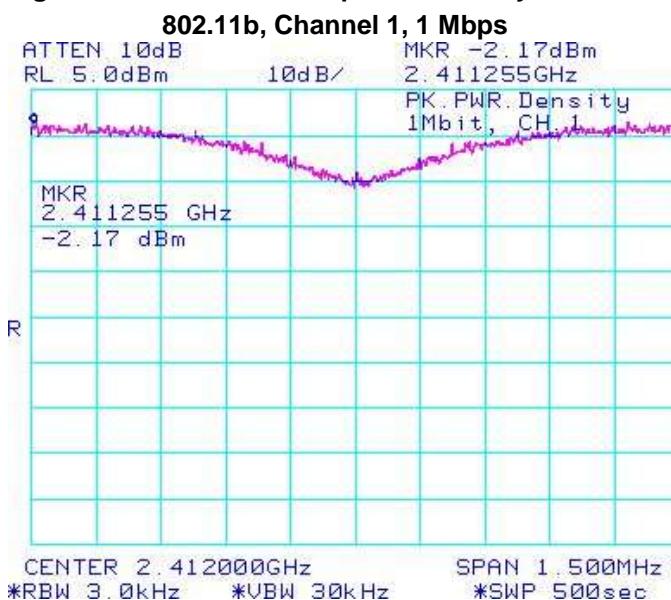


Figure 5-17: Peak Power Spectral Density


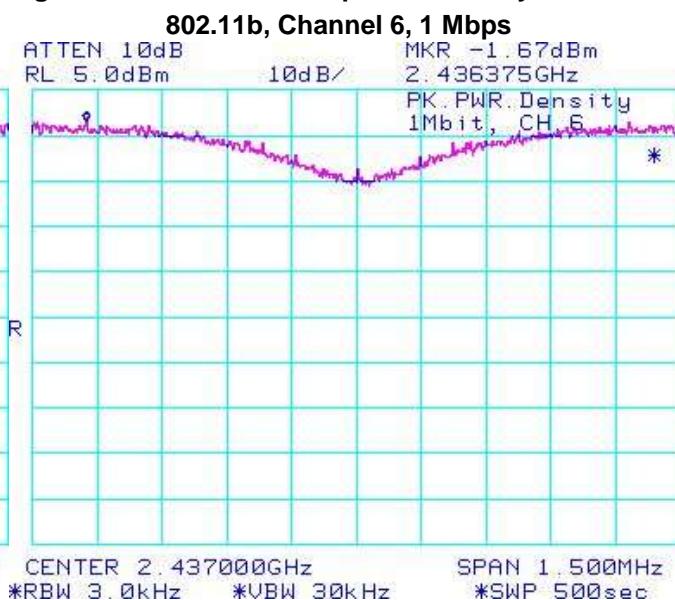


Figure 5-18: Peak Power Spectral Density

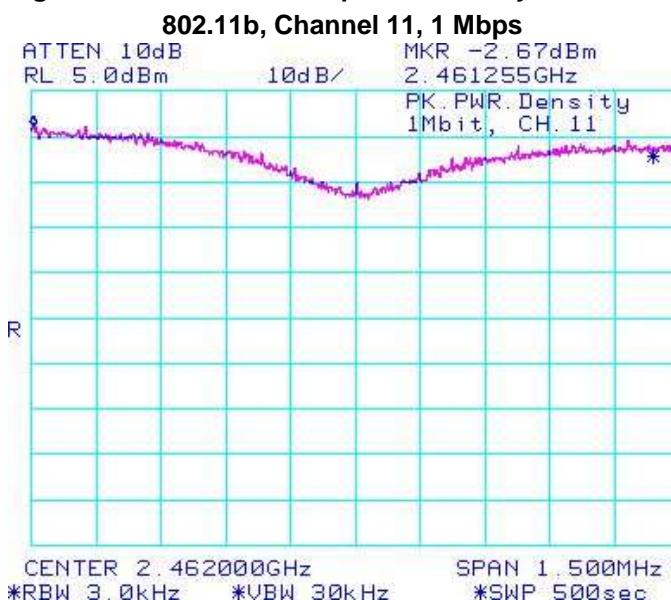

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-19: Peak Power Spectral Density

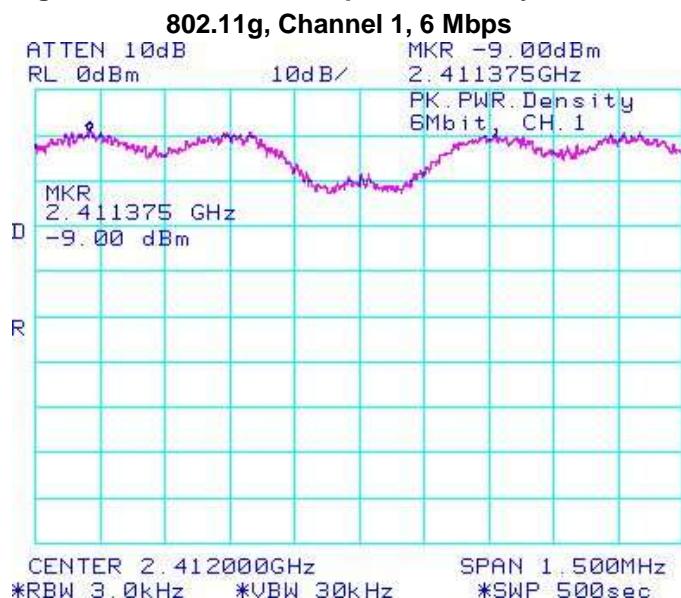


Figure 5-20: Peak Power Spectral Density


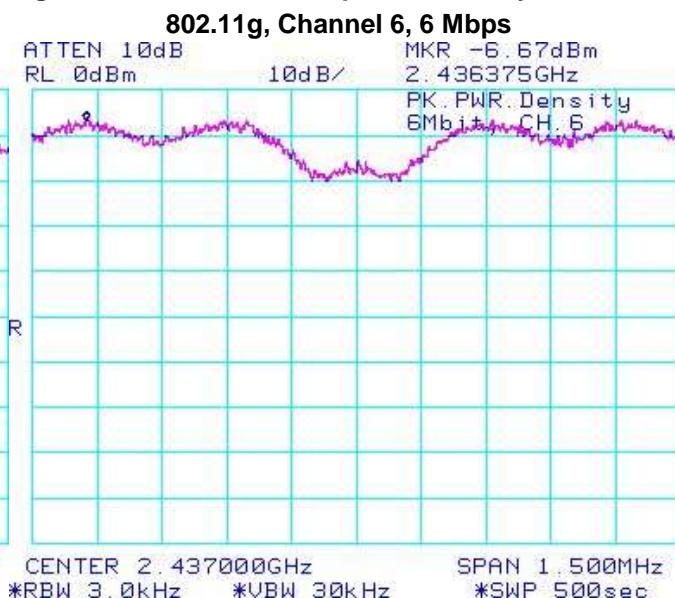


Figure 5-21: Peak Power Spectral Density

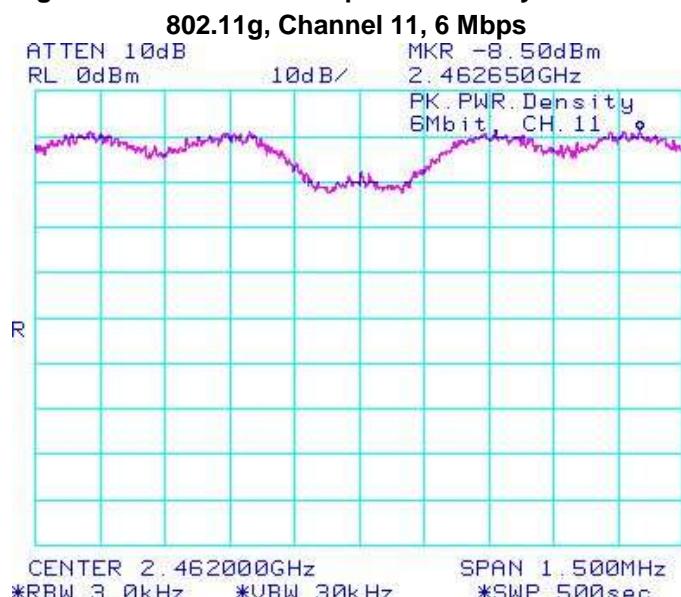

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-22: Peak Power Spectral Density

802.11n, Channel 1, MCS 0

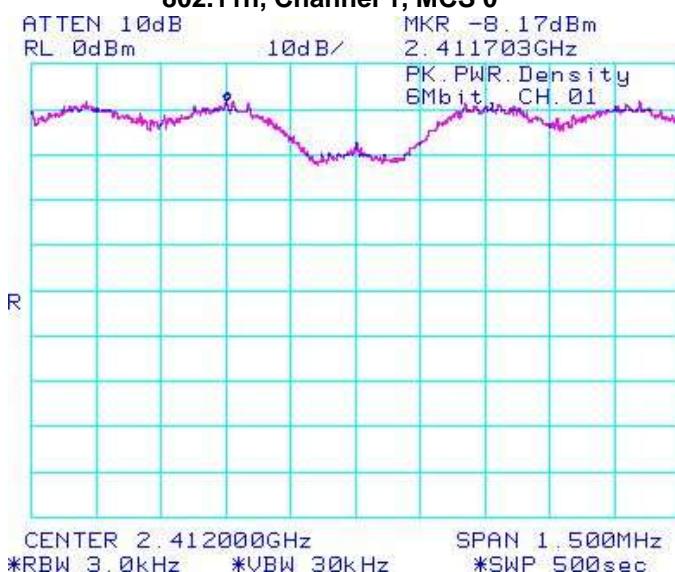


Figure 5-23: Peak Power Spectral Density

802.11n, Channel 6, MCS 0


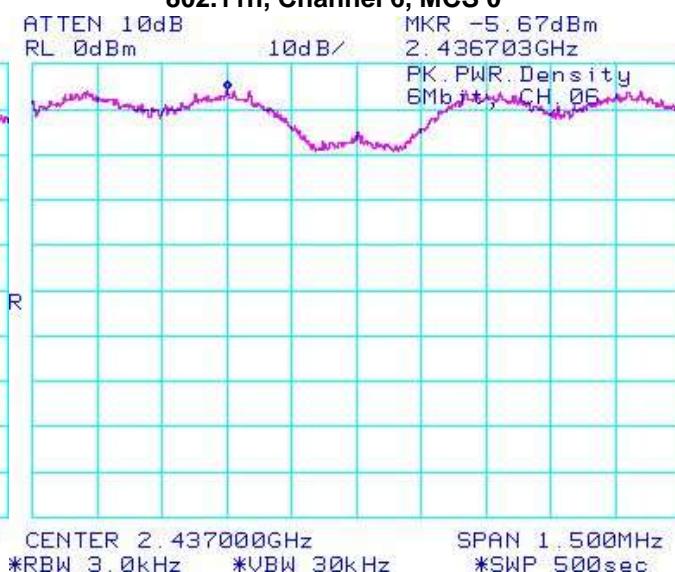


Figure 5-24: Peak Power Spectral Density

802.11n, Channel 11, MCS 0

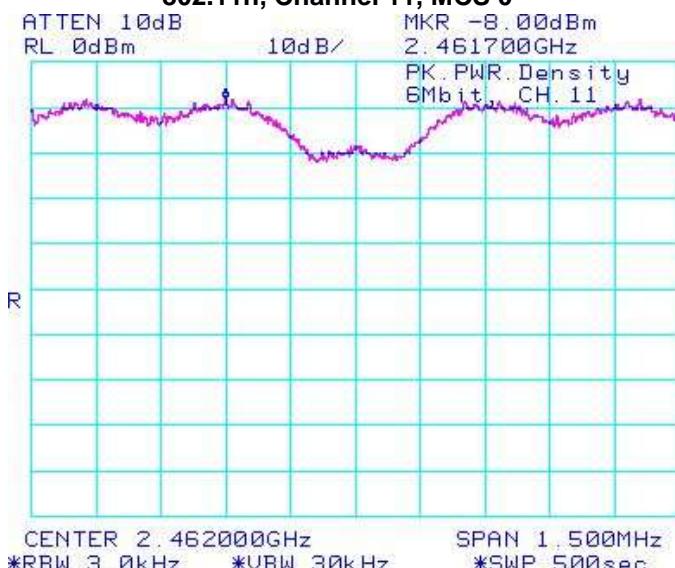

| | | | |
|---|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

802.11b/g/n RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 18.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

| Channel | Data Rate | Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from Carrier (dBc) | Limit (dBc) |
|---------|-----------|-------------|---------------------------|--|-------------|
| 1 | 1 Mbps | 18.25 | -39.33 | -57.58 | -20 |
| | 5.5 Mbps | 18.09 | -49.50 | -67.59 | -20 |
| | 11 Mbps | 18.06 | -43.67 | -61.73 | -20 |
| | 6 Mbps | 14.73 | -50.17 | -64.90 | -20 |
| | 24 Mbps | 14.09 | -49.67 | -63.76 | -20 |
| | 54 Mbps | 13.83 | -50.33 | -64.16 | -20 |
| | MCS 0 | 14.67 | -46.67 | -61.34 | -20 |
| | MCS 4 | 13.98 | -49.00 | -62.98 | -20 |
| | MCS 7 | 12.73 | -48.50 | -61.23 | -20 |
| 6 | 1 Mbps | 18.58 | -49.33 | -67.91 | -20 |
| | 5.5 Mbps | 18.49 | -49.60 | -68.09 | -20 |
| | 11 Mbps | 18.44 | -44.50 | -62.94 | -20 |
| | 6 Mbps | 17.32 | -49.50 | -66.82 | -20 |
| | 24 Mbps | 14.39 | -50.33 | -64.72 | -20 |
| | 54 Mbps | 14.01 | -48.38 | -62.39 | -20 |
| | MCS 0 | 17.33 | -50.17 | -67.50 | -20 |
| | MCS 4 | 14.21 | -49.83 | -64.04 | -20 |
| | MCS 7 | 12.97 | -49.17 | -62.14 | -20 |

| | | | | |
|--|---|--|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 5 | | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11b/g/n RF Conducted Emission Test Results cont'd

| Channel | Data Rate | Power (dBm) | Max. Measured Level (dBm) | Max. Measured Level from Carrier (dBc) | Limit (dBc) |
|---------|-----------|-------------|---------------------------|--|-------------|
| 11 | 1 Mbps | 18.84 | -50.33 | -69.17 | -20 |
| | 5.5 Mbps | 18.75 | -51.50 | -70.25 | -20 |
| | 11 Mbps | 18.73 | -51.77 | -70.50 | -20 |
| | 6 Mbps | 15.28 | -49.00 | -64.28 | -20 |
| | 24 Mbps | 14.60 | -50.67 | -65.27 | -20 |
| | 54 Mbps | 14.17 | -50.17 | -64.34 | -20 |
| | MCS 0 | 15.23 | -48.83 | -64.06 | -20 |
| | MCS 4 | 14.47 | -49.50 | -63.97 | -20 |
| | MCS 7 | 13.22 | -49.78 | -63.00 | -20 |

The emissions were in the NF.

See figures 5-25 to 5-33 for the plots of the spurious RF conducted emissions for Channels 1, 6 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-25: Spurious Conducted RF Emissions

802.11b, Channel 1, 1 Mbps


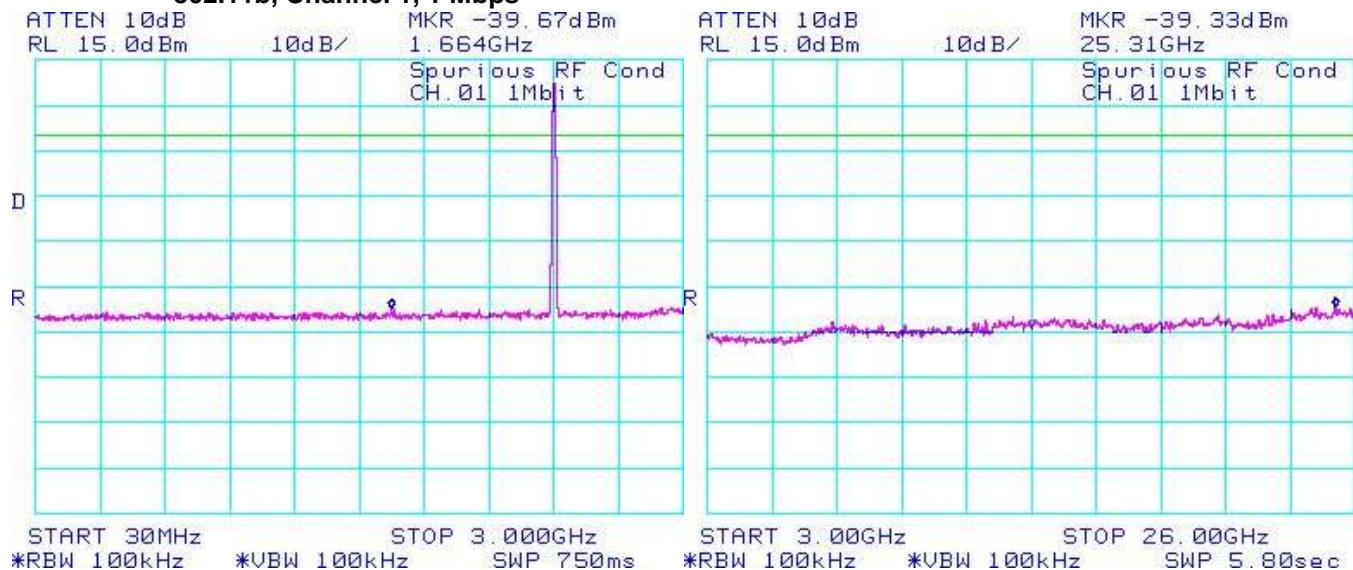


Figure 5-26 : Spurious Conducted RF Emissions

802.11b, Channel 6, 1 Mbps

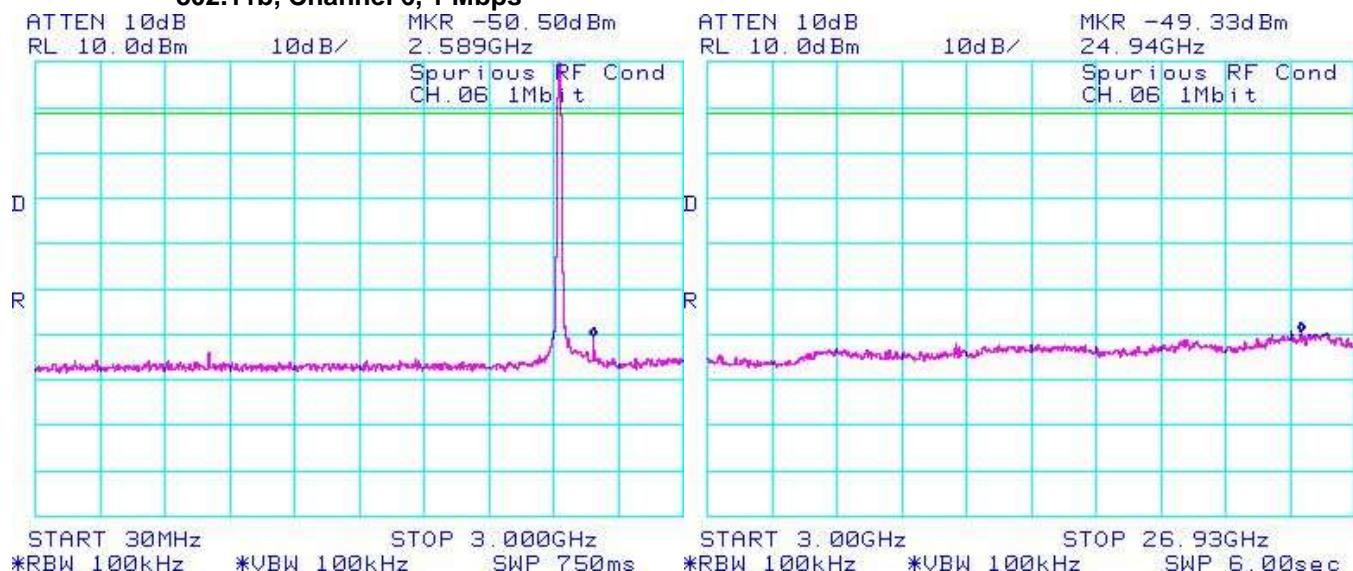

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-27: Spurious Conducted RF Emissions

802.11b, Channel 11, 1 Mbps


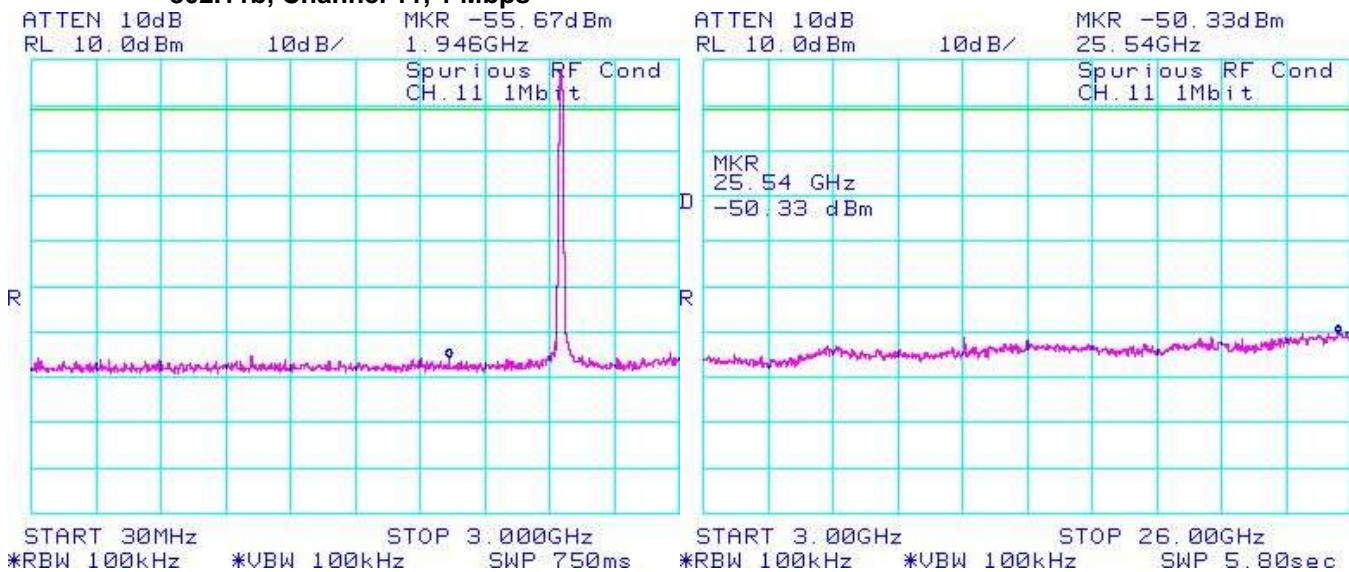


Figure 5-28: Spurious Conducted RF Emissions

802.11g, Channel 1, 6 Mbps

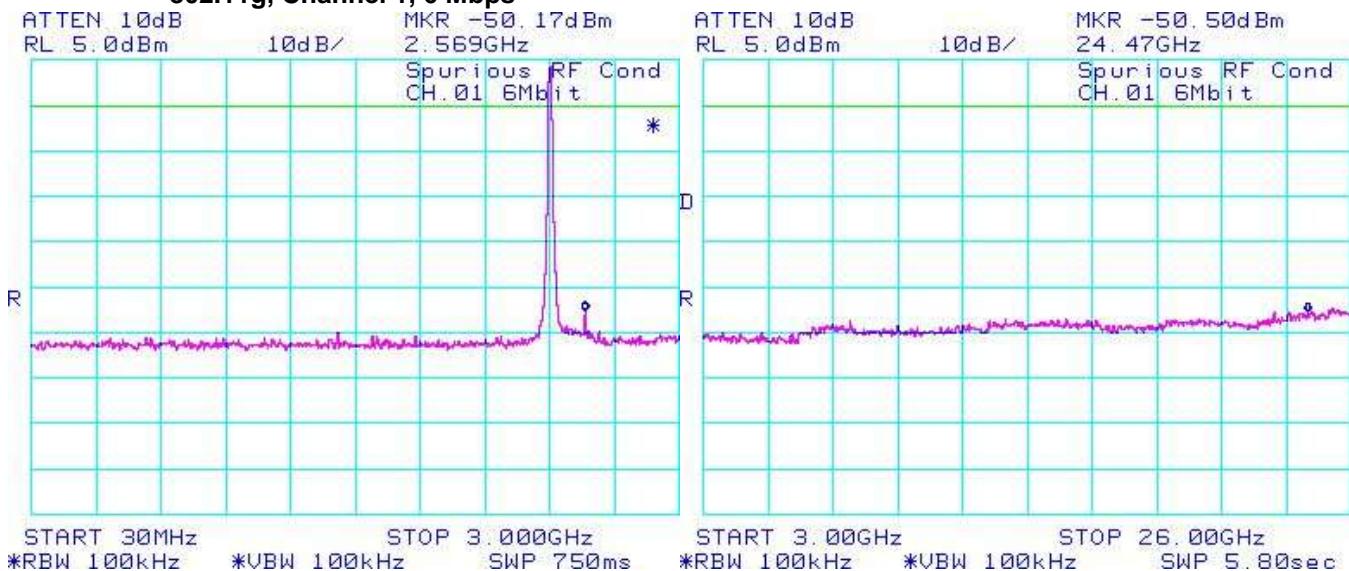

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-29: Spurious Conducted RF Emissions

802.11g, Channel 6, 6 Mbps


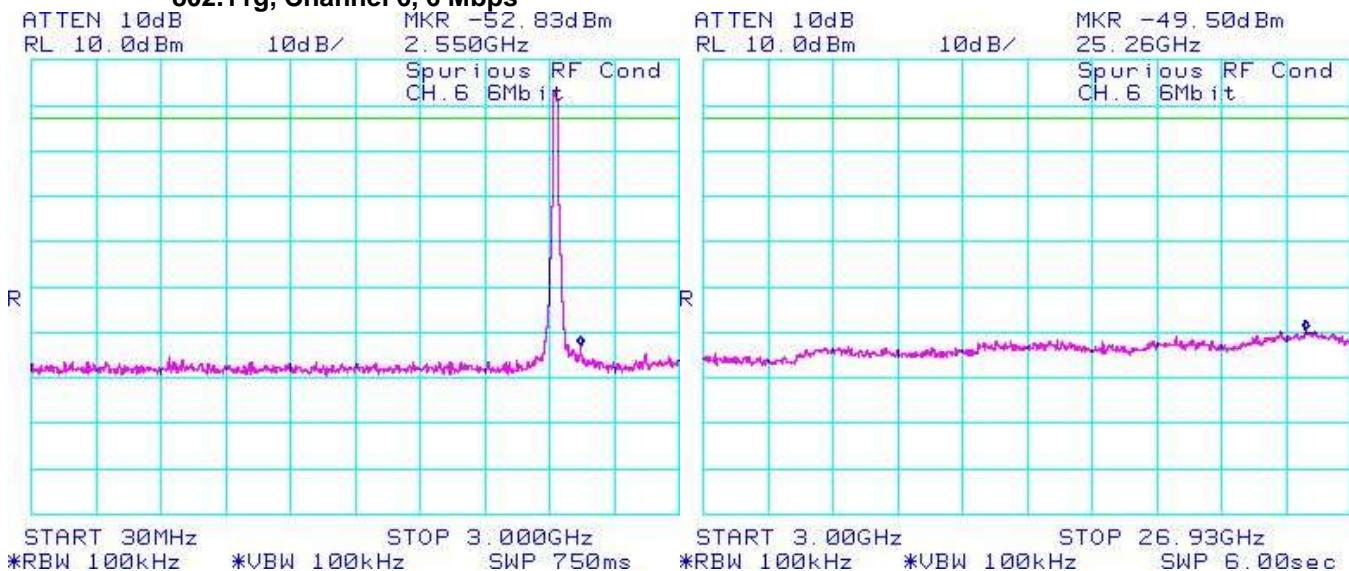


Figure 5-30: Spurious Conducted RF Emissions

802.11g, Channel 11, 6 Mbps

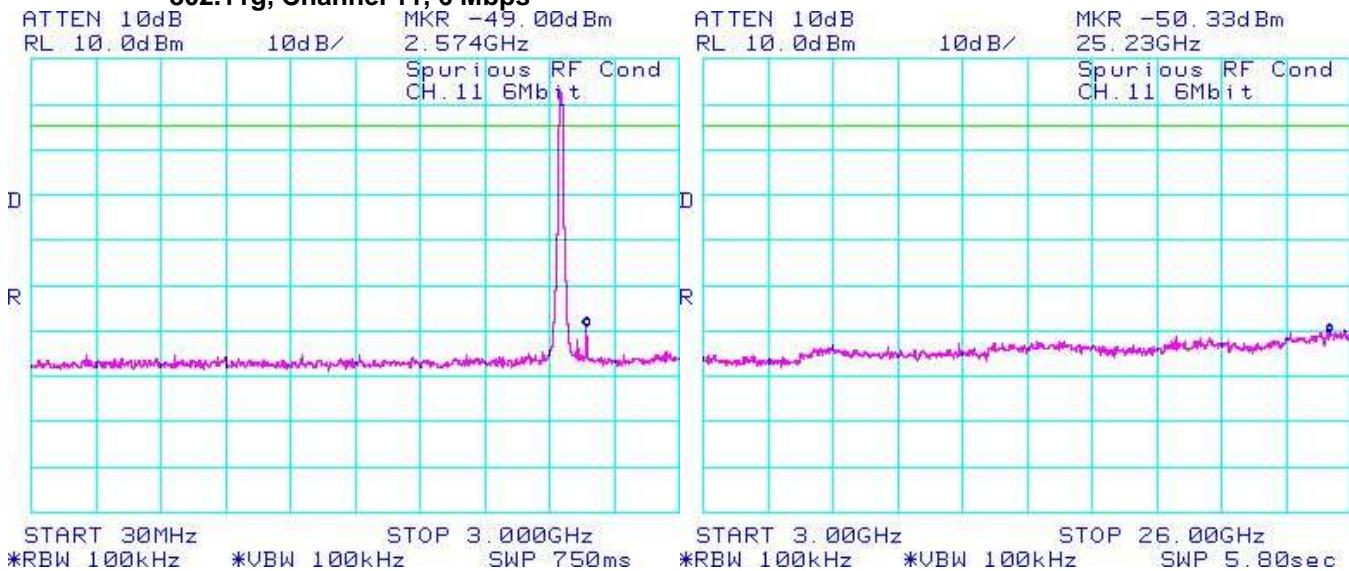

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-31: Spurious Conducted RF Emissions

802.11n, Channel 1, MCS 0


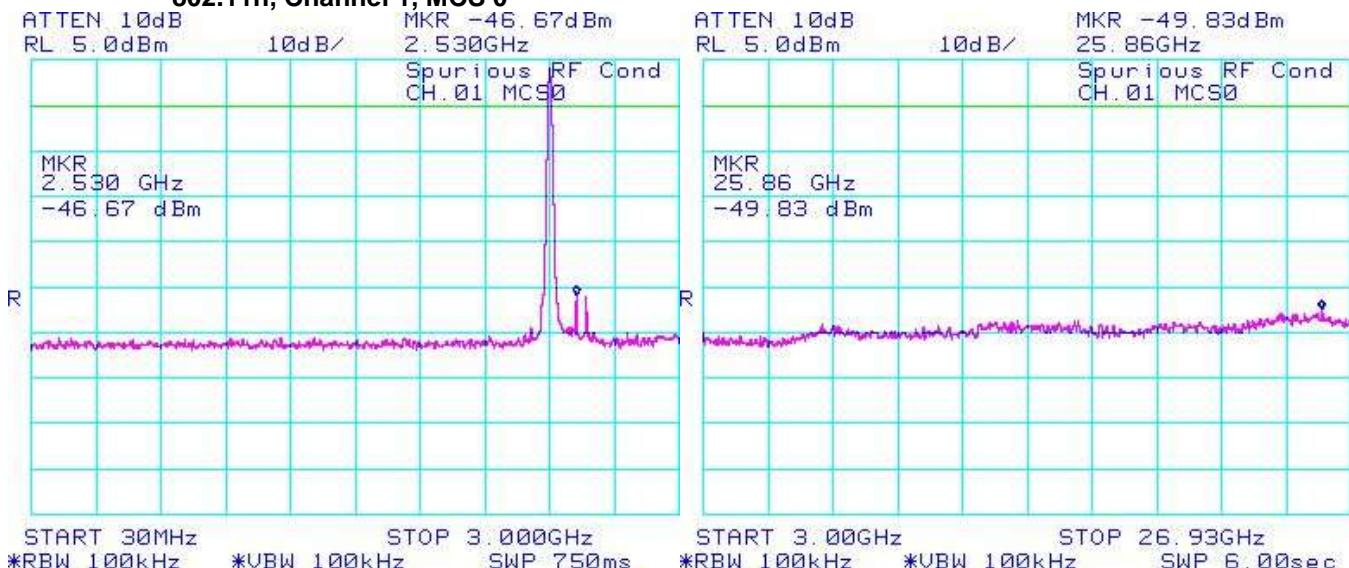


Figure 5-32: Spurious Conducted RF Emissions


802.11n, Channel 6, MCS 0

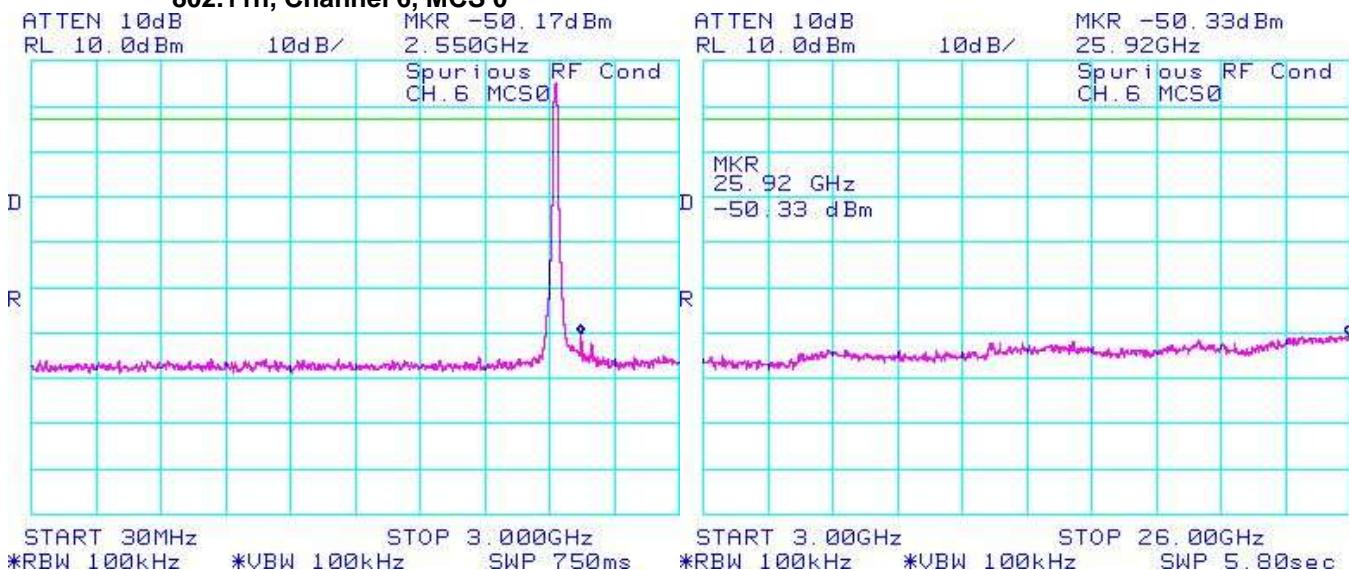

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 5-33: Spurious Conducted RF Emissions

802.11n, Channel 11, MCS 0

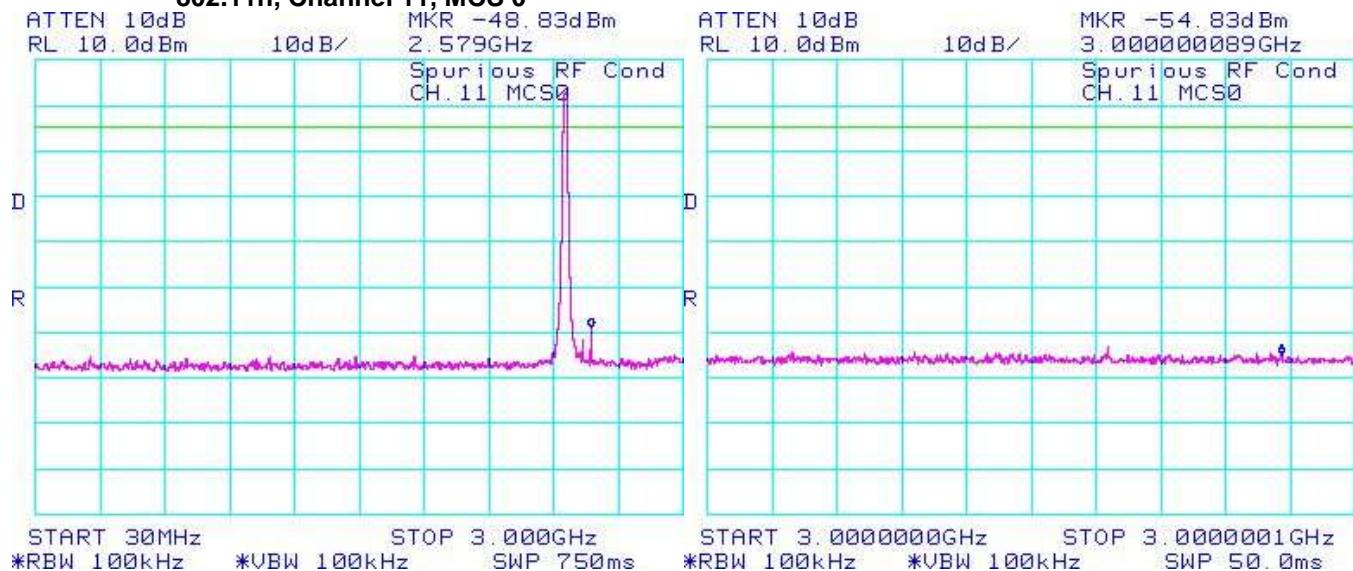


| | | |
|--|---|---|
| RIM Testing Services™ | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

APPENDIX 6 – 802.11a CONDUCTED EMISSIONS TEST DATA/PLOTS

| | |
|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 |

802.11a RF Conducted Emission Test Results

Test Setup Diagram

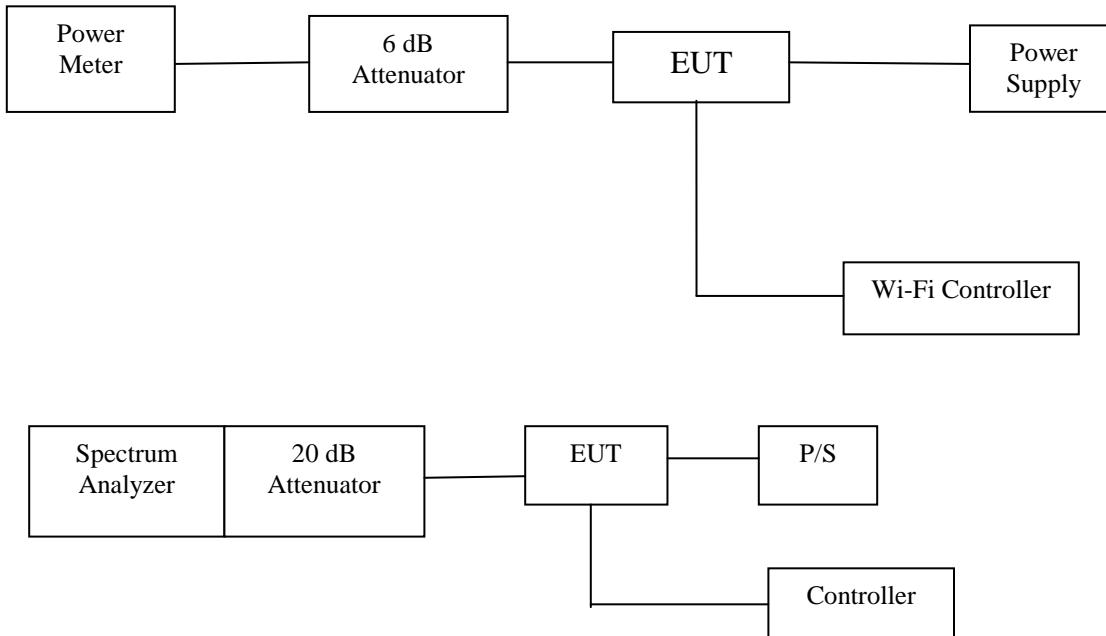

A reference offset of 8.9 dB was applied to the spectrum analyzer and 7.4 dB to the Power Meter reference level for the attenuators and coaxial cable loss in the test circuit.

Date of test: August 03 and 05, 2011.

The measurements were performed by Kevin Rose.

The environmental test conditions were: Temperature: 24 °C
Relative Humidity: 49 %



Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11a RF Conducted Emission Test Results cont'd

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a) (2) and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, and 161 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.

| Channel | Data Rate | Limit (kHz) | Measured Level (MHz) |
|---------|-----------|-------------|----------------------|
| 36 | 6 Mbps | ≥ 500 | 16.40 |
| | 24 Mbps | ≥ 500 | 16.50 |
| | 54 Mbps | ≥ 500 | 16.50 |
| 44 | 6 Mbps | ≥ 500 | 16.37 |
| | 24 Mbps | ≥ 500 | 16.53 |
| | 54 Mbps | ≥ 500 | 16.53 |
| 48 | 6 Mbps | ≥ 500 | 16.40 |
| | 24 Mbps | ≥ 500 | 16.50 |
| | 54 Mbps | ≥ 500 | 16.50 |
| 52 | 6 Mbps | ≥ 500 | 16.33 |
| | 24 Mbps | ≥ 500 | 16.50 |
| | 54 Mbps | ≥ 500 | 16.50 |
| 60 | 6 Mbps | ≥ 500 | 16.33 |
| | 24 Mbps | ≥ 500 | 16.50 |
| | 54 Mbps | ≥ 500 | 16.50 |
| 64 | 6 Mbps | ≥ 500 | 16.30 |
| | 24 Mbps | ≥ 500 | 16.47 |
| | 54 Mbps | ≥ 500 | 16.50 |
| 100 | 6 Mbps | ≥ 500 | 16.37 |
| | 24 Mbps | ≥ 500 | 16.53 |
| | 54 Mbps | ≥ 500 | 16.53 |



Test Report No.
RTS-5385-1108-55

Dates of Test
July 28 to August 19, 2011

FCC ID: L6AREC70UW
IC: 2503A-REC70UW

802.11a RF Conducted Emission Test Results cont'd

| Channel | Data Rate | Limit (kHz) | Measured Level (MHz) |
|---------|-----------|-------------|----------------------|
| 140 | 6 Mbps | ≥ 500 | 16.37 |
| | 24 Mbps | ≥ 500 | 16.53 |
| | 54 Mbps | ≥ 500 | 16.53 |
| 149 | 6 Mbps | ≥ 500 | 16.37 |
| | 24 Mbps | ≥ 500 | 16.50 |
| | 54 Mbps | ≥ 500 | 16.53 |
| 157 | 6 Mbps | ≥ 500 | 16.40 |
| | 24 Mbps | ≥ 500 | 16.53 |
| | 54 Mbps | ≥ 500 | 16.53 |
| 161 | 6 Mbps | ≥ 500 | 16.33 |
| | 24 Mbps | ≥ 500 | 16.53 |
| | 54 Mbps | ≥ 500 | 16.50 |

See figures 6-1 to 6-11 for the plots of the 6 dB bandwidth measurements for Channel 36, 44, 48, 52, 60, 64, 100, 140, 149, 157 and 161 at 6 Mbps each for 802.11a mode.

802.11a RF Conducted Emission Test Results cont'd

Figure 6-1: 6 dB Bandwidth

802.11a, Channel 36, 6 Mbps

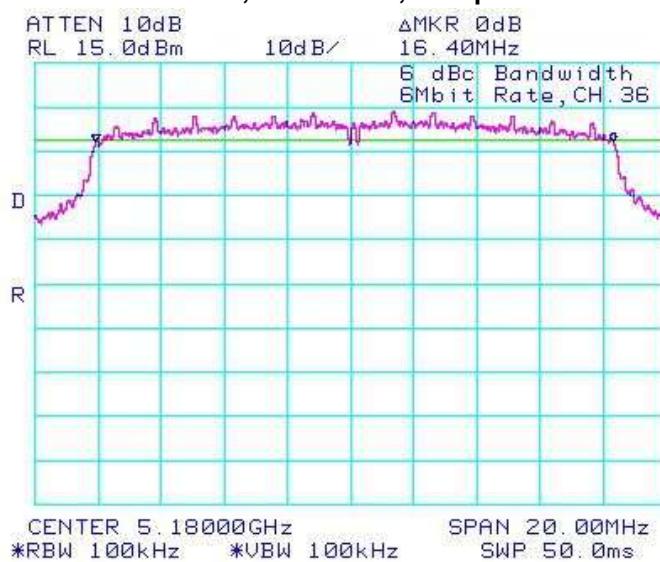


Figure 6-2: 6 dB Bandwidth

802.11a, Channel 44, 6 Mbps

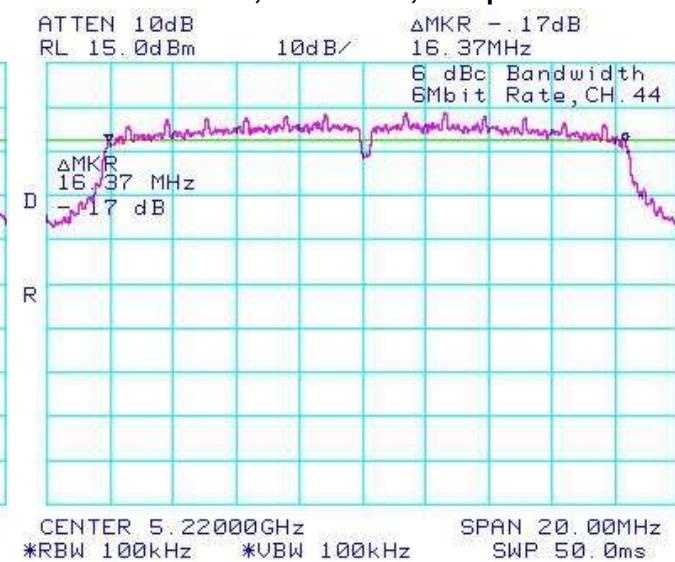


Figure 6-3: 6 dB Bandwidth

802.11a, Channel 48, 6 Mbps


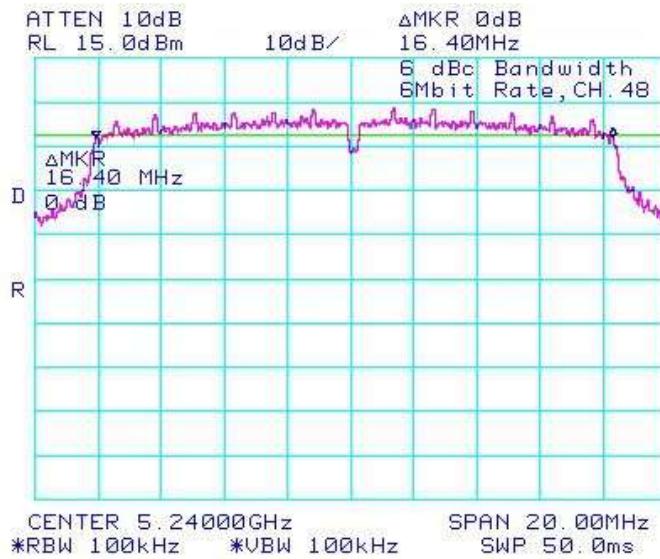


Figure 6-4: 6 dB Bandwidth

802.11a, Channel 52, 6 Mbps

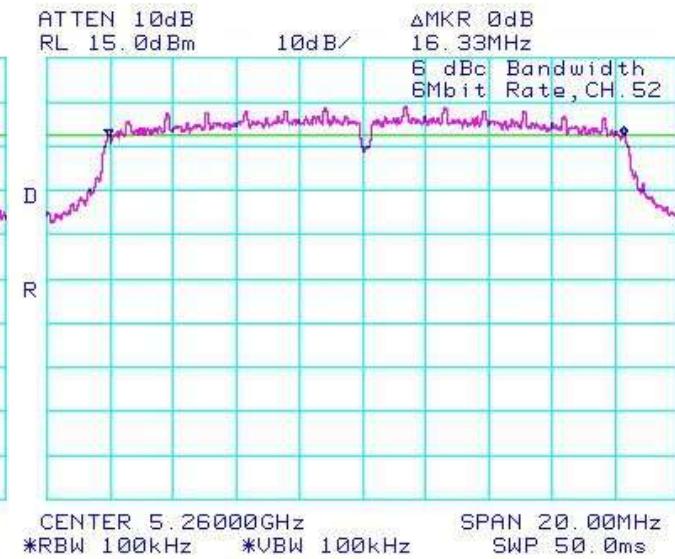

802.11a RF Conducted Emission Test Results cont'd

Figure 6-5: 6 dB Bandwidth

802.11a, Channel 60, 6 Mbps

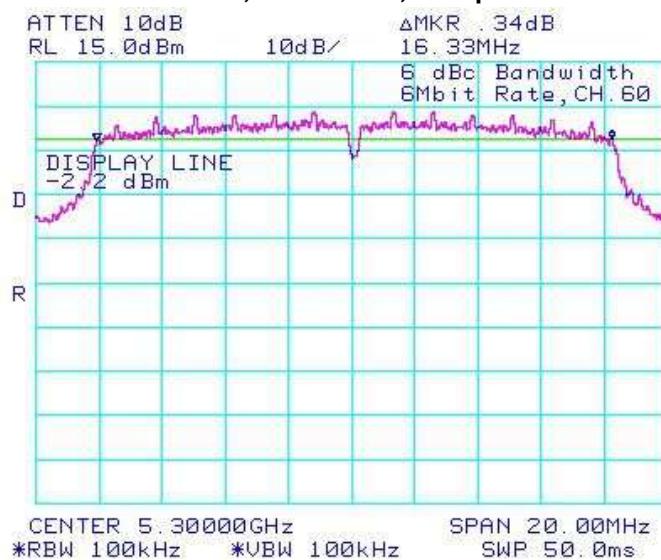


Figure 6-6: 6 dB Bandwidth

802.11a, Channel 64, 6 Mbps

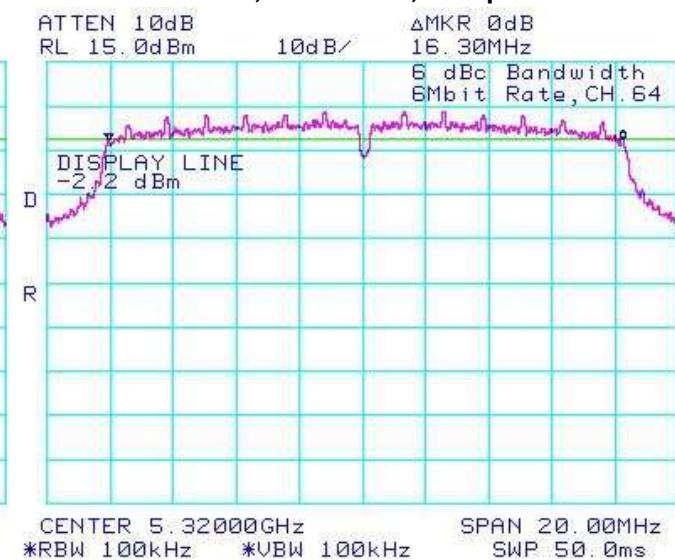


Figure 6-7: 6 dB Bandwidth

802.11a, Channel 100, 6 Mbps


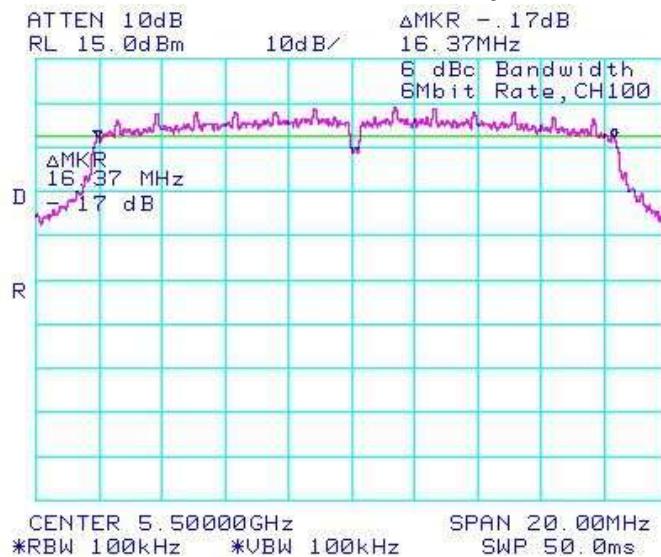


Figure 6-8: 6 dB Bandwidth

802.11a, Channel 140, 6 Mbps

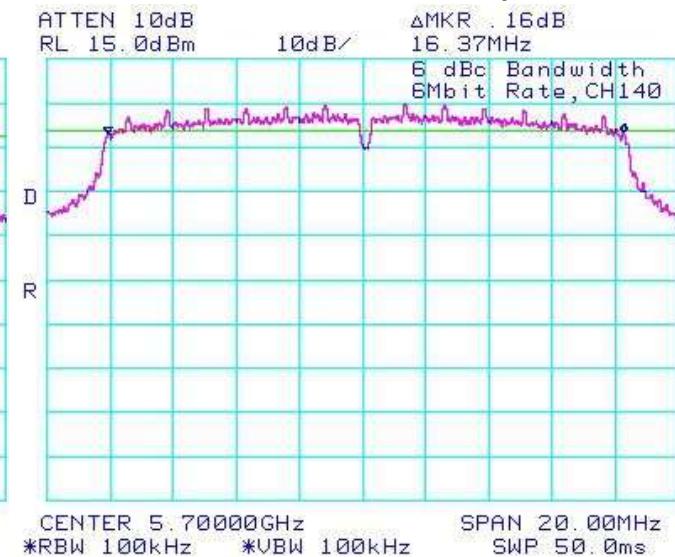

802.11a RF Conducted Emission Test Results cont'd

Figure 6-9: 6 dB Bandwidth

802.11a, Channel 149, 6 Mbps

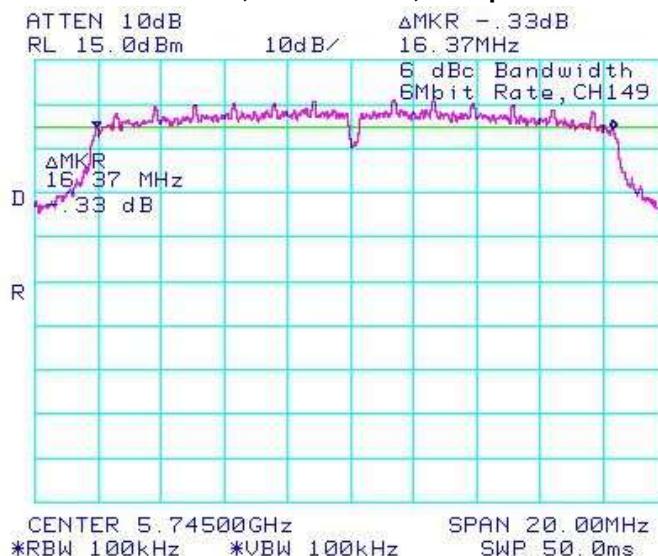


Figure 6-10: 6 dB Bandwidth

802.11a, Channel 157, 6 Mbps


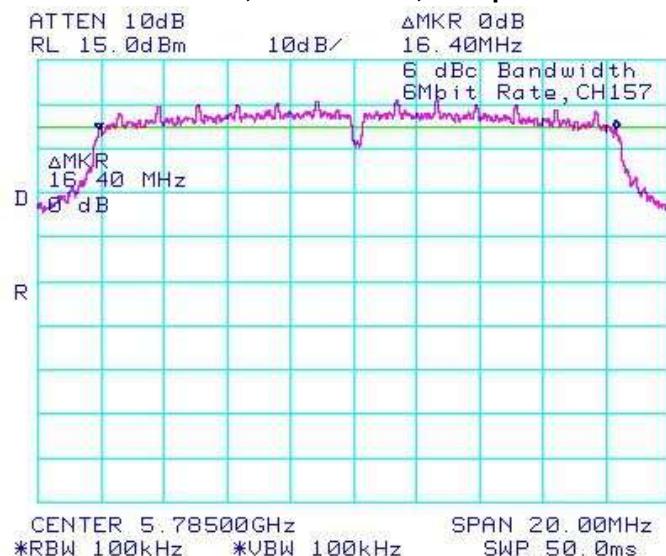


Figure 6-11: 6 dB Bandwidth

802.11a, Channel 161, 6 Mbps

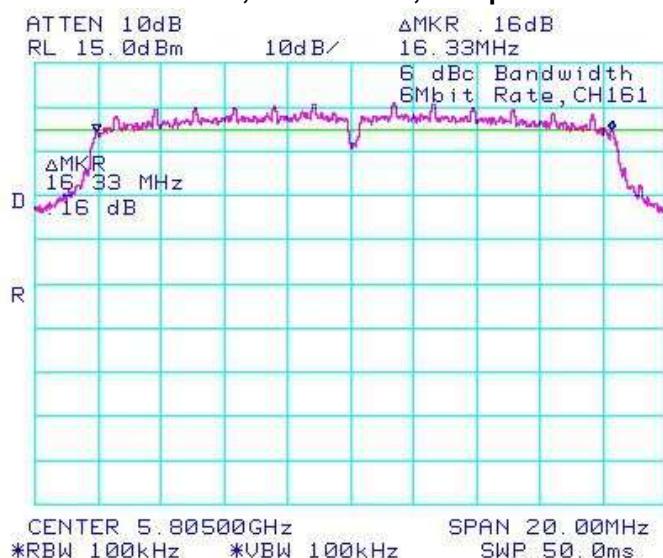

| | | | |
|---|---|---------------------------|--------------------------|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11a RF Conducted Emission Test Results cont'd

Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 100, 140, 149, 157, and 161 were measured for 802.11a mode using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 8.9 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

| Channel | Data Rate | Class 2 Limit (W) | Measured Level (dBm) | Measured Level (mW) |
|---------|-----------|-------------------|----------------------|---------------------|
| 36 | 6 Mbps | < 1.00 | 14.71 | 29.58 |
| | 24 Mbps | < 1.00 | 14.46 | 27.93 |
| | 54 Mbps | < 1.00 | 13.70 | 23.44 |
| 44 | 6 Mbps | < 1.00 | 14.64 | 29.11 |
| | 24 Mbps | < 1.00 | 14.51 | 28.25 |
| | 54 Mbps | < 1.00 | 13.62 | 23.01 |
| 48 | 6 Mbps | < 1.00 | 14.74 | 29.79 |
| | 24 Mbps | < 1.00 | 14.53 | 28.38 |
| | 54 Mbps | < 1.00 | 13.64 | 23.12 |
| 52 | 6 Mbps | < 1.00 | 14.82 | 30.34 |
| | 24 Mbps | < 1.00 | 14.64 | 29.11 |
| | 54 Mbps | < 1.00 | 13.80 | 23.99 |
| 60 | 6 Mbps | < 1.00 | 14.72 | 29.65 |
| | 24 Mbps | < 1.00 | 14.53 | 28.38 |
| | 54 Mbps | < 1.00 | 13.77 | 23.82 |
| 64 | 6 Mbps | < 1.00 | 14.74 | 29.79 |
| | 24 Mbps | < 1.00 | 14.54 | 28.44 |
| | 54 Mbps | < 1.00 | 13.77 | 23.82 |
| 100 | 6 Mbps | < 1.00 | 14.69 | 29.44 |
| | 24 Mbps | < 1.00 | 14.54 | 28.44 |
| | 54 Mbps | < 1.00 | 13.63 | 23.07 |

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11a RF Conducted Emission Test Results cont'd

| Channel | Data Rate | Class 2 Limit (W) | Measured Level (dBm) | Measured Level (mW) |
|---------|-----------|-------------------|----------------------|---------------------|
| 140 | 6 Mbps | < 1.00 | 15.45 | 35.08 |
| | 24 Mbps | < 1.00 | 14.86 | 30.62 |
| | 54 Mbps | < 1.00 | 13.52 | 22.49 |
| 149 | 6 Mbps | < 1.00 | 16.54 | 45.08 |
| | 24 Mbps | < 1.00 | 14.88 | 30.76 |
| | 54 Mbps | < 1.00 | 13.33 | 21.53 |
| 157 | 6 Mbps | < 1.00 | 16.45 | 44.16 |
| | 24 Mbps | < 1.00 | 14.63 | 29.04 |
| | 54 Mbps | < 1.00 | 13.22 | 20.99 |
| 161 | 6 Mbps | < 1.00 | 16.48 | 44.46 |
| | 24 Mbps | < 1.00 | 14.50 | 28.18 |
| | 54 Mbps | < 1.00 | 13.16 | 20.70 |

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11a RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.407 and RSS-210. Channels 36, 48, 52, 64, 149, and 161 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.

| Channel | Data Rate | Limit (dBc) | Measured Level (dBc) | Margin (dBc) |
|---------|-----------|-------------|----------------------|--------------|
| 36 | 6 Mbps | < -20 | -48.67 | -28.67 |
| | 24 Mbps | < -20 | -51.33 | -31.33 |
| | 54 Mbps | < -20 | -51.50 | -31.50 |
| 48 | 6 Mbps | < -20 | -21.50 | -1.50 |
| | 24 Mbps | < -20 | -22.00 | -2.00 |
| | 54 Mbps | < -20 | -22.83 | -2.83 |
| 52 | 6 Mbps | < -20 | -21.50 | -1.50 |
| | 24 Mbps | < -20 | -23.00 | -3.00 |
| | 54 Mbps | < -20 | -24.17 | -4.17 |
| 64 | 6 Mbps | < -20 | -51.17 | -31.17 |
| | 24 Mbps | < -20 | -51.88 | -31.88 |
| | 54 Mbps | < -20 | -52.17 | -32.17 |
| 149 | 6 Mbps | < -20 | -37.00 | -17.00 |
| | 24 Mbps | < -20 | -43.50 | -23.50 |
| | 54 Mbps | < -20 | -47.50 | -27.50 |
| 161 | 6 Mbps | < -20 | -51.00 | -31.00 |
| | 24 Mbps | < -20 | -51.33 | -31.33 |
| | 54 Mbps | < -20 | -52.17 | -32.67 |

See figures 6-12 to 6-17 for the plots of the band edge compliance measurements for Channel 36, 48, 52, 64, 149, and 161 at 6 Mbps each for 802.11a mode.

802.11a RF Conducted Emission Test Results cont'd

Figure 6-12: Band Edge Compliance

802.11a, Channel 36, 6 Mbps

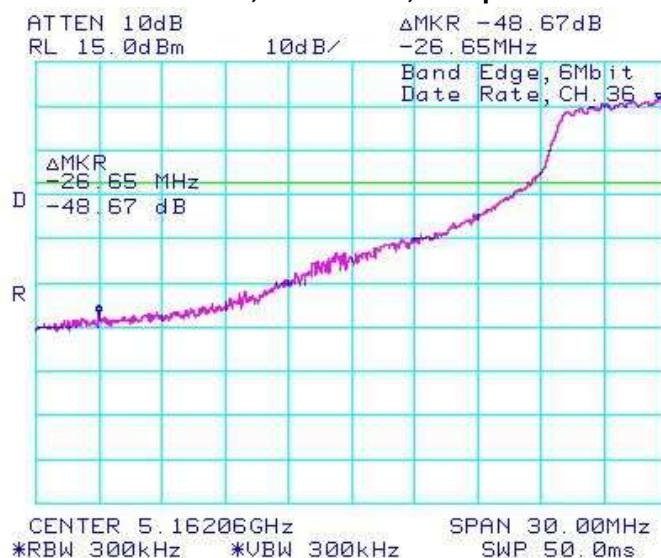


Figure 6-13: Band Edge Compliance

802.11a, Channel 48, 6 Mbps



Figure 6-14: Band Edge Compliance

802.11a, Channel 52, 6 Mbps

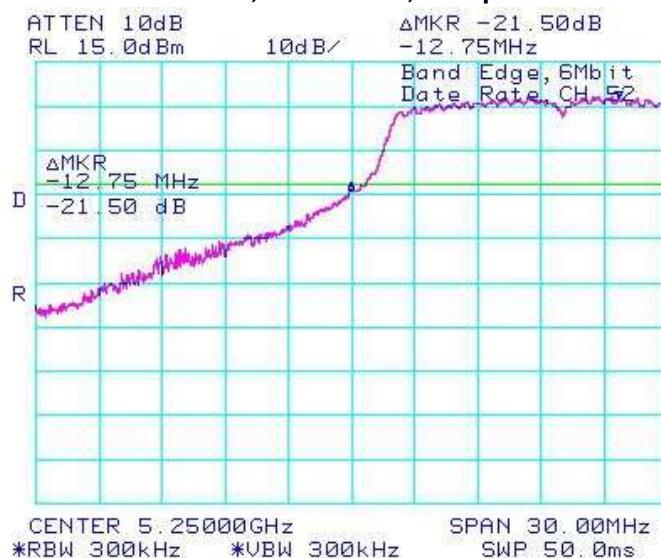


Figure 6-15: Band Edge Compliance

802.11a, Channel 64, 6 Mbps



802.11a RF Conducted Emission Test Results cont'd

Figure 6-16: Band Edge Compliance

802.11a, Channel 149, 6 Mbps


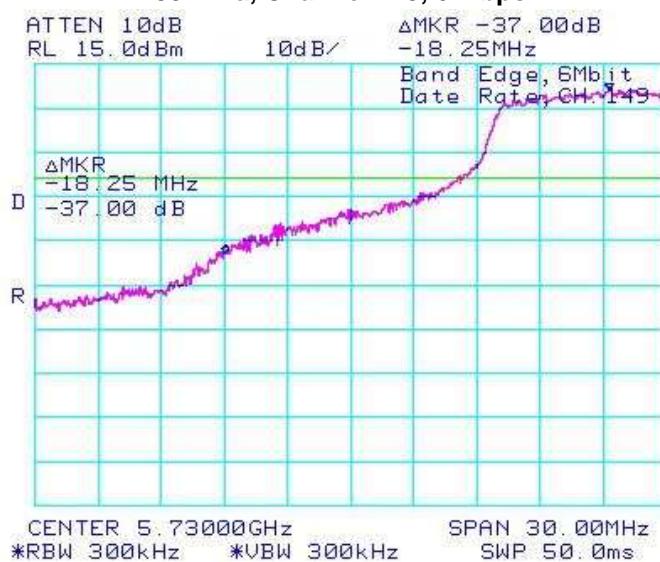


Figure 6-17: Band Edge Compliance

802.11a, Channel 161, 6 Mbps

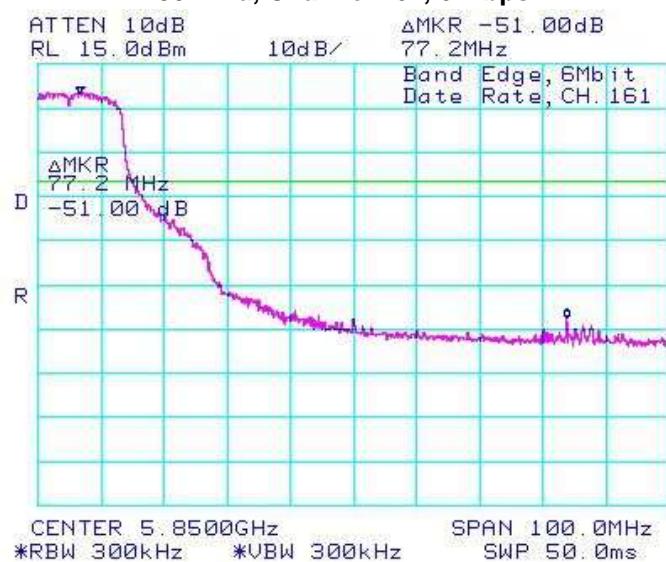

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

802.11a RF Conducted Emission Test Results cont'd

Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.407 and RSS-210. Channels 36, 44, 48, 52, 60, 64, 149, 157, and 161 were measured at 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11a mode.

| Channel | Data Rate | Limit (dBm) | Measured Level (dBm) | Margin (dBm) |
|---------|-----------|-------------|----------------------|--------------|
| 36 | 6 Mbps | < 8.00 | -8.50 | -16.50 |
| | 24 Mbps | < 8.00 | -8.33 | -16.33 |
| | 54 Mbps | < 8.00 | -8.15 | -16.15 |
| 44 | 6 Mbps | < 8.00 | -8.00 | -16.00 |
| | 24 Mbps | < 8.00 | -7.83 | -15.83 |
| | 54 Mbps | < 8.00 | -9.00 | -17.00 |
| 48 | 6 Mbps | < 8.00 | -8.00 | -16.00 |
| | 24 Mbps | < 8.00 | -7.67 | -15.67 |
| | 54 Mbps | < 8.00 | -9.00 | -17.00 |
| 52 | 6 Mbps | < 8.00 | -8.00 | -16.00 |
| | 24 Mbps | < 8.00 | -7.50 | -15.50 |
| | 54 Mbps | < 8.00 | -8.83 | -16.83 |
| 60 | 6 Mbps | < 8.00 | -7.67 | -15.67 |
| | 24 Mbps | < 8.00 | -7.50 | -15.50 |
| | 54 Mbps | < 8.00 | -9.17 | -17.17 |
| 64 | 6 Mbps | < 8.00 | -7.83 | -15.83 |
| | 24 Mbps | < 8.00 | -7.67 | -15.67 |
| | 54 Mbps | < 8.00 | -9.00 | -17.00 |
| 149 | 6 Mbps | < 8.00 | -5.67 | -13.67 |
| | 24 Mbps | < 8.00 | -6.67 | -14.67 |
| | 54 Mbps | < 8.00 | -8.17 | -16.17 |
| 157 | 6 Mbps | < 8.00 | -6.00 | -14.00 |
| | 24 Mbps | < 8.00 | -7.54 | -15.54 |
| | 54 Mbps | < 8.00 | -8.53 | -16.53 |
| 161 | 6 Mbps | < 8.00 | -5.67 | -13.67 |
| | 24 Mbps | < 8.00 | -7.10 | -15.10 |
| | 54 Mbps | < 8.00 | -8.67 | -16.67 |

See figures 6-18 to 6-26 for the plots of the peak power spectral density for Channel 36, 44, 48, 52, 60, 64, 149, 157 and 161 at 6 Mbps each for 802.11a mode.

802.11a RF Conducted Emission Test Results cont'd

Figure 6-18: Peak Power Spectral Density

802.11a, Channel 36, 6 Mbps

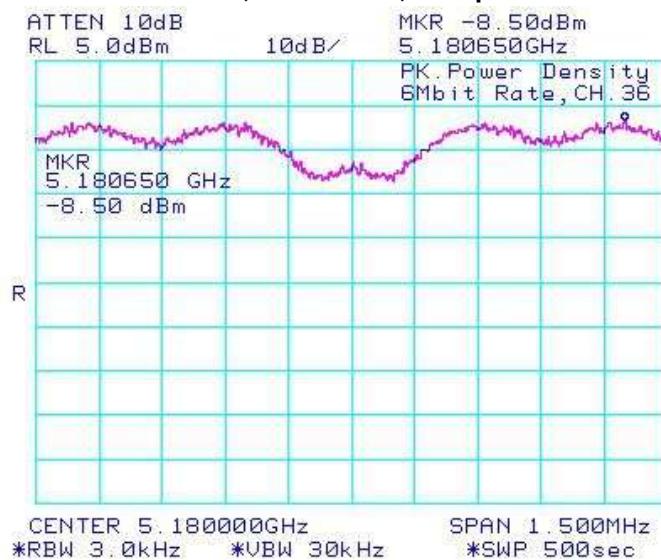


Figure 6-19: Peak Power Spectral Density

802.11a, Channel 44, 6 Mbps



Figure 6-20: Peak Power Spectral Density

802.11a, Channel 48, 6 Mbps


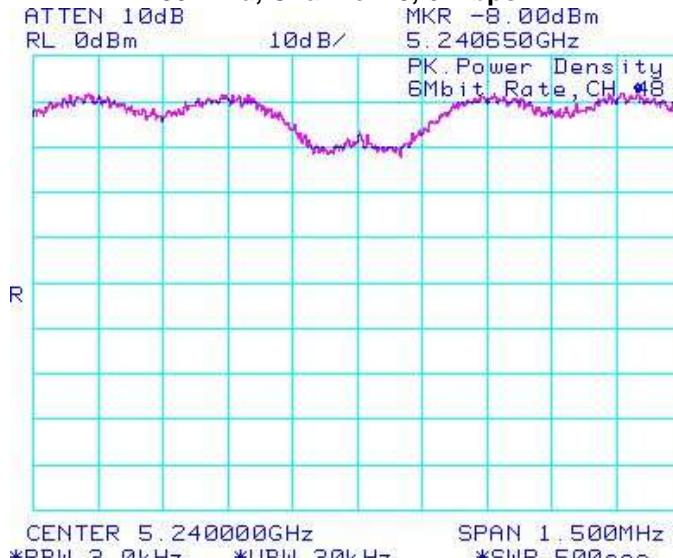


Figure 6-21: Peak Power Spectral Density

802.11a, Channel 52, 6 Mbps

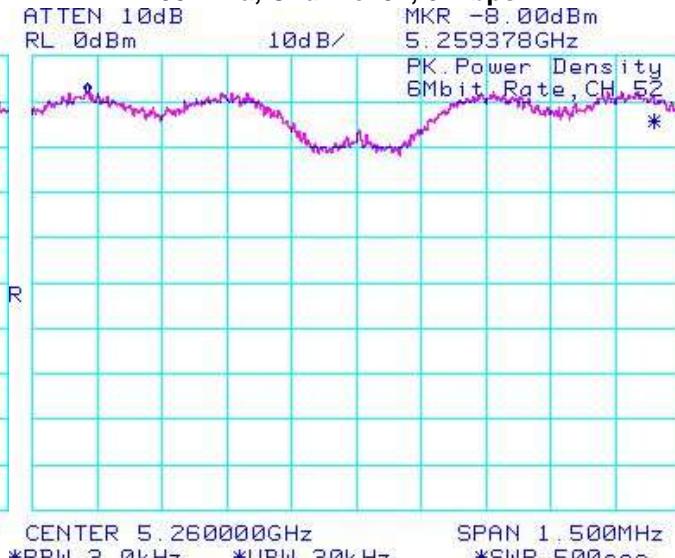

802.11a RF Conducted Emission Test Results cont'd

Figure 6-22: Peak Power Spectral Density

802.11a, Channel 60, 6 Mbps

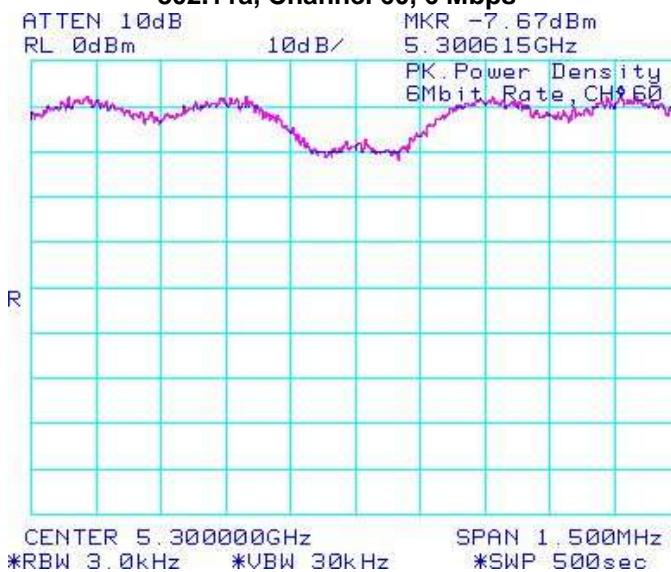


Figure 6-23: Peak Power Spectral Density

802.11a, Channel 64, 6 Mbps

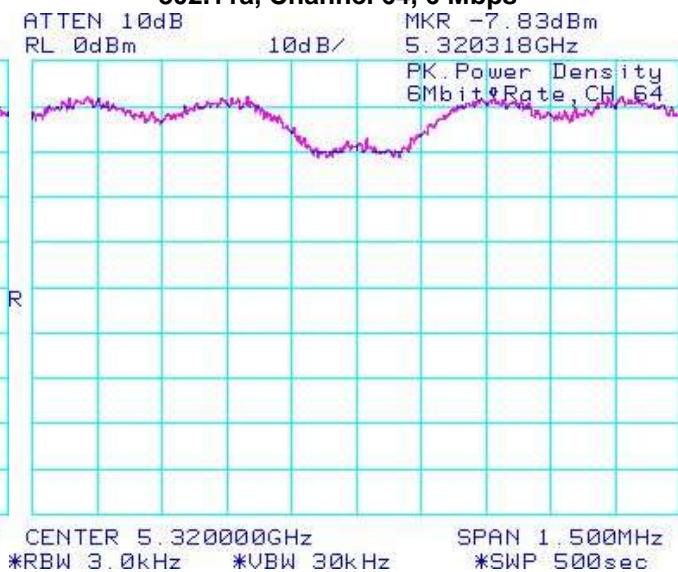


Figure 6-24: Peak Power Spectral Density

802.11a, Channel 149, 6 Mbps


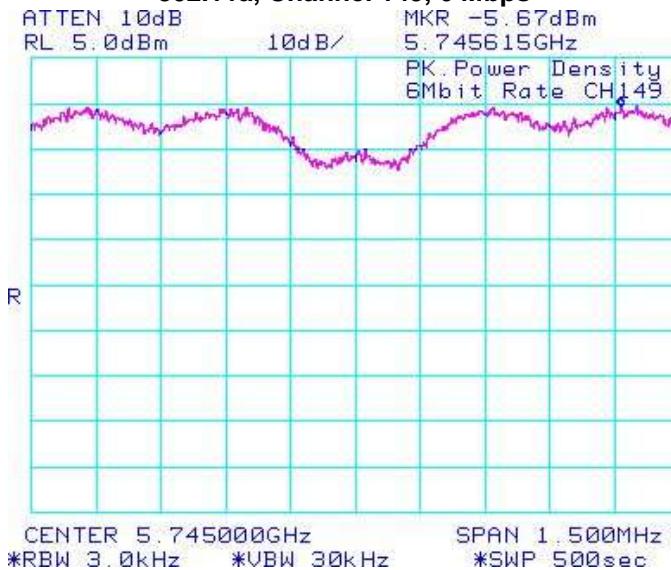


Figure 6-25: Peak Power Spectral Density


802.11a, Channel 157, 6 Mbps

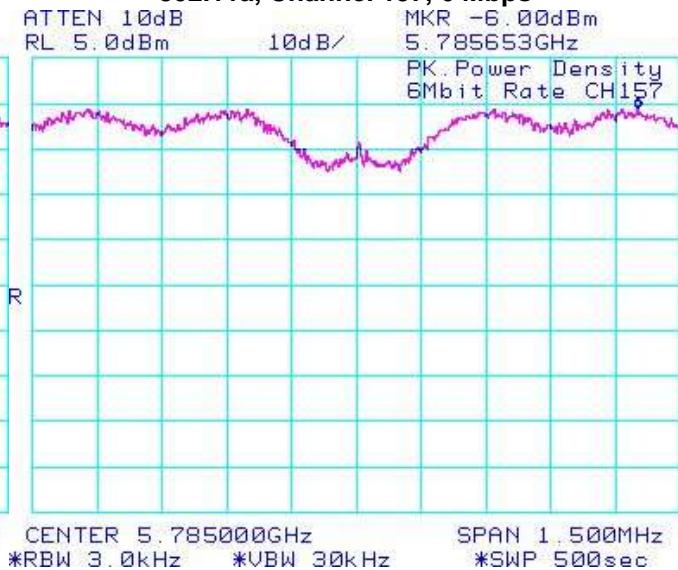

| | | |
|--|---|---|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 6 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

802.11a RF Conducted Emission Test Results cont'd

Figure 6-26: Peak Power Spectral Density

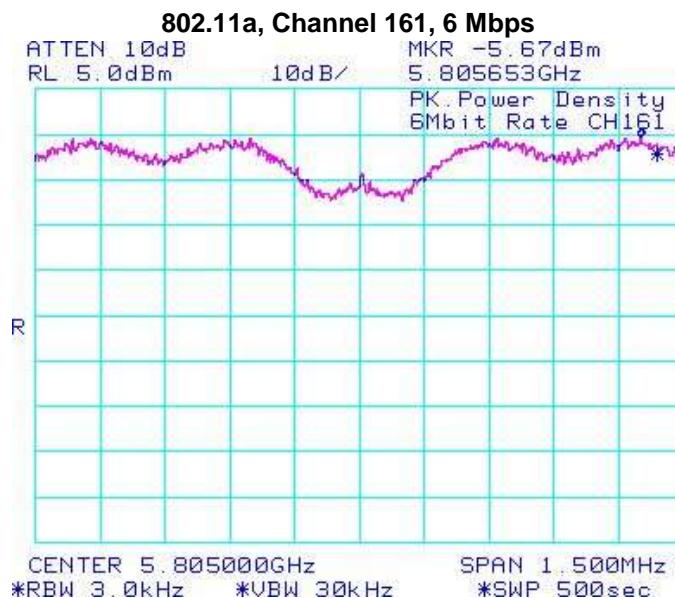


Spurious RF Conducted Emissions


The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.407 and RSS-210. Channels 44, 60, and 157 were measured at 6 Mbps each for 802.11a mode. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 29.0 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

| Channel | Data Rate | Power (dBm) | Max. Measured Level (dBm) | Limit (dBc) | Margin (dB) |
|---------|-----------|-------------|---------------------------|-------------|-------------|
| 44 | 6 Mbps | 14.64 | -40.47 | -20 | -20.47 |
| 60 | 6 Mbps | 14.72 | -40.88 | -20 | -20.88 |
| 157 | 6 Mbps | 16.45 | -40.29 | -20 | -20.29 |

The emissions were in the noise floor.


See figures 6-27 to 6-29 for the plots of the spurious RF conducted emissions for Channel 44, 60 and 157 at 6 Mbps each for 802.11a mode.

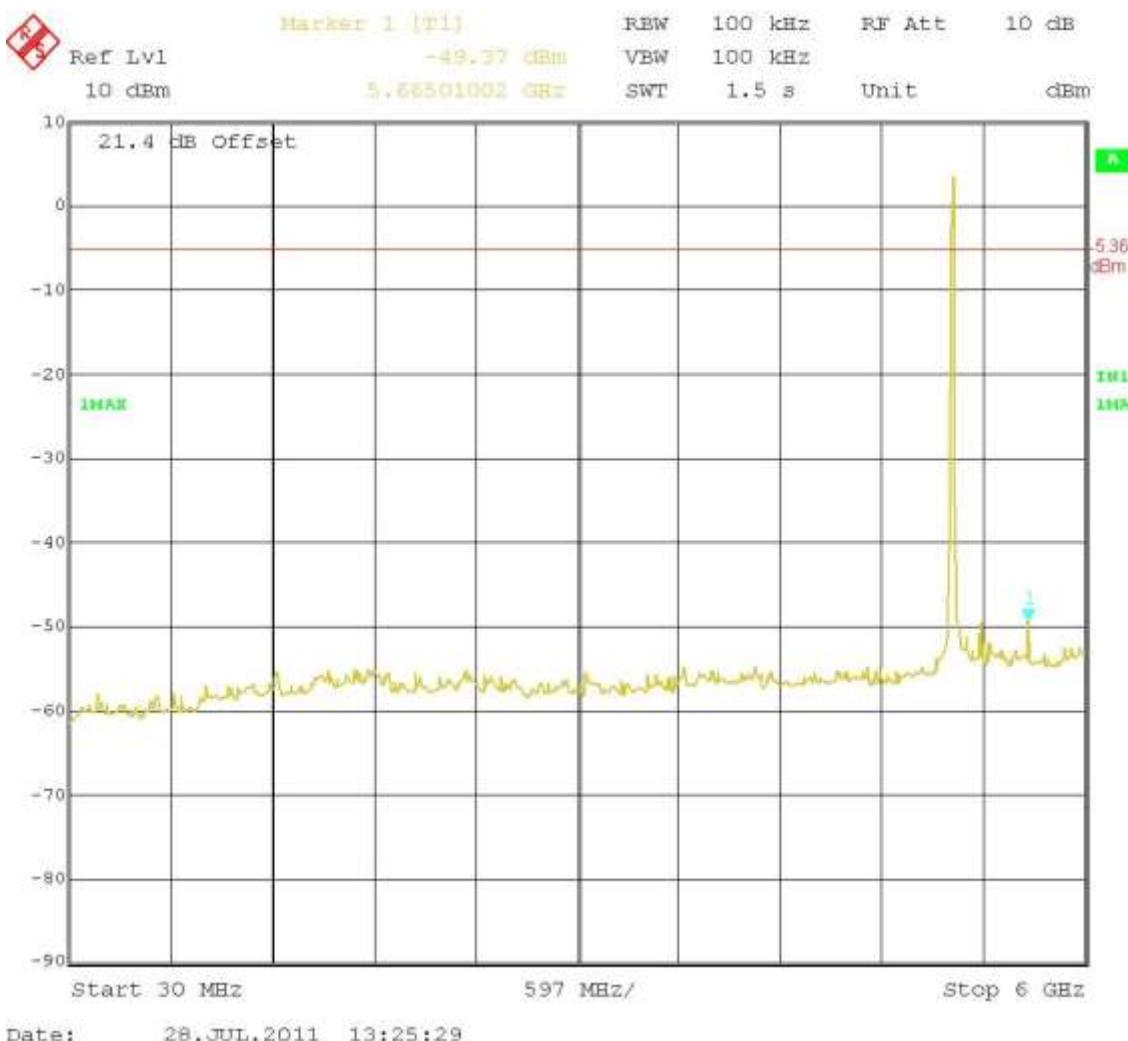
802.11a RF Conducted Emission Test Results cont'd**Figure 6-27a: Spurious RF Conducted Emissions, 802.11a Channel 44, 6 Mbps**

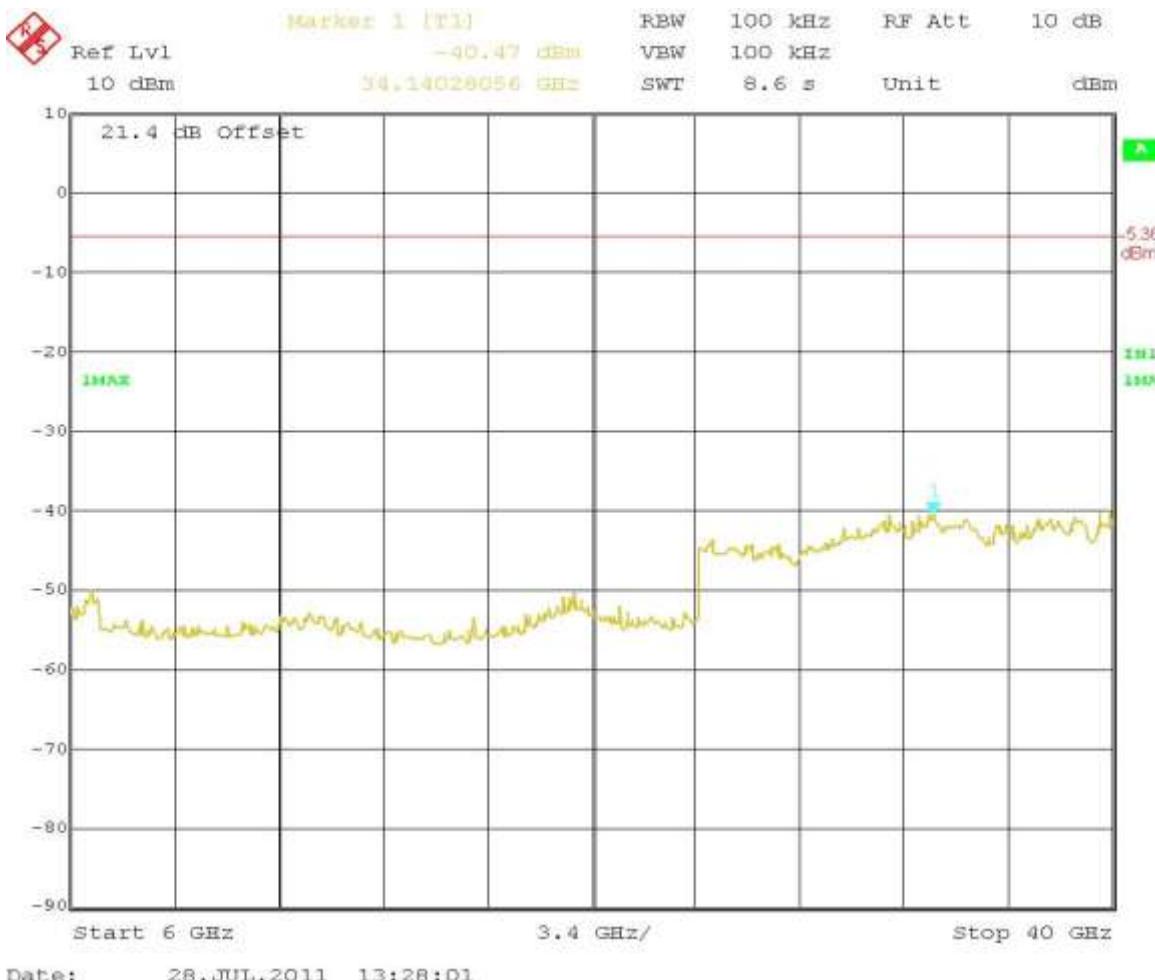802.11a RF Conducted Emission Test Results cont'd**Figure 6-27b: Spurious RF Conducted Emissions, 802.11a Channel 44, 6 Mbps**

802.11a RF Conducted Emission Test Results cont'd


Figure 6-28a: Spurious RF Conducted Emissions, 802.11a Channel 60, 6 Mbps

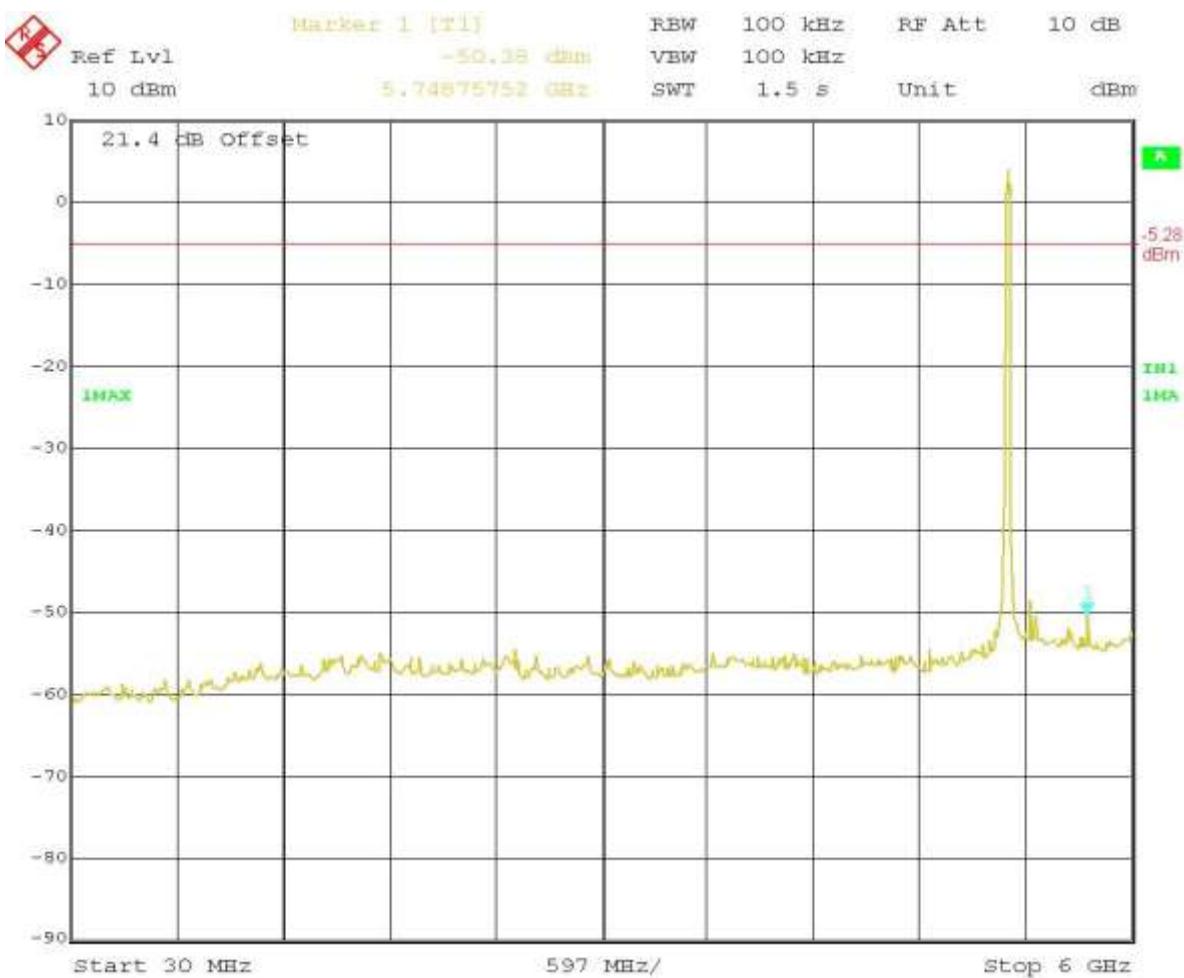

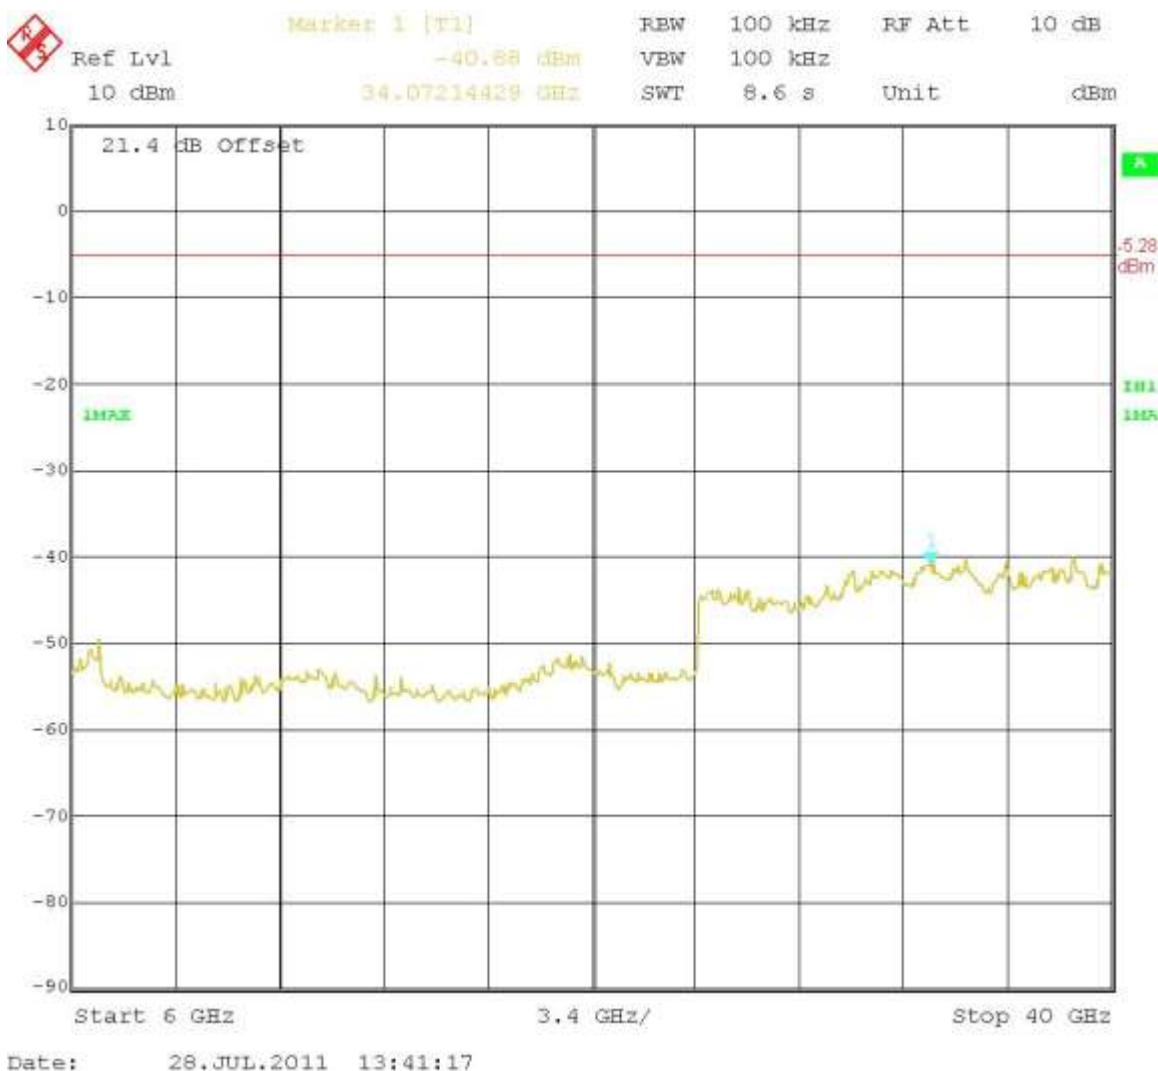802.11a RF Conducted Emission Test Results cont'd**Figure 6-28b: Spurious RF Conducted Emissions, 802.11a Channel 60, 6 Mbps**

802.11a RF Conducted Emission Test Results cont'd

Figure 6-29a: Spurious RF Conducted Emissions, 802.11a Channel 157, 6 Mbps

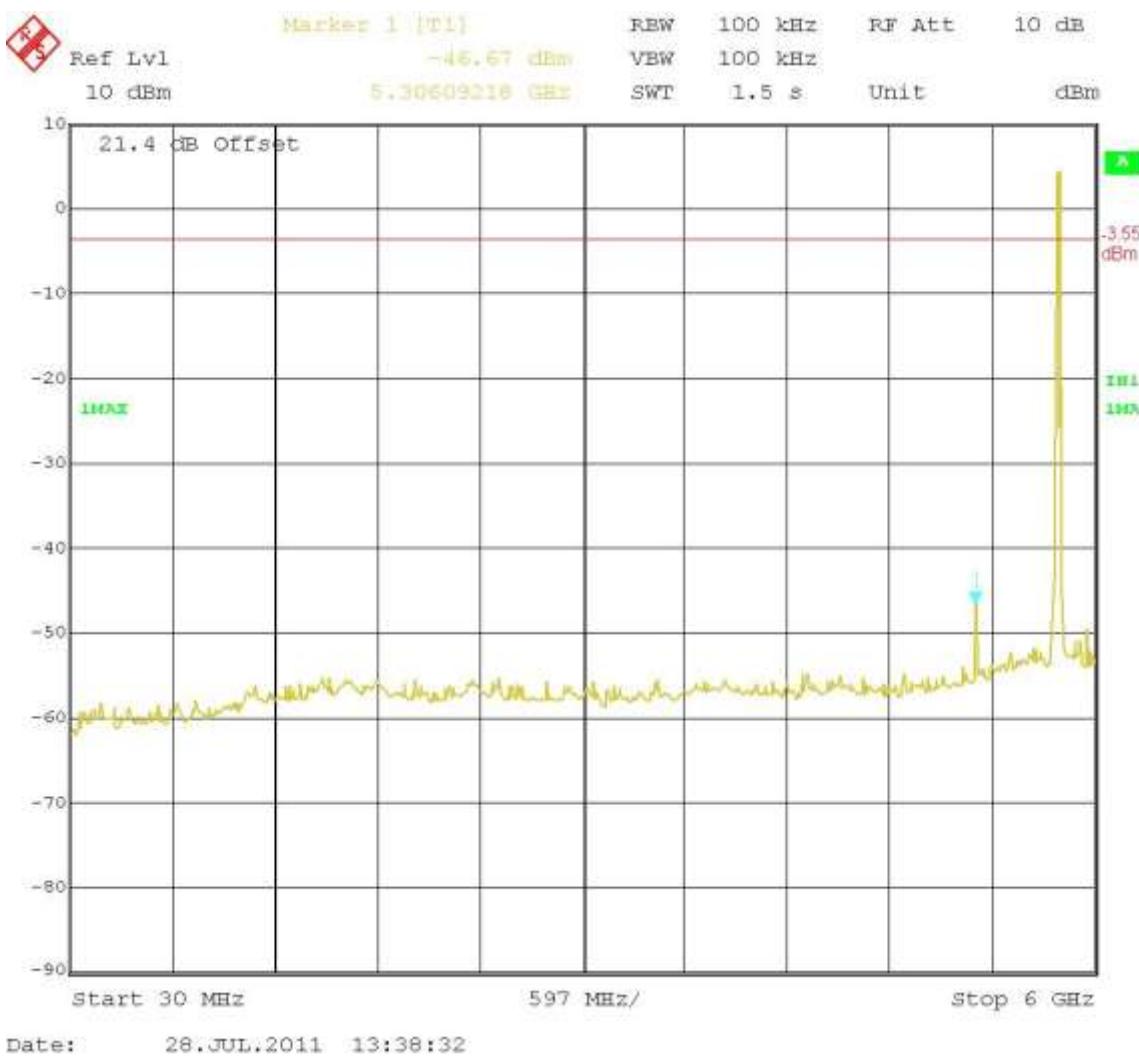

802.11a RF Conducted Emission Test Results cont'd

Figure 6-29b: Spurious RF Conducted Emissions, 802.11a Channel 157, 6 Mbps



| | | |
|---|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 7 | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW |

APPENDIX 7 – NEAR FIELD COMMUNICATIONS TEST DATA/PLOTS

| | | | |
|---|---|---|--|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 7 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW IC: 2503A-REC70UW | |

Near Field Communications (NFC) Test Results cont'd

Radiated Emissions

Date of Test: August 12, 2011

Measurements were performed by Nielven Olis.

The environmental test conditions were: Temperature: 26 °C
Relative Humidity: 32 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, and sweep frequency of 9 kHz to 1 GHz.

The BlackBerry® smartphone was in vertical position.

The frequency sweep measurements were performed in Near Field Communications Tx mode at 13.56 MHz.

| Frequency (MHz) | Reading (PK) (dB μ V) | Correction Factor (dB) | Corrected Reading (PK) (dB μ V/m) | Limit (dB μ V/m) | Test Margin (dB) |
|--------------------|---------------------------------|------------------------------|--|-------------------------|------------------------|
| 13.56 | 34.26 | 24.24 | 58.50 | 124.00 | -65.50 |

All other emissions had a test margin of greater than 25.0 dB.

Near Field Communications (NFC) Test Results cont'd

Occupied Bandwidth


Date of test: August 15, 2011.

The measurements were performed by Kevin Guo.

The environmental test conditions were: Temperature: 24 °C
 Relative Humidity: 46 %

| Operation mode (TX ON) | Occupied Bandwidth (kHz) |
|-------------------------------|---------------------------------|
| NFC, modulated | 424.20 |

Figure 7-1: Occupied Bandwidth, NFC TX Frequency = 13.56 MHz

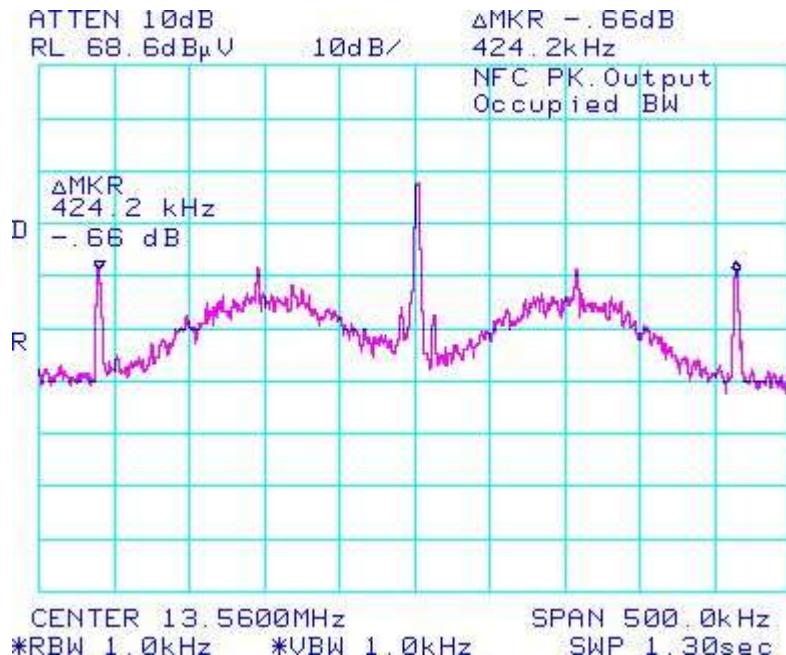

| | |
|---|---|
|  | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 7 |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 |

Near Field Communications (NFC) Test Results cont'd

Frequency Stability

Date of test: August 15, 2011.

The measurements were performed by Kevin Guo.

The environmental test conditions were: Temperature: 24 °C
Relative Humidity: 46 %

| Test Temperature (Celsius) | Nominal Freq. (MHz) | Measured Freq. (MHz) | Input Voltage (Volts) | Max Freq Error (Hz) | % Deviation (Limit .01%) | PPM |
|----------------------------|---------------------|----------------------|-----------------------|---------------------|--------------------------|---------|
| -20 | 13.56 | 13.560125 | 3.6 | 125 | 0.00092 | 9.2183 |
| -20 | 13.56 | 13.560158 | 3.7 | 158 | 0.00117 | 11.6519 |
| -20 | 13.56 | 13.560183 | 4.2 | 183 | 0.00135 | 13.4956 |
| -10 | 13.56 | 13.560283 | 3.6 | 283 | 0.00209 | 20.8702 |
| -10 | 13.56 | 13.560283 | 3.7 | 283 | 0.00209 | 20.8702 |
| -10 | 13.56 | 13.560392 | 4.2 | 392 | 0.00289 | 28.9086 |
| 0 | 13.56 | 13.560492 | 3.6 | 492 | 0.00363 | 36.2832 |
| 0 | 13.56 | 13.560508 | 3.7 | 508 | 0.00375 | 37.4631 |
| 0 | 13.56 | 13.560592 | 4.2 | 592 | 0.00437 | 43.6578 |
| 10 | 13.56 | 13.560667 | 3.6 | 667 | 0.00492 | 49.1888 |
| 10 | 13.56 | 13.560667 | 3.7 | 667 | 0.00492 | 49.1888 |
| 10 | 13.56 | 13.560700 | 4.2 | 700 | 0.00516 | 51.6224 |
| 20 | 13.56 | 13.560725 | 3.6 | 725 | 0.00535 | 53.4661 |
| 20 | 13.56 | 13.560725 | 3.7 | 725 | 0.00535 | 53.4661 |
| 20 | 13.56 | 13.560700 | 4.2 | 700 | 0.00516 | 51.6224 |
| 30 | 13.56 | 13.560797 | 3.6 | 797 | 0.00588 | 58.7758 |
| 30 | 13.56 | 13.560797 | 3.7 | 797 | 0.00588 | 58.7758 |
| 30 | 13.56 | 13.560717 | 4.2 | 717 | 0.00529 | 52.8761 |

| | | | |
|--|---|---------------------------|--------------------------|
| RIM Testing Services | EMI Test Report for the BlackBerry® smartphone Model REC71UW APPENDIX 7 | | |
| Test Report No. RTS-5385-1108-55 | Dates of Test July 28 to August 19, 2011 | FCC ID: L6AREC70UW | IC: 2503A-REC70UW |

Near Field Communications (NFC) Test Results cont'd

Frequency Stability cont'd

| Test Temperature (Celsius) | Nominal Freq. (MHz) | Measured Freq. (MHz) | Input Voltage (Volts) | Max Freq Error (Hz) | % Deviation (Limit .01%) | PPM |
|----------------------------|---------------------|----------------------|-----------------------|---------------------|--------------------------|---------|
| 40 | 13.56 | 13.560682 | 3.6 | 682 | 0.00503 | 50.2950 |
| 40 | 13.56 | 13.560682 | 3.7 | 682 | 0.00503 | 50.2950 |
| 40 | 13.56 | 13.560677 | 4.2 | 677 | 0.00499 | 49.9263 |
| 50 | 13.56 | 13.560556 | 3.6 | 556 | 0.00410 | 41.0029 |
| 50 | 13.56 | 13.560556 | 3.7 | 556 | 0.00410 | 41.0029 |
| 50 | 13.56 | 13.560523 | 4.2 | 523 | 0.00386 | 38.5693 |
| 60 | 13.56 | 13.560228 | 3.6 | 228 | 0.00168 | 16.8142 |
| 60 | 13.56 | 13.560228 | 3.7 | 228 | 0.00168 | 16.8142 |
| 60 | 13.56 | 13.560204 | 4.2 | 204 | 0.00150 | 15.0442 |