



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**1(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**APPENDIX C: PROBE & DIPOLE CALIBRATION DATA**

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **RTS (RIM Testing Services)**Certificate No: **ES3-3225\_Jan11**

## CALIBRATION CERTIFICATE

Object	ES3DV3 - SN:3225		
Calibration procedure(s)	QA CAL-01.v7, QA CAL-23.v4 and QA CAL-25.v3 Calibration procedure for dosimetric E-field probes		
Calibration date:	January 13, 2011		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01138)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
Calibrated by:	Name Jeton Kestrelli	Function Laboratory Technician	Signature
Approved by:	Name Katica Pokovic	Function Technical Manager	Signature

Issued: January 15, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
3(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108****Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>*: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). *NORM<sub>x,y,z</sub>* are only intermediate values, i.e., the uncertainties of *NORM<sub>x,y,z</sub>* does not effect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)x,y,z = NORM<sub>x,y,z</sub> \* frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- Ax,y,z; Bx,y,z; Cx,y,z, VRx,y,z; A, B, C* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM<sub>x,y,z</sub> \* ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**4(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**ES3DV3 SN:3225****January 13, 2011**

# Probe ES3DV3

## SN:3225

Manufactured: September 1, 2009  
Last calibrated: December 11, 2009  
Recalibrated: January 13, 2011

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
5(63)

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

ES3DV3 SN:3225

January 13, 2011

## DASY/EASY - Parameters of Probe: ES3DV3 SN:3225

## Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu$ V/(V/m) <sup>2</sup> ) <sup>A</sup>	1.26	1.21	1.31	$\pm$ 10.1%
DCP (mV) <sup>B</sup>	102.1	100.8	99.1	

## Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X Y Z	0.00 0.00 0.00	0.00 0.00 0.00	1.00 1.00 1.00	149.8 148.1 110.7	$\pm$ 2.6 %

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E-field uncertainty inside TSL (see Pages 5 and 6).<sup>B</sup> Numerical linearization parameter, uncertainty not required.<sup>C</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**6(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**ES3DV3 SN:3225****January 13, 2011****DASY/EASY - Parameters of Probe: ES3DV3 SN:3225****Calibration Parameter Determined in Head Tissue Simulating Media**

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
750	$\pm 50 / \pm 100$	$41.9 \pm 5\%$	$0.89 \pm 5\%$	6.47	6.47	6.47	0.89	$1.08 \pm 11.0\%$
900	$\pm 50 / \pm 100$	$41.5 \pm 5\%$	$0.97 \pm 5\%$	6.11	6.11	6.11	0.81	$1.10 \pm 11.0\%$
1810	$\pm 50 / \pm 100$	$40.0 \pm 5\%$	$1.40 \pm 5\%$	5.26	5.26	5.26	0.37	$1.68 \pm 11.0\%$
1950	$\pm 50 / \pm 100$	$40.0 \pm 5\%$	$1.40 \pm 5\%$	4.98	4.98	4.98	0.48	$1.51 \pm 11.0\%$
2450	$\pm 50 / \pm 100$	$39.2 \pm 5\%$	$1.80 \pm 5\%$	4.60	4.60	4.60	0.52	$1.54 \pm 11.0\%$
2600	$\pm 50 / \pm 100$	$39.0 \pm 5\%$	$1.96 \pm 5\%$	4.52	4.52	4.52	0.53	$1.58 \pm 11.0\%$

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
7(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**ES3DV3 SN:3225****January 13, 2011****DASY/EASY - Parameters of Probe: ES3DV3 SN:3225****Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz]	Validity [MHz] <sup>C</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
750	± 50 / ± 100	55.5 ± 5%	0.96 ± 5%	6.30	6.30	6.30	0.76	1.17 ± 11.0%
900	± 50 / ± 100	55.0 ± 5%	1.05 ± 5%	6.12	6.12	6.12	0.72	1.20 ± 11.0%
1810	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.88	4.88	4.88	0.26	2.70 ± 11.0%
1950	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.89	4.89	4.89	0.33	2.28 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.43	4.43	4.43	0.99	1.04 ± 11.0%
2600	± 50 / ± 100	52.5 ± 5%	2.16 ± 5%	4.29	4.29	4.29	0.99	1.05 ± 11.0%

<sup>C</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



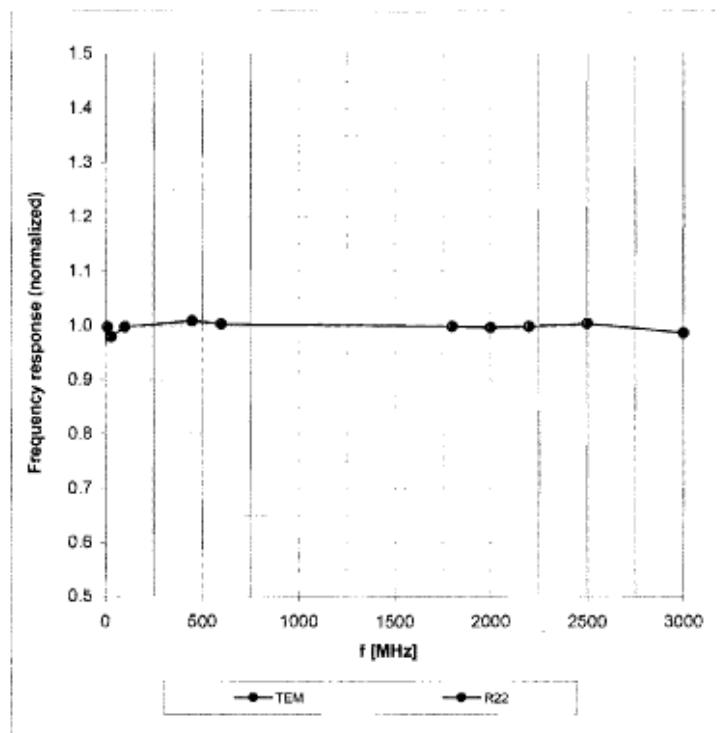
Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**8(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**ES3DV3 SN:3225****January 13, 2011****Frequency Response of E-Field**

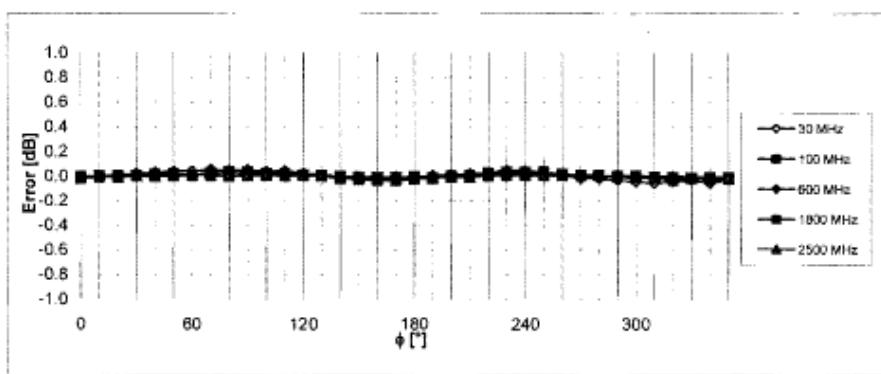
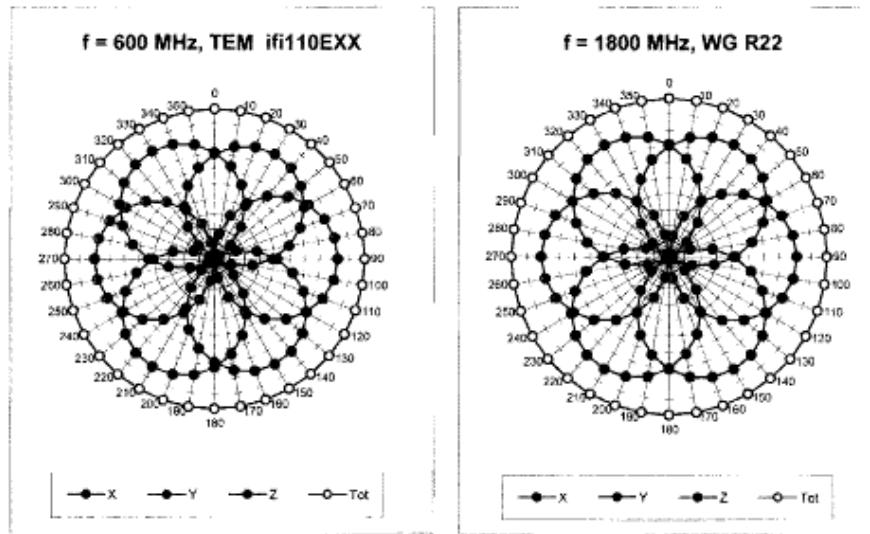
(TEM-Cell:ifi110 EXX, Waveguide: R22)

**Uncertainty of Frequency Response of E-field:  $\pm 6.3\% (k=2)$**

ES3DV3 SN:3225

January 13, 2011

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$



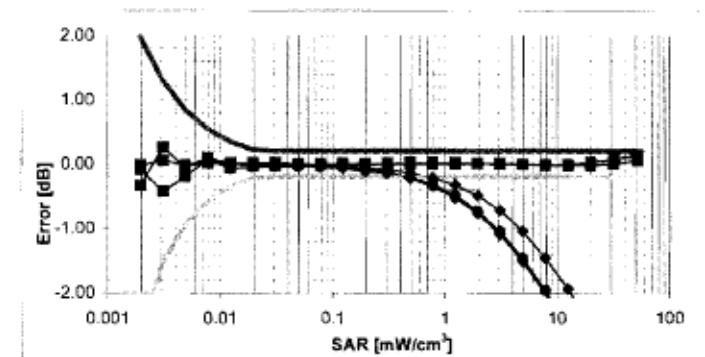
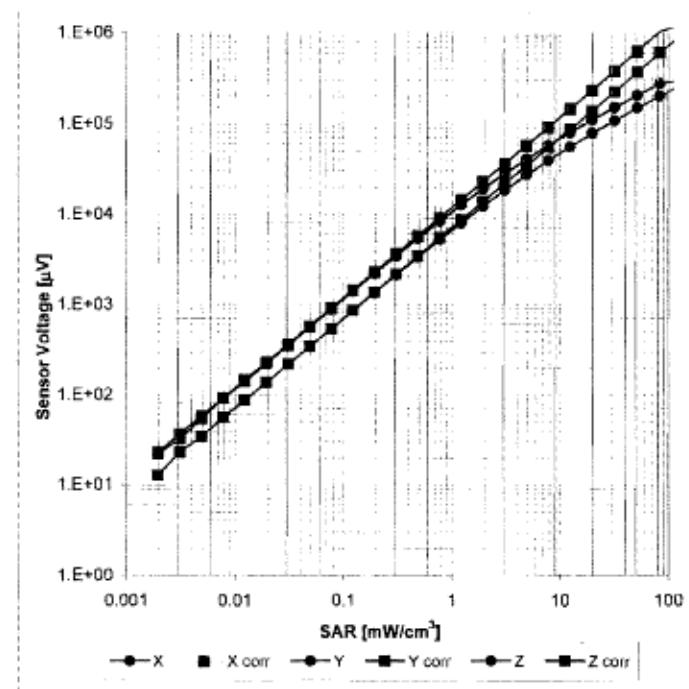
Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

ES3DV3 SN:3225

January 13, 2011

### Dynamic Range $f(\text{SAR}_{\text{head}})$

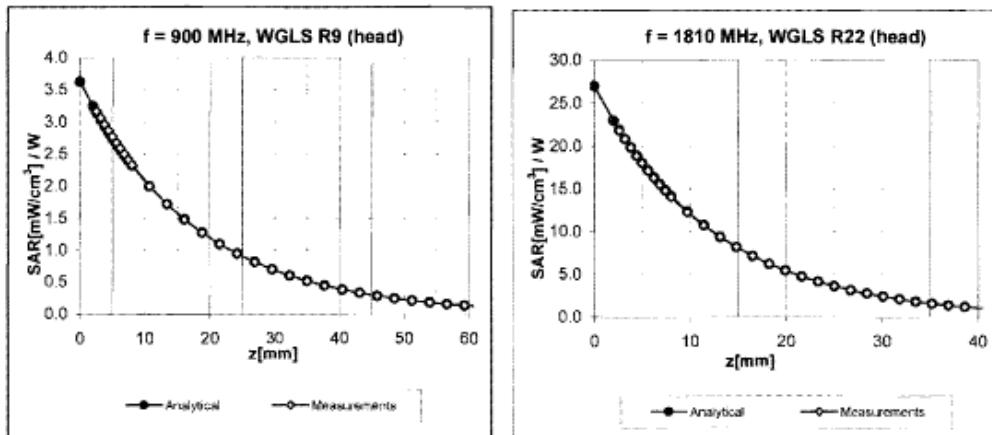
(TEM cell,  $f = 900 \text{ MHz}$ )

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

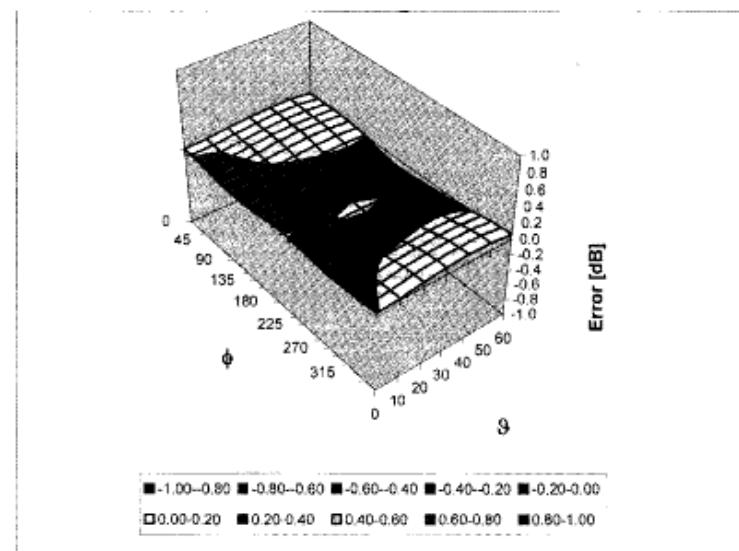
ES3DV3 SN:3225

January 13, 2011

## Conversion Factor Assessment



## Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ), f = 900 MHzUncertainty of Spherical Isotropy Assessment:  $\pm 2.6\% (k=2)$



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**12(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**ES3DV3 SN:3225****January 13, 2011****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
13(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificatesClient **RTS (RIM Testing Services)**Certificate No: **ES3-3225\_Jan12****CALIBRATION CERTIFICATE**

Object	<b>ES3DV3 - SN:3225</b>
Calibration procedure(s)	<b>QA-CAL-01.v8, QA-CAL-23.v4, QA-CAL-25.v4</b> Calibration procedure for dosimetric E-field probes
Calibration date:	<b>January 11, 2012</b>
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.	
All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity < 70%.	
Calibration Equipment used (M&TE critical for calibration)	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US373905B5	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name <b>Jeton Kastrell</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature 
Issued: January 12, 2012			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: **ES3-3225\_Jan12**

Page 1 of 11

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	December 25, 2011 – January 25, 2012	RTS-5955-1201-37	L6AREQ70UW	2503A-REQ70UW

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

#### Glossary:

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $PAR$ : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z$ : A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**15(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ES3DV3 – SN:3225

January 11, 2012

# Probe ES3DV3

## SN:3225

Manufactured: September 1, 2009  
Calibrated: January 11, 2012

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**16(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ES3DV3- SN:3225

January 11, 2012

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3225****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.26	1.20	1.30	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	101.2	100.8	101.2	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>C</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	107.7	$\pm 1.7\%$
			Y	0.00	0.00	1.00	113.4	
			Z	0.00	0.00	1.00	110.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
17(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ES3DV3- SN:3225

January 11, 2012

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3225****Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.42	6.42	6.42	0.27	2.04	± 12.0 %
900	41.5	0.97	6.06	6.06	6.06	0.35	1.74	± 12.0 %
1810	40.0	1.40	5.23	5.23	5.23	0.73	1.21	± 12.0 %
1950	40.0	1.40	4.98	4.98	4.98	0.58	1.41	± 12.0 %
2450	39.2	1.80	4.50	4.50	4.50	0.79	1.26	± 12.0 %
2600	39.0	1.96	4.32	4.32	4.32	0.77	1.32	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
18(63)

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

ES3DV3- SN:3225

January 11, 2012

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3225****Calibration Parameter Determined in Body Tissue Simulating Media**

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.27	6.27	6.27	0.36	1.74	± 12.0 %
900	55.0	1.05	6.07	6.07	6.07	0.29	2.02	± 12.0 %
1810	53.3	1.52	4.92	4.92	4.92	0.50	1.57	± 12.0 %
1950	53.3	1.52	4.87	4.87	4.87	0.59	1.49	± 12.0 %
2450	52.7	1.95	4.30	4.30	4.30	0.68	1.16	± 12.0 %
2600	52.5	2.16	4.12	4.12	4.12	0.80	0.99	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

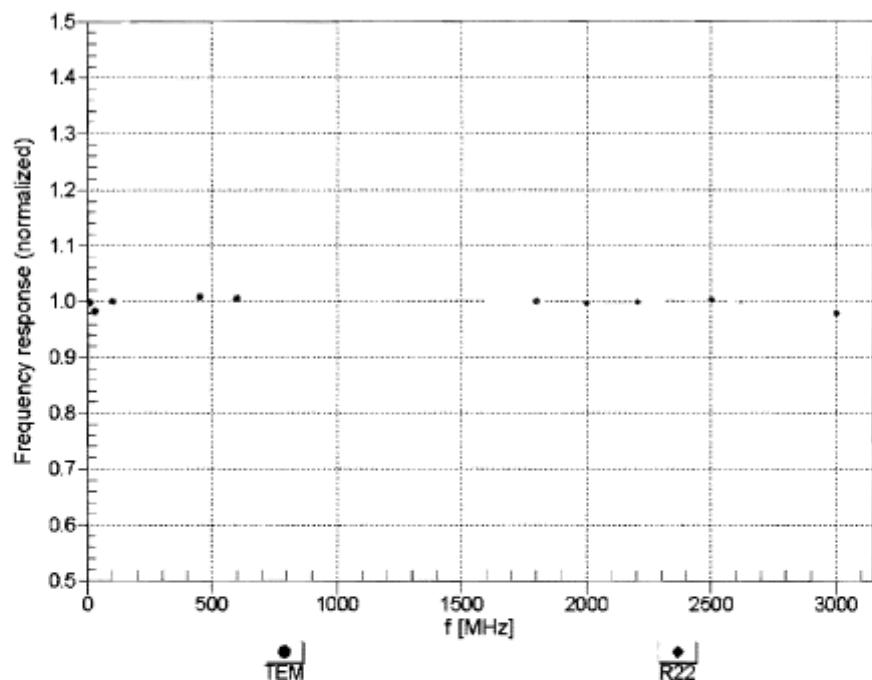
Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ES3DV3– SN:3225

January 11, 2012

## Frequency Response of E-Field

(TEM-Cell:ifl110 EXX, Waveguide: R22)



Uncertainty of Frequency Response of E-field:  $\pm 6.3\% (k=2)$



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
20(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

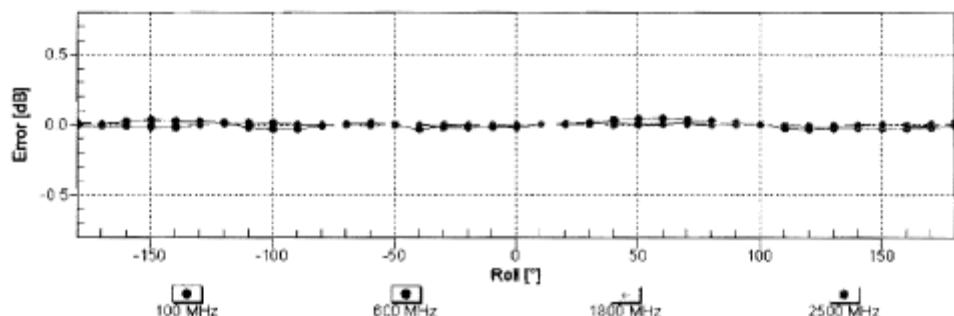
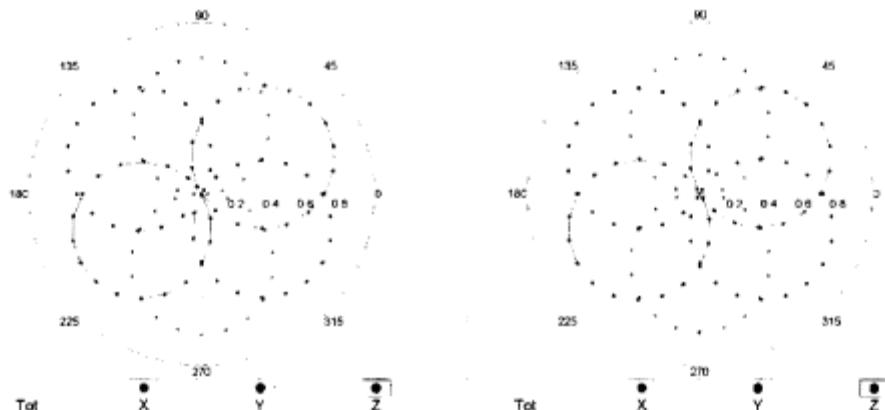
ES3DV3- SN:3225

January 11, 2012

Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$ 

f=600 MHz, TEM

f=1800 MHz, R22

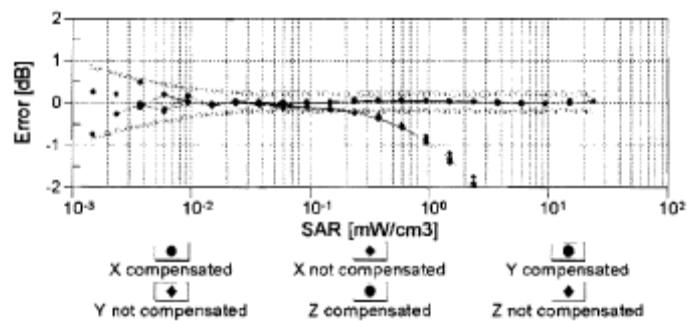
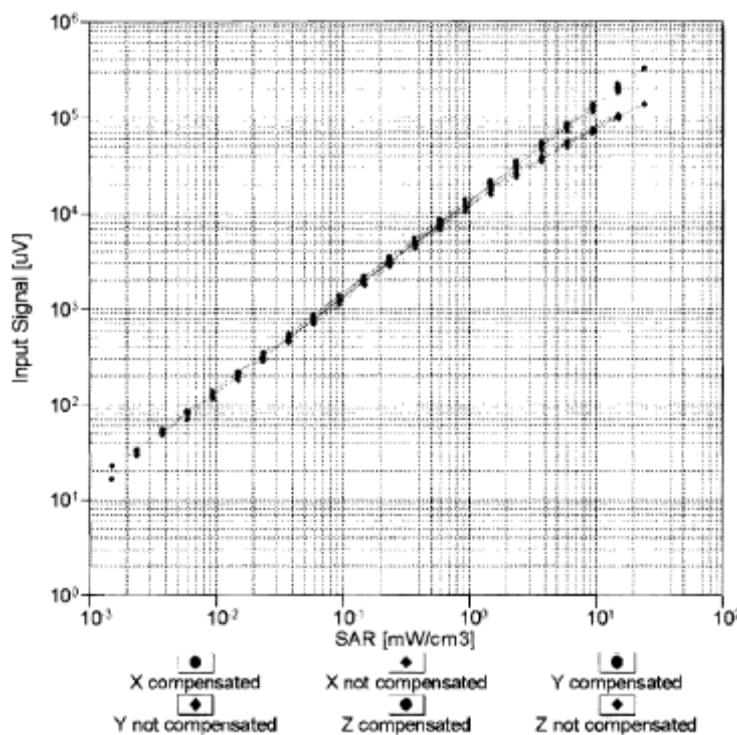
Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

ES3DV3- SN:3225

January 11, 2012

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)



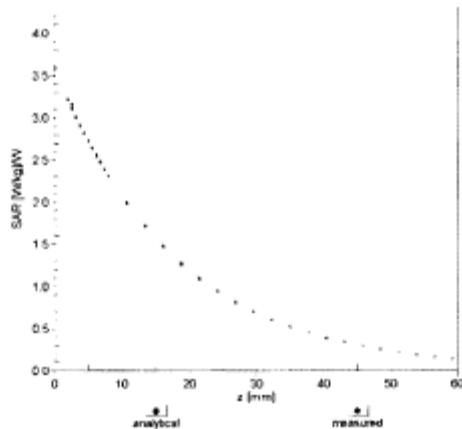
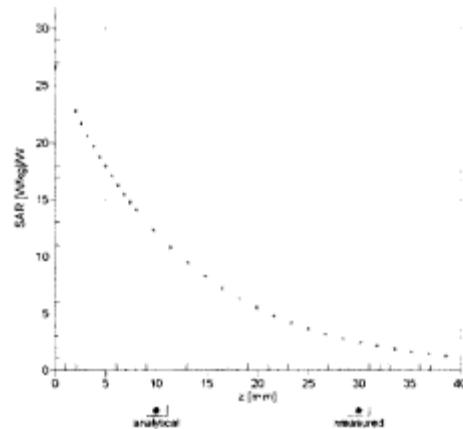
Uncertainty of Linearity Assessment:  $\pm 0.6\% (k=2)$

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------


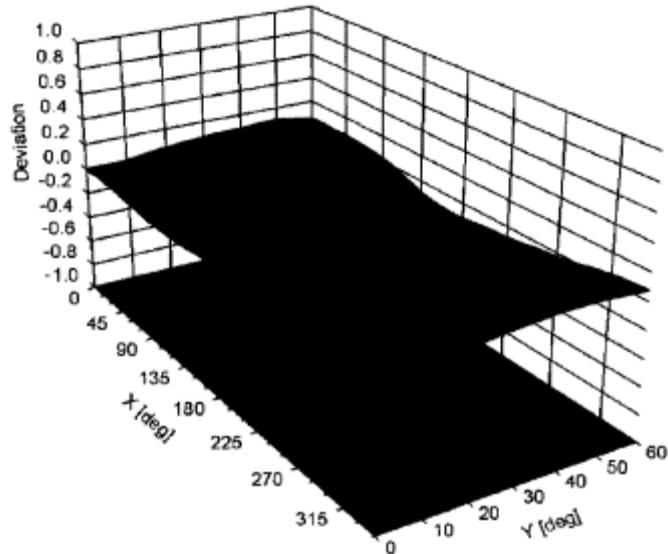
ES3DV3– SN:3225

January 11, 2012

## Conversion Factor Assessment

 $f = 900 \text{ MHz}, \text{WGLS R9 (H_convF)}$  $f = 1810 \text{ MHz}, \text{WGLS R22 (H_convF)}$ 

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$ 



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**23(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ES3DV3– SN:3225

January 11, 2012

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3225****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
24(63)

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client RTS (RIM Testing Services)

Certificate No: ET3-1644\_Nov11

**CALIBRATION CERTIFICATE**

Object ET3DV6 - SN:1644

Calibration procedure(s) QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4  
Calibration procedure for dosimetric E-field probes

Calibration date: November 15, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name: Jeton Kestrali	Function: Laboratory Technician	Signature:
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 17, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1644\_Nov11

Page 1 of 11

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

#### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\beta$	$\beta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$ : Assessed for E-field polarization  $\beta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORM_{x,y,z}$  are only intermediate values, i.e., the uncertainties of  $NORM_{x,y,z}$  does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $PAR$ : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z$ :  $A, B, C$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORM_{x,y,z} * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

	Document	Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report	Page 26(63)
	Author Data	Dates of Test	Test Report No FCC ID: IC ID
Andrew Becker	December 25, 2011 – January 25, 2012	RTS-5955-1201-37	L6AREQ70UW 2503A-REQ70UW

ET3DV6 – SN:1644

November 15, 2011

# Probe ET3DV6

## SN:1644

Manufactured: November 7, 2001  
 Calibrated: November 15, 2011

Calibrated for DASY/EASY Systems  
 (Note: non-compatible with DASY2 system!)



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
27(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1644

November 15, 2011

**DASY/EASY - Parameters of Probe: ET3DV6 - SN:1644****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu$ V/(V/m)) <sup>A</sup>	1.71	1.97	1.98	$\pm$ 10.1 %
DCP (mV) <sup>B</sup>	98.3	98.4	98.1	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	140.4	$\pm$ 2.2 %
			Y	0.00	0.00	1.00	118.6	
			Z	0.00	0.00	1.00	145.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).<sup>B</sup> Numerical linearization parameter: uncertainty not required.<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
28(63)

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

ET3DV6- SN:1644

November 15, 2011

**DASY/EASY - Parameters of Probe: ET3DV6 - SN:1644****Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.28	6.28	6.28	0.67	1.99	± 12.0 %
900	41.5	0.97	5.96	5.96	5.96	0.72	1.88	± 12.0 %
1810	40.0	1.40	5.10	5.10	5.10	0.63	2.36	± 12.0 %
2450	39.2	1.80	4.34	4.34	4.34	0.89	1.73	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
29(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1644

November 15, 2011

**DASY/EASY - Parameters of Probe: ET3DV6- SN:1644****Calibration Parameter Determined in Body Tissue Simulating Media**

<b>f (MHz)<sup>c</sup></b>	<b>Relative Permittivity<sup>f</sup></b>	<b>Conductivity (S/m)<sup>f</sup></b>	<b>ConvF X</b>	<b>ConvF Y</b>	<b>ConvF Z</b>	<b>Alpha</b>	<b>Depth (mm)</b>	<b>Unct. (k=2)</b>
750	55.5	0.96	6.18	6.18	6.18	0.79	1.86	± 12.0 %
900	55.0	1.05	5.92	5.92	5.92	0.61	2.26	± 12.0 %
1810	53.3	1.52	4.69	4.69	4.69	0.65	2.60	± 12.0 %
2450	52.7	1.95	4.14	4.14	4.14	1.00	1.37	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\alpha$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\alpha$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



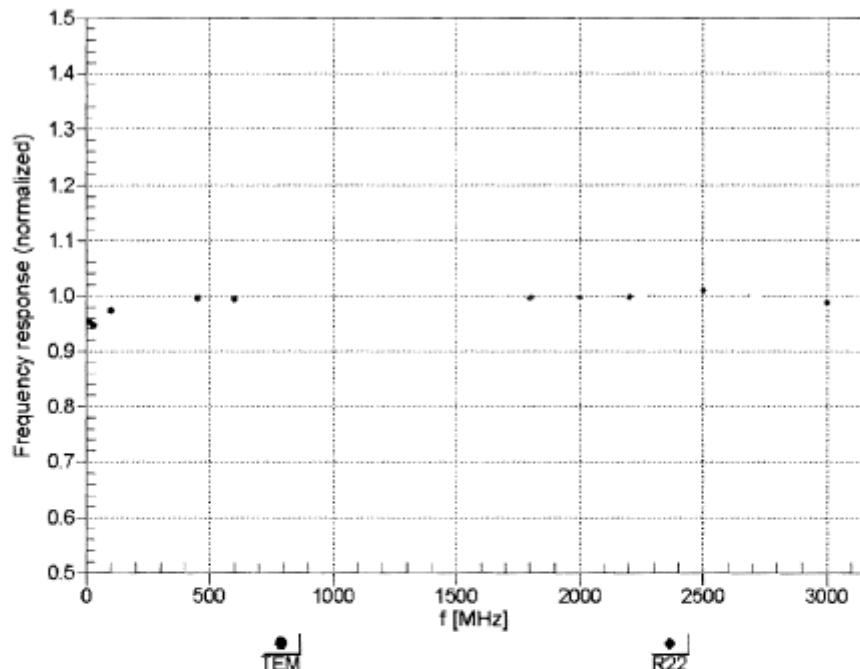
Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**30(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1644

November 15, 2011

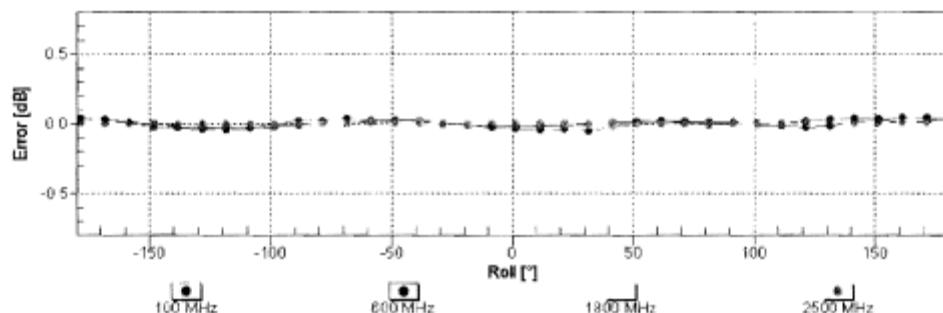
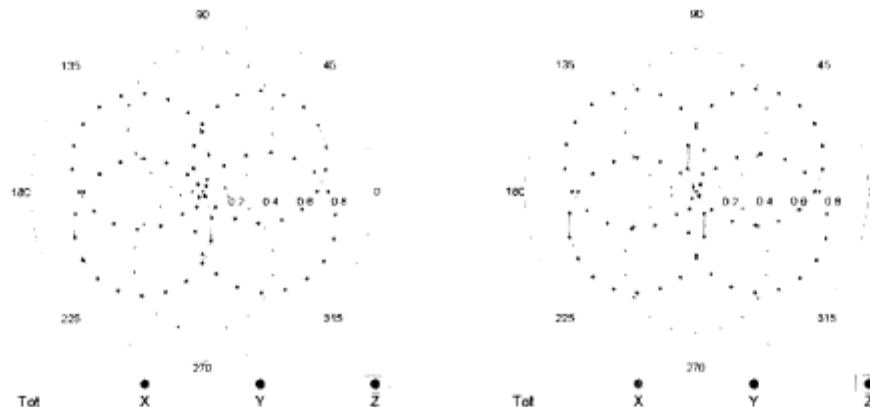
**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6-SN:1644

November 15, 2011

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

 $f=600 \text{ MHz, TEM}$  $f=1800 \text{ MHz, R22}$ 

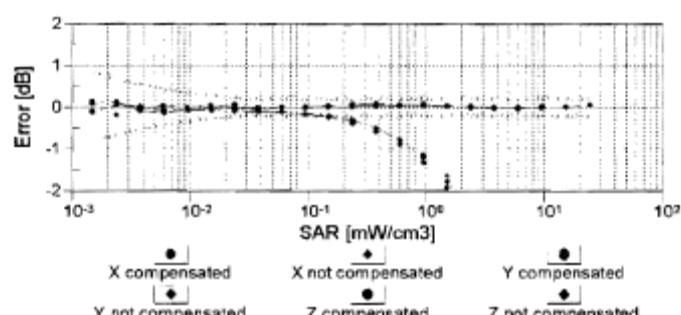
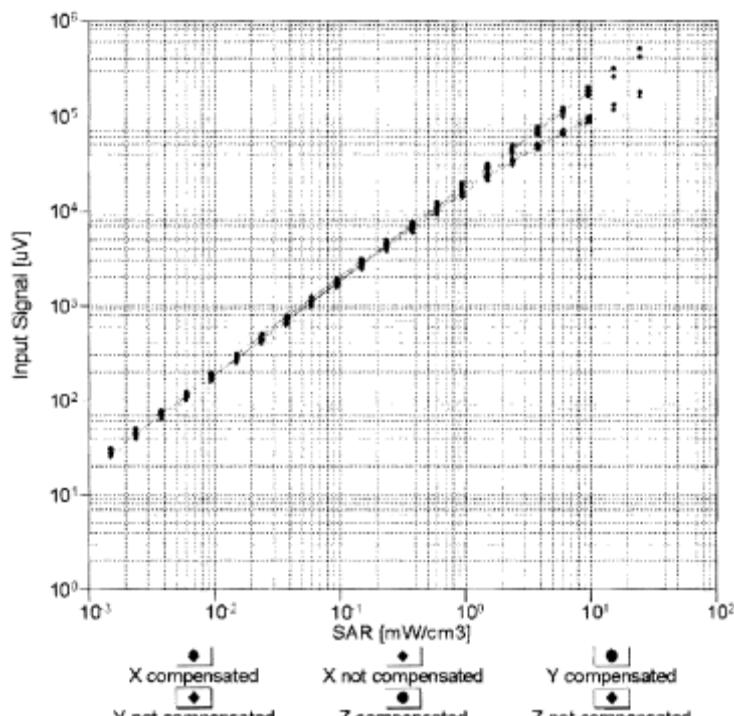
Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

ET3DV6- SN:1644

November 15, 2011

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f = 900 MHz)



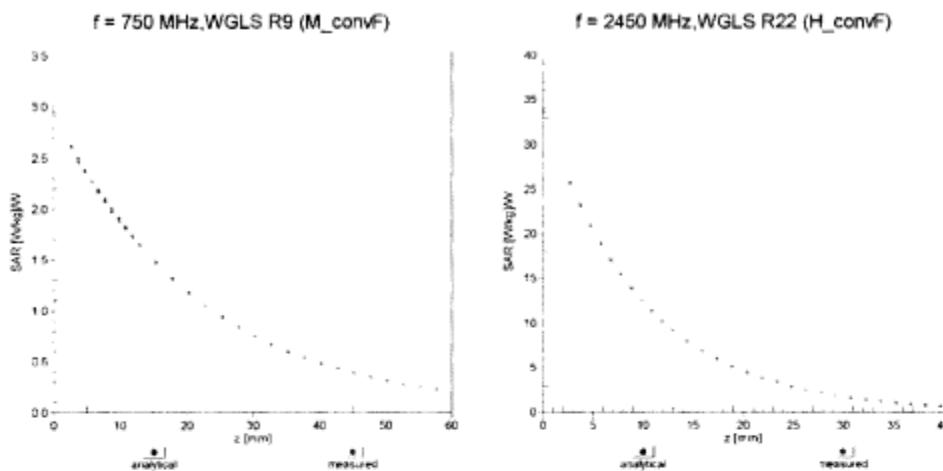
Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------


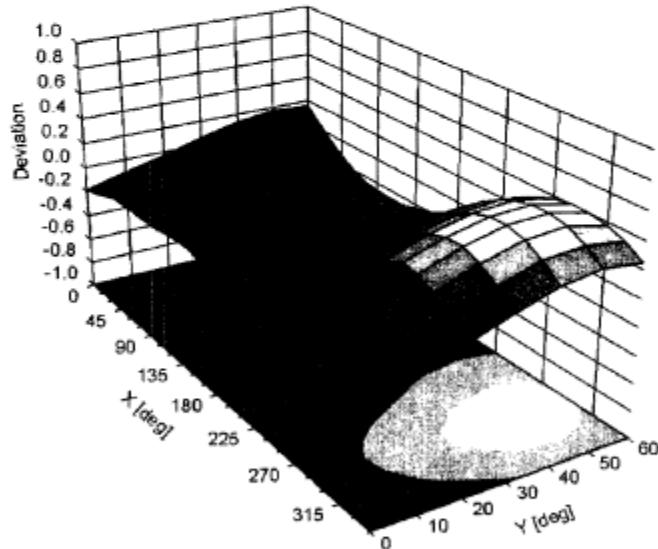
ET3DV6- SN:1644

November 15, 2011

## Conversion Factor Assessment



## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$ 



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**34(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1644

November 15, 2011

**DASY/EASY - Parameters of Probe: ET3DV6 - SN:1644****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**35(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **RTS (RIM Testing Services)**Certificate No: **ET3-1643\_Mar11****CALIBRATION CERTIFICATE**Object **ET3DV6 - SN:1843**Calibration procedure(s) **QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3**  
**Calibration procedure for dosimetric E-field probes**Calibration date: **March 9, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name <b>Jeton Kastrati</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature 

Issued: March 10, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **ET3-1643\_Mar11**

Page 1 of 11

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	December 25, 2011 – January 25, 2012	RTS-5955-1201-37	L6AREQ70UW	2503A-REQ70UW

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**Swiss Calibration Service**

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\alpha$	$\alpha$ rotation around probe axis
Polarization $\beta$	$\beta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\beta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>**: C<sub>x,y,z</sub> are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR**: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**37(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6 – SN:1643

March 9, 2011

# Probe ET3DV6

## SN:1643

Manufactured: November 7, 2001  
Calibrated: March 9, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**38(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1643

March 9, 2011

**DASY/EASY - Parameters of Probe: ET3DV6 - SN:1643****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu$ V/(V/m)) <sup>A</sup>	1.77	1.99	1.76	$\pm$ 10.1 %
DCP (mV) <sup>B</sup>	99.1	94.5	100.0	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>C</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	107.8	$\pm$ 2.2 %
			Y	0.00	0.00	1.00	109.4	
			Z	0.00	0.00	1.00	108.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
39(63)

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1643

March 9, 2011

**DASY/EASY - Parameters of Probe: ET3DV6 - SN:1643****Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) <sup>c</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.59	6.59	6.59	0.81	1.77	± 12.0 %
900	41.5	0.97	6.21	6.21	6.21	0.74	1.88	± 12.0 %
1810	40.0	1.40	5.15	5.15	5.15	0.56	2.39	± 12.0 %
1950	40.0	1.40	4.96	4.96	4.96	0.57	2.35	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**40(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1643

March 9, 2011

**DASY/EASY - Parameters of Probe: ET3DV6- SN:1643****Calibration Parameter Determined in Body Tissue Simulating Media**

<b>f (MHz)<sup>C</sup></b>	<b>Relative Permittivity<sup>F</sup></b>	<b>Conductivity (S/m)<sup>F</sup></b>	<b>ConvF X</b>	<b>ConvF Y</b>	<b>ConvF Z</b>	<b>Alpha</b>	<b>Depth (mm)</b>	<b>Unct. (k=2)</b>
750	55.5	0.96	6.29	6.29	6.29	0.78	1.83	± 12.0 %
900	55.0	1.05	6.13	6.13	6.13	0.72	1.98	± 12.0 %
1810	53.3	1.52	4.72	4.72	4.72	0.65	2.59	± 12.0 %
1950	53.3	1.52	4.72	4.72	4.72	0.65	2.39	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



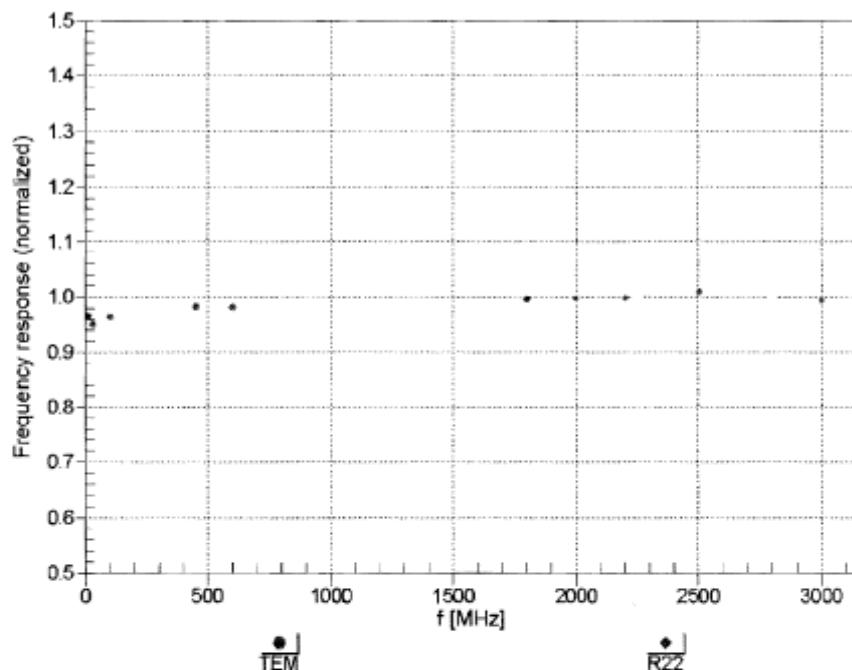
Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**41(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6– SN:1643

March 9, 2011

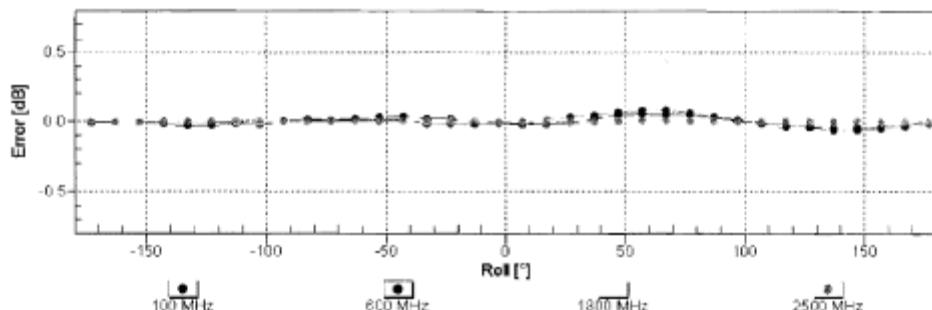
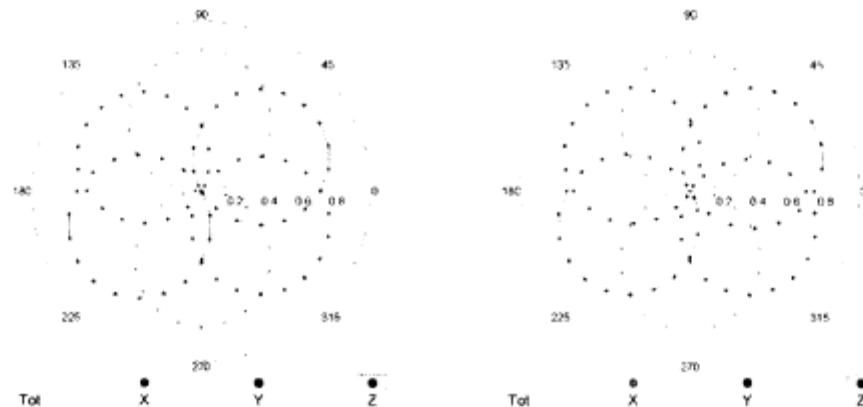
**Frequency Response of E-Field  
(TEM-Cell:ifi110 EXX, Waveguide: R22)****Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1643

March 9, 2011

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

 $f=600 \text{ MHz, TEM}$  $f=1800 \text{ MHz, R22}$ 

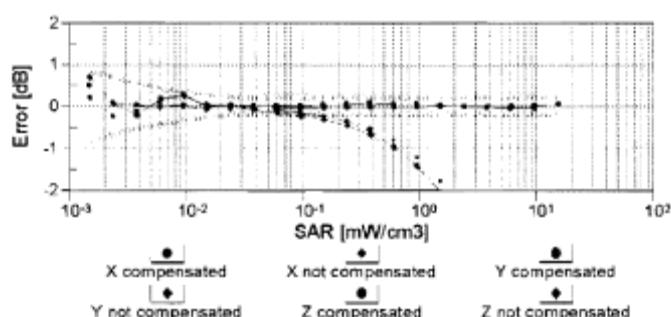
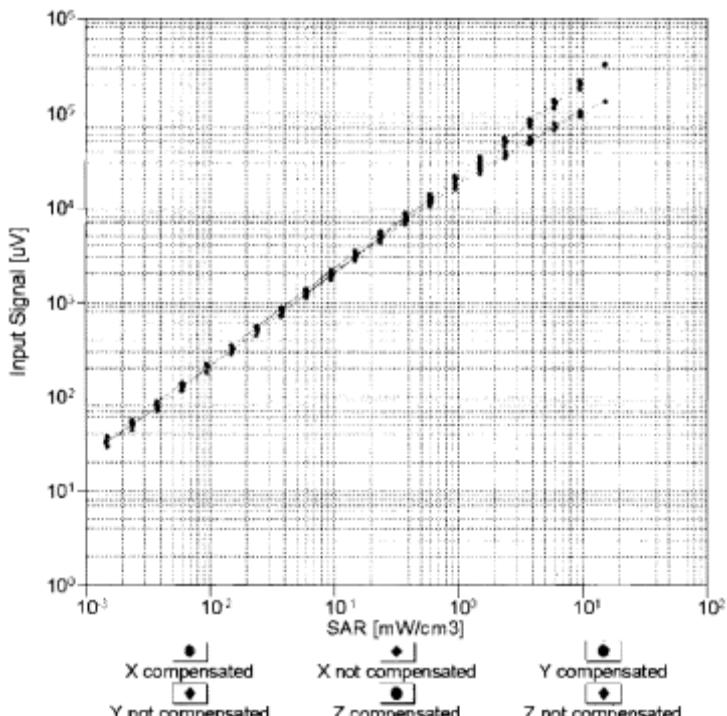
Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

ET3DV6- SN:1643

March 9, 2011

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900$ MHz)



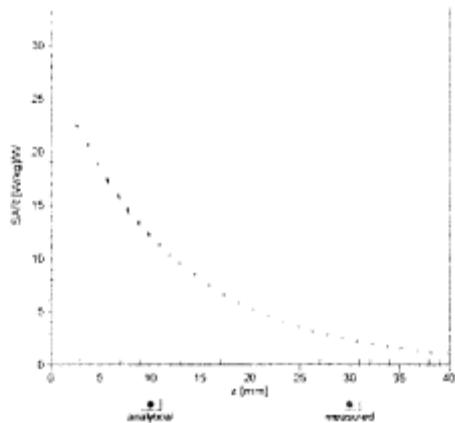
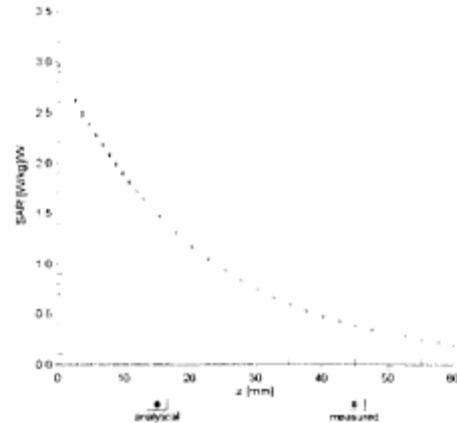
Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

Author Data Andrew Becker	Dates of Test December 25, 2011 – January 25, 2012	Test Report No RTS-5955-1201-37	FCC ID: L6AREQ70UW	IC ID 2503A-REQ70UW
------------------------------	---	------------------------------------	-----------------------	------------------------

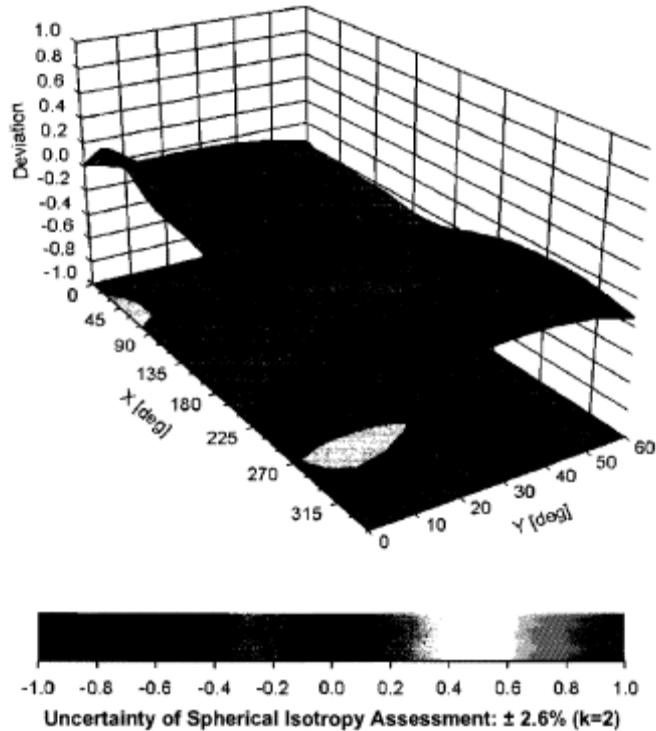
ET3DV6- SN:1643

March 9, 2011

## Conversion Factor Assessment

 $f = 1950 \text{ MHz, WGLS R22 (H_convF)}$  $f = 750 \text{ MHz, WGLS R9 (M_convF)}$ 

## Deviation from Isotropy in Air

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$ 



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**45(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

ET3DV6- SN:1643

March 9, 2011

**DASY/EASY - Parameters of Probe: ET3DV6 - SN:1643****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**46(63)**Author Data  
**Andrew Becker**

Dates of Test

**December 25, 2011 – January 25, 2012**

Test Report No

**RTS-5955-1201-37**

FCC ID:

**L6AREQ70UW**

IC ID

**2503A-REQ70UW**

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **RTS (RIM Testing Services)**Certificate No: **D835V2-446\_Jan11****CALIBRATION CERTIFICATE**Object **D835V2 - SN: 446**Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits**Calibration date: **January 21, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: Name **Dimce Iliev** Function **Laboratory Technician**

Signature

Approved by: Name **Katja Pokovic** Function **Technical Manager**

Signature

Issued: January 21, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D835V2-446\_Jan11**

Page 1 of 6



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**47(63)**

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	December 25, 2011 – January 25, 2012	RTS-5955-1201-37	L6AREQ70UW	2503A-REQ70UW

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108****Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**48(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V4.9	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	835 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.5	0.90 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	41.3 ± 6 %	0.89 mho/m ± 6 %
<b>Head TSL temperature during test</b>	(21.8 ± 0.2) °C	---	---

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 mW / g
SAR normalized	normalized to 1W	9.56 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.63 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.56 mW / g
SAR normalized	normalized to 1W	6.24 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.27 mW / g ± 16.5 % (k=2)



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**49(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	<b>49.6 Ω - 7.7 jΩ</b>
Return Loss	<b>- 22.2 dB</b>

**General Antenna Parameters and Design**

Electrical Delay (one direction)	<b>1.386 ns</b>
----------------------------------	-----------------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	<b>SPEAG</b>
Manufactured on	<b>October 24, 2001</b>

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

### DASY5 Validation Report for Head TSL

Date/Time: 21.01.2011 10:18:05

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

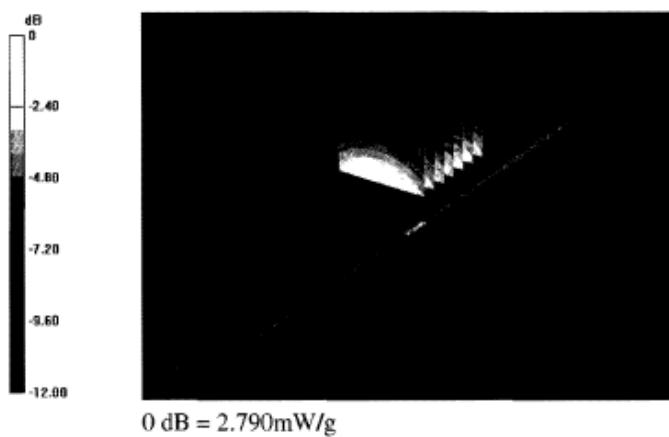
**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.426 V/m; Power Drift = 0.04 dB

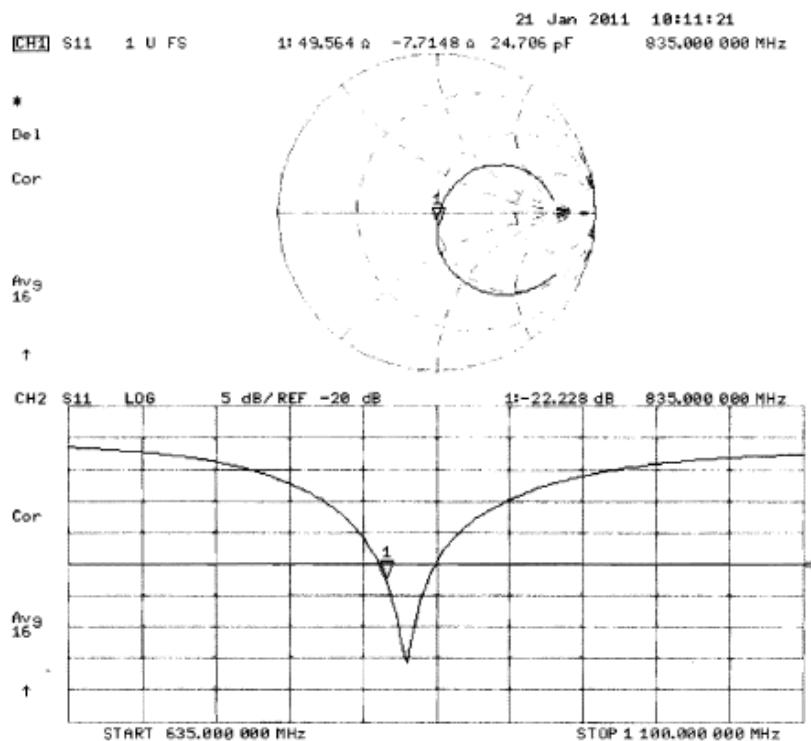
Peak SAR (extrapolated) = 3.600 W/kg

**SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.56 mW/g**

Maximum value of SAR (measured) = 2.790 mW/g



Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Impedance Measurement Plot for Head TSL**




Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**52(63)**

Author Data

Andrew Becker

Dates of Test

December 25, 2011 – January 25, 2012

Test Report No

RTS-5955-1201-37

FCC ID:

L6AREQ70UW

IC ID

2503A-REQ70UW

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **RTS (RIM Testing Services)**Certificate No: **D1900V2-545\_Jan11****CALIBRATION CERTIFICATE**Object **D1900V2 - SN: 545**Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits**Calibration date: **January 13, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Dmitri Iliev** **Laboratory Technician**Approved by: **Katja Pokovic** **Technical Manager**

Issued: January 14, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-545\_Jan11

Page 1 of 6

 Document	<b>Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report</b>				Page <b>53(63)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

<b>TSL</b>	tissue simulating liquid
<b>ConvF</b>	sensitivity in TSL / NORM x,y,z
<b>N/A</b>	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**54(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	38.5 ± 6 %	1.43 mho/m ± 6 %
<b>Head TSL temperature during test</b>	(21.2 ± 0.2) °C	----	----

**SAR result with Head TSL**

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	<b>Condition</b>	
SAR measured	250 mW input power	10.2 mW / g
SAR normalized	normalized to 1W	40.8 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>40.0 mW /g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	<b>Condition</b>	
SAR measured	250 mW input power	5.26 mW / g
SAR normalized	normalized to 1W	21.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>20.8 mW /g ± 16.5 % (k=2)</b>



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**55(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	50.8 $\Omega$ + 1.8 $j\Omega$
Return Loss	- 34.4 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	November 15, 2001

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**DASY5 Validation Report for Head TSL**

Date/Time: 13.01.2011 14:52:49

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:545**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement

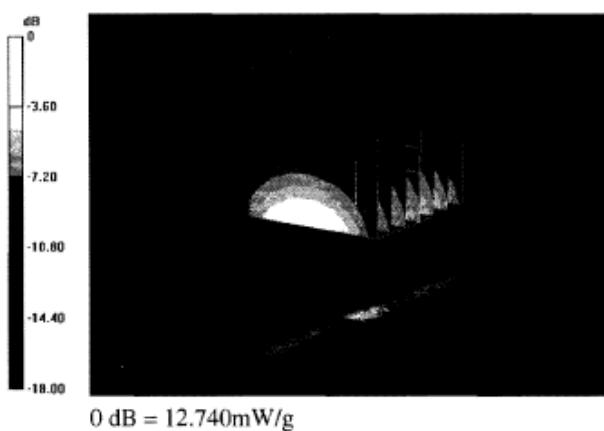
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.053 V/m; Power Drift = 0.03 dB

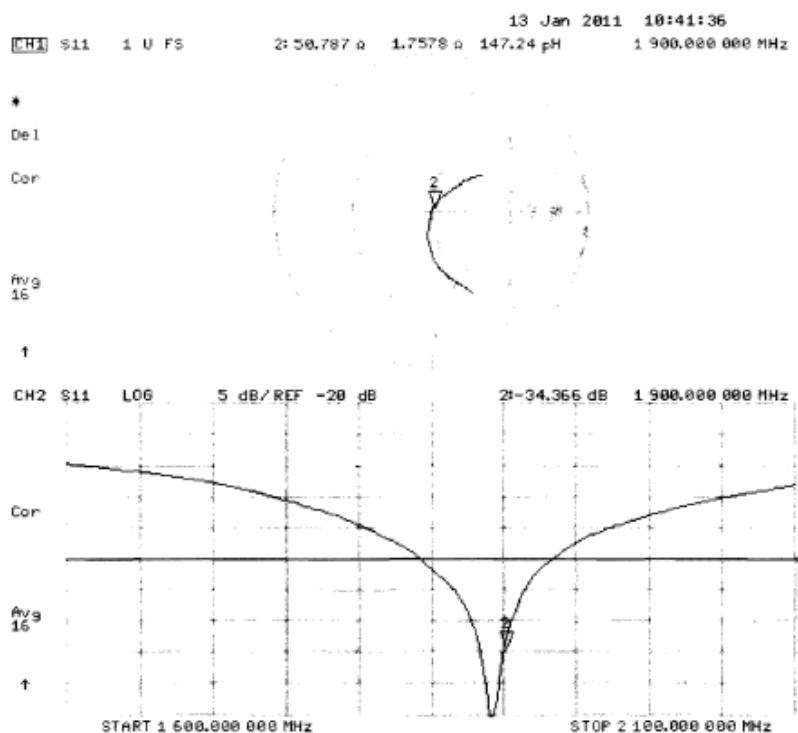
Peak SAR (extrapolated) = 18.648 W/kg

**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.26 mW/g**

Maximum value of SAR (measured) = 12.743 mW/g



Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Impedance Measurement Plot for Head TSL**




Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**58(63)**Author Data  
**Andrew Becker**

Dates of Test

**December 25, 2011 – January 25, 2012**

Test Report No

**RTS-5955-1201-37**

FCC ID:

**L6AREQ70UW**

IC ID

**2503A-REQ70UW**

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificatesClient **RTS (RIM Testing Services)**Certificate No: **D2450V2-747\_Nov11****CALIBRATION CERTIFICATE**Object **D2450V2 - SN: 747**

Calibration procedure(s)

**QA CAL-05.v8**

Calibration procedure for dipole validation kits above 700 MHz

Calibration date:

**November 09, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5086 (20g)	29-Mar-11 (No. 217-01368)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	

Approved by:	Name	Function	Signature
	Kelja Pokovic	Technical Manager	

Issued: November 9, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D2450V2-747\_Nov11**

Page 1 of 6

 Document	<b>Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report</b>				Page <b>59(63)</b>
	Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### **Glossary:**

<b>TSL</b>	tissue simulating liquid
<b>ConvF</b>	sensitivity in TSL / NORM x,y,z
<b>N/A</b>	not applicable or not measured

#### **Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

#### **Additional Documentation:**

- DASY4/5 System Handbook

#### **Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**60(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	37.7 ± 6 %	1.84 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	---	---

**SAR result with Head TSL**

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	13.8 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	54.1 mW /g ± 17.0 % (k=2)

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	6.39 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	25.3 mW /g ± 16.5 % (k=2)



Document

**Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report**Page  
**61(63)**

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	52.5 $\Omega$ + 1.3 $j\Omega$
Return Loss	- 31.2 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.161 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	December 01, 2003

Author Data <b>Andrew Becker</b>	Dates of Test <b>December 25, 2011 – January 25, 2012</b>	Test Report No <b>RTS-5955-1201-37</b>	FCC ID: <b>L6AREQ70UW</b>	IC ID <b>2503A-REQ70UW</b>
-------------------------------------	--	---	------------------------------	-------------------------------

### DASY5 Validation Report for Head TSL

Date: 09.11.2011

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 747**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.84$  mho/m;  $\epsilon_r = 37.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn60I; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 100I
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

#### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

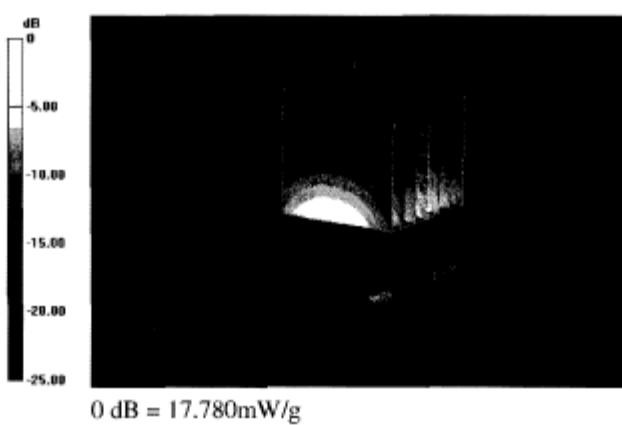
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.1 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.853 W/kg

**SAR(1 g) = 13.8 mW/g; SAR(10 g) = 6.39 mW/g**

Maximum value of SAR (measured) = 17.782 mW/g





Document

## Appendix C for the BlackBerry® Smartphone Model REQ71UW Mobile Hot Spot SAR Report

Page  
63(63)

Author Data	Dates of Test	Test Report No	FCC ID:	IC ID
Andrew Becker	December 25, 2011 – January 25, 2012	RTS-5955-1201-37	L6AREQ70UW	2503A-REQ70UW

## Impedance Measurement Plot for Head TSL

