

FCC DFS Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 15.407
&
Industry Canada (IC), RSS-210



A division of Research In Motion Limited

REPORT NO.: RTS-6012-1207-13A

PRODUCT MODEL NO.: RFF91LW, RFK121LW

TYPE NAME: BlackBerry® smartphone

FCC ID: L6ARFF90LW, L6ARFK120LW

IC: 2503A-RFF90LW, 2503A-RFK120LW

DATE: November 20, 2012

RTS is accredited
according to
EN ISO/IEC 17025 by:



592

 <p>DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW</p>		
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW FCC ID: L6ARFK120LW IC: 2503A-RFK120LW

Statement of Performance:

The BlackBerry® smartphone, model RFF91LW, part number CER-48927-001 Rev 2 and accessories when configured and operated per RIM's operation instructions, and performs within the requirements of the test standards.

The BlackBerry® smartphone, model RFK121LW, part number CER-48927-001 Rev2, and its accessories perform within the requirements of the test standards when configured and operated under RIM's operation instructions.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:

Heng Lin
 Regulatory Compliance Specialist
 Date: November 20, 2012

Reviewed by:

Savtej S. Sandhu
 Regulatory Compliance Specialist
 Date: November 20, 2012

Reviewed and Approved by:

Masud S. Attayi, P.Eng.
 Manager, Regulatory Compliance
 Date: November 21, 2012

	DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW	
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW FCC ID: L6ARFK120LW IC: 2503A-RFK120LW

Table of Contents

A. Scope	4
B. Associated Documents.....	4
C. Product Identification.....	4
D. Support Equipment Used for the Testing of the EUT	5
E. Test Results Chart – FCC Part 15, Client Device.....	6
F. Summary of Result.....	6
G. Compliance Test Equipment Used	7
APPENDIX 1 - DFS TEST PLOTS and DATA	8

 <p>DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW</p>		
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW FCC ID: L6ARFK120LW IC: 2503A-RFK120LW

A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15.407, October, 2011
- Industry Canada, RSS-210, Issue 8, December 2010, Licence-exempt Radio Apparatus

B. Associated Documents

- 1) RFF91LW_HW_Declaration_CER-48927-001_Rev2

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at:
 295 Phillip Street
 Waterloo, Ontario
 Canada, N2L 3W8
 Phone: 519 888 7465
 Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services
 440 Phillip Street
 Waterloo, Ontario
 Canada, N2L 5R9
 Phone: 519 888 7465
 Fax: 519 888 6906

The testing was performed on July 05 and 06, 2012.

	DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW		
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW	FCC ID: L6ARFK120LW IC: 2503A-RFK120LW

BlackBerry® smartphone Samples Tested

SAMPLE	MODEL	CER NUMBER	PIN	Software
1	RFF91LW	CER-48927-001 Rev 1	2A20297A	127.0.1.1651

DFS testing was performed on sample 1.

Only the characteristics that may have been affected by the changes from RFF91LW Rev1 to RFF91LW Rev2 were re-tested.

For more details, refer to RFF91LW_HW_Declaration_CER-48927-001_Rev2.

The manufacturer declared modes for the EUT operational characteristics that affect DFS are as follows:

Operating Modes (5250 -5350 MHz, 5470-5725MHz)

- Master Device
- Client Device (no In-Service Monitoring, no Ad – Hoc mode)
- Client Device with In-Service Monitoring

Channel Protocol

- IP Based
- Frame Based
- Other _____

D. Support Equipment Used for the Testing of the EUT

Manufacturer	Description	Model	Serial Number	FCC ID and IC
Cisco	Access Point	AIR-RM1252G-A-K9	FCW1336Z03R	LDK102061/2 2461B-102061/2
Lenovo	Laptop	8742-C2U	L3-B3615 07/06	MCLJ07H081 2878D-J07H081
D-Link	Router	WBR-1310	P10317B010096	KA2WBR1310 4216A-WBR1310

 RIM Testing Services™	DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW		
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW FCC ID: L6ARFK120LW IC: 2503A-RFK120LW	

E. Test Results Chart – FCC Part 15, Client Device

SPECIFICATION		TEST TYPE	Meets Requirement	Test Data APPENDIX
FCC CFR 47	IC			
Part 15.407	RSS-210	Channel closing transmission time	Yes	1
Part 15.407	RSS-210	Channel move time	Yes	1
Part 15.407	RSS-210	Non-occupancy period - associated	Yes	1

F. Summary of Result

- a). The BlackBerry® smartphone met the requirement of the Channel Closing Transmission and Time, Channel Move time and Non-occupancy period requirement as per FCC 15.407 and RSS 210. The measurement was performed on Channel 60 (5300 MHz) of the DFS band. Radar Type 1 of the Short Pulse Test waveform was used for tests.

See APPENDIX 1 for the test data.

Measurement Uncertainties:

Measurement	Measurement Unit	Expanded Uncertainty
DFS Threshold (Conducted)	dB	1.2

	DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW				
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW FCC ID: L6ARFK120LW IC: 2503A-RFK120LW			

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Spectrum Analyzer	Rohde & Schwarz	FSV	101820	12-11-22	DFS
DFS RF Modulator	National Instruments	PXIe-5611	EC157C	12-12-11	DFS
DFS I/Q Signal Generator	National Instruments	PXIe-5450	EC6BB1	12-12-11	DFS
DFS RF Signal Generator	National Instruments	PXIe-5620	ED2167	12-12-11	DFS
T/RH Meter	OMEGA	iTHX-SD	0380564	12-10-13	DFS


RIM Testing Services™	DFS Test Report for the BlackBerry® smartphone Model RFF91LW, RFK121LW APPENDIX 1	
Test Report No. RTS-6012-1207-13A	Date of Test July 05 and 06, 2012	FCC ID: L6ARFF90LW IC: 2503A-RFF90LW FCC ID: L6ARFK120LW IC: 2503A-RFK120LW

APPENDIX 1 - DFS TEST PLOTS and DATA

DFS Conducted Test Results

DFS Test Methods

Conducted Test Method

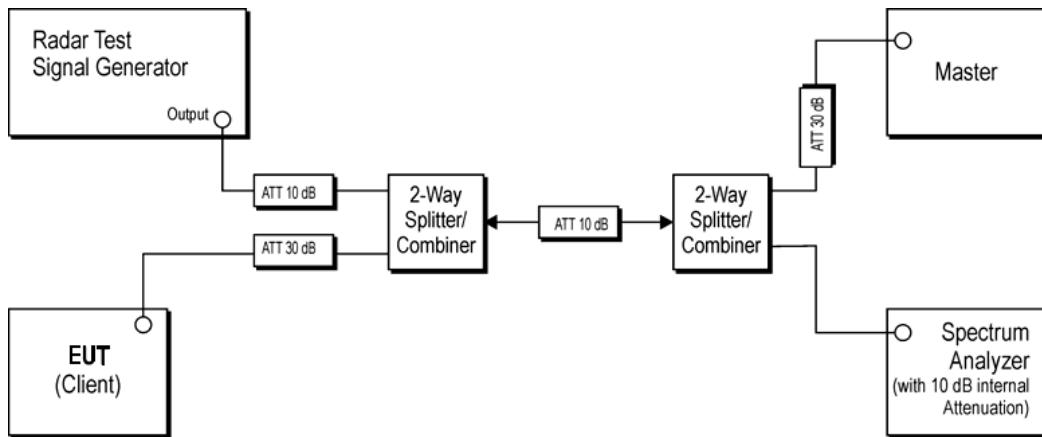

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel Move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

Test Report No.
RTS-6012-1207-13ADate of Test
July 05 and 06, 2012FCC ID: L6ARFF90LW IC: 2503A-RFF90LW
FCC ID: L6ARFK120LW IC: 2503A-RFK120LWDFS Conducted Test Results Cont'dRadar Waveforms

FCC Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Detection Percentage	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

FCC Long Pulse Radar Test Waveforms							
Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μs)	Number of Pulses per Burst	Number of Bursts	Minimum Detection Percentage	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Frequency Hopping Radar Test Waveforms							
Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Detection Percentage	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30



Test Report No.
RTS-6012-1207-13A

Date of Test
July 05 and 06, 2012

FCC ID: L6ARFF90LW **IC:** 2503A-RFF90LW
FCC ID: L6ARFK120LW **IC:** 2503A-RFK120LW

DFS Conducted Test Results Cont'd


The following tests were performed by Heng Lin

Date of the test: July 05, 2012

The environmental conditions were: Temperature: 24.3 °C
Humidity: 43.3 %

Wave form Type	Channel Closing Transmission Time		Channel Move Time		Result
	Measured	Limit	Measured	Limit	
Radar Type 1	84 ms	260 ms	2.61 s	10 s	PASS

Channel Closing Transmission Time

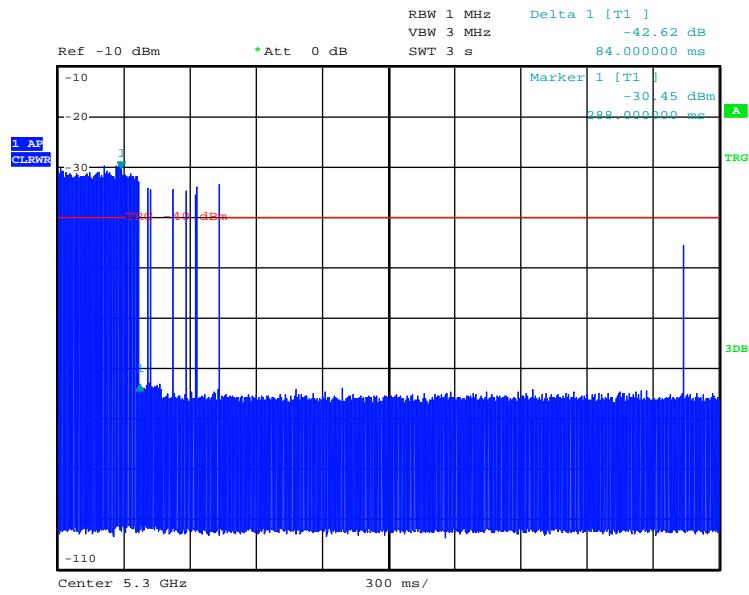

Date: 5.JUL.2012 21:56:08


Test Report No.
 RTS-6012-1207-13A

Date of Test
 July 05 and 06, 2012

FCC ID: L6ARFF90LW **IC:** 2503A-RFF90LW
FCC ID: L6ARFK120LW **IC:** 2503A-RFK120LW


DFS Conducted Test Results Cont'd

Channel Move Time

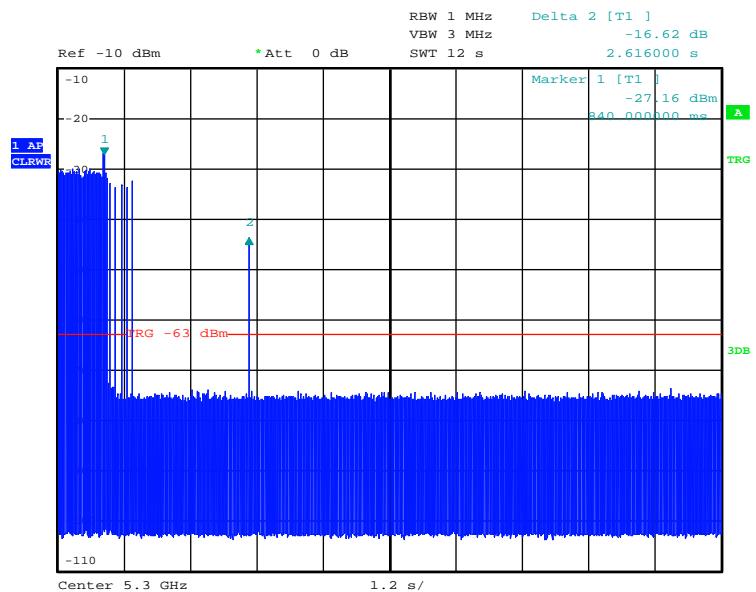

Date: 5.JUL.2012 03:19:40

Non-Occupancy Period \geq 30 min.

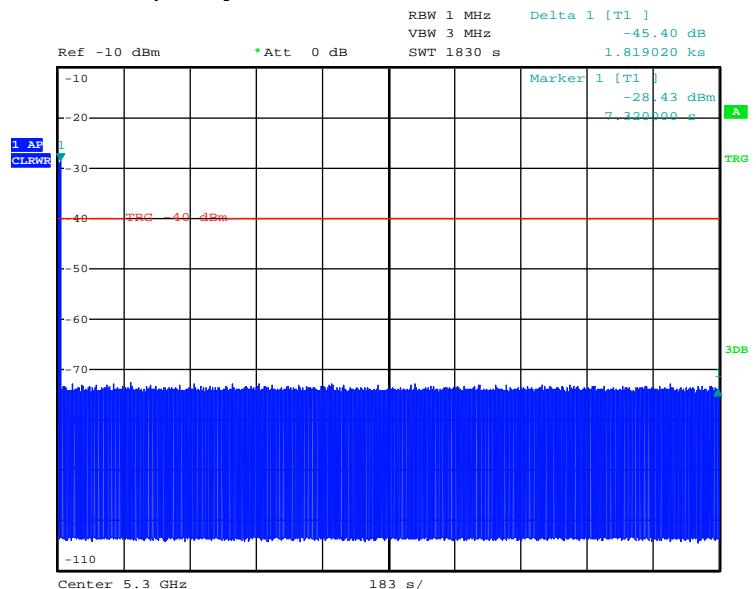

Date: 6.JUL.2012 04:20:19

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
 - A division of Research in Motion Limited.

Copyright 2005-2012

Page 12 of 12