

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 15.107, 15.109
&
Industry Canada (IC), ICES-003



A division of Research In Motion Limited

REPORT NO.: RTS-6036-1305-03A

PRODUCT MODEL NO.: RFS121LW, RFT81UW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6ARFS120LW, L6ARFT80UW
IC: 2503A- RFS120LW, 2503A-RFT80UW

DATE: May 13, 2013

RTS is accredited
according to
EN ISO/IEC 17025 by:



592

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Statement of Performance:

The BlackBerry® smartphone, model RFS121LW, part number CER-54731-001 Rev2-906-00 and accessories when configured and operated per RIM's operation instructions, and performs within the requirements of the test standards.

The BlackBerry® smartphone, model RFT81UW, part number CER-54732-001 Rev2-X09-01(009), and its accessories perform within the requirements of the test standards when configured and operated under RIM's operation instructions.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:

Reviewed by:

Heng Lin
Regulatory Compliance Specialist

Savtej Sandhu
Regulatory Compliance Specialist

Reviewed and Approved by:

Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Table of Contents

A.	Scope	4
B.	Associated Documents.....	4
C.	Product Identification	4
D.	Support Equipment Used for the Testing of the EUT	7
E.	Summary of Results	7
F.	Compliance Test Equipment Used	13
G.	Test Software Used	13
	APPENDIX 1 - AC CONDUCTED EMISSIONS TEST DATA	14
	APPENDIX 2 - RADIATED EMISSIONS TEST DATA	39

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15, Subpart B, October, 2012 Class B Digital Devices, Unintentional Radiators
- IC ICES-003 Issue 5, August 2012, Information Technology Equipment (ITE) – Limits and methods of measurement

B. Associated Documents

- 1) MultiSourceDeclaration_RFS121LW_b4081.
- 2) RFS121LW_HW_Declaration_CER-54731-001_Rev2-906-00.
- 3) BlackBerrySystemSimilarity_RFS121LW_RFT81UW.
- 4) RFT81UW_HW_Declaration_CER-54732-001_Rev2-906-00.
- 5) MultiSourceDeclaration_RFT81UW_b1411.

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at:
295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services EMI test facilities	
305 Phillip Street	440 Phillip Street
Waterloo, Ontario	Waterloo, Ontario
Canada, N2L 3W8	Canada, N2L 5R9
Phone: 519 888 7465	Phone: 519 888 7465
Fax: 519 888 6906	Fax: 519 888 6906

The testing was performed on March 07-18, 28 and April 09, 18, 22, 2013

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

The sample EUT included:

SAMPLE	MODEL	CER NUMBER	PIN	Software
1	RFS121LW	CER-54731-001 Rev1-906-00	2AB02A65	OS Version 127.0.1.4081 Bundle: 4081
2	RFS121LW	CER-54731-001 Rev1-906-00	2AB02A5A	OS Version 127.0.1.3901 Bundle: 3901
3	RFS121LW	CER-54731-001 Rev2-906-00	2AB04CFB	OS Version 127.0.1.3901 Bundle: 3901
4	RFS121LW	CER-54731-001 Rev1-906-00	2AB02A48	OS Version 127.0.1.4081 Bundle: 4081
5	RFS121LW	CER-54731-001 Rev1-906-00	2AB02A58	OS Version 127.0.1.4081 Bundle: 4081
6	RFT81UW	CER-54732-001 Rev1-906-00	2AB02BCF	OS Version 127.0.1.4081 Bundle: 4081
7	RFT81UW	CER-54732-001 Rev1-906-00	2AB02CC5	OS Version 127.0.1.4081 Bundle: 4081
8	RFT81UW	CER-54732-001 Rev2-X09-01(009)	2FFF99FA	OS Version 10.1.0.1411 Bundle: 1411

AC conducted testing was performed on samples 1, 2, 3, 6 and 8

Radiated Emissions testing was performed on samples 4, 5, 7, and 8

To view the differences between OS: 127.0.1.3901 and OS: 10.1.0.1411 see document
MultiSourceDeclaration_RFS121LW_b4081 and
MultiSourceDeclaration_RFT81UW_b1411.

Only the characteristics that may have been affected by the changes from
RFS121LW_Rev1-906-00 to Rev2-906-00 were re-tested.

For more details, refer to RFS121LW_HW_Declaration_CER-54731-001_Rev2-906-00.

Only the characteristics that may have been affected by the changes from model
RFS121LW to RFT81UW were re-tested. For more information, see
BlackBerrySystemSimilarity_RFS121LW_RFT81UW.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

BlackBerry® smartphone Accessories Tested

- 1) Fixed Blade Charger Rev2, part number HDW-24481-001 (model number RIM-C-4ADUUS-001 with an output voltage of 5.0 volts dc, 750mA.
- 2) Alt.1 Fixed Blade Charger Rev3, part number HDW-24481-001 (model number PSM04A-050QRIM-R), with an output voltage of 5.0 volts dc, 750mA
- 3) Alt.2 Fixed Blade Charger Rev 1, part number HDW-47725-001 with an output voltage of 5.0 volts dc, 850mA
- 4) Alt.3 Fixed Blade Charger Rev B, part number HDW-46445-001 with an output voltage of 5.0 volts dc, 850mA
- 5) Folding Blade Charger Rev1, part number HDW-34724-001 with an output voltage of 5.0 volts dc and current of 1.8 Amps
- 6) World Wide Travel Charger Rev 1, part number HDW 34725-002 with an output voltage of 5.0 volts, dc, 2A
- 7) 12 V DC Charger, part number HDW-46705-001, with an output of 5 volts, 1A
- 8) Alt.1 12 V DC Charger, part number HDW-46706-001, with an output of 5 volts, 1.8A
- 9) Wired Headset, part number HDW-44306-003, with a lead length of 1.1 metres
- 10)Alt.1 Wired Headset, part number HDW-44306-003,with a lead length of 1.1 metres
- 11)Alt.2 Wired Headset, part number HDW-49299-001, with a lead length of 1.1 metres
- 12)Alt.3 Wired Headset, part number HDW-53005-001, with a lead length of 1.1 metres
- 13)Alt.4 Wired Headset, part number HDW-55351-001, with a lead length of 1.1 metres
- 14)USB Data Cable, part number HDW-50071-001 RevB, 1.2 metre long.
- 15)Alt.1 USB Data Cable, part number HDW-50071-001 RevC, 1.2 metre long.
- 16)USB Data Cable, part number HDW-51800-001 RevB, 1.0 metre long
- 17)Alt.1 USB Data Cable, part number HDW-51800-001 RevC, 1.0 metre long

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW		
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW	

D. Support Equipment Used for the Testing of the EUT

- 1) IBM Thinkpad Lenovo T60p laptop, type 8742-C2U, product ID 8742C2U
- 2) Samsung Monitor, Model Number S22A350H, Product Number LS22A3500HS/2A
- 3) Phillips Monitor, Model Number MWE12244T, Product ID 2444E1SB/27
- 4) 12 V DC Battery, Enerwatt AhM Series, WP12-12

E. Summary of Results

SPECIFICATION		TEST TYPE	Meets Requirement	Test Data APPENDIX
FCC CFR 47	IC			
Part 15.107	ICES-003,6.1	Conducted AC Line Emission	Yes	1
Part 15.109	ICES-003,6.1	Radiated Unintentional Spurious Emissions	Yes	2

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

a) AC CONDUCTED EMISSIONS

The conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16.

BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.

The following test configurations were measured on model RFS121LW:

Test Configuration	Operating Mode(s)	Charger + Accessories
1	GSM 850 Idle, Charging and Audio Playback	Fixed Blade Charger + Wired Headset + 1.2m USB Cable
2	PCS 1900 Idle Charging and Video Playback	Alt.1 Fixed Blade Charger + Alt.1 Wired Headset + Alt.1 1.2m USB Cable
3	Bluetooth Tx, Charging and Audio Playback	Alt.2 Fixed Blade Charger + Alt.2 Wired Headset + 1.0m USB cable
4	802.11b Tx, Charging and Video Playback	Alt.3 Fixed Blade Charger + Wired Headset + Alt.1 1.0m USB Cable
5	NFC Tx, Charging and Video Playback	Folding Blade Charger + Alt.1 Wired Headset
6	UMTS B2 HSDPA Idle, Charging and Audio Playback	World Wide Travel Charger + Alt.2 Wired Headset
7	UMTS B5 DC HSDPA Idle, Charging	Folding Blade Charger + Alt.3 Wired Headset
8	NFC Tx, Charging and Video Playback	Folding Blade Charger + Alt.4 Wired Headset

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15.107, Class B Limit, and IC ICES-003, 6.1. The sample EUT had a worst case test margin of 9.43 dB below the QP limit at 0.515 MHz using the QP detector and a test margin of 6.12 dB below the AVG limit at 0.420 MHz using the AVG detector in Test Configuration 5.

To view the test data/plots, see APPENDIX 1

The following test configurations were measured on model RFT81UW:

Test Configuration	Operating Mode(s)	Charger + Accessories
9	UMTS B5 DC HSDPA Idle, Charging	Folding Blade Charger + Alt.3 Wired Headset
10	UMTS B2 HSDPA Idle, Charging and Audio Playback	Folding Blade Charger + Alt.4 Wired Headset

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15.107, Class B Limit, and IC ICES-003, 6.1. The sample EUT had a worst case test margin of 9.74 dB below the QP limit at 0.524 MHz using the QP detector and a test margin of 7.67 dB below the AVG limit at 0.429 MHz using the AVG detector in Test Configuration 9.

Measurement Uncertainty ± 3.2 dB

To view the test data/plots, see APPENDIX 1

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

b) RADIATED EMISSIONS

The radiated emissions from the EUT were measured using the methods outlined in CISPR Recommendation 22. The EUT was placed on a nonconductive Styrofoam table, 80 cm high that was positioned on a remote controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The radiated emissions were measured up to the fifth harmonic of the highest frequency of the band tested. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber. The FCC registration number is **778487** and the Industry Canada(IC) file number is **2503B-1**. The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was in battery charging mode for all configurations. The ac input voltage was 120V, 60Hz.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

The following test configurations were measured on model RFS121LW:

Test Configuration	Operating Mode(s)	Charger + Accessories
1	GSM 850 Idle, Charging and Audio Playback	Fixed Blade Charger + Wired Headset + 1.2m USB Cable
2	PCS 1900 Idle Charging and Video Playback	Alt.1 Fixed Blade Charger + Alt.1. Wired Headset + Alt.1 1.2m USB Cable
3	Bluetooth Tx, Charging and Audio Playback	Alt.2 Fixed Blade Charger + Alt.2 Wired Headset + 1.0m USB Cable
4	802.11b Tx, Charging and Video Playback	Alt.3 Fixed Blade Charger + Alt.3 Wired Headset + Alt.1 1.0m USB Cable
5	NFC Tx, Charging and Video Playback	Folding Blade Charger + Alt.3 Wired Headset
6	UMTS Band 2 HSDPA+ Idle, Charging and Audio Playback	World Wide Travel Charger + Alt.2 Wired Headset
7	UMTS Band 5 HSDPA+ Idle, Charging	Alt.1 12 V DC Charger + Wired Headset + DC Battery
8	UMTS Band 2 DC HSDPA+ Idle, Charging	12 V DC Charger + Alt.1 Wired Headset + 1.2m USB Cable + DC Battery
9	UMTS Band 5 DC HSDPA+ Idle, Charging	Alt.3 Wired Headset + Alt.1 1.2m USB Cable + Laptop
10	GSM 850 Idle, Charging and Audio Playback	Folding Blade Charger + Alt.4 Wired Headset

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15.109, Class B limit and IC ICES-003, 6.2.

The system met the requirements with a worst case emission test margin of 5.98 dB below the QP limit at 65.600 MHz using QP detector in Test Configuration 10.

To view the test data see APPENDIX 2.

The following test configurations were measured on model RFT81UW:

Test Configuration	Operating Mode(s)	Charger + Accessories
11	UMTS Band 5 DC HSDPA+ Idle, Charging	Alt.2 Wired Headset + Alt.1 1.2m USB Cable + Laptop
12	UMTS Band 5 DC HSDPA + Idle, Chargin	Alt.2 Wired Headset + Alt.1 1.2m USB Cable + Laptop

The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15.109, Class B limit and IC ICES-003, 6.2.

The system met the requirements with a worst case emission test margin of 8.43 dB below the QP limit at 134.000 MHz using QP detector in Test Configuration 11.

To view the test data see APPENDIX 2.

Sample Calculation:

Field Strength (dBµV/m) is calculated as follows:

FS = Measured Level (dBµV) + A.F. (dB/m) + Cable Loss (dB) - Preamp (dB) + Filter Loss (dB)

Measurement Uncertainty ±4.5 dB

			EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW		
Test Report No. RTS-6036-1305-03A		Date of Test March 07-18, 28 and April 09, 18, 22,2013		FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW	

F. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Preamplifier	Sonoma	310N/11909A	185831	13-10-10	Radiated Emissions
Preamplifier system	TDK RF Solutions	PA-02	080010	13-10-10	Radiated Emissions
EMI Receiver	Rohde & Schwarz	ESIB 40	100255	13-11-30	Radiated Emissions
Digital Multimeter	Hewlett Packard	34401A	US36042324	13-11-13	Conducted/Radiated Emissions
Environment Monitor	OMEGA	iTHX-SD	0380561	13-10-30	Radiated Emission
Environment Monitor	OMEGA	iTHX-SD	0380567	13-10-30	Radiated Emission
L.I.S.N.	Rohde & Schwarz	ENV216	100060	13-10-25	Conducted Emissions
Hybrid Log Antenna	EMC Automation	HLP-3003C	017401	13-08-23	Radiated Emissions
Horn Antenna	EMC Automation	HRN-0118	030101	14-07-08	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	837493/073	13-11-26	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	112394	13-11-24	Radiated/Conducted Emissions
EMI Test Receiver	Rohde & Schwarz	ESU 40	100162	13-11-29	Radiated/Conducted Emissions
Bluetooth Tester	Rohde & Schwarz	CBT	100368	13-12-04	Radiated Emissions
Bluetooth Tester	Rohde & Schwarz	CBT	100737	14-12-05	Radiated/Conducted Emissions

G. Test Software Used

<u>SOFTWARE</u>	<u>COMPANY</u>	<u>VERSION</u>	<u>USE</u>
EMC32	Rohde & Schwarz	8.52.0	Radiated Emissions
TDK Standard Emission Test	TDK RF Solutions	8.53.1.62	Radiated Emissions

APPENDIX 1 - AC CONDUCTED EMISSIONS TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 1

Figure 1-1: L1 lines


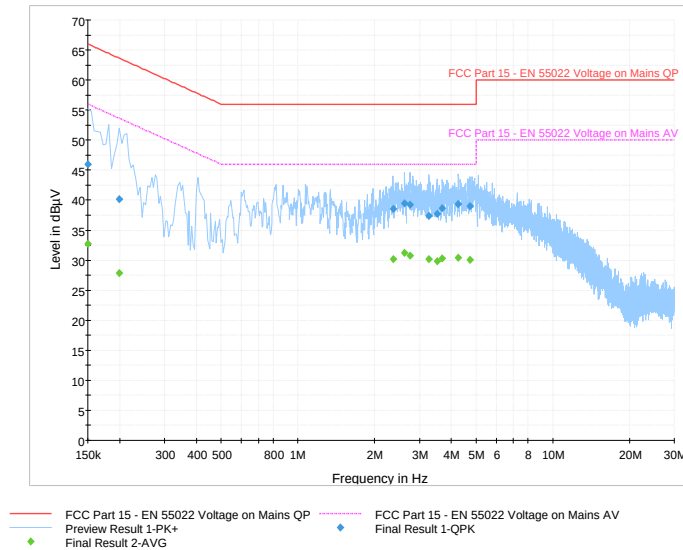


Figure 1-2: N Lines

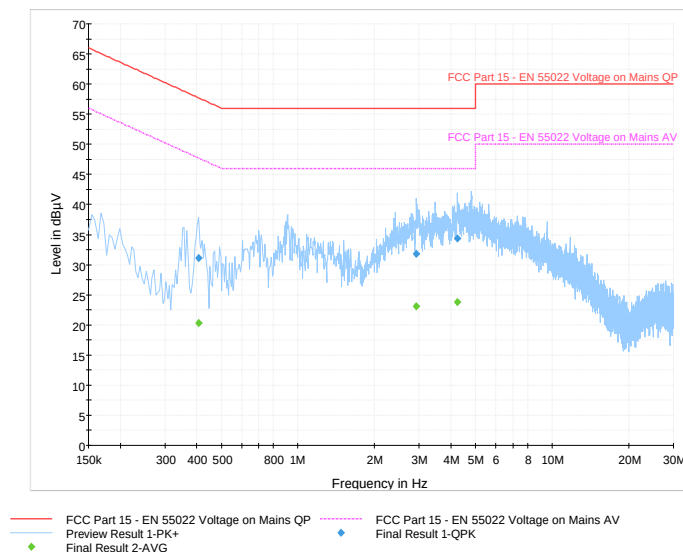

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Test Configuration 2

Date of the test: March 07, 2013

The environmental conditions were: Temperature: 24.6 °C
 Humidity: 22.1 %

Frequency (MHz)	Line	Reading (QP) (dBμV)	Correction Factor (dB)	Corrected Reading (QP) (dBμV)	Limit (QP) (dBμV)	Limit (AV) (dBμV)	Margin (QP) Limits (dB)
0.159	L1	36.58	11.14	47.72	65.50	55.50	-17.78
0.497	L1	27.66	9.91	37.57	56.10	46.10	-18.53
0.569	N	25.93	9.88	35.81	56.00	46.00	-20.19
9.501	N	26.41	9.98	36.39	60.00	50.00	-23.61
11.049	N	28.12	9.99	38.11	60.00	50.00	-21.89
11.513	N	27.85	10.01	37.86	60.00	50.00	-22.14
11.531	L1	36.41	10.00	46.41	60.00	50.00	-13.59
11.625	L1	36.41	10.00	46.41	60.00	50.00	-13.59
11.913	N	27.39	10.03	37.42	60.00	50.00	-22.58
11.936	L1	36.36	10.02	46.38	60.00	50.00	-13.62
11.994	L1	36.07	10.02	46.09	60.00	50.00	-13.91
12.183	L1	35.94	10.03	45.97	60.00	50.00	-14.03
12.354	L1	35.64	10.04	45.68	60.00	50.00	-14.32
12.440	N	25.79	10.05	35.85	60.00	50.00	-24.16
12.548	L1	34.56	10.05	44.61	60.00	50.00	-15.39
12.620	L1	34.56	10.05	44.60	60.00	50.00	-15.40

All other emissions are at least 25 dB below the limit.

Measurements were done with the quasi-peak detector.

See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 2

Figure 1-3: L1 lines


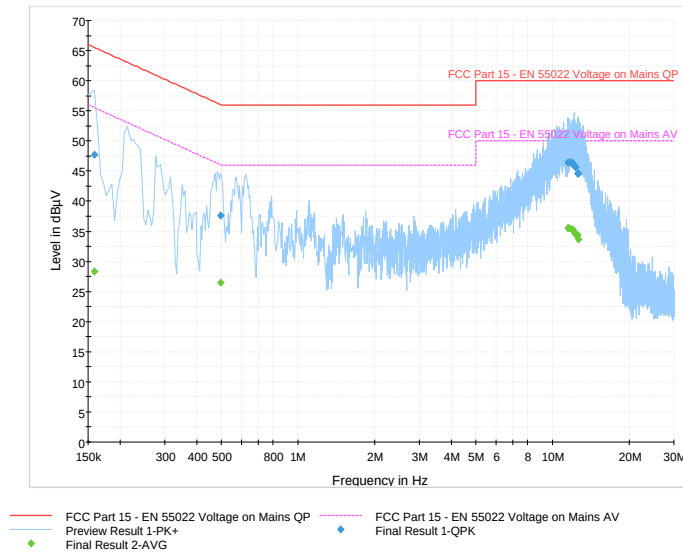


Figure 1-4: N Lines

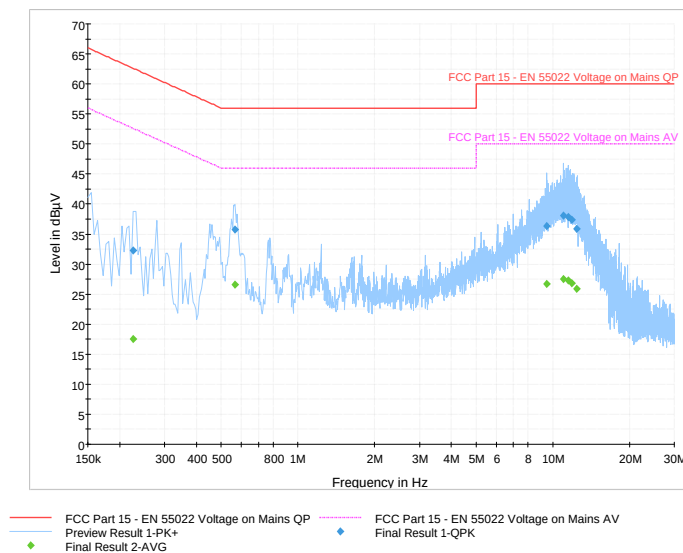

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 3

Figure 1-5: L1 lines


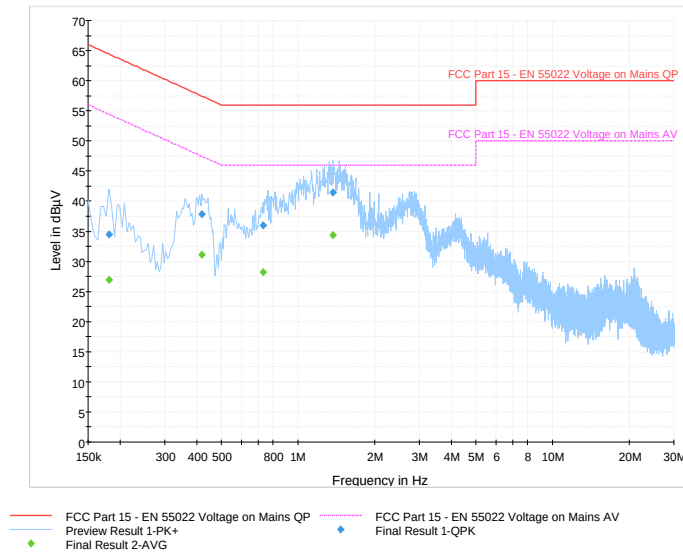


Figure 1-6: N Lines

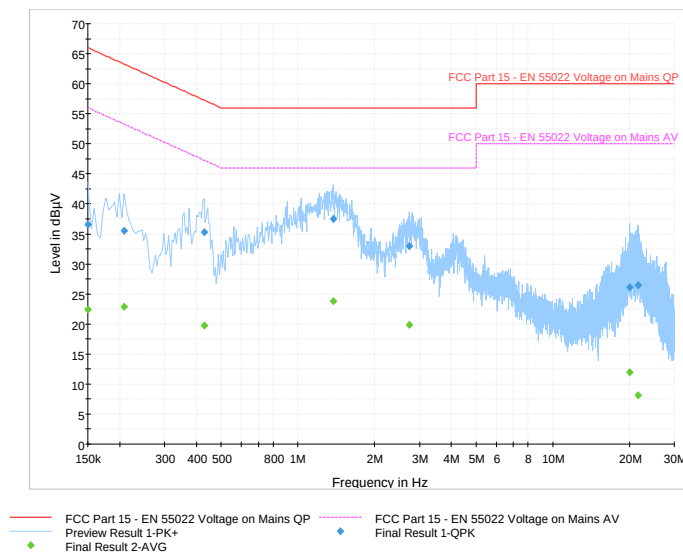

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 4

Figure 1-7: L1 lines


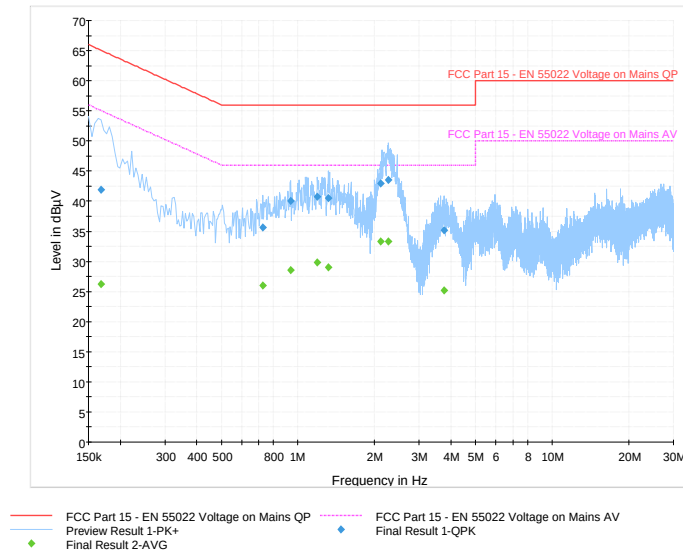


Figure 1-8: N Lines

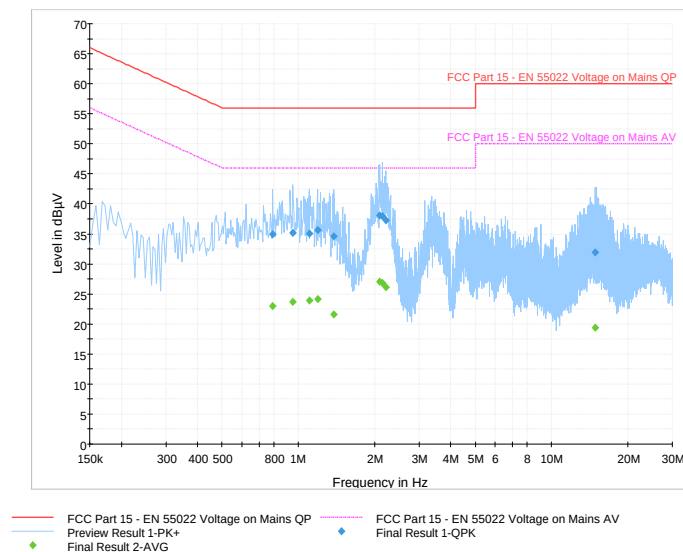

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Test Configuration 5

Date of the test: March 28, 2013

The environmental conditions were: Temperature: 24.8 °C
 Humidity: 27.2 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dBµV)	Limit (QP) (dBµV)	Margin (QP) Limits (dB)
0.186	L1	37.01	10.95	47.97	64.20	-16.23
0.420	L1	36.59	9.98	46.57	57.40	-10.83
0.425	N	36.89	9.98	46.88	57.40	-10.53
0.434	L1	35.51	9.96	45.47	57.20	-11.73
0.515	N	36.66	9.91	46.57	56.00	-9.43
0.614	L1	31.67	9.85	41.53	56.00	-14.47
0.969	N	34.13	9.81	43.94	56.00	-12.06
0.974	L1	32.82	9.80	42.62	56.00	-13.38
1.064	N	33.45	9.81	43.26	56.00	-12.74
1.199	L1	33.43	9.80	43.23	56.00	-12.77
2.108	N	32.79	9.83	42.62	56.00	-13.38
2.117	L1	33.11	9.83	42.94	56.00	-13.06
2.351	N	34.17	9.84	44.02	56.00	-11.98
2.423	L1	33.35	9.85	43.20	56.00	-12.80
3.539	L1	31.08	9.89	40.97	56.00	-15.03
3.656	N	31.91	9.90	41.80	56.00	-14.20
3.732	L1	30.36	9.89	40.25	56.00	-15.75
4.695	N	31.18	9.91	41.09	56.00	-14.91

This report shall **NOT** be reproduced except in full without the written consent of RIM Testing Services

- A division of Research in Motion Limited.

Copyright 2005-2013

Page 23 of 51

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Frequency (MHz)	Line	Reading (QP) (dBμV)	Correction Factor (dB)	Corrected Reading (AV) (dBμV)	Limit (AV) (dBμV)	Margin (AV) Limits (dB)
0.186	L1	27.21	10.95	38.16	44.20	-16.04
0.420	L1	31.30	9.98	41.28	37.40	-6.12
0.425	N	31.08	9.98	41.07	37.40	-6.34
0.434	L1	26.93	9.96	36.90	37.20	-10.31
0.515	N	29.15	9.91	39.06	36.00	-6.95
0.614	L1	23.88	9.85	33.73	36.00	-12.27
0.969	N	20.32	9.81	30.13	36.00	-15.87
0.974	L1	19.02	9.80	28.83	36.00	-17.17
1.064	N	20.71	9.81	30.52	36.00	-15.48
1.199	L1	26.99	9.80	36.79	36.00	-9.21
2.108	N	26.02	9.83	35.85	36.00	-10.15
2.117	L1	26.56	9.83	36.39	36.00	-9.61
2.351	N	28.43	9.84	38.27	36.00	-7.73
2.423	L1	27.28	9.85	37.13	36.00	-8.88
3.539	L1	25.49	9.89	35.38	36.00	-10.62
3.656	N	26.20	9.90	36.10	36.00	-9.90
3.732	L1	24.77	9.89	34.67	36.00	-11.34
4.695	N	25.42	9.91	35.33	36.00	-10.67

All other emissions are at least 25 dB below the limit.

Measurements were done with the quasi-peak detector and the average detector.

See figure 1-9 and figure 1-10 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW


AC Conducted Emissions Test Graphs

Test Configuration 5

Figure 1-9: L1 lines



Figure 1-10: N Lines

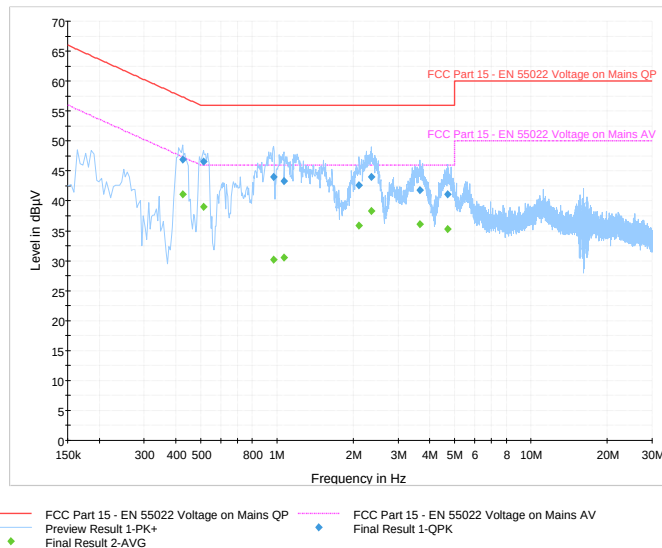

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 6

Figure 1-11: L1 lines


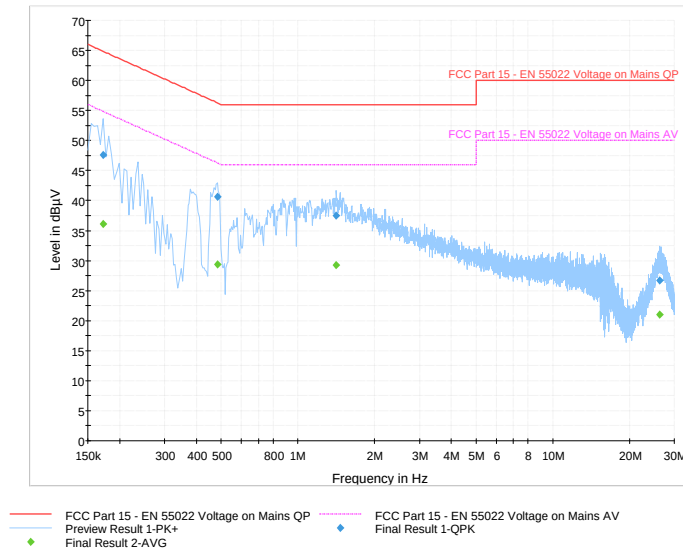


Figure 1-12: N Lines

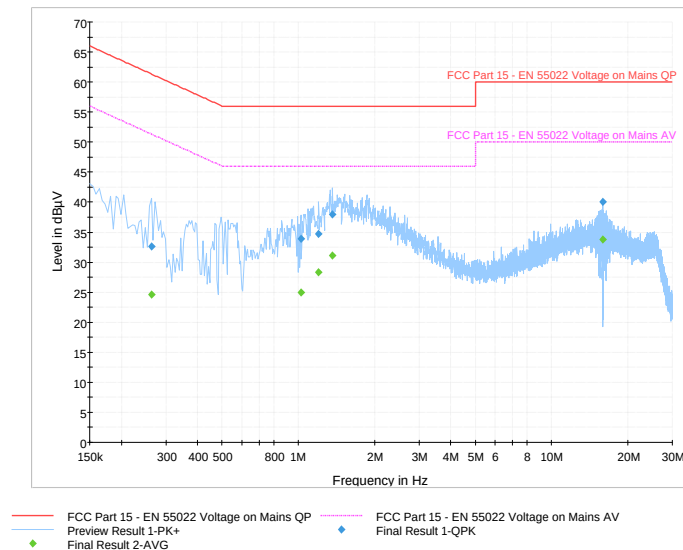

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Test Configuration 7

Date of the test: March 28, 2013

The environmental conditions were: Temperature: 24.8 °C
 Humidity: 27.3 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dBµV)	Limit (QP) (dBµV)	Margin (QP) Limits (dB)
0.177	L1	39.39	11.02	50.41	64.60	-14.19
0.411	L1	36.22	9.99	46.21	57.60	-11.39
0.411	N	36.68	10.01	46.68	57.60	-10.92
0.434	L1	35.13	9.96	45.09	57.20	-12.11
0.519	L1	36.33	9.90	46.23	56.00	-9.77
0.519	N	36.37	9.91	46.27	56.00	-9.73
0.551	L1	22.20	9.88	32.08	56.00	-23.92
0.969	N	33.71	9.81	43.52	56.00	-12.48
0.992	L1	32.11	9.80	41.91	56.00	-14.09
1.050	N	34.41	9.81	44.22	56.00	-11.78
1.185	L1	33.18	9.80	42.98	56.00	-13.02
1.361	N	32.69	9.81	42.50	56.00	-13.50
2.099	L1	32.94	9.83	42.77	56.00	-13.23
2.364	L1	33.91	9.84	43.75	56.00	-12.25
2.405	N	34.00	9.85	43.85	56.00	-12.15
3.593	N	31.90	9.90	41.80	56.00	-14.20
3.647	L1	30.88	9.89	40.78	56.00	-15.22
3.705	N	31.50	9.90	41.40	56.00	-14.60
4.749	N	30.69	9.91	40.61	56.00	-15.39

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (AP) (dBµV)	Limit (AV) (dBµV)	Margin (AV) Limits (dB)
0.177	L1	27.64	11.02	38.66	44.60	-15.94
0.411	L1	28.47	9.99	38.47	37.60	-9.13
0.411	N	29.43	10.01	39.43	37.60	-8.17
0.434	L1	26.41	9.96	36.37	37.20	-10.83
0.519	L1	27.55	9.90	37.45	36.00	-8.55
0.519	N	27.20	9.91	37.11	36.00	-8.89
0.551	L1	15.09	9.88	24.97	36.00	-21.03
0.969	N	20.13	9.81	29.94	36.00	-16.06
0.992	L1	21.29	9.80	31.09	36.00	-14.91
1.050	N	21.57	9.81	31.38	36.00	-14.62
1.185	L1	26.15	9.80	35.95	36.00	-10.05
1.361	N	25.22	9.81	35.03	36.00	-10.97
2.099	L1	26.16	9.83	35.99	36.00	-10.01
2.364	L1	28.08	9.84	37.93	36.00	-8.08
2.405	N	27.76	9.85	37.60	36.00	-8.40
3.593	N	26.27	9.90	36.16	36.00	-9.84
3.647	L1	25.27	9.89	35.17	36.00	-10.83
3.705	N	25.92	9.90	35.81	36.00	-10.19
4.749	N	25.00	9.91	34.92	36.00	-11.08

All other emissions are at least 25 dB below the limit.

Measurements were done with the quasi-peak detector average detector.

See figure 1-13 and figure 1-14 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 7

Figure 1-13: L1 lines


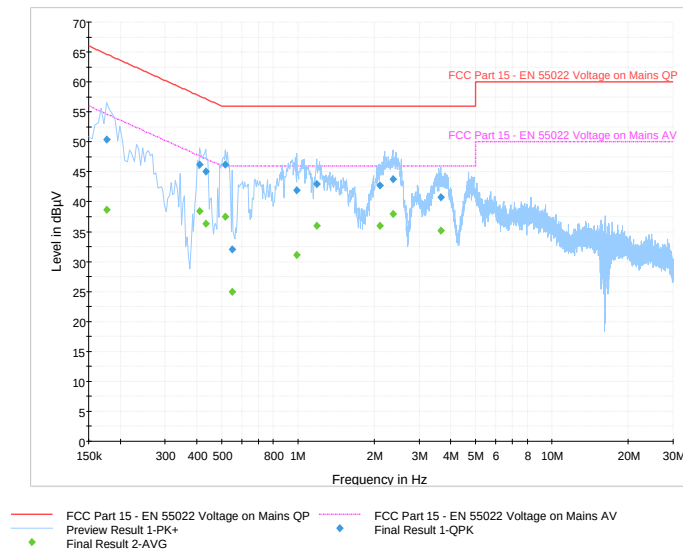


Figure 1-14: N Lines

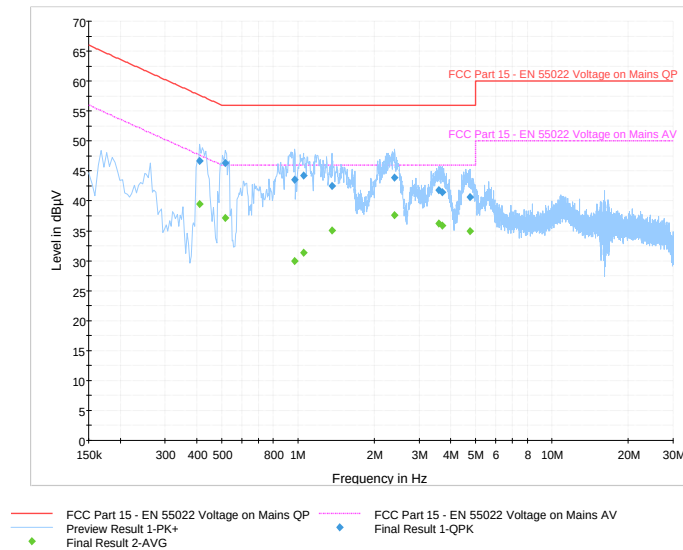

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Test Configuration 8

Date of the test: April 25, 2013

The environmental conditions were: Temperature: 26.8 °C
 Humidity: 34.2 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dBµV)	Limit (QP) (dBµV)	Margin (QP) Limits (dB)
0.173	L1	37.25	11.05	48.30	64.80	-16.50
0.177	N	33.58	11.05	44.63	64.60	-19.97
0.411	L1	36.28	9.99	46.28	57.60	-11.32
0.411	N	36.88	10.01	46.89	57.60	-10.71
0.510	L1	36.24	9.90	46.14	56.00	-9.86
0.519	N	36.56	9.91	46.46	56.00	-9.54
0.960	N	34.69	9.81	44.51	56.00	-11.49
0.965	L1	33.59	9.81	43.40	56.00	-12.61
1.064	L1	32.27	9.80	42.07	56.00	-13.93
1.185	N	34.86	9.80	44.67	56.00	-11.33
1.397	N	32.41	9.81	42.22	56.00	-13.79
2.085	L1	33.39	9.83	43.21	56.00	-12.79
2.328	L1	33.99	9.84	43.83	56.00	-12.17
2.346	N	34.02	9.84	43.87	56.00	-12.13
3.692	N	31.56	9.90	41.45	56.00	-14.55
3.696	L1	30.70	9.89	40.60	56.00	-15.41
4.565	N	31.17	9.91	41.08	56.00	-14.92
4.754	L1	29.45	9.90	39.35	56.00	-16.65

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services

- A division of Research in Motion Limited.

Copyright 2005-2013

Page 31 of 51

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (AV) (dBµV)	Limit (AV) (dBµV)	Margin (AV) Limits (dB)
0.173	L1	25.78	11.05	36.83	44.80	-17.97
0.177	N	26.81	11.05	37.86	44.60	-16.74
0.411	L1	28.43	9.99	38.42	37.60	-9.18
0.411	N	29.66	10.01	39.66	37.60	-7.94
0.510	L1	29.10	9.90	39.00	36.00	-7.00
0.519	N	27.25	9.91	37.16	36.00	-8.84
0.960	N	21.57	9.81	31.38	36.00	-14.62
0.965	L1	20.35	9.81	30.16	36.00	-15.84
1.064	L1	19.70	9.80	29.50	36.00	-16.50
1.185	N	28.07	9.80	37.87	36.00	-8.13
1.397	N	23.07	9.81	32.87	36.00	-13.13
2.085	L1	26.26	9.83	36.08	36.00	-9.92
2.328	L1	28.39	9.84	38.23	36.00	-7.77
2.346	N	28.33	9.84	38.17	36.00	-7.83
3.692	N	25.87	9.90	35.76	36.00	-10.24
3.696	L1	25.12	9.89	35.01	36.00	-10.99
4.565	N	25.43	9.91	35.34	36.00	-10.66
4.754	L1	23.88	9.90	33.79	36.00	-12.22
16.040	N	17.59	10.12	27.71	40.00	-22.29

All other emissions are at least 25 dB below the limit.

Measurements were done with the quasi-peak detector and the average detector.

See figure 1-15 and figure 1-16 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 8

Figure 1-15: L1 lines


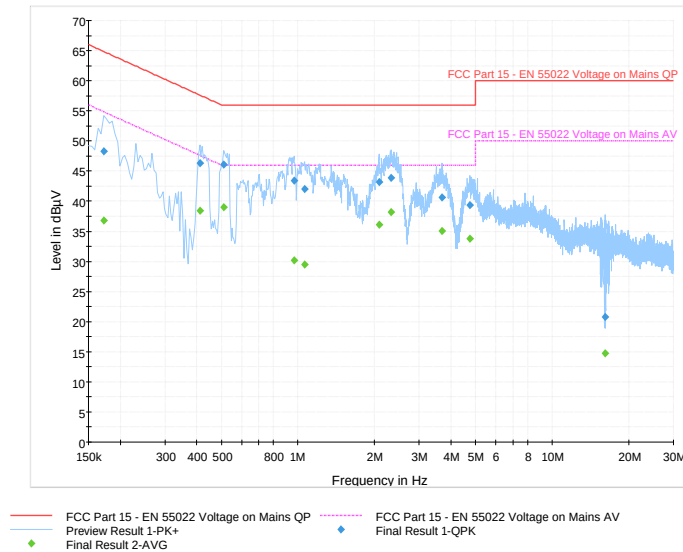


Figure 1-16: N Lines

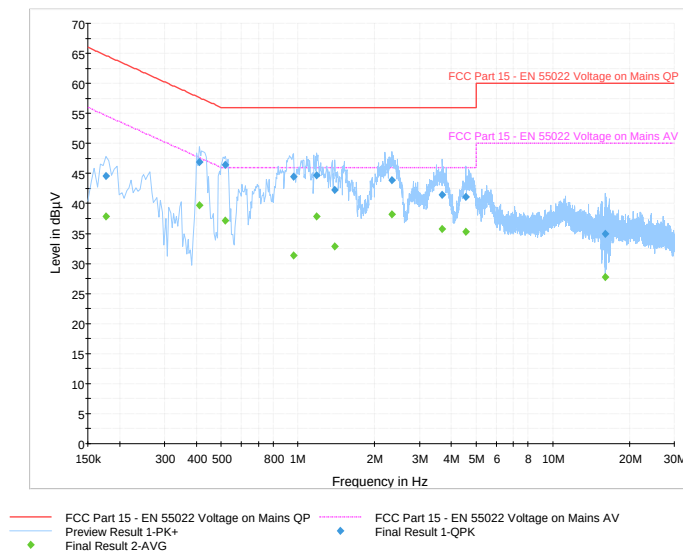

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emission Test Results

The following test configurations were measured on model RFT81UW:

Test Configuration 9

The BlackBerry® smartphone was tested on April 09, 2013

The environmental test conditions were: Temperature: 25.1 °C
Relative Humidity: 36.6 %

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (QP) (dBµV)	Limit (QP) (dBµV)	Margin (QP) Limits (dB)
0.177	L1	39.39	11.02	50.41	64.60	-14.19
0.177	N	33.07	11.05	44.11	64.60	-20.49
0.416	L1	36.54	9.99	46.53	57.50	-10.98
0.429	N	36.56	9.98	46.54	57.30	-10.76
0.438	L1	34.97	9.95	44.93	57.10	-12.17
0.524	L1	36.36	9.90	46.26	56.00	-9.74
0.533	N	34.65	9.90	44.55	56.00	-11.45
0.938	N	36.06	9.81	45.88	56.00	-10.12
0.974	L1	33.29	9.80	43.10	56.00	-12.90
1.208	N	34.74	9.80	44.54	56.00	-11.46
2.063	N	32.99	9.83	42.82	56.00	-13.18
2.364	N	33.92	9.84	43.76	56.00	-12.24
2.382	L1	33.91	9.84	43.75	56.00	-12.25
3.512	L1	30.90	9.89	40.79	56.00	-15.21
3.615	L1	31.11	9.89	41.01	56.00	-14.99
3.624	N	31.77	9.90	41.67	56.00	-14.33
4.785	N	30.24	9.91	40.15	56.00	-15.85

This report shall **NOT** be reproduced except in full without the written consent of RIM Testing Services

- A division of Research in Motion Limited.

Copyright 2005-2013

Page 34 of 51

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Results cont'd

Frequency (MHz)	Line	Reading (QP) (dBµV)	Correction Factor (dB)	Corrected Reading (AV) (dBµV)	Limit (AV) (dBµV)	Margin (AV) Limits (dB)
0.177	L1	27.12	11.02	38.14	44.60	-16.46
0.177	N	26.50	11.05	37.55	44.60	-17.05
0.416	L1	29.58	9.99	39.56	37.50	-7.94
0.429	N	29.65	9.98	39.63	37.30	-7.67
0.438	L1	25.45	9.95	35.40	37.10	-11.70
0.524	L1	26.93	9.90	36.83	36.00	-9.17
0.533	N	20.74	9.90	30.64	36.00	-15.36
0.938	N	27.91	9.81	37.73	36.00	-8.28
0.974	L1	19.54	9.80	29.35	36.00	-16.65
1.208	N	28.48	9.80	38.28	36.00	-7.72
2.063	N	25.69	9.83	35.52	36.00	-10.48
2.364	N	28.13	9.84	37.98	36.00	-8.02
2.382	L1	28.05	9.84	37.89	36.00	-8.11
3.512	L1	25.34	9.89	35.23	36.00	-10.77
3.615	L1	25.49	9.89	35.38	36.00	-10.62
3.624	N	26.14	9.90	36.04	36.00	-9.96
4.785	N	24.46	9.91	34.37	36.00	-11.63

All other emissions are at least 25 dB below the limit.

Measurements were done with the quasi-peak detector and the average detector.

See figure 1-17 and figure 1-18 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 9

Figure 1-17: L1 lines


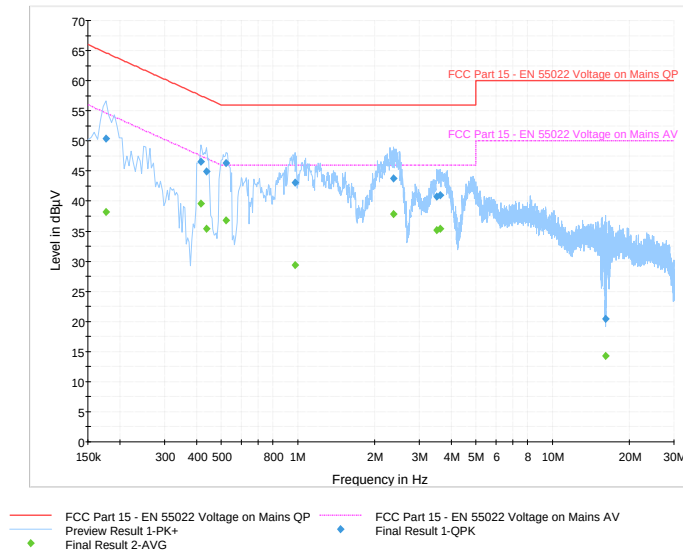


Figure 1-18: N Lines

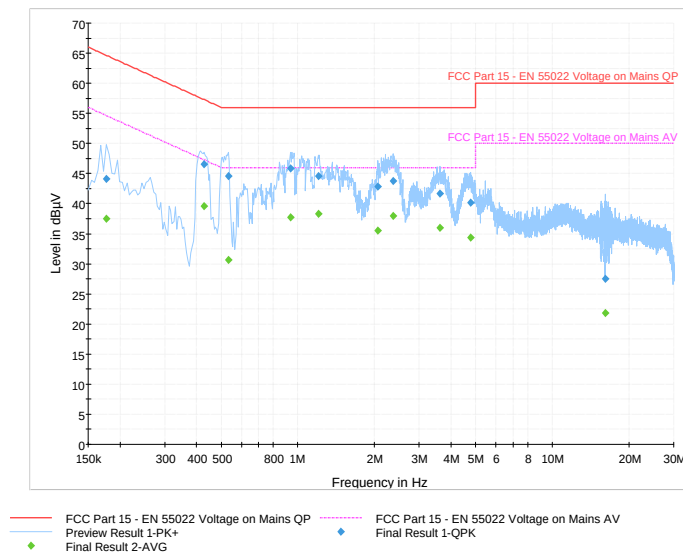

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 1	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

AC Conducted Emissions Test Graphs

Test Configuration 10

Figure 1-19: L1 lines


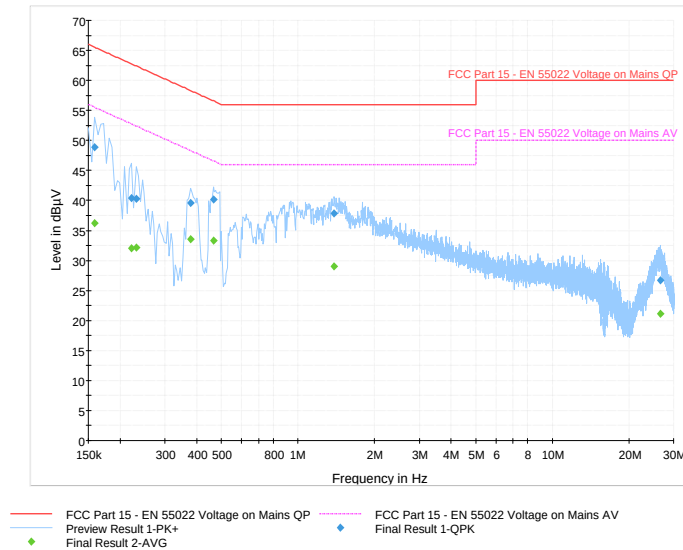


Figure 1-20: N Lines

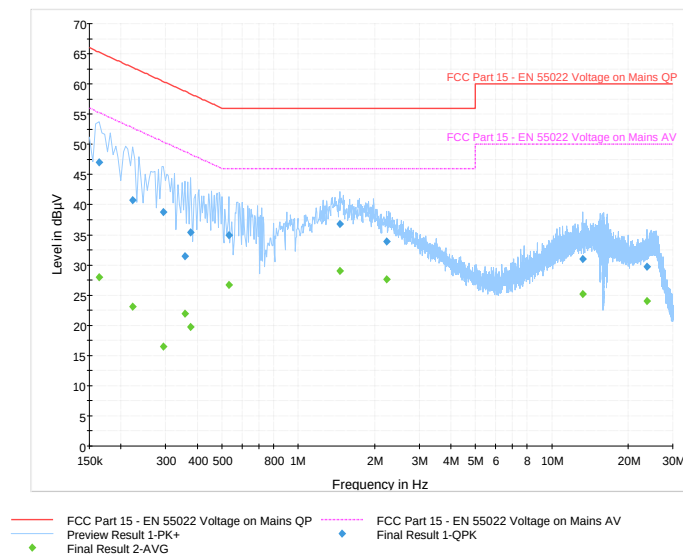

APPENDIX 2 - RADIATED EMISSIONS TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results

The following test configurations were measured on model RFS121LW:

The following tests were performed by Savtej Sandhu, Feras Obeid and Berkin Can.

Test Configuration 1

Date of the test: March 08, 2013

The environmental conditions were: Temperature: 25.5 °C
 Humidity: 17.2 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading +corr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
41.600	V	1.88	328.00	Q.P.	38.29	-15.10	23.19	40.00	-16.81
49.000	V	2.88	339.00	Q.P.	37.92	-16.35	21.57	40.00	-18.43
85.150	V	1.41	16.00	Q.P.	40.10	-13.88	26.22	40.00	-13.78
345.600	H	1.53	314.00	Q.P.	25.73	-1.94	23.79	46.00	-22.21
425.600	H	2.04	336.00	Q.P.	28.08	-2.69	25.39	46.00	-20.61

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 2

Date of the test: March 08, 2013

The environmental conditions were: Temperature: 25.5 °C
 Humidity: 17.2 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading +corr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
66.200	V	1.49	113.00	Q.P.	39.51	-16.31	23.20	40.00	-16.80

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 3

Date of the test: March 11, 2013

The environmental conditions were: Temperature: 25.9 °C
 Humidity: 17.6 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detect or (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
39.350	V	1.48	39.00	Q.P.	30.63	-14.58	16.05	40.00	-23.95
44.900	V	1.73	354.00	Q.P.	38.24	-15.80	22.44	40.00	-17.56
56.400	V	1.40	91.00	Q.P.	33.53	-17.02	16.51	40.00	-23.49
68.500	V	2.09	211.00	Q.P.	31.71	-16.09	15.62	40.00	-24.38
78.900	V	1.64	270.00	Q.P.	33.56	-14.62	18.94	40.00	-21.06
97.050	V	1.68	202.00	Q.P.	31.05	-12.30	18.75	43.50	-24.75
342.450	H	1.14	320.00	Q.P.	27.17	-2.23	24.94	46.00	-21.06

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 4

Date of the test: March 08, 2013

The environmental conditions were: Temperature: 25.9 °C
 Humidity: 17.6 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detect or (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+corr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
44.250	V	1.52	350.00	Q.P.	35.87	-15.68	20.19	40.00	-19.81
204.800	V	3.41	131.00	Q.P.	30.58	-7.61	22.97	43.50	-20.53
361.600	H	3.35	180.00	Q.P.	27.79	-4.71	23.08	46.00	-22.92

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 5

Date of the test: March 11, 2013

The environmental conditions were: Temperature: 25.9 °C
 Humidity: 17.6 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
36.950	V	1.49	240.00	Q.P.	38.82	-13.90	24.92	40.00	-15.08
59.250	V	1.42	91.00	Q.P.	41.77	-16.86	24.91	40.00	-15.09
80.650	V	1.61	212.00	Q.P.	40.38	-14.34	26.04	40.00	-13.96
108.800	V	1.96	354.00	Q.P.	30.20	-11.43	18.77	43.50	-24.73
112.000	V	1.42	354.00	Q.P.	31.44	-11.37	20.07	43.50	-23.43
339.250	H	2.59	351.00	Q.P.	25.87	-2.74	23.13	46.00	-22.87
380.800	H	2.80	311.00	Q.P.	28.36	-4.51	23.85	46.00	-22.15

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 6

Date of the test: March 11, 2013

The environmental conditions were: Temperature: 24.9 °C
 Humidity: 27.9 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
214.400	V	1.48	87.00	Q.P.	33.15	-8.71	24.44	43.50	-19.06
384.050	H	2.78	149.00	Q.P.	30.18	-4.13	26.05	46.00	-19.95
515.250	V	2.52	212.00	Q.P.	32.63	0.42	33.05	46.00	-12.95
1933.000	V	1.12	161.00	Q.P.	49.74	5.24	54.98	74.00	-19.02

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 7

Date of the test: March 12, 2013

The environmental conditions were: Temperature: 25.7 °C
 Humidity: 18.7 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
140.200	H	2.09	7.00	Q.P.	36.78	-11.79	24.99	43.50	-18.51
348.800	V	1.64	354.00	Q.P.	26.02	-2.45	23.57	46.00	-22.43
425.600	H	3.18	349.00	Q.P.	25.65	-2.69	22.96	46.00	-23.04

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 8

Date of the test: March 12, 2013

The environmental conditions were: Temperature: 25.7 °C
 Humidity: 18.7 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
278.650	H	1.17	136.00	Q.P.	31.78	-8.41	23.37	46.00	-22.63
893.800	V	1.70	186.00	Q.P.	31.48	7.58	39.06	46.00	-6.94

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 9

Date of the test: March 11, 2013

The environmental conditions were: Temperature: 25.5 °C
 Humidity: 17.2 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
40.150	V	1.64	17.00	Q.P.	37.78	-14.80	22.98	40.00	-17.02
71.950	V	1.98	219.00	Q.P.	38.28	-15.43	22.85	40.00	-17.15
122.900	H	1.67	112.00	Q.P.	34.05	-11.50	22.55	43.50	-20.95
130.600	V	1.81	219.00	Q.P.	32.18	-11.88	20.30	43.50	-23.20
144.000	H	2.14	208.00	Q.P.	43.39	-11.78	31.61	43.50	-11.89
184.150	H	1.99	196.00	Q.P.	32.90	-10.60	22.30	43.50	-21.20
216.000	H	1.77	263.00	Q.P.	38.38	-8.81	29.57	43.50	-13.93
244.850	H	1.49	339.00	Q.P.	34.81	-9.44	25.37	46.00	-20.63
336.000	H	1.05	73.00	Q.P.	32.74	-3.48	29.26	46.00	-16.74
366.200	V	1.40	169.00	Q.P.	29.34	-4.90	24.44	46.00	-21.56
431.950	H	2.26	112.00	Q.P.	39.15	-2.65	36.50	46.00	-9.50
527.950	V	2.23	318.00	Q.P.	28.52	1.16	29.68	46.00	-16.32
664.150	V	1.86	21.00	Q.P.	27.60	2.57	30.17	46.00	-15.83

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 10

Date of the test: April 26, 2013

The environmental conditions were: Temperature: 25.1 °C
 Humidity: 17.1 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
34.350	V	1.47	45.00	Q.P.	39.86	-13.10	26.76	40.00	-13.24
50.600	V	1.59	6.00	Q.P.	40.47	-16.72	23.75	40.00	-16.25
65.600	V	1.43	86.00	Q.P.	50.42	-16.40	34.02	40.00	-5.98
342.450	H	1.01	229.00	Q.P.	27.66	-2.23	25.43	46.00	-20.57

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22, 2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results

The following test configurations were measured on model RFT81UW:

Test Configuration 11

Date of the test: March 18, 2013

The environmental conditions were: Temperature: 25.5 °C
 Humidity: 17.2 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBμV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading +corr) (dBμV/m)	Limit @ 3.0 m (dBμV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
45.150	V	0.31	160.00	Q.P.	-46.82	70.06	23.24	40.45	-17.21
94.500	H	0.31	274.00	Q.P.	-104.62	129.93	25.31	40.45	-15.14
134.000	H	0.31	227.00	Q.P.	60.76	-28.74	32.02	40.45	-8.43
183.200	H	0.31	315.00	Q.P.	-152.71	168.36	15.65	40.45	-24.80
216.000	H	0.31	188.00	Q.P.	-235.22	264.67	29.45	40.45	-11.00
432.000	H	0.30	383.00	Q.P.	-13.68	52.01	38.33	47.45	-9.12

All other emissions are at least 25 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFS121LW,RFT81UW Appendix 2	
Test Report No. RTS-6036-1305-03A	Date of Test March 07-18, 28 and April 09, 18, 22,2013	FCC ID: L6ARFS120LW, IC : 2503A-RFS120LW FCC ID: L6ARFT80UW, IC : 2503A-RFT80UW

Radiated Emissions Test Results cont'd

Test Configuration 12

Date of the test: April 18, 2013

The environmental conditions were: Temperature: 25.1 °C
 Humidity: 17.2 %

Frequency (MHz)	Antenna		Test Angle (Deg.)	Detector (Q.P. or Peak)	Measured Level (dBµV)	Correction Factor for preamp/antenna / cables/ filter (dB/m)	Field Strength Level (reading+c orr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
	Pol. (V/H)	Height (metres)							
45.200	V	3.90	88.00	Q.P.	39.42	-15.87	23.55	40.45	-16.90
120.000	V	1.53	262.00	Q.P.	37.13	-11.28	25.85	40.45	-14.60
144.000	H	2.02	64.00	Q.P.	41.45	-11.78	29.67	40.45	-10.78
184.350	H	2.98	287.00	Q.P.	33.41	-10.57	22.84	40.45	-17.61
216.000	H	1.39	278.00	Q.P.	39.46	-8.81	30.65	40.45	-9.80
240.000	H	1.41	272.00	Q.P.	47.28	-9.81	37.47	47.45	-9.98
432.000	V	1.65	43.00	Q.P.	39.66	-2.65	37.01	47.45	-10.44
864.000	V	1.98	352.00	Q.P.	28.57	6.43	35.00	47.45	-12.45

All other emissions are at least 25 dB below the limit.