**CETECOM™****CETECOM ICT Services**  
consulting - testing - certification >>>

## TEST REPORT

Test report no.: 1-6234/13-01-02

**DAkkS**  
Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)  
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01  
Area of Testing: Radio/Satellite Communications

### Applicant

**Research In Motion Limited**  
305 Phillip Street  
Waterloo, ON N2L 3W8 / CANADA  
Phone: +1 51 98 88 74 65  
Fax: +1 51 98 88 69 06  
Contact: Masud Attayi  
e-mail: [mattayi@rim.com](mailto:mattayi@rim.com)  
Phone: +1 51 98 88 74 65

### Manufacturer

**Research In Motion Limited**  
305 Phillip Street  
Waterloo, ON N2L 3W8 / CANADA

### Test standard/s

47 CFR Part 22	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services

For further applied test standards please refer to section 3 of this test report.

### Test Item

Kind of test item:	<b>Blackberry GSM Phones</b>
Model name:	<b>RFU81UW</b>
FCC ID:	<b>L6ARFU80UW</b>
IC:	<b>2503A-RFU80UW</b>
Frequency:	GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz
Technology tested:	GSM, UMTS
Antenna:	Integrated antenna
Power Supply:	3.7 V DC by Li - Ion battery
Temperature:	+23

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorised:

Stefan Bös  
Senior Testing Manager

### Test performed:

Andreas Luckenbill  
Expert

## 1 Table of contents

<b>1 Table of contents.....</b>	<b>2</b>
<b>2 General information .....</b>	<b>4</b>
<b>2.1 Notes and disclaimer .....</b>	<b>4</b>
<b>2.2 Application details.....</b>	<b>4</b>
<b>3 Test standard/s .....</b>	<b>4</b>
<b>4 Test environment.....</b>	<b>5</b>
<b>5 Test item.....</b>	<b>5</b>
<b>5.1 Additional information .....</b>	<b>5</b>
<b>6 Test laboratories sub-contracted .....</b>	<b>5</b>
<b>7 Description of the test setup.....</b>	<b>6</b>
<b>7.1 Radiated measurements chamber C .....</b>	<b>6</b>
<b>7.2 Radiated measurements 12.75 GHz to 25 GHz.....</b>	<b>8</b>
<b>7.3 AC conducted .....</b>	<b>9</b>
<b>8 Summary of measurement results .....</b>	<b>10</b>
<b>8.1 GSM 850.....</b>	<b>10</b>
<b>8.2 PCS 1900 .....</b>	<b>10</b>
<b>8.3 UMTS band II.....</b>	<b>11</b>
<b>8.4 UMTS band V.....</b>	<b>11</b>
<b>8.5 Results GSM 850 .....</b>	<b>12</b>
<b>8.5.1 RF output power .....</b>	<b>12</b>
<b>8.5.2 Frequency stability.....</b>	<b>14</b>
<b>8.5.3 Spurious emissions radiated .....</b>	<b>15</b>
<b>8.5.4 Spurious emissions conducted.....</b>	<b>21</b>
<b>8.5.5 Block edge compliance.....</b>	<b>21</b>
<b>8.5.6 Occupied bandwidth .....</b>	<b>21</b>
<b>8.6 Results PCS 1900 .....</b>	<b>22</b>
<b>8.6.1 RF output power .....</b>	<b>22</b>
<b>8.6.2 Frequency stability.....</b>	<b>24</b>
<b>8.6.3 Spurious emissions radiated .....</b>	<b>25</b>
<b>8.6.4 Spurious emissions conducted.....</b>	<b>34</b>
<b>8.6.5 Block edge compliance.....</b>	<b>34</b>
<b>8.6.6 Occupied bandwidth .....</b>	<b>34</b>
<b>8.7 Results UMTS band II.....</b>	<b>35</b>
<b>8.7.1 RF output power .....</b>	<b>35</b>
<b>8.7.2 Frequency stability.....</b>	<b>37</b>
<b>8.7.3 Spurious emissions radiated .....</b>	<b>38</b>
<b>8.7.4 Spurious emissions conducted.....</b>	<b>46</b>
<b>8.7.5 Block edge compliance.....</b>	<b>46</b>
<b>8.7.6 Occupied bandwidth .....</b>	<b>46</b>
<b>8.8 Results UMTS band V .....</b>	<b>47</b>
<b>8.8.1 RF output power .....</b>	<b>47</b>
<b>8.8.2 Frequency stability.....</b>	<b>49</b>
<b>8.8.3 Spurious emissions radiated .....</b>	<b>50</b>
<b>8.8.4 Spurious emissions conducted.....</b>	<b>55</b>
<b>8.8.5 Block edge compliance.....</b>	<b>55</b>
<b>8.8.6 Occupied bandwidth .....</b>	<b>55</b>
<b>9 Test equipment and ancillaries used for tests .....</b>	<b>56</b>
<b>10 Observations .....</b>	<b>57</b>

Annex A	Document history .....	58
Annex B	Further information.....	58
Annex C	Accreditation Certificate .....	59

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order:	2013-05-10
Date of receipt of test item:	2013-05-27
Start of test:	2013-05-27
End of test:	2013-06-14
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 22	2012-10	Title 47 of the Code of Federal Regulations; Chapter I Part 22 - Public mobile services
47 CFR Part 24	2012-10	Title 47 of the Code of Federal Regulations; Chapter I Part 24 - Personal communications services
RSS - 132 Issue 3	2013-01	Spectrum Management and Telecommunications Policy - Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 6	2013-01	Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

## 4 Test environment

Temperature:	$T_{\text{nom}}$	+22 °C during room temperature tests
	$T_{\text{max}}$	-/- °C during high temperature tests
	$T_{\text{min}}$	-/- °C during low temperature tests
Relative humidity content:		56 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	$V_{\text{nom}}$	3.7 V DC by Li - Ion battery
	$V_{\text{max}}$	-/- V
	$V_{\text{min}}$	-/- V

## 5 Test item

Kind of test item	:	Blackberry GSM Phones
Type identification	:	RFU81UW
S/N serial number	:	IMEI 004402242283665
HW hardware status	:	CER-56900-001-Rev1-x03-00 (903)
SW software status	:	7.1.0.980 (b2678)
Frequency band [MHz]	:	GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz
Type of modulation	:	GMSK, 8-PSK, QPSK, 16 – QAM
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - Ion battery
Temperature range	:	No needed! Tests according to manufacturer test plan!

### 5.1 Additional information


Test setup- and EUT-photos are included in test reports: 1-6234/13-01-01\_AnnexA  
1-6234/13-01-01\_AnnexC

## 6 Test laboratories sub-contracted

None

## 7 Description of the test setup

### 7.1 Radiated measurements chamber C

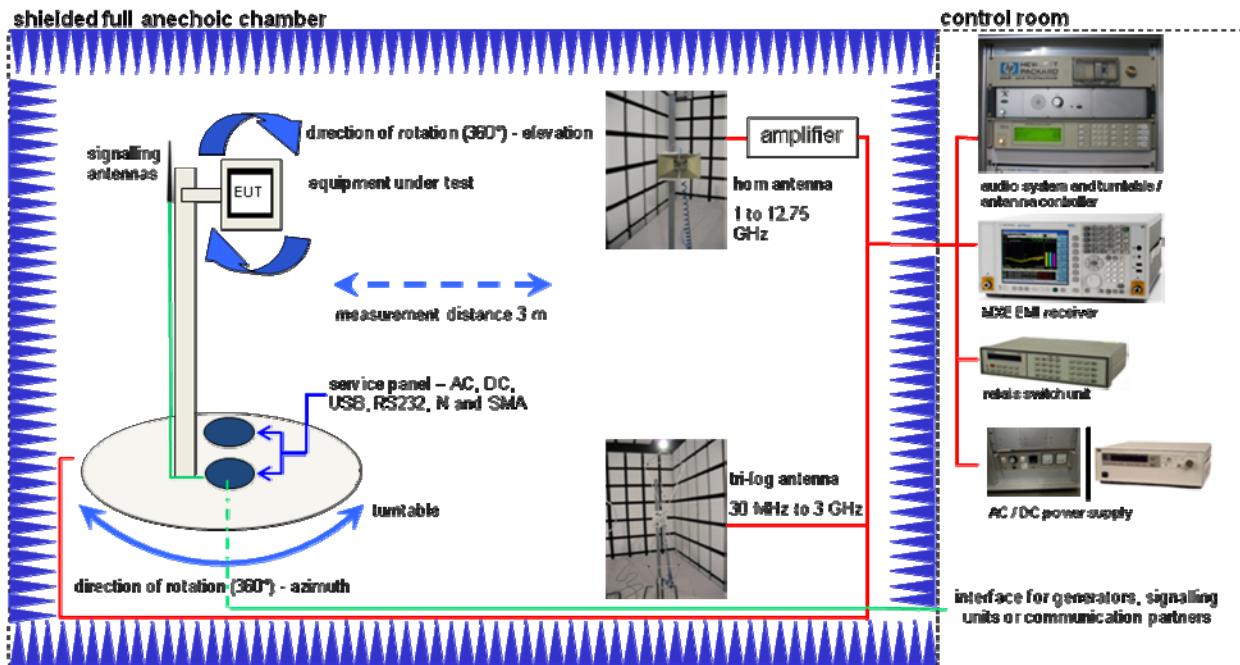

#### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	2210	300001015
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143
Universal Communication Tester	CMU200	R&S	103992	300003231

Wideband Radio Communication Tester	CMW500	R&S	102375	300004187_0
--	--------	-----	--------	-------------


## 7.2 Radiated measurements 12.75 GHz to 25 GHz



### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517
Universal Communication Tester	CMU200	R&S	103992	300003231
Wideband Radio Communication Tester	CMW500	R&S	102375	300004187_0

### 7.3 AC conducted

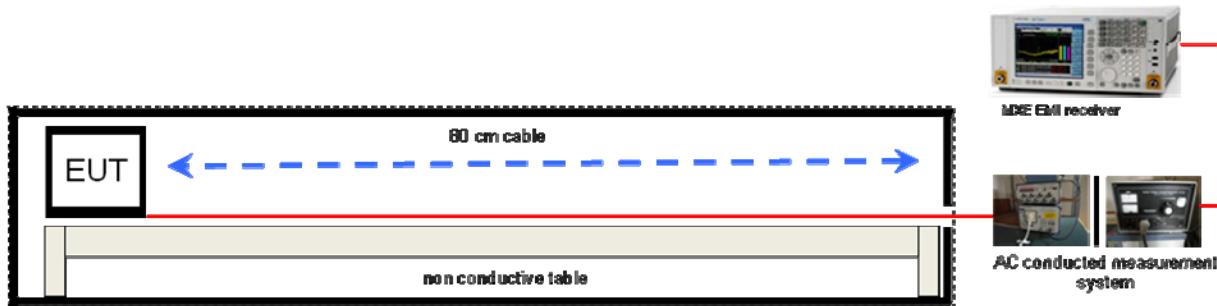

#### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regel trenntravo	Erfi	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210
Universal Communication Tester	CMU200	R&S	103992	300003231
Wideband Radio Communication Tester	CMW500	R&S	102375	300004187_0

## 8 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 22, 24 RSS 132, 133	passed	2013-06-17	Tests according to manufacturer test plan!

### 8.1 GSM 850

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

**Note:** NA = Not applicable; NP = Not performed

### 8.2 PCS 1900

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

**Note:** NA = Not applicable; NP = Not performed

### 8.3 UMTS band II

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

**Note:** NA = Not applicable; NP = Not performed

### 8.4 UMTS band V

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

**Note:** NA = Not applicable; NP = Not performed

## 8.5 Results GSM 850

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

### 8.5.1 RF output power

**Description:**

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

**Measurement:**

The mobile was set up for the maximum output power with pseudo random data modulation.

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

**Limits:**

FCC	IC
CFR Part 22.913 CFR Part 2.1046	RSS 132
Nominal Peak Output Power	
+38.45 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

**Results:**

Output Power (conducted) GMSK mode		
Frequency (MHz)	Average Output Power (dBm)	Peak to Average Ratio (dB)
824.2	Not performed!	
836.4		
848.8		
Measurement uncertainty	± 0.5 dB	

Output Power (conducted) 8-PSK mode		
Frequency (MHz)	Average Output Power (dBm)	Peak to Average Ratio (dB)
824.2	Not performed!	
836.4		
848.8		
Measurement uncertainty	± 0.5 dB	

Output Power (radiated) GMSK mode	
Frequency (MHz)	Average Output Power (dBm) - ERP
824.2	30.4
836.4	31.7
848.8	32.5
Measurement uncertainty	± 2.0 dB

Output Power (radiated) 8-PSK mode	
Frequency (MHz)	Average Output Power (dBm) - ERP
824.2	26.1
836.4	27.0
848.8	27.6
Measurement uncertainty	± 2.0 dB

**Result:** **Passed**

### 8.5.2 Frequency stability

**Not performed – tests according to manufacturer test plan!**

### 8.5.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the GSM-850 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 22.917 CFR Part 2.1053	RSS 132
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the GSM-850 band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

Spurious Emission Level (dBm)								
Harmonic	Ch. 128 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 189 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 251 Freq. (MHz)	Level [dBm]
2	1648.4	More than 20 dB below the limit!	2	1672.8	More than 20 dB below the limit!	2	1697.6	More than 20 dB below the limit!
3	2472.6		3	2509.2		3	2546.4	
4	3296.8		4	3345.6		4	3395.2	
5	4121.0		5	4182.0		5	4244.0	
6	4945.2		6	5018.4		6	5092.8	
7	5769.4		7	5854.8		7	5941.6	
8	6593.6		8	6691.2		8	6790.4	
9	7417.8		9	7527.6		9	7639.2	
10	8242.0		10	8364.0		10	8488.0	
Measurement uncertainty					± 3dB			


**Result:** **Passed**

**Plots:**


**Plot 1:** Channel 128 (30 MHz – 12.75 GHz), GSM

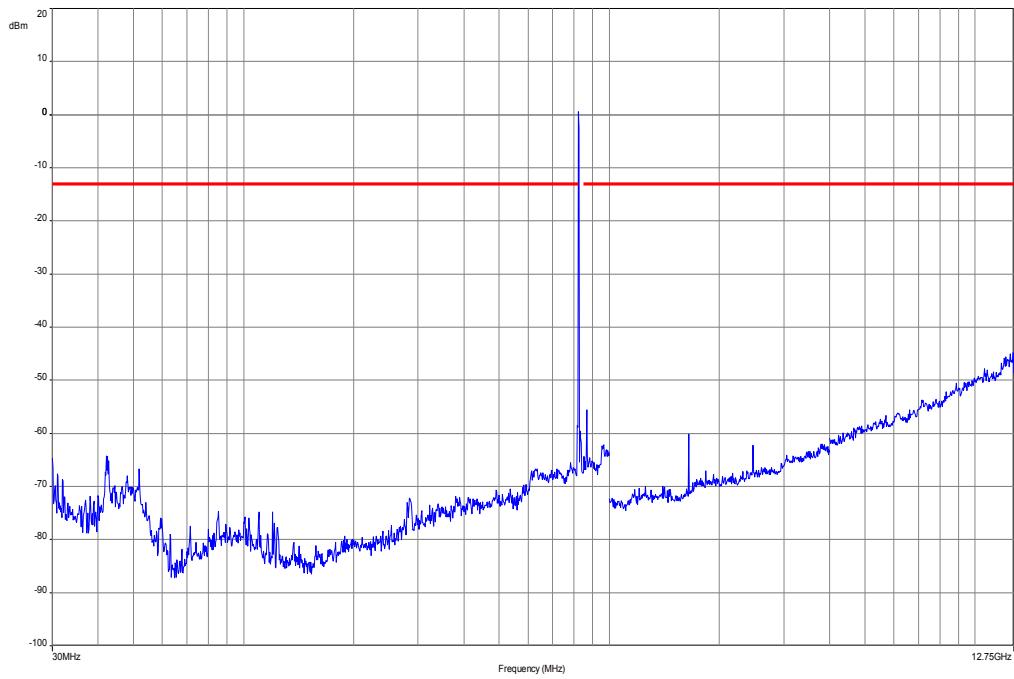


**Plot 2:** Channel 190 (30 MHz – 12.75 GHz), GSM

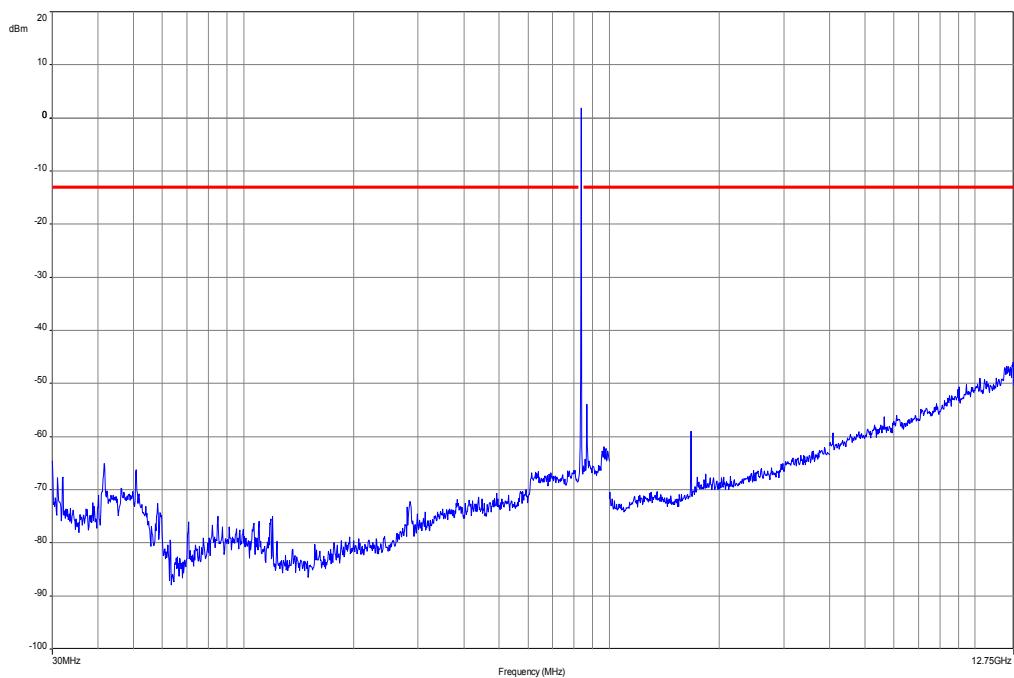


**Plot 3:** Channel 251 (30 MHz – 12.75 GHz), GSM

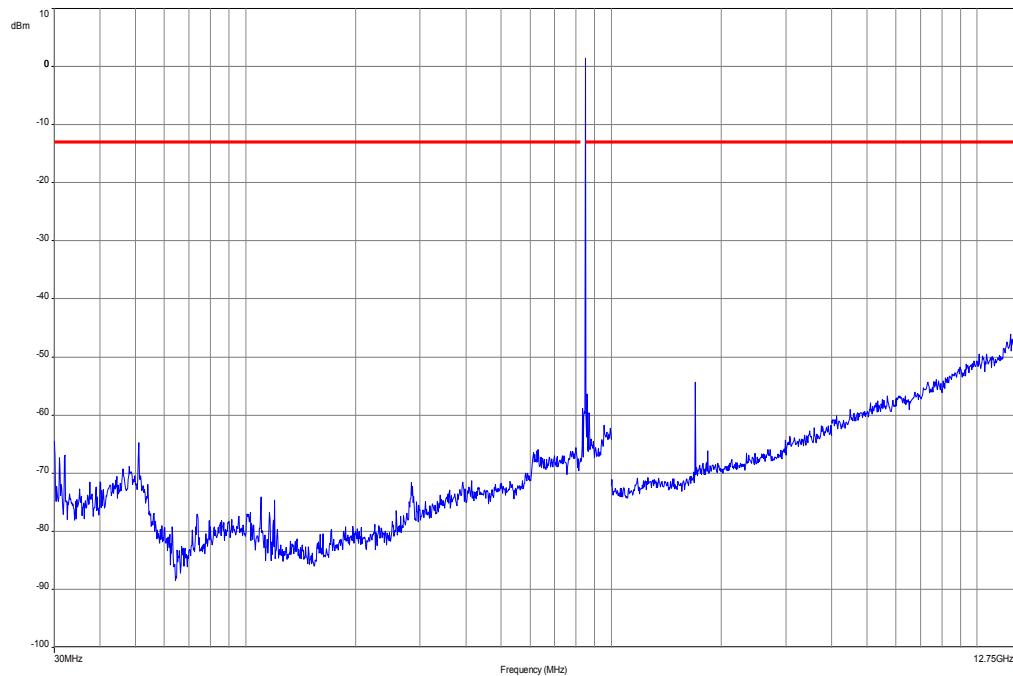


**Plot 4:** Channel 190 (30 MHz – 12.75 GHz), GPRS

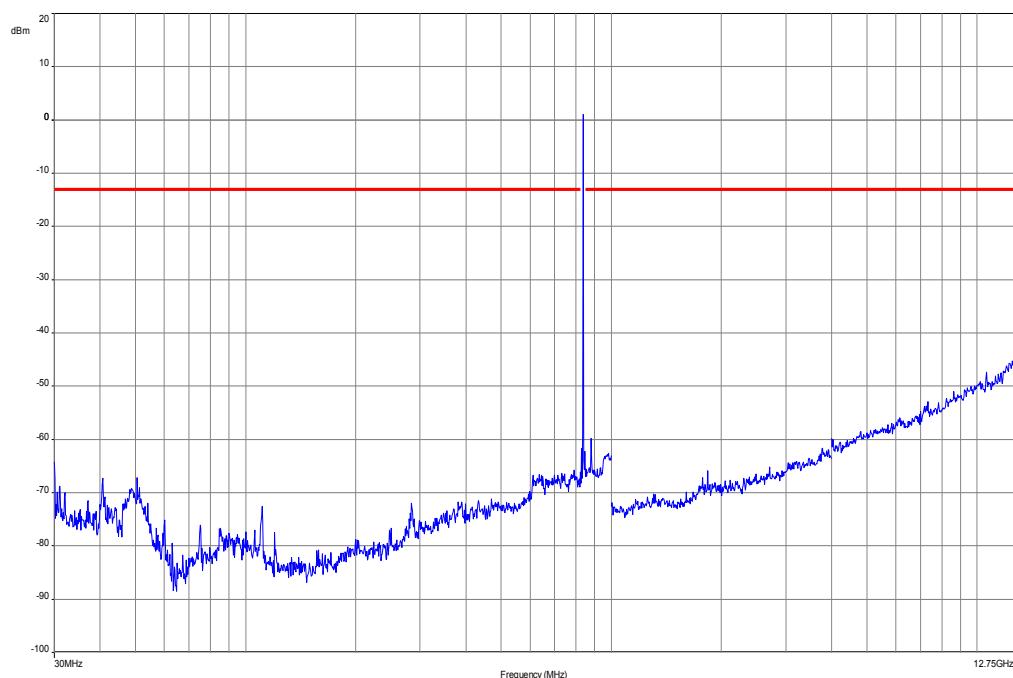


**Plot 5:** Channel 128 (30 MHz – 12.75 GHz), EDGE

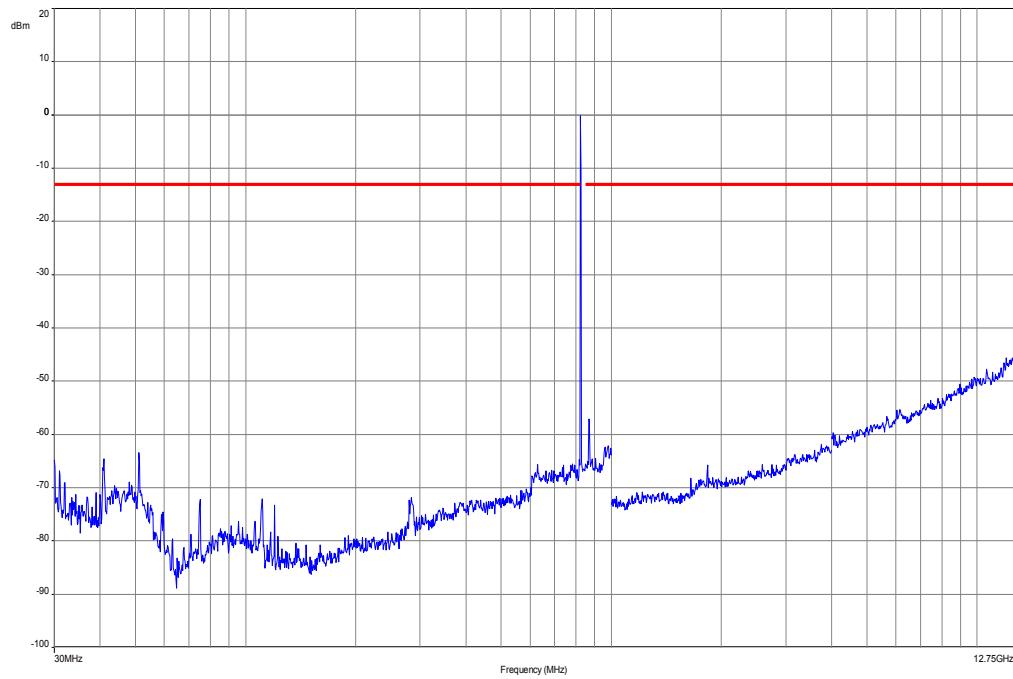

**Plot 6:** Channel 190 (30 MHz – 12.75 GHz), EDGE

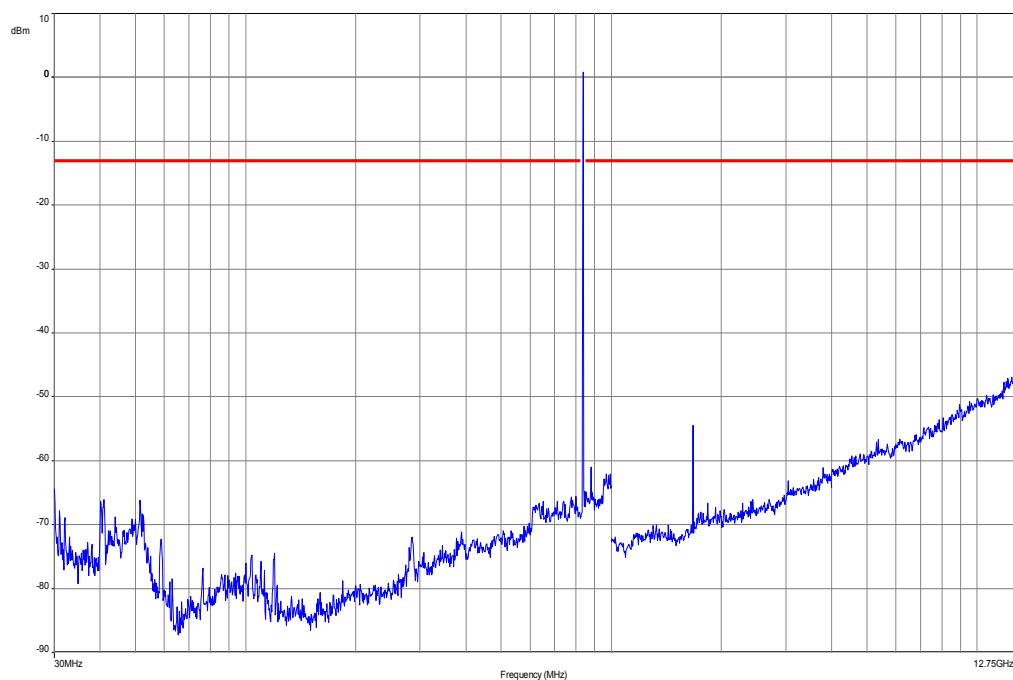

**Plot 7: Channel 251 (30 MHz – 12.75 GHz), EDGE**

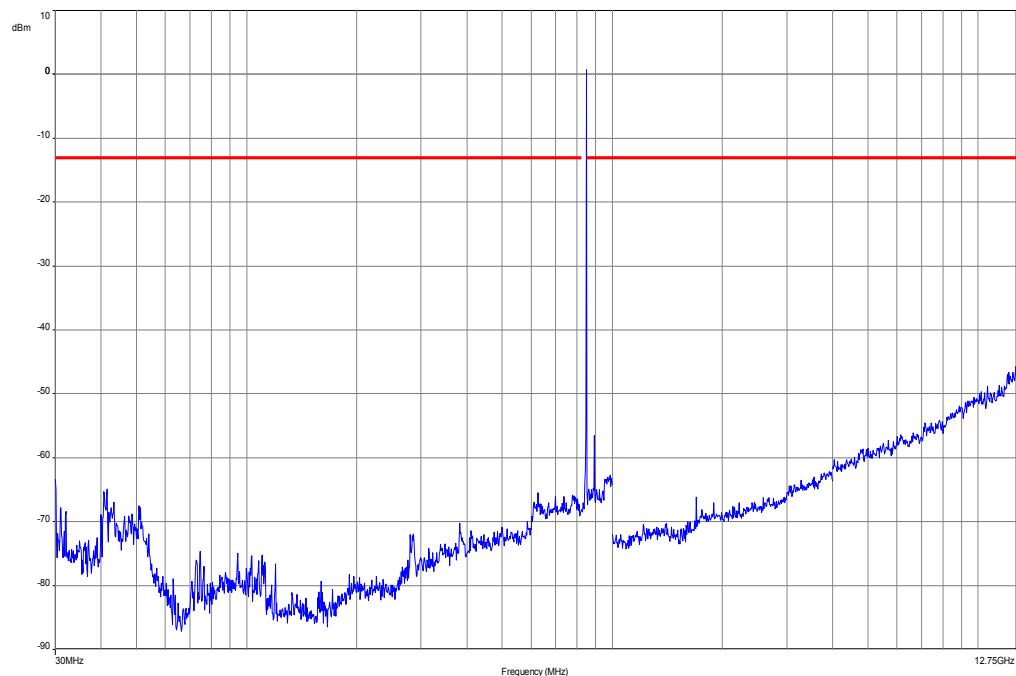

#### **8.5.4 Spurious emissions conducted**

**Not performed – tests according to manufacturer test plan!**

#### **8.5.5 Block edge compliance**

**Not performed – tests according to manufacturer test plan!**

#### **8.5.6 Occupied bandwidth**

**Not performed – tests according to manufacturer test plan!**

## 8.6 Results PCS 1900

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

### 8.6.1 RF output power

#### Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	1 MHz
Resolution bandwidth:	1 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 24.232 CFR Part 2.1046	RSS 133
Nominal Peak Output Power	
+33.00 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

**Results:**

Output Power (conducted) GMSK mode		
Frequency (MHz)	Average Output Power (dBm)	Peak to Average Ratio (dB)
1850.2	Not performed!	
1880.0		
1909.8		
Measurement uncertainty	± 0.5 dB	

Output Power (conducted) 8-PSK mode		
Frequency (MHz)	Average Output Power (dBm)	Peak to Average Ratio (dB)
1850.2	Not performed!	
1880.0		
1909.8		
Measurement uncertainty	± 0.5 dB	

Output Power (radiated) GMSK mode	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1850.2	32.2
1880.0	31.7
1909.8	32.2
Measurement uncertainty	± 2.0 dB

Output Power (radiated) 8-PSK mode	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1850.2	27.5
1880.0	27.1
1909.8	27.7
Measurement uncertainty	± 2.0 dB

**Result:** **Passed**

## 8.6.2 Frequency stability

**Not performed – tests according to manufacturer test plan!**

### 8.6.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 24.238 CFR Part 2.1053	RSS 133
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

Spurious Emission Level (dBm)								
Harmonic	Ch. 512 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 661 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 810 Freq. (MHz)	Level [dBm]
2	3700.4	More than 20 dB below the limit!	2	3760.0	More than 20 dB below the limit!	2	3819.6	More than 20 dB below the limit!
3	5550.6		3	5640.0		3	5729.4	
4	7400.8		4	7520.0		4	7639.2	
5	9251.0		5	9400.0		5	9549.0	
6	11101.2		6	11280.0		6	11458.8	
7	12951.4		7	13160.0		7	13368.6	
8	14801.6		8	15040.0		8	15278.4	
9	16651.8		9	16920.0		9	17188.2	
10	18502.0		10	18800.0		10	19098.0	
Measurement uncertainty					± 3dB			

**Result:** **Passed**


**Plots:**

**Plot 1:** Channel 512 (30 MHz – 12.75 GHz), GSM

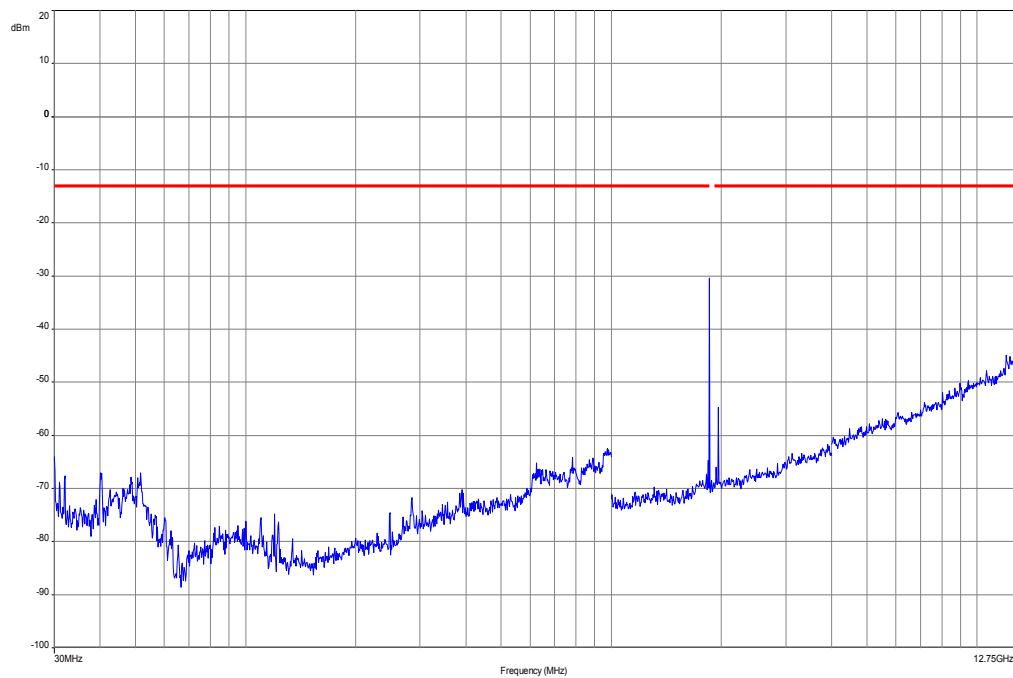

*Carrier notched with 1.9 GHz rejection filter*


**Plot 2:** Channel 512 (12 GHz - 20 GHz), GSM

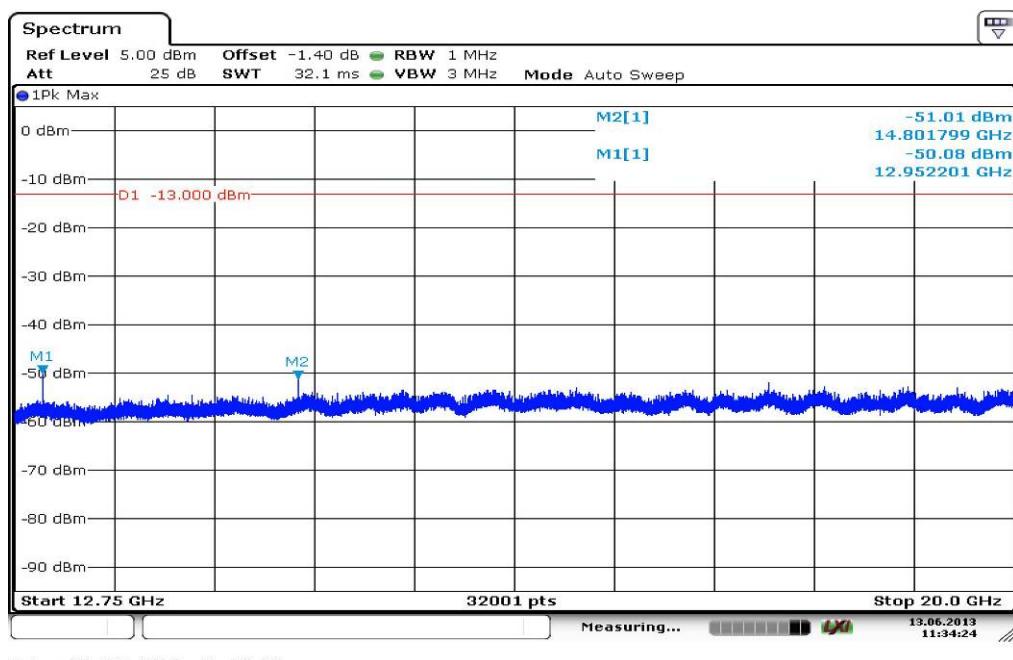

Date: 13.JUN.2013 11:34:24


13.06.2013  
11:34:24

**Plot 3:** Channel 661 (30 MHz – 12.75 GHz), GSM

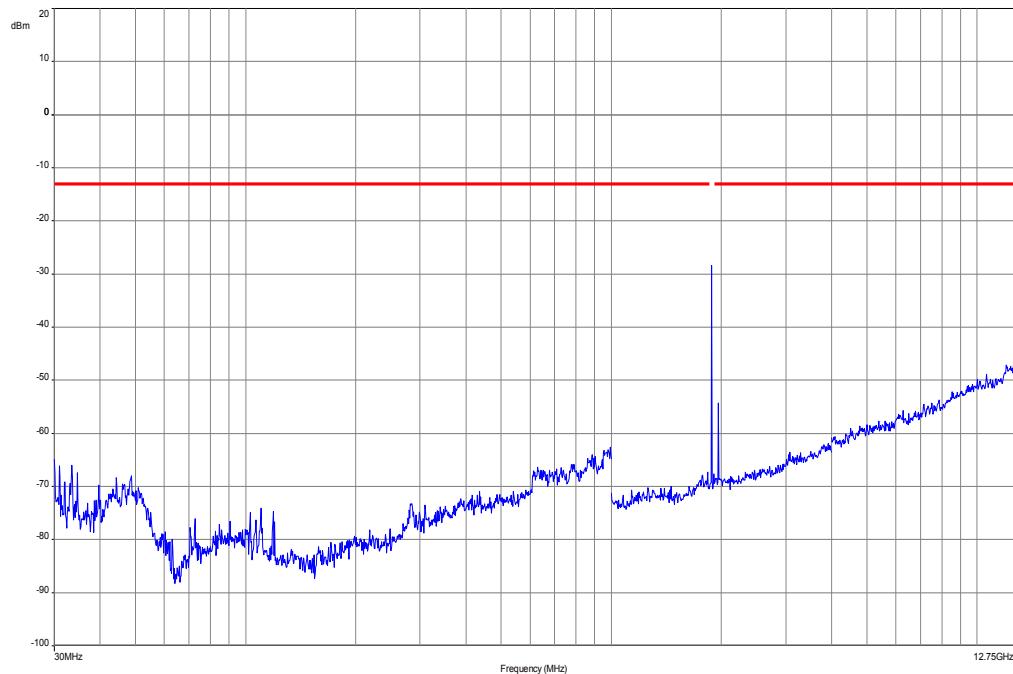


*Carrier notched with 1.9 GHz rejection filter*


**Plot 4:** Channel 661 (12 GHz - 20 GHz), GSM

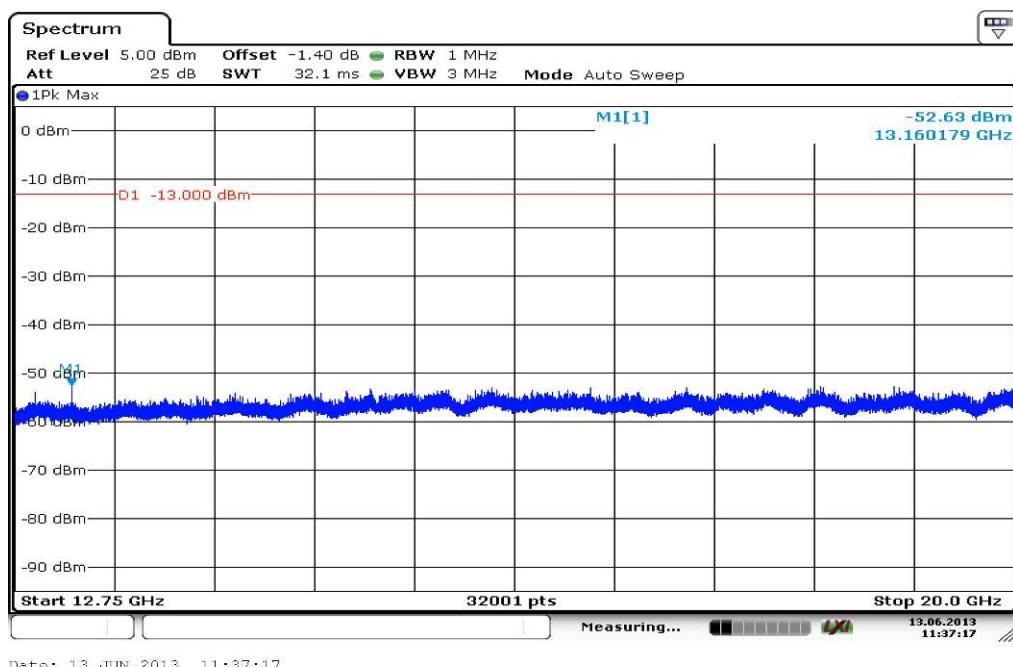


Date: 13.JUN.2013 11:37:17

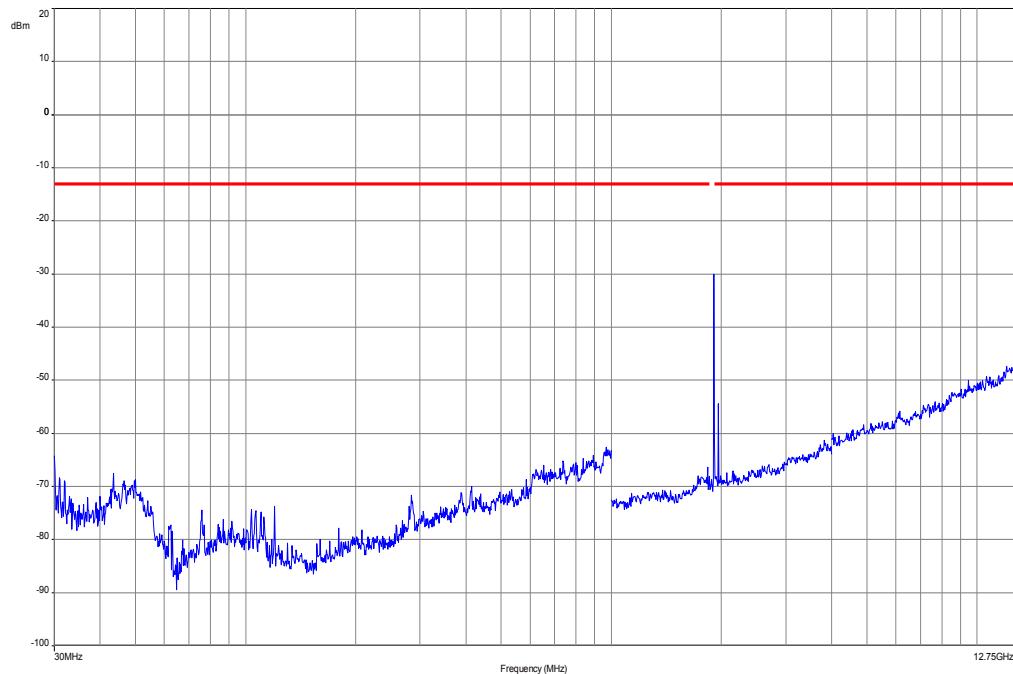**Plot 5:** Channel 810 (30 MHz – 12.75 GHz), GSM

*Carrier notched with 1.9 GHz rejection filter*

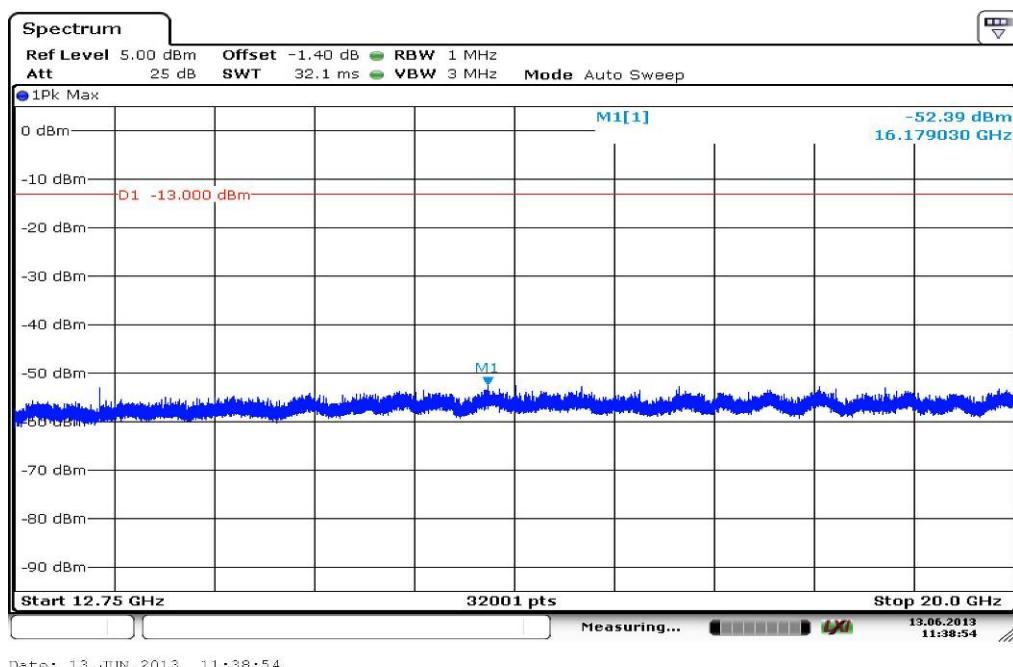
**Plot 6:** Channel 810 (12 GHz - 20 GHz), GSM

**Plot 7:** Channel 512 (30 MHz – 12.75 GHz), GPRS

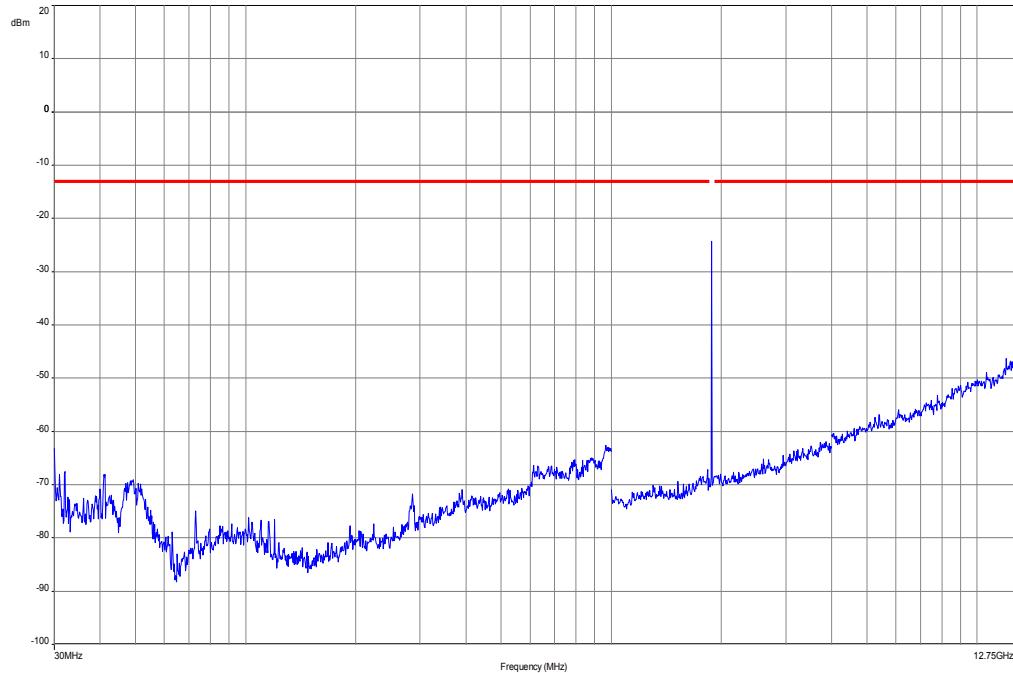


*Carrier notched with 1.9 GHz rejection filter*

**Plot 8:** Channel 512 (12 GHz - 20 GHz), GPRS

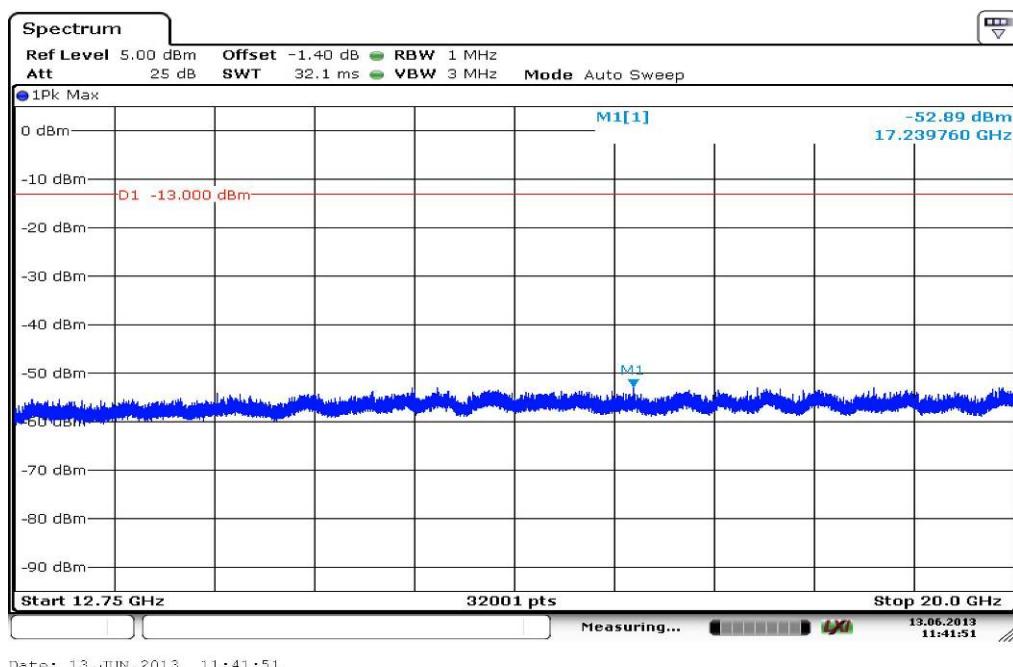


**Plot 9:** Channel 512 (30 MHz – 12.75 GHz), EDGE

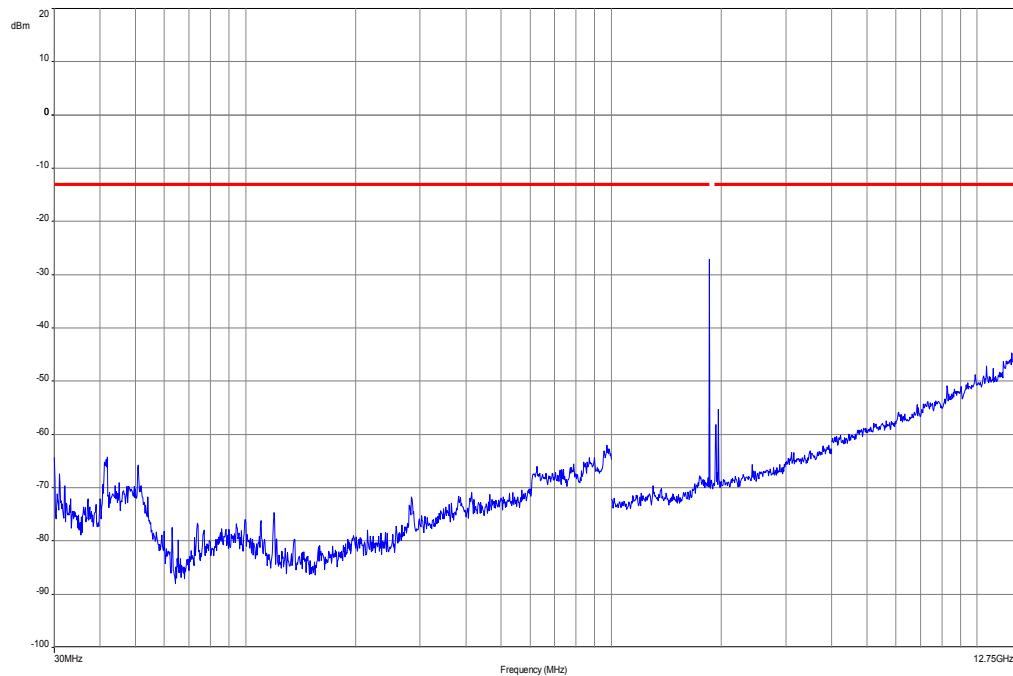


*Carrier notched with 1.9 GHz rejection filter*

**Plot 10:** Channel 512 (12 GHz - 20 GHz), EDGE

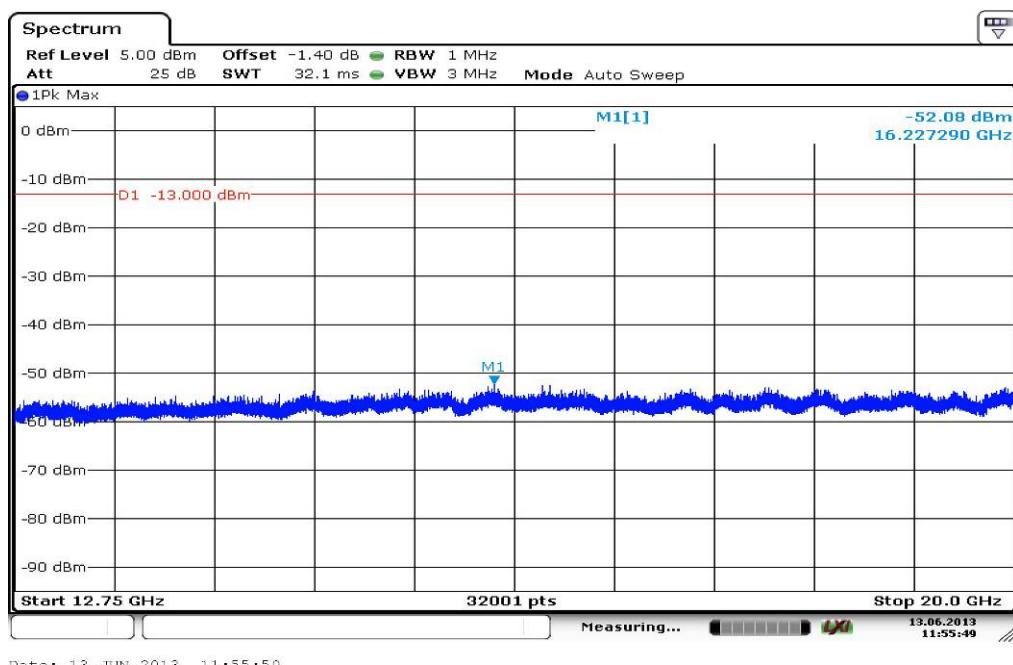


Date: 13.JUN.2013 11:55:50

13.06.2013  
11:55:49

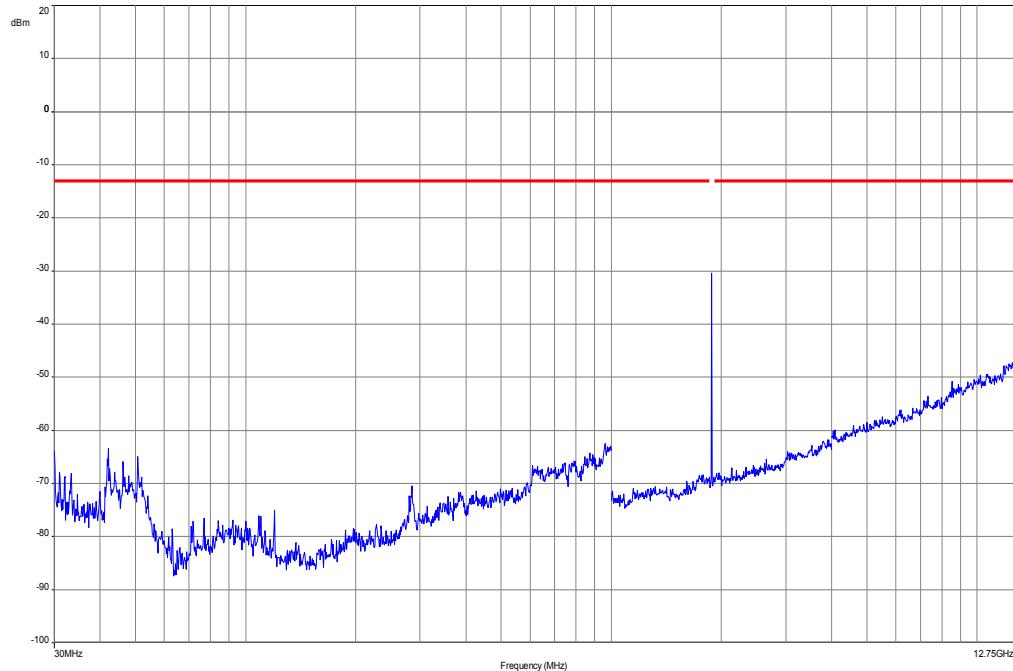
**Plot 11:** Channel 661 (30 MHz – 12.75 GHz), EDGE

*Carrier notched with 1.9 GHz rejection filter*

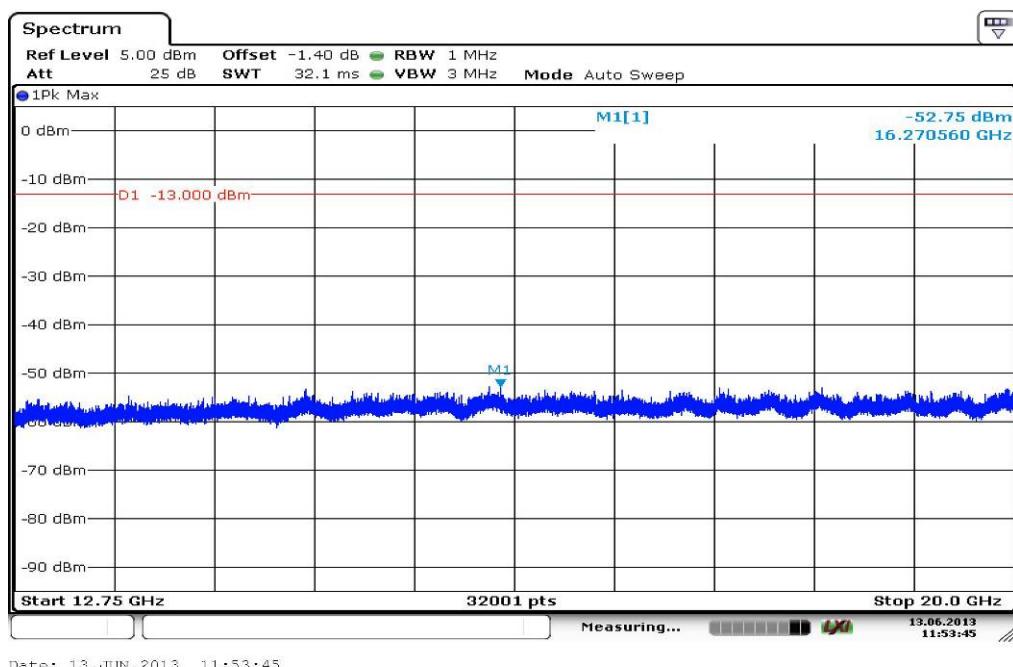
**Plot 12:** Channel 661 (12 GHz - 20 GHz), EDGE

Date: 13.JUN.2013 11:53:45

13.06.2013  
11:53:45

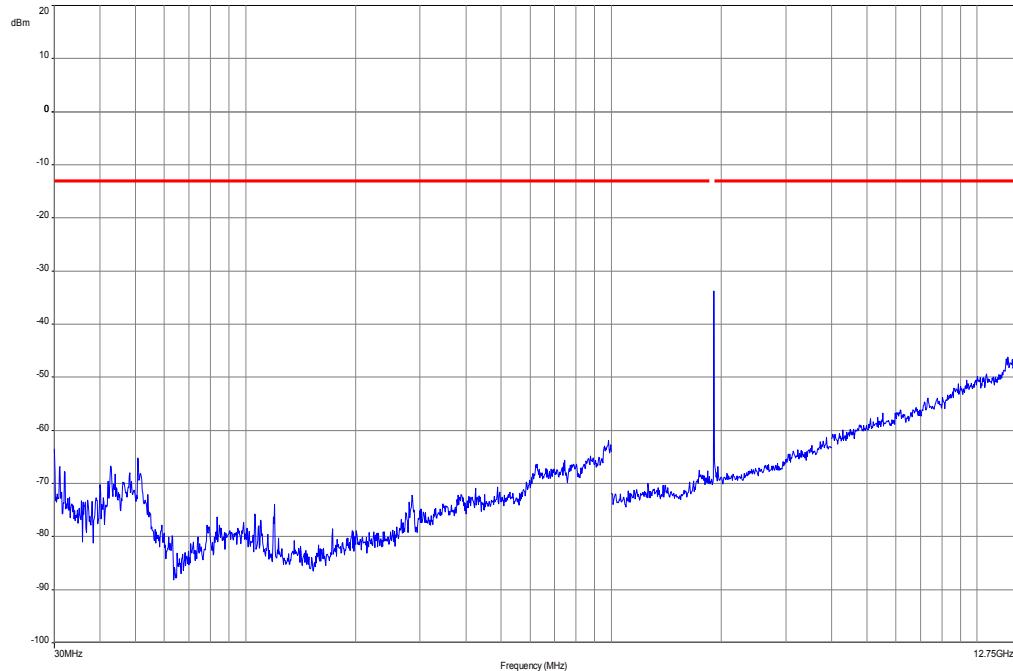**Plot 13:** Channel 810 (30 MHz – 12.75 GHz), EDGE

*Carrier notched with 1.9 GHz rejection filter*

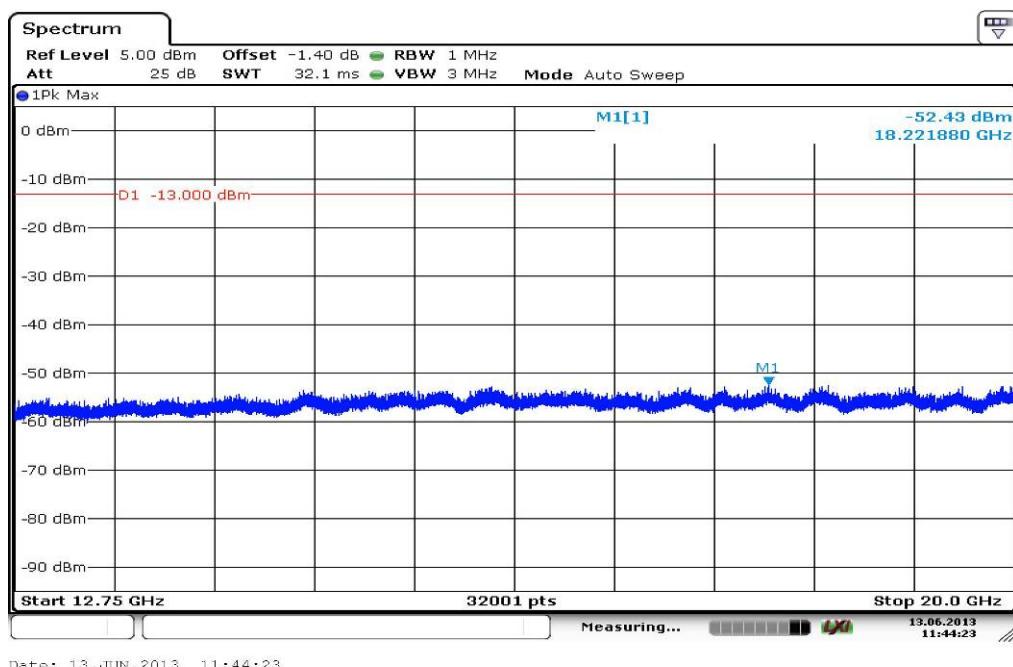**Plot 14:** Channel 810 (12 GHz - 20 GHz), EDGE

#### **8.6.4 Spurious emissions conducted**

**Not performed – tests according to manufacturer test plan!**

#### **8.6.5 Block edge compliance**

**Not performed – tests according to manufacturer test plan!**

#### **8.6.6 Occupied bandwidth**

**Not performed – tests according to manufacturer test plan!**

## 8.7 Results UMTS band II

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

### 8.7.1 RF output power

#### Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	10 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 24.232 CFR Part 2.1046	RSS 133
Nominal Peak Output Power	
+33.00 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

**Results:**

Output Power (conducted) WCDMA mode		
Frequency (MHz)	Average Output Power (dBm)	Peak to Average Ratio (dB)
1852.4	Not performed!	
1880.0		
1907.6		
Measurement uncertainty	± 0.5 dB	

**Results: Voice**

Output Power (radiated) WCDMA mode	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1852.4	22.6
1880.0	22.5
1907.6	23.1
Measurement uncertainty	± 2.0 dB

**Results: HSUPA**

Output Power (radiated) WCDMA mode	
Frequency (MHz)	Average Output Power (dBm) - EIRP
1852.4	23.5
1880.0	23.5
1907.6	24.2
Measurement uncertainty	± 2.0 dB

**Result: Passed**

## 8.7.2 Frequency stability

**Not performed – tests according to manufacturer test plan!**

### 8.7.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band II.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 24.238 CFR Part 2.1053	RSS 133
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band II (1852.4 MHz, 1880.0 MHz and 1907.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band II into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.


All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

Spurious Emission Level (dBm)								
Harmonic	Ch. 9262 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9400 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 9538 Freq. (MHz)	Level [dBm]
2	3704.8	More than 20 dB below the limit!	2	3760.0	More than 20 dB below the limit!	2	3815.2	More than 20 dB below the limit!
3	5557.2		3	5640.0		3	5722.8	
4	7409.6		4	7520.0		4	7630.4	
5	9262.0		5	9400.0		5	9538.0	
6	11114.4		6	11280.0		6	11445.6	
7	12966.8		7	13160.0		7	13353.2	
8	14819.2		8	15040.0		8	15260.8	
9	16671.6		9	16920.0		9	17168.4	
10	18524.0		10	18800.0		10	19076.0	
Measurement uncertainty					± 3dB			



**Result:** **Passed**

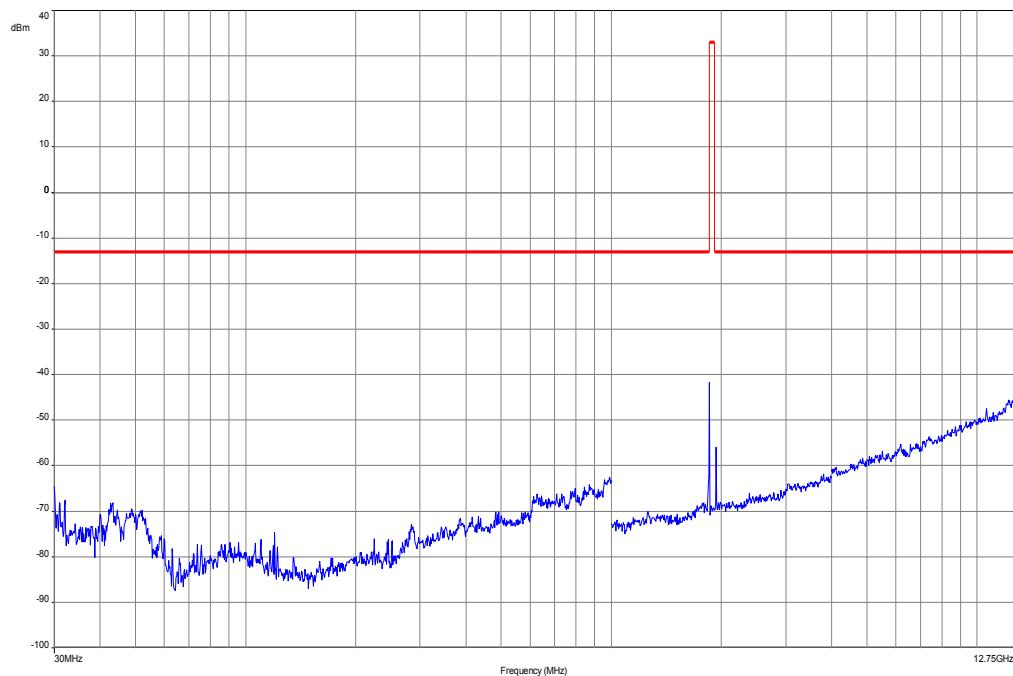
**Plots:****Plot 1: Channel 9262 (30 MHz – 12.75 GHz), voice**

*Carrier notched with 1.9 GHz rejection filter*

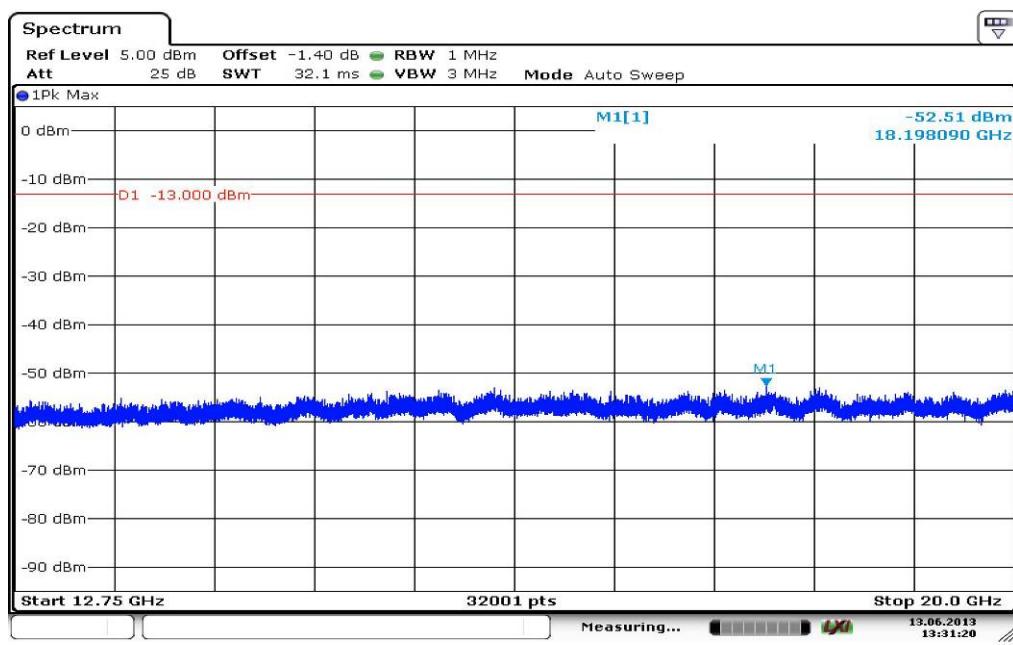
**Plot 2: Channel 9262 (12.75 GHz – 20 GHz), voice**

Date: 13.JUN.2013 13:31:21

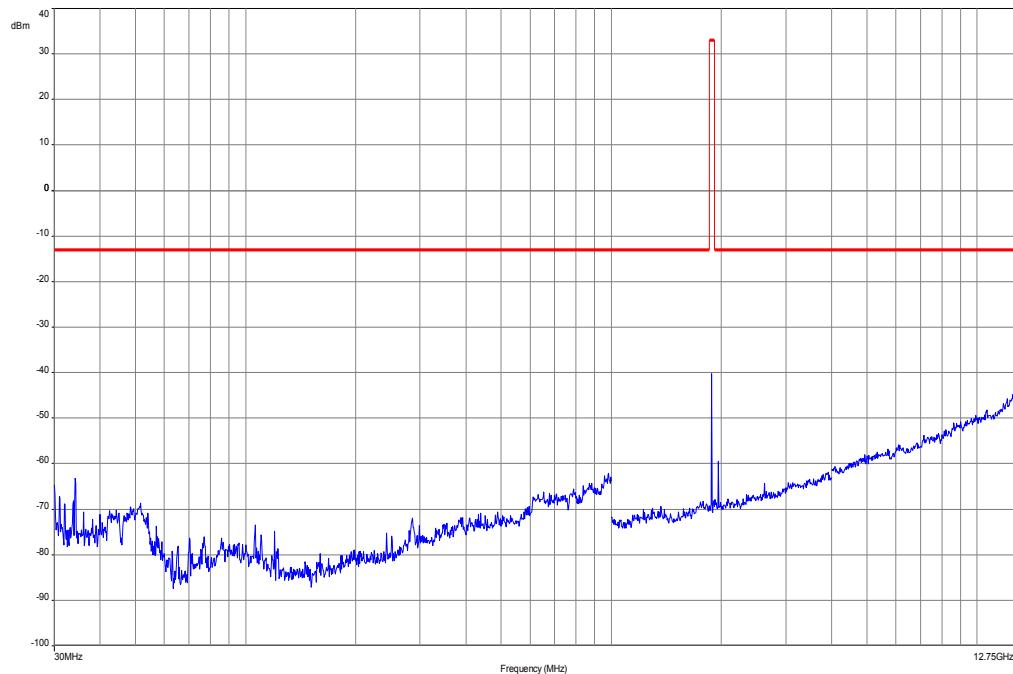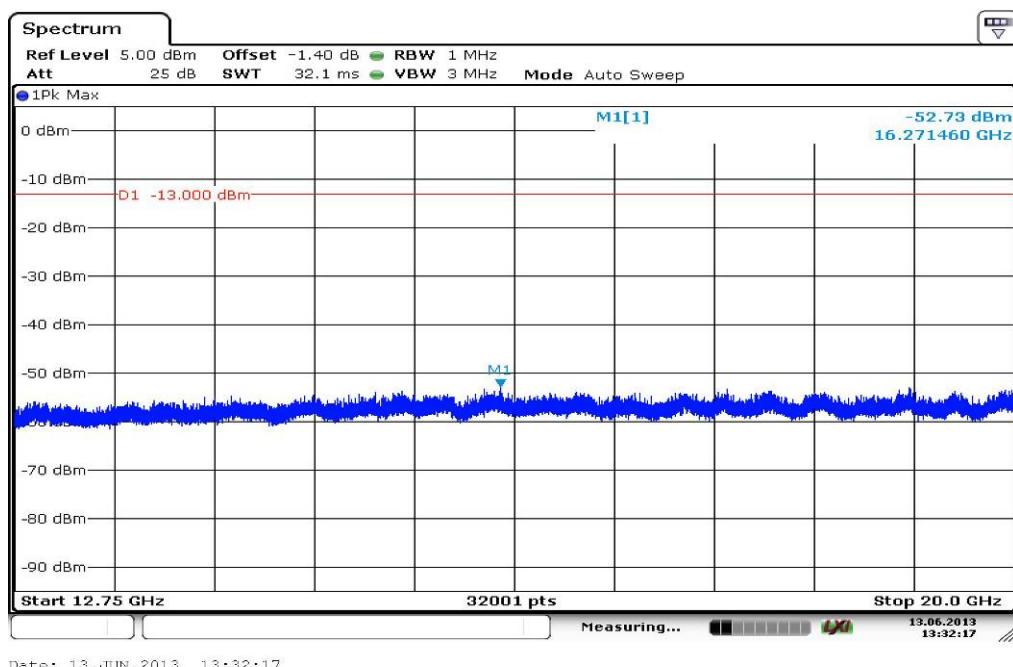**Plot 3: Channel 9400 (30 MHz – 12.75 GHz), voice**

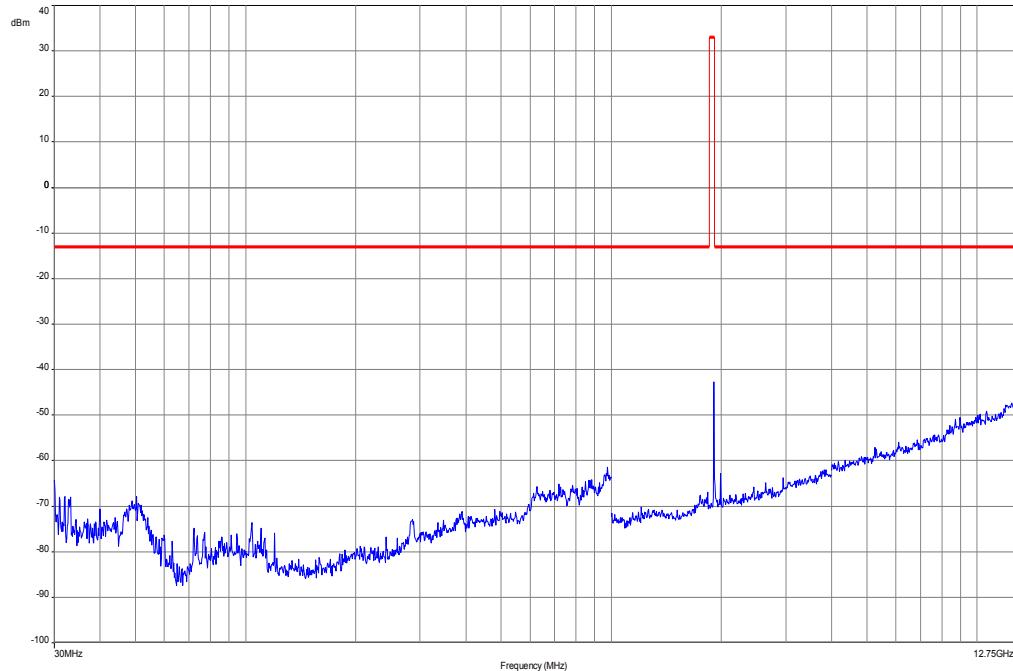*Carrier notched with 1.9 GHz rejection filter*
**Plot 4: Channel 9400 (12.75 GHz – 20 GHz), voice**


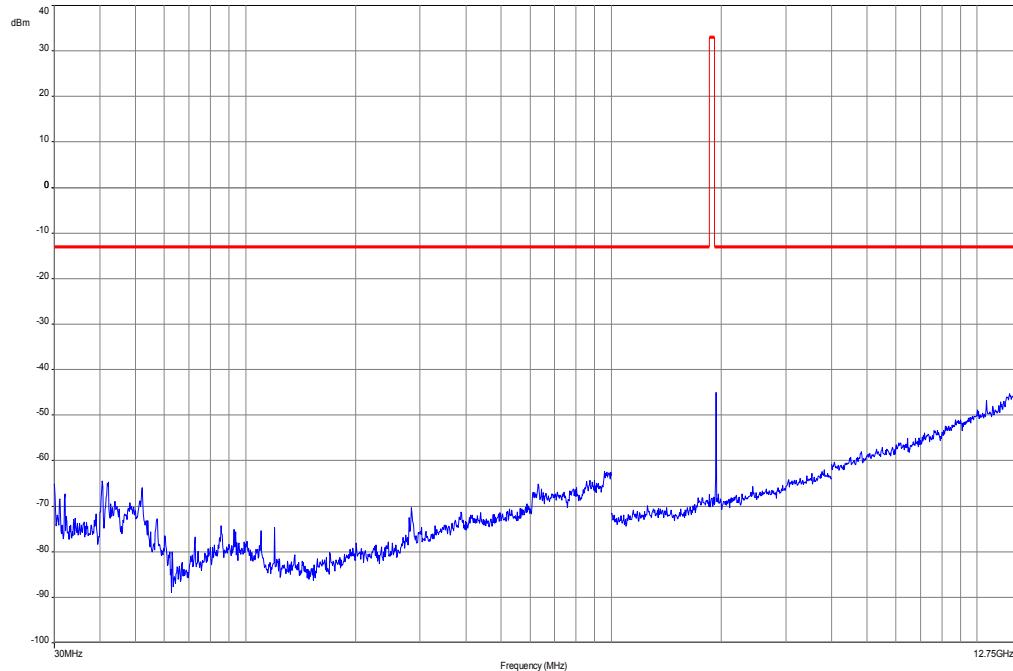
**Plot 5: Channel 9538 (30 MHz – 12.75 GHz), voice**

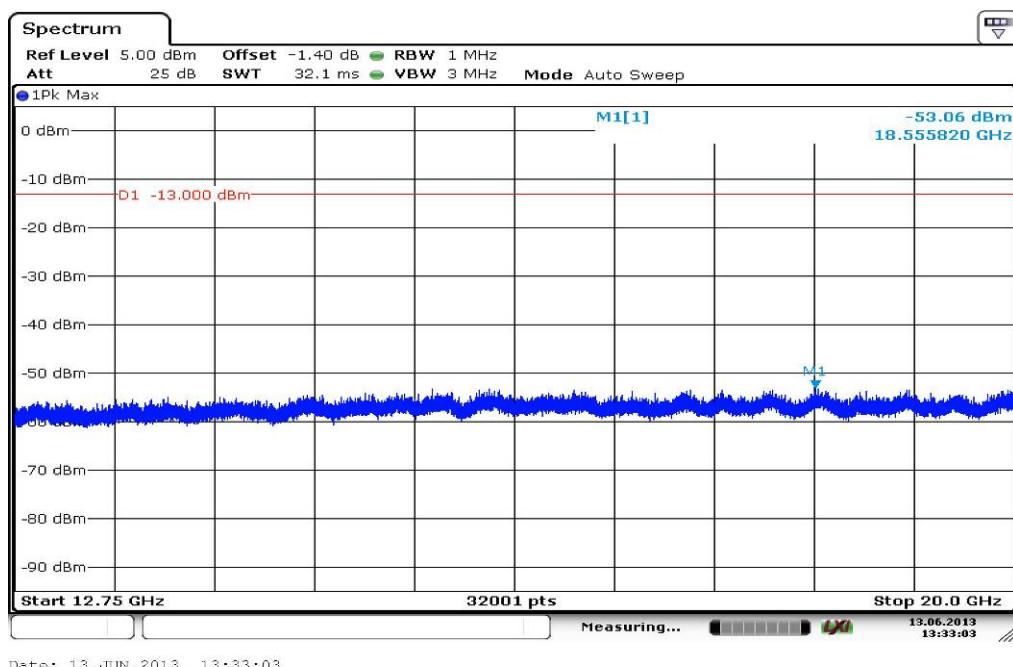
*Carrier notched with 1.9 GHz rejection filter*


**Plot 6: Channel 9538 (12.75 GHz – 20 GHz), voice**


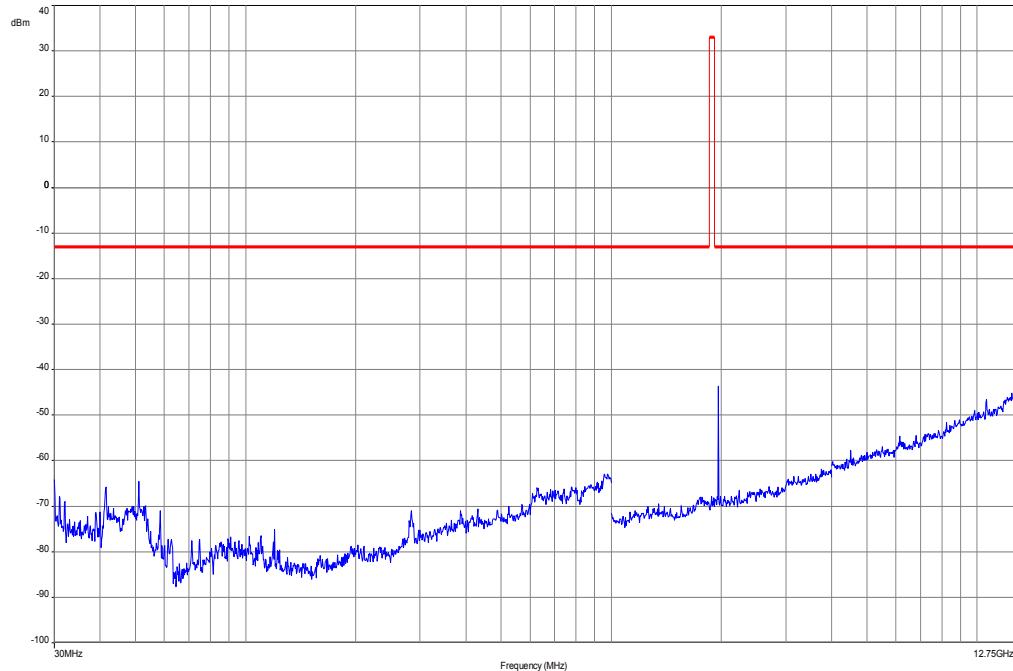
Date: 13.JUN.2013 13:33:03

13.06.2013  
13:33:03


**Plot 1: Channel 9262 (30 MHz – 12.75 GHz), HSUPA**


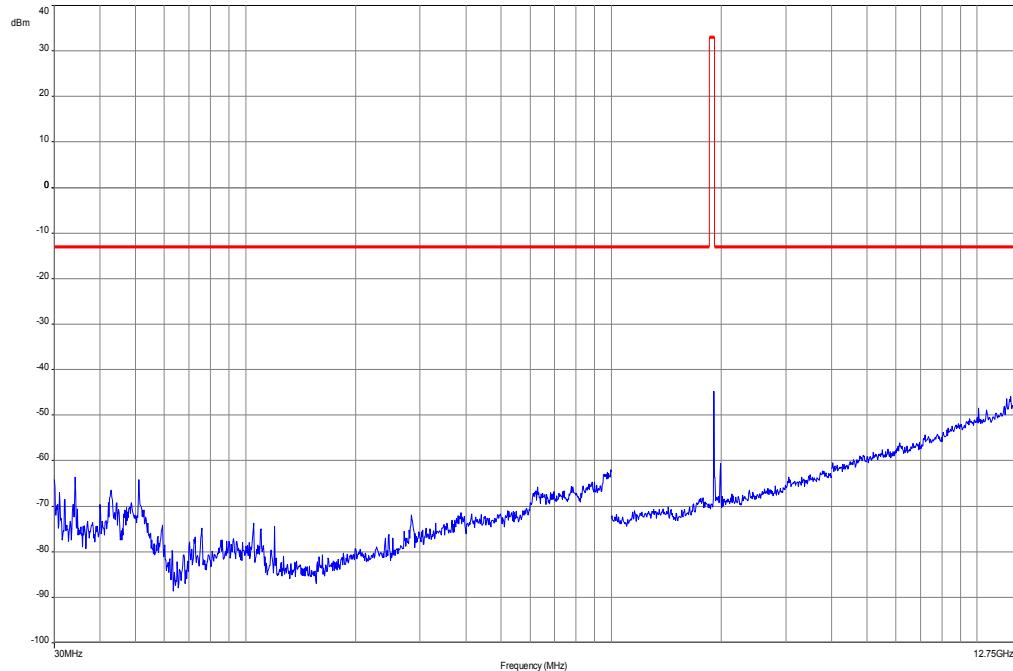
*Carrier notched with 1.9 GHz rejection filter*

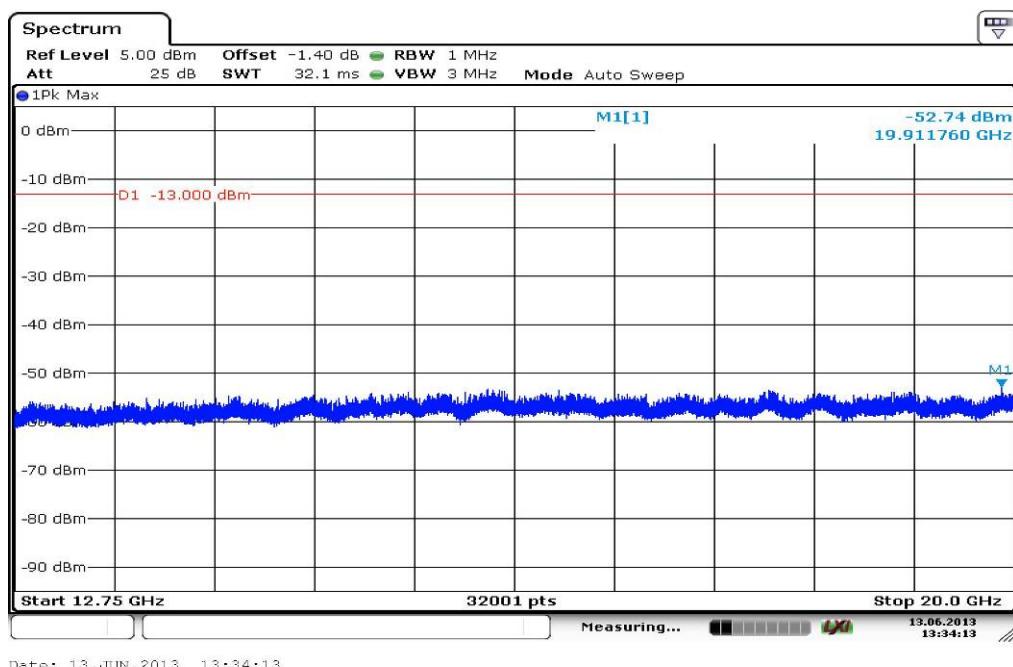**Plot 2: Channel 9262 (12.75 GHz – 20 GHz), HSUPA**


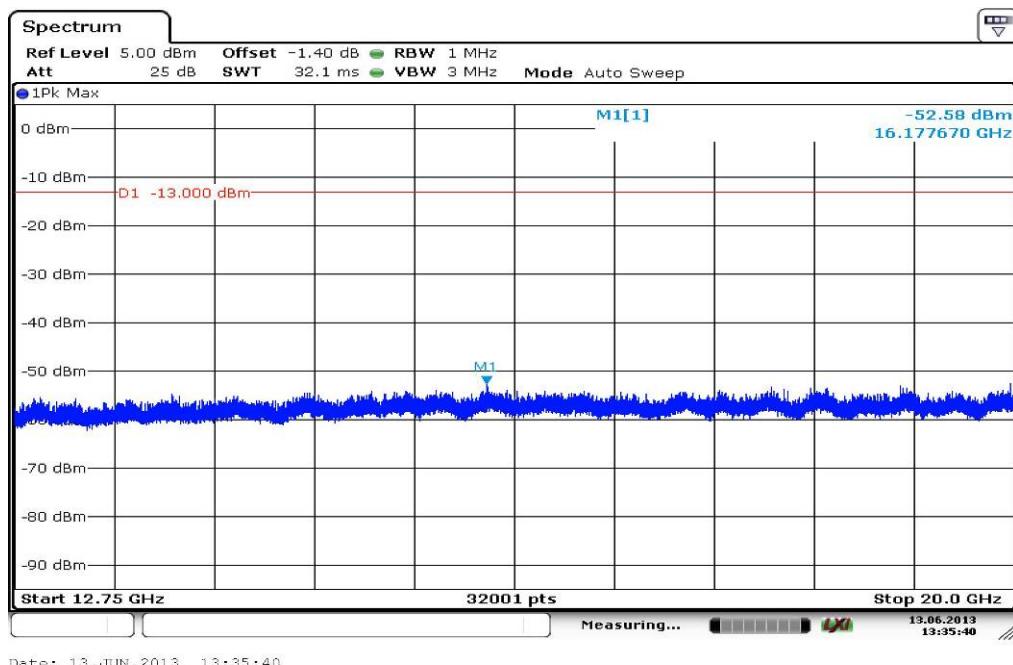
**Plot 3: Channel 9400 (30 MHz – 12.75 GHz), HSUPA**


*Carrier notched with 1.9 GHz rejection filter*

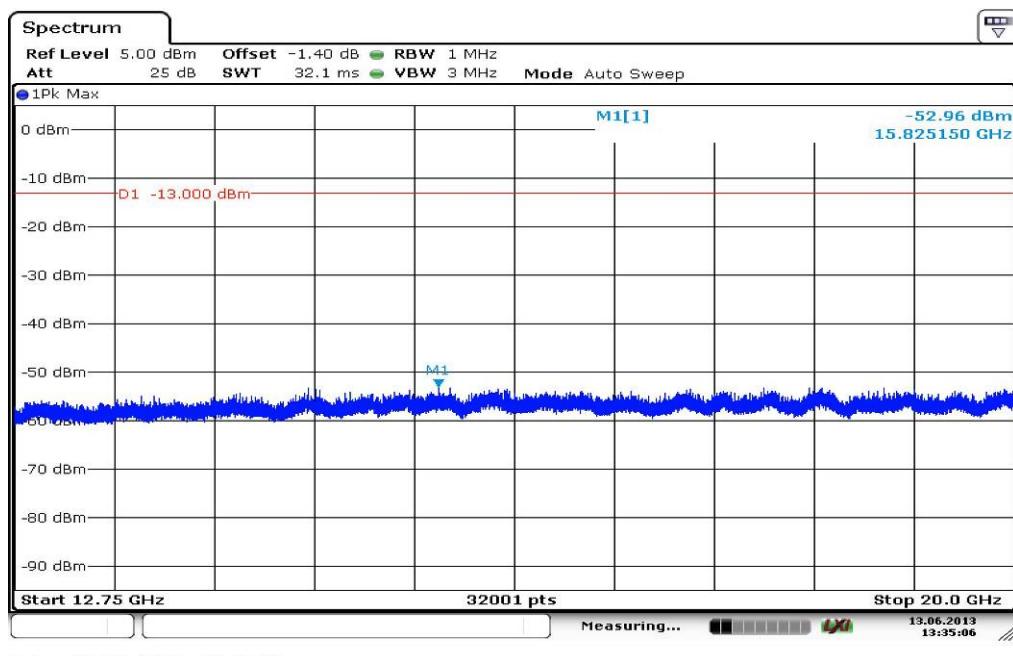**Plot 4: Channel 9400 (12.75 GHz – 20 GHz), HSUPA**


**Plot 5: Channel 9538 (30 MHz – 12.75 GHz), HSUPA**


*Carrier notched with 1.9 GHz rejection filter*

**Plot 6: Channel 9538 (12.75 GHz – 20 GHz), HSUPA**


#### **8.7.4 Spurious emissions conducted**

**Not performed – tests according to manufacturer test plan!**

#### **8.7.5 Block edge compliance**

**Not performed – tests according to manufacturer test plan!**

#### **8.7.6 Occupied bandwidth**

**Not performed – tests according to manufacturer test plan!**

## 8.8 Results UMTS band V

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

### 8.8.1 RF output power

#### Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Peak and RMS (Power in Burst)
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	10 MHz
Span:	Zero Span
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 22.913 CFR Part 2.1046	RSS 132
Nominal Peak Output Power	
+38.45 dBm In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

**Results:**

Output Power (conducted) WCDMA mode		
Frequency (MHz)	Average Output Power (dBm)	Peak to Average Ratio (dB)
826.4	Not performed!	
836.0		
846.6		
Measurement uncertainty	± 0.5 dB	

**Results: Voice**

Output Power (radiated) WCDMA mode	
Frequency (MHz)	Average Output Power (dBm) - ERP
826.4	22.0
836.0	22.4
846.6	23.0
Measurement uncertainty	± 2.0 dB

**Results: HSUPA**

Output Power (radiated) WCDMA mode	
Frequency (MHz)	Average Output Power (dBm) - ERP
826.4	23.6
836.0	24.5
846.6	24.7
Measurement uncertainty	± 2.0 dB

**Result: Passed**

## 8.8.2 Frequency stability

**Not performed – tests according to manufacturer test plan!**

### 8.8.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 846.6 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band V.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

#### Limits:

FCC	IC
CFR Part 22.917 CFR Part 2.1053	RSS 132
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P, Power in Watts)	
-13 dBm	

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band V (826.4 MHz, 836.0 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.



All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

Spurious Emission Level (dBm)								
Harmonic	Ch. 4132 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4180 Freq. (MHz)	Level [dBm]	Harmonic	Ch. 4233 Freq. (MHz)	Level [dBm]
2	1652.8	More than 20 dB below the limit!	2	1672.0	More than 20 dB below the limit!	2	1693.2	More than 20 dB below the limit!
3	2479.2		3	2508.0		3	2539.8	
4	3305.6		4	3344.0		4	3386.4	
5	4132.0		5	4180.0		5	4233.0	
6	4958.4		6	5016.0		6	5079.6	
7	5784.8		7	5852.0		7	5926.2	
8	6611.2		8	6688.0		8	6772.8	
9	7437.6		9	7524.0		9	7619.4	
10	8264.0		10	8360.0		10	8466.0	
Measurement uncertainty					± 3dB			


**Result:** **Passed**

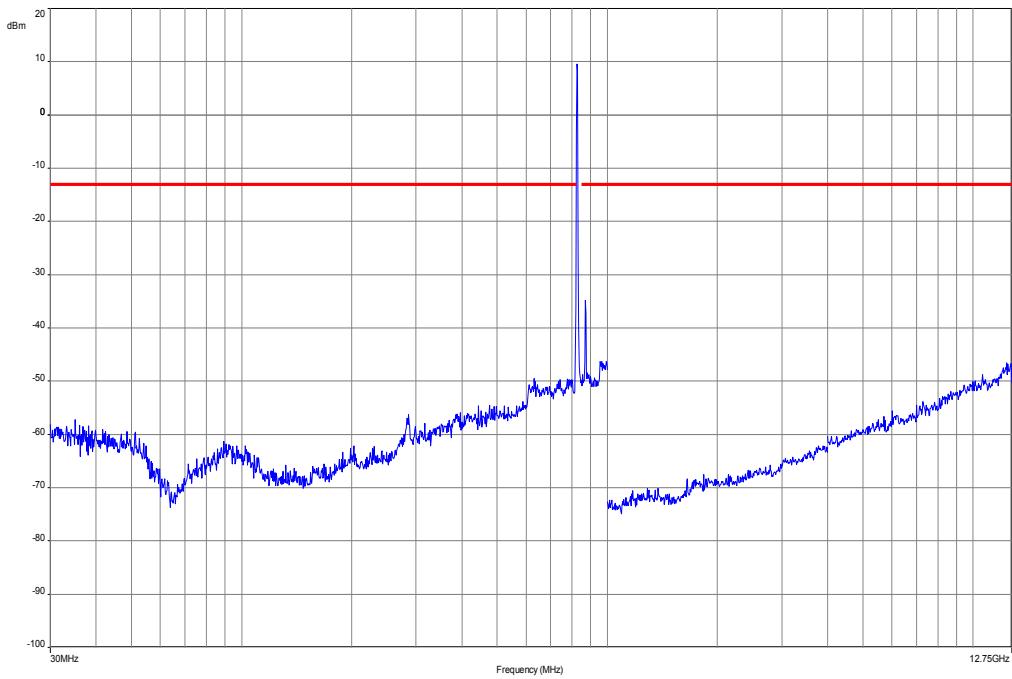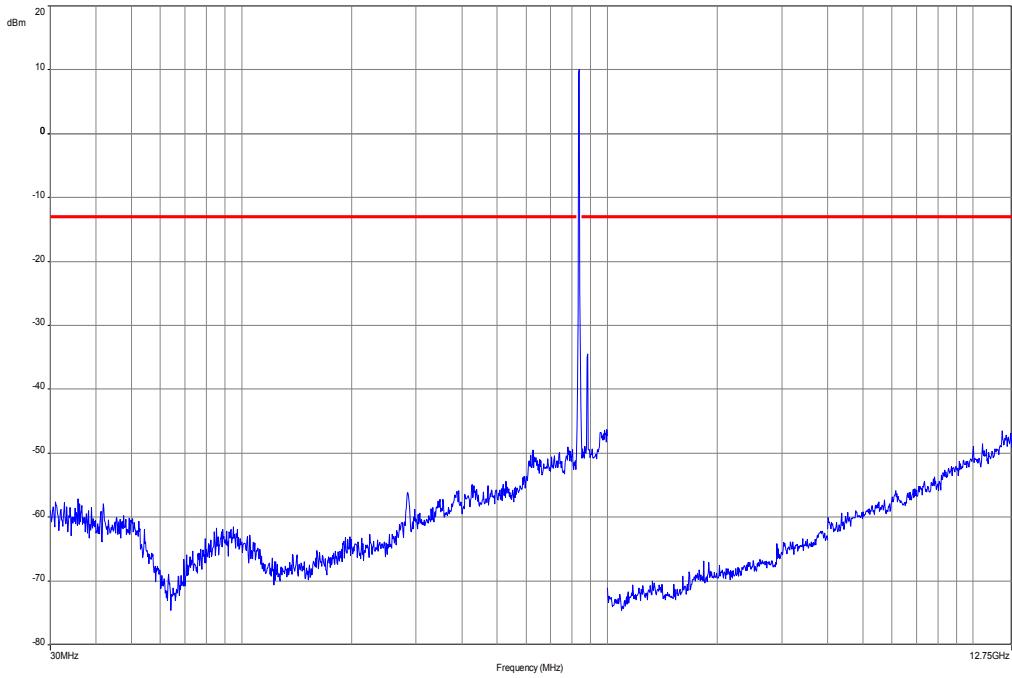**Plots:****Plot 1:** Channel 4132 (30 MHz – 12.75 GHz), voice**Plot 2:** Channel 4182 (30 MHz – 12.75 GHz), voice


**Plot 3:** Channel 4233 (30 MHz – 12.75 GHz), voice

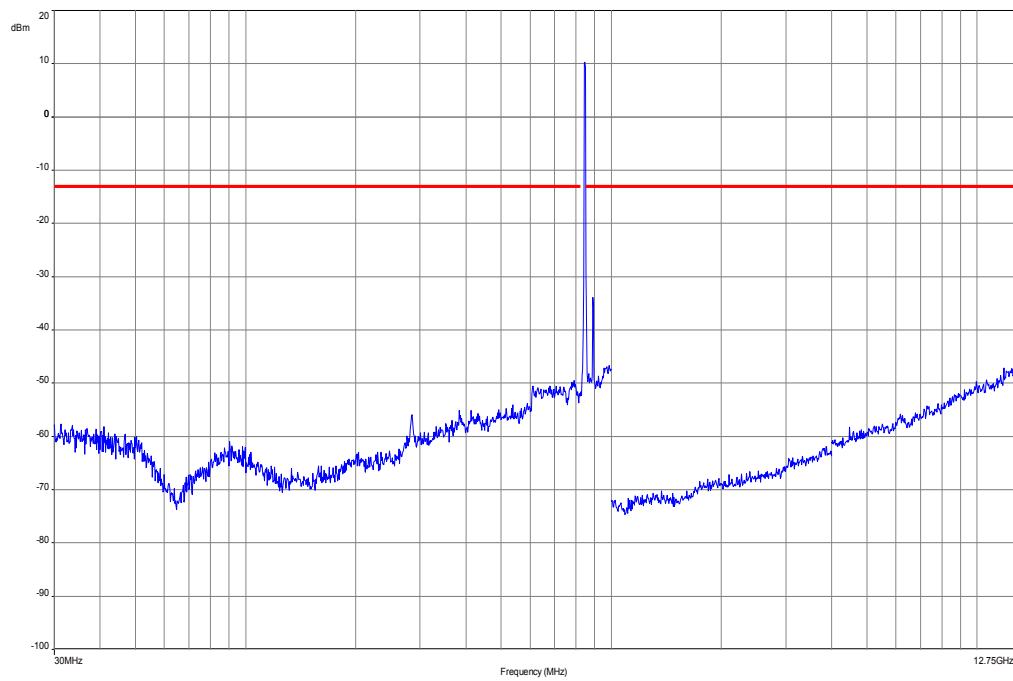


**Plot 4:** Channel 4132 (30 MHz – 12.75 GHz), HSUPA

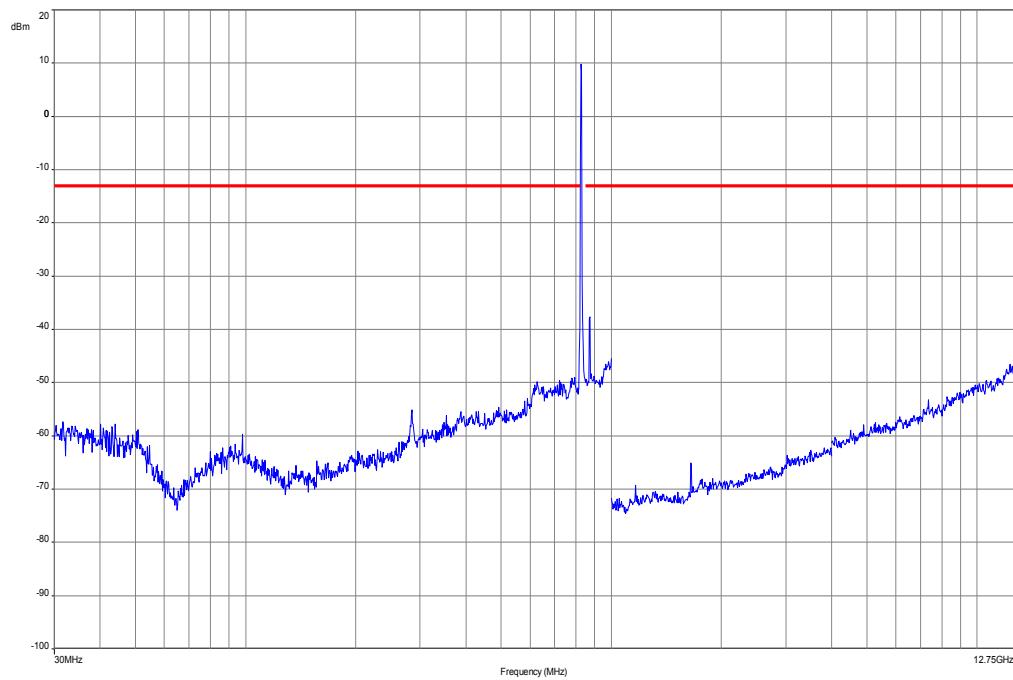

**Plot 5:** Channel 4182 (30 MHz – 12.75 GHz), HSUPA

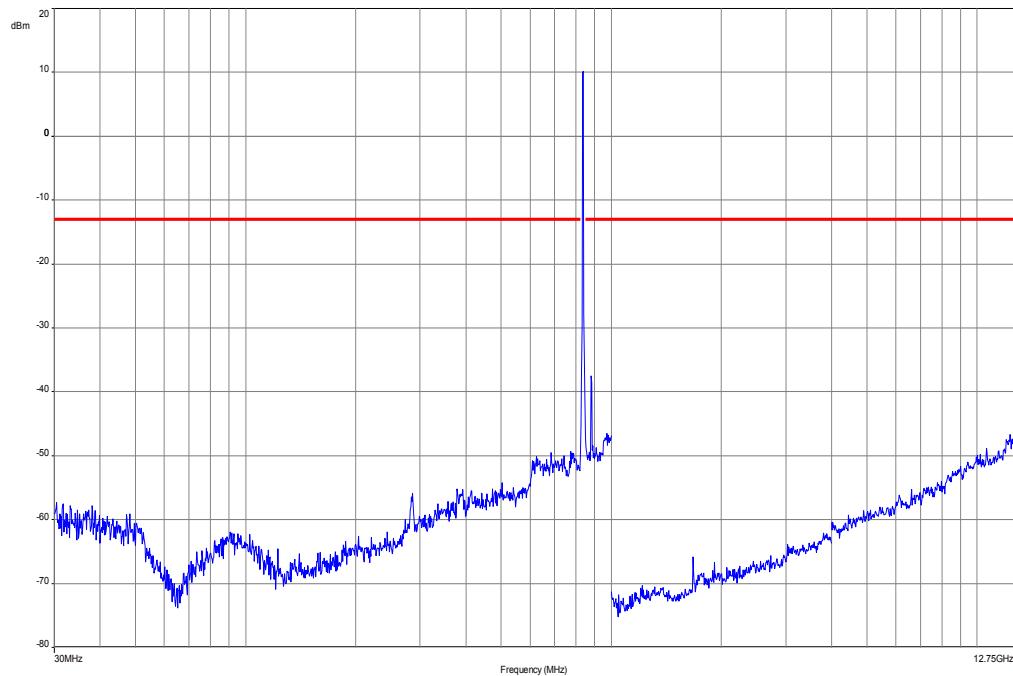

**Plot 6:** Channel 4233 (30 MHz – 12.75 GHz), HSUPA

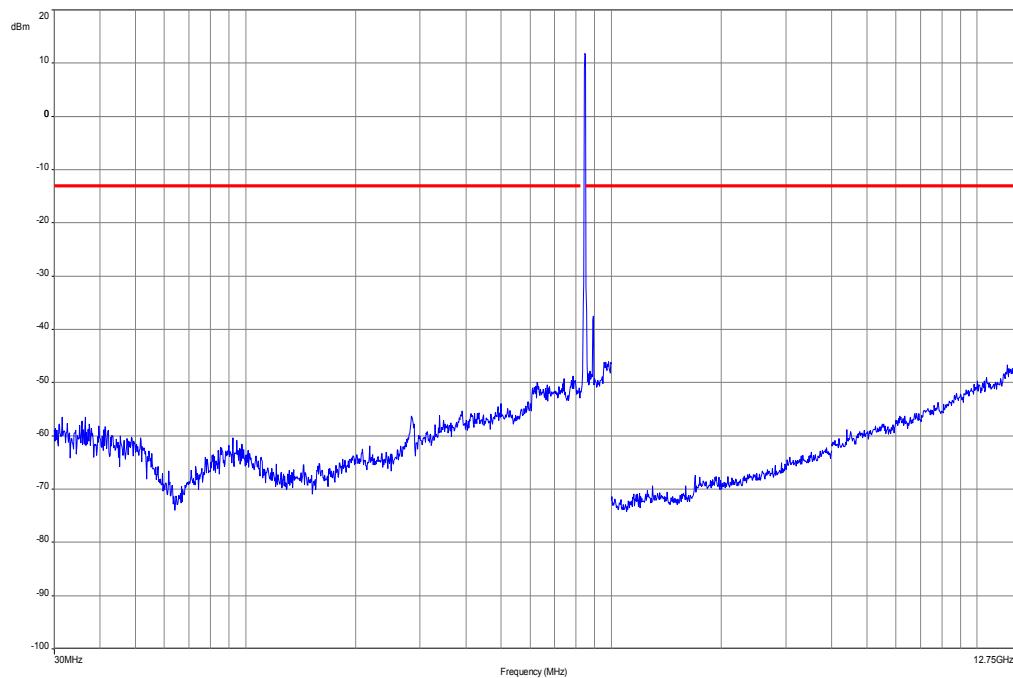

#### **8.8.4 Spurious emissions conducted**

**Not performed – tests according to manufacturer test plan!**

#### **8.8.5 Block edge compliance**

**Not performed – tests according to manufacturer test plan!**

#### **8.8.6 Occupied bandwidth**

**Not performed – tests according to manufacturer test plan!**

## 9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibrati on	Last Calibration	Next Calibration
1	n. a.	TRILOG Broadband Test- Antenna 30 MHz - 3 GHz	VULB916 3	Schwarzbe ck	295	300003787	k	12.04.2012	12.04.2014
2	n. a.	Spectrum- Analyzer	FSU26	R&S	200809	300003874	k	16.01.2013	16.01.2014
3	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	12.01.2012	12.01.2015
4	n. a.	Double-Ridged Waveguide Horn Antenna 1- 18.0GHz	3115	EMCO	8812-3088	300001032	vlKI!	08.05.2013	08.05.2015
5	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
6	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
7	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
8	9	Isolating Transformer	MPL IEC625 Bus Regeltrien ntravo	Erfi	91350	300001155	ne		
9	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
10	n. a.	Amplifier	js42- 00502650 -28-5a	Parzich GMBH	928979	300003143	ne		
11	n. a.	Band Reject filter	WRCG18 55/1910- 1835/192 5-40/8SS	Wainwright	7	300003350	ev		
12	n. a.	TRILOG Broadband Test- Antenna 30 MHz - 3 GHz	VULB916 3	Schwarzbe ck	371	300003854	vlKI!	14.10.2011	14.10.2014
13	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologi es	MY51210197	300004405	k	21.02.2013	21.02.2014
14	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
15	A025	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786	ne		
16	A027	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486	ne		
17	n. a.	Universal Communication Tester	CMU200	R&S	103992	300003231	vlKI!	21.08.2012	21.08.2014
18	n. a.	Wideband Radio Communication Tester	CMW500	R&S	102375	300004187_0	k	18.01.2013	18.01.2015

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 10 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A Document history**

Version	Applied changes	Date of release
1.0	Initial release	2013-06-17

**Annex B Further information****Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

## Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Beiliegene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

**Akkreditierung** 

Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen  
durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL  
VoIP und DECT  
Akustik  
Funk einschließlich WLAN  
Short Range Devices (SRD)  
RFID  
WiMax und Richtfunk  
Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)  
Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive  
Produktsicherheit  
SAR and Hearing Aid Compatibility (HAC)  
Umweltimulation  
Smart Card Terminals  
Bluetooth  
Wi-Fi - Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der  
Akkreditierungsnr. D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der  
Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013

  
Dr. Ingrid Eigner  
Dipl.-Ing. (FH) M. Eng.  
Akkreditierungsleiter

Seite 1 von 80 auf der Rückseite

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Gartenstraße 6  
60594 Frankfurt am Main

Standort Braunschweig  
Rundesallee 100  
38116 Braunschweig

Die aussageweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen  
Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate  
Weiterverbreitung des Deckblatts durch die umsichtig genannte Konformitätsbewertungsstelle in  
unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,  
die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung ist aufgrund der Richtlinie 2004/108/EG (AkkStelleG) vom  
31. Juli 2009 (BGBl. I S. 2629) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments  
und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Markteinführung  
im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30).  
Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der  
European co-operation for Accreditation (EA), der International Accreditation Forum (IAF) und  
der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen  
erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.nu](http://www.iaf.nu)

### Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>