

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 1(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

APPENDIX C2: SAR DISTRIBUTION PLOTS FOR HOTSPOT CONFIGURATION

Revision History		
Rev. Number	Date	Changes
Initial	Aug 15, 2013	-----
Rev 2	Dec 15, 2014	Added SAR plots for 802.11a Hotspot mode 1. Page 55-59

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 2(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

DTM/GSM 850

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 3(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - GPRS 850

Communication System: GSM 850; Communication System Band: GSM 850; Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.970$ S/m; $\epsilon_r = 53.234$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -

GSM850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 25.146 V/m; **Power Drift = 0.042 dB**

Fast SAR: SAR(1g) = 0.526 W/kg; SAR(10g) = 0.372 W/kg

Maximum value of SAR (interpolated) = 0.595 W/kg

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -

GSM850_chan190_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 25.146 V/m; **Power Drift = 0.042 dB**

Averaged SAR: SAR(1g) = 0.545 W/kg; SAR(10g) = 0.417 W/kg

Maximum value of SAR (interpolated) = 0.676 W/kg

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -

GSM850_chan190_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan 2 (36x46x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 25.146 V/m; **Power Drift = 0.044 dB**

Averaged SAR: SAR(1g) = 0.549 W/kg; SAR(10g) = 0.420 W/kg

Maximum value of SAR (interpolated) = 0.688 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 4(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

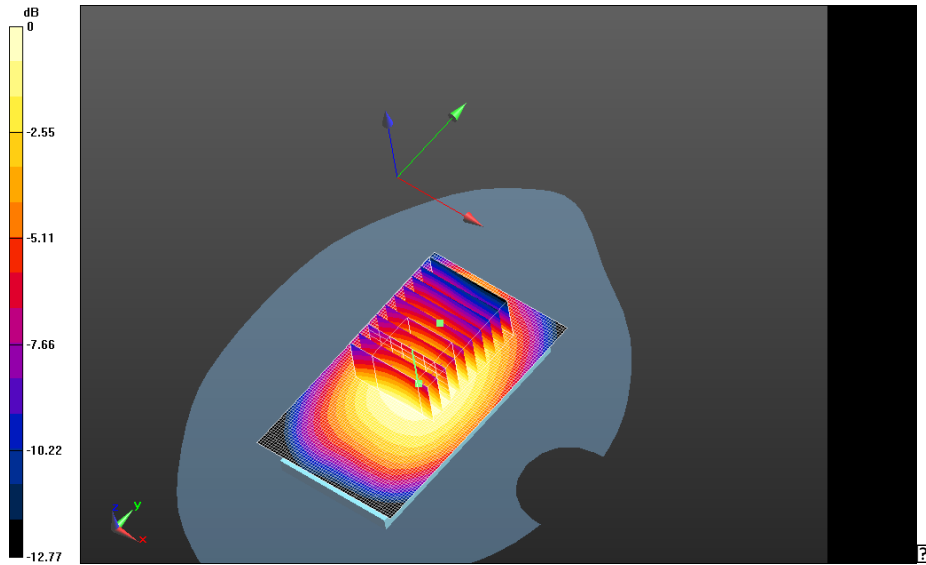

0 dB = 0.602 W/kg = -2.20 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 5(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -

GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated

grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 27.593 V/m; **Power Drift = -0.086 dB**

Fast SAR: SAR(1g) = 0.615 W/kg; SAR(10g) = 0.432 W/kg

Maximum value of SAR (interpolated) = 0.695 W/kg

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -


GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 27.593 V/m; **Power Drift = -0.086 dB**

Averaged SAR: SAR(1g) = 0.622 W/kg; SAR(10g) = 0.478 W/kg


Maximum value of SAR (interpolated) = 0.771 W/kg

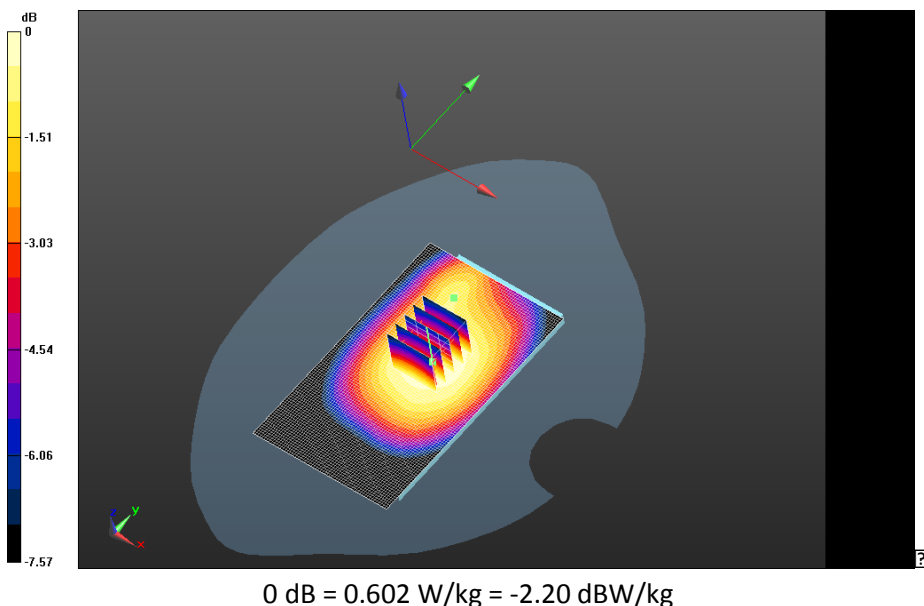

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 6(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-
Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 27.160 V/m; **Power Drift = -0.044 dB**


Fast SAR: SAR(1g) = 0.593 W/kg; SAR(10g) = 0.420 W/kg
Maximum value of SAR (interpolated) = 0.668 W/kg

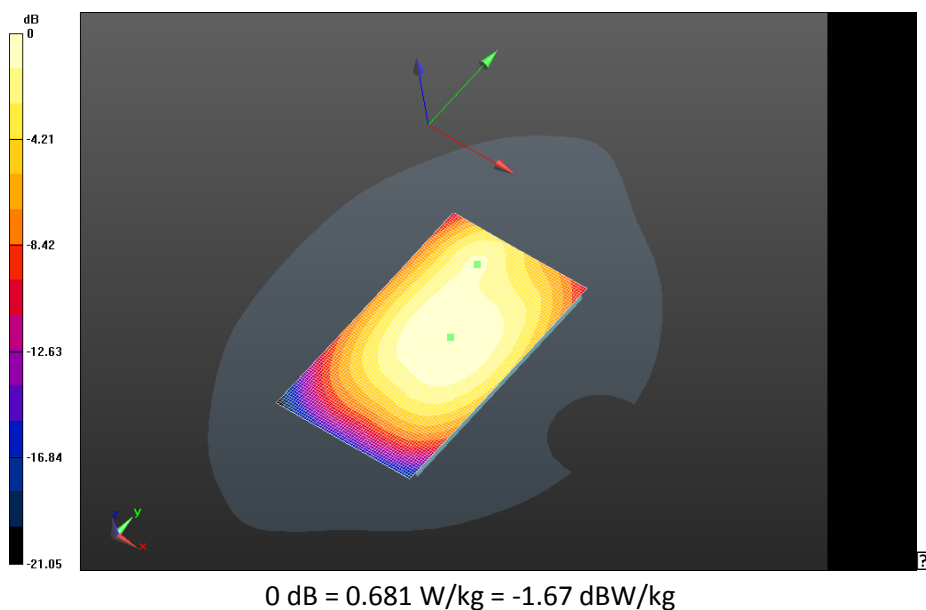

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 7(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_4-
Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 26.160 V/m; **Power Drift = -0.173 dB**

Fast SAR: SAR(1g) = 0.552 W/kg; SAR(10g) = 0.390 W/kg
Maximum value of SAR (interpolated) = 0.622 W/kg

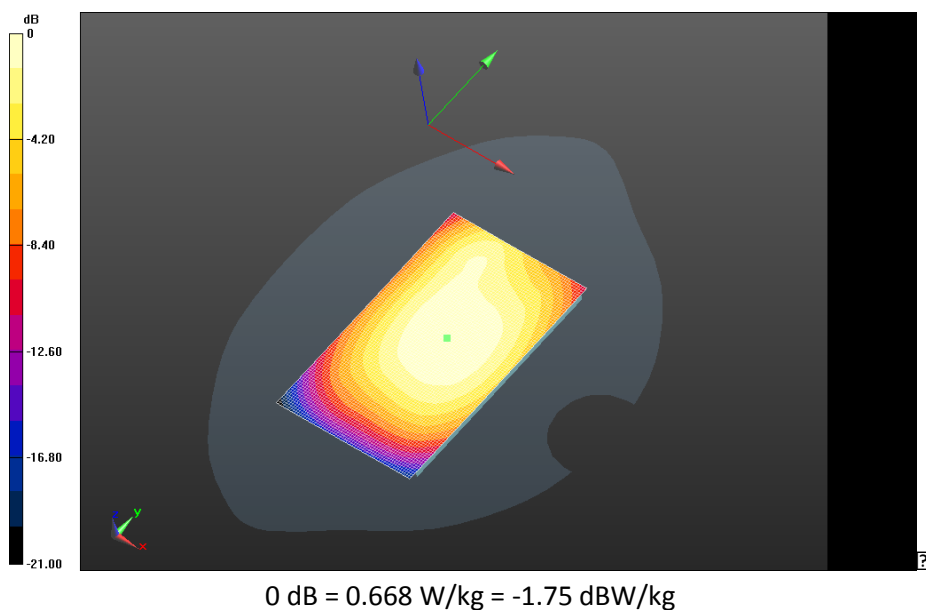

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 8(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Front -


GPRS850_chan190_amb_temp_23.6C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated

grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 26.348 V/m; **Power Drift = -0.146 dB**

Fast SAR: SAR(1g) = 0.566 W/kg; SAR(10g) = 0.401 W/kg

Maximum value of SAR (interpolated) = 0.637 W/kg

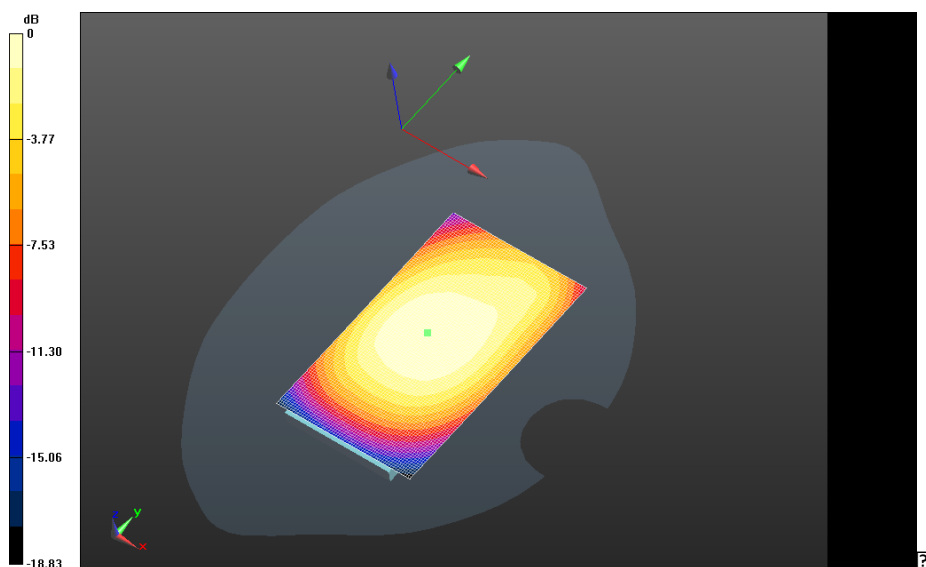

0 dB = 0.622 W/kg = -2.06 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 9(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Left -


GPRS850_chan190_amb_temp_22.9C_liq_temp_21.9C/Area Scan (31x91x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 24.200 V/m; **Power Drift = -1.04e-005 dB**

Fast SAR: SAR(1g) = 0.463 W/kg; SAR(10g) = 0.313 W/kg

Maximum value of SAR (interpolated) = 0.526 W/kg

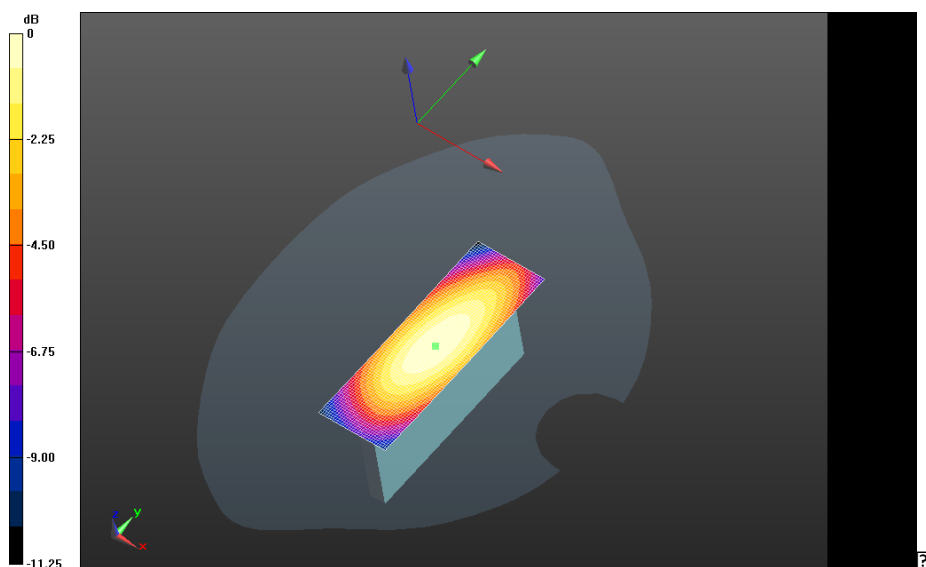


0 dB = 0.637 W/kg = -1.96 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 10(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Right -
GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (31x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 22.776 V/m; **Power Drift = 0.00474 dB**


Fast SAR: SAR(1g) = 0.416 W/kg; SAR(10g) = 0.281 W/kg
Maximum value of SAR (interpolated) = 0.476 W/kg

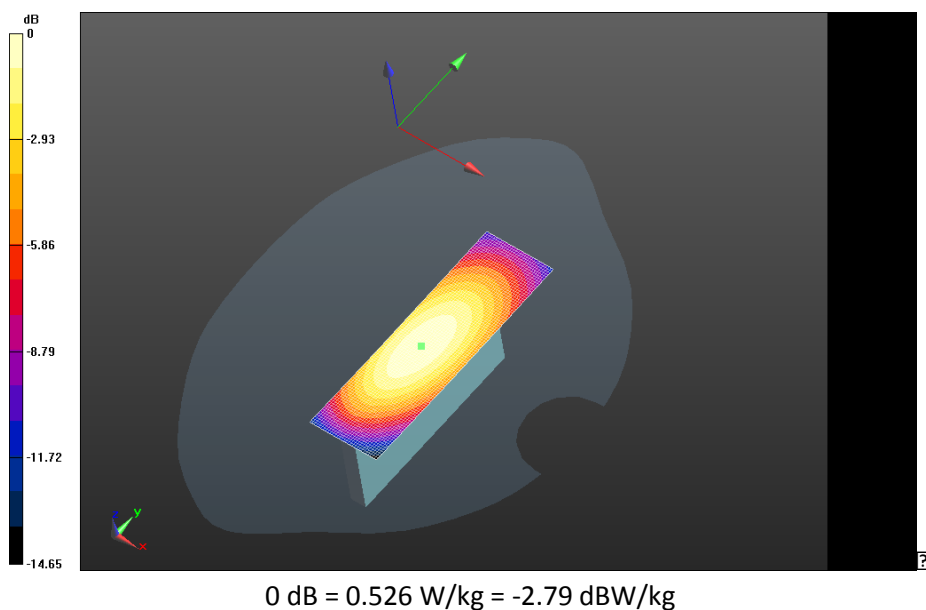

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 11(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 850/10mm Device Bottom -
GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (31x71x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 13.794 V/m; **Power Drift = -0.043 dB**

Fast SAR: SAR(1g) = 0.175 W/kg; SAR(10g) = 0.111 W/kg
Maximum value of SAR (interpolated) = 0.210 W/kg

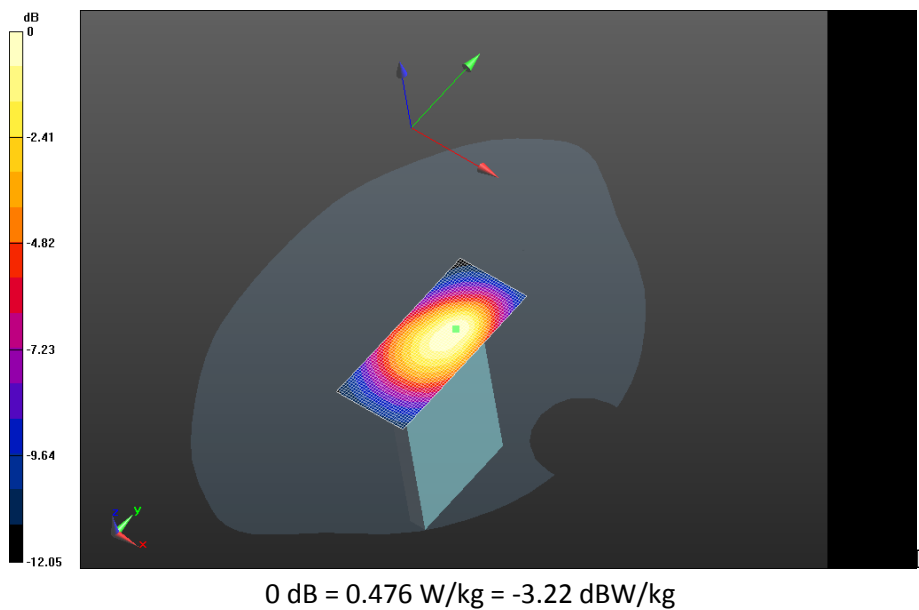

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 12(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

UMTS Band V

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 13(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS band V

Communication System: WCDMA FDD V; Communication System Band: UMTS band V;

Frequency: 836.4 MHz

Medium Parameters used: $f=836.4$ MHz; $\sigma = 0.970$ S/m; $\epsilon_r = 53.238$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS band V/10mm Device Back - UMTS_band

V_chan4182_amb_temp_23.5C_liq_temp_21.8C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 24.132 V/m; **Power Drift = -0.020 dB**

Mobile Hot Spot MSL - UMTS band V/10mm Device Back - UMTS_band

V_chan4182_amb_temp_23.5C_liq_temp_21.8C/Zoom Scan (26x21x36)/Cube 0: Interpolated


grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 24.132 V/m; **Power Drift = -0.020 dB**

Averaged SAR: SAR(1g) = 0.505 W/kg; SAR(10g) = 0.386 W/kg

Maximum value of SAR (interpolated) = 0.623 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 14(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

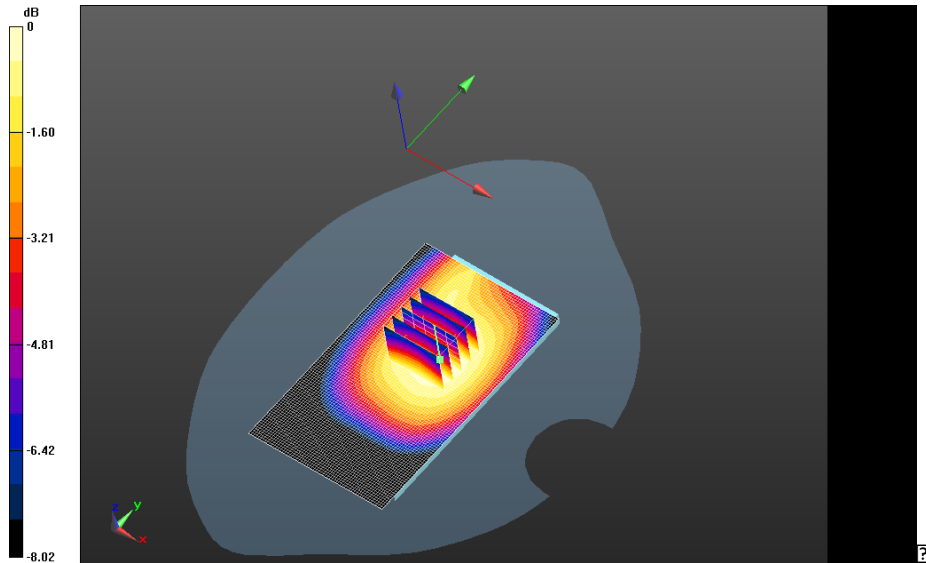


0 dB = 0.550 W/kg = -2.60 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 15(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - UMTS band V/10mm Device Front - UMTS_band
V_chan4182_amb_temp_23.4C_liq_temp_21.6C/Area Scan (61x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 24.544 V/m; **Power Drift = -0.052 dB**


Fast SAR: SAR(1g) = 0.489 W/kg; SAR(10g) = 0.347 W/kg
Maximum value of SAR (interpolated) = 0.552 W/kg

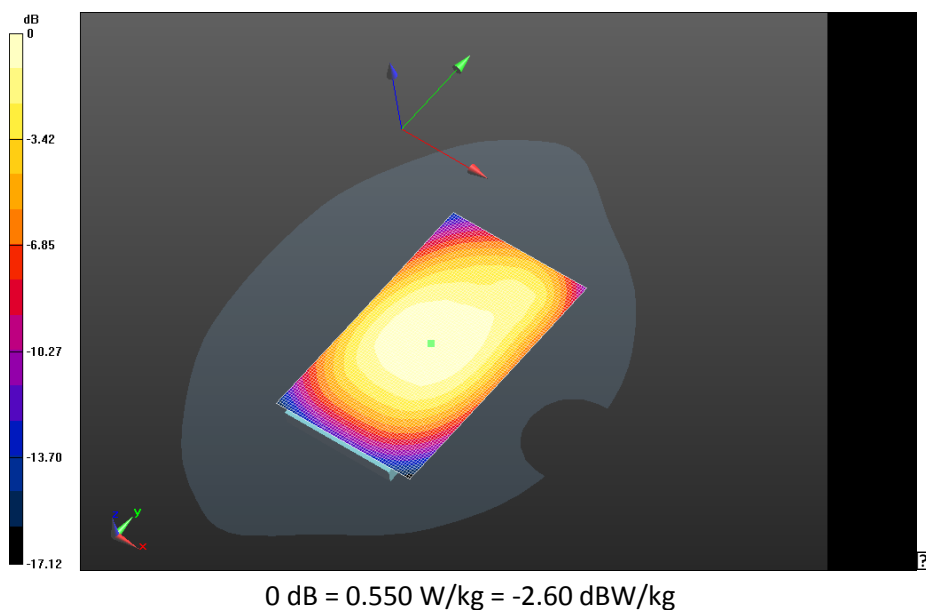

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 16(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - UMTS band V/10mm Device Left - UMTS_band
V_chan4182_amb_temp_23.2C_liq_temp_21.7C/Area Scan (31x91x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 22.598 V/m; **Power Drift = -0.013 dB**


Fast SAR: SAR(1g) = 0.406 W/kg; SAR(10g) = 0.275 W/kg
Maximum value of SAR (interpolated) = 0.461 W/kg

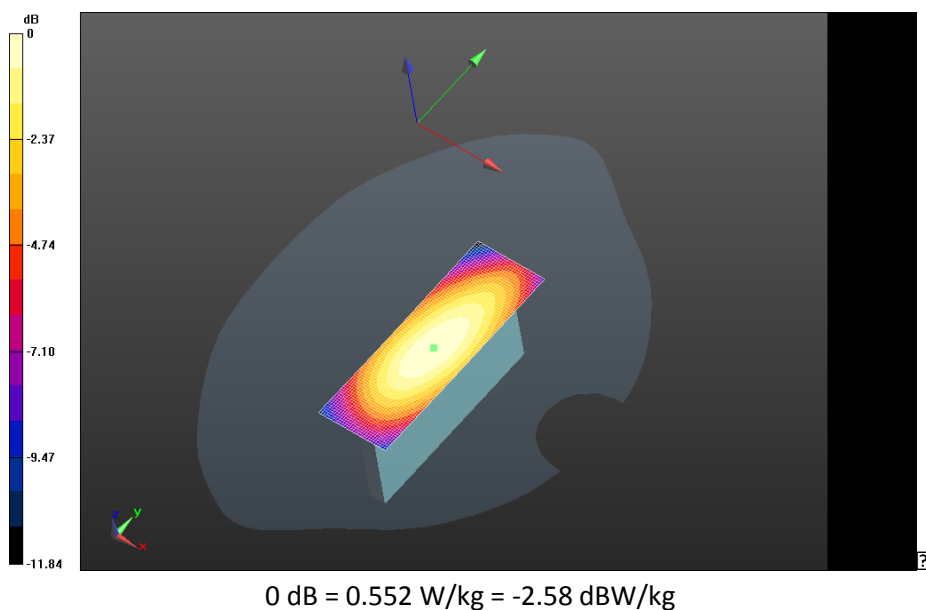

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 17(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - UMTS band V/10mm Device Right - UMTS_band
V_chan4182_amb_temp_23.1C_liq_temp_21.5C/Area Scan (31x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 21.179 V/m; **Power Drift = 0.090 dB**


Fast SAR: SAR(1g) = 0.368 W/kg; SAR(10g) = 0.248 W/kg
Maximum value of SAR (interpolated) = 0.422 W/kg

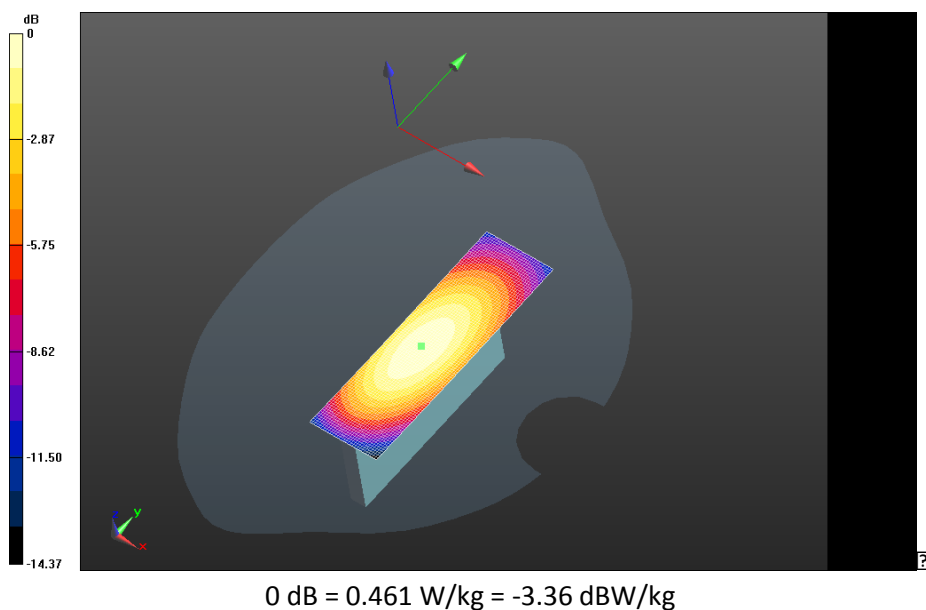

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 18(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - UMTS band V/10mm Device Bottom - UMTS_band
V_chan4182_amb_temp_23.C_liq_temp_21.4C/Area Scan (31x71x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 13.833 V/m; **Power Drift = -0.149 dB**

Fast SAR: SAR(1g) = 0.166 W/kg; SAR(10g) = 0.105 W/kg
Maximum value of SAR (interpolated) = 0.197 W/kg

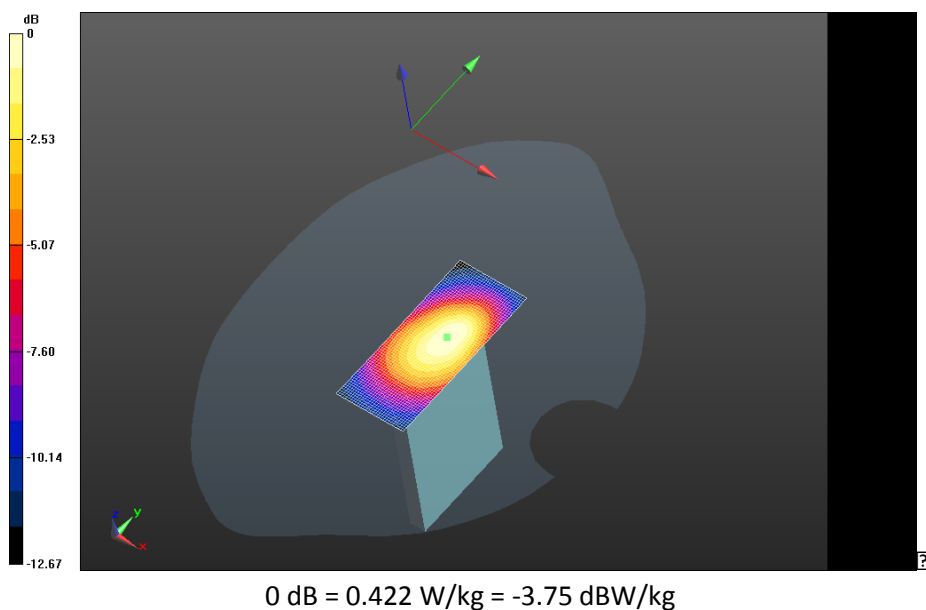

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 19(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

DTM/GSM 1900

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 20(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - GPRS 1900

Communication System: GSM 1900; Communication System Band: GSM 1900; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 50.997$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back -

GSM1900_chan661_amb_temp_24.2C_liq_temp_22.6C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.388 V/m; **Power Drift = 0.015 dB**

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back -

GSM1900_chan661_amb_temp_24.2C_liq_temp_22.6C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.388 V/m; **Power Drift = 0.054 dB**

Averaged SAR: SAR(1g) = 0.512 W/kg; SAR(10g) = 0.302 W/kg

Maximum value of SAR (interpolated) = 0.867 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 21(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

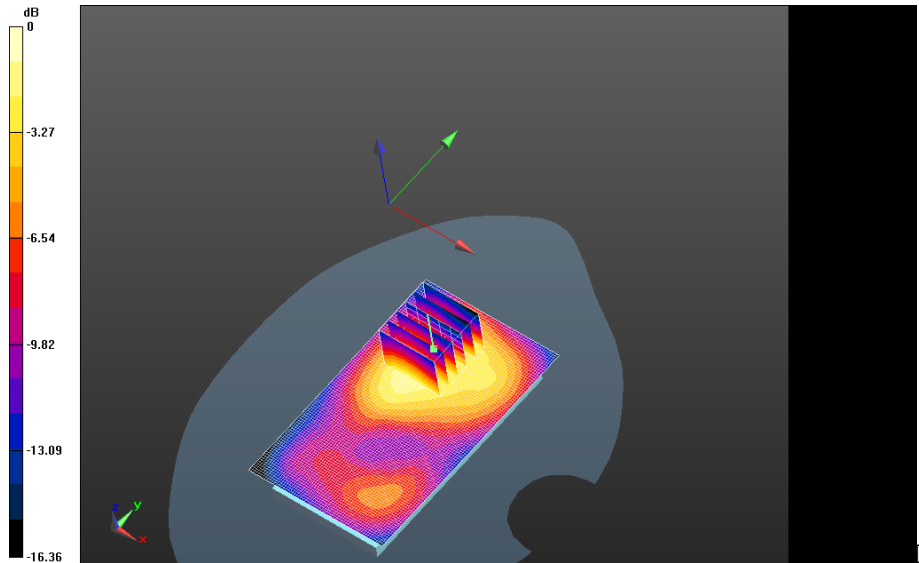


0 dB = 0.624 W/kg = -2.05 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 22(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back -
GPRS1900_chan661_amb_temp_24.4C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 9.303 V/m; **Power Drift = -0.106 dB**


Fast SAR: SAR(1g) = 0.488 W/kg; SAR(10g) = 0.276 W/kg
Maximum value of SAR (interpolated) = 0.611 W/kg

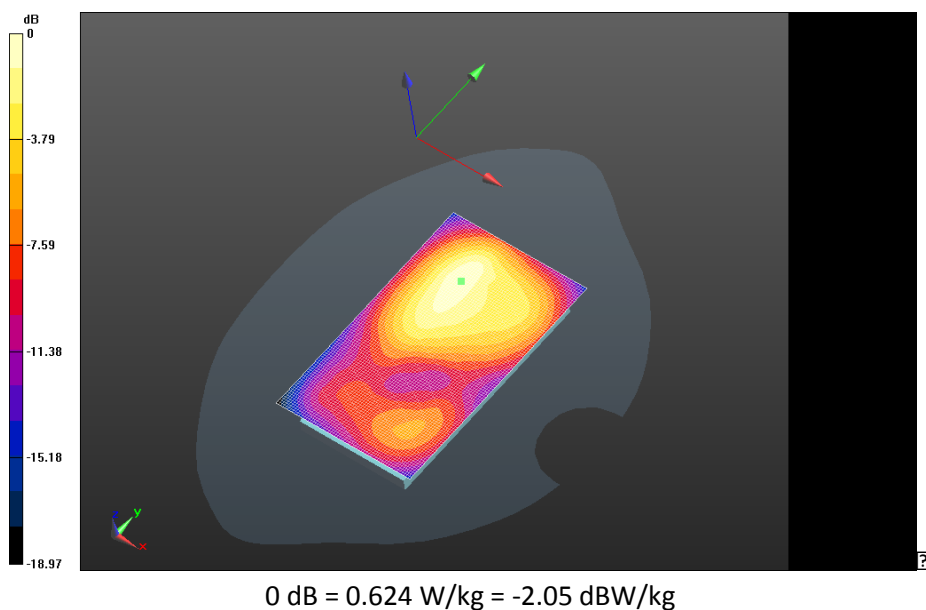

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 23(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_3-
Slots_chan661_amb_temp_24.5C_liq_temp_22.8C/Area Scan (61x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 9.011 V/m; **Power Drift = 0.129 dB**


Fast SAR: SAR(1g) = 0.433 W/kg; SAR(10g) = 0.256 W/kg
Maximum value of SAR (interpolated) = 0.529 W/kg

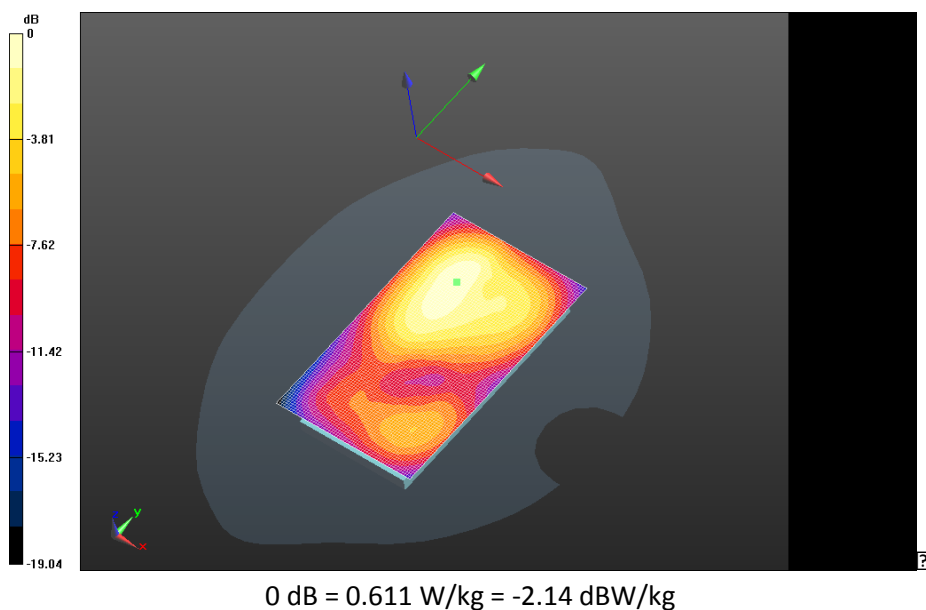

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 24(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-
Slots_chan661_amb_temp_24.4C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 8.779 V/m; **Power Drift = -0.086 dB**


Fast SAR: SAR(1g) = 0.406 W/kg; SAR(10g) = 0.241 W/kg
Maximum value of SAR (interpolated) = 0.494 W/kg

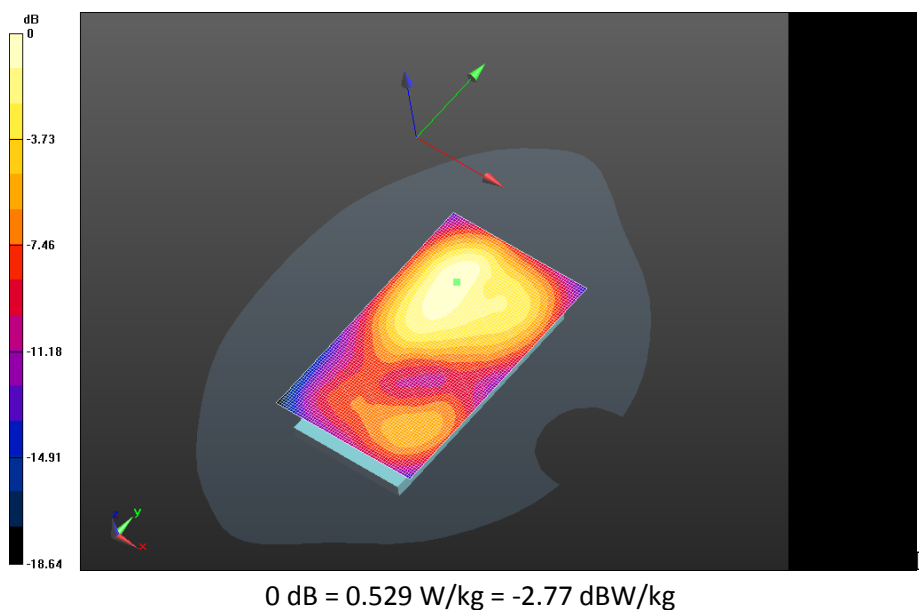

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 25(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Front -
GSM1900_chan661_amb_temp_24.3C_liq_temp_22.8C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 8.293 V/m; **Power Drift = 0.052 dB**


Fast SAR: SAR(1g) = 0.330 W/kg; SAR(10g) = 0.204 W/kg
Maximum value of SAR (interpolated) = 0.396 W/kg

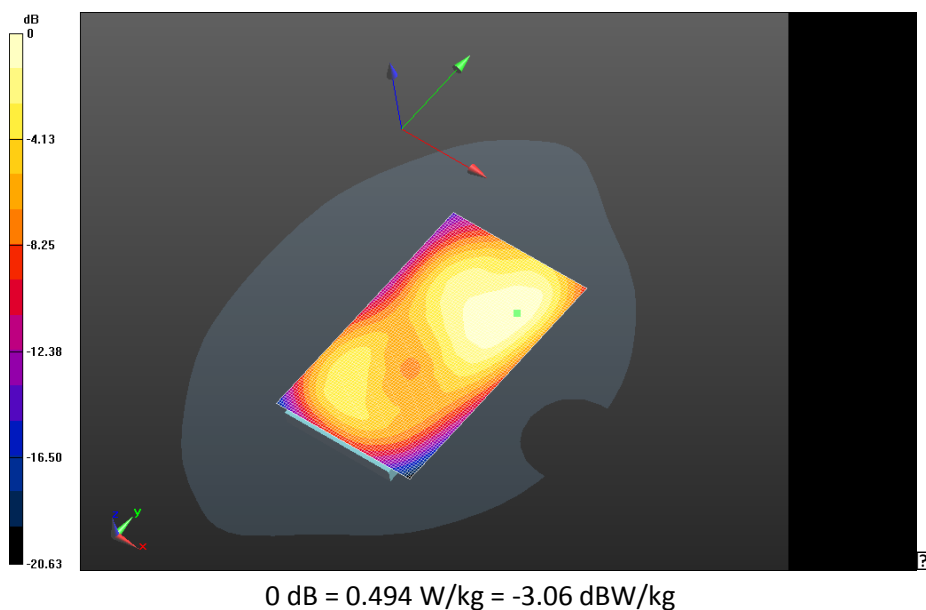

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 26(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Left -
GSM1900_chan661_amb_temp_24.2C_liq_temp_22.8C/Area Scan (31x91x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.109 V/m; **Power Drift = 0.054 dB**


Fast SAR: SAR(1g) = 0.279 W/kg; SAR(10g) = 0.160 W/kg
Maximum value of SAR (interpolated) = 0.339 W/kg

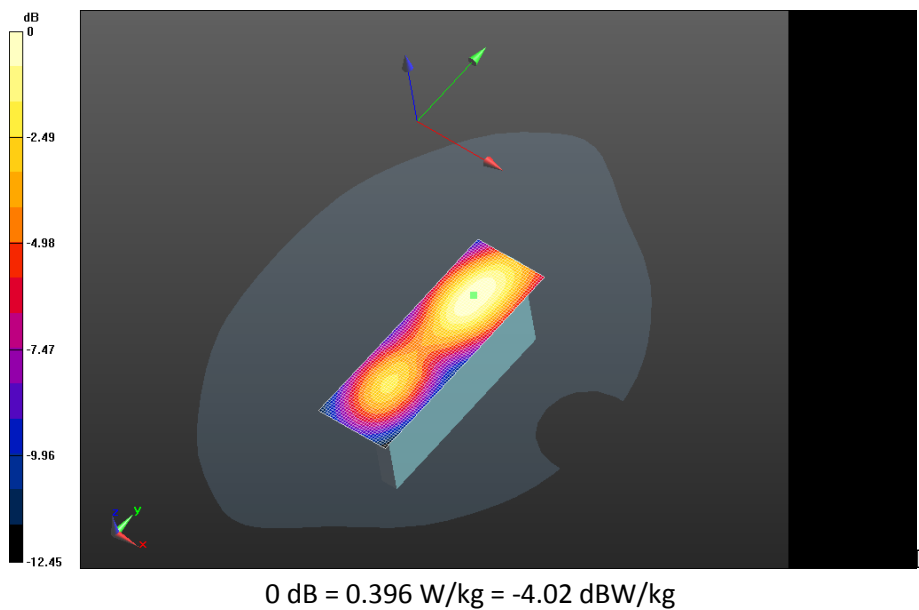

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 27(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Right -
GSM1900_chan661_amb_temp_24.2C_liq_temp_22.5C/Area Scan (31x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.613 V/m; **Power Drift = 0.029 dB**


Fast SAR: SAR(1g) = 0.0804 W/kg; SAR(10g) = 0.0484 W/kg
Maximum value of SAR (interpolated) = 0.0966 W/kg

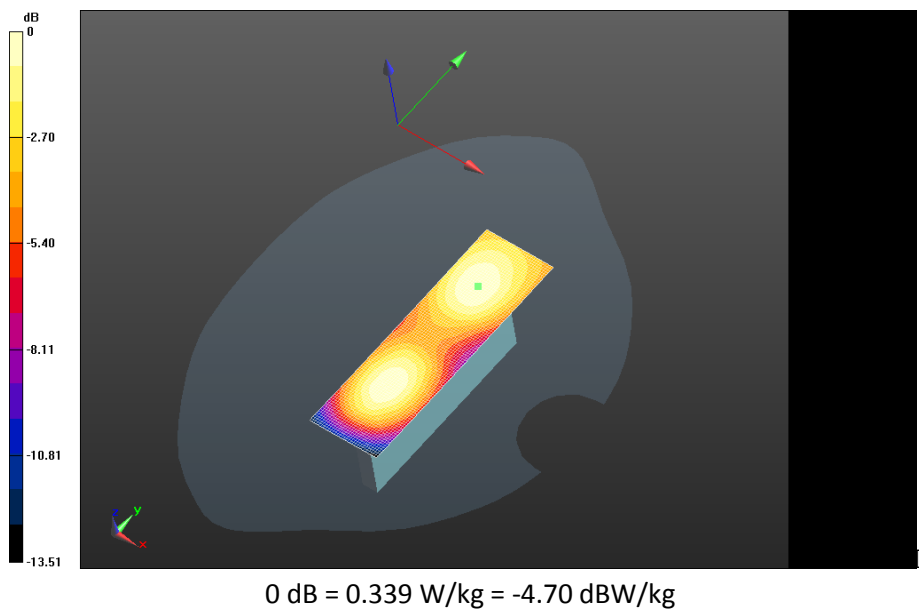

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 28(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - GPRS 1900/10mm Device Bottom -
GSM1900_chan661_amb_temp_24.3C_liq_temp_22.6C/Area Scan (31x71x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.946 V/m; **Power Drift = -0.022 dB**

Fast SAR: SAR(1g) = 0.170 W/kg; SAR(10g) = 0.0973 W/kg
Maximum value of SAR (interpolated) = 0.211 W/kg

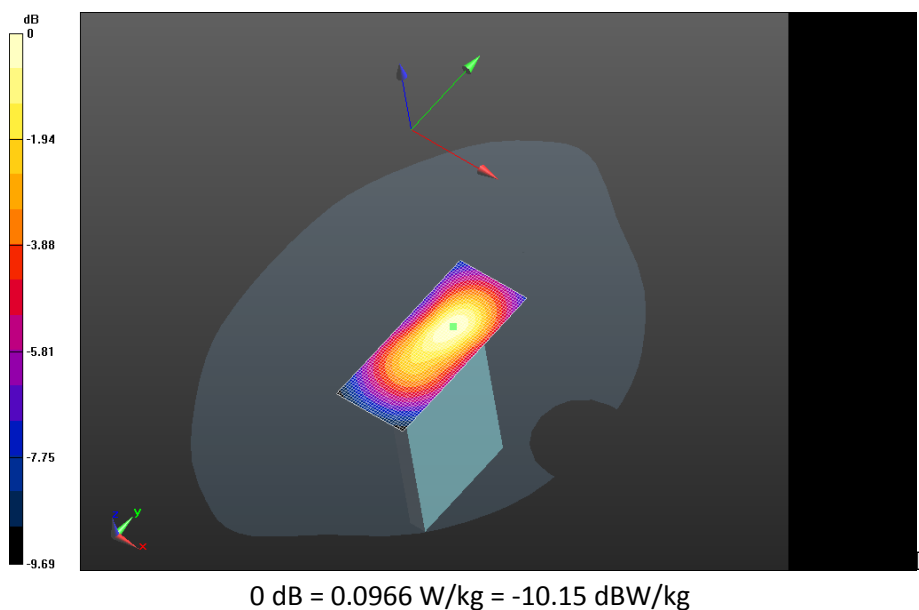

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 29(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

UMTS Band II

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 30(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 8/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1852.4 MHz

Medium Parameters used: $f=1852.4$ MHz; $\sigma = 1.502$ S/m; $\epsilon_r = 51.051$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9262_amb_temp_22.8C_liq_temp_22.1C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.746 W/kg

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9262_amb_temp_22.8C_liq_temp_22.1C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 10.608 V/m; **Power Drift = 0.127 dB**

Averaged SAR: SAR(1g) = 0.626 W/kg; SAR(10g) = 0.379 W/kg

Maximum value of SAR (interpolated) = 1.02 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 31(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

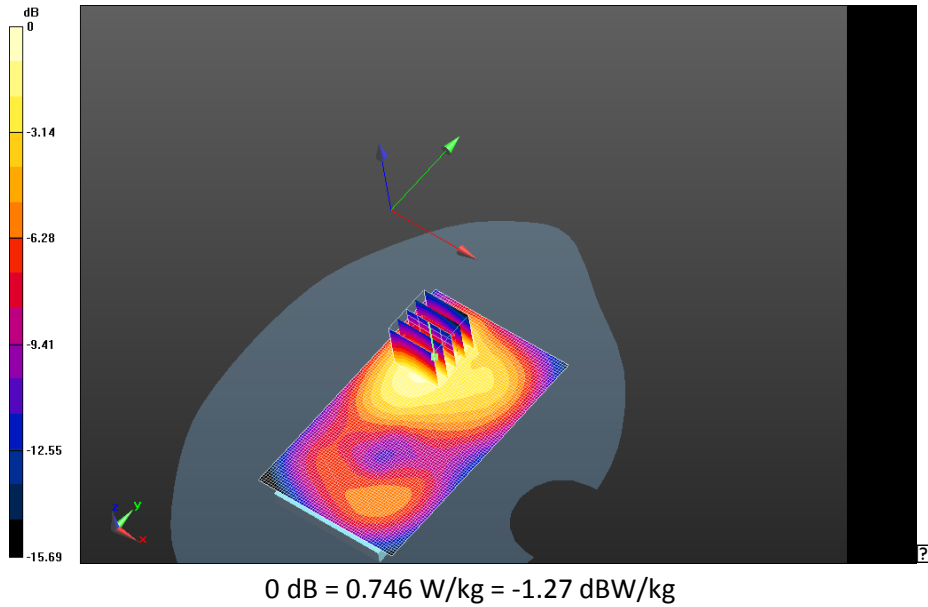

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 32(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 50.997$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9400_amb_temp_23.0C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 12.928 V/m; **Power Drift = 0.049 dB**

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9400_amb_temp_23.0C_liq_temp_22.4C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 12.928 V/m; **Power Drift = 0.049 dB**

Averaged SAR: SAR(1g) = 0.790 W/kg; SAR(10g) = 0.467 W/kg

Maximum value of SAR (interpolated) = 1.32 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 33(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

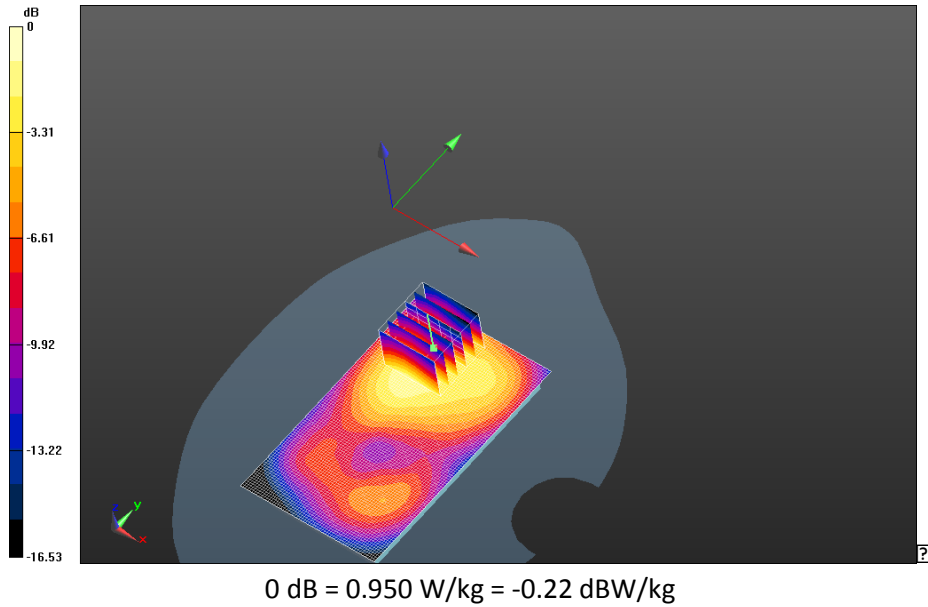

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 34(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 8/15/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II Extra

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1852.4 MHz

Medium Parameters used: $f=1852.4$ MHz; $\sigma = 1.502$ S/m; $\epsilon_r = 51.051$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II Extra/10mm Device Back -

UMTS_II_chan9538_amb_temp_23.1C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated

grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.779 W/kg

Mobile Hot Spot MSL - UMTS II Extra/10mm Device Back -

UMTS_II_chan9538_amb_temp_23.1C_liq_temp_22.4C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 10.938 V/m; **Power Drift = -0.100 dB**

Averaged SAR: SAR(1g) = 0.680 W/kg; SAR(10g) = 0.405 W/kg

Maximum value of SAR (interpolated) = 1.12 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 35(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

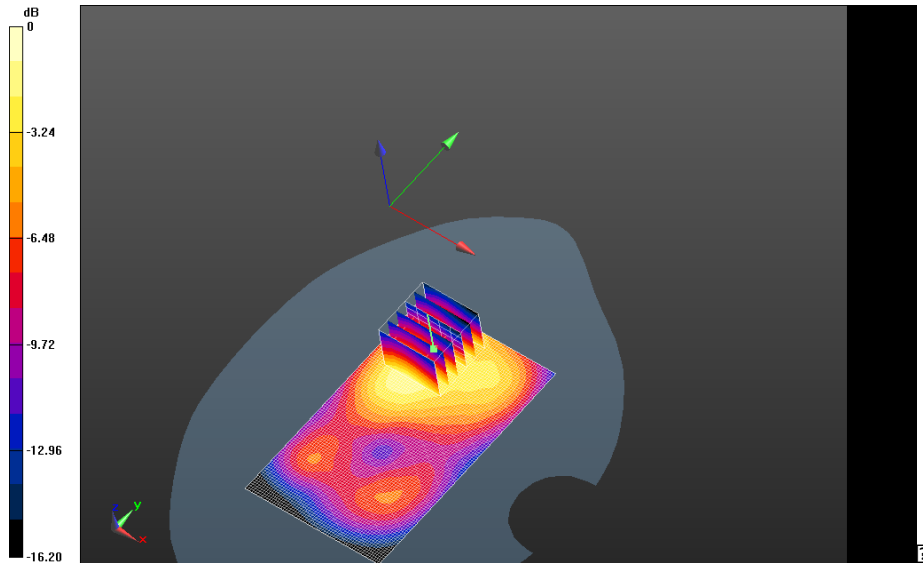

0 dB = 0.746 W/kg = -1.27 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 36(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 50.997$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Front -

UMTS_II_chan9400_amb_temp_23.0C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 10.459 V/m; **Power Drift = 0.00202 dB**

Mobile Hot Spot MSL - UMTS II/10mm Device Front -

UMTS_II_chan9400_amb_temp_23.0C_liq_temp_22.5C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 10.459 V/m; **Power Drift = 0.00202 dB**

Averaged SAR: SAR(1g) = 0.740 W/kg; SAR(10g) = 0.447 W/kg

Maximum value of SAR (interpolated) = 1.22 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 37(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

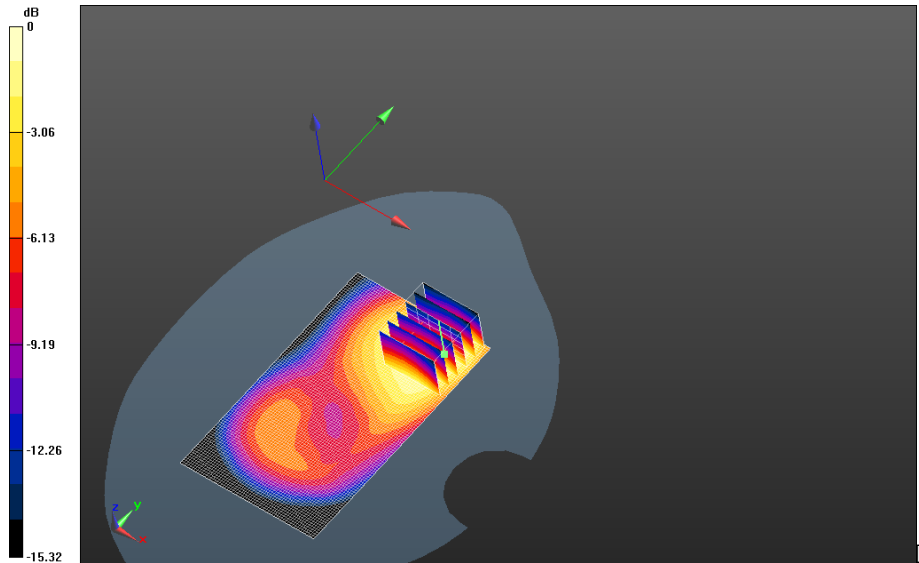

0 dB = 0.950 W/kg = -0.22 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 38(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 50.997$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Left -


UMTS_II_chan9400_amb_temp_24.1C_liq_temp_22.5C/Area Scan (31x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 10.727 V/m; **Power Drift = 0.024 dB**

Fast SAR: SAR(1g) = 0.484 W/kg; SAR(10g) = 0.274 W/kg

Maximum value of SAR (interpolated) = 0.594 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 39(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

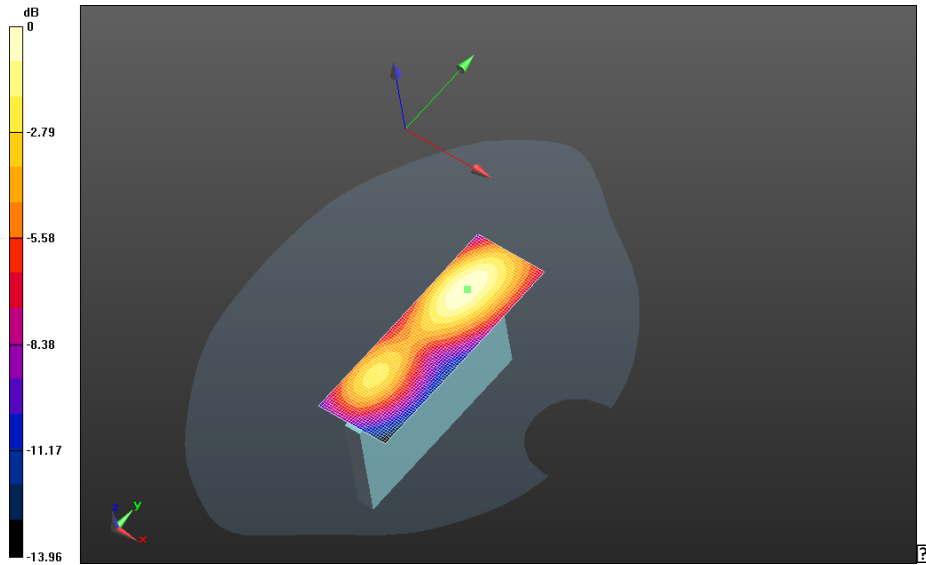

0 dB = 0.890 W/kg = -0.51 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 40(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 50.997$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Right -


UMTS_II_chan9400_amb_temp_24.1C_liq_temp_22.5C/Area Scan (31x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 6.910 V/m; **Power Drift = 0.033 dB**

Fast SAR: SAR(1g) = 0.122 W/kg; SAR(10g) = 0.0733 W/kg

Maximum value of SAR (interpolated) = 0.147 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 41(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

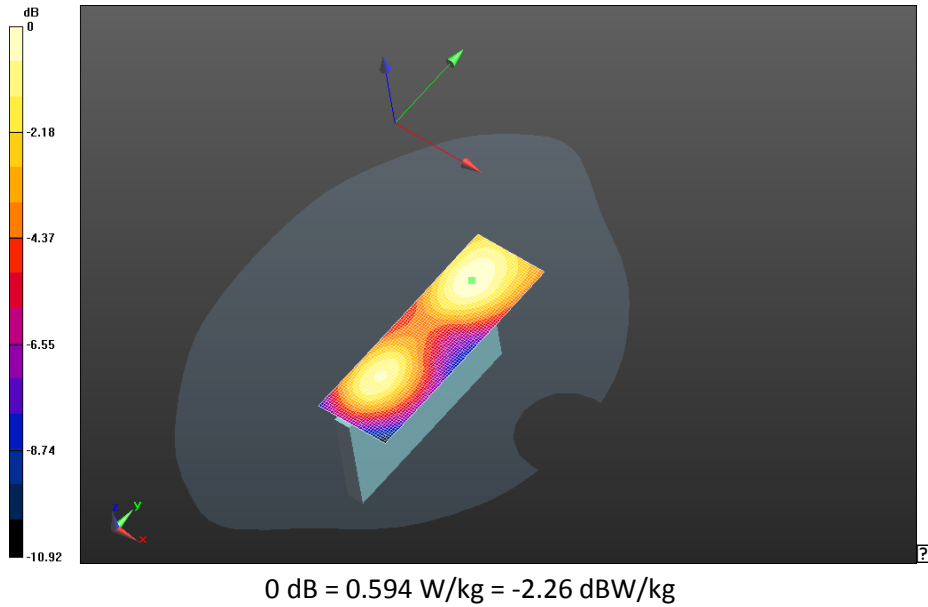

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 42(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE461

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 50.997$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Bottom -


UMTS_II_chan9400_amb_temp_24.1C_liq_temp_22.5C/Area Scan (31x71x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 14.277 V/m; **Power Drift = -0.077 dB**

Fast SAR: SAR(1g) = 0.265 W/kg; SAR(10g) = 0.154 W/kg

Maximum value of SAR (interpolated) = 0.327 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 43(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

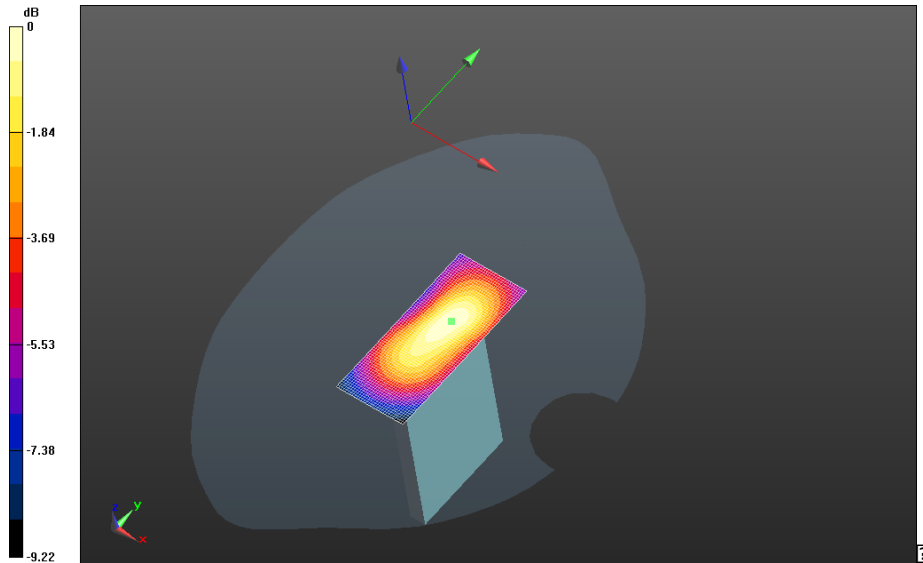

0 dB = 0.147 W/kg = -8.33 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 44(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

802.11b

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 45(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/24/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE4E2

Configuration: Mobile Hot Spot MSL - 802.11b

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 50.993$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.35,4.35,4.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - 802.11b/10mm Device Back -

802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Area Scan (81x131x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 6.575 V/m; **Power Drift = 0.102 dB**

Mobile Hot Spot MSL - 802.11b/10mm Device Back -

802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Zoom Scan (36x36x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 9.801 V/m; **Power Drift = 0.102 dB**

Averaged SAR: SAR(1g) = 0.165 W/kg; SAR(10g) = 0.0836 W/kg

Maximum value of SAR (interpolated) = 0.360 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 46(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

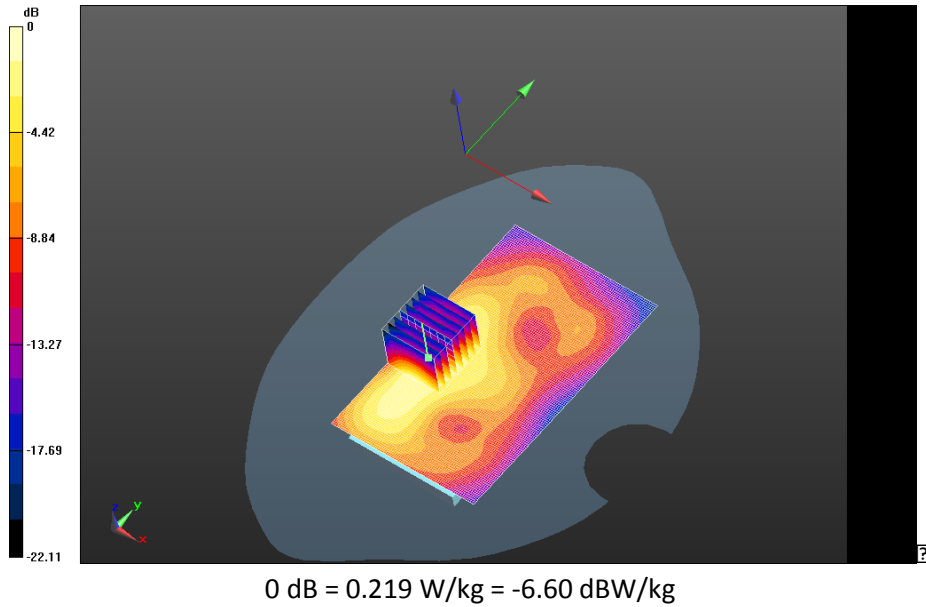

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 47(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - 802.11b/10mm Device Front -

802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Area Scan (81x131x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 3.380 V/m; **Power Drift = 0.182 dB**

Mobile Hot Spot MSL - 802.11b/10mm Device Front -


802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 3.380 V/m; **Power Drift = 0.182 dB**

Averaged SAR: SAR(1g) = 0.0386 W/kg; SAR(10g) = 0.0204 W/kg

Maximum value of SAR (interpolated) = 0.0782 W/kg

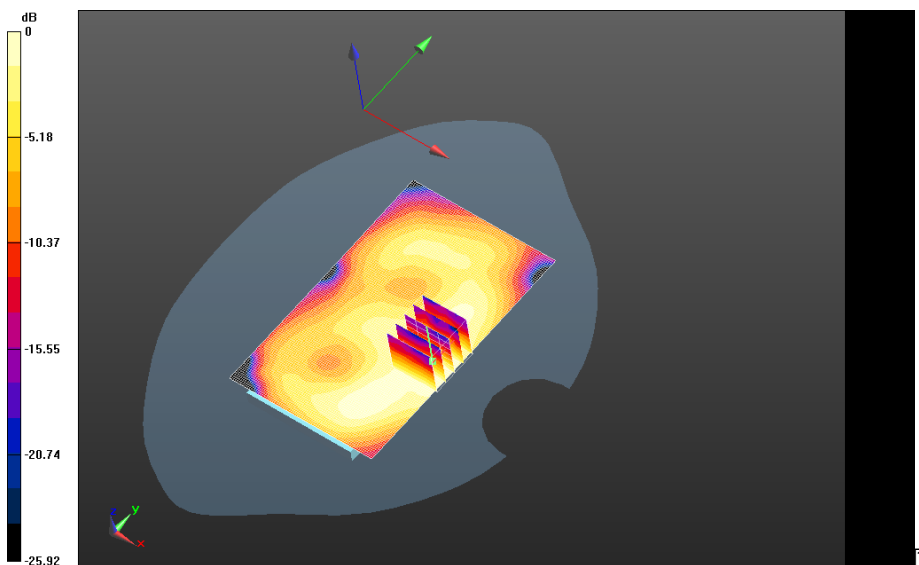

0 dB = 0.219 W/kg = -6.60 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 48(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - 802.11b/10mm Device Left -


802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Area Scan (41x131x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 9.845 V/m; **Power Drift = 0.024 dB**

Fast SAR: SAR(1g) = 0.154 W/kg; SAR(10g) = 0.0786 W/kg

Maximum value of SAR (interpolated) = 0.205 W/kg

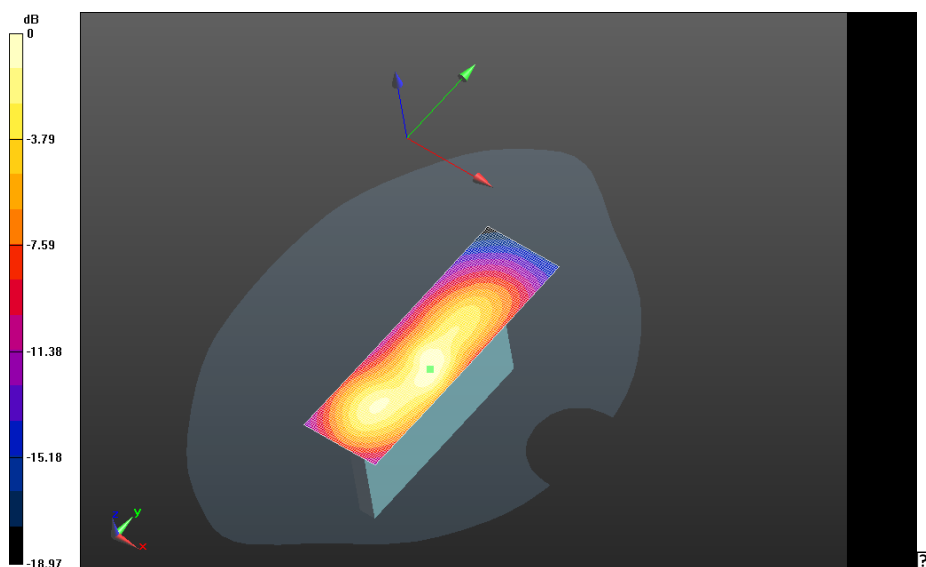


0 dB = 0.0422 W/kg = -13.75 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 49(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - 802.11b/10mm Device Right -
802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Area Scan (41x131x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Reference Value = 1.443 V/m; **Power Drift = -0.097 dB**

Fast SAR: SAR(1g) = 0.0132 W/kg; SAR(10g) = 0.00665 W/kg
Maximum value of SAR (interpolated) = 0.0174 W/kg

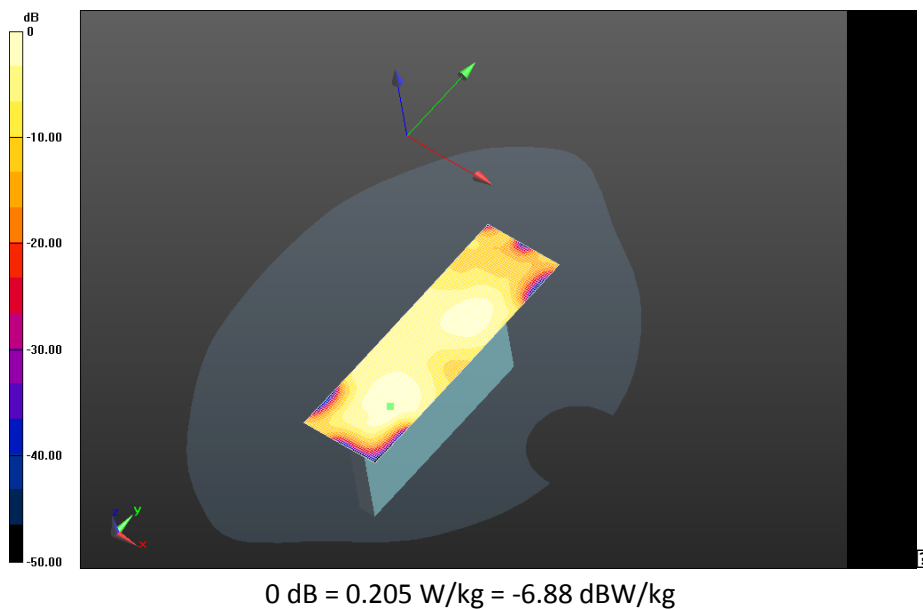

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 50(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - 802.11b/10mm Device Bottom -


802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Area Scan (41x91x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 2.523 V/m; **Power Drift = -0.101 dB**

Fast SAR: SAR(1g) = 0.0101 W/kg; SAR(10g) = 0.00556 W/kg

Maximum value of SAR (interpolated) = 0.0125 W/kg

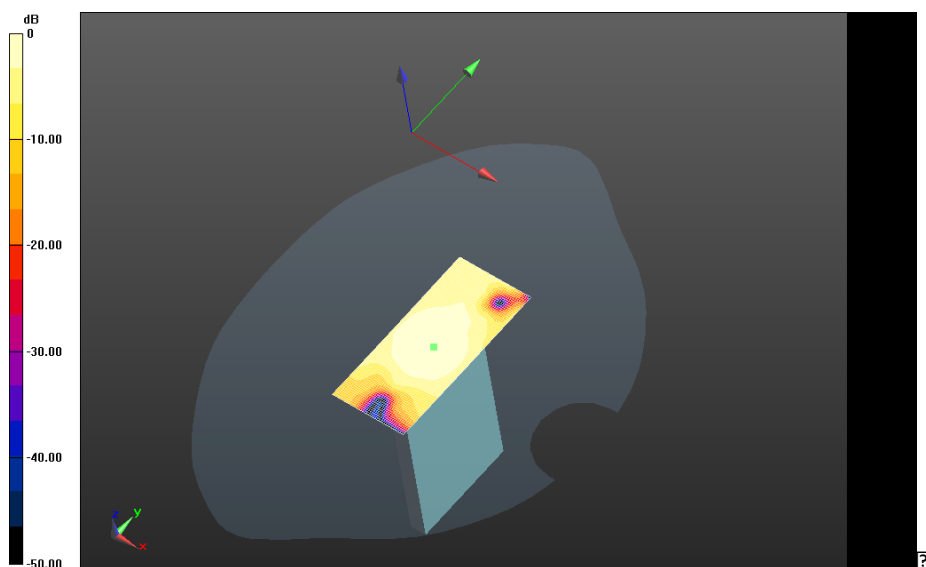

0 dB = 0.0174 W/kg = -17.59 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 51(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hot Spot MSL - 802.11b/10mm Device Top -


802.11b_chan6_amb_temp_23.5C_liq_temp_22.4C/Area Scan (41x101x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 2.726 V/m; **Power Drift = 0.143 dB**

Fast SAR: SAR(1g) = 0.0124 W/kg; SAR(10g) = 0.00725 W/kg

Maximum value of SAR (interpolated) = 0.0152 W/kg

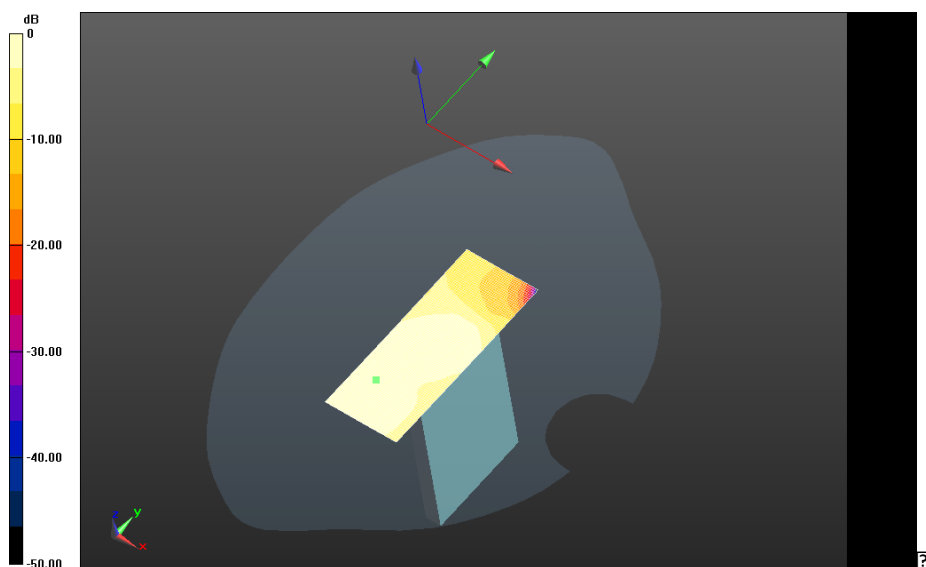

0 dB = 0.0125 W/kg = -19.03 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 52(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Bluetooth

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 53(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 7/19/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE447

Configuration: Body Worn MSL - Bluetooth

Communication System: Bluetooth; Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz
Medium Parameters used: $f=2441$ MHz; $\sigma = 1.998$ S/m; $\epsilon_r = 50.773$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.35,4.35,4.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Body Worn MSL - Bluetooth/15mm Device Back -

Bluetooth_chan39_amb_temp_23.5C_liq_temp_22.4C/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00707 W/kg

Body Worn MSL - Bluetooth/15mm Device Back -

Bluetooth_chan39_amb_temp_23.5C_liq_temp_22.4C/Zoom Scan (31x31x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 1.937 V/m; **Power Drift = -0.151 dB**

Averaged SAR: SAR(1g) = 0.00543 W/kg; SAR(10g) = 0.00249 W/kg

Maximum value of SAR (interpolated) = 0.0106 W/kg


Body Worn MSL - Bluetooth/15mm Device Back -

Bluetooth_chan39_amb_temp_23.5C_liq_temp_22.4C/Zoom Scan 2 (31x46x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 1.937 V/m; **Power Drift = 0.012 dB**

Averaged SAR: SAR(1g) = 0.00540 W/kg; SAR(10g) = 0.00243 W/kg

Maximum value of SAR (interpolated) = 0.0121 W/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 54(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

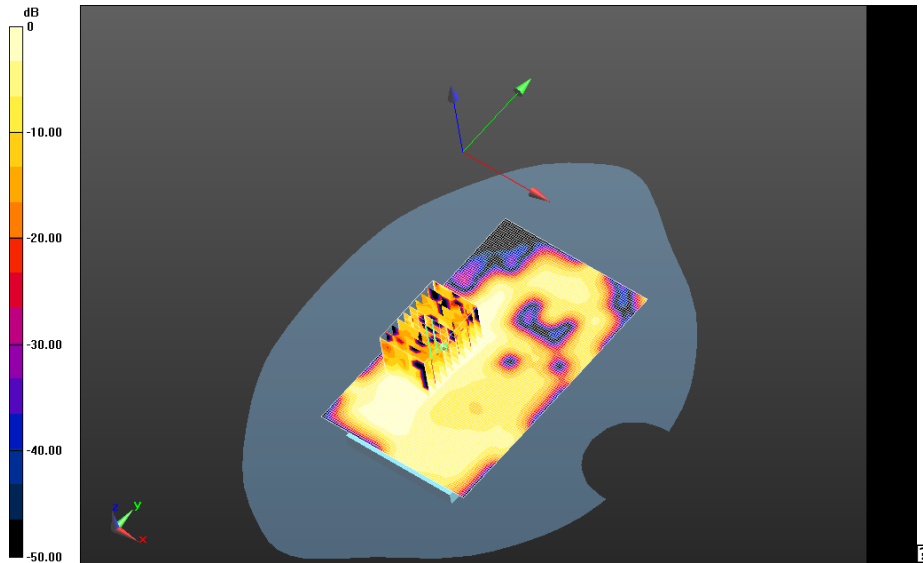

0 dB = 0.00734 W/kg = -21.34 dBW/kg

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 55(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

802.11a

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 56(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 12/10/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE447

Configuration: Mobile Hotspot MSL - 802.11a 5200 MHz

Communication System: 802.11a (0); Communication System Band: Low and Mid Bands;

Frequency: 5180 MHz

Medium Parameters used: $f=5180$ MHz; $\sigma = 5.612$ S/m; $\epsilon_r = 46.703$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Mobile Hotspot MSL - 802.11a 5200 MHz/10mm Device Back -

802.11a_chan36_low_band_Amb_Temp_23.4C_Liquid_Temp_22.2C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 2.688 V/m; **Power Drift = 0.035 dB**

Averaged SAR: SAR(1g) = 0.512 W/kg; SAR(10g) = 0.144 W/kg


Maximum value of SAR (interpolated) = 2.14 W/kg

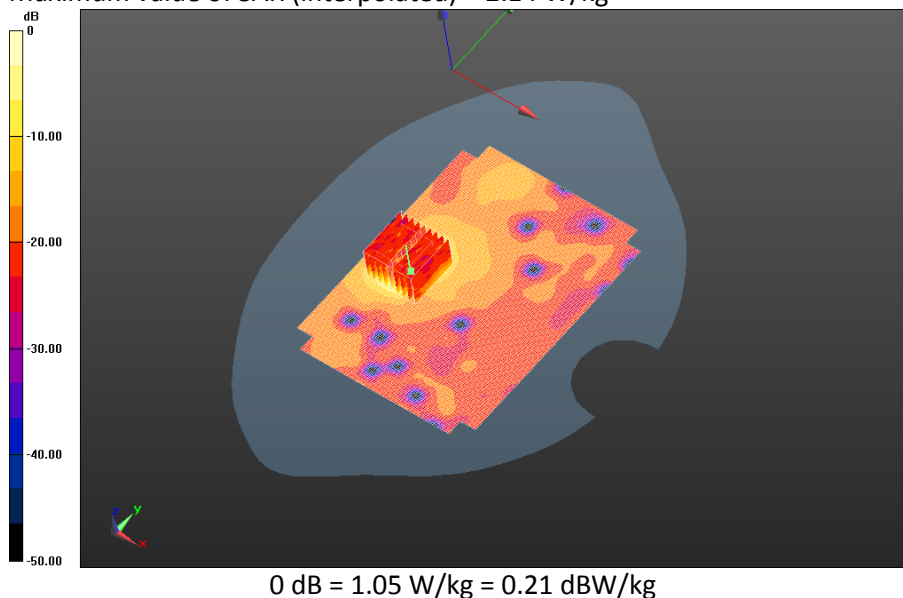

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 57(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hotspot MSL - 802.11a 5200 MHz/10mm Device Front -
802.11a_chan36_low_band_Amb_Temp_23.4C_Liquid_Temp_22.1C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.051 V/m; **Power Drift = 0.060 dB**


Averaged SAR: SAR(1g) = 0.0256 W/kg; SAR(10g) = 0.0137 W/kg
Maximum value of SAR (interpolated) = 0.0702 W/kg

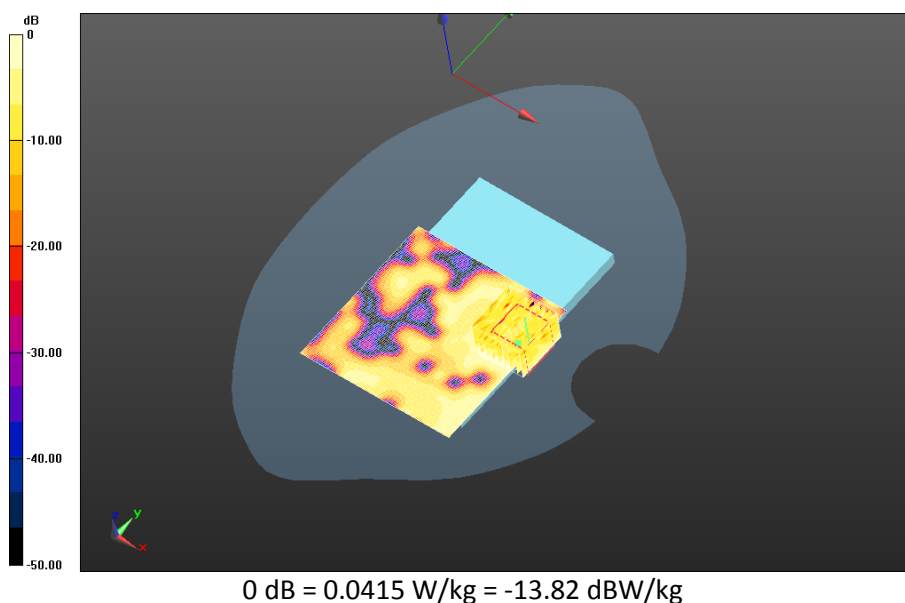

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 58(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Mobile Hotspot MSL - 802.11a 5200 MHz/10mm Device Left -
802.11a_chan36_low_band_Amb_Temp_23.3C_Liquid_Temp_22.1.C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 5.405 V/m; **Power Drift = -0.089 dB**

Averaged SAR: SAR(1g) = 0.238 W/kg; SAR(10g) = 0.0832 W/kg
Maximum value of SAR (interpolated) = 0.918 W/kg

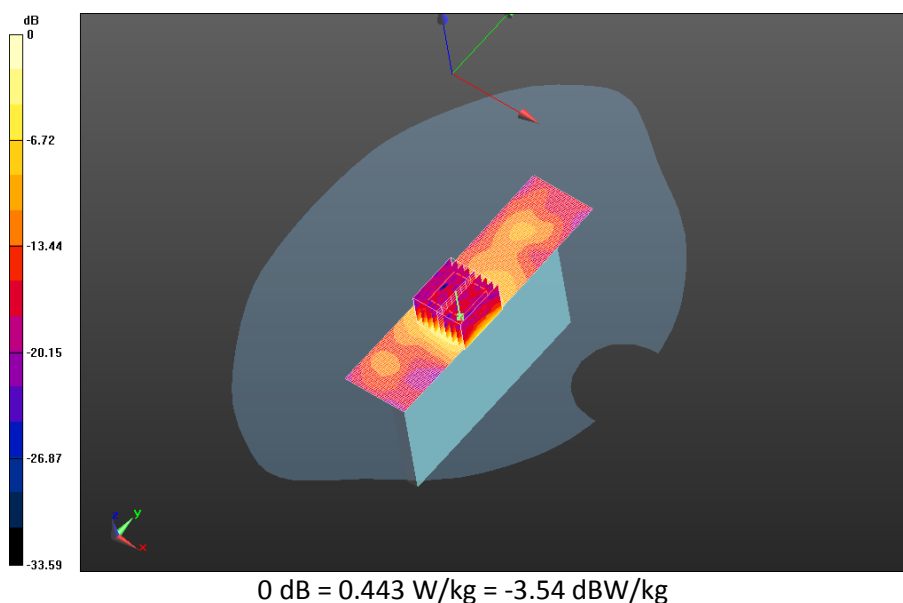

		Document Appendix C2 for the BlackBerry® Smartphone Model RFW121LW SAR Report Rev 2		Page 59(59)
Author Data Andrew Becker	Dates of Test July 02 –August 15, 2013 March 24-26, 2014 December 8-12, 2014	Test Report No RTS-6046-1307-42 Rev 5	FCC ID: L6ARFW120LW	

Date: 12/8/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFFE447

Configuration: Mobile Hotspot MSL - 802.11a 5800 MHz

Communication System: 802.11a (0); Communication System Band: Upper Band II; Frequency: 5765 MHz

Medium Parameters used: $f=5765$ MHz; $\sigma = 6.451$ S/m; $\epsilon_r = 45.242$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.86,3.86,3.86); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Back -


802.11a_chan149_upper_bandII_Amb_Temp_23.0C_Liquid_Temp_21.5C/Zoom Scan

(36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 2.475 V/m; **Power Drift = 0.109 dB**

Averaged SAR: SAR(1g) = 0.141 W/kg; SAR(10g) = 0.0452 W/kg

Maximum value of SAR (interpolated) = 1.50 W/kg

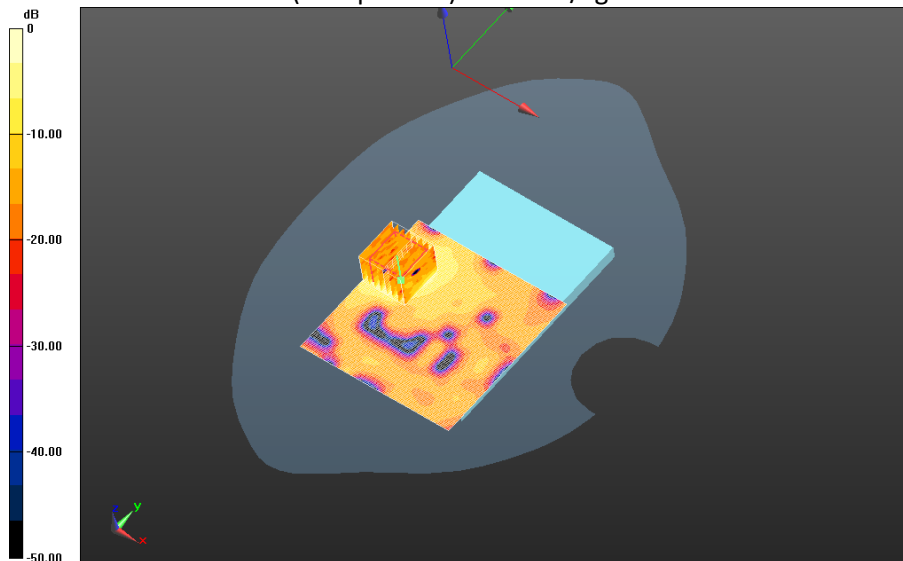

0 dB = 0.285 W/kg = -5.45 dBW/kg