

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 2, 22, 24 and 27
&
Industry Canada (IC), RSS-GEN, 132, 133 and 139 (Applicable to RFY111LW)



A division of BlackBerry Limited

REPORT NO.: RTS-6046-1308-21A_Rev1

PRODUCT MODEL NO.: RFW121LW, RFY111LW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6ARFW120LW, L6ARFY110LW
IC (for RFY111LW): 2503A-RFY110LW

EMISSION DESIGNATOR (GSM): 247KGXW
EMISSION DESIGNATOR (EDGE): 245KG7W
EMISSION DESIGNATOR (WCDMA): 4M17F9W
EMISSION DESIGNATOR (LTE QPSK): See Appendix for details
EMISSION DESIGNATOR (LTE 16QAM): See Appendix for details

This report supersedes the report RTS-6046-1308-21A dated 19 August 2013

DATE: September 13, 2013

RTS is accredited
according to
EN ISO/IEC 17025 by:



592

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Report Revision History:

Rev1:

1. Editorial changes in the header and footer.
2. Test result chart update with radiated GSM 850 ERP and PCS 1900 EIRP in section E.
3. New results updated in Summary of Results section F and Appendix 1C.
4. Equipment List update in section G.

Statement of Performance:

The BlackBerry® smartphone, model RFW121LW, part number CER 54733-001 Rev 2-x08-00 and accessories when configured and operated per BlackBerry's operation instructions performs within the requirements of the test standards.

The BlackBerry® smartphone, model RFY111LW, part number CER 56898-001 Rev 2-x05-00 and accessories when configured and operated per BlackBerry's operation instructions performs within the requirements of the test standards.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:

Reviewed by:

Kevin Guo
Regulatory Compliance Specialist

Savtej S. Sandhu
Regulatory Compliance Specialist

Reviewed and Approved by:

Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Table of Contents

A. SCOPE.....	4
B. ASSOCIATED DOCUMENTS.....	4
C. PRODUCT IDENTIFICATION.....	4
D. SUPPORT EQUIPMENT USED FOR THE TESTING OF THE EUT.....	5
E. TEST RESULTS CHART.....	6
F. SUMMARY OF RESULTS.....	8
G. COMPLIANCE TEST EQUIPMENT USED	16
H. TEST SOFTWARE USED	17
APPENDIX 1A – GSM CONDUCTED RF EMISSIONS TEST DATA/PLOTS	18
APPENDIX 1B – GSM FREQUENCY STABILITY TEST DATA.....	36
APPENDIX 1C – GSM RADIATED EMISSIONS TEST DATA.....	48
APPENDIX 2A– WCDMA BAND 2/4/5 CONDUCTED RF EMISSIONS TEST DATA/PLOTS.....	55
APPENDIX 2B – WCDMA BAND 2/4/5 FREQUENCY STABILITY TEST DATA	82
APPENDIX 2C – WCDMA BAND 2/4/5 RADIATED EMISSIONS TEST DATA	98
APPENDIX 3A– LTE BAND 5 CONDUCTED RF EMISSIONS TEST DATA/PLOTS.....	108
APPENDIX 3B – LTE BAND 5 FREQUENCY STABILITY TEST DATA	126
APPENDIX 3C – LTE BAND 5 RADIATED EMISSIONS TEST DATA.....	134
APPENDIX 4A– LTE BAND 4 CONDUCTED RF EMISSIONS TEST DATA/PLOTS.....	138
APPENDIX 4B – LTE BAND 4 FREQUENCY STABILITY TEST DATA	157
APPENDIX 4C – LTE BAND 4 RADIATED EMISSIONS TEST DATA.....	165

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

A. Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

- FCC CFR 47 Part 2, Subpart J, Equipment Authorization Procedures, Oct, 2012.
- FCC CFR 47 Part 22, Subpart H, Cellular Radiotelephone Services, Oct., 2012.
- FCC CFR 47 Part 24 Subpart E, Broadband PCS, Oct., 2012.
- FCC CFR 47 Part 27, Subpart C, Technical Standards, Oct, 2012.
- Industry Canada, RSS-132 Issue 3, January 2013, Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz.
- Industry Canada, RSS-133 Issue 6, January 2013, 2 GHz Personal Communications Services.
- Industry Canada, RSS-GEN Issue 3, December 2010, General Requirements and Information for the Certification of Radio communication Equipment.
- Industry Canada, RSS-139 Issue 2, February 2009, Advanced Wireless Services Equipment Operating in the Bands 1710-1755 MHz and 2110-2155 MHz.

B. Associated Documents

1. BlackBerrySystemSimilarity_RFW121LW_RFY111LW

C. Product Identification

Manufactured by BlackBerry Limited whose headquarters is located at:
295 Phillip Street
Waterloo, Ontario
Canada, N2L 3W8
Phone: 519 888 7465
Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RTS EMI test facilities:

305 Phillip Street	440 Phillip Street
Waterloo, Ontario	Waterloo, Ontario,
Canada, N2L 3W8	Canada , N2L 5R9
Phone: 519 888 7465	Phone: 519 888 7465
Fax: 519 888 6906	Fax: 519 888 6906

| The testing was performed from July 19 to August 15 and Sept 12, 2013.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

BlackBerry® smartphone Samples Tested

Sample	Model	CER NUMBER	PIN	Software Information
1	RFW121LW	CER 54733-001 Rev 2-x08-00	2FFE444	OS: 10.2.0.519
2	RFW121LW	CER 54733-001 Rev 2-x08-00	2FFE459	OS: 10.2.0.519
3	RFW121LW	CER 54733-001 Rev 2-x08-00	2FFE438	OS: 10.2.0.519
4	RFW121LW	CER 54733-001 Rev 2-x08-00	2FFE448	OS: 10.2.0.519
5	RFW121LW	CER 54733-001 Rev 2-x08-00	2FFE45F	OS: 10.2.0.519
6	RFW121LW	CER 54733-001 Rev 2-x08-00	2FFE470	OS: 10.2.0.519
7	RFY111LW	CER 56898-001 Rev 2-x05-00	2FFE4F2	OS: 10.2.0.519
8	RFY111LW	CER 56898-001 Rev 2-x05-00	2FFE4DA	OS: 10.2.0.519
9	RFY111LW	CER 56898-001 Rev 2-x05-00	2FFE4B7	OS: 10.2.0.519

RF Conducted Emissions testing was performed on samples 1, 2, 7.

Radiated Emissions testing was performed on samples 3, 4, 5, 6, 8 and 9.

Only the characteristics that may have been affected by the changes from RFW121LW to RFY111LW were re-tested.

For more information, see BlackBerrySystemSimilarity_RFW121LW_RFY111LW.

D. Support Equipment Used for the Testing of the EUT

No support equipment required; for list of equipment refer to section G, Compliance Test Equipment Used.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

E. Test Results Chart

SPECIFICATION		TEST TYPE	RESULT	TEST DATA APPENDIX
FCC CFR 47	IC			
Part 2.1051 Part 22.917 Part 24.238	RSS-GEN, 4.9 RSS-132, 5.5 RSS-133, 6.5	GSM850 / PCS1900 Conducted Spurious Emissions	Pass	1A
Part 2.1049 Part 22.917 Part 24.238	RSS-GEN, 4.6	GSM 850 / PCS1900 Occupied Bandwidth and Channel Mask	Pass	1A
Part 2.1055 Part 24.235	RSS-132, 5.3 RSS-133, 6.3	GSM 850 /PCS1900 Frequency Stability vs. Temperature and Voltage	Pass	1B
Part 22.913(a)(2) Part 24.232(c)	RSS-132, 5.4 RSS-133, 6.4	GSM850 ERP PCS1900 EIRP	Pass	1C
Part 2.1053 Part 22.917 Part 24.238	RSS-GEN, 4.9 RSS-132, 4.5 RSS-133, 6.5	GSM850 / PCS1900 Radiated Spurious/Harmonic Emissions	Pass	1C
Part 2.1051 Part 22.917 Part 24.238 Part 27.53(h)	RSS-GEN, 4.9 RSS-132, 5.5 RSS-133, 6.5 RSS-139, 6.5	WCDMA Band 2/4/5 Conducted Spurious Emissions	Pass	2A
Part 2.1049 Part 22.917 Part 24.238 Part 27.53(h)(1)	RSS-GEN, 4.6	WCDMA Band 2/4/5 Occupied Bandwidth and Channel Mask	Pass	2A
Part 2.1055(a)(d) Part 24.235 Part 27.54	RSS-132, 5.3 RSS-133, 6.3 RSS-139, 6.3	WCDMA Band 2/4/5 Frequency Stability vs. Temperature and Voltage	Pass	2B
Part 22.913(a)(2) Part 24.232(c) Part 27.50(d)(4)	RSS-132, 5.4 RSS-133, 6.4 RSS-139, 6.4	WCDMA Band 5 ERP WCDMA Band 2 EIRP WCDMA Band 4 EIRP	Pass	2C
Part 2.1053 Part 22.917 Part 24.238 Part 27.53(h)	RSS-GEN, 4.9 RSS-132, 5.5 RSS-133, 6.5 RSS-139, 6.5	WCDMA Band 2/4/5 Radiated Spurious/Harmonic Emissions	Pass	2C
Part 2.1051 Part 22.917	RSS-132, 5.5	LTE Band 5 Conducted Spurious Emissions	Pass	3A
Part 2.1049 Part 22.917	RSS-GEN, 4.6	LTE Band 5 Occupied Bandwidth and Channel Mask	Pass	3A
Part 2.1055(a)(d)	RSS-132, 5.3	LTE Band 5 Frequency Stability vs. Temperature and Voltage	Pass	3B
Part 22.913(a)(2)	RSS-132, 5.4	LTE Band 5 ERP	Pass	3C

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW			
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW		IC: 2503A-RFY110LW

Part 22.917	RSS-132, 5.5	LTE Band 5 Radiated Spurious/Harmonic Emissions	Pass	3C
Part 2.1051 Part 27.53(h)	RSS-139, 6.5	LTE Band 4 Conducted Spurious Emissions	Pass	4A
Part 2.1049 Part 27.53(h)(1)	RSS-GEN, 4.6	LTE Band 4 Occupied Bandwidth and Channel Mask	Pass	4A
Part 27.50 (d)(5)	RSS-139, 6.4	LTE Band 4 Peak to Average Ratio measurements	Pass	4A
Part 2.1055 Part 27.54	RSS-139, 6.3	LTE Band 4 Frequency Stability vs. Temperature and Voltage	Pass	4B
Part 2.1053 Part 27.50(d)(4)	RSS-139, 6.4	LTE Band 4 EIRP	Pass	4C
Part 2.1053 Part 27.53(h)	RSS-139, 6.5	LTE Band 4 Radiated Spurious/Harmonic Emissions	Pass	4C

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

F. Summary of Results

All references to IC compliance is applicable only to model RFY111LW.

1) Conducted Emission Measurements

The following tests were performed on model RFW121LW.

- The BlackBerry® smartphone met the requirements of the Tx Conducted Spurious Emissions in the GSM850 as per 47 CFR 2.1051, CFR 22.917, CFR 22.901(d), RSS-132, 5.5 and RSS-GEN, 4.9. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 30 MHz to 10 GHz.

See APPENDIX 1A for test data.

The BlackBerry® smartphone met the requirements of the Tx Conducted Spurious Emissions in the PCS1900 as per 47 CFR 2.1051, CFR 24.238(a), RSS-133, 6.5 and RSS-GEN, 4.9. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 30 MHz to 20 GHz.

See APPENDIX 1A for test data

- The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and channel mask in the GSM850 as per 47 CFR 2.202, CFR 22.917 and RSS-GEN, 4.6. The EUT was measured in GSM and EDGE mode on the low, middle and high channels. The worst case occupied bandwidth was 247.5 kHz on the middle channel in CALL mode, and 243.1 kHz on middle channel in EDGE mode.

See APPENDIX 1A for test data.

The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and channel mask in the PCS1900 as per 47 CFR 2.202, CFR 24.238 and RSS-GEN, 4.6. The EUT was measured in GSM and EDGE mode on the low, middle and high channels. The worst case occupied bandwidth was 246.0 kHz on middle channel in CALL mode, and 244.6 kHz on the middle channel in EDGE mode.

See APPENDIX 1A for test data.

- The BlackBerry® smartphone met the requirements of the Frequency Stability in the GSM850 as per 47 CFR 2.1055 and RSS-132, 5.3. The EUT was measured in GSM850 mode on the low, middle and high channels.

See APPENDIX 1B for test data.

The BlackBerry® smartphone met the requirements of the Frequency Stability in the PCS1900 as per 47 CFR 2.1055, CFR 24.235 and RSS-133, 6.3. The EUT was measured in PCS1900 mode on the low, middle and high channels.

See APPENDIX1B for test data.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

- The BlackBerry® smartphone met the requirements of the Tx Conducted Spurious Emissions in the WCDMA band 5 as per 47 CFR 2.1051, CFR 22.917, CFR 22.901(d) and RSS-GEN, 4.9. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 30 MHz to 10 GHz. See APPENDIX 2A for test data.

The BlackBerry® smartphone met the requirements of the Tx Conducted Spurious Emissions in the WCDMA band 2 as per 47 CFR 2.1051, CFR 24.238(a) and RSS-GEN, 4.9. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 30 MHz to 20 GHz. See APPENDIX 2A for test data

The following tests were performed on model RFY111LW.

The EUT met the requirements of the Tx Conducted Spurious Emissions in the WCDMA Band 4 as per 47 CFR 2.1051, CFR 27.53 and RSS-139, 6.5. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 30 MHz to 20 GHz.

See APPENDIX 2A for test data

The following tests were performed on model RFW121LW.

- The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and channel mask in the WCDMA band 5 as per 47 CFR 2.202, CFR 22.917 and RSS-GEN, 4.6. The EUT was measured in Voice and HSUPA mode on the low, middle and high channels. The worst case occupied bandwidth was 4.168 MHz on the low channel in Loopback mode, and 4.160 MHz on the low channel in HSUPA mode.

See APPENDIX 2A for test data.

The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and channel mask in the WCDMA band 2 as per 47 CFR 2.202, CFR 24.238 and RSS-GEN, 4.6. The EUT was measured in Voice and HSUPA mode on the low, middle and high channels. The worst case occupied bandwidth was 4.161 MHz on the middle and high channels in Loopback mode, and 4.160 MHz on the middle and high channels in HSUPA mode.

See APPENDIX 2A for test data.

- The BlackBerry® smartphone met the requirements of the Frequency Stability in the WCDMA band 5 as per 47 CFR 2.1055 and RSS-132, 5.3. The EUT was measured in WCDMA band 5 mode on the low, middle and high channels.

See APPENDIX 2B for test data.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

The BlackBerry® smartphone met the requirements of the Frequency Stability in the WCDMA band 2 as per 47 CFR 2.1055, CFR 24.235 and RSS-133, 6.3. The EUT was measured in WCDMA band 2 mode on the low, middle and high channels. See APPENDIX 2B for test data.

The following tests were performed on model RFY111LW.

The EUT met the requirements of the Frequency Stability in the WCDMA Band 4 as per 47 CFR 2.1055, CFR 27.54 and RSS-139, 6.3. The EUT was measured in WCDMA Band 4 mode on the low, middle and high channels.

See APPENDIX 2B for test data.

- The BlackBerry® smartphone met the requirements of the Tx Conducted Spurious Emissions in the LTE Band 5 as per 47 CFR 2.1051, CFR 22.917, CFR 22.901(d), RSS-132, 5.5 and RSS-GEN, 4.9. The EUT was measured on the low, middle and high channels in 1.4MHz, 3MHz, 5MHz and 10MHz as per scalable bandwidths for LTE Band 5 with QPSK and 16-QAM modulations. Different resource block allocations were investigated, a minimum one resource block case was also tested. The frequency range investigated was from 30 MHz to 10 GHz.

See APPENDIX 3A for test data.

The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and channel mask in the LTE Band 5 as per 47 CFR 2.202, CFR 22.917 and RSS-GEN, 4.6. The EUT was measured on the low, middle and high channels in 1.4MHz, 3MHz, 5MHz and 10MHz bandwidths for LTE Band 5 with QPSK and 16-QAM modulations. Different resource block allocations were investigated, a minimum one resource block case was also tested.

See APPENDIX 3A for test data.

The BlackBerry® smartphone met the requirements of the Frequency Stability in the LTE Band 5 as per 47 CFR 2.1055, CFR 22.917 and RSS-132, 5.3. The EUT was measured on the low, middle and high channels in 1.4MHz, 3MHz, 5MHz and 10MHz as per scalable bandwidths for LTE Band 5 with QPSK and 16-QAM modulations. Different resource block allocations were investigated, a minimum one resource block case was also tested.

See APPENDIX 3B for test data.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

- The BlackBerry® smartphone met the requirements of the Tx Conducted Spurious Emissions in the LTE Band 4 as per 47 CFR 2.1051, CFR 27.53 and RSS-139, 6.5. The EUT was measured on the low, middle and high channels in 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz bandwidths for LTE Band 4 with QPSK and 16-QAM modulations. Different resource block allocations were investigated, a minimum one resource block case was also tested. The frequency range investigated was from 30 MHz to 20 GHz. The EUT met the requirements of the Occupied Bandwidth and channel mask in the LTE Band 4 as per 47 CFR 2.1049, CFR 27.53. The EUT was measured on the low, middle and high channels.
See Appendix 4A for test data

The BlackBerry® smartphone met the requirements of the Occupied Bandwidth and channel mask in the LTE Band 4 as per 47 CFR 2.1049, CFR 27.53 and RSS-GEN, 4.6. The EUT was measured on the low, middle and high channels in 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz bandwidths for LTE Band 4 with QPSK and 16-QAM modulations. Different resource block allocations were also investigated, a minimum one resource block case was also tested.

See APPENDIX 4A for test data

The BlackBerry® smartphone met the requirements of the Frequency Stability in the LTE Band 4 as per 47 CFR 2.1055, CFR 27.54 and RSS-139, 6.3. The EUT was measured in LTE Band 4 mode on the low, middle and high channels in 20MHz BW with 100 resource blocks and QPSK modulation.

See APPENDIX 4B for test data.

 Testing Services	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

2) Radiated Emission Measurements

The radiated spurious emissions/harmonics and ERP/EIRP were measured for GSM 850 and PCS 1900. The results are within the limits. The BlackBerry® smartphone was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remotely controlled turntable. The test distance used between the BlackBerry® smartphone and the receiving antenna was three meters. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 meters. The turntable was rotated to determine the azimuth of the peak emissions. Both the horizontal and vertical polarizations of the emissions were measured. The maximum emissions level was recorded. The BlackBerry® smartphone was then substituted with an antenna placed in the same location as the BlackBerry® smartphone. A Dipole antenna was used for the ERP measurements and a Horn antenna was used for EIRP measurements. The substitution antenna was connected into a signal generator that was set to the test frequency.

The emissions were maximized by elevating the antenna in the range of 1 to 4 meters. The signal generator output was then adjusted to match the BlackBerry® smartphone output reading. The signal generator output was recorded. Both the horizontal and vertical polarizations of the emissions were measured.

The following measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a Semi-anechoic Chamber ((SAC) with floor absorber) above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The SAC with floor absorber's FCC registration number is **959115** and the IC file number is **2503C-1**. The BlackBerry® smartphone was measured on the low, middle and high channels.

The following tests were performed on model RFW121LW.

- a) The radiated spurious emissions/harmonics and ERP/EIRP were measured for GSM 850 and PCS 1900. The results are within the limits.
 - The highest ERP in the 850 band Call mode measured was 29.04 dBm (0.80 W) at 824.2 MHz (channel 128)
 - The highest ERP in the 850 band EDGE mode measured was 27.78 dBm (0.60 W) at 836.60 MHz (channel 190).
 - The highest EIRP in the PCS band Call mode measured was 32.77 dBm (1.89 W) at 1850.20 MHz (channel 512).
 - The highest EIRP in the PCS band EDGE mode measured was 29.36 dBm (0.86 W) at 1909.80 MHz (channel 810).

 Testing Services TM	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

The radiated spurious emission and carrier harmonics were measured up to the 10th harmonic for low, middle, and high channels in the GSM 850 and PCS 1900. Each band was measured in CALL and EDGE modes, with both the horizontal and vertical polarizations.

- The worst margin was 17.4 dB below the limit at 2509.908MHz in Call mode in band GSM850.
- The worst margin was 22.8 dB below the limit at 2466.800MHz in EDGE mode in band GSM850.
- All margins in the PCS 1900 for harmonic emissions were at least 25 dB below the limit for all test frequencies in Call mode.
- All margins in the PCS 1900 for harmonic emissions were at least 25 dB below the limit for all test frequencies in EDGE mode.

See Appendix 1C for test data.

b) The radiated spurious emissions/harmonics and ERP/EIRP were measured for WCDMA Band 2/4/5.

The following tests were performed on model RFW121LW:

- The highest ERP in the WCDMA band 5, Call Service mode was 22.09 dBm (0.16 W) at 826.40 MHz (channel 4132).
- The highest ERP in the WCDMA band 5, HSUPA mode was 19.85 dBm (0.10 W) at 826.40 MHz (channel 4132).
- The highest EIRP in the WCDMA band 2, Call Service mode measured was 24.01 dBm (0.25 W) at 1852.4 MHz (channel 9262).
- The highest EIRP in the WCDMA band 2, HSUPA mode measured was 22.38 dBm (0.17 W) at 1852.4 MHz (channel 9262).

The following tests were performed on model RFY111LW:

- The highest EIRP in the WCDMA band 4, Call Service mode measured was 23.42 dBm (0.22 W) at 1732.6 MHz (channel 1413).
- The highest EIRP in the WCDMA band 4, HSUPA mode measured was 21.34 dBm (0.14 W) at 1732.6 MHz (channel 1413).

The radiated carrier harmonics were measured up to the 10th harmonic for low, middle and high channels in the WCDMA band 2/4/5. Each band was measured in Call, and HSUPA modes. Both the horizontal and vertical polarizations were measured.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

The following tests were performed on model RFW121LW:

- All margins in the WCDMA Band 5 for harmonic emissions were at least 25 dB below the limit for all test frequencies.
- All margins in the WCDMA Band 2 for harmonic emissions were at least 25 dB below the limit for all test frequencies.

The following tests were performed on model RFY111LW:

- All margins in the WCDMA Band 4 for harmonic emissions were at least 25 dB below the limit for all test frequencies.

See Appendix 2C for test data.

c) The radiated spurious emissions/harmonics and ERP were measured for LTE Band 5.

The EUT was measured on the low, middle and high channels in worse case channel bandwidth, resource block and both modulation QPSK and 16-QAM. Both horizontal and vertical polarizations were measured.

- The highest EIRP in the LTE Band 5 measured was 21.80 dBm (0.15 W) at 834.00 MHz (channel 20500) in 10MHz BW, 1 resource block and QPSK modulation.
- The highest EIRP in the LTE Band 5 measured was 20.52 dBm (0.11 W) at 834.00 MHz (channel 20500) in 10MHz BW, 1 resource block and 16-QAM modulation.

The radiated carrier harmonics were measured up to the 10th harmonic. The EUT was measured on the low, middle and high channels in worse case channel bandwidth, resource block and both modulation QPSK and 16-QAM. Both horizontal and vertical polarizations were measured.

All margins in the LTE Band 5 for harmonic emissions were at least 25 dB below the limit for all test frequencies.

See Appendix 3C for test data.

d) The radiated spurious emissions/harmonics and ERP were measured for LTE Band 4.

The EUT was measured on the low, middle and high channels in worse case channel bandwidth, resource block and both modulation QPSK and 16-QAM. Both horizontal and vertical polarizations were measured.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

- The highest EIRP in the LTE Band 4 measured was 23.26 dBm (0.21 W) at 1744.90 MHz (channel 20299) in 5 MHz BW, 1 resource block and QPSK modulation.
- The highest EIRP in the LTE Band 4 measured was 22.30 dBm (0.17 W) at 1744.90 MHz (channel 20299) in 5 MHz BW, 1 resource block and 16-QAM modulation.

The radiated carrier harmonics were measured up to the 10th harmonic. The EUT was measured on the low, middle and high channels in worse case channel bandwidth, resource block and both modulation QPSK and 16-QAM. Both horizontal and vertical polarizations were measured.

- The worst margin was 14.7dB below the limit at 5130.80MHz.

See Appendix 4C for test data.

3) Co-Location Radiated Measurements

The radiated emissions were measured up to 18 GHz for middle channels for simultaneous transmission in the following test configuration combinations:

The following tests were performed on model RFW121LW:

- GSM 850 + Bluetooth(DH5) + 802.11b
- PCS 1900 + Bluetooth(2DH5) + 802.11g
- WCDMA B2 + Bluetooth(3DH5)+ 802.11n(2.4GHz).
- WCDMA B5 + Bluetooth(DH5) + 802.11a

The following tests were performed on model RFY111LW:

- WCDMA B4 + Bluetooth(DH5) + 802.11b
- LTE B4 + Bluetooth(3DH5) + 802.11g
- LTE B5 + Bluetooth(DH5) + 802.11n

Both the horizontal and vertical polarizations were measured. The emissions due to different simultaneous transmission did not increase the amplitude of any emissions nor did it produce any new inter-modulation products as a result of mixing.

Sample Calculation:

Corrected Signal level (CSL) is calculated as follows:

CSL (dBm) = Measured Level (dB μ V) – Antenna Gain (dBi) + Free Space loss (dB) – 107(dB) + Cable Loss (dB) - Preamp (dB) + Filter Loss (dB) -2.15(dB)

Measurement Uncertainty ± 4.5 dB

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW			
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW		IC: 2503A-RFY110LW

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Preamplifier	Sonoma	310N/11909A	185831	13-10-10	Radiated Emissions
Preamplifier system	TDK RF Solutions	PA-02	080010	13-10-10	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA4-SP	001	14-02-13	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA-SP	001	14-02-13	Radiated Emissions
Hybrid Log Antenna	EMC Automation	HLP-3003C	017301	14-08-13	Radiated Emissions
Horn Antenna	EMC Automation	HRN-0118	030101	14-08-07	Radiated Emissions
Horn Antenna	EMC Automation	HRN-0118	030201	15-05-07	Radiated Emissions
Horn Antenna	Emco	3117	47563	15-08-07	Radiated Emissions
Horn Antenna	ETS	3116	2538	14-09-29	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	974	14-11-27	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	837493/073	13-11-26	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	112394	13-11-25	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	109747	13-10-18	RF Conducted Emissions
EMI Receiver	Rohde & Schwarz	ESIB-40	100255	13-11-30	Radiated Emissions
EMI Receiver	Rohde & Schwarz	ESU-40	100162	13-11-30	Radiated Emissions
DC Power Supply	HP	6632B	US37472178	13-09-25	RF Conducted Emissions
Environment Monitor	Omega	iTHX-SD	0380561	13-10-30	Radiated Emissions
Environment Monitor	Omega	iTHX-SD	0340060	13-10-30	RF Conducted Emissions
Environment Monitor	Omega	iTHX-SD	0380567	13-10-30	Radiated Emissions

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW			
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Compliance Test Equipment Used cont'd

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	101469	13-12-10	Radiated /RF Conducted Emission
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	109949	13-12-08	Radiated /RF Conducted Emission
Signal Generator	Agilent	E8257D	MY45140527	14-12-10	Radiated Emissions
Signal Generator	Agilent	83630B	3844A00927	14-11-23	Radiated Emissions
Spectrum Analyzer	Rohde & Schwarz	FSV	101820	13-11-28	RF Conducted Emissions
Spectrum Analyzer	Rohde & Schwarz	FSP	100884	13-11-22	RF Conducted Emissions

H. Test Software used

<u>SOFTWARE</u>	<u>COMPANY</u>	<u>VERSION</u>	<u>USE</u>
EMC32	Rohde & Schwarz	8.53.0	Radiated Emissions
TDK Standard Emission Test	TDK RF Solutions	8.53.1.62	Radiated Emissions


APPENDIX 1A – GSM CONDUCTED RF EMISSIONS TEST DATA/PLOTS

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1A	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW

GSM Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, -26 dBc bandwidth, 99% power bandwidth and the channel mask on BlackBerry® smartphone.

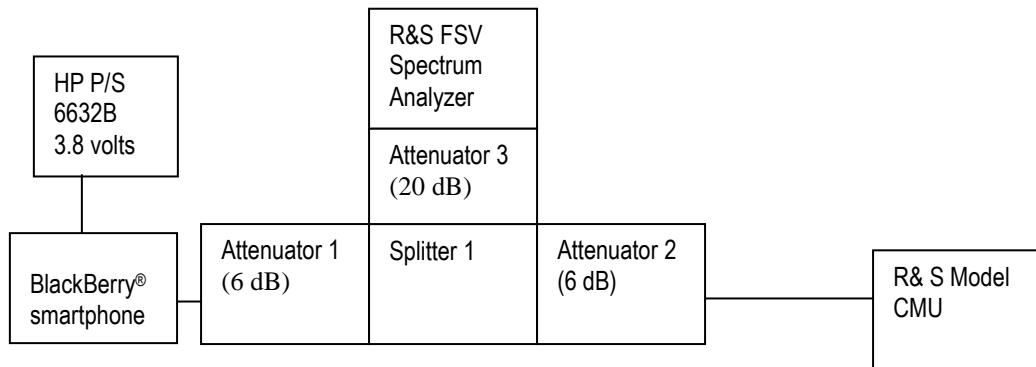Test Setup Diagram



A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

The environmental test conditions were:

Temperature: 25.1 °C
Relative Humidity: 41.3 %

The following measurements were performed by Berkin Can.

RTS Testing Services	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

The following measurements were performed on product RFW121LW.

The conducted spurious emissions – As per 47 CFR 2.1051, CRF 22.917, CFR 24.238(a), RSS-GEN, 4.9, RSS-132, 5.5 and RSS-133, 6.5 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

For each carrier frequency of low, middle and high, the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for the GSM850 band was measured to be 277.9 kHz, and for the PCS1900 band was measured to be 274.9 kHz as shown below. Results were derived in a 3.0 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

Test Data for GSM850 band and PCS1900 band in Call mode

GSM850 band Frequency (MHz)	–26dBc Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
824.2	273.5	244.6
837.6	277.9	247.5
848.8	275.0	244.6

PCS1900 band Frequency (MHz)	–26dBc Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1850.2	270.0	244.0
1880.0	274.9	246.0
1909.8	271.8	242.0

Measurement Plots for 850 and 1900 bands in Call mode

See Figures 1-1a to 1-12a for the plots of the conducted spurious emissions.

See Figures 1-13a to 1-24a for the plots of 26dBc/99% Occupied Bandwidth.

See Figures 1-25a to 1-28a for the plots of the Channel mask.

See figures 1-51a to 1-53a for the plots of Peak to Average Ratio.



Test Report No.:
RTS-6046-1308-21A_Rev1

Dates of Test:
July 19 to August 15 and Sept
12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

Test Data for GSM850 and PCS1900 bands in EDGE mode

GSM850 band Frequency (MHz)	99% Occupied Bandwidth (kHz)
824.2	241.7
837.6	243.1
848.8	241.7

PCS1900 band Frequency (MHz)	99% Occupied Bandwidth (kHz)
1850.2	241.7
1880.0	244.6
1909.8	241.7

Measurement Plots for GSM850 and PCS1900 bands in EDGE mode

See Figures 1-29a to 1-34a for the plots of the 99% Occupied Bandwidth EDGE results.

See Figures 1-35a to 1-38a for the plots of channel mask EDGE results.

See Figures 1-39a to 1-50a for the plots of the conducted spurious emissions EDGE results


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


GSM Conducted RF Emission Test Data cont'd

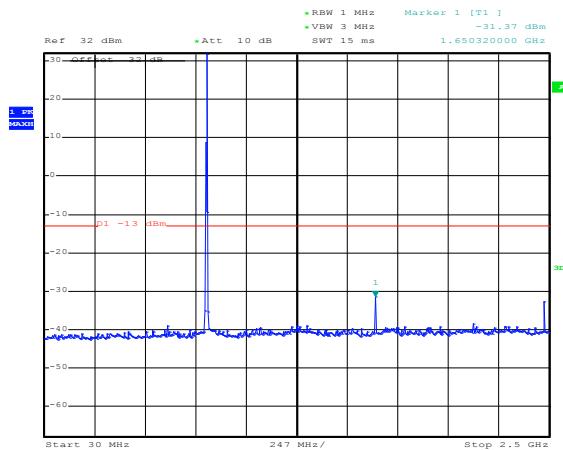Figure 1-a: GSM850 band, Spurious Conducted Emissions, Low channel




Date: 2.JUL.2013 18:42:58

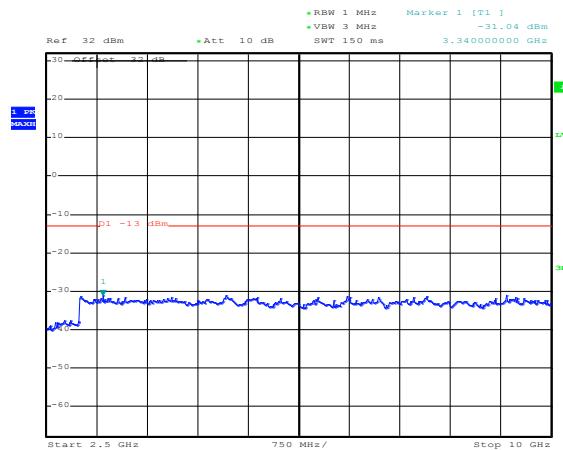Figure 1-1a: GSM850 band, Spurious Conducted Emissions, Low channel




Date: 2.JUL.2013 18:47:24

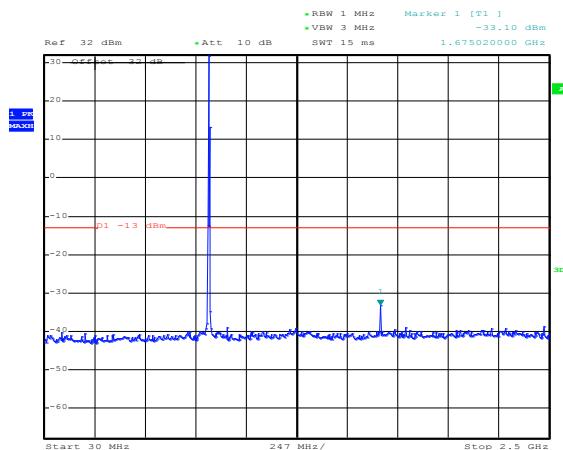Figure 1-2a: GSM850 band, Spurious Conducted Emissions, Middle Channel



Date: 2.JUL.2013 18:43:22

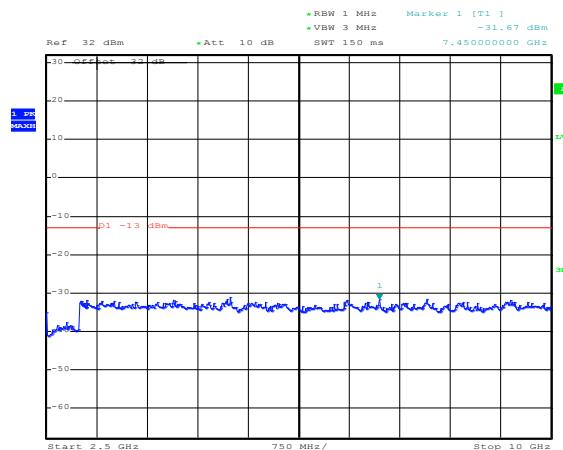Figure 1-3a: GSM850 band, Spurious Conducted Emissions, Middle Channel



Date: 2.JUL.2013 18:44:52


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


GSM Conducted RF Emission Test Data cont'd

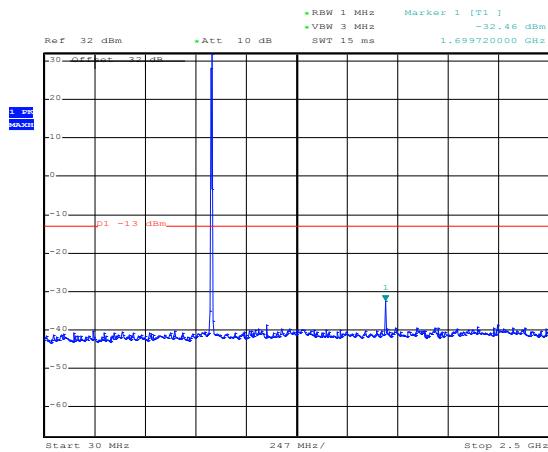Figure 1-4a: GSM850 band, Spurious Conducted Emissions, High Channel




Date: 2.JUL.2013 18:43:42

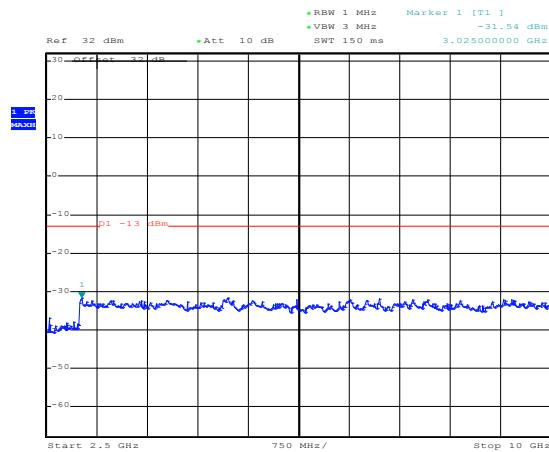Figure 1-5a: GSM850 band, Spurious Conducted Emissions, High Channel




Date: 2.JUL.2013 18:44:28

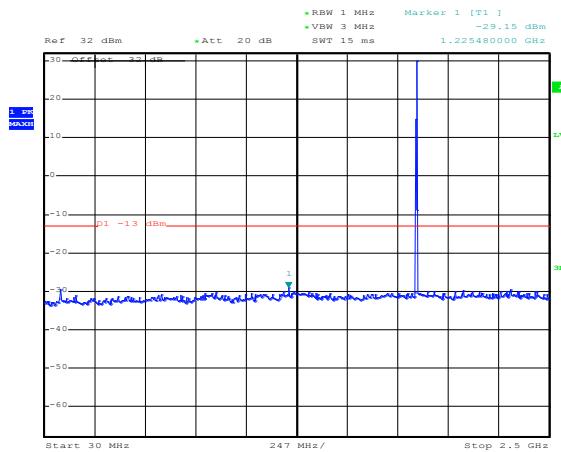Figure 1-7a: PCS1900 band, Spurious Conducted Emissions, Low Channel



Date: 2.JUL.2013 18:53:01

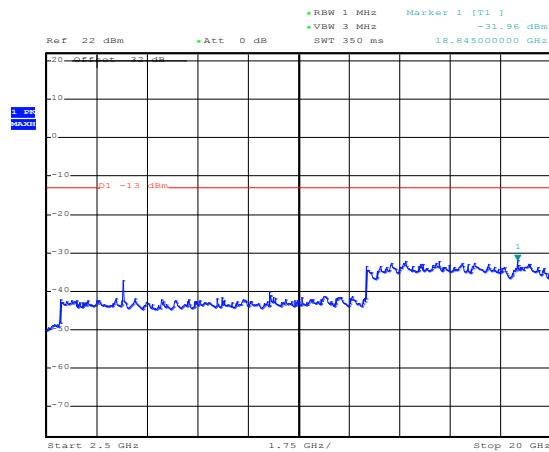Figure 1-8a: PCS1900 band, Spurious Conducted Emissions, Low Channel



Date: 2.JUL.2013 18:57:07


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


GSM Conducted RF Emission Test Data cont'd

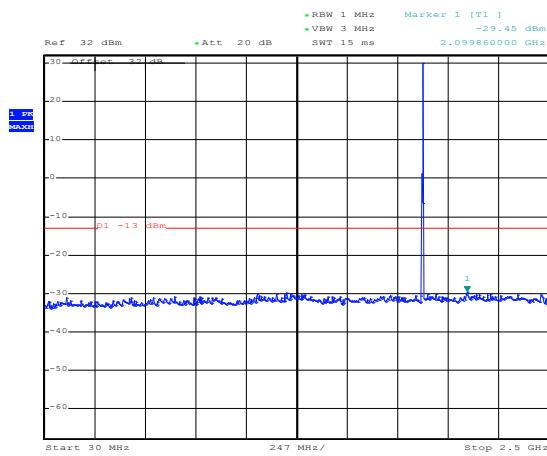Figure 1-9a: PCS1900 band, Spurious Conducted Emissions, Middle Channel




Date: 2.JUL.2013 18:53:55

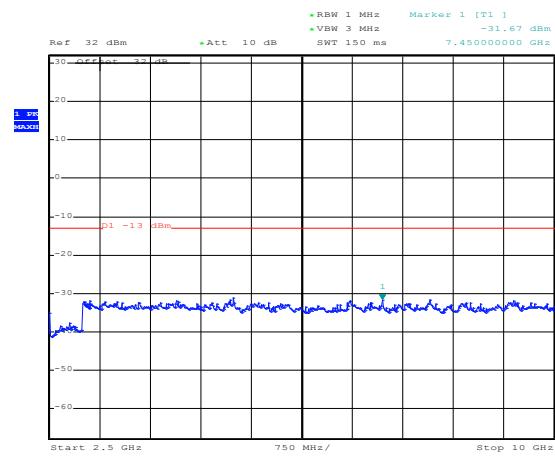Figure 1-10a: PCS1900 band, Spurious Conducted Emissions, Middle Channel




Date: 2.JUL.2013 18:44:52

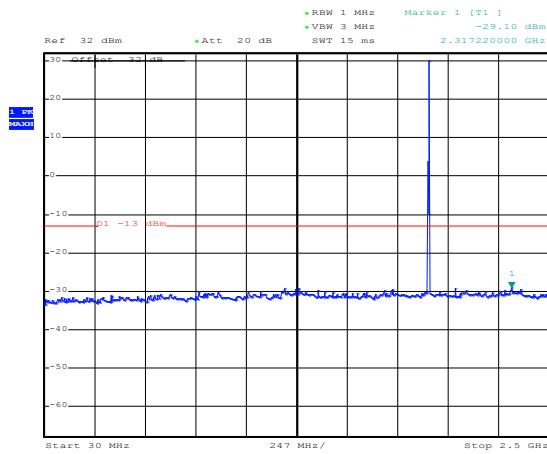Figure 1-11a: PCS1900 band, Spurious Conducted Emissions, High Channel



Date: 2.JUL.2013 18:55:44

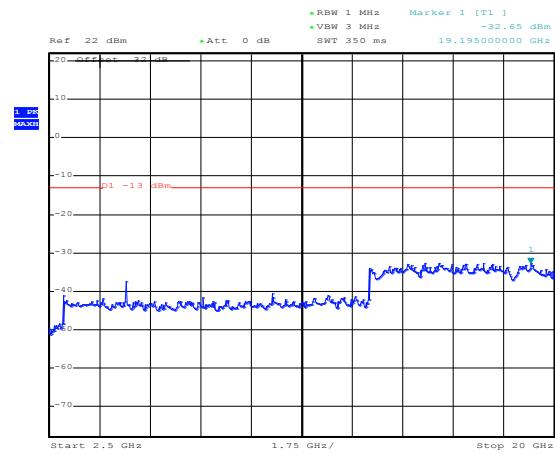Figure 1-12a: PCS1900 band, Spurious Conducted Emissions, High Channel



Date: 2.JUL.2013 18:56:16


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

**Figure 1-13a: -26dBc bandwidth, GSM850 band
 Low Channel in GSM mode**

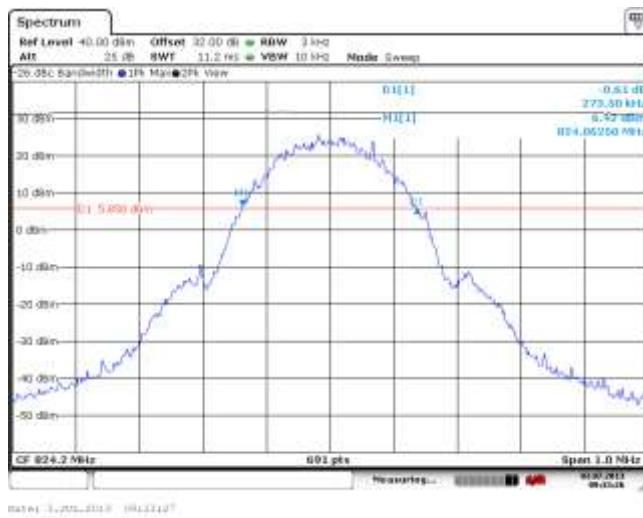

**Figure 1-14a: Occupied Bandwidth, GSM850 band
 Low Channel in GSM mode**



**Figure 1-15a: -26dBc bandwidth, GSM850 band
 Middle Channel in GSM mode**



**Figure 1-16a: Occupied Bandwidth, GSM850 band
 Middle Channel in GSM mode**




Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

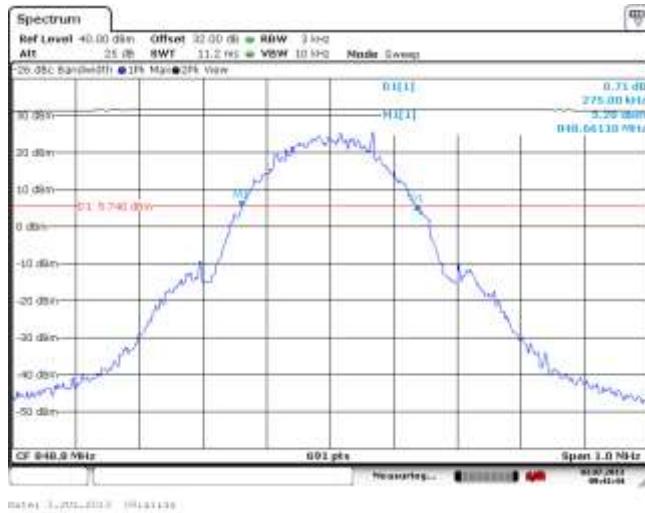**Figure 1-17a: -26dBc bandwidth, GSM850 band
 High Channel in GSM mode**

**Figure 1-18a: Occupied Bandwidth, GSM850 band
 High Channel in GSM mode**

**Figure 1-19a: -26dBc bandwidth, PCS1900
 Low Channel in GSM mode**

**Figure 1-20a: Occupied Bandwidth, PCS1900
 Low Channel in GSM mode**


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013


FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

**Figure 1-21a: -26dBc bandwidth, PCS1900
 Middle Channel in GSM mode**



**Figure 1-22a: Occupied Bandwidth, PCS1900
 Middle Channel in GSM mode**

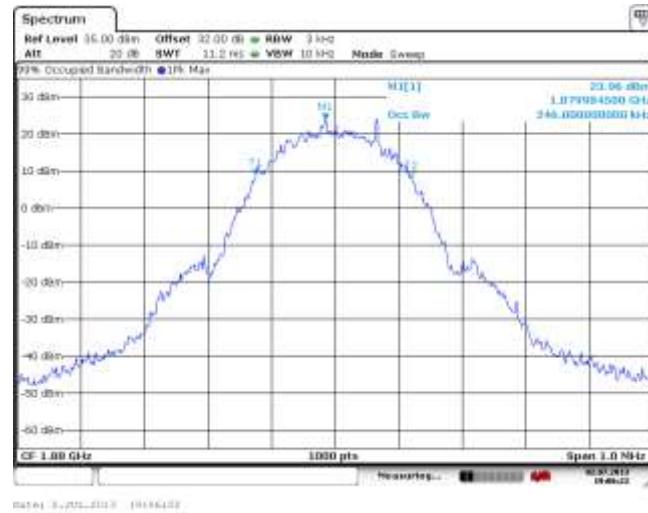

**Figure 1-23a: -26dBc bandwidth, PCS1900
 High Channel in GSM mode**



**Figure 1-24a: Occupied Bandwidth, PCS1900
 High Channel in GSM mode**



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

Figure 1-25a: GSM850 band, Low Channel Mask in GSM mode

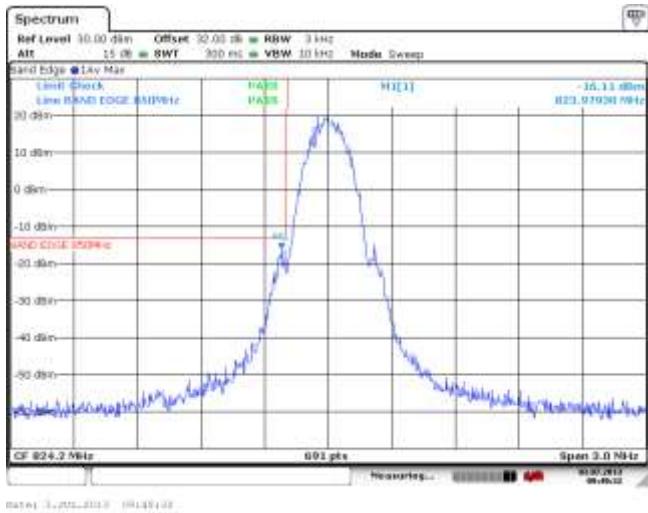


Figure 1-26a: GSM850 band High Channel Mask in GSM mode

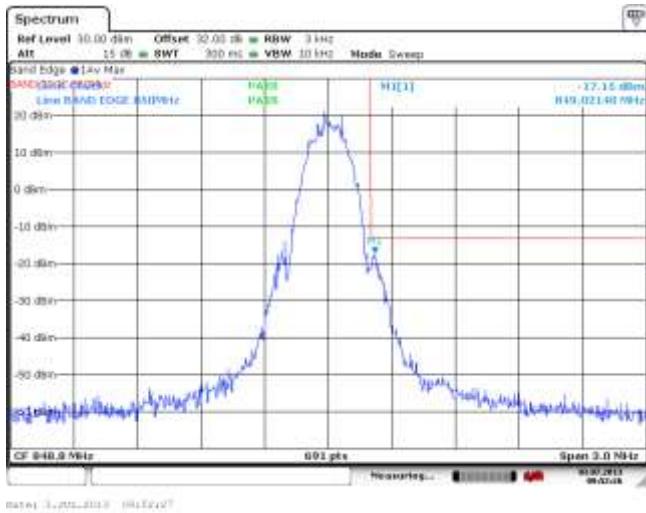


Figure 1-27a: PCS1900, Low Channel Mask in GSM mode


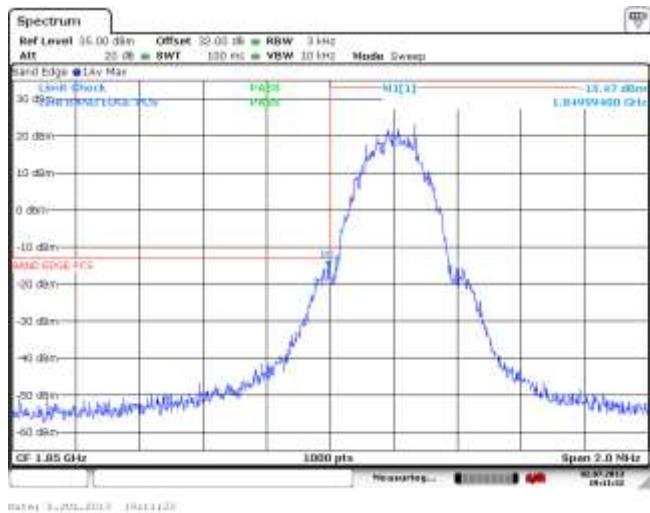


Figure 1-28a: PCS1900, High Channel Mask in GSM mode



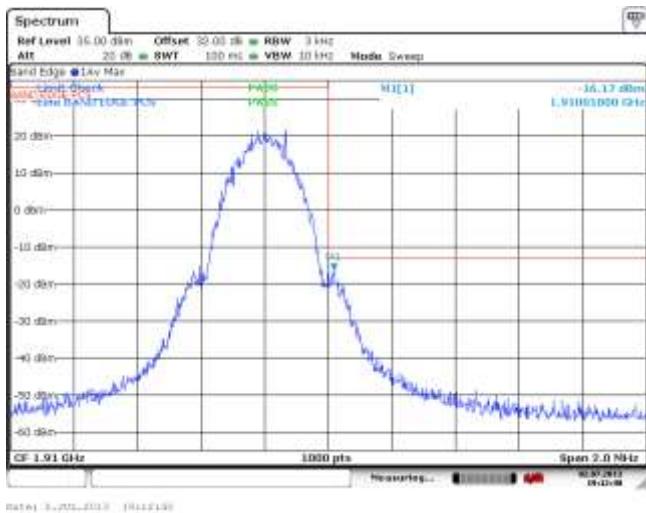


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

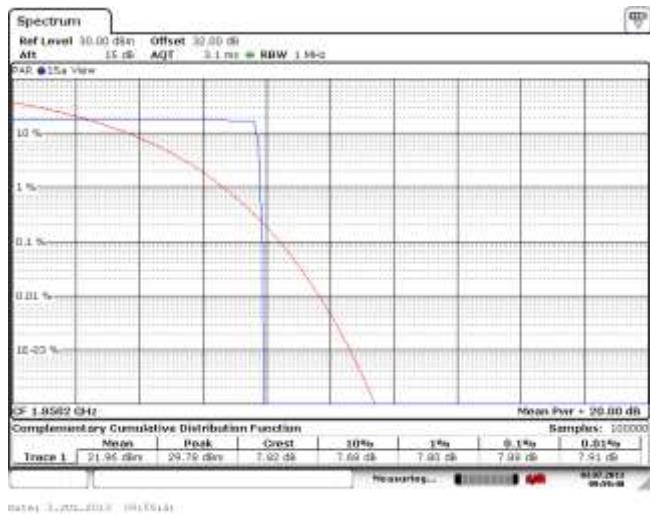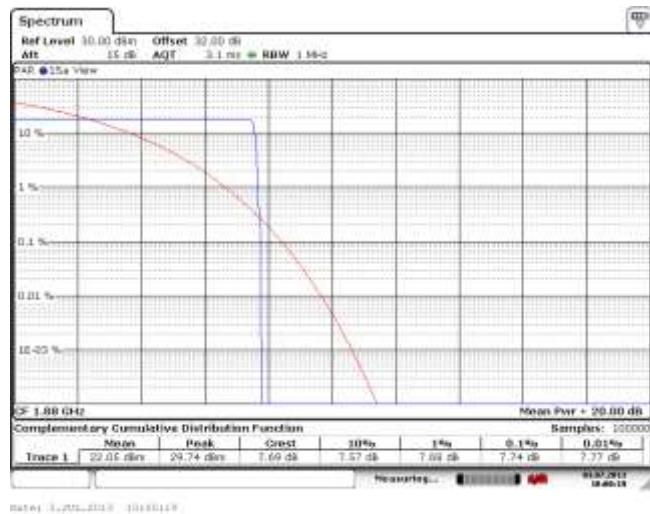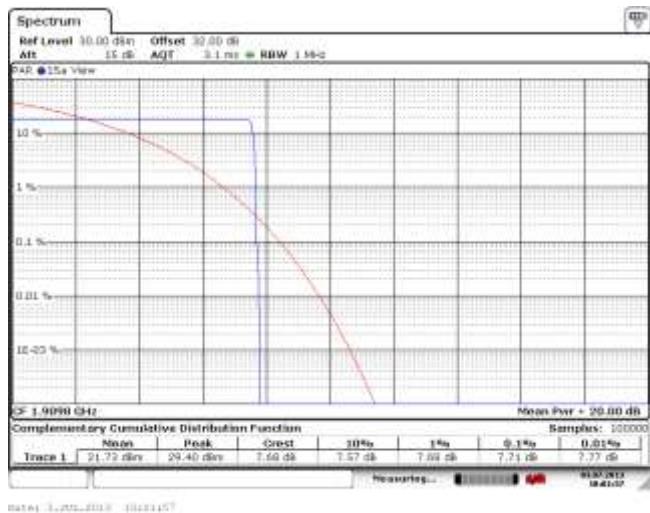Figure 1-51a: PCS1900 Band, PAR Low Channel

Figure 1-52a: PCS1900 Band, PAR Mid Channel

Figure 1-53a: PCS1900 Band, PAR High Channel


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

Figure 1-29a: Occupied Bandwidth, GSM850 Band, Low Channel in EDGE mode



Figure 1-30a: Occupied Bandwidth, GSM850 Band, Middle Channel in EDGE mode

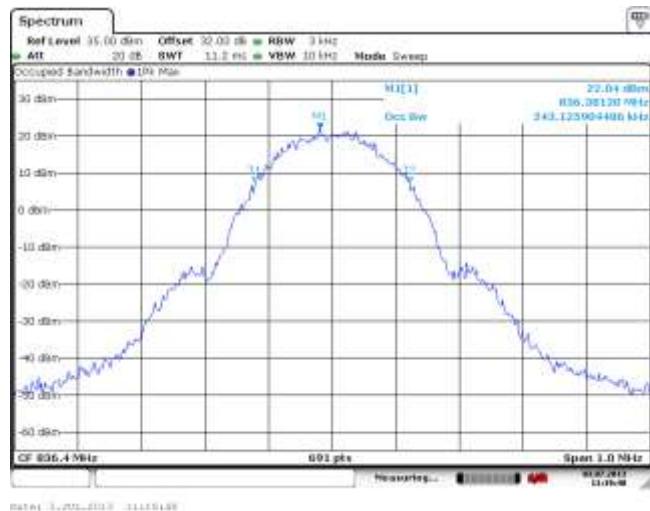


Figure 1-31a: Occupied Bandwidth, GSM850 band, High Channel in EDGE mode


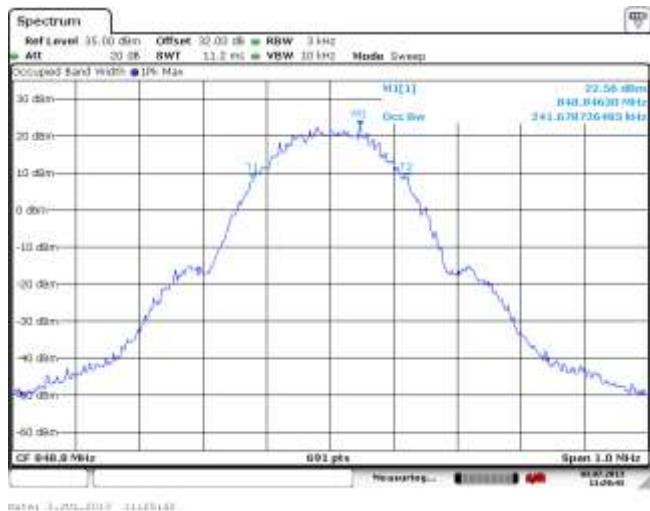


Figure 1-32a: Occupied Bandwidth, PCS1900 Band, Low Channel in EDGE mode

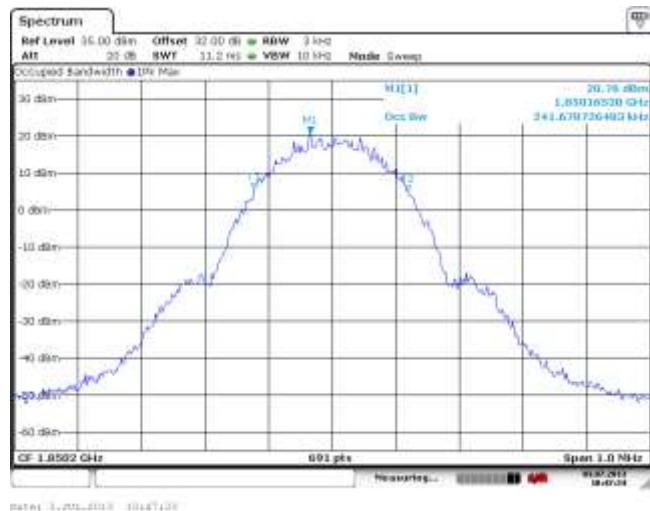

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

Figure 1-33a: Occupied Bandwidth, PCS1900 Band, Middle Channel in EDGE mode

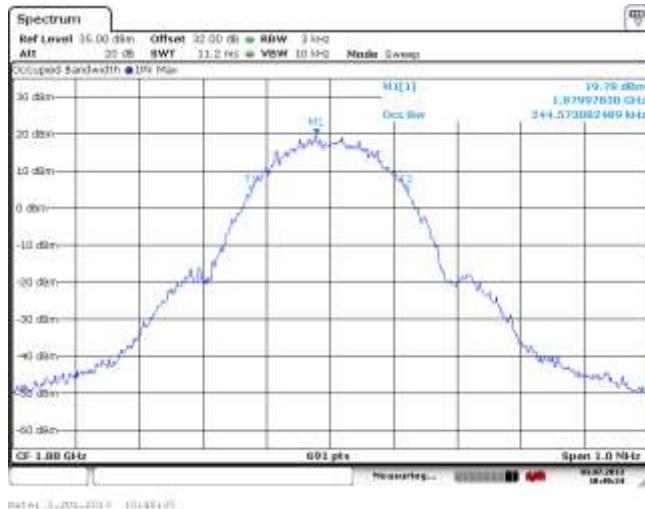


Figure 1-34a: Occupied Bandwidth, PCS1900 Band, High Channel in EDGE mode

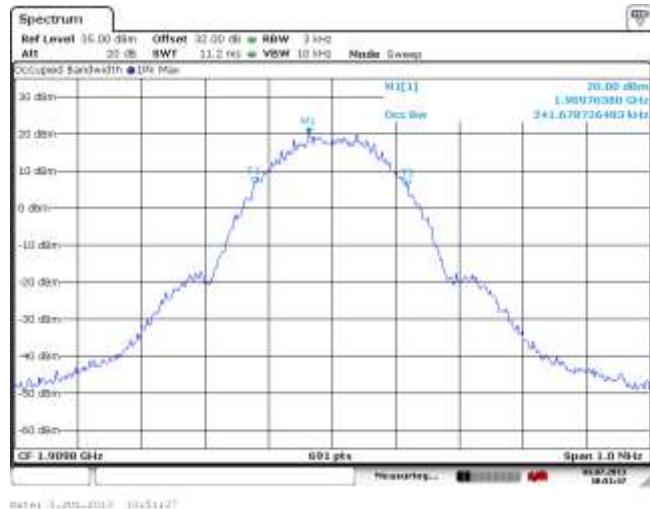


Figure 1-35a: GSM850 Band, Low Channel Mask in EDGE mode


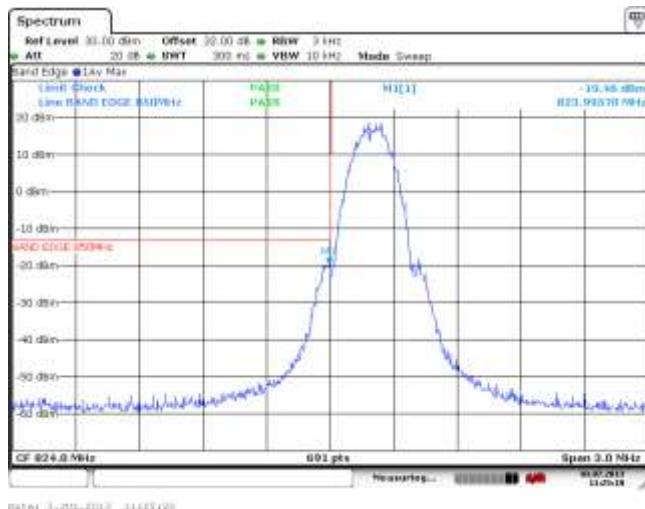


Figure 1-36a: GSM850 Band, High Channel Mask in EDGE mode

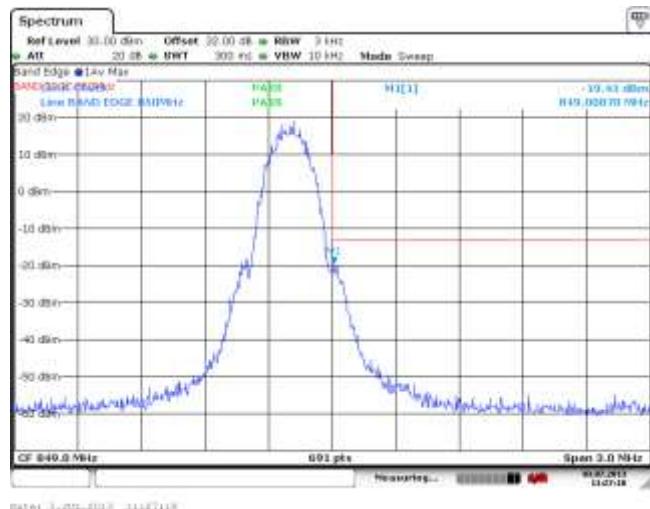

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM Conducted RF Emission Test Data cont'd

Figure 1-37a: PCS1900 Band, Low Channel Mask in EDGE mode


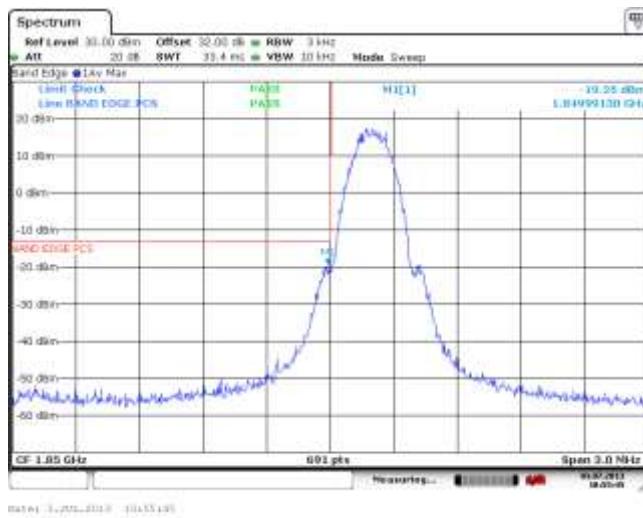


Figure 1-38a: PCS1900 Band, High Channel Mask in EDGE mode

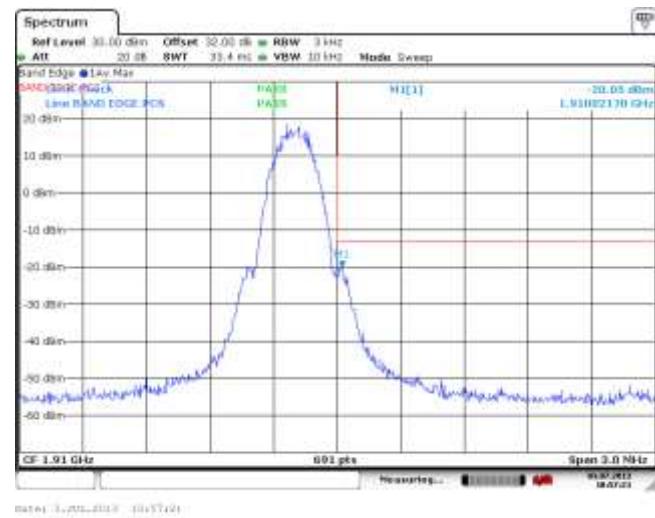


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


GSM Conducted RF Emission Test Data cont'd

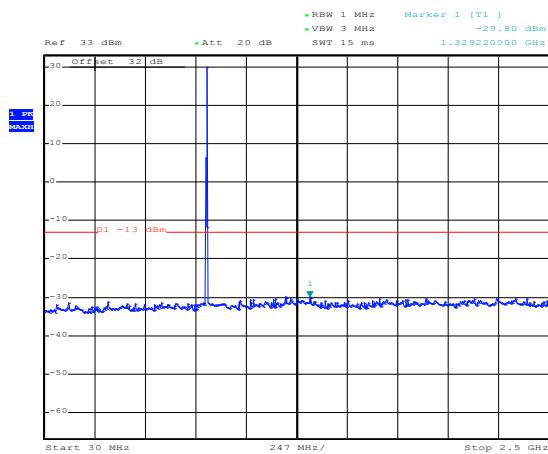Figure 1-39a: GSM850 band, Spurious Conducted Emissions, Low channel in Edge Mode




Date: 3.JUL.2013 11:57:24

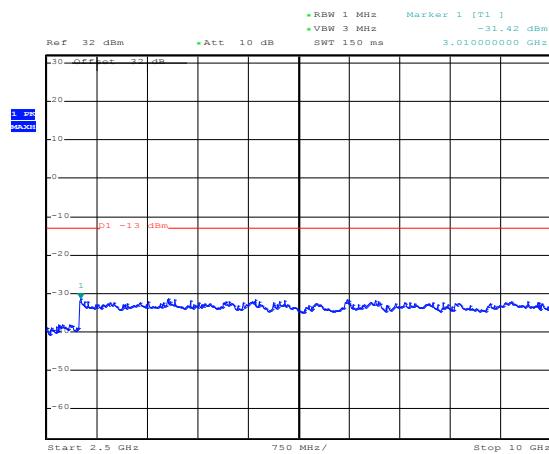Figure 1-40a: GSM850 band, Spurious Conducted Emissions, Low channel in Edge Mode




Date: 3.JUL.2013 12:01:48

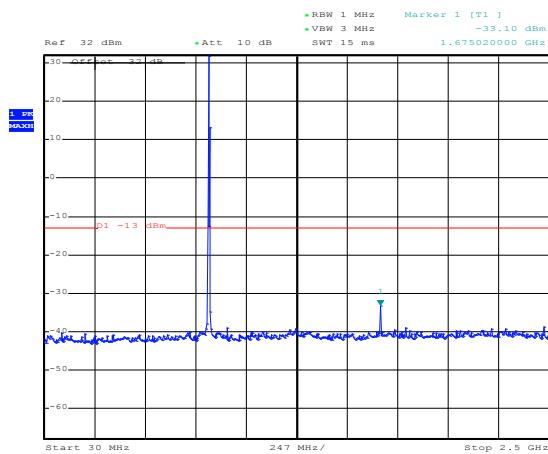Figure 1-41a: GSM850 band, Spurious Conducted Emissions, Middle channel in Edge Mode



Date: 2.JUL.2013 18:43:22

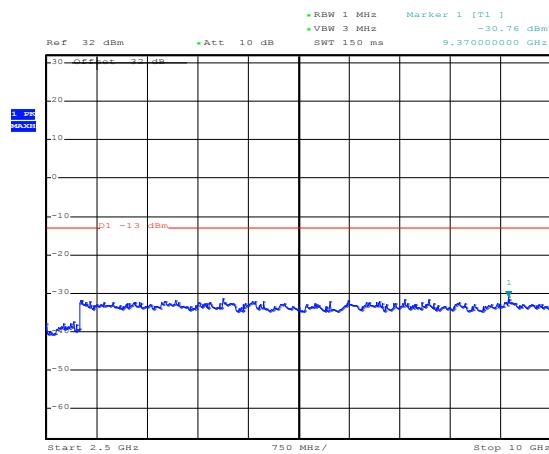Figure 1-42a: GSM850 band, Spurious Conducted Emissions, Middle channel in Edge Mode



Date: 3.JUL.2013 12:00:43


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


GSM Conducted RF Emission Test Data cont'd

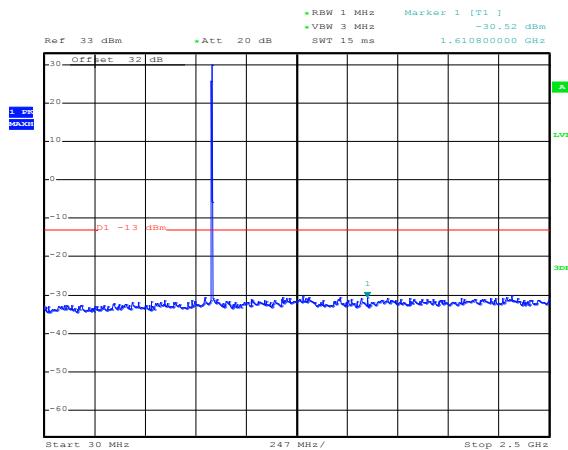Figure 1-43a: GSM850 band, Spurious Conducted Emissions, High channel in Edge Mode




Date: 3.JUL.2013 11:58:57

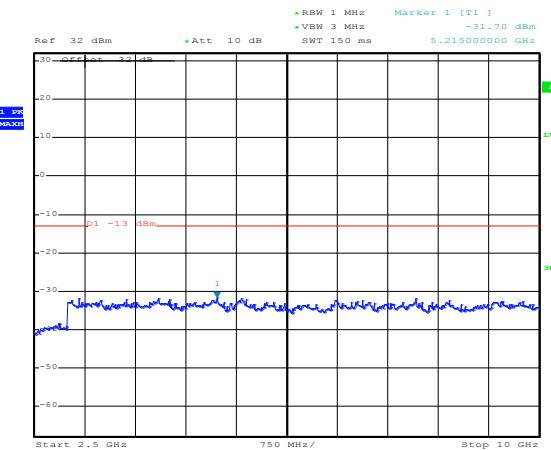Figure 1-44a: GSM850 band, Spurious Conducted Emissions, High channel in Edge Mode




Date: 3.JUL.2013 11:59:52

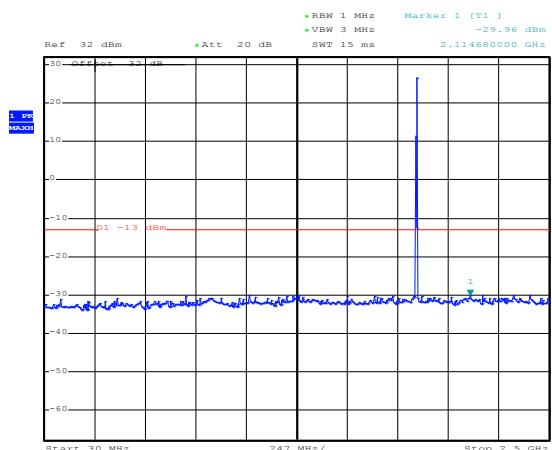Figure 1-45a: PCS1900 band, Spurious Conducted Emissions, Low channel in Edge Mode



Date: 3.JUL.2013 13:52:17

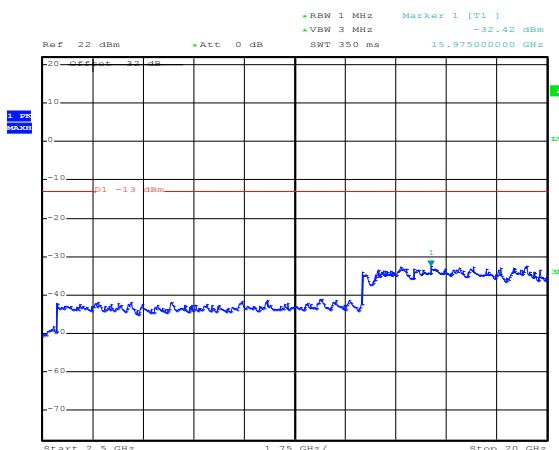Figure 1-46a: PCS1900 band, Spurious Conducted Emissions, Low channel in Edge Mode



Date: 3.JUL.2013 13:53:59


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and Sept
 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


GSM Conducted RF Emission Test Data cont'd

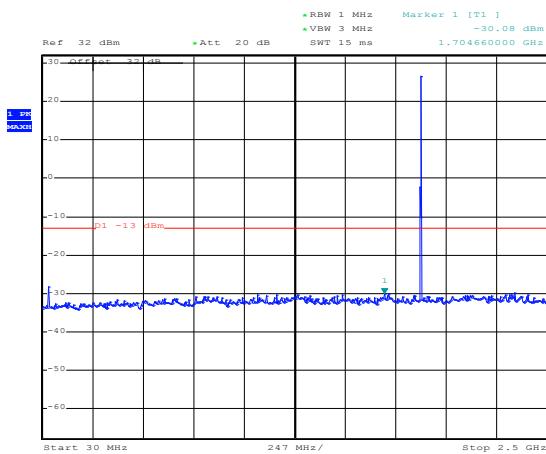Figure 1-47a: PCS1900 band, Spurious Conducted Emissions, middle channel in Edge Mode




Date: 3.JUL.2013 13:52:45

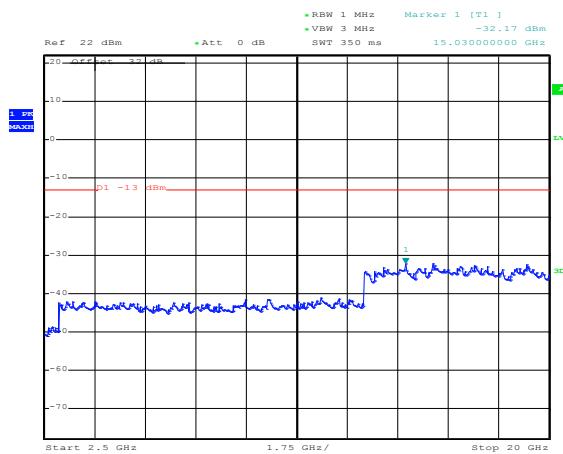Figure 1-48a: PCS1900 band, Spurious Conducted Emissions, middle channel in Edge Mode




Date: 3.JUL.2013 13:54:25

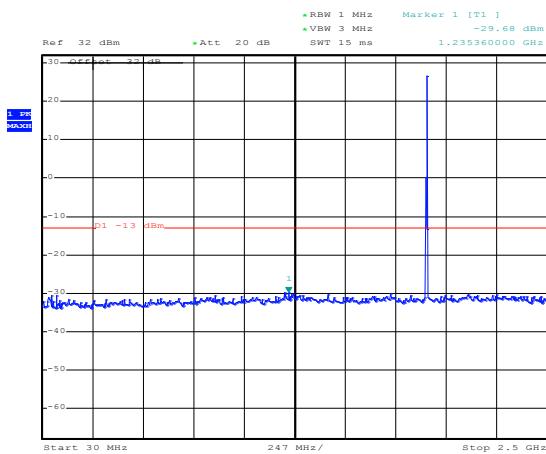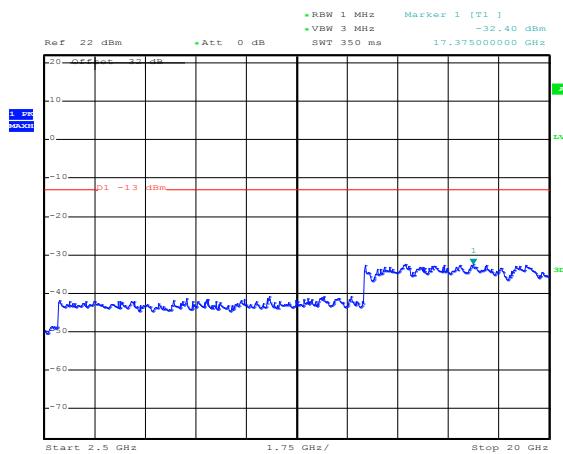Figure 1-49a: PCS1900 band, Spurious Conducted Emissions, High channel in Edge Mode



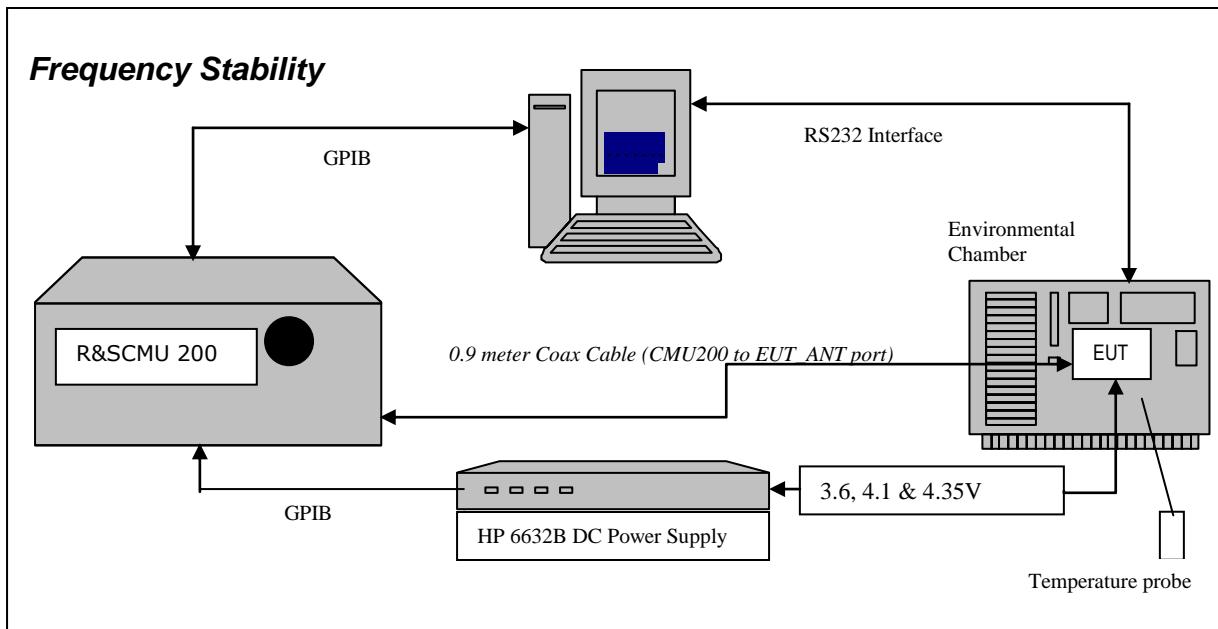
Date: 3.JUL.2013 13:53:18

Figure 1-50a: PCS1900 band, Spurious Conducted Emissions, High channel in Edge Mode



Date: 3.JUL.2013 13:55:14

APPENDIX 1B – GSM FREQUENCY STABILITY TEST DATA

GSM Frequency Stability Test Data

The measurements were performed by Berkin Can.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.995 Frequency Stability - Procedures

- (a,b) Frequency Stability - Temperature Variation
- (d) Frequency Stability - Voltage Variation

24.235 Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 24.235, CFR 47 chapter 1, Section 22.917 RSS-132, 4.3 Frequency Stability, and RSS-133, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMU 200 and the EUT antenna port.

Calibration for the Cable Loss was performed in the RF Laboratory using the Agilent power meter and Agilent Signal Generator.

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1B	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW

Test setup:

The EUT was placed in the Temperature chamber and connected to CMU 200 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the measurements were to be made.

The chamber was switched on and the temperature was set to -30°C.

After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled.

The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMU 200 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, to 4.1 and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 4.1 and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 824.2, 836.4, and 848.8 MHz for the GSM850 band, 1850.2, 1880.0 and 1909.8 MHz for the PCS1900 band. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1B	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMU 200 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.6 volts.
5. Set up CMU 200 Radio Communication Tester.
6. Command the CMU 200 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMU 200 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMU 200, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
10. The CMU 200 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
11. Repeat steps 5 to 10 changing the supply voltage to 4.1 Volts
12. Increase temperature by 10°C and soak for 1/2 hour.
13. Repeat steps 4 - 12 for temperatures -30°C to 60°C .
14. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 4.1 and 4.35 volts.

The maximum frequency error in the GSM850 band measured was -0.0394 PPM.
The maximum frequency error in the PCS1900 band measured was -0.0256 PPM.

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW		

The following measurements were performed on product RFW121LW.

Date of Test: June 18, 2013

GSM850 results: channels 128, 189 and 251 @ 20°C maximum transmitted power

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.20	3.6	20	-5.84	-0.0071
189	836.40	3.6	20	3.42	0.0041
251	848.60	3.6	20	5.04	0.0059

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.20	4.1	20	5.51	0.0067
189	836.40	4.1	20	7.00	0.0084
251	848.60	4.1	20	10.83	0.0128

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.20	4.35	20	7.40	0.0090
189	836.40	4.35	20	5.74	0.0069
251	848.60	4.35	20	7.77	0.0092

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**GSM850 Results: channel 128 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.20	3.6	-30	-22.96	-0.0279
128	824.20	3.6	-20	-17.36	-0.0211
128	824.20	3.6	-10	9.37	0.0114
128	824.20	3.6	0	-4.50	-0.0055
128	824.20	3.6	10	-11.81	-0.0143
128	824.20	3.6	20	-5.84	-0.0071
128	824.20	3.6	30	-4.81	-0.0058
128	824.20	3.6	40	7.79	0.0095
128	824.20	3.6	50	4.88	0.0059
128	824.20	3.6	60	5.16	0.0063
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.20	4.1	-30	-28.95	-0.0351
128	824.20	4.1	-20	-19.35	-0.0235
128	824.20	4.1	-10	11.30	0.0137
128	824.20	4.1	0	-9.51	-0.0115
128	824.20	4.1	10	-9.11	-0.0111
128	824.20	4.1	20	5.51	0.0067
128	824.20	4.1	30	-22.27	-0.0270
128	824.20	4.1	40	-4.63	-0.0056
128	824.20	4.1	50	-6.54	-0.0079
128	824.20	4.1	60	-6.28	-0.0076
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.20	4.35	-30	-31.46	-0.0382
128	824.20	4.35	-20	-27.33	-0.0332
128	824.20	4.35	-10	15.43	0.0187
128	824.20	4.35	0	-4.42	-0.0054
128	824.20	4.35	10	-11.89	-0.0144
128	824.20	4.35	20	7.40	0.0090
128	824.20	4.35	30	-15.25	-0.0185
128	824.20	4.35	40	3.81	0.0046
128	824.20	4.35	50	-9.62	-0.0117
128	824.20	4.35	60	-9.17	-0.0111

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**GSM850 Results: channel 189 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.40	3.6	-30	-23.45	-0.0280
189	836.40	3.6	-20	-18.94	-0.0226
189	836.40	3.6	-10	12.32	0.0147
189	836.40	3.6	0	-5.44	-0.0065
189	836.40	3.6	10	-9.57	-0.0114
189	836.40	3.6	20	3.42	0.0041
189	836.40	3.6	30	-8.99	-0.0107
189	836.40	3.6	40	5.86	0.0070
189	836.40	3.6	50	-4.05	-0.0048
189	836.40	3.6	60	5.60	0.0067
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.40	4.1	-30	-24.29	-0.0290
189	836.40	4.1	-20	-21.55	-0.0258
189	836.40	4.1	-10	15.91	0.0190
189	836.40	4.1	0	-7.58	-0.0091
189	836.40	4.1	10	-7.87	-0.0094
189	836.40	4.1	20	7.00	0.0084
189	836.40	4.1	30	-16.19	-0.0194
189	836.40	4.1	40	3.35	0.0040
189	836.40	4.1	50	-6.66	-0.0080
189	836.40	4.1	60	-7.52	-0.0090
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.40	4.35	-30	-32.99	-0.0394
189	836.40	4.35	-20	-29.12	-0.0348
189	836.40	4.35	-10	20.14	0.0241
189	836.40	4.35	0	-4.55	-0.0054
189	836.40	4.35	10	-12.14	-0.0145
189	836.40	4.35	20	5.74	0.0069
189	836.40	4.35	30	-19.98	-0.0239
189	836.40	4.35	40	-7.31	-0.0087
189	836.40	4.35	50	-9.72	-0.0116
189	836.40	4.35	60	-8.60	-0.0103



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

GSM850 Results: channel 251 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
251	848.8	3.6	-30	-28.31	-0.0334
251	848.8	3.6	-20	-16.38	-0.0193
251	848.8	3.6	-10	15.03	0.0177
251	848.8	3.6	0	-5.78	-0.0068
251	848.8	3.6	10	-8.03	-0.0095
251	848.8	3.6	20	5.04	0.0059
251	848.8	3.6	30	-24.71	-0.0291
251	848.8	3.6	40	8.64	0.0102
251	848.8	3.6	50	4.49	0.0053
251	848.8	3.6	60	4.05	0.0048
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
251	848.8	4.1	-30	-30.15	-0.0355
251	848.8	4.1	-20	-23.90	-0.0282
251	848.8	4.1	-10	14.90	0.0176
251	848.8	4.1	0	-11.75	-0.0138
251	848.8	4.1	10	-10.98	-0.0129
251	848.8	4.1	20	10.83	0.0128
251	848.8	4.1	30	-17.72	-0.0209
251	848.8	4.1	40	-5.43	-0.0064
251	848.8	4.1	50	-5.59	-0.0066
251	848.8	4.1	60	-7.42	-0.0087
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
251	848.8	4.35	-30	-25.06	-0.0295
251	848.8	4.35	-20	-29.00	-0.0342
251	848.8	4.35	-10	20.63	0.0243
251	848.8	4.35	0	4.81	0.0057
251	848.8	4.35	10	-10.63	-0.0125
251	848.8	4.35	20	7.77	0.0092
251	848.8	4.35	30	-14.29	-0.0168
251	848.8	4.35	40	-12.17	-0.0143
251	848.8	4.35	50	-10.84	-0.0128
251	848.8	4.35	60	-5.87	-0.0069



Test Report No.:
RTS-6046-1308-21A_Rev1

Dates of Test:
July 19 to August 15 and
Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

PCS results: channels 512, 661, & 810 @ 20°C maximum transmitted power

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.20	3.6	20	-4.71	-0.0025
661	1880.00	3.6	20	-7.09	-0.0038
810	1909.80	3.6	20	-19.04	-0.0100

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.20	4.1	20	-27.88	-0.0151
661	1880.00	4.1	20	-17.36	-0.0092
810	1909.80	4.1	20	-17.12	-0.0090

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.20	4.35	20	-14.33	-0.0077
661	1880.00	4.35	20	-12.99	-0.0069
810	1909.80	4.35	20	-16.99	-0.0089

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**PCS1900 Results: channel 512 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.20	3.6	-30	-27.62	-0.0149
512	1850.20	3.6	-20	-21.24	-0.0115
512	1850.20	3.6	-10	-23.51	-0.0127
512	1850.20	3.6	0	-9.90	-0.0054
512	1850.20	3.6	10	-10.74	-0.0058
512	1850.20	3.6	20	-4.71	-0.0025
512	1850.20	3.6	30	10.42	0.0056
512	1850.20	3.6	40	-26.06	-0.0141
512	1850.20	3.6	50	11.00	0.0059
512	1850.20	3.6	60	11.24	0.0061
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.20	4.1	-30	-40.71	-0.0220
512	1850.20	4.1	-20	-35.62	-0.0193
512	1850.20	4.1	-10	-29.67	-0.0160
512	1850.20	4.1	0	-12.90	-0.0070
512	1850.20	4.1	10	-22.63	-0.0122
512	1850.20	4.1	20	-27.88	-0.0151
512	1850.20	4.1	30	16.11	0.0087
512	1850.20	4.1	40	-27.56	-0.0149
512	1850.20	4.1	50	-9.26	-0.0050
512	1850.20	4.1	60	-7.69	-0.0042
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.20	4.35	-30	-35.24	-0.0190
512	1850.20	4.35	-20	-43.47	-0.0235
512	1850.20	4.35	-10	-31.54	-0.0170
512	1850.20	4.35	0	-12.84	-0.0069
512	1850.20	4.35	10	-15.90	-0.0086
512	1850.20	4.35	20	-14.33	-0.0077
512	1850.20	4.35	30	14.83	0.0080
512	1850.20	4.35	40	-22.49	-0.0122
512	1850.20	4.35	50	-15.07	-0.0081
512	1850.20	4.35	60	-18.89	-0.0102



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

PCS1900 Results: channel 661 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
661	1880.00	3.6	-30	-24.46	-0.0130
661	1880.00	3.6	-20	-24.30	-0.0129
661	1880.00	3.6	-10	-21.18	-0.0113
661	1880.00	3.6	0	-11.60	-0.0062
661	1880.00	3.6	10	-12.26	-0.0065
661	1880.00	3.6	20	-7.09	-0.0038
661	1880.00	3.6	30	17.02	0.0091
661	1880.00	3.6	40	-22.24	-0.0118
661	1880.00	3.6	50	15.36	0.0082
661	1880.00	3.6	60	11.69	0.0062
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
661	1880.00	4.1	-30	-37.31	-0.0198
661	1880.00	4.1	-20	-34.31	-0.0183
661	1880.00	4.1	-10	-32.48	-0.0173
661	1880.00	4.1	0	-11.72	-0.0062
661	1880.00	4.1	10	-18.16	-0.0097
661	1880.00	4.1	20	-17.36	-0.0092
661	1880.00	4.1	30	19.80	0.0105
661	1880.00	4.1	40	-20.89	-0.0111
661	1880.00	4.1	50	-6.17	-0.0033
661	1880.00	4.1	60	-10.99	-0.0058
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
661	1880.00	4.35	-30	-33.00	-0.0176
661	1880.00	4.35	-20	-28.96	-0.0154
661	1880.00	4.35	-10	-32.51	-0.0173
661	1880.00	4.35	0	-12.70	-0.0068
661	1880.00	4.35	10	-18.60	-0.0099
661	1880.00	4.35	20	-12.99	-0.0069
661	1880.00	4.35	30	18.11	0.0096
661	1880.00	4.35	40	-14.93	-0.0079
661	1880.00	4.35	50	-16.87	-0.0090
661	1880.00	4.35	60	-15.03	-0.0080



Test Report No.:
RTS-6046-1308-21A_Rev1

Dates of Test:
July 19 to August 15 and
Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

PCS1900 Results: channel 810 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
810	1909.80	3.6	-30	-22.96	-0.0120
810	1909.80	3.6	-20	-28.10	-0.0147
810	1909.80	3.6	-10	-22.34	-0.0117
810	1909.80	3.6	0	7.09	0.0037
810	1909.80	3.6	10	-17.29	-0.0091
810	1909.80	3.6	20	-19.04	-0.0100
810	1909.80	3.6	30	20.10	0.0105
810	1909.80	3.6	40	-16.05	-0.0084
810	1909.80	3.6	50	17.08	0.0089
810	1909.80	3.6	60	12.52	0.0066
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
810	1909.80	4.1	-30	-39.79	-0.0208
810	1909.80	4.1	-20	-32.52	-0.0170
810	1909.80	4.1	-10	-33.72	-0.0177
810	1909.80	4.1	0	-12.99	-0.0068
810	1909.80	4.1	10	-20.63	-0.0108
810	1909.80	4.1	20	-17.12	-0.0090
810	1909.80	4.1	30	18.61	0.0097
810	1909.80	4.1	40	-23.63	-0.0124
810	1909.80	4.1	50	-12.55	-0.0066
810	1909.80	4.1	60	-12.29	-0.0064
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
810	1909.80	4.35	-30	-48.84	-0.0256
810	1909.80	4.35	-20	-23.88	-0.0125
810	1909.80	4.35	-10	-29.53	-0.0155
810	1909.80	4.35	0	4.07	0.0021
810	1909.80	4.35	10	-17.40	-0.0091
810	1909.80	4.35	20	-16.99	-0.0089
810	1909.80	4.35	30	17.17	0.0090
810	1909.80	4.35	40	-11.48	-0.0060
810	1909.80	4.35	50	-17.11	-0.0090
810	1909.80	4.35	60	-15.65	-0.0082

APPENDIX 1C – GSM RADIATED EMISSIONS TEST DATA

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LWRadiated Power Test Data Results

The following measurements were performed on product RFW121LW.

Date of test: July 15 and Sept 12, 2013

The following measurements were performed by Rex Zhang.

The environmental tests conditions were: Temperature: 25.6 °C
Relative Humidity: 15.0 %

The BlackBerry® smartphone was standalone, horizontal with LCD facing down and bottom pointing to RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

GSM850 Band in Call Mode

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	(W)	Limit (dBm)	Diff. To Limit (dB)
F0	128	824.20	850	Dipole	V	-30.66	-22.88	V-V	11.91	29.04	0.80	38.50	9.46
F0	128	824.20	850	Dipole	H	-22.88		H-H	10.60				
F0	190	836.60	850	Dipole	V	-30.83	-22.45	V-V	12.22	29.02	0.80	38.50	9.48
F0	190	836.60	850	Dipole	H	-22.45		H-H	11.46				
F0	251	848.80	850	Dipole	V	-30.35	-22.78	V-V	11.93	28.71	0.74	38.50	9.79
F0	251	848.80	850	Dipole	H	-22.78		H-H	11.70				

GSM850 Band in EDGE Mode

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	(W)	Limit (dBm)	Diff. To Limit (dB)
F0	128	824.20	850	Dipole	V	-33.47	-25.30	V-V	9.15	26.28	0.42	38.50	12.22
F0	128	824.20	850	Dipole	H	-25.30		H-H	7.72				
F0	190	836.60	850	Dipole	V	-34.69	-24.16	V-V	10.98	27.78	0.60	38.50	10.72
F0	190	836.60	850	Dipole	H	-24.16		H-H	7.55				
F0	251	848.80	850	Dipole	V	-33.82	-24.95	V-V	10.80	27.58	0.57	38.50	10.92
F0	251	848.80	850	Dipole	H	-24.95		H-H	8.41				

This report shall NOT be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2013

Page 49 of 169

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LWRadiated Power Test Data Results cont'd

Date of test: July 19 and Sept 12, 2013

The following measurements were performed by Kevin Guo.

The environmental tests conditions were: Temperature: 25.2 °C
Relative Humidity: 37.4 %

The BlackBerry® smartphone was standalone, horizontal with LCD facing down and bottom pointing to RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

PCS1900 Band in Call Mode

							Substitution Method						
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) dBuV	Pol.	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	512	1850.20	1900	Horn	V	82.31	90.95	V-V	-2.38	32.77	1.89	33	0.23
	512	1850.20	1900	Horn	H	90.95		H-H	-2.04				
F0	661	1880.00	1900	Horn	V	83.74	89.9	V-V	-3.50	32.02	1.59	33	0.98
	661	1880.00	1900	Horn	H	89.90		H-H	-2.88				
F0	810	1909.80	1900	Horn	V	83.15	90	V-V	-1.7	32.43	1.75	33	0.57
	810	1909.80	1900	Horn	H	90		H-H	-1.52				

PCS1900 Band in EDGE Mode

							Substitution Method						
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) dBuV	Pol.	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	512	1850.20	1900	Horn	V	77.81	87.27	V-V	-5.73	29.15	0.82	33	3.85
	512	1850.20	1900	Horn	H	87.27		H-H	-5.66				
F0	661	1880.00	1900	Horn	V	76.45	86.82	V-V	-6.27	28.63	0.73	33	4.37
	661	1880.00	1900	Horn	H	86.82		H-H	-6.48				
F0	810	1909.80	1900	Horn	V	76.17	86.79	V-V	-4.59	29.36	0.86	33	3.64
	810	1909.80	1900	Horn	H	86.79		H-H	-4.83				

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

GSM850 Call Mode

Date of Test: July 12, 2013

The following measurements were performed by Rex Zhang.

The environmental test conditions were: Temperature: 25.7 °C
Relative Humidity: 17.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 30 MHz to 1000 MHz.

The BlackBerry® smartphone was standalone, with USB facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in GSM850 Call Tx mode, channels 128, 190, 251.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 15 - 17, 2013

The following measurements were performed by Mahmood Ahmed.

The environmental test conditions were: Temperature: 24.5 - 25.4 °C
Relative Humidity: 23.6 - 41.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 9 GHz.

The BlackBerry® smartphone was standalone, with USB port pointing up and the LCD facing to the RX antenna when the turntable is at 0 degree position.

The measurements were performed in GSM850 Call Tx mode, channels 128, 190, 251.

Frequency (MHz)	Channel Of Occurrence	Antenna		Test Angle (Deg.)	Detector (PK or QP)	Measured Level (dB μ V)	Correction Factor for preampl/antenna/ cables/ filter (dB)	Field Strength Level (reading+corr) (dBm)	Limit @ 3.0 m (dBm)	Test Margin (dB)
		Pol.	Height (V/H) (meters)							
2509.908	190	V	2.07	187	PK	48.32	-86.32	-30.413	-13.00	-17.4

All other emissions were at least 25.0 dB below the limit.

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

GSM850 EDGE Mode

Date of Test: July 12, 2013

The environmental test conditions were: Temperature: 25.7 °C
Relative Humidity: 17.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 30 MHz to 1000 MHz.

The BlackBerry® smartphone was standalone, with USB facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in GSM850 EDGE Tx mode, channels 128, 190, 251. All emissions were at least 25.0 dB below the limit.

Date of Test: July 15 - 17, 2013

The environmental test conditions were: Temperature: 24.5 - 25.4 °C
Relative Humidity: 23.6 - 41.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 9 GHz.

The BlackBerry® smartphone was standalone, with USB jack pointing up and the LCD facing to the RX antenna when the turntable is at 0 degree position.

The measurements were performed in GSM850 EDGE Tx mode, channels 128, 190, 251.

Frequency (MHz)	Channel Of Occurrence	Antenna		Test Angle (Deg.)	Detector (PK or QP)	Measured Level (dB μ V)	Correction Factor for preamp/antenna/ cables/ filter (dB)	Field Strength Level (reading+corr) (dBm)	Limit @ 3.0 m (dBm)	Test Margin (dB)
		Pol. (V/H)	Height (meters)							
2466.800	190	V	3.16	255	PK	49.71	85.56	-35.842	-13.00	-22.8

All other emissions were at least 25.0 dB below the limit.

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

PCS1900 CALL Mode

Date of Test: July 12, 2013

The following measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 25.7 °C
Relative Humidity: 17.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 30 MHz to 1000 MHz.

The BlackBerry® smartphone was standalone, with USB jack pointing down and the LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in PCS1900 Call Tx mode, channels 512, 661, 810. All emissions were at least 25.0 dB below the limit.

Date of Test: July 16 - 21, 2013

The following measurements were performed by Mahmood Ahmed.

The environmental test conditions were: Temperature: 24.3 – 25.4 °C
Relative Humidity: 23.6 – 42.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 20 GHz.

The BlackBerry® smartphone was standalone, with USB jack pointing up and the LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in PCS1900 Call Tx mode, channels 512, 661, 810.

All emissions were at least 25.0 dB below the limit.

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 1C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

PCS1900 EDGE Mode

Date of Test: July 12, 2013

The environmental test conditions were: Temperature: 25.7 °C
Relative Humidity: 17.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 30 MHz to 1000 MHz.

The BlackBerry® smartphone was standalone, with USB jack pointing down and the LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in PCS1900 EDGE Tx mode, channels 512, 661, 810. All emissions were at least 25.0 dB below the limit.

Date of Test: July 16 - 21, 2013

The environmental test conditions were: Temperature: 24.3 – 25.4 °C
Relative Humidity: 23.6 – 42.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 20 GHz.

The BlackBerry® smartphone was standalone, with USB jack pointing up and the LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in PCS1900 EDGE Tx mode, channels 512, 661, 810.

All emissions were at least 25.0 dB below the limit.


APPENDIX 2A– WCDMA Band 2/4/5 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 2A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

WCDMA BAND 2/4/5 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

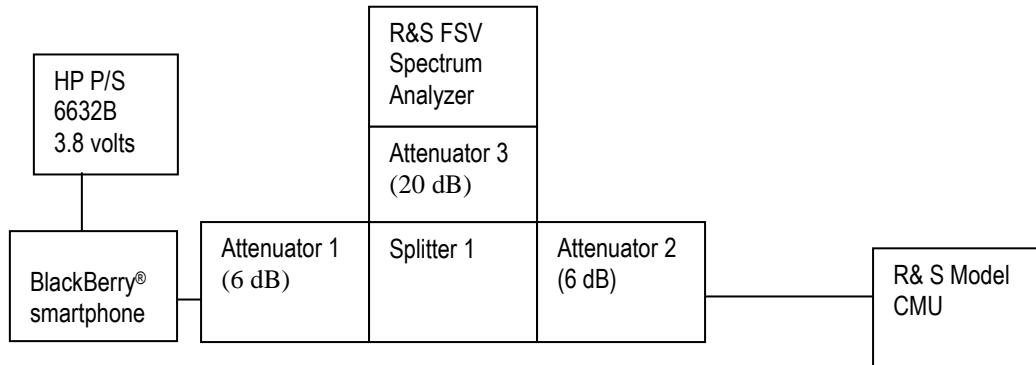Test Setup Diagram



A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

Date of Test: July 19, 2013

The environmental test conditions were: Temperature: 25.4°C
Relative Humidity: 35.4%

The following measurements were performed by Berkin Can.

This report shall NOT be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.
Copyright 2005-2013 Page 56 of 169

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 2A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd

The conducted spurious emissions – As per 47 CFR 2.1051, CFR 22.917, CFR 24.238(a), RSS-132, 5.5 and RSS – 133, 6.5 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

For each carrier frequency of low, middle and high, the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for WCDMA band 5 was measured to be 4.573 MHz, and for the WCDMA band 2 was measured to be 4.58 MHz as shown below. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

Test Data for WCDMA Band 2/4/5 selected Frequencies in Voice mode

WCDMA Band 5 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
826.400	4.573	4.168
836.400	4.566	4.161
846.600	4.573	4.161

WCDMA Band 2 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
1852.400	4.580	4.153
1880.000	4.580	4.161
1907.600	4.559	4.161

WCDMA Band 4 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
1712.4	4.570	4.150
1732.6	4.580	4.155
1752.6	4.570	4.150

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 2A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Peak to Average Ratio (PAR)

The peak to average ratio was measured on the low, middle and high channels. On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied. The worst case measured was 3.58 dB on the low channel of WCDMA Band 2. The worst case measured was 3.63 dB on low and high channels of WCDMA Band 4.

Measurement Plots for WCDMA Band 2/4/5 Voice mode

The measurement plots on product RFW121LW:

See Figures 2-1a to 2-12a for the plots of the conducted spurious emissions.
See Figures 2-13a to 2-24a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.
See Figures 2-25a to 2-28a for the plots of the Channel mask.
See Figures 2-29a to 2-31a for the plots of the Peak to Average Ratio (WCDMA Band 2).

The measurement plots on product RFY111LW:

See Figures 2-1b to 2-6b for the plots of the conducted spurious emissions.
See Figures 2-7b to 2-12b for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.
See Figures 2-13b to 2-14b for the plots of the Channel mask.
See Figures 2-15b to 2-17b for the plots of the Peak to Average Ratio (WCDMA Band 4).

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 2A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Test Data for WCDMA Band 2/4/5 selected Frequencies in HSUPA mode

WCDMA Band 5 Frequency (MHz)	99% Occupied Bandwidth (MHz)
826.400	4.160
836.400	4.155
846.600	4.150

WCDMA Band 2 Frequency (MHz)	99% Occupied Bandwidth (MHz)
1852.400	4.155
1880.000	4.160
1907.600	4.160

WCDMA Band 4 Frequency (MHz)	99% Occupied Bandwidth (MHz)
1712.4	4.150
1732.6	4.155
1752.6	4.150

Measurement Plots for WCDMA Band 5/2/4 in HSUPA mode

Refer to the following measurement plots for more detail:

The measurement plots for product RFW121LW:

See Figures 2-32a to 2-43a for the plots of the conducted spurious emissions.

See Figures 2-44a to 2-49a for the plots of 99% Occupied Bandwidth.

See Figures 2-50a to 2-53a for the plots of the Channel mask.

The measurement plots for product RFY111LW:

See Figures 2-18b to 2-23b for the plots of the conducted spurious emissions.

See Figures 2-24b to 2-26b for the plots of 99% Occupied Bandwidth.

See Figures 2-27b to 2-28b for the plots of the Channel mask.


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

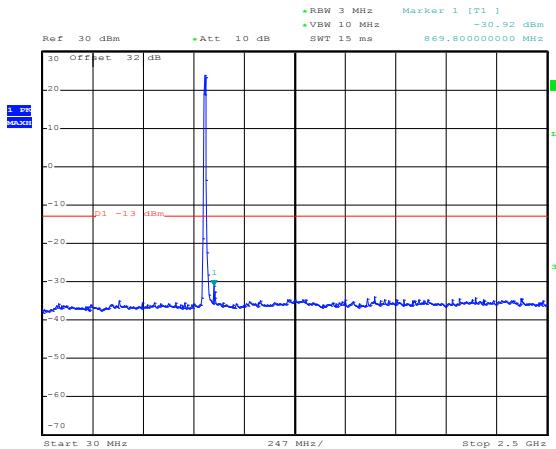Figure 2-1a: Band 5, Spurious Conducted Emissions, Low channel




Date: 4.JUL.2013 11:24:10

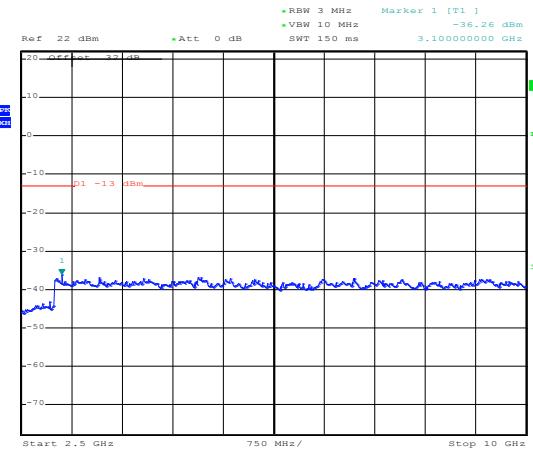Figure 2-2a: Band 5, Spurious Conducted Emissions, Low channel




Date: 4.JUL.2013 11:28:05

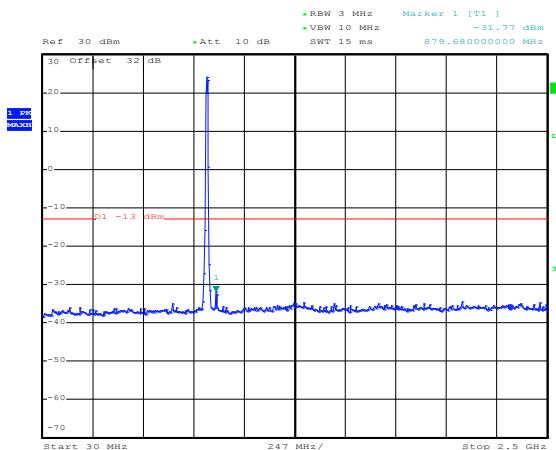Figure 2-3a: Band 5, Spurious Conducted Emissions, Middle channel



Date: 4.JUL.2013 11:24:50

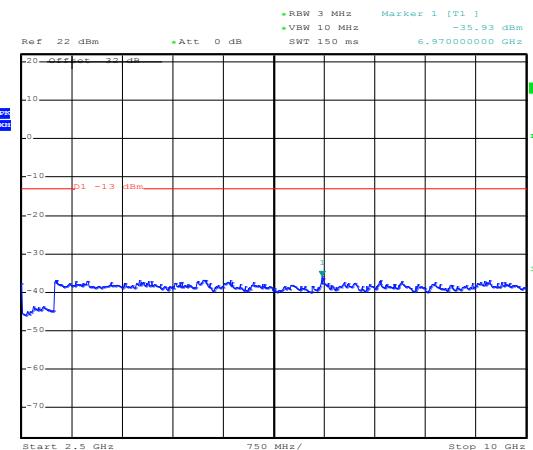Figure 2-4a: Band 5, Spurious Conducted Emissions, Middle channel



Date: 4.JUL.2013 11:27:37


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

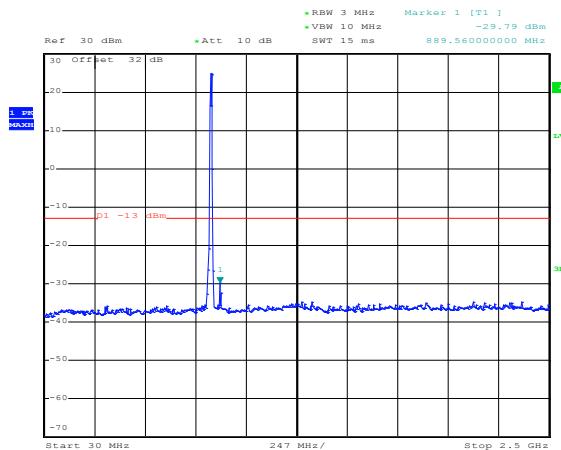Figure 2-5a: Band 5, Spurious Conducted Emissions, High Channel




Date: 4.JUL.2013 11:25:20

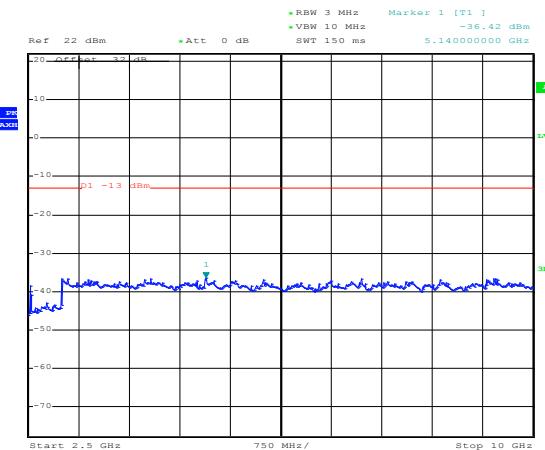Figure 2-6a: Band 5, Spurious Conducted Emissions, High Channel




Date: 4.JUL.2013 11:26:56

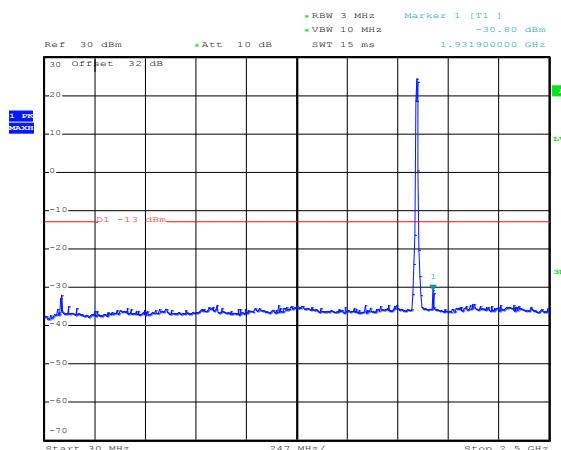Figure 2-2a:, BAND 2 Spurious Conducted Emissions, Low Channel



Date: 4.JUL.2013 11:31:31

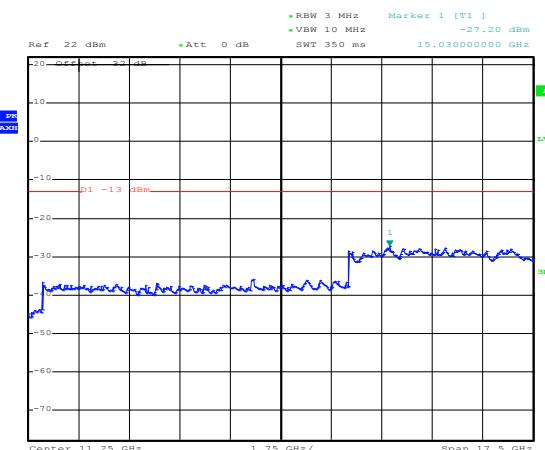Figure 2-8a: BAND 2, Spurious Conducted Emissions, Low Channel



Date: 4.JUL.2013 11:38:56


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

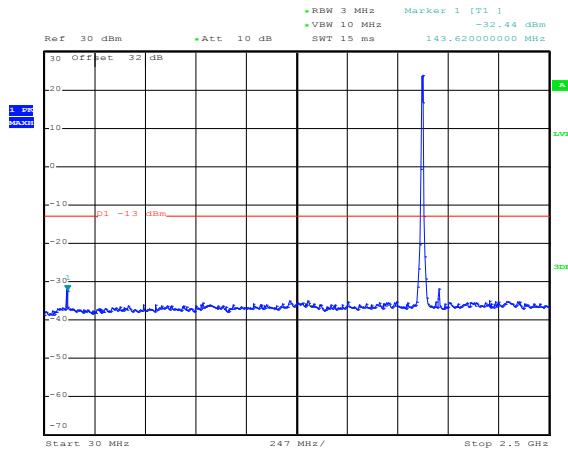Figure 2-9a: BAND 2, Spurious Conducted Emissions, Middle Channel




Date: 4.JUL.2013 11:32:04

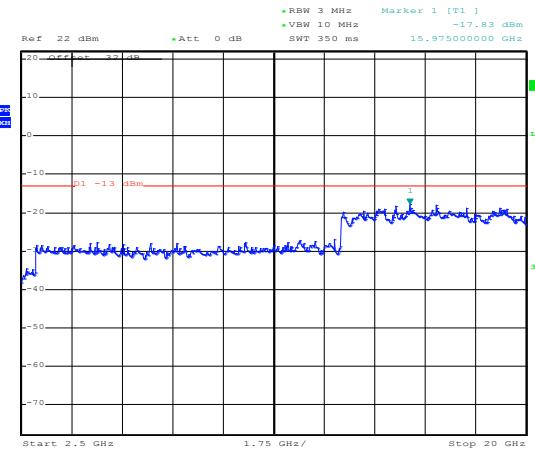Figure 2-10a: BAND 2, Spurious Conducted Emissions, Middle Channel




Date: 4.JUL.2013 11:38:15

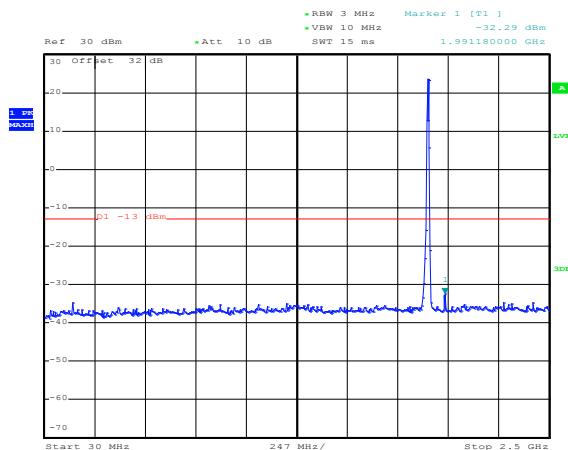Figure 2-11a: BAND 2, Spurious Conducted Emissions, High Channel



Date: 4.JUL.2013 11:37:34

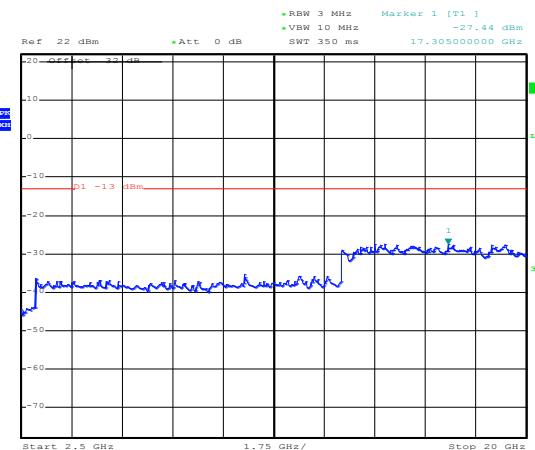Figure 2-12a: BAND 2, Spurious Conducted Emissions, High Channel







Date: 4.JUL.2013 11:36:58

Test Report No.:
 RTS-6046-1308-21A_Rev1

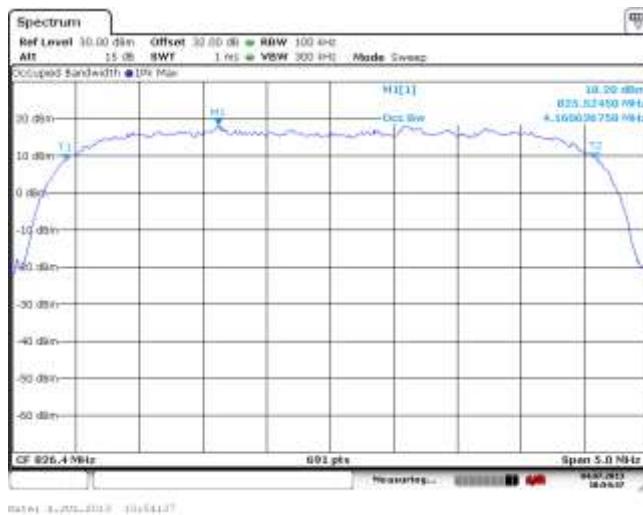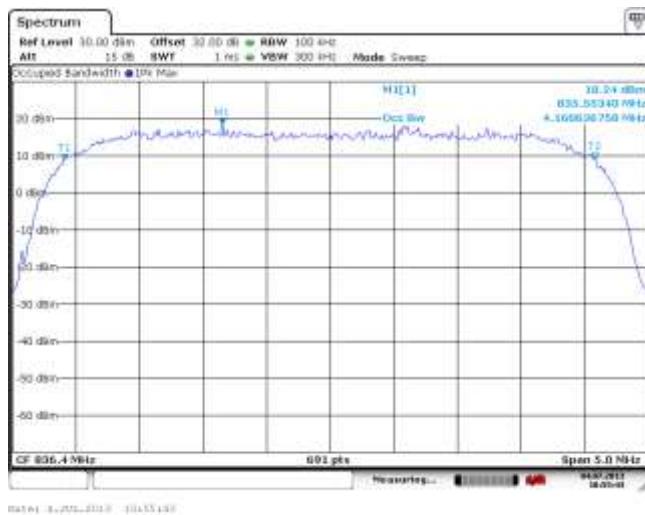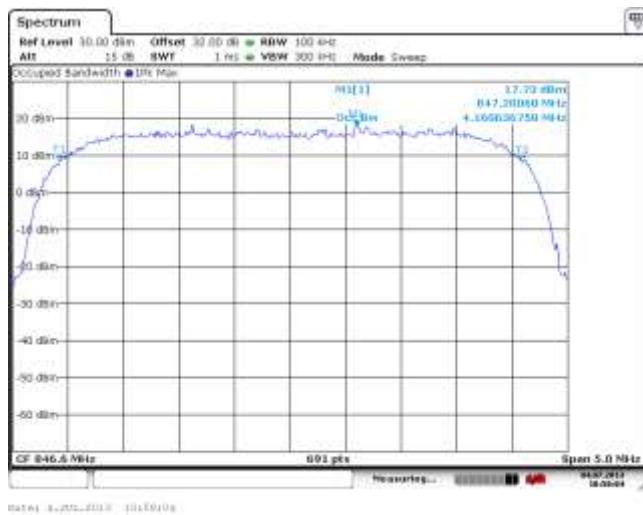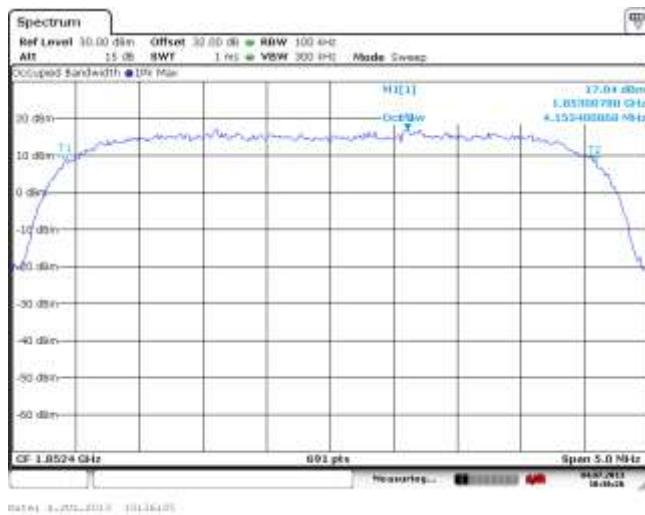Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

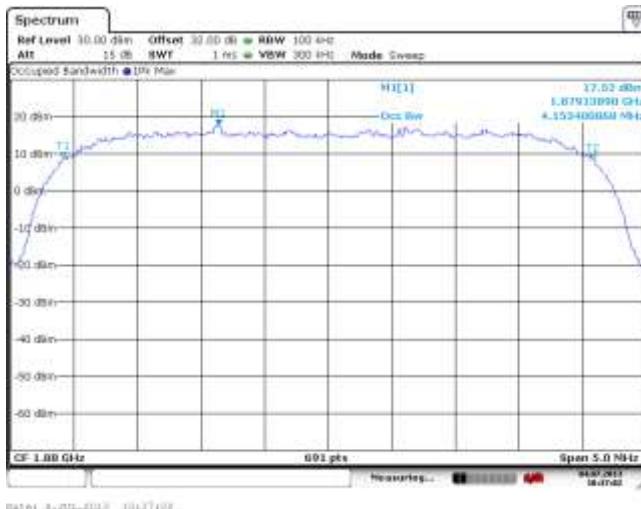
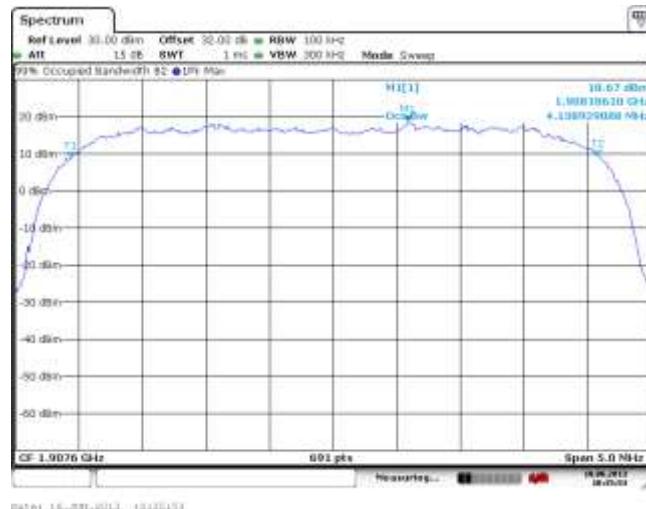
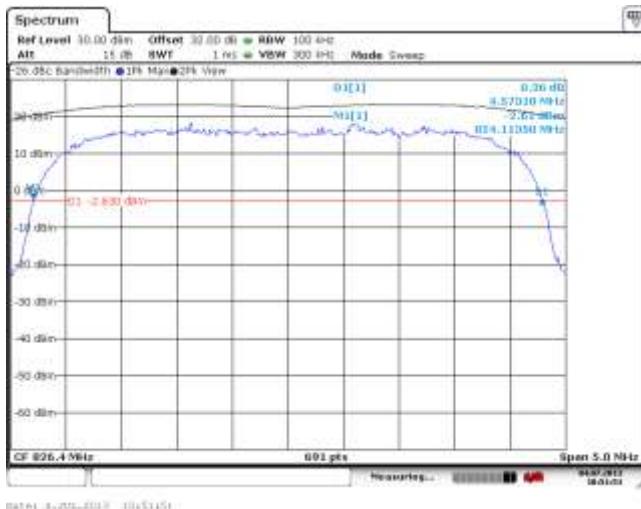
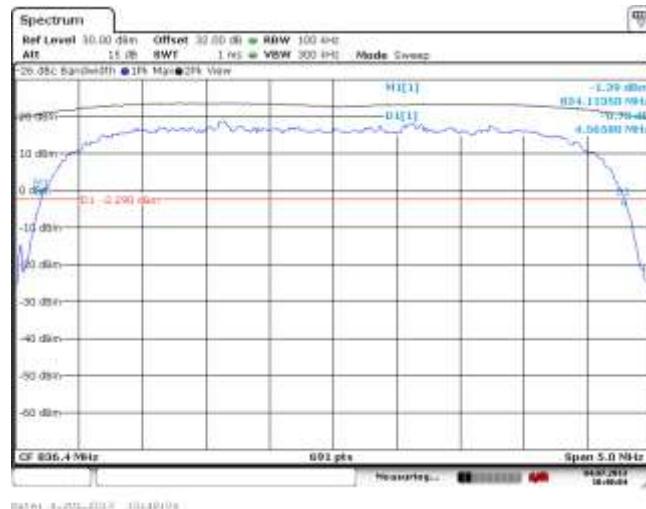
WCDMA Conducted RF Emission Test Data cont'd
Figure 2-13a: Occupied Bandwidth, Band 5 Low Channel

Figure 2-14a: Occupied Bandwidth, Band 5 Middle Channel

Figure 2-15a: Occupied Bandwidth, Band 5 High Channel

Figure 2-16a: Occupied Bandwidth, Band 2 Low Channel


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

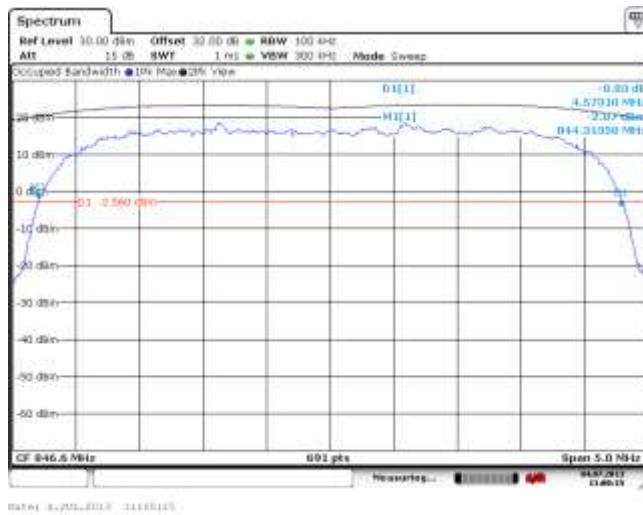
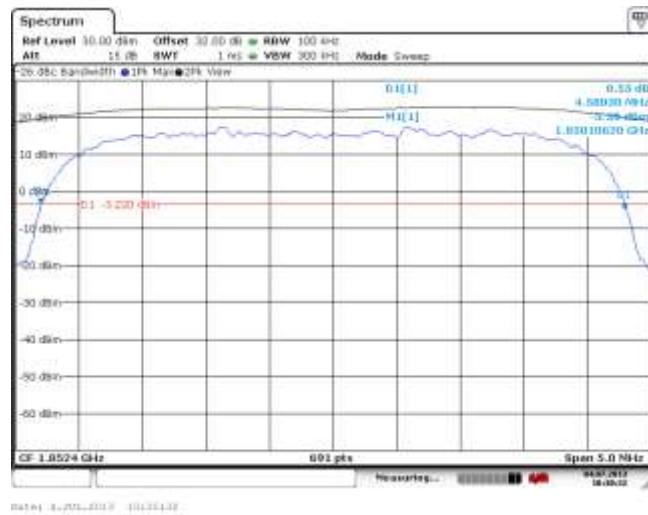
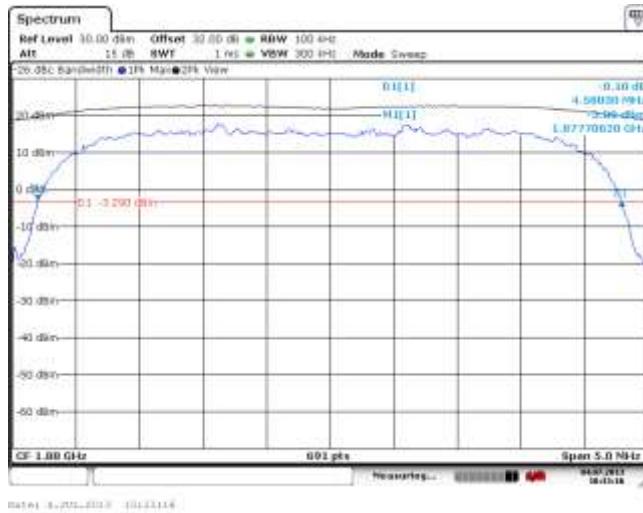
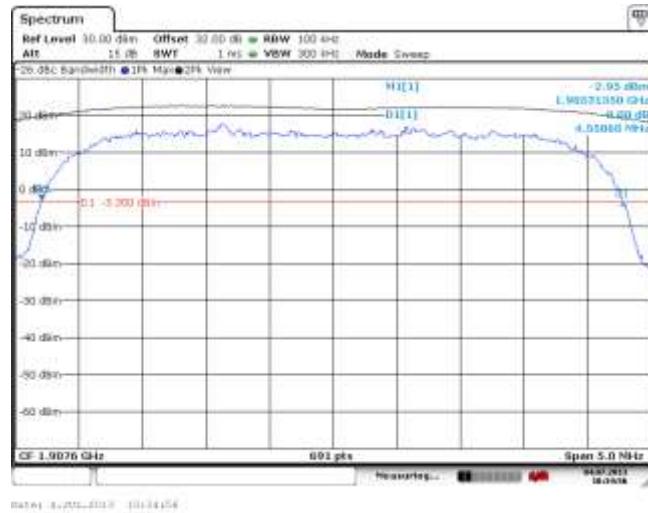
WCDMA Conducted RF Emission Test Data cont'd

Figure 2-17a: Occupied Bandwidth, Band 2 Middle Channel

Figure 2-18a: Occupied Bandwidth, Band 2 High Channel

Figure 2-19a: -26 dBc Bandwidth, Band 5 Low Channel

Figure 2-20a: -26 dBc Bandwidth, Band 5 Middle Channel


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013





FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd
Figure 2-21a: -26 dBc Bandwidth, Band 5 High Channel

Figure 2-22a: -26 dBc Bandwidth, Band 2 Low Channel

Figure 2-23a: -26 dBc Bandwidth, Band 2 Middle Channel

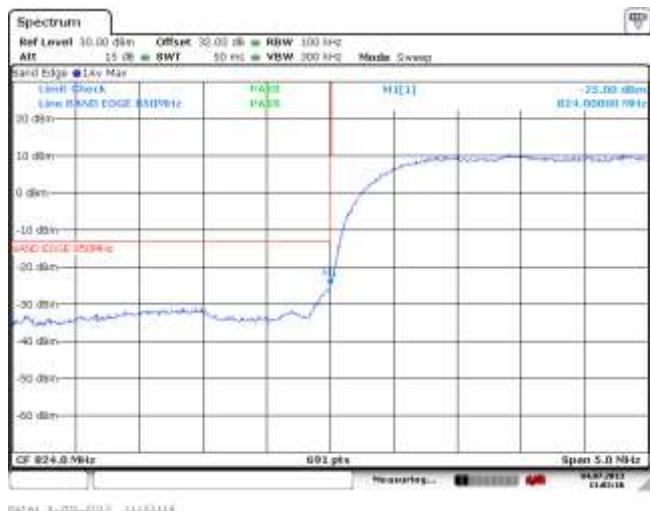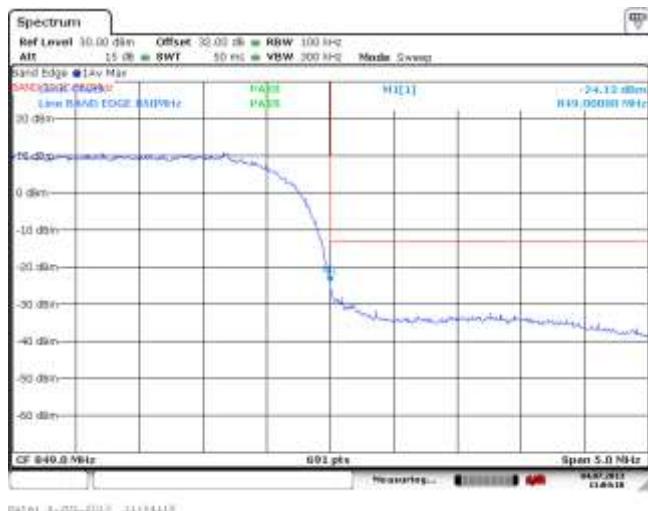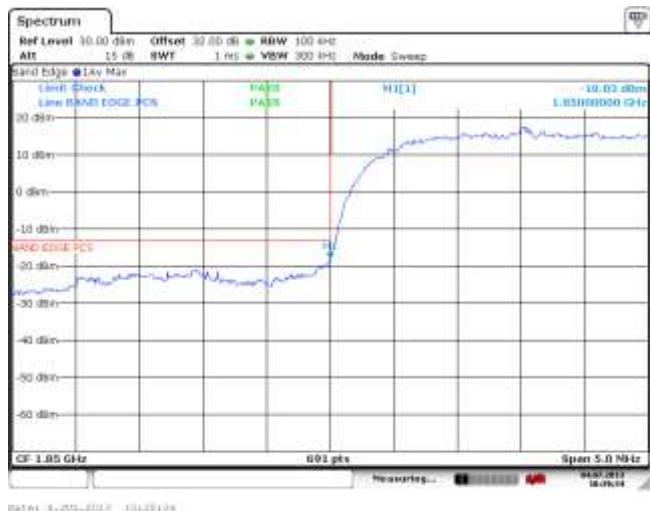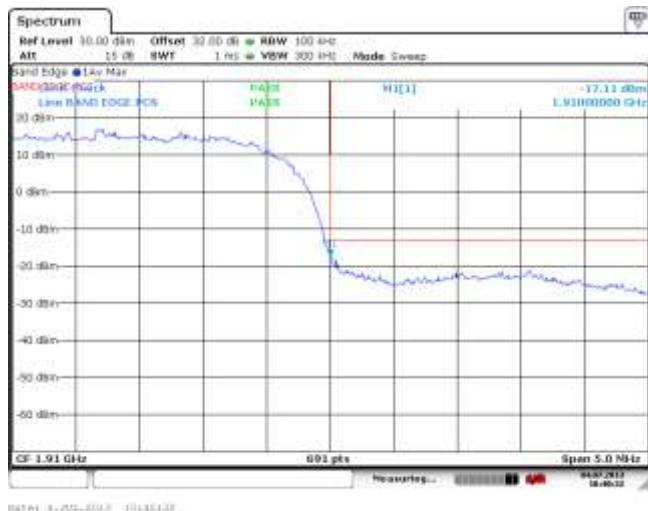Figure 2-24a: -26 dBc Bandwidth, Band 2 High Channel


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013




FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd
Figure 2-25a: Band 5 Low Channel Mask

Figure 2-26a: Band 5 High Channel Mask

Figure 2-27a: Band 2 Low Channel Mask

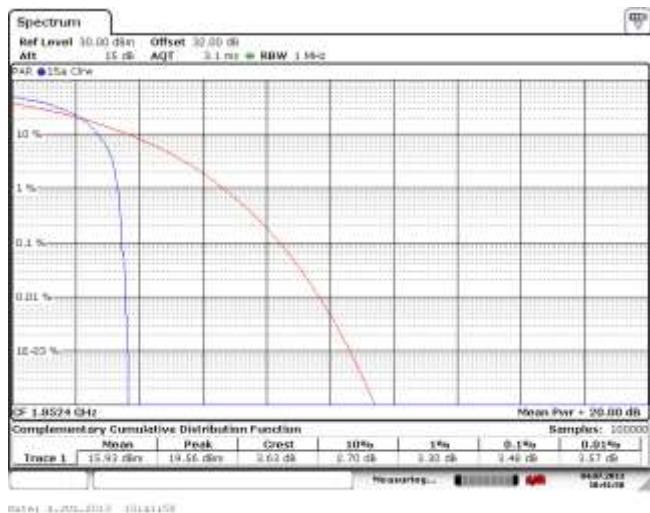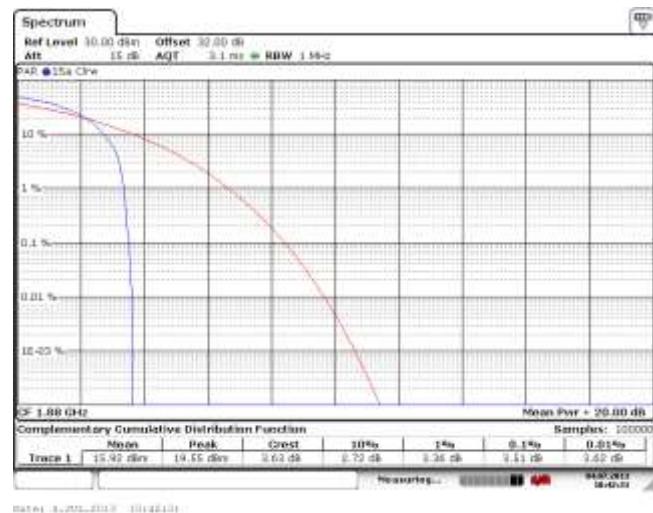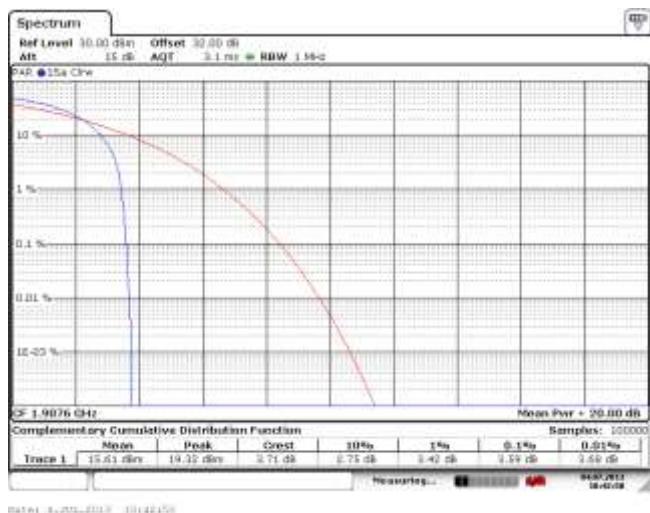Figure 2-28a: Band 2 High Channel Mask


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd
Figure 2-29a: Band 2, PAR Low Channel

Figure 2-30a: Band 2, PAR Mid Channel

Figure 2-31a: Band 2, PAR High Channel


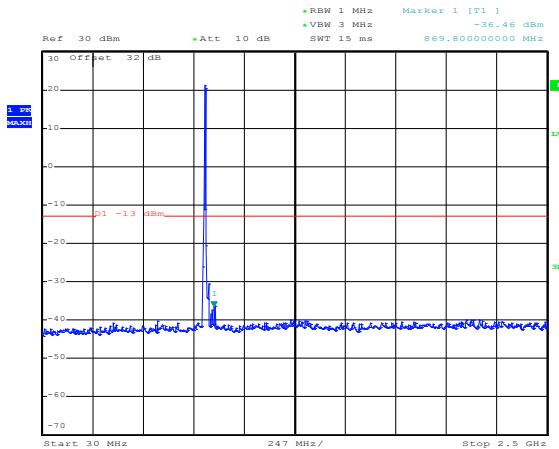
Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

Figure 2-32a: Band 5 HSUPA, Spurious Conducted Emissions, Low channel




Date: 4.JUL.2013 12:36:30

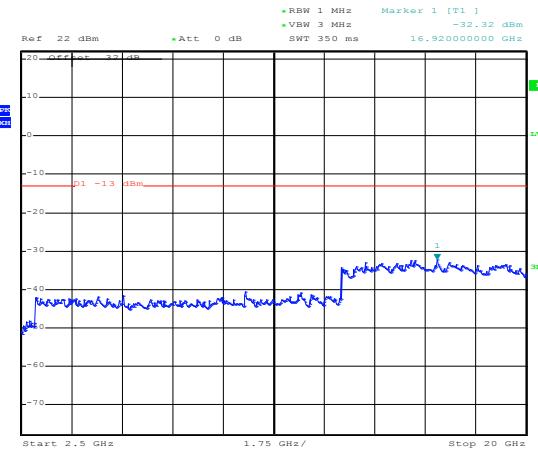Figure 2-33a: Band 5 HSUPA, Spurious Conducted Emissions, Low channel




Date: 4.JUL.2013 12:37:15

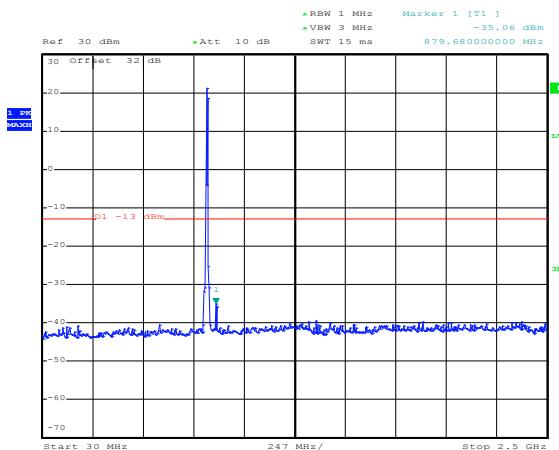Figure 2-34a: Band 5 HSUPA, Spurious Conducted Emissions, Middle channel



Date: 4.JUL.2013 12:35:50

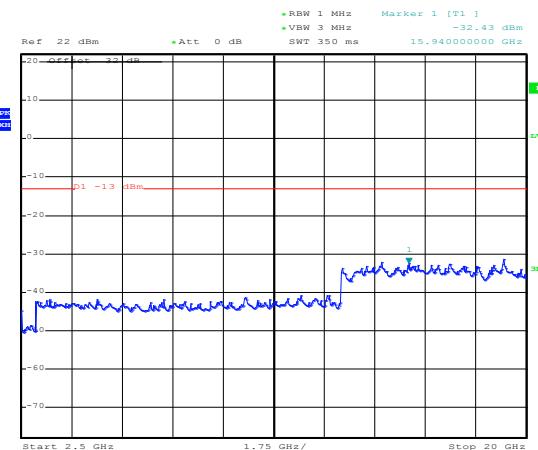Figure 2-35a: Band 5 HSUPA, Spurious Conducted Emissions, Middle channel



Date: 4.JUL.2013 12:37:59


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

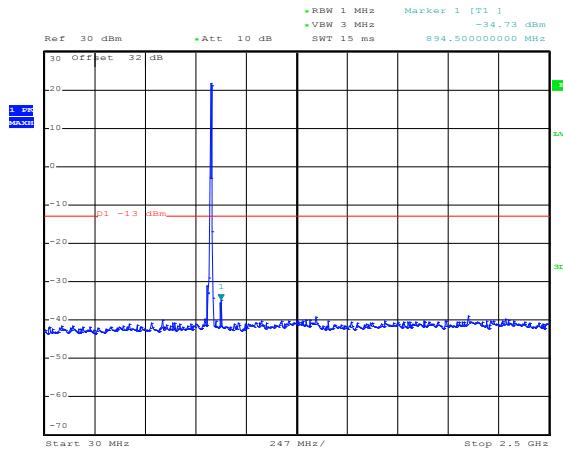Figure 2-36a: Band 5 HSUPA, Spurious Conducted Emissions, High Channel




Date: 4.JUL.2013 12:34:06

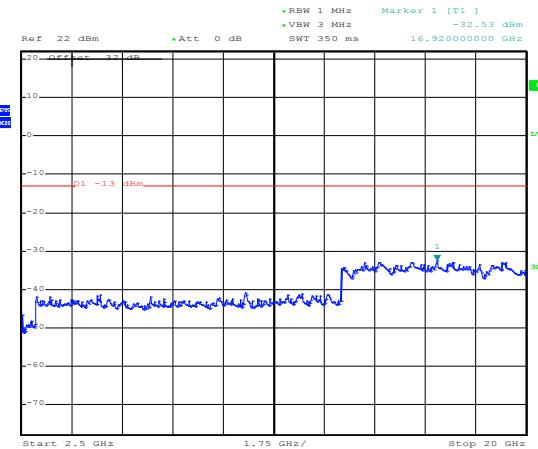Figure 2-37a: Band 5 HSUPA, Spurious Conducted Emissions, High Channel




Date: 4.JUL.2013 12:38:28

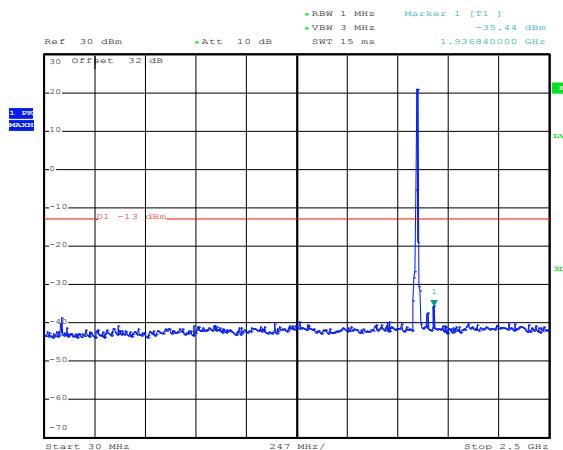Figure 2-38a: Band 2 HSUPA, Spurious Conducted Emissions, Low Channel



Date: 4.JUL.2013 12:26:58

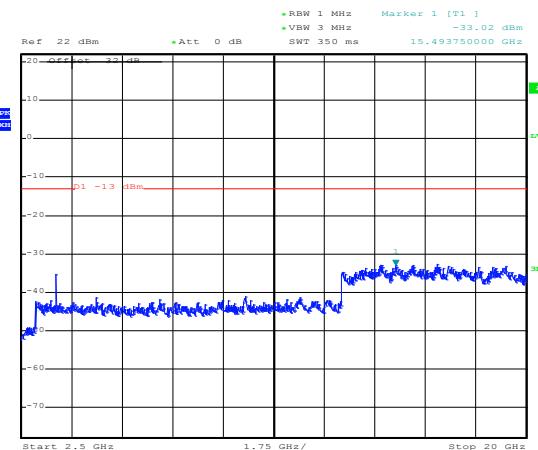Figure 2-39a: Band 2 HSUPA, Spurious Conducted Emissions, Low Channel



Date: 18.JUN.2013 15:41:17


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

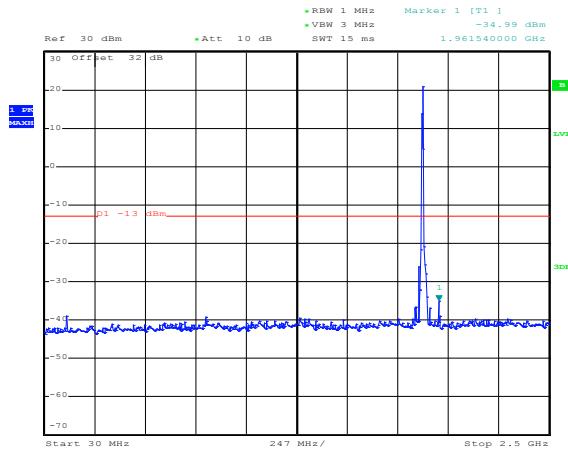Figure 2-40a: Band 2 HSUPA, Spurious Conducted Emissions, Middle Channel




Date: 4.JUL.2013 12:27:29

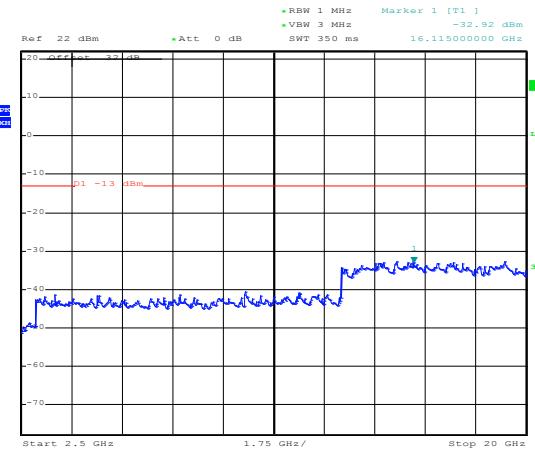Figure 2-41a: Band 2 HSUPA, Spurious Conducted Emissions, Middle Channel




Date: 4.JUL.2013 12:28:59

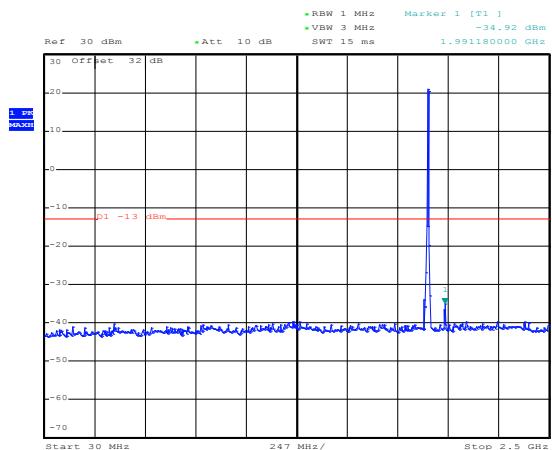Figure 2-42a: Band 2 HSUPA, Spurious Conducted Emissions, High Channel



Date: 4.JUL.2013 12:27:55

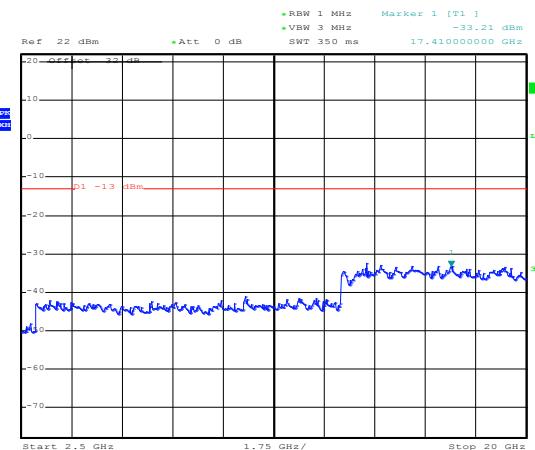Figure 2-43a: Band 2 HSUPA, Spurious Conducted Emissions, High Channel







Date: 4.JUL.2013 12:28:31

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

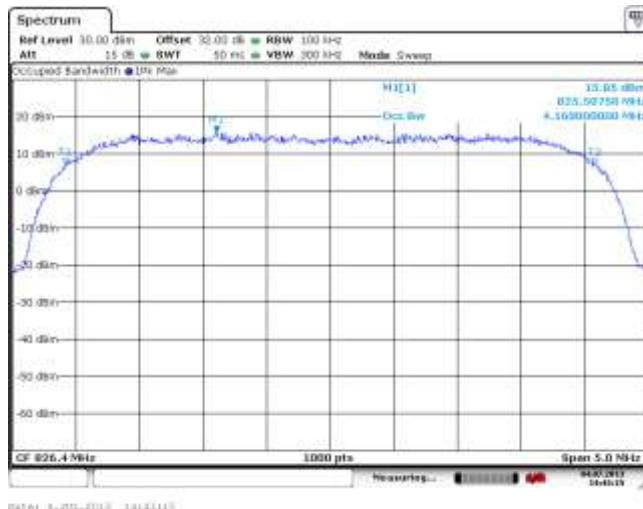
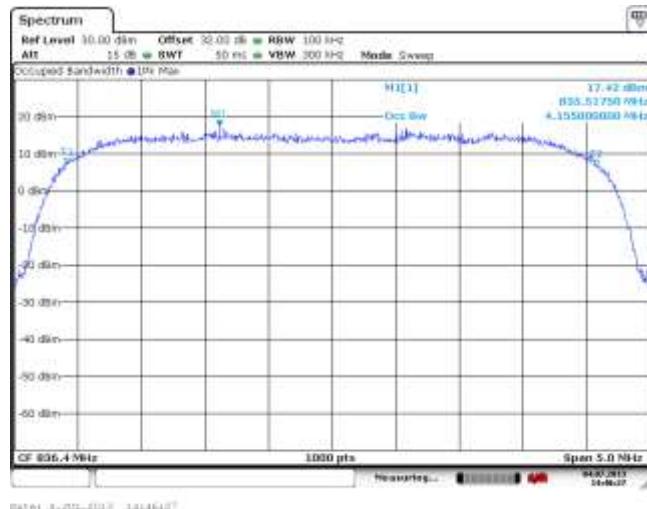
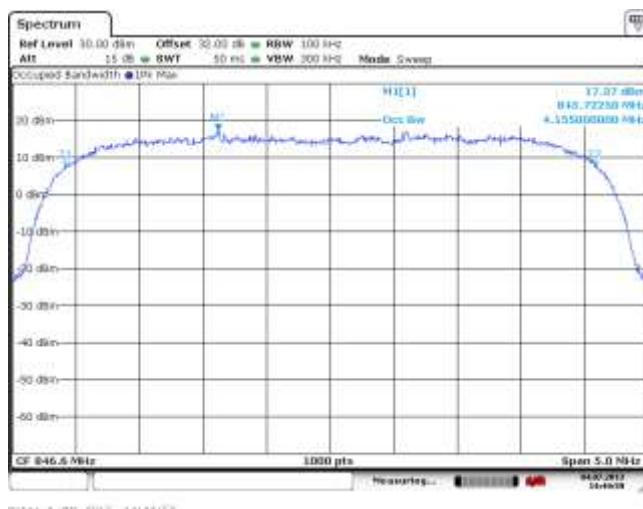
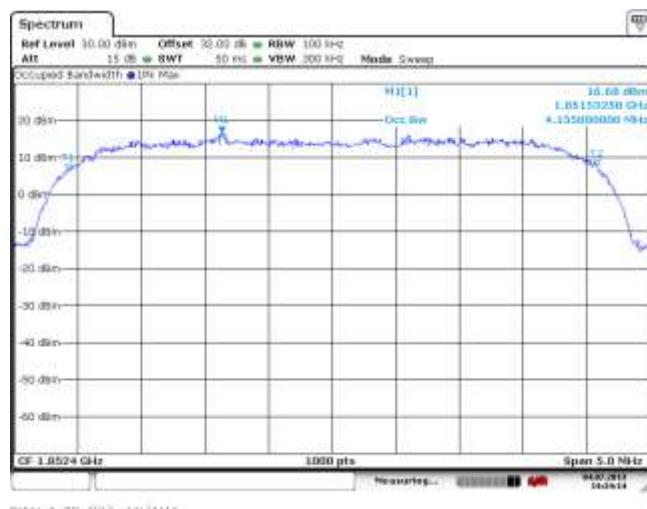
FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd
**Figure 2-44a: Occupied Bandwidth, Band 5
HSUPA Low Channel**

**Figure 2-45a: Occupied Bandwidth, Band 5
HSUPA Middle Channel**

**Figure 2-46a: Occupied Bandwidth, Band 5
HSUPA High Channel**

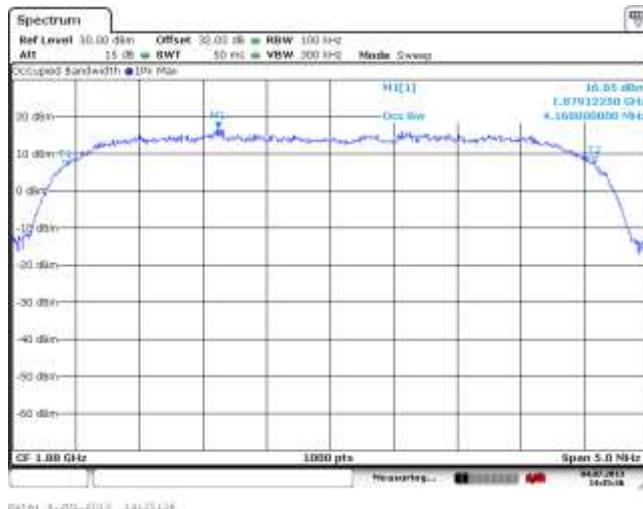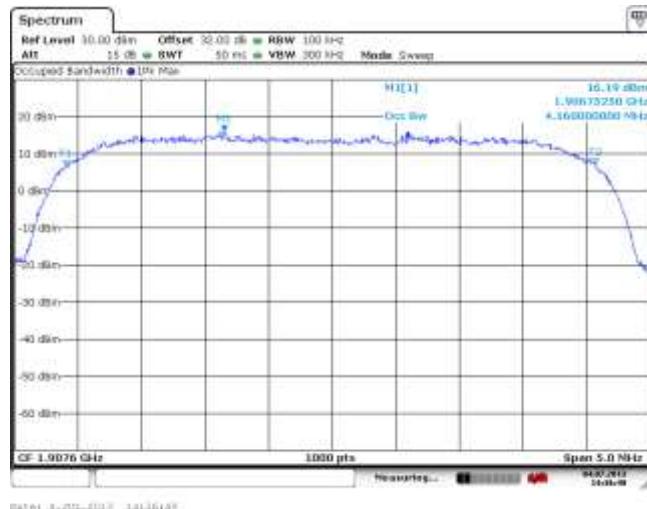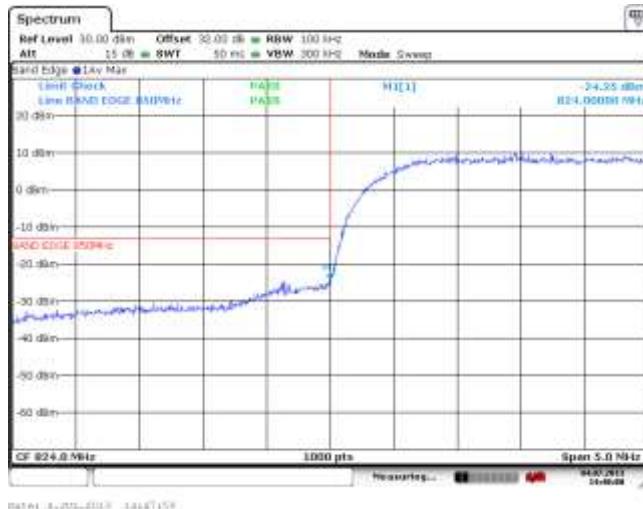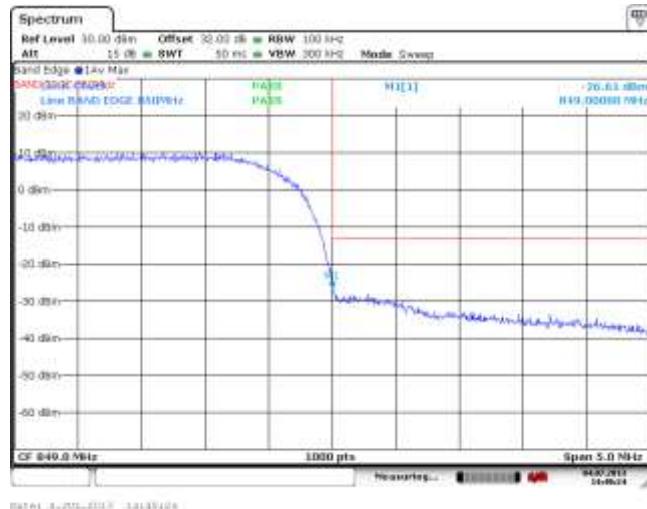**Figure 2-47a: Occupied Bandwidth, Band 2
HSUPA Low Channel**


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013



FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd
Figure 2-48a: Occupied Bandwidth, Band 2 HSUPA Middle Channel

Figure 2-49a: Occupied Bandwidth, Band 2 HSUPA High Channel

Figure 2-50a: Band 5 , HSUPA Low Channel Mask

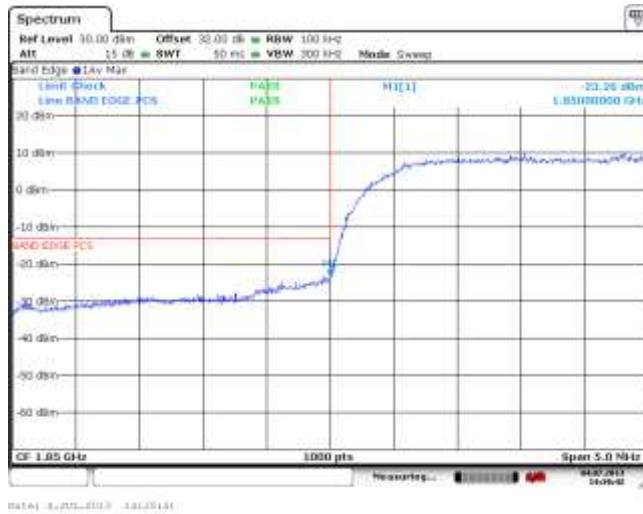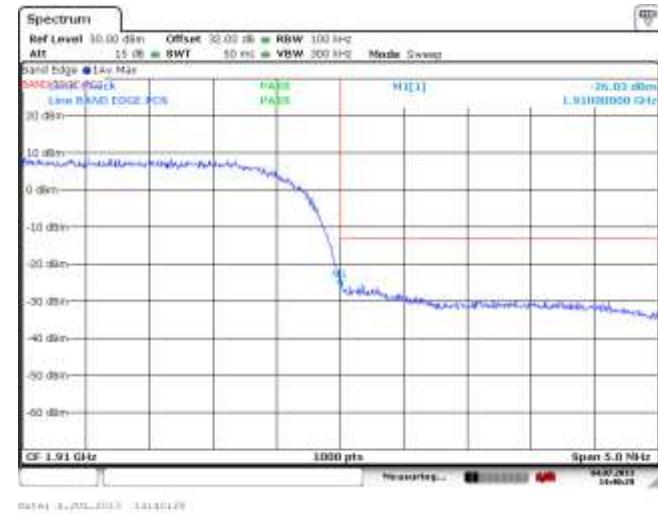Figure 2-51a: Band 5 , HSUPA High Channel Mask


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

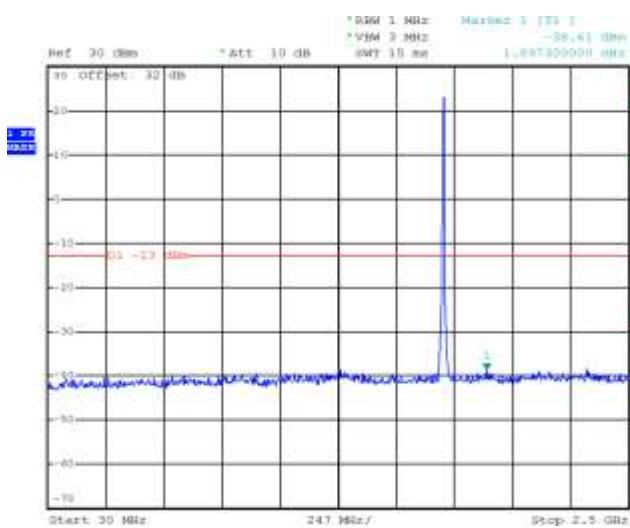
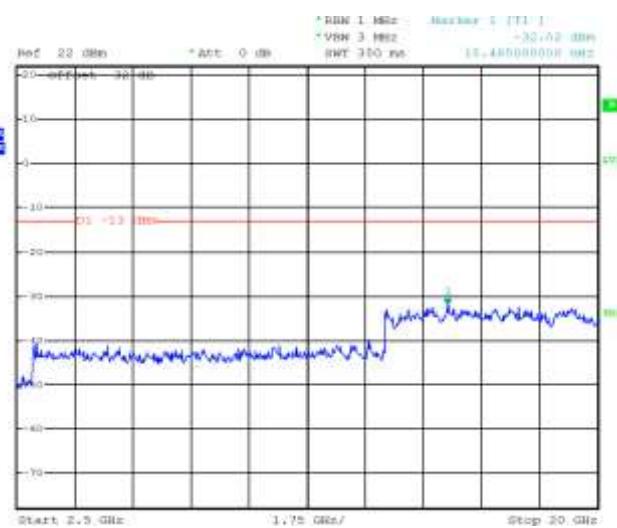
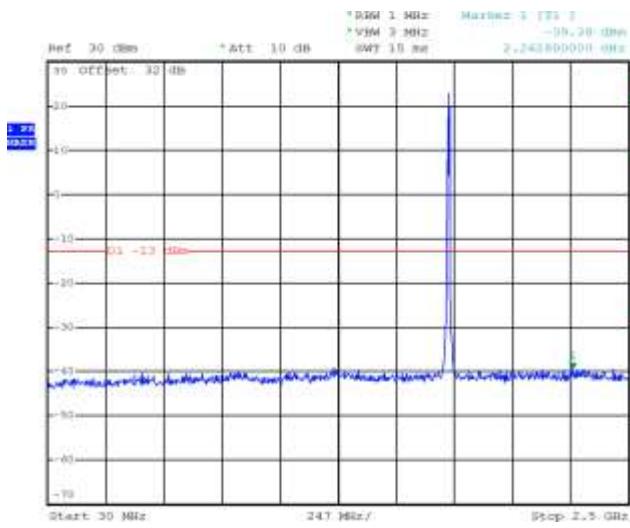
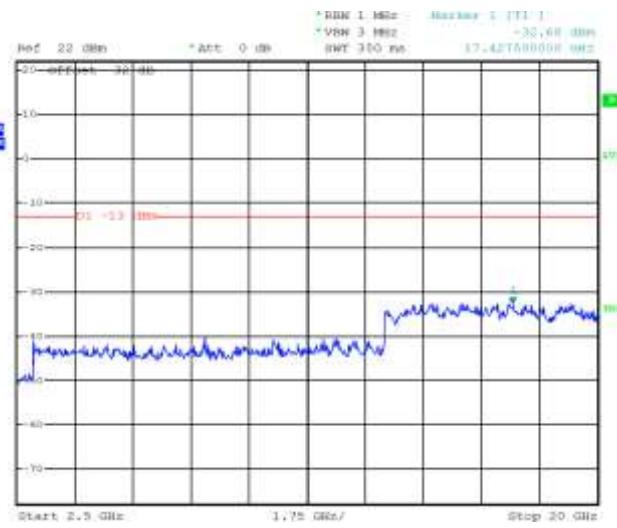
WCDMA Conducted RF Emission Test Data cont'd
Figure 2-52a: Band 2, HSUPA Low Channel Mask

Figure 2-53a: Band 2, HSUPA High Channel Mask


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd

Figure 2-1b: Band 4, Spurious Conducted Emissions, Low channel

Figure 2-2b: Band 4, Spurious Conducted Emissions, Low channel

Figure 2-3b: Band 4, Spurious Conducted Emissions, Middle channel

Figure 2-4b: Band 4, Spurious Conducted Emissions, Middle channel


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd

Figure 2-5b: Band 4, Spurious Conducted Emissions, High Channel


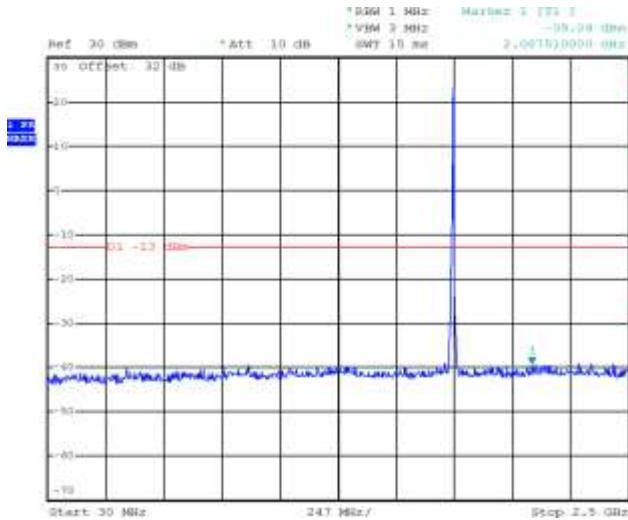


Figure 2-6b: Band 4, Spurious Conducted Emissions, High Channel

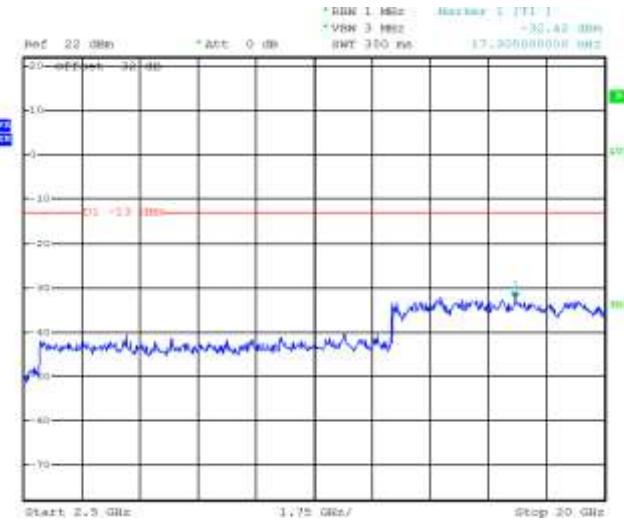

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd

Figure 2-7b: Occupied Bandwidth, Band 4 Low Channel

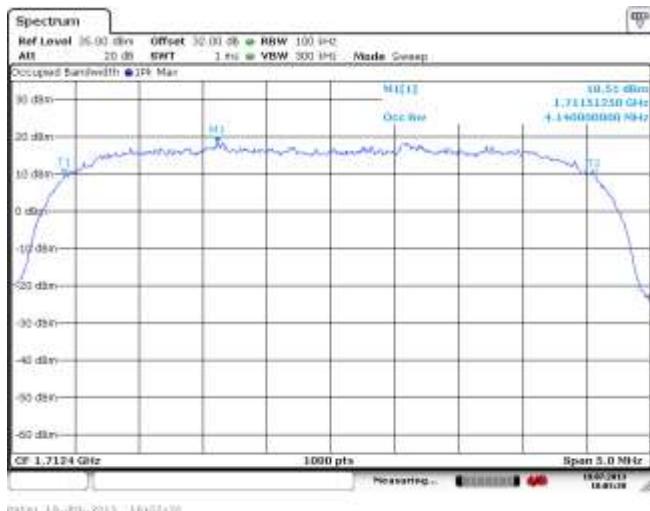


Figure 2-8b: Occupied Bandwidth, Band 4 Middle Channel

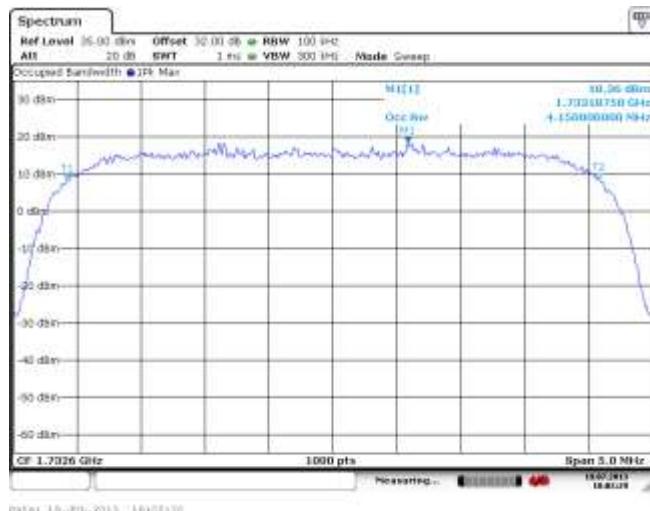


Figure 2-9b: Occupied Bandwidth, Band 4 High Channel


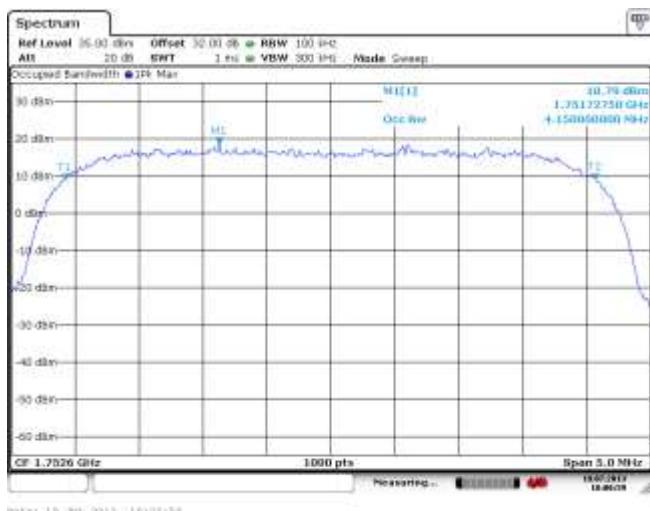






Figure 2-10b: -26 dBc Bandwidth, Band 4 Low Channel

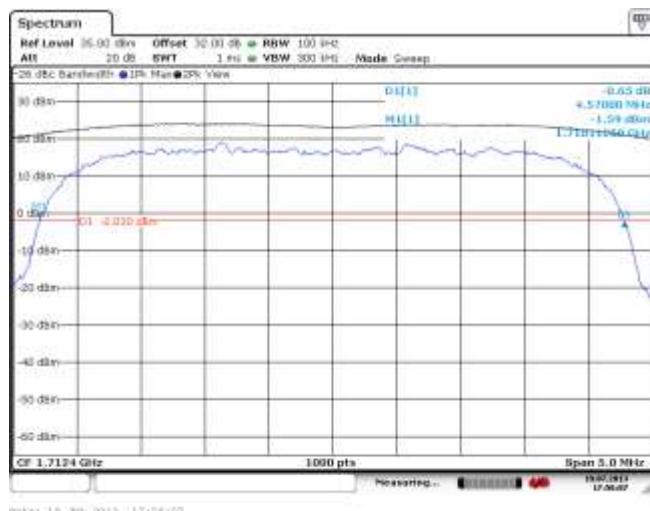

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

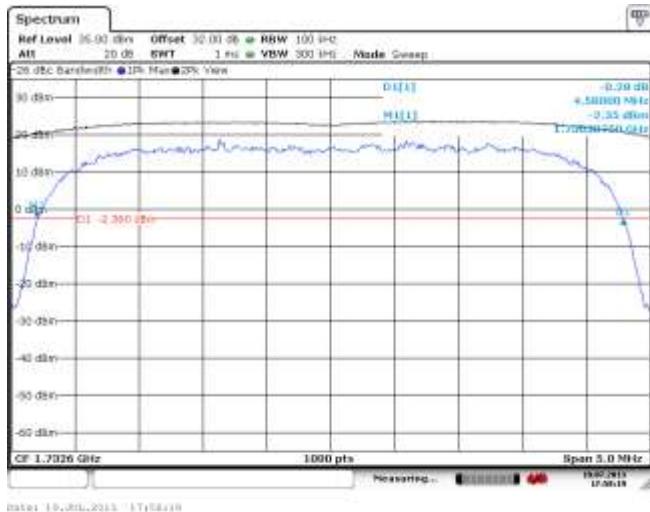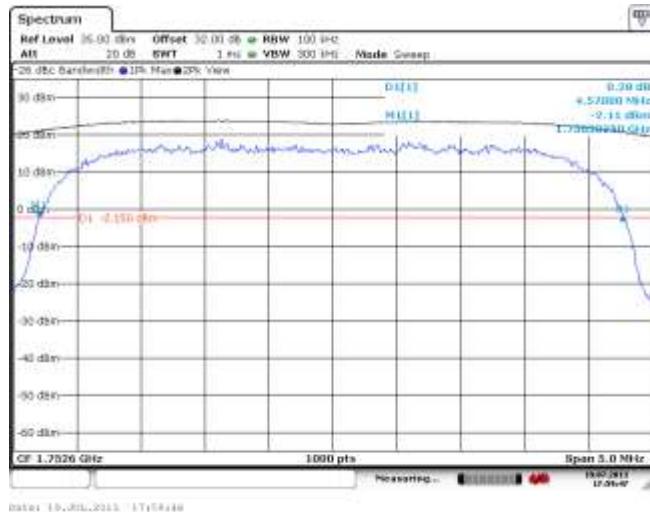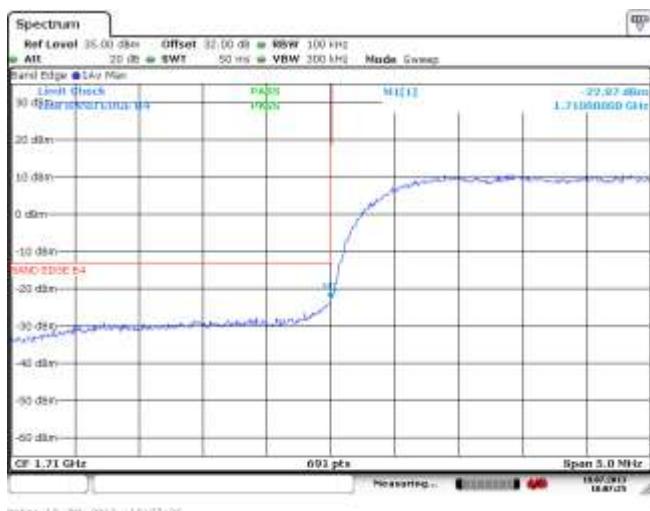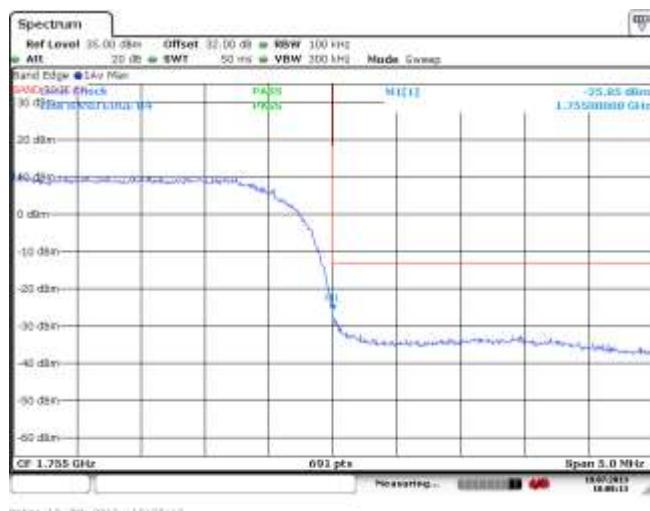Figure 2-11b: -26 dBc Bandwidth, Band 4 Middle Channel

Figure 2-12b: -26 dBc Bandwidth, Band 4 High Channel

Figure 2-13b: Band 4 Low Channel Mask

Figure 2-14b: Band 4 High Channel Mask


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd

Figure 2-15b: Band 4, PAR Low Channel



Figure 2-16b: Band 4, PAR Mid Channel


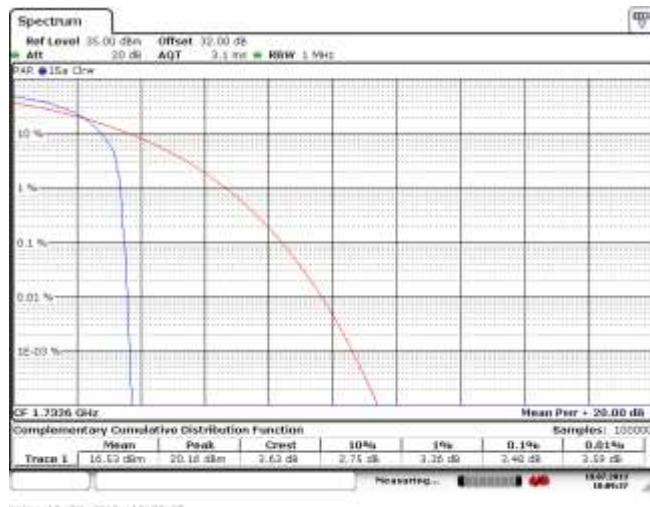


Figure 2-17b: Band 4, PAR High Channel

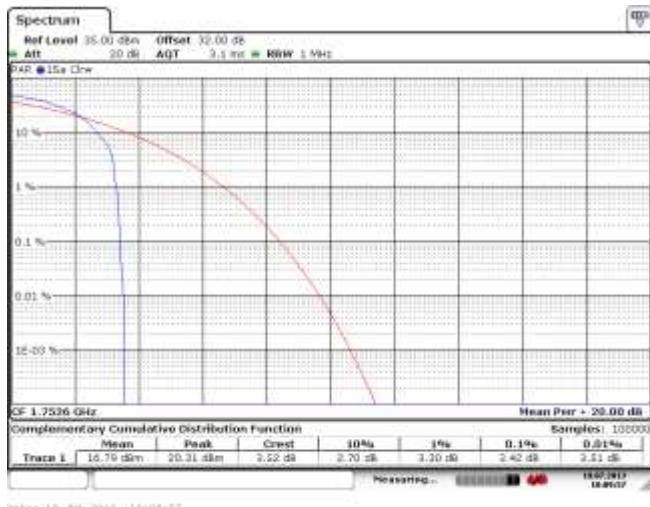


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

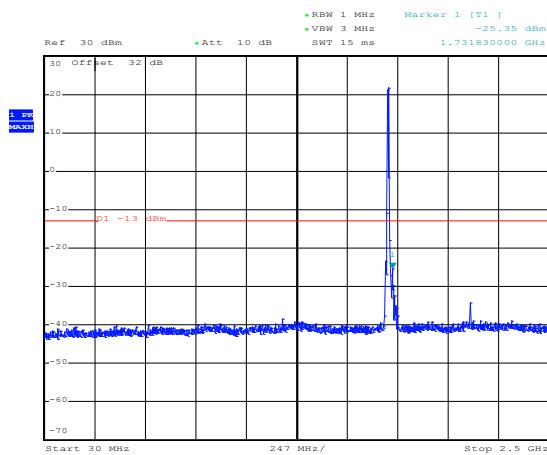Figure 2-18b: Band 4 HSUPA, Spurious Conducted Emissions, Low channel




Date: 20.AUG.2013 14:58:40

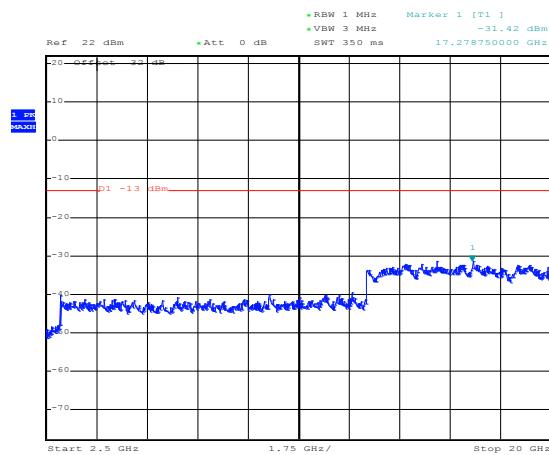Figure 2-19b: Band 4 HSUPA, Spurious Conducted Emissions, Low channel




Date: 20.AUG.2013 15:03:21

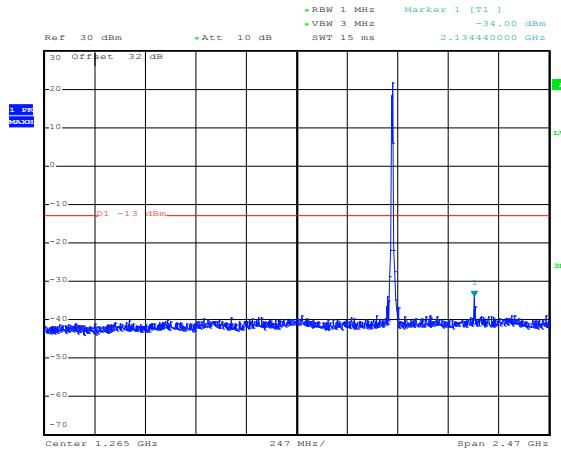Figure 2-20b: Band 4 HSUPA, Spurious Conducted Emissions, Middle channel



Date: 20.AUG.2013 15:00:30

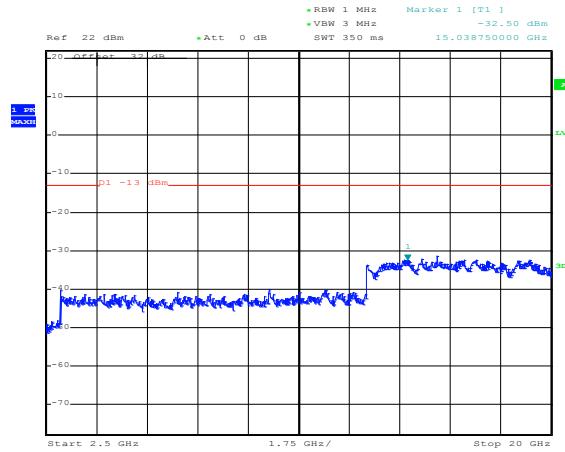Figure 2-21b: Band 4 HSUPA, Spurious Conducted Emissions, Middle channel



Date: 20.AUG.2013 15:02:54


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


WCDMA Conducted RF Emission Test Data cont'd

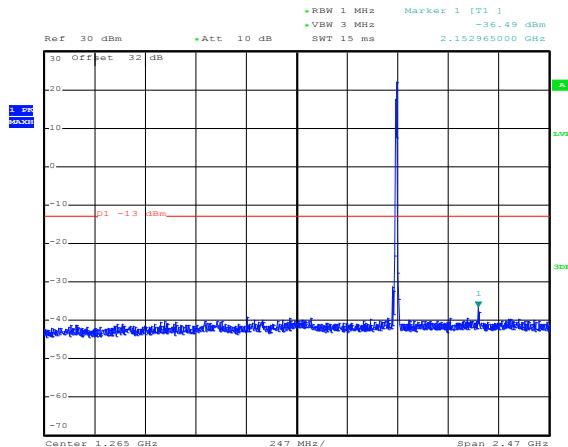Figure 2-22b: Band 4 HSUPA, Spurious Conducted Emissions, High Channel




Date: 20.AUG.2013 15:01:09

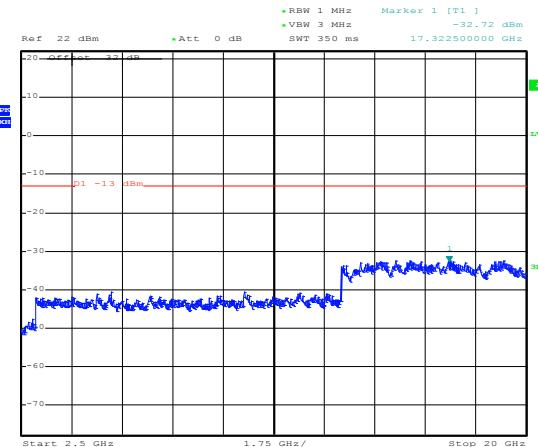Figure 2-23b: Band 4 HSUPA, Spurious Conducted Emissions, High Channel




Date: 20.AUG.2013 15:01:47

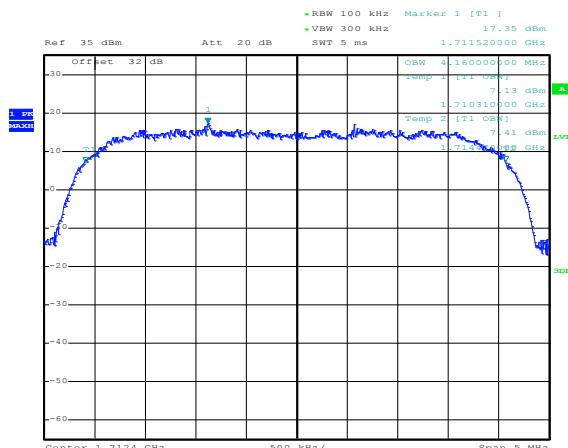Figure 2-24b: Occupied Bandwidth, Band 4 HSUPA Low Channel



Date: 20.AUG.2013 15:06:02

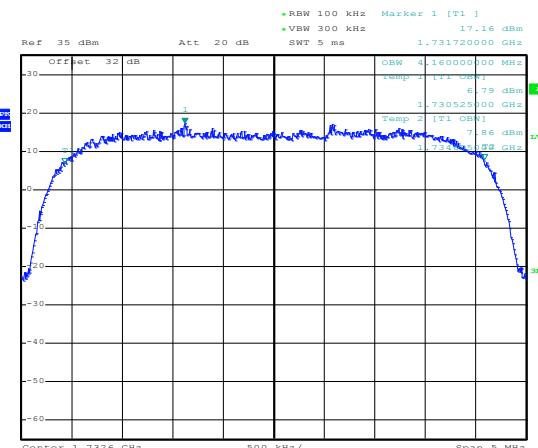Figure 2-25b: Occupied Bandwidth, Band 4 HSUPA Middle Channel




Date: 20.AUG.2013 15:06:55


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

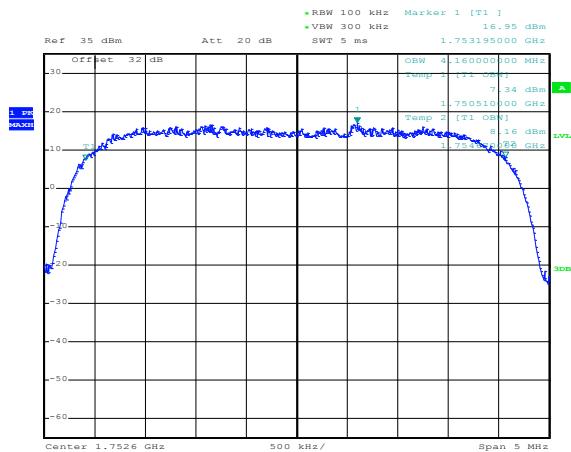
FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Conducted RF Emission Test Data cont'd
Figure 2-26b: Occupied Bandwidth, Band 4 HSUPA High Channel


Date: 20.AUG.2013 15:08:14

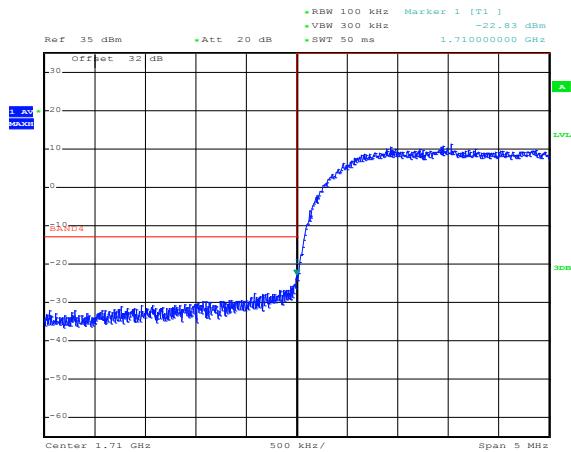
Figure 2-27b: Band 4 , HSUPA Low Channel Mask


Date: 20.AUG.2013 15:10:20

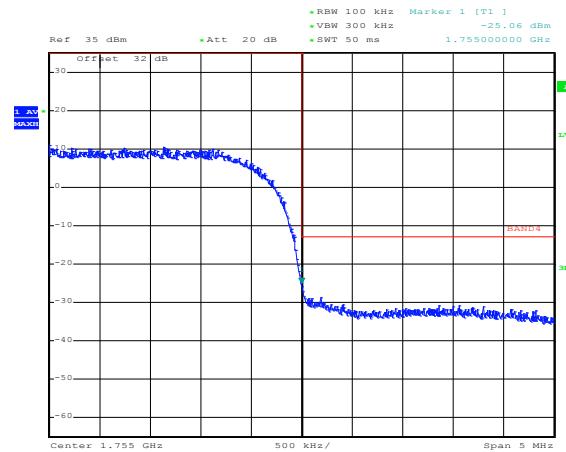Figure 2-28b: Band 4 , HSUPA High Channel Mask


Date: 20.AUG.2013 15:11:54

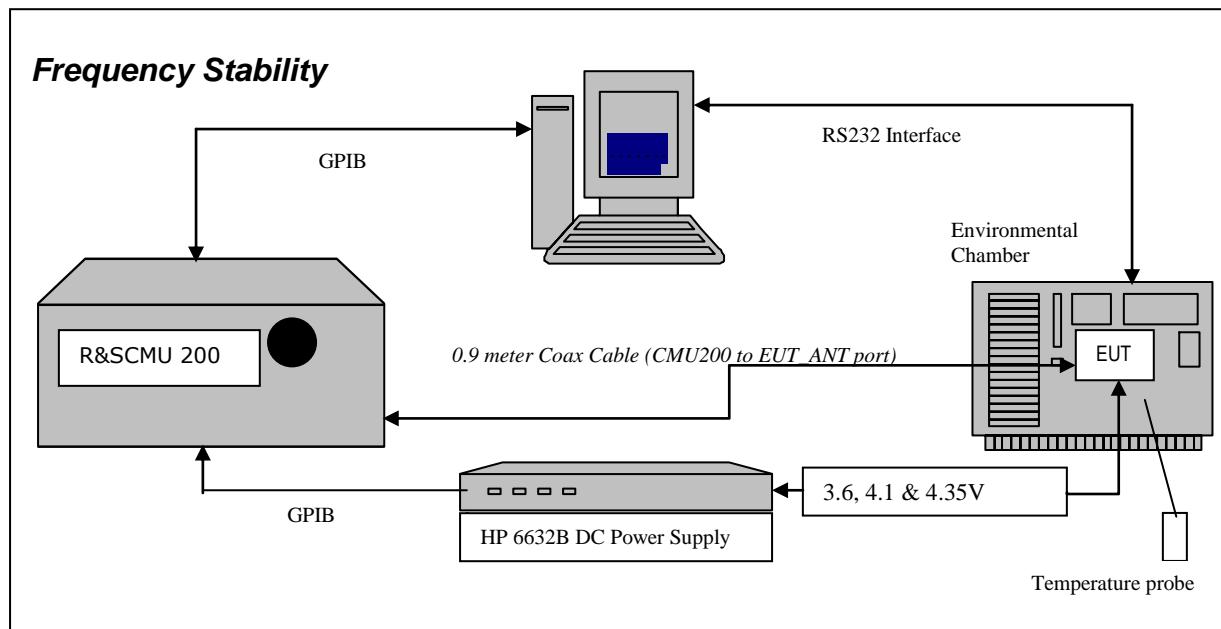APPENDIX 2B – WCDMA Band 2/4/5 FREQUENCY STABILITY TEST DATA

WCDMA Frequency Stability Test Data

The following measurements were performed by Berkin Can.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

- (a,b) Frequency Stability - Temperature Variation
- (d) Frequency Stability - Voltage Variation

24.235 Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMU 200 and the EUT antenna port.

RTS <i>Testing Services</i> TM	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMU 200 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C.

After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled.

The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMU 200 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, 4.1 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 4.1 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 1852.4, 1880.0 and 1907.6 MHz for the WCDMA band 2. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMU 200 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.6 volts.
5. Set up CMU 200 Radio Communication Tester.
6. Command the CMU 200 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMU 200 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMU 200, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
10. The CMU 200 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
11. Repeat steps 5 to 10 changing the supply voltage to 4.1 Volts
12. Increase temperature by 10°C and soak for 1/2 hour.
13. Repeat steps 4 - 12 for temperatures -30°C to 60°C .
14. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 4.1 and 4.35 volts

The maximum frequency error in the WCDMA band 5 measured was **0.0392 PPM**.
The maximum frequency error in the WCDMA band 2 measured was **0.0157 PPM**.
The maximum frequency error in the WCDMA band 4 measured was **0.0177PPM**.

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

The following tests were performed on model RFW121LW:

WCDMA Band 5 results: channels 4132, 4182 and 4233 @ 20°C maximum transmitted power

Traffic Channel Number	WCDMA Band 5 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4132	826.4	3.6	20	20.16	0.0244
4182	836.4	3.6	20	-5.65	-0.0068
4233	846.6	3.6	20	-6.47	-0.0076

Traffic Channel Number	WCDMA Band 5 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4132	826.4	4.1	20	-8.31	-0.0101
4182	836.4	4.1	20	21.81	0.0261
4233	846.6	4.1	20	-13.93	-0.0165

Traffic Channel Number	WCDMA Band 5 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4132	826.4	4.35	20	-6.62	-0.0080
4182	836.4	4.35	20	-9.97	-0.0119
4233	846.6	4.35	20	-6.86	-0.0081

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**WCDMA Band 5 Results: channel 4132 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4132	826.4	3.6	-30	-10.75	-0.0130
4132	826.4	3.6	-20	-2.98	-0.0036
4132	826.4	3.6	-10	11.93	0.0144
4132	826.4	3.6	0	-4.84	-0.0059
4132	826.4	3.6	10	-6.11	-0.0074
4132	826.4	3.6	20	20.16	0.0244
4132	826.4	3.6	30	-13.84	-0.0167
4132	826.4	3.6	40	17.64	0.0213
4132	826.4	3.6	50	17.76	0.0215
4132	826.4	3.6	60	-3.36	-0.0041
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4132	826.4	4.1	-30	18.24	0.0221
4132	826.4	4.1	-20	-4.79	-0.0058
4132	826.4	4.1	-10	-4.13	-0.0050
4132	826.4	4.1	0	-3.89	-0.0047
4132	826.4	4.1	10	18.06	0.0219
4132	826.4	4.1	20	-8.31	-0.0101
4132	826.4	4.1	30	-2.97	-0.0036
4132	826.4	4.1	40	-2.08	-0.0025
4132	826.4	4.1	50	-2.76	-0.0033
4132	826.4	4.1	60	26.45	0.0320
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4132	826.4	4.35	-30	-14.51	-0.0176
4132	826.4	4.35	-20	-6.67	-0.0081
4132	826.4	4.35	-10	-3.95	-0.0048
4132	826.4	4.35	0	-6.23	-0.0075
4132	826.4	4.35	10	19.33	0.0234
4132	826.4	4.35	20	-6.62	-0.0080
4132	826.4	4.35	30	-2.25	-0.0027
4132	826.4	4.35	40	17.02	0.0206
4132	826.4	4.35	50	20.87	0.0253
4132	826.4	4.35	60	-5.63	-0.0068

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Band 5 Results: channel 4182 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4182	836.4	3.6	-30	13.43	0.0161
4182	836.4	3.6	-20	18.05	0.0216
4182	836.4	3.6	-10	-7.46	-0.0089
4182	836.4	3.6	0	21.37	0.0255
4182	836.4	3.6	10	14.62	0.0175
4182	836.4	3.6	20	-5.65	-0.0068
4182	836.4	3.6	30	19.95	0.0239
4182	836.4	3.6	40	1.38	0.0016
4182	836.4	3.6	50	0.44	0.0005
4182	836.4	3.6	60	32.76	0.0392
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4182	836.4	4.1	-30	10.75	0.0129
4182	836.4	4.1	-20	-7.14	-0.0085
4182	836.4	4.1	-10	-7.29	-0.0087
4182	836.4	4.1	0	17.46	0.0209
4182	836.4	4.1	10	-6.96	-0.0083
4182	836.4	4.1	20	21.81	0.0261
4182	836.4	4.1	30	14.14	0.0169
4182	836.4	4.1	40	18.85	0.0225
4182	836.4	4.1	50	18.91	0.0226
4182	836.4	4.1	60	-8.62	-0.0103
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4182	836.4	4.35	-30	11.41	0.0136
4182	836.4	4.35	-20	13.13	0.0157
4182	836.4	4.35	-10	13.17	0.0157
4182	836.4	4.35	0	15.86	0.0190
4182	836.4	4.35	10	-7.86	-0.0094
4182	836.4	4.35	20	-9.97	-0.0119
4182	836.4	4.35	30	19.98	0.0239
4182	836.4	4.35	40	-3.43	-0.0041
4182	836.4	4.35	50	-5.85	-0.0070
4182	836.4	4.35	60	31.91	0.0382

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**WCDMA Band 5 Results: channel 4233 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4233	846.6	3.6	-30	14.75	0.0174
4233	846.6	3.6	-20	-5.12	-0.0060
4233	846.6	3.6	-10	-13.52	-0.0160
4233	846.6	3.6	0	17.40	0.0206
4233	846.6	3.6	10	-6.75	-0.0080
4233	846.6	3.6	20	-6.47	-0.0076
4233	846.6	3.6	30	13.24	0.0156
4233	846.6	3.6	40	17.07	0.0202
4233	846.6	3.6	50	22.26	0.0263
4233	846.6	3.6	60	-7.01	-0.0083
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4233	846.6	4.1	-30	16.03	0.0189
4233	846.6	4.1	-20	16.83	0.0199
4233	846.6	4.1	-10	19.66	0.0232
4233	846.6	4.1	0	20.64	0.0244
4233	846.6	4.1	10	16.41	0.0194
4233	846.6	4.1	20	-13.93	-0.0165
4233	846.6	4.1	30	-5.87	-0.0069
4233	846.6	4.1	40	-1.47	-0.0017
4233	846.6	4.1	50	-2.05	-0.0024
4233	846.6	4.1	60	-9.71	-0.0115
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
4233	846.6	4.35	-30	-6.56	-0.0077
4233	846.6	4.35	-20	-6.40	-0.0076
4233	846.6	4.35	-10	15.25	0.0180
4233	846.6	4.35	0	17.97	0.0212
4233	846.6	4.35	10	18.59	0.0220
4233	846.6	4.35	20	-6.86	-0.0081
4233	846.6	4.35	30	16.41	0.0194
4233	846.6	4.35	40	-6.82	-0.0081
4233	846.6	4.35	50	-4.70	-0.0056
4233	846.6	4.35	60	-2.81	-0.0033

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW**FCC ID:** L6ARFY110LW**IC:** 2503A-RFY110LW**WCDMA Band 2 results: channels 9262, 9400, & 9538 @ 20°C maximum transmitted power**

Traffic Channel Number	WCDMA1900 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9262	1852.40	3.6	20	16.46	0.0089
9400	1880.00	3.6	20	-8.89	-0.0047
9538	1907.60	3.6	20	-12.62	-0.0066

Traffic Channel Number	WCDMA1900 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9262	1852.40	4.1	20	-7.94	-0.0043
9400	1880.00	4.1	20	14.81	0.0079
9538	1907.60	4.1	20	-12.91	-0.0068

Traffic Channel Number	WCDMA1900 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9262	1852.40	4.35	20	-8.78	-0.0047
9400	1880.00	4.35	20	-10.23	-0.0054
9538	1907.60	4.35	20	-13.90	-0.0073

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**WCDMA Band 2 Results: channel 9262 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9262	1852.40	3.6	-30	-11.61	-0.0063
9262	1852.40	3.6	-20	-3.34	-0.0018
9262	1852.40	3.6	-10	14.80	0.0080
9262	1852.40	3.6	0	-8.29	-0.0045
9262	1852.40	3.6	10	-9.24	-0.0050
9262	1852.40	3.6	20	16.46	0.0089
9262	1852.40	3.6	30	-15.26	-0.0082
9262	1852.40	3.6	40	12.53	0.0068
9262	1852.40	3.6	50	11.40	0.0062
9262	1852.40	3.6	60	-7.67	-0.0041
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9262	1852.40	4.1	-30	18.08	0.0098
9262	1852.40	4.1	-20	-7.56	-0.0041
9262	1852.40	4.1	-10	-10.99	-0.0059
9262	1852.40	4.1	0	-7.73	-0.0042
9262	1852.40	4.1	10	15.18	0.0082
9262	1852.40	4.1	20	-7.94	-0.0043
9262	1852.40	4.1	30	-4.47	-0.0024
9262	1852.40	4.1	40	-9.08	-0.0049
9262	1852.40	4.1	50	-10.63	-0.0057
9262	1852.40	4.1	60	27.75	0.0150
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9262	1852.40	4.35	-30	-14.07	-0.0076
9262	1852.40	4.35	-20	-7.63	-0.0041
9262	1852.40	4.35	-10	-12.58	-0.0068
9262	1852.40	4.35	0	-8.63	-0.0047
9262	1852.40	4.35	10	18.53	0.0100
9262	1852.40	4.35	20	-8.78	-0.0047
9262	1852.40	4.35	30	-4.12	-0.0022
9262	1852.40	4.35	40	17.62	0.0095
9262	1852.40	4.35	50	18.07	0.0098
9262	1852.40	4.35	60	-10.68	-0.0058



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Band 2 Results: channel 9400 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9400	1880.00	3.6	-30	13.02	0.0069
9400	1880.00	3.6	-20	14.69	0.0078
9400	1880.00	3.6	-10	-12.06	-0.0064
9400	1880.00	3.6	0	18.43	0.0098
9400	1880.00	3.6	10	12.57	0.0067
9400	1880.00	3.6	20	-8.89	-0.0047
9400	1880.00	3.6	30	15.07	0.0080
9400	1880.00	3.6	40	-6.11	-0.0033
9400	1880.00	3.6	50	-4.15	-0.0022
9400	1880.00	3.6	60	29.44	0.0157
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9400	1880.00	4.1	-30	12.10	0.0064
9400	1880.00	4.1	-20	-7.51	-0.0040
9400	1880.00	4.1	-10	-7.99	-0.0043
9400	1880.00	4.1	0	13.73	0.0073
9400	1880.00	4.1	10	-8.67	-0.0046
9400	1880.00	4.1	20	14.81	0.0079
9400	1880.00	4.1	30	15.24	0.0081
9400	1880.00	4.1	40	17.29	0.0092
9400	1880.00	4.1	50	15.28	0.0081
9400	1880.00	4.1	60	-10.20	-0.0054
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9400	1880.00	4.35	-30	9.46	0.0050
9400	1880.00	4.35	-20	11.29	0.0060
9400	1880.00	4.35	-10	10.03	0.0053
9400	1880.00	4.35	0	10.45	0.0056
9400	1880.00	4.35	10	-8.04	-0.0043
9400	1880.00	4.35	20	-10.23	-0.0054
9400	1880.00	4.35	30	12.56	0.0067
9400	1880.00	4.35	40	-5.93	-0.0032
9400	1880.00	4.35	50	-10.60	-0.0056
9400	1880.00	4.35	60	29.22	0.0155



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Band 2 Results: channel 9538 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9538	1907.60	3.6	-30	15.69	0.0082
9538	1907.60	3.6	-20	-6.65	-0.0035
9538	1907.60	3.6	-10	-10.40	-0.0055
9538	1907.60	3.6	0	17.34	0.0091
9538	1907.60	3.6	10	-9.71	-0.0051
9538	1907.60	3.6	20	-12.62	-0.0066
9538	1907.60	3.6	30	15.67	0.0082
9538	1907.60	3.6	40	15.97	0.0084
9538	1907.60	3.6	50	15.26	0.0080
9538	1907.60	3.6	60	-9.04	-0.0047
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
9538	1907.60	4.1	-30	11.48	0.0060
9538	1907.60	4.1	-20	12.50	0.0066
9538	1907.60	4.1	-10	14.05	0.0074
9538	1907.60	4.1	0	15.27	0.0080
9538	1907.60	4.1	10	14.17	0.0074
9538	1907.60	4.1	20	-12.91	-0.0068
9538	1907.60	4.1	30	-9.37	-0.0049
9538	1907.60	4.1	40	-3.40	-0.0018
9538	1907.60	4.1	50	-5.16	-0.0027
9538	1907.60	4.1	60	-13.74	-0.0072
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	21BPPM
9538	1907.60	4.35	-30	-11.06	-0.0058
9538	1907.60	4.35	-20	-8.32	-0.0044
9538	1907.60	4.35	-10	11.93	0.0063
9538	1907.60	4.35	0	12.01	0.0063
9538	1907.60	4.35	10	17.92	0.0094
9538	1907.60	4.35	20	-13.90	-0.0073
9538	1907.60	4.35	30	12.21	0.0064
9538	1907.60	4.35	40	-8.28	-0.0043
9538	1907.60	4.35	50	-12.56	-0.0066
9538	1907.60	4.35	60	-9.16	-0.0048

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

The following measurements were performed on product RFY111LW.

Date of Test: July 19, 2013

The environmental conditions were: Temperature: 25 °C
Humidity: 29 %

WCDMA Band 4 results: channels 1312, 1413 and 1513 @ 20°C maximum transmitted power

Traffic Channel Number	WCDMA Band 4 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1312	1712.4	3.6	20	24.12	0.0141
1413	1732.6	3.6	20	-1.25	-0.0007
1513	1752.6	3.6	20	-1.87	-0.0012

Traffic Channel Number	WCDMA Band 4 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1312	1712.4	4.1	20	-5.77	-0.0034
1413	1732.6	4.1	20	24.67	0.0142
1513	1752.6	4.1	20	-10.09	-0.0067

Traffic Channel Number	WCDMA Band 4 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1312	1712.4	4.35	20	-2.55	-0.0015
1413	1732.6	4.35	20	-5.92	-0.0034
1513	1752.6	4.35	20	-3.52	-0.0023



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Band 4 Results: channel 1312 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1312.00	1712.40	3.6	-30	-7.47	-0.0044
1312.00	1712.40	3.6	-20	1.20	0.0007
1312.00	1712.40	3.6	-10	14.97	0.0087
1312.00	1712.40	3.6	0	-0.18	-0.0001
1312.00	1712.40	3.6	10	-15.47	-0.0090
1312.00	1712.40	3.6	20	24.12	0.0141
1312.00	1712.40	3.6	30	-11.38	-0.0066
1312.00	1712.40	3.6	40	20.53	0.0120
1312.00	1712.40	3.6	50	21.45	0.0125
1312.00	1712.40	3.6	60	15.60	0.0091
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1312.00	1712.40	4.1	-30	22.04	0.0129
1312.00	1712.40	4.1	-20	-0.90	-0.0005
1312.00	1712.40	4.1	-10	-26.34	-0.0154
1312.00	1712.40	4.1	0	-12.53	-0.0073
1312.00	1712.40	4.1	10	22.89	0.0134
1312.00	1712.40	4.1	20	-5.77	-0.0034
1312.00	1712.40	4.1	30	-6.30	-0.0037
1312.00	1712.40	4.1	40	19.88	0.0116
1312.00	1712.40	4.1	50	0.72	0.0004
1312.00	1712.40	4.1	60	30.29	0.0177
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1312.00	1712.40	4.35	-30	-11.32	-0.0066
1312.00	1712.40	4.35	-20	-3.98	-0.0023
1312.00	1712.40	4.35	-10	-0.02	0.0000
1312.00	1712.40	4.35	0	-2.75	-0.0016
1312.00	1712.40	4.35	10	23.27	0.0136
1312.00	1712.40	4.35	20	-2.55	-0.0015
1312.00	1712.40	4.35	30	3.02	0.0018
1312.00	1712.40	4.35	40	20.77	0.0121
1312.00	1712.40	4.35	50	25.52	0.0149
1312.00	1712.40	4.35	60	-1.84	-0.0011

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

WCDMA Band 4 Results: channel 1413 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1413.00	1732.60	3.6	-30	18.13	0.0105
1413.00	1732.60	3.6	-20	21.28	0.0123
1413.00	1732.60	3.6	-10	-4.01	-0.0023
1413.00	1732.60	3.6	0	25.87	0.0149
1413.00	1732.60	3.6	10	16.93	0.0098
1413.00	1732.60	3.6	20	-1.25	-0.0007
1413.00	1732.60	3.6	30	23.87	0.0138
1413.00	1732.60	3.6	40	4.98	0.0029
1413.00	1732.60	3.6	50	5.30	0.0031
1413.00	1732.60	3.6	60	27.14	0.0157
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1413.00	1732.60	4.1	-30	14.23	0.0082
1413.00	1732.60	4.1	-20	-3.94	-0.0023
1413.00	1732.60	4.1	-10	-2.29	-0.0013
1413.00	1732.60	4.1	0	20.96	0.0121
1413.00	1732.60	4.1	10	-4.38	-0.0025
1413.00	1732.60	4.1	20	24.67	0.0142
1413.00	1732.60	4.1	30	17.73	0.0102
1413.00	1732.60	4.1	40	21.63	0.0125
1413.00	1732.60	4.1	50	22.10	0.0128
1413.00	1732.60	4.1	60	-6.23	-0.0036
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1413.00	1732.60	4.35	-30	13.40	0.0077
1413.00	1732.60	4.35	-20	15.38	0.0089
1413.00	1732.60	4.35	-10	16.37	0.0094
1413.00	1732.60	4.35	0	19.01	0.0110
1413.00	1732.60	4.35	10	-4.01	-0.0023
1413.00	1732.60	4.35	20	-5.92	-0.0034
1413.00	1732.60	4.35	30	23.79	0.0137
1413.00	1732.60	4.35	40	16.42	0.0095
1413.00	1732.60	4.35	50	-2.64	-0.0015
1413.00	1732.60	4.35	60	25.80	0.0149

**Test Report No.:**
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**WCDMA Band 4 Results: channel 1513 @ maximum transmitted power**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1513.00	1752.6	3.6	-30	18.34	0.0121
1513.00	1752.6	3.6	-20	-1.09	-0.0007
1513.00	1752.6	3.6	-10	-11.11	-0.0073
1513.00	1752.6	3.6	0	21.45	0.0142
1513.00	1752.6	3.6	10	-3.29	-0.0022
1513.00	1752.6	3.6	20	-1.87	-0.0012
1513.00	1752.6	3.6	30	17.12	0.0113
1513.00	1752.6	3.6	40	20.46	0.0135
1513.00	1752.6	3.6	50	26.90	0.0178
1513.00	1752.6	3.6	60	-2.76	-0.0018
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1513.00	1752.6	4.1	-30	18.93	0.0125
1513.00	1752.6	4.1	-20	20.84	0.0138
1513.00	1752.6	4.1	-10	22.14	0.0146
1513.00	1752.6	4.1	0	24.69	0.0163
1513.00	1752.6	4.1	10	19.48	0.0129
1513.00	1752.6	4.1	20	-10.09	-0.0067
1513.00	1752.6	4.1	30	-1.36	-0.0009
1513.00	1752.6	4.1	40	3.02	0.0020
1513.00	1752.6	4.1	50	0.43	0.0003
1513.00	1752.6	4.1	60	-6.20	-0.0041
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
1513.00	1752.6	4.35	-30	-2.54	-0.0017
1513.00	1752.6	4.35	-20	-2.02	-0.0013
1513.00	1752.6	4.35	-10	17.03	0.0113
1513.00	1752.6	4.35	0	21.22	0.0140
1513.00	1752.6	4.35	10	22.92	0.0151
1513.00	1752.6	4.35	20	-3.52	-0.0023
1513.00	1752.6	4.35	30	20.27	0.0134
1513.00	1752.6	4.35	40	-2.20	-0.0015
1513.00	1752.6	4.35	50	-1.59	-0.0011
1513.00	1752.6	4.35	60	1.72	0.0011

APPENDIX 2C – WCDMA Band 2/4/5 RADIATED EMISSIONS TEST DATA

RTS <i>Testing Services</i> TM	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C									
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013				FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW					

Radiated Power Test Data Results

The following measurements were performed on product RFW121LW.

Date of Test: July 23, 2013

The following measurements were performed by Feras Obeid.

The environmental tests conditions were: Temperature: 25.0 °C
Relative Humidity: 29.5 %

The BlackBerry® smartphone was standalone, horizontally with LCD facing up and top pointing to the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

WCDMA Band 5 Voice Mode

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	(W)	Limit (dBm)	Diff. To Limit (dB)
F0	4132	826.40	5	Dipole	V	-43.72	-30.14	V-V	4.98	22.09	0.16	38.5	16.41
F0	4132	826.40	5	Dipole	H	-30.14		H-H	3.07				
F0	4182	836.40	5	Dipole	V	-44.09	-30.89	V-V	4.49	21.30	0.13	38.5	17.20
F0	4182	836.40	5	Dipole	H	-30.89		H-H	2.85				
F0	4233	846.60	5	Dipole	V	-41.10	-30.68	V-V	4.02	20.84	0.12	38.5	17.66
F0	4233	846.60	5	Dipole	H	-30.68		H-H	3.32				

WCDMA Band 5 HSUPA Mode

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	(W)	Limit (dBm)	Diff. To Limit (dB)
F0	4132	826.40	5	Dipole	V	-40.99	-32.33	V-V	2.74	19.85	0.10	38.50	18.65
F0	4132	826.40	5	Dipole	H	-32.33		H-H	0.83				
F0	4182	836.40	5	Dipole	V	-43.13	-32.71	V-V	2.67	19.48	0.09	38.50	19.02
F0	4182	836.40	5	Dipole	H	-32.71		H-H	1.05				
F0	4233	846.60	5	Dipole	V	-42.73	-32.78	V-V	1.90	18.72	0.07	38.50	19.78
F0	4233	846.60	5	Dipole	H	-32.78		H-H	1.15				

This report shall NOT be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2013

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Power Test Data Results cont'd

Date of Test: July 22, 2013

The following measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 25.2 °C
Relative Humidity: 36.8 %

The BlackBerry® smartphone was standalone, horizontally with LCD facing up and top pointing to the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

WCDMA Band 2 Voice Mode

								Substitution Method					
EUT				Rx Antenna	Spectrum Analyzer			Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Isotropic radiator)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	9262	1852.40	2	Horn	V	-26.19	-26.19	V-V	-16.31	24.01	0.25	33.0	8.99
F0	9262	1852.40	2	Horn	H	-27.27		H-H	-15.33				
F0	9400	1880.00	2	Horn	V	-27.18	-27.18	V-V	-17.04	22.97	0.20	33.0	10.03
F0	9400	1880.00	2	Horn	H	-27.39		H-H	-16.02				
F0	9538	1907.60	2	Horn	V	-26.89	-26.89	V-V	-16.87	23.07	0.20	33.0	9.93
F0	9538	1907.60	2	Horn	H	-27.52		H-H	-15.81				

WCDMA Band 2 HSUPA Mode

							Substitution Method						
EUT			Rx Antenna	Spectrum Analyzer		Tracking Generator							
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Isotropic Radiotor)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	9262	1852.40	2	Horn	V	-27.79	-27.79	V-V	-17.93	22.38	0.17	33.0	10.62
F0	9262	1852.40	2	Horn	H	-28.96		H-H	-16.96				
F0	9400	1880.00	2	Horn	V	-28.31	-28.31	V-V	-18.23	21.82	0.15	33.0	11.18
F0	9400	1880.00	2	Horn	H	-29.01		H-H	-17.17				
F0	9538	1907.60	2	Horn	V	-28.30	-28.30	V-V	-18.32	21.62	0.15	33.0	11.38
F0	9538	1907.60	2	Horn	H	-29.09		H-H	-17.26				

 PMM <i>Testing Services</i> ™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

WCDMA Band 5 Voice Mode

Date of Test: July 13, 2013

The following measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 23.9 °C
Relative Humidity: 36.9 %

The BlackBerry® smartphone was standalone, with USB facing up and top pointing to the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in WCDMA band 5 Call mode on channels 4132, 4182, and 4233.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 16 - 18, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 23.2 - 25.6 °C
Relative Humidity: 17.7 - 31.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 9 GHz.

The BlackBerry® smartphone was standalone, horizontal with LCD facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 5 Call mode on channels 4132, 4182, and 4233.

All emissions were at least 25.0 dB below the limit.

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

WCDMA 5 HSUPA Mode

Date of Test: July 13, 2013

The following measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 23.9 °C
Relative Humidity: 36.9 %

The BlackBerry® smartphone was standalone, with USB facing up and top pointing to the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in WCDMA band 5 HSUPA mode on channels 4132, 4182, and 4233.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 16 - 18, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 23.2 - 25.6 °C
Relative Humidity: 17.7 - 31.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 9 GHz.

The BlackBerry® smartphone was standalone, horizontal with LCD facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 5 HSUPA mode on channels 4132, 4182, and 4233.

All emissions were at least 25.0 dB below the limit.

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

WCDMA Band 2 Voice mode

Date of Test: July 13, 2013

The following measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 23.9 °C
Relative Humidity: 36.9 %

The BlackBerry® smartphone was standalone, with USB facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 2 Call mode on channels 9262, 9400 and 9538.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 15 - 21, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 23.2 - 25.6 °C
Relative Humidity: 17.7 - 31.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1GHz to 20 GHz.

The BlackBerry® smartphone was standalone, horizontal with LCD facing up and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 2 Call mode on channels 9262, 9400, 9538.

All emissions were at least 25.0 dB below the limit.

 PMM <i>Testing Services</i> ™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

WCDMA Band 2 HSUPA Mode

Date of Test: July 13, 2013

The following measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 23.9 °C
Relative Humidity: 36.9 %

The BlackBerry® smartphone was standalone, with USB facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 2 HSUPA mode on channels 9262, 9400, and 9538.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 15 - 21, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 23.2 - 25.6 °C
Relative Humidity: 17.7 - 31.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1GHz to 20 GHz.

The BlackBerry® smartphone was standalone, horizontal with LCD facing up and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 2 HSUPA mode on channels 9262, 9400, 9538.

All emissions were at least 25.0 dB below the limit.

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C							
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013			FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW				

Radiated Emissions Test Data Results cont'd

The following measurements were performed on product RFY111LW.

Date of Test: July 10, 2013

The following measurements were performed by Feras Obeid.

The environmental tests conditions were: Temperature: 25.8 °C
Relative Humidity: 38.9 %

The BlackBerry® smartphone was standalone, USB down with LCD facing to the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

WCDMA Band 4 Voice Mode

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	(W)	Limit (dBm)	Diff. To Limit (dB)
F0	1312	1712.40	4	Horn	V	-24.41	-24.41	V-V	-16.88	22.76	0.19	30.00	7.24
F0	1312	1712.40	4	Horn	H	-26.19		H-H	-16.79				
F0	1413	1732.60	4	Horn	V	-24.14	-24.14	V-V	-16.60	23.42	0.22	30.00	6.58
F0	1413	1732.60	4	Horn	H	-28.62		H-H	-16.25				
F0	1513	1752.60	4	Horn	V	-24.50	-24.50	V-V	-16.72	23.20	0.21	30.00	6.80
F0	1513	1752.60	4	Horn	H	-26.15		H-H	-16.21				

WCDMA Band 4 HSUPA Mode

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	(W)	Limit (dBm)	Diff. To Limit (dB)
F0	1312	1712.40	4	Horn	V	-26.54	-26.54	V-V	-18.97	20.62	0.12	30.00	9.38
F0	1312	1712.40	4	Horn	H	-28.71		H-H	-18.93				
F0	1413	1732.60	4	Horn	V	-26.24	-26.24	V-V	-18.62	21.34	0.14	30.00	8.66
F0	1413	1732.60	4	Horn	H	-29.67		H-H	-18.33				
F0	1513	1752.60	4	Horn	V	-26.56	-26.56	V-V	-18.79	21.15	0.13	30.00	8.85
F0	1513	1752.60	4	Horn	H	-28.25		H-H	-18.26				

 PMM <i>Testing Services</i> ™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

WCDMA Band 4 Voice Mode

Date of Test: July 10, 2013

The following measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 25.5 °C
Relative Humidity: 38.4 %

The BlackBerry® smartphone was standalone, USB down with LCD facing to the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in WCDMA band 4 Call mode on channels 1312, 1413, and 1513.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 25 - 29, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 23.2 – 26.9 °C
Relative Humidity: 31.7 – 36.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 9 GHz.

The BlackBerry® smartphone was standalone, USB down with LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 4 Call mode on channels 1312, 1413, and 1513.

All emissions were at least 25.0 dB below the limit

 PMM <i>Testing Services</i> ™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW, RFY111LW APPENDIX 2C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

WCDMA Band 4 HSUPA Mode

Date of Test: July 10, 2013

The following measurements were performed by Savtej Sandhu.

The environmental test conditions were: Temperature: 25.5 °C
Relative Humidity: 38.4 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

The BlackBerry® smartphone was standalone, USB down with LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 4 HSUPA mode on channels 1312, 1413, and 1513.

All emissions were at least 25.0 dB below the limit.

Date of Test: July 25 - 29, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 23.2 – 26.9 °C
Relative Humidity: 31.7 – 36.5 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1GHz to 20 GHz.

The BlackBerry® smartphone was standalone, USB down with LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed in WCDMA Band 4 HSUPA mode on channels 1312, 1413, 1513.

All emissions were at least 25.0 dB below the limit.


APPENDIX 3A– LTE Band 5 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

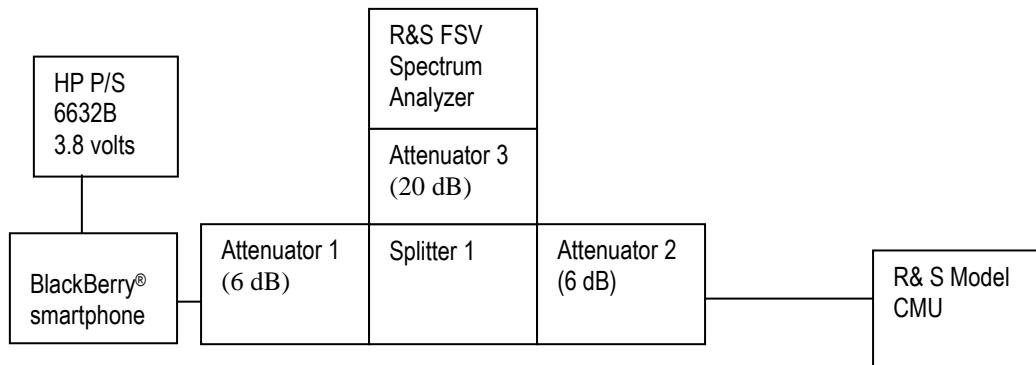Test Setup Diagram



A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

The following measurements were performed on product RFY111LW.

Date of Test: August 15, 2013

The environmental test conditions were: Temperature: 22.7 °C
Relative Humidity: 20.1 %

The following measurements were performed by Berkin Can.

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

The following measurements were performed on product RFY111LW.

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
824.7-848.2	22.03	1M08G7D	LTE B5	1.4	QPSK
824.7-848.2	20.80	1M08D7W	LTE B5	1.4	16QAM
825.5-847.5	21.98	2M69G7D	LTE B5	3	QPSK
825.5-847.5	21.41	2M69D7W	LTE B5	3	16QAM
826.5-846.4	21.98	4M48G7D	LTE B5	5	QPSK
826.5-846.4	21.34	4M48D7W	LTE B5	5	16QAM
829-844	21.84	8M95G7D	LTE B5	10	QPSK
829-844	21.43	8M93D7W	LTE B5	10	16QAM

The conducted spurious emissions – As per 47 CFR 2.1051, CFR 22.917 and RSS-132, 4.5 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

For each 1.4MHz, 3MHz, 5MHz, 10MHz with different number of resource blocks as per scalable bandwidths for LTE band 5, the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

A minimum resource block condition was also measured (RB = 1).

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE band 5 was measured to be 9.3 MHz. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Test Data for LTE Band 5 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 5 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16-QAM
829.0	9.3	8.915	8.931
836.5	9.26	8.931	8.931
843.9	9.28	8.946	8.931

Measurement Plots for LTE Band 5

See Figures 3-1a to 3-18a for the plots of the conducted spurious emissions.

See Figures 3-19a to 3-36a and 3-45a to 3-47a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.

See Figures 3-37a to 3-44a for the plots of the Channel mask.

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-1a: Band 5, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

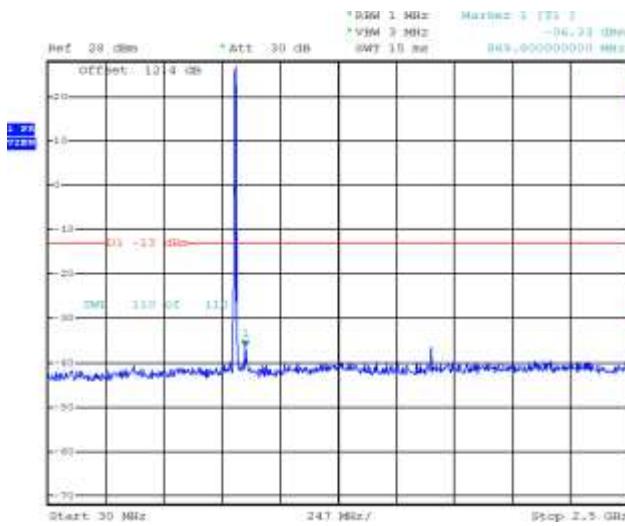


Figure 3-2a: Band 5, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

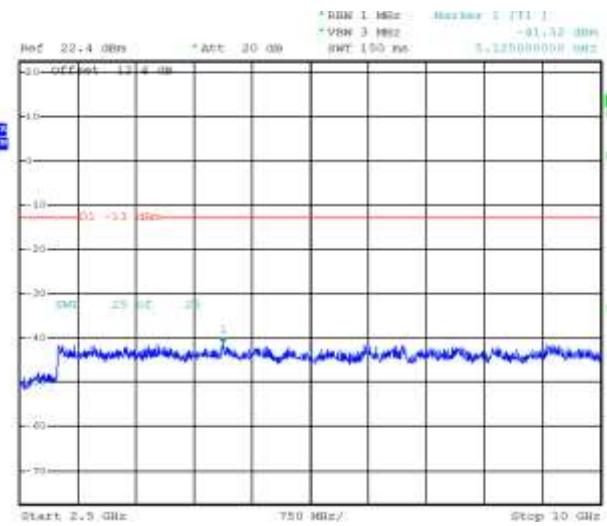


Figure 3-3a: Band 5, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)


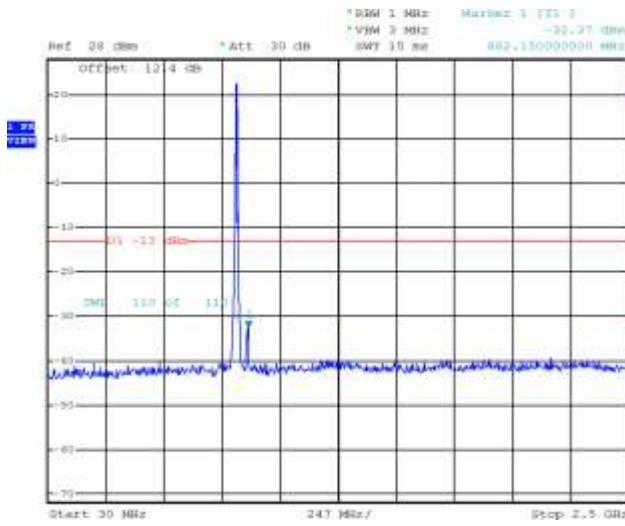


Figure 3-4a: Band 5, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

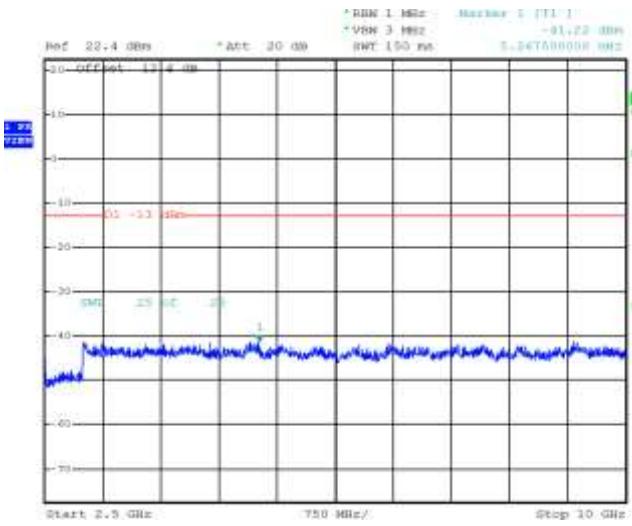

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-5a: Band 5, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

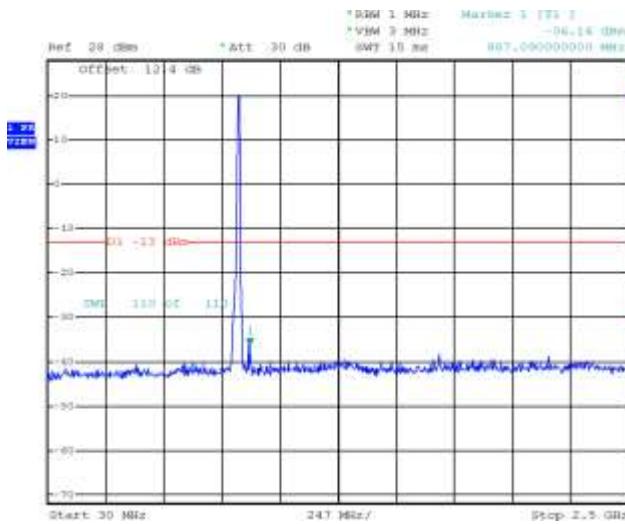


Figure 3-6a: Band 5, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

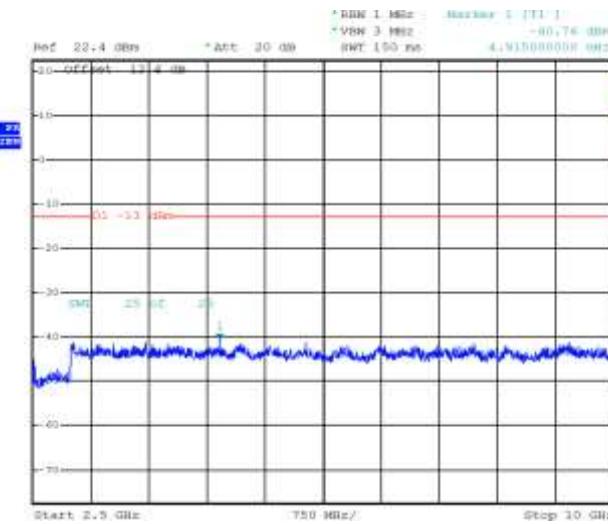


Figure 3-7a: Band 5, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)


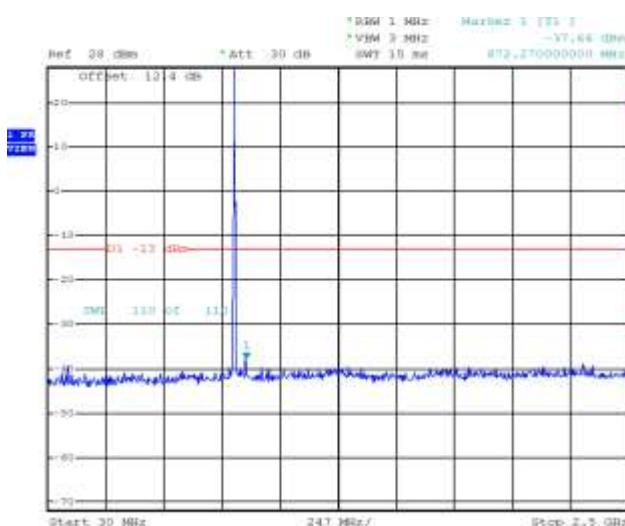


Figure 3-8a: Band 5, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

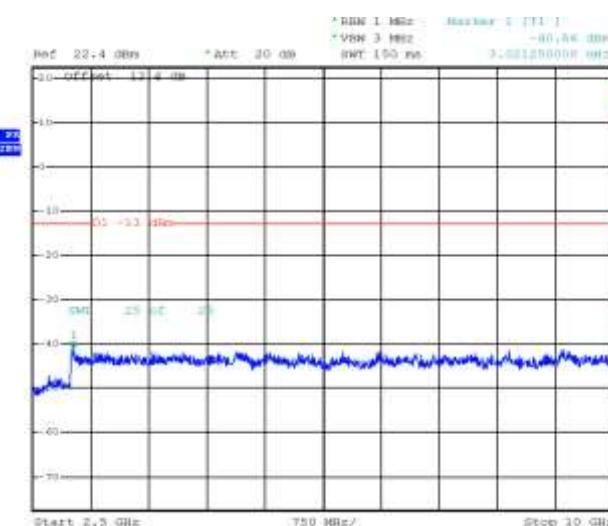

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-9a: Band 5, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 15)

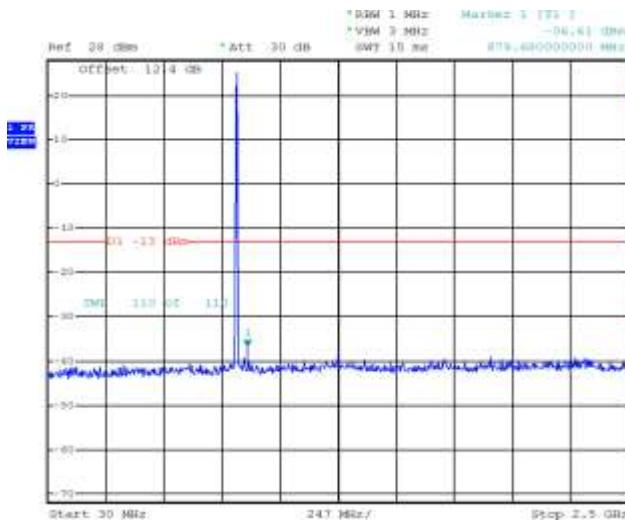


Figure 3-10a: Band 5, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 15)

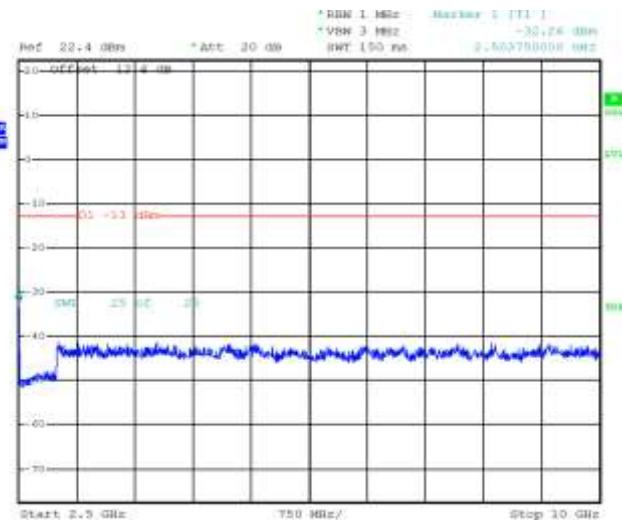


Figure 3-11a: Band 5, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)


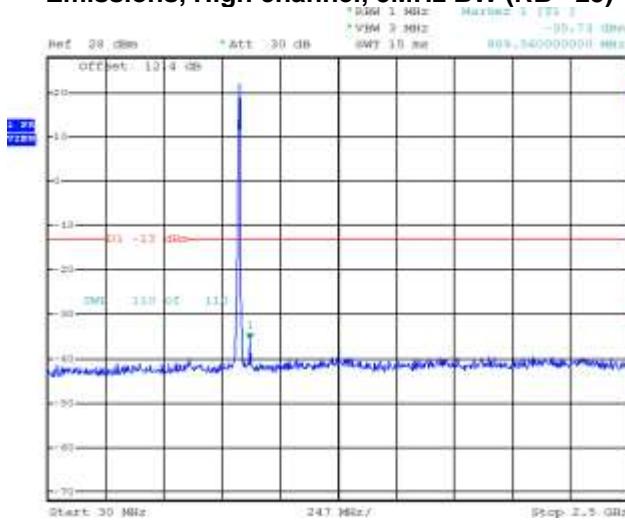


Figure 3-12a: Band 5, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

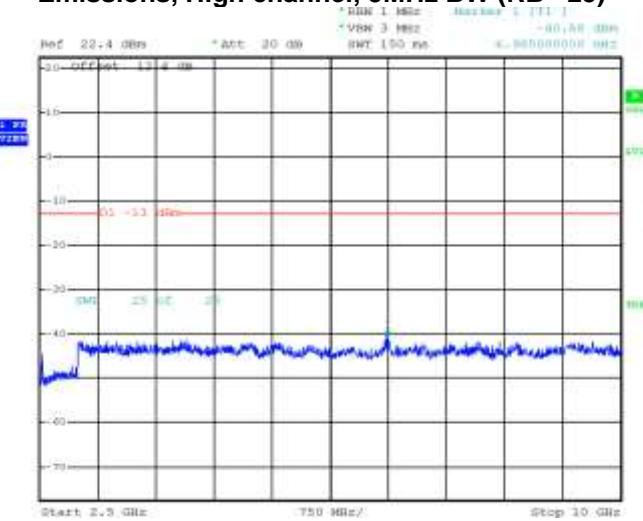

 Testing Services™	<p>EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW</p> <p>APPENDIX 3A</p>
<p>Test Report No.: RTS-6046-1308-21A_Rev1</p>	<p>Dates of Test: July 19 to August 15 and Sept 12, 2013</p> <p>FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW</p>

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-13a: Band 5, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

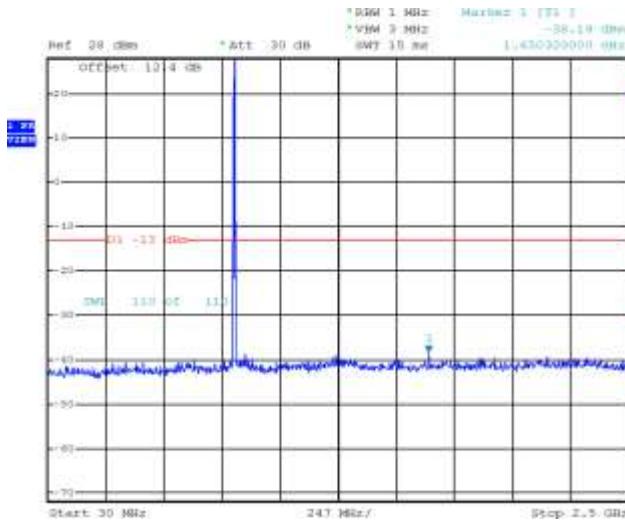


Figure 3-15a: Band 5, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

Figure 3-14a: Band 5, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)


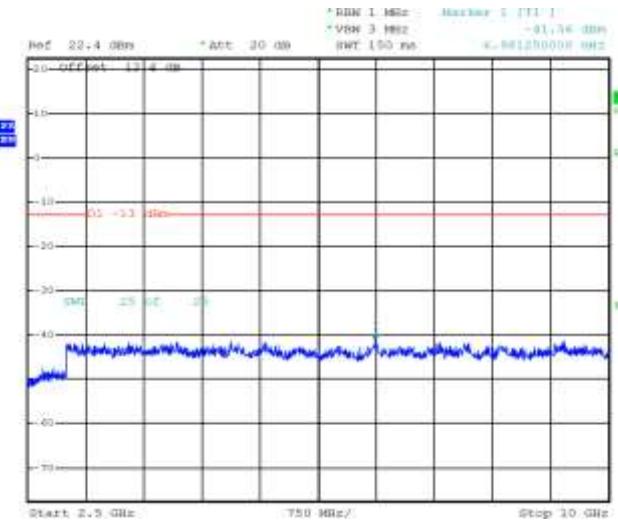
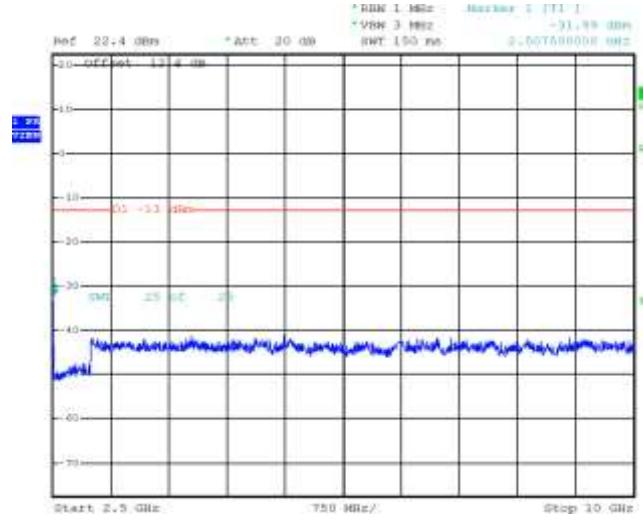


Figure 3-16a: Band 5, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

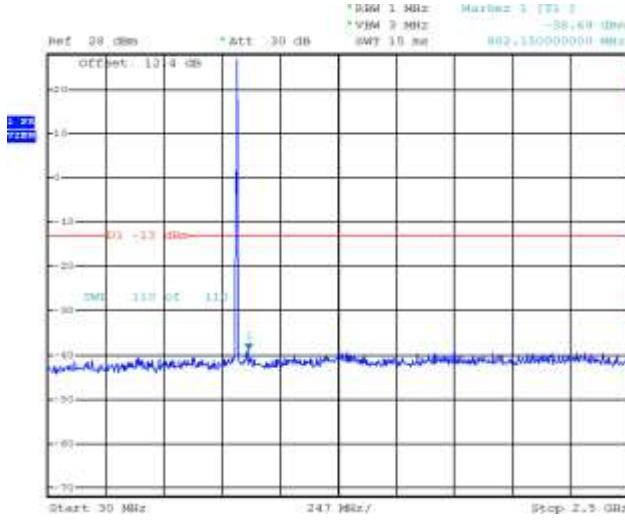

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-17a: Band 5, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)


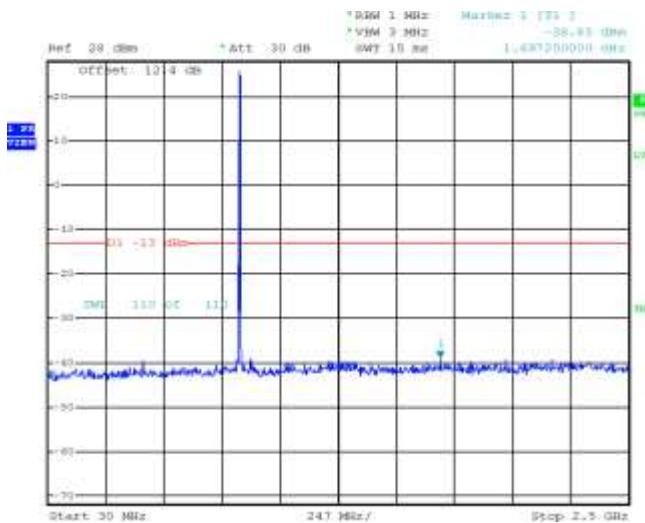


Figure 3-18a: Band 5, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)

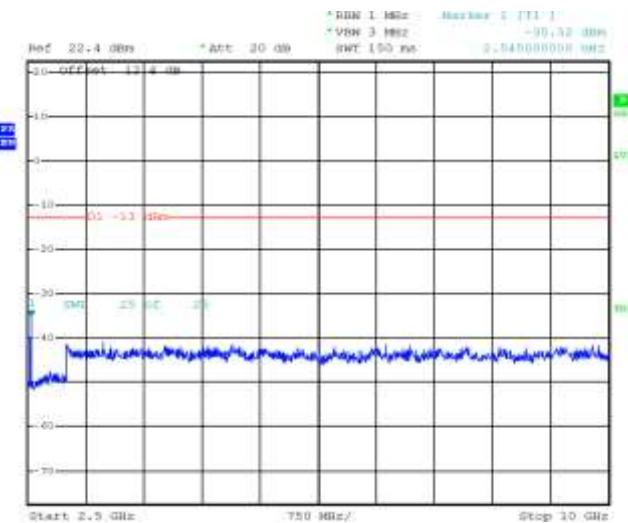


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW


LTE Band 5 Conducted RF Emission Test Data cont'd

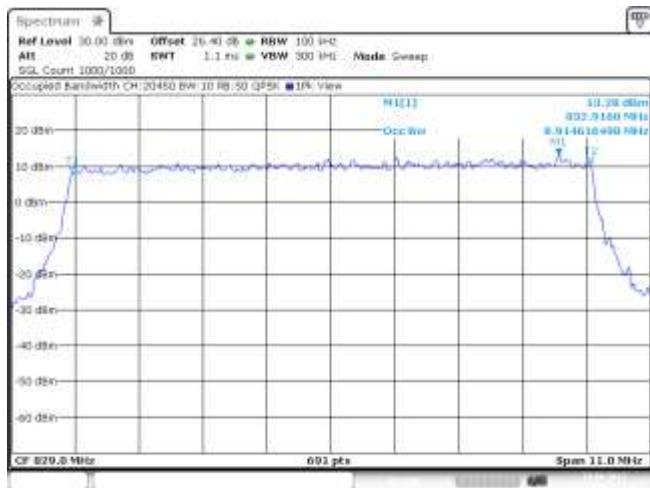Figure 3-19a: Occupied Bandwidth, Band 5 Low Channel, 10MHz BW, RB=50




date: 15,Aug,2013 15:14:42

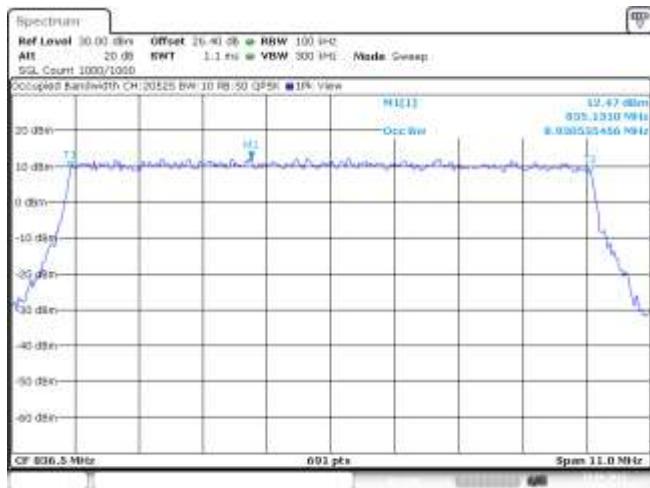Figure 3-20a: Occupied Bandwidth, Band 5 Middle Channel, 10MHz BW, RB=50



date: 15,Aug,2013 15:14:43

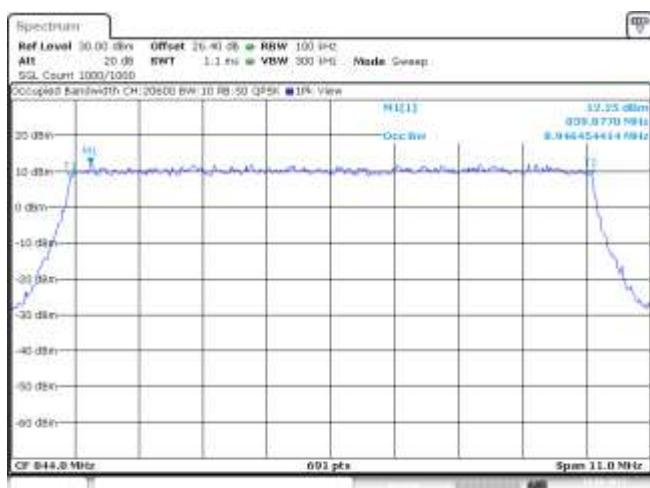Figure 3-21a: Occupied Bandwidth, Band 5 High Channel, 10MHz BW, RB=50



date: 15,Aug,2013 15:15:00

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-22a: Occupied Bandwidth, Band 5 Low Channel, 5MHz BW, RB=25

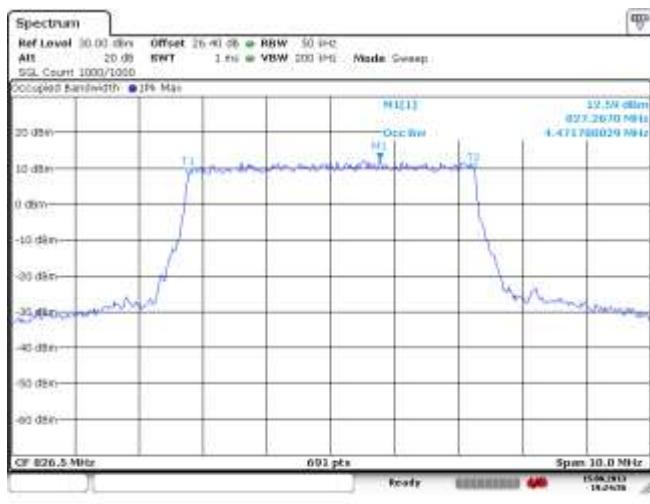


Figure 3-23a: Occupied Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=25


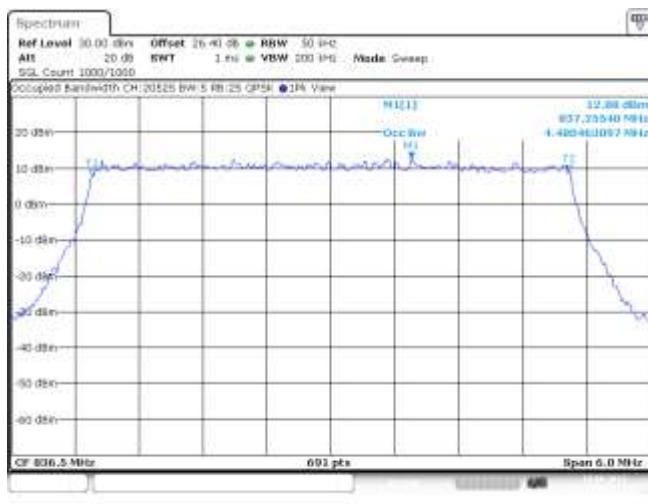


Figure 3-24a: Occupied Bandwidth, Band 5 High Channel, 5MHz BW, RB=25

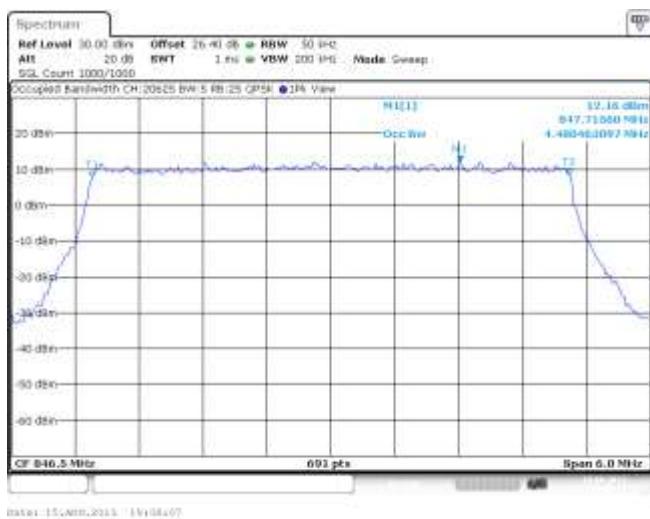

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-25a: Occupied Bandwidth, Band 5 Low Channel, 1.4MHz BW, RB=6

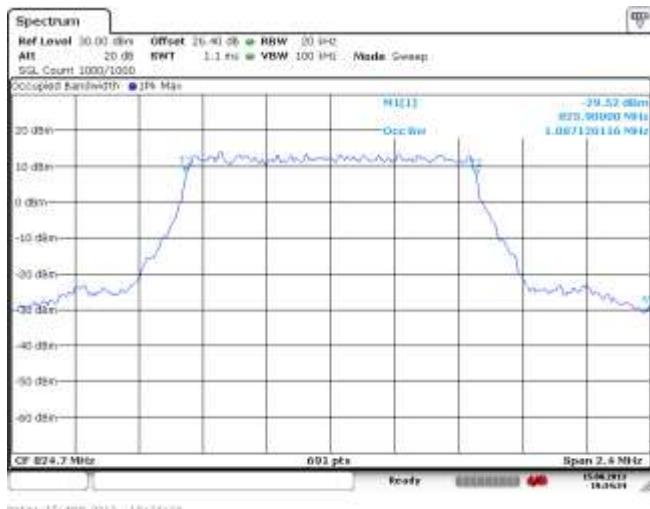


Figure 3-26a: Occupied Bandwidth, Band 5 Middle Channel, 1.4MHz BW, RB=6


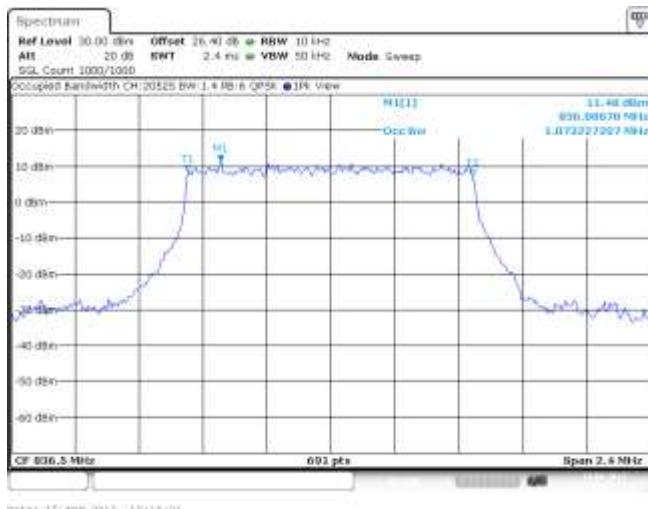


Figure 3-27a: Occupied Bandwidth, Band 5 High Channel, 1.4MHz BW, RB=6

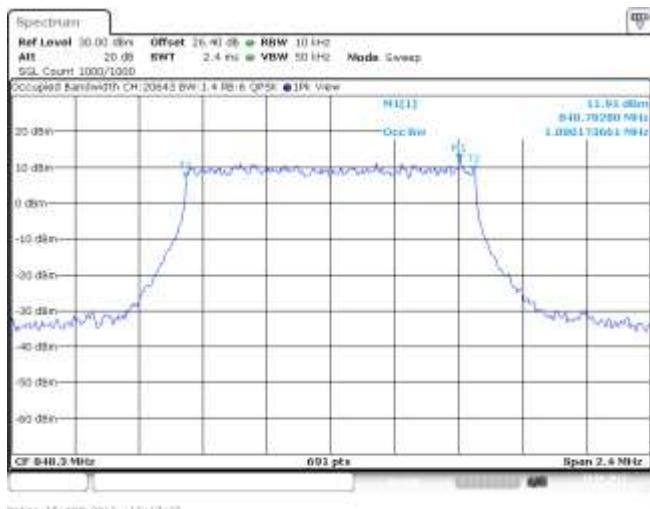

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-28a: -26 dBc Bandwidth, Band 5 Low Channel, 10MHz BW, RB=50

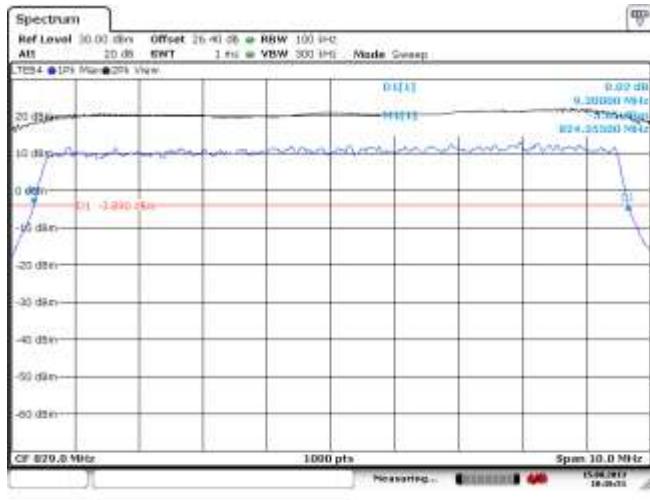


Figure 3-29a: -26 dBc Bandwidth, Band 5 Middle Channel, 10MHz BW, RB=50

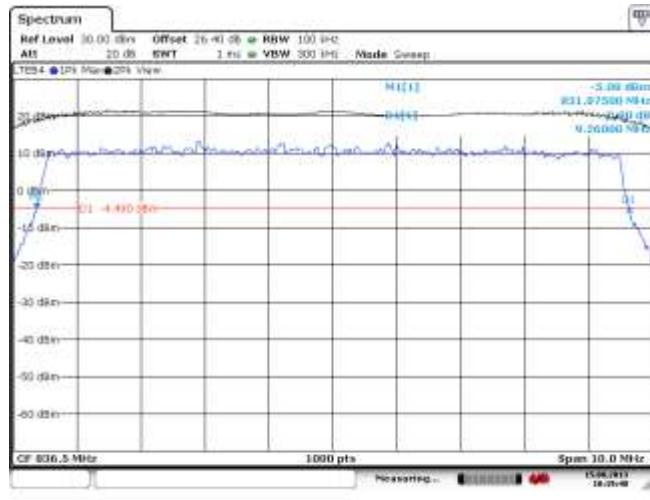


Figure 3-30a: -26 dBc Bandwidth, Band 5 High Channel, 10MHz BW, RB=50


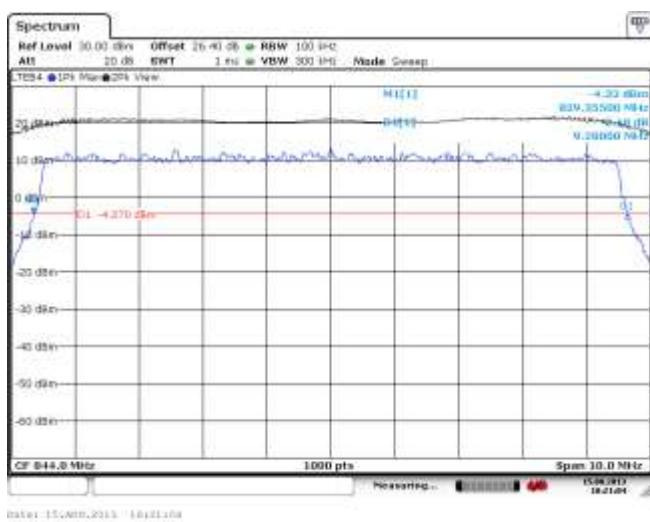






Figure 3-31a: -26 dBc Bandwidth, Band 5 Low Channel, 5MHz BW, RB=25

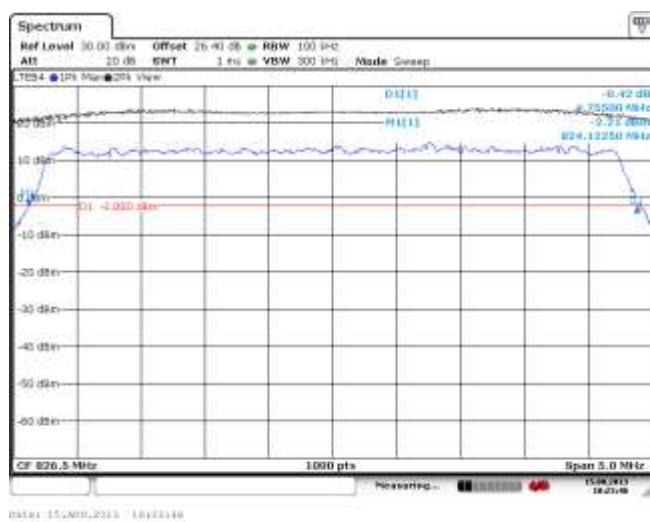

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

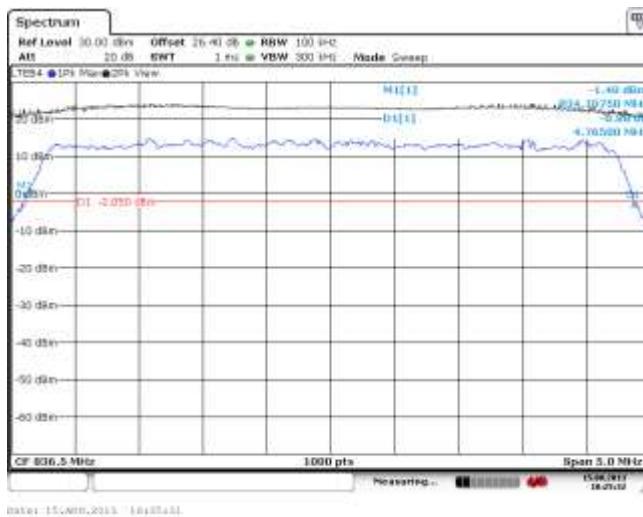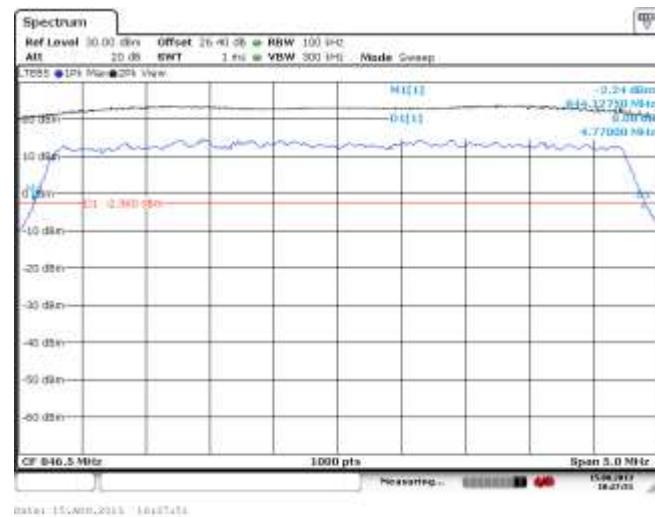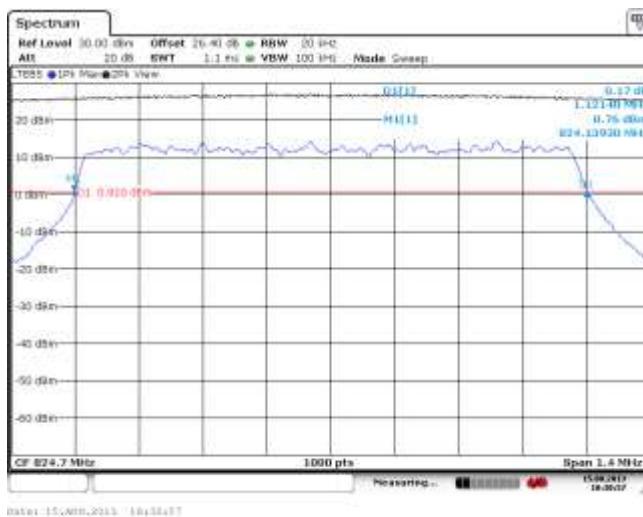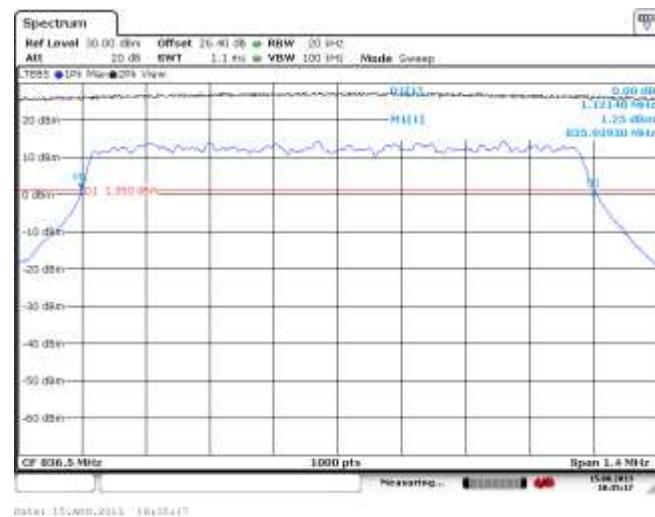
FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd
Figure 3-32a: -26 dBc Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=25

Figure 3-33a: -26 dBc Bandwidth, Band 5 High Channel, 5MHz BW, RB=25

Figure 3-34a: -26 dBc Bandwidth, Band 5 Low Channel, 1.4MHz BW, RB=6

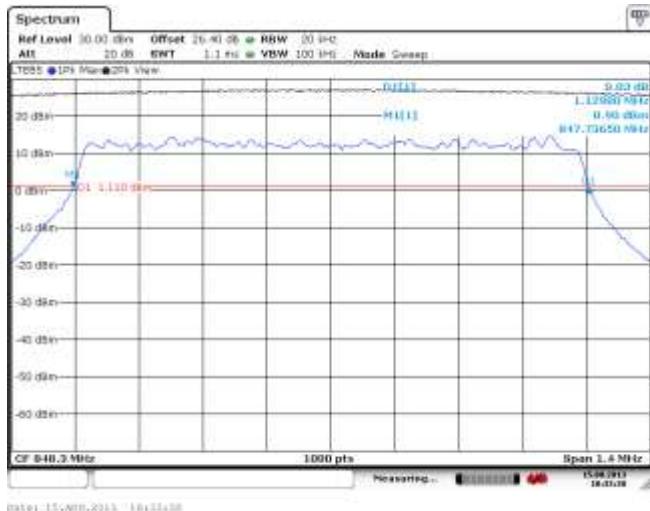Figure 3-35a: -26 dBc Bandwidth, Band 5 Middle Channel, 1.4MHz BW, RB=6


RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-36a: -26 dBc Bandwidth, Band 5 High Channel, 1.4MHz BW, RB=6




Date: 15.08.2013 18:13:58

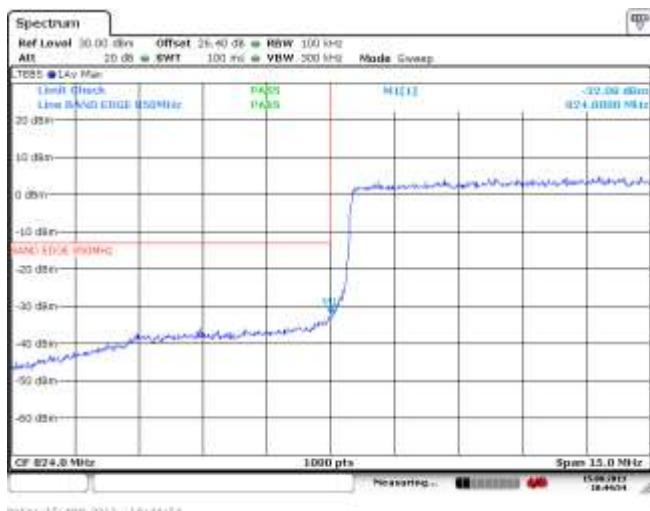Figure 3-37a: Band 5 Low Channel Mask, 10MHz BW, RB=50



Date: 15.08.2013 18:44:14

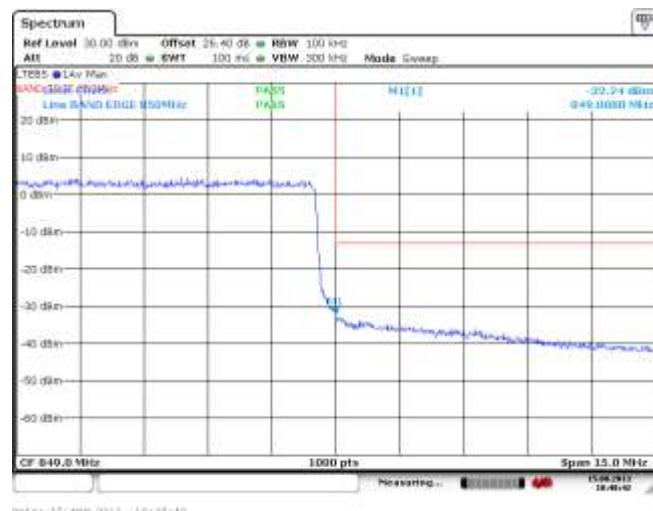Figure 3-38a: Band 5 High Channel Mask, 10MHz BW, RB=50



Date: 15.08.2013 18:44:42


Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013


FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd


**Figure 3-39a: Band 5 Low Channel Mask, 5MHz
 BW, RB=25**

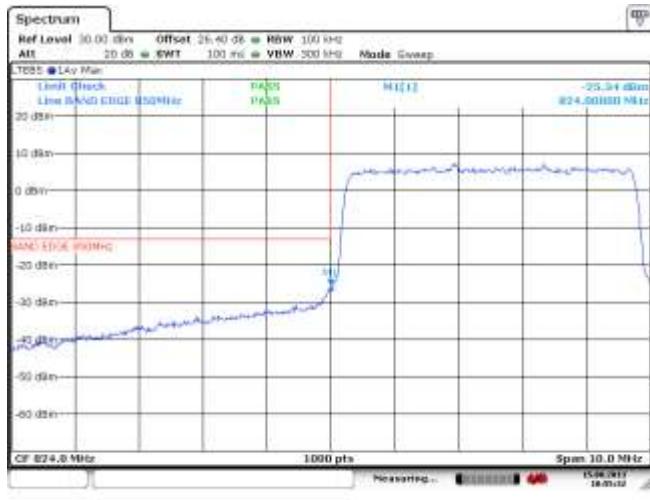


**Figure 3-40a: Band 5 High Channel Mask, 5MHz
 BW, RB=25**

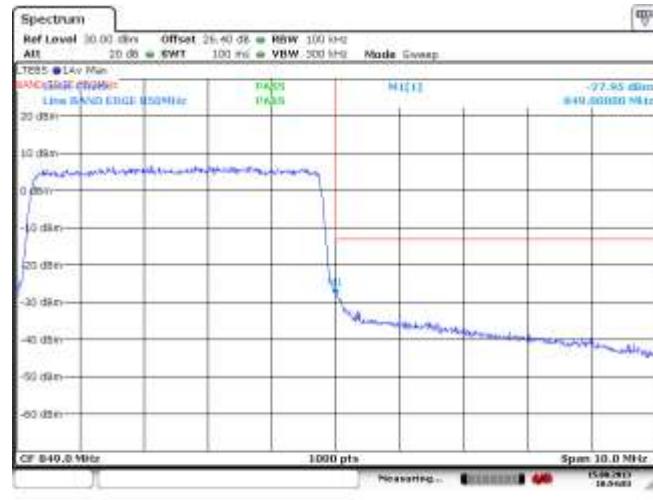

**Figure 3-41a: Band 5 Low Channel Mask, 1.4MHz
 BW, RB=6**

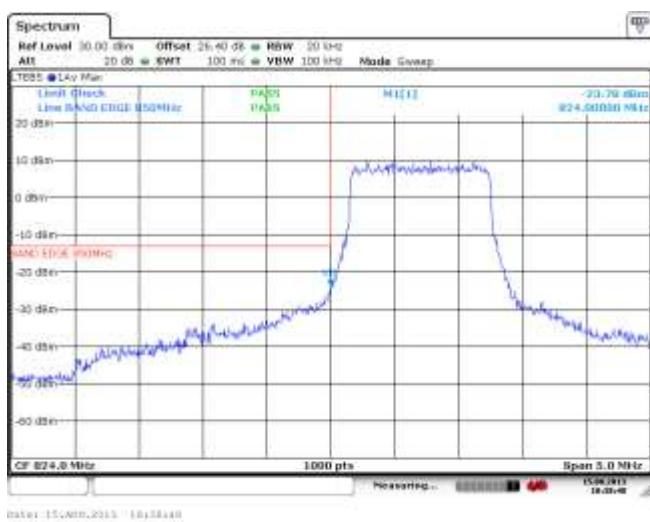

**Figure 3-42a: Band 5 High Channel Mask, 1.4MHz
 BW, RB=6**

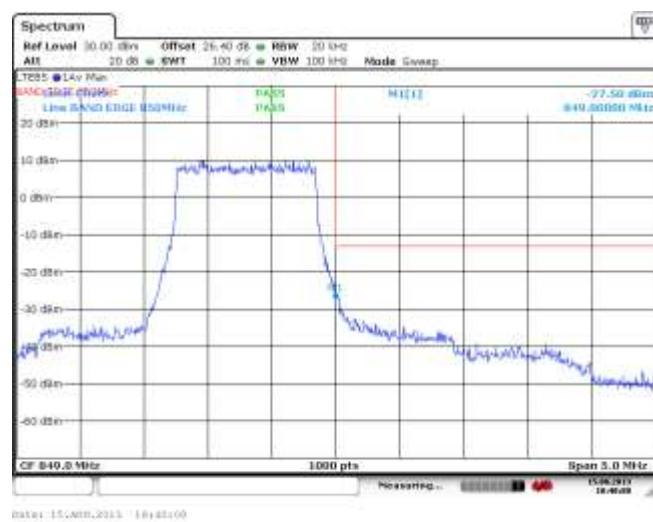

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-43d: Band 5 Low Channel Mask, 10MHz BW, RB=1


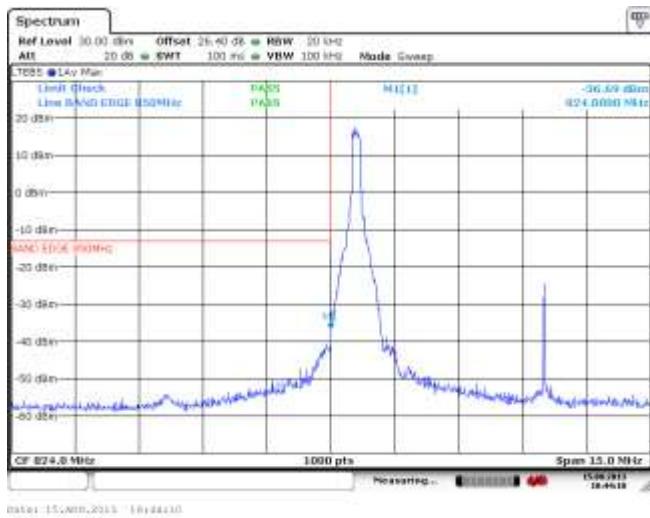


Figure 3-44a: Band 5 High Channel Mask, 10MHz BW, RB=1

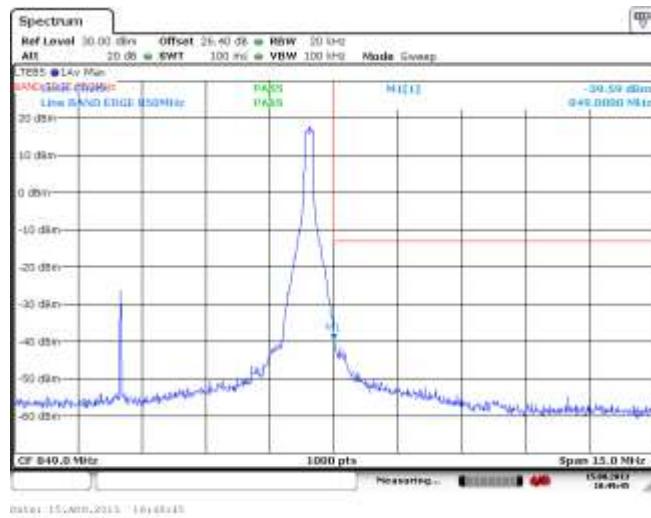

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3A	
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW IC: 2503A-RFY110LW

LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 3-45a: Occupied Bandwidth, Band 5 Low Channel, 10MHz BW (RB= 50) 16-QAM

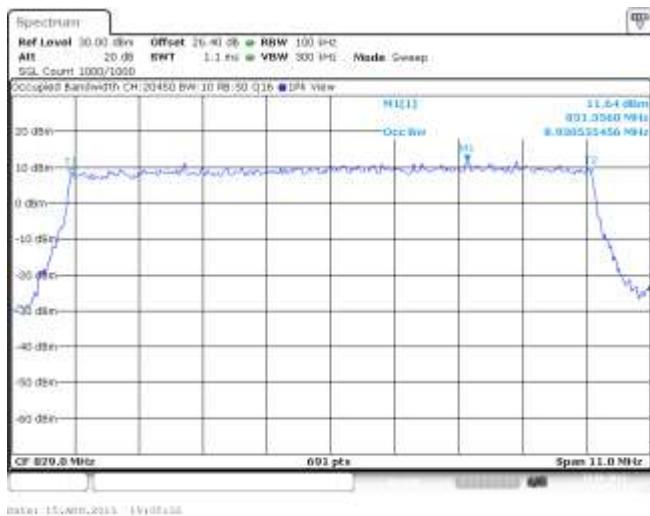


Figure 3-46a: Occupied Bandwidth, Band 5 Mid Channel, 20MHz BW (RB= 50) 16-QAM


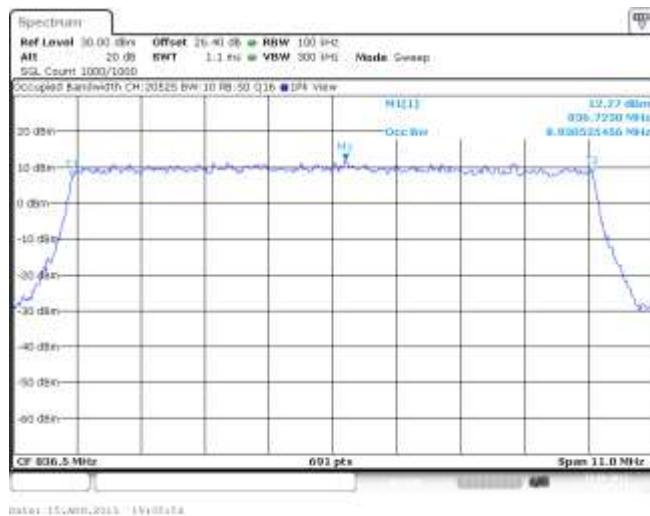



Figure 3-47a: Occupied Bandwidth, Band 5 High Channel, 10MHz BW (RB= 50) 16-QAM

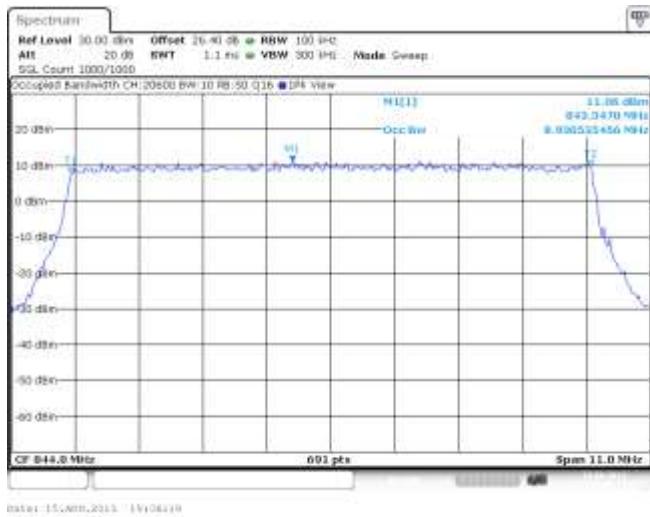

APPENDIX 3B – LTE Band 5 FREQUENCY STABILITY TEST DATA

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

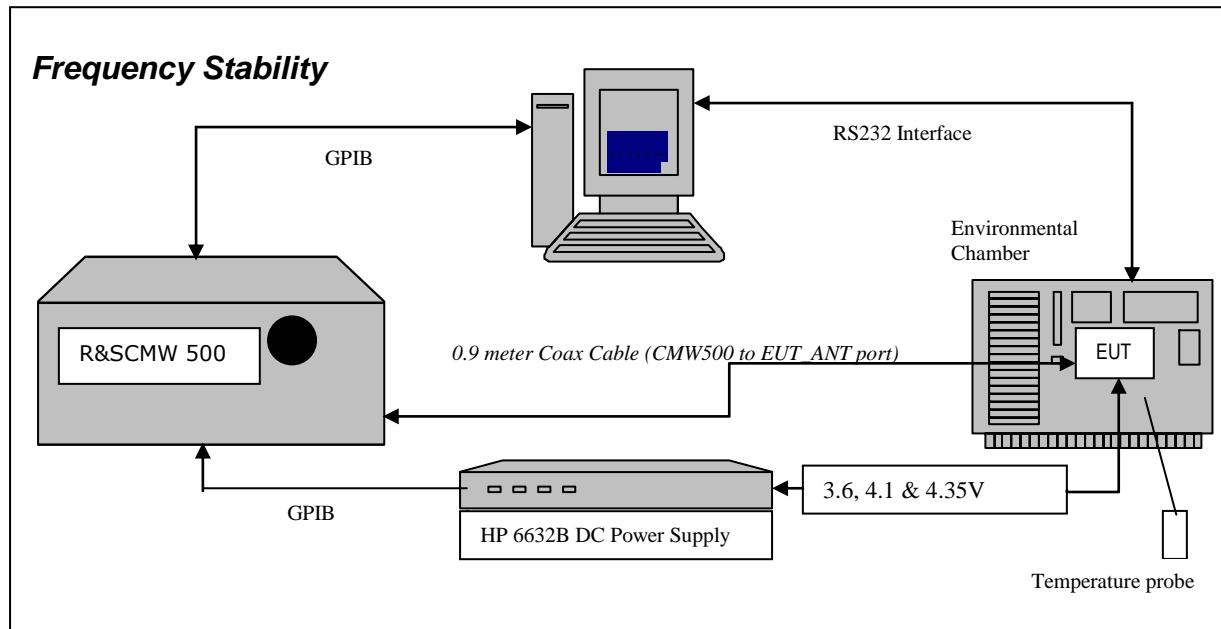LTE Band 5 Frequency Stability Test Data



The following measurements were performed by Berkin Can.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

- (a,b) Frequency Stability - Temperature Variation
- (d) Frequency Stability - Voltage Variation

24.236 Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C.

After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled.

The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, 4.1 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 4.1 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 829.0 MHz, 836.5 MHz and 844.0 MHz each was measured under 10 MHz bandwidth with maximum (50) resource blocks. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

15. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
16. Start test program
17. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
18. Set power supply voltage to 3.6 volts.
19. Set up CMW 500 Radio Communication Tester.
20. Command the CMW 500 to switch to the low channel.
21. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
22. EUT is commanded to Transmit 100 Bursts.
23. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
24. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
25. Repeat steps 5 to 10 changing the supply voltage to 4.1 Volts
26. Increase temperature by 10°C and soak for 1/2 hour.
27. Repeat steps 4 - 12 for temperatures -30°C to 60°C .
28. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 4.1 and 4.35 volts

The maximum frequency error in the LTE Band 5 measured was **0.0306 PPM**.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

The following measurements were performed on product RFY111LW.

Date of test: August 15, 2013

LTE Band 5 results: channels 20400, 20525 and 20649 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.6	20	12.36	0.0149
20525	836.5	3.6	20	14.10	0.0169
20600	844.0	3.6	20	23.82	0.0282

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.1	20	20.25	0.0244
20525	836.5	4.1	20	16.18	0.0193
20600	844.0	4.1	20	25.52	0.0302

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.35	20	15.69	0.0189
20525	836.5	4.35	20	12.39	0.0148
20600	844.0	4.35	20	10.73	0.0127

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE band 5 Results: channel 20400 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.6	-30	10.68	0.0129
20450	829.0	3.6	-20	17.31	0.0209
20450	829.0	3.6	-10	17.17	0.0207
20450	829.0	3.6	0	23.35	0.0282
20450	829.0	3.6	10	15.90	0.0192
20450	829.0	3.6	20	12.36	0.0149
20450	829.0	3.6	30	19.53	0.0236
20450	829.0	3.6	40	22.27	0.0269
20450	829.0	3.6	50	17.87	0.0216
20450	829.0	3.6	60	13.22	0.0159
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.1	-30	19.15	0.0231
20450	829.0	4.1	-20	18.86	0.0228
20450	829.0	4.1	-10	17.96	0.0217
20450	829.0	4.1	0	22.54	0.0272
20450	829.0	4.1	10	15.32	0.0185
20450	829.0	4.1	20	20.25	0.0244
20450	829.0	4.1	30	20.89	0.0252
20450	829.0	4.1	40	15.43	0.0186
20450	829.0	4.1	50	24.91	0.0300
20450	829.0	4.1	60	19.53	0.0236
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.35	-30	15.76	0.0190
20450	829.0	4.35	-20	18.90	0.0228
20450	829.0	4.35	-10	14.86	0.0179
20450	829.0	4.35	0	17.18	0.0207
20450	829.0	4.35	10	12.47	0.0150
20450	829.0	4.35	20	15.69	0.0189
20450	829.0	4.35	30	19.35	0.0233
20450	829.0	4.35	40	18.47	0.0223
20450	829.0	4.35	50	22.18	0.0268
20450	829.0	4.35	60	13.90	0.0168

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE band 5 Results: channel 20525 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	3.6	-30	15.90	0.0190
20525	836.5	3.6	-20	16.77	0.0200
20525	836.5	3.6	-10	10.48	0.0125
20525	836.5	3.6	0	14.68	0.0175
20525	836.5	3.6	10	11.57	0.0138
20525	836.5	3.6	20	14.10	0.0169
20525	836.5	3.6	30	18.38	0.0220
20525	836.5	3.6	40	11.22	0.0134
20525	836.5	3.6	50	17.30	0.0207
20525	836.5	3.6	60	15.41	0.0184
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	4.1	-30	25.62	0.0306
20525	836.5	4.1	-20	24.11	0.0288
20525	836.5	4.1	-10	17.13	0.0205
20525	836.5	4.1	0	24.62	0.0294
20525	836.5	4.1	10	12.68	0.0152
20525	836.5	4.1	20	16.18	0.0193
20525	836.5	4.1	30	19.75	0.0236
20525	836.5	4.1	40	22.56	0.0270
20525	836.5	4.1	50	11.74	0.0140
20525	836.5	4.1	60	23.76	0.0284
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	4.35	-30	18.76	0.0224
20525	836.5	4.35	-20	20.25	0.0242
20525	836.5	4.35	-10	23.45	0.0280
20525	836.5	4.35	0	23.34	0.0279
20525	836.5	4.35	10	19.05	0.0228
20525	836.5	4.35	20	12.39	0.0148
20525	836.5	4.35	30	11.43	0.0137
20525	836.5	4.35	40	12.11	0.0145
20525	836.5	4.35	50	24.09	0.0288
20525	836.5	4.35	60	11.19	0.0134

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE band 5 Results: channel 20649 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	3.6	-30	24.89	0.0295
20600	844.0	3.6	-20	12.41	0.0147
20600	844.0	3.6	-10	19.59	0.0232
20600	844.0	3.6	0	11.42	0.0135
20600	844.0	3.6	10	22.08	0.0262
20600	844.0	3.6	20	23.82	0.0282
20600	844.0	3.6	30	24.80	0.0294
20600	844.0	3.6	40	24.50	0.0290
20600	844.0	3.6	50	15.28	0.0181
20600	844.0	3.6	60	13.36	0.0158
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	4.1	-30	22.07	0.0262
20600	844.0	4.1	-20	12.18	0.0144
20600	844.0	4.1	-10	19.76	0.0234
20600	844.0	4.1	0	11.97	0.0142
20600	844.0	4.1	10	21.37	0.0253
20600	844.0	4.1	20	25.52	0.0302
20600	844.0	4.1	30	23.16	0.0274
20600	844.0	4.1	40	19.08	0.0226
20600	844.0	4.1	50	19.95	0.0236
20600	844.0	4.1	60	10.60	0.0126
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	4.35	-30	13.06	0.0155
20600	844.0	4.35	-20	14.00	0.0166
20600	844.0	4.35	-10	16.29	0.0193
20600	844.0	4.35	0	24.87	0.0295
20600	844.0	4.35	10	13.18	0.0156
20600	844.0	4.35	20	10.73	0.0127
20600	844.0	4.35	30	24.58	0.0291
20600	844.0	4.35	40	15.62	0.0185
20600	844.0	4.35	50	23.65	0.0280
20600	844.0	4.35	60	15.10	0.0179

APPENDIX 3C – LTE Band 5 RADIATED EMISSIONS TEST DATA

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Power Test Data Results

The following measurements were performed on product RFY111LW.

Date of Test: July 26, 2013

The following measurements were performed by Feras Obeid.

The environmental tests conditions were: Temperature: 26.2 °C
Relative Humidity: 37.1 %

The BlackBerry® smartphone was standalone horizontally with LCD facing down and top pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 5, 10MHz BW, RB=1, QPSK modulation

							Substitution Method						
EUT			Rx Antenna		Spectrum Analyzer		Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	Limit (dBm)	Diff to Limit (dB)	
F0	20500	834.00	5	Dipole	V	-39.31	-30.84	V-V	4.78	21.80	0.15	38.50	16.70
F0	20500	834.00	5	Dipole	H	-30.84		H-H	2.82				
F0	20525	836.50	5	Dipole	V	-39.43	-31.70	V-V	3.84	20.73	0.12	38.50	17.77
F0	20525	836.50	5	Dipole	H	-31.70		H-H	2.29				
F0	20549	838.90	5	Dipole	V	-39.31	-31.85	V-V	4.15	21.04	0.13	38.50	17.46
F0	20549	838.90	5	Dipole	H	-31.85		H-H	2.59				

LTE band 5, 10MHz BW, RB=1, 16-QAM modulation

							Substitution Method						
EUT			Rx Antenna		Spectrum Analyzer		Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	Limit (dBm)	Diff to Limit (dB)	
F0	20500	834.00	5	Dipole	V	-40.92	-32.19	V-V	3.50	20.52	0.11	38.50	17.98
F0	20500	834.00	5	Dipole	H	-32.19		H-H	1.47				
F0	20525	836.50	5	Dipole	V	-40.91	-32.98	V-V	2.64	19.53	0.09	38.50	18.97
F0	20525	836.50	5	Dipole	H	-32.98		H-H	1.08				
F0	20549	838.90	5	Dipole	V	-40.85	-32.66	V-V	3.26	20.15	0.10	38.50	18.35
F0	20549	838.90	5	Dipole	H	-32.66		H-H	1.70				

This report shall NOT be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2013

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3C									
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013				FCC ID: L6ARFW120LW		FCC ID: L6ARFY110LW		IC: 2503A-RFY110LW	

Radiated Emissions Test Data Results cont'd

LTE band 5, 1.4MHz BW, RB=1, QPSK modulation

							Substitution Method						
EUT			Rx Antenna		Spectrum Analyzer		Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	Limit (dBm)	Diff to Limit (dB)	
F0	20500	834.00	5	Dipole	V	-38.46	-31.90	V-V	3.65	20.67	0.12	38.50	17.83
F0	20500	834.00	5	Dipole	H	-31.90		H-H	1.62				
F0	20525	836.50	5	Dipole	V	-40.85	-32.48	V-V	3.04	19.93	0.10	38.50	18.57
F0	20525	836.50	5	Dipole	H	-32.48		H-H	1.53				
F0	20549	838.90	5	Dipole	V	-39.72	-31.73	V-V	4.24	21.13	0.13	38.50	17.37
F0	20549	838.90	5	Dipole	H	-31.73		H-H	3.18				

LTE band 5, 1.4MHz BW, RB=1, 16-QAM modulation

							Substitution Method						
EUT			Rx Antenna		Spectrum Analyzer		Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole) (dBm)	Limit (dBm)	Diff to Limit (dB)	
F0	20500	834.00	5	Dipole	V	-39.72	-33.16	V-V	2.35	19.37	0.09	38.50	19.13
F0	20500	834.00	5	Dipole	H	-33.16		H-H	0.33				
F0	20525	836.50	5	Dipole	V	-42.13	-33.79	V-V	1.81	18.70	0.07	38.50	19.80
F0	20525	836.50	5	Dipole	H	-33.79		H-H	0.24				
F0	20549	838.90	5	Dipole	V	-40.93	-32.96	V-V	2.96	19.85	0.10	38.50	18.65
F0	20549	838.90	5	Dipole	H	-32.96		H-H	2.09				

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 3C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

Date of Test: July 23, 2013

The following measurements were performed by Feras Obeid.

The environmental test conditions were: Temperature: 24 °C
Relative Humidity: 33.3 %

The BlackBerry® smartphone was standalone horizontally with LCD facing down and top pointing to the RX antenna when the turntable is at 0 degree position

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in LTE band 5 with QPSK and 16QAM modulation for 1.4MHz BW (channel 20407, 20525 and 20642 with RB = 1).

All emissions were at least 25 dB below the limit.

Date of Test: July 24, 2013

The following measurements were performed by Kevin Guo

The environmental test conditions were: Temperature: 25.5 °C
Relative Humidity: 21.6 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 10 GHz.

The BlackBerry® smartphone was standalone horizontally with LCD facing down and top pointing to the RX antenna when the turntable is at 0 degree position

Measurements were performed in LTE band 5 with QPSK and 16QAM modulation for 1.4MHz BW (channel 20407, 20525 and 20642 with RB = 1).

All emissions were at least 25 dB below the limit.


APPENDIX 4A– LTE Band 4 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

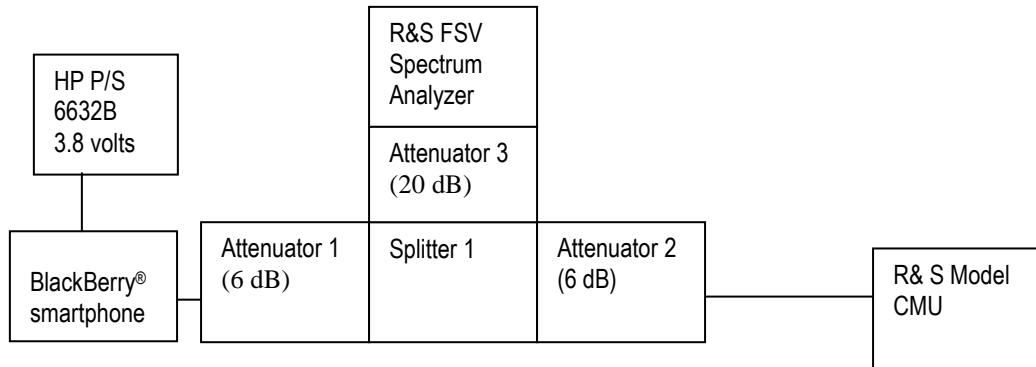Test Setup Diagram



A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

The following measurements were tested on RFY111LW.

Date of Test: August 15, 2013

The environmental test conditions were: Temperature: 23.2°C
Relative Humidity: 21.1 %

The following measurements were performed by Berkin Can.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4A				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

The following measurements were performed on product RFY111LW.

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
1710.7-1754.3	21.22	1M08G7D	LTE B4	1.4	QPSK
1710.7-1754.3	20.12	1M08D7W	LTE B4	1.4	16QAM
1711.5-1753.5	21.24	2M69G7D	LTE B4	3	QPSK
1711.5-1753.5	20.69	2M69D7W	LTE B4	3	16QAM
1712.5-1752.5	21.30	4M48G7D	LTE B4	5	QPSK
1712.5-1752.5	20.63	4M47D7W	LTE B4	5	16QAM
1715-1750	21.21	8M93G7D	LTE B4	10	QPSK
1715-1750	20.69	8M95D7W	LTE B4	10	16QAM
1717.5-1747.5	21.28	13M4G7D	LTE B4	15	QPSK
1717.5-1747.5	20.75	13M4D7W	LTE B4	15	16QAM
1720-1745	21.23	17M9G7D	LTE B4	20	QPSK
1720-1745	20.17	17M9D7W	LTE B4	20	16QAM

The conducted spurious emissions – As per 47 CFR 2.1051, CFR 27.53, RSS-139, 6.5 were measured from 30 MHz to 20 GHz.

-26 dBc Bandwidth and Occupied Bandwidth (99%)

The modulation spectrum was measured by both methods of 99% power bandwidth and – 26 dBc bandwidth For each 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz with different number of resource blocks for LTE band 4,.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

A minimum resource block condition was also measured (RB = 1).

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE band 4 was measured to be 18.66 MHz. Results were derived in a 200 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

Test Report No.:
RTS-6046-1308-21A_Rev1**Dates of Test:**
July 19 to August 15 and
Sept 12, 2013**FCC ID:** L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW**Test Data for LTE Band 4 selected Frequencies in 20MHz BW (RB = 100)**

LTE Band 4 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16-QAM
1720.0	18.66	17.87	17.84
1732.5	18.62	17.87	17.87
1745.0	18.46	17.81	17.81

Peak to Average Ratio (PAR)

For each 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz with different number of resource blocks as per scalable bandwidths for LTE band 4, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 10.53 dB in 20MHz bandwidth with 50 resource blocks.

Measurement Plots for LTE Band 4

See Figures 4-1a to 4-18a for the plots of the conducted spurious emissions.

See Figures 4-19a to 4-34a and 4-51a to 4-53a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.

See Figures 4-35a to 4-44a for the plots of the Channel mask.

See Figures 4-45a to 4-50a for the plots of the Peak to Average Ratios.

 RIM Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4A		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-1a: Band 4, Spurious Conducted Emissions, Low channel, 20MHz BW (RB= 1)

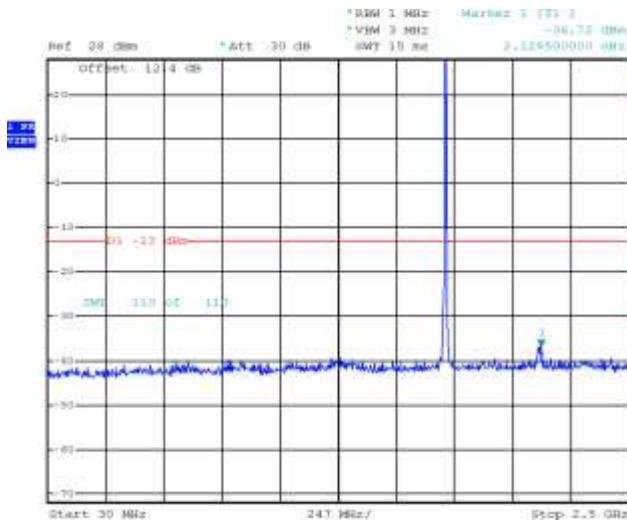


Figure 4-3a: Band 4, Spurious Conducted Emissions, Middle channel, 20MHz BW (RB= 50)

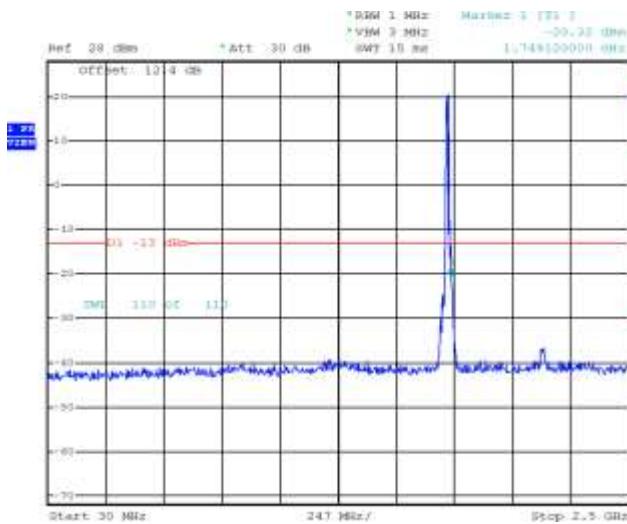


Figure 4-2a: Band 4, Spurious Conducted Emissions, Low channel, 20MHz BW (RB= 1)


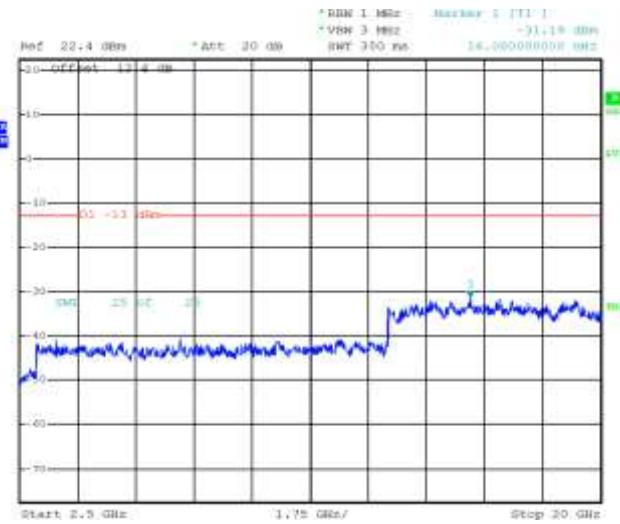


Figure 4-4a: Band 4, Spurious Conducted Emissions, Middle channel, 20MHz BW (RB= 50)

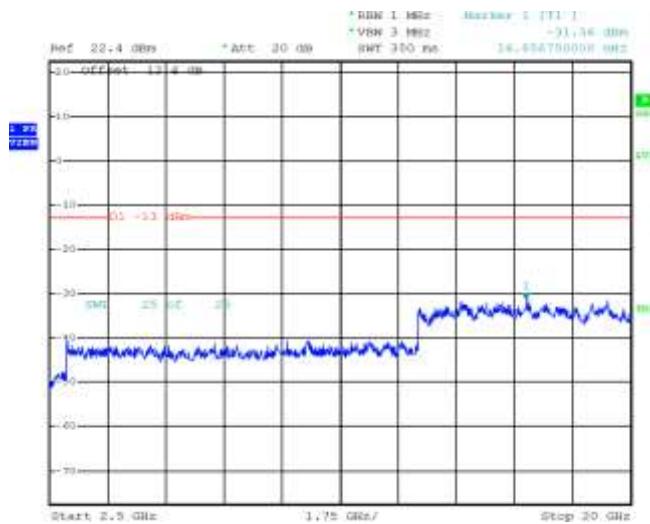

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-5a: Band 4, Spurious Conducted Emissions, High Channel, 20MHz BW (RB= 100)

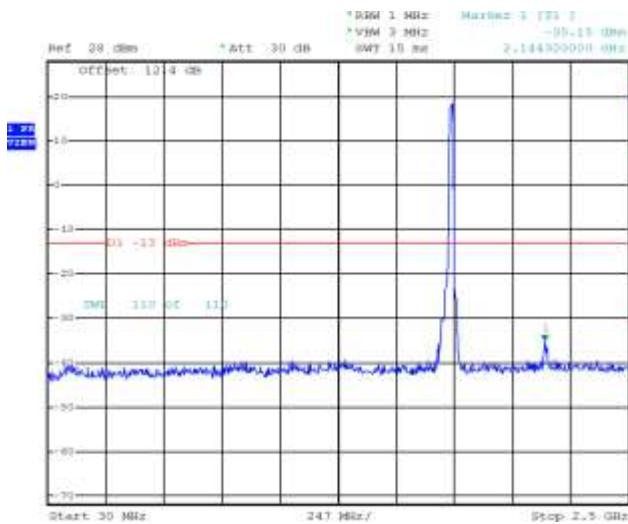


Figure 4-6a: Band 4, Spurious Conducted Emissions, High Channel, 20MHz BW (RB= 100)

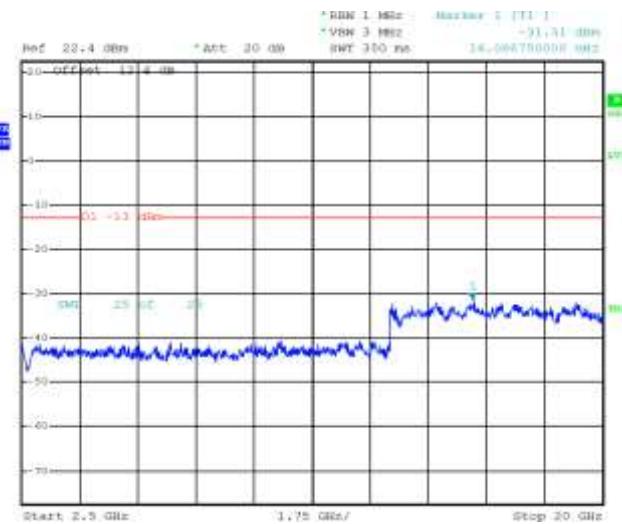


Figure 4-7a: Band 4, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)


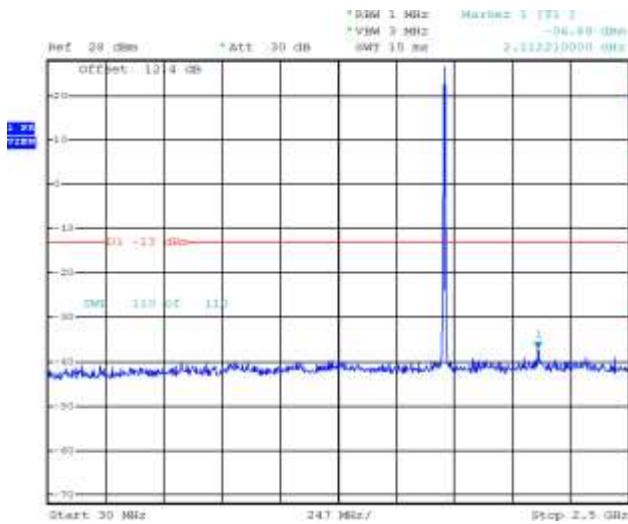


Figure 4-8a: Band 4, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

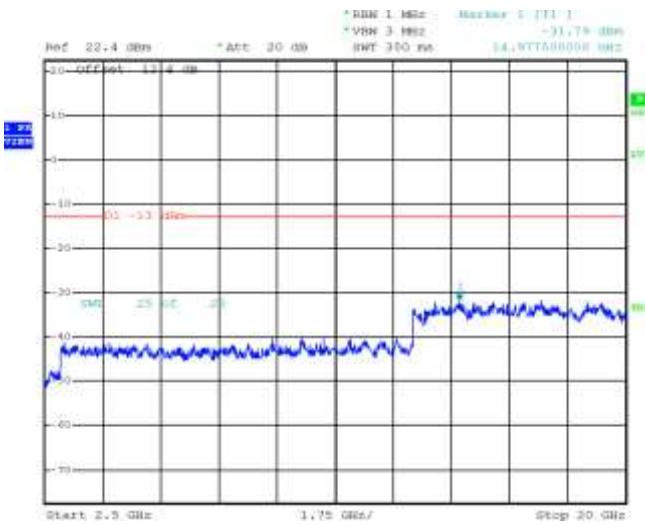

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-9a: Band 4, Spurious Conducted Emissions, Middle Channel, 10MHz BW (RB= 25)

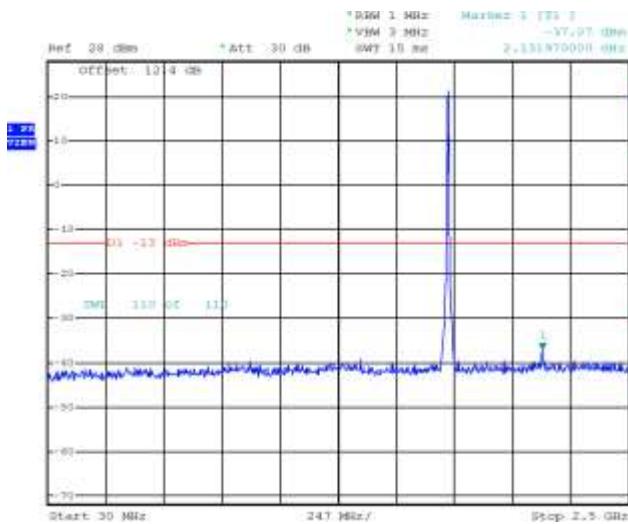


Figure 4-10a: Band 4, Spurious Conducted Emissions, Middle Channel, 10MHz BW (RB= 25)

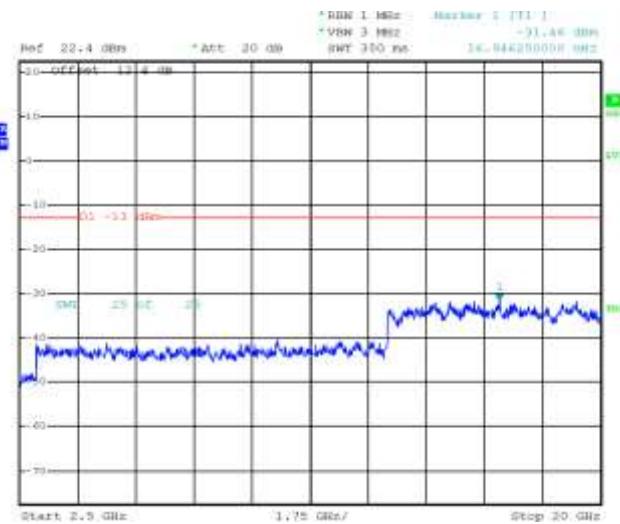


Figure 4-11a: Band 4, Spurious Conducted Emissions, High channel, 10MHz BW (RB= 50)


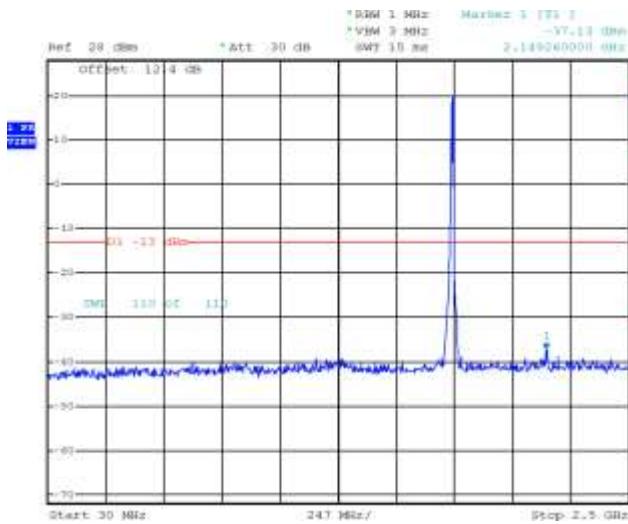


Figure 4-12a: Band 4, Spurious Conducted Emissions, High channel, 10MHz BW (RB= 50)

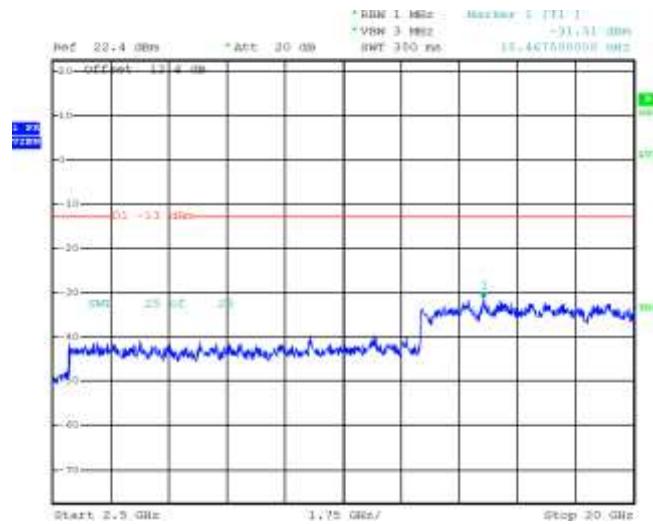

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-13a: Band 4, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

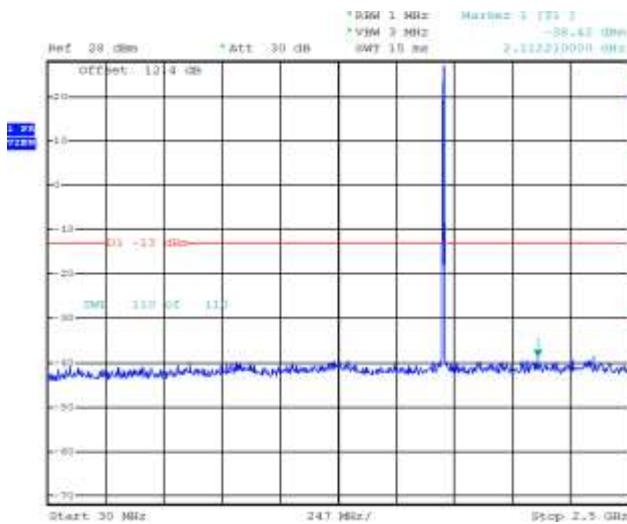


Figure 4-14a: Band 4, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

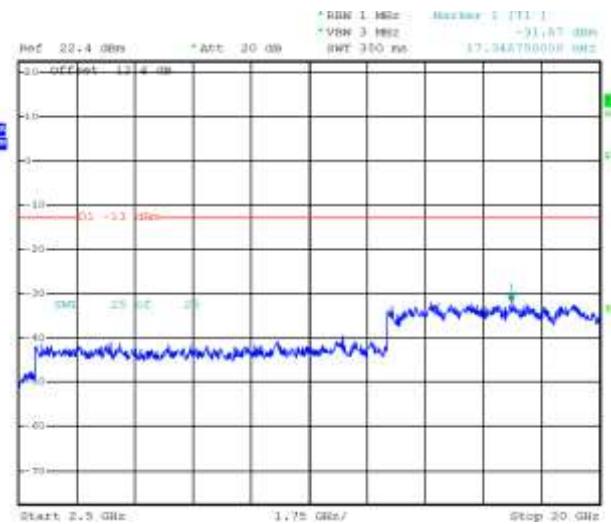


Figure 4-15a: Band 4, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)


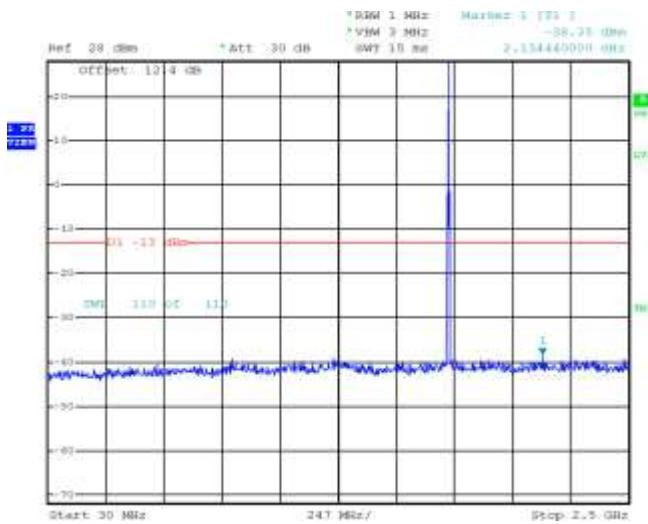


Figure 4-16a: Band 4, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

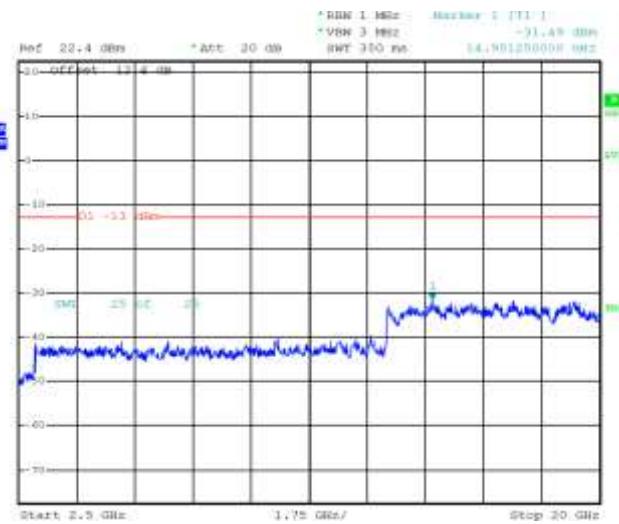

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-17a: Band 4, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)


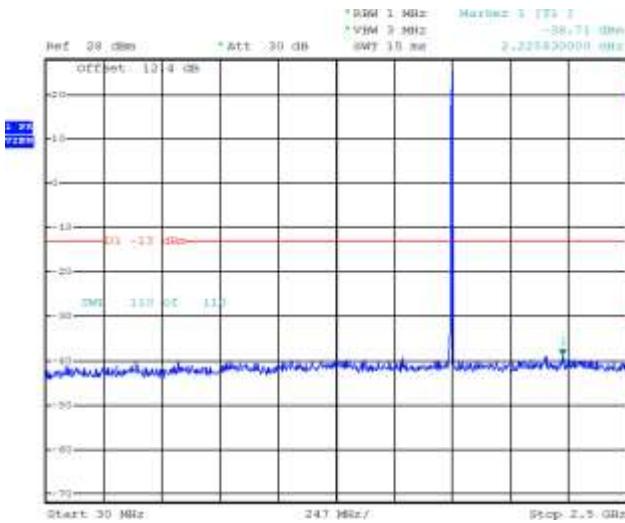


Figure 4-18a: Band 4, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)

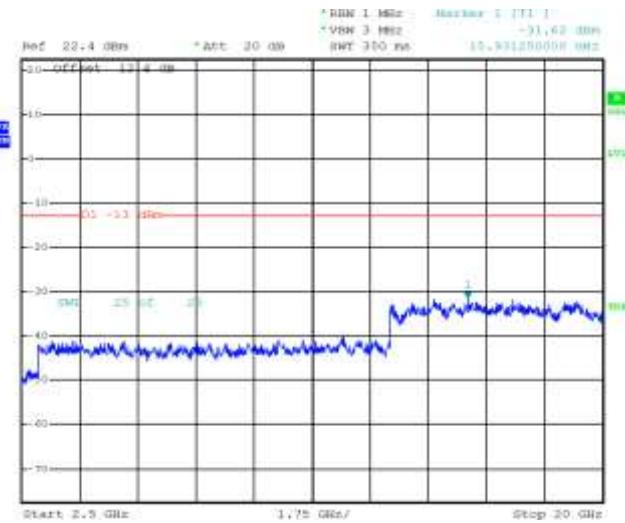

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-19a: Occupied Bandwidth, Band 4 Low Channel, 20MHz BW, RB=100

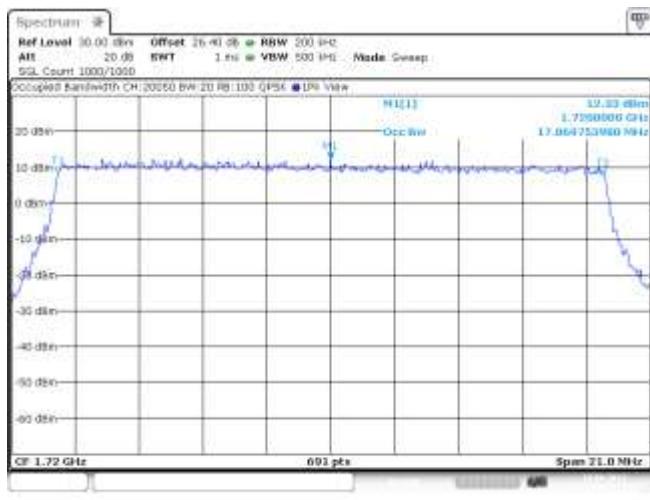


Figure 4-20a: Occupied Bandwidth, Band 4 Middle Channel, 20MHz BW, RB=100


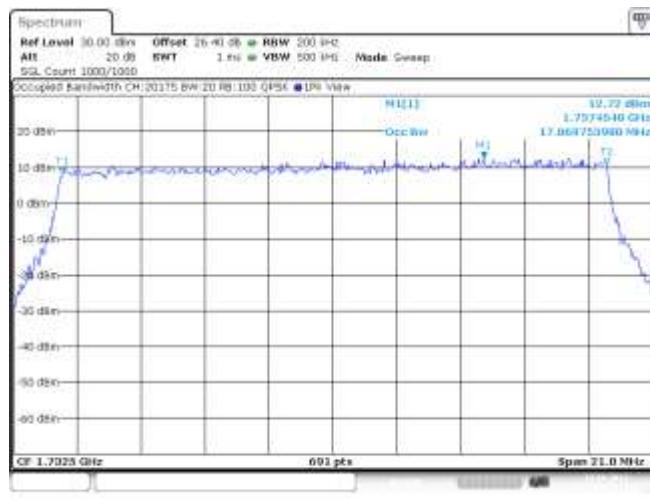


Figure 4-21a: Occupied Bandwidth, Band 4 High Channel, 20MHz BW, RB=100

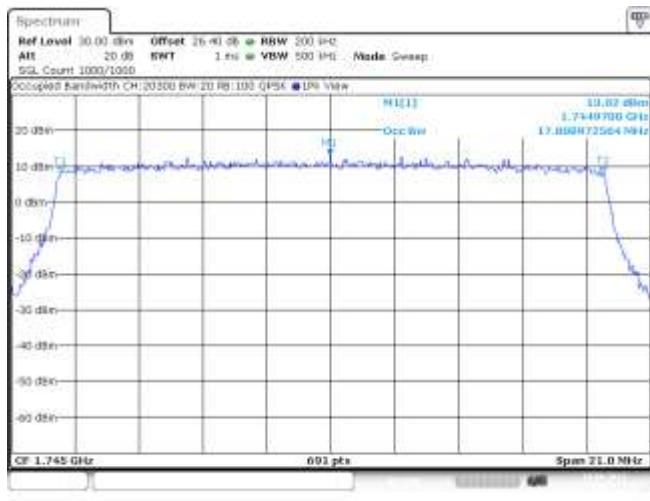

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-22a: Occupied Bandwidth, Band 4 Low Channel, 10MHz BW, RB=50

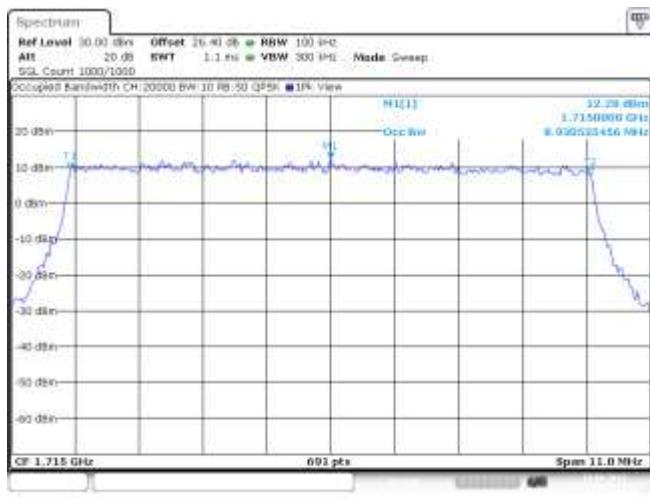


Figure 4-23a: Occupied Bandwidth, Band Middle Channel, 10MHz BW, RB=50


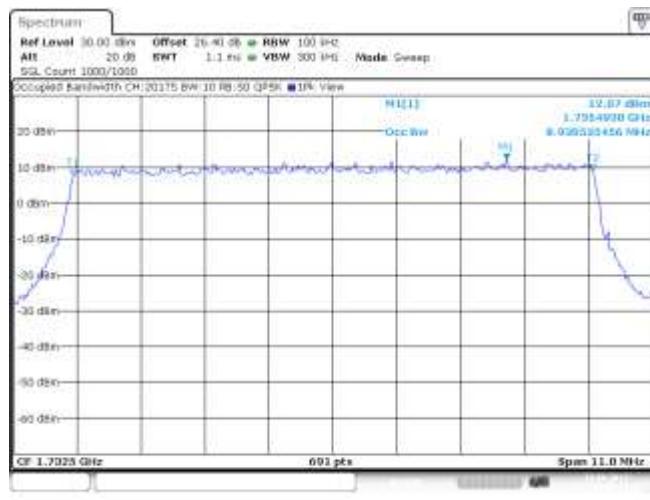


Figure 4-24a: Occupied Bandwidth, Band 4 High Channel, 10MHz BW, RB=50

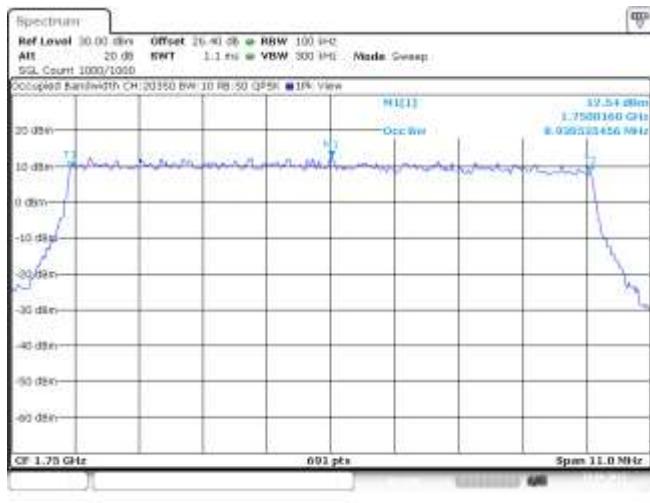

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-25a: Occupied Bandwidth, Band 4 Low Channel, 1.4MHz BW, RB=6

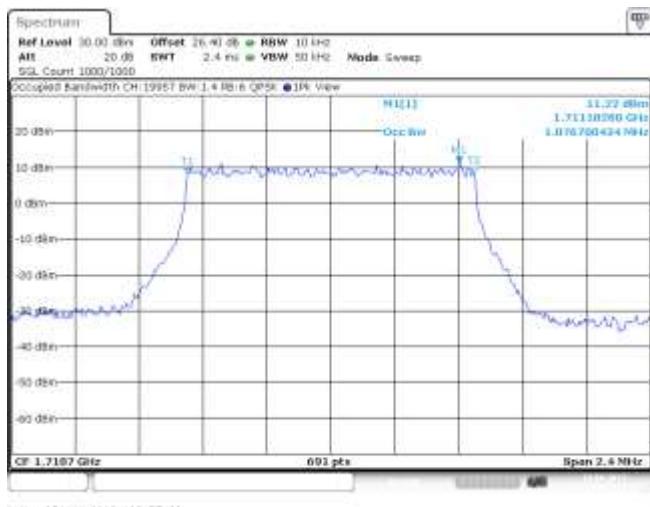


Figure 4-26a: Occupied Bandwidth, Band 4 Middle Channel, 1.4MHz BW, RB=6


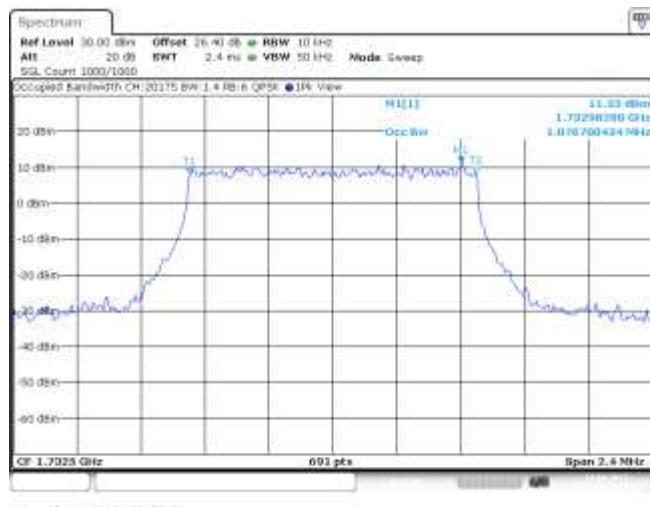


Figure 4-27a: Occupied Bandwidth, Band 4 High Channel, 1.4MHz BW, RB=6

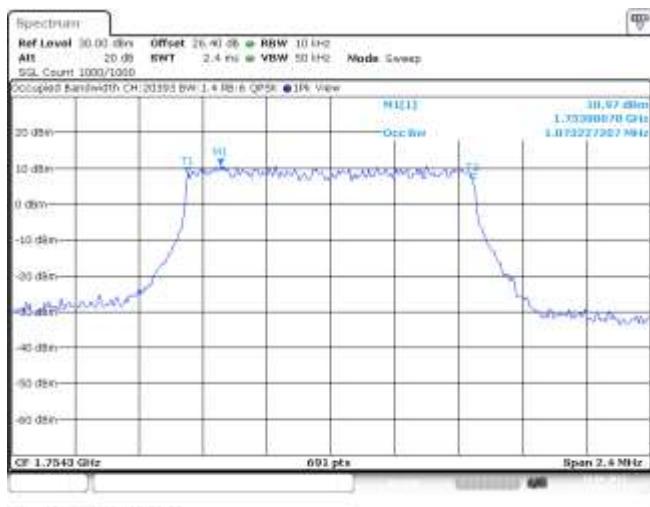

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-28a: -26 dBc Bandwidth, Band 4 Low Channel, 20MHz BW, RB=100

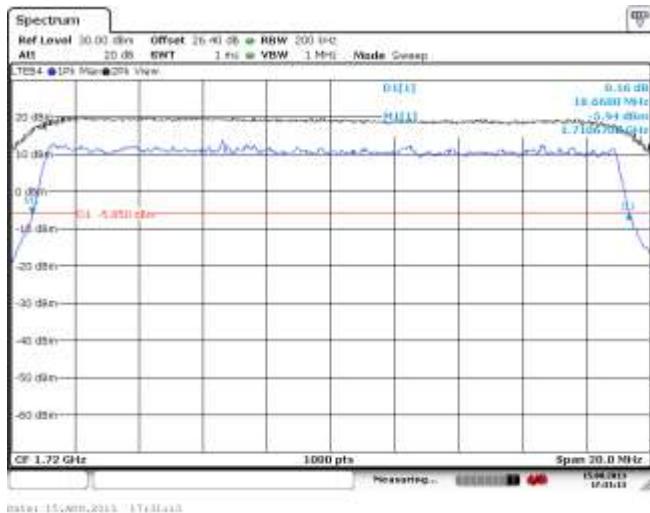


Figure 4-29a: -26 dBc Bandwidth, Band 4 Middle Channel, 20MHz BW, RB=100

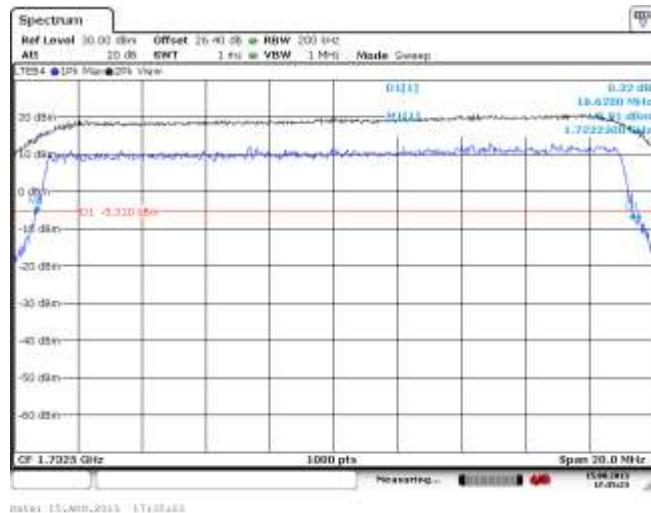


Figure 4-30a: -26 dBc Bandwidth, Band 4 High Channel, 20MHz BW, RB=100


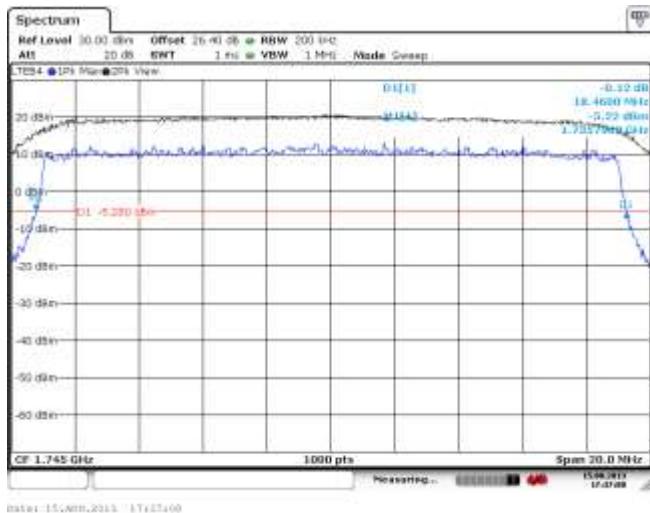


Figure 4-31a: -26 dBc Bandwidth, Band 4 Low Channel, 10MHz BW, RB=50

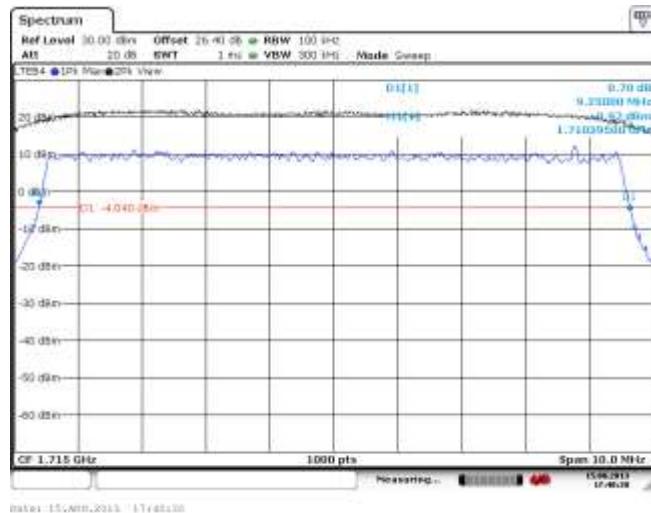

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-32a: -26 dBc Bandwidth, Band 4 Middle Channel, 10MHz BW, RB=50

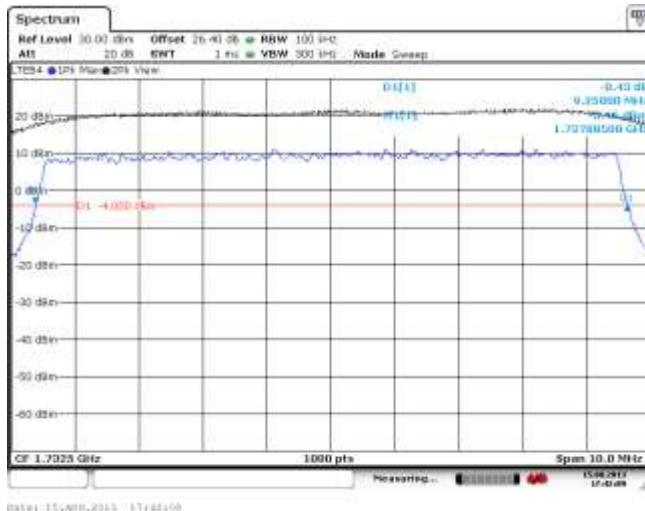


Figure 4-33a: -26 dBc Bandwidth, Band 4 High Channel, 10MHz BW, RB=50

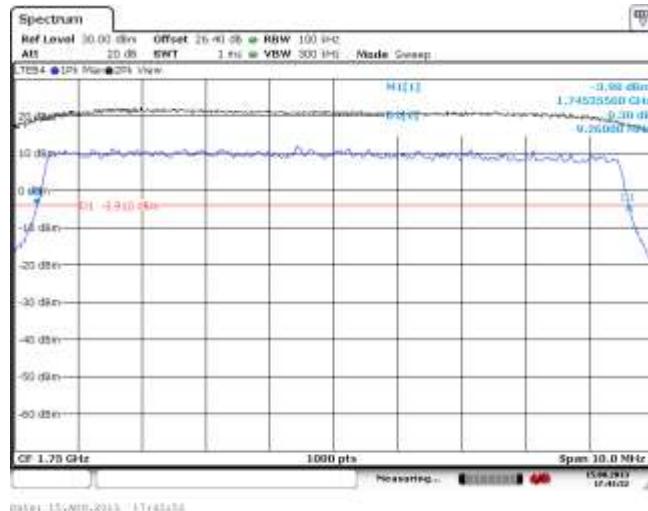


Figure 4-34a: -26 dBc Bandwidth, Band 4 Low Channel, 1.4MHz BW, RB=6


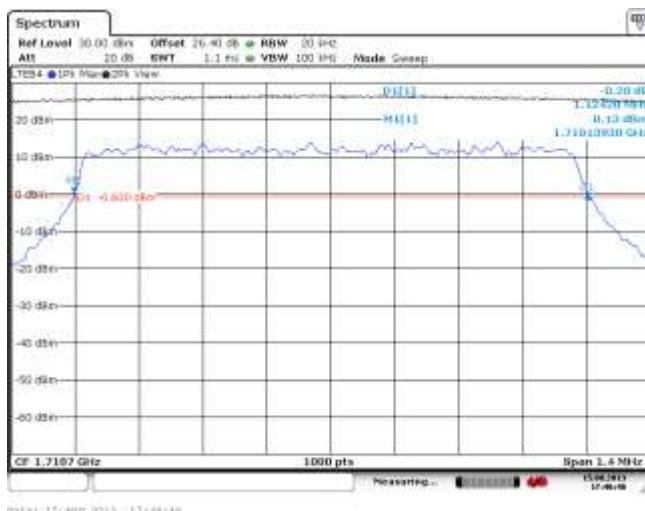


Figure 4-35a: -26 dBc Bandwidth, Band 4 Middle Channel, 1.4MHz BW, RB=6

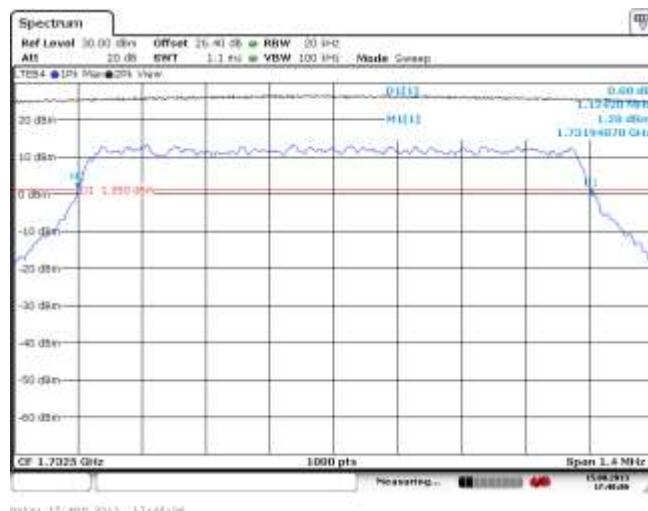

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-36a: -26 dBc Bandwidth, Band 4 High Channel, 1.4MHz BW, RB=6

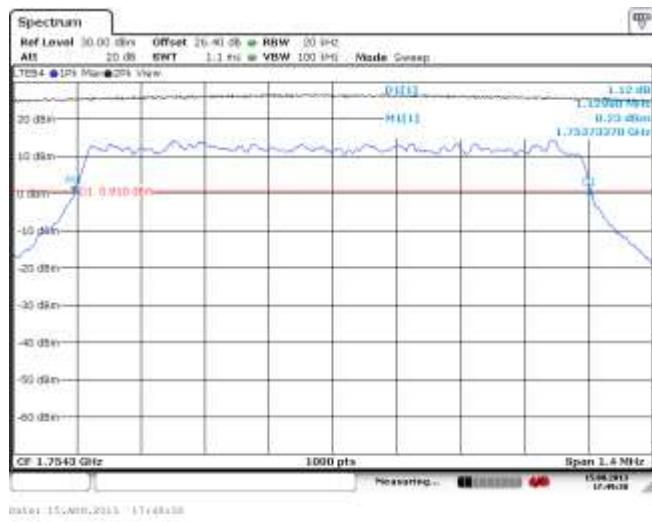


Figure 4-37a: Band 4 Low Channel Mask, 20MHz BW, RB=100


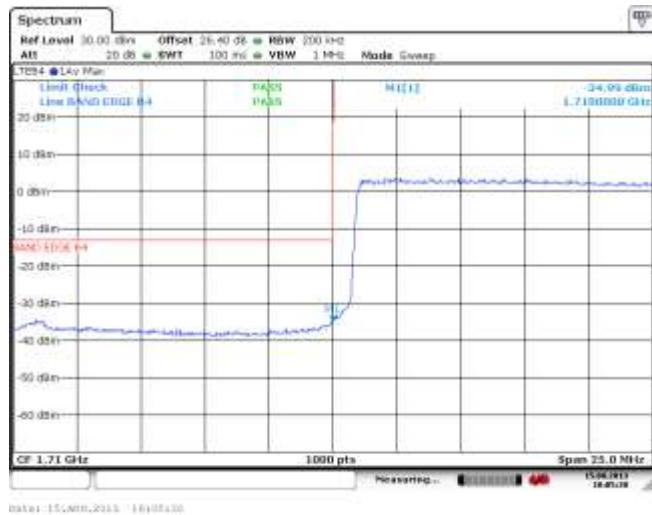


Figure 4-38a: Band 4 High Channel Mask, 20MHz BW, RB=100

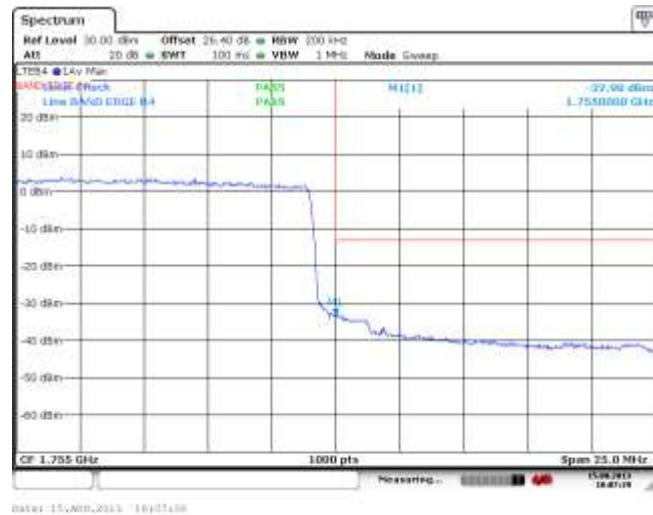

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-39a: Band 4 Low Channel Mask, 10MHz BW, RB=50

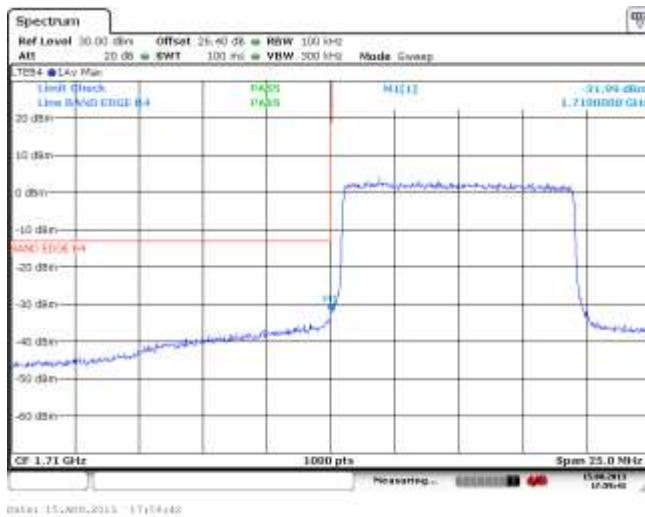


Figure 4-40a: Band 4 High Channel Mask, 10MHz BW, RB=50

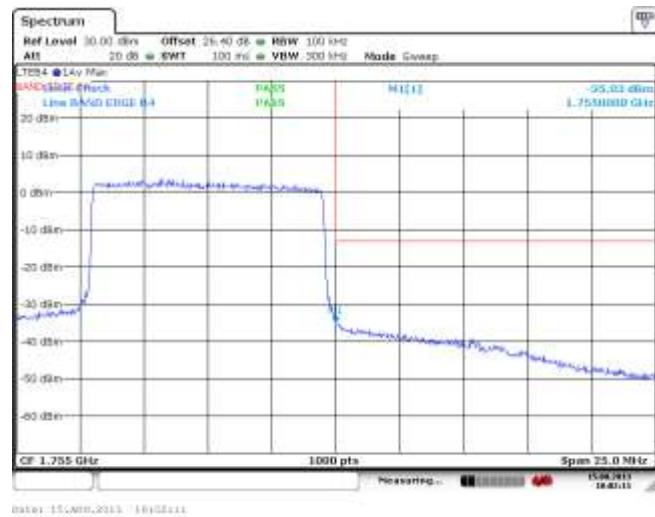


Figure 4-41a: Band 4 Low Channel Mask, 1.4MHz BW, RB=6

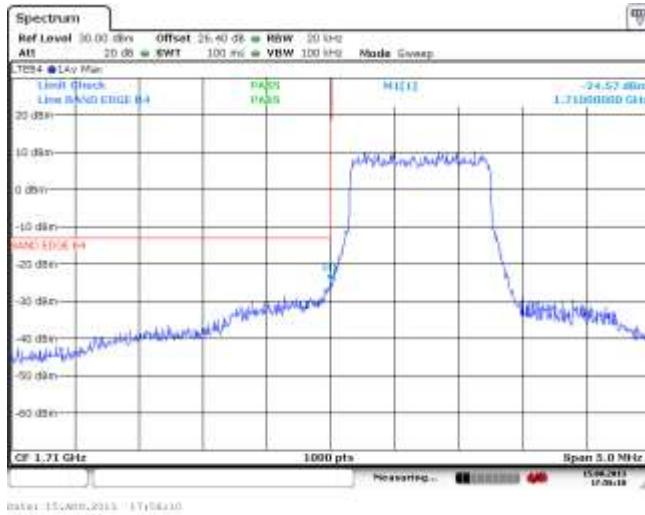


Figure 4-42a: Band 4 High Channel Mask, 1.4MHz BW, RB=6



Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-43a: Band 4 Low Channel Mask, 20MHz BW, RB=1

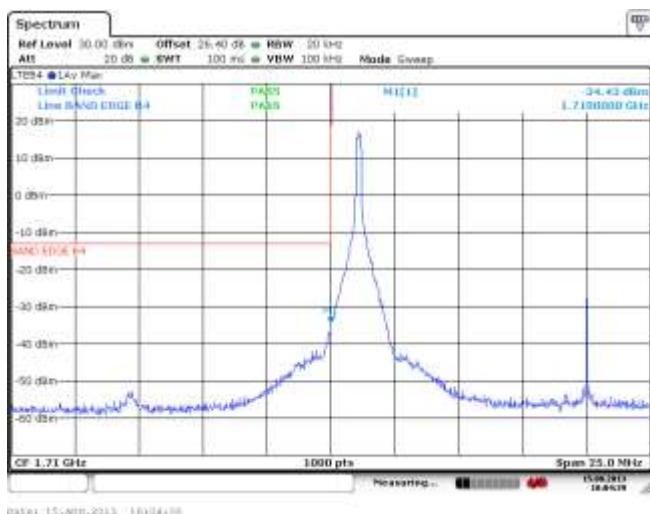


Figure 4-44a: Band 4 High Channel Mask, 20MHz BW, RB=1

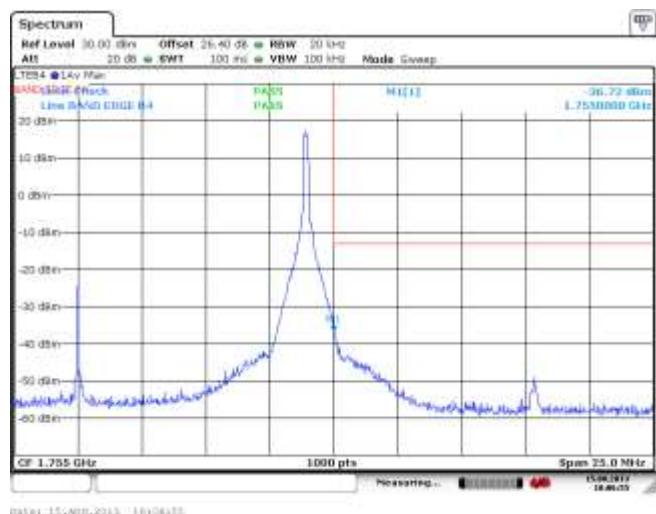


Figure 4-45a: Band 4 Mid Channel PAR, 20MHz BW, RB=50, QPSK


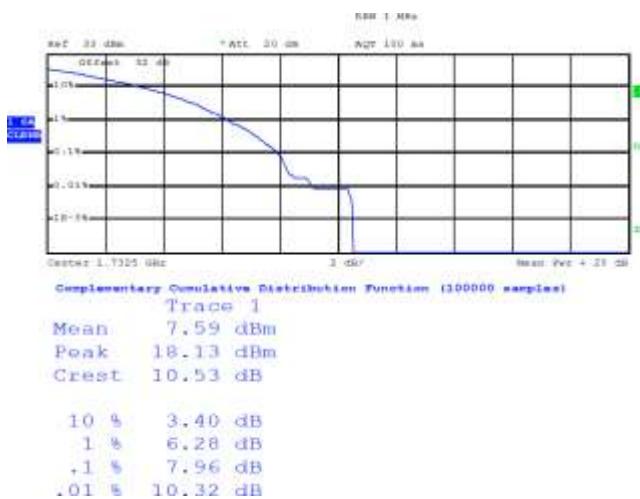


Figure 4-46a: Band 4 Middle Channel Mask, 20MHz BW, RB=100, 16-QAM

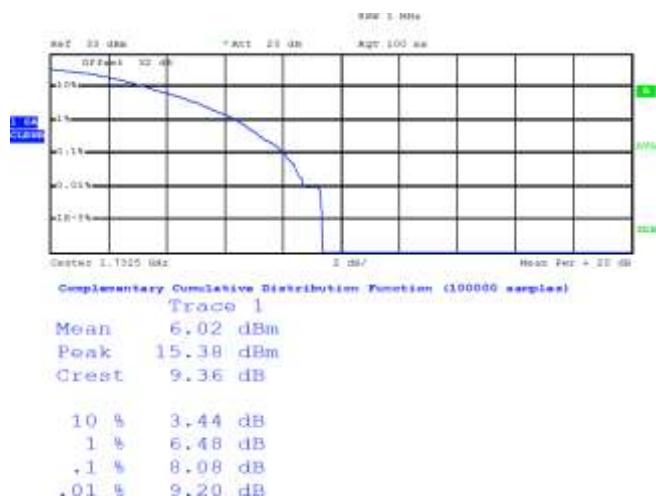

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-47a: Band 4 Mid Channel PAR, 10MHz BW, RB=25, QPSK

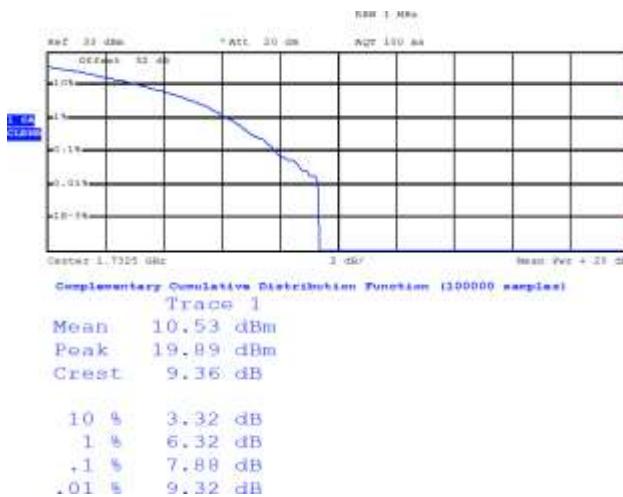


Figure 4-48a: Band 4 Mid Channel PAR, 10MHz BW, RB=50, 16-QAM

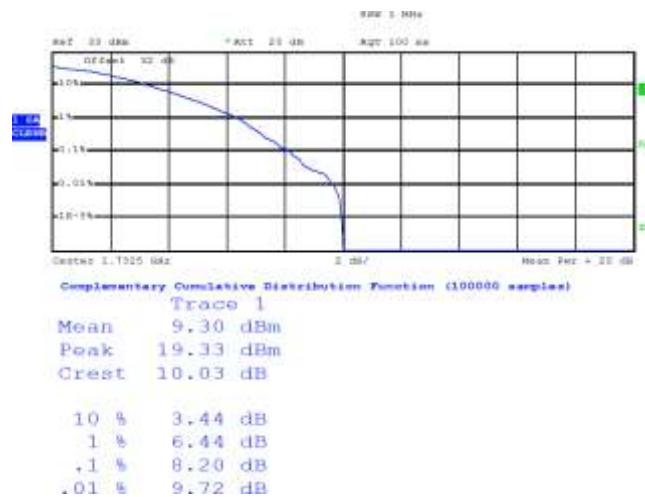


Figure 4-49a: Band 4 Mid Channel PAR, 1.4MHz BW, RB=3, QPSK


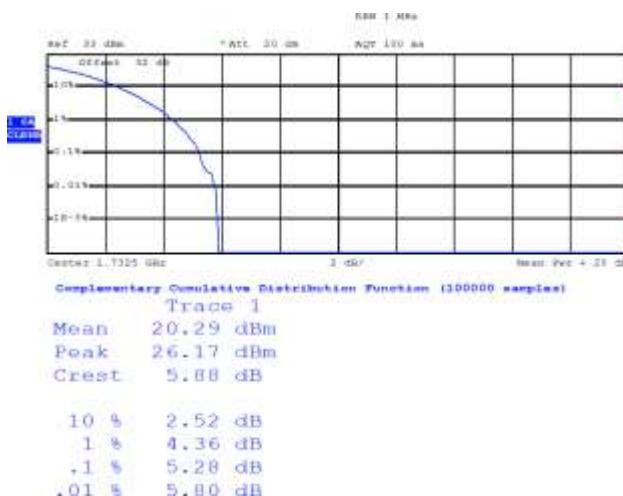


Figure 4-50a: Band 4 Middle Channel Mask, 5MHz BW, RB=6, 16-QAM

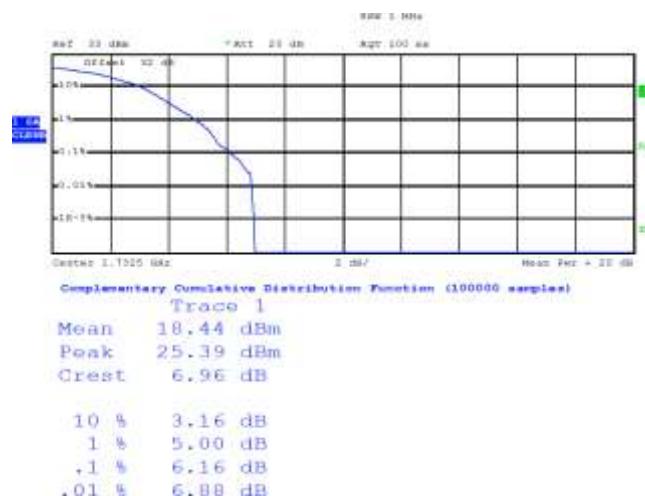

Test Report No.:
 RTS-6046-1308-21A_Rev1

Dates of Test:
 July 19 to August 15 and
 Sept 12, 2013

FCC ID: L6ARFW120LW
FCC ID: L6ARFY110LW **IC:** 2503A-RFY110LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 4-51a: Occupied Bandwidth, Band 4 Low Channel, 20MHz BW (RB= 100) 16-QAM

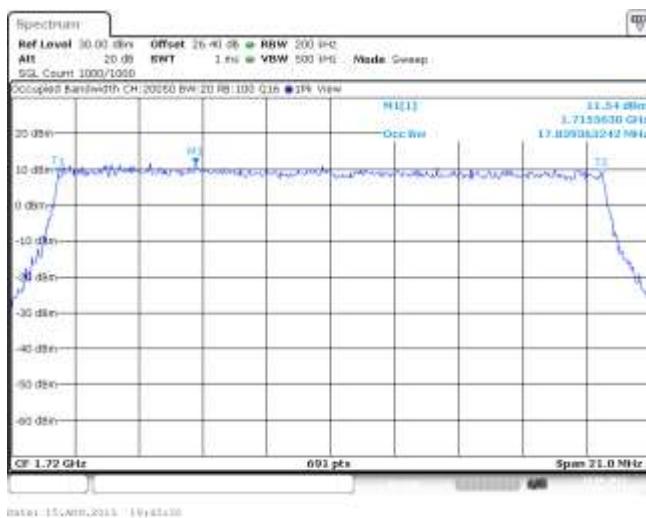


Figure 4-52a: Occupied Bandwidth, Band 4 Mid Channel, 20MHz BW (RB= 100) 16-QAM


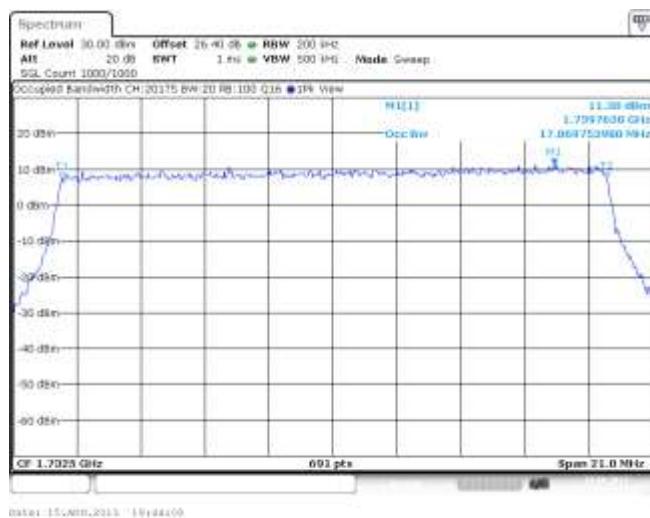



Figure 4-53a: Occupied Bandwidth, Band 4 High Channel, 20MHz BW (RB= 100) 16-QAM

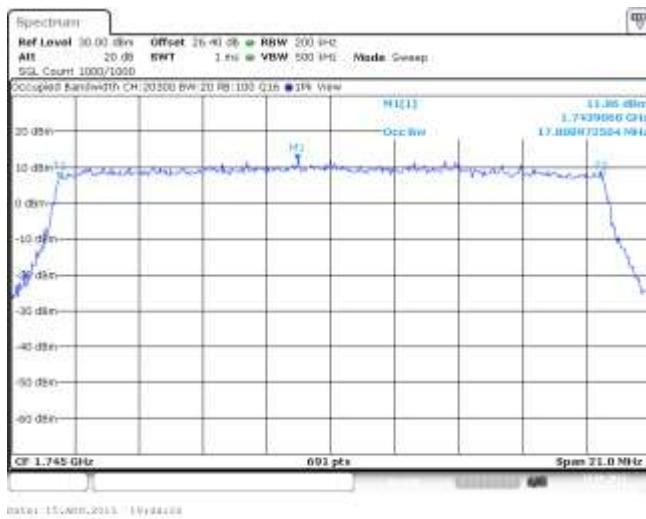

APPENDIX 4B – LTE Band 4 FREQUENCY STABILITY TEST DATA

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

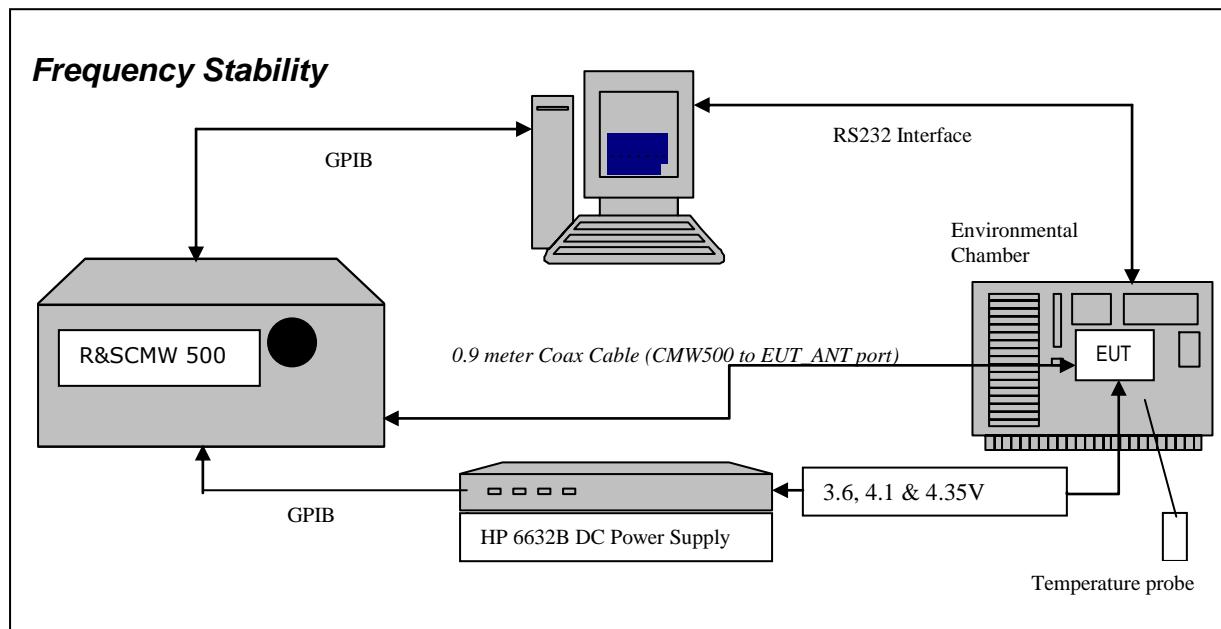LTE Band 4 Frequency Stability Test Data



The following measurements were performed by Berkin Can.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

- (a,b) Frequency Stability - Temperature Variation
- (d) Frequency Stability - Voltage Variation

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C.

After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled.

The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, to 4.1 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 4.1 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 1720.0 MHz, 1732.5 MHz and 1745.0 MHz each was measured under 20 MHz bandwidth with maximum (100) resource blocks. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

29. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
30. Start test program
31. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
32. Set power supply voltage to 3.6 volts.
33. Set up CMW 500 Radio Communication Tester.
34. Command the CMW 500 to switch to the low channel.
35. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
36. EUT is commanded to Transmit 100 Bursts.
37. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
38. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
39. Repeat steps 5 to 10 changing the supply voltage to 4.1 Volts
40. Increase temperature by 10°C and soak for 1/2 hour.
41. Repeat steps 4 - 12 for temperatures -30°C to 60°C .
42. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 4.1 and 4.35 volts

The maximum frequency error in the LTE band 4 measured was **0.0189 PPM**.

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

The following measurements were performed on product RFY111LW.

Date of test: August 15, 2013

LTE Band 4 results: channels 20050, 20175 and 20300 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	3.6	20	19.11	0.0111
20175	1732.5	3.6	20	17.07	0.0099
20300	1745.0	3.6	20	18.95	0.0109

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	4.1	20	18.14	0.0105
20175	1732.5	4.1	20	22.84	0.0132
20300	1745.0	4.1	20	21.97	0.0126

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	4.35	20	25.24	0.0147
20175	1732.5	4.35	20	11.17	0.0064
20300	1745.0	4.35	20	5.29	0.0030

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE band 4 Results: channel 20050 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	3.6	-30	14.67	0.0085
20050	1720.0	3.6	-20	19.91	0.0116
20050	1720.0	3.6	-10	12.98	0.0075
20050	1720.0	3.6	0	22.27	0.0129
20050	1720.0	3.6	10	19.99	0.0116
20050	1720.0	3.6	20	19.11	0.0111
20050	1720.0	3.6	30	17.79	0.0103
20050	1720.0	3.6	40	18.30	0.0106
20050	1720.0	3.6	50	27.34	0.0159
20050	1720.0	3.6	60	19.30	0.0112
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	4.1	-30	20.21	0.0118
20050	1720.0	4.1	-20	20.93	0.0122
20050	1720.0	4.1	-10	23.47	0.0136
20050	1720.0	4.1	0	23.85	0.0139
20050	1720.0	4.1	10	27.43	0.0159
20050	1720.0	4.1	20	18.14	0.0105
20050	1720.0	4.1	30	32.54	0.0189
20050	1720.0	4.1	40	17.52	0.0102
20050	1720.0	4.1	50	12.75	0.0074
20050	1720.0	4.1	60	21.05	0.0122
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	4.35	-30	16.22	0.0094
20050	1720.0	4.35	-20	15.50	0.0090
20050	1720.0	4.35	-10	23.11	0.0134
20050	1720.0	4.35	0	18.68	0.0109
20050	1720.0	4.35	10	20.17	0.0117
20050	1720.0	4.35	20	25.24	0.0147
20050	1720.0	4.35	30	25.70	0.0149
20050	1720.0	4.35	40	17.85	0.0104
20050	1720.0	4.35	50	12.59	0.0073
20050	1720.0	4.35	60	21.32	0.0124

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE band 4 Results: channel 20175 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20175	1732.5	3.6	-30	19.56	0.0113
20175	1732.5	3.6	-20	15.27	0.0088
20175	1732.5	3.6	-10	14.97	0.0086
20175	1732.5	3.6	0	9.13	0.0053
20175	1732.5	3.6	10	13.53	0.0078
20175	1732.5	3.6	20	17.07	0.0099
20175	1732.5	3.6	30	8.99	0.0052
20175	1732.5	3.6	40	14.77	0.0085
20175	1732.5	3.6	50	24.33	0.0140
20175	1732.5	3.6	60	11.64	0.0067
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20175	1732.5	4.1	-30	27.32	0.0158
20175	1732.5	4.1	-20	9.34	0.0054
20175	1732.5	4.1	-10	19.38	0.0112
20175	1732.5	4.1	0	21.72	0.0125
20175	1732.5	4.1	10	12.88	0.0074
20175	1732.5	4.1	20	22.84	0.0132
20175	1732.5	4.1	30	24.86	0.0143
20175	1732.5	4.1	40	21.06	0.0122
20175	1732.5	4.1	50	17.56	0.0101
20175	1732.5	4.1	60	23.32	0.0135
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20175	1732.5	4.35	-30	14.81	0.0085
20175	1732.5	4.35	-20	23.26	0.0134
20175	1732.5	4.35	-10	17.73	0.0102
20175	1732.5	4.35	0	17.42	0.0101
20175	1732.5	4.35	10	4.78	0.0028
20175	1732.5	4.35	20	11.17	0.0064
20175	1732.5	4.35	30	19.61	0.0113
20175	1732.5	4.35	40	19.20	0.0111
20175	1732.5	4.35	50	16.19	0.0093
20175	1732.5	4.35	60	12.08	0.0070

 Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4B				
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013		FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

LTE band 4 Results: channel 20300 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20300	1745.0	3.6	-30	15.42	0.0088
20300	1745.0	3.6	-20	8.97	0.0051
20300	1745.0	3.6	-10	14.50	0.0083
20300	1745.0	3.6	0	12.88	0.0074
20300	1745.0	3.6	10	23.57	0.0135
20300	1745.0	3.6	20	18.95	0.0109
20300	1745.0	3.6	30	31.71	0.0182
20300	1745.0	3.6	40	11.79	0.0068
20300	1745.0	3.6	50	25.46	0.0146
20300	1745.0	3.6	60	8.06	0.0046
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20300	1745.0	4.1	-30	14.01	0.0080
20300	1745.0	4.1	-20	23.45	0.0134
20300	1745.0	4.1	-10	15.56	0.0089
20300	1745.0	4.1	0	5.08	0.0029
20300	1745.0	4.1	10	16.96	0.0097
20300	1745.0	4.1	20	21.97	0.0126
20300	1745.0	4.1	30	12.95	0.0074
20300	1745.0	4.1	40	24.23	0.0139
20300	1745.0	4.1	50	4.53	0.0026
20300	1745.0	4.1	60	22.80	0.0131
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20300	1745.0	4.35	-30	20.94	0.0120
20300	1745.0	4.35	-20	19.82	0.0114
20300	1745.0	4.35	-10	9.75	0.0056
20300	1745.0	4.35	0	25.20	0.0144
20300	1745.0	4.35	10	12.45	0.0071
20300	1745.0	4.35	20	5.29	0.0030
20300	1745.0	4.35	30	27.07	0.0155
20300	1745.0	4.35	40	25.44	0.0146
20300	1745.0	4.35	50	17.89	0.0103
20300	1745.0	4.35	60	27.79	0.0159

APPENDIX 4C – LTE Band 4 RADIATED EMISSIONS TEST DATA

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Power Test Data Results

The following measurements were tested on RFY111LW

Date of Test: July 23, 2013

The following measurements were performed by Feras Obeid.

The environmental tests conditions were: Temperature: 25.0 °C
Relative Humidity: 29.5 %

The BlackBerry® smartphone was standalone, USB port pointing down with the LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 4, 20MHz BW, RB=1, QPSK modulation

EUT								Substitution Method			
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator			
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)	
										(dBm)	(W)
F0	20050	1720.00	4	Horn	V	-24.86	-24.86	V-V	-16.83	23.00	0.20
F0	20050	1720.00	4	Horn	H	-27.95		H-H	-16.42		
F0	20175	1732.50	4	Horn	V	-25.68	-25.68	V-V	-17.61	22.40	0.17
F0	20175	1732.50	4	Horn	H	-29.33		H-H	-17.23		
F0	20299	1744.90	4	Horn	V	-25.79	-25.79	V-V	-17.58	22.44	0.18
F0	20299	1744.90	4	Horn	H	-28.25		H-H	-16.90		

LTE band 4, 20MHz BW, RB=1, 16-QAM modulation

EUT								Substitution Method			
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator			
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)	
										(dBm)	(W)
F0	20050	1720.00	4	Horn	V	-26.07	-26.07	V-V	-18.02	21.80	0.15
F0	20050	1720.00	4	Horn	H	-29.09		H-H	-17.62		
F0	20175	1732.50	4	Horn	V	-26.81	-26.81	V-V	-18.71	21.30	0.13
F0	20175	1732.50	4	Horn	H	-30.59		H-H	-18.33		
F0	20299	1744.90	4	Horn	V	-27.02	-27.02	V-V	-18.77	21.18	0.13
F0	20299	1744.90	4	Horn	H	-29.24		H-H	-18.16		

This report shall NOT be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2013

Page 166 of 169

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4C									
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013					FCC ID: L6ARFW120LW	FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW		

Radiated Emissions Test Data Results cont'd

LTE band 4, 5MHz BW, RB=1, QPSK modulation

							Substitution Method				
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator			
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)	
										(dBm)	(W)
F0	20050	1720.00	4	Horn	V	-24.96	-24.96	V-V	-16.96	22.82	0.19
F0	20050	1720.00	4	Horn	H	-27.46		H-H	-16.60		
F0	20175	1732.50	4	Horn	V	-25.27	-25.27	V-V	-17.18	22.81	0.19
F0	20175	1732.50	4	Horn	H	-28.47		H-H	-16.82		
F0	20299	1744.90	4	Horn	V	-25.06	-25.06	V-V	-16.88	23.26	0.21
F0	20299	1744.90	4	Horn	H	-27.38		H-H	-16.08		

LTE band 4, 5MHz BW, RB=1, 16-QAM modulation

							Substitution Method				
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator			
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)	
										(dBm)	(W)
F0	20050	1720.00	4	Horn	V	-26.15	-26.15	V-V	-18.17	21.66	0.15
F0	20050	1720.00	4	Horn	H	-28.58		H-H	-17.76		
F0	20175	1732.50	4	Horn	V	-26.48	-26.48	V-V	-18.42	21.60	0.14
F0	20175	1732.50	4	Horn	H	-29.71		H-H	-18.03		
F0	20299	1744.90	4	Horn	V	-26.02	-26.02	V-V	-17.66	22.30	0.17
F0	20299	1744.90	4	Horn	H	-28.39		H-H	-17.04		

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4C										
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013				FCC ID: L6ARFW120LW		FCC ID: L6ARFY110LW		IC: 2503A-RFY110LW		

Radiated Emissions Test Data Results cont'd

LTE band 4, 1.4MHz BW, RB=1, QPSK modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm) (W)	Limit (dBm)	Diff to Limit (dB)	
F0	20050	1720.00	4	Horn	V	-26.10	-26.10	V-V	-18.18	21.69	0.15	30.00	8.31
F0	20050	1720.00	4	Horn	H	-26.73		H-H	-17.73				
F0	20175	1732.50	4	Horn	V	-26.67	-26.67	V-V	-18.62	21.41	0.14	30.00	8.59
F0	20175	1732.50	4	Horn	H	-28.06		H-H	-18.22				
F0	20299	1744.90	4	Horn	V	-25.29	-25.29	V-V	-16.86	23.12	0.21	30.00	6.88
F0	20299	1744.90	4	Horn	H	-27.91		H-H	-16.22				

LTE band 4, 1.4MHz BW, RB=1, 16-QAM modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm) (W)	Limit (dBm)	Diff to Limit (dB)	
F0	20050	1720.00	4	Horn	V	-27.32	-27.32	V-V	-19.35	20.44	0.11	30.00	9.56
F0	20050	1720.00	4	Horn	H	-27.92		H-H	-18.98				
F0	20175	1732.50	4	Horn	V	-27.84	-27.84	V-V	-19.76	20.20	0.10	30.00	9.80
F0	20175	1732.50	4	Horn	H	-29.24		H-H	-19.43				
F0	20299	1744.90	4	Horn	V	-26.57	-26.57	V-V	-18.00	21.82	0.15	30.00	8.18
F0	20299	1744.90	4	Horn	H	-29.13		H-H	-17.52				

RTS Testing Services™	EMI Test Report for the BlackBerry® smartphone Model RFW121LW,RFY111LW APPENDIX 4C		
Test Report No.: RTS-6046-1308-21A_Rev1	Dates of Test: July 19 to August 15 and Sept 12, 2013	FCC ID: L6ARFW120LW FCC ID: L6ARFY110LW	IC: 2503A-RFY110LW

Radiated Emissions Test Data Results cont'd

Date of Test: July 23, 2013

The following measurements were performed by Feras Obeid.

The environmental tests conditions were: Temperature: 25.0 °C
Relative Humidity: 29.5 %

The BlackBerry® smartphone was standalone, USB port point down with LCD facing to the RX antenna when the turntable is at 0 degree position

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in LTE band 4 with QPSK and 16QAM modulation for 5MHz BW (channel 19957, 20175 and 20347 with RB = 1).

All emissions were at least 25.0 dB below the limit.

Date of Test: July 23 - 24, 2013

The following measurements were performed by Mahmood Ahmed

The environmental test conditions were: Temperature: 26 °C
Relative Humidity: 32.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 20 GHz.

The BlackBerry® smartphone was standalone, horizontally with LCD facing down and the top pointing to the RX antenna when the turntable is at 0 degree position

Measurements were performed in LTE band 4 with QPSK and 16QAM modulation for 5MHz BW (channel 19957, 20175 and 20347 with RB = 1).

Frequency (MHz)	Channel Of Occurrence	Antenna		Test Angle (Deg.)	Detector (PK or QP)	Measured Level (dB μ V)	Correction Factor for preamp/antenna/ cables/ filter (dB)	Field Strength Level (reading+corr) (dBm)	Limit @ 3.0 m (dBm)	Test Margin (dB)
		Pol.	Height (V/H) (meters)							
5130.80	19975	V	3	263	PK	46.32	-74.39	-27.72	-13.00	-14.7

All other emissions were at least 25.0 dB below the limit