

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 1(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 2(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

DTM/GSM 850 (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 3(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - DTM 850

Communication System: DTM 850 (3 slots); Communication System Band: DTM 850 (3 slots);

Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 40.671$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - DTM 850/Touch Position - DTM850_3-

Slots_chan190_amb_temp_22.8C_liq_temp_22.6C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.385 W/kg

Right-Hand-Side HSL - DTM 850/Touch Position - DTM850_3-

Slots_chan190_amb_temp_22.8C_liq_temp_22.6C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 6.755 V/m; **Power Drift = -0.133 dB**

Averaged SAR: SAR(1g) = 0.350 W/kg; SAR(10g) = 0.273 W/kg

Maximum value of SAR (interpolated) = 0.418 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 4(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

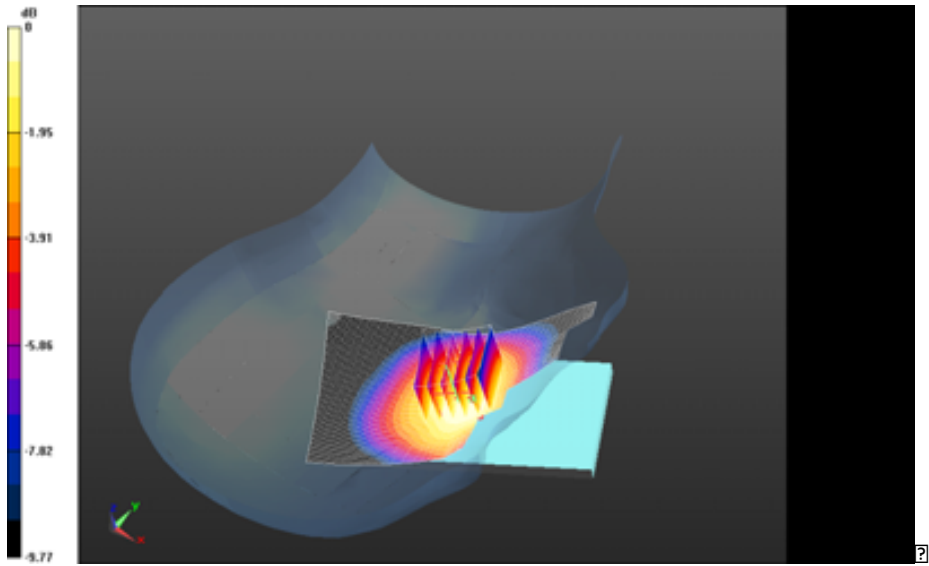

0 dB = 0.375 W/kg = -4.26 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 5(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/27/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Left-Hand-Side HSL - DTM 850

Communication System: DTM 850 (3 slots); Communication System Band: DTM 850 (3 slots);

Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 40.671$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - DTM 850/Touch Position - DTM850_3-

Slots_chan190_amb_temp_23.3C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.390 W/kg

Left-Hand-Side HSL - DTM 850/Touch Position - DTM850_3-

Slots_chan190_amb_temp_23.3C_liq_temp_22.5C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 6.964 V/m; **Power Drift = 0.022 dB**

Averaged SAR: SAR(1g) = 0.349 W/kg; SAR(10g) = 0.265 W/kg

Maximum value of SAR (interpolated) = 0.459 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 6(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

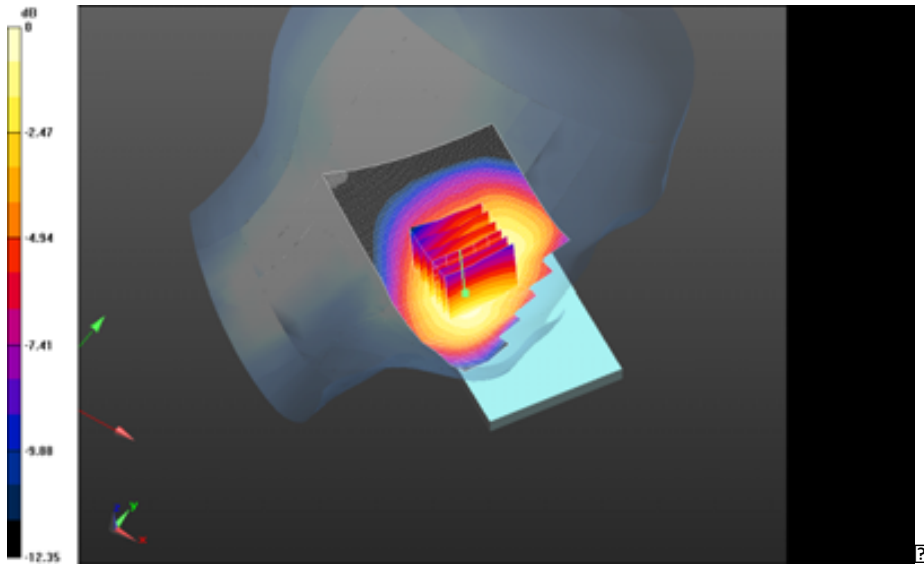

0 dB = 0.387 W/kg = -4.12 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 7(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

UMTS Band V (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 8(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7671

Configuration: Right-Hand-Side HSL - UMTS band V

Communication System: WCDMA FDD V; Communication System Band: UMTS band V;

Frequency: 836.4 MHz

Medium Parameters used: $f=836.4$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 40.678$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - UMTS band V/Touch Position - UMTS band V_chan4182

_amb_temp_23.6C_liq_temp_23.0C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0951 W/kg

Right-Hand-Side HSL - UMTS band V/Touch Position - UMTS band V_chan4182


_amb_temp_23.6C_liq_temp_23.0C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 3.556 V/m; **Power Drift = 0.068 dB**

Averaged SAR: SAR(1g) = 0.0867 W/kg; SAR(10g) = 0.0673 W/kg

Maximum value of SAR (interpolated) = 0.105 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 9(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

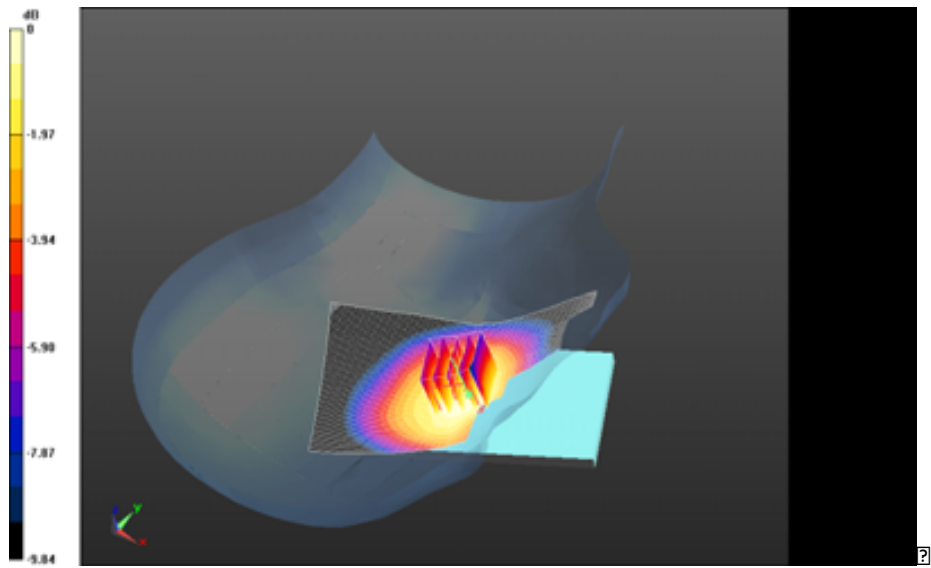

0 dB = 0.0930 W/kg = -10.32 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 10(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7671

Configuration: Left-Hand-Side HSL - UMTS band V

Communication System: WCDMA FDD V; Communication System Band: UMTS band V;

Frequency: 836.4 MHz

Medium Parameters used: $f=836.4$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 40.678$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - UMTS band V/Touch Position - UMTS band

V_chan4182_amb_temp_23.6C_liq_temp_23.0C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.119 W/kg

Left-Hand-Side HSL - UMTS band V/Touch Position - UMTS band

V_chan4182_amb_temp_23.6C_liq_temp_23.0C/Zoom Scan (26x26x36)/Cube 0: Interpolated


grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 3.384 V/m; **Power Drift = -0.180 dB**

Averaged SAR: SAR(1g) = 0.105 W/kg; SAR(10g) = 0.0769 W/kg

Maximum value of SAR (interpolated) = 0.141 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 11(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

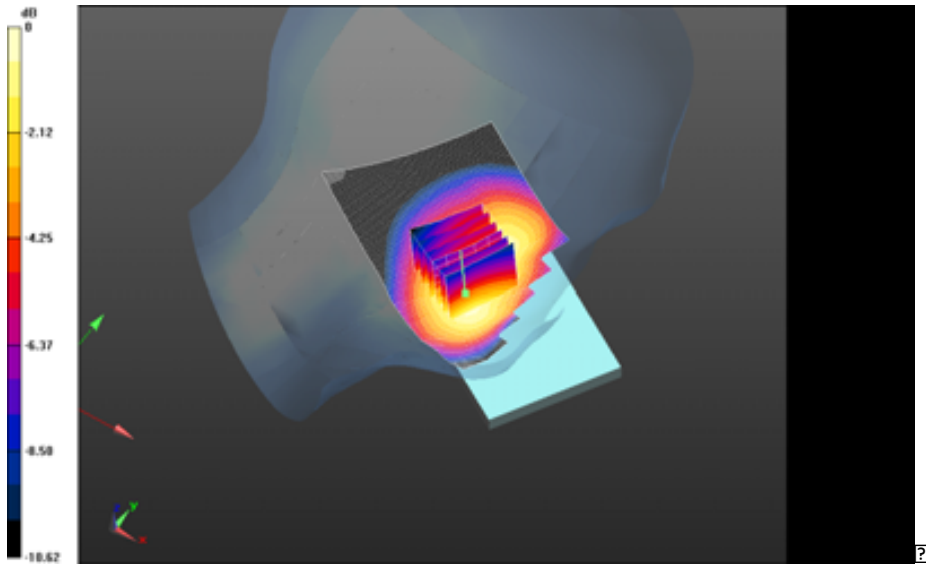

0 dB = 0.117 W/kg = -9.32 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 12(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

CDMA 800 (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 13(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - CDMA 800 BC10

Communication System: CDMA 800; Communication System Band: CDMA 2000 BC 10;

Frequency: 820.5 MHz

Medium Parameters used: $f=820.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 40.838$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - CDMA 800 BC10/Touch Position - CDMA 800

BC10_chan580_amb_temp_23.2C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 7.091 V/m; **Power Drift = 0.093 dB**

Right-Hand-Side HSL - CDMA 800 BC10/Touch Position - CDMA 800

BC10_chan580_amb_temp_23.2C_liq_temp_22.7C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 7.091 V/m; **Power Drift = 0.093 dB**

Averaged SAR: SAR(1g) = 0.306 W/kg; SAR(10g) = 0.237 W/kg

Maximum value of SAR (interpolated) = 0.398 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 14(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

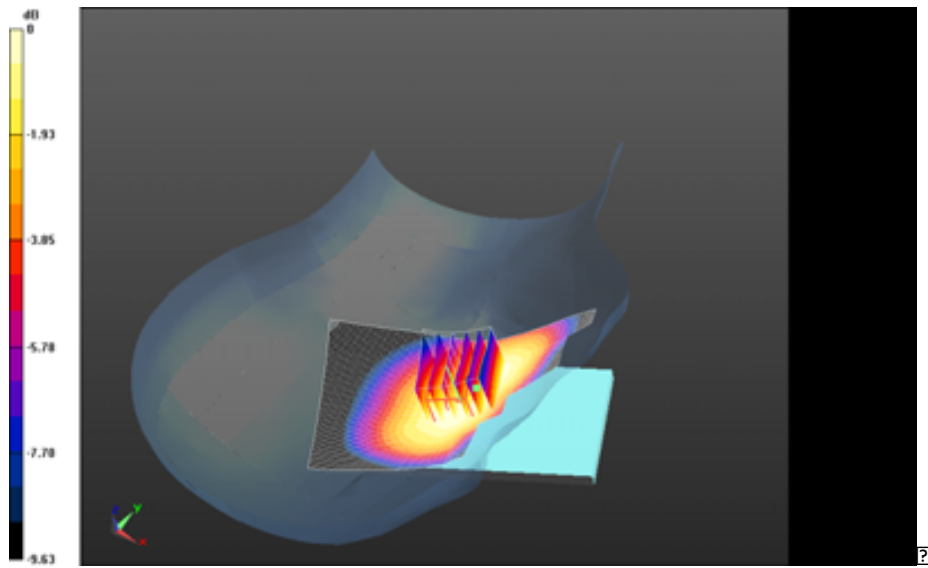

0 dB = 0.335 W/kg = -4.75 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 15(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - CDMA 800 BC10/Tilt Position -CDMA 800

BC10_chan580_amb_temp_23.2C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 10.241 V/m; **Power Drift = 0.255 dB**

Right-Hand-Side HSL - CDMA 800 BC10/Tilt Position -CDMA 800


BC10_chan580_amb_temp_23.2C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 10.241 V/m; **Power Drift = 0.255 dB**

Averaged SAR: SAR(1g) = 0.182 W/kg; SAR(10g) = 0.142 W/kg

Maximum value of SAR (interpolated) = 0.222 W/kg

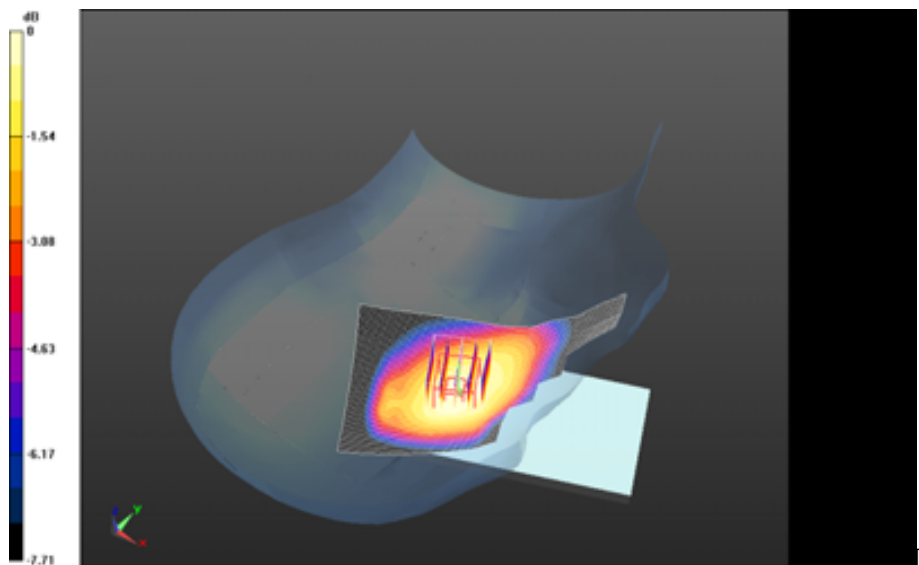

0 dB = 0.335 W/kg = -4.75 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 16(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - CDMA 800 BC10

Communication System: CDMA 800; Communication System Band: CDMA 2000 BC 10;

Frequency: 820.5 MHz

Medium Parameters used: $f=820.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 40.838$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - CDMA 800 BC10/Touch Position -CDMA 800

BC10_chan580_amb_temp_23.2C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 6.046 V/m; **Power Drift = 0.128 dB**

Left-Hand-Side HSL - CDMA 800 BC10/Touch Position -CDMA 800

BC10_chan580_amb_temp_23.2C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 6.046 V/m; **Power Drift = 0.128 dB**

Averaged SAR: SAR(1g) = 0.275 W/kg; SAR(10g) = 0.216 W/kg

Maximum value of SAR (interpolated) = 0.328 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 17(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

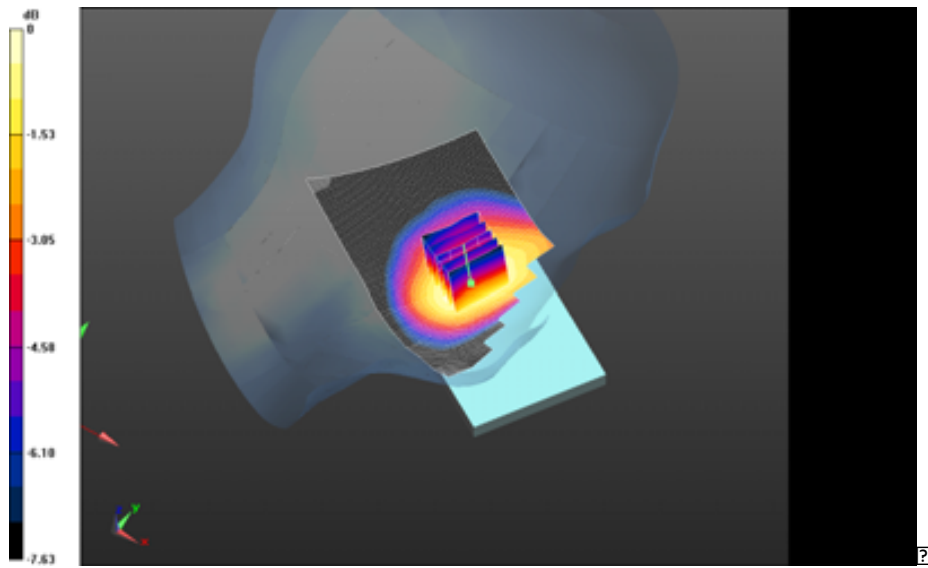


0 dB = 0.297 W/kg = -5.27 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 18(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - CDMA 800 BC10/Tilt Position -CDMA 800 BC10_chan580
_amb_temp_23.5C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.478 V/m; **Power Drift = -0.042 dB**

Left-Hand-Side HSL - CDMA 800 BC10/Tilt Position -CDMA 800 BC10_chan580
_amb_temp_23.5C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 10.478 V/m; **Power Drift = -0.042 dB**

Averaged SAR: SAR(1g) = 0.151 W/kg; SAR(10g) = 0.118 W/kg
Maximum value of SAR (interpolated) = 0.186 W/kg

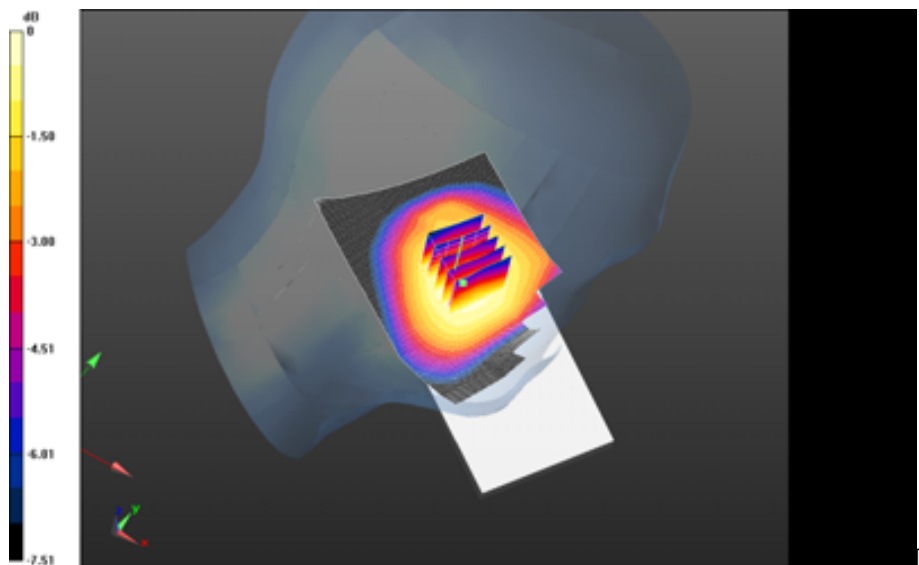

0 dB = 0.297 W/kg = -5.27 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 19(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

CDMA 850 (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 20(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - CDMA 850 BC0

Communication System: CDMA 850; Communication System Band: CDMA 2000 Cellular;

Frequency: 836.52 MHz

Medium Parameters used: $f=836.52$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 40.676$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - CDMA 850 BC0/Touch Position - CDMA 850 BC0__chan384

_amb_temp_23.1C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 7.880 V/m; **Power Drift = -0.112 dB**

Right-Hand-Side HSL - CDMA 850 BC0/Touch Position - CDMA 850 BC0__chan384


_amb_temp_23.1C_liq_temp_22.7C/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 7.880 V/m; **Power Drift = -0.112 dB**

Averaged SAR: SAR(1g) = 0.302 W/kg; SAR(10g) = 0.233 W/kg

Maximum value of SAR (interpolated) = 0.394 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 21(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

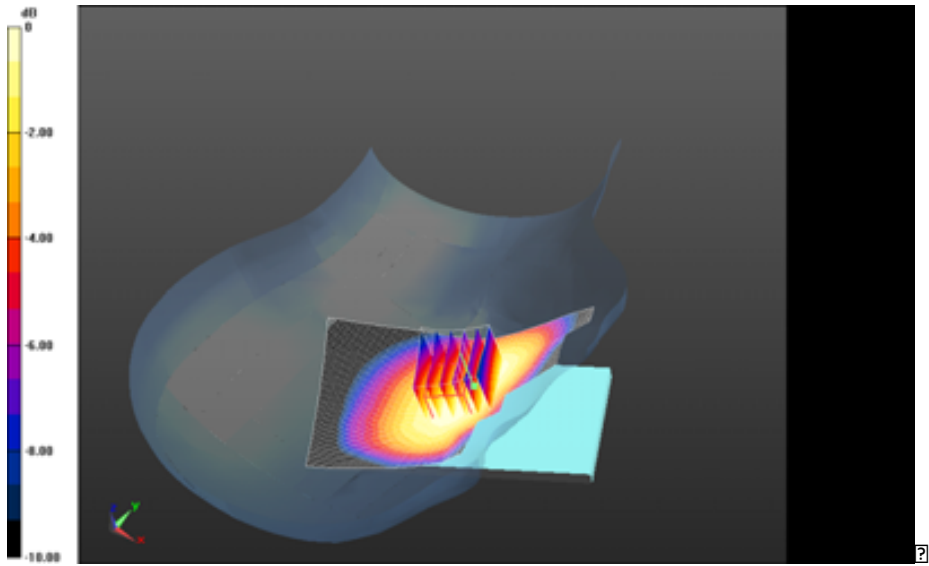


0 dB = 0.334 W/kg = -4.76 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 22(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - CDMA 850 BC0/Tilt Position -CDMA 850 BC0_chan38
_amb_temp_23.3C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.839 V/m; **Power Drift = -0.00531 dB**

Right-Hand-Side HSL - CDMA 850 BC0/Tilt Position -CDMA 850 BC0_chan38
_amb_temp_23.3C_liq_temp_22.7C/Zoom Scan (26x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 10.839 V/m; **Power Drift = -0.00531 dB**

Averaged SAR: SAR(1g) = 0.191 W/kg; SAR(10g) = 0.148 W/kg
Maximum value of SAR (interpolated) = 0.231 W/kg

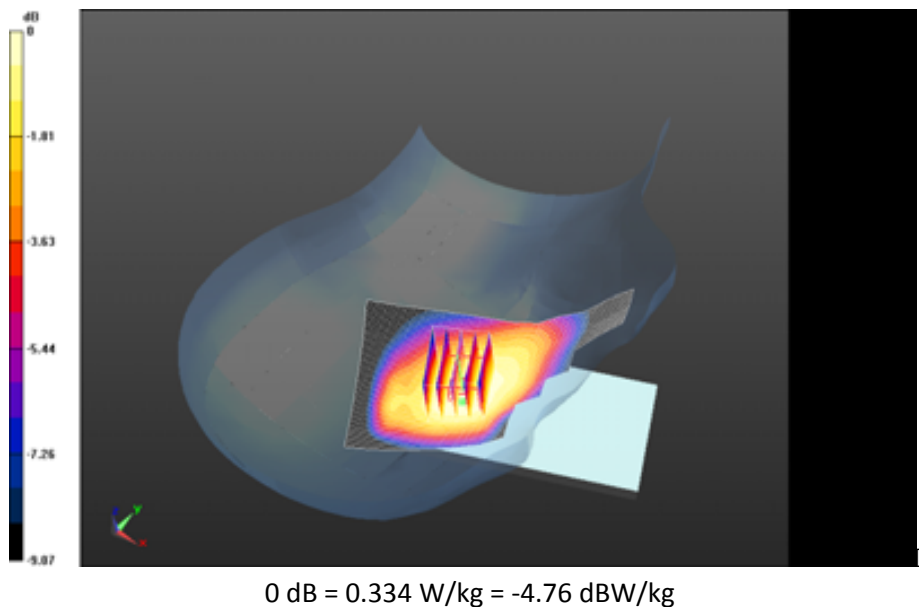

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 23(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/26/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - CDMA 850 BC0

Communication System: CDMA 850; Communication System Band: CDMA 2000 Cellular;

Frequency: 836.52 MHz

Medium Parameters used: $f=836.52$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 40.676$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.19,6.19,6.19); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - CDMA 850 BC0/Touch Position -- CDMA 850

BC0_chan384_amb_temp_23.0C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 5.654 V/m; **Power Drift = 0.072 dB**

Left-Hand-Side HSL - CDMA 850 BC0/Touch Position -- CDMA 850

BC0_chan384_amb_temp_23.0C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0: Interpolated


grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 5.654 V/m; **Power Drift = 0.072 dB**

Averaged SAR: SAR(1g) = 0.262 W/kg; SAR(10g) = 0.205 W/kg

Maximum value of SAR (interpolated) = 0.315 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 24(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

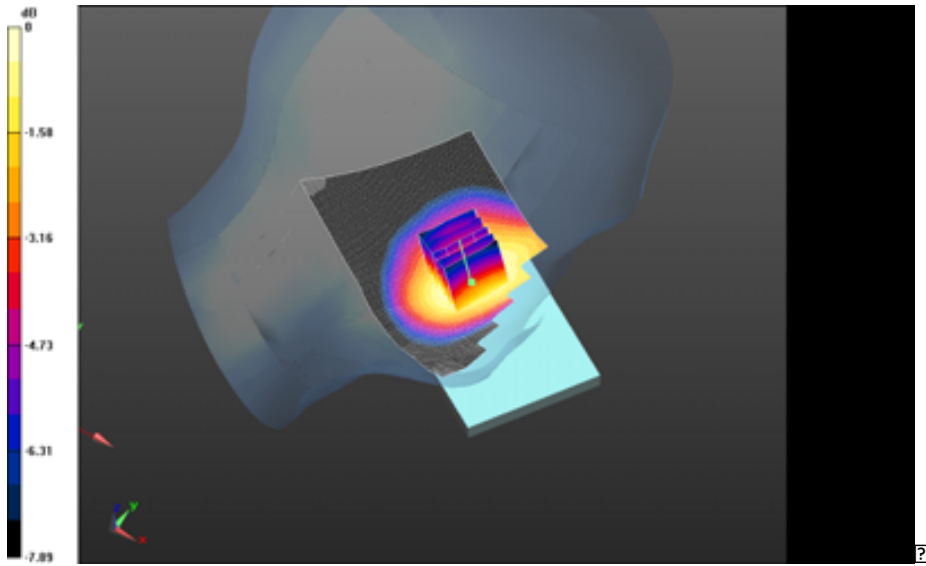

0 dB = 0.283 W/kg = -5.48 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 25(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - CDMA 850 BC0/Tilt Position -- CDMA 850

BC0_chan384_amb_temp_23.0C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 9.996 V/m; **Power Drift = 0.050 dB**

Left-Hand-Side HSL - CDMA 850 BC0/Tilt Position -- CDMA 850


BC0_chan384_amb_temp_23.0C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0: Interpolated

grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.996 V/m; **Power Drift = 0.050 dB**

Averaged SAR: SAR(1g) = 0.141 W/kg; SAR(10g) = 0.110 W/kg

Maximum value of SAR (interpolated) = 0.176 W/kg

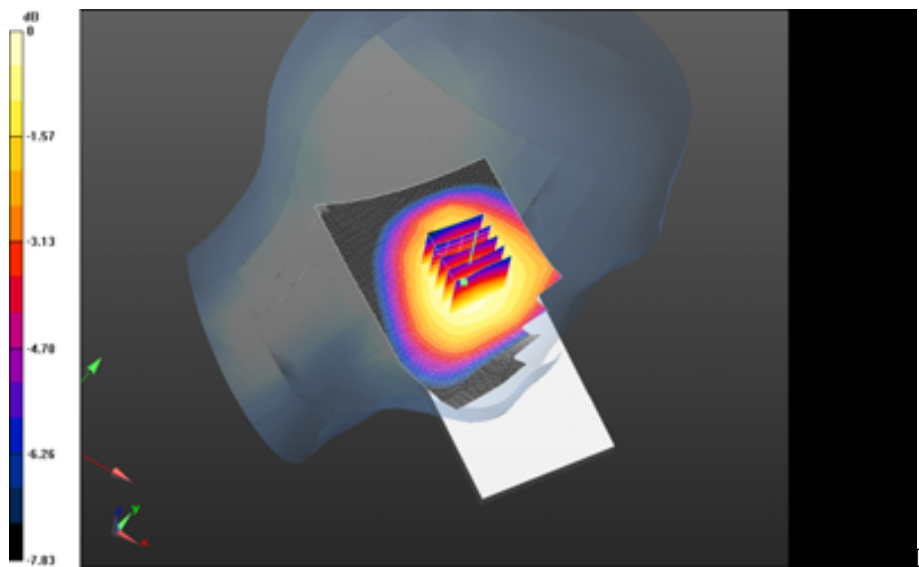

0 dB = 0.283 W/kg = -5.48 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 26(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

SVLTE 25 (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 27(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/2/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - SVLTE Band 25

Communication System: LTE band 25; Communication System Band: LTE band 25; Frequency: 1882.5 MHz

Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 38.432$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - SVLTE Band 25/Touch Position -

SVLTE_Band_25_chan26365_RB1_Offset50_amb_temp_23.4C_liq_temp_22.5C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 3.801 V/m; **Power Drift = -0.155 dB**

Right-Hand-Side HSL - SVLTE Band 25/Touch Position -

SVLTE_Band_25_chan26365_RB1_Offset50_amb_temp_23.4C_liq_temp_22.5C/Zoom Scan


(31x31x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 3.801 V/m; **Power Drift = -0.155 dB**

Averaged SAR: SAR(1g) = 0.108 W/kg; SAR(10g) = 0.0681 W/kg

Maximum value of SAR (interpolated) = 0.160 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 28(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

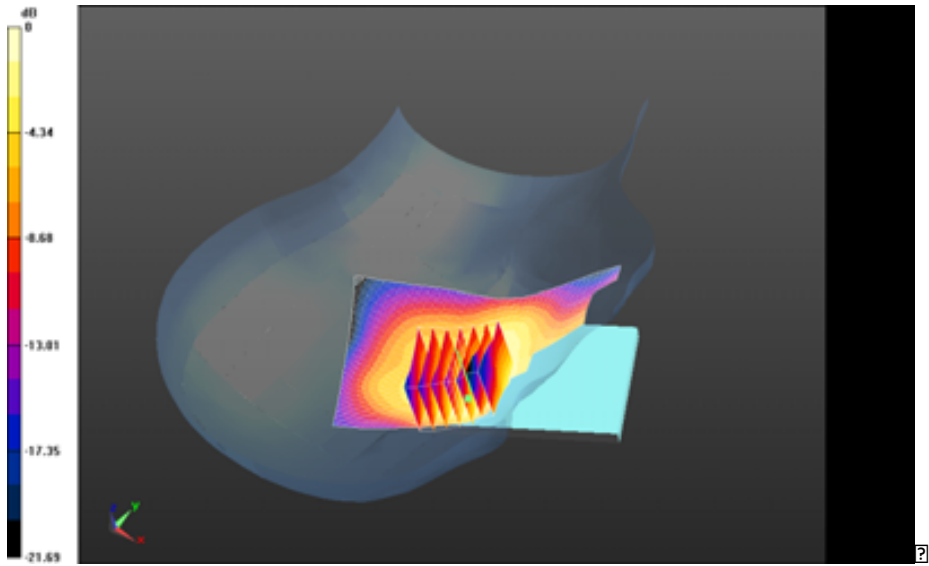

0 dB = 0.120 W/kg = -9.21 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 29(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date/Time: 7/3/2013 11:12:02 AM

Test Laboratory: RIM Testing Services

Right-Hand-Side HSL - SVLTE Band 25/Touch Position -

SVLTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.4C_liq_temp_22.5C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 3.355 V/m; **Power Drift = 0.153 dB**

Right-Hand-Side HSL - SVLTE Band 25/Touch Position -


SVLTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.4C_liq_temp_22.5C/Zoom Scan

(26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 3.355 V/m; **Power Drift = 0.153 dB**

Averaged SAR: SAR(1g) = 0.0896 W/kg; SAR(10g) = 0.0564 W/kg

Maximum value of SAR (interpolated) = 0.131 W/kg

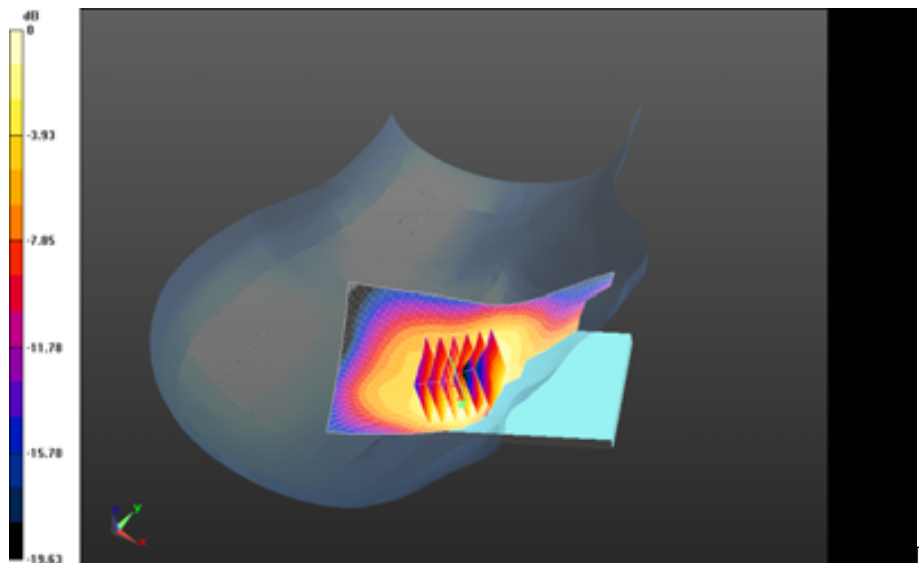


0 dB = 0.120 W/kg = -9.21 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 30(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - SVLTE Band 25/Touch Position -
SVLTE_Band_25_chan26365_RB100_Offset0_amb_temp_23.1C_liq_temp_22.0C 2/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.035 V/m; **Power Drift = 0.018 dB**

Right-Hand-Side HSL - SVLTE Band 25/Touch Position -
SVLTE_Band_25_chan26365_RB100_Offset0_amb_temp_23.1C_liq_temp_22.0C 2/Zoom Scan
(26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 9.650 V/m; **Power Drift = 0.018 dB**

Averaged SAR: SAR(1g) = 0.106 W/kg; SAR(10g) = 0.0668 W/kg
Maximum value of SAR (interpolated) = 0.153 W/kg

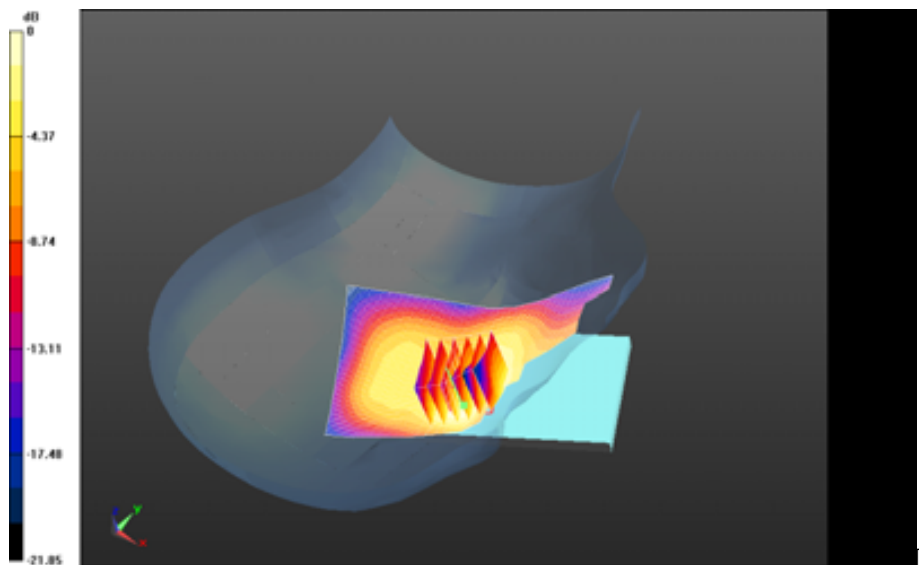


0 dB = 0.0999 W/kg = -10.00 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 31(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - SVLTE Band 25/Tilt Position -
SVLTE_Band_25_chan26365_RB1_Offset50_amb_temp_23.1C_liq_temp_22.2C/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.729 V/m; **Power Drift = 0.028 dB**

Right-Hand-Side HSL - SVLTE Band 25/Tilt Position -
SVLTE_Band_25_chan26365_RB1_Offset50_amb_temp_23.1C_liq_temp_22.2C/Zoom Scan
(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 5.729 V/m; **Power Drift = 0.028 dB**

Averaged SAR: SAR(1g) = 0.0614 W/kg; SAR(10g) = 0.0373 W/kg
Maximum value of SAR (interpolated) = 0.0915 W/kg

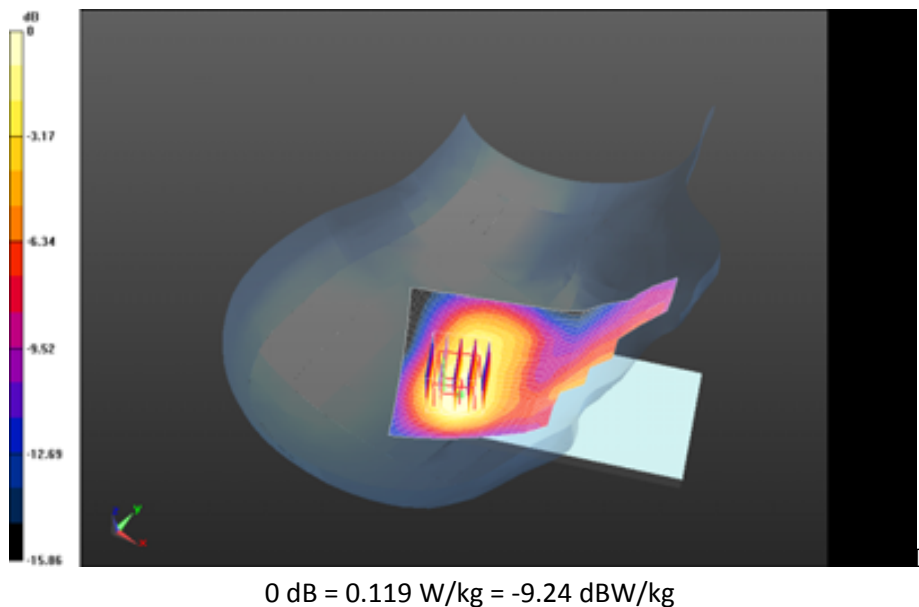

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 32(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/2/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - SVLTE Band 25

Communication System: LTE band 25; Communication System Band: LTE band 25; Frequency: 1882.5 MHz

Medium Parameters used: $f=1882.5$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 38.432$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - SVLTE Band 25/Touch Position -

SVLTE_Band_25_chan26365_RB1_Offset50_amb_temp_23.3C_liq_temp_22.2C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 3.278 V/m; **Power Drift = -0.134 dB**

Left-Hand-Side HSL - SVLTE Band 25/Touch Position -

SVLTE_Band_25_chan26365_RB1_Offset50_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan


(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 3.278 V/m; **Power Drift = -0.134 dB**

Averaged SAR: SAR(1g) = 0.227 W/kg; SAR(10g) = 0.136 W/kg

Maximum value of SAR (interpolated) = 0.345 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 33(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

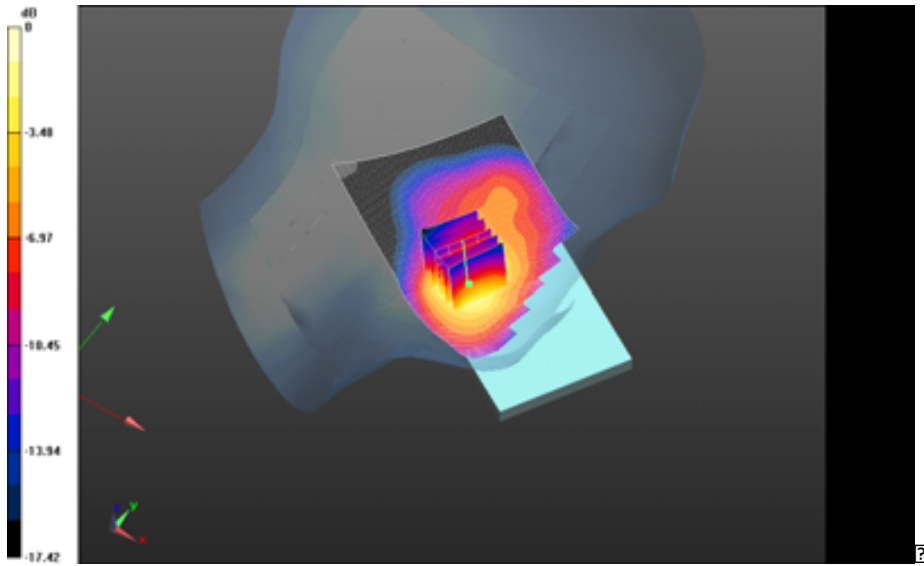


0 dB = 0.267 W/kg = -5.73 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 34(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - SVLTE Band 25/Touch Position -
SVLTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.3C_liq_temp_22.2C/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 3.145 V/m; **Power Drift = 0.141 dB**

Left-Hand-Side HSL - SVLTE Band 25/Touch Position -
SVLTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan
(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 3.145 V/m; **Power Drift = 0.141 dB**


Averaged SAR: SAR(1g) = 0.229 W/kg; SAR(10g) = 0.137 W/kg
Maximum value of SAR (interpolated) = 0.349 W/kg

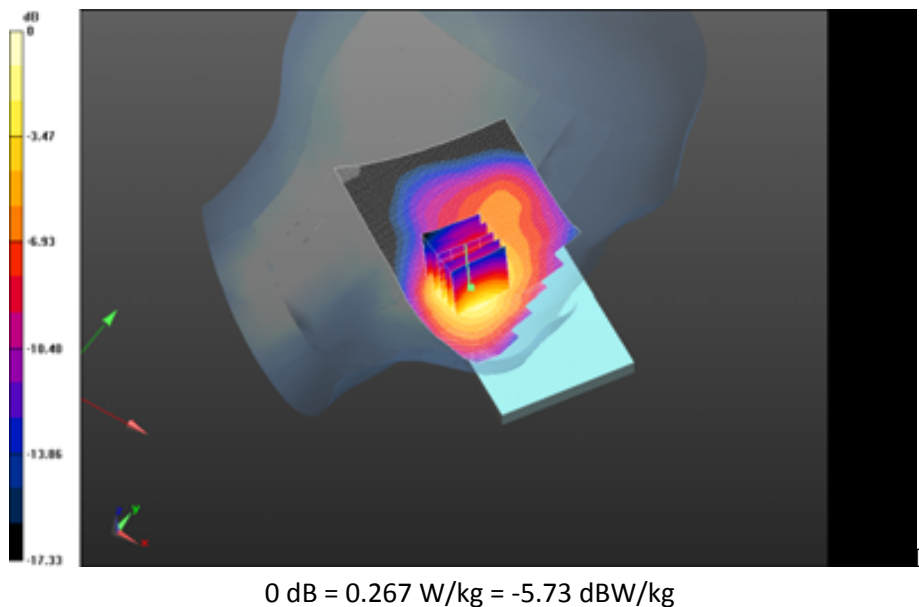

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 35(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - SVLTE Band 25/Touch Position -
SVLTE_Band_25_chan26365_RB100_Offset1_amb_temp_23.3C_liq_temp_22.2C 2 2/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 2.957 V/m; **Power Drift = 0.153 dB**

Fast SAR: SAR(1g) = 0.197 W/kg; SAR(10g) = 0.109 W/kg
Maximum value of SAR (interpolated) = 0.249 W/kg

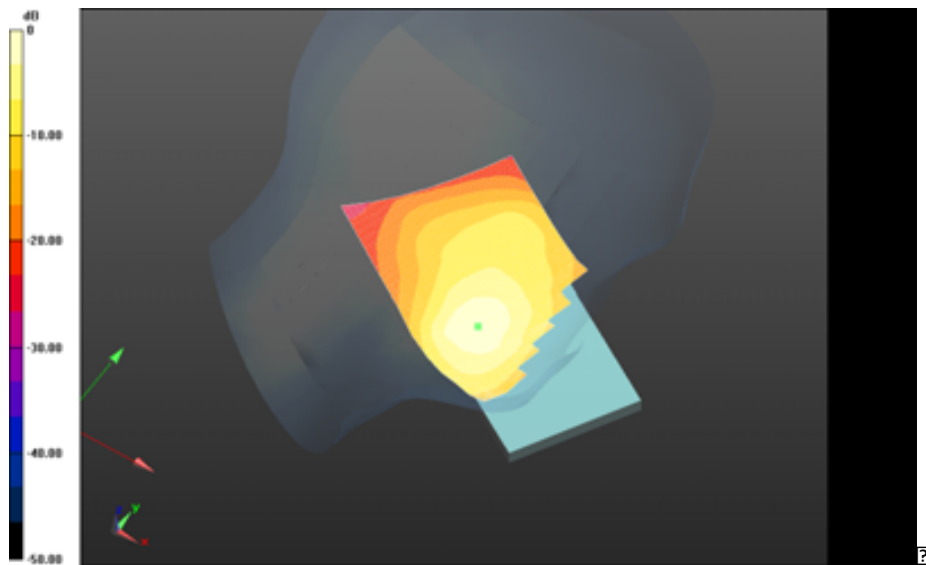


0 dB = 0.269 W/kg = -5.70 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 36(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - SVLTE Band 25/Tilt Position -
SVLTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.3C_liq_temp_22.2C/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 6.124 V/m; **Power Drift = -0.167 dB**

Left-Hand-Side HSL - SVLTE Band 25/Tilt Position -
SVLTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan
(36x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 7.088 V/m; **Power Drift = -0.167 dB**

Averaged SAR: SAR(1g) = 0.0610 W/kg; SAR(10g) = 0.0413 W/kg
Maximum value of SAR (interpolated) = 0.0887 W/kg

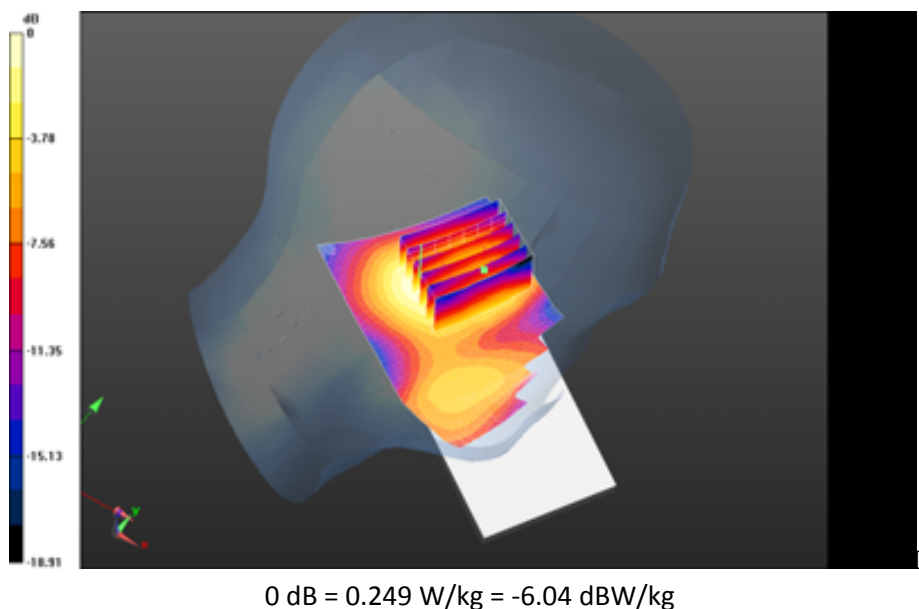

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 37(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

LTE 25 Full Power (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 38(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/2/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - LTE Band 25

Communication System: LTE band 25; Communication System Band: LTE band 25; Frequency: 1860 MHz

Medium Parameters used: $f=1860$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 38.511$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - LTE Band 25/Touch Position -

LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.4C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 6.593 V/m; **Power Drift = 0.043 dB**

Right-Hand-Side HSL - LTE Band 25/Touch Position -


LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.4C_liq_temp_22.5C/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 15.295 V/m; **Power Drift = 0.043 dB**

Averaged SAR: SAR(1g) = 0.277 W/kg; SAR(10g) = 0.176 W/kg

Maximum value of SAR (interpolated) = 0.400 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 39(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

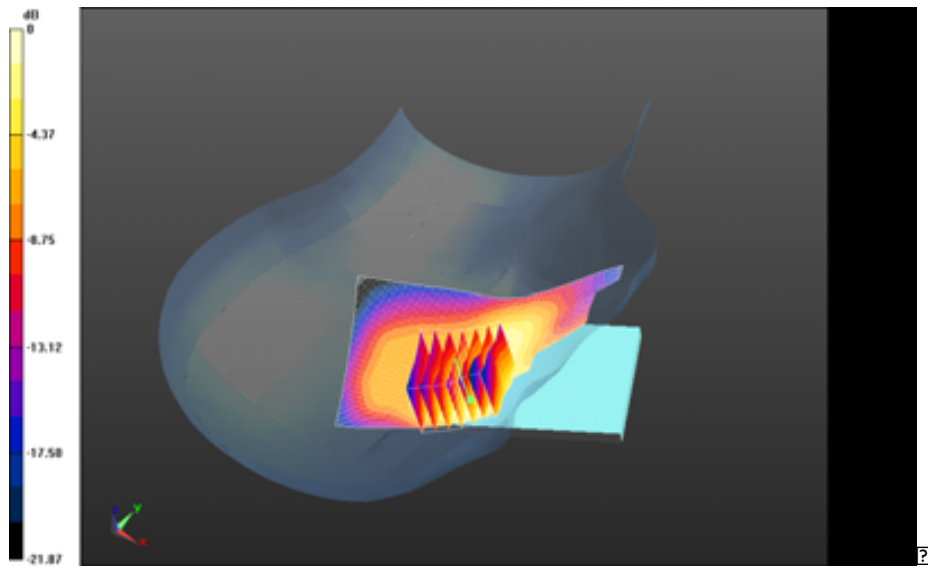

0 dB = 0.317 W/kg = -4.99 dBW/kg

0 dB = 0.313 W/kg = -5.04 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 40(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - LTE Band 25/Touch Position -


LTE_Band_25_chan26140_RB50_Offset50_amb_temp_23.4C_liq_temp_22.5C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.889 V/m; **Power Drift = 0.346 dB**

Fast SAR: SAR(1g) = 0.201 W/kg; SAR(10g) = 0.117 W/kg

Maximum value of SAR (interpolated) = 0.248 W/kg

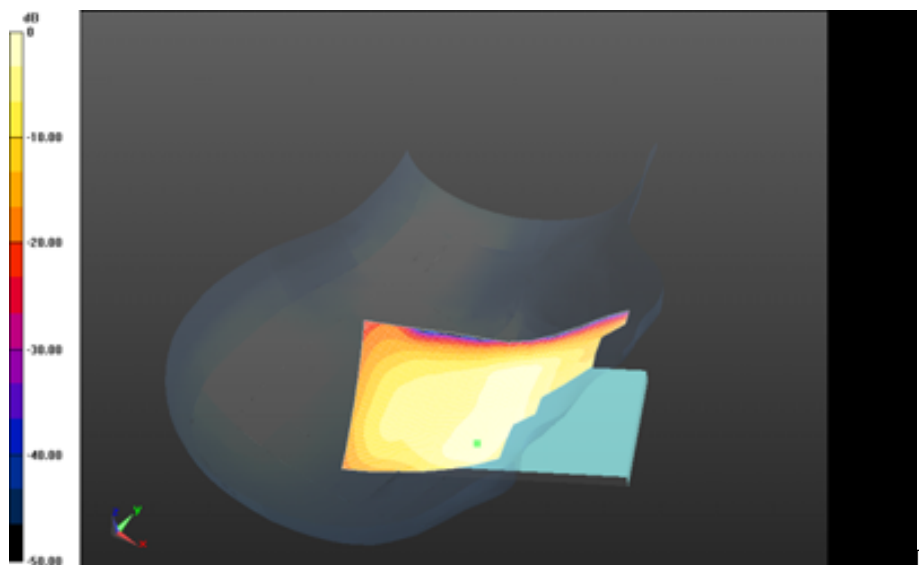


0 dB = 0.317 W/kg = -4.99 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 41(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - LTE Band 25/Touch Position -
LTE_Band_25_chan26365_RB100_Offset0_amb_temp_23.1C_liq_temp_22.0C 2/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.069 V/m; **Power Drift = 0.223 dB**

Fast SAR: SAR(1g) = 0.246 W/kg; SAR(10g) = 0.140 W/kg
Maximum value of SAR (interpolated) = 0.307 W/kg

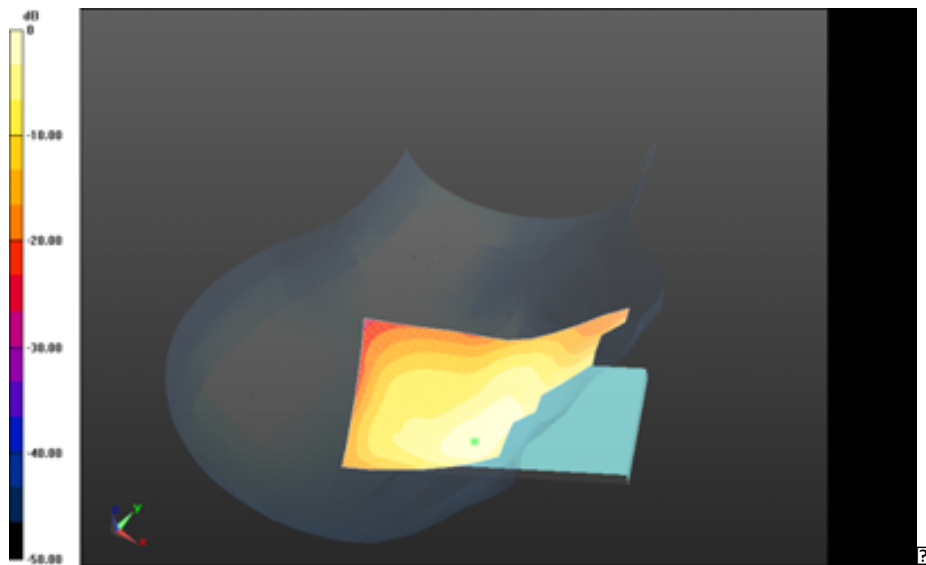

0 dB = 0.248 W/kg = -6.06 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 42(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - LTE Band 25/Tilt Position -

LTE_Band_25_chan26140_RB1_Offset100_amb_temp_23.1C_liq_temp_22.2C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.097 V/m; **Power Drift = 0.113 dB**

Right-Hand-Side HSL - LTE Band 25/Tilt Position -


LTE_Band_25_chan26140_RB1_Offset100_amb_temp_23.1C_liq_temp_22.2C/Zoom Scan

(31x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.959 V/m; **Power Drift = -0.095 dB**

Averaged SAR: SAR(1g) = 0.113 W/kg; SAR(10g) = 0.0686 W/kg

Maximum value of SAR (interpolated) = 0.174 W/kg

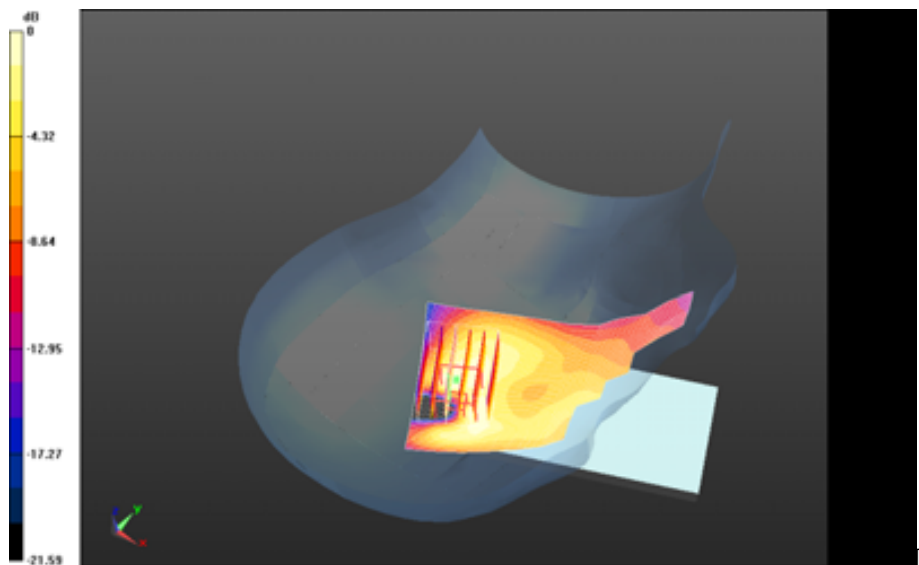

0 dB = 0.307 W/kg = -5.13 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 43(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/2/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Left-Hand-Side HSL - LTE Band 25

Communication System: LTE band 25; Communication System Band: LTE band 25; Frequency: 1860 MHz

Medium Parameters used: $f=1860$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 38.511$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - LTE Band 25/Touch Position -

LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.3C_liq_temp_22.2C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.273 V/m; **Power Drift = 0.00578 dB**

Left-Hand-Side HSL - LTE Band 25/Touch Position -

LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan


(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 5.273 V/m; **Power Drift = 0.00578 dB**

Averaged SAR: SAR(1g) = 0.594 W/kg; SAR(10g) = 0.350 W/kg

Maximum value of SAR (interpolated) = 0.923 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 44(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

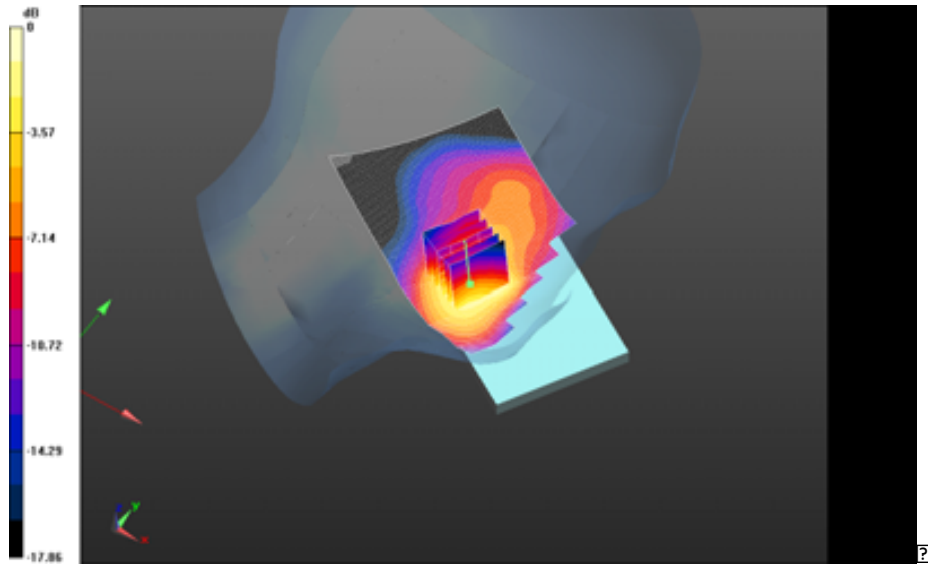

0 dB = 0.668 W/kg = -1.75 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 45(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - LTE Band 25/Touch Position -


LTE_Band_25_chan26140_RB50_Offset50_amb_temp_23.0C_liq_temp_22.1C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.300 V/m; **Power Drift = -0.011 dB**

Fast SAR: SAR(1g) = 0.572 W/kg; SAR(10g) = 0.314 W/kg

Maximum value of SAR (interpolated) = 0.711 W/kg

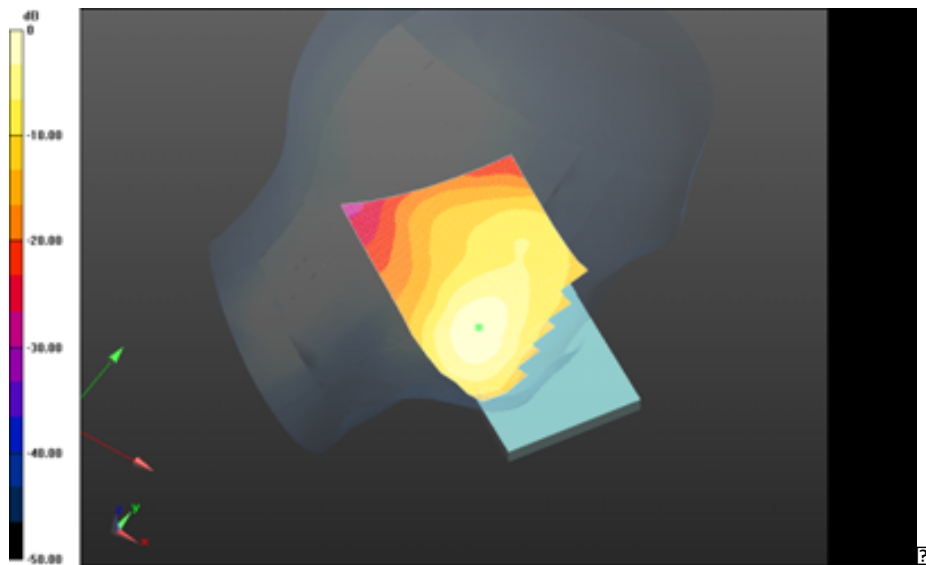

0 dB = 0.668 W/kg = -1.75 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 46(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - LTE Band 25/Touch Position -


LTE_Band_25_chan26365_RB100_Offset0_amb_temp_23.3C_liq_temp_22.5/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 4.627 V/m; **Power Drift = 0.137 dB**

Fast SAR: SAR(1g) = 0.513 W/kg; SAR(10g) = 0.282 W/kg

Maximum value of SAR (interpolated) = 0.644 W/kg

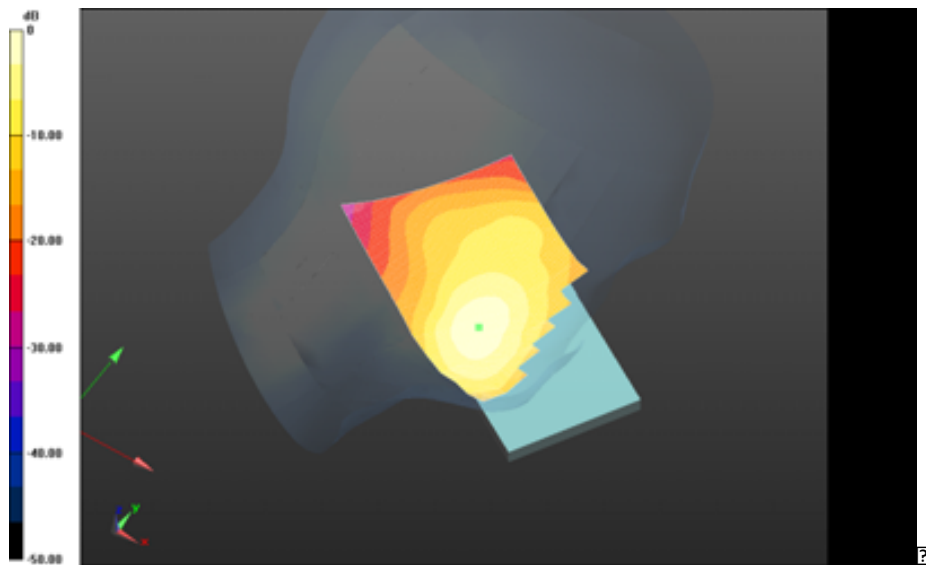

0 dB = 0.711 W/kg = -1.48 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 47(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - LTE Band 25/Tilt Position -

LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.3C_liq_temp_22.2C/Area Scan

(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 8.879 V/m; **Power Drift = -0.043 dB**

Left-Hand-Side HSL - LTE Band 25/Tilt Position -


LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan

(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 11.045 V/m; **Power Drift = -0.043 dB**

Averaged SAR: SAR(1g) = 0.147 W/kg; SAR(10g) = 0.0915 W/kg

Maximum value of SAR (interpolated) = 0.214 W/kg

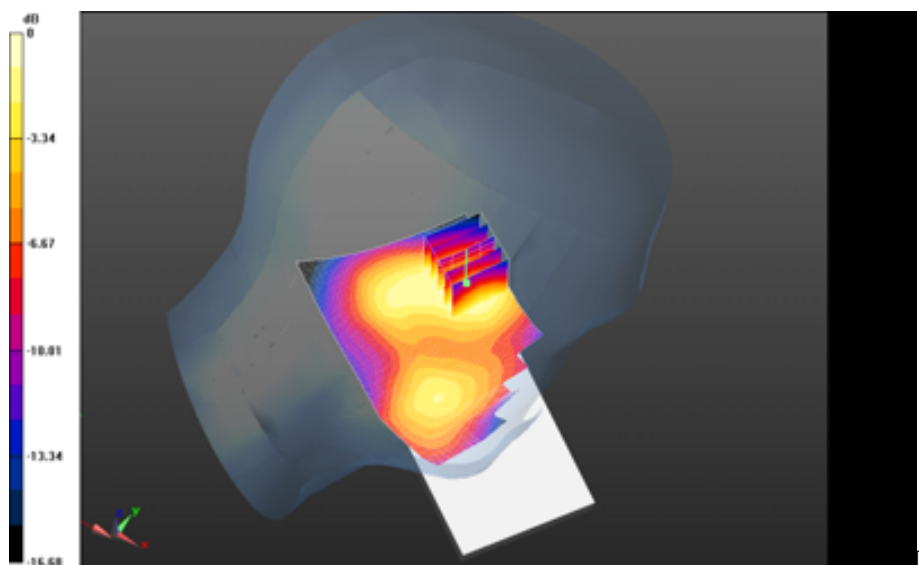

0 dB = 0.644 W/kg = -1.91 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 48(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

DTM 1900 (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 49(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/3/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - DTM 1900

Communication System: DTM 1900; Communication System Band: DTM 1900; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.441$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - DTM 1900/Touch Position -

DTM1900_chan661_amb_temp_23.0C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.416 W/kg

Right-Hand-Side HSL - DTM 1900/Touch Position -

DTM1900_chan661_amb_temp_23.0C_liq_temp_22.5C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.049 V/m; **Power Drift = -0.043 dB**

Averaged SAR: SAR(1g) = 0.335 W/kg; SAR(10g) = 0.214 W/kg

Maximum value of SAR (interpolated) = 0.492 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 50(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

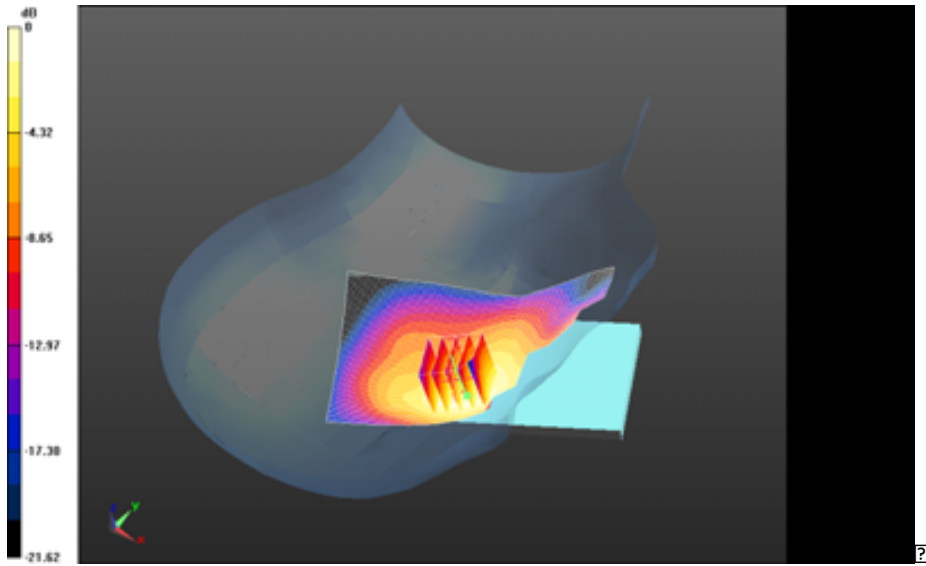

0 dB = 0.394 W/kg = -4.05 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 51(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/3/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Left-Hand-Side HSL - DTM 1900

Communication System: DTM 1900; Communication System Band: DTM 1900; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.441$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - DTM 1900/Touch Position -

DTM1900_chan661_amb_temp_23.0C_liq_temp_22.5C/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.844 W/kg

Left-Hand-Side HSL - DTM 1900/Touch Position -

DTM1900_chan661_amb_temp_23.0C_liq_temp_22.5C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.641 V/m; **Power Drift = 0.091 dB**

Averaged SAR: SAR(1g) = 0.705 W/kg; SAR(10g) = 0.427 W/kg

Maximum value of SAR (interpolated) = 1.09 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 52(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

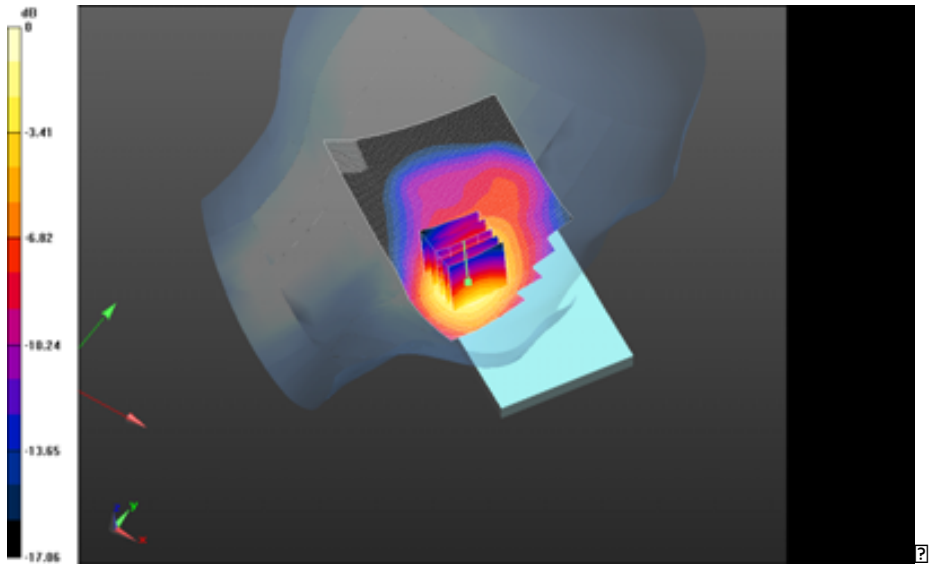

0 dB = 0.824 W/kg = -0.84 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 53(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

UMTS Band II (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 54(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/3/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.441$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - UMTS II/Touch Position -

UMTS_II_chan9400_amb_temp_23.0C_liq_temp_21.8C/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.429 W/kg

Right-Hand-Side HSL - UMTS II/Touch Position -

UMTS_II_chan9400_amb_temp_23.0C_liq_temp_21.8C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.301 V/m; **Power Drift = -0.178 dB**

Averaged SAR: SAR(1g) = 0.342 W/kg; SAR(10g) = 0.215 W/kg

Maximum value of SAR (interpolated) = 0.503 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 55(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

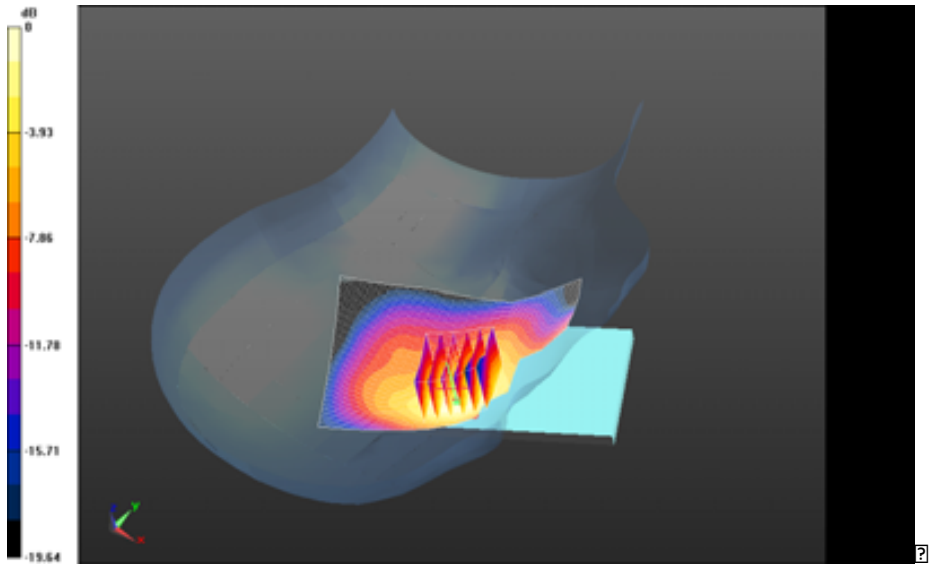

0 dB = 0.400 W/kg = -3.98 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 56(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/3/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Left-Hand-Side HSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.441$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - UMTS II/Touch Position -

UMTS_II_chan9400_amb_temp_23.1C_liq_temp_21.9C/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.818 W/kg

Left-Hand-Side HSL - UMTS II/Touch Position -

UMTS_II_chan9400_amb_temp_23.1C_liq_temp_21.9C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.788 V/m; **Power Drift = -0.065 dB**

Averaged SAR: SAR(1g) = 0.695 W/kg; SAR(10g) = 0.420 W/kg

Maximum value of SAR (interpolated) = 1.07 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 57(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

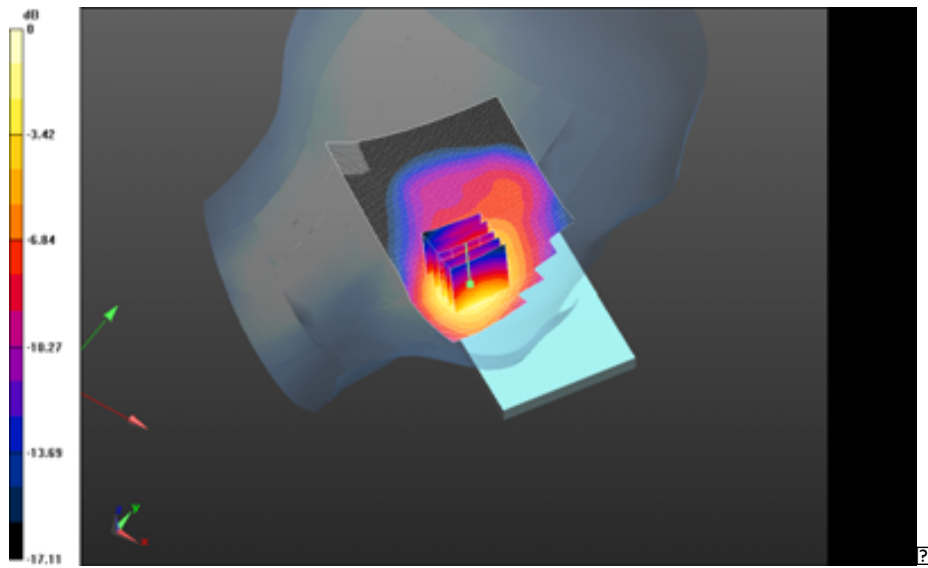

0 dB = 0.806 W/kg = -0.94 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 58(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

CDMA 1900 (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 59(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - CDMA 1900 BC1

Communication System: CDMA 1900; Communication System Band: CDMA 2000 PCS;

Frequency: 1851.25 MHz

Medium Parameters used: $f=1851.25$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 39.455$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan25

_amb_temp_23.1C_liq_temp_22.6C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 11.085 V/m; **Power Drift = 0.015 dB**

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan25


_amb_temp_23.1C_liq_temp_22.6C/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 11.085 V/m; **Power Drift = 0.015 dB**

Averaged SAR: SAR(1g) = 1.11 W/kg; SAR(10g) = 0.706 W/kg

Maximum value of SAR (interpolated) = 1.65 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 60(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

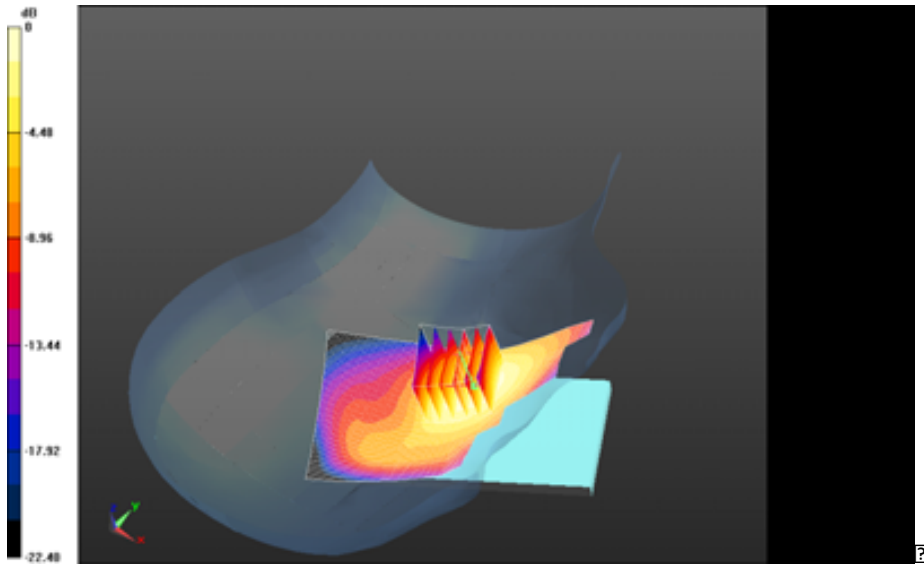


0 dB = 1.31 W/kg = 1.17 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 61(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan600
_amb_temp_23.1C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 11.700 V/m; **Power Drift = 0.157 dB**

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan600
_amb_temp_23.1C_liq_temp_22.7C/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 11.700 V/m; **Power Drift = 0.157 dB**

Averaged SAR: SAR(1g) = 1.27 W/kg; SAR(10g) = 0.800 W/kg
Maximum value of SAR (interpolated) = 1.89 W/kg

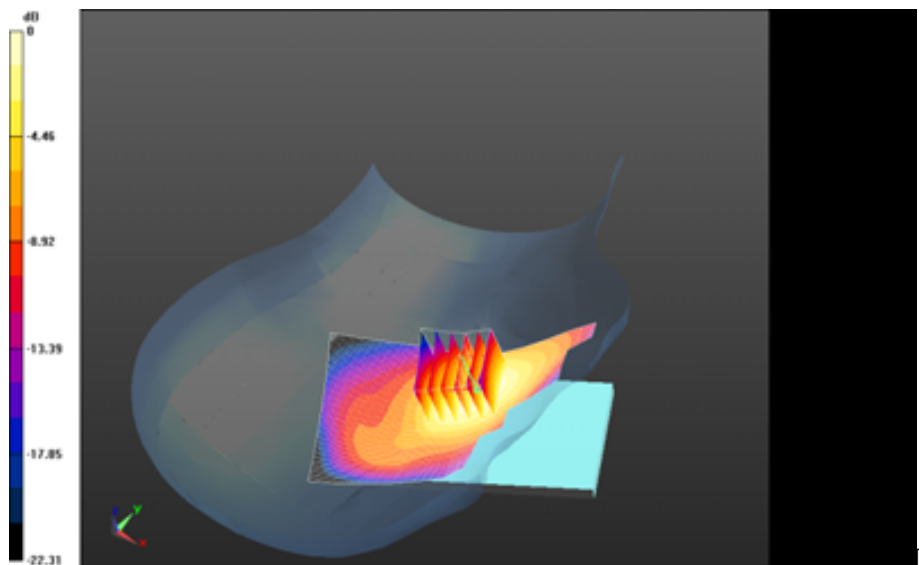


0 dB = 1.31 W/kg = 1.17 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 62(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan1175
_amb_temp_23.2C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 11.912 V/m; **Power Drift = -0.101 dB**

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan1175
_amb_temp_23.2C_liq_temp_22.5C/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 11.912 V/m; **Power Drift = -0.101 dB**

Averaged SAR: SAR(1g) = 1.17 W/kg; SAR(10g) = 0.732 W/kg
Maximum value of SAR (interpolated) = 1.78 W/kg

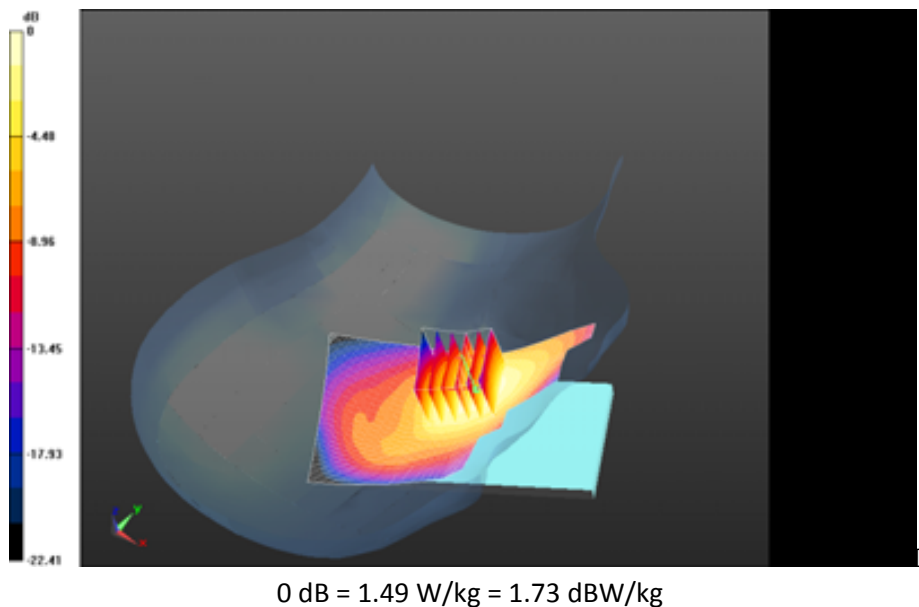


	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 63(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - CDMA 1900 BC1/Tilt Position -CDMA 1900 BC1_chan600
_amb_temp_23.4C_liq_temp_22.6C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 19.525 V/m; **Power Drift = 0.055 dB**

Right-Hand-Side HSL - CDMA 1900 BC1/Tilt Position -CDMA 1900 BC1_chan600
_amb_temp_23.4C_liq_temp_22.6C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 19.525 V/m; **Power Drift = 0.055 dB**

Averaged SAR: SAR(1g) = 0.391 W/kg; SAR(10g) = 0.243 W/kg
Maximum value of SAR (interpolated) = 0.589 W/kg

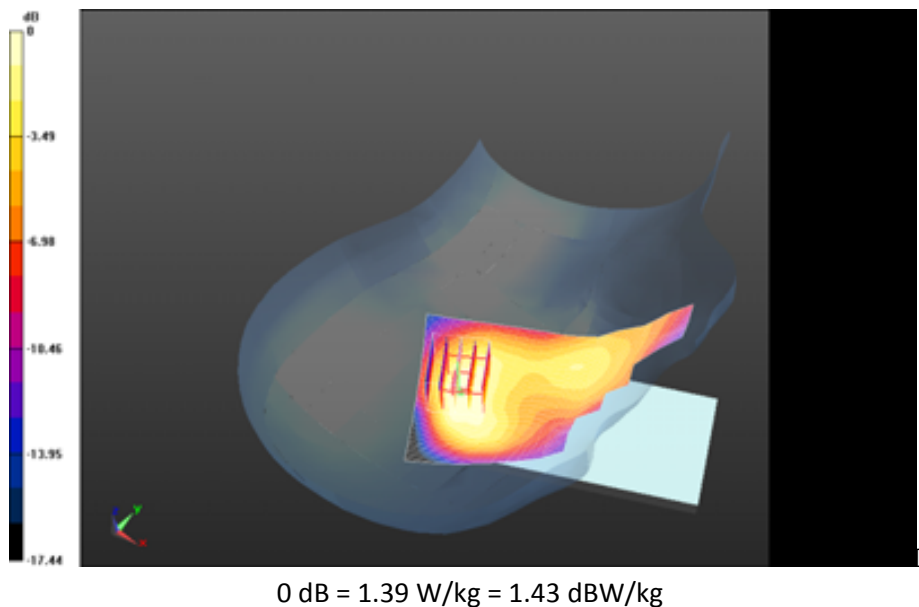


	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 64(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan600 _2nd scan_amb_temp_23.1C_liq_temp_22.7C 2/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.919 V/m; **Power Drift = 0.034 dB**

Right-Hand-Side HSL - CDMA 1900 BC1/Touch Position - CDMA 1900 BC1_chan600 _2nd scan_amb_temp_23.1C_liq_temp_22.7C 2/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 10.919 V/m; **Power Drift = 0.034 dB**

Averaged SAR: SAR(1g) = 1.33 W/kg; SAR(10g) = 0.824 W/kg
Maximum value of SAR (interpolated) = 2.02 W/kg

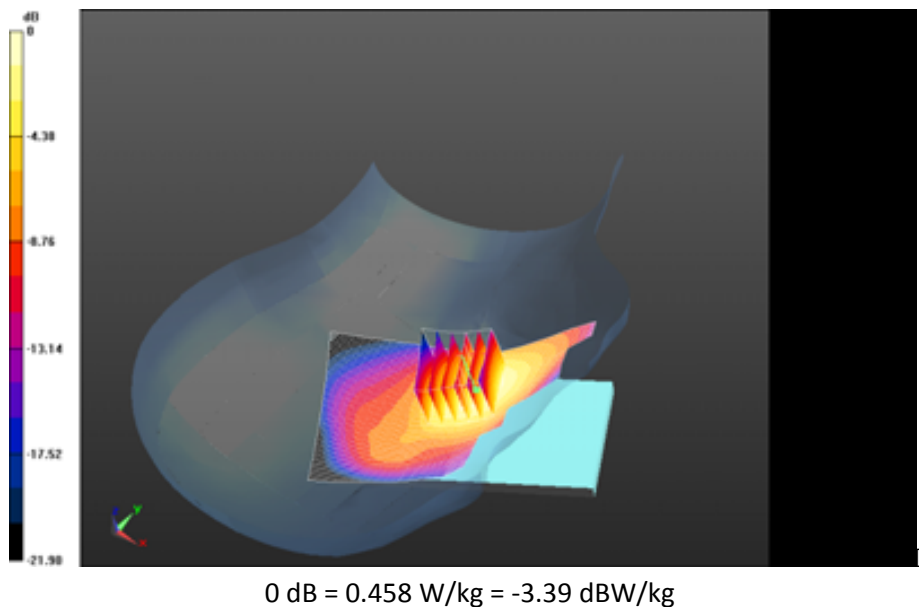

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 65(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - CDMA 1900 BC1

Communication System: CDMA 1900; Communication System Band: CDMA 2000 PCS;

Frequency: 1851.25 MHz

Medium Parameters used: $f=1851.25$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 39.455$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.35,5.35,5.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - CDMA 1900 BC1/Touch Position -- CDMA 1900

BC1_chan25_amb_temp_23.2C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated grid:


$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 10.186 V/m; **Power Drift = 0.067 dB**

Fast SAR: SAR(1g) = 0.583 W/kg; SAR(10g) = 0.344 W/kg

Maximum value of SAR (interpolated) = 0.728 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 66(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

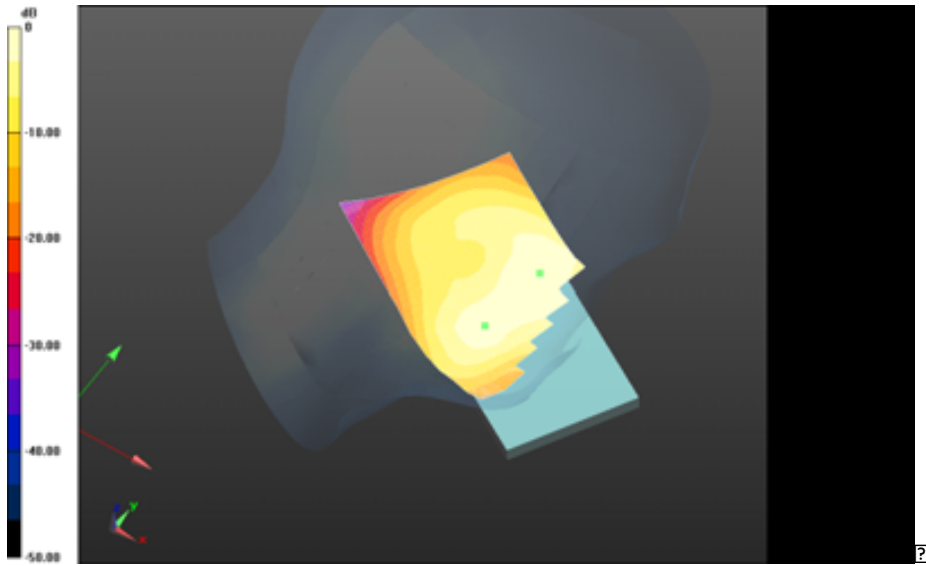

0 dB = 0.728 W/kg = -1.38 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 67(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - CDMA 1900 BC1/Touch Position -- CDMA 1900

BC1_chan600_amb_temp_23.2C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 9.533 V/m; **Power Drift = 0.066 dB**

Left-Hand-Side HSL - CDMA 1900 BC1/Touch Position -- CDMA 1900


BC1_chan600_amb_temp_23.2C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0: Interpolated

grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.533 V/m; **Power Drift = 0.066 dB**

Averaged SAR: SAR(1g) = 0.725 W/kg; SAR(10g) = 0.467 W/kg

Maximum value of SAR (interpolated) = 1.03 W/kg

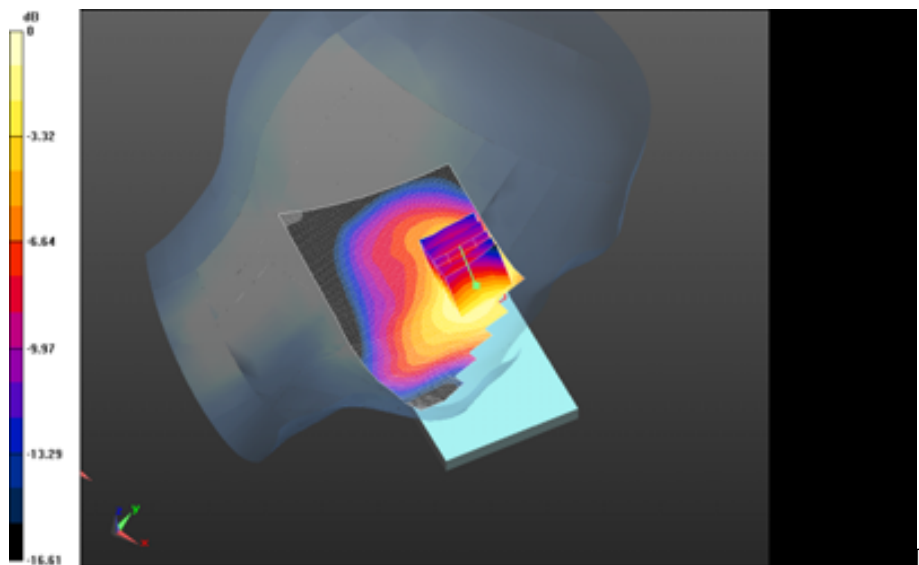

0 dB = 0.728 W/kg = -1.38 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 68(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - CDMA 1900 BC1/Touch Position -- CDMA 1900


BC1_chan1175_amb_temp_23.2C_liq_temp_22.3C 2/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 10.612 V/m; **Power Drift = -0.090 dB**

Fast SAR: SAR(1g) = 0.626 W/kg; SAR(10g) = 0.368 W/kg

Maximum value of SAR (interpolated) = 0.789 W/kg

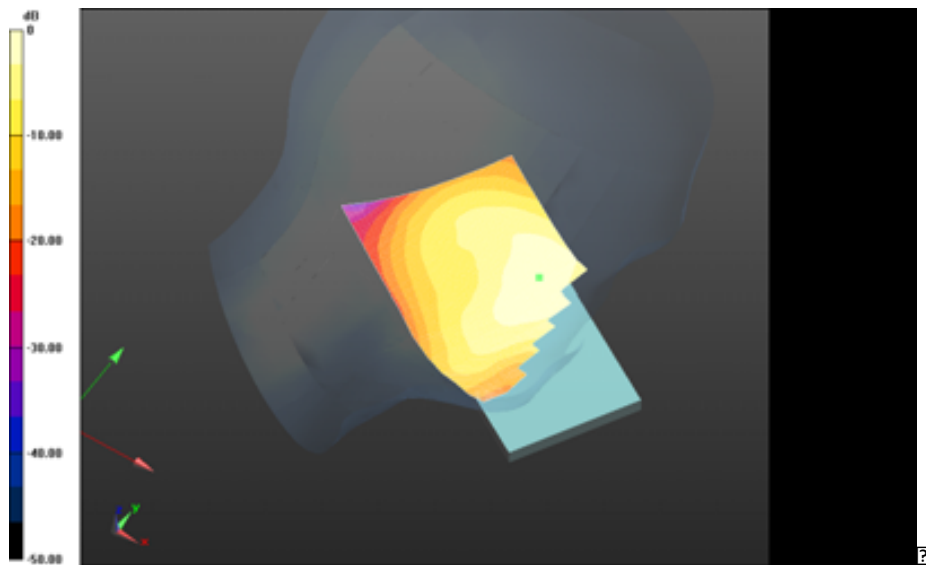

0 dB = 0.840 W/kg = -0.76 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 69(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - CDMA 1900 BC1/Tilt Position -- CDMA 1900

BC1_chan600_amb_temp_23.0C_liq_temp_22.7C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 16.337 V/m; **Power Drift = 0.031 dB**

Left-Hand-Side HSL - CDMA 1900 BC1/Tilt Position -- CDMA 1900


BC1_chan600_amb_temp_23.0C_liq_temp_22.7C/Zoom Scan (21x21x36)/Cube 0: Interpolated

grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 16.337 V/m; **Power Drift = 0.031 dB**

Averaged SAR: SAR(1g) = 0.423 W/kg; SAR(10g) = 0.265 W/kg

Maximum value of SAR (interpolated) = 0.617 W/kg

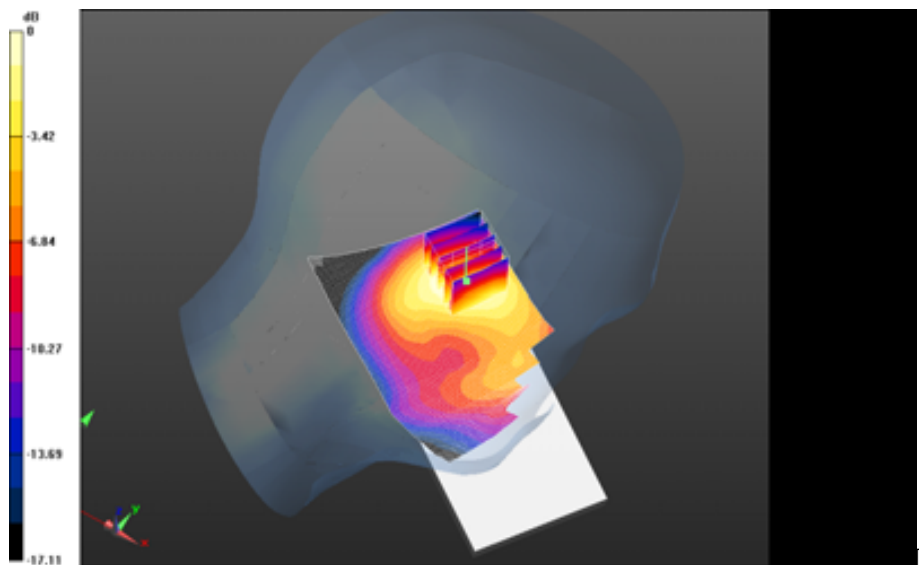

0 dB = 0.789 W/kg = -1.03 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 70(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

802.11b/g full power (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 71(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/6/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2412 MHz

Medium Parameters used: $f=2412$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 37.553$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan1_amb_temp_23.2C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.00 W/kg

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan1_amb_temp_23.2C_liq_temp_22.2C/Zoom Scan (36x31x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 11.715 V/m; **Power Drift = 0.020 dB**

Averaged SAR: SAR(1g) = 0.666 W/kg; SAR(10g) = 0.336 W/kg

Maximum value of SAR (interpolated) = 1.37 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 72(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

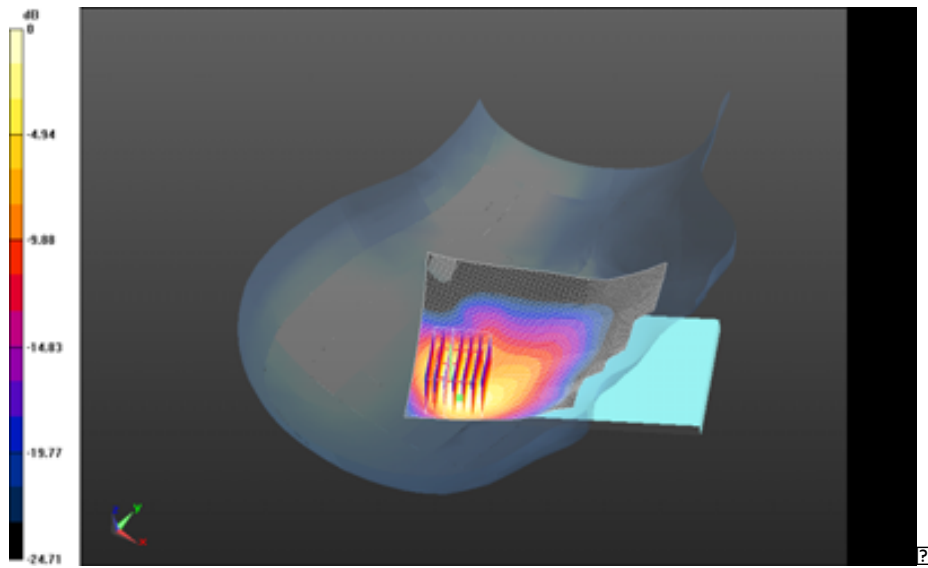

0 dB = 0.866 W/kg = -0.62 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 73(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Right-Hand-Side HSL - 802.11g/Touch Position -


802.11g_chan6_amb_temp_23.2C_liq_temp_22.2C/Zoom Scan (36x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 10.183 V/m; **Power Drift = 0.369 dB**

Averaged SAR: SAR(1g) = 0.747 W/kg; SAR(10g) = 0.380 W/kg

Maximum value of SAR (interpolated) = 1.49 W/kg

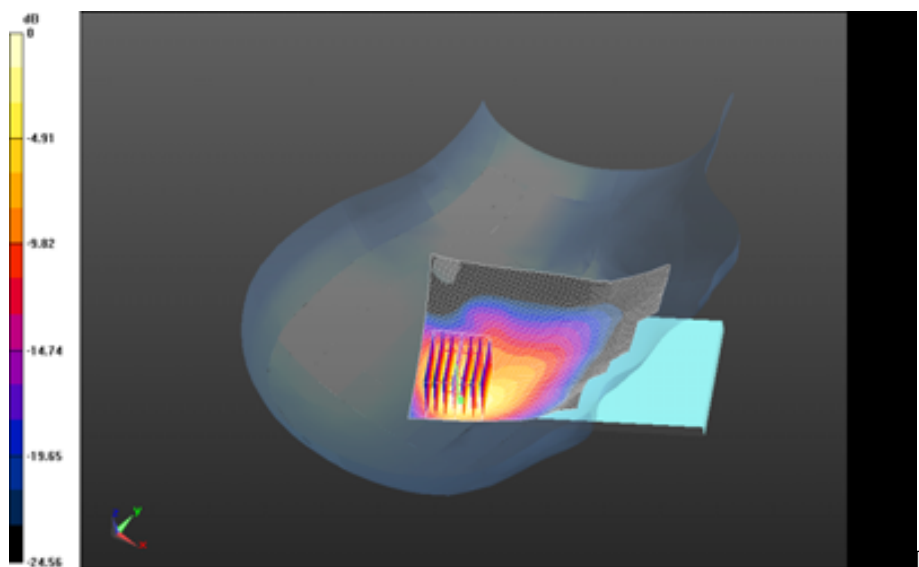

0 dB = 0.866 W/kg = -0.62 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 74(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11b/Touch Position -

802.11b_chan11_amb_temp_23.3C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.730 W/kg

Right-Hand-Side HSL - 802.11b/Touch Position -


802.11b_chan11_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan (36x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 9.145 V/m; **Power Drift = 0.089 dB**

Averaged SAR: SAR(1g) = 0.478 W/kg; SAR(10g) = 0.241 W/kg

Maximum value of SAR (interpolated) = 0.938 W/kg

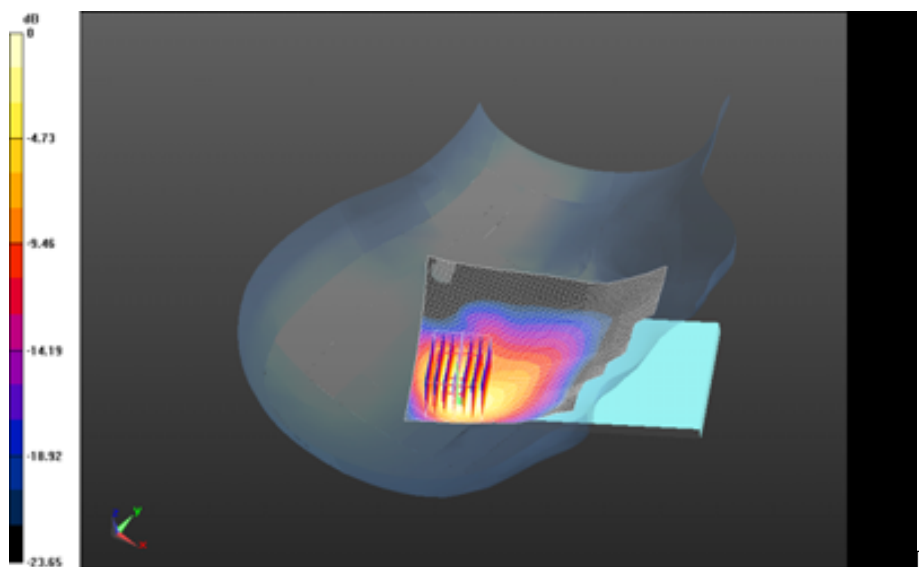

0 dB = 0.961 W/kg = -0.17 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 75(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11g/Tilt Position -

802.11g_chan1_amb_temp_23.1C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Right-Hand-Side HSL - 802.11g/Tilt Position -


802.11g_chan1_amb_temp_23.1C_liq_temp_22.2C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 11.001 V/m; **Power Drift = 0.00291 dB**

Averaged SAR: SAR(1g) = 0.812 W/kg; SAR(10g) = 0.355 W/kg

Maximum value of SAR (interpolated) = 1.69 W/kg

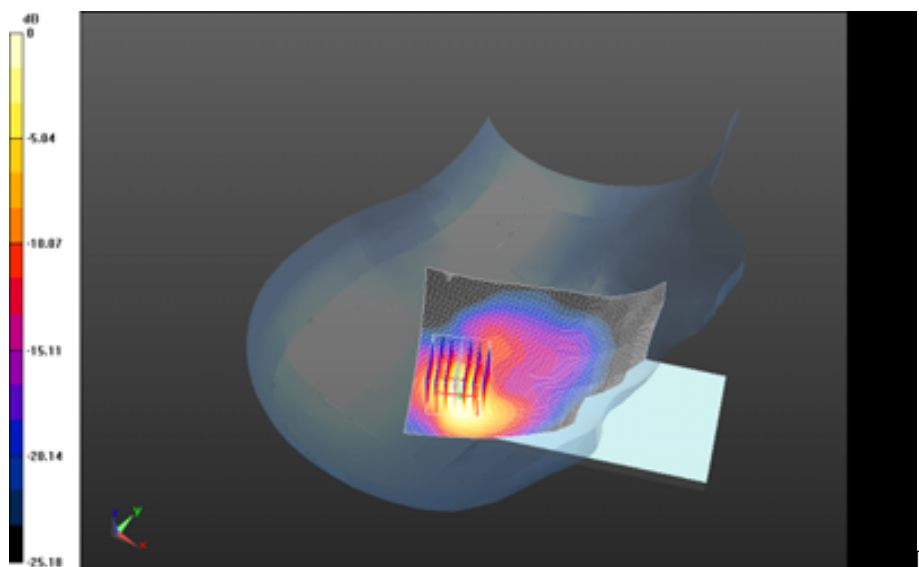

0 dB = 0.616 W/kg = -2.10 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 76(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11g/Tilt Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Right-Hand-Side HSL - 802.11g/Tilt Position -


802.11g_chan6_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 11.444 V/m; **Power Drift = 0.028 dB**

Averaged SAR: SAR(1g) = 0.880 W/kg; SAR(10g) = 0.388 W/kg

Maximum value of SAR (interpolated) = 1.78 W/kg

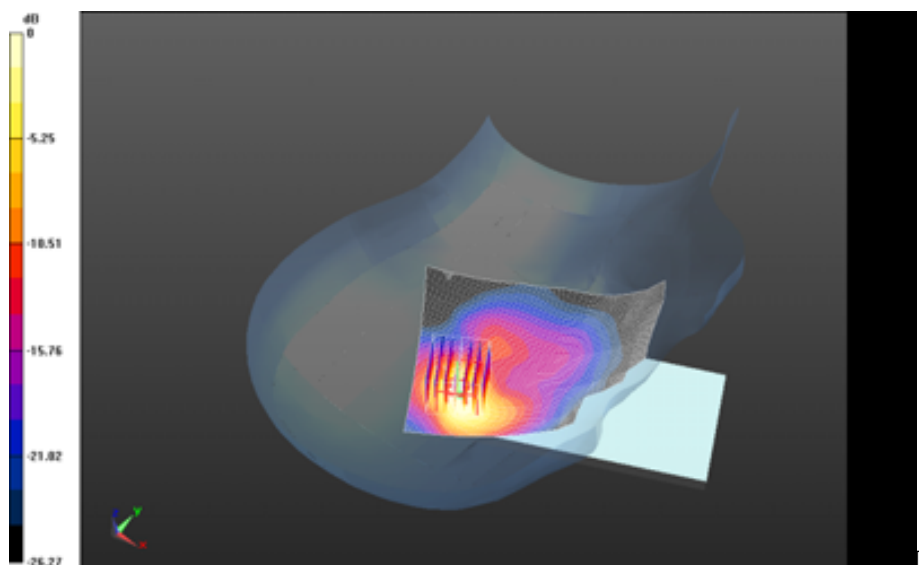

0 dB = 0.970 W/kg = -0.13 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 77(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11b/Tilt Position -

802.11b_chan11_amb_temp_23.2C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.788 W/kg

Right-Hand-Side HSL - 802.11b/Tilt Position -


802.11b_chan11_amb_temp_23.2C_liq_temp_22.2C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 9.277 V/m; **Power Drift = 0.00356 dB**

Averaged SAR: SAR(1g) = 0.578 W/kg; SAR(10g) = 0.253 W/kg

Maximum value of SAR (interpolated) = 1.22 W/kg

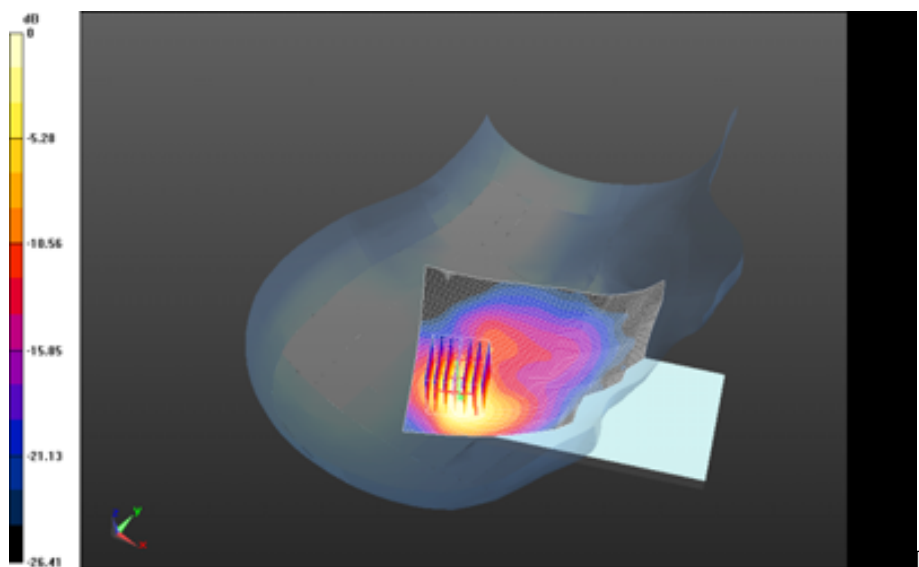

0 dB = 1.21 W/kg = 0.83 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 78(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/7/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 37.496$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.559 W/kg

Left-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 12.747 V/m; **Power Drift = -0.032 dB**

Averaged SAR: SAR(1g) = 0.449 W/kg; SAR(10g) = 0.212 W/kg

Maximum value of SAR (interpolated) = 0.886 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 79(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

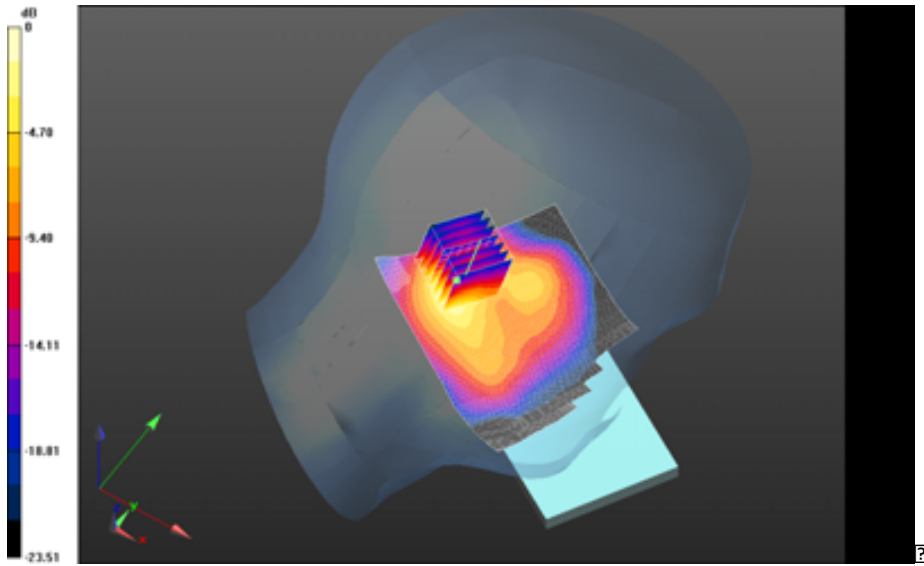

0 dB = 0.584 W/kg = -2.34 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 80(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - 802.11g/Tilt Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_21.8C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.653 W/kg

Left-Hand-Side HSL - 802.11g/Tilt Position -


802.11g_chan6_amb_temp_23.2C_liq_temp_21.8C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 12.072 V/m; **Power Drift = 0.016 dB**

Averaged SAR: SAR(1g) = 0.497 W/kg; SAR(10g) = 0.229 W/kg

Maximum value of SAR (interpolated) = 0.971 W/kg

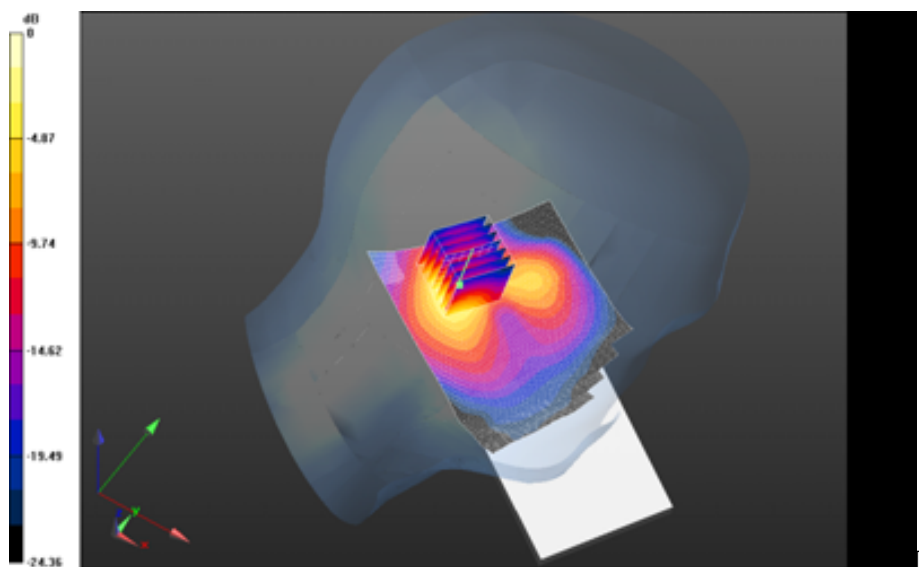

0 dB = 0.584 W/kg = -2.34 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 81(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

802.11g CDMA_BC1 Power level (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 82(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/24/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.831$ S/m; $\epsilon_r = 37.930$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_22.9C/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.511 W/kg

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_22.9C/Zoom Scan (36x31x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 6.617 V/m; **Power Drift = 0.200 dB**

Averaged SAR: SAR(1g) = 0.346 W/kg; SAR(10g) = 0.177 W/kg

Maximum value of SAR (interpolated) = 0.684 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 83(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

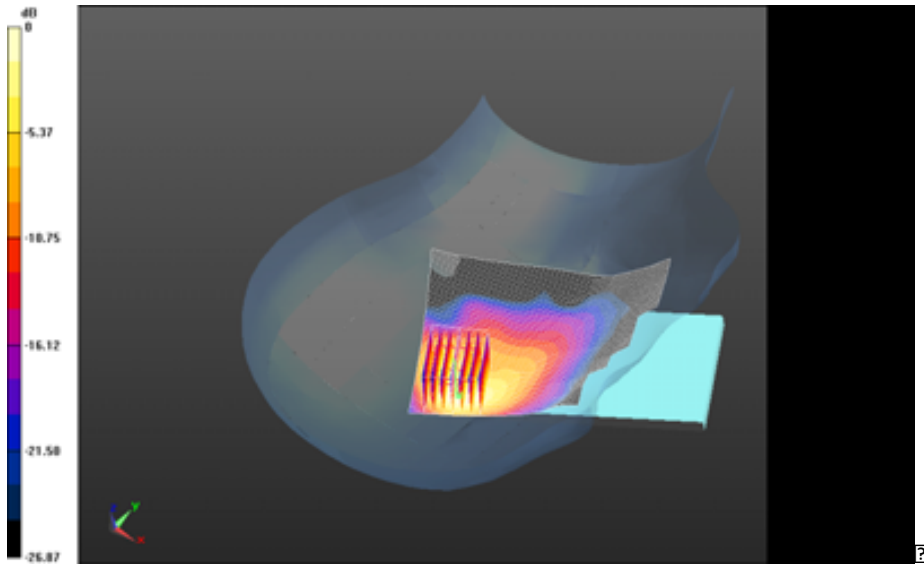


0 dB = 0.443 W/kg = -3.54 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 84(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11g/Tilt Position -
802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Area Scan (81x111x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.525 W/kg

Right-Hand-Side HSL - 802.11g/Tilt Position -
802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:
Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm
Reference Value = 5.591 V/m; **Power Drift = 0.222 dB**

Averaged SAR: SAR(1g) = 0.431 W/kg; SAR(10g) = 0.191 W/kg
Maximum value of SAR (interpolated) = 0.865 W/kg

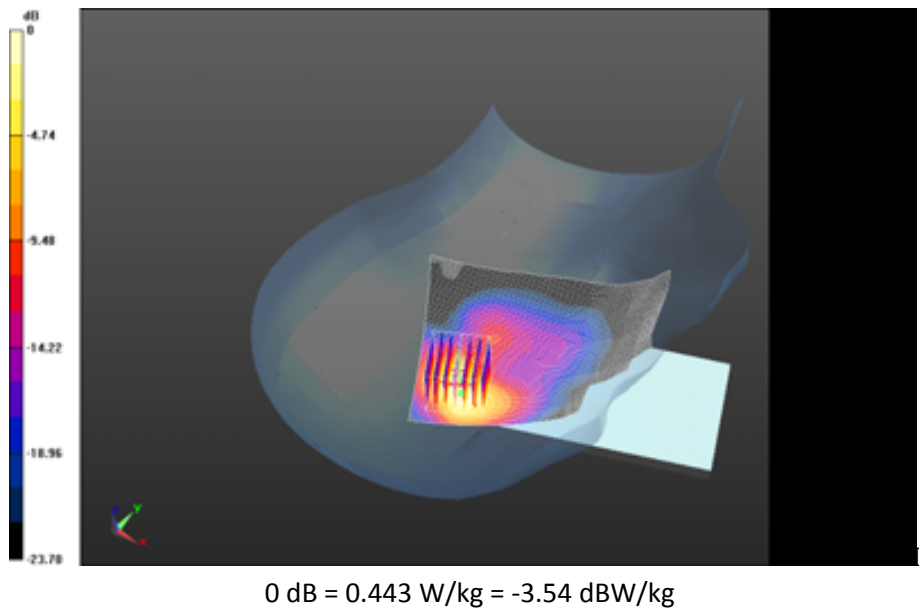

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 85(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 7/25/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.831$ S/m; $\epsilon_r = 37.930$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.249 W/kg

Left-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 8.650 V/m; **Power Drift = 0.018 dB**

Averaged SAR: SAR(1g) = 0.203 W/kg; SAR(10g) = 0.0975 W/kg

Maximum value of SAR (interpolated) = 0.390 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 86(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

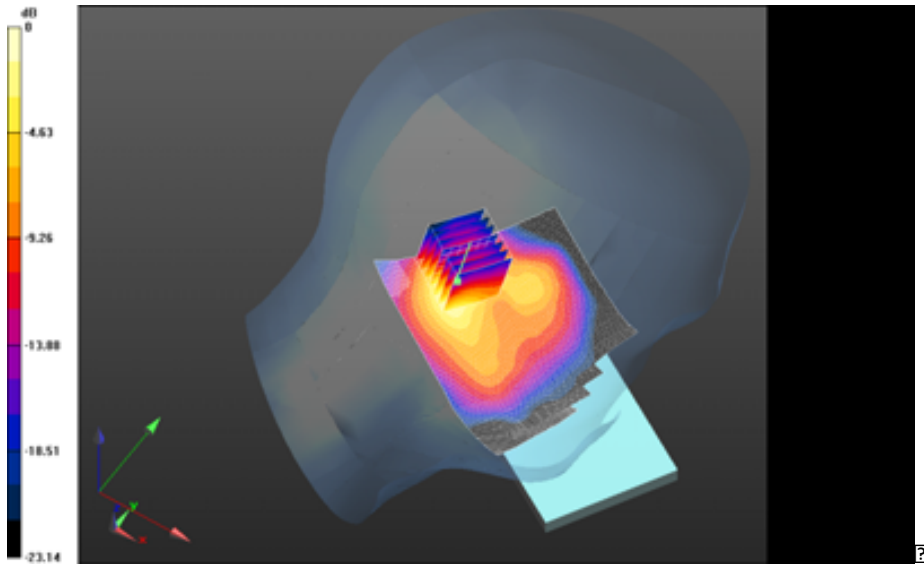

0 dB = 0.262 W/kg = -5.82 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 87(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - 802.11g/Tilt Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_21.8C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.294 W/kg

Left-Hand-Side HSL - 802.11g/Tilt Position -


802.11g_chan6_amb_temp_23.2C_liq_temp_21.8C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 7.343 V/m; **Power Drift = 0.147 dB**

Averaged SAR: SAR(1g) = 0.220 W/kg; SAR(10g) = 0.102 W/kg

Maximum value of SAR (interpolated) = 0.420 W/kg

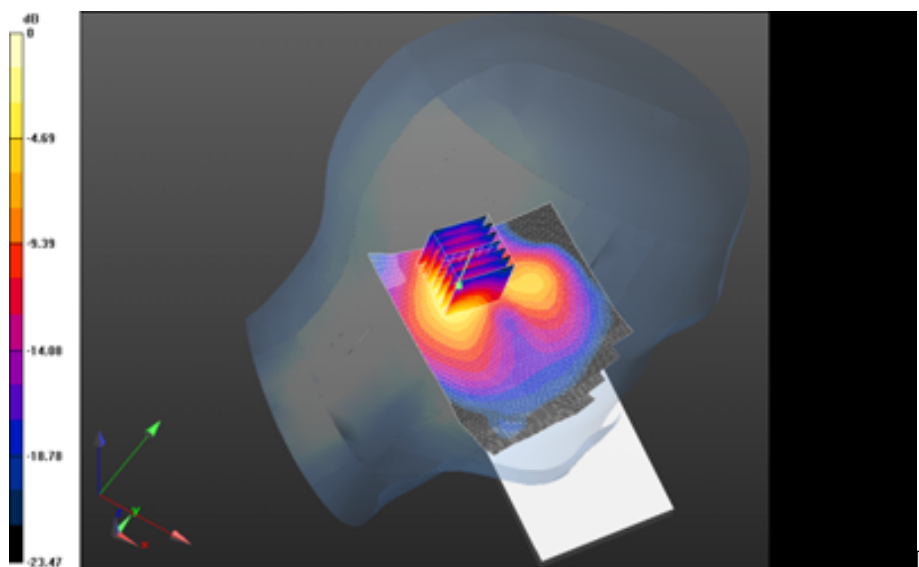

0 dB = 0.262 W/kg = -5.82 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 88(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

802.11g SVLTE CDMA BC1

25 Power level

(RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 89(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/6/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Right-Hand-Side HSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 37.496$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.134 W/kg

Right-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_22.2C/Zoom Scan (36x31x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 4.285 V/m; **Power Drift = 0.078 dB**

Averaged SAR: SAR(1g) = 0.0891 W/kg; SAR(10g) = 0.0446 W/kg

Maximum value of SAR (interpolated) = 0.179 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 90(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

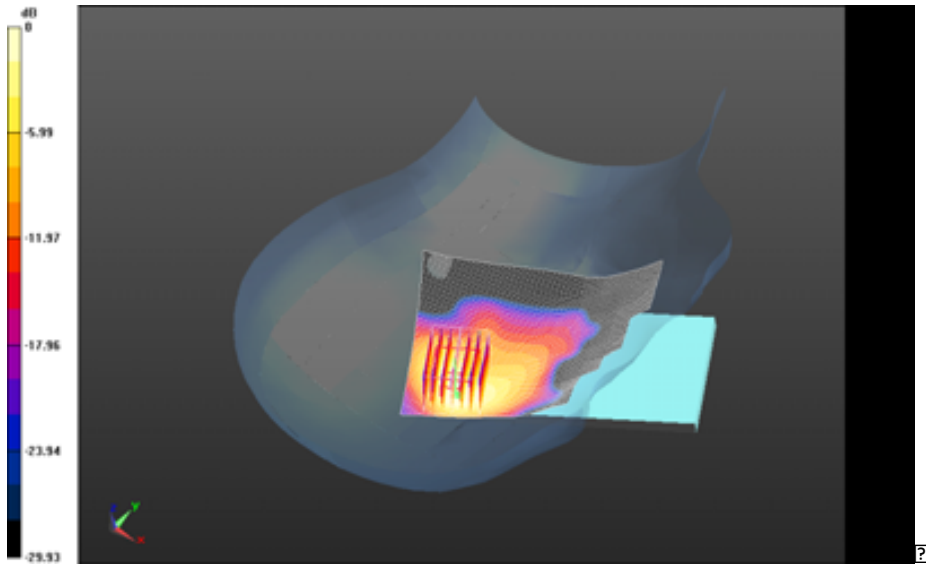

0 dB = 0.113 W/kg = -9.47 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 91(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11g/Tilt Position -

802.11g_chan6_amb_temp_23.1C_liq_temp_22.2C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.146 W/kg

Right-Hand-Side HSL - 802.11g/Tilt Position -


802.11g_chan6_amb_temp_23.1C_liq_temp_22.2C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 4.087 V/m; **Power Drift = 0.143 dB**

Averaged SAR: SAR(1g) = 0.107 W/kg; SAR(10g) = 0.0470 W/kg

Maximum value of SAR (interpolated) = 0.219 W/kg

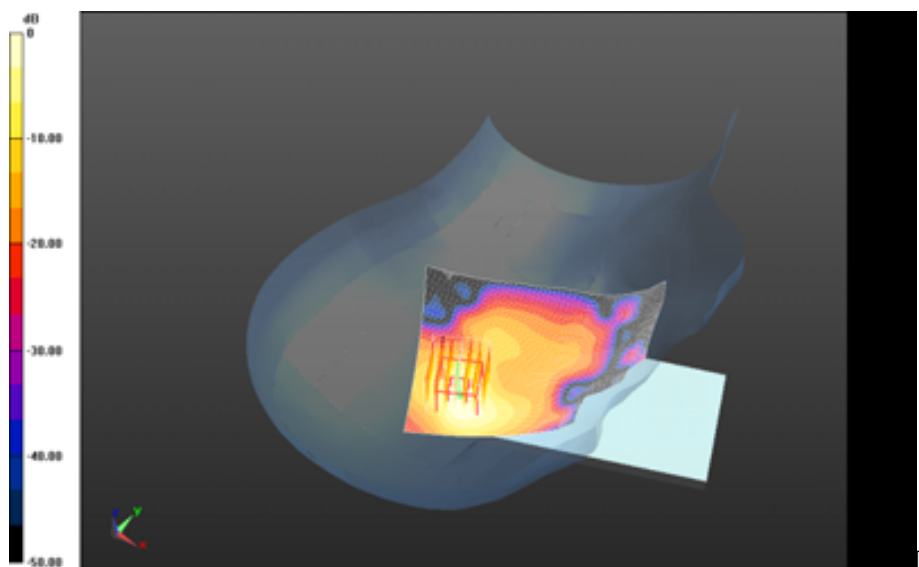

0 dB = 0.113 W/kg = -9.47 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 92(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/7/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Left-Hand-Side HSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 37.496$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.65,4.65,4.65); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Left-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0647 W/kg

Left-Hand-Side HSL - 802.11g/Touch Position -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.9C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 4.386 V/m; **Power Drift = 0.131 dB**

Averaged SAR: SAR(1g) = 0.0513 W/kg; SAR(10g) = 0.0239 W/kg

Maximum value of SAR (interpolated) = 0.104 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 93(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

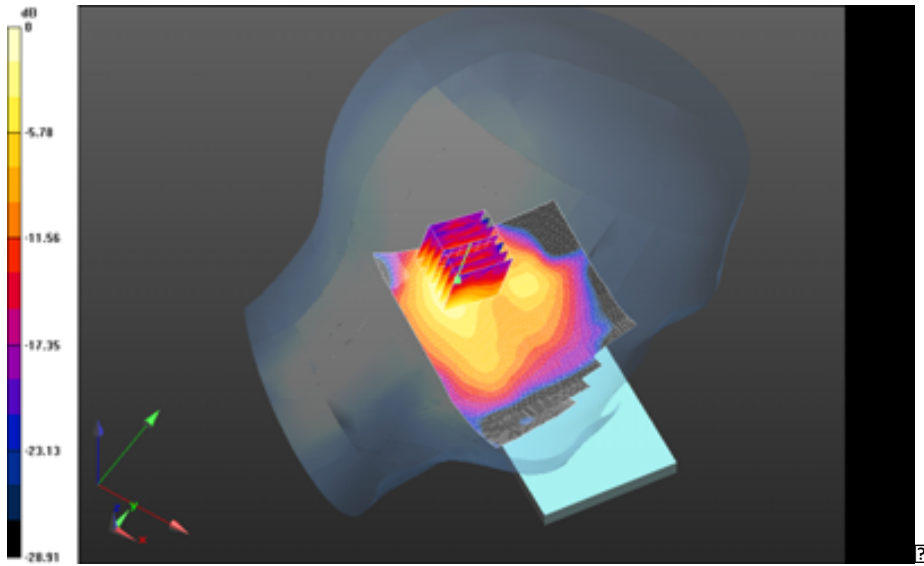

0 dB = 0.0666 W/kg = -11.77 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 94(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Left-Hand-Side HSL - 802.11g/Tilt Position -

802.11g_chan6_amb_temp_23.2C_liq_temp_21.8C/Area Scan (81x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0771 W/kg

Left-Hand-Side HSL - 802.11g/Tilt Position -


802.11g_chan6_amb_temp_23.2C_liq_temp_21.8C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 4.194 V/m; **Power Drift = 0.152 dB**

Averaged SAR: SAR(1g) = 0.0590 W/kg; SAR(10g) = 0.0269 W/kg

Maximum value of SAR (interpolated) = 0.117 W/kg

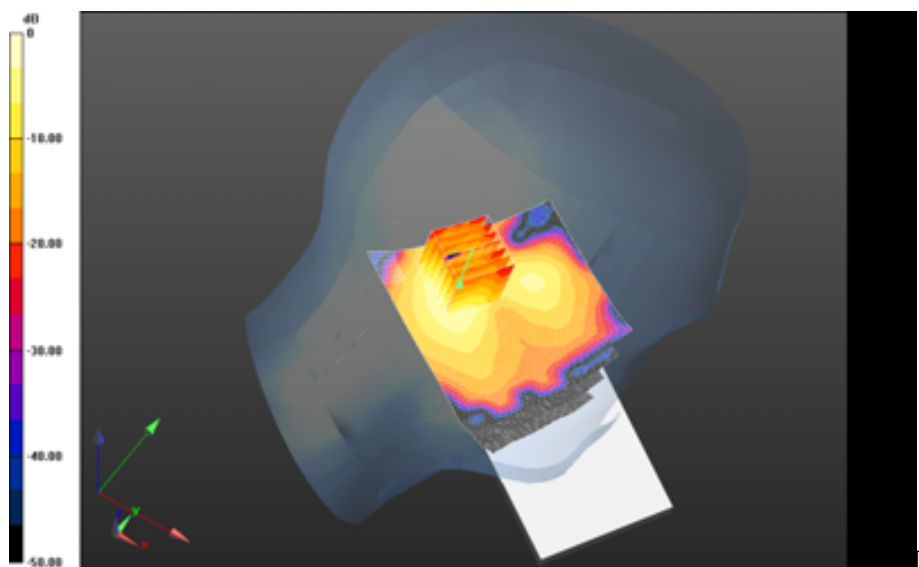

0 dB = 0.0666 W/kg = -11.77 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 95(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

802.11a, CDMA BC1_power level (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 96(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - 802.11a 5200 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5180 MHz

Medium Parameters used: $f=5180$ MHz; $\sigma = 4.577$ S/m; $\epsilon_r = 34.316$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (5.13,5.13,5.13); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11a 5200 MHz/Touch Position -

802.11a_chan36_low_band_amb_temp_24.2C_liq_temp_21.7C/Zoom Scan (41x41x61)/Cube


0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 10.098 V/m; **Power Drift = 0.014 dB**

Averaged SAR: SAR(1g) = 0.221 W/kg; SAR(10g) = 0.0749 W/kg

Maximum value of SAR (interpolated) = 0.864 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 97(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

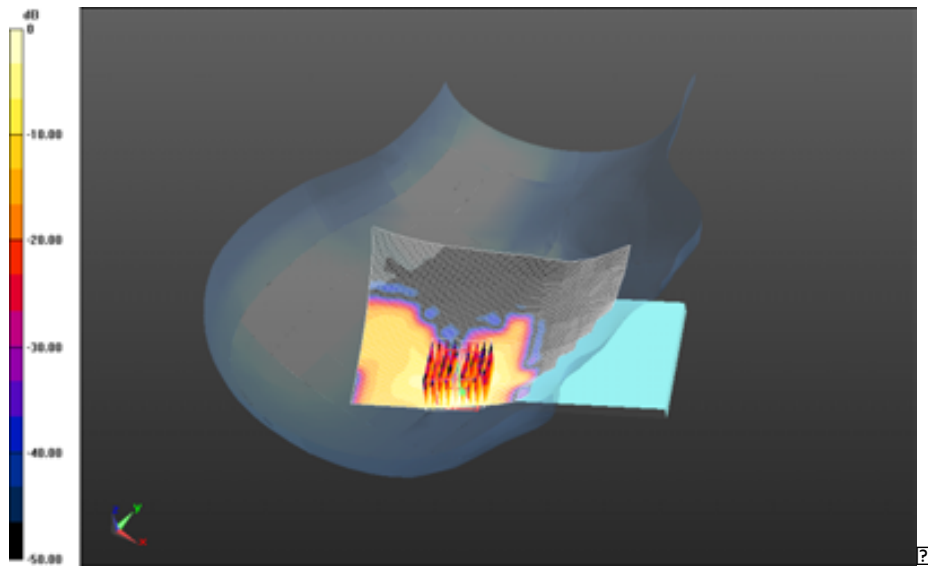


0 dB = 0.435 W/kg = -3.62 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 98(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11a 5200 MHz/Touch Position -
802.11a_chan52_low_band_amb_temp_23.0C_liq_temp_21.7C/Zoom Scan (36x36x61)/Cube
0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 10.443 V/m; Power Drift = 0.164 dB

Averaged SAR: SAR(1g) = 0.272 W/kg; SAR(10g) = 0.0912 W/kg
Maximum value of SAR (interpolated) = 1.12 W/kg

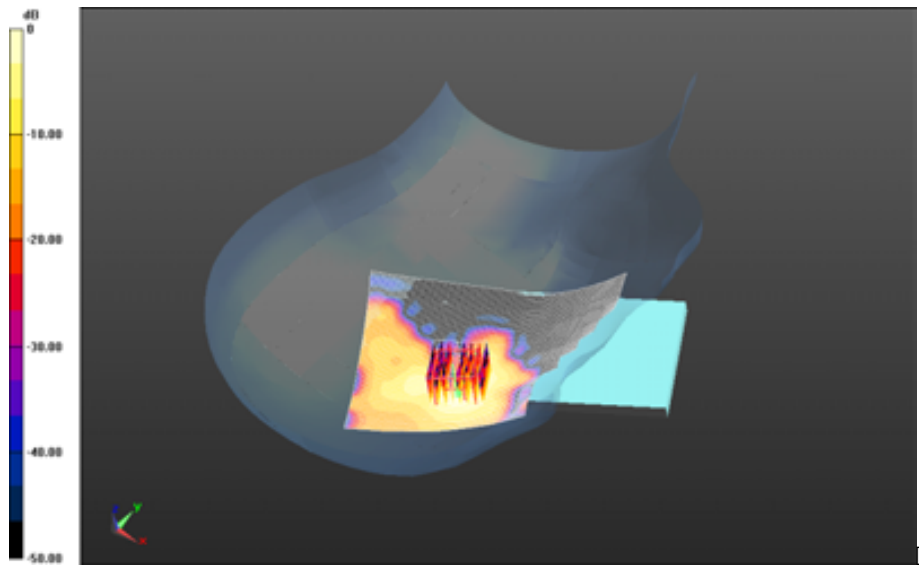

0 dB = 0.435 W/kg = -3.62 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 99(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - 802.11a 5500 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 4.970$ S/m; $\epsilon_r = 34.144$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.79,4.79,4.79); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)


Right-Hand-Side HSL - 802.11a 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_23.4C_liq_temp_21.7C/Zoom Scan (41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 10.919 V/m; **Power Drift = 0.109 dB**

Averaged SAR: SAR(1g) = 0.334 W/kg; SAR(10g) = 0.106 W/kg

Maximum value of SAR (interpolated) = 1.42 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 100(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

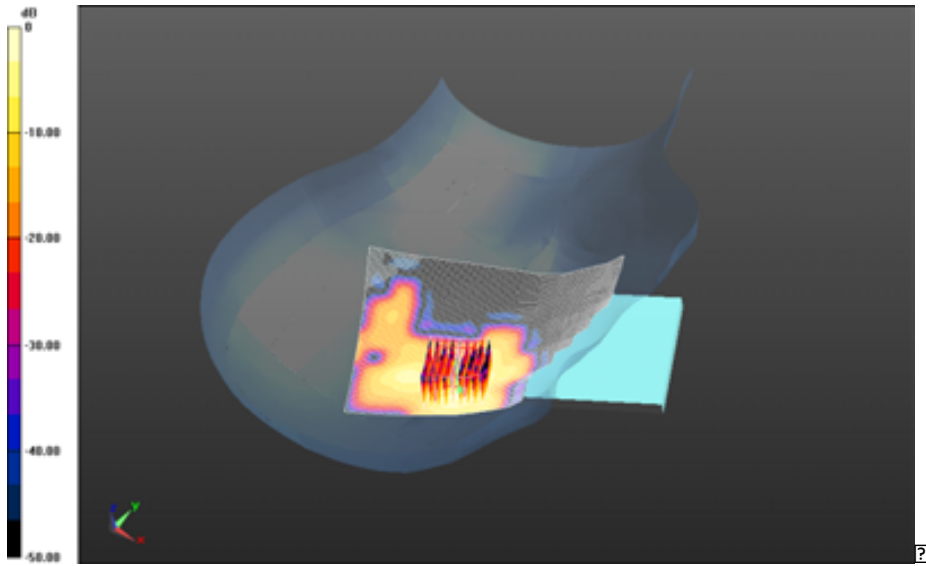


0 dB = 0.680 W/kg = -1.67 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 101(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11a 5500 MHz/Touch Position -
802.11n_chan104_Upper_bandI_amb_temp_23.4C_liq_temp_22.2C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 10.038 V/m; **Power Drift = -0.152 dB**

Averaged SAR: SAR(1g) = 0.235 W/kg; SAR(10g) = 0.0786 W/kg
Maximum value of SAR (interpolated) = 1.02 W/kg

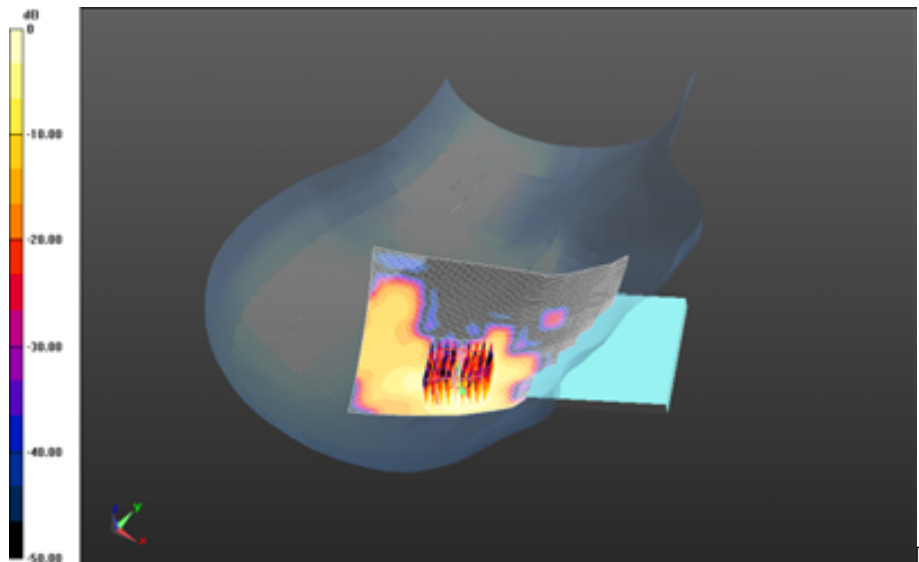

0 dB = 0.680 W/kg = -1.67 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 102(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - 802.11a 5800 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5745 MHz

Medium Parameters used: $f=5745$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 34.088$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.61,4.61,4.61); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11a 5800 MHz/Touch Position -


802.11a_chan149_Upper_bandII_amb_temp_23.1C_liq_temp_22.1C/Zoom Scan (36x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 9.066 V/m; **Power Drift = 0.084 dB**

Averaged SAR: SAR(1g) = 0.195 W/kg; SAR(10g) = 0.0643 W/kg

Maximum value of SAR (interpolated) = 0.778 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 103(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

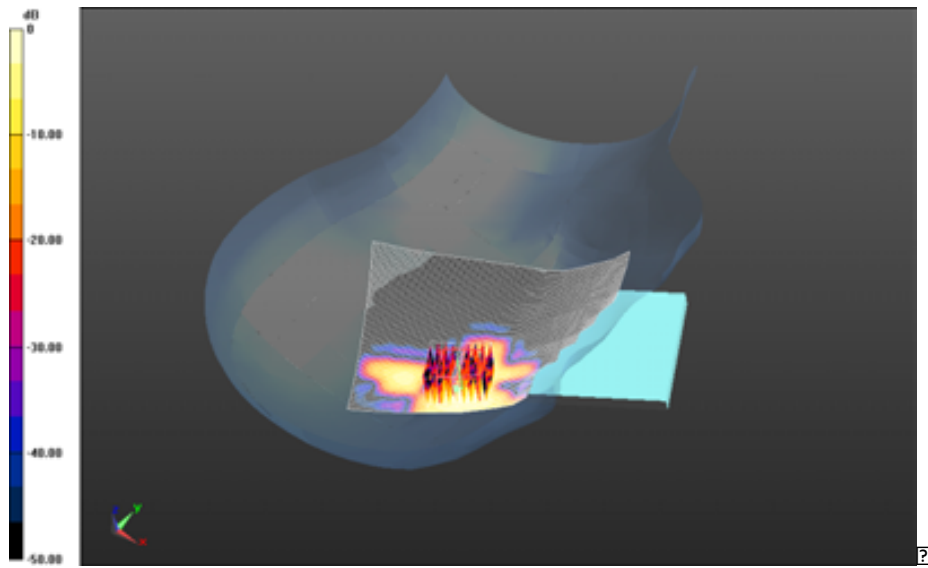

0 dB = 0.393 W/kg = -4.06 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 104(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Left-Hand-Side HSL - 802.11a 5500 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 4.970$ S/m; $\epsilon_r = 34.144$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.79,4.79,4.79); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)


Left-Hand-Side HSL - 802.11a 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_22.9C_liq_temp_22.2C/Zoom Scan (46x56x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 5.793 V/m; **Power Drift = -0.046 dB**

Averaged SAR: SAR(1g) = 0.0808 W/kg; SAR(10g) = 0.0328 W/kg

Maximum value of SAR (interpolated) = 0.284 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 105(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

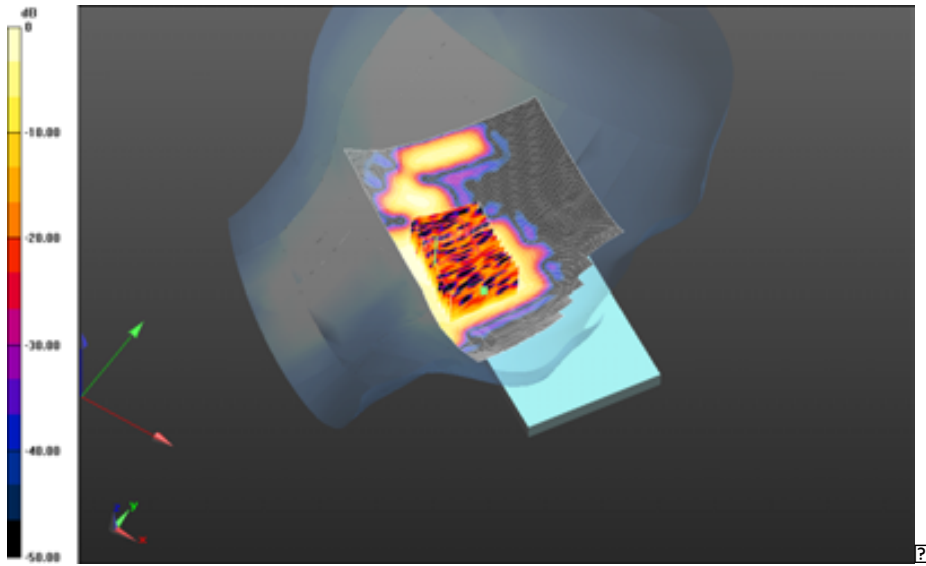

0 dB = 0.154 W/kg = -8.12 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 106(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

802.11a, SvLTE_CDMA BC1_25_power level (RGB141LW)

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 107(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - 802.11a 5200 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5180 MHz

Medium Parameters used: $f=5180$ MHz; $\sigma = 4.577$ S/m; $\epsilon_r = 34.316$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (5.13,5.13,5.13); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11a 5200 MHz/Touch Position -

802.11a_chan36_low_band_amb_temp_24.2C_liq_temp_21.7C/Zoom Scan (41x41x61)/Cube


0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 3.461 V/m; **Power Drift = 0.00634 dB**

Averaged SAR: SAR(1g) = 0.0253 W/kg; SAR(10g) = 0.00849 W/kg

Maximum value of SAR (interpolated) = 0.139 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 108(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

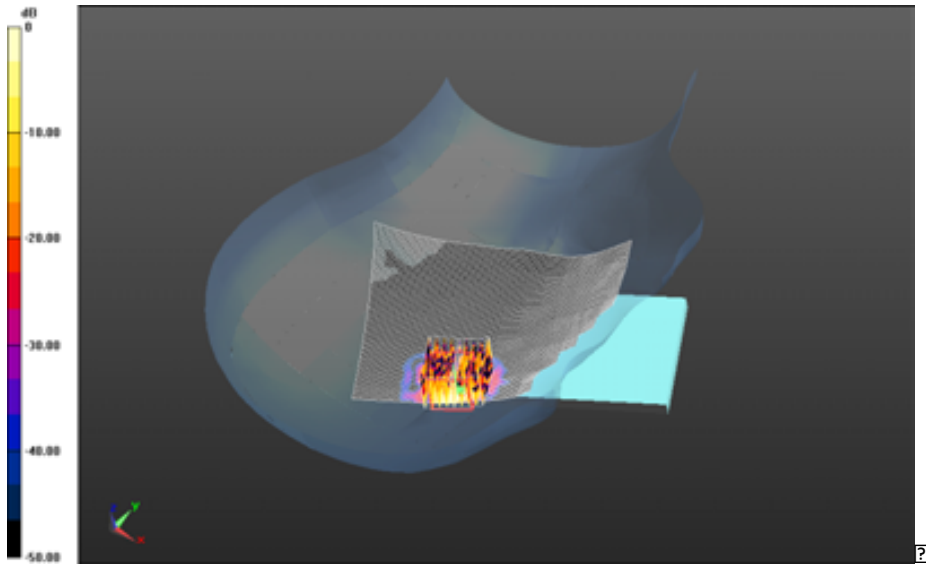


0 dB = 0.0620 W/kg = -12.08 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 109(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Right-Hand-Side HSL - 802.11a 5200 MHz/Touch Position -
802.11a_chan52_low_band_amb_temp_23.0C_liq_temp_21.7C/Zoom Scan (46x46x61)/Cube
0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 3.855 V/m; **Power Drift = 0.181 dB**

Averaged SAR: SAR(1g) = 0.0303 W/kg; SAR(10g) = 0.0108 W/kg
Maximum value of SAR (interpolated) = 0.231 W/kg

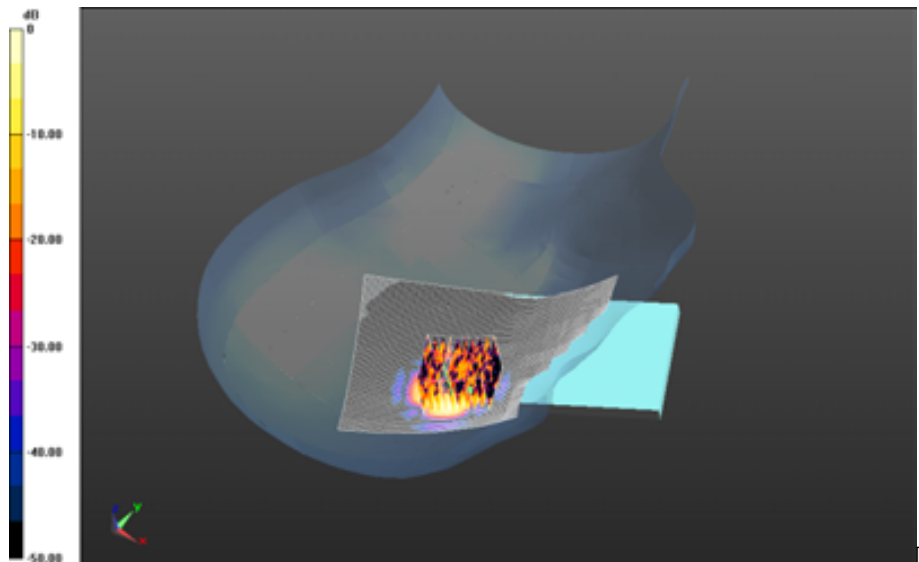

0 dB = 0.0620 W/kg = -12.08 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 110(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - 802.11a 5500 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 4.970$ S/m; $\epsilon_r = 34.144$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.79,4.79,4.79); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11a 5500 MHz/Touch Position -

802.11a_chan104_Upper_band1_amb_temp_23.1C_liq_temp_22.2C/Zoom Scan


(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 5.238 V/m; **Power Drift = -0.059 dB**

Averaged SAR: SAR(1g) = 0.0546 W/kg; SAR(10g) = 0.0177 W/kg

Maximum value of SAR (interpolated) = 0.240 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 111(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

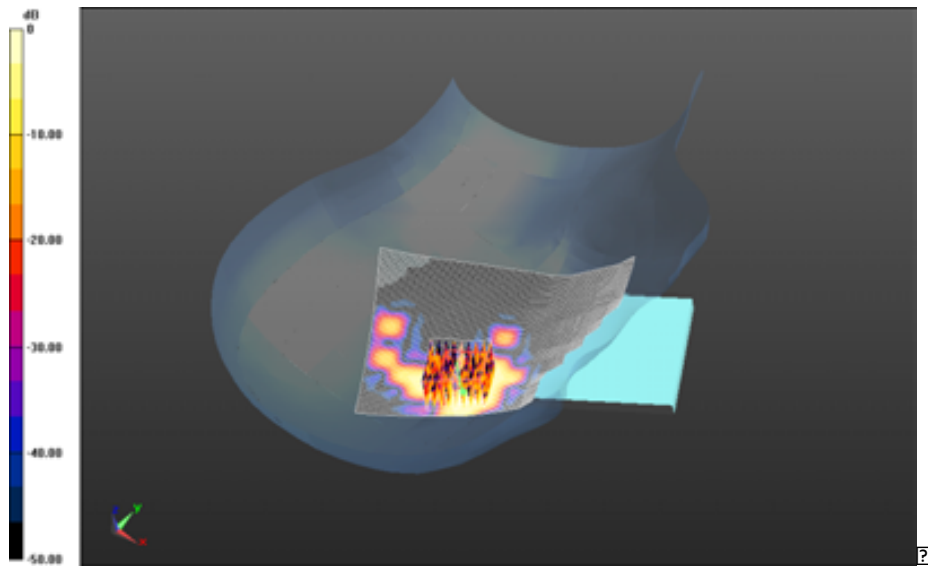

0 dB = 0.120 W/kg = -9.21 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 112(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/9/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Right-Hand-Side HSL - 802.11a 5800 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5745 MHz

Medium Parameters used: $f=5745$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 34.088$; $\rho = 1.000$ g/cm³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.61,4.61,4.61); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Right-Hand-Side HSL - 802.11a 5800 MHz/Touch Position -

802.11a_chan149_Upper_bandII_amb_temp_23.1C_liq_temp_22.1C/Zoom Scan


(36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 4.947 V/m; **Power Drift = -0.0076 dB**

Averaged SAR: SAR(1g) = 0.0491 W/kg; SAR(10g) = 0.0151 W/kg

Maximum value of SAR (interpolated) = 0.221 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 113(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

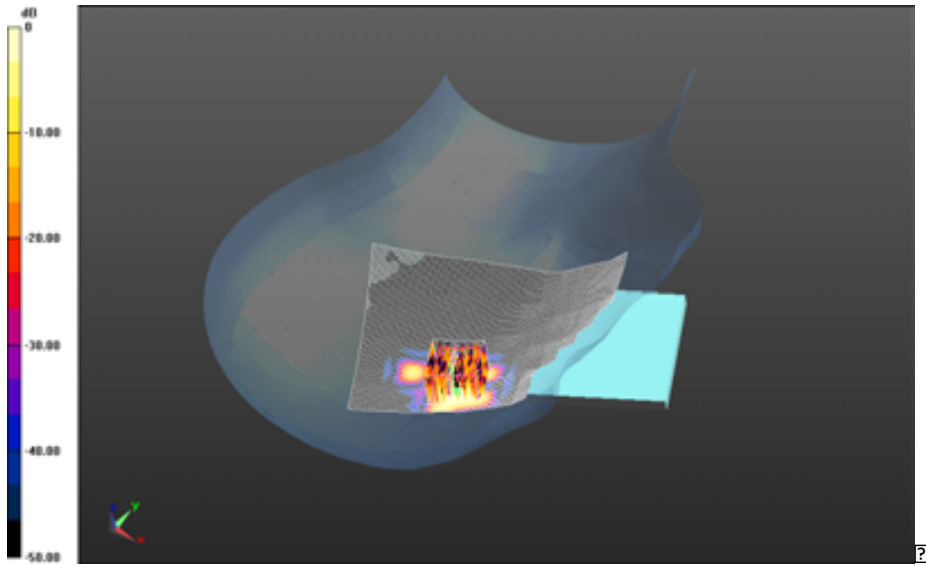

0 dB = 0.109 W/kg = -9.63 dBW/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 114(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

Date: 8/8/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Left-Hand-Side HSL - 802.11a 5500 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands; Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 4.970$ S/m; $\epsilon_r = 34.144$; $\rho = 1.000$ g/cm³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.79,4.79,4.79); Calibrated: 1/15/2013;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)


Left-Hand-Side HSL - 802.11a 5500 MHz/Touch Position -

802.11a_chan104_Upper_bandI_amb_temp_22.9C_liq_temp_22.2C/Zoom Scan (46x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 3.439 V/m; **Power Drift = 0.020 dB**

Averaged SAR: SAR(1g) = 0.0167 W/kg; SAR(10g) = 0.00692 W/kg

Maximum value of SAR (interpolated) = 0.191 W/kg

	Document Appendix B for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 2			Page 115(115)
Author Data Andrew Becker	Dates of Test June 11 – August 16,2013	Test Report No RTS-6046-1308-39 Rev 2	FCC ID: L6ARGB140LW	IC

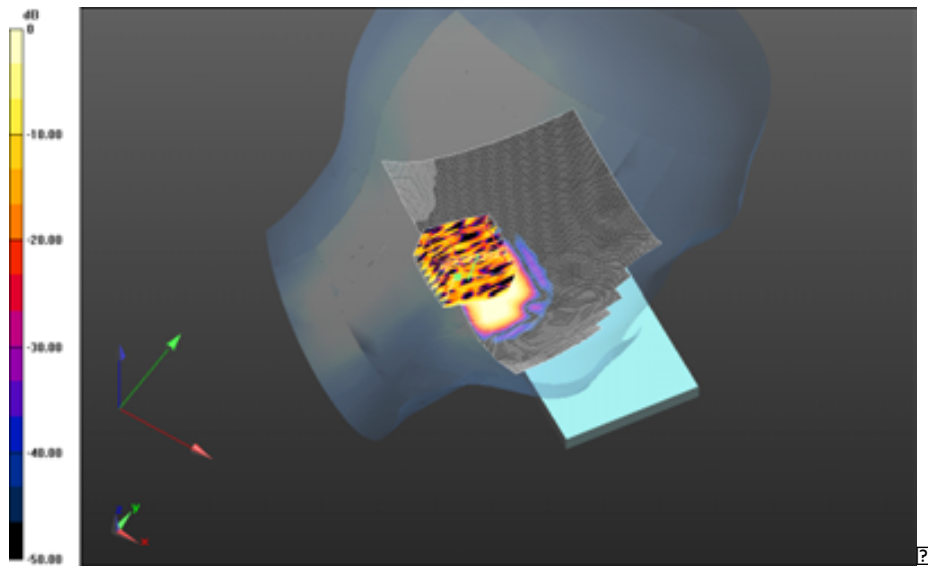

0 dB = 0.0428 W/kg = -13.69 dBW/kg