

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 1(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

APPENDIX C2: SAR DISTRIBUTION PLOTS FOR HOT SPOT CONFIGURATION

Revision History		
Rev. Number	Date	Changes
Initial	Aug 21, 2013	-----
Rev 2	Sep 16, 2013	Separated data and report for model: RGB141LW and added more information to address FCC requirements.
Rev 3	Sep 18, 2013	Reused SAR data from model RFX101W was added to this report to address FCC OET requirement.
Rev 4	Dec 15, 2014	Added SAR plots for 802.11a Hotspot mode • Page 107 – 114

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 2(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

GPRS 850

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			3(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/25/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 333E285E

Configuration: Mobile Hot Spot MSL - GPRS 850

Communication System: GSM 850; Communication System Band: GSM 850; Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.829$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -


GSM850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 22.695 V/m; **Power Drift = 0.075 dB**

Fast SAR: SAR(1g) = 0.641 W/kg; SAR(10g) = 0.442 W/kg

Maximum value of SAR (interpolated) = 0.717 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 4(114)
	Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW
IC				

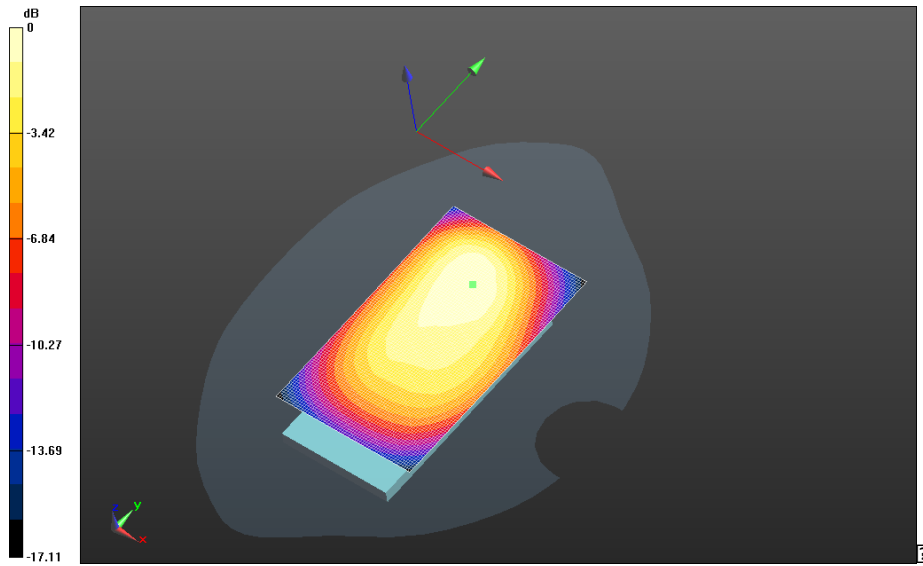


0 dB = 0.717 W/kg = -1.44 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 5(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Back -
GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 24.890 V/m; **Power Drift = 0.044 dB**

Fast SAR: SAR(1g) = 0.778 W/kg; SAR(10g) = 0.532 W/kg
Maximum value of SAR (interpolated) = 0.887 W/kg

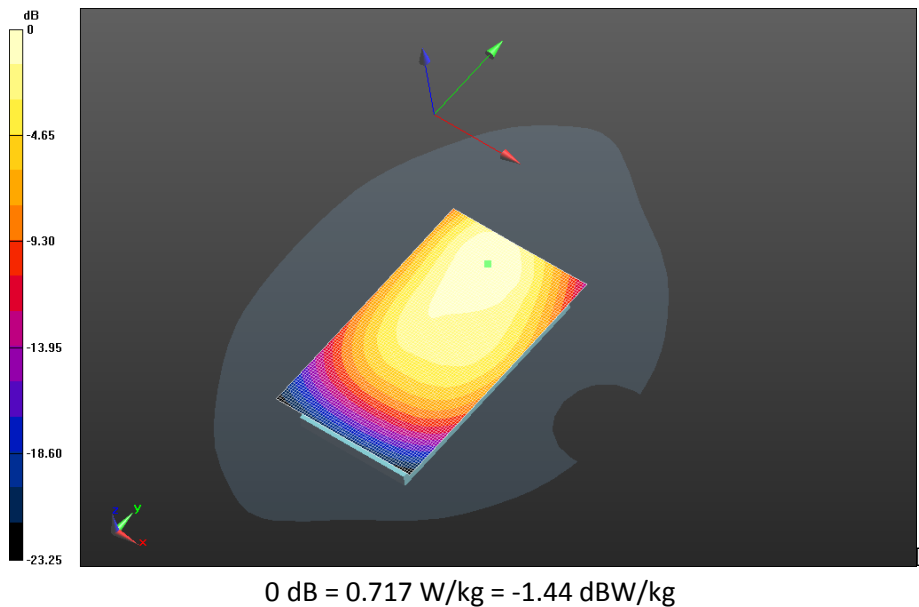

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			6(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-

Slots_chan128_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 26.570 V/m; **Power Drift = -0.026 dB**

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-


Slots_chan128_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (26x26x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 26.570 V/m; **Power Drift = -0.026 dB**

Averaged SAR: SAR(1g) = 0.783 W/kg; SAR(10g) = 0.558 W/kg

Maximum value of SAR (interpolated) = 1.07 W/kg

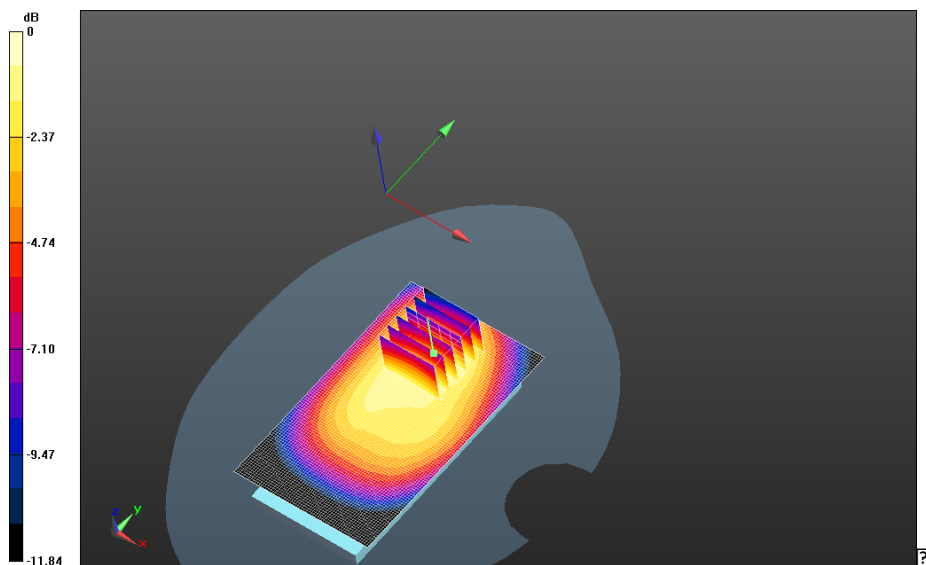

0 dB = 0.887 W/kg = -0.52 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			7(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-

Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 28.173 V/m; **Power Drift = -0.062 dB**

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-


Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 28.173 V/m; **Power Drift = -0.062 dB**

Averaged SAR: SAR(1g) = 0.971 W/kg; SAR(10g) = 0.687 W/kg

Maximum value of SAR (interpolated) = 1.33 W/kg

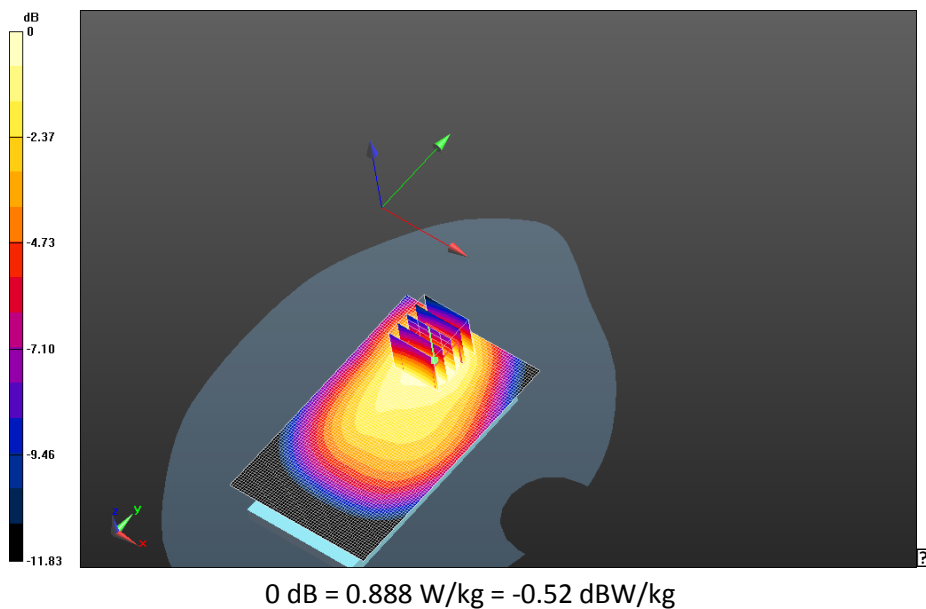


	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			8(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-Slots_chan190_amb_temp_22.8C_liq_temp_21.1C_2nd/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 27.761 V/m; **Power Drift = -0.038 dB**

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-Slots_chan190_amb_temp_22.8C_liq_temp_21.1C_2nd/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 27.761 V/m; **Power Drift = -0.038 dB**

Averaged SAR: SAR(1g) = 0.958 W/kg; SAR(10g) = 0.677 W/kg
Maximum value of SAR (interpolated) = 1.32 W/kg

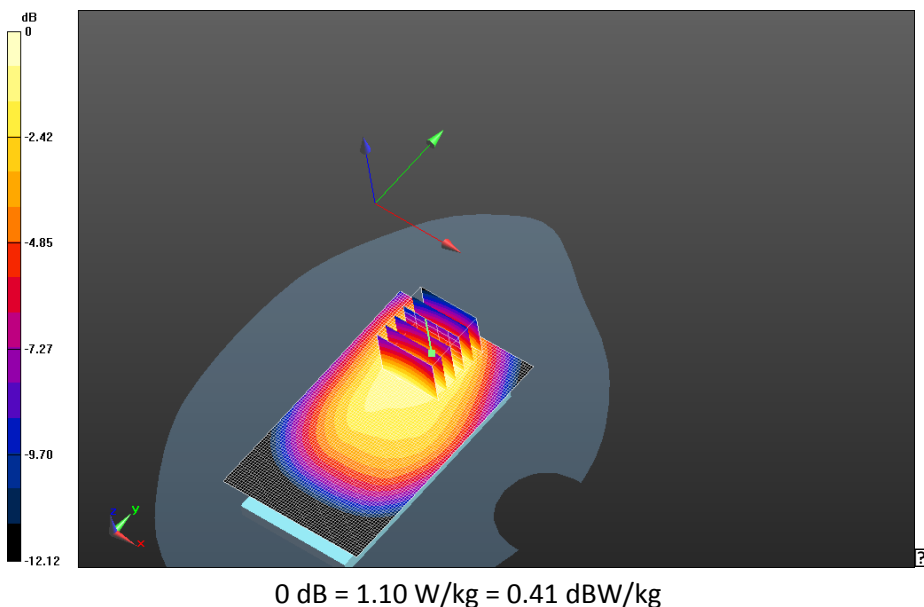

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 9(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-


Slots_chan251_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 26.048 V/m; **Power Drift = 0.013 dB**

Fast SAR: SAR(1g) = 0.918 W/kg; SAR(10g) = 0.630 W/kg

Maximum value of SAR (interpolated) = 1.04 W/kg

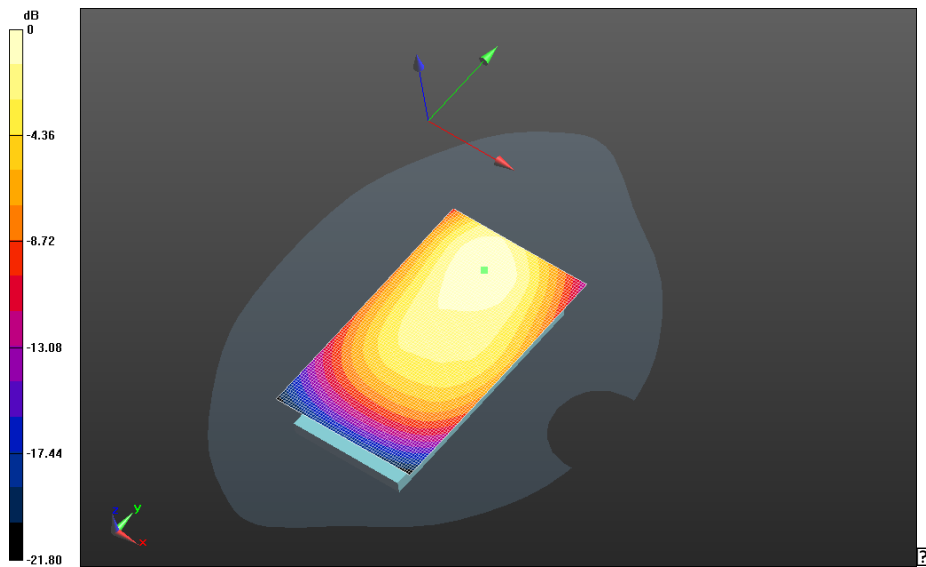

0 dB = 1.08 W/kg = 0.33 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			10(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_4-


Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 25.701 V/m; **Power Drift = -0.043 dB**

Fast SAR: SAR(1g) = 0.810 W/kg; SAR(10g) = 0.559 W/kg

Maximum value of SAR (interpolated) = 0.917 W/kg

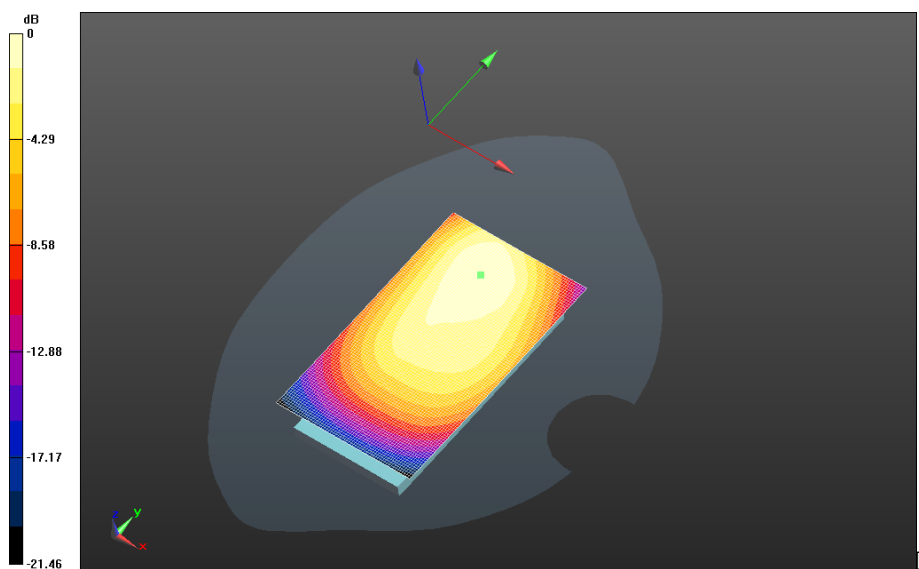

0 dB = 1.04 W/kg = 0.17 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			11(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Front -

GPRS850_chan190_amb_temp_23.6C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 27.055 V/m; **Power Drift = -0.017 dB**

Mobile Hot Spot MSL - GPRS 850/10mm Device Front -


GPRS850_chan190_amb_temp_23.6C_liq_temp_22.5C/Zoom Scan (26x26x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 27.055 V/m; **Power Drift = -0.017 dB**

Averaged SAR: SAR(1g) = 0.749 W/kg; SAR(10g) = 0.548 W/kg

Maximum value of SAR (interpolated) = 0.998 W/kg

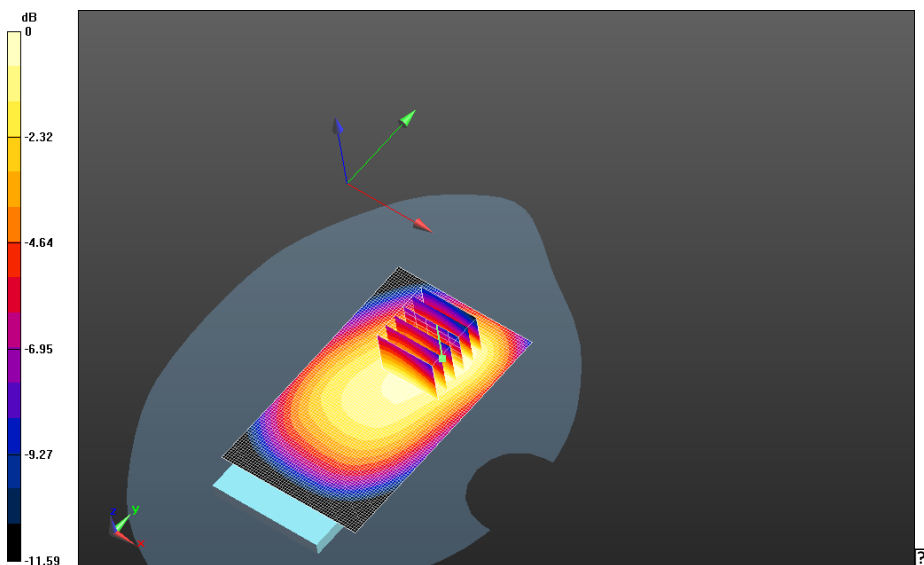

0 dB = 0.917 W/kg = -0.38 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			12(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Left -


GPRS850_chan190_amb_temp_22.9C_liq_temp_21.9C/Area Scan (31x91x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 25.661 V/m; **Power Drift = 0.079 dB**

Fast SAR: SAR(1g) = 0.516 W/kg; SAR(10g) = 0.347 W/kg

Maximum value of SAR (interpolated) = 0.586 W/kg

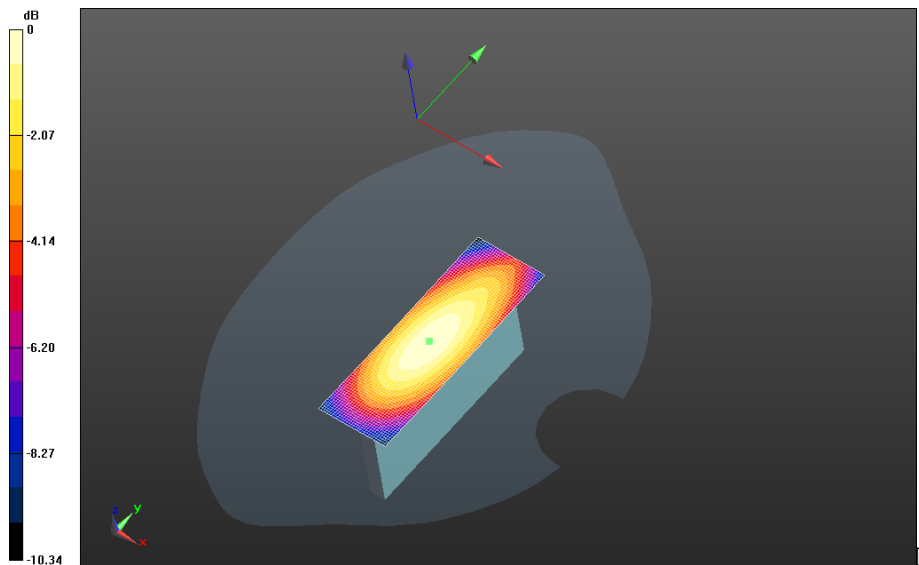


0 dB = 0.836 W/kg = -0.78 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 13(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Right -
GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (31x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 22.276 V/m; **Power Drift = 0.065 dB**

Fast SAR: SAR(1g) = 0.394 W/kg; SAR(10g) = 0.265 W/kg
Maximum value of SAR (interpolated) = 0.452 W/kg

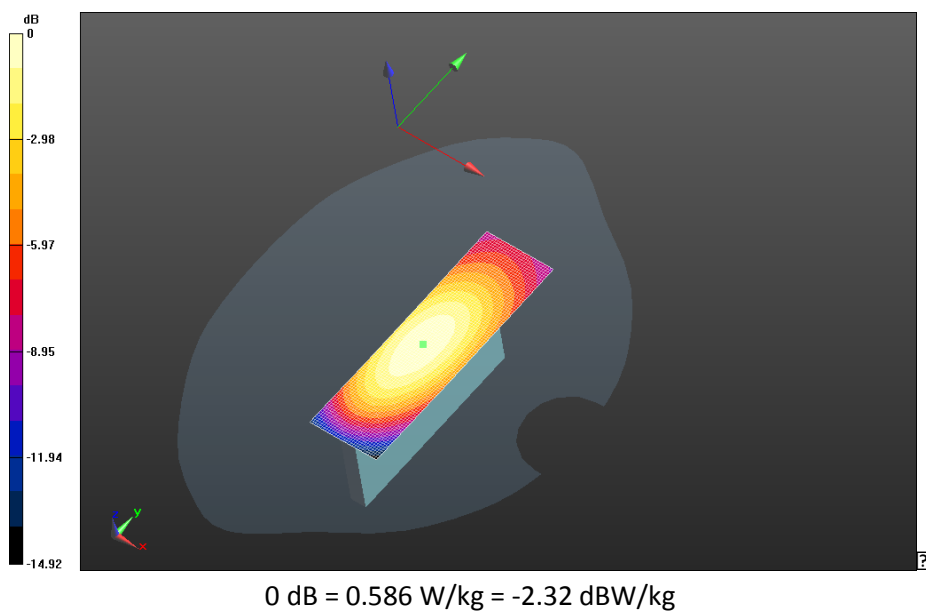

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			14(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 850/10mm Device Bottom -


GPRS850_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (31x71x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 17.832 V/m; **Power Drift = -0.00535 dB**

Fast SAR: SAR(1g) = 0.268 W/kg; SAR(10g) = 0.175 W/kg

Maximum value of SAR (interpolated) = 0.315 W/kg

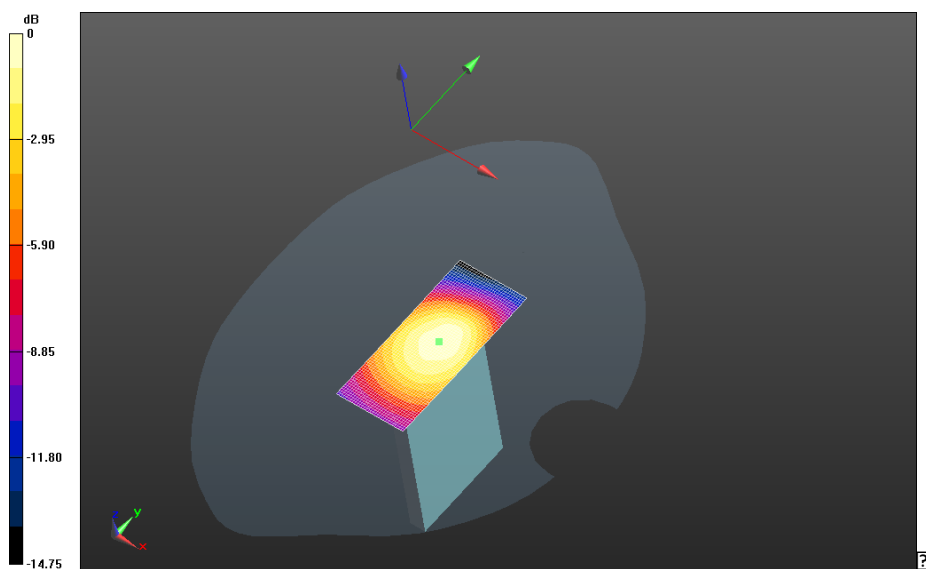

0 dB = 0.452 W/kg = -3.45 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 15(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7671

Configuration: Mobile Hot Spot MSL - GPRS 850

Communication System: GPRS 850 (3 slots); Communication System Band: GPRS 850 (3 slots);

Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.964$ S/m; $\epsilon_r = 53.124$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-

Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.825 W/kg

Mobile Hot Spot MSL - GPRS 850/10mm Device Back - GPRS850_3-

Slots_chan190_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 22.307 V/m; **Power Drift = -0.036 dB**

Averaged SAR: SAR(1g) = 0.725 W/kg; SAR(10g) = 0.502 W/kg

Maximum value of SAR (interpolated) = 1.02 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 16(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

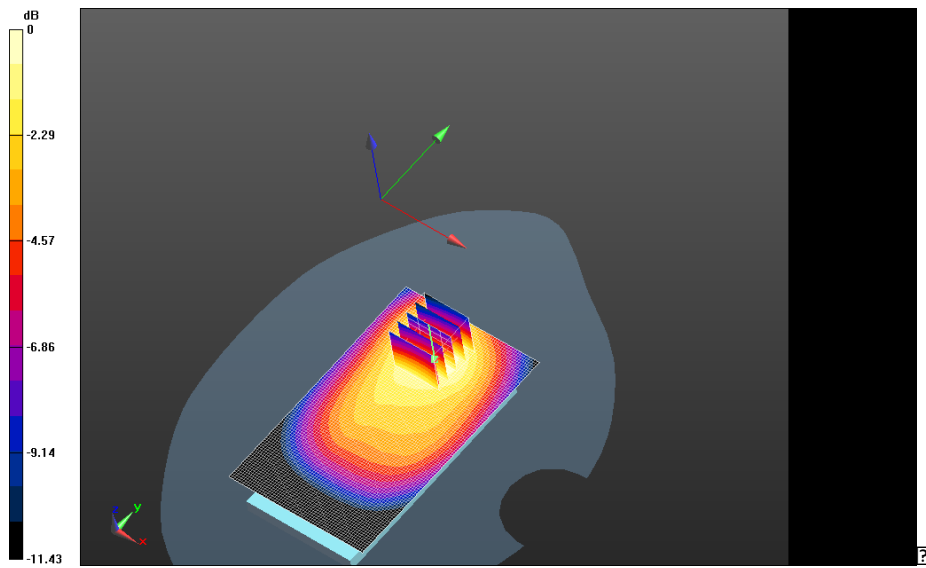

0 dB = 0.827 W/kg = -0.82 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 17(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

UMTS Band V

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			18(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/25/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 333E285E

Configuration: Mobile Hot Spot MSL - UMTS band V

Communication System: WCDMA FDD V; Communication System Band: UMTS band V;

Frequency: 836.4 MHz

Medium Parameters used: $f=836.4$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 52.833$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS band V/10mm Device Back - UMTS_band

V_chan4182_amb_temp_23.5C_liq_temp_21.8C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 20.445 V/m; **Power Drift = -0.107 dB**

Mobile Hot Spot MSL - UMTS band V/10mm Device Back - UMTS_band

V_chan4182_amb_temp_23.5C_liq_temp_21.8C/Zoom Scan (26x26x36)/Cube 0: Interpolated


grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 20.445 V/m; **Power Drift = -0.107 dB**

Averaged SAR: SAR(1g) = 0.497 W/kg; SAR(10g) = 0.352 W/kg

Maximum value of SAR (interpolated) = 0.679 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 19(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

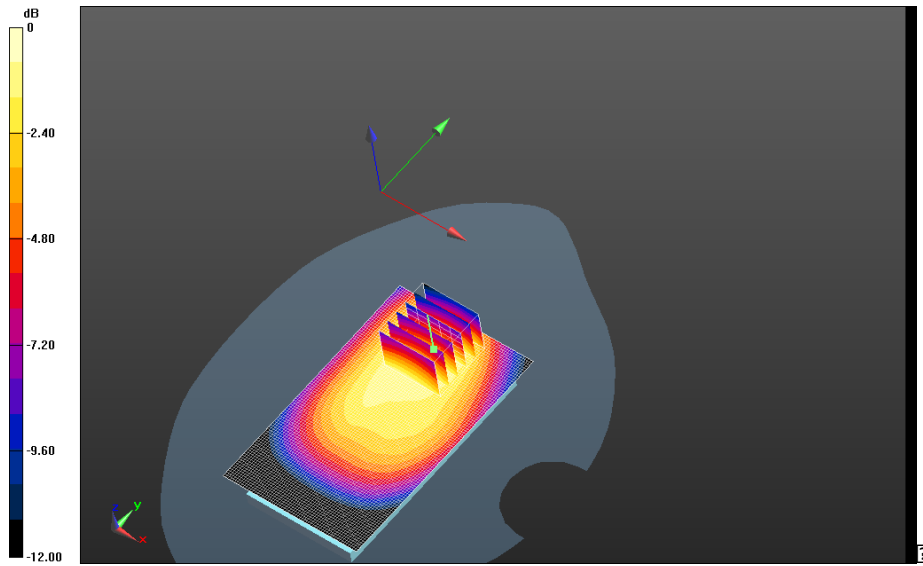


0 dB = 0.563 W/kg = -2.49 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			20(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

**Mobile Hot Spot MSL - UMTS band V/10mm Device Front - UMTS_band
V_chan4182_amb_temp_23.4C_liq_temp_21.6C/Area Scan (61x101x1):** Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 21.034 V/m; **Power Drift = -0.011 dB**


Fast SAR: SAR(1g) = 0.442 W/kg; SAR(10g) = 0.307 W/kg
Maximum value of SAR (interpolated) = 0.499 W/kg

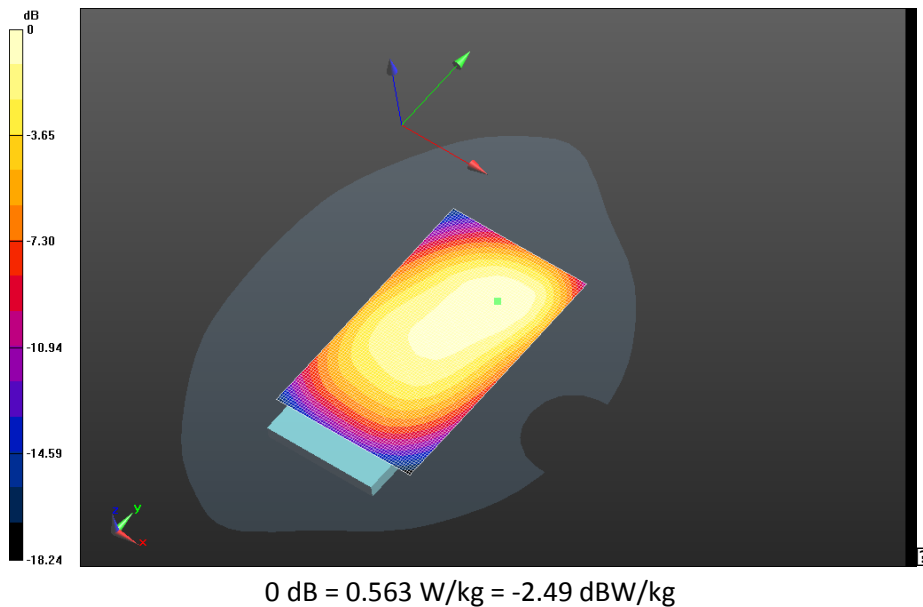

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 21(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS band V/10mm Device Left - UMTS_band
V_chan4182_amb_temp_23.2C_liq_temp_21.7C/Area Scan (31x91x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 19.958 V/m; **Power Drift = -0.082 dB**

Fast SAR: SAR(1g) = 0.318 W/kg; SAR(10g) = 0.216 W/kg
Maximum value of SAR (interpolated) = 0.362 W/kg

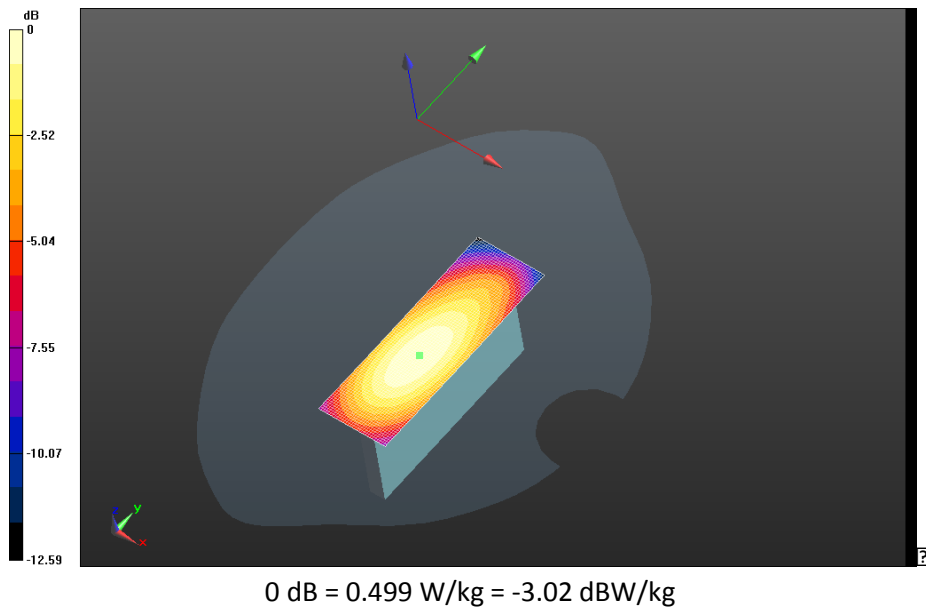

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			22(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS band V/10mm Device Right - UMTS_band


V_chan4182_amb_temp_23.1C_liq_temp_21.5C/Area Scan (31x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 18.328 V/m; **Power Drift = -0.067 dB**

Fast SAR: SAR(1g) = 0.259 W/kg; SAR(10g) = 0.174 W/kg

Maximum value of SAR (interpolated) = 0.296 W/kg

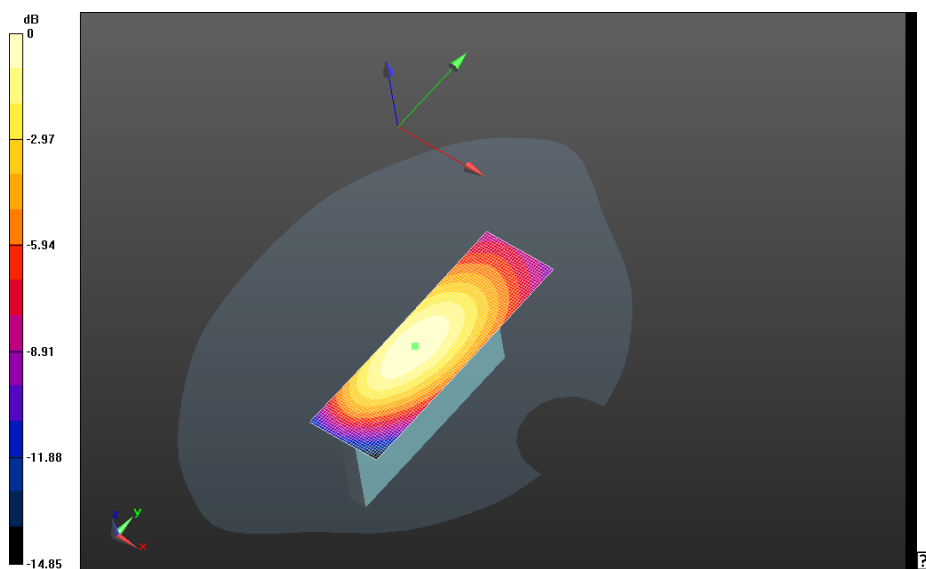


0 dB = 0.362 W/kg = -4.41 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			23(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS band V/10mm Device Bottom - UMTS_band
V_chan4182_amb_temp_23.C_liq_temp_21.4C/Area Scan (31x71x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 14.345 V/m; **Power Drift = 0.00741 dB**

Fast SAR: SAR(1g) = 0.160 W/kg; SAR(10g) = 0.106 W/kg
Maximum value of SAR (interpolated) = 0.191 W/kg

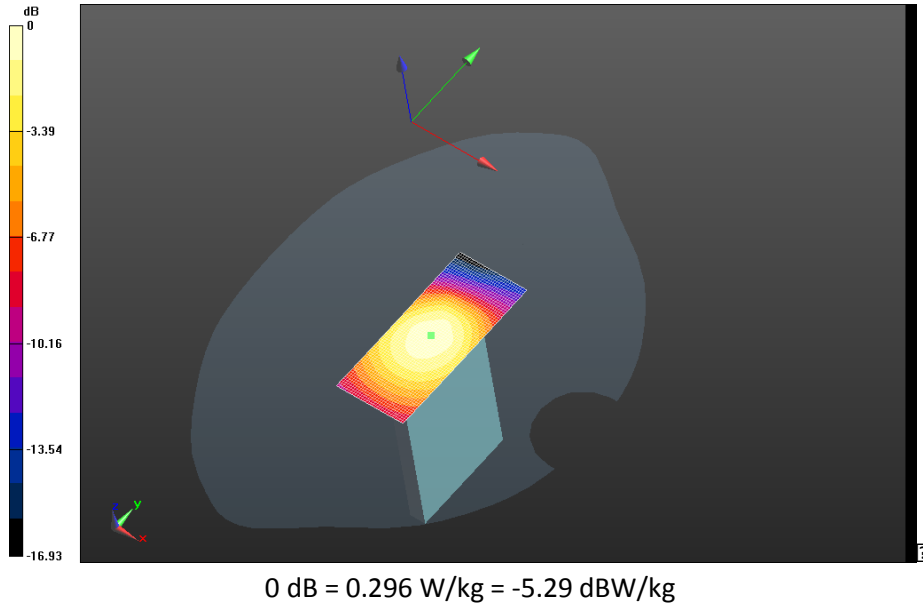

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			24(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7671

Configuration: Mobile Hot Spot MSL - UMTS band V

Communication System: WCDMA FDD V; Communication System Band: UMTS band V;

Frequency: 836.4 MHz

Medium Parameters used: $f=836.4$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 53.128$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS band V/10mm Device Back - UMTS_band

V_chan4182_amb_temp_23.5C_liq_temp_21.8C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.627 W/kg

Mobile Hot Spot MSL - UMTS band V/10mm Device Back - UMTS_band

V_chan4182_amb_temp_23.5C_liq_temp_21.8C/Zoom Scan (26x26x36)/Cube 0: Interpolated


grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 19.362 V/m; **Power Drift = 0.00745 dB**

Averaged SAR: SAR(1g) = 0.556 W/kg; SAR(10g) = 0.383 W/kg

Maximum value of SAR (interpolated) = 0.788 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 25(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

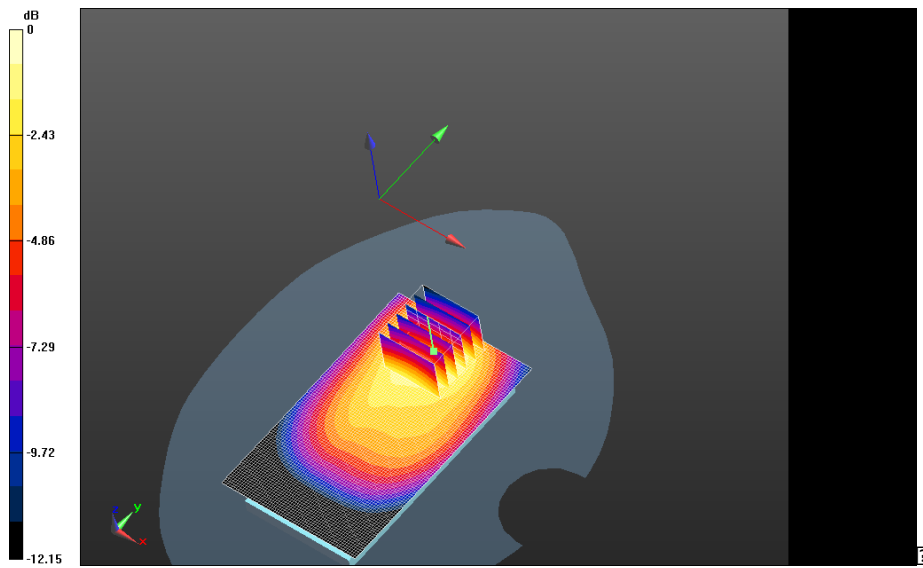

0 dB = 0.636 W/kg = -1.97 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 26(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

CDMA 800

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			27(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Mobile Hot Spot MSL - CDMA 800 BC10

Communication System: CDMA 800; Communication System Band: CDMA 2000 BC 10;

Frequency: 817.9 MHz

Medium Parameters used: $f=817.9$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 53.307$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800

BC10_chan476_amb_temp_23.2C_liq_temp_22.3C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 23.098 V/m; **Power Drift = -0.164 dB**

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800

BC10_chan476_amb_temp_23.2C_liq_temp_22.3C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 23.098 V/m; **Power Drift = -0.164 dB**

Averaged SAR: SAR(1g) = 0.939 W/kg; SAR(10g) = 0.650 W/kg

Maximum value of SAR (interpolated) = 1.30 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 28(114)
	Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW
IC				

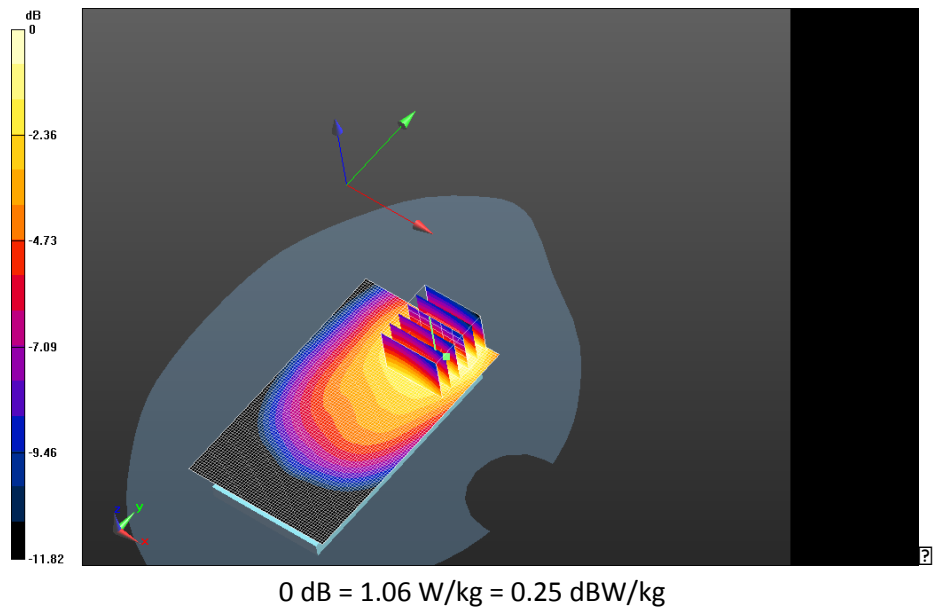

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 29(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800


BC10_chan580_amb_temp_23.2C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 22.855 V/m; **Power Drift = -0.191 dB**

Fast SAR: SAR(1g) = 0.907 W/kg; SAR(10g) = 0.615 W/kg

Maximum value of SAR (interpolated) = 1.04 W/kg

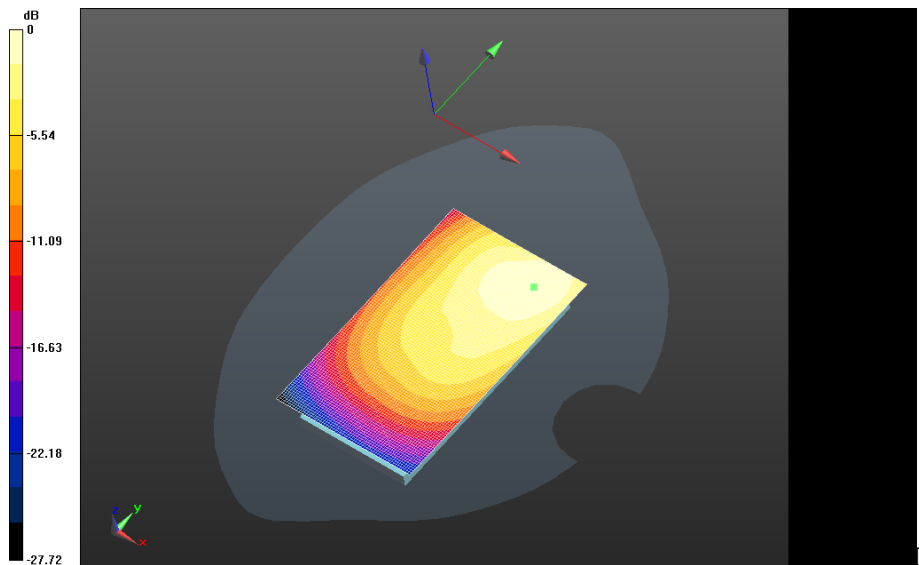

0 dB = 1.06 W/kg = 0.25 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 30(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800

BC10_chan684_amb_temp_23.0C_liq_temp_22.6/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 23.287 V/m; **Power Drift = 0.031 dB**


Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800

BC10_chan684_amb_temp_23.0C_liq_temp_22.6/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 23.287 V/m; **Power Drift = 0.031 dB**

Averaged SAR: SAR(1g) = 0.953 W/kg; SAR(10g) = 0.662 W/kg

Maximum value of SAR (interpolated) = 1.32 W/kg

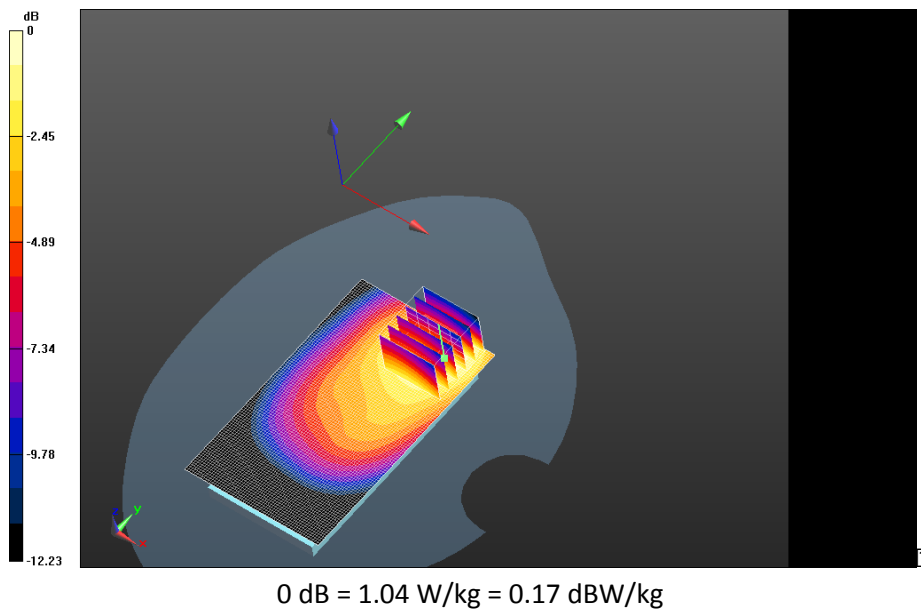

		Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 31(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC	

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800

BC10_chan684_2nd_scan_amb_temp_22.7C_liq_temp_22.3/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 23.309 V/m; **Power Drift = 0.032 dB**

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Back - CDMA 800


BC10_chan684_2nd_scan_amb_temp_22.7C_liq_temp_22.3/Zoom Scan (26x26x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 23.309 V/m; **Power Drift = 0.032 dB**

Averaged SAR: SAR(1g) = 0.952 W/kg; SAR(10g) = 0.661 W/kg

Maximum value of SAR (interpolated) = 1.32 W/kg

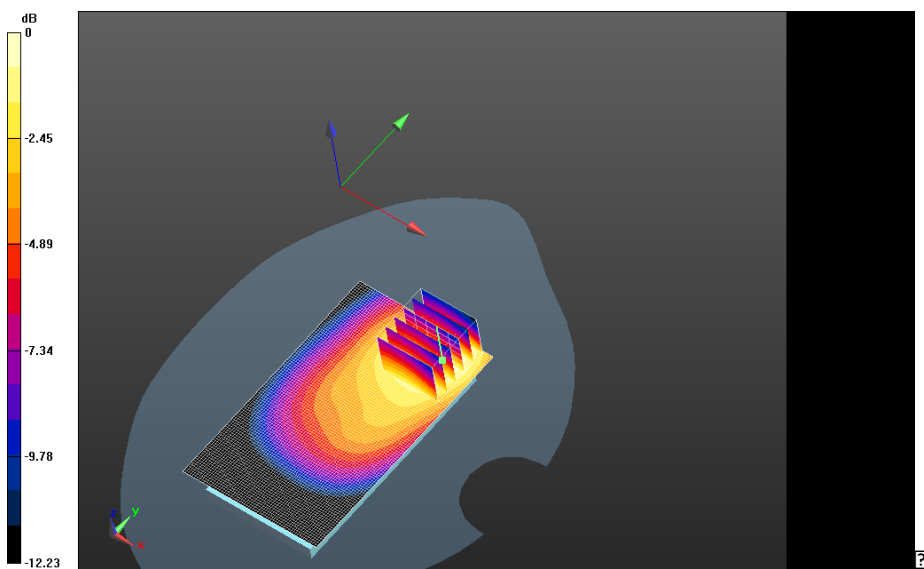

0 dB = 1.08 W/kg = 0.33 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			32(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Front - CDMA 800


BC10_chan580_amb_temp_23.0C_liq_temp_22.2C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 22.628 V/m; **Power Drift = 0.037 dB**

Fast SAR: SAR(1g) = 0.608 W/kg; SAR(10g) = 0.417 W/kg

Maximum value of SAR (interpolated) = 0.696 W/kg

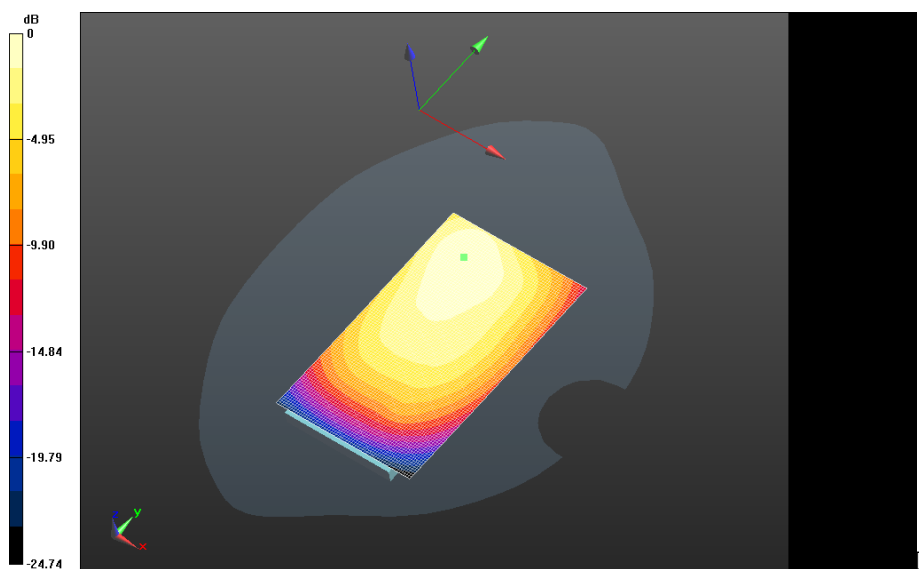

0 dB = 1.08 W/kg = 0.33 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			33(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Left - CDMA 800


BC10_chan580_amb_temp_23.0C_liq_temp_22.2C/Area Scan (31x91x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 19.385 V/m; **Power Drift = 0.029 dB**

Fast SAR: SAR(1g) = 0.293 W/kg; SAR(10g) = 0.200 W/kg

Maximum value of SAR (interpolated) = 0.333 W/kg

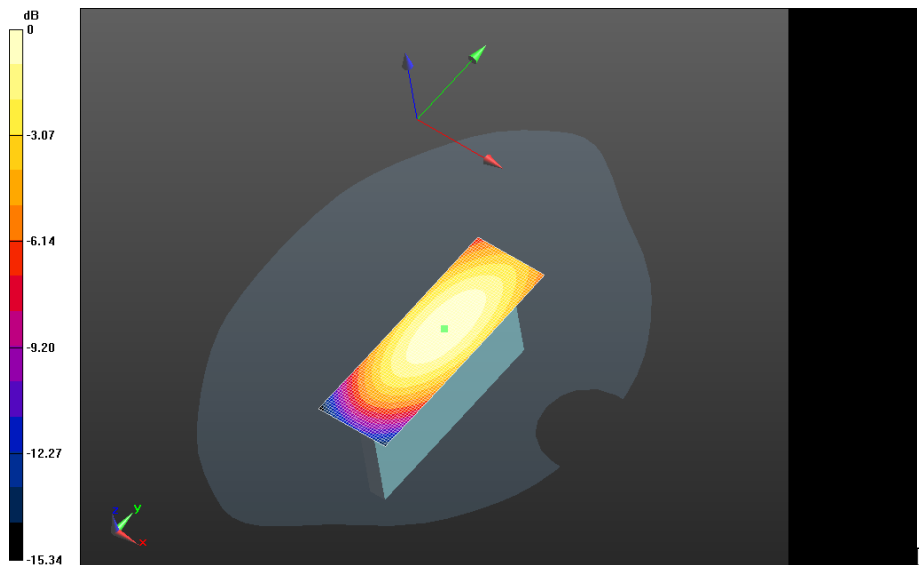

0 dB = 0.696 W/kg = -1.57 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			34(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Right - CDMA 800


BC10_chan580_amb_temp_23.0C_liq_temp_22.2C/Area Scan (31x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 22.366 V/m; **Power Drift = 0.086 dB**

Fast SAR: SAR(1g) = 0.389 W/kg; SAR(10g) = 0.264 W/kg

Maximum value of SAR (interpolated) = 0.443 W/kg

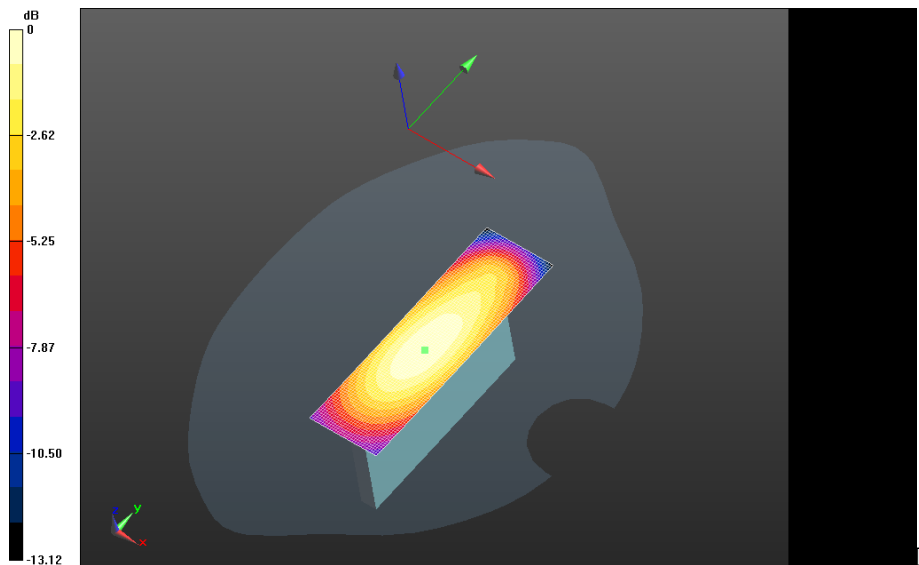

0 dB = 0.333 W/kg = -4.78 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			35(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 800 BC10/10mm Device Bottom - CDMA 800


BC10_chan580_amb_temp_23.0C_liq_temp_22.2C/Area Scan (31x71x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 22.608 V/m; **Power Drift = 0.092 dB**

Fast SAR: SAR(1g) = 0.451 W/kg; SAR(10g) = 0.301 W/kg

Maximum value of SAR (interpolated) = 0.518 W/kg

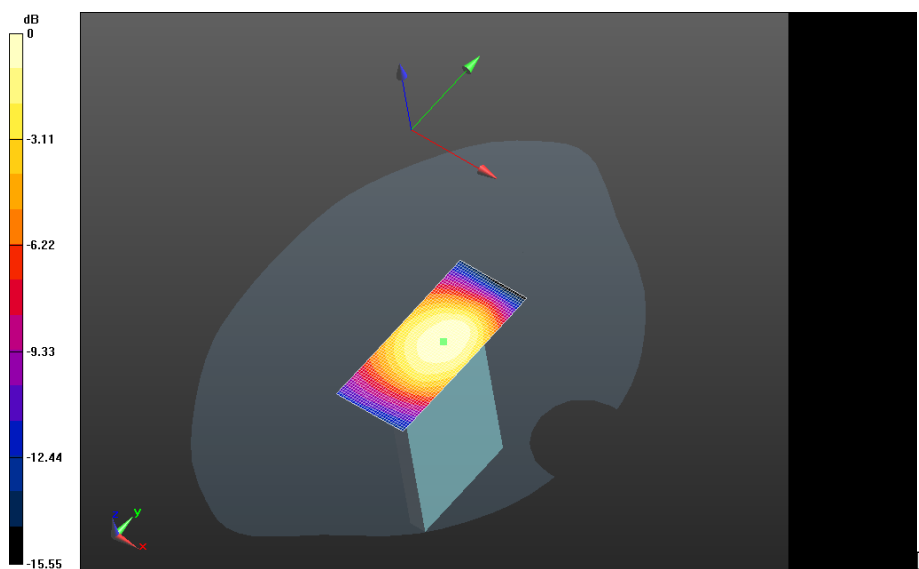

0 dB = 0.443 W/kg = -3.54 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 36(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

CDMA 850

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 37(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/27/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Mobile Hot Spot MSL - CDMA 850 BC0

Communication System: CDMA 850; Communication System Band: CDMA 2000 Cellular;

Frequency: 824.7 MHz

Medium Parameters used: $f=825$ MHz; $\sigma = 0.950$ S/m; $\epsilon_r = 53.215$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (6.12,6.12,6.12); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Back - CDMA 850

BC0_chan1013_amb_temp_23.3C_liq_temp_22.2C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 24.048 V/m; **Power Drift = 0.113 dB**

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Back - CDMA 850

BC0_chan1013_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan (26x26x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 24.048 V/m; **Power Drift = 0.113 dB**

Averaged SAR: SAR(1g) = 0.980 W/kg; SAR(10g) = 0.684 W/kg

Maximum value of SAR (interpolated) = 1.35 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 38(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

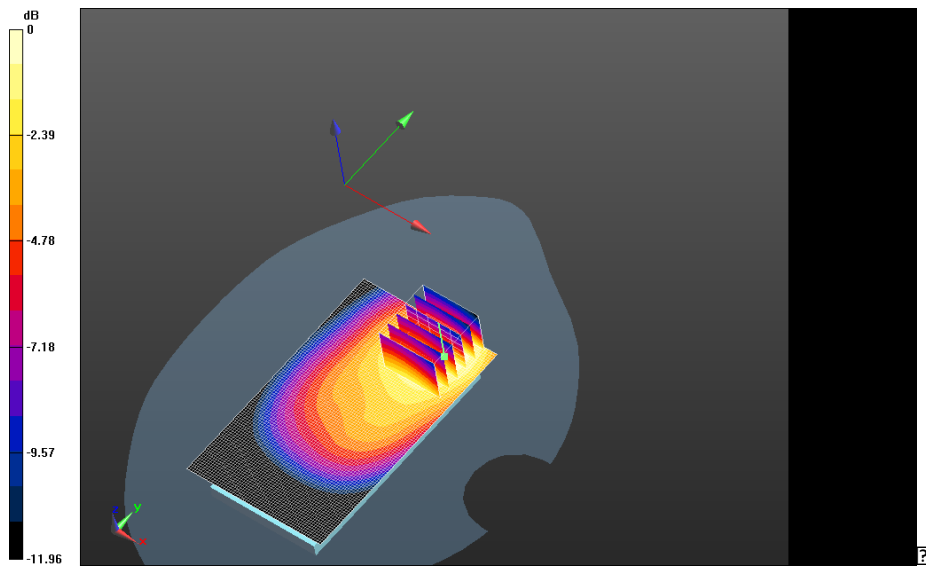

0 dB = 1.11 W/kg = 0.45 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			39(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Back - CDMA 850

BC0_chan1013_2nd_Scan_amb_temp_23.2C_liq_temp_22.4C/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 24.252 V/m; **Power Drift = 0.073 dB**

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Back - CDMA 850


BC0_chan1013_2nd_Scan_amb_temp_23.2C_liq_temp_22.4C/Zoom Scan (26x26x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 24.252 V/m; **Power Drift = 0.073 dB**

Averaged SAR: SAR(1g) = 0.998 W/kg; SAR(10g) = 0.693 W/kg

Maximum value of SAR (interpolated) = 1.38 W/kg

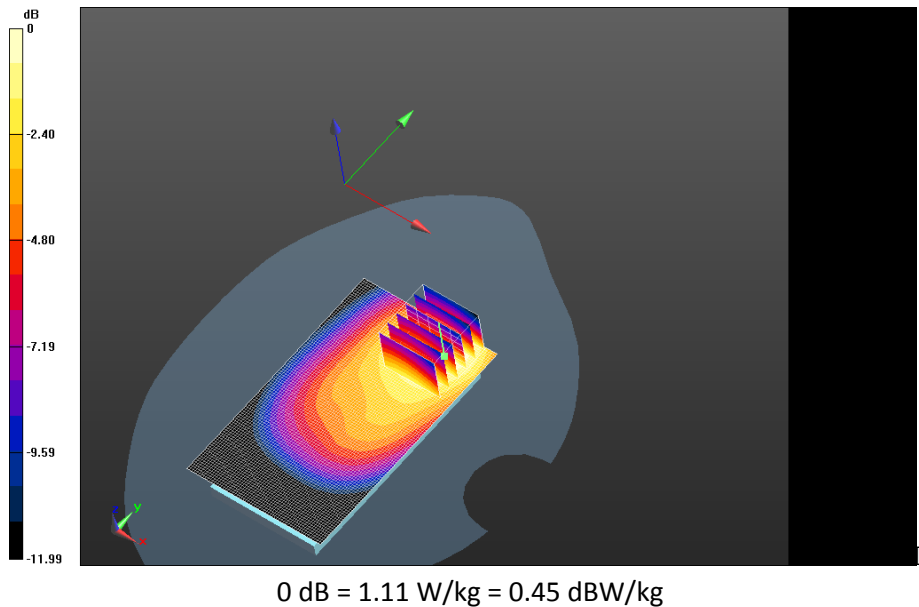

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 40(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Back - CDMA 850


BC0_chan384_amb_temp_23.3C_liq_temp_22.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 21.209 V/m; **Power Drift = 0.070 dB**

Fast SAR: SAR(1g) = 0.820 W/kg; SAR(10g) = 0.555 W/kg

Maximum value of SAR (interpolated) = 0.941 W/kg

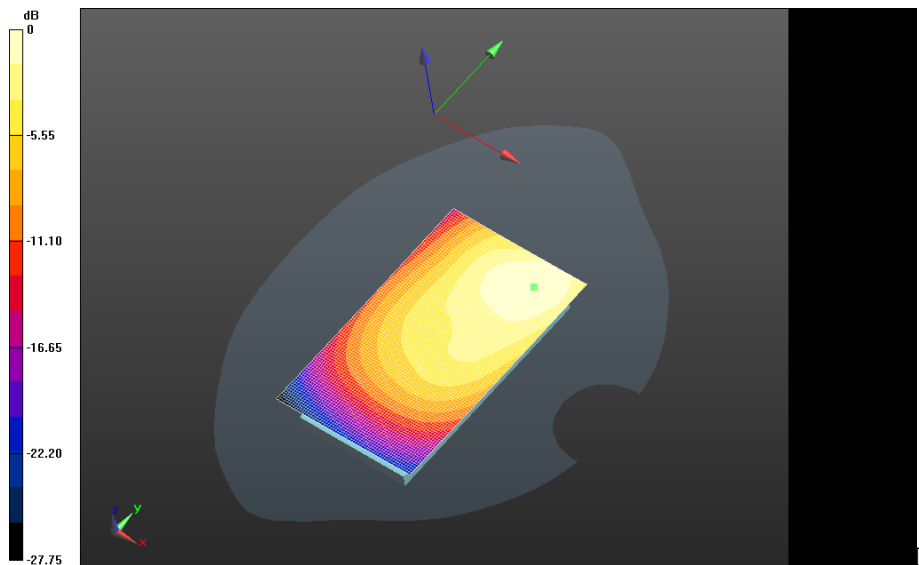

0 dB = 1.13 W/kg = 0.53 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			41(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Back - CDMA 850


BC0_chan777_amb_temp_23.0C_liq_temp_22.0C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 21.315 V/m; **Power Drift = 0.063 dB**

Fast SAR: SAR(1g) = 0.858 W/kg; SAR(10g) = 0.579 W/kg

Maximum value of SAR (interpolated) = 0.984 W/kg

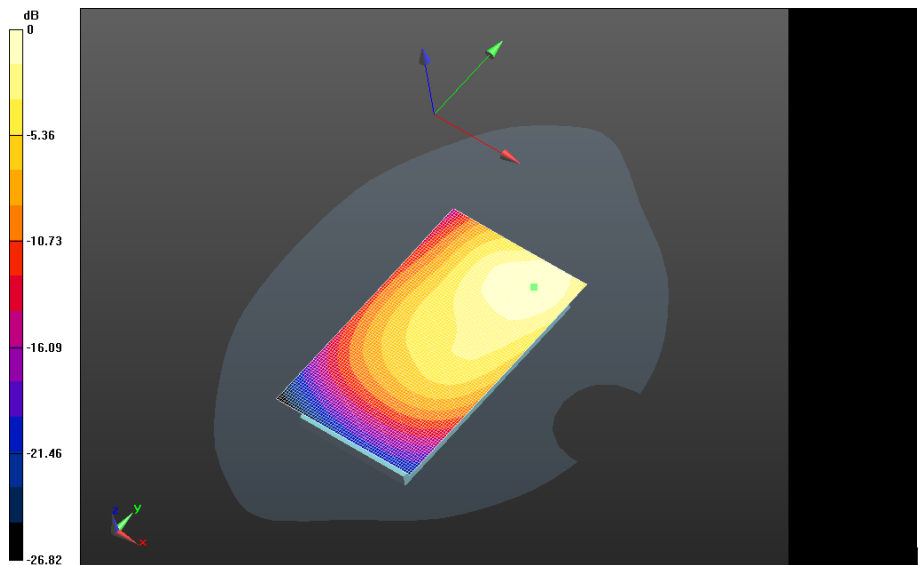

0 dB = 0.941 W/kg = -0.26 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			42(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Front - CDMA 850


BC0_chan384_amb_temp_22.7C_liq_temp 22.3C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 21.433 V/m; **Power Drift = -0.092 dB**

Fast SAR: SAR(1g) = 0.652 W/kg; SAR(10g) = 0.446 W/kg

Maximum value of SAR (interpolated) = 0.740 W/kg

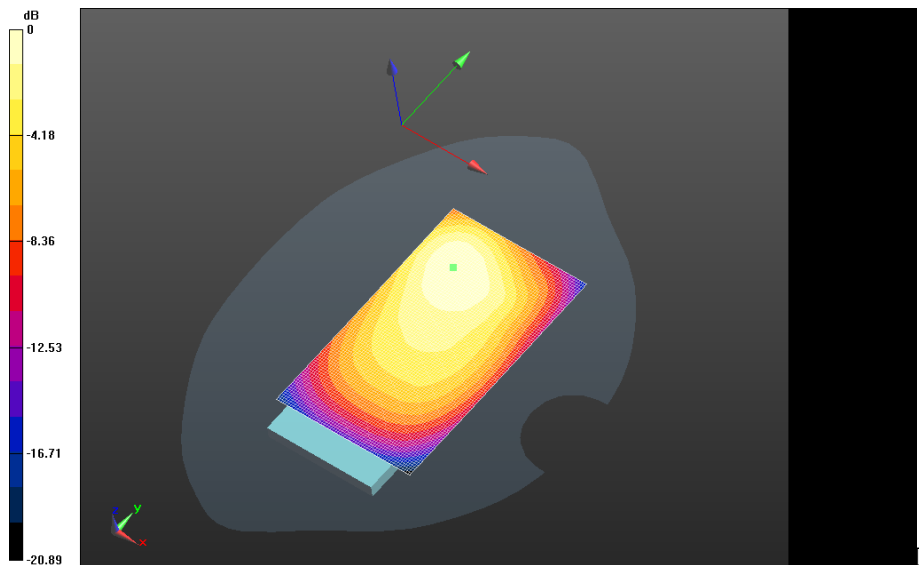

0 dB = 0.984 W/kg = -0.07 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 43(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Left - CDMA 850


BC0_chan384_amb_temp_23.5C_liq_temp_22.2C/Area Scan (31x91x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 18.359 V/m; **Power Drift = 0.00175 dB**

Fast SAR: SAR(1g) = 0.268 W/kg; SAR(10g) = 0.182 W/kg

Maximum value of SAR (interpolated) = 0.306 W/kg

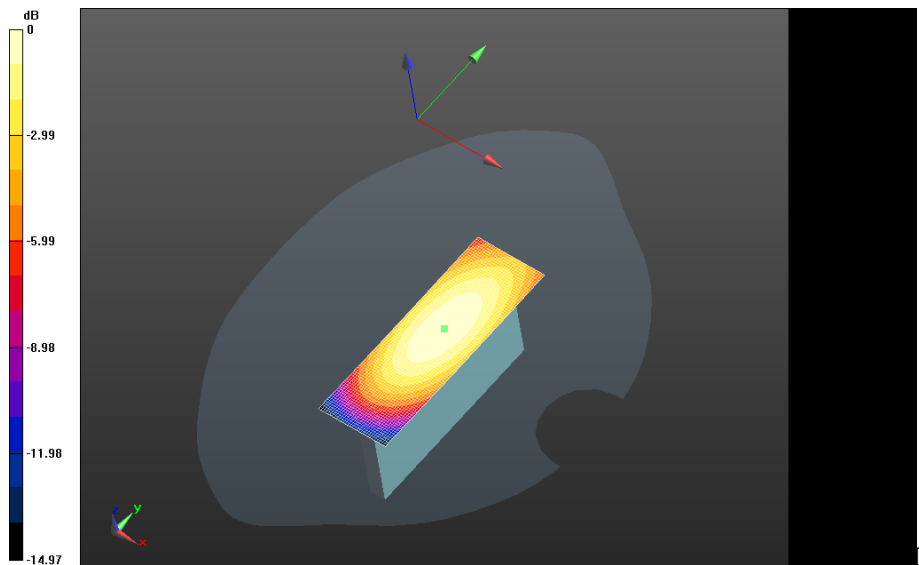

0 dB = 0.740 W/kg = -1.31 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			44(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Right - CDMA 850


BC0_chan384_amb_temp_23.5C_liq_temp_22.2C/Area Scan (31x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 20.332 V/m; **Power Drift = 0.097 dB**

Fast SAR: SAR(1g) = 0.333 W/kg; SAR(10g) = 0.225 W/kg

Maximum value of SAR (interpolated) = 0.382 W/kg

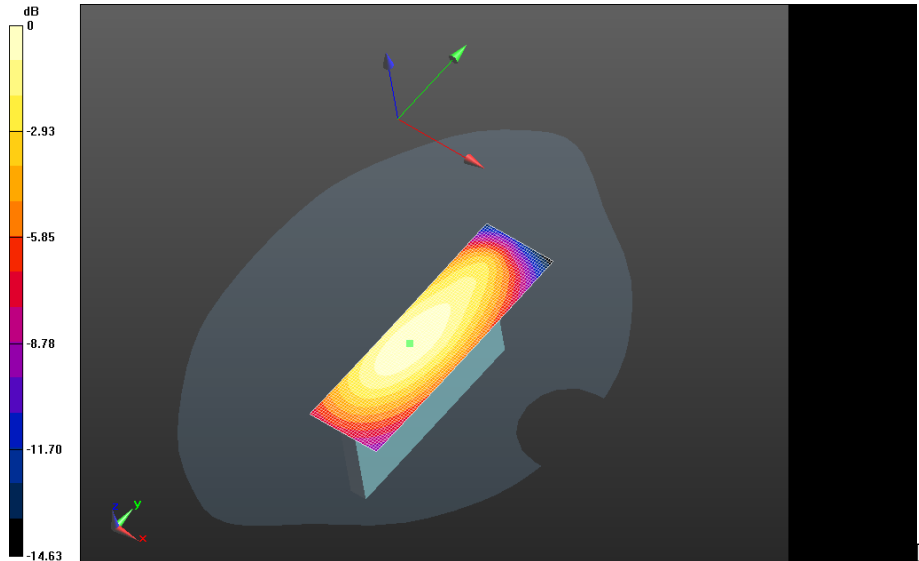


0 dB = 0.306 W/kg = -5.14 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 45(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 850 BC0/10mm Device Bottom - CDMA 850
BC0_chan384_amb_temp_23.5C_liq_temp_22.2C/Area Scan (31x71x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 20.332 V/m; **Power Drift = 0.051 dB**

Fast SAR: SAR(1g) = 0.358 W/kg; SAR(10g) = 0.239 W/kg
Maximum value of SAR (interpolated) = 0.415 W/kg

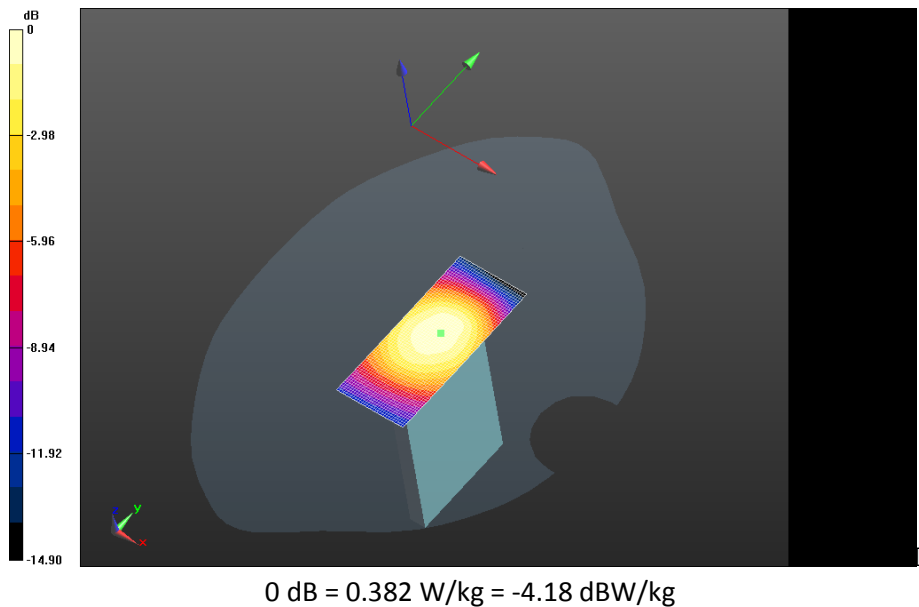

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 46(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

LTE 25 Full Power

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			47(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 7/2/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Mobile Hot Spot MSL - LTE Band 25

Communication System: LTE band 25; Communication System Band: LTE band 25; Frequency: 1860 MHz

Medium Parameters used: $f=1860$ MHz; $\sigma = 1.506$ S/m; $\epsilon_r = 50.738$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - LTE Band 25/10mm Device Back -


LTE_Band_25_chan26140_RB1_Offset99_amb_temp_23.1C_liq_temp_22.5C/Area Scan

(61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 10.466 V/m; **Power Drift = -0.104 dB**

Fast SAR: SAR(1g) = 0.744 W/kg; SAR(10g) = 0.412 W/kg

Maximum value of SAR (interpolated) = 0.939 W/kg

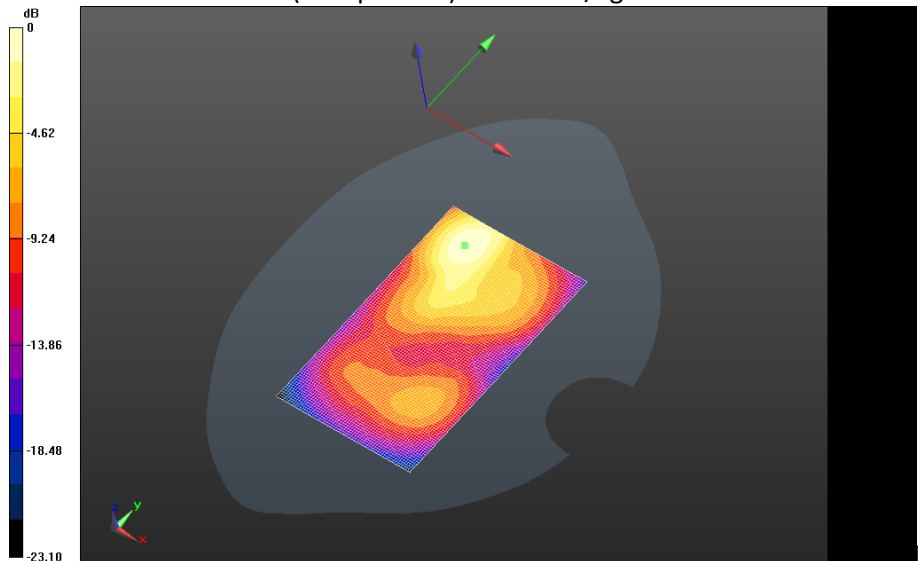


0 dB = 0.939 W/kg = -0.27 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			48(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - LTE Band 25/10mm Device Back -
LTE_Band_25_chan26140_RB50_Offset50_amb_temp_23.4C_liq_temp_22.5C/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.381 V/m; **Power Drift = 0.024 dB**


Fast SAR: SAR(1g) = 0.785 W/kg; SAR(10g) = 0.431 W/kg
Maximum value of SAR (interpolated) = 0.995 W/kg

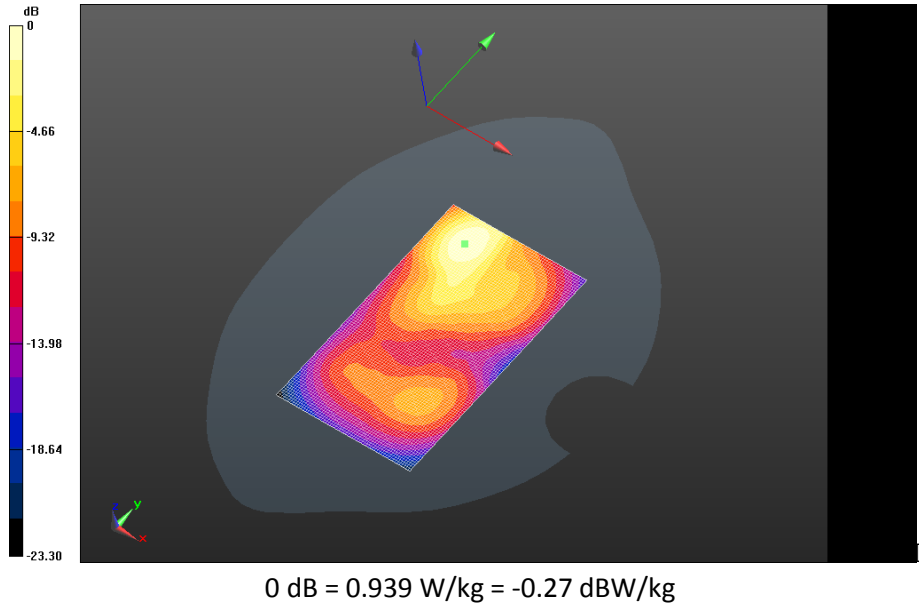

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			49(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - LTE Band 25/10mm Device Back -
LTE_Band_25_chan26365_RB100_Offset0_amb_temp_23.1C_liq_temp_22.5C/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 9.061 V/m; **Power Drift = -0.071 dB**


Fast SAR: SAR(1g) = 0.705 W/kg; SAR(10g) = 0.385 W/kg
Maximum value of SAR (interpolated) = 0.892 W/kg

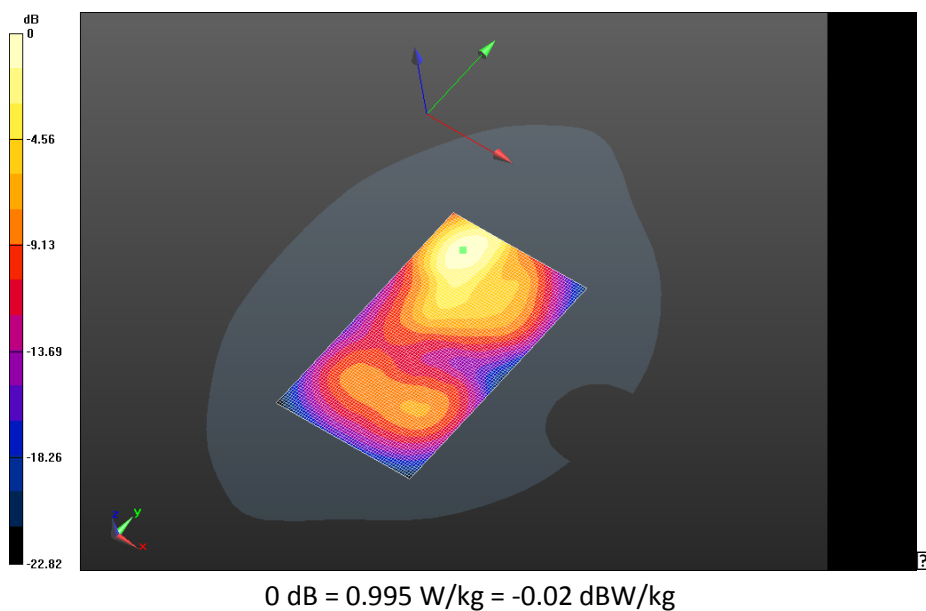

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			50(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - LTE Band 25/10mm Device Front -
LTE_Band_25_chan26140_RB50_Offset50_amb_temp_23.5C_liq_temp_22.5C/Area Scan
(61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 9.287 V/m; **Power Drift = 0.091 dB**

Fast SAR: SAR(1g) = 0.406 W/kg; SAR(10g) = 0.244 W/kg
Maximum value of SAR (interpolated) = 0.498 W/kg

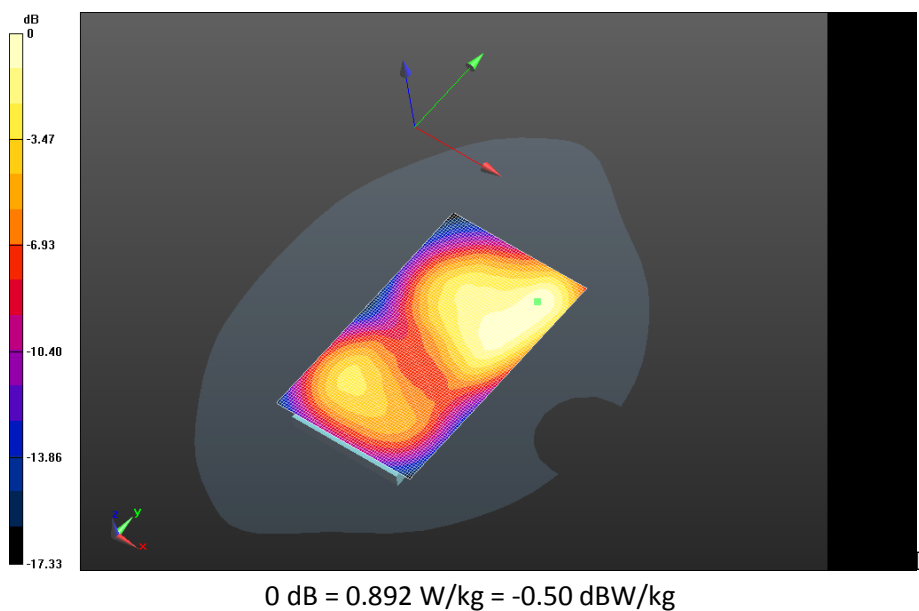

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			51(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - LTE Band 25/10mm Device Left -


LTE_Band_25_chan26140_RB50_Offset50_amb_temp_23.3C_liq_temp_22.5C/Area Scan

(31x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.771 V/m; **Power Drift = -0.011 dB**

Fast SAR: SAR(1g) = 0.251 W/kg; SAR(10g) = 0.143 W/kg

Maximum value of SAR (interpolated) = 0.310 W/kg

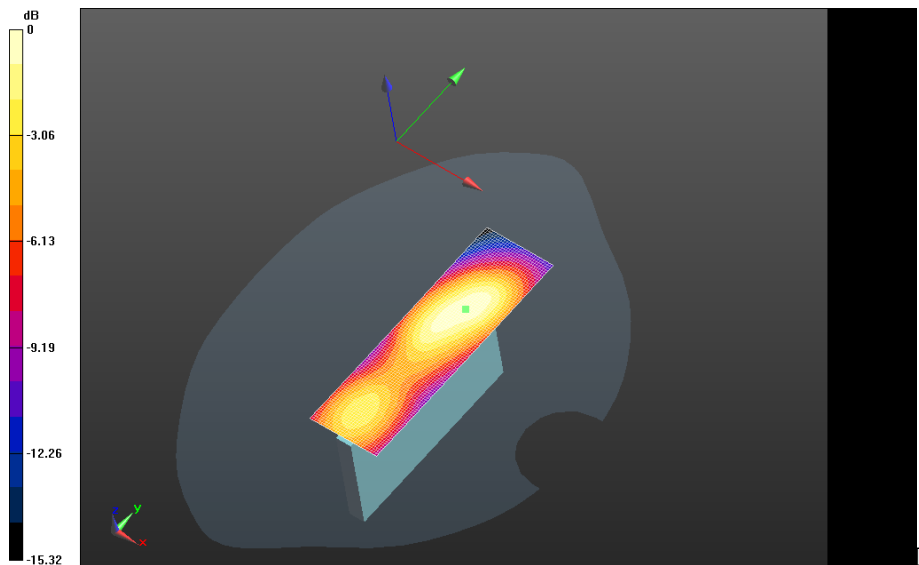


0 dB = 0.498 W/kg = -3.03 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 52(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - LTE Band 25/10mm Device Right -
LTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.1C_liq_temp_22.5C/Area Scan
(31x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 4.273 V/m; **Power Drift = 0.00827 dB**


Fast SAR: SAR(1g) = 0.0896 W/kg; SAR(10g) = 0.0499 W/kg
Maximum value of SAR (interpolated) = 0.109 W/kg

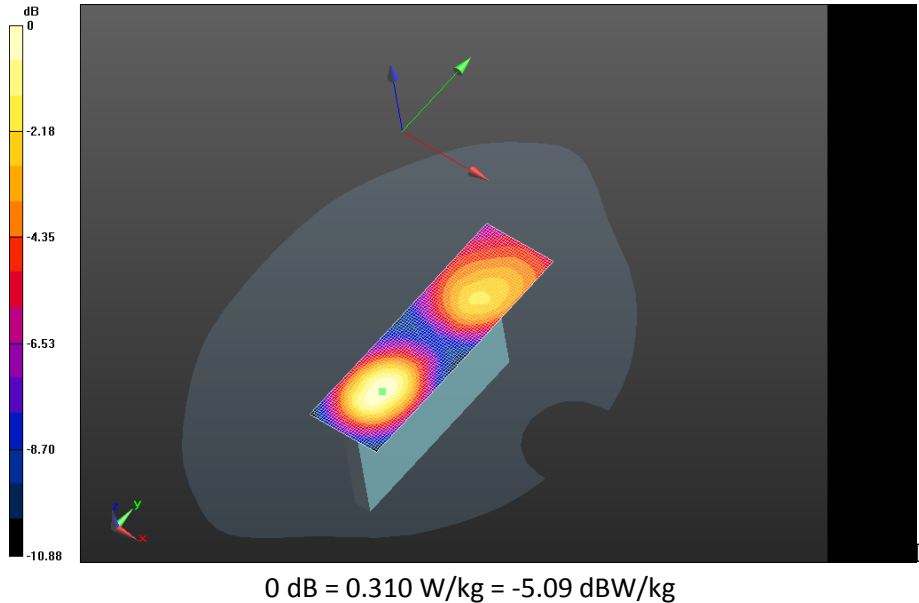

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			53(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - LTE Band 25/10mm Device Bottom -
LTE_Band_25_chan26365_RB50_Offset50_amb_temp_23.0C_liq_temp_22.5C/Area Scan
(31x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 8.555 V/m; **Power Drift = 0.012 dB**

Fast SAR: SAR(1g) = 0.0904 W/kg; SAR(10g) = 0.0543 W/kg
Maximum value of SAR (interpolated) = 0.108 W/kg

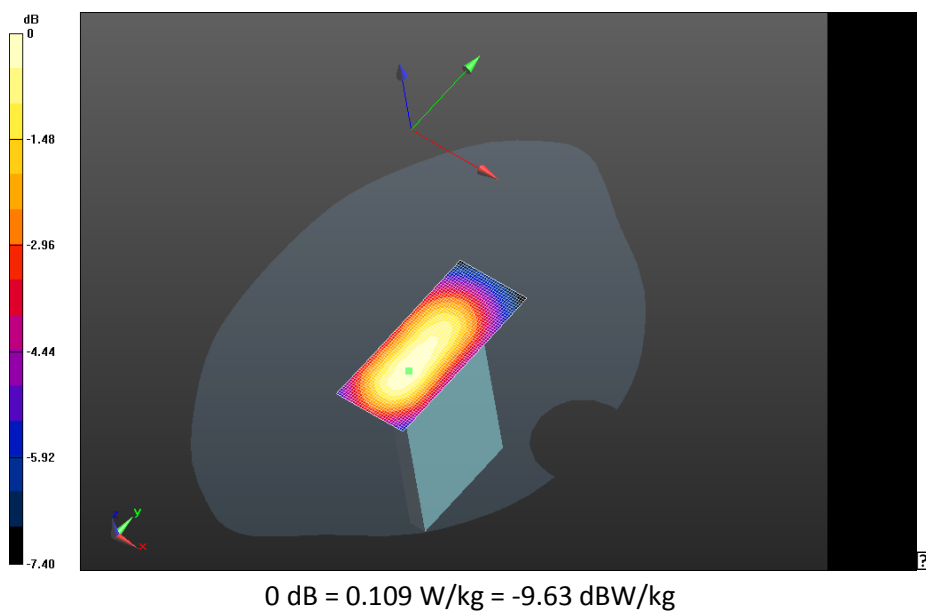

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 54(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

GPRS 1900

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			55(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/24/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 333E285E

Configuration: Mobile Hot Spot MSL - GPRS 1900

Communication System: GSM 1900; Communication System Band: GSM 1900; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 51.502$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back -


GSM1900_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.885 V/m; **Power Drift = -0.026 dB**

Fast SAR: SAR(1g) = 0.650 W/kg; SAR(10g) = 0.364 W/kg

Maximum value of SAR (interpolated) = 0.816 W/kg


	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 56(114)
	Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW
IC				

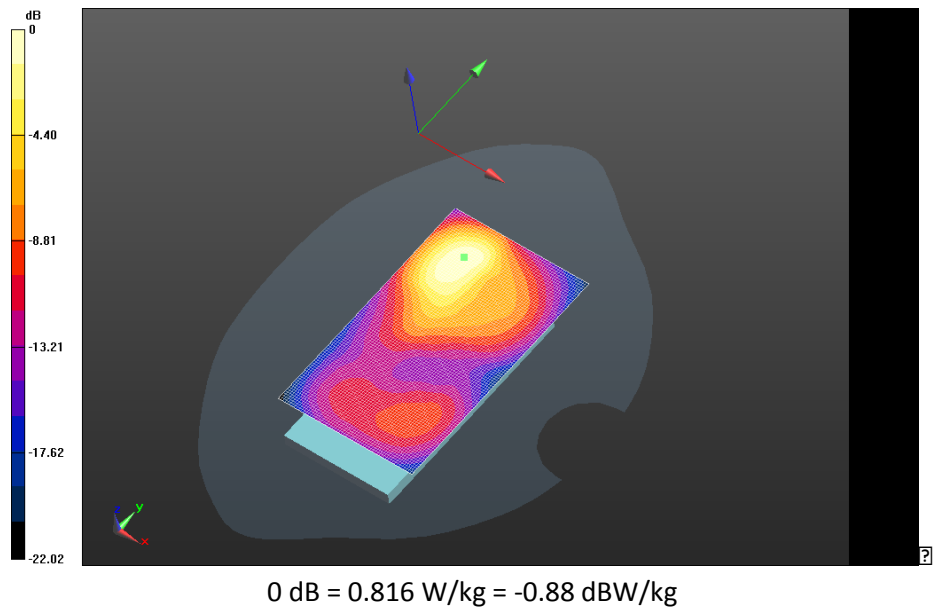

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			57(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back -
GPRS1900_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 7.288 V/m; **Power Drift = -0.091 dB**

Fast SAR: SAR(1g) = 0.888 W/kg; SAR(10g) = 0.503 W/kg
Maximum value of SAR (interpolated) = 1.09 W/kg

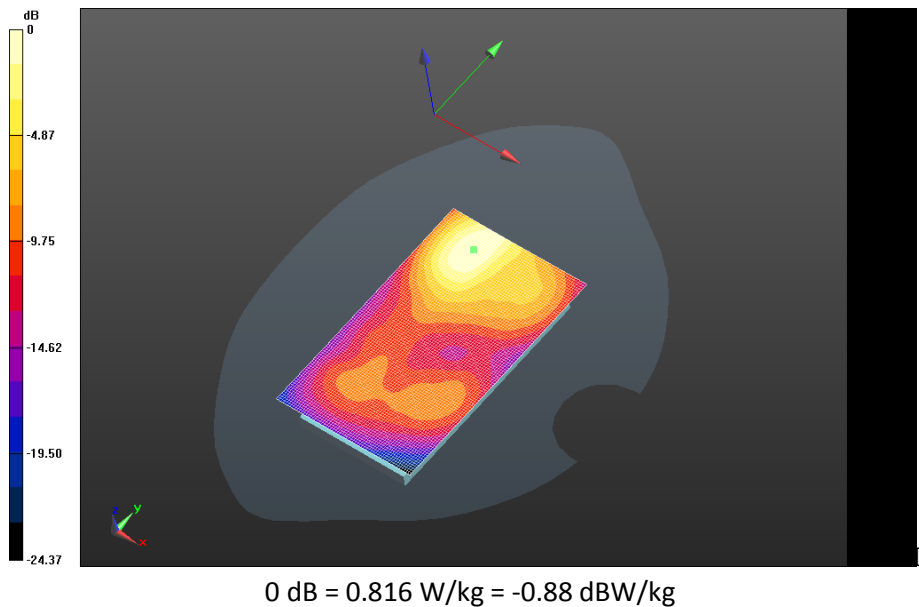

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			58(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_3-


Slots_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 6.444 V/m; **Power Drift = 0.090 dB**

Fast SAR: SAR(1g) = 0.808 W/kg; SAR(10g) = 0.448 W/kg

Maximum value of SAR (interpolated) = 1.01 W/kg

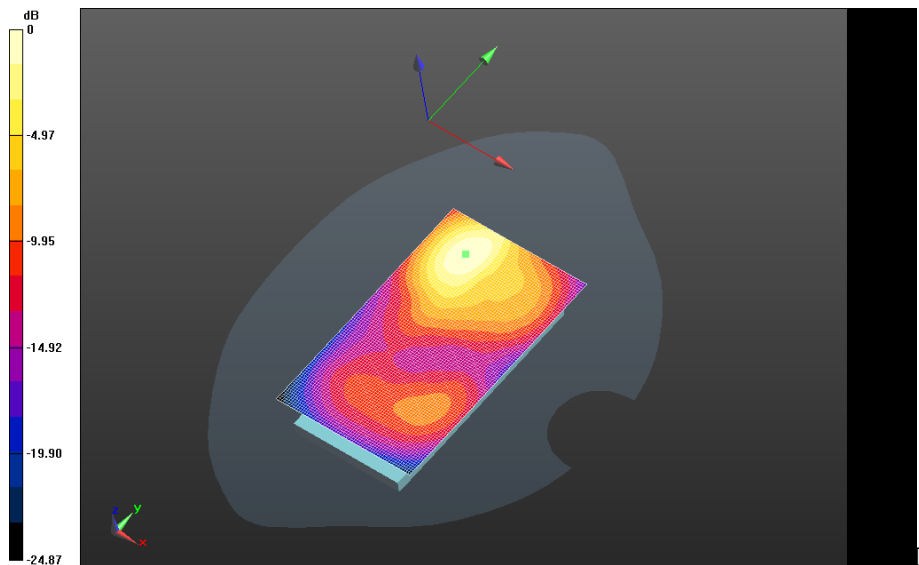

0 dB = 1.09 W/kg = 0.37 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			59(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-


Slots_chan512_amb_temp_23.1C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 9.190 V/m; **Power Drift = 0.037 dB**

Fast SAR: SAR(1g) = 0.882 W/kg; SAR(10g) = 0.488 W/kg

Maximum value of SAR (interpolated) = 1.10 W/kg

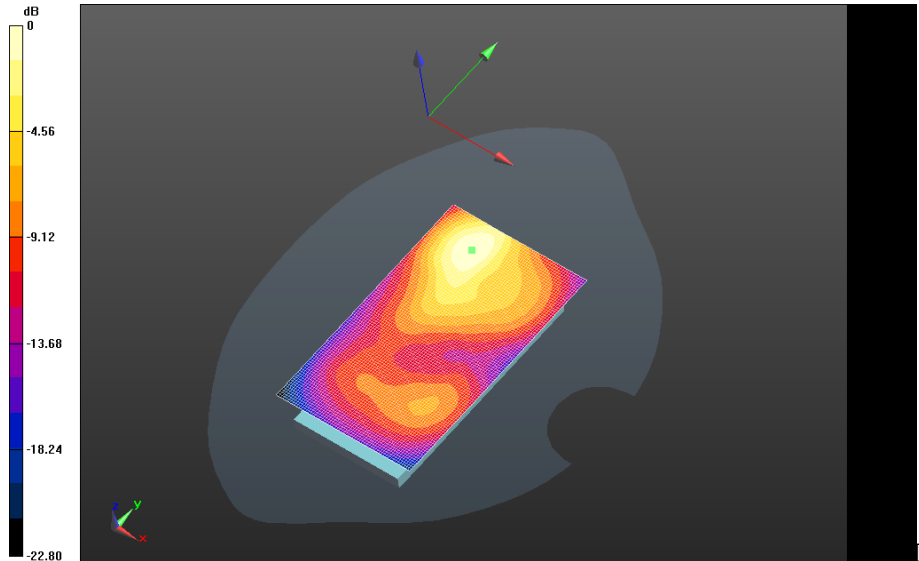

0 dB = 1.01 W/kg = 0.04 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			60(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-

Slots_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 6.805 V/m; **Power Drift = 0.049 dB**

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-


Slots_chan661_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.805 V/m; **Power Drift = 0.049 dB**

Averaged SAR: SAR(1g) = 0.910 W/kg; SAR(10g) = 0.516 W/kg

Maximum value of SAR (interpolated) = 1.48 W/kg

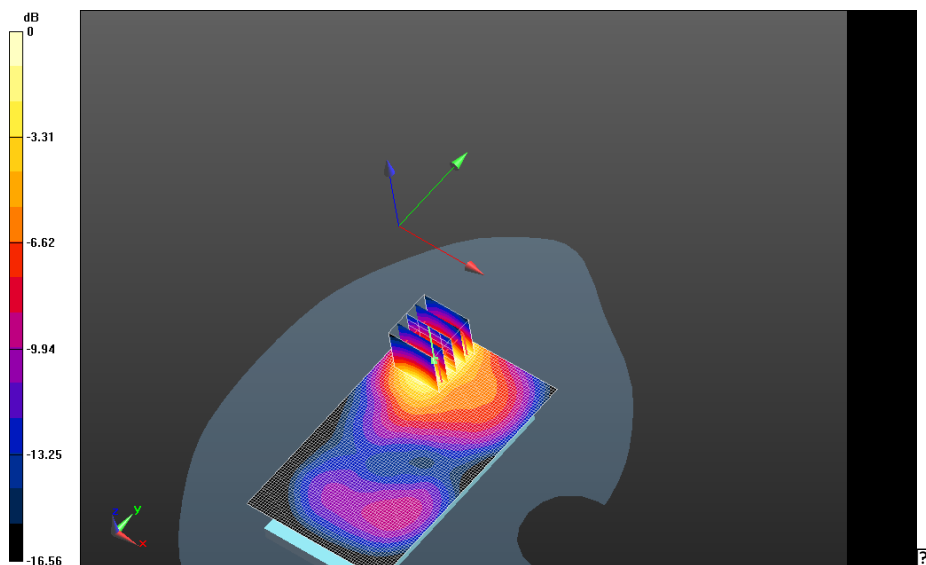

0 dB = 1.10 W/kg = 0.41 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			61(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-

Slots_chan661_amb_temp_23.3C_liq_temp_22.2C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 7.484 V/m; **Power Drift = 0.066 dB**

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-


Slots_chan661_amb_temp_23.3C_liq_temp_22.2C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 7.484 V/m; **Power Drift = 0.066 dB**

Averaged SAR: SAR(1g) = 0.964 W/kg; SAR(10g) = 0.547 W/kg

Maximum value of SAR (interpolated) = 1.61 W/kg

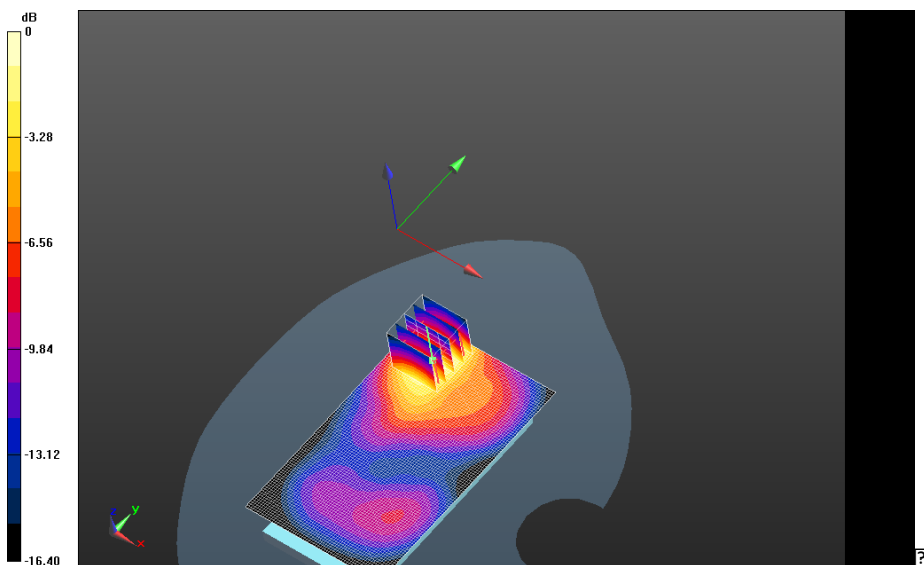

0 dB = 1.10 W/kg = 0.41 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 62(114)
	Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW
IC				

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-


Slots_chan810_amb_temp_22.7C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 6.611 V/m; **Power Drift = 0.100 dB**

Fast SAR: SAR(1g) = 0.764 W/kg; SAR(10g) = 0.434 W/kg

Maximum value of SAR (interpolated) = 0.944 W/kg

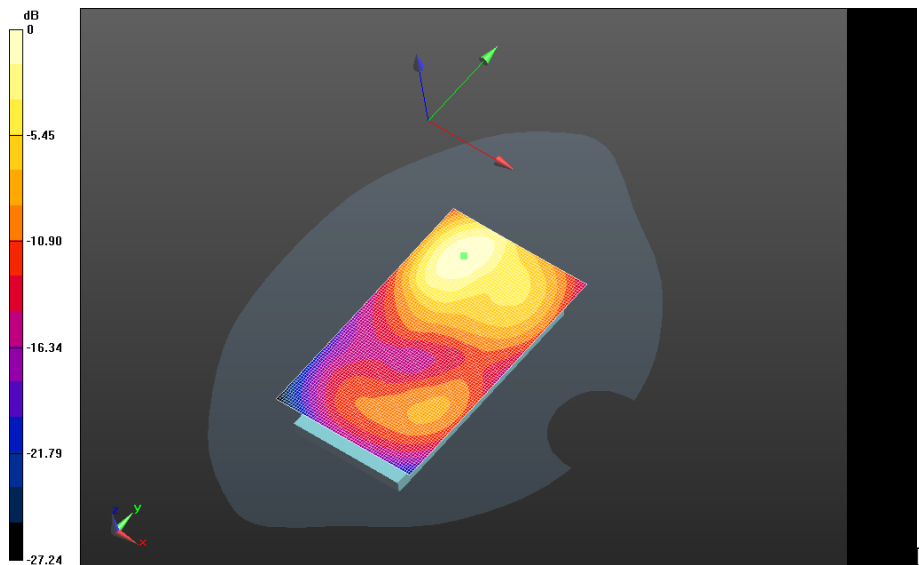

0 dB = 1.16 W/kg = 0.64 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			63(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Front -

GPRS1900_chan661_amb_temp_23.6C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.351 V/m; **Power Drift = 0.053 dB**

Mobile Hot Spot MSL - GPRS 1900/10mm Device Front -

GPRS1900_chan661_amb_temp_23.6C_liq_temp_22.5C/Zoom Scan (26x26x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.351 V/m; **Power Drift = 0.053 dB**

Averaged SAR: SAR(1g) = 0.586 W/kg; SAR(10g) = 0.353 W/kg

Maximum value of SAR (interpolated) = 0.988 W/kg

Mobile Hot Spot MSL - GPRS 1900/10mm Device Front -


GPRS1900_chan661_amb_temp_23.6C_liq_temp_22.5C/Zoom Scan 2 (41x31x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.351 V/m; **Power Drift = 0.070 dB**

Averaged SAR: SAR(1g) = 0.586 W/kg; SAR(10g) = 0.352 W/kg

Maximum value of SAR (interpolated) = 0.981 W/kg

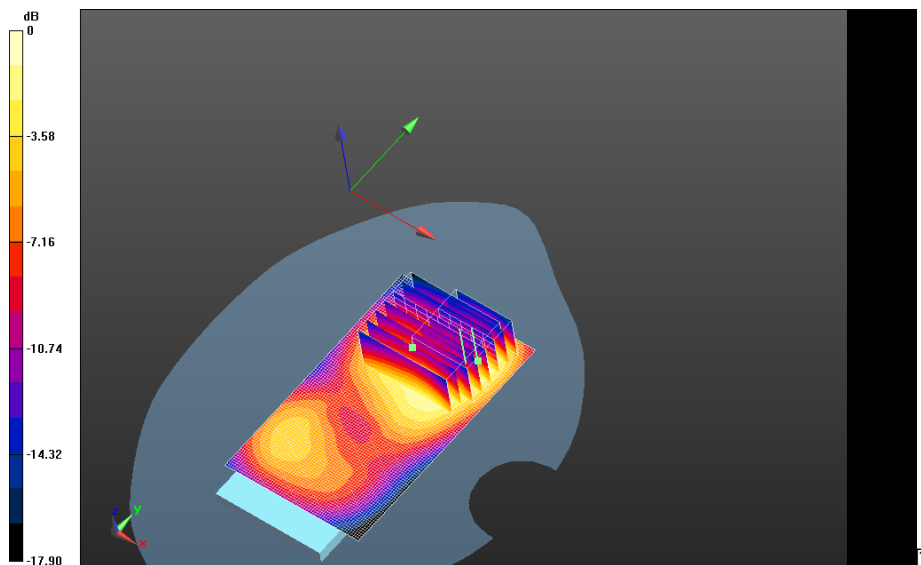


0 dB = 0.944 W/kg = -0.25 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			64(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Left -
GPRS1900_chan661_amb_temp_22.9C_liq_temp_21.9C/Area Scan (31x91x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 10.719 V/m; **Power Drift = -0.039 dB**


Fast SAR: SAR(1g) = 0.514 W/kg; SAR(10g) = 0.290 W/kg
Maximum value of SAR (interpolated) = 0.627 W/kg

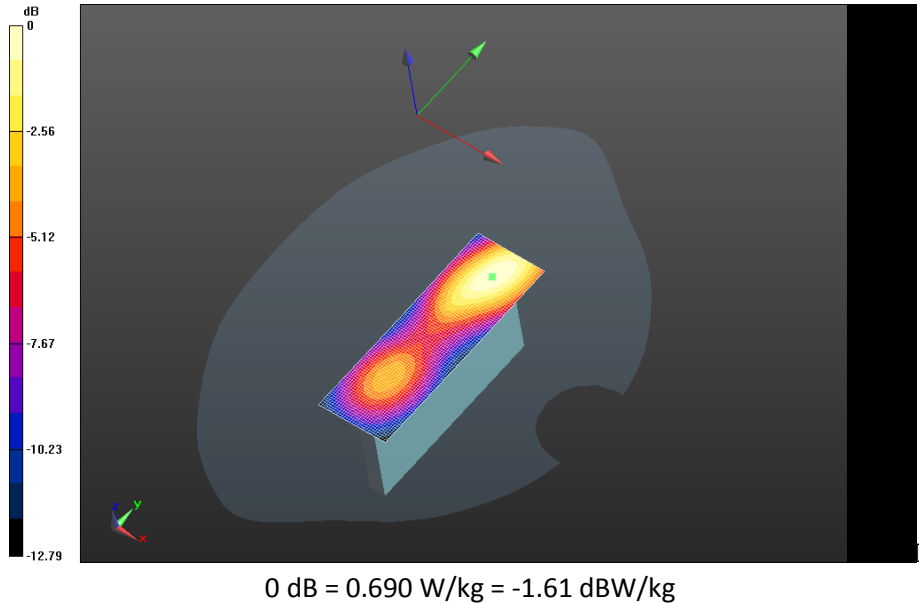

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			65(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - GPRS 1900/10mm Device Right -
GPRS1900_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (31x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.339 V/m; **Power Drift = 0.057 dB**

Fast SAR: SAR(1g) = 0.0806 W/kg; SAR(10g) = 0.0479 W/kg
Maximum value of SAR (interpolated) = 0.0981 W/kg

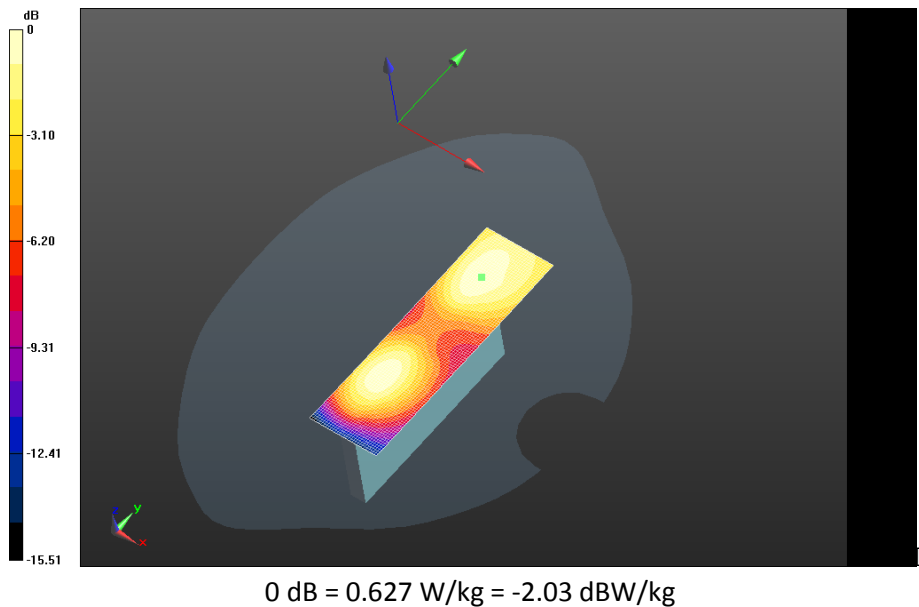

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			66(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC


Mobile Hot Spot MSL - GPRS 1900/10mm Device Bottom -

GPRS1900_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (31x71x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 12.011 V/m; **Power Drift = -0.048 dB**

Fast SAR: SAR(1g) = 0.200 W/kg; SAR(10g) = 0.119 W/kg

Maximum value of SAR (interpolated) = 0.239 W/kg

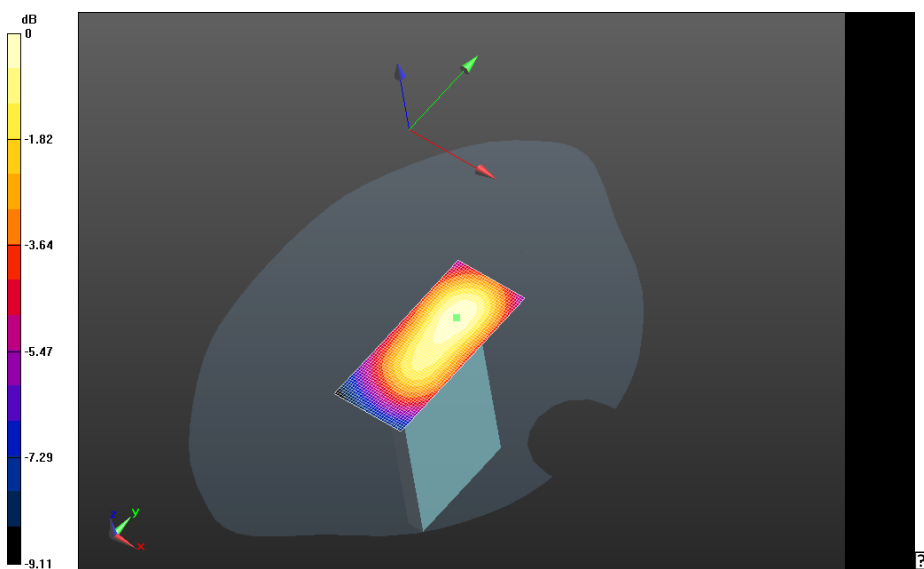

0 dB = 0.0981 W/kg = -10.08 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 67(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 7/3/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Mobile Hot Spot MSL - GPRS 1900

Communication System: GPRS 1900 (4-slots); Communication System Band: GPRS 1900 (4 slots); Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 50.675$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-

Slots_chan661_amb_temp_22.8C_liq_temp_21.1C/Area Scan (61x101x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.647 W/kg

Mobile Hot Spot MSL - GPRS 1900/10mm Device Back - GPRS1900_4-

Slots_chan661_amb_temp_22.8C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 7.735 V/m; **Power Drift = 0.00546 dB**

Averaged SAR: SAR(1g) = 0.562 W/kg; SAR(10g) = 0.314 W/kg

Maximum value of SAR (interpolated) = 0.942 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 68(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

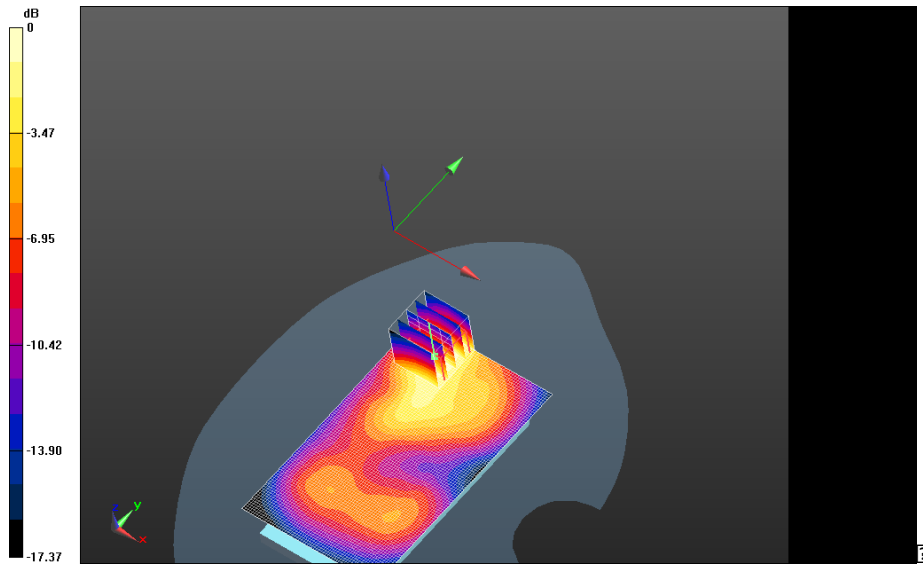

0 dB = 0.664 W/kg = -1.78 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 69(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

UMTS Band II

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			70(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/21/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 333E285E

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1852.4 MHz

Medium Parameters used: $f=1852.4$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 51.601$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9262_amb_temp_23.7C_liq_temp_22.3C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 8.710 V/m; **Power Drift = -0.031 dB**

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9262_amb_temp_23.7C_liq_temp_22.3C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 8.710 V/m; **Power Drift = -0.031 dB**

Averaged SAR: SAR(1g) = 1.03 W/kg; SAR(10g) = 0.586 W/kg

Maximum value of SAR (interpolated) = 1.69 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 71(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

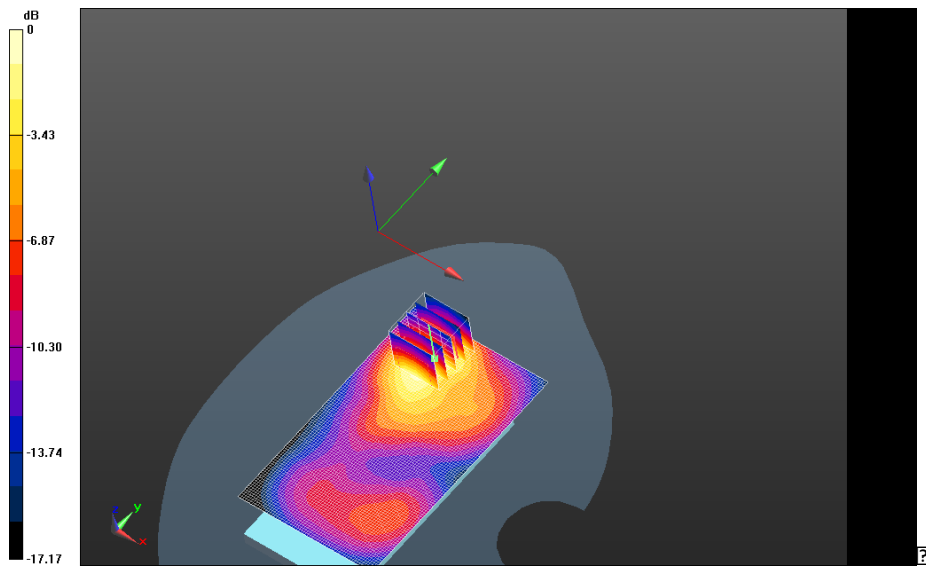

0 dB = 1.22 W/kg = 0.86 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			72(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9400_amb_temp_23.6C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 6.977 V/m; **Power Drift = -0.136 dB**

Mobile Hot Spot MSL - UMTS II/10mm Device Back -


UMTS_II_chan9400_amb_temp_23.6C_liq_temp_22.4C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.977 V/m; **Power Drift = -0.136 dB**

Averaged SAR: SAR(1g) = 1.19 W/kg; SAR(10g) = 0.674 W/kg

Maximum value of SAR (interpolated) = 1.95 W/kg

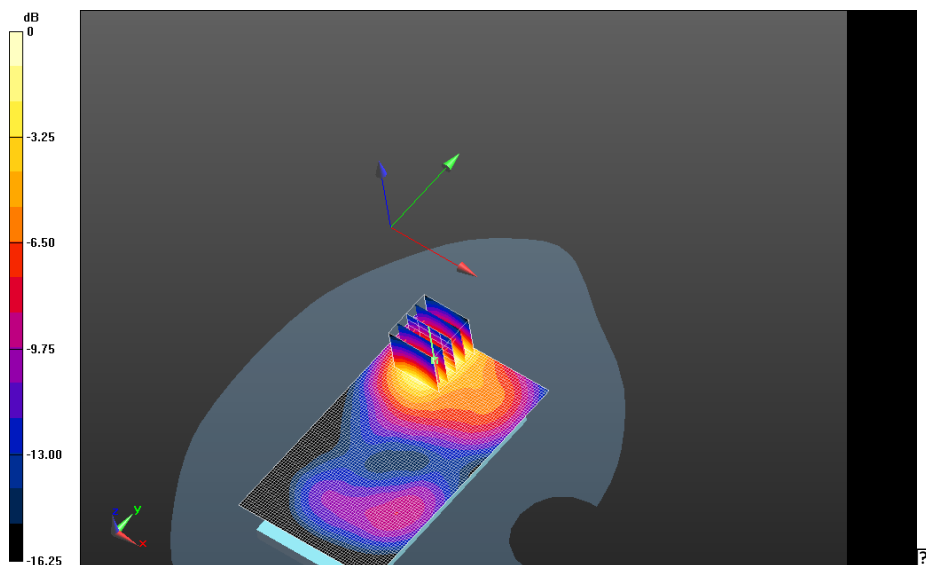

0 dB = 1.22 W/kg = 0.86 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 73(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9400_amb_temp_23.6C_liq_temp_22.4C_2nd/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 6.663 V/m; **Power Drift = -0.098 dB**

Mobile Hot Spot MSL - UMTS II/10mm Device Back -


UMTS_II_chan9400_amb_temp_23.6C_liq_temp_22.4C_2nd/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 6.663 V/m; **Power Drift = -0.098 dB**

Averaged SAR: SAR(1g) = 1.12 W/kg; SAR(10g) = 0.639 W/kg

Maximum value of SAR (interpolated) = 1.85 W/kg

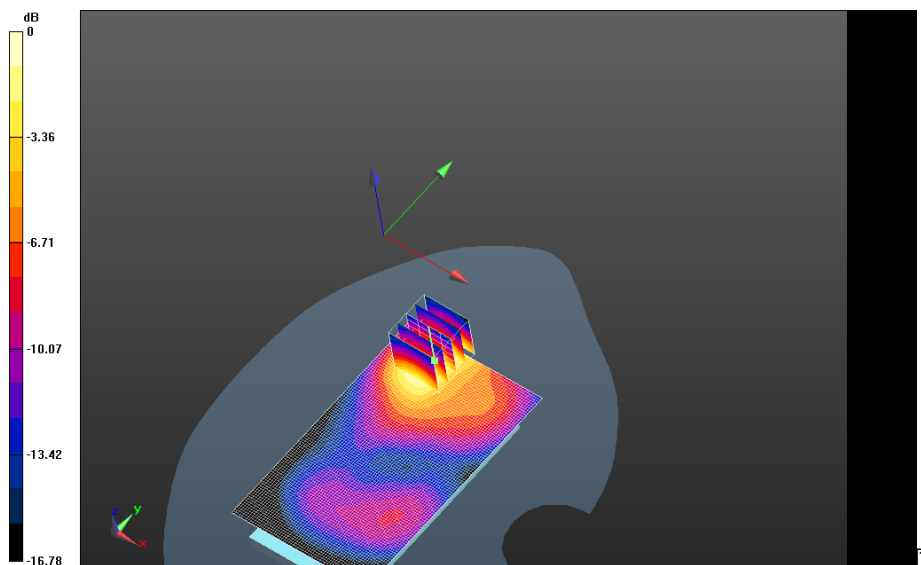


0 dB = 1.45 W/kg = 1.61 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			74(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS II/10mm Device Back -
UMTS_II_chan9538_amb_temp_23.6C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 6.886 V/m; **Power Drift = 0.126 dB**

Fast SAR: SAR(1g) = 0.939 W/kg; SAR(10g) = 0.540 W/kg
Maximum value of SAR (interpolated) = 1.17 W/kg

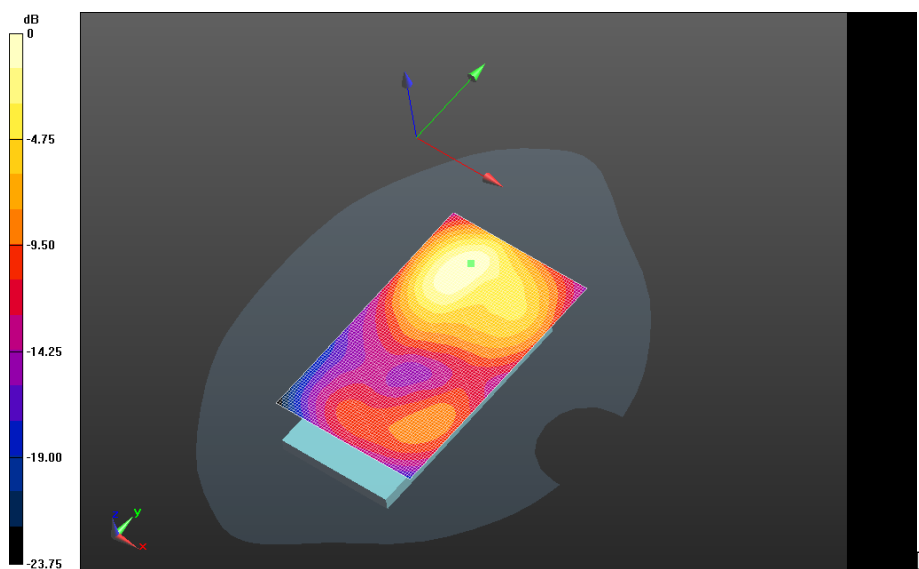

0 dB = 1.37 W/kg = 1.37 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			75(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS II/10mm Device Front -

UMTS_II_chan9400_amb_temp_23.8C_liq_temp_22.6C/Area Scan (61x101x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.536 V/m; **Power Drift = 0.058 dB**

Mobile Hot Spot MSL - UMTS II/10mm Device Front -

UMTS_II_chan9400_amb_temp_23.8C_liq_temp_22.6C/Zoom Scan (26x26x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.536 V/m; **Power Drift = 0.058 dB**

Averaged SAR: SAR(1g) = 0.818 W/kg; SAR(10g) = 0.492 W/kg

Maximum value of SAR (interpolated) = 1.40 W/kg

Mobile Hot Spot MSL - UMTS II/10mm Device Front -


UMTS_II_chan9400_amb_temp_23.8C_liq_temp_22.6C/Zoom Scan 2 (41x31x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 9.536 V/m; **Power Drift = 0.063 dB**

Averaged SAR: SAR(1g) = 0.819 W/kg; SAR(10g) = 0.490 W/kg

Maximum value of SAR (interpolated) = 1.38 W/kg

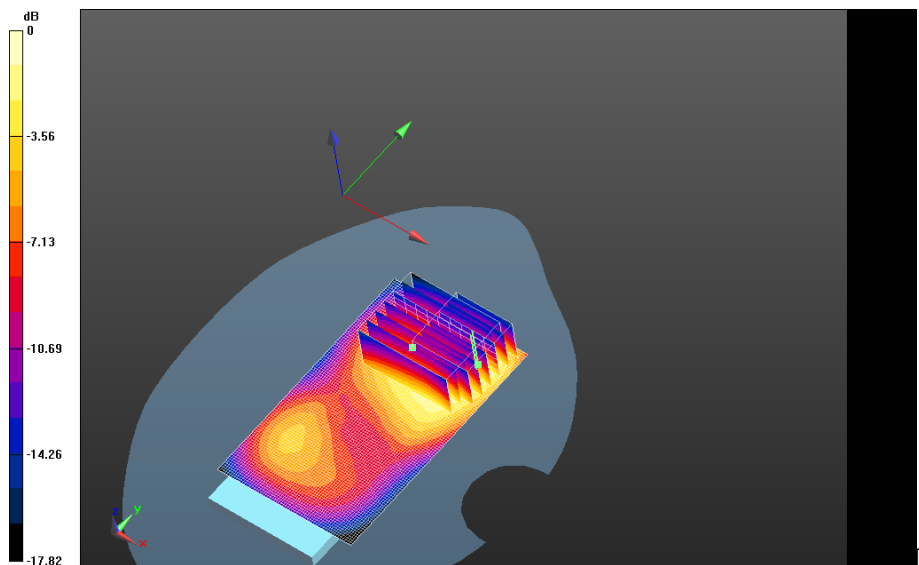

0 dB = 1.17 W/kg = 0.68 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 76(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC


Mobile Hot Spot MSL - UMTS II/10mm Device Left -

UMTS_II_chan9400_amb_temp_23.8C_liq_temp_22.5C/Area Scan (31x91x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 11.898 V/m; **Power Drift = -0.101 dB**

Fast SAR: SAR(1g) = 0.822 W/kg; SAR(10g) = 0.458 W/kg

Maximum value of SAR (interpolated) = 1.01 W/kg

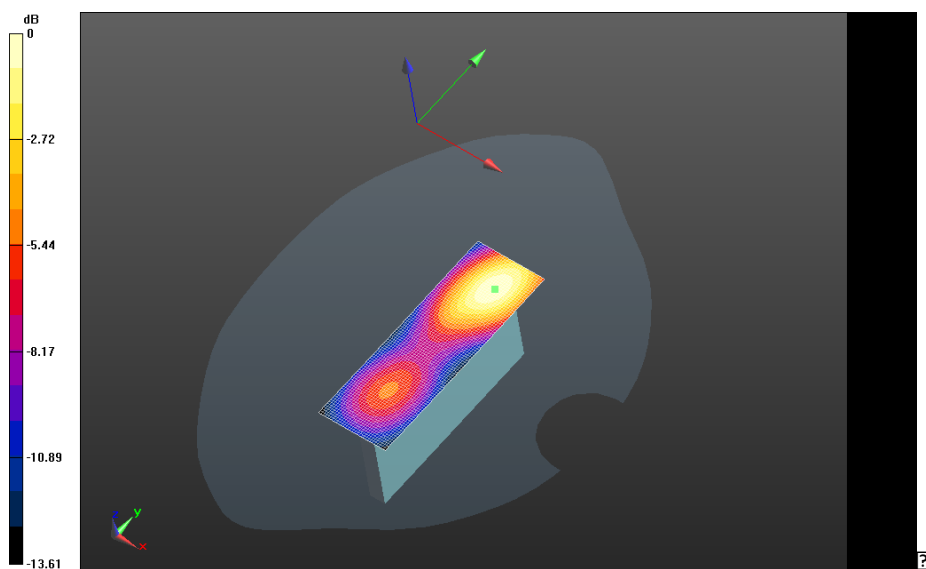

0 dB = 0.989 W/kg = -0.05 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			77(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS II/10mm Device Right -


UMTS_II_chan9400_amb_temp_23.8C_liq_temp_22.5C/Area Scan (31x91x1): Interpolated

grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.990 V/m; **Power Drift = 0.027 dB**

Fast SAR: SAR(1g) = 0.106 W/kg; SAR(10g) = 0.0616 W/kg

Maximum value of SAR (interpolated) = 0.128 W/kg

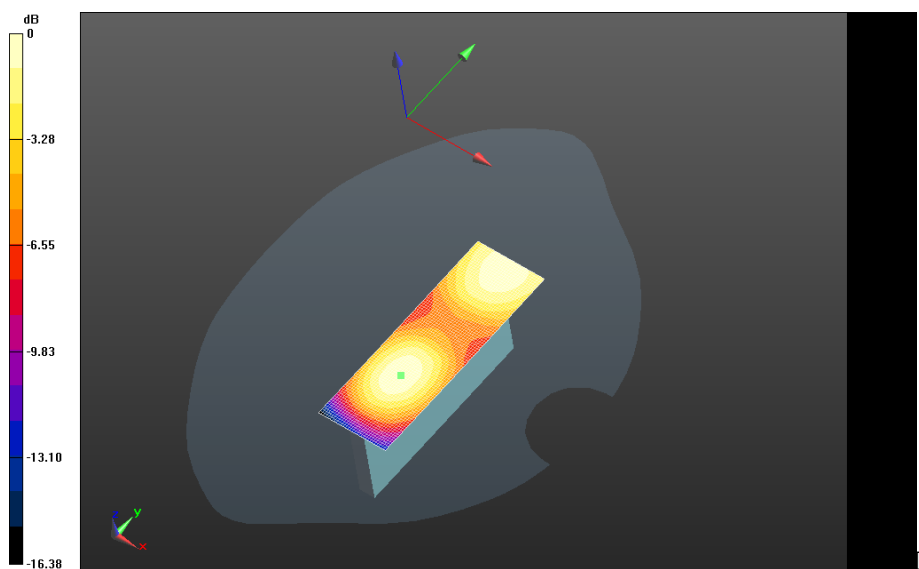


0 dB = 1.01 W/kg = 0.04 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			78(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - UMTS II/10mm Device Bottom -
UMTS_II_chan9400_amb_temp_23.8C_liq_temp_22.5C/Area Scan (31x71x1): Interpolated
grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 13.876 V/m; **Power Drift = -0.030 dB**

Fast SAR: SAR(1g) = 0.276 W/kg; SAR(10g) = 0.163 W/kg
Maximum value of SAR (interpolated) = 0.335 W/kg

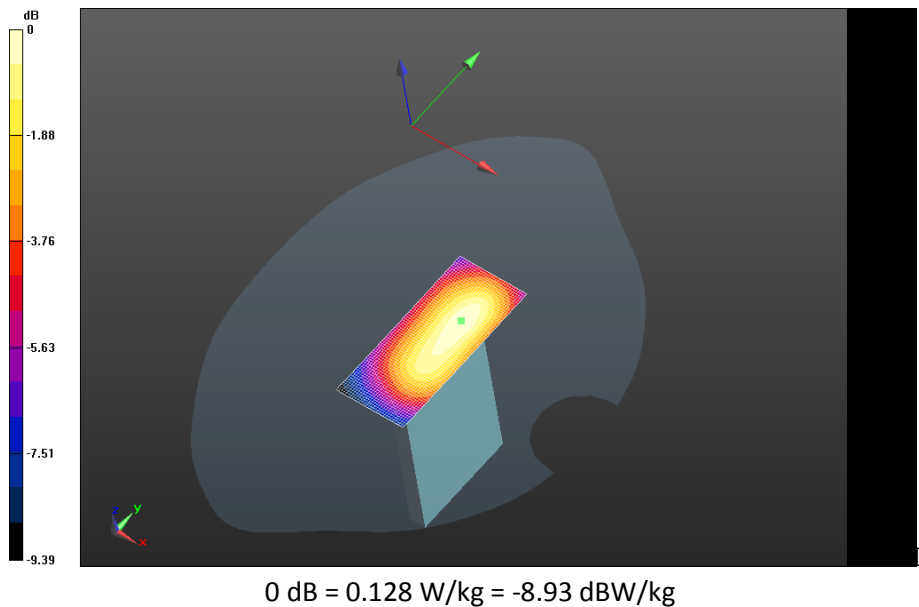

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			79(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 7/3/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Mobile Hot Spot MSL - UMTS II

Communication System: WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 50.675$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9400_amb_temp_23.6C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.682 W/kg

Mobile Hot Spot MSL - UMTS II/10mm Device Back -

UMTS_II_chan9400_amb_temp_23.6C_liq_temp_22.4C/Zoom Scan (21x21x36)/Cube 0:


Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 7.981 V/m; **Power Drift = -0.161 dB**

Averaged SAR: SAR(1g) = 0.585 W/kg; SAR(10g) = 0.330 W/kg

Maximum value of SAR (interpolated) = 0.993 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 80(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

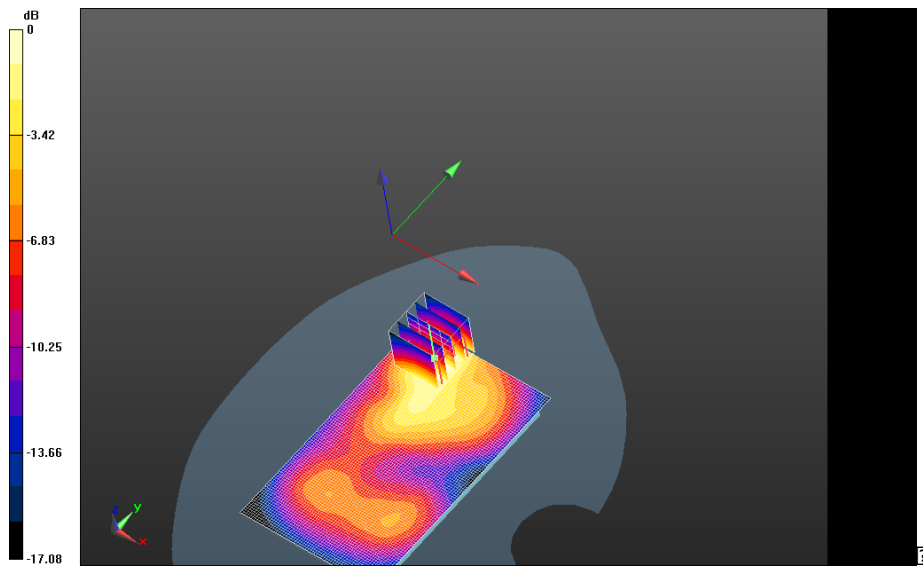

0 dB = 0.691 W/kg = -1.61 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 81(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

CDMA 1900

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			82(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/28/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E7691

Configuration: Mobile Hot Spot MSL - CDMA 1900 BC1

Communication System: CDMA 1900; Communication System Band: CDMA 2000 PCS;

Frequency: 1851.25 MHz

Medium Parameters used: $f=1851.25$ MHz; $\sigma = 1.489$ S/m; $\epsilon_r = 51.239$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (5.04,5.04,5.04); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Back - CDMA 1900


BC1_chan25_amb_temp_23.6C_liq_temp_22.5C/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 12.250 V/m; **Power Drift = 0.097 dB**

Fast SAR: SAR(1g) = 0.796 W/kg; SAR(10g) = 0.496 W/kg

Maximum value of SAR (interpolated) = 0.947 W/kg

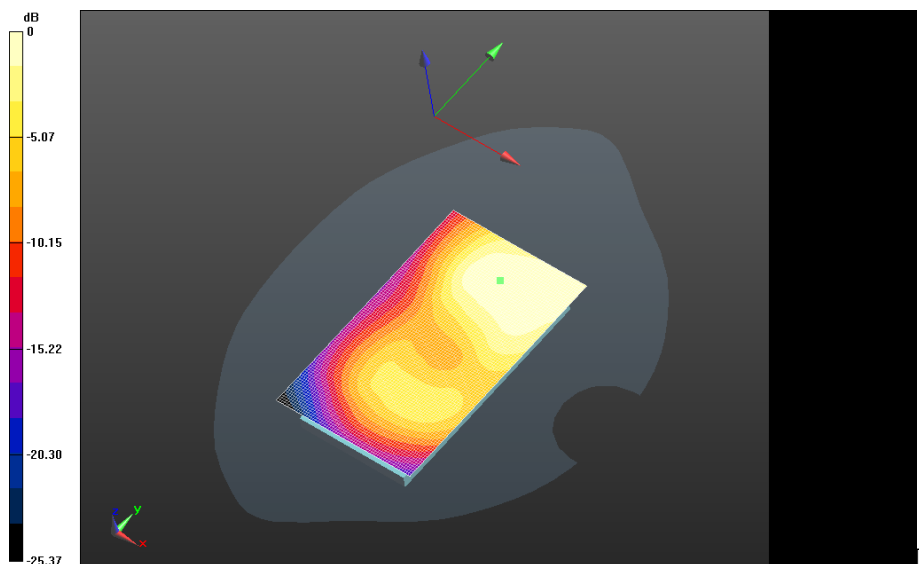

0 dB = 0.947 W/kg = -0.24 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			83(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Back - CDMA 1900

BC1_chan600_amb_temp_23.3C_liq_temp_22.6C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 11.498 V/m; **Power Drift = -0.069 dB**


Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Back - CDMA 1900

BC1_chan600_amb_temp_23.3C_liq_temp_22.6C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 11.498 V/m; **Power Drift = -0.069 dB**

Averaged SAR: SAR(1g) = 0.847 W/kg; SAR(10g) = 0.547 W/kg

Maximum value of SAR (interpolated) = 1.30 W/kg

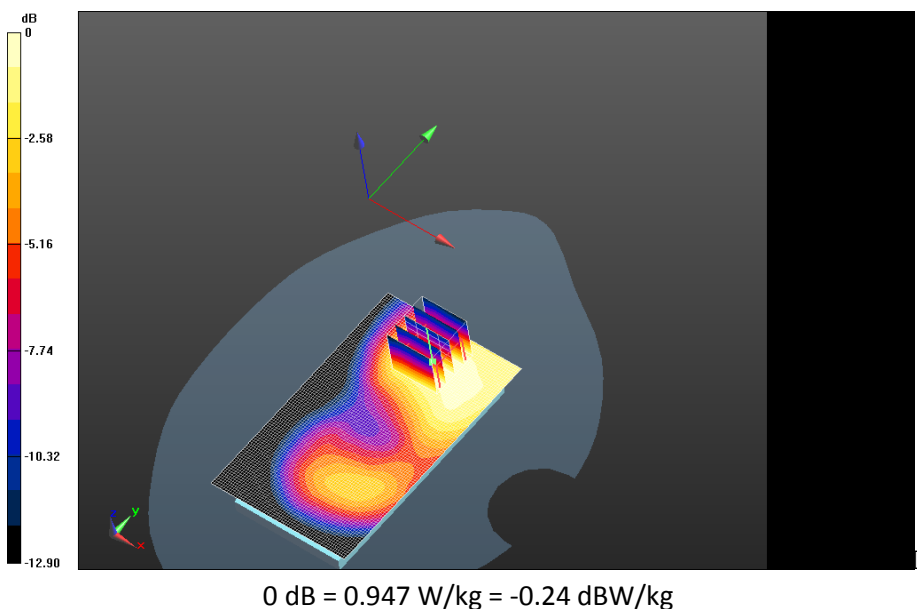


	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			84(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Back - CDMA 1900 BC1_chan600_2nd scan_amb_temp_23.1C_liq_temp_22.8C/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 11.484 V/m; **Power Drift = -0.099 dB**

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Back - CDMA 1900 BC1_chan600_2nd scan_amb_temp_23.1C_liq_temp_22.8C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 11.484 V/m; **Power Drift = -0.099 dB**

Averaged SAR: SAR(1g) = 0.849 W/kg; SAR(10g) = 0.546 W/kg
Maximum value of SAR (interpolated) = 1.32 W/kg

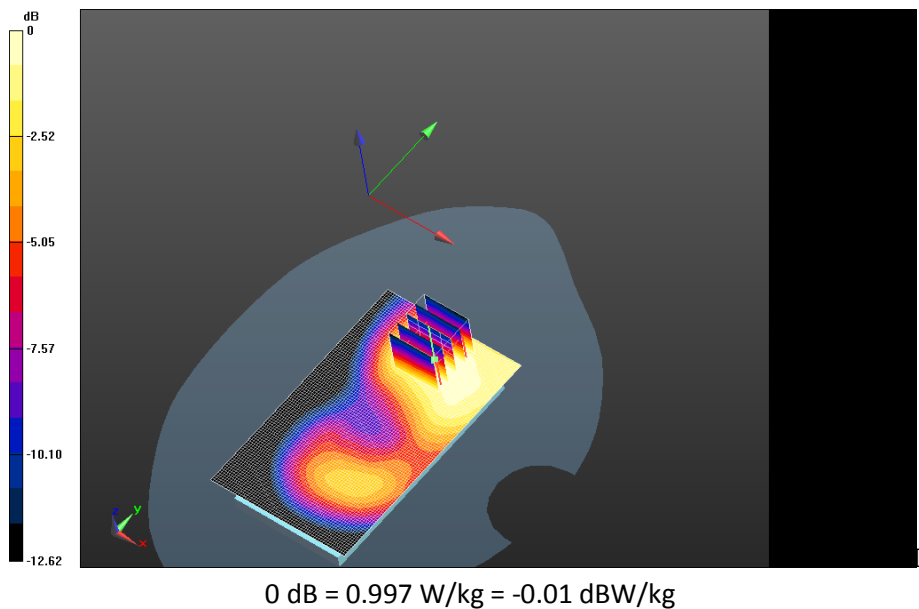

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			85(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Back - CDMA 1900


BC1_chan1175_amb_temp_23.1C_liq_temp_22.4C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 10.554 V/m; **Power Drift = -0.051 dB**

Fast SAR: SAR(1g) = 0.718 W/kg; SAR(10g) = 0.448 W/kg

Maximum value of SAR (interpolated) = 0.858 W/kg

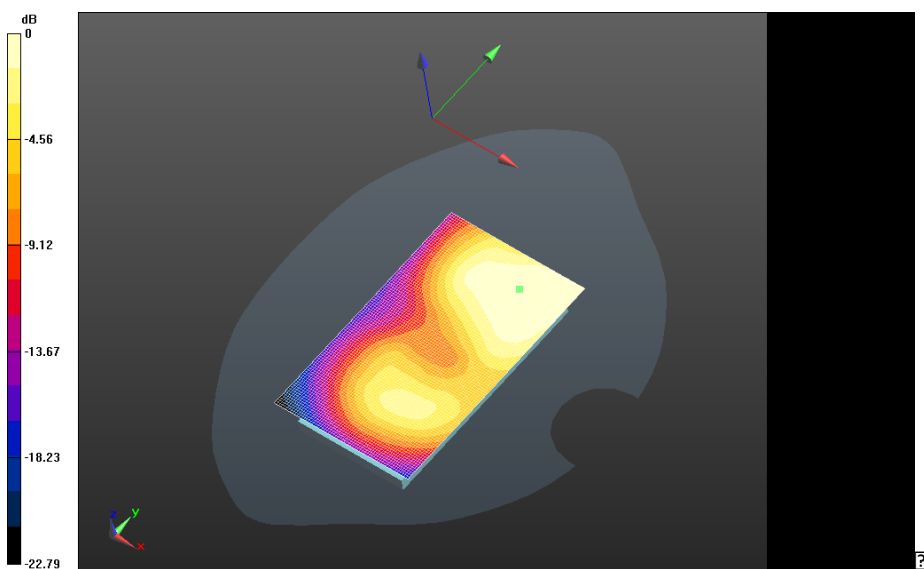

0 dB = 1.00 W/kg = 0.00 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			86(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900


BC1_chan25_amb_temp_23.4C_liq_temp 22.3C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 16.063 V/m; **Power Drift = -0.070 dB**

Fast SAR: SAR(1g) = 1.09 W/kg; SAR(10g) = 0.677 W/kg

Maximum value of SAR (interpolated) = 1.29 W/kg

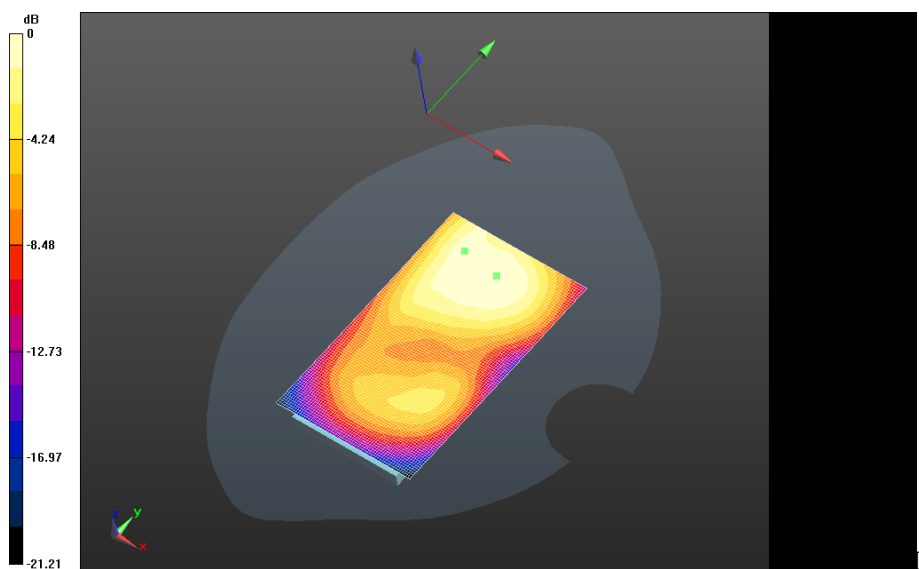

0 dB = 0.858 W/kg = -0.67 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 87(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900

BC1_chan600_amb_temp_23.4C_liq_temp 22.3C/Area Scan (61x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 16.143 V/m; **Power Drift = -0.098 dB**

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900

BC1_chan600_amb_temp_23.4C_liq_temp 22.3C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 16.143 V/m; **Power Drift = -0.098 dB**

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900


BC1_chan600_amb_temp_23.4C_liq_temp 22.3C/Zoom Scan 2 (36x31x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 16.143 V/m; **Power Drift = 0.384 dB**

Averaged SAR: SAR(1g) = 1.07 W/kg; SAR(10g) = 0.704 W/kg

Maximum value of SAR (interpolated) = 1.62 W/kg

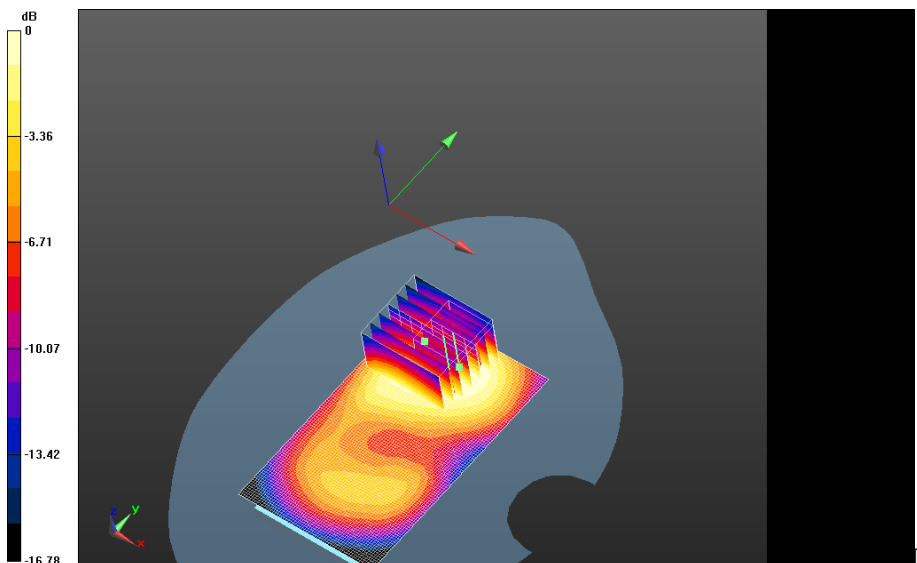

0 dB = 1.29 W/kg = 1.11 dBW/kg


	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 88(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900 BC1_chan600_2nd Scan_amb_temp_23.4C_liq_temp 22.3C/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 15.244 V/m; **Power Drift = -0.00231 dB**

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900 BC1_chan600_2nd Scan_amb_temp_23.4C_liq_temp 22.3C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 15.244 V/m; **Power Drift = -0.00231 dB**

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900 BC1_chan600_2nd Scan_amb_temp_23.4C_liq_temp 22.3C/Zoom Scan 2 (36x31x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 15.244 V/m; **Power Drift = 0.084 dB**

Averaged SAR: SAR(1g) = 1.09 W/kg; SAR(10g) = 0.703 W/kg
Maximum value of SAR (interpolated) = 1.67 W/kg

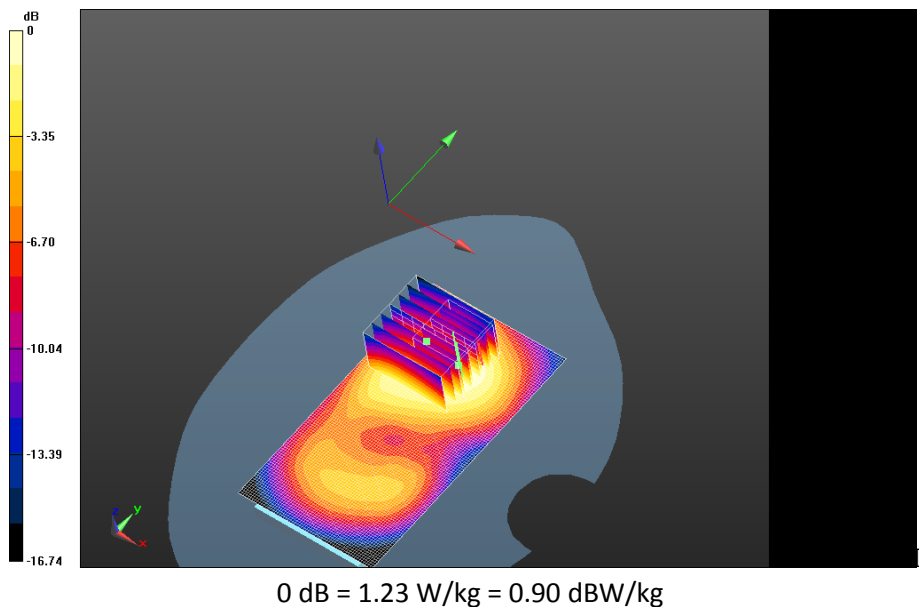


	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			89(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

**Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900
BC1_chan1175_amb_temp_23.3C_liq_temp 22.3C/Area Scan (61x111x1):** Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 15.533 V/m; **Power Drift = -0.016 dB**

**Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900
BC1_chan1175_amb_temp_23.3C_liq_temp 22.3C/Zoom Scan (26x26x36)/Cube 0:**
Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 15.533 V/m; **Power Drift = -0.016 dB**

**Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Front - CDMA 1900
BC1_chan1175_amb_temp_23.3C_liq_temp 22.3C/Zoom Scan 2 (41x31x36)/Cube 0:**
Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 15.533 V/m; **Power Drift = 0.101 dB**

Averaged SAR: SAR(1g) = 1.08 W/kg; SAR(10g) = 0.697 W/kg
Maximum value of SAR (interpolated) = 1.66 W/kg

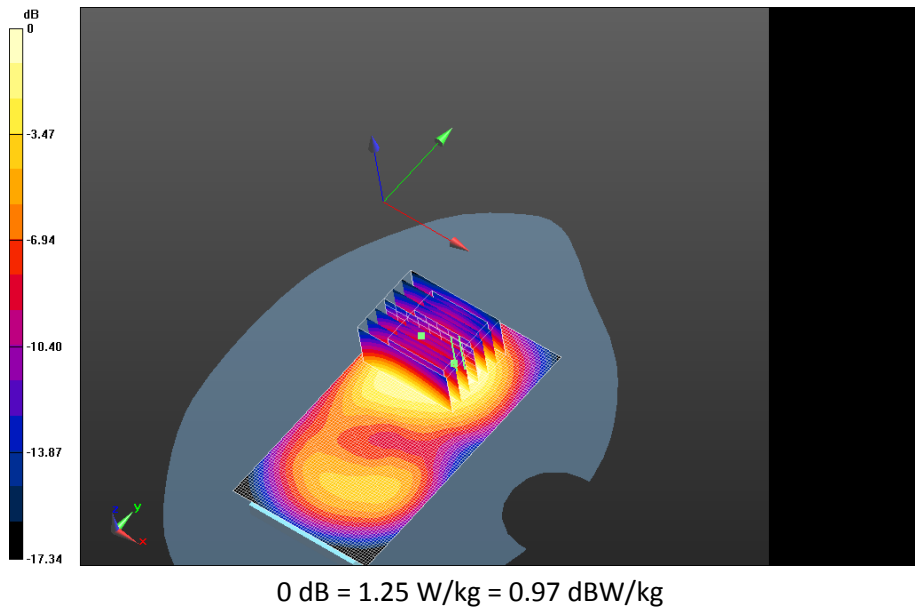

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			90(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Left - CDMA 1900


BC1_chan600_amb_temp_23.1C_liq_temp_22.3C/Area Scan (31x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 6.502 V/m; **Power Drift = -0.028 dB**

Fast SAR: SAR(1g) = 0.178 W/kg; SAR(10g) = 0.108 W/kg; Secondary SAR(1g) = 0.898 W/kg

Maximum value of SAR (interpolated) = 0.215 W/kg

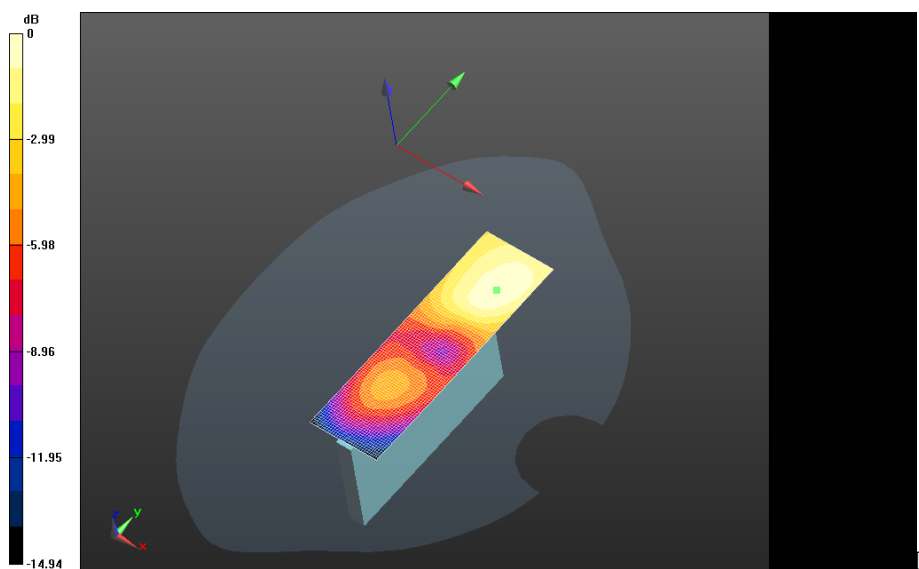

0 dB = 1.27 W/kg = 1.04 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			91(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Right - CDMA 1900


BC1_chan25_amb_temp_23.6C_liq_temp_22.3C/Area Scan (31x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 17.273 V/m; **Power Drift = 0.083 dB**

Fast SAR: SAR(1g) = 0.818 W/kg; SAR(10g) = 0.464 W/kg; Secondary SAR(1g) = 0.548 W/kg

Maximum value of SAR (interpolated) = 1.01 W/kg

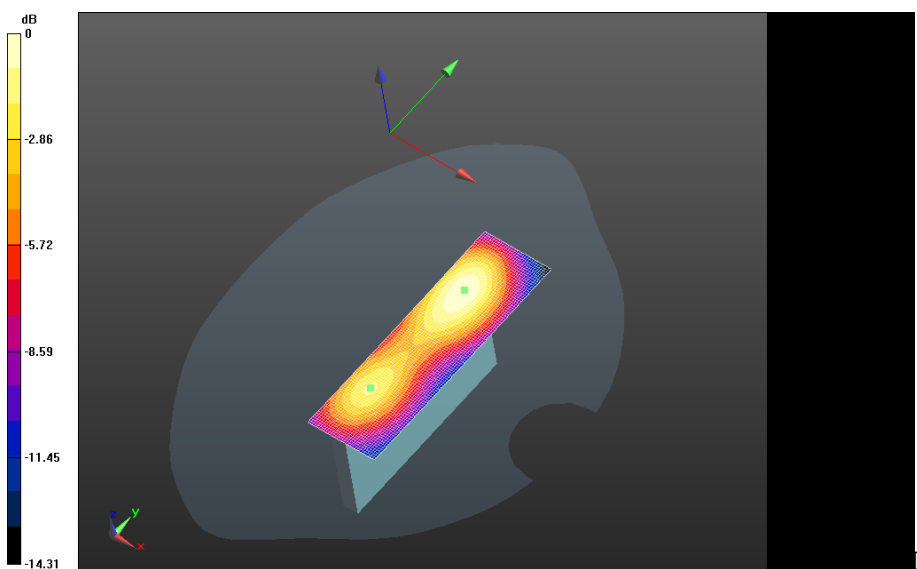


0 dB = 0.215 W/kg = -6.68 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			92(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

**Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Right - CDMA 1900
BC1_chan600_amb_temp_23.1C_liq_temp_22.3C/Area Scan (31x101x1):** Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 17.867 V/m; **Power Drift = -0.033 dB**

Fast SAR: SAR(1g) = 0.872 W/kg; SAR(10g) = 0.499 W/kg; Secondary SAR(1g) = 0.666 W/kg
Maximum value of SAR (interpolated) = 1.07 W/kg

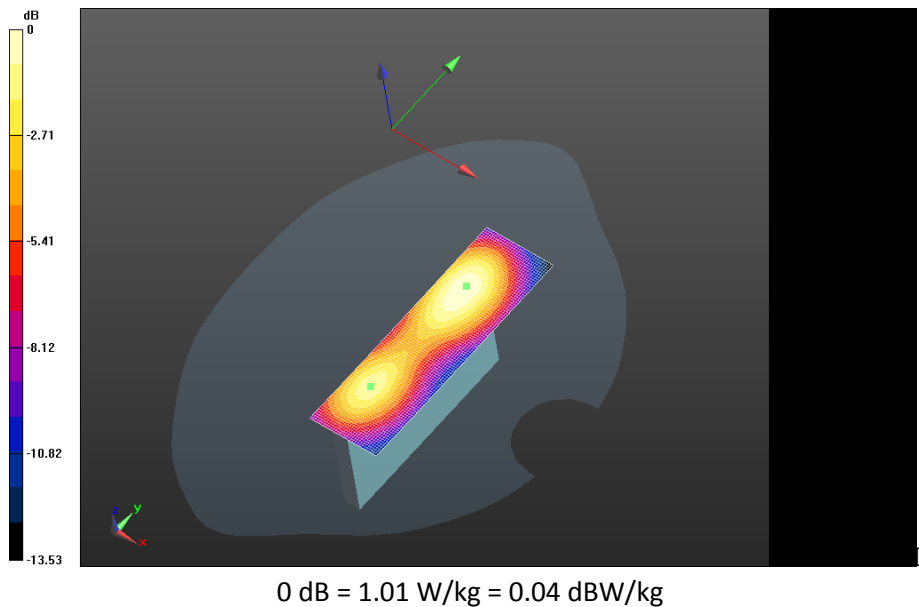

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			93(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Right - CDMA 1900


BC1_chan1175_amb_temp_23.1C_liq_temp_22.3C/Area Scan (31x101x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 16.734 V/m; **Power Drift = -0.098 dB**

Fast SAR: SAR(1g) = 0.786 W/kg; SAR(10g) = 0.452 W/kg; Secondary SAR(1g) = 0.598 W/kg

Maximum value of SAR (interpolated) = 0.959 W/kg

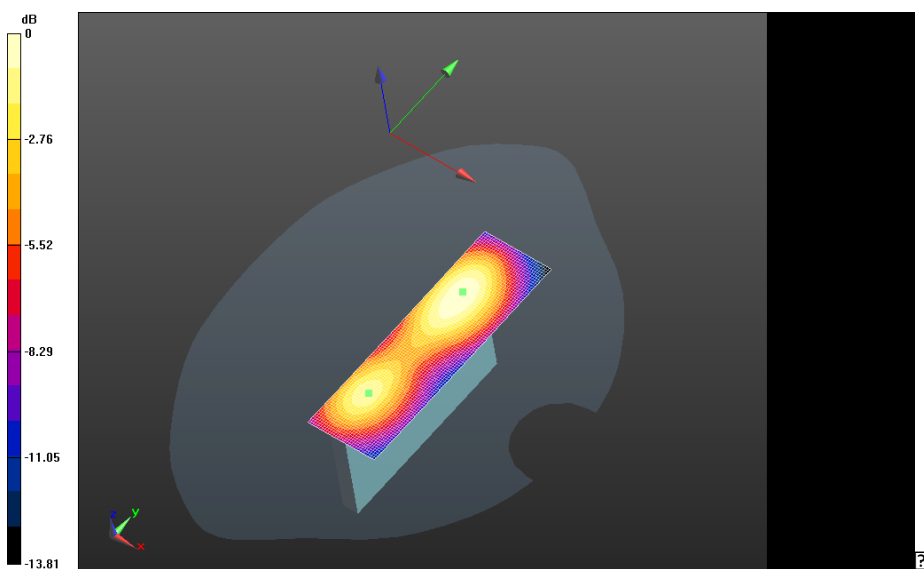

0 dB = 1.07 W/kg = 0.29 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			94(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - CDMA 1900 BC1/10mm Device Bottom - CDMA 1900


BC1_chan600_amb_temp_23.5C_liq_temp_22.2C/Area Scan (31x71x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 18.135 V/m; **Power Drift = -0.089 dB**

Fast SAR: SAR(1g) = 0.407 W/kg; SAR(10g) = 0.237 W/kg; Secondary SAR(1g) = 0.598 W/kg

Maximum value of SAR (interpolated) = 0.492 W/kg

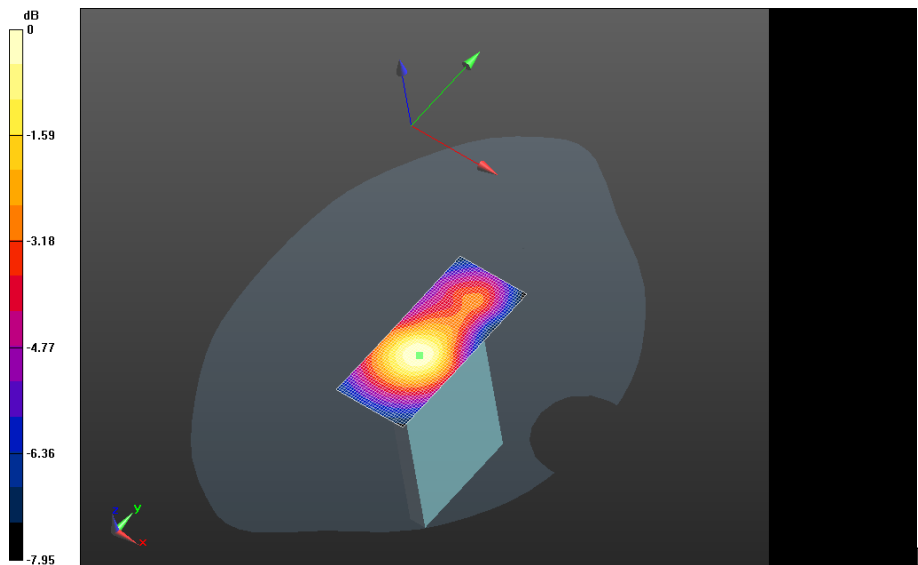

0 dB = 0.959 W/kg = -0.18 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 95(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

802.11b/g

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			96(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 7/25/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Mobile Hot Spot MSL - 802.11g

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 50.993$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.35,4.35,4.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - 802.11g/10mm Device Back -

802.11g_chan6_amb_temp_23.0C_liq_temp_22.6C/Area Scan 2 (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.186 V/m; **Power Drift = 0.195 dB**

Mobile Hot Spot MSL - 802.11g/10mm Device Back -

802.11g_chan6_amb_temp_23.0C_liq_temp_22.6C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.186 V/m; **Power Drift = 0.195 dB**

Averaged SAR: SAR(1g) = 0.190 W/kg; SAR(10g) = 0.0839 W/kg

Maximum value of SAR (interpolated) = 0.422 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 97(114)
	Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW
IC				

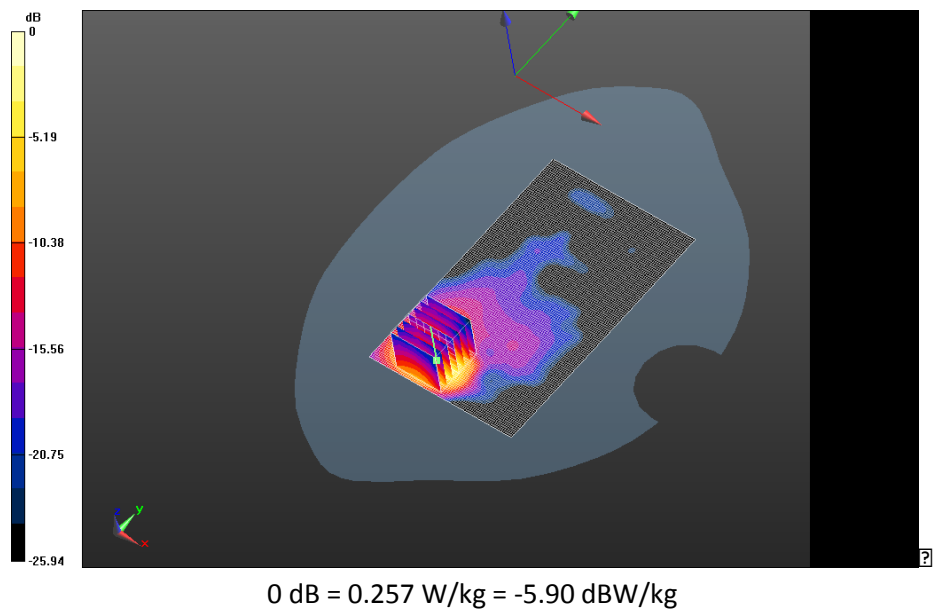

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			98(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - 802.11g/10mm Device Front -

802.11g_chan6_amb_temp_23.2C_liq_temp_21.5C/Area Scan (81x131x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 1.407 V/m; **Power Drift = 0.429 dB**

Mobile Hot Spot MSL - 802.11g/10mm Device Front -


802.11g_chan6_amb_temp_23.2C_liq_temp_21.5C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.407 V/m; **Power Drift = 0.429 dB**

Averaged SAR: SAR(1g) = 0.0451 W/kg; SAR(10g) = 0.0232 W/kg

Maximum value of SAR (interpolated) = 0.0878 W/kg

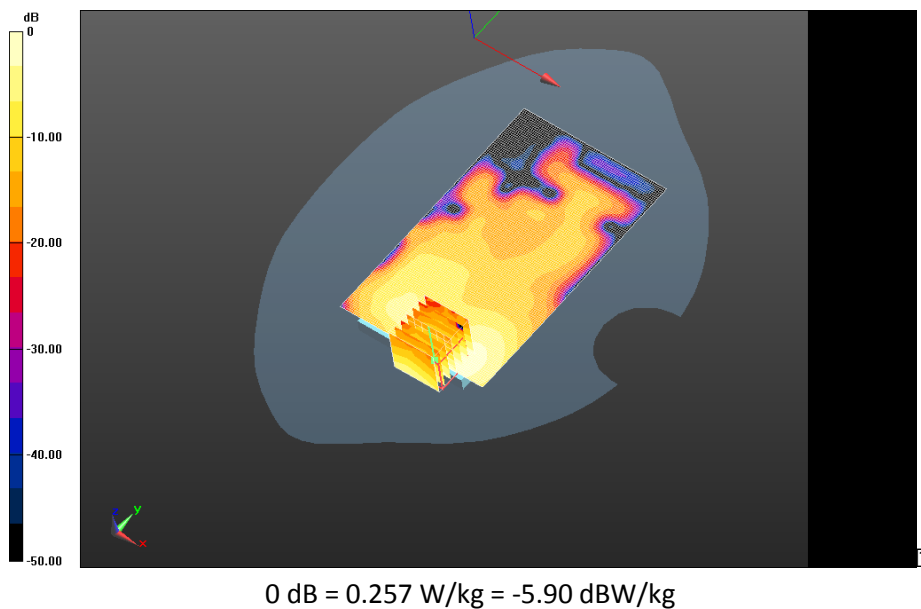

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			99(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - 802.11g/10mm Device Left -


802.11g_chan6_amb_temp_23.0C_liq_temp_22.6C/Area Scan (41x111x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 2.789 V/m; **Power Drift = -0.00381 dB**

Fast SAR: SAR(1g) = 0.0286 W/kg; SAR(10g) = 0.0142 W/kg

Maximum value of SAR (interpolated) = 0.0375 W/kg

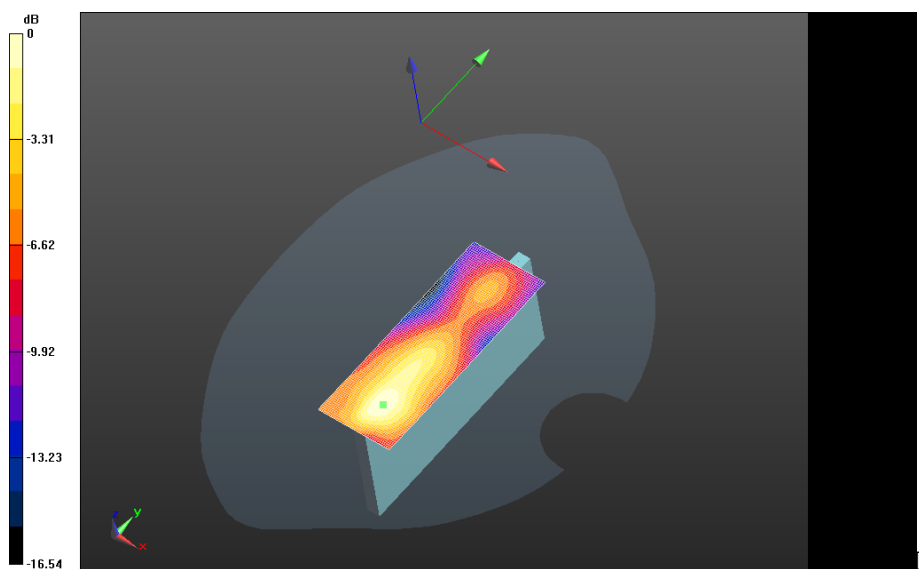

0 dB = 0.0572 W/kg = -12.43 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 100(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - 802.11g/10mm Device Right -


802.11g_chan6_amb_temp_22.7C_liq_temp_22.6C/Area Scan (41x121x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 0.394 V/m; **Power Drift = 0.382 dB**

Fast SAR: SAR(1g) = 0.00258 W/kg; SAR(10g) = 0.00113 W/kg

Maximum value of SAR (interpolated) = 0.00447 W/kg

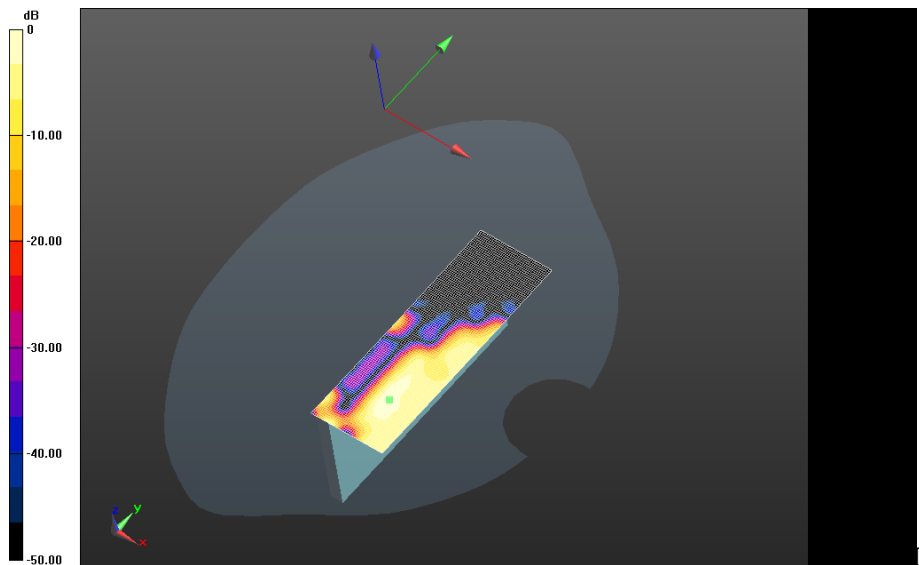

0 dB = 0.0375 W/kg = -14.26 dBW/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			101(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - 802.11g/10mm Device Top -


802.11g_chan6_amb_temp_23.0C_liq_temp_22.6C/Area Scan (41x91x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 4.182 V/m; **Power Drift = 0.00828 dB**

Fast SAR: SAR(1g) = 0.0904 W/kg; SAR(10g) = 0.0444 W/kg

Maximum value of SAR (interpolated) = 0.118 W/kg

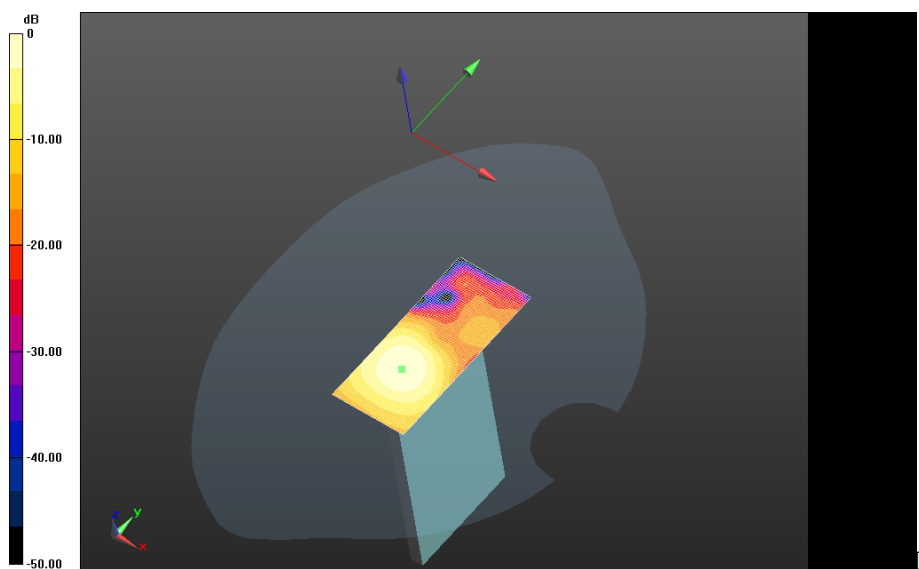

0 dB = 0.00447 W/kg = -23.50 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 102(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Bluetooth

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			103(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 6/18/2013

Test Lab: RIM Testing Services

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 333E2854

Configuration: Mobile Hot Spot MSL - Bluetooth

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.887$ S/m; $\epsilon_r = 50.251$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.35,4.35,4.35); Calibrated: 1/10/2013;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn881; Calibrated: 1/14/2013
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.6(1115); SEMCAD X Version 14.6.9 (7117)

Mobile Hot Spot MSL - Bluetooth/10mm Device Back -

Bluetooth_chan0_amb_temp_23.1C_liq_temp_21.6C/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0836 W/kg

Mobile Hot Spot MSL - Bluetooth/10mm Device Back -

Bluetooth_chan0_amb_temp_23.1C_liq_temp_21.6C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 5.908 V/m; **Power Drift = -0.00777 dB**

Averaged SAR: SAR(1g) = 0.0617 W/kg; SAR(10g) = 0.0273 W/kg

Maximum value of SAR (interpolated) = 0.134 W/kg

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			104(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

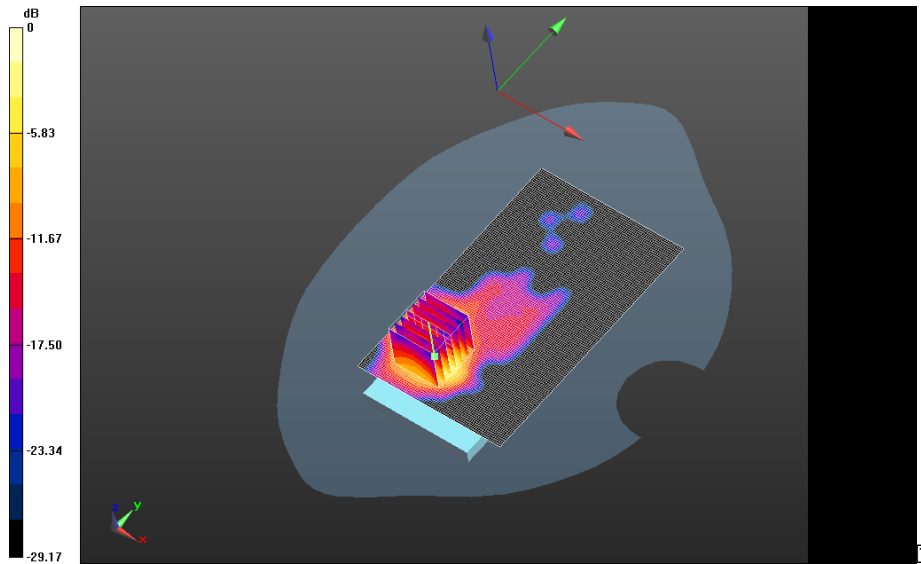

0 dB = 0.0821 W/kg = -10.86 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 105(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - Bluetooth/10mm Device Front -

Bluetooth_chan0_amb_temp_23.2C_liq_temp_21.5C/Area Scan (81x131x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0230 W/kg

Mobile Hot Spot MSL - Bluetooth/10mm Device Front -


Bluetooth_chan0_amb_temp_23.2C_liq_temp_21.5C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 3.513 V/m; **Power Drift = 0.324 dB**

Averaged SAR: SAR(1g) = 0.0186 W/kg; SAR(10g) = 0.00923 W/kg

Maximum value of SAR (interpolated) = 0.0384 W/kg

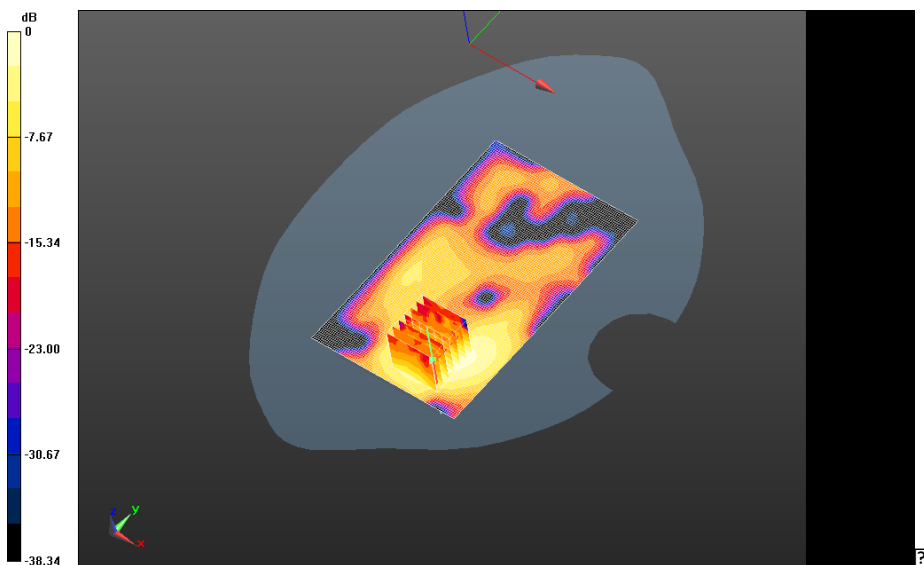

0 dB = 0.0821 W/kg = -10.86 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 106(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hot Spot MSL - Bluetooth/10mm Device Top -

Bluetooth_chan0_amb_temp_23.2C_liq_temp_21.4C/Area Scan (41x91x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0377 W/kg

Mobile Hot Spot MSL - Bluetooth/10mm Device Top -


Bluetooth_chan0_amb_temp_23.2C_liq_temp_21.4C/Zoom Scan (21x21x36)/Cube 0:

Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 4.441 V/m; **Power Drift = 0.156 dB**

Averaged SAR: SAR(1g) = 0.0307 W/kg; SAR(10g) = 0.0158 W/kg

Maximum value of SAR (interpolated) = 0.0596 W/kg

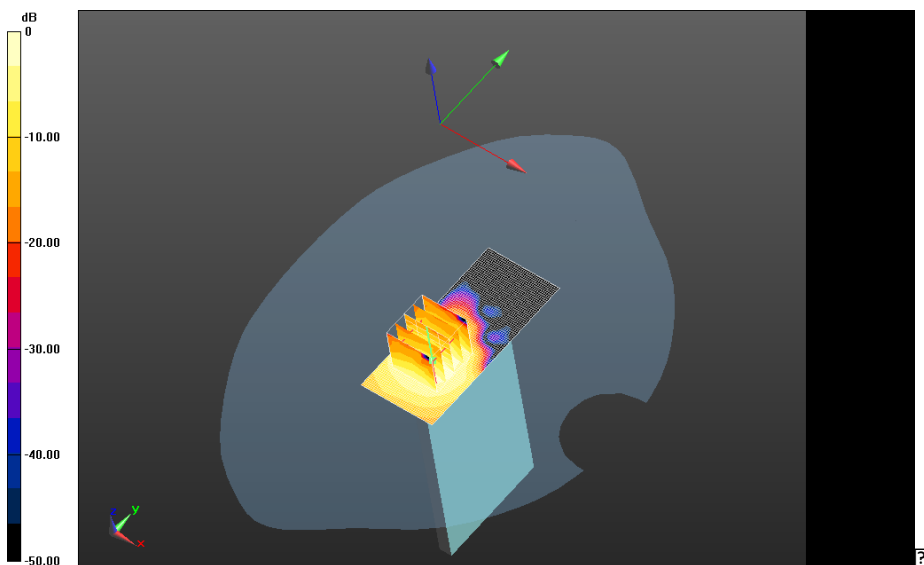

0 dB = 0.0243 W/kg = -16.14 dBW/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 107(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

802.11a

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			108(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 12/10/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Mobile Hotspot MSL - 802.11a 5200 MHz

Communication System: 802.11a (0); Communication System Band: Low and Mid Bands;

Frequency: 5180 MHz, Duty Cycle: 1:1

Medium Parameters used: $f=5180$ MHz; $\sigma = 5.612$ S/m; $\epsilon_r = 46.703$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (4.06,4.06,4.06); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hotspot MSL - 802.11a 5200 MHz/10mm Device Back -

802.11a_chan36_low_band_Amb_Temp_23.4C_Liquid_Temp_22.2C/Area Scan (181x241x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Mobile Hotspot MSL - 802.11a 5200 MHz/10mm Device Back -

802.11a_chan36_low_band_Amb_Temp_23.4C_Liquid_Temp_22.2C/Zoom Scan


(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 2.857 V/m; Power Drift = -0.069 dB

Averaged SAR: SAR(1g) = 0.0674 W/kg; SAR(10g) = 0.0294 W/kg

Maximum value of SAR (interpolated) = 0.220 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 109(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

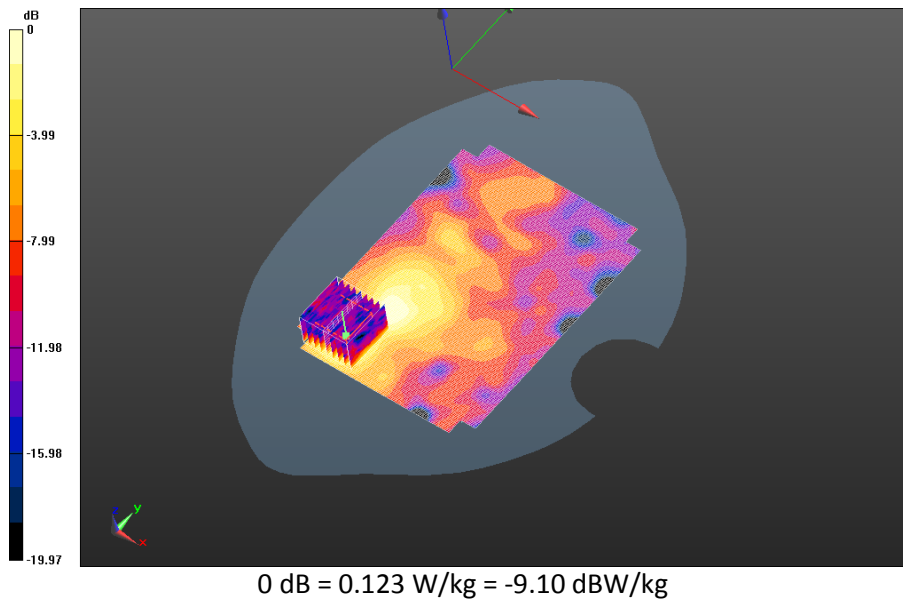

	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			110(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Date: 12/10/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 303E76AA

Configuration: Mobile Hotspot MSL - 802.11a 5800 MHz

Communication System: 802.11a (0); Communication System Band: Low and Mid Bands;
Frequency: 5745 MHz, Communication System PAR: 0 dB; PMF: 1.12202e-005; Duty Cycle: 1:1
Medium Parameters used: $f=5745$ MHz; $\sigma = 6.423$ S/m; $\epsilon_r = 45.305$; $\rho = 1.000$ g/cm³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3592; ConvF: (3.86,3.86,3.86); Calibrated: 11/10/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Back -

802.11a_chan149_upper_bandII_Amb_Temp_23.2C_Liquid_Temp_22.0C/Area Scan

(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.195 W/kg

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Back -

802.11a_chan149_upper_bandII_Amb_Temp_23.2C_Liquid_Temp_22.0C/Zoom Scan


(31x31x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 2.222 V/m; Power Drift = -0.200 dB

Averaged SAR: SAR(1g) = 0.115 W/kg; SAR(10g) = 0.0460 W/kg

Maximum value of SAR (interpolated) = 0.575 W/kg

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 111(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

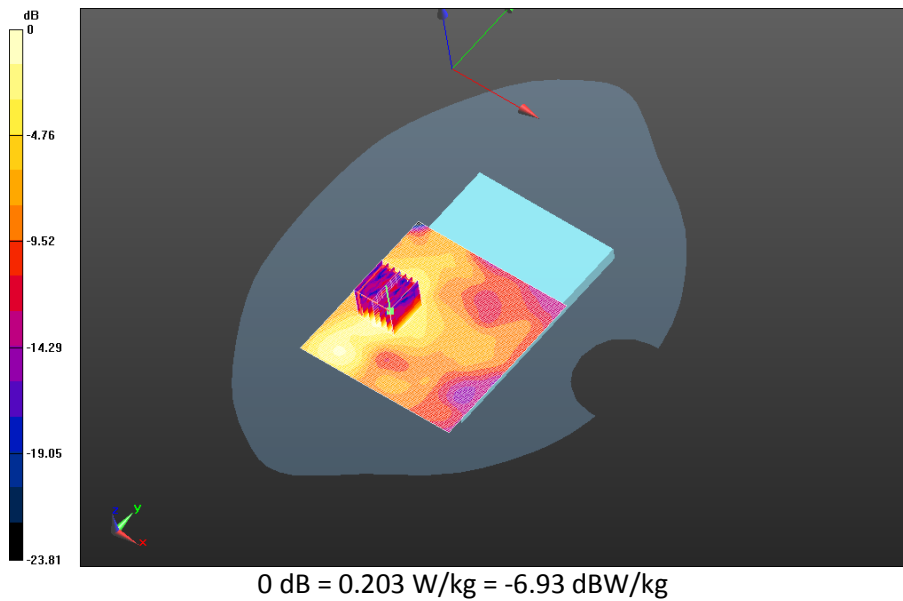


	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 112(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Front -
802.11a_chan149_upper_bandII_Amb_Temp_23.2C_Liquid_Temp_21.9C/Area Scan
(101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0467 W/kg

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Front -
802.11a_chan149_upper_bandII_Amb_Temp_23.2C_Liquid_Temp_21.9C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.879 V/m; Power Drift = 0.217 dB

Averaged SAR: SAR(1g) = 0.0275 W/kg; SAR(10g) = 0.0138 W/kg
Maximum value of SAR (interpolated) = 0.121 W/kg

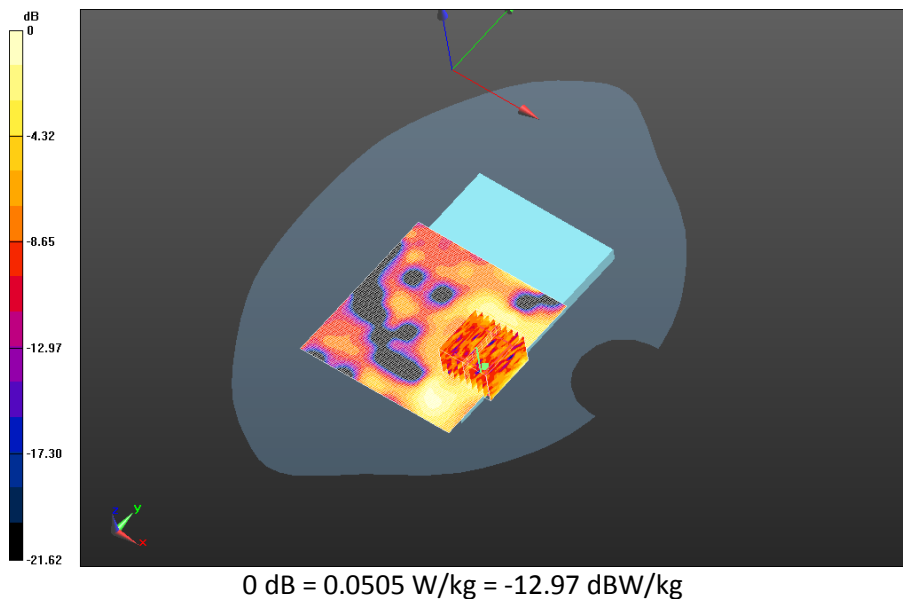


	Document			Page
	Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			113(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Left -
802.11a_chan149_upper_bandII_Amb_Temp_23.1C_Liquid_Temp_22.0C/Area Scan
(181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.213 W/kg

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Left -
802.11a_chan149_upper_bandII_Amb_Temp_23.1C_Liquid_Temp_22.0C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 3.935 V/m; Power Drift = 0.051 dB

Averaged SAR: SAR(1g) = 0.115 W/kg; SAR(10g) = 0.0498 W/kg
Maximum value of SAR (interpolated) = 0.528 W/kg

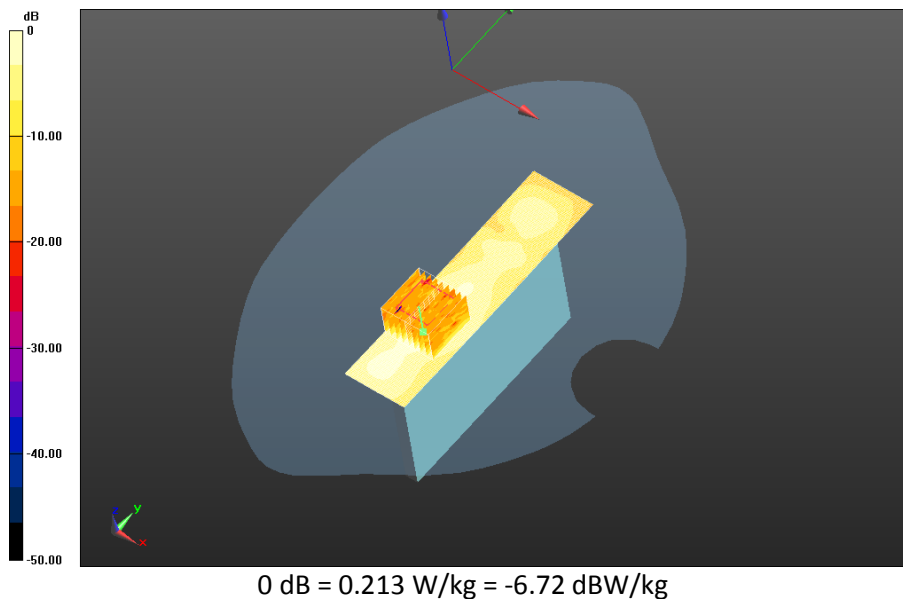

	Document Appendix C2 for the BlackBerry® Smartphone Model RGB141LW SAR Report Rev 4			Page 114(114)
Author Data Andrew Becker	Dates of Test June 11 – August 16, 2013 March 24-26, 2014 December 8 – 12, 2014	Test Report No RTS-6046-1308-39 Rev 6	FCC ID: L6ARGB140LW	IC

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Top -
802.11a_chan149_upper_bandII_Amb_Temp_23.1C_Liquid_Temp_22.0C/Area Scan
(181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0632 W/kg

Mobile Hotspot MSL - 802.11a 5800 MHz/10mm Device Top -
802.11a_chan149_upper_bandII_Amb_Temp_23.1C_Liquid_Temp_22.0C/Zoom Scan
(46x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.914 V/m; Power Drift = 0.651 dB

Averaged SAR: SAR(1g) = 0.0387 W/kg; SAR(10g) = 0.0195 W/kg
Maximum value of SAR (interpolated) = 0.194 W/kg

