



FCC TEST REPORT

FCC ID: L73- MT5

On Behalf of

Sanwa Electronic Instrument Co Ltd

2.4GHz Radio Control System

Model No.: MT-5

Prepared for : Sanwa Electronic Instrument Co Ltd
Address : 1-2-50, Honmachi, Yoshida, Higashi-Osaka, Osaka 578, Japan

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2110005-C01-R04
Date of Receipt : October 12, 2021
Date of Test : October 12, 2021-November 3, 2021
Date of Report : November 4, 2021
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	10
2.3. Tested Supporting System Details	10
2.4. Block Diagram of connection between EUT and simulators	10
2.5. Test Mode Description.....	10
2.6. Test Conditions	10
2.7. Test Facility	11
2.8. Measurement Uncertainty.....	11
2.9. Test Equipment List	12
3. Maximum Peak Output power	13
3.1. Limit	13
3.2. Test Procedure	13
3.3. Test Setup.....	13
3.4. Test Result	13
4. Bandwidth.....	15
4.1. Limit	15
4.2. Test Procedure	15
4.3. Test Result	15
5. Carrier Frequency Separation.....	34
5.1. Limit	34
5.2. Test Procedure	34
5.3. Test Result	34
6. Number Of Hopping Channel.....	36
6.1. Limit	36
6.2. Test Procedure	36
6.3. Test Result	36
7. Dwell Time.....	38
7.1. Test limit	38
7.2. Test Procedure	38
7.3. Test Result	38
8. Radiated emissions.....	49
8.1. Limit	49
8.2. Block Diagram of Test setup	50
8.3. Test Procedure	51
8.4. Test Result	51
9. Band Edge Compliance	56

9.1. Block Diagram of Test Setup.....	56
9.2. Limit	56
9.3. Test Procedure	56
9.4. Test Result	56
10. Power Line Conducted Emissions	68
10.1. Block Diagram of Test Setup.....	68
10.2. Limit	68
10.3. Test Procedure	68
10.4. Test Result	68
11. Antenna Requirements	69
11.1. Limit	69
11.2. Result	69
12. Test setup photo	70
12.1. Photos of Radiated emission.....	70
13. Photos of The EUT	71

TEST REPORT DECLARATION

Applicant : Sanwa Electronic Instrument Co Ltd
Address : 1-2-50, Honmachi, Yoshida, Higashi-Osaka, Osaka 578, Japan
Manufacturer : Dongguan Fountain Electronics
Address : Qiaolian Industrial District, Erhuan St., Dongkeng Town, Dongguan City,
Guangdong, P.R. China
EUT Description : 2.4GHz Radio Control System
(A) Model No. : MT-5
(B) Trademark : SANWA

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer


.....

Approved by (name + signature).....: Simple Guan
Project Manager


.....

Date of issue..... : November 4, 2021

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 4, 2021	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	N/A
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name	: 2.4GHz Radio Control System
Model No.	: MT-5
DIFF	: N/A
Trademark	: SANWA
Power rate	: DC 4.5V from battery
Test Power supply	: 3*DC 1.5V by AAA battery
Radio Technology	: 2.4G
Operation frequency	: 1) 2404-2470 MHz 2) 2405-2471 MHz 3) 2412-2478 MHz 4) 2413-2479MHz 5) 2401-2467MHz
Channel No.	: 34Channels
Channel Separation	: 2MHz
Modulation	: GFSK
Antenna Type	: Integrated Antenna, max gain 2.0dBi.
Software version	: 72.01R101
Hardware version	: 700A17751A

Channel list:

2404-2470MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2404	10CH	2422	19CH	2440	28CH	2458
2CH	2406	11CH	2424	20CH	2442	29CH	2460
3CH	2408	12CH	2426	21CH	2444	30CH	2462
4CH	2410	13CH	2428	22CH	2446	31CH	2464
5CH	2412	14CH	2430	23CH	2448	32CH	2466
6CH	2414	15CH	2432	24CH	2450	33CH	2468
7CH	2416	16CH	2434	25CH	2452	34CH	2470
8CH	2418	17CH	2436	26CH	2454		
9CH	2420	18CH	2438	27CH	2456		

2405-2471MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2405	10CH	2423	19CH	2441	28CH	2459
2CH	2407	11CH	2425	20CH	2443	29CH	2461
3CH	2409	12CH	2427	21CH	2445	30CH	2463
4CH	2411	13CH	2429	22CH	2447	31CH	2465
5CH	2413	14CH	2431	23CH	2449	32CH	2467
6CH	2415	15CH	2433	24CH	2451	33CH	2469
7CH	2417	16CH	2435	25CH	2453	34CH	2471
8CH	2419	17CH	2437	26CH	2455		
9CH	2421	18CH	2439	27CH	2457		

2412-2478MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2412	10CH	2430	19CH	2448	28CH	2466
2CH	2414	11CH	2432	20CH	2450	29CH	2468
3CH	2416	12CH	2434	21CH	2452	30CH	2470
4CH	2418	13CH	2436	22CH	2454	31CH	2472
5CH	2420	14CH	2438	23CH	2456	32CH	2474
6CH	2422	15CH	2440	24CH	2458	33CH	2476
7CH	2424	16CH	2442	25CH	2460	34CH	2478
8CH	2426	17CH	2444	26CH	2462		
9CH	2428	18CH	2446	27CH	2464		

2413-2479MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2413	10CH	2431	19CH	2449	28CH	2467
2CH	2415	11CH	2433	20CH	2451	29CH	2469
3CH	2417	12CH	2435	21CH	2453	30CH	2471
4CH	2419	13CH	2437	22CH	2455	31CH	2473
5CH	2421	14CH	2439	23CH	2457	32CH	2475
6CH	2423	15CH	2441	24CH	2459	33CH	2477
7CH	2425	16CH	2443	25CH	2461	34CH	2479
8CH	2427	17CH	2445	26CH	2463		
9CH	2429	18CH	2447	27CH	2465		

2401-2467MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2401	10CH	2419	19CH	2437	28CH	2455
2CH	2403	11CH	2421	20CH	2439	29CH	2457
3CH	2405	12CH	2423	21CH	2441	30CH	2459
4CH	2407	13CH	2425	22CH	2443	31CH	2461
5CH	2409	14CH	2427	23CH	2445	32CH	2463
6CH	2411	15CH	2429	24CH	2447	33CH	2465
7CH	2413	16CH	2431	25CH	2449	34CH	2467
8CH	2415	17CH	2433	26CH	2451		
9CH	2417	18CH	2435	27CH	2453		


2.2.Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	AAA Battery case	/	/	/	/
2	2.4GHz Radio Control System	SANWA	RX-493i	/	/

2.4.Block Diagram of connection between EUT and simulators



2.5.Test Mode Description

Tested mode, channel, and data rate information	
Mode	Channel
GFSK	Low
	Middle
	High

Note: New batteries used during testing.

2.6.Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 15, 2019 Certificated by IC
Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2020.09.02	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2021.08.25	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2021.08.25	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2021.08.25	1Year
Receiver	R&S	ESCI	101165	2021.08.25	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2020.04.12	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	RE1	2021.08.25	1Year
RF Cable	Resenberger	Cable 2	RE2	2021.08.25	1Year
RF Cable	Resenberger	Cable 3	CE1	2021.08.25	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2021.08.25	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2021.08.25	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2021.08.25	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2021.08.25	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	SK2018101801	2021.08.25	1 Year
Power Meter	Agilent	E9300A	MY41496628	2021.08.25	1 Year
Power Sensor	DARE	RPR3006W	15100041SNO91	2021.08.25	1 Year
Temp. & Humid. Chamber	Wei Huang	WHTH-1000 -40-880	100631	2021.04.21	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2021.08.25	1 Year
Adjustable attenuator	MWRFtest	N/A	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	N/A	N/A	N/A

3. MAXIMUM PEAK OUTPUT POWER

3.1.Limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3.Test Setup



3.4.Test Result

2404-2470 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2404	8.801	21	Pass
	2436	9.512	21	Pass
	2470	8.787	21	Pass
Conclusion: PASS				

2405-2471 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2405	8.948	21	Pass
	2437	7.997	21	Pass
	2471	8.64	21	Pass
Conclusion: PASS				

2412-2478 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2412	9.212	21	Pass
	2444	9.043	21	Pass
	2478	9.481	21	Pass
Conclusion: PASS				

2413-2479 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2413	9.233	21	Pass
	2445	8.823	21	Pass
	2479	9.01	21	Pass
Conclusion: PASS				

2401-2467 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2401	1.836	21	Pass
	2433	1.57	21	Pass
	2467	1.938	21	Pass
Conclusion: PASS				

4. BANDWIDTH

4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.Test Result


2404-2470 MHz:

Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2404	Ant 1	1.718	1.58	/	Pass
2436	Ant 1	1.65	1.592	/	Pass
2470	Ant 1	1.67	1.76	/	Pass

OBW NVNT user 2404MHz Ant1

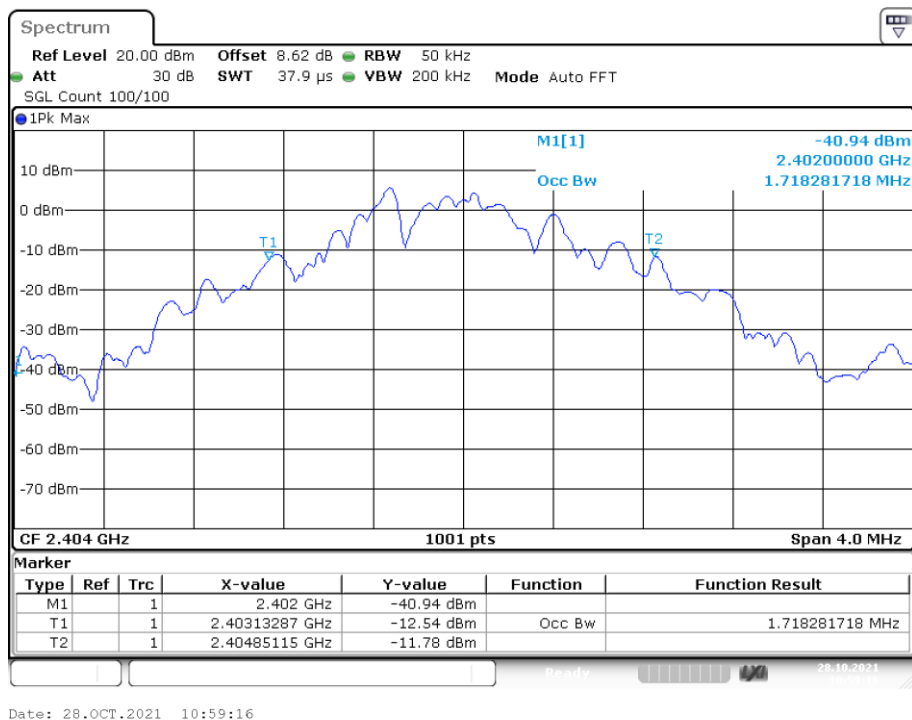

-20 dB BW NVNT user 2404MHz Ant1

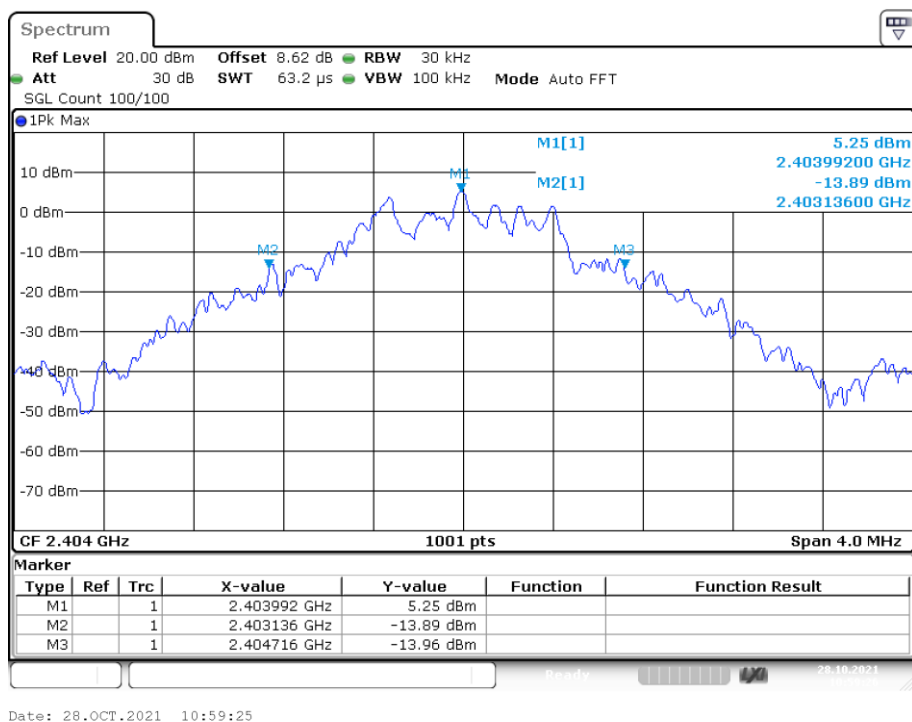

OBW NVNT user 2436MHz Ant1




Date: 28.OCT.2021 11:03:30

-20 dB BW NVNT user 2436MHz Ant1




Date: 28.OCT.2021 11:03:39

OBW NVNT user 2470MHz Ant1

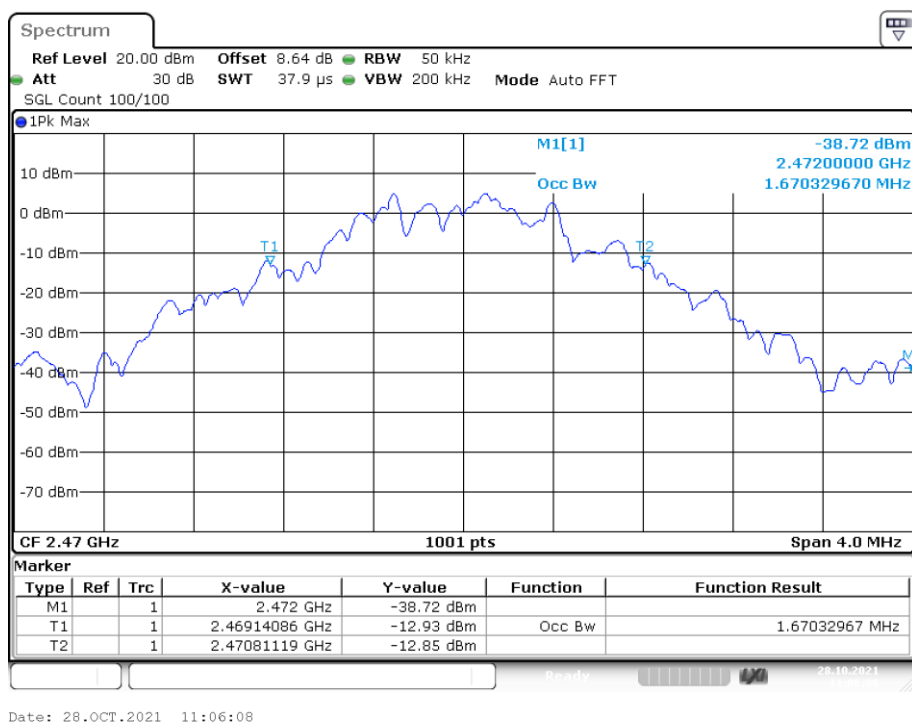


-20 dB BW NVNT user 2470MHz Ant1

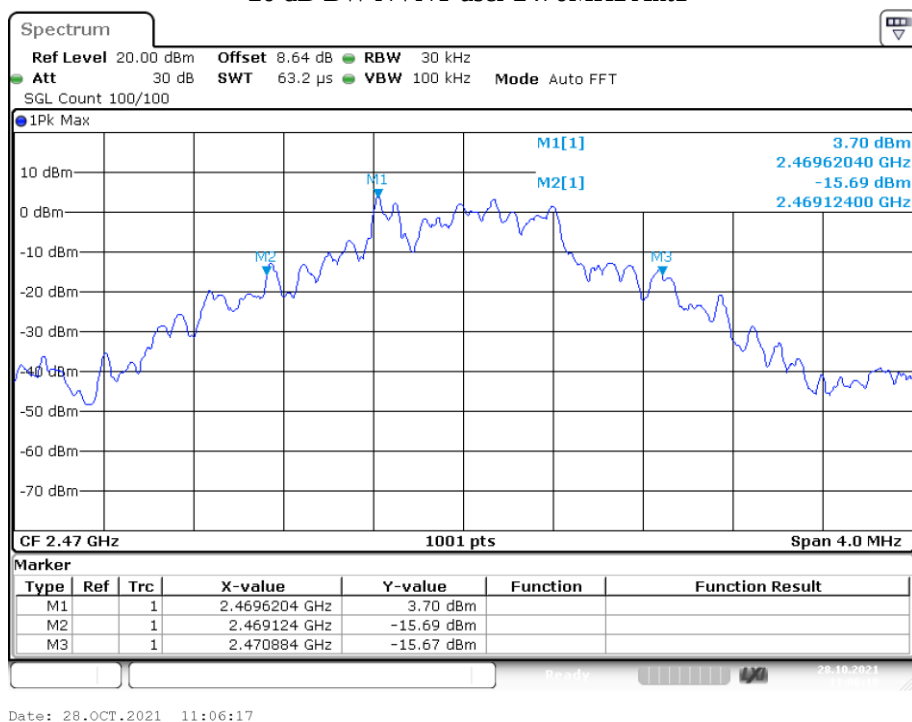


2405-2471 MHz:

Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2405	Ant 1	1.642	1.604	/	Pass
2437	Ant 1	1.606	1.48	/	Pass
2471	Ant 1	1.55	1.572	/	Pass

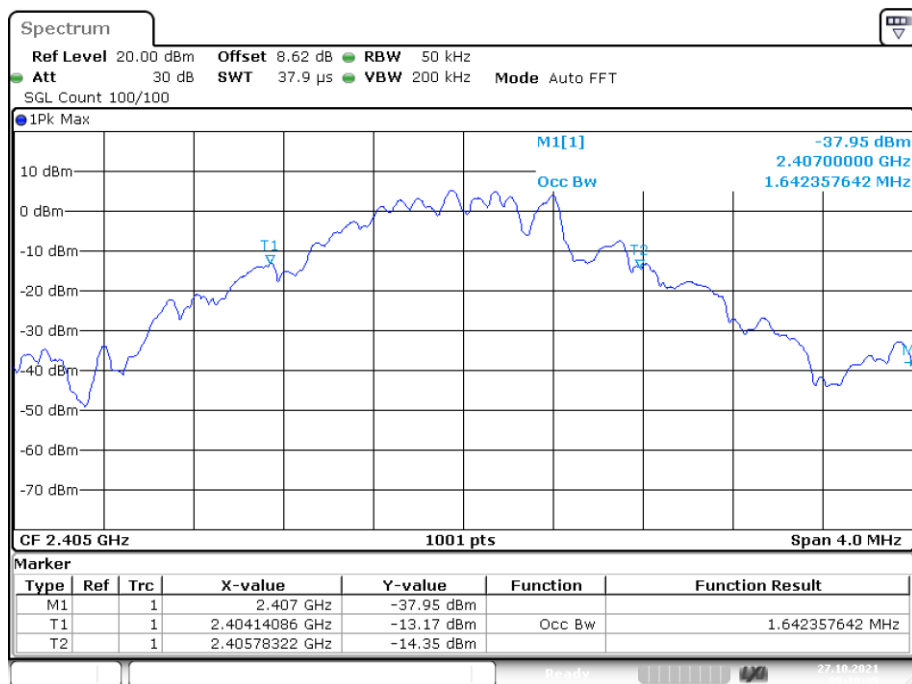OBW NVNT user 2405MHz Ant1

Date: 27.OCT.2021 05:10:34

-20 dB BW NVNT user 2405MHz Ant1

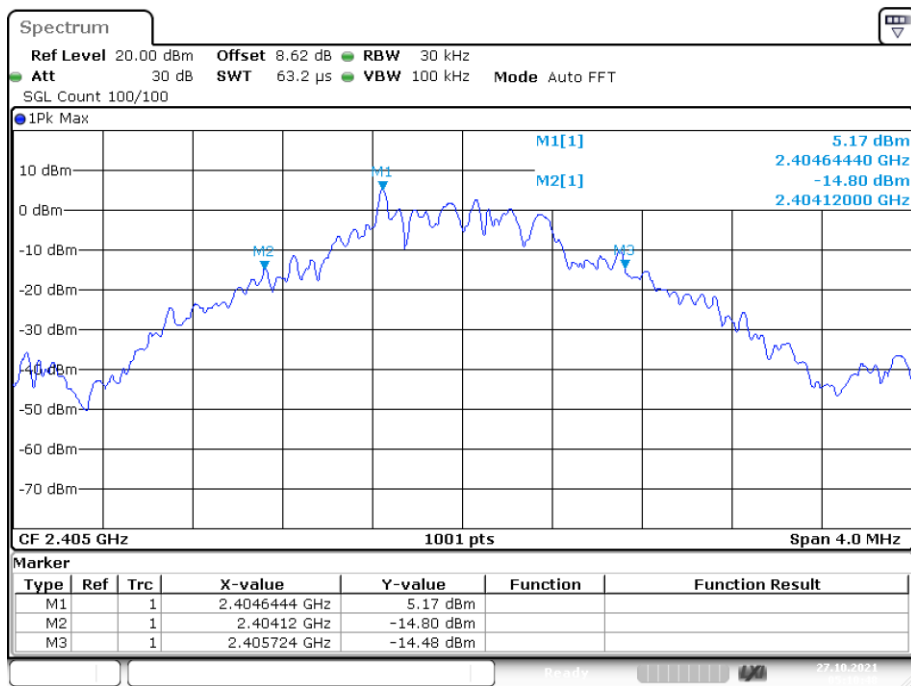


Date: 27.OCT.2021 05:10:48

OBW NVNT user 2437MHz Ant1



Date: 27.OCT.2021 12:28:39

-20 dB BW NVNT user 2437MHz Ant1

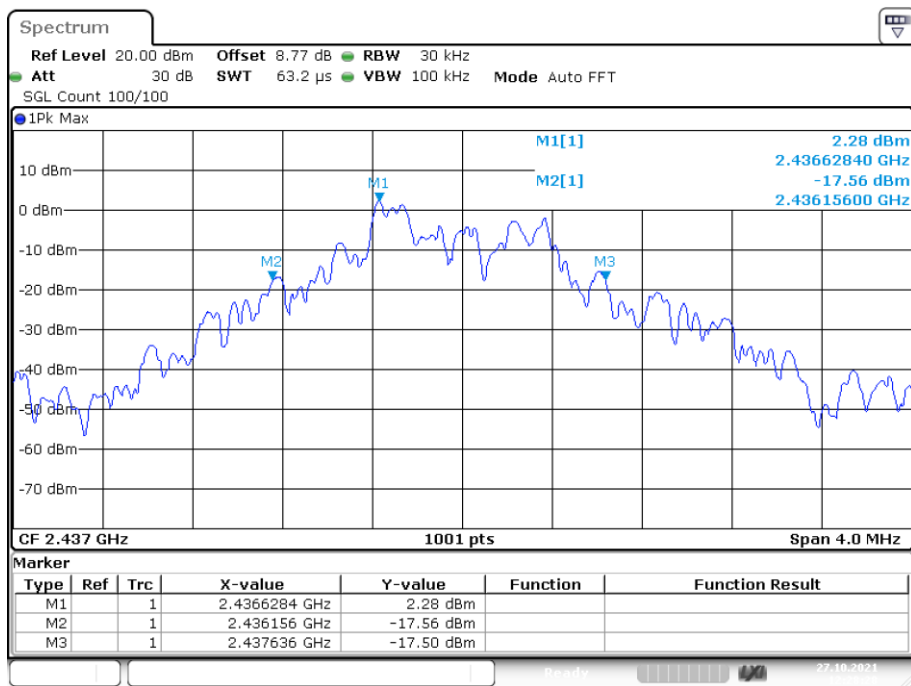


Date: 27.OCT.2021 12:28:27

OBW NVNT user 2471MHz Ant1



Date: 27.OCT.2021 12:29:42

-20 dB BW NVNT user 2471MHz Ant1

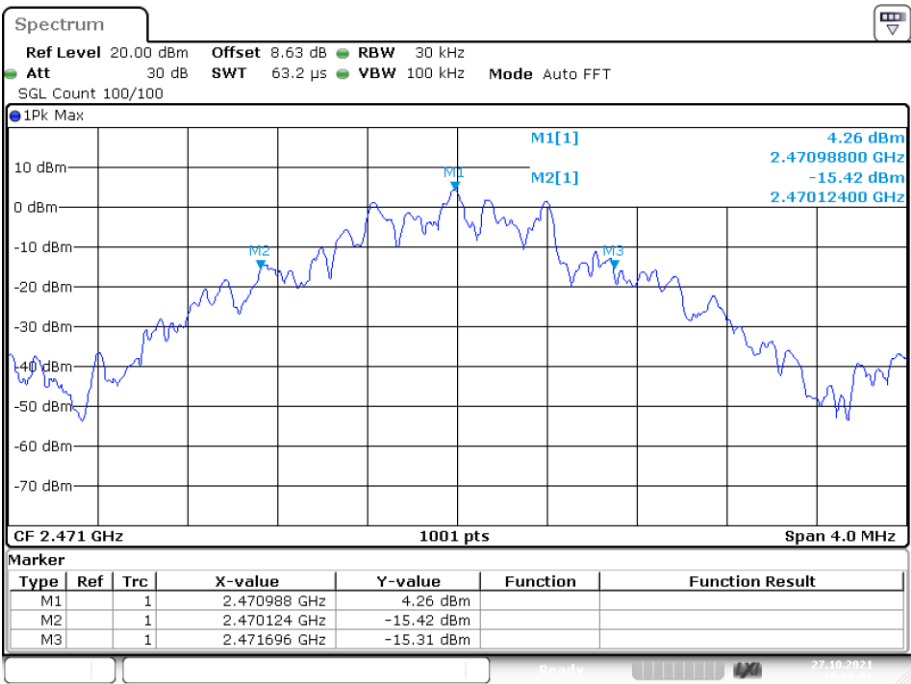

Date: 27.OCT.2021 12:29:50

2412-2478 MHz:


Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2412	Ant 1	1.614	1.752	/	Pass
2446	Ant 1	1.606	1.728	/	Pass
2478	Ant 1	1.702	1.784	/	Pass

OBW NVNT user 2412MHz Ant1




Date: 28.OCT.2021 11:36:06

-20 dB BW NVNT user 2412MHz Ant1

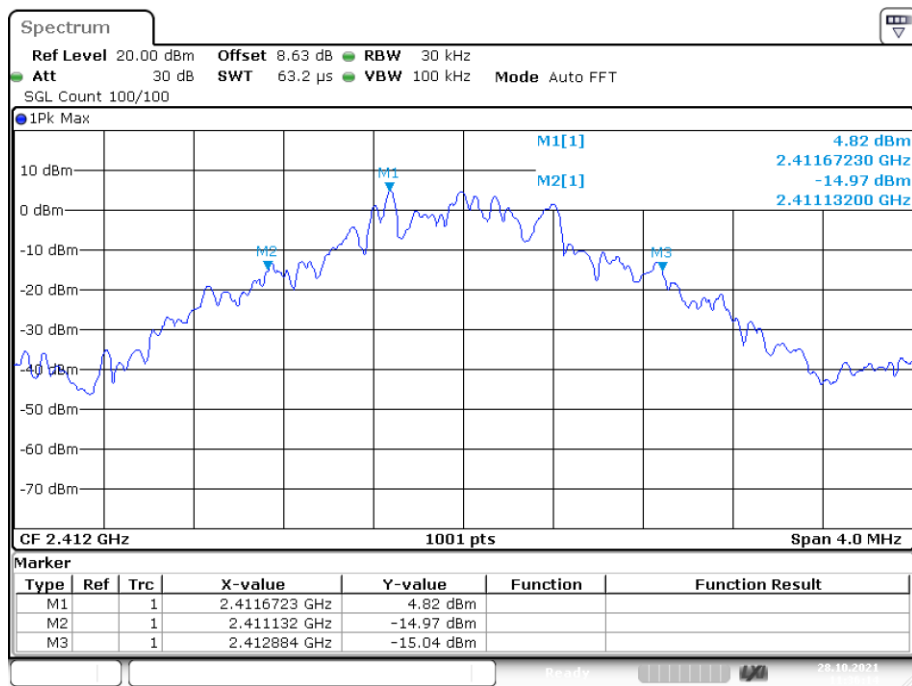


Date: 28.OCT.2021 11:36:14

OBW NVNT user 2444MHz Ant1

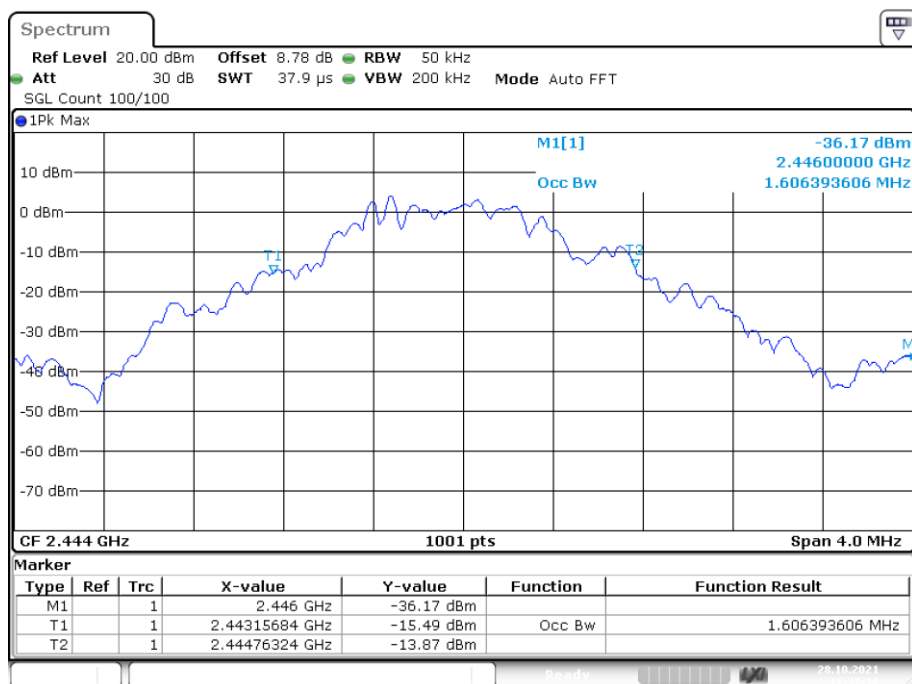


Date: 28.OCT.2021 11:37:38


-20 dB BW NVNT user 2444MHz Ant1

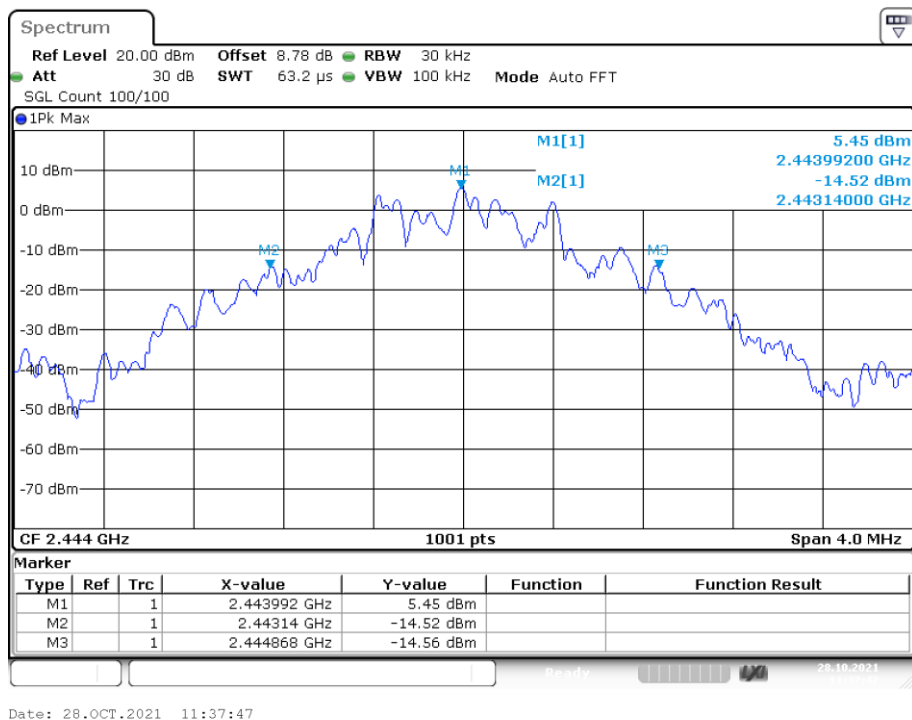

OBW NVNT user 2478MHz Ant1

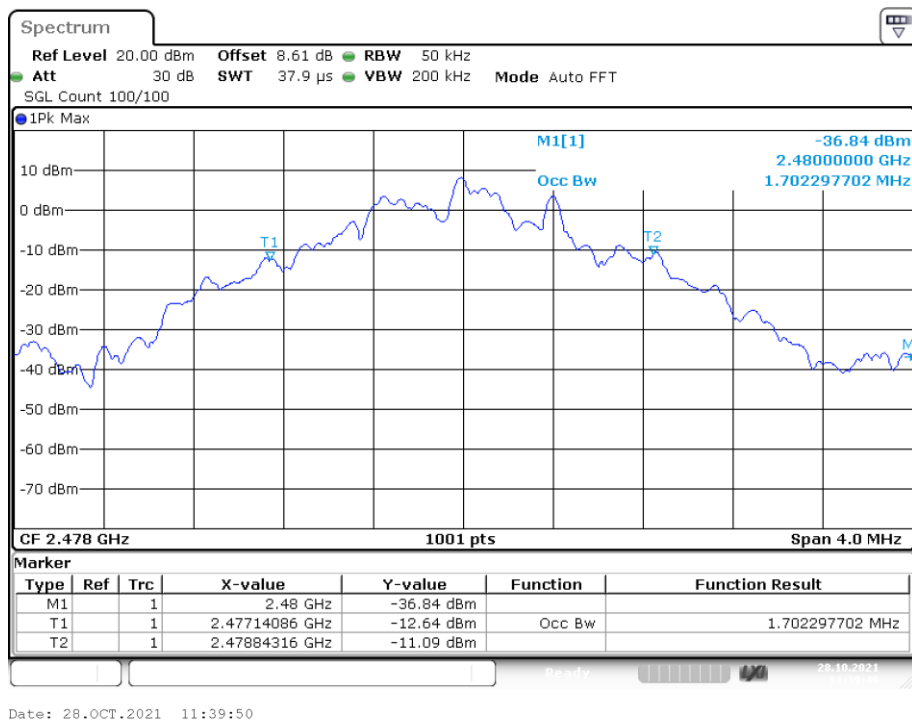

-20 dB BW NVNT user 2478MHz Ant1

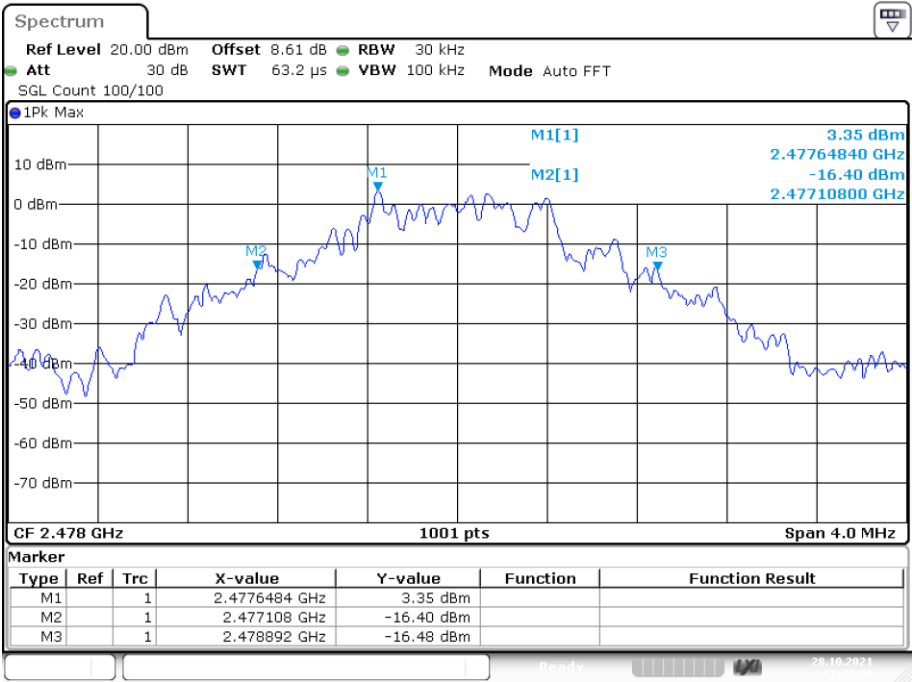

Date: 28.OCT.2021 11:39:59


2413-2479MHz:

Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2413	Ant 1	1.694	1.612	/	Pass
2445	Ant 1	1.682	1.772	/	Pass
2479	Ant 1	1.69	1.768	/	Pass

OBW NVNT user 2413MHz Ant1

Date: 28.OCT.2021 10:33:26

-20 dB BW NVNT user 2413MHz Ant1

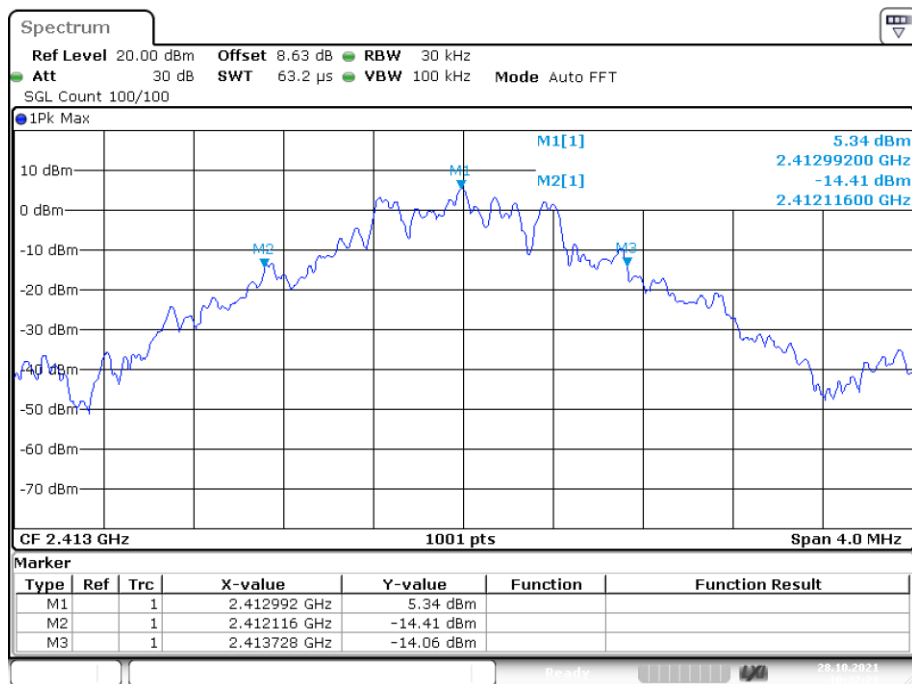


Date: 28.OCT.2021 10:32:23

OBW NVNT user 2445MHz Ant1



Date: 28.OCT.2021 10:34:54

-20 dB BW NVNT user 2445MHz Ant1

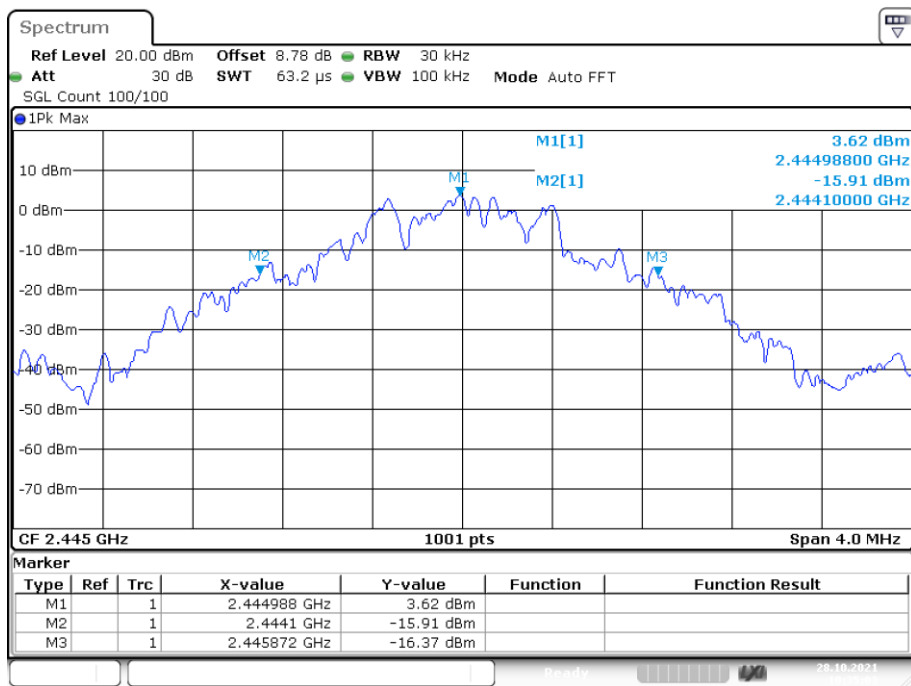

Date: 28.OCT.2021 10:35:03

OBW NVNT user 2479MHz Ant1



Date: 28.OCT.2021 10:39:39

-20 dB BW NVNT user 2479MHz Ant1




Date: 28.OCT.2021 10:39:48

2401-2467MHz:


Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2413	Ant 1	1.674	1.6	/	Pass
2445	Ant 1	1.598	1.552	/	Pass
2479	Ant 1	1.778	1.784	/	Pass

OBW NVNT user 2401MHz Ant1

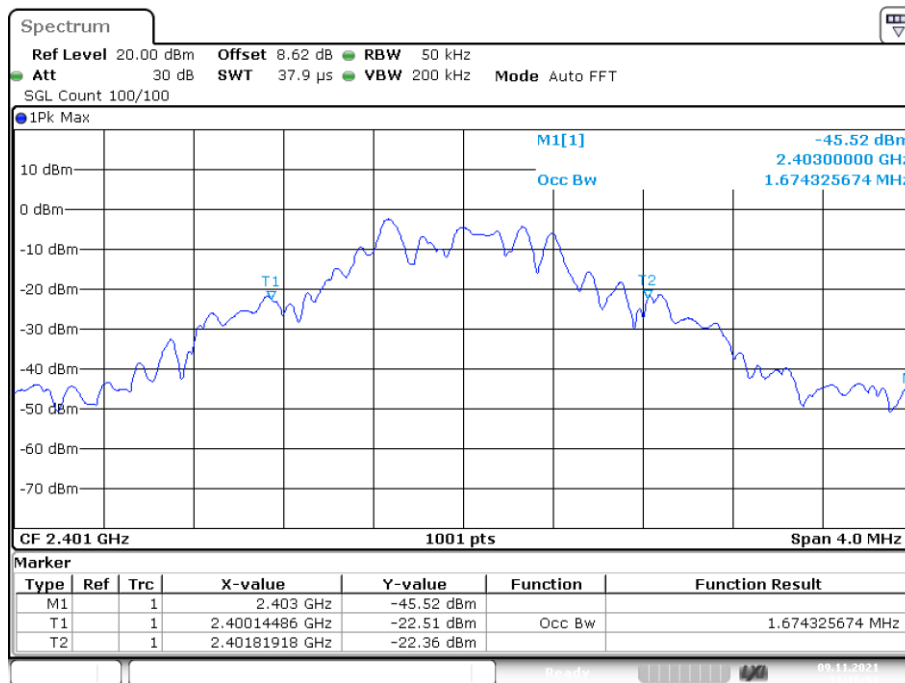


Date: 9.NOV.2021 11:16:51

-20dB Bandwidth NVNT user 2401MHz Ant1

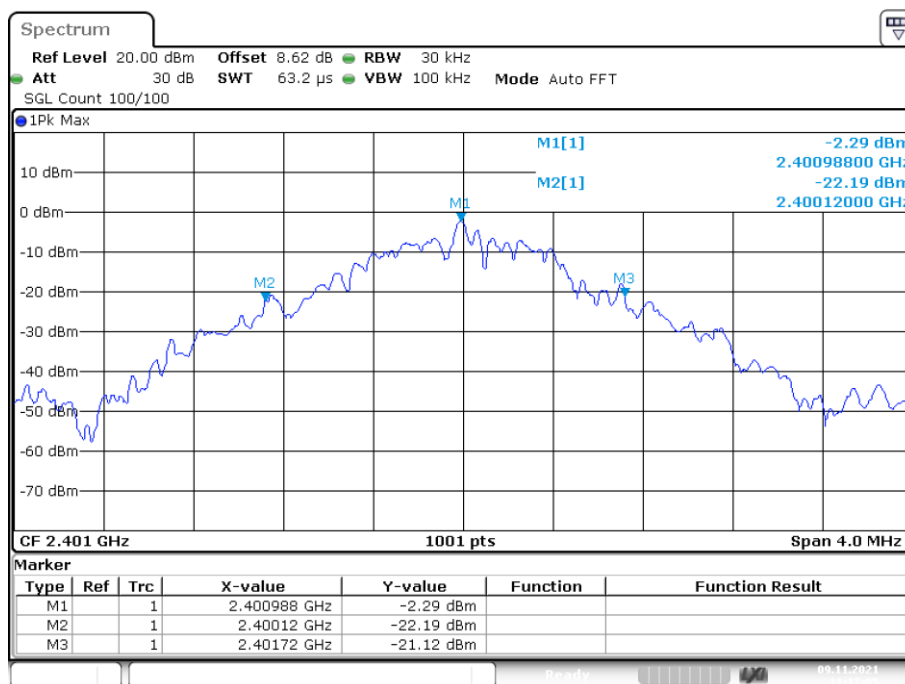


Date: 9.NOV.2021 11:17:05

OBW NVNT user 2433MHz Ant1

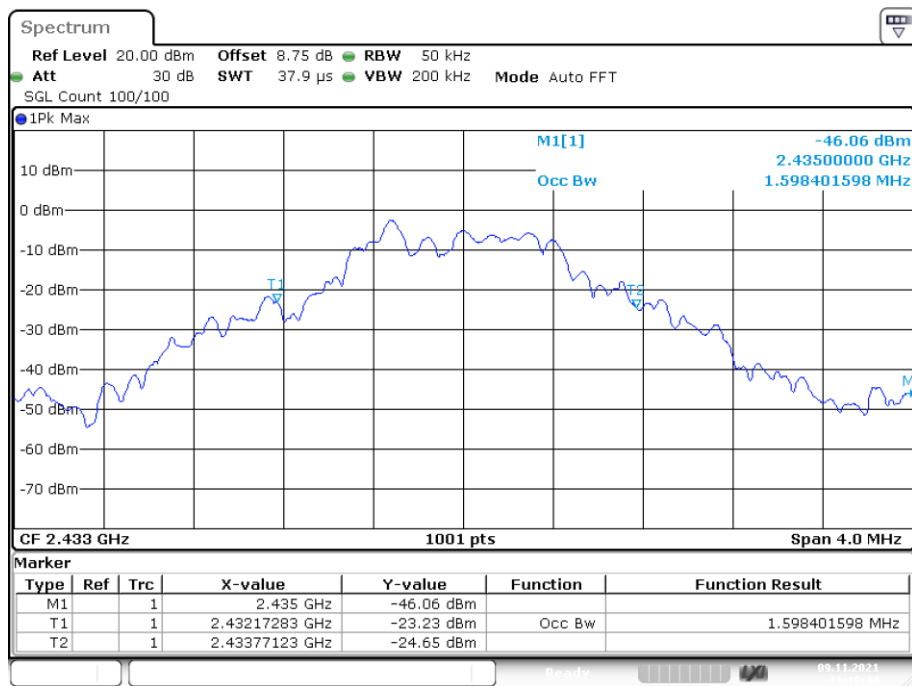


Date: 9.NOV.2021 11:18:44

-20dB Bandwidth NVNT user 2433MHz Ant1

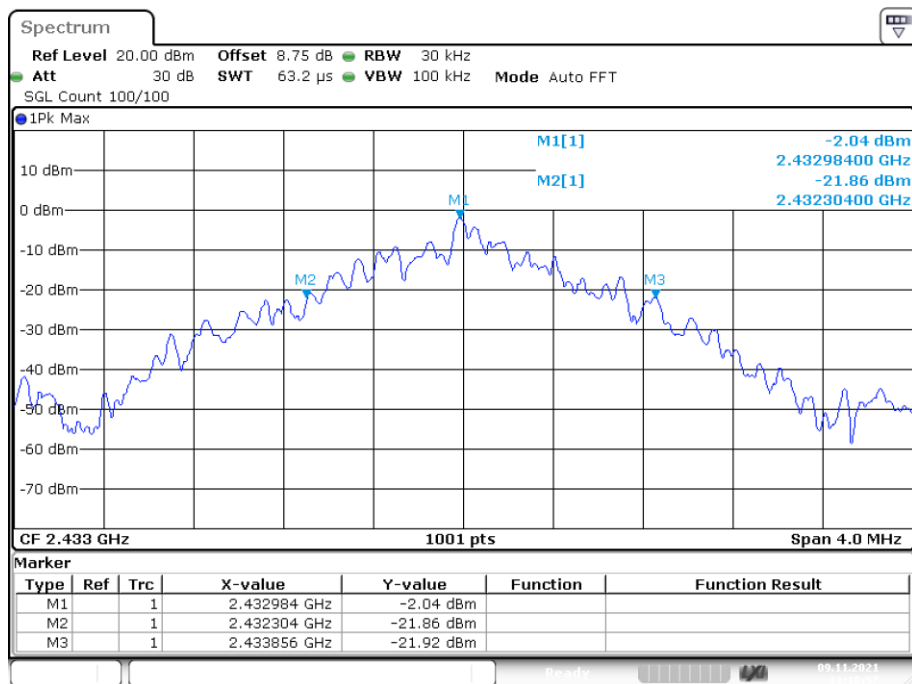

Date: 9.NOV.2021 11:18:57

OBW NVNT user 2467MHz Ant1

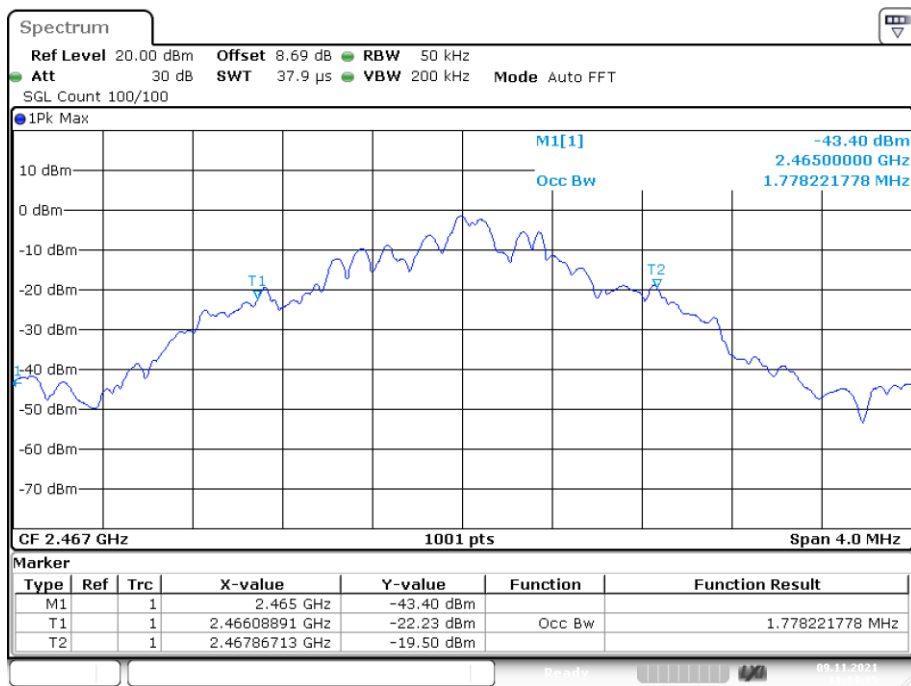

Date: 9.NOV.2021 11:14:34

-20dB Bandwidth NVNT user 2467MHz Ant1



Date: 9.NOV.2021 11:15:05

5. CARRIER FREQUENCY SEPARATION

5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

5.3.Test Result


Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
GFSK (2404-2470MHz)	2435.668	2437.648	1.98	1.061	Pass
GFSK (2405-2471MHz)	2436.984	2438.988	2.004	0.987	Pass
GFSK (2412-2478MHz)	2443.984	2445.988	2.004	1.152	Pass
GFSK (2413-2479MHz)	2444.988	2446.988	2	1.181	Pass
GFSK (2401-2467MHz)	2432.984	2434.988	2.004	1.035	Pass

Original test data for channel separation


① 2404-2470 MHz

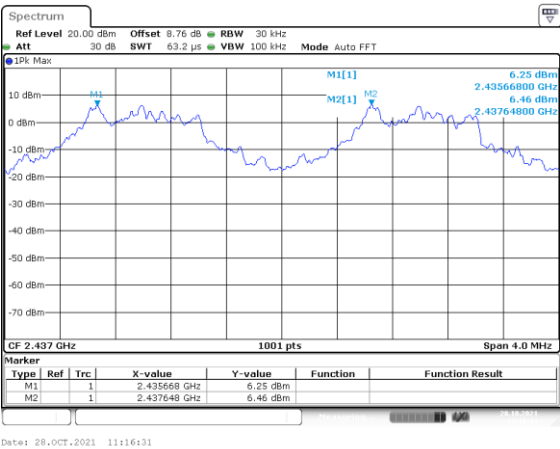


② 2405-2471 MHz

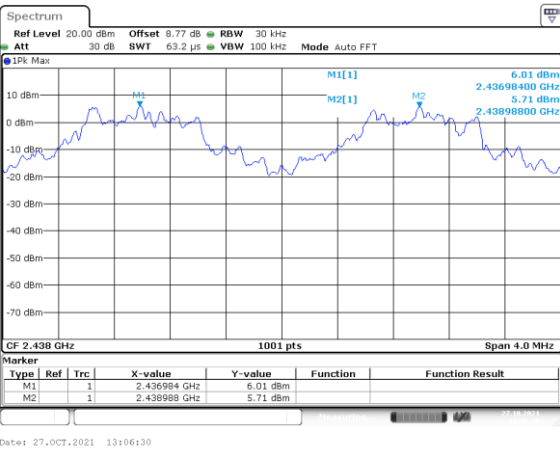


③ 2412-2478 MHz

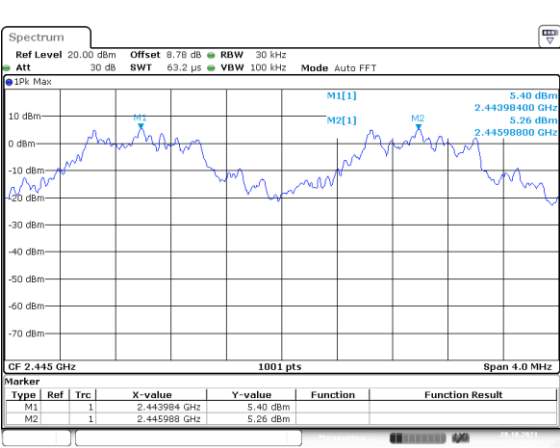

④ 2413-2479MHz

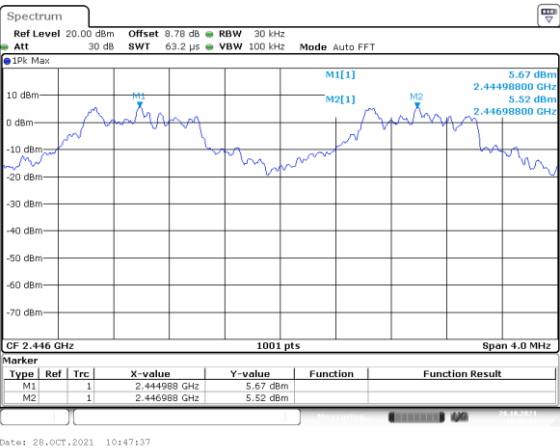

③ 2401-2467 MHz

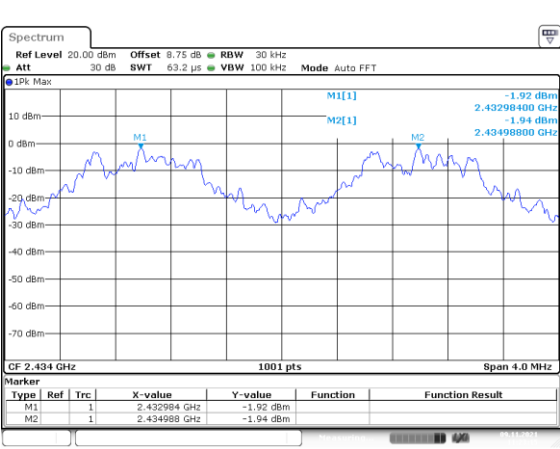

6. NUMBER OF HOPPING CHANNEL

6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3.Test Result


Mode	Number of hopping channel	Limit	Conclusion
GFSK	34	>15	PASS

Original test data for hopping channel number


① 2404-2470 MHz

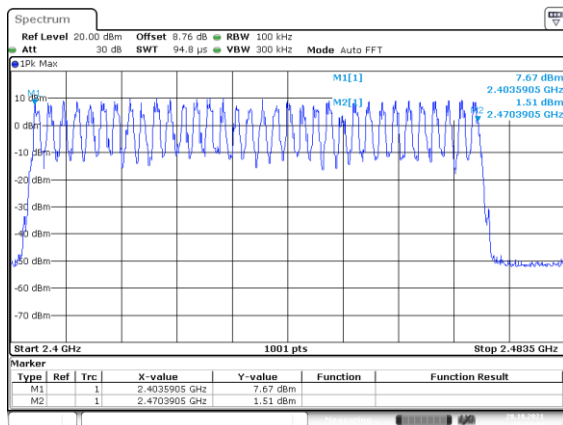


② 2405-2471 MHz

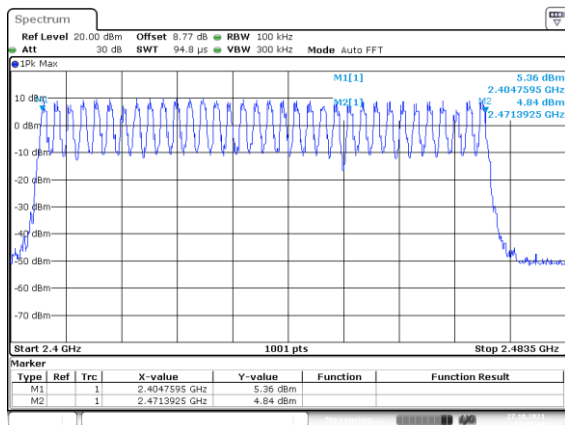


③ 2412-2478 MHz

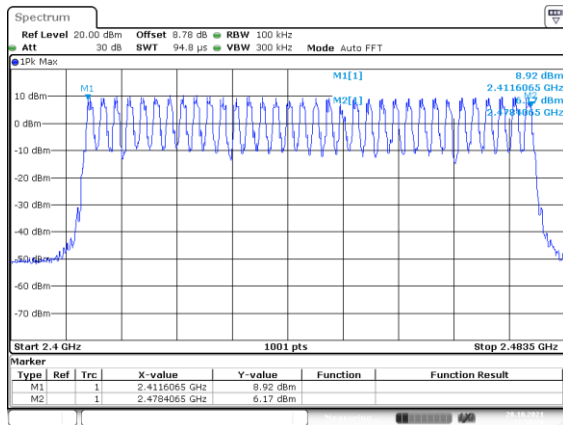

④ 2413-2479MHz

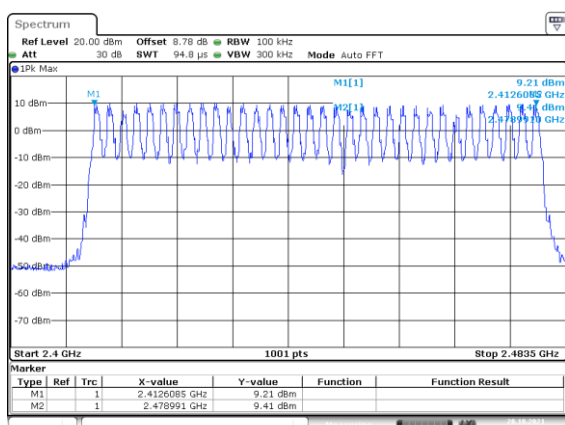

③ 2401-2467 MHz

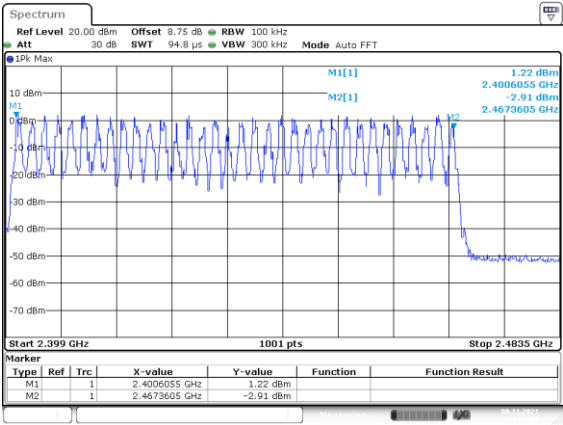

Date: 9.NOV.2021 11:25:08

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result


PASS.

Detailed information please see the following page.

2404-2470 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2436	0.136	42.5408	400	Pass


Note: Dwell time=23*34*0.4*0.136=42.5408ms

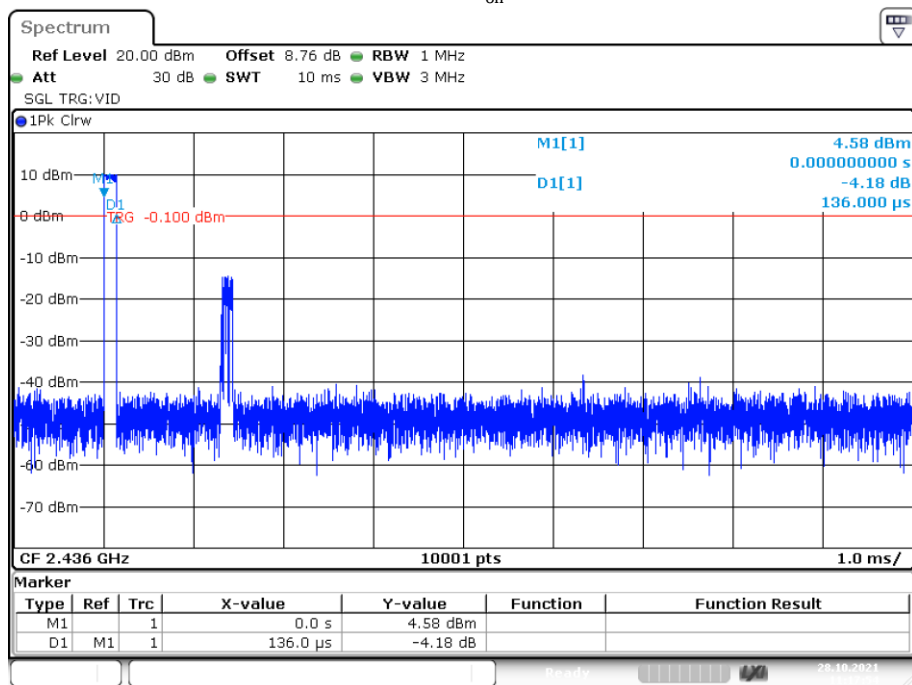2436MHz: $T_{on}=0.136ms$ 

Date: 28.OCT.2021 11:17:54

N=23

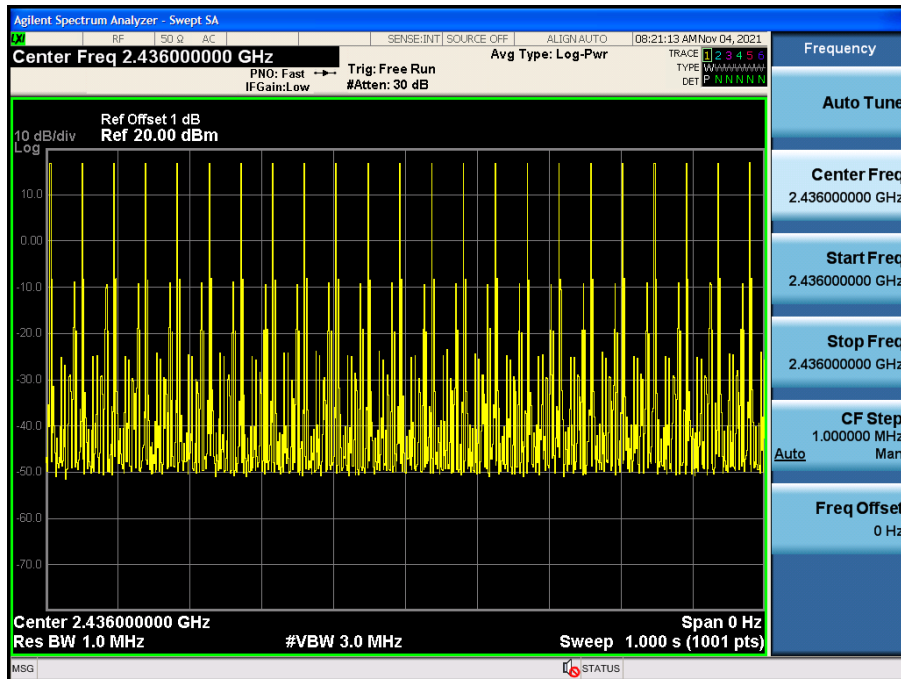

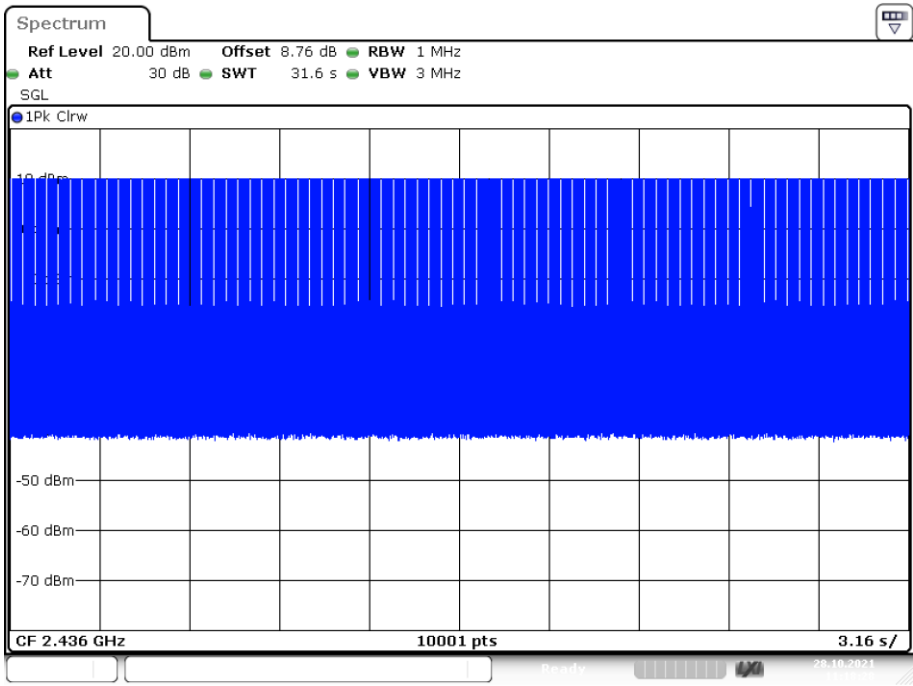


Date: 28.OCT.2021 11:18:29

2405-2471 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2437	0.135	40.392	400	Pass


Note: Dwell time=22*34*0.4*0.135=40.392ms

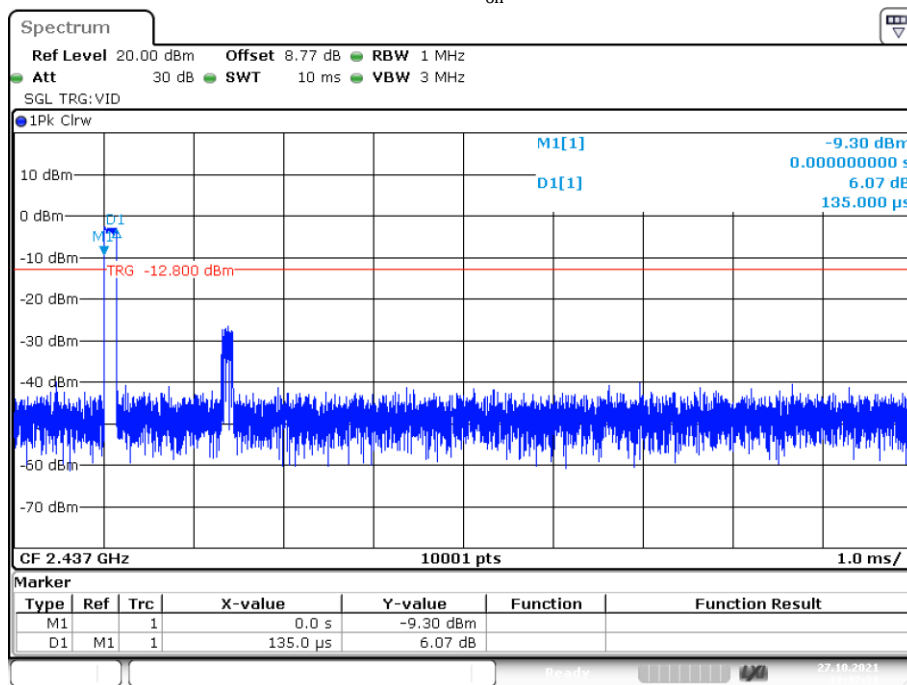2437MHz: $T_{on}=0.135ms$ 

Date: 27.OCT.2021 12:37:31

N=22

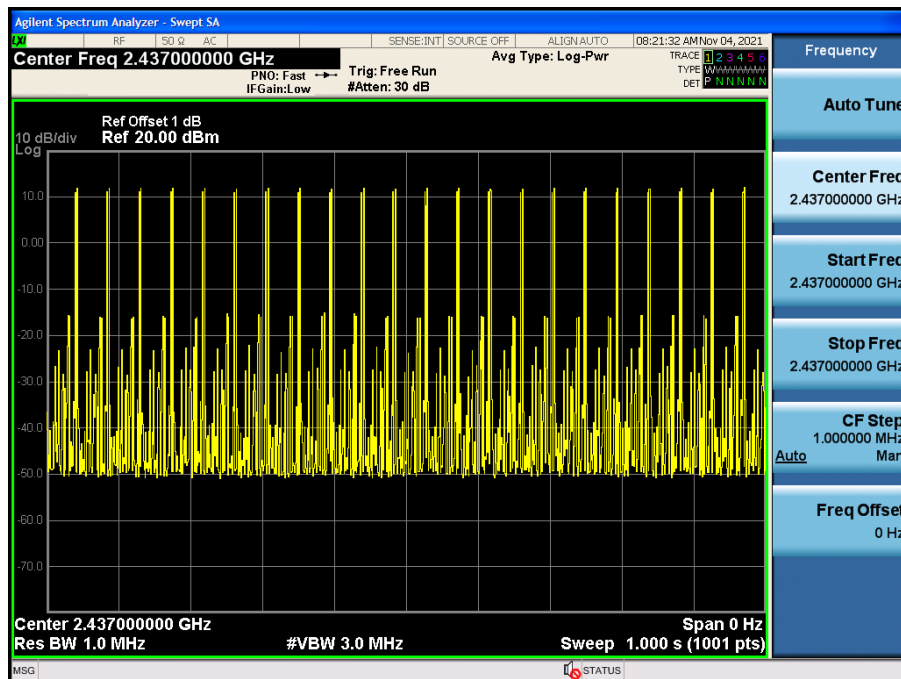

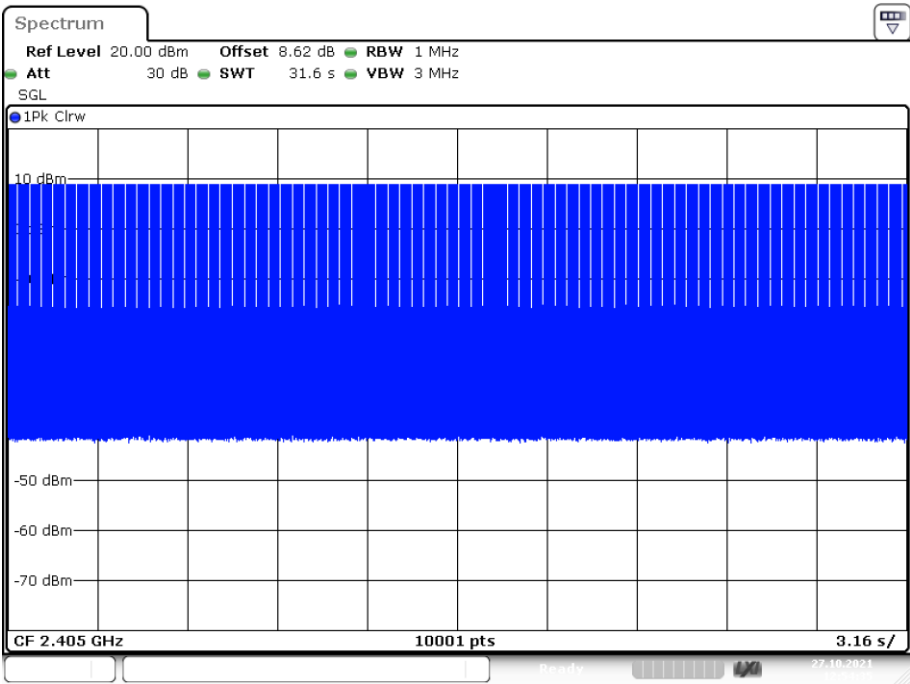


Date: 27.OCT.2021 12:54:35

2412-2478 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2444	0.136	42.5408	400	Pass


Note: Dwell time=23*34*0.4*0.136=42.5408ms

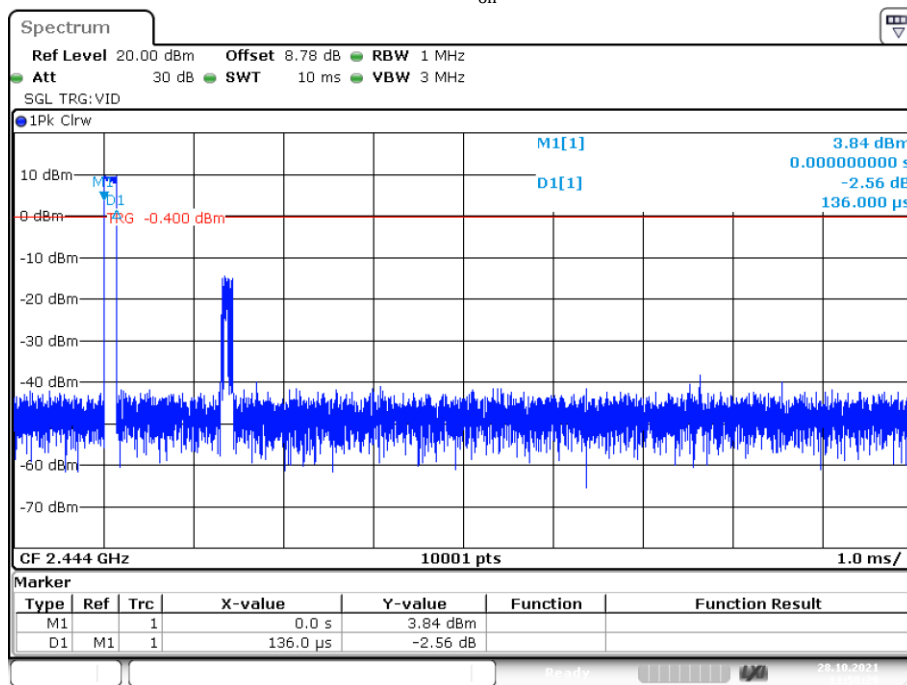2446MHz: $T_{on}=0.136\text{ms}$ 

Date: 28.OCT.2021 11:58:29

N=23

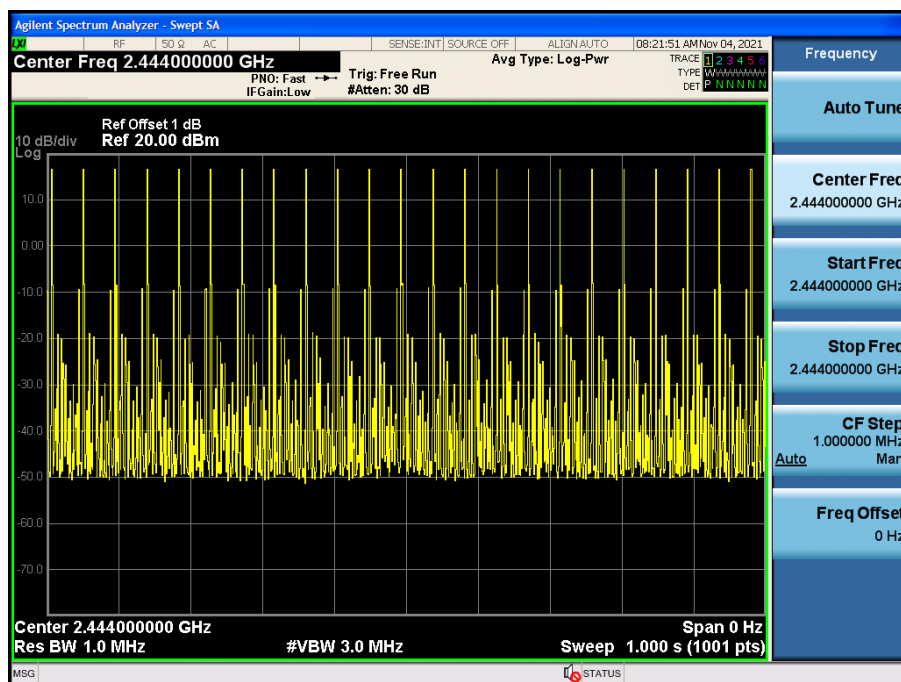


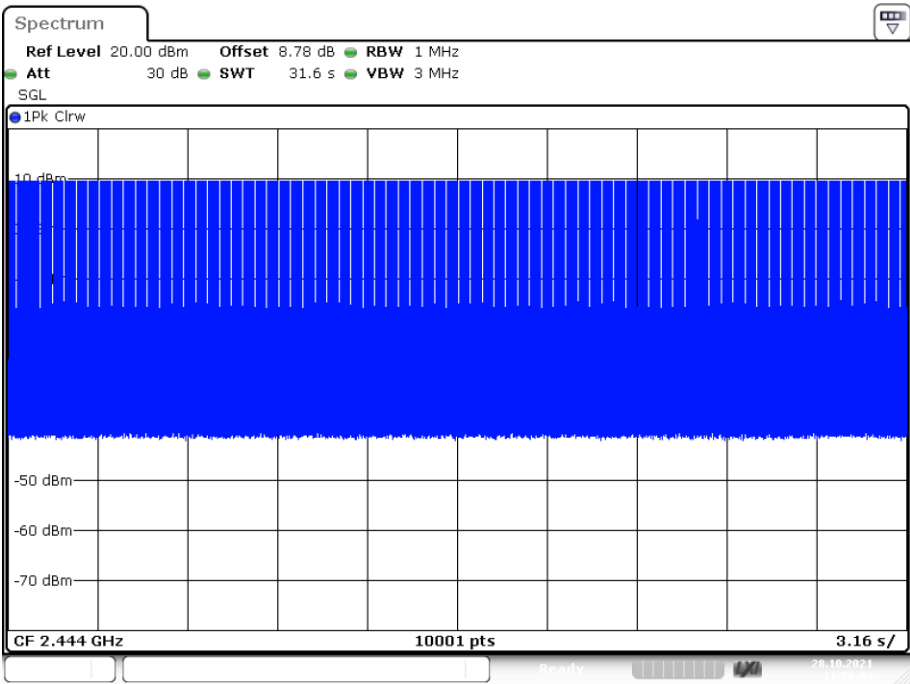

Date: 28.OCT.2021 11:59:03


2413-2479MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2445	0.136	40.6912	400	Pass
Note: Dwell time= $22 \times 34 \times 0.4 \times 0.136 = 40.6912\text{ms}$				

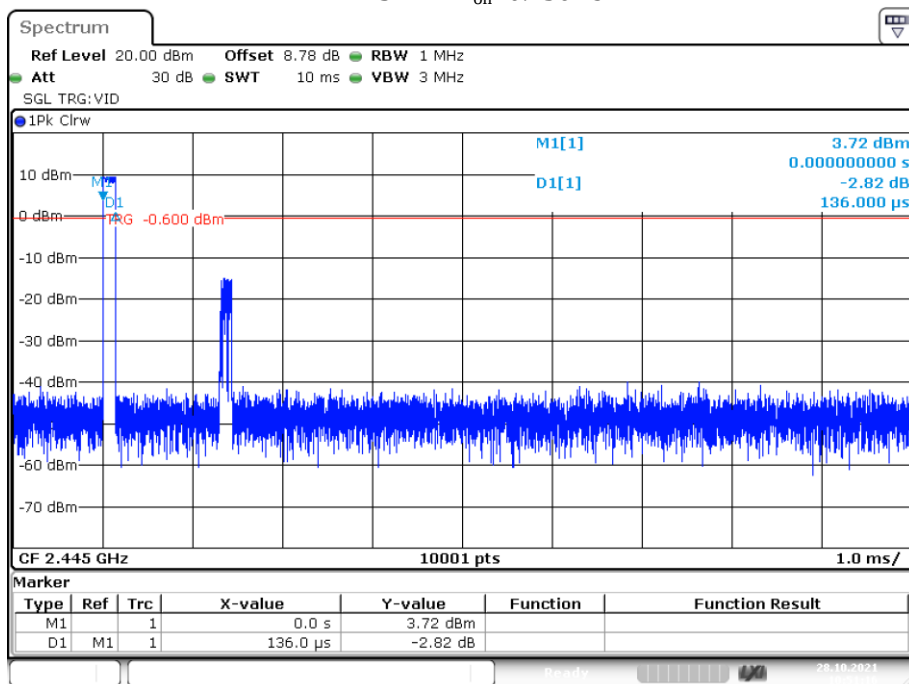2445MHz $T_{on}=0.136\text{ms}$ 

Date: 28.OCT.2021 10:51:16

N=22

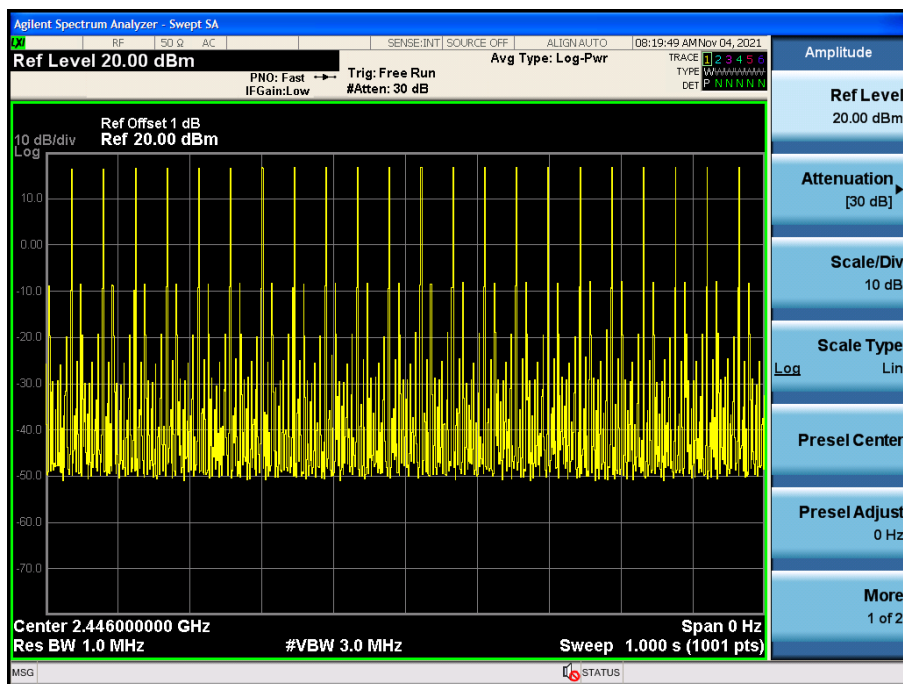

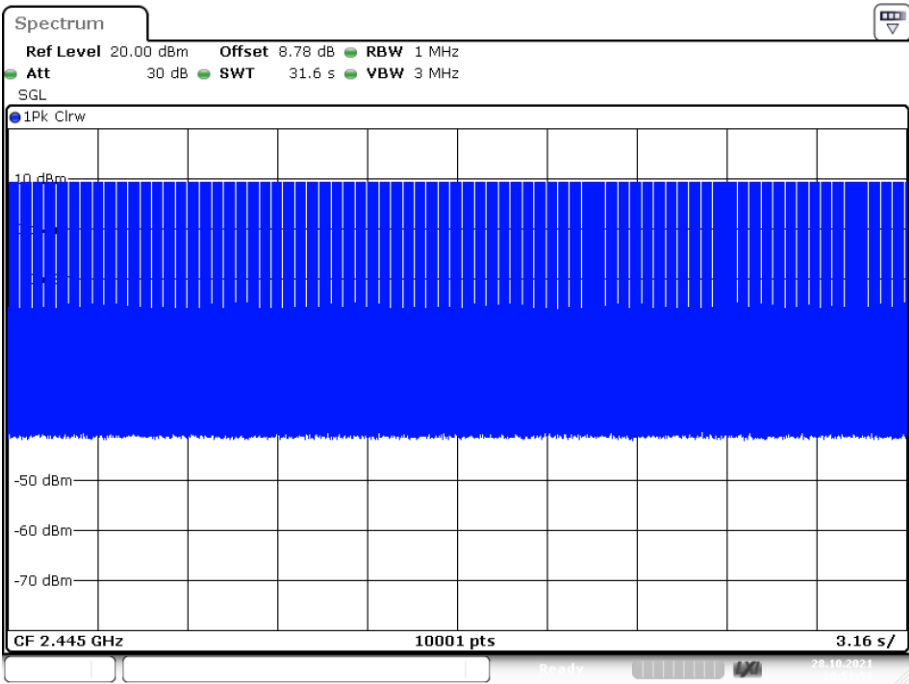


Date: 28.OCT.2021 10:51:51

2401-2467 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2433	0.136	22.1952	400	Pass

Note: Dwell time=12*34*0.4*0.136=22.1952ms


Dwell NVNT user 2433MHz Ant1 One Burst

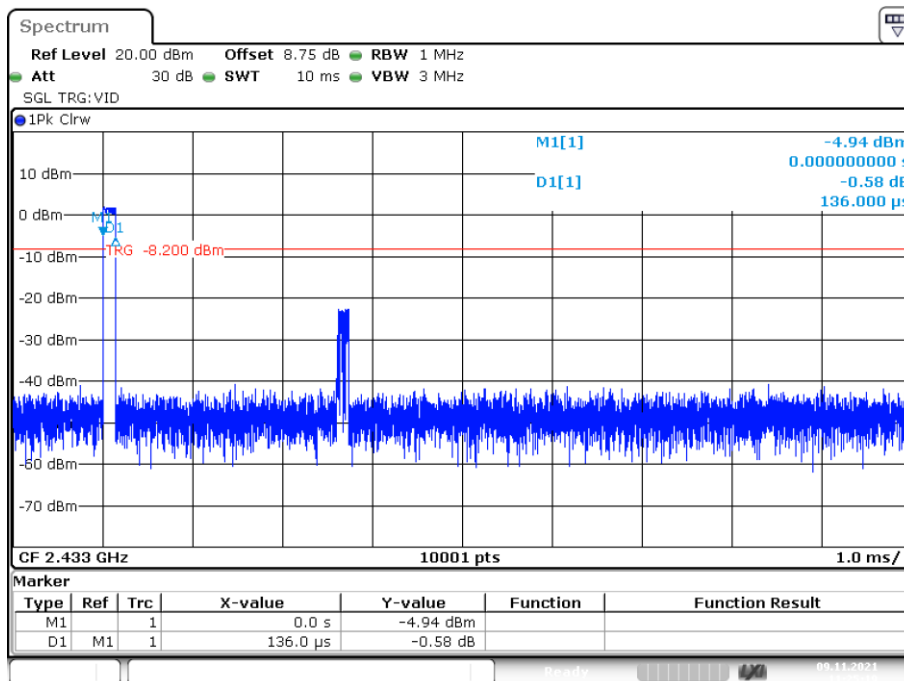

N=12

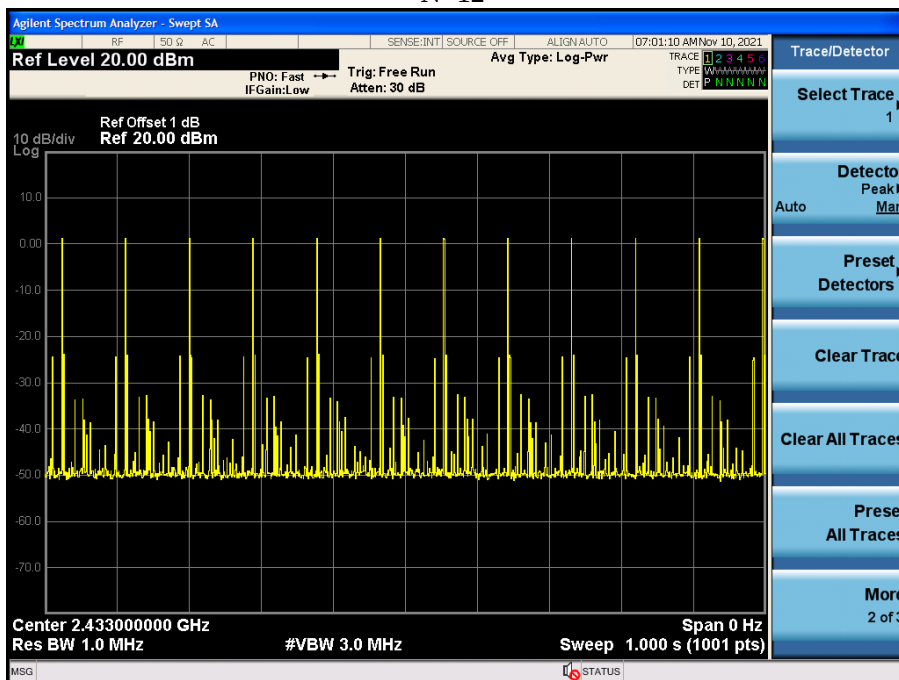

Dwell NVNT user 2433MHz Ant1 Accumulated

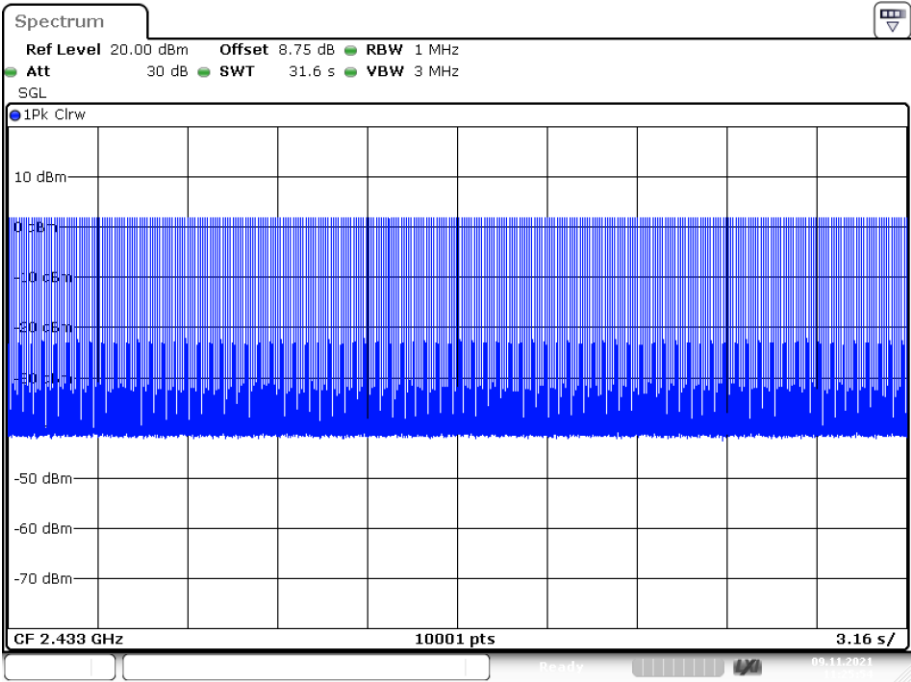

Date: 9.NOV.2021 11:25:54

8. RADIATED EMISSIONS

8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

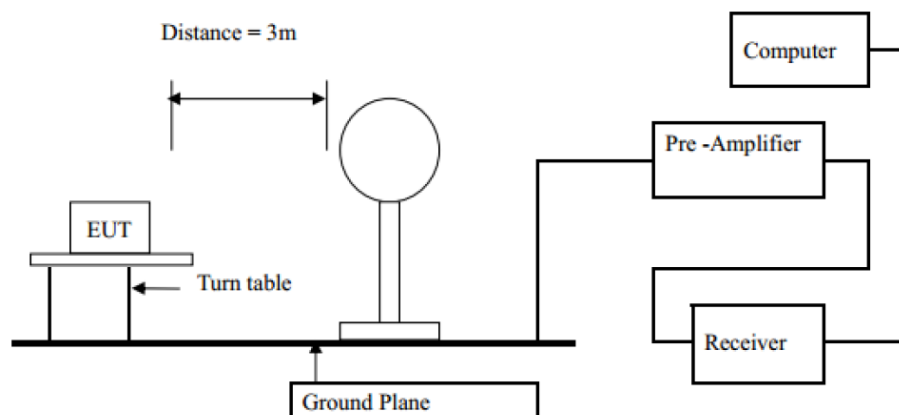

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

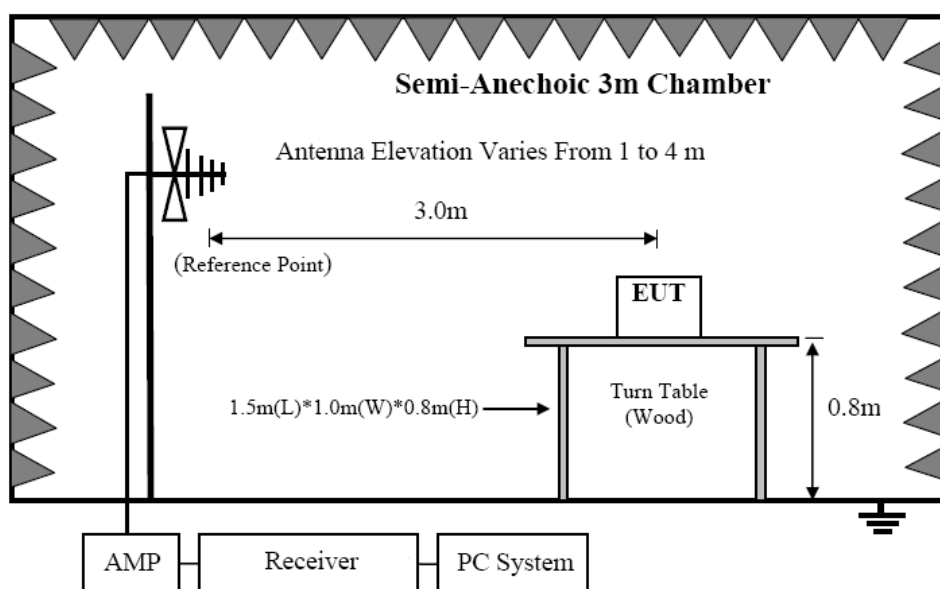

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

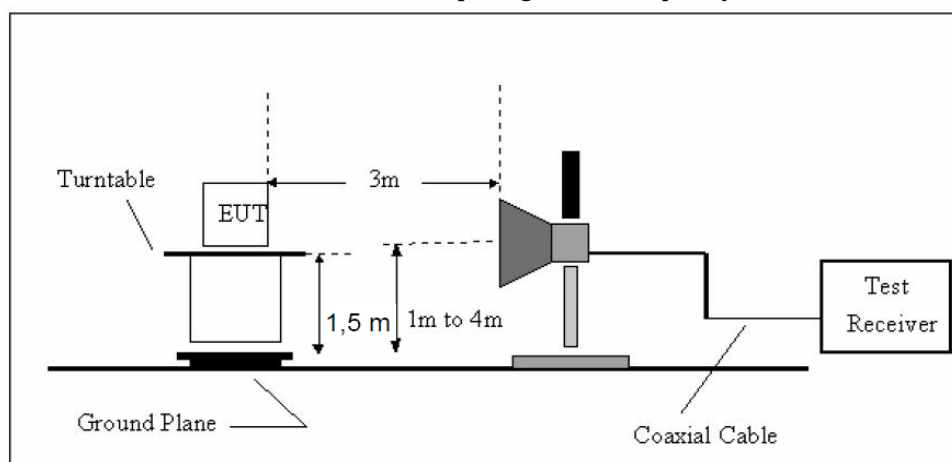

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

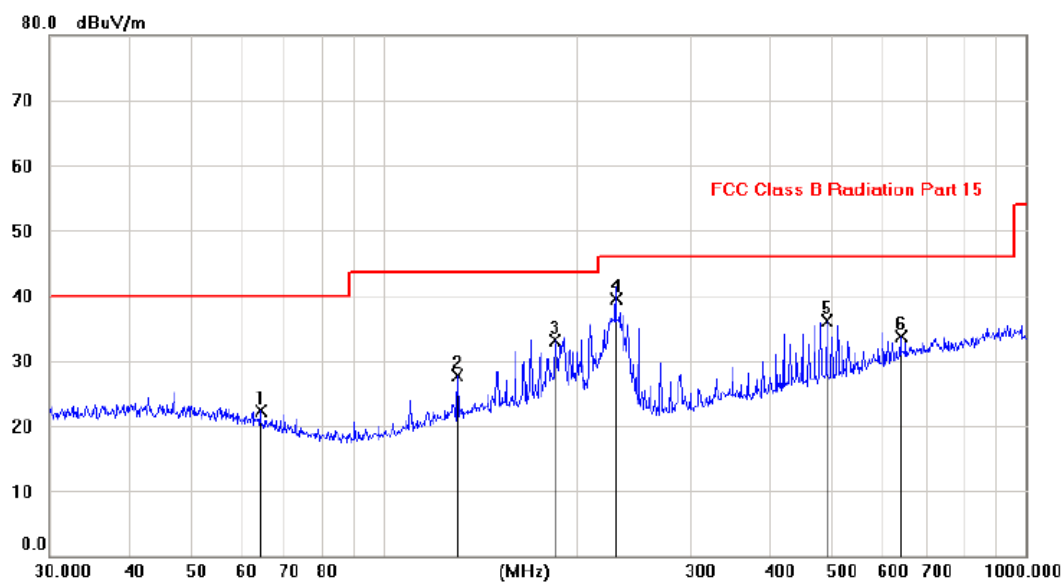

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		64.0202	9.79	12.51	22.30	40.00	-17.70	peak		
2		129.9985	14.19	13.59	27.78	43.50	-15.72	peak		
3		185.0081	21.12	12.07	33.19	43.50	-10.31	peak		
4	*	229.9909	27.25	12.31	39.56	46.00	-6.44	QP		
5		489.8278	17.99	18.08	36.07	46.00	-9.93	peak		
6		640.0123	12.81	20.97	33.78	46.00	-12.22	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

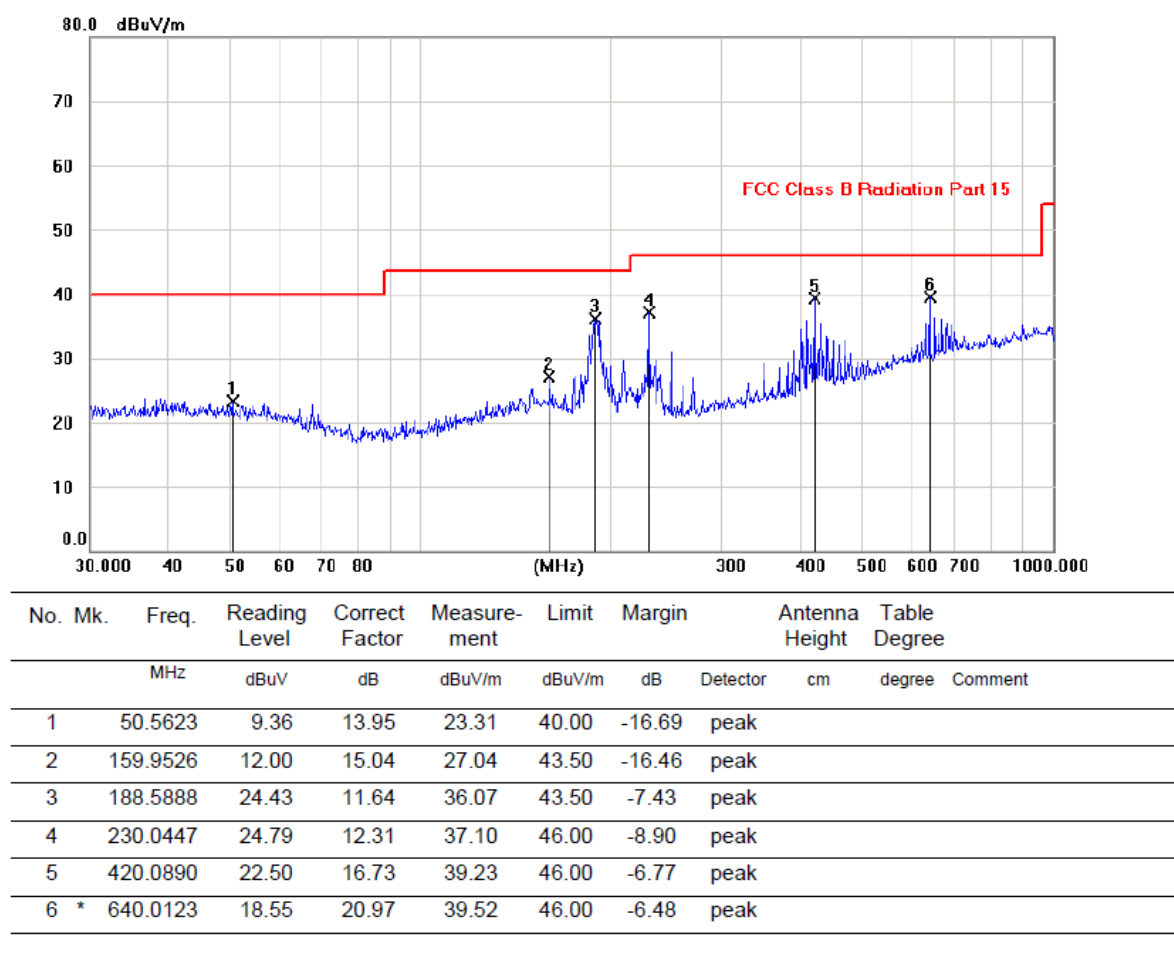Horizontal:

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.




Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2445MHz (2413-2479MHz, DC 4.5V) was listed in this report.

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4802	47.21	V	33.95	10.18	34.26	57.08	74	-16.92	PK
4802	35.58	V	33.95	10.18	34.26	45.45	54	-8.55	AV
7203	/	/	/	/	/	/	/	/	/
9604	/	/	/	/	/	/	/	/	/
4802	44.29	H	33.95	10.18	34.26	54.16	74	-19.84	PK
4802	36.63	H	33.95	10.18	34.26	46.50	54	-7.50	AV
7203	/	/	/	/	/	/	/	/	/
9604	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4888	43.84	V	33.93	10.2	34.29	53.68	74	-20.32	PK
4888	36.64	V	33.93	10.2	34.29	46.48	54	-7.52	AV
7332	/	/	/	/	/	/	/	/	/
9776	/	/	/	/	/	/	/	/	/
4888	46.05	H	33.93	10.2	34.29	55.89	74	-18.11	PK
4888	36.33	H	33.93	10.2	34.29	46.17	54	-7.83	AV
7332	/	/	/	/	/	/	/	/	/
9776	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4958	46.43	V	33.98	10.22	34.25	56.38	74	-17.62	PK
4958	33.46	V	33.98	10.22	34.25	43.41	54	-10.59	AV
7437	/	/	/	/	/	/	/	/	/
9916	/	/	/	/	/	/	/	/	/
4958	42.32	H	33.98	10.22	34.25	52.27	74	-21.73	PK
4958	33.34	H	33.98	10.22	34.25	43.29	54	-10.71	AV
7437	/	/	/	/	/	/	/	/	/
9916	/	/	/	/	/	/	/	/	/

Note:


1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

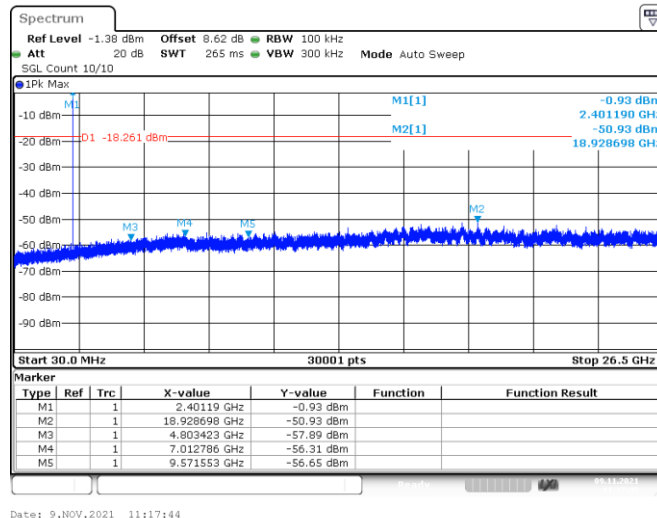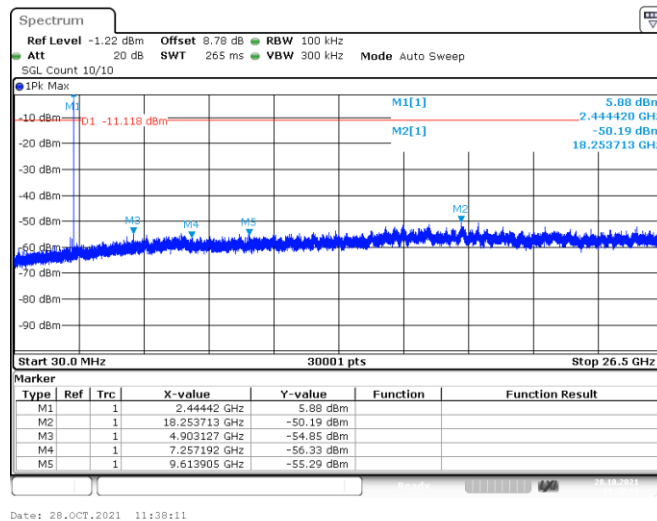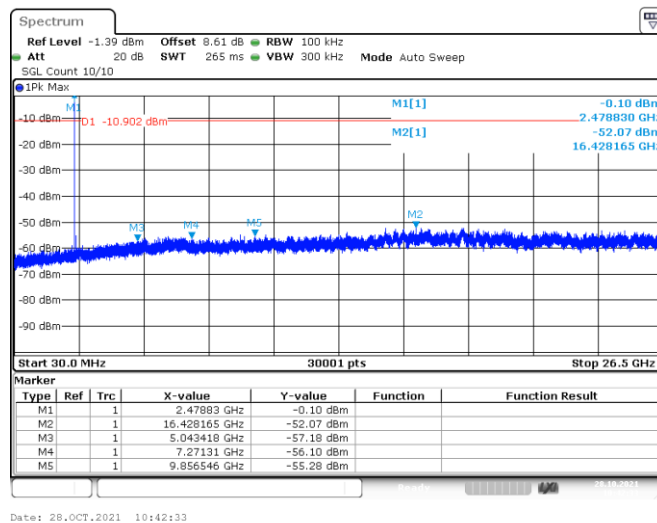Conducted RF Spurious Emission:**Tx. Spurious NVNT user 2401MHz Ant1 Emission****Tx. Spurious NVNT user 2444MHz Ant1 Emission****Tx. Spurious NVNT user 2479MHz Ant1 Emission**

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

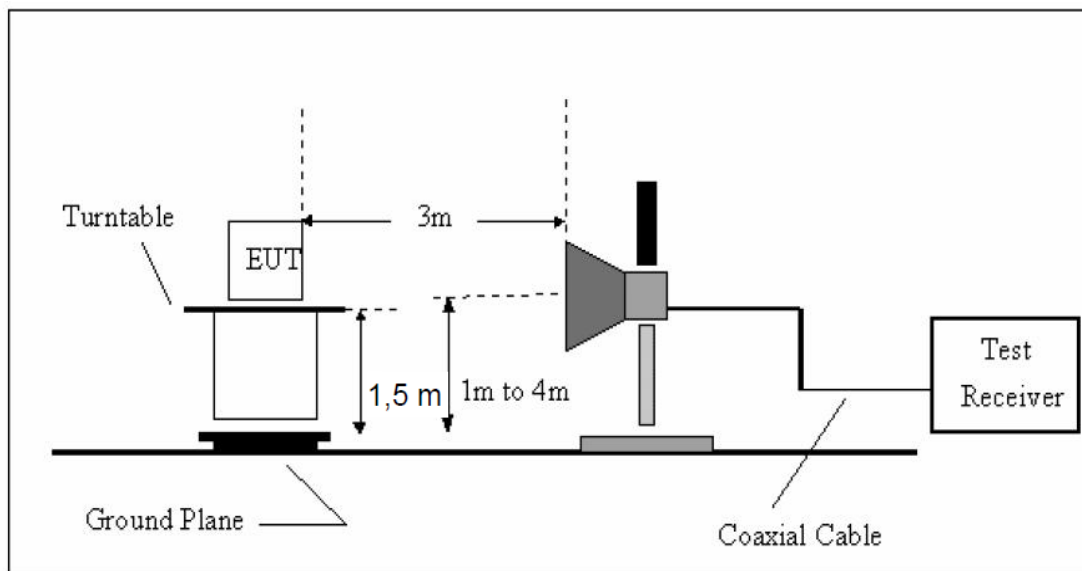

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


9.4. Test Result

PASS. (See below detailed test data)

Test Mode: GFSK-Low (2404MHz)

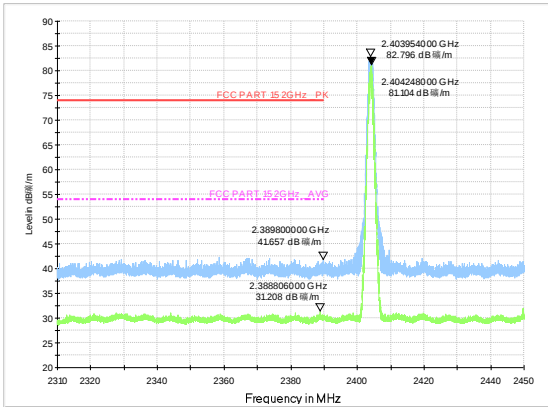


hopping-off

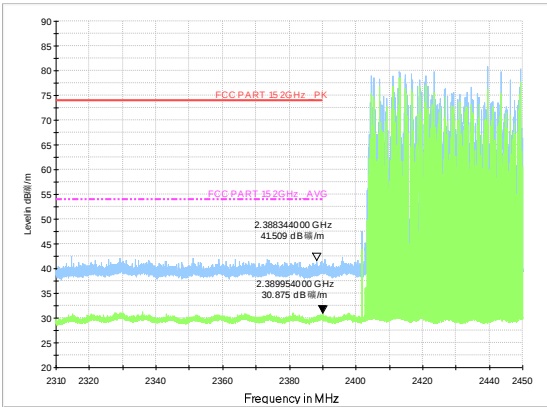


hopping-on

Test Mode: GFSK-Low (2470MHz)

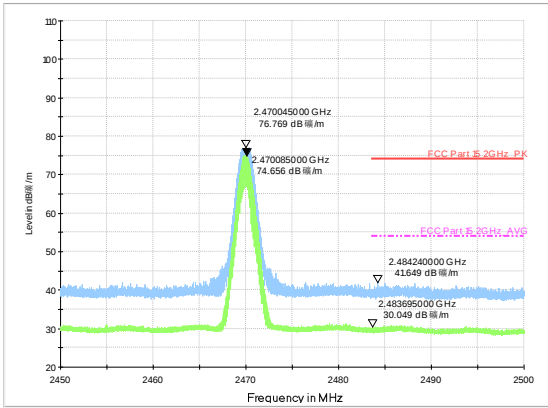

hopping-off

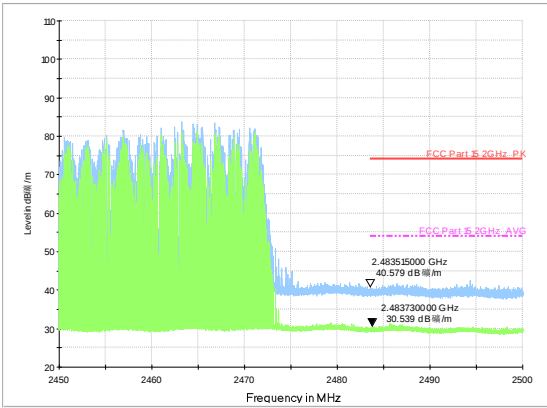

hopping-on