


Top Label



Figure: PLB complete assembly with antenna

To Activate: Lift & flip the switch to the “ON” position
Verify: The red “ON” light flashes 1 sec on, 4 sec off
Self Test: Lift & flip and Hold the switch to the “SELF TEST” position and wait for 25 sec
Verify: The red “ON” light must illuminate for 4 sec then extinguishes. Wait for an additional 21 sec.
Pass: The red “ON” light must remain extinguished
Fail: The red “ON” light flashes. Please see Operation Manual for detail fault code analysis

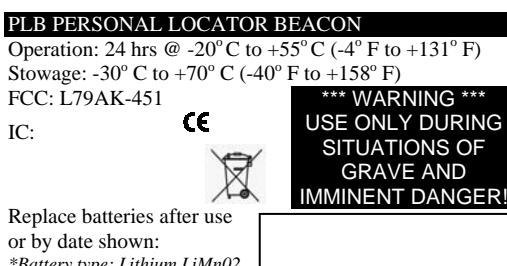

Front Label

Deliberate misuse may incur a severe penalty
Notice to the Public: Do not move if found. Report its position to the proper authorities

DO NOT OPEN, TAMPER, INCINERATE OR RECHARGE BATTERIES

Compass safe distance 1m (3.3 ft)

Warranty void if opened

This satellite PLB will NOT float

PLACE BEACON DECAL HERE

USA: PLB owner must register with NOAA the identification code contained on this product: SARSAT
 Beacon Registration NOAA SARSAT Beacon
 Registration: NSOF, E/SP3, 4231 Suitland Road, Suitland MD 20746 or at www.beaconregistration.noaa.gov
 Outside USA: register with your national authority

BEACON REGISTRATION IS MANDATORY

Back Label