
TEST REPORT

In support of the Application for Grant of Equipment Authorization of the WTPA
For use in the Nokia MetroSite Edge 1900 Base Station to FCC Part 24

FCC ID: L7KWTPA-01

Report No RO610411B1

January 2003

Equipment: Metrosite Edge Base Station using the WTPA**FCC ID:** L7KWTPA-01**Specification:** 47 CFR 2 & 47 CFR 24**Applicant and Manufacturer:**
Nokia UK Limited
Stanhope Road
Camberley
Surrey
GU13 3BW**Manufacturer's Representative:** Mr Andrew Parry**APPROVED BY**
M JENKINS
Wireless Group Leader**DATED** 29th January 2003**Start of Test:** 22nd October 2002
Completion of Test: 7th November 2002

This report is intended to replace original report RO610411B that contained typographical errors and required further clarifications.

DISTRIBUTION		
Nokia UK Limited		Copy 1
TÜV Product Service		Copy 2
		Copy No

ENGINEERING STATEMENT

I ATTEST: the measurements shown in this report were made in accordance with the procedures indicated, and that the emissions from this equipment were found to be within the applicable limits. I assume full responsibility for the accuracy and completeness of these measurements. On the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 2, Part 15 and Part 24 of the FCC Rules under normal use and maintenance.

S C Hartley
Test EngineerRyan Henley
Test EngineerA R Hubbard
Test Engineer



CONTENTS:-

	Page No.
Introduction	3
Test Location	3
Test Equipment and Ancillaries Used For Test	3
Description of Equipment Under Test Configuration	4
Test Rationale	4
List of Performed Measurements	6
The list of measured parameters covering	
Subclause	Parameter to be measured
47 CFR 2.1053, 24.238(a)	Radiated Emissions
47 CFR 2.1046, 24.232	RF Power Output
47 CFR 2.1047(d)	Modulation Characteristics
47 CFR 2.1049(h), 24.238(b)	Occupied Bandwidth
47 CFR 2.1049, 24.238(b)	Spurious Emissions at Antenna Terminals
47 CFR 2.1051, 24.238(a)	Spurious Emissions
47 CFR 2.1055, 24.235	Frequency Stability – Temperature Variations
47 CFR 2.1055(d)(1)	Frequency Stability – Voltage Variations
47 CFR 15.207(a)	AC Conducted Spurious Emissions

For copyright details see Page 135 of 135



Introduction

The information contained within this report is intended to show verification of compliance of the Nokia Base Transmitter Station, Metrosite GSM 1900 base station with WTPA, to the requirements of 47 CFR 2 and 47 CFR 24.

Test Location

All testing was conducted at the premises of BABT, Segensworth Road, Fareham, Hants, PO15 5RH. Testing at BABT was carried out by BABT Personnel, S C Hartley, Ryan Henley, A R Hubbard, Test Engineers. Radiated Emissions measurements were performed in a 3 metre semi-anechoic screened room. A complete room description is on file with the FCC Laboratory Division, Registration Number: 90987.

Test Equipment and Ancillaries Used For Test

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due
1	Spectrum Analyser	FSEM	Rohde and Schwarz	827156/006	28/12/02
2	20dB Attenuator	46-20-34	Weinschel	AT9195	13/09/03
3	10dB Attenuator	47-10-34	Weinschel	BC2506	13/09/03
4	10dB Attenuator	47-10-34	Weinschel	AT4937	23/04/03
5	Notch Filter	5TNF-1500/5000-N/N	K & L	2	TU
6	800MHz Low pass filter	9752	Mini Circuits	9752	25/07/03
7	2.9GHz Low pass filter	WHJ 2200-4E	Wainwright	16	09/09/03
8	4GHz High pass filter	f-100-4000-S-R	RLC Electronics	-	TU
9	R F Pre Amplifier	AWT-18036	Avantek	F133658452	25/04/03
10	Cable	2m N-N Type	Reynolds Ind	-	TU
11	Cable	1m N-N Type	Reynolds Ind	-	TU
12	Power supply	11AP10090	Wayne Kerr	189647	TU
13	Variac ⁽³⁾	-	RS	-	TU
14	DVM	70	Fluke	7230985	04/01/03
15	Communication Analyser	CMU 300	Rohde and Schwarz	100038	
16	Power supply	6269B	Hewlett Packard	2323A-10766	TU
17	Climatic Chamber	-	Climatec	-	12/01/03
18	EMI Receiver	8542E	Hewlett Packard	3617A00165/00154	11/12/2002
19	Bilog Antenna	CBL6143	Schaffner	—	11/04/2003
20	Turntable Controller	HD 050	H-D	050/396	TU
21	Antenna Mast	1051-2	Emco	9101-1570	TU
22	Antenna Mast Controller	2090	Emco	—	TU
23	Screened Room	EAC54300	Siemens	—	TU
24	Low Noise Amplifier (1 – 8GHz)	AMF-3D-001080-13P	Miteq	—	TU
25	Low Noise Amplifier (8 – 18GHz)	AMF-4E-080180-15-10P	Miteq	492562	TU
26	Low Noise Amplifier (18 – 26.5GHz)	AMT-26177-33	Avantek	6669	TU
27	Spectrum Analyser	E4407B	Agilent	US41442853	11/02/2003
28	Horn Antenna (1 – 18GHz)	3115	Emco	97015079	29/06/2003



Test Equipment and Ancillaries Used For Test - Continued

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due
29	Horn Antenna (18 - 26.5GHz)	2024-20	Flann	164	TU
30	Microwave to co-axial Adaptor	20093SF40	Flann	595	TU
31	Signal Generator	8672A	Hewlett Packard	2016A01097	21/12/2002
32	Signal Generator	2031	Marconi	119530066	20/08/2003
33	Transient Limiter	11947A	Hewlett Packard	3107A01649	07-05-2003
34	LISN	ESH2-Z5	Rohde & Schwarz	879675-022	15/04/2003

Note(s)

- 1) All items are calibrated annually, except where labelled T/U (Traceability Unscheduled). These items are calibrated within the test configurations using calibrated equipment.
- 2) Throughout the test report the test equipment used for each test is referenced using the number indicated in the table above (1 to 34).
- 3) The Variable Auto Transformer, (Variac), was used to adjust the supply voltage to 110V AC at a frequency of 60Hz.

Description of Equipment Under Test Configuration

The BTS can be configured as either 800 or 1900 or a combination of both. Both 800 and 1900 TRX's support both GMSK and 8PSK modulation. The cabinet can house a maximum of four TRX's. The testing was performed on the TRX RF output connector. The unit can be configured with three alternative power supply options: 110V AC, 24V DC or 48V DC. For the 1900 TRX's, complete testing was carried out on 24VDC. For 800MHz testing, complete testing was carried out using the 110V AC Supply. This ensured testing had been carried out on both AC and DC supplies, with limited testing carried out on the 48V DC supply.

Note: For 800MHz test results, TUV PS report TG610411A refers.

Test Rationale

Output Power

All 3 power supplies were tested with both modulation schemes at maximum and minimum power.

Occupied Bandwidth & Modulation Characteristics

24V DC supply only. The power supply option was deemed to have no effect on these test parameters. Maximum and minimum power levels and both modulation schemes were tested.

Block Edge Measurements

24V DC supply only. The power supply option was deemed to have no effect on the block edge measurement. Testing the Frequency Error at Voltage Variation would indicate any error due to supply voltage, which would cause the fundamental to fall outside the block edge. Both modulation schemes were tested. Maximum power only was tested. If the equipment meets the block edge requirements at maximum power, it will meet the requirements at minimum power. The occupied bandwidth shows that minimum power does not effect the shape of the fundamental, only the amplitude.

Conducted Spurious Emissions

24V DC supply. The 24V DC supply was deemed to be worst case of the DC Supplies. Thus, the EUT was tested on bottom, middle and top on both modulation schemes. To demonstrate that the 48V DC and 110V AC supplies were compliant, these were tested on middle channel at maximum power.



Radiated Spurious Emissions

30MHz to 1000MHz

Configuration 1a. 24V DC supply. GSM 1900 8PSK Modulation Middle channel, GSM 1900 GMSK Modulation Top channel, GSM 800 8PSK Modulation Middle channel and GSM 800 GMSK Modulation Bottom channel. PAPST Fan. EUT positioned horizontally.

Configuration 1b. 24V DC supply. GSM 1900 8PSK Modulation Middle channel, GSM 1900 GMSK Modulation Top channel, GSM 800 8PSK Modulation Middle channel and GSM 800 GMSK Modulation Bottom channel. PAPST Fan. EUT positioned vertically.

Configuration 2. 48V DC supply. GSM 1900 GMSK Modulation Middle channel, GSM 1900 8PSK Modulation Bottom channel, GSM 800 GMSK Modulation Middle channel and GSM 800 8PSK Modulation Top channel. Japan Servo Fan. EUT positioned vertically.

Configuration 3. 110V AC supply. GSM 1900 GMSK Modulation Bottom channel, GSM 1900 8PSK Modulation Middle channel, GSM 800 GMSK Modulation Top channel and GSM 800 8PSK Modulation Middle channel. Japan Servo Fan. EUT positioned vertically.

1GHz to 20GHz

Configuration 4a. 24V DC supply. GSM 1900 GMSK Modulation Top, Middle, Bottom and Channel 227. Japan Servo fan. EUT positioned vertically.

Configuration 4b. 24V DC supply. GSM 1900 8PSK Modulation Top, Middle, Bottom and Channel 227. Japan Servo fan. EUT positioned vertically.

Frequency Tolerance

24V DC Supply only. Both GMSK and 8PSK modulation.

Frequency Tolerance with Voltage Variation

110V AC, 24V DC, 48V DC. Both GMSK and 8PSK modulation. Due to the nature of the test, all three power supply variations were tested. This also ensures that the frequency tolerance remains acceptable to ensure the TRX remains within the block edge.

Line Conducted Emissions

Configuration 5. 110V AC. GSM 1900 GMSK Modulation Bottom and Middle, GSM 1900 8PSK Modulation Top and Channel 734.

Channel Configuration

The EUT has been tested on bottom, middle and top channels, based on the complete PCS1900 operating band. However, in accordance with Part 24.238(b), the bottom and top channels are blocked from use. For the Block Edge testing, the tested channels have been changed to demonstrate compliance with the standard. This is reflected in the user guide for the EUT. To cover bottom, middle and top channels for each block and each test case would involve a huge amount of testing. Thus, to provide a practical representative set of results, the EUT was tested at bottom, middle and top of the entire PCS1900 band to demonstrate compliance with the standard.



The equipment under test is made up of the following component parts.

<u>Module</u>	<u>Vendor</u>	<u>Kit Number</u>	<u>Serial Number</u>
Cabinet		058187A.....405	B020900045
<u>Transceivers</u>			
WTPA		468231A.....X41	L1023721891
WTPA		468231A.....X41	L1023721885
WTPA		468231A.....X41	L1023721882
WTPA		468231A.....X41	L1023721880
<u>Power Supplies</u>			
48V DC PSU		40071 193 200/2	00200
24V DC PSU	Delta Electronics	DPSN-480-AB-3A Rev: S1	OFCO 221
110V AC PSU	ASCOM	40071 193 100/D	00205
<u>Digital Boards</u>			
FXC E1 T1 (Transmission Card)		467611A.....103 VXTB	L1013368629
VIFA Card		467208A.....103 VIFA	4H021000567

Table 1

List of Performed Measurements using the configuration in Table 1

- i) Radiated Emissions 47 CFR 2.1053, 24.238
- ii) Power Output 47 CFR 2.1046, 24.232
- iii) Modulation Characteristics 47 CFR 2.1047(d)
- iv) Occupied Bandwidth 47 CFR 2.1049(h), 24.238(b)
- v) Band Edge Measurements 47 CFR 24.238(b)
- vi) Conducted Emissions 47 CFR 2.1051, 24.238(a)
- vii) Frequency Stability – Temperature Variations 47 CFR 2.1055, 24.235
- viii) Frequency Stability – Voltage Variations 47 CFR 2.1055(d)(1)
- ix) AC Conducted Line Emissions 47 CFR 15.207(a)



Test Case: Radiated Emissions

Test Date: 1st November to 6th November 2002

Rule Parts: 2.1053, 24.238(a)

Measurement Method

The EUT was set up in each of the configurations listed on page 5 in turn.

A preliminary profile of the Radiated Electric Field Emissions was obtained by operating the Equipment Under Test (EUT) on a remotely controlled turntable within a semi-anechoic chamber; measurements were taken at a 3m distance. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, a search was made in the frequency range 30MHz to 20GHz. The list of worst case emissions was then confirmed or updated. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth. Emissions levels were then formally measured. The details of the worst case emissions were then recorded in the Job Log Book. Details of the worst case emissions are presented in Tables 2 to 7. Plots 1 to 8 are taken from the receiver in max hold while the EUT was rotated through 360 degrees.

Radiated Electric Field Emissions measurements were made using a Hewlett Packard 8542E EMI Receiver in the frequency range 30MHz to 1000MHz and an Agilent E4407B Spectrum Analyser in the frequency range 1GHz to 20GHz. Measurements in the range 30MHz to 1000MHz were made using a Peak Detector in a 120kHz bandwidth and measurements above 1GHz were made using a Peak Detector in a 1MHz bandwidth.

Determination of Spurious Emissions Limit

As the EUT does not have an integral antenna the field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipole as per 2.1053(a).

$$E_{(V/m)} = \frac{\sqrt{30 \times G_i \times P_o}}{d}$$

where G_i is the antenna gain relative to isotropic
 P_o is the power out of the transceiver in W
 d is the distance in metres

therefore at 3m the field strength using the lowest transceiver output power would be:

$$E_{(V/m)} = \frac{\sqrt{30 \times 1.64 \times 3.981}}{3} = 4.7V/m = 133.4dB\mu V/m$$

As per 24.238(a) the spurious emissions must be attenuated by $43 + 10\log(P_o)$ this gives:

$$43 + 10\log(3.981) = 49.0dB$$

therefore the limit at 3m measurement distance is:

$$133.4 - 49.0 = 84.4dB\mu V/m$$



Test Case: Radiated Emissions (continued)

Configuration: 1a

Alternative Open Area Test Site Results: The levels of the 6 highest emissions measured in accordance with the specification are presented in Table 2 below: -

Emission Frequency	Antenna		Turntable Azimuth	Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m	Specification Limit
	Polarity	Height						
MHz	H/V	cm	degree	dB μ V	dB	dB	dB μ V/m	dB μ V/m
115.6	H	290	0	27.8	1.3	12.1	41.2	84.4
120.3	H	290	0	26.0	1.4	12.3	39.7	84.4
169.0	H	135	0	25.5	1.7	10.0	37.2	84.4
299.0	H	101	15	22.0	2.3	13.7	38.0	84.4
676.0	V	102	159	20.4	2.8	18.9	42.1	84.4
728.0	V	140	205	17.8	4.0	19.8	41.6	84.4

Table 2

The margin between the specification requirements and all other emissions was 47dB or more below the specification limit.

ABBREVIATIONS FOR ABOVE TABLE

H Horizontal Polarisation

V Vertical Polarisation

Procedure Test Performed in accordance with ANSI C63.4.

Test Equipment Used:

18, 19, 20, 21, 22, 23




Test Case: Radiated Emissions (continued)

Configuration: 1a

hp 14:36:26 NOV 01, 2002


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

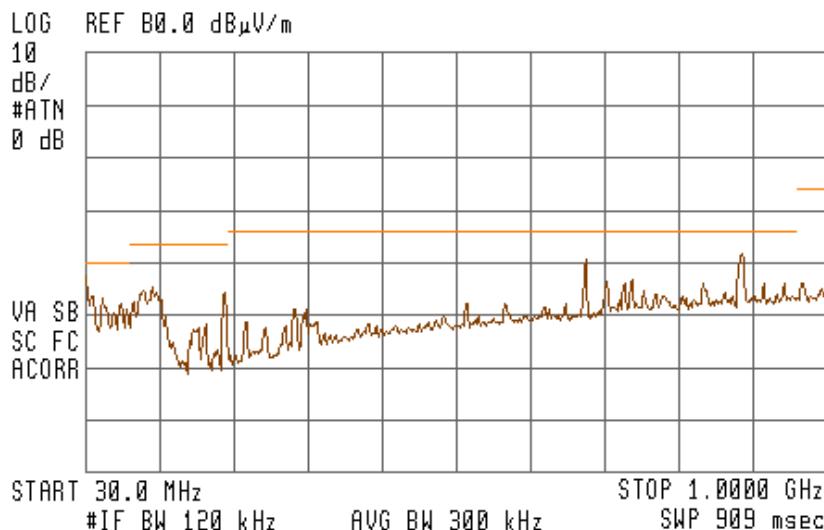

Plot 1 Vertical polarisation

hp 14:19:33 NOV 01, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

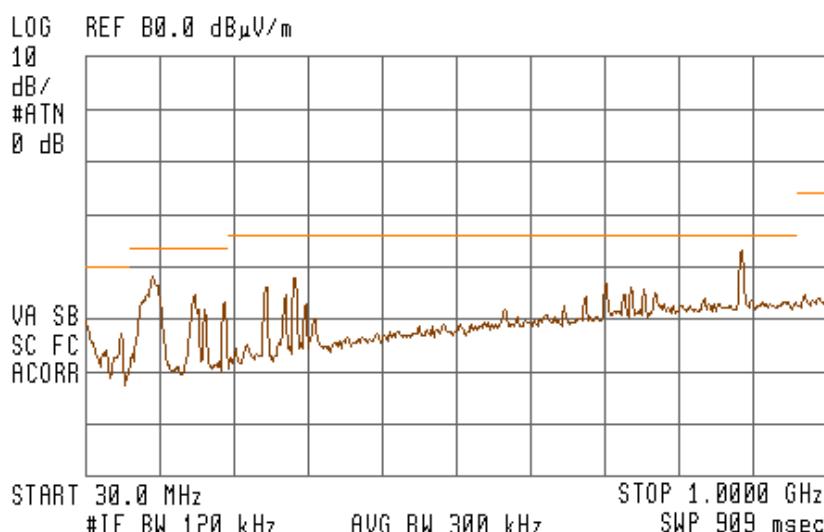

Plot 2 Horizontal polarisation



Test Case: Radiated Emissions (continued)

Configuration: 1b

Alternative Open Area Test Site Results: The levels of the 6 highest emissions measured in accordance with the specification are presented in Table 3 below: -

Emission Frequency	Antenna		Turntable Azimuth	Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m	Specification Limit
	Polarity	Height						
MHz	H/V	cm	degree	dB μ V	dB	dB	dB μ V/m	dB μ V/m
31.47	V	100	172	18.3	0.7	21.8	40.8	84.4
108.90	V	100	202	27.4	1.3	11.7	40.4	84.4
676.00	H	315	241	16.9	3.8	18.9	39.6	84.4
704.54	V	128	172	17.3	3.9	19.2	40.4	84.4
737.30	H	126	315	19.8	4.0	19.8	43.6	84.4
780.00	H	110	235	20.3	4.1	20.1	44.5	84.4

Table 3

The margin between the specification requirements and all other emissions was 45dB or more below the specification limit.

ABBREVIATIONS FOR ABOVE TABLE

H Horizontal Polarisation

V Vertical Polarisation

Procedure Test Performed in accordance with ANSI C63.4.

Test Equipment Used:

18, 19, 20, 21, 22, 23




Test Case: Radiated Emissions (continued)

Configuration: 1b

hp 10:22:44 NOV 04, 2002


ACTV DET: PEAK
MEAS DET: PEAK QP

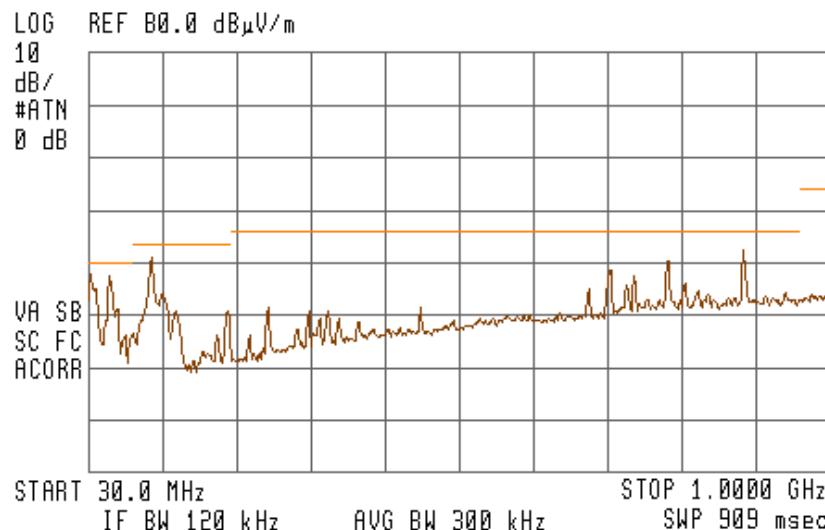

Plot 3 Vertical polarisation

hp 10:14:11 NOV 04, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP

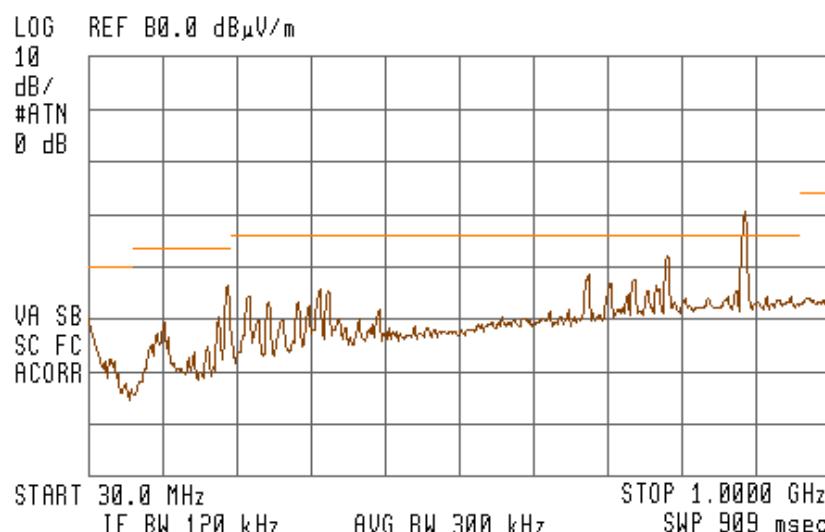

Plot 4 Horizontal polarisation



Test Case: Radiated Emissions (continued)

Configuration: 2

Alternative Open Area Test Site Results: The levels of the 6 highest emissions measured in accordance with the specification are presented in Table 4 below: -

Emission Frequency	Antenna		Turntable Azimuth	Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m	Specification Limit
	Polarity	Height						
MHz	H/V	cm	degree	dB μ V	dB	dB	dB μ V/m	dB μ V/m
63.55	V	103	194	31.1	1.0	8.0	40.1	84.4
676.00	H	101	234	20.3	3.8	18.9	43.0	84.4
704.50	V	125	195	17.9	3.9	19.2	41.0	84.4
737.30	V	119	186	18.7	4.0	19.8	42.5	84.4
832.00	H	136	227	17.0	4.3	20.4	41.7	84.4
858.00	H	123	250	15.5	4.3	20.4	40.2	84.4

Table 4

The margin between the specification requirements and all other emissions was 44dB or more below the specification limit.

ABBREVIATIONS FOR ABOVE TABLE

H Horizontal Polarisation

V Vertical Polarisation

Procedure Test Performed in accordance with ANSI C63.4.

Test Equipment Used:

18, 19, 20, 21, 22, 23




Test Case: Radiated Emissions (continued)

Configuration: 2

hp 14:48:16 NOV 04, 2002


ACTV DET: PEAK
MEAS DET: PEAK QP

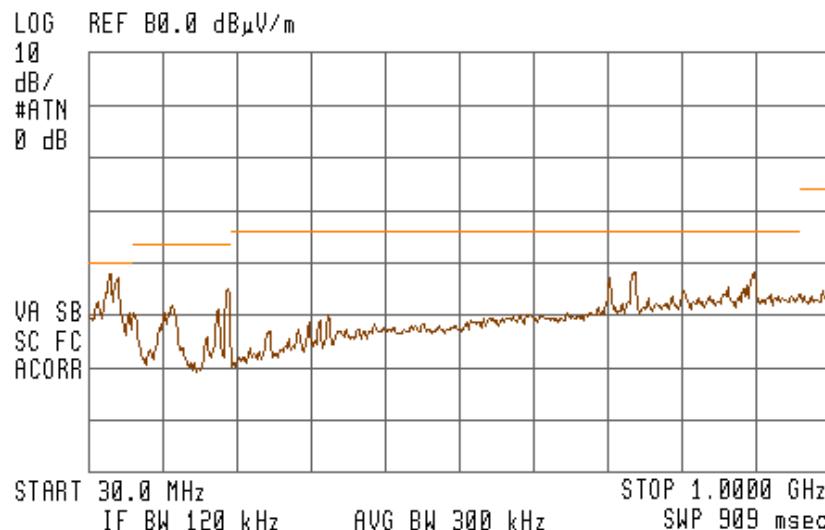

Plot 5 Vertical polarisation

hp 14:40:56 NOV 04, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP

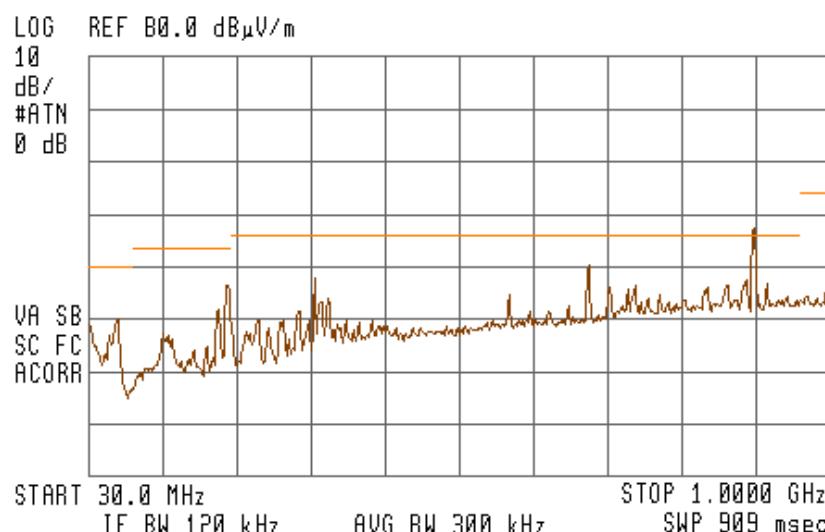

Plot 6 Horizontal polarisation



Test Case: Radiated Emissions (continued)

Configuration: 3

Alternative Open Area Test Site Results: The levels of the 6 highest emissions measured in accordance with the specification are presented in Table 5 below: -

Emission Frequency	Antenna		Turntable Azimuth	Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m	Specification Limit
	Polarity	Height						
MHz	H/V	cm	degree	dB μ V	dB	dB	dB μ V/m	dB μ V/m
208.00	H	100	314	24.4	1.9	10.7	37.0	84.4
327.70	H	103	171	20.6	2.4	14.4	37.4	84.4
676.00	H	100	16	13.8	3.8	18.9	36.5	84.4
737.30	V	120	210	19.4	4.0	19.8	43.2	84.4
802.85	V	114	169	13.2	4.2	20.3	37.7	84.4
884.00	H	106	162	13.9	4.4	20.4	38.7	84.4

Table 5

The margin between the specification requirements and all other emissions was 48dB or more below the specification limit.

ABBREVIATIONS FOR ABOVE TABLE

H Horizontal Polarisation

V Vertical Polarisation

Procedure Test Performed in accordance with ANSI C63.4.

Test Equipment Used:

18, 19, 20, 21, 22, 23




Test Case: Radiated Emissions (continued)

Configuration: 3

hp 09:39:42 NOV 05, 2002


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

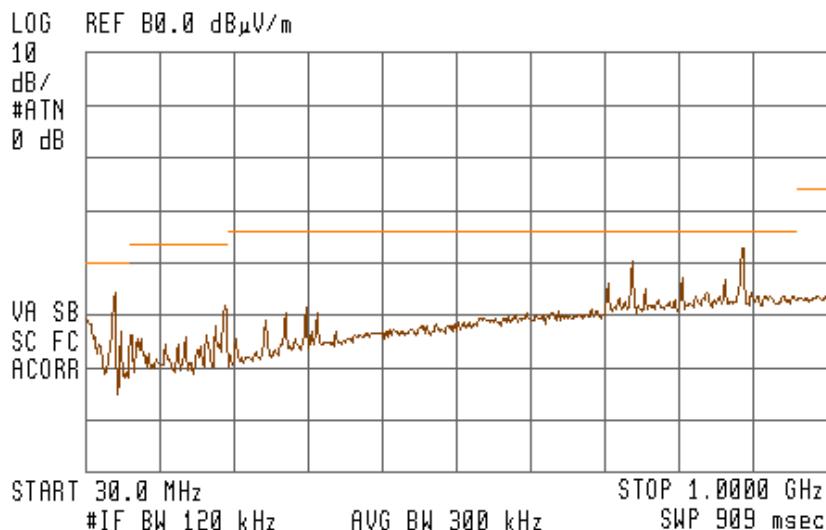

Plot 7 Vertical polarisation

hp 09:49:02 NOV 05, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

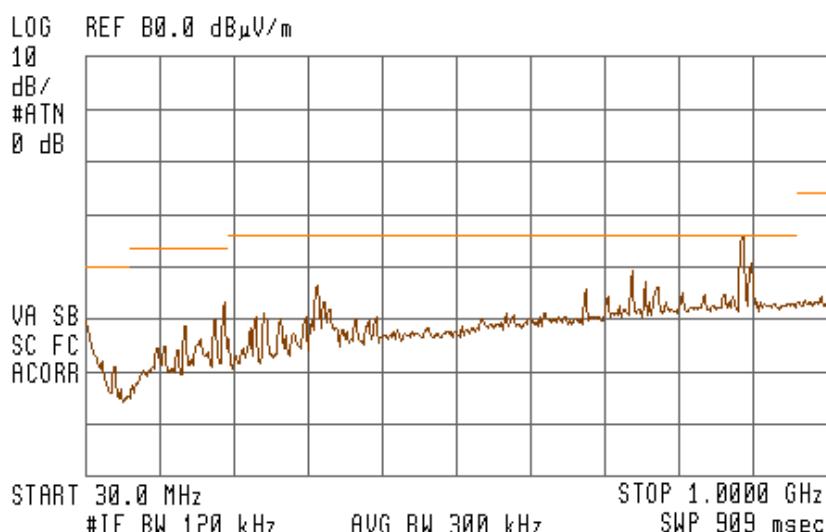

Plot 8 Horizontal polarisation



Test Case: Radiated Emissions (continued)

Configuration: 4a

Alternative Open Area Test Site Results: The level of the highest emission measured in accordance with the specification is presented in Table 6 below: -

Emission Frequency	Antenna		Turntable Azimuth	Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m	Specification Limit
	Polarity	Height						
MHz	H/V	cm	degree	dB μ V	dB	dB	dB μ V/m	dB μ V/m
1144.16	H	158	270	60.08	-32.78	24.80	52.1	84.4

Table 6

The margin between the specification requirements and all other emissions was 21dB or more below the specification limit.

ABBREVIATIONS FOR ABOVE TABLE

H Horizontal Polarisation

V Vertical Polarisation

Procedure Test Performed in accordance with ANSI C63.4.

Test Equipment Used:

20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32



Test Case: Radiated Emissions (continued)

Configuration: 4b

Alternative Open Area Test Site Results: The levels of the 6 highest emissions measured in accordance with the specification are presented in Table 7 below: -

Emission Frequency	Antenna		Turntable Azimuth	Level at 3m	Cable Loss	Antenna Factor	Field Strength at 3m	Specification Limit
	Polarity	Height						
MHz	H/V	cm	degree	dB μ V	dB	dB	dB μ V/m	dB μ V/m
1144.0	H	187	271	62.7	-32.4	25.2	55.5	84.4
1170.0	H	184	238	55.8	-32.1	25.2	48.9	84.4
1196.0	H	172	274	61.2	-32.1	25.3	54.4	84.4
1222.0	H	158	261	55.5	-31.9	25.3	48.9	84.4
1248.0	H	100	264	54.3	-32.1	25.3	47.5	84.4
1560.0	H	188	297	55.1	-32.1	26.1	49.1	84.4

Table 7

The margin between the specification requirements and all other emissions was 21dB or more below the specification limit.

ABBREVIATIONS FOR ABOVE TABLE

H Horizontal Polarisation

V Vertical Polarisation


Procedure Test Performed in accordance with ANSI C63.4.

Test Equipment Used:


20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32



Photograph No 1 – Radiated Emissions – Configuration 1a

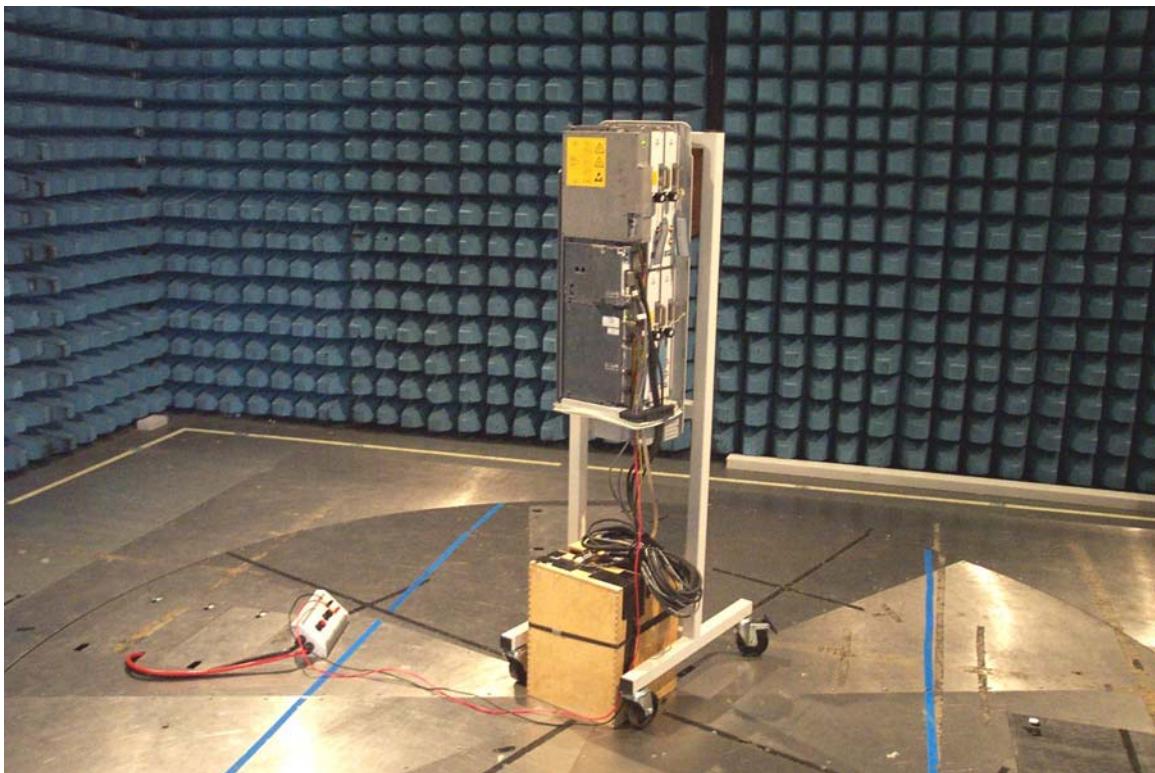

Photograph No 2 – Radiated Emissions – Configurations 1b, 2, 4a and 4b

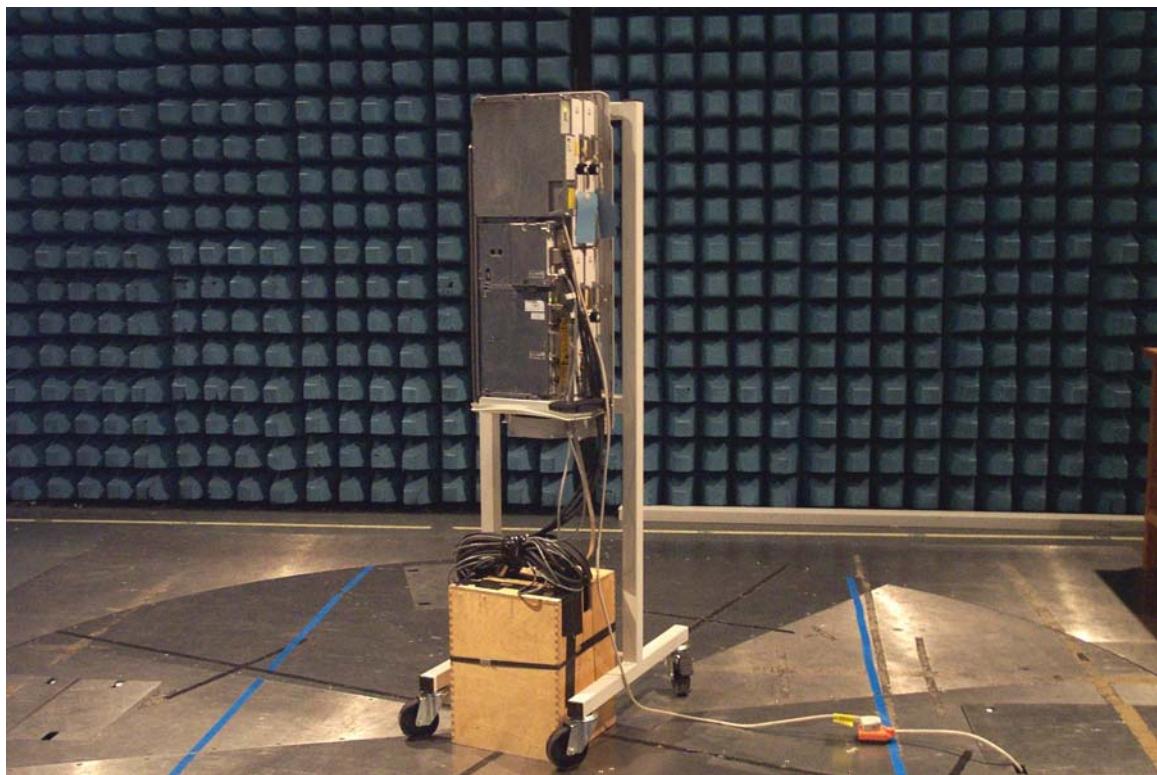

Photograph No 3 – Radiated Emissions – Configuration 3



Test Case: RF Output Power

Test Date: 22nd October 2002

Rule Parts: 2.1046, 24.232

Measurement Method

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals. The EUT supports both GMSK and 8PSK modulation schemes. The carrier power was measured with GMSK and 8PSK modulation with all time slots active.

The spectrum analyser RBW and VBW were set to 1MHz and the path loss measured and entered as a reference level offset.

Results

110V AC Supply

Maximum Power - GMSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	15.55	20.5	36.05	4.03
1960.0	15.99	20.5	36.49	4.56
1989.8	15.65	20.5	36.15	4.12

110V AC Supply

Minimum Power - GMSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (mW)
1930.2	-13.92	20.5	6.58	4.55
1960.0	-13.48	20.5	7.02	5.04
1989.8	-13.72	20.5	6.78	4.76

Limit	<100W or <+50dBm
-------	------------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(a). The EUT does not exceed 100W or +50dBm at the measured frequencies.

Test Equipment Used:

1, 2, 10, 13 & 14



110V AC Supply

Maximum Power – 8PSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	16.39	20.5	36.89	4.89
1960.0	16.75	20.5	37.25	5.31
1989.8	16.45	20.5	36.95	4.95

110V AC Supply

Minimum Power – 8PSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	0.64	20.5	21.14	0.13
1960.0	1.03	20.5	21.53	0.14
1989.8	0.80	20.5	21.30	0.13

Limit	<100W or <+50dBm
-------	------------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(a). The EUT does not exceed 100W or +50dBm at the measured frequencies.

Test Equipment Used:

1, 2, 10, 13 & 14



24V DC Supply

Maximum Power – GMSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	15.46	20.5	35.96	3.94
1960.0	15.94	20.5	36.44	4.41
1989.8	15.60	20.5	36.10	4.07

24V DC Supply

Minimum Power – GMSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (mW)
1930.2	-14.02	20.5	6.48	4.45
1960.0	-13.67	20.5	6.83	4.82
1989.8	-13.86	20.5	6.64	4.61

Limit	<100W or <+50dBm
-------	------------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(a). The EUT does not exceed 100W or +50dBm at the measured frequencies.

Test Equipment Used:

1, 2, 10, 12 & 14



24V DC Supply

Maximum Power – 8PSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	16.35	20.5	36.85	4.84
1960.0	16.74	20.5	37.24	5.30
1989.8	16.42	20.5	36.92	4.92

24V DC Supply

Minimum Power – 8PSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	0.64	20.5	21.14	0.13
1960.0	1.10	20.5	21.60	0.14
1989.8	0.68	20.5	21.18	0.13

Limit	<100W or <+50dBm
-------	------------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(a). The EUT does not exceed 100W or +50dBm at the measured frequencies.

Test Equipment Used:

1, 2, 10, 12 & 14



48V DC Supply

Maximum Power – GMSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	15.50	20.5	36.00	3.98
1960.0	15.99	20.5	36.49	4.46
1989.8	15.67	20.5	36.17	4.14

48V DC Supply

Minimum Power – GMSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (mW)
1930.2	-13.83	20.5	6.67	4.65
1960.0	-13.24	20.5	7.26	5.32
1989.8	-13.55	20.5	6.95	4.96

Limit	<100W or <+50dBm
-------	------------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(a). The EUT does not exceed 100W or +50dBm at the measured frequencies.

Test Equipment Used:

1, 2, 10, 12 & 14



48V DC Supply

Maximum Power – 8PSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	16.37	20.5	36.87	4.86
1960.0	16.78	20.5	37.28	5.35
1989.8	16.51	20.5	37.01	5.02

48V DC Supply

Minimum Power – 8PSK

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1930.2	0.71	20.5	21.21	0.13
1960.0	1.08	20.5	21.58	0.14
1989.8	0.87	20.5	21.37	0.14

Limit	<100W or <+50dBm
-------	------------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(a). The EUT does not exceed 100W or +50dBm at the measured frequencies.

Test Equipment Used:

1, 2, 10, 12 & 14



Test Case: Modulation Characteristics
Test Date: 21st October 2002
Rule Parts: 2.1047(d)

Description Of Modulation Technique

The modulation scheme used in GSM is called Gaussian Minimum Shift Keying (GMSK). GMSK facilitates the use of narrow bandwidth and allows for both coherent and non coherent detection capabilities. It is a scheme in which the transitions from One to Zero or Zero to One do not occur quickly, but over a period of time. If pulses are transmitted quickly harmonics are transmitted. The power spectrum for a square wave is rich in harmonics, and the power within the side lobes is wasted, and can be a cause of potential interference.

A method to reduce the harmonics is to round off the edges of the pulses thus lowering the spectral components of the signal. In GSM this is done by using a Gaussian pre-filter which typically has a bandwidth of 81.25kHz. The output from the Gaussian filter then phase modulates the carrier. As there are no dramatic phase transitions of the carrier this gives a constant envelope and low spectral component output from the transmitter.

The spectral efficiency is calculated by

$$\text{bit rate} / \text{Channel bandwidth} = 270.83333 \text{ kbit/s} / 200 \text{ kHz} = 1.354 \text{ bit/s/Hz.}$$

$$\text{The bandwidth product BT} = \text{Bandwidth} \times \text{bit duration} = 81.25 \text{ kHz} \times 3.6923 \text{ micros} = 0.3$$


GMSK and 8PSK OVERVIEW

The modulation schemes used for the Metrosite EDGE are GMSK and 8PSK. The 8PSK modulation scheme is EDGE (Enhanced Date Rates for GSM Evolution).

A brief overview of how GMSK and 8PSK works is shown below.

GMSK (Gaussian Minimum Shift Keying)

The fundamental principal behind GMSK is Phase shift keying. This splits a data stream into a series of 2-digit phase shifts, using the following phase shifts to represent data pairs.

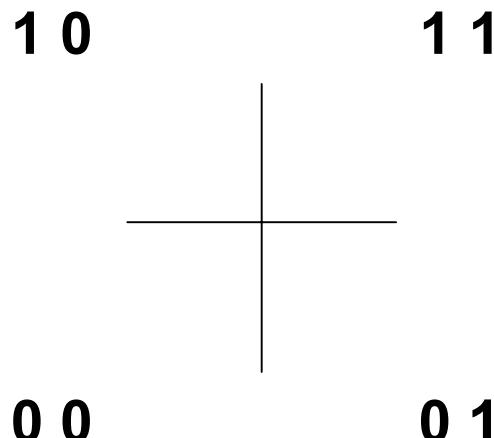



Therefore for the BIT sequence 0 0 1 1 1 0 0 1 The corresponding phase shift will be used

BIT SEQUENCE	0 0	1 1	1 0	0 1
PHASE	225°	45°	135°	315°

This is called QPSK (Quadratic Phase Shift Keying)

However

There is a problem with QPSK: transition from e.g. 00 to 11 gives phase shift of 180° (π radians). This has the effect of inverting the carrier waveform and this can lead to detection errors at the receiver.

Solution: restrict phase changes to $\pm 90^\circ$

1. Split bitstream into 2 streams e.g.

	0 0		1 1		0 1		1 0	
I Stream	0		1		0		1	
Q stream		0		1		1		0


2. Modulate each stream with PSK ($1 = 90^\circ$ or $\pi/2$, $0 = -90^\circ$ or $-\pi/2$ phase shift)

I Stream	0		1		0		1	
	$-\pi/2$		$-\pi/2$		$-\pi/2$		$\pi/2$	
Q stream		0		1		1		0
		$-\pi/2$		$\pi/2$		$\pi/2$		$-\pi/2$

3. Combine (add) the two PSK signals:


Combined Phase	- $\pi/2$	$-\pi$	- $\pi/2$	0	- $\pi/2$	0	$\pi/2$	0
----------------	-----------	--------	-----------	---	-----------	---	---------	---

Result: offset - QPSK, phase change is restricted to $\pm \pi/2$ radians:

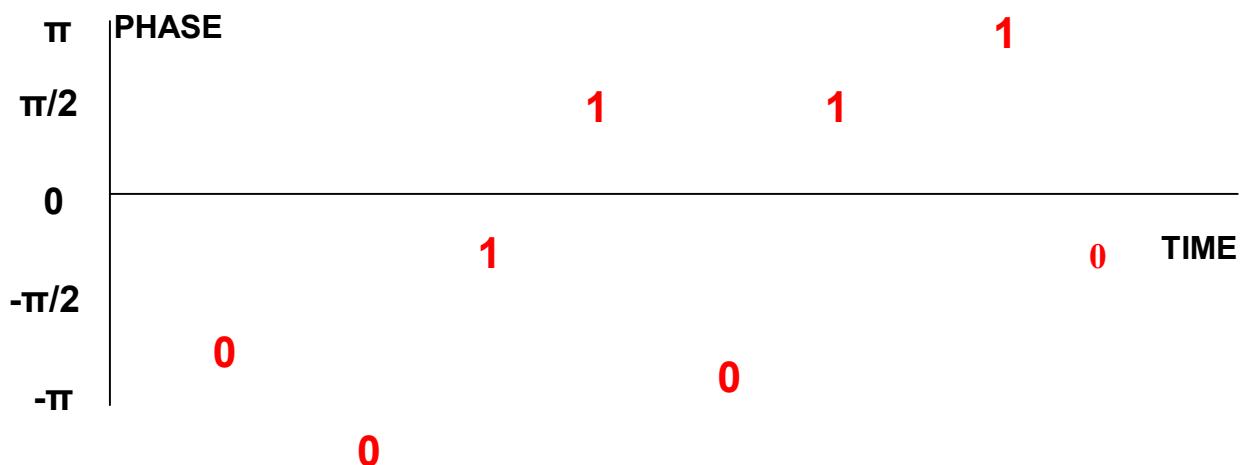

It would be preferable to have "gradual" changes in place between each pair of bits (Continuous-phase modulation). Replacing each "rectangular" shaped pulse (for 1 or 0) with a sinusoidal pulse can do this:

Result: Minimum Shift Keying (MSK):

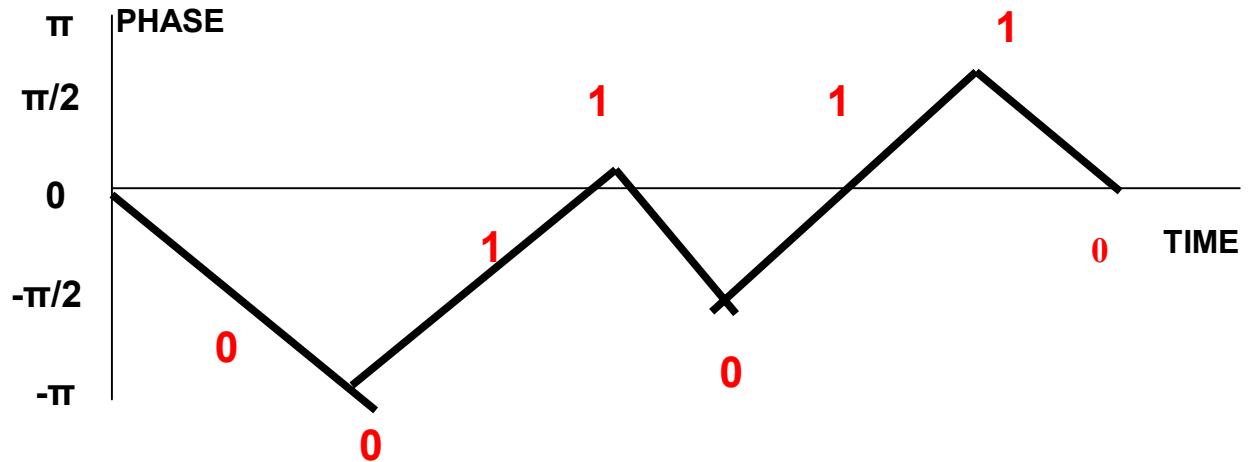


Gaussian Minimum Shift Keying

MSK has high sidebands relative to the main lobes in the frequency domain - this can lead to interference with adjacent signals.

If the rectangular pulses corresponding to the bitstream are filtering using a Gaussian-shaped impulse response filter, we get Gaussian MSK (GMSK) - this has low sidelobes compared to MSK.

8-PSK (8-Phase Shift Keying)

8-PSK uses the same basic principle of phase shift modulation. The only difference being the increased number of vectors.

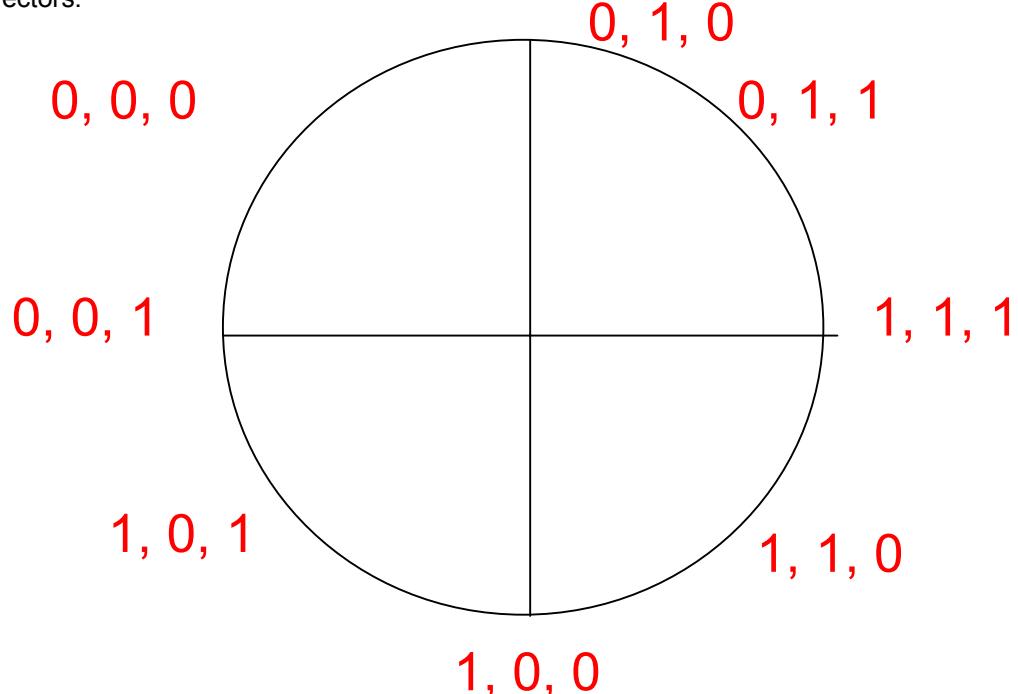





Once the digital bit sequence has been generated the same process as GMSK is used to generate the modulated signal.

Four plots are shown on the following pages showing the EUT transmitting with the display in the time domain:

- 1) EUT transmitting with GMSK modulation showing alternate time slots.
- 2) EUT transmitting with GMSK modulation showing one time slot.
- 3) EUT transmitting with 8PSK modulation showing alternate time slots.
- 4) EUT transmitting with 8PSK modulation showing one time slot.

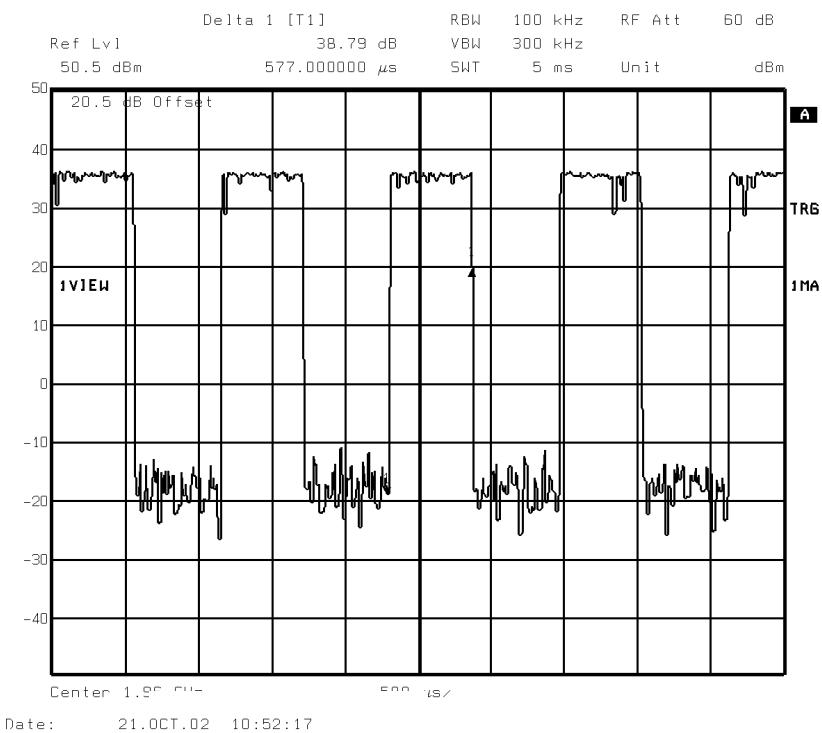


Plot (1)

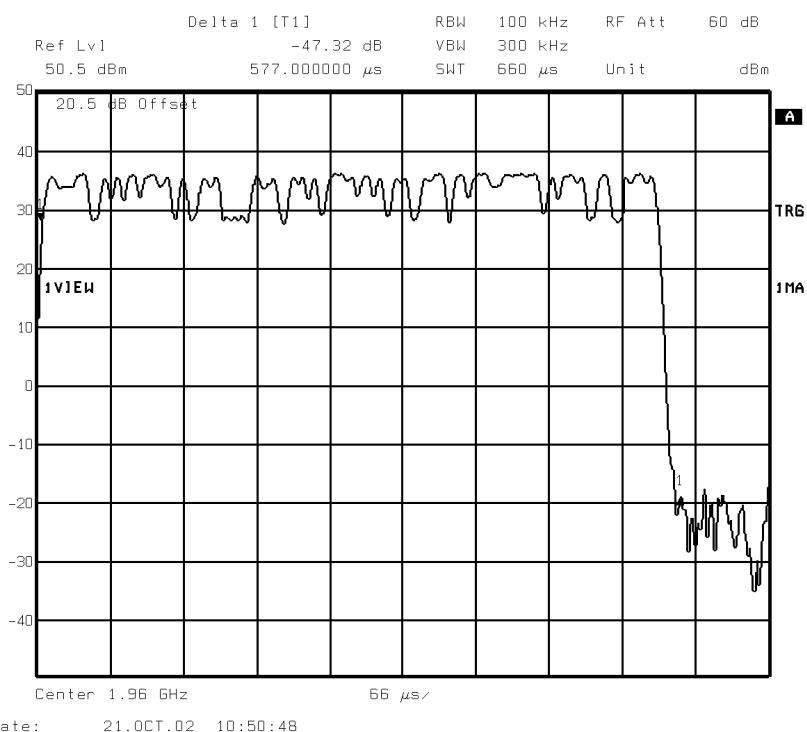


Plot (2)

Test Equipment Used:

1, 2, 10, 13 & 14

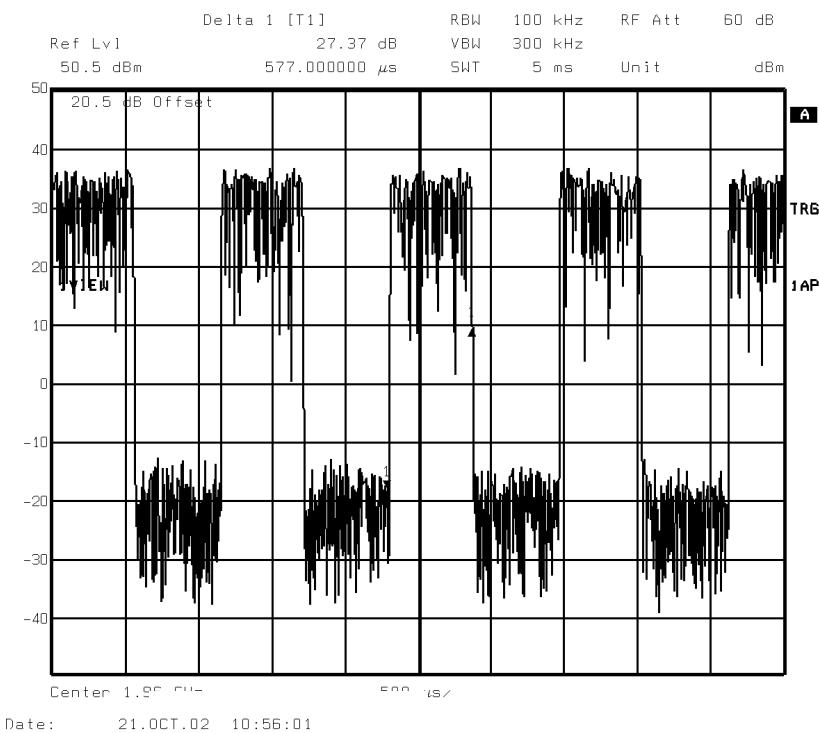

Plot (3)

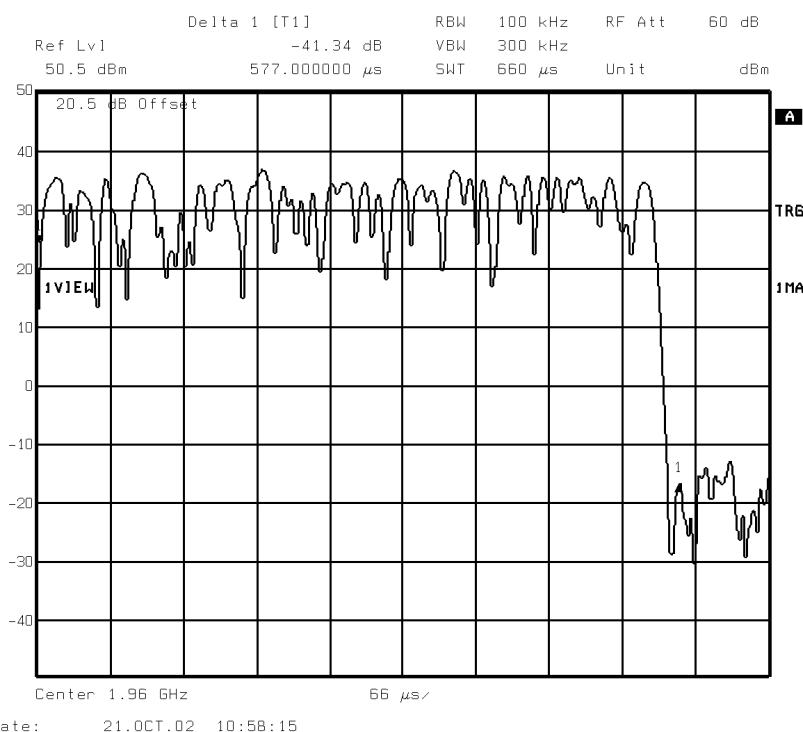

Plot (4)

Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Occupied Bandwidth

Test Date: 21st October 2002

Rule Parts: 2.1049, 24.238(b)


Measurement Method

The EUT was transmitted at maximum power, modulated with all timeslots active. Using a resolution bandwidth of 30 kHz and a video bandwidth of 100 kHz, the -26dBc points were established and the emission bandwidth determined.

The plot below shows the resultant display from the Spectrum Analyser.

Occupied Bandwidth As Defined By The -26dBc Points

Maximum Power - GMSK

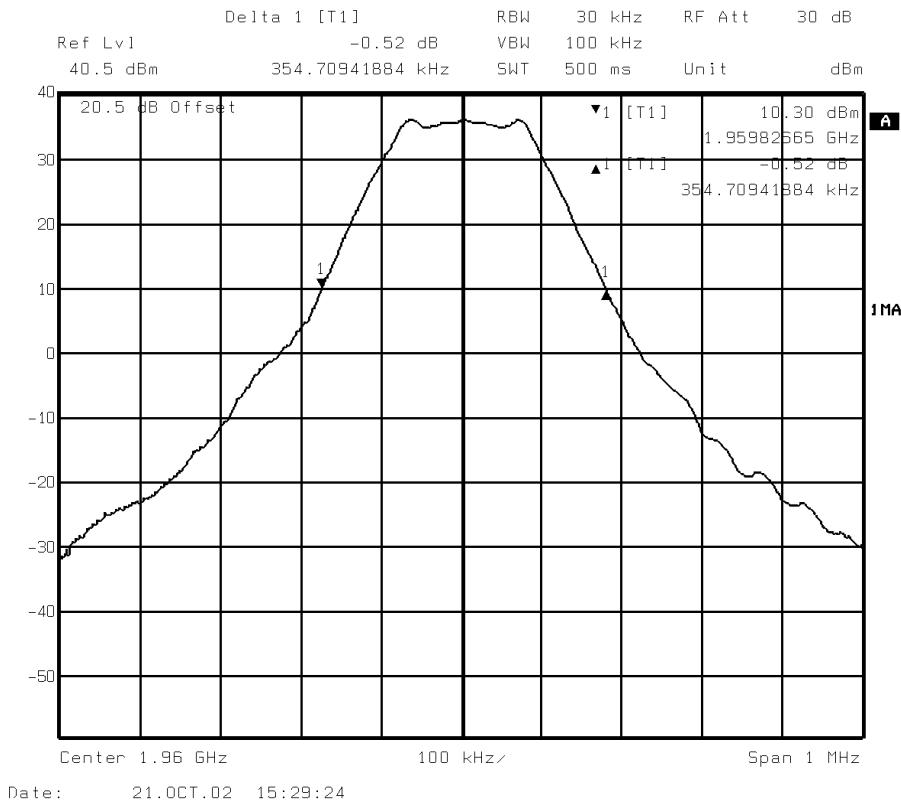


Test Equipment Used:

1, 2, 10, 13 & 14



Minimum Power - GMSK

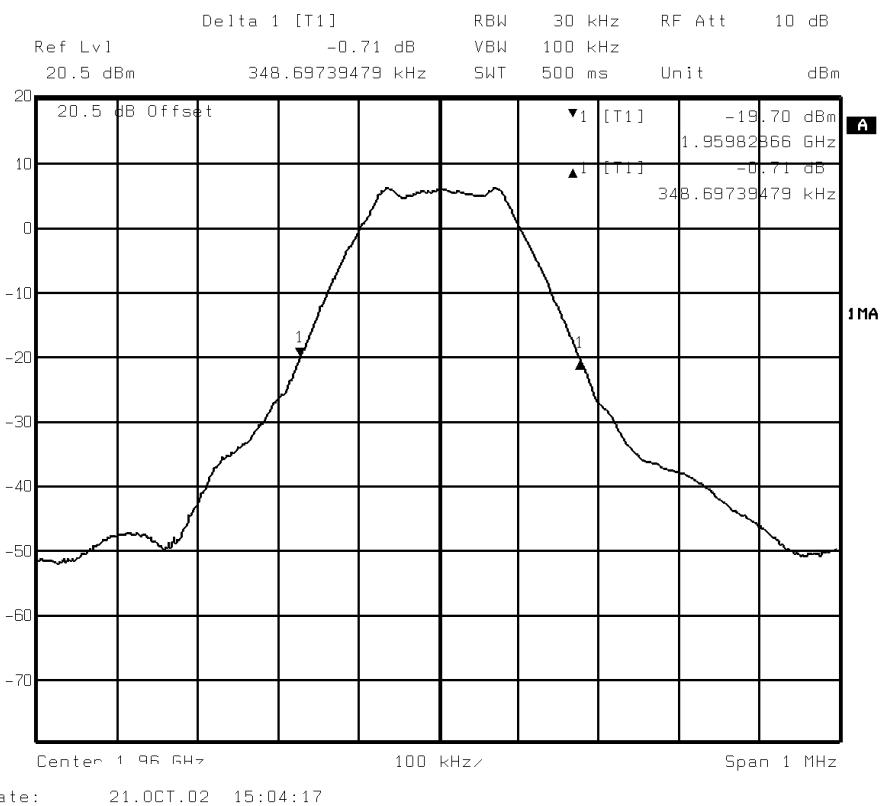


Test Equipment Used:

1, 2, 10, 13 & 14



Maximum Power – 8PSK

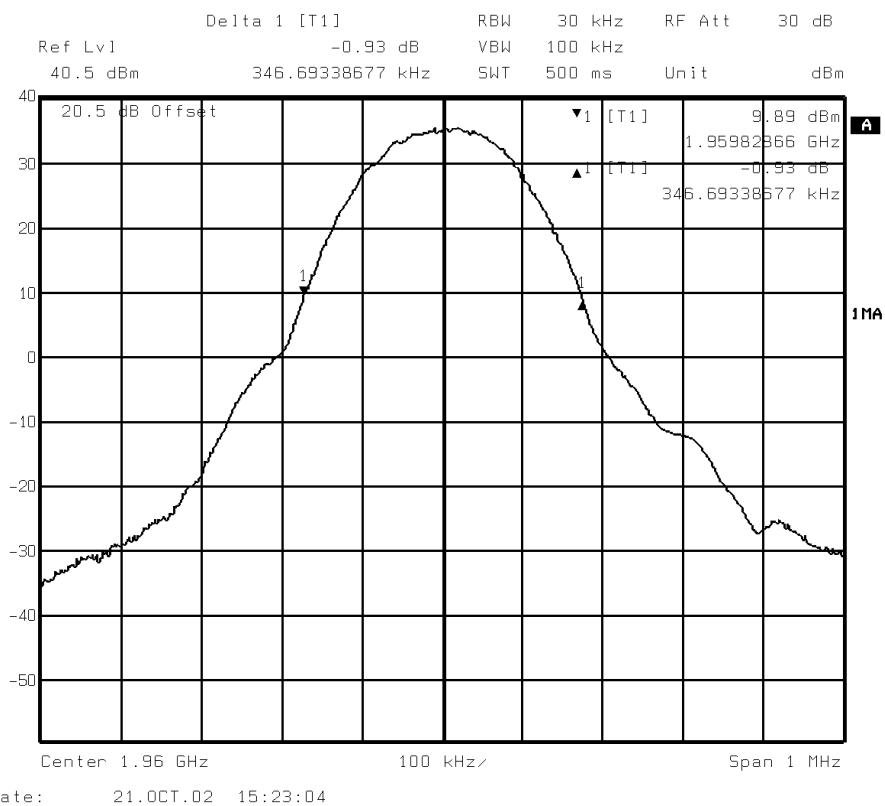


Test Equipment Used:

1, 2, 10, 13 & 14



Minimum Power – 8PSK

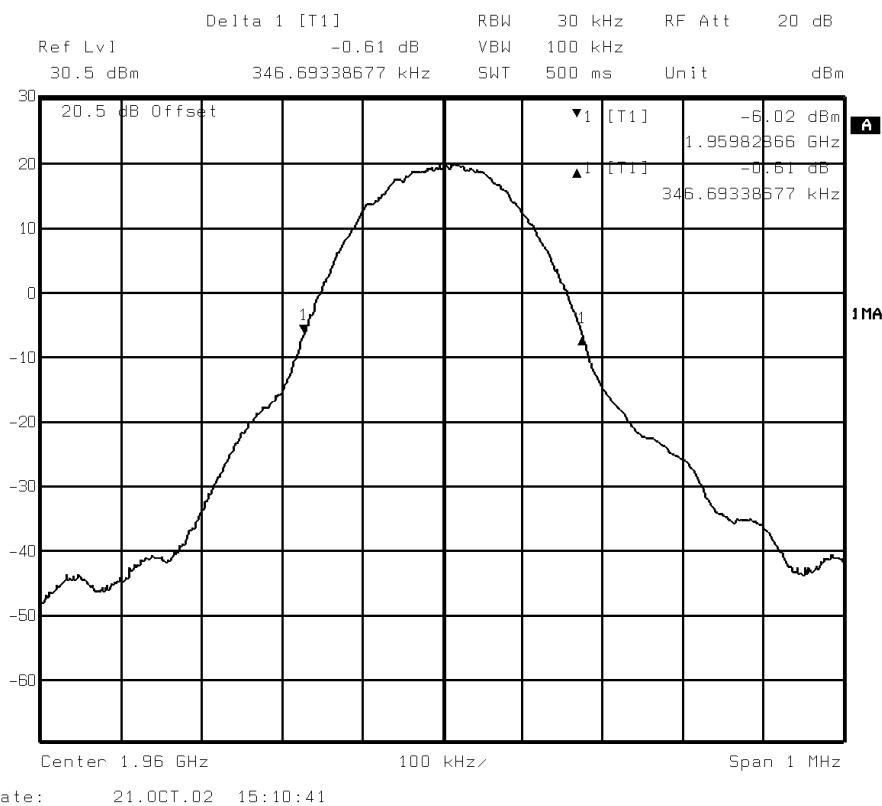

Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Measurement Method

In accordance with Part 24.238, at least 1% of the 26dB bandwidth was used for the resolution and video bandwidths up to 1MHz away from the Block Edge. At greater than 1MHz away from block edge, the resolution and video bandwidths were increased to 1MHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. It was found that there was <0.3dB variation in all channels, thus the worst case reference level offset was used throughout. Having entered the reference level offset, the limit line was displayed, showing the -13dBm, (43+10logP), limit.

Below are the Frequency Blocks the EUT was tested against along with the tested channels.

Communication Channel Pair Blocks

Frequency Block (MHz)	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A (1930 – 1945)	Channel : 513 Frequency : 1930.4MHz	Channel : 584 Frequency : 1944.6Hz
B (1950 – 1965)	Channel : 613 Frequency : 1950.4MHz	Channel : 684 Frequency : 1964.6MHz
C (1975 – 1990)	Channel : 738 Frequency : 1975.4MHz	Channel : 809 Frequency : 1989.6MHz
D (1945 – 1950)	Channel : 588 Frequency : 1945.4MHz	Channel : 609 Frequency : 1949.6MHz
E (1965 – 1970)	Channel : 688 Frequency : 1965.4MHz	Channel : 709 Frequency : 1969.6MHz
F (1970 – 1975)	Channel : 713 Frequency : 1970.4MHz	Channel : 734 Frequency : 1974.6Hz

Remarks

The channels shown in the table above are the minimum and maximum channels that can be used in each block to maintain compliance. Channels used outside of those stated in the table exceed the specification limits, thus they cannot be used.

The channels outside of those shown in the table above were not tested at lower power levels to determine a level at which compliance would be achieved. Therefore, to maintain compliance, only the channels shown in the table above shall be used.

The measurement plots are shown on the following pages.




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 513, (1930.4MHz)

GMSK Modulation

Block A
1930 – 1945MHz

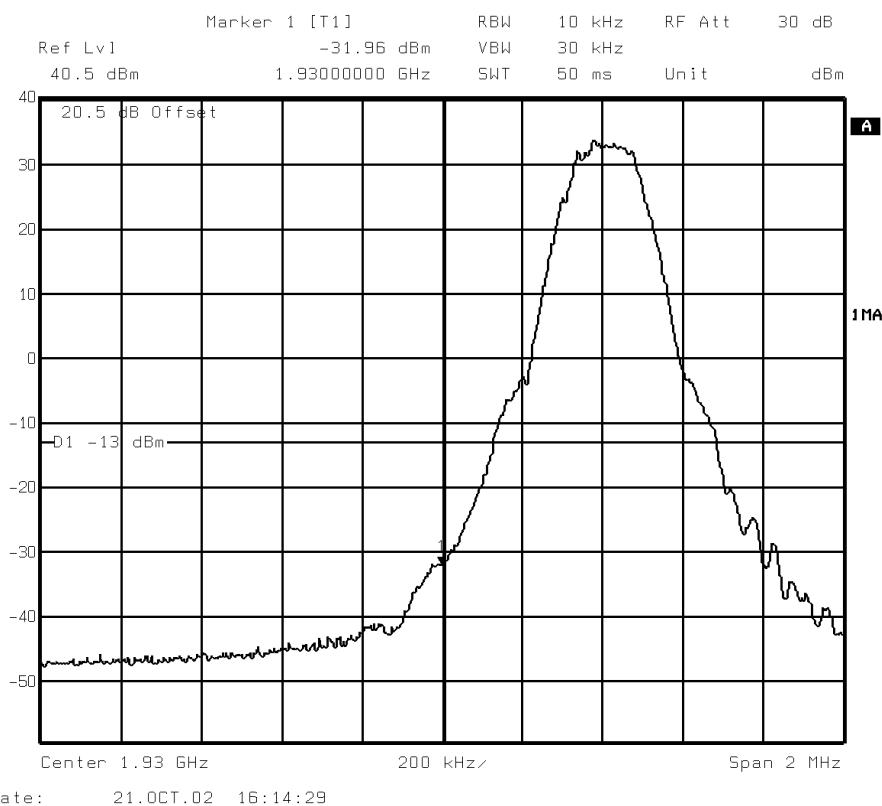

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.


Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 513, (1930.4MHz)
8PSK Modulation

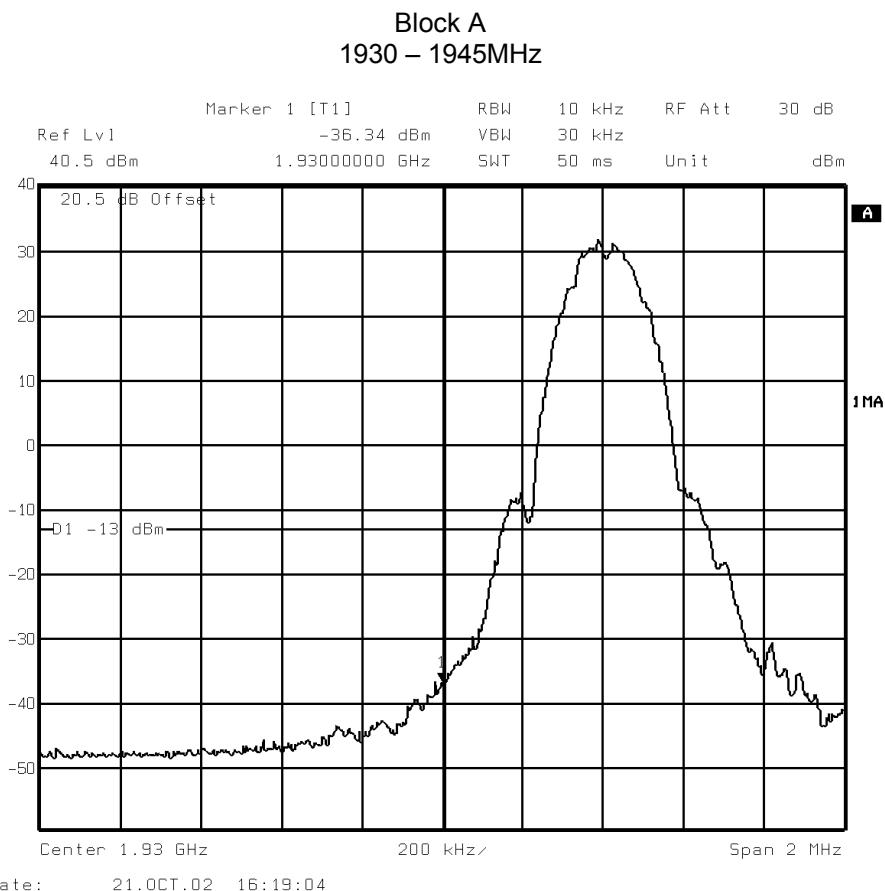

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 584, (1944.6.4MHz)

GMSK Modulation

Block A
1930 – 1945MHz

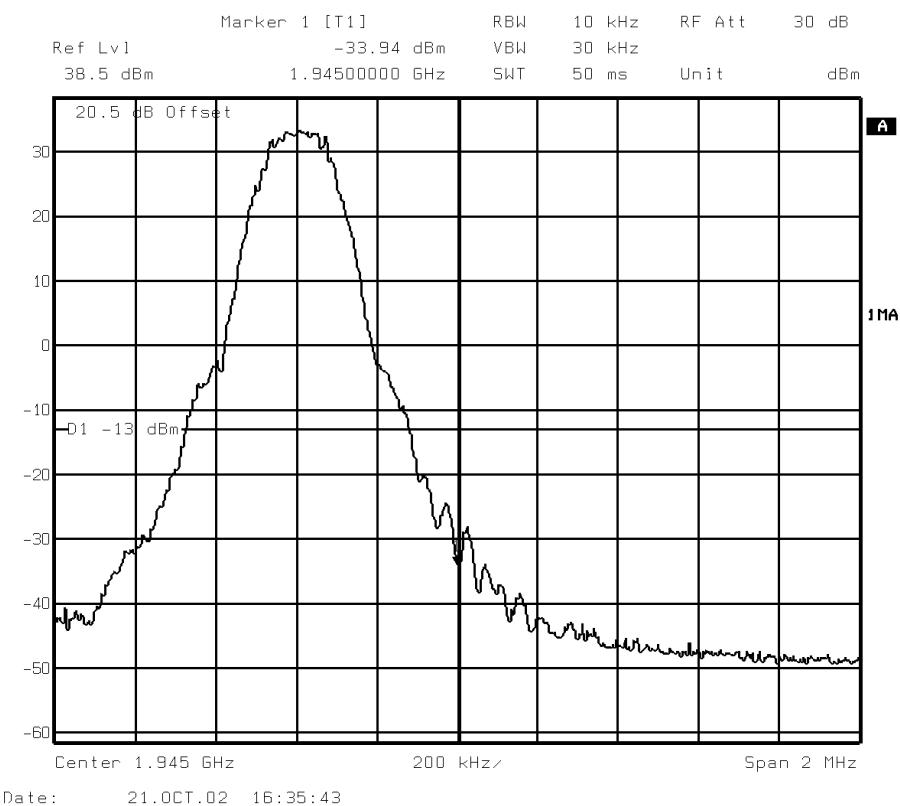

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.


Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 584, (1944.6.4MHz)
8PSK Modulation

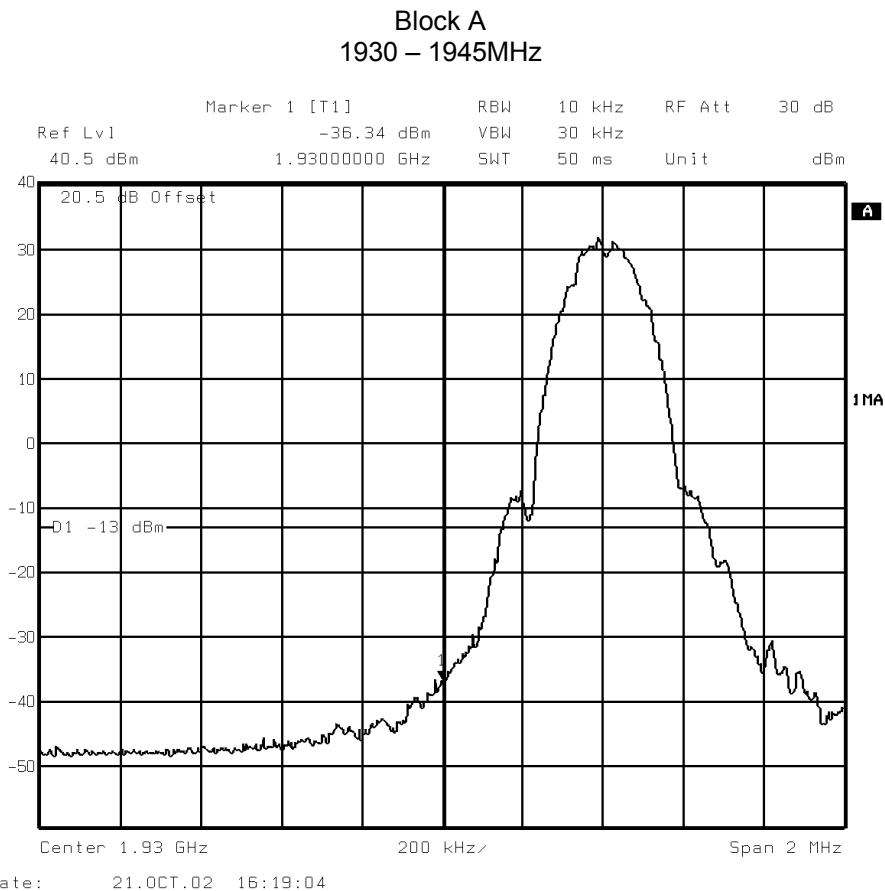

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 613, (1950.4MHz)

GMSK Modulation

Block B
1950 – 1965MHz

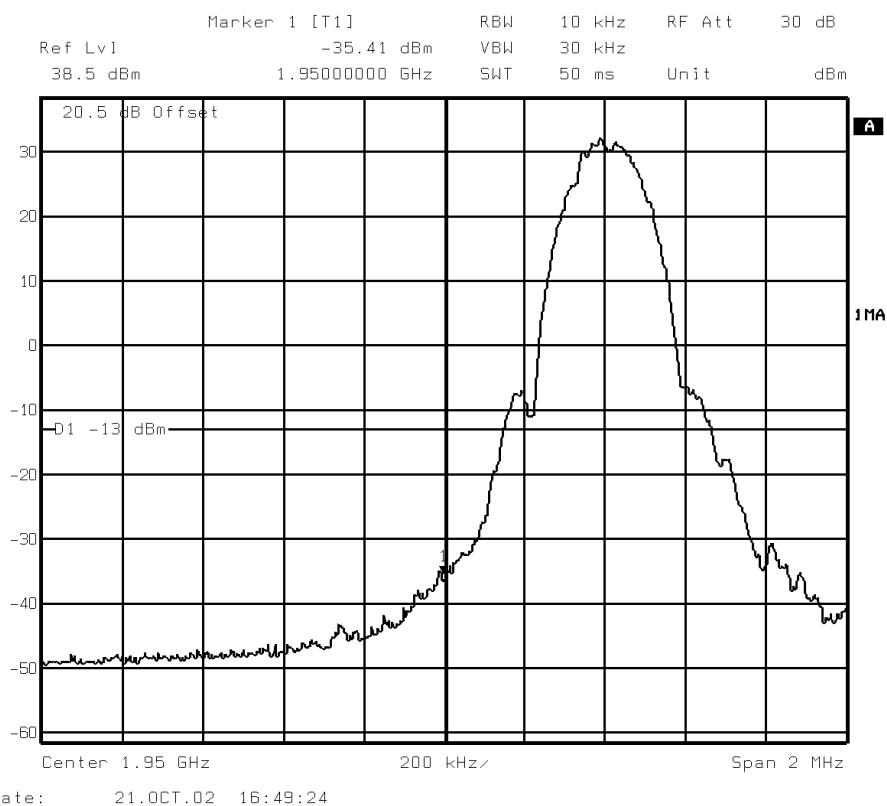

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 613, (1950.4MHz)

8PSK Modulation

Block B
1950 – 1965MHz

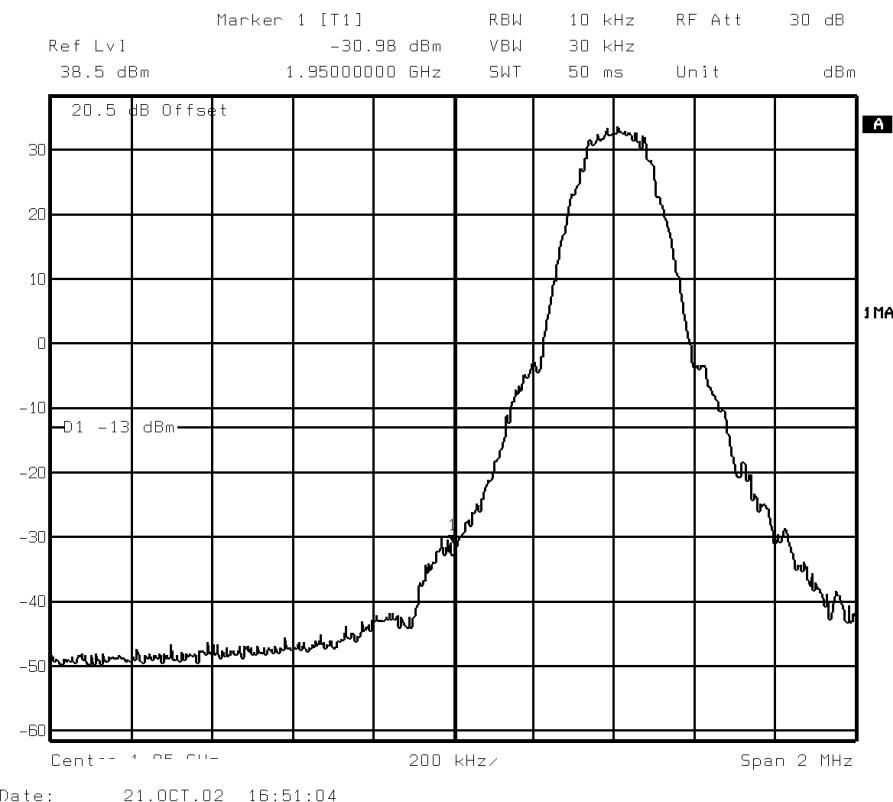

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 684, (1964.6MHz)

GMSK Modulation

Block B
1950 – 1965MHz

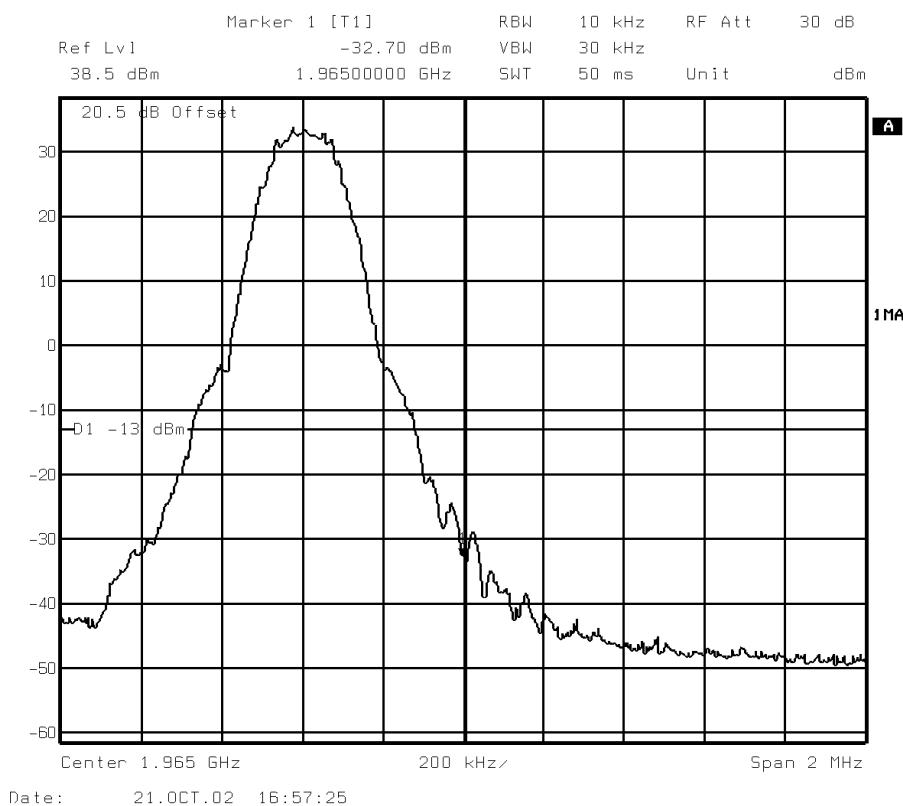

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 684, (1964.6MHz)

8PSK Modulation

Block B
1950 – 1965MHz

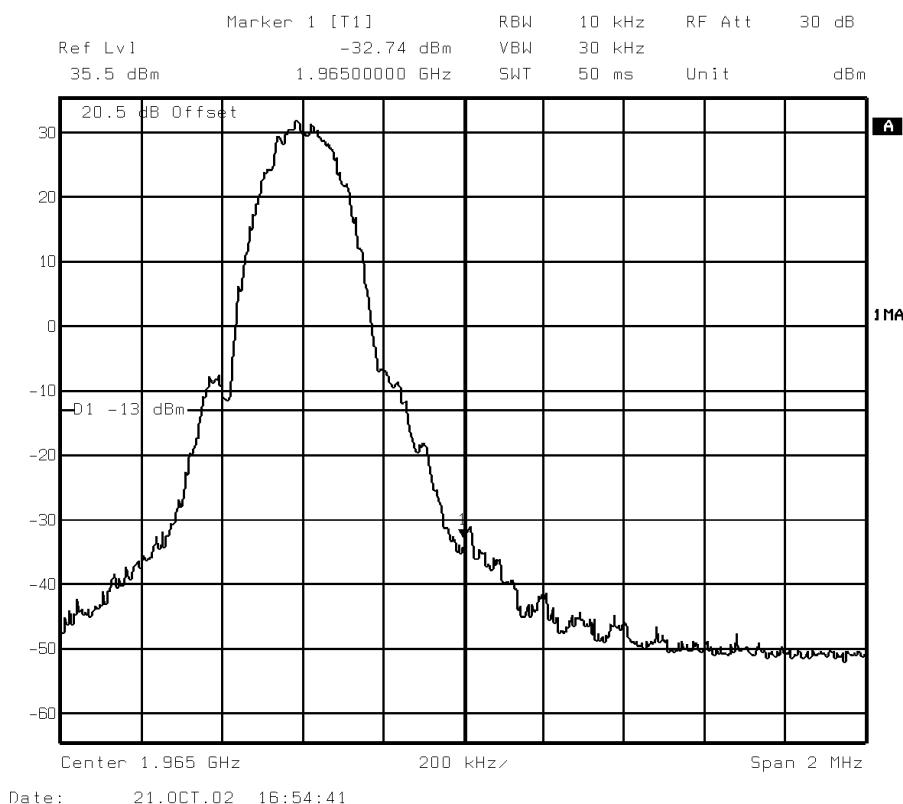

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 738, (1975.4MHz)

GMSK Modulation

Block C
1975 – 1990MHz

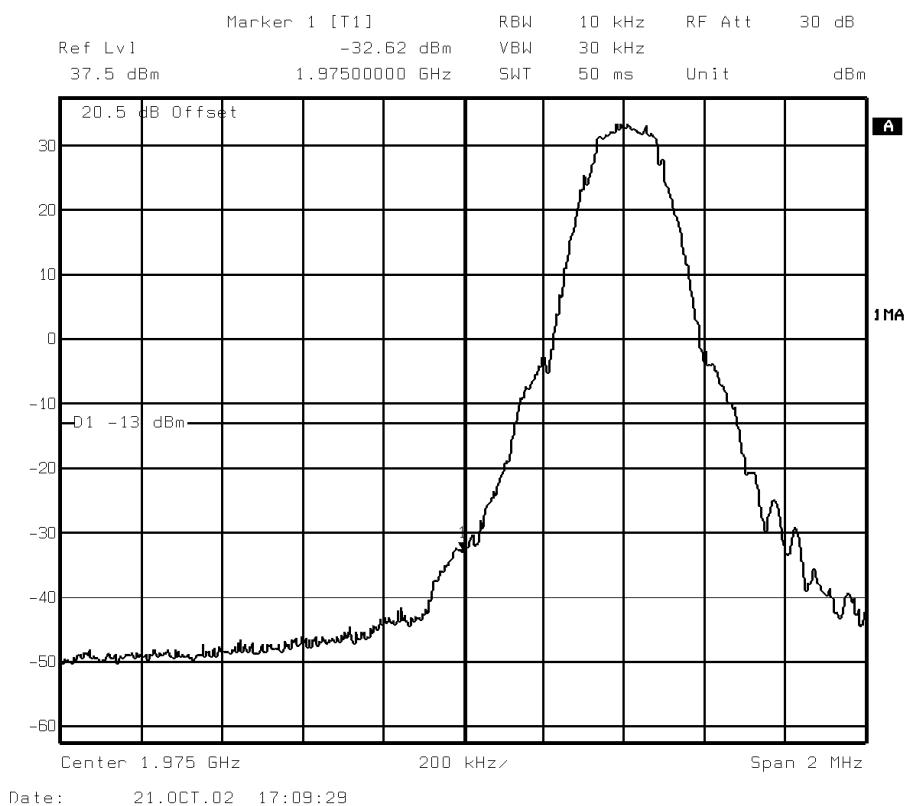

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 738, (1975.4MHz)

8PSK Modulation

Block C
1975 – 1990MHz

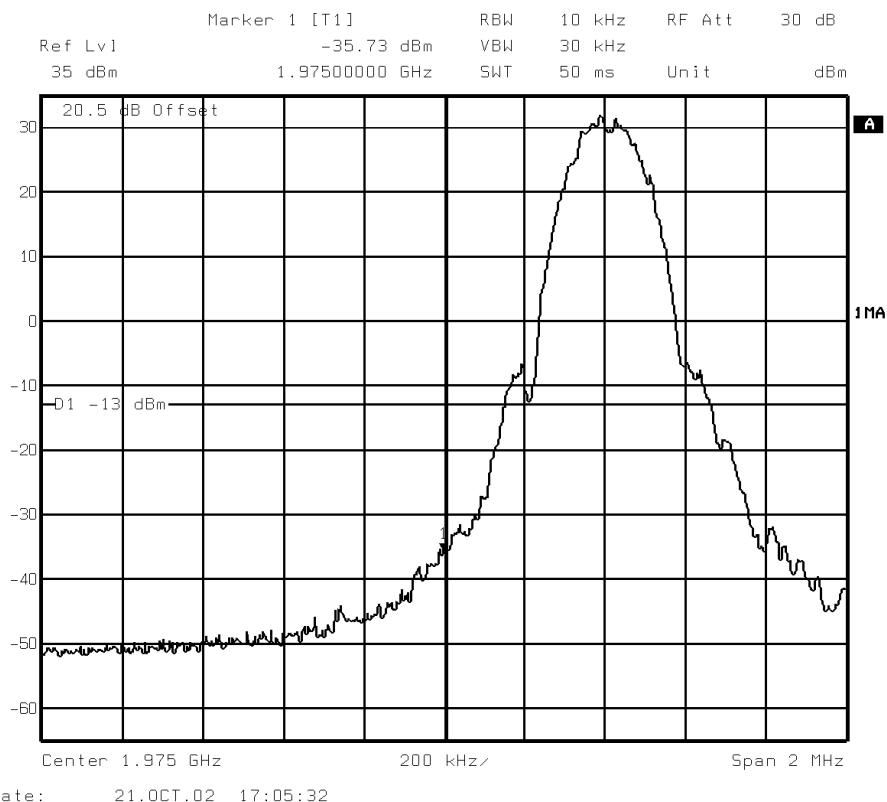

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.


Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 809, (1989.6MHz)

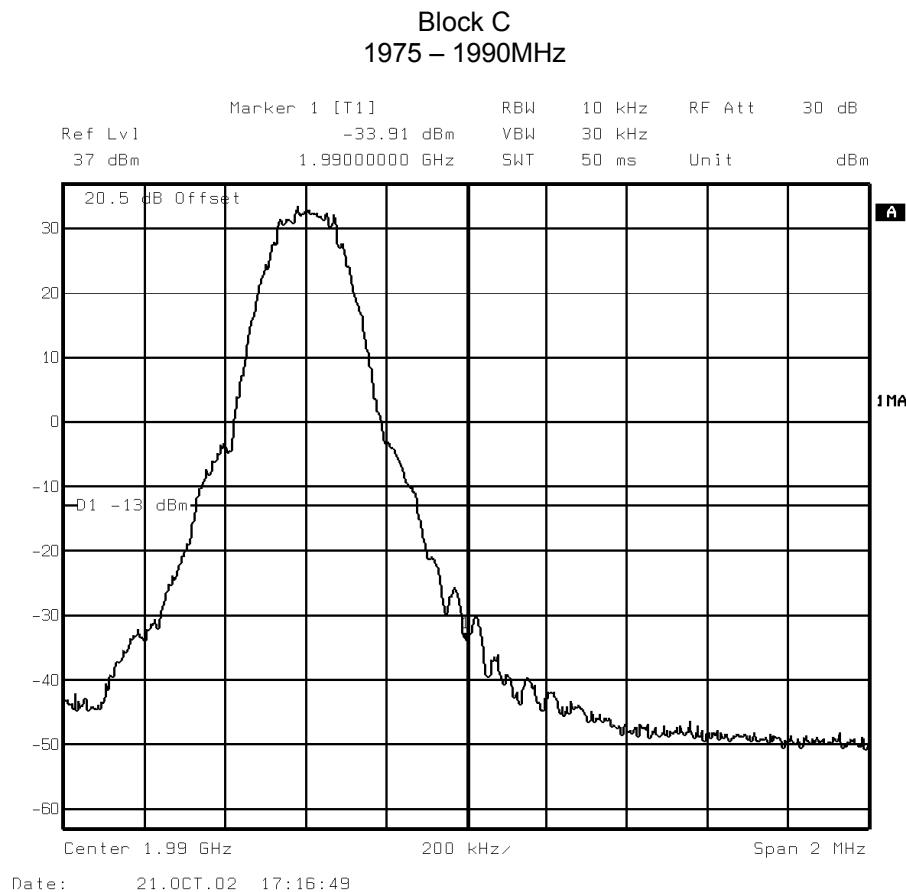

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.


Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 809, (1989.6MHz)

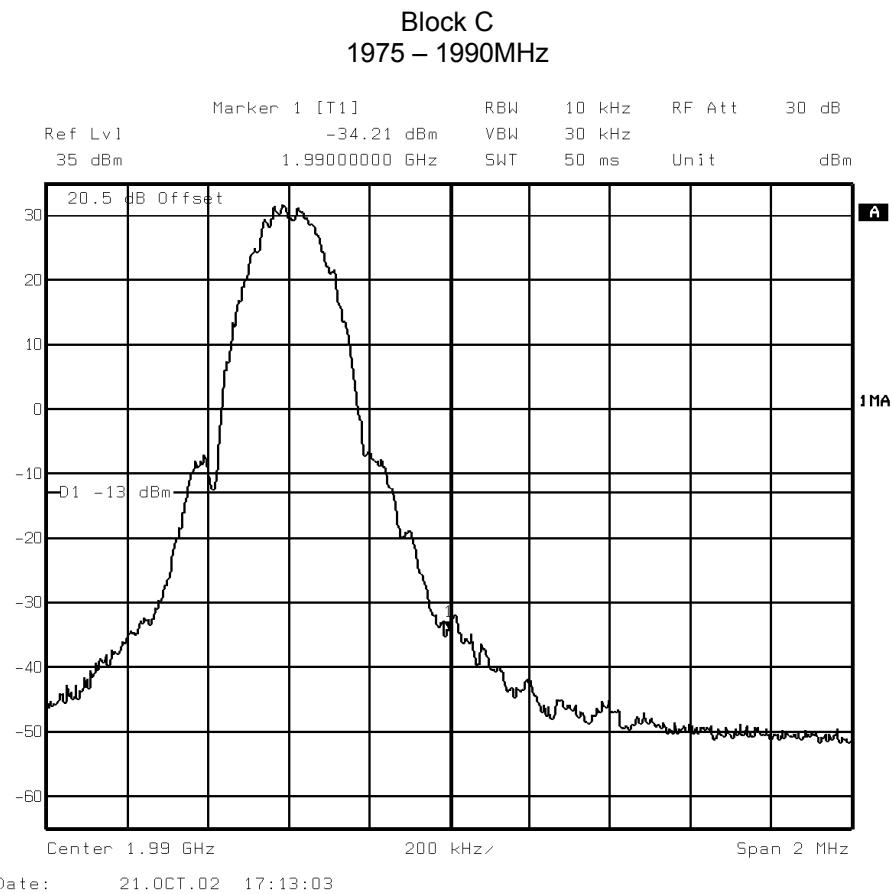

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 588, (1945.4MHz)

GMSK Modulation

Block D
1945 – 1950MHz

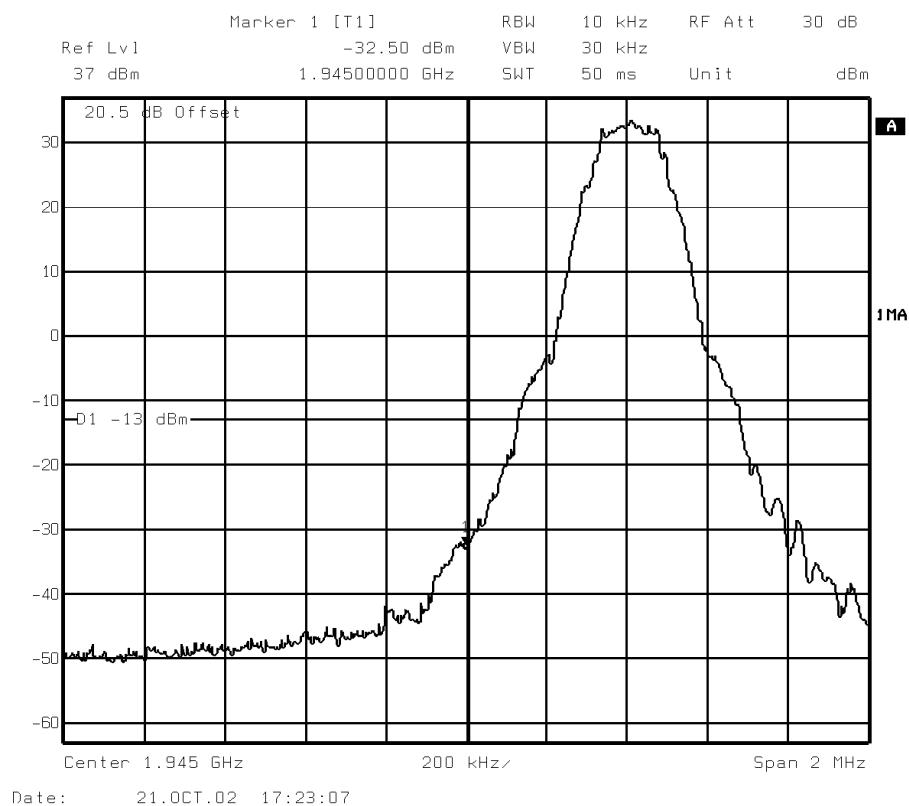

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 588, (1945.4MHz)

8PSK Modulation

Block D
1945 – 1950MHz

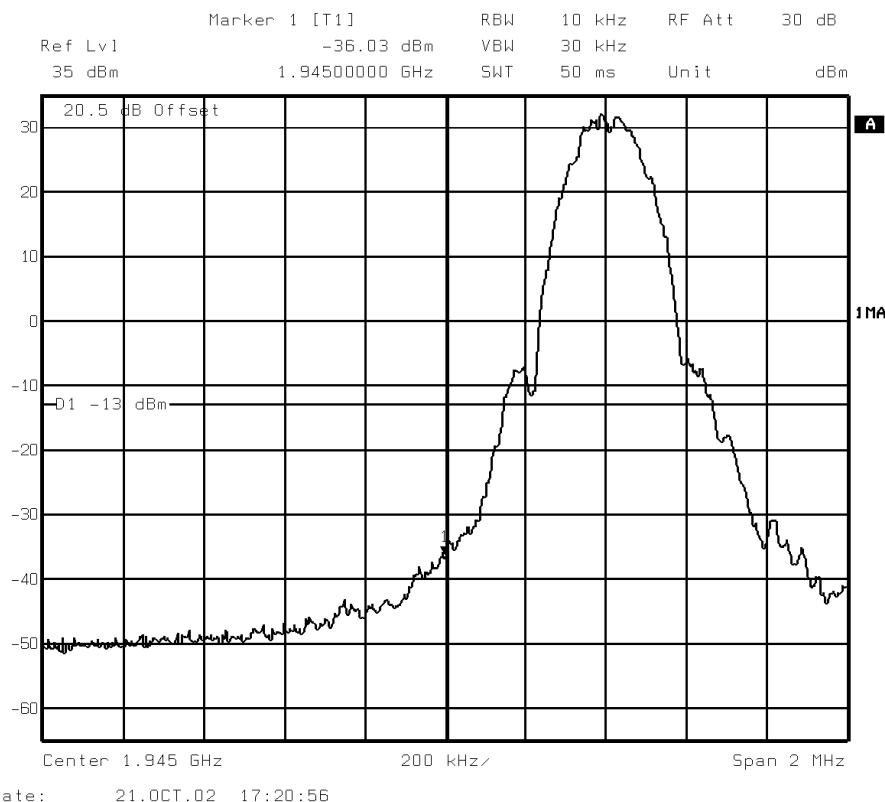

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 609, (1949.6MHz)

GMSK Modulation

Block D
1945 – 1950MHz

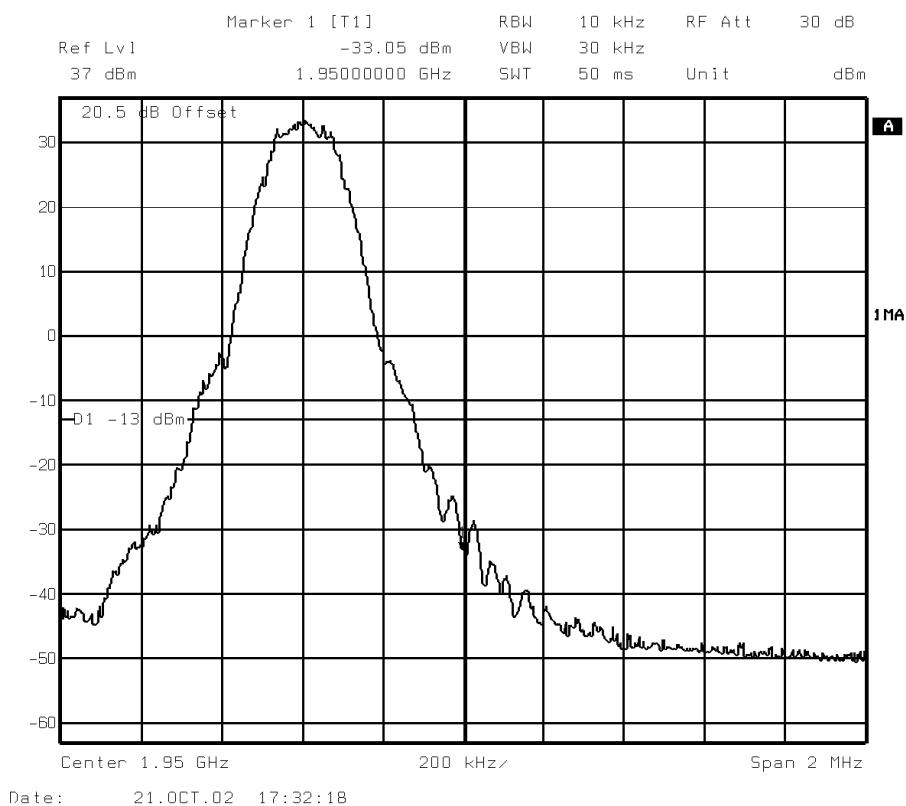

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.

Test Equipment Used:


1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 609, (1949.6MHz)
8PSK Modulation

Block D
1945 – 1950MHz

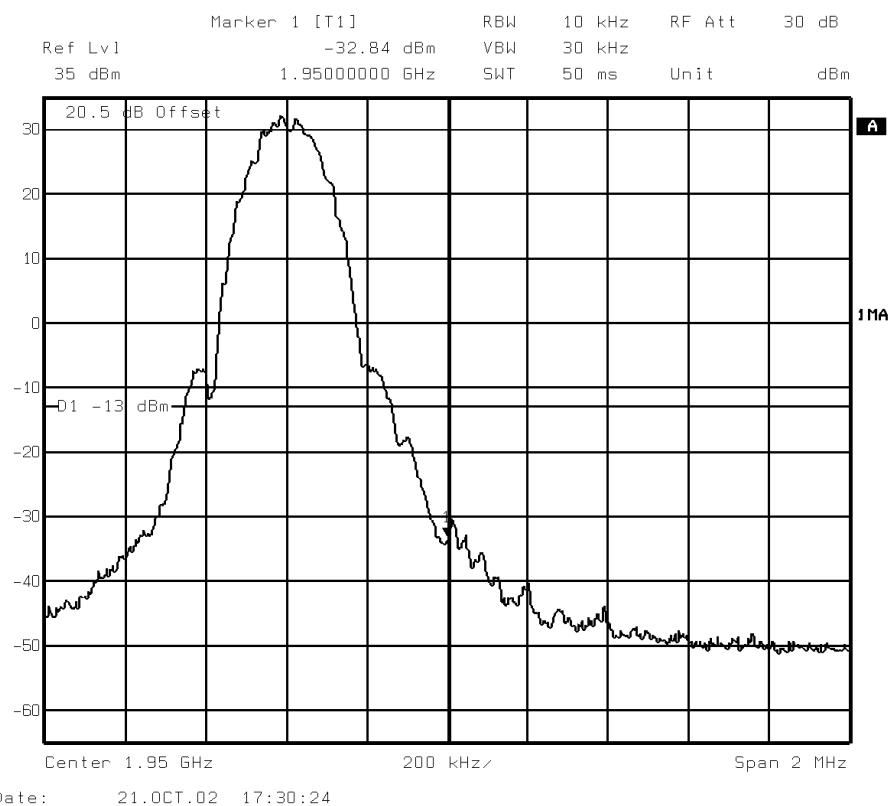

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 688, (1965.4MHz)

GMSK Modulation

Block E
1965 – 1970MHz

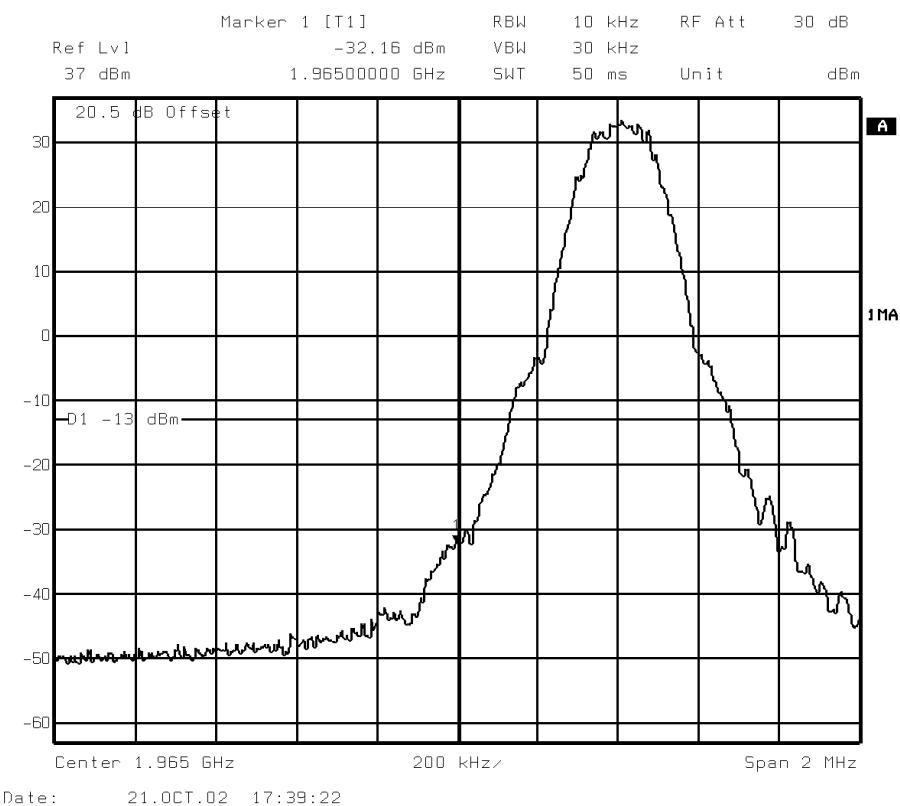

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 688, (1965.4MHz)

8PSK Modulation

Block E
1965 – 1970MHz

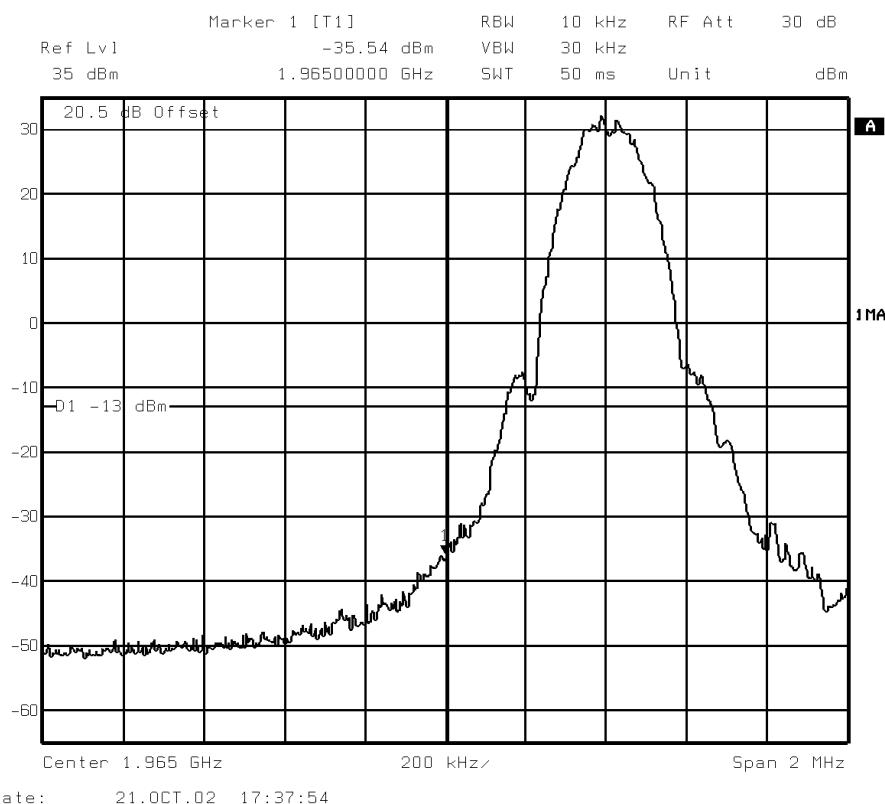

Remarks

All emissions are below –13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 709, (1969.6MHz)

GMSK Modulation

Block E
1965 – 1970MHz

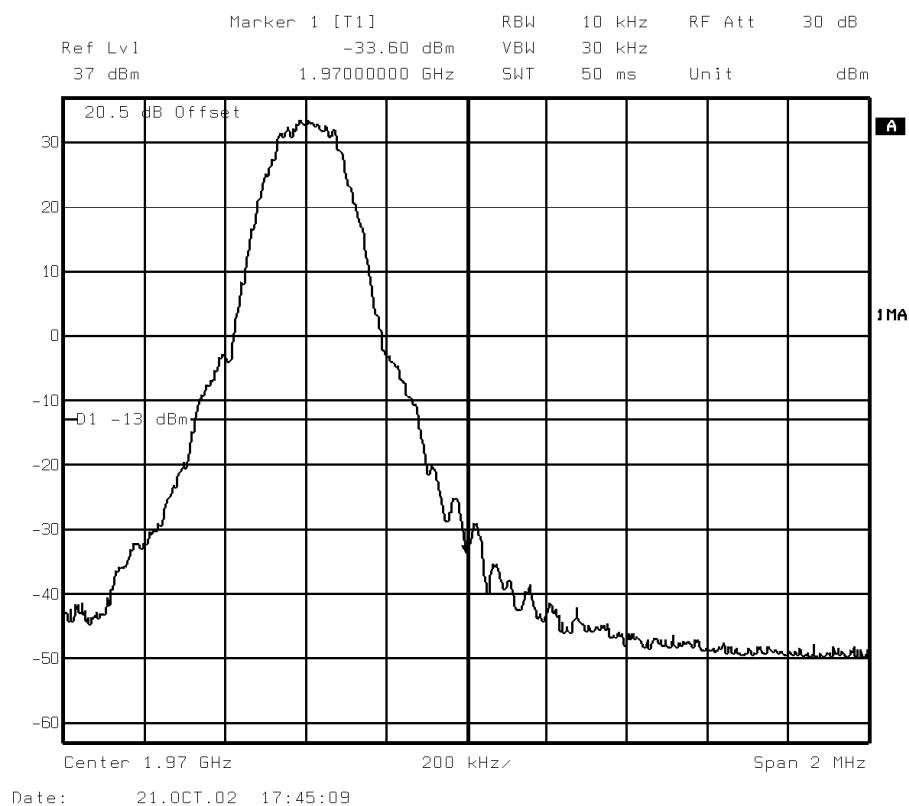

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 709, (1969.6MHz)

8PSK Modulation

Block E
1965 – 1970MHz

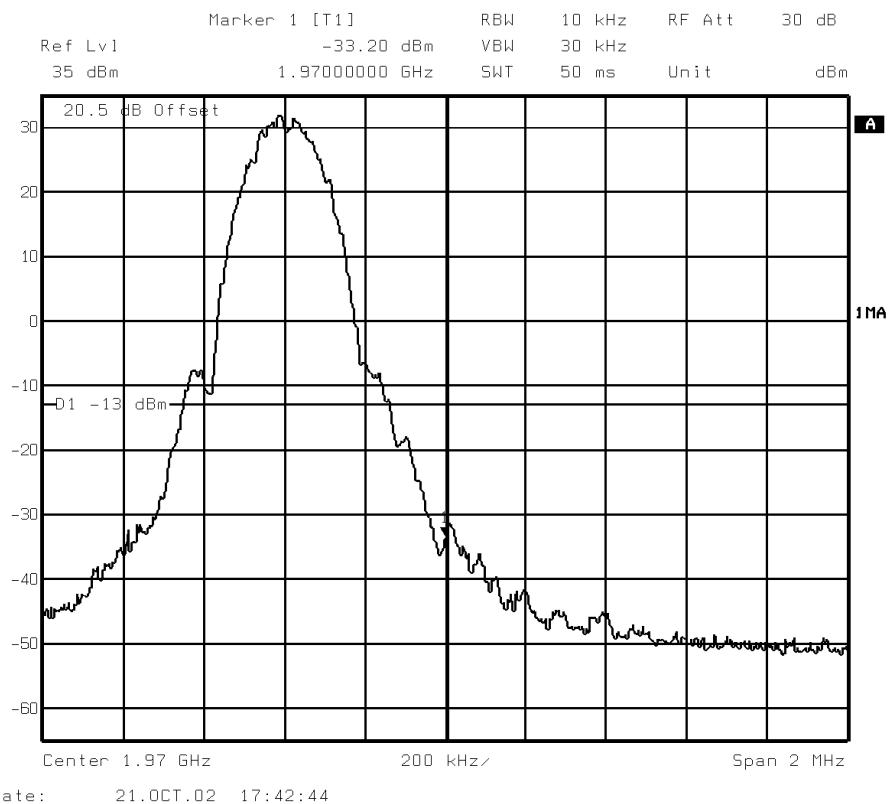

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 713, (1970.4MHz)

8PSK Modulation

Block F
1970 – 1975MHz

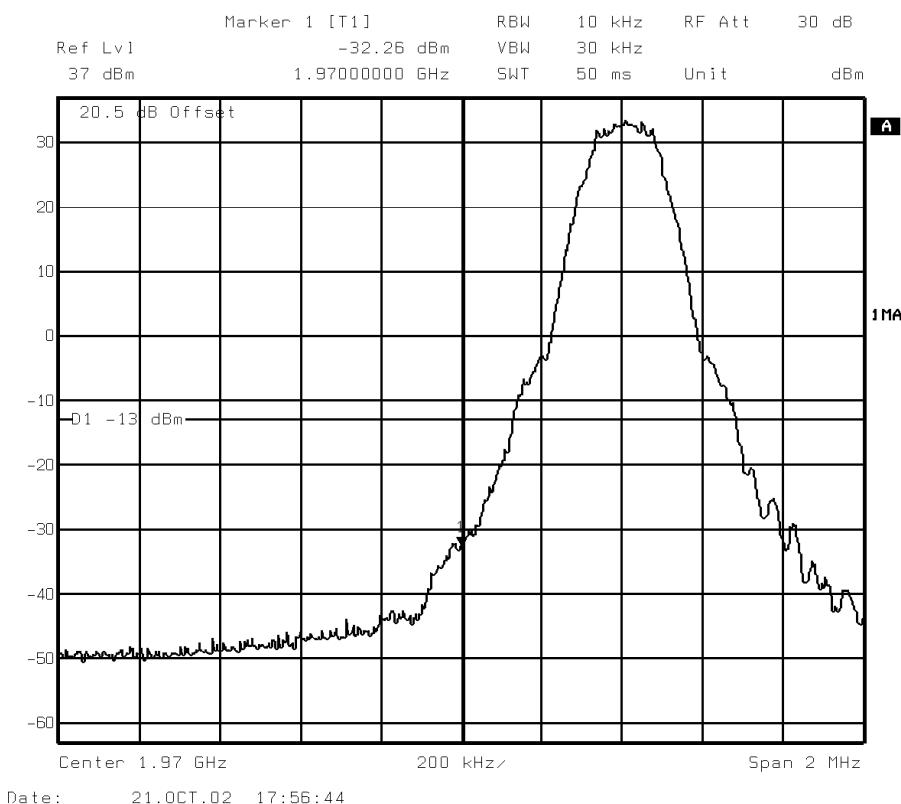

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:


1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 713, (1970.4MHz)
8PSK Modulation

Block F
1970 – 1975MHz

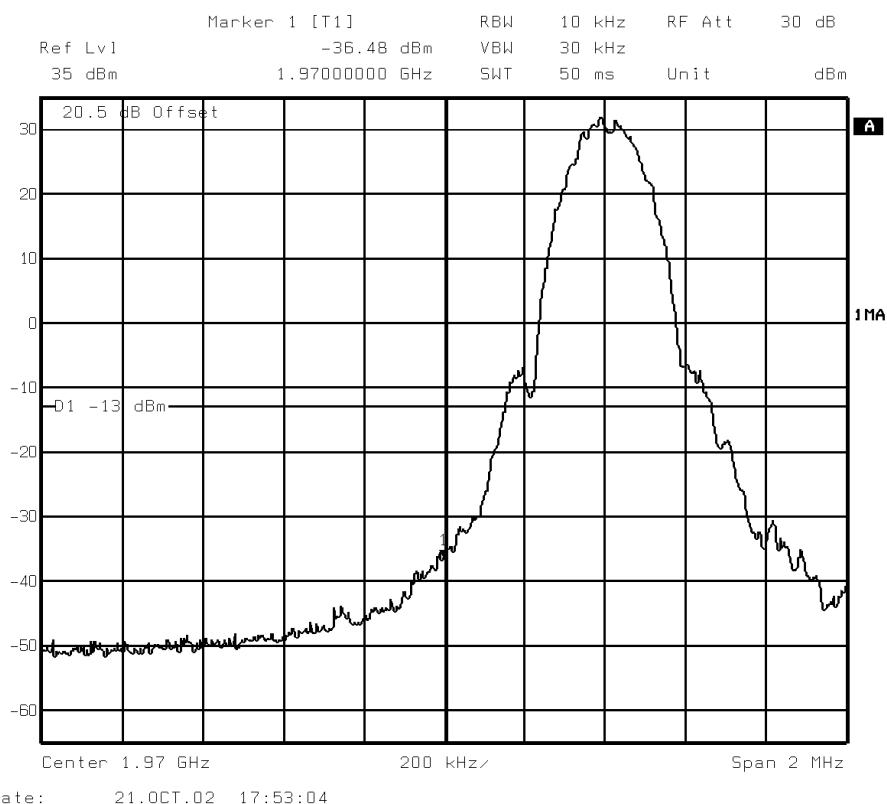

Date: 21.10.02 17:53:04

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14




Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 734, (1974.6MHz)

GMSK Modulation

Block F
1970 – 1975MHz

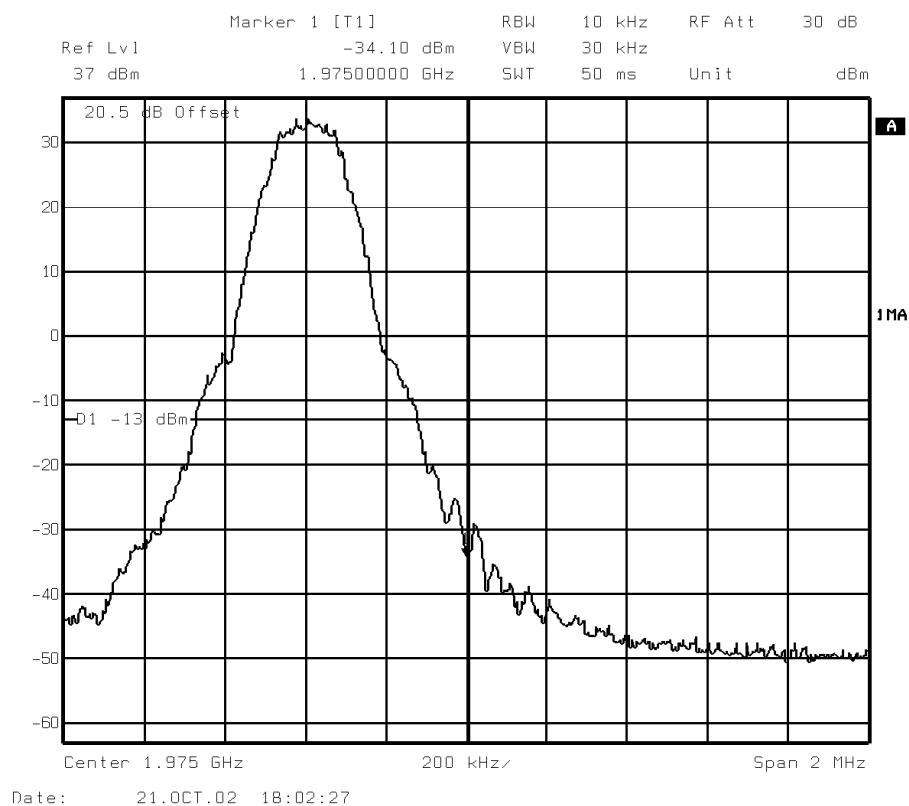

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:


1, 2, 10, 13 & 14



Test Case: Spurious Emissions At Antenna Terminals (+/-1MHz)
Test Date: 21st October 2002
Rule Parts: 2.1049, 24.238(b)

Block Edge Measurement With EUT Transmitting on Full Power On Channel 734, (1974.6MHz)
8PSK Modulation

Block F
1970 – 1975MHz

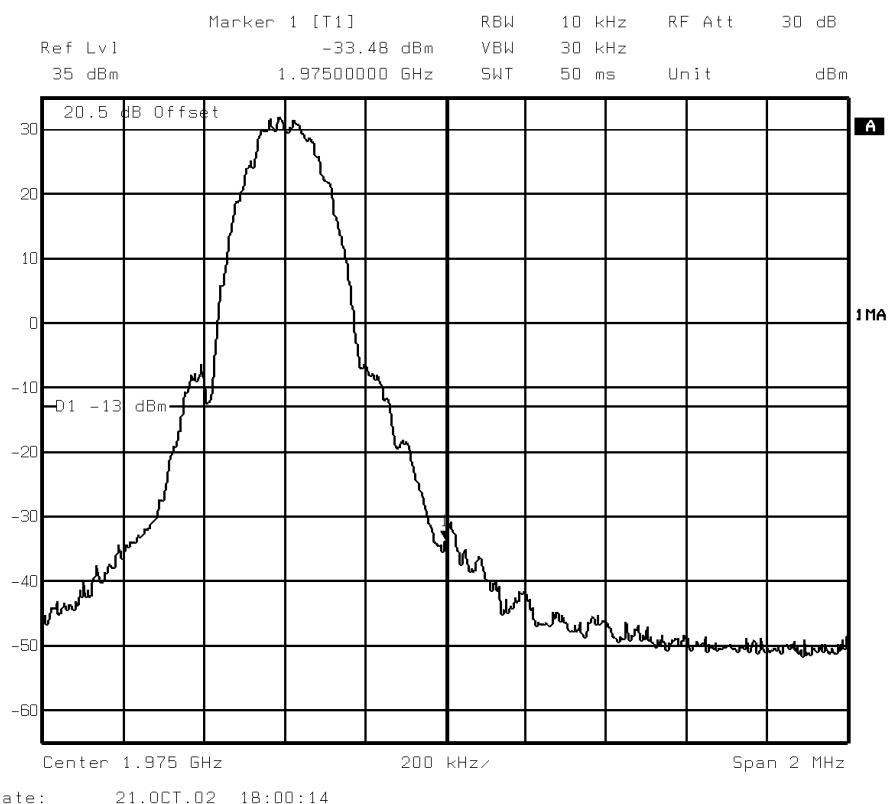

Remarks

All emissions are below -13dBm up to 1MHz away from the block edge.

Test Equipment Used:

1, 2, 10, 13 & 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Measurement Method

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9kHz to 20 GHz. The EUT was set to transmit on full power with all timeslots active and minimum power with all timeslots active. The EUT was tested on Bottom, Middle and Top channels for both power levels. The resolution and video bandwidths were set to 1MHz in accordance with Part 24.238. The spectrum analyser detector was set to Max Hold.

From 9kHz to 800MHz, attenuators and a low pass filter were used. For measuring the range 800MHz to 3.5GHz, a notch filter was used in conjunction with an attenuator. This was to reduce saturation effects in the spectrum analyser. From 3.5 to 8GHz, attenuators and a high pass filter were used. From 8GHz to 20GHz, attenuators, a high pass filter and an amplifier were used.

Complete testing was carried out on the EUT with 24V DC Supply on both GMSK and 8PSK modulation schemes and both power levels.

The maximum path loss across the measurement band was used as the reference level offset to ensure worst case

In addition, measurements were made up to the 10th harmonic of the fundamental.

Summary Of Results

No emissions were detected within 20dB of the limit – 9kHz to 20GHz

Remarks

The EUT passed the requirements laid out in 24.238.

The plots on the following pages show the frequency spectrum from 9kHz to 20GHz of the EUT.


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 512, (1930.2MHz) – Maximum Power - GMSK
24V DC Supply

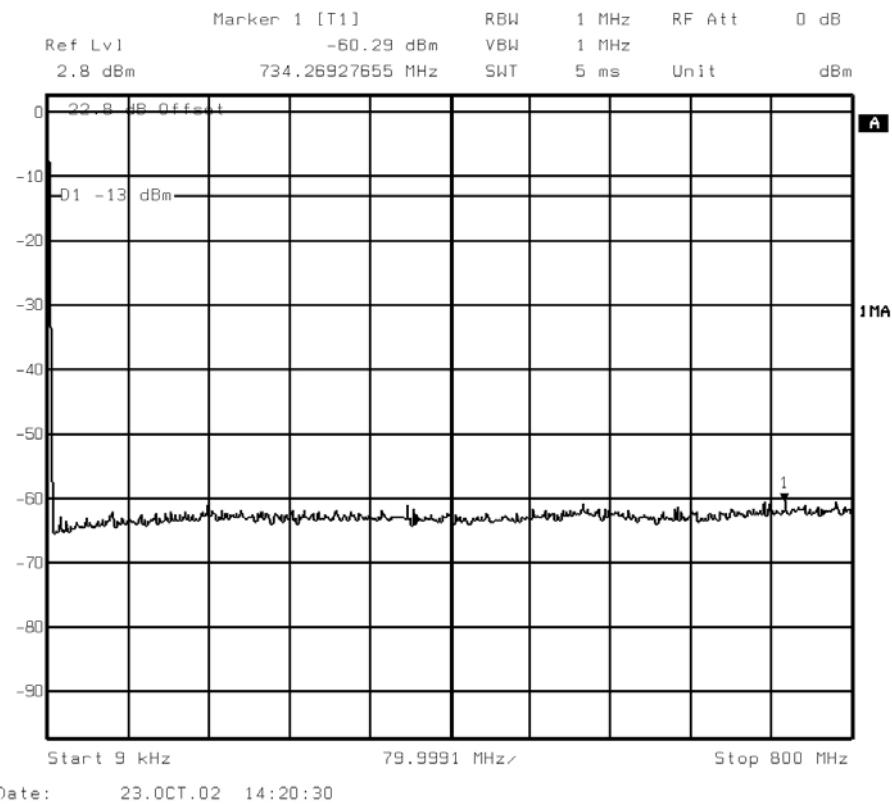

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 512, (1930.2MHz) – Maximum Power - GMSK
24V DC Supply

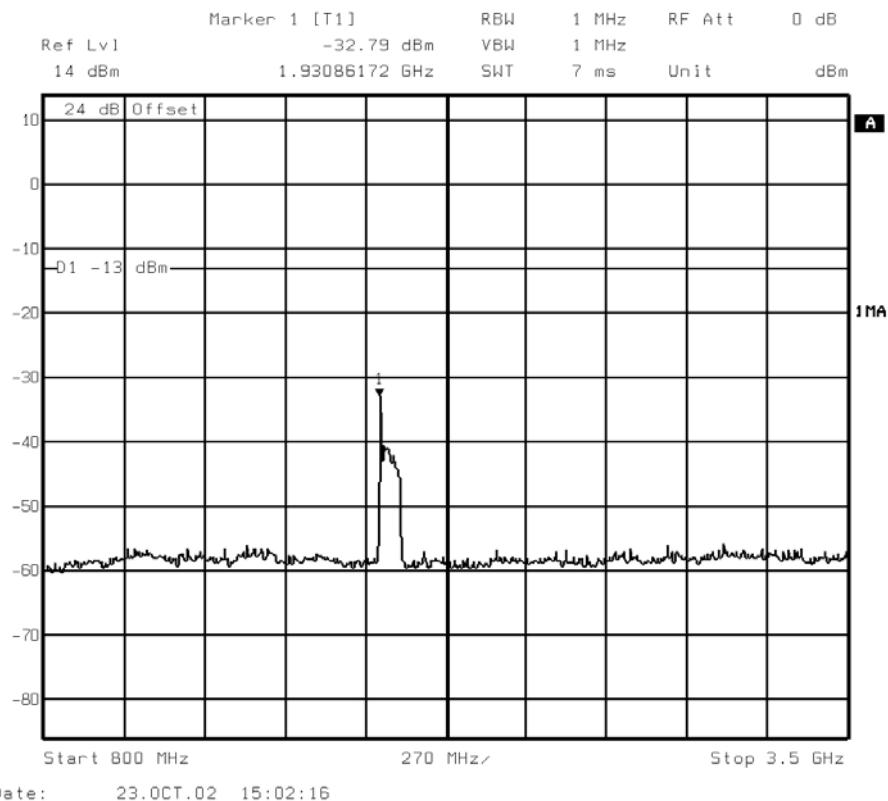


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 512, (1930.2MHz) – Maximum Power - GMSK
24V DC Supply

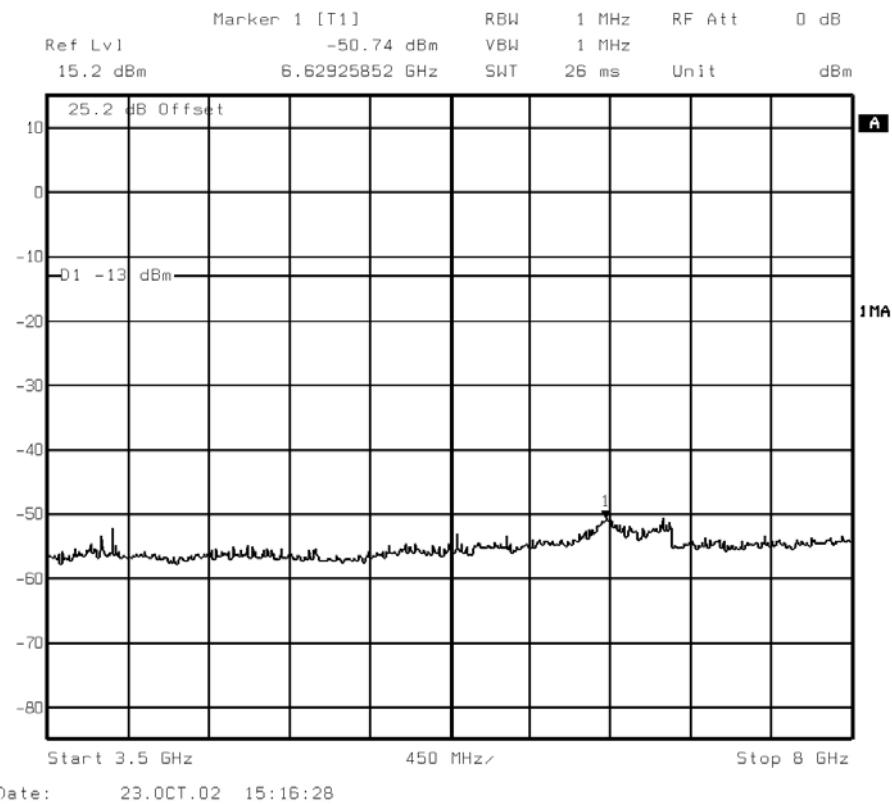


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 512, (1930.2MHz) – Maximum Power - GMSK
24V DC Supply

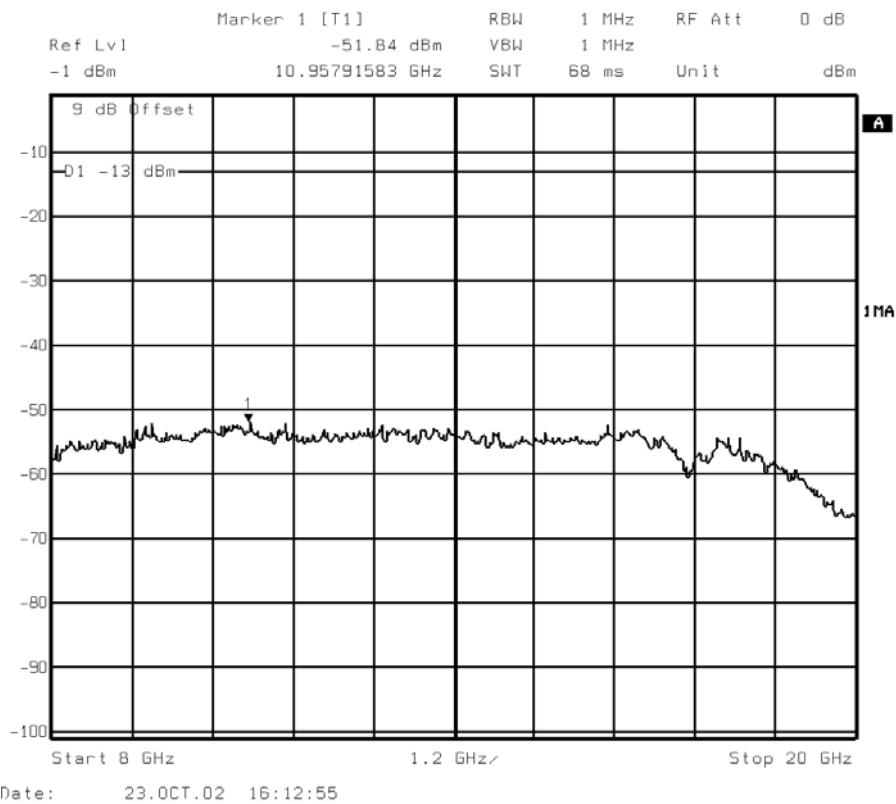

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 661, (1960.0MHz) – Maximum Power - GMSK
24V DC Supply

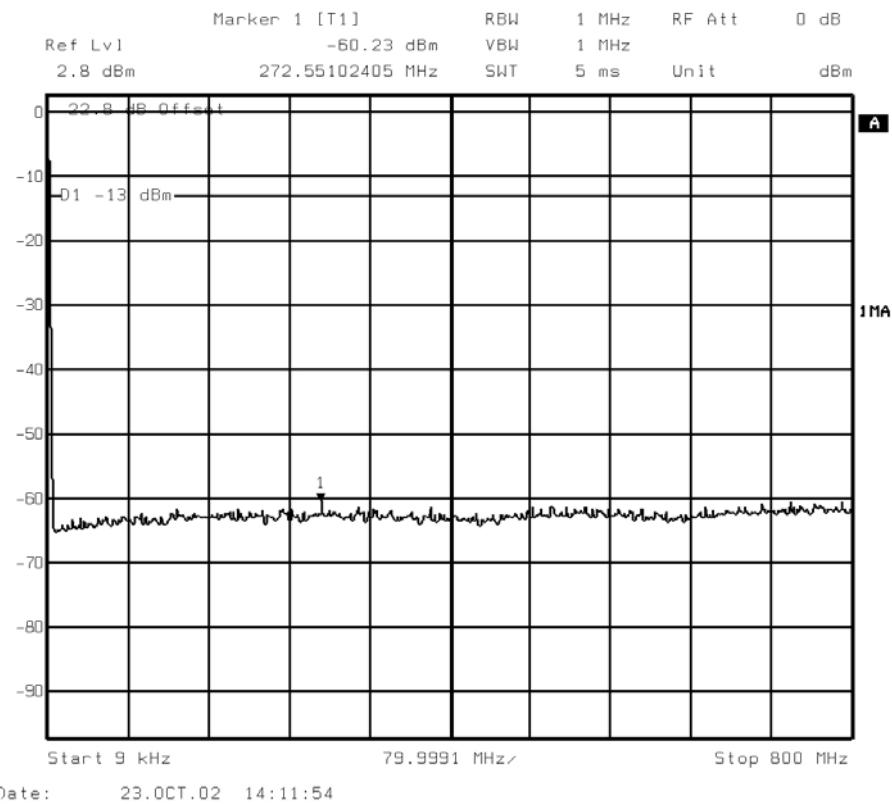


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 661, (1960.0MHz) – Maximum Power - GMSK
24V DC Supply

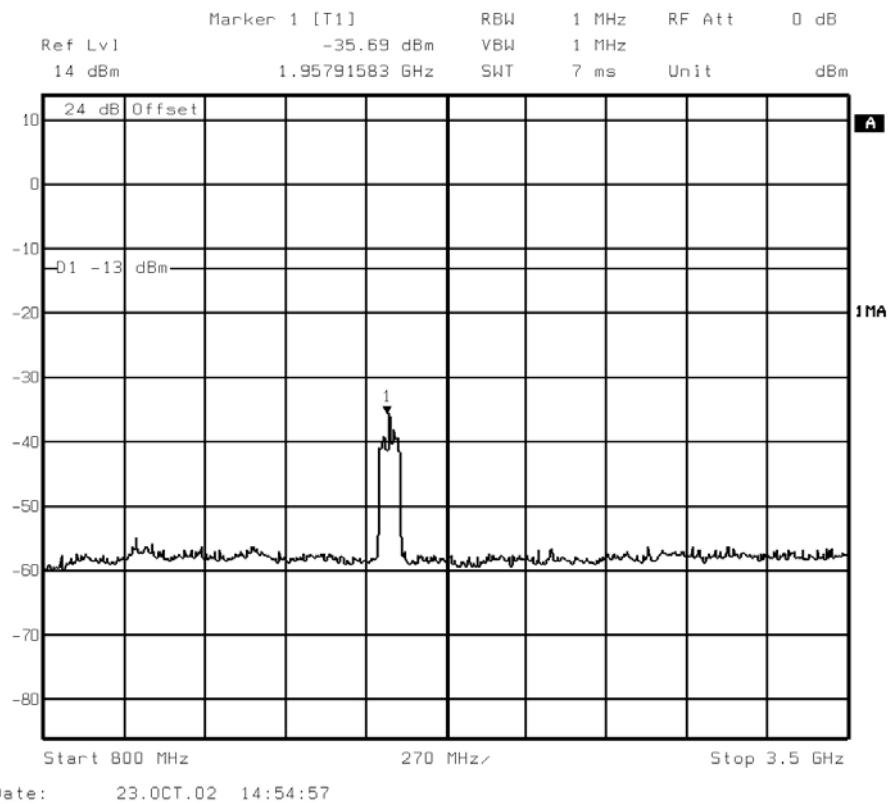


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Maximum Power - GMSK
24V DC Supply

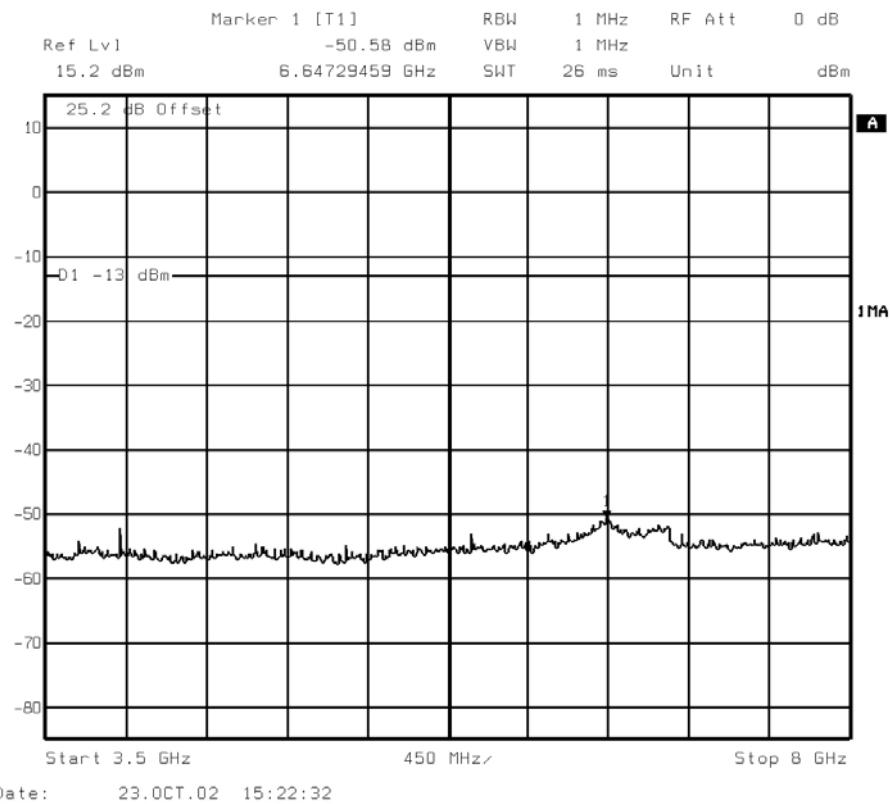

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 661, (1960.0MHz) – Maximum Power - GMSK

24V DC Supply

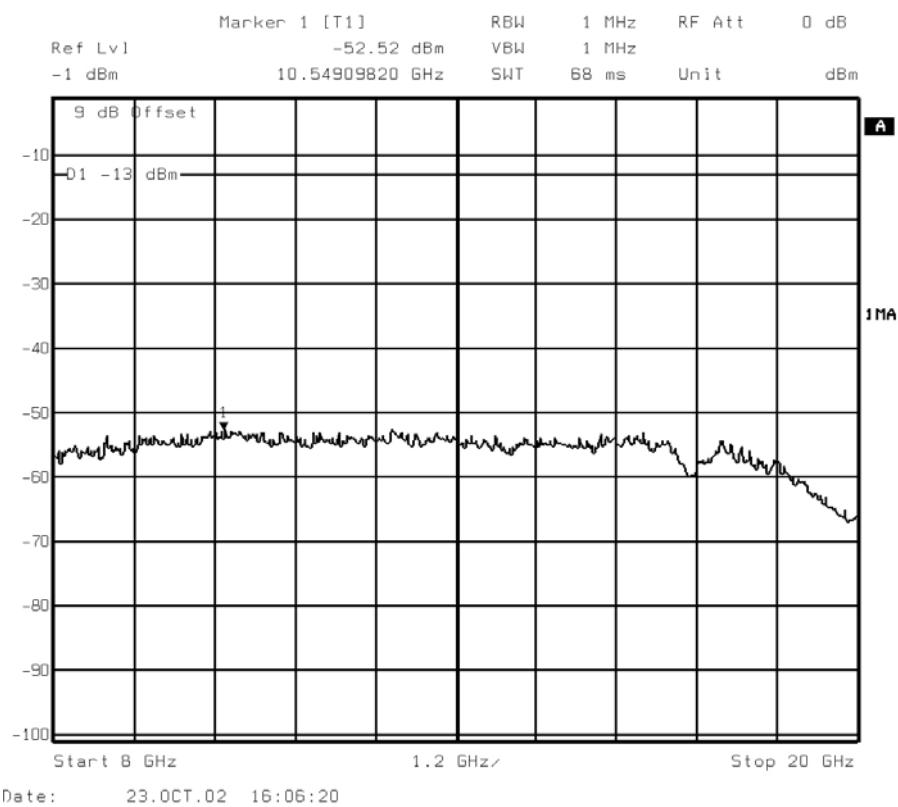

Date: 23.OCT.02 16:06:20


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 810, (1989.8MHz) – Maximum Power - GMSK
24V DC Supply

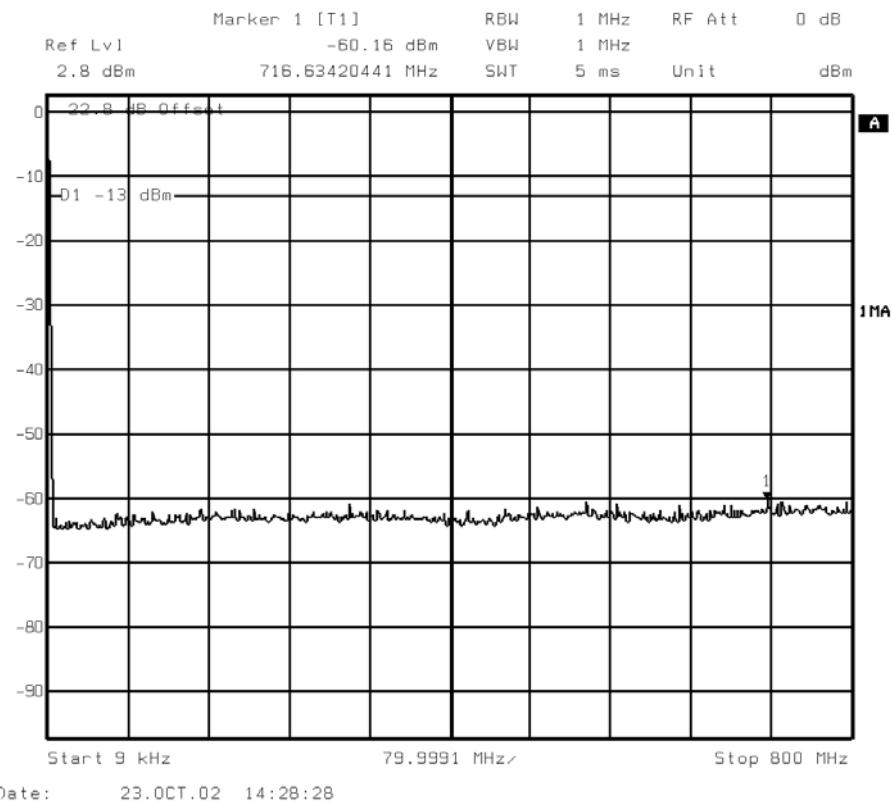


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800GHz – 3.5GHz)
Channel 810, (1989.8MHz) – Maximum Power - GMSK
24V DC Supply

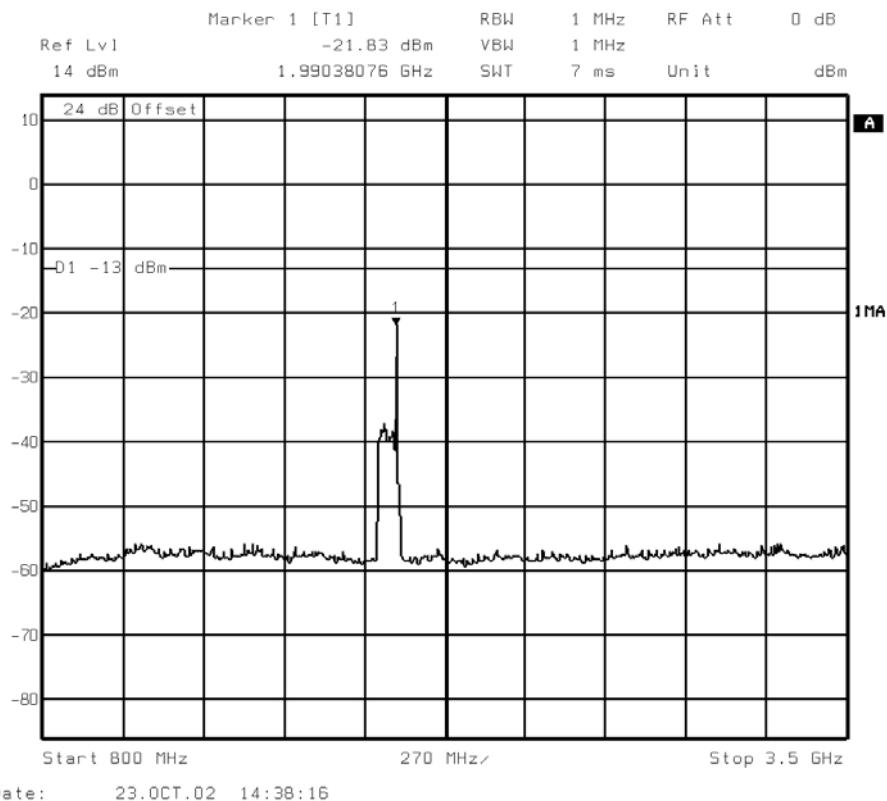

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 810, (1989.8MHz) – Maximum Power - GMSK
24V DC Supply

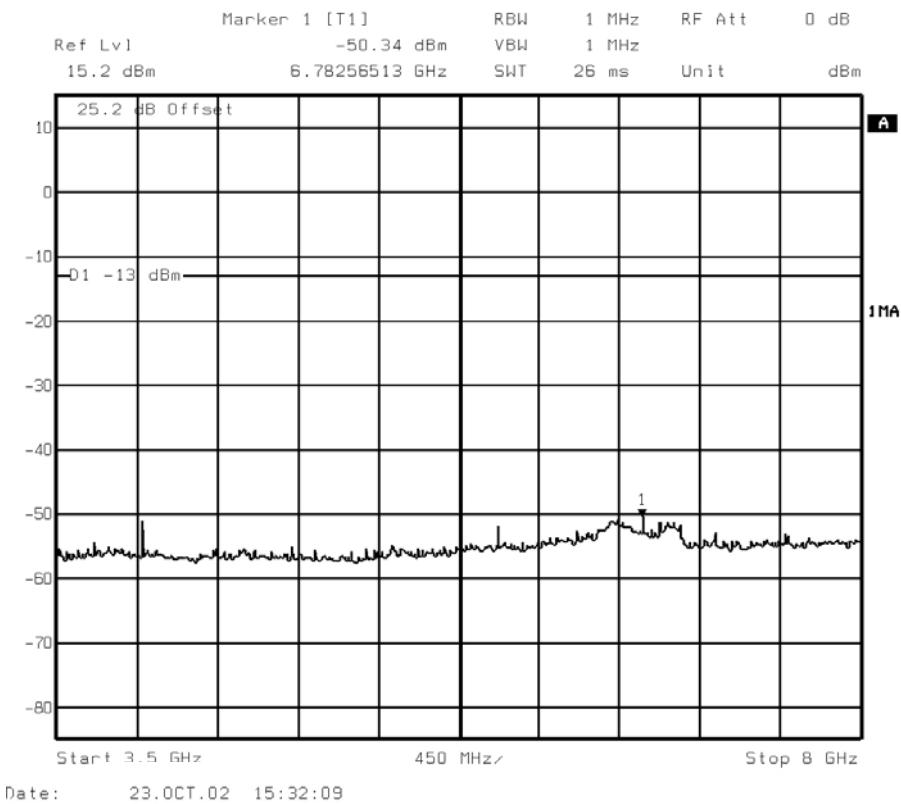


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 810, (1989.8MHz) – Maximum Power - GMSK
24V DC Supply

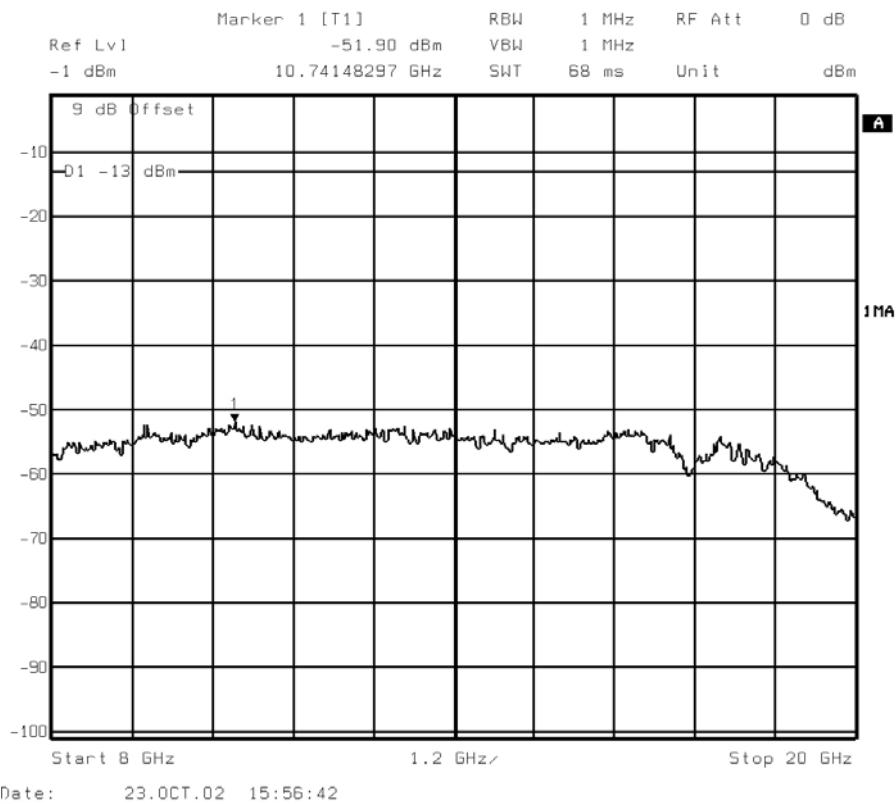

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 512, (1930.2MHz) – Minimum Power - GMSK
24V DC Supply

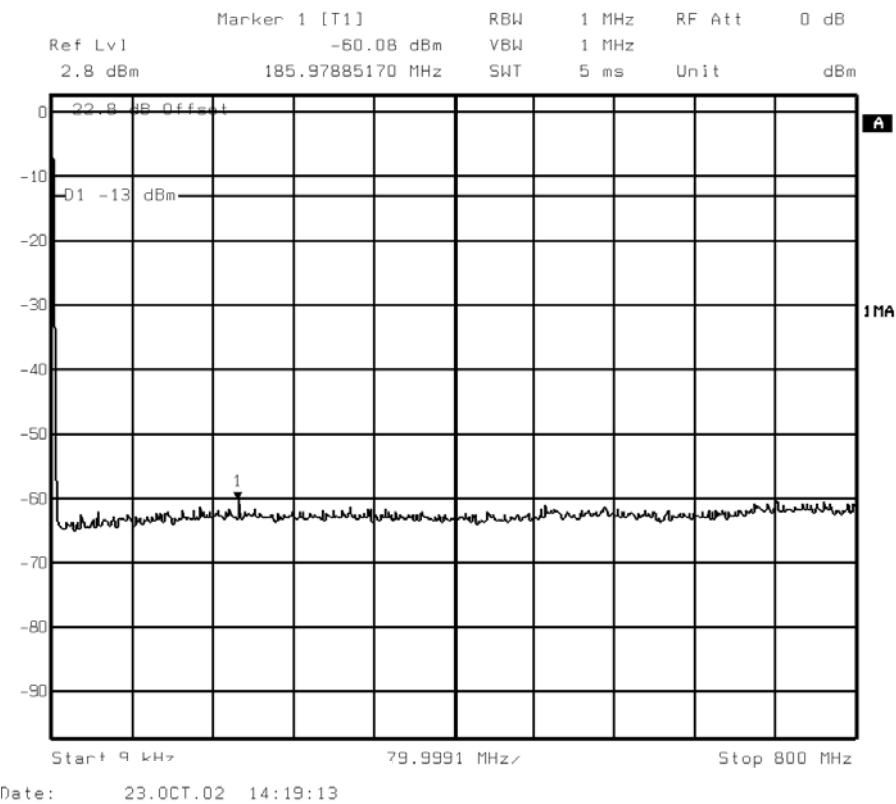

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 512, (1930.2MHz) – Minimum Power - GMSK
24V DC Supply

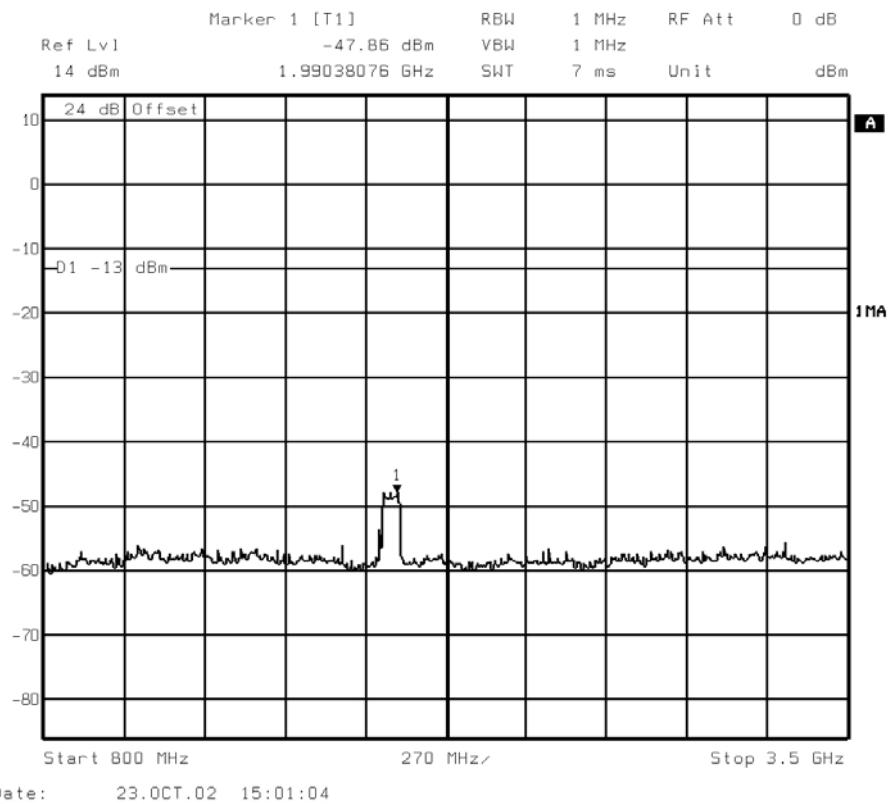

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 512, (1930.2MHz) – Minimum Power - GMSK
24V DC Supply

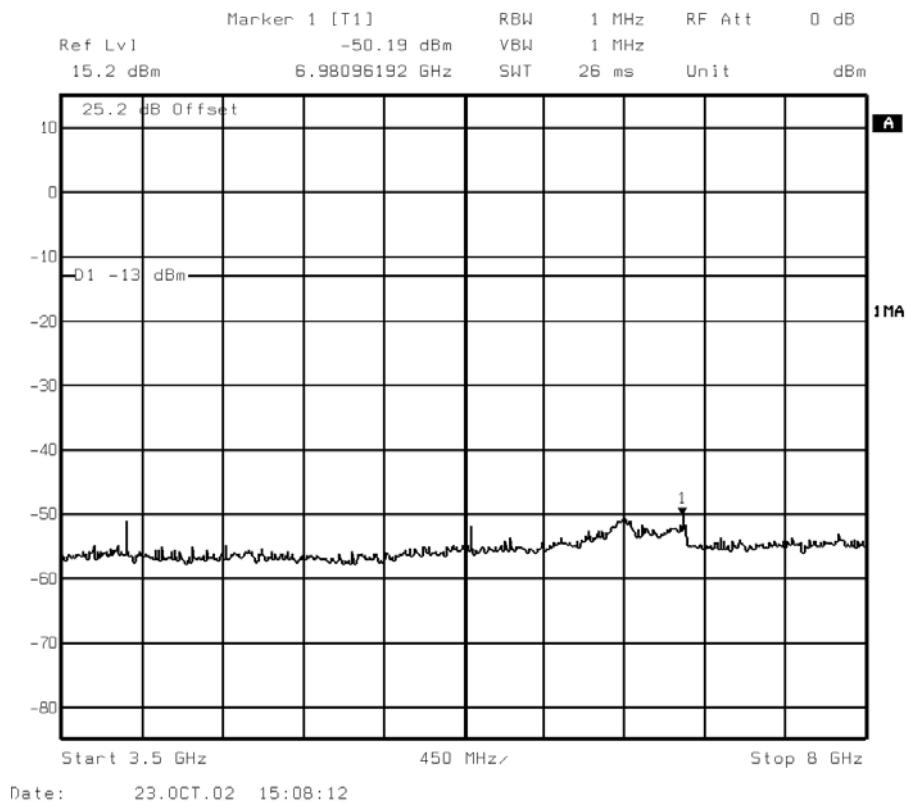

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 512, (1930.2MHz) – Minimum Power - GMSK

24V DC Supply

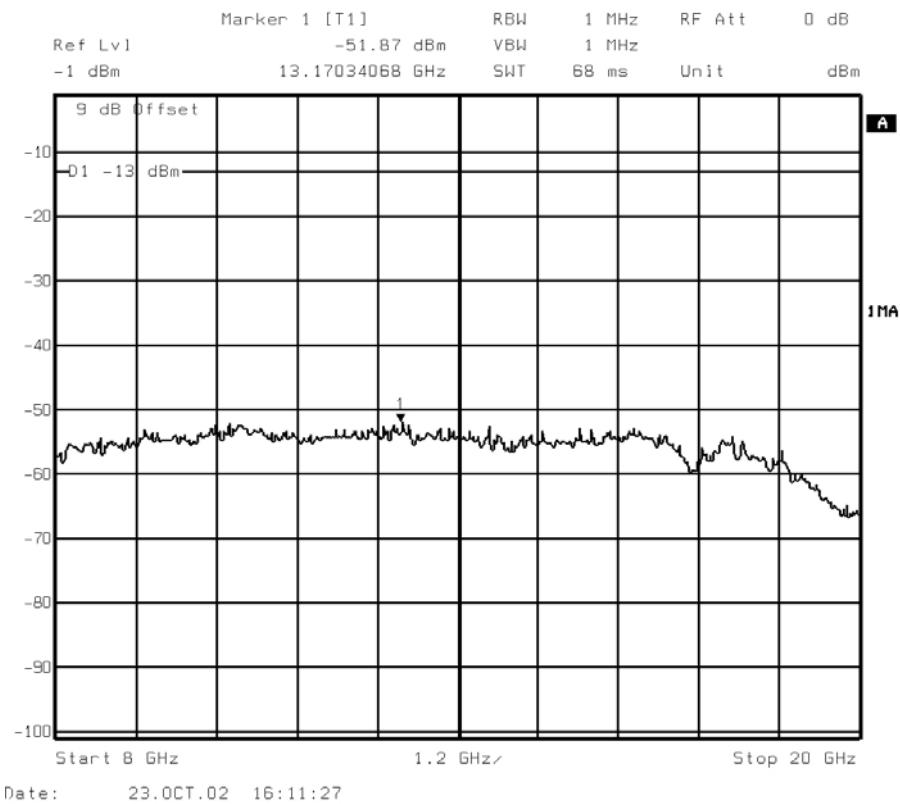

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)

Channel 661, (1960.0MHz) – Minimum Power - GMSK

24V DC Supply

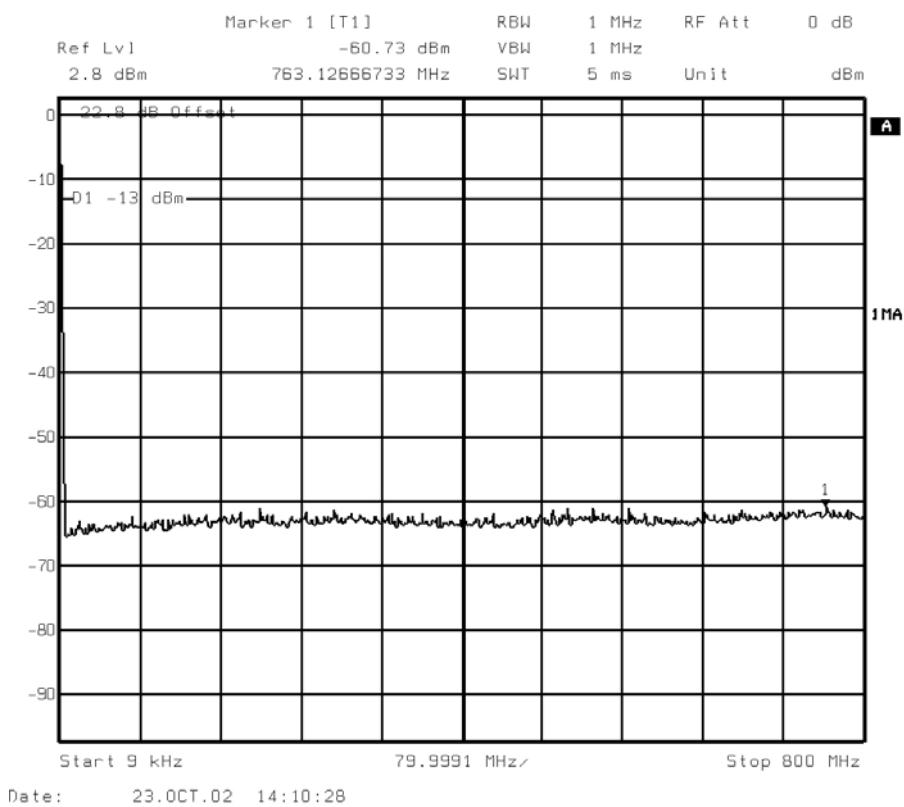

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)

Channel 661, (1960.0MHz) – Minimum Power - GMSK

24V DC Supply

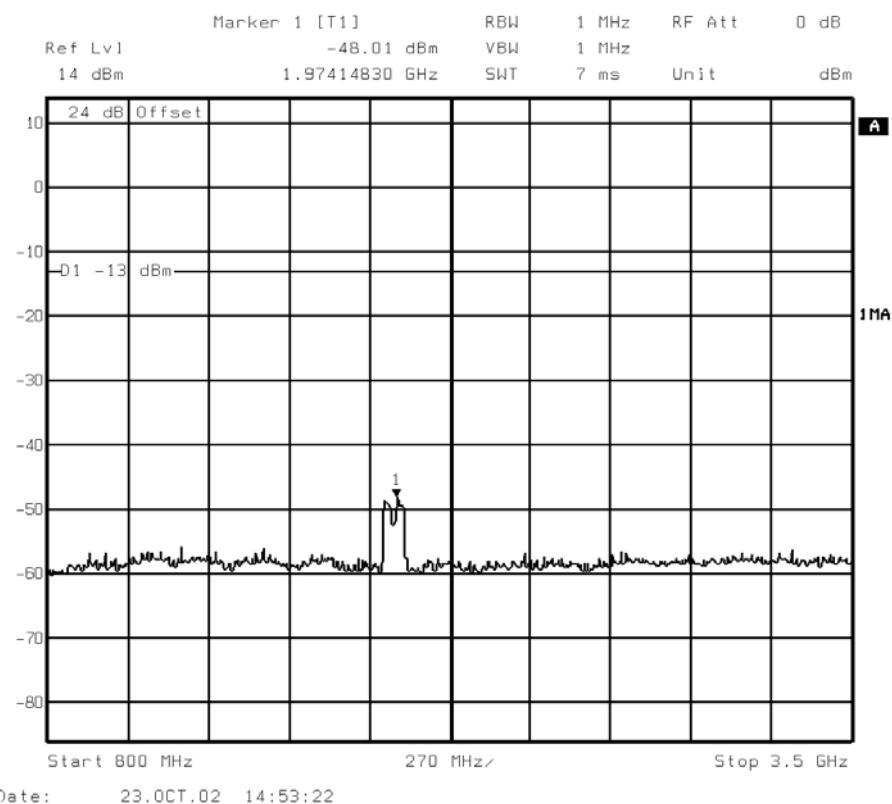

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Minimum Power - GMSK
24V DC Supply

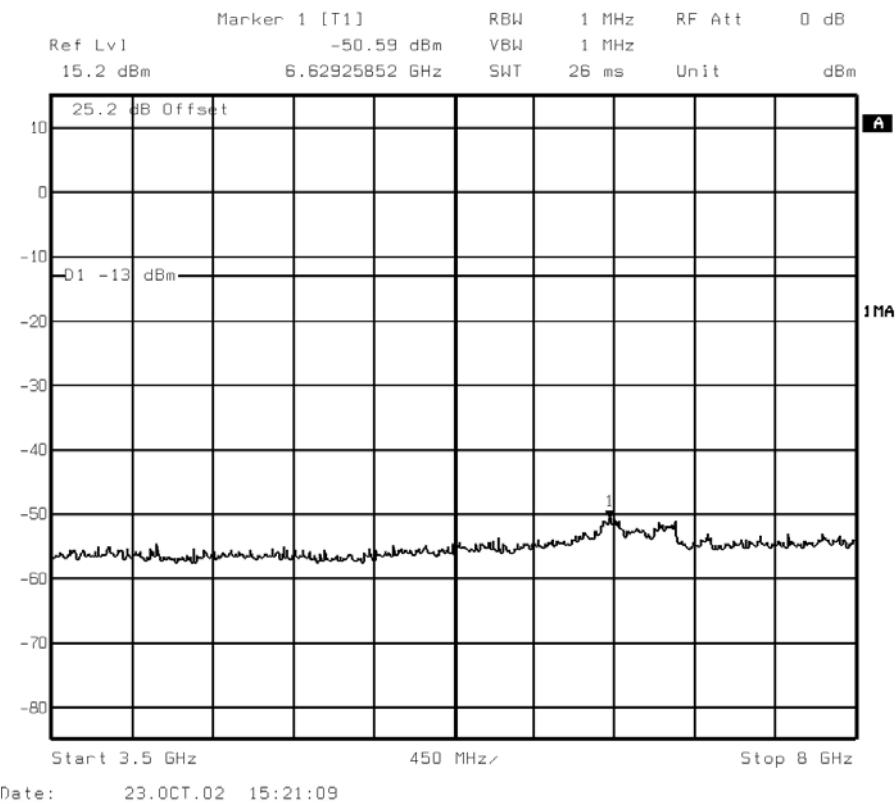

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 661, (1960.0MHz) – Minimum Power - GMSK

24V DC Supply

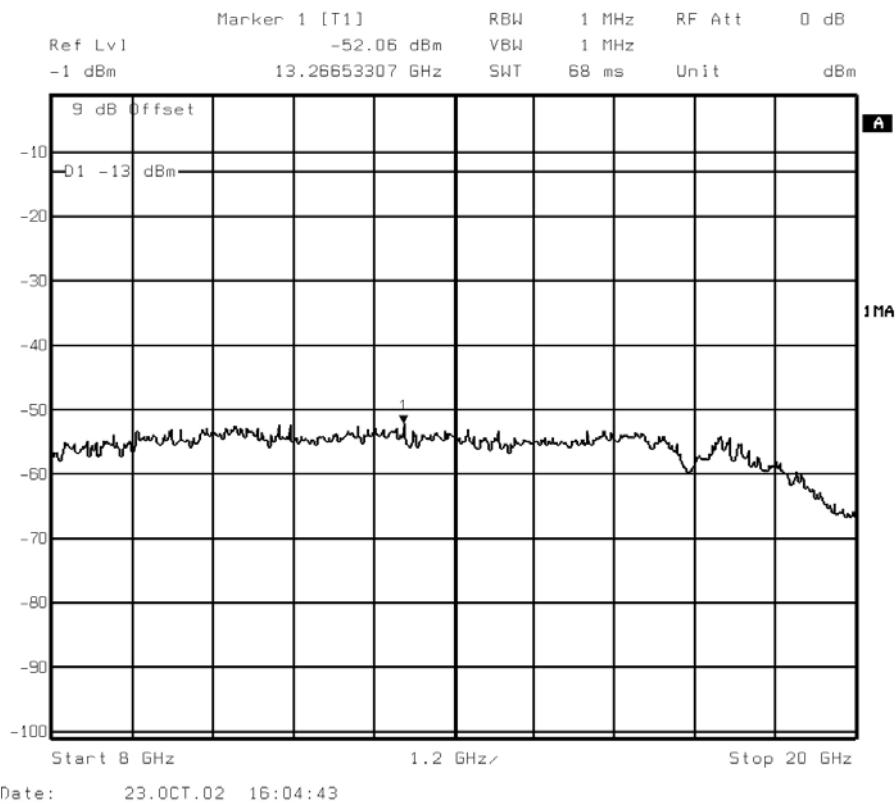

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 810, (1989.8MHz) – Minimum Power - GMSK
24V DC Supply

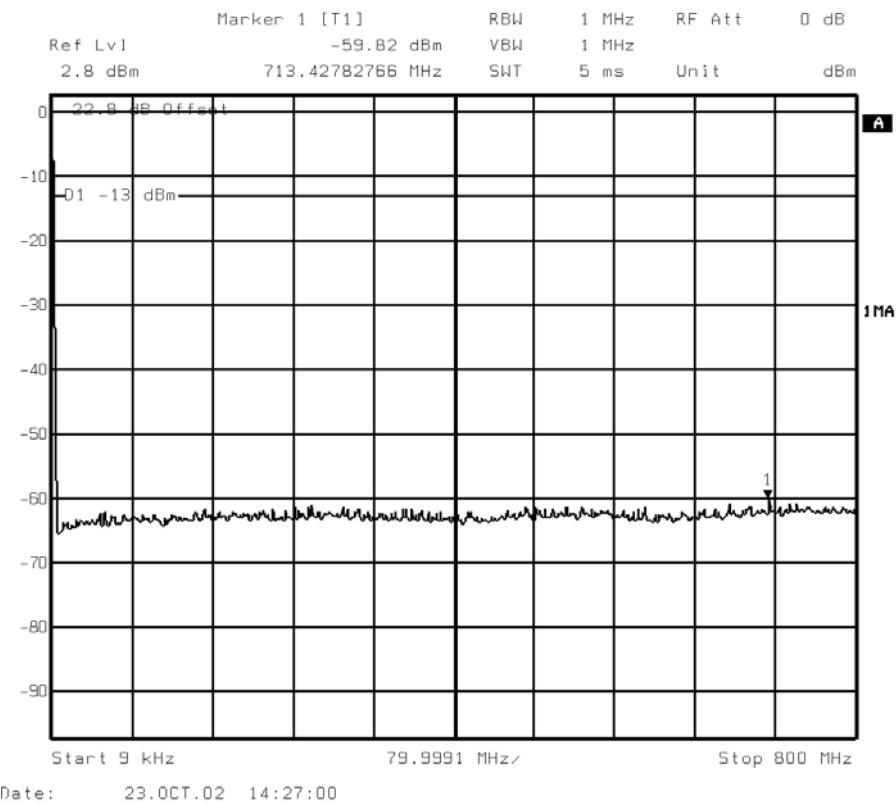

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 810, (1989.8MHz) – Minimum Power - GMSK
24V DC Supply

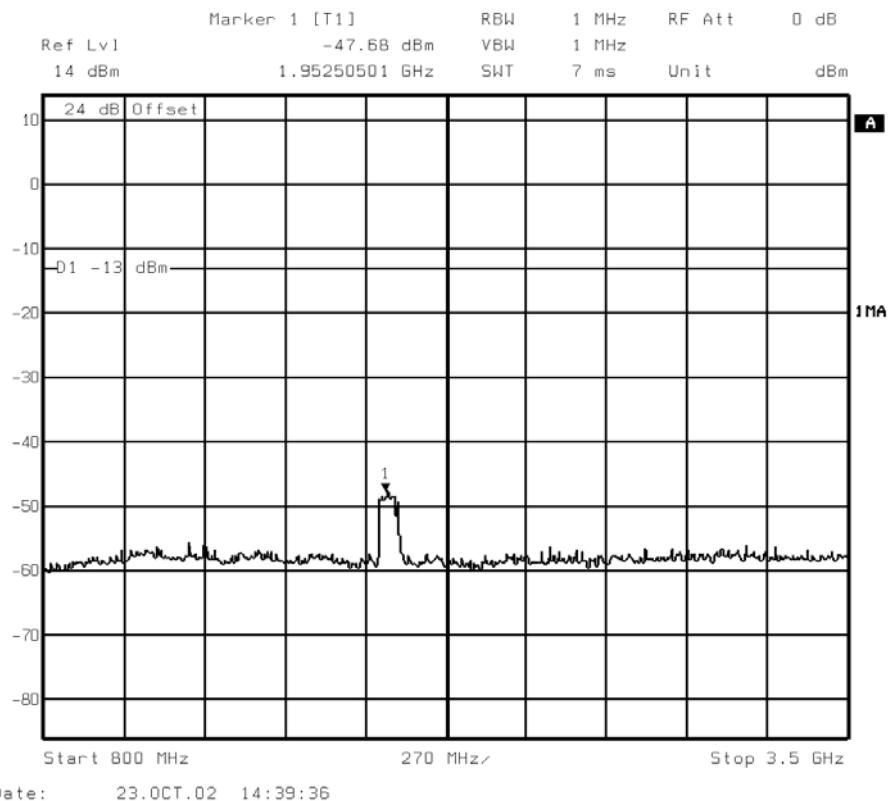

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 810, (1989.8MHz) – Minimum Power - GMSK
24V DC Supply

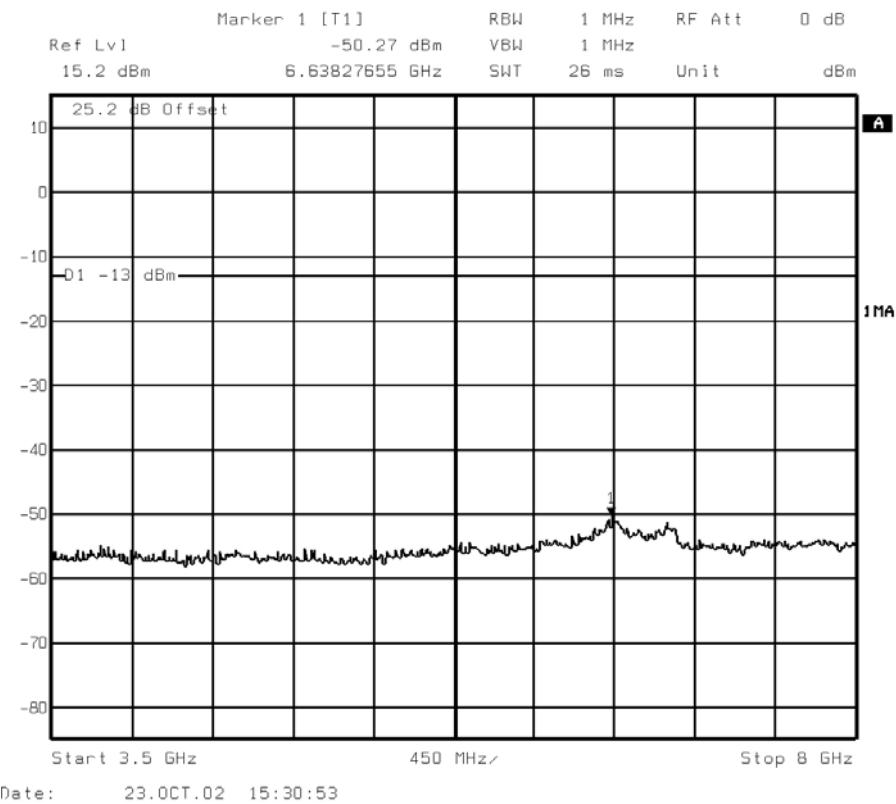

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 810, (1989.8MHz) – Minimum Power - GMSK

24V DC Supply

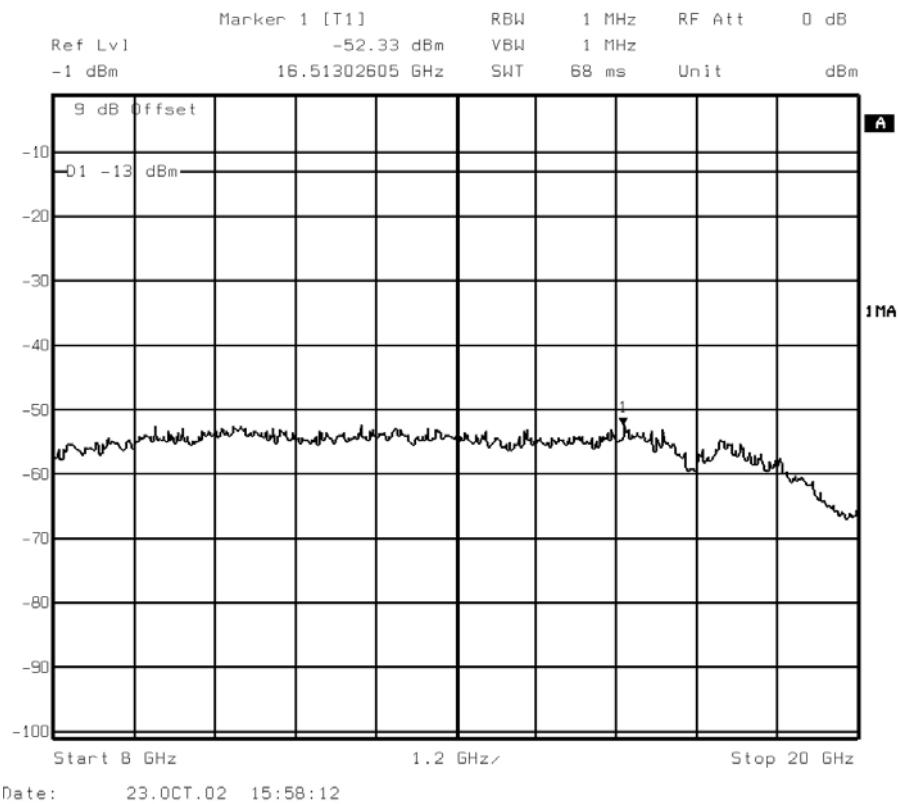

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 512, (1930.2MHz) – Maximum Power – 8PSK
24V DC Supply

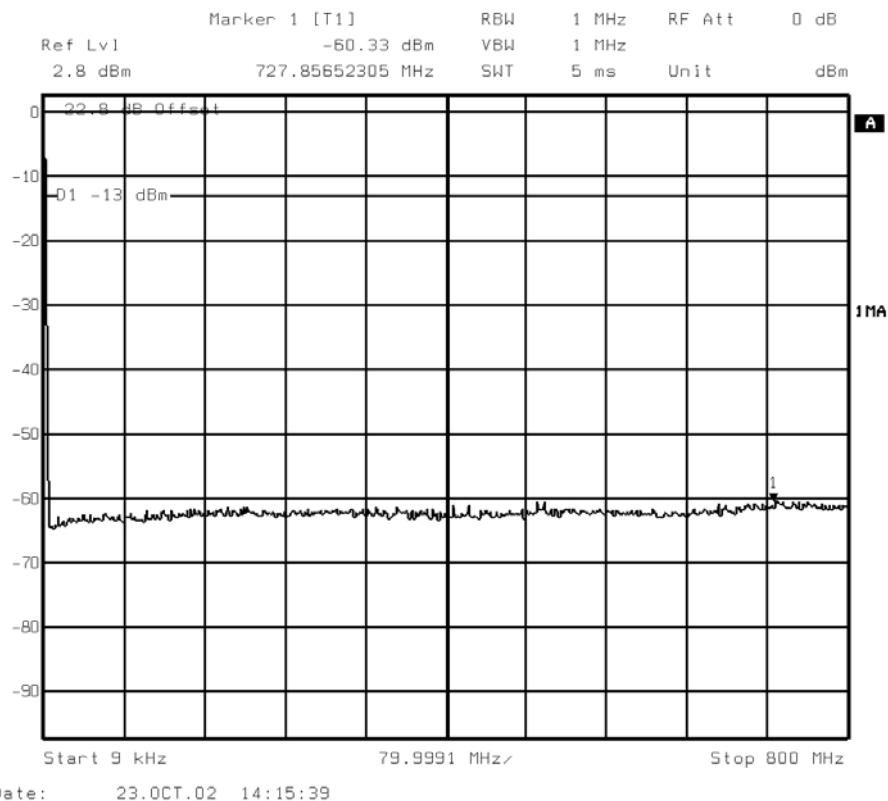

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 512, (1930.2MHz) – Maximum Power – 8PSK
24V DC Supply

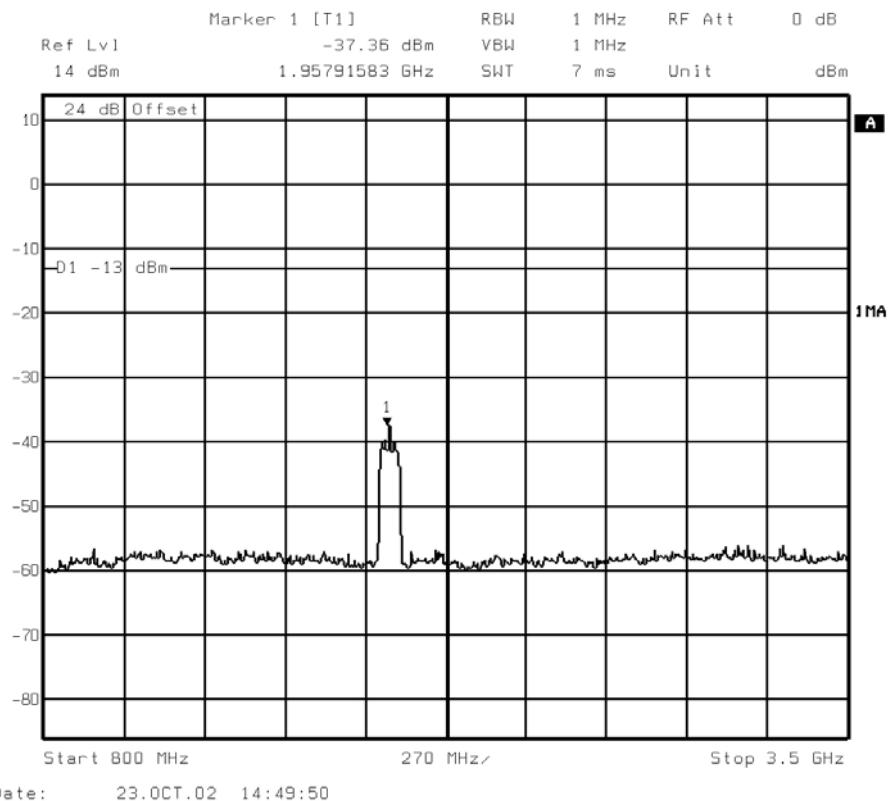

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 512, (1930.2MHz) – Maximum Power – 8PSK
24V DC Supply

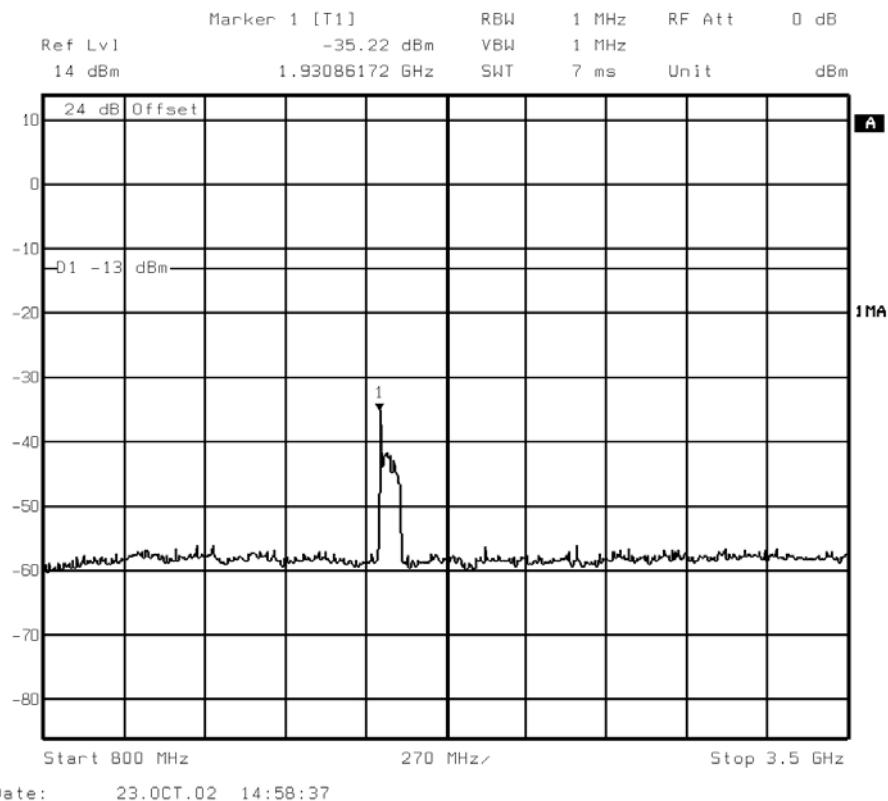

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 512, (1930.2MHz) – Maximum Power – 8PSK
24V DC Supply

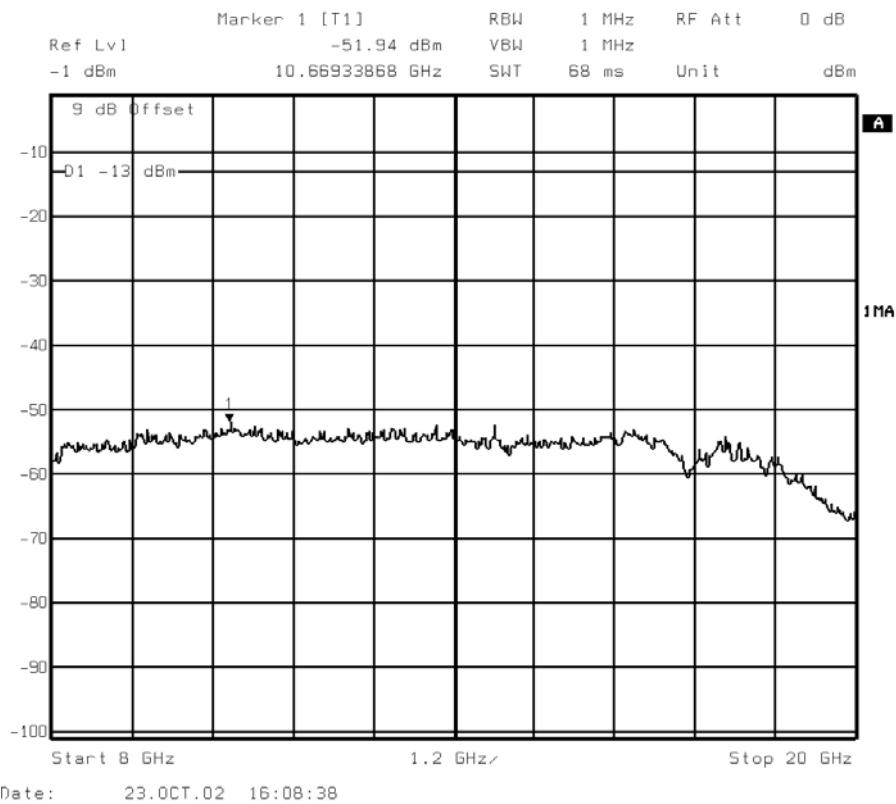

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 661, (1960.0MHz) – Maximum Power – 8PSK
24V DC Supply

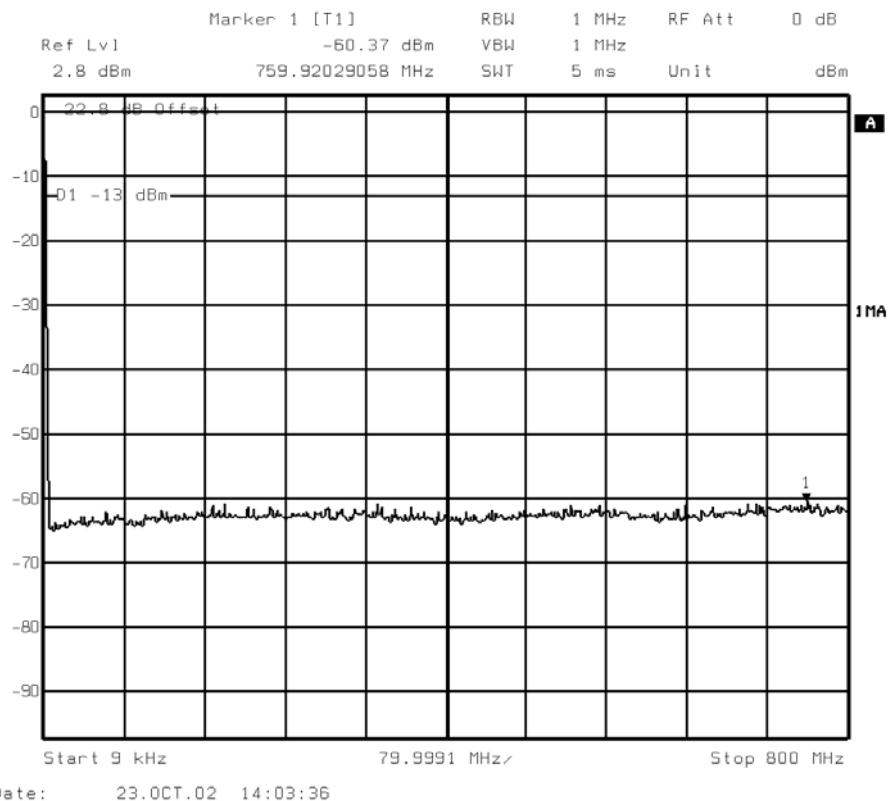

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)

Channel 661, (1960.0MHz) – Maximum Power –8PSK
24V DC Supply

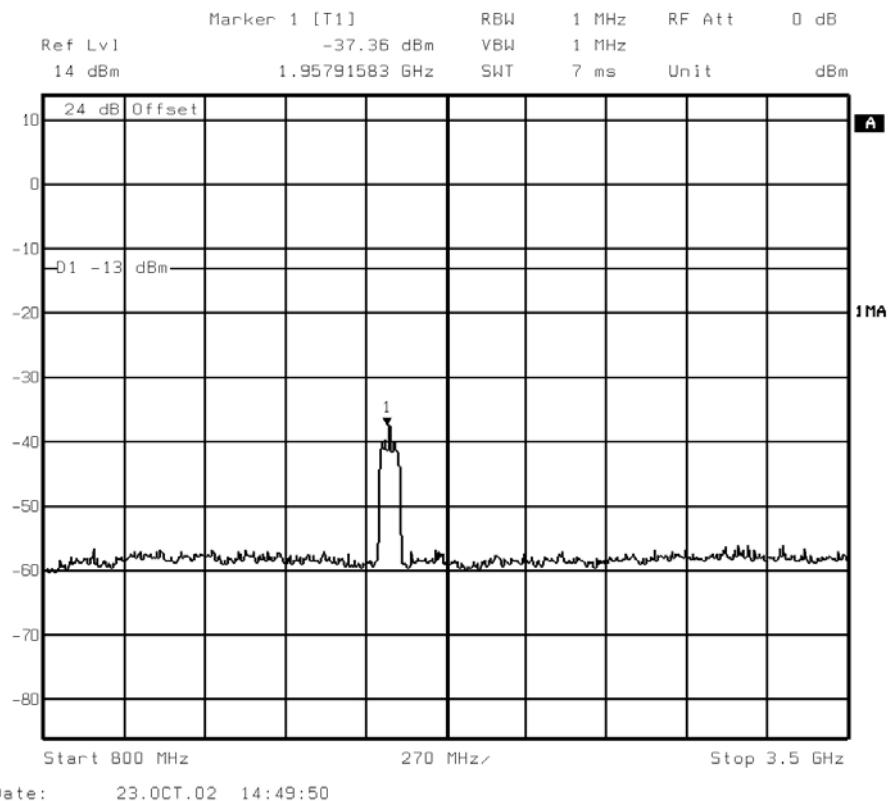

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Maximum Power – 8PSK
24V DC Supply

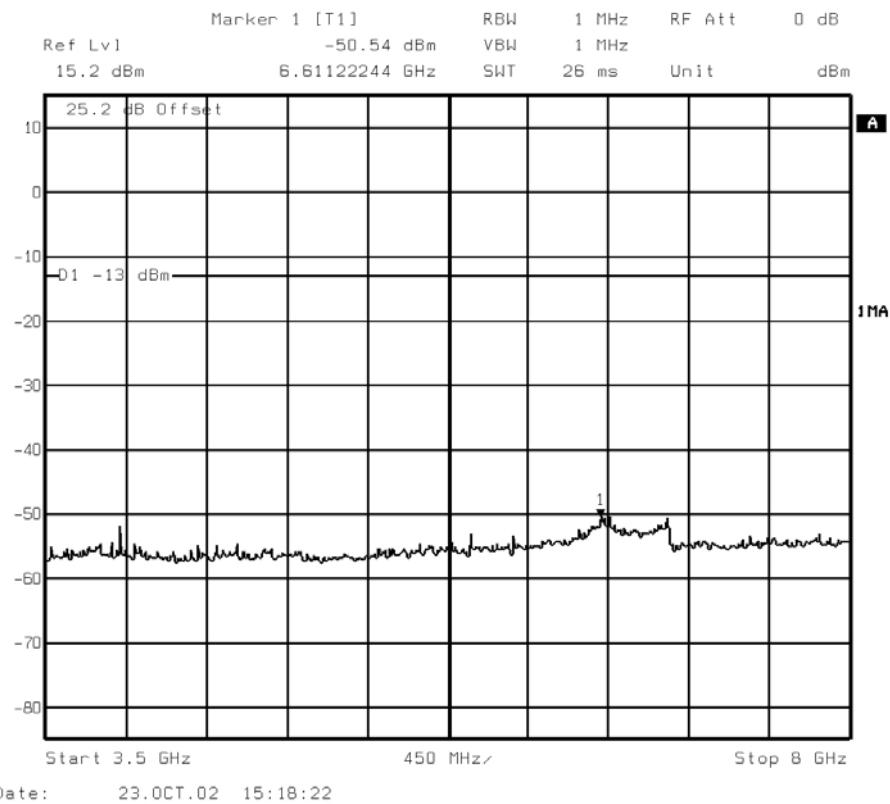

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 661, (1960.0MHz) – Maximum Power – 8PSK
24V DC Supply

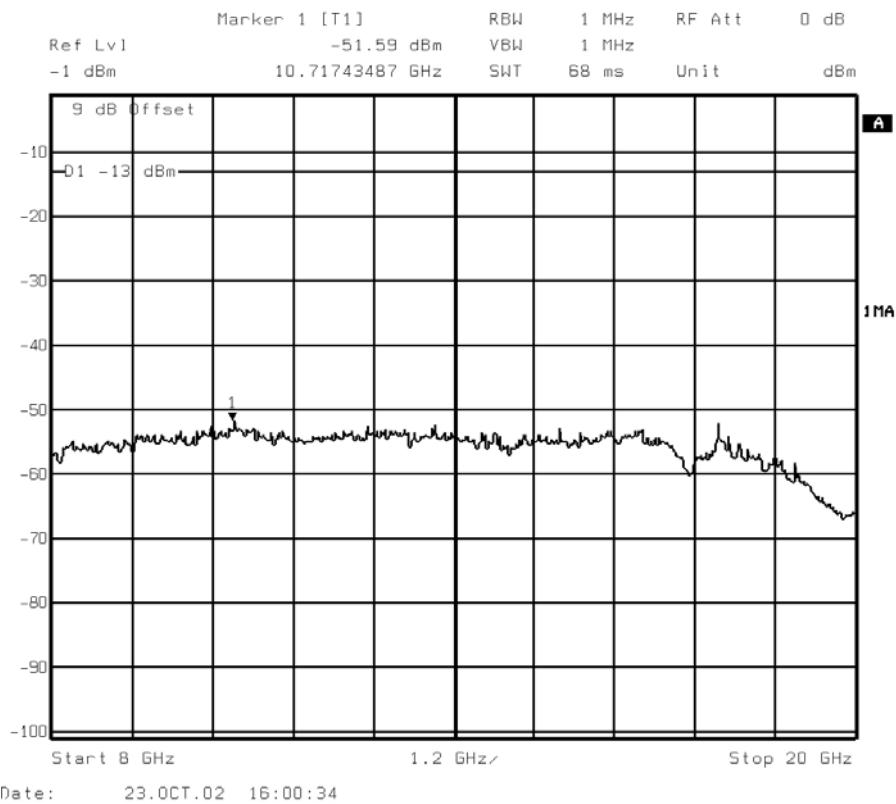

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 810, (1989.8MHz) – Maximum Power – 8PSK
24V DC Supply

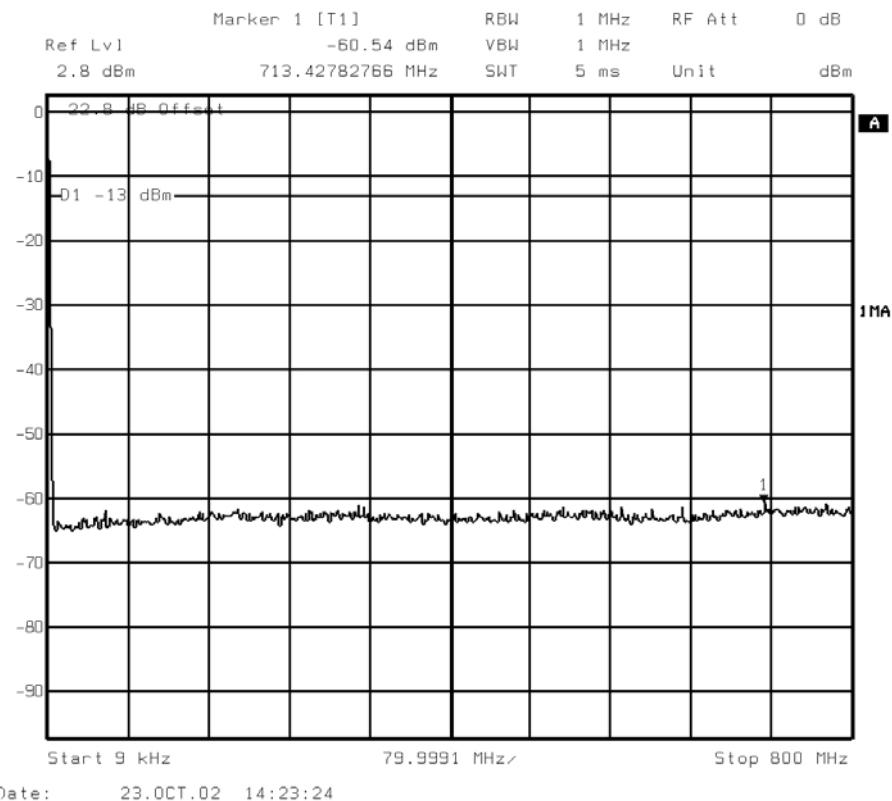

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 810, (1989.8MHz) – Maximum Power – 8PSK
24V DC Supply

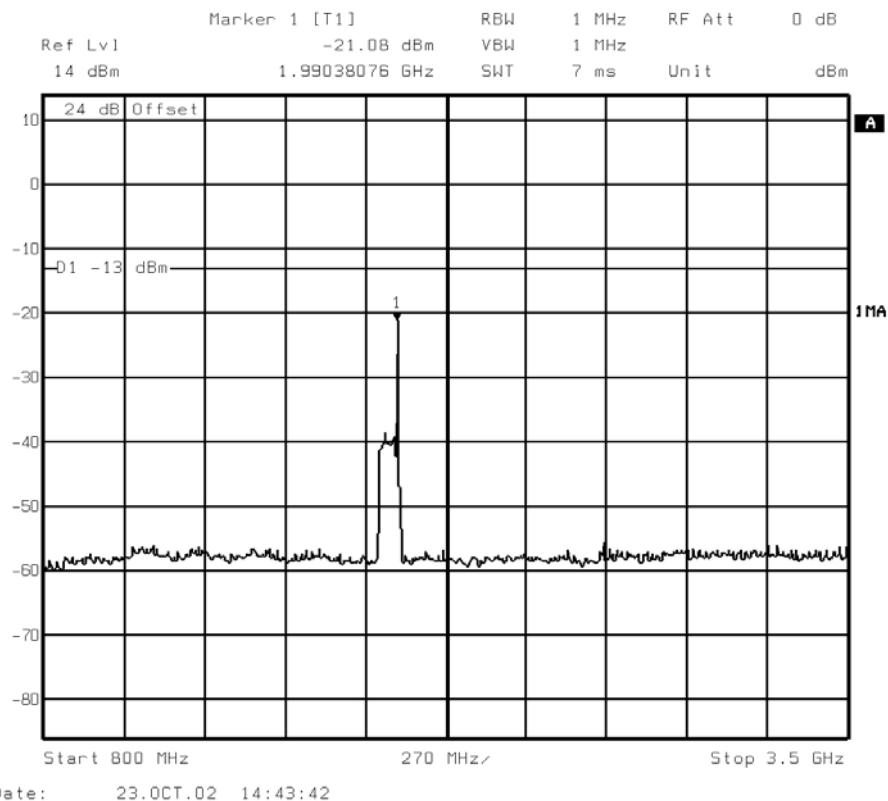

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 810, (1989.8MHz) – Maximum Power – 8PSK
24V DC Supply

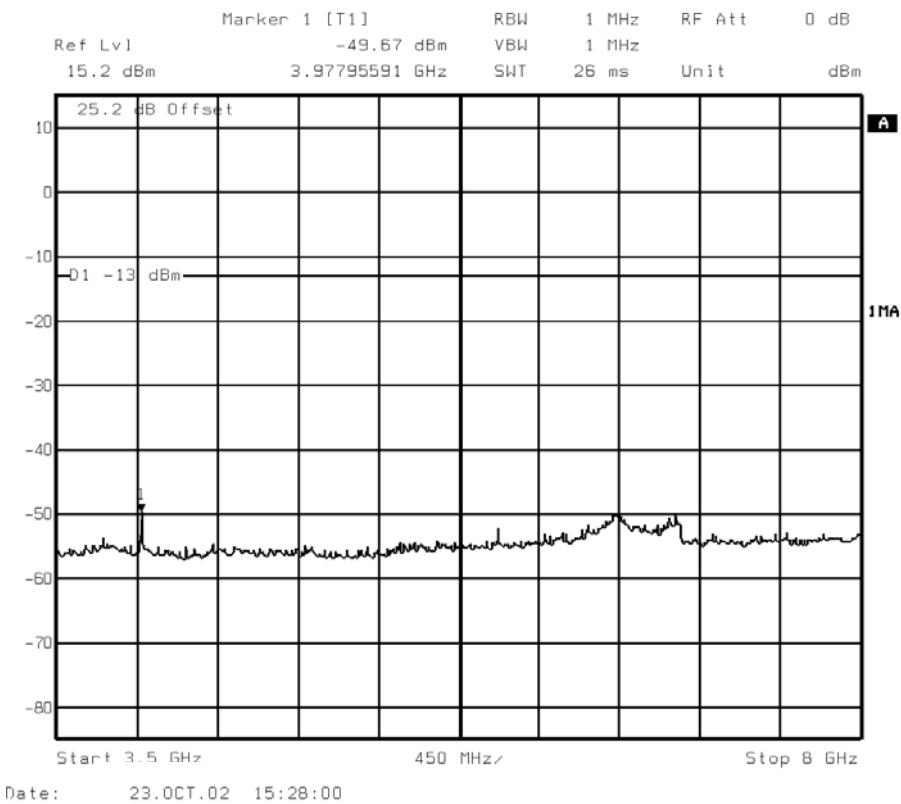

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 810, (1989.8MHz) – Maximum Power – 8PSK
24V DC Supply

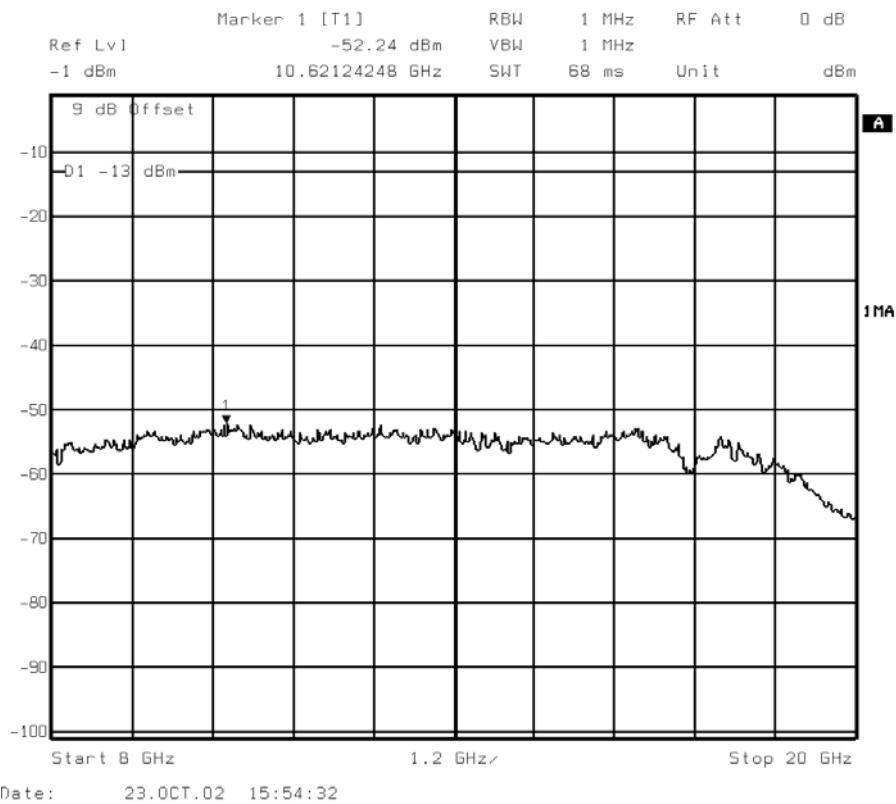

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)

Channel 512, (1930.2MHz) – Minimum Power – 8PSK

24V DC Supply

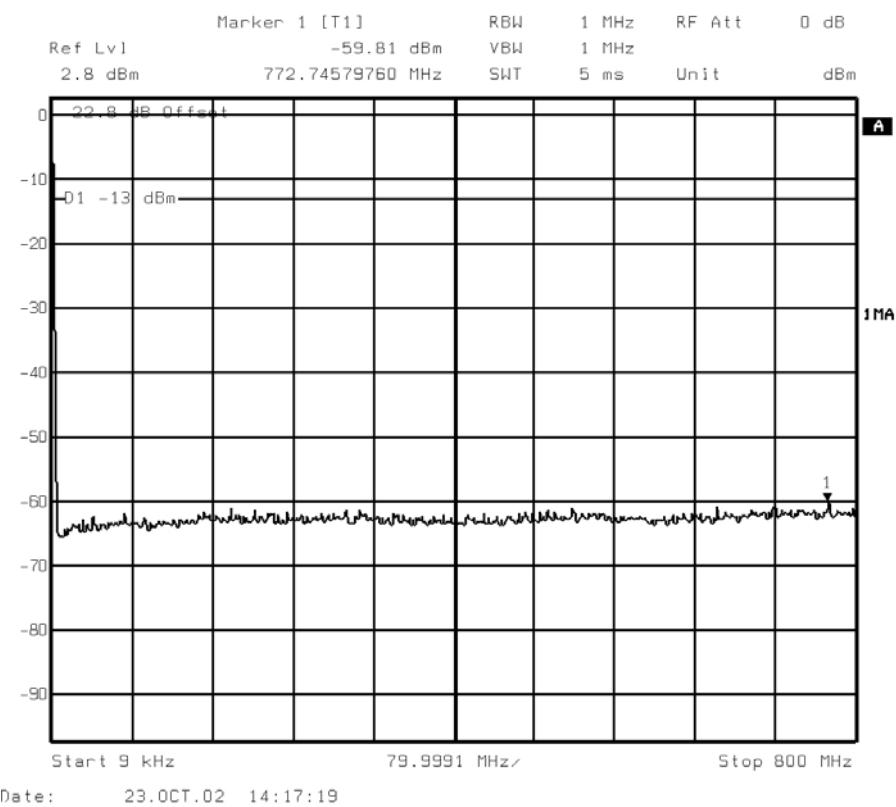

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 512, (1930.2MHz) – Minimum Power – 8PSK
24V DC Supply

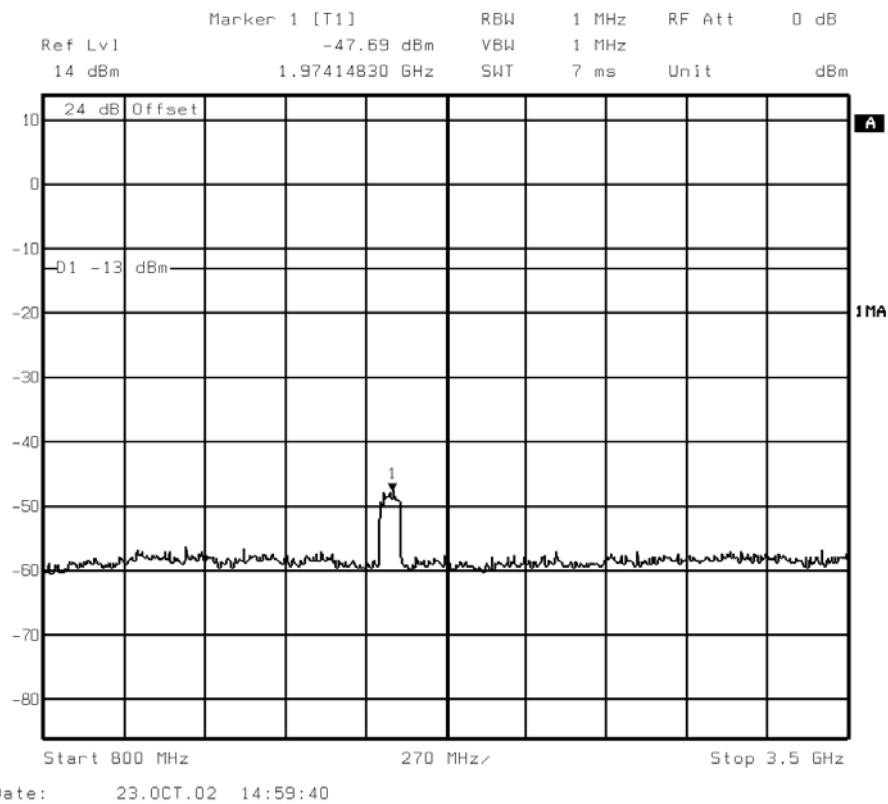


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 512, (1930.2MHz) – Minimum Power – 8PSK
24V DC Supply

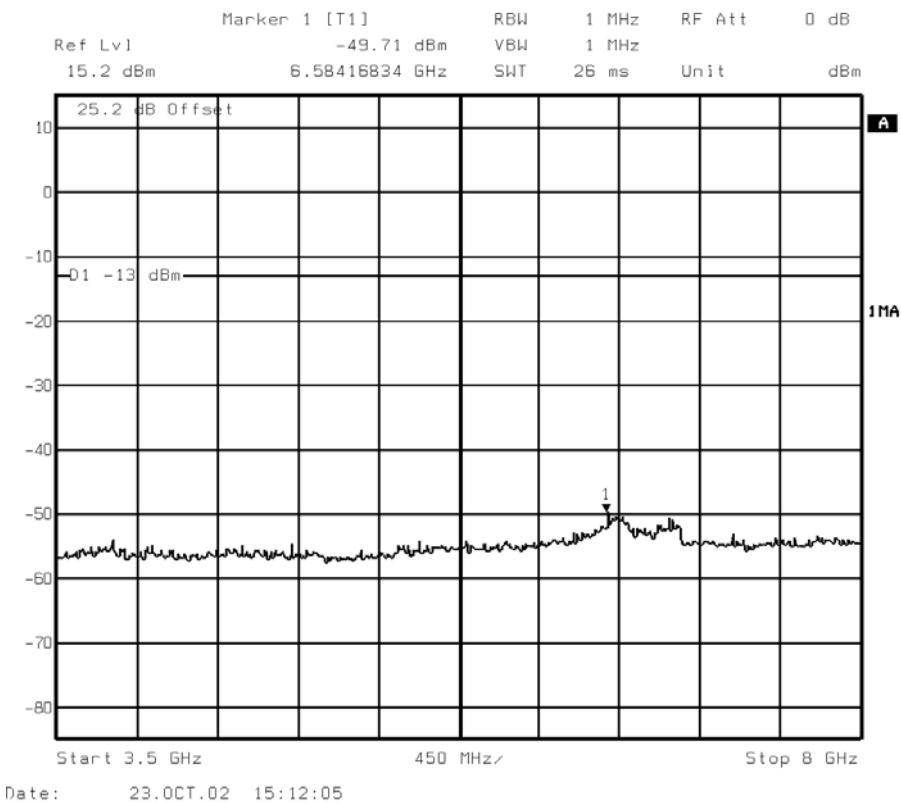

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 512, (1930.2MHz) – Minimum Power – 8PSK

24V DC Supply

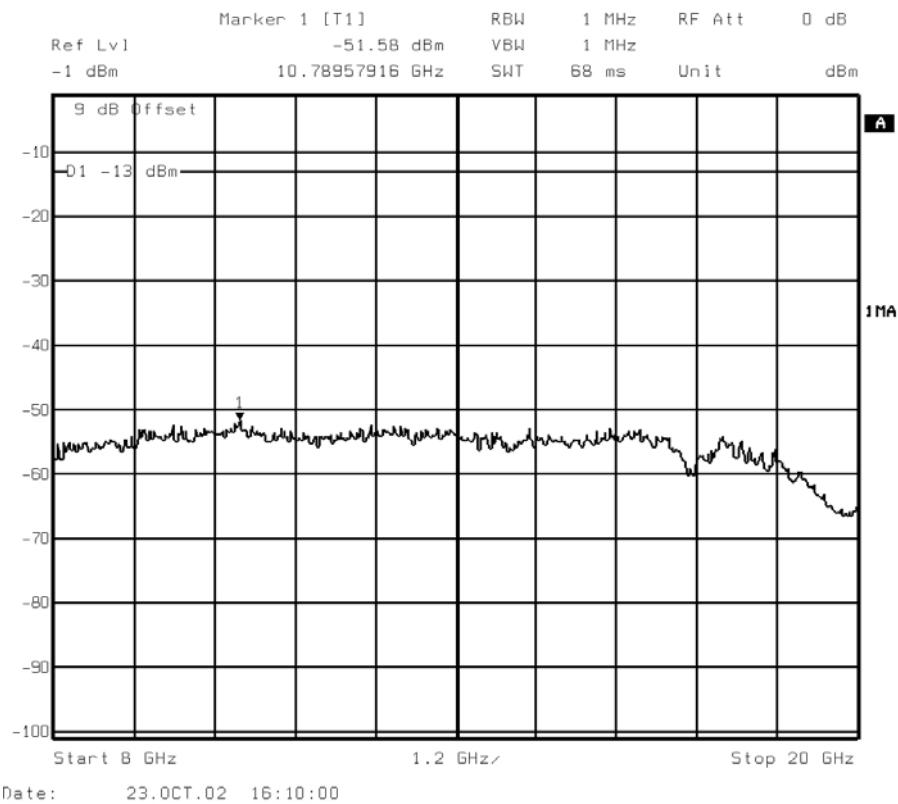

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800GHz)

Channel 661, (1960.0MHz) – Minimum Power – 8PSK

24V DC Supply

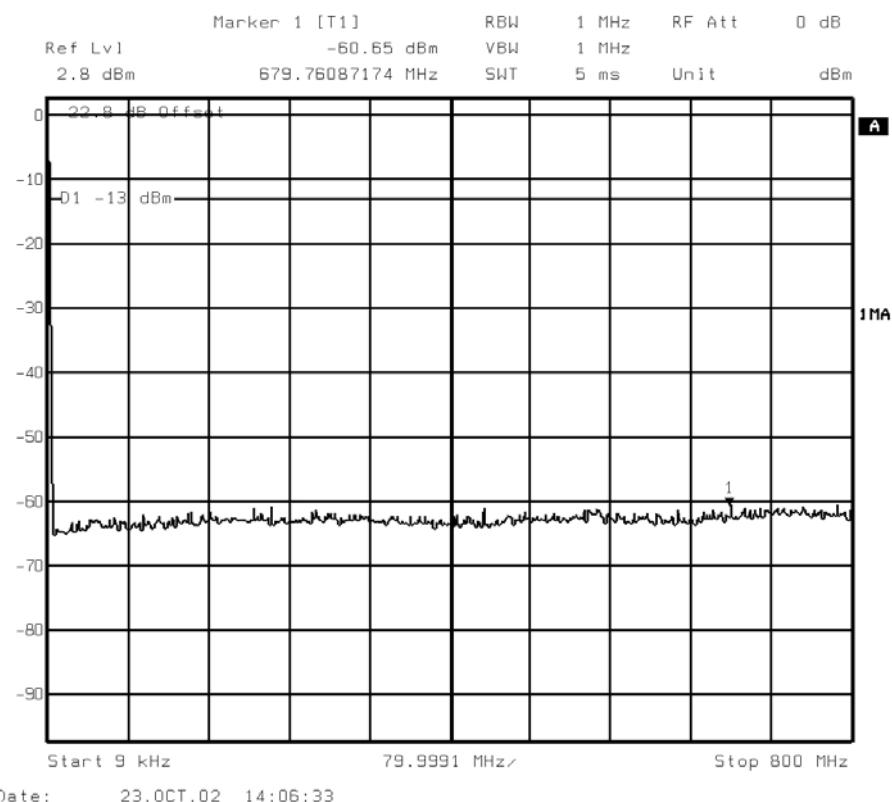


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 661, (1960.0MHz) – Minimum Power – 8PSK
24V DC Supply

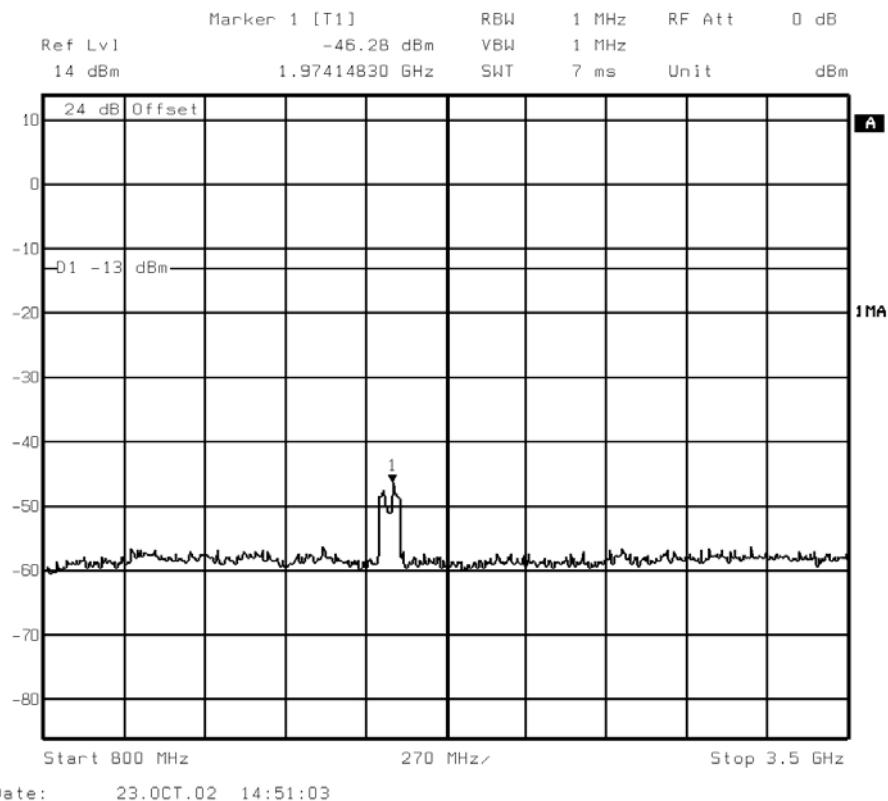


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Minimum Power – 8PSK
24V DC Supply

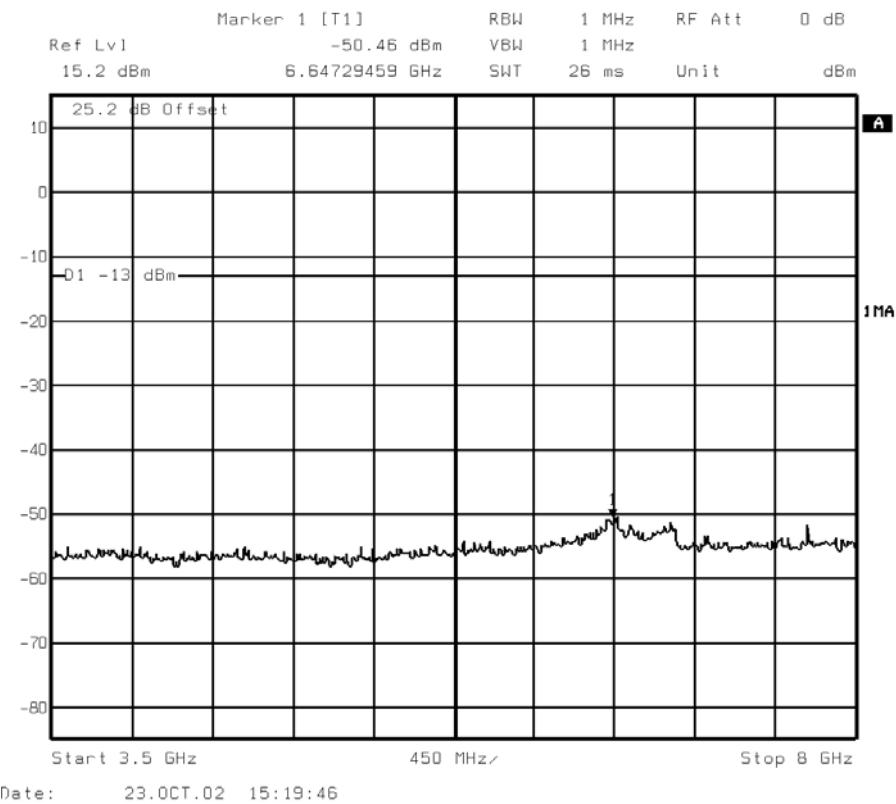


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 661, (1960.0MHz) – Minimum Power – 8PSK
24V DC Supply

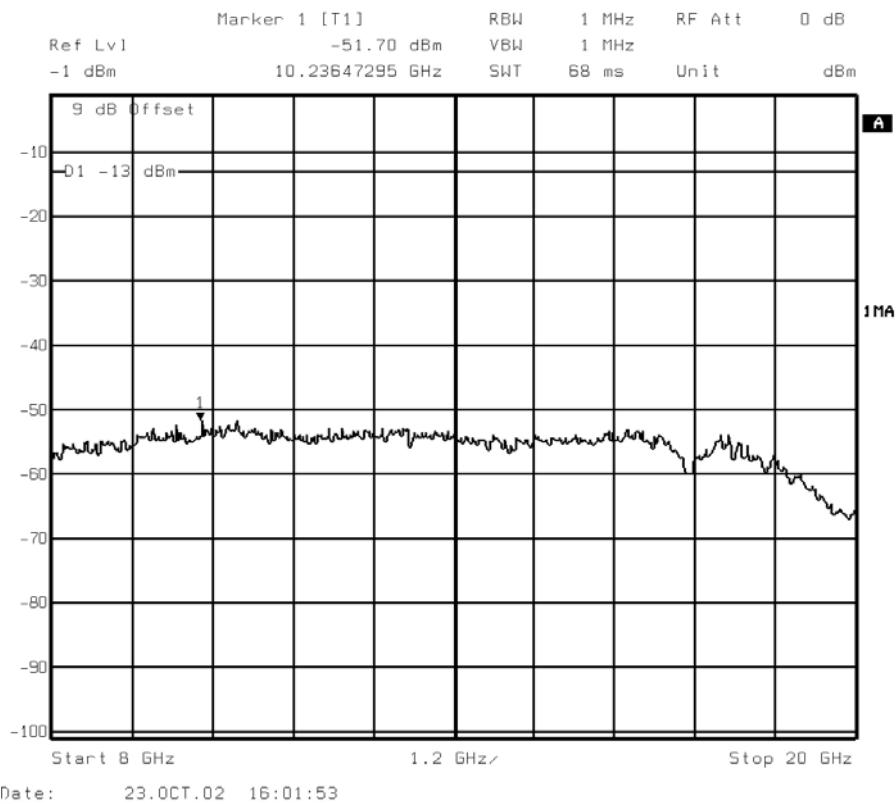


Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions
Test Date: 23rd October 2002
Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 810, (1989.8MHz) – Minimum Power – 8PSK
24V DC Supply

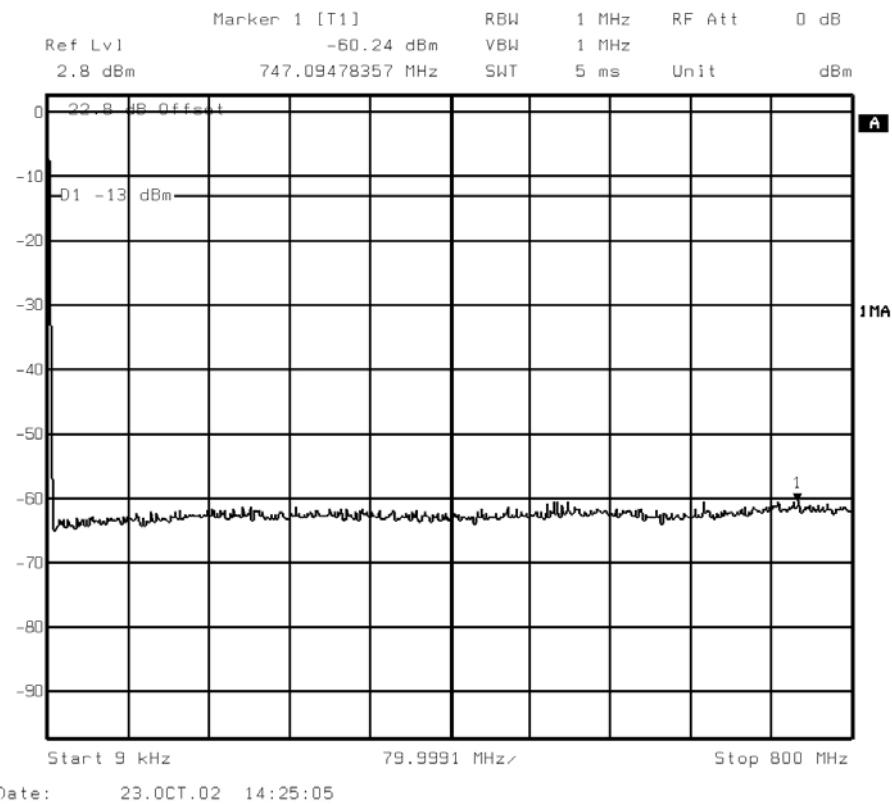

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)

Channel 810, (1989.8MHz) – Minimum Power – 8PSK

24V DC Supply

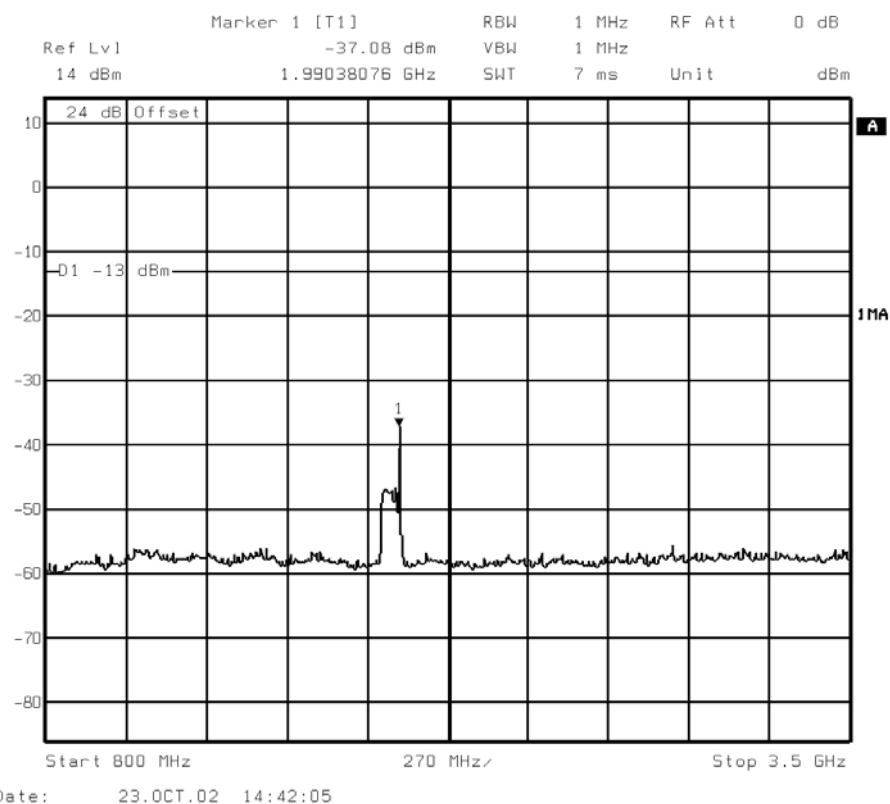

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 810, (1989.8MHz) – Minimum Power – 8PSK
24V DC Supply

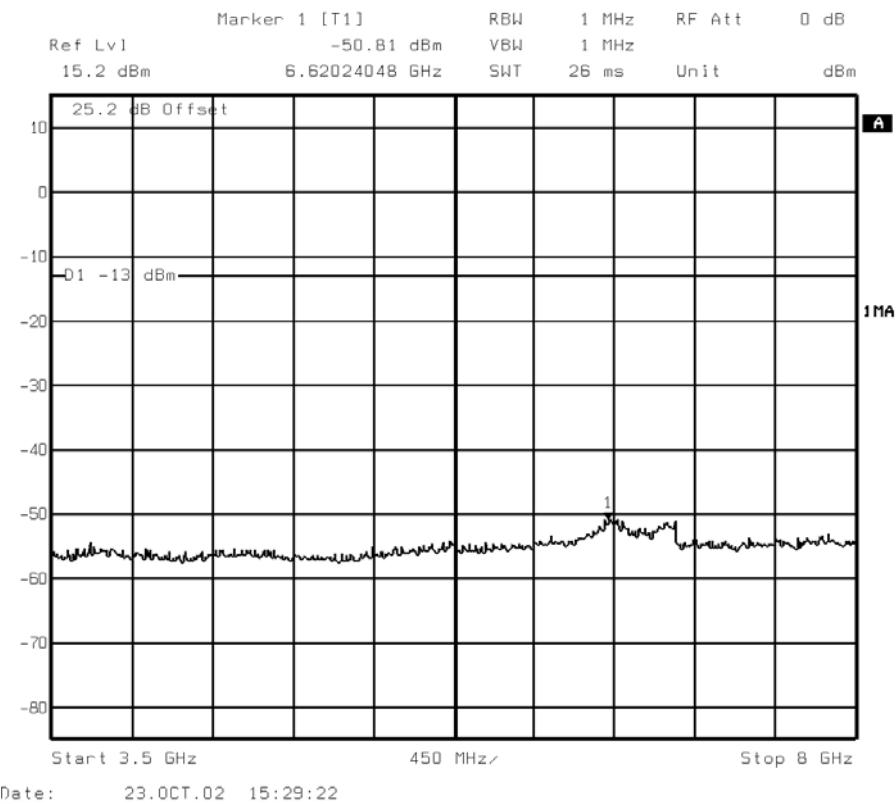

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14



Test Case: Spurious Emissions


Test Date: 23rd October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)

Channel 810, (1989.8MHz) – Minimum Power – 8PSK

24V DC Supply

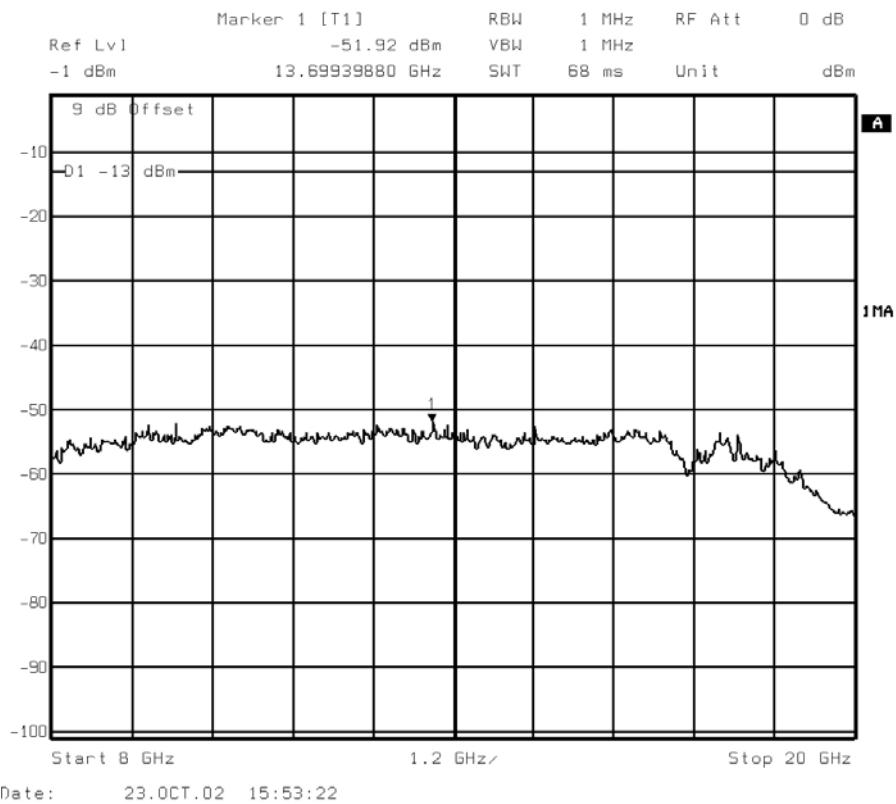

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
48V DC Supply

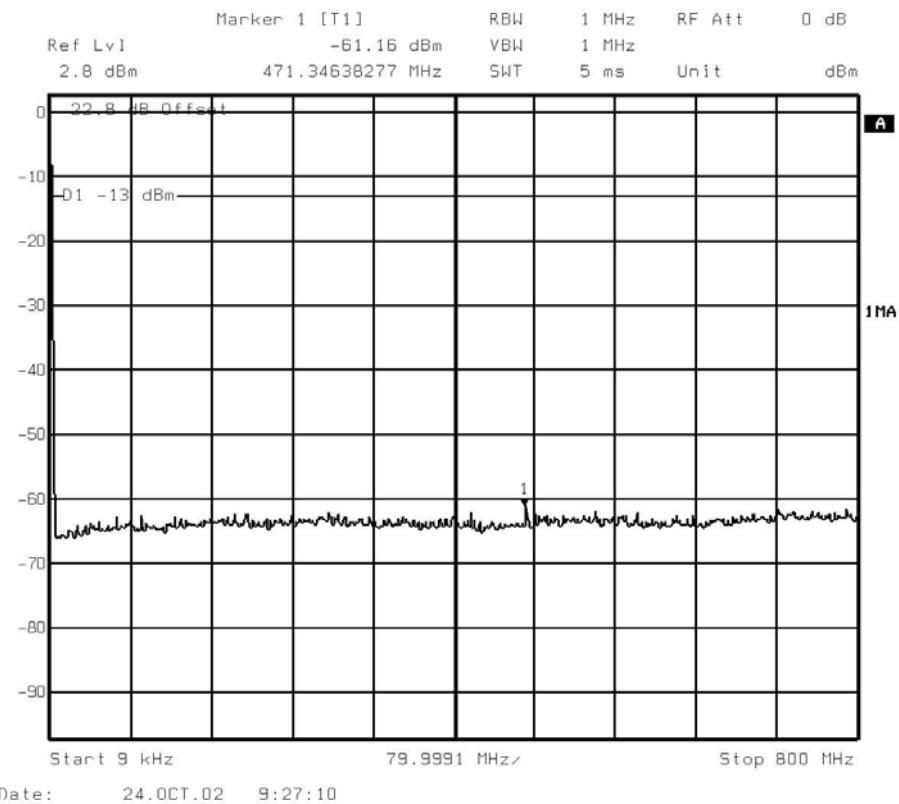

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
48V DC Supply

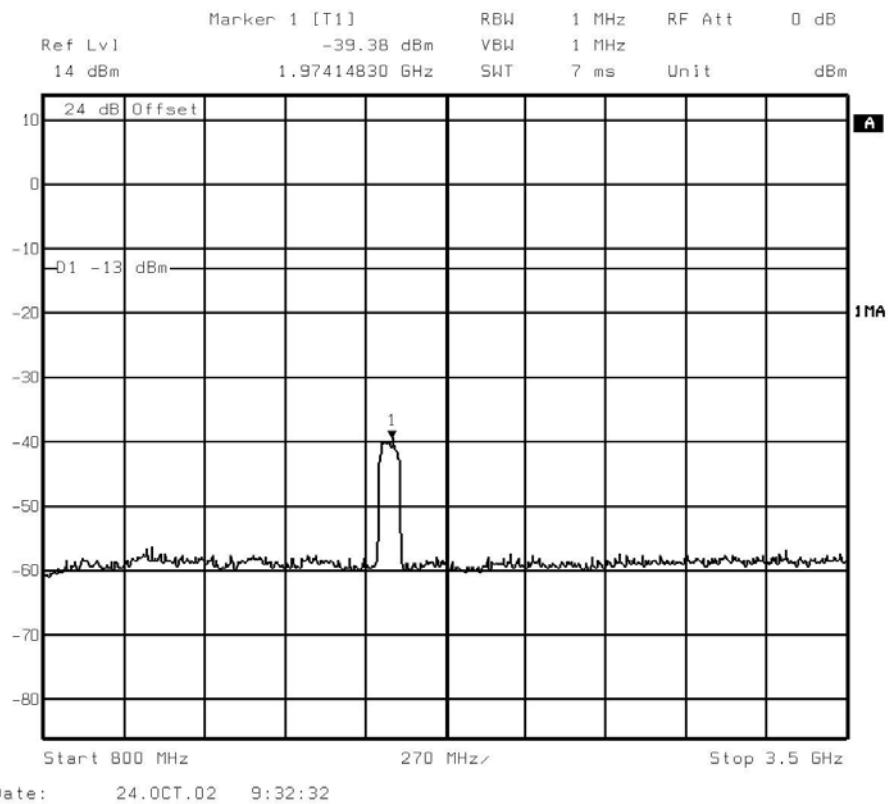

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
48V DC Supply

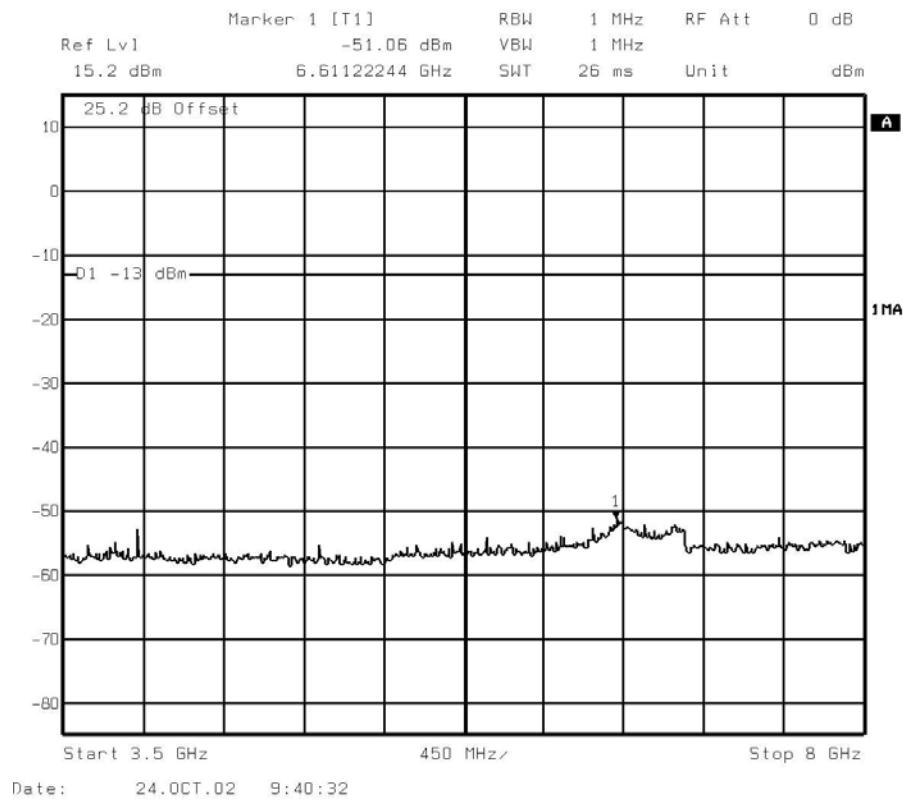

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
48V DC Supply

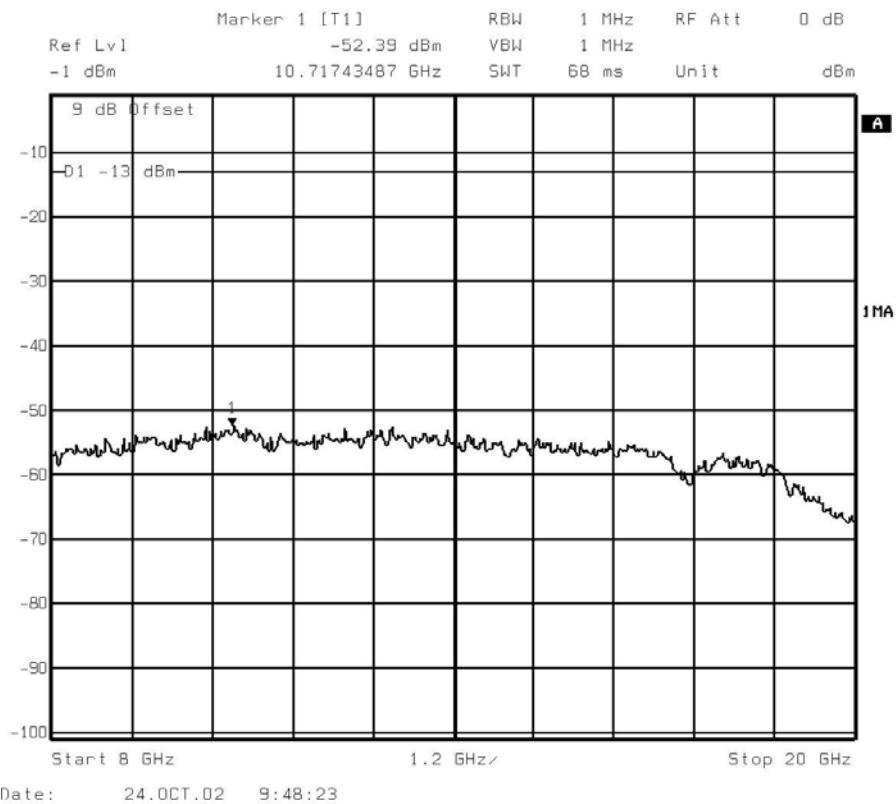

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
48V DC Supply

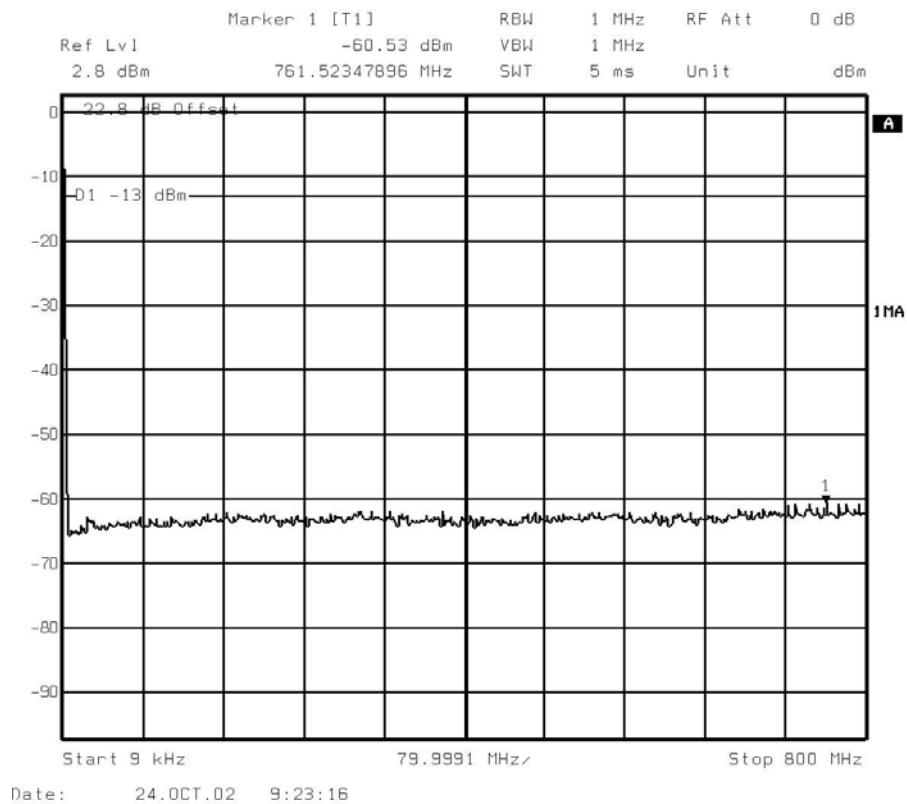

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
48V DC Supply

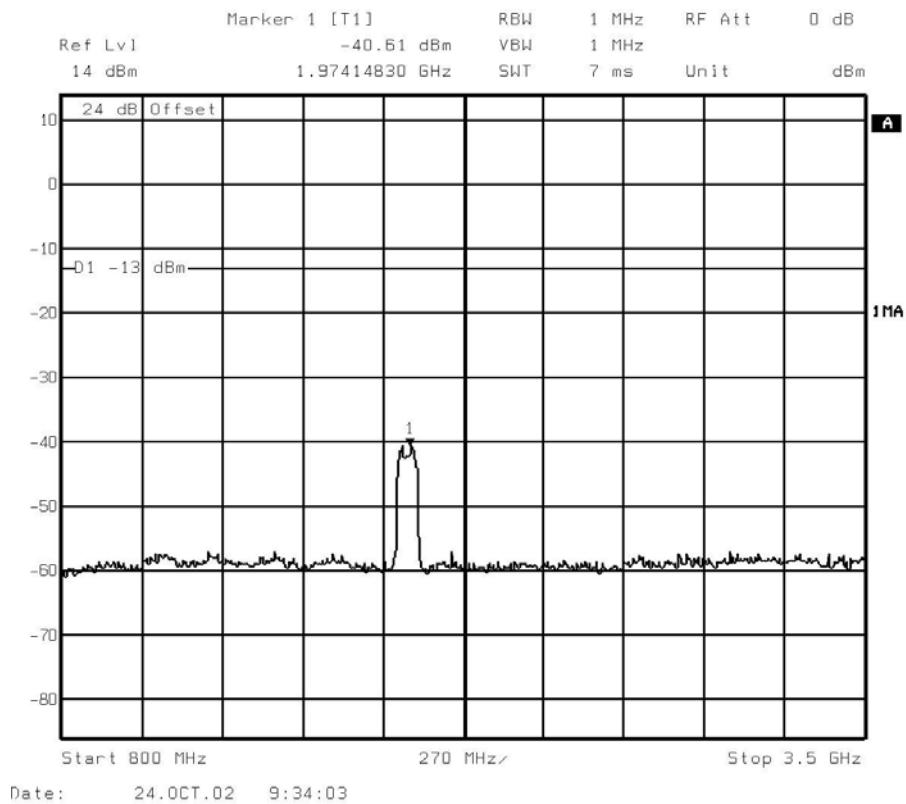

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
48V DC Supply

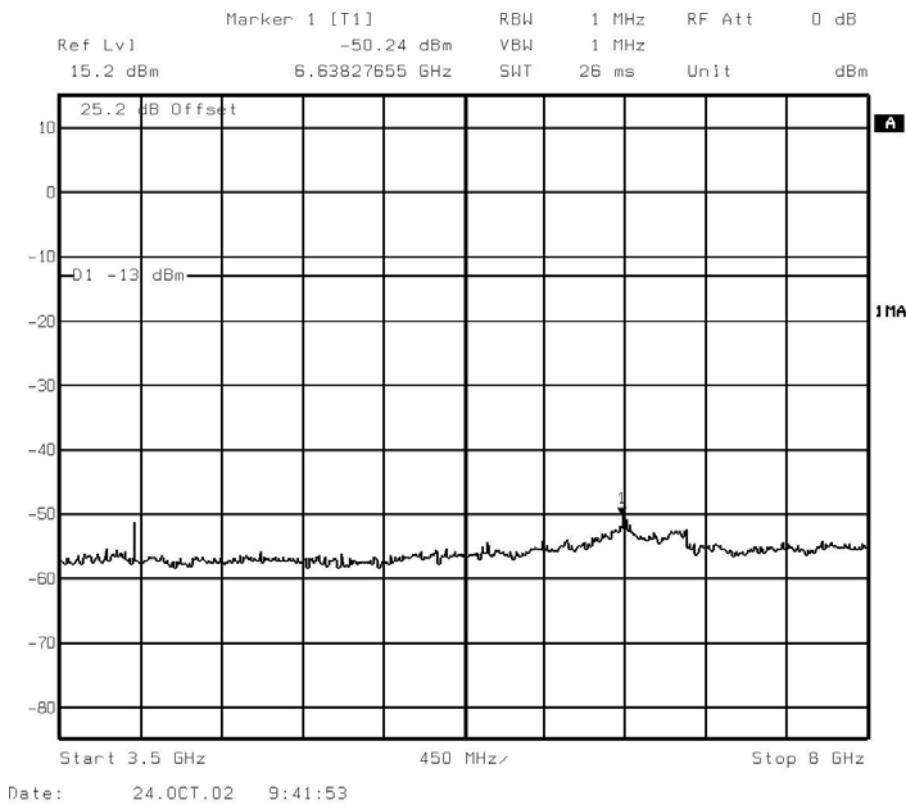

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
48V DC Supply

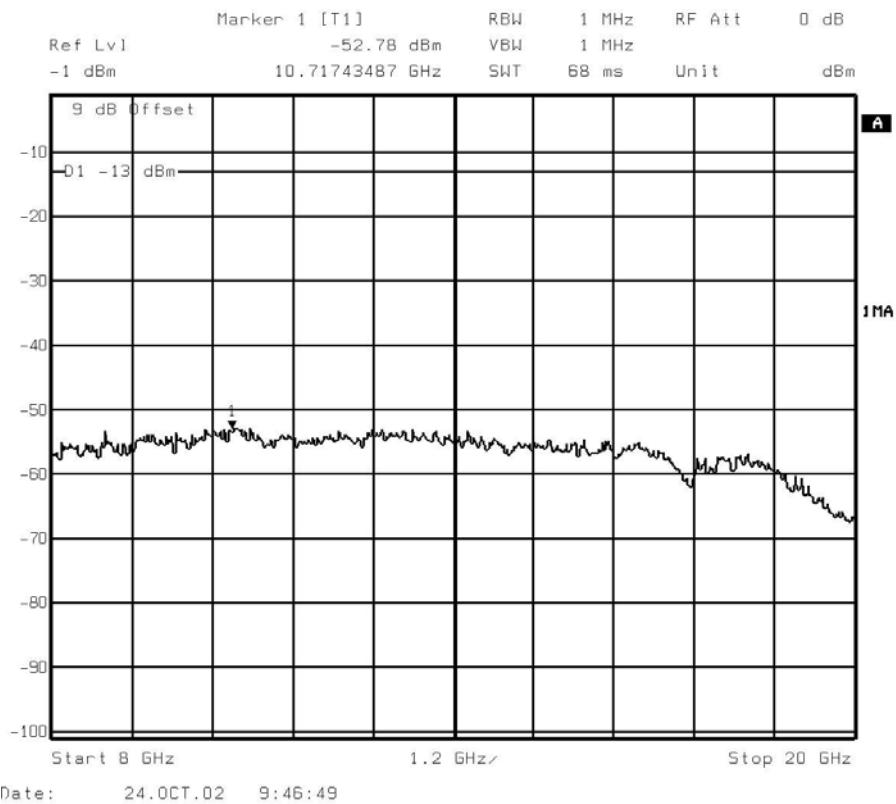

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
110V AC Supply

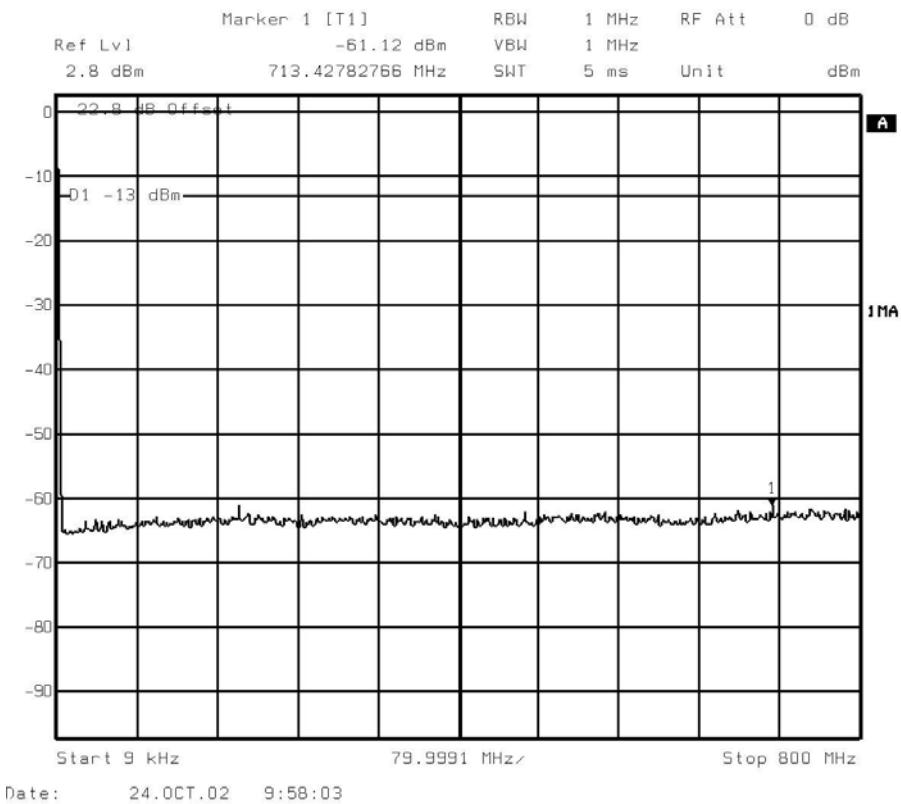

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
110V AC Supply

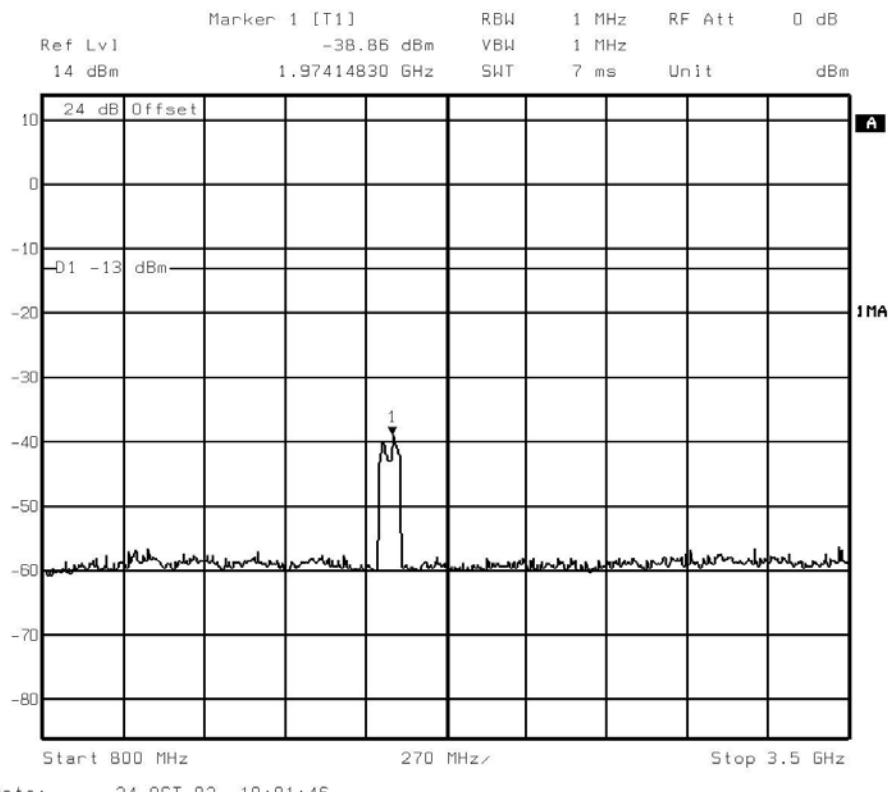

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
110V AC Supply

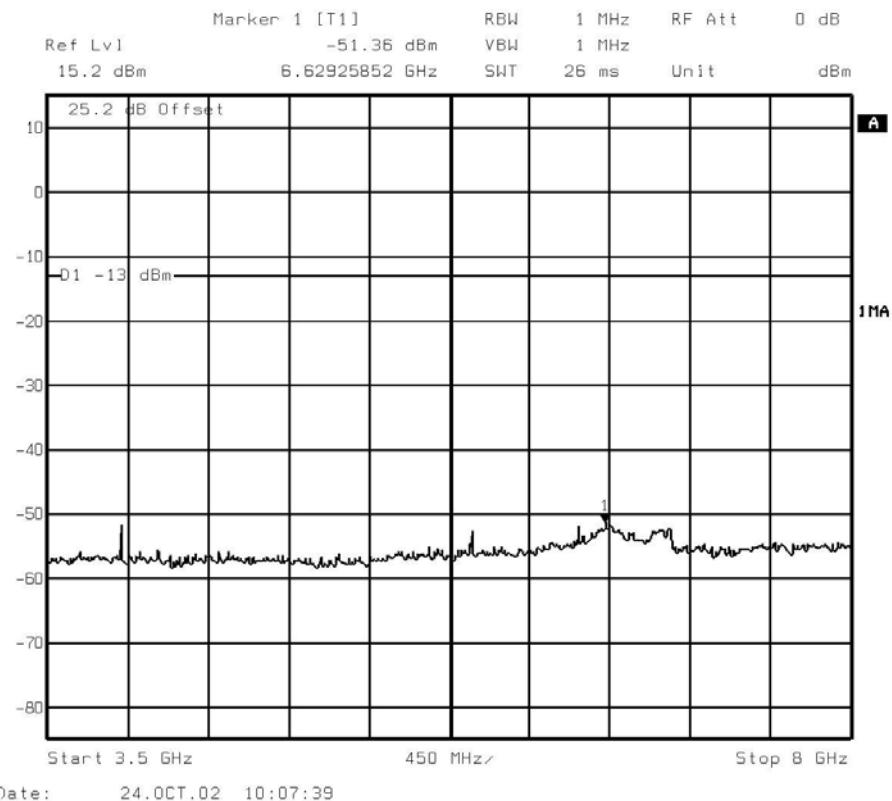

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 661, (1960.0MHz) – Max Power – GMSK
110V AC Supply

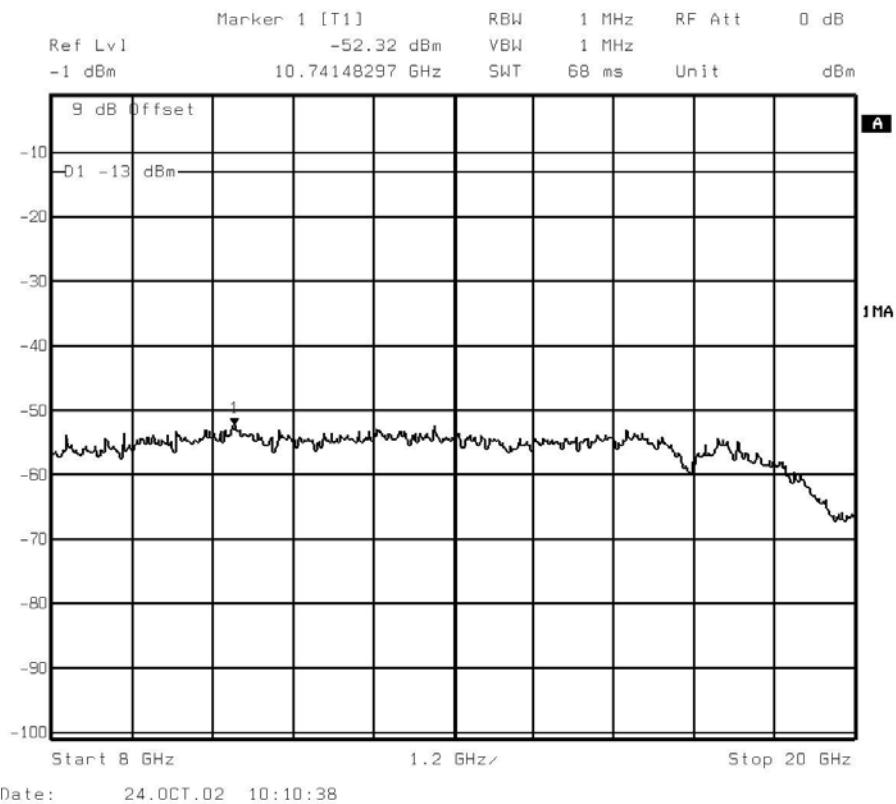

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (9kHz – 800MHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
110V AC Supply

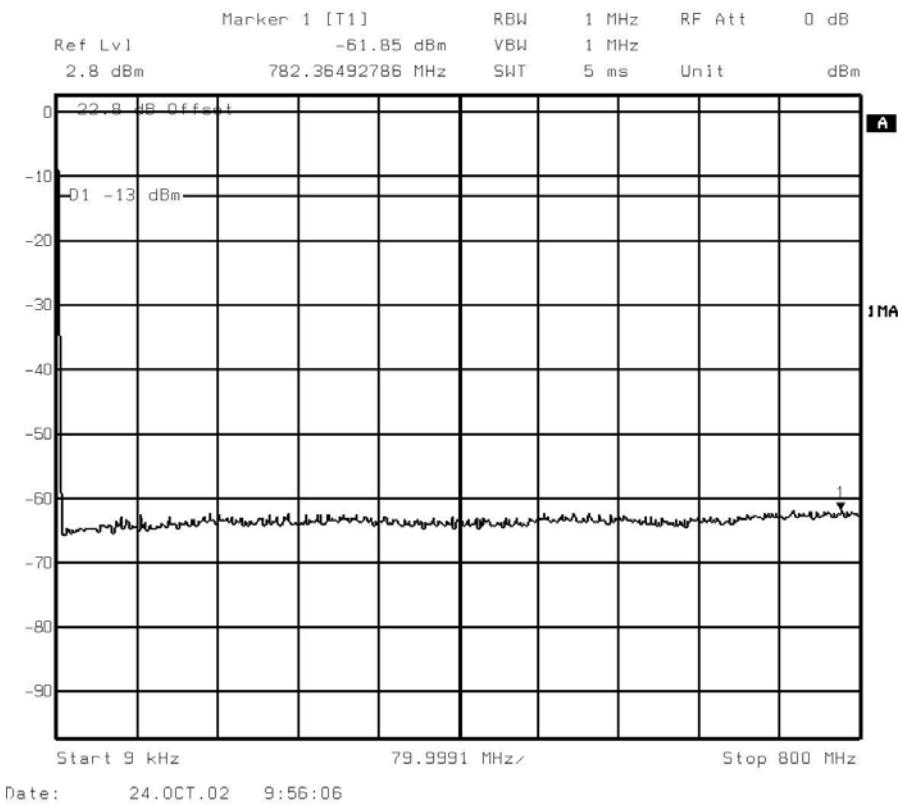

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (800MHz – 3.5GHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
110V AC Supply

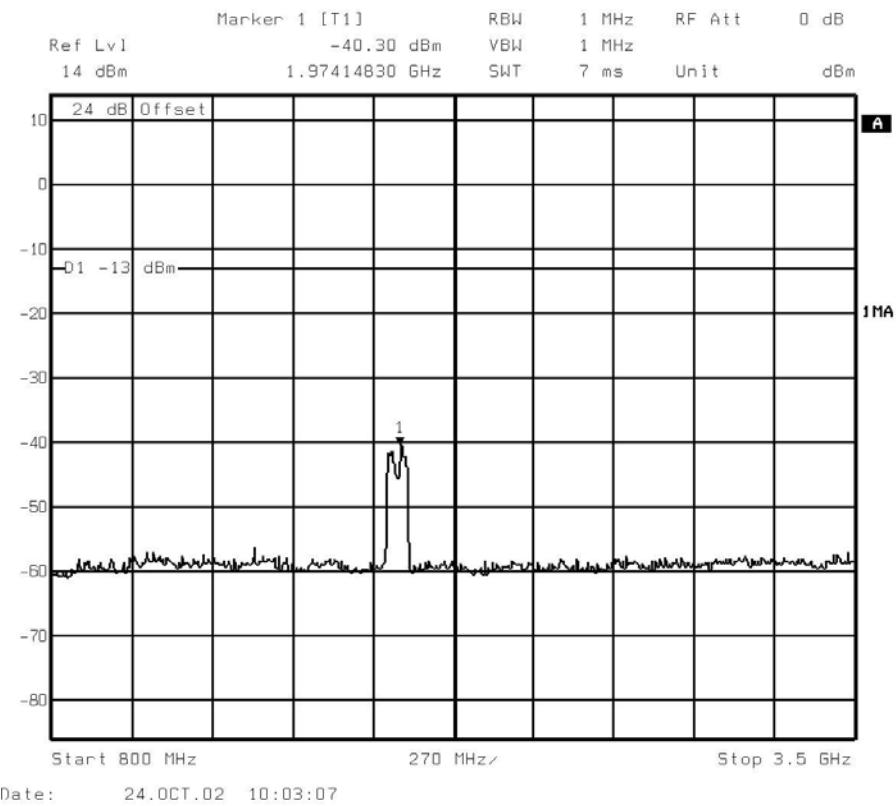

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (3.5GHz – 8GHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
110V AC Supply

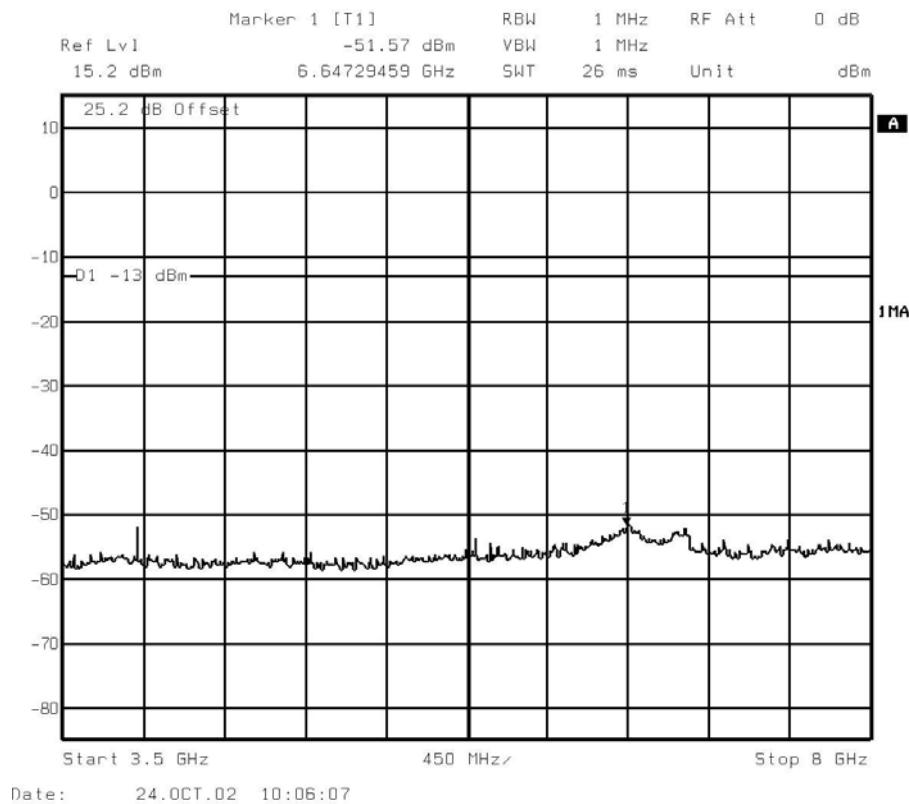

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14




Test Case: Spurious Emissions

Test Date: 24th October 2002

Rule Parts: 2.1051, 24.238(a)

Spurious Emissions (8GHz – 20GHz)
Channel 661, (1960.0MHz) – Max Power – 8PSK
110V AC Supply

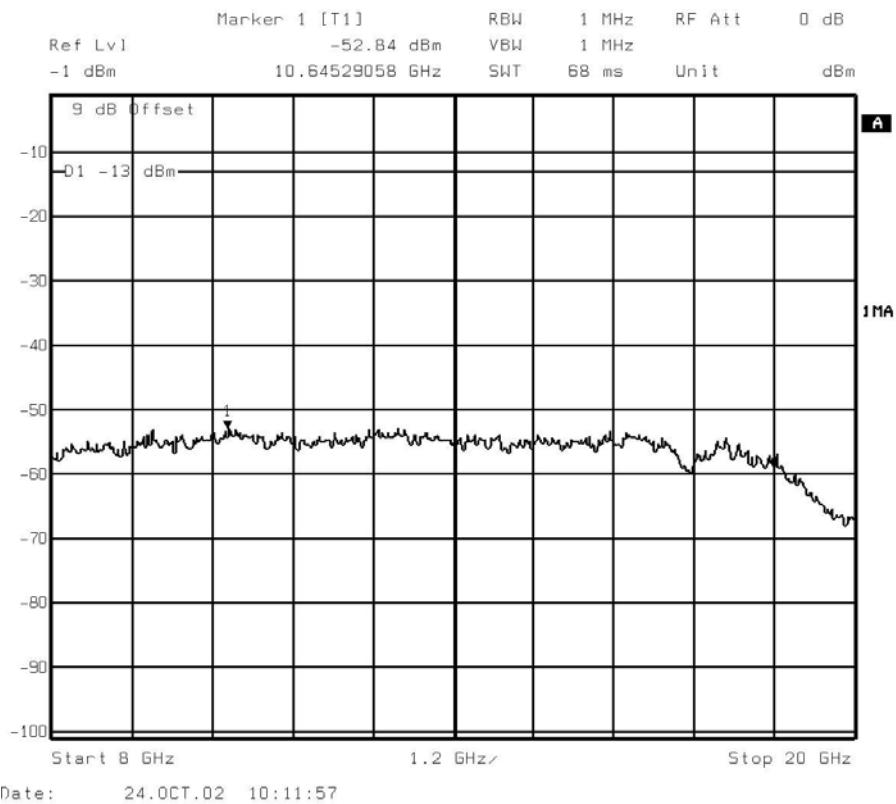

Test Equipment Used:

1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14



Test Case: Frequency Stability Under Temperature Variations

Test Date: 22nd October 2002

Rule Parts: 2.1055, 24.235

Measurement Method

The EUT was set to transmit on maximum power with all timeslots active. A Digital Communications Analyser, (CMU300), was used to measure the frequency error. The average result was taken over 100 bursts. The temperature was adjusted between -30°C and +50°C in 10° steps as per 2.1055.

Results

24V DC Supply - GMSK Modulation

Temperature Interval (°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (kHz)
-30	1.96	-14	±1.96
-20	1.96	+19	±1.96
-10	1.96	-9	±1.96
0	1.96	-8	±1.96
+10	1.96	-7	±1.96
+20	1.96	-9	±1.96
+30	1.96	+13	±1.96
+40	1.96	+11	±1.96
+50	1.96	+7	±1.96

24V DC Supply - 8PSK Modulation

Temperature Interval (°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (kHz)
-30	1.96	+13	±1.96
-20	1.96	-16	±1.96
-10	1.96	+16	±1.96
0	1.96	-9	±1.96
+10	1.96	-9	±1.96
+20	1.96	-11	±1.96
+30	1.96	+12	±1.96
+40	1.96	+11	±1.96
+50	1.96	+6	±1.96

Remarks

EUT complies with CFR 47 Part 24.235. The frequency stability of the EUT is sufficient to keep it within the authorized frequency blocks at any temperature interval across the measured range.

Test Equipment Used:

10, 14, 15, 16, 17



Test Case: Frequency Stability Under Voltage Variations
Test Date: 24th October 2002
Rule Parts: 24.135(a)

Measurement Method

The EUT was set to transmit on maximum power with all timeslots active. A Digital Communications Analyser, (CMU300), was used to measure the frequency error. The average result was taken over 100 bursts.

There are three possible power supply options for the base station. All three supply options were tested. The results are shown below.

110V AC Supply

The mains voltage was adjusted between 85 and 115% of the nominal declared operating voltage as specified by the manufacturer using a variac in conjunction with a DVM.

Results

Supply Variation (%)	AC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)		Deviation Limit (kHz)
			GMSK	8PSK	
85	93.5	1.96	-7	-9	±1.96
0	110.0	1.96	-8	-9	±1.96
115	126.5	1.96	-8	+10	±1.96

24V DC Supply

The supply voltage was adjusted between 85 and 115% of the nominal declared operating voltage as specified by the manufacturer using a power supply in conjunction with a DVM.

Results

Supply Variation (%)	DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)		Deviation Limit (kHz)
			GMSK	8PSK	
85	20.4	1.96	-8	-10	±1.96
0	24.0	1.96	-9	-7	±1.96
115	27.6	1.96	-9	-10	±1.96



48V DC Supply

The supply voltage was adjusted between 85 and 115% of the nominal declared operating voltage as specified by the manufacturer using a power supply in conjunction with a DVM.

Results

Supply Variation (%)	DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)		Deviation Limit (kHz)
			GMSK	8PSK	
85	40.8	1.96	-8	-9	±1.96
0	48.0	1.96	-9	-8	±1.96
115	55.2	1.96	-7	-10	±1.96

Remarks

EUT complies with CFR 47 Part 24.135(a). The EUT does not exceed ±1.96kHz at the measured frequency either at nominal or voltage variation.

Test Equipment Used:

10, 12, 13, 14, 15



Test Case: AC Conducted Spurious Emissions

Test Date: 7th November 2002

Rule Parts: 15.207(a)

Measurement Method

All Conducted Emission Measurements were undertaken within a shielded enclosure. Emissions were measured on the Live and Neutral Lines.

Emissions were then formally measured using both Quasi-Peak and Average Detectors which met the CISPR requirements. The details of the worst case emissions were then recorded and are presented in Table 8 and Table 9. Plots 9 to 12 are taken from the receiver in max hold.

The Conducted Emission measurements were made using a Hewlett Packard 8542E EMI Receiver.

The test was performed in accordance with ANSI C63.4.



Test Case: AC Conducted Spurious Emissions (Continued)

Configuration: 5. Live Line

The EUT met the requirements of 47 CFR 15.207(a) [AC Power Port] Conducted Disturbance test for the Live Line.

Conducted Disturbances Live Line: A search was made in the frequency range 150kHz to 30MHz. The levels of the 7 highest emissions were measured in accordance with the specification and are presented in Table 8 below: -

Emission Frequency	Quasi-Peak Level	Average Level	Quasi-Peak Limit	Average Limit	Pass / Fail
	MHz	dB μ V	dB μ V	dB μ V	
0.150	56.0	52.7	66.0	56.0	Pass
0.204	48.5	44.0	63.4	53.4	Pass
0.893	29.2	27.1	56.0	46.0	Pass
1.935	29.8	27.9	56.0	46.0	Pass
2.530	30.8	29.0	56.0	46.0	Pass
2.857	30.7	26.7	56.0	46.0	Pass
3.127	31.9	30.1	56.0	46.0	Pass

Table 8

The margin between the specification requirements and all other emissions was 26dB or more below the specified Quasi-Peak limit and 20dB or more below the specified Average limit, when measured with a Quasi-Peak detector.

Procedure Test performed in accordance with ANSI C63.4.

Test Equipment Used:

18, 23, 33, 34



Test Case: AC Conducted Spurious Emissions (Continued)

Configuration: 5. Neutral Line

The EUT met the requirements of 47 CFR 15.207(a) [AC Power Port] Conducted Disturbance test for the Neutral Line.

Conducted Disturbances Neutral Line: A search was made in the frequency range 150kHz to 30MHz. The levels of the 6 highest emissions were measured in accordance with the specification and are presented in Table 9 below: -

Emission Frequency	Quasi-Peak Level	Average Level	Quasi-Peak Limit	Average Limit	Pass / Fail
	MHz	dB μ V	dB μ V	dB μ V	
0.150	56.1	52.5	66.0	56.0	Pass
0.204	48.4	43.9	63.4	53.4	Pass
2.646	29.8	27.8	56.0	46.0	Pass
2.803	30.3	27.9	56.0	46.0	Pass
3.007	30.6	26.8	56.0	46.0	Pass
3.126	30.6	28.7	56.0	46.0	Pass

Table 9

The margin between the specification requirements and all other emissions was 27dB or more below the specified Quasi-Peak limit and 20dB or more below the specified Average limit, when measured with a Quasi-Peak detector.

Procedure Test performed in accordance with ANSI C63.4.

Test Equipment Used:

18, 23, 33, 34




Test Case: AC Conducted Spurious Emissions (Continued)

Configuration: 5. Live Line

hp 17:36:44 NOV 07, 2002


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

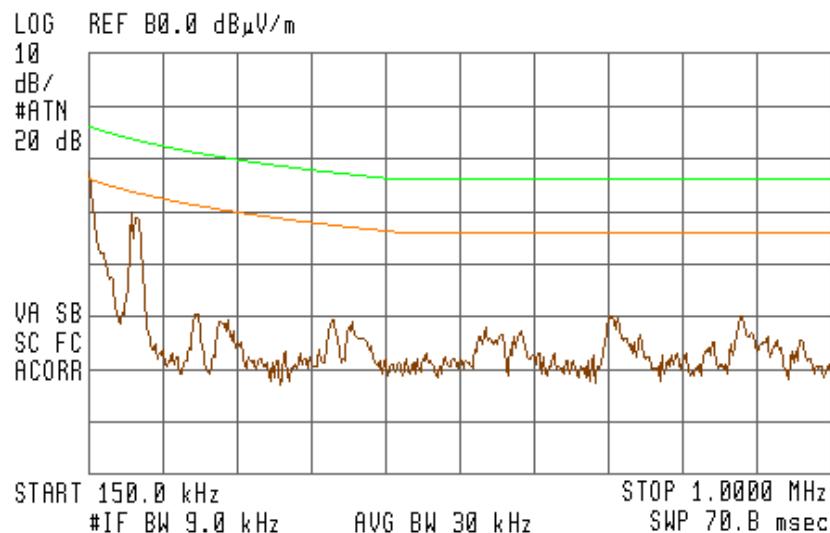

Plot 9 Live Line

hp 17:43:11 NOV 07, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

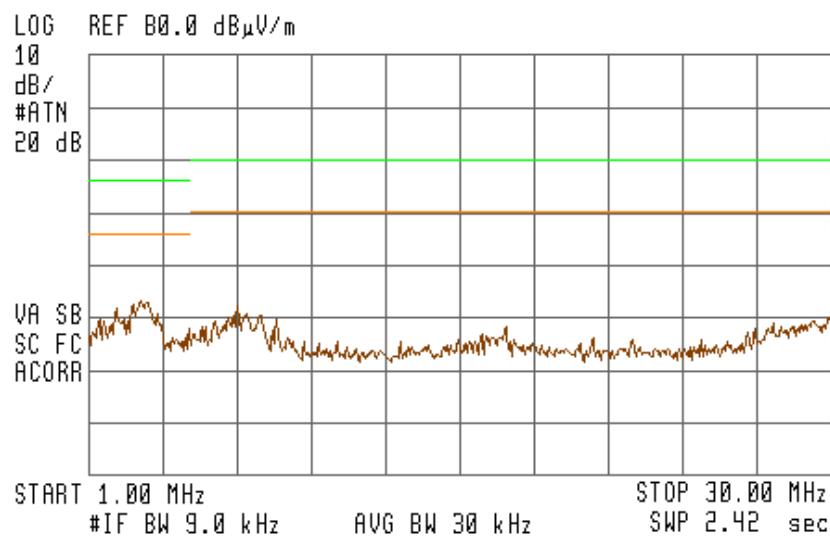

Plot 10 Live Line




Test Case: AC Conducted Spurious Emissions (Continued)

Configuration: 5. Neutral Line

hp 17:26:53 NOV 07, 2002


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

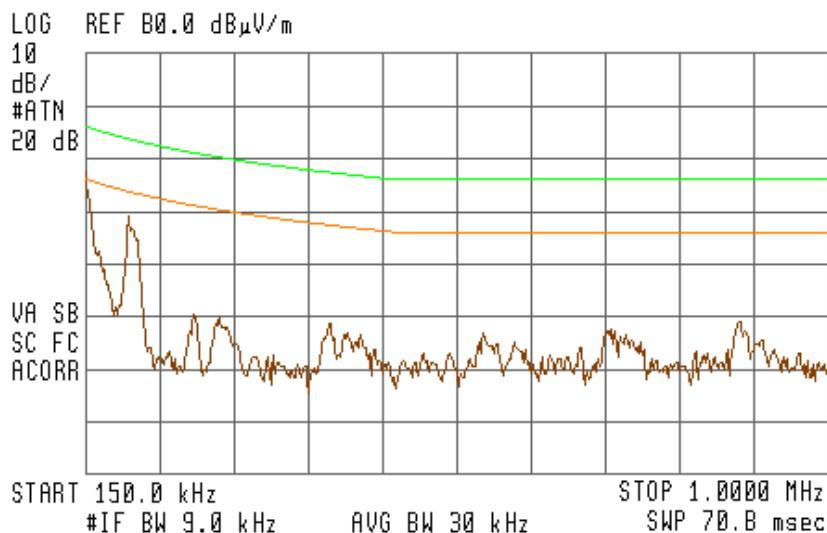


Plot 11 Neutral Line

hp 17:31:14 NOV 07, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

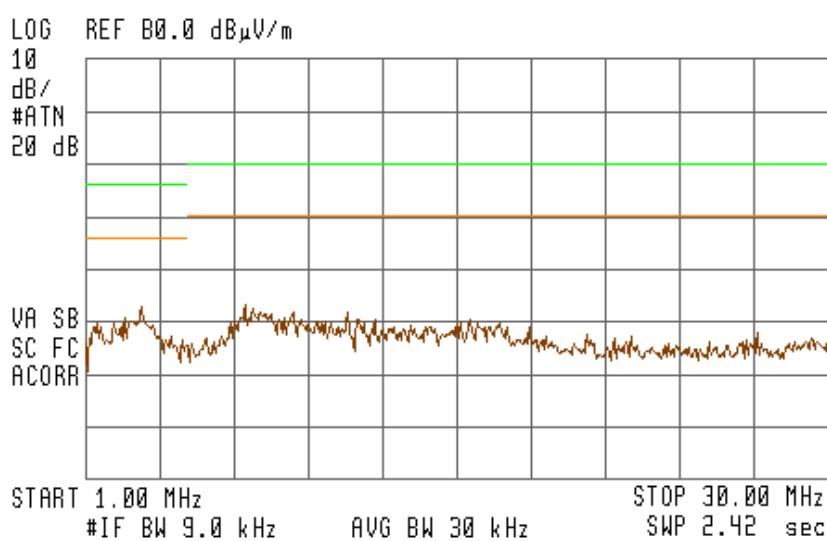

Plot 12 Neutral Line

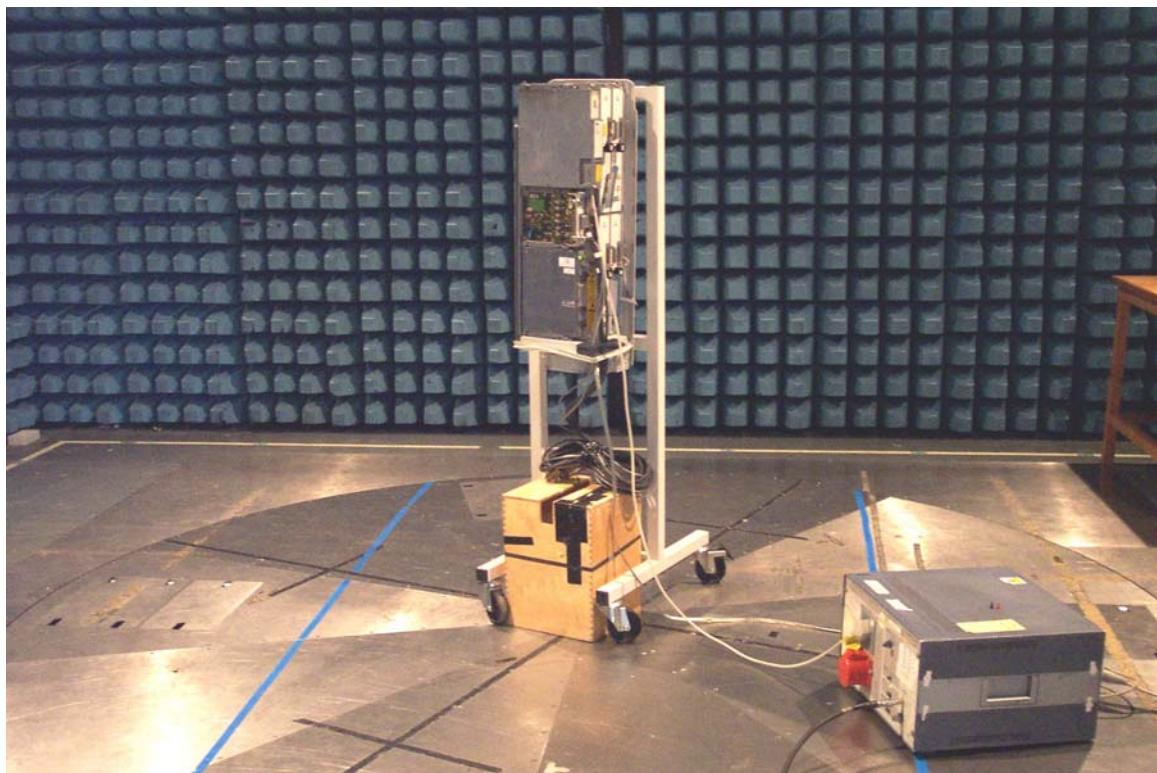

Photograph No 4 – Conducted Emissions – Configuration 5



This report relates only to the actual item/items tested.

UKAS Accreditations do not cover opinions and interpretations and any expressed herein are outside the scope of any UKAS Accreditation.

Results of tests not yet included in our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced without the written permission of TÜV Product Service Limited

© 2002 TÜV Product Service Limited