

COMMUNICATION CERTIFICATION LABORATORY

TEST REPORT: 73-6870

FCC ID: L82-242900

Page 13 of 112

**Exhibit 6: Test Report**

**TEST REPORT FROM:**

COMMUNICATION CERTIFICATION LABORATORY

1940 W. Alexander Street

Salt Lake City, Utah

84119-2039

Type of Report: Certification

TEST OF: 240C9 and 242C9

FCC ID: L82-242900

To FCC PART 15.247, Subpart C

Test Report Serial No: 73-6870

**Applicant:**

Siemens Information and Communication Products, LLC,  
Communication Devices  
2205 Grand Avenue Parkway  
Austin, TX 78728-3811

Date(s) of Test: May 24 - 26, 1999

Issue Date: June 4, 1999

Equipment Receipt Date: May 24, 1999

**CERTIFICATION OF ENGINEERING REPORT**

This report has been prepared by Communication Certification Laboratory to determine compliance of the device described below with the requirements of FCC PART 15.247, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Siemens Information and Communication Products, LLC, Communication Devices
- Manufacturer: Siemens Information and Communication Products, LLC, Communication Devices
- Brand Name: SIEMENS
- Model Number: 240C9 and 242C9
- FCC ID: L82-242900

On this 4<sup>th</sup> day of June 1999, I, individually, and for Communication Certification Laboratory, certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

COMMUNICATION CERTIFICATION LABORATORY

---

Checked by: William S. Hurst, P.E.  
Vice President

---

Tested by: Roger J. Midgley  
EMC Engineering Manager

**SECTION 1. CLIENT INFORMATION AND RESPONSIBLE PARTY:**

**1.1 Client Information:**

Company Name: Siemens Information and Communication Products,  
LLC, Communication Devices  
2205 Grand Avenue Parkway  
Austin, TX 78728-3811

Contact Name: Jim Davis  
Title: EMC Engineer

**SECTION 2. EQUIPMENT UNDER TEST (EUT)****2.1 Identification of EUT:**

Trade Name: SIEMENS  
Model Name or Number: 240C9 and 242C9  
Serial Number: N/A  
Options Fitted: None  
Country of Manufacture: U.S.A.

**2.2 Description of EUT:**

The Siemens 240 Series is a cordless telephone that is designed to work in the 900 MHz ISM band. It is marketed under two different model numbers, 240C9 and 242C9. The radio portion of both models are identical the only difference is that the 242C9 provides caller ID. The data in this report was taken on the 242C9 as representative of both models.

The 240 Series cordless phone uses direct sequence spread spectrum modulation in the band 902 - 928 MHz. The band is divided into 31 duplex channels by using a TDD (Time Division Duplex) transmit scheme (see list of channels below). The 240 Series does not use channels 1 or 31. Each channel uses 32 kbit/s ADPCM voice coding for transmitting the payload data, together with the data channel this results in a 100 kbit system data rate. The spreading encoding provides a 12 dB spreading gain, by using a 15 Bit PN sequence, resulting in a 1.5 Mchip/s spreading rate. The transmitter has variable output power, transmitting up to a maximum of 100 mW.

This report covers the transmitter only the receiver is covered under a separate verification report.

**2.3 Modification Incorporated/Special Accessories on EUT:**

There were no modifications or special accessories required to comply with the specification.

**2.4 EUT and Support Equipment:**

The FCC ID numbers for all the EUT and support equipment used during the test (including inserted cards) are listed below:

Brand Name Model Number Serial No.	FCC ID Number	Description	Name of Interface Ports/Interface Cables
BN: SIEMENS MN: 242C9 SN: N/A	L82-242900	Direct Sequence Spread Spectrum Handset and Base Station (EUT)	N/A

**2.5 List of Channels:**

Channel Number	Channel Frequency (MHz)	Channel Number	Channel Frequency (MHz)
1	903.75	17	915.75
2	904.50	18	916.50
3	905.25	19	917.25
4	906.00	20	918.00
5	906.75	21	918.75
6	907.50	22	919.50
7	908.25	23	920.25
8	909.00	24	921.00
9	909.75	25	921.75
10	910.50	26	922.50
11	911.25	27	923.25
12	912.00	28	924.00
13	912.75	29	924.75
14	913.50	30	925.50
15	914.25	31	926.25
16	915.00		

**SECTION 3. TEST SPECIFICATION, METHODS & PROCEDURES****3.1 Test Specification:**

Title: FCC PART 15.247, Subpart C (47 CFR 15).

Limits and methods of measurement of radio interference characteristics of radio frequency devices. Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

Purpose of Test: The tests were performed to demonstrate Initial compliance.

**3.2 Methods & Procedures:****3.2.1 § 15.247**

(a) Operation under the provisions of this section is limited to frequency hopping and direct sequence spread spectrum intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system-hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitting signals.

(i) Frequency hopping systems operating in the 902 - 928 MHz band shall use at least 50 hopping frequencies. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

(ii) Frequency hopping systems operating in the 2400 - 2483.5 MHz and the 5725 - 5850 MHz bands shall use at least 75 hopping frequencies. The maximum allowed 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the transmitter shall not exceed 1 watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) In any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209 (a), whichever results in the lesser attenuation. All other emissions outside these bands shall not exceed the general radiated emission limits specified in § 15.209 (a).

(d) For direct sequence system, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

(e) The processing gain of a direct sequence system shall be at least 10 dB. The processing gain shall be determined from the ratio in dB of the signal to noise ratio with the system spreading code turned off to the signal to noise ratio with the system spreading code turned on, as measured at the demodulated output of the receiver.

(f) Hybrid systems that employ a combination of both direct sequence and frequency hopping modulation techniques shall achieve a processing gain of at least 17 dB from the combined techniques. The frequency hopping operation of the hybrid system, with the direct sequence operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period equal to the number of hopping frequencies employed multiplied by 0.4. The direct sequence operation of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

NOTE: Spread spectrum systems are sharing these bands on a non-interference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated

under the provisions of part 18 of this chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP, which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U.S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

### **3.2.2 § 15.207 Conducted Limits**

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with the provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

(b) The following option may be employed if the conducted emissions exceed the limits in paragraph (a) of this section when measured using instrumentation employing a quasi-peak detector function: If the level of the emission measured using the quasi-peak instrumentation is 6 dB, or more, higher than the level of the same emission measured with instrumentation having an average detector and a 9 kHz minimum bandwidth, that emission is considered broadband and the level obtained with the quasi-peak detector may be reduced by 13 dB for comparison to the limits. When employing this option, the following conditions shall be observed:

(1) The measuring instrumentation with the average detector shall employ a linear IF amplifier.

(2) Care must be taken not to exceed the dynamic range of the measuring instrument when measuring an emission with a low duty cycle.

(3) The test report required for verification of for an application for a grant of equipment authorization shall contain all details supporting the use of this option.

(c) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operation as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §§ 15.205, 15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.

(d) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operation while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### **3.2.3 Test Procedure**

The testing was performed according to the procedures in ANSI C63.4 (1992). Testing was performed at CCL's anechoic chamber located in Salt Lake City, Utah. This site has been fully described in a report submitted to the FCC, and was accepted in a letter dated March 1, 1999 (31040/SIT).

CCL participates in the National Voluntary Laboratory Accreditation Program (NVLAP) and has been accepted under NVLAP Lab Code:100272-0, which is effective until September 30, 1999.

For radiated emissions testing that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

**SECTION 4. OPERATION OF EUT DURING TESTING.****4.1 Operating Environment:**

Power Supply:                   Handset - Operates via DC battery  
   Base Station - 120 VAC  
AC Mains Frequency: 60 Hz

**4.2 Operating Modes:**

Each mode of operation was exercised to produce worst case emissions. The worst case emissions were with the 242C9 running in the following mode. The 242C9 was placed in the transmit mode with the same type of modulation that would normally be used during normal operation. The handset and base station were both tested separately, the data for both is enclosed in this report.

**4.3 Configuration & Peripherals:**

The 242C9 was placed on the table in the transmit mode with the same type of modulation that would normally be used during normal operation.

**SECTION 5. SUMMARY OF TEST RESULTS:****5.1 FCC PART 15.247, Subpart C****5.1.1 Summary of Tests:**

Section	Test Performed	Frequency Range (MHz)	Result
15.247 (a)(2)	Emission Bandwidth	902 to 928	Complied
15.247 (b)(1)	Peak Output Power	902 to 928	Complied
15.247 (C)	Antenna Conducted Spurious Emissions	30 to 10,000	Complied
15.247 (C)	Radiated Spurious Emissions	30 to 10,000	Complied
15.247 (d)	Power Spectral Density	902 to 928	Complied
15.247 (e)	Processing Gain	902 to 928	Complied
15.207	Line Conducted Emissions (Hot Lead to Ground)	0.45 to 30	Complied
15.207	Line Conducted Emissions (Neutral Lead to Ground)	0.45 to 30	Complied

**5.2 Result**

In the configuration tested, the EUT complied with the requirements of the specification.

**SECTION 6. MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS:****6.1 General Comments:**

This section contains the test results only. Details of the test methods used, etc., can be found in Appendix B of this report.

**6.2 Test Results****6.2.1 § 15.247 (a) (2)****Measurement Data Emission Bandwidth:**

A diagram of the test configuration is enclosed in Appendix A and a list of reference codes for test equipment used is enclosed in Appendix B.

Test equipment used: 1, 3 and 4.

**Handset**

Frequency (MHz)	Emission Bandwidth (MHz)
904.50	2.39
915.00	2.43
925.50	2.43

**Base Station**

Frequency (MHz)	Emission Bandwidth (MHz)
904.50	2.39
915.00	2.46
925.50	2.52

**RESULT**

In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots in Appendix C).

**6.2.2 § 15.247 (b) Peak Output Power:****Measurement Data:**

The maximum peak output power measured for this device was 44.7 mW or 16.5 dBm. Shown below is the measured peak output power. The maximum directional gain of the antenna is less than 6 dBi; therefore, the maximum output power is not required to be reduced from the value measured.

The maximum directional gain of the antenna's are shown below:

Handset - 0.5 dBi  
Base Station - 0.7 dBi

A diagram of the test configuration is enclosed in Appendix A and a list of reference codes for test equipment used is enclosed in Appendix B.

Test equipment used: 1, 3 and 4.

**Handset**

Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)
904.50	13.2	20.9
915.00	10.2	10.5
925.50	14.7	29.5

**Base Station**

Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)
904.50	15.4	34.7
915.00	15.7	37.2
925.50	16.5	44.7

**RESULT**

In the configuration tested, the EUT complied with the requirements of the specification (see spectrum analyzer plots in Appendix C).

**6.2.3 § 15.247 (c) Spurious Emissions:****Measurement Data Antenna Conducted Emissions:**

The frequency range from 30 MHz to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. Shown in Appendix C are plots with the 242C9 tuned to the upper and lower band edges. These demonstrate compliance with the provisions of this section.

A diagram of the test configuration is enclosed in Appendix A and a list of reference codes for test equipment used is enclosed in Appendix B.

Test equipment used: 1, 3 and 4.

**Handset**

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is  $13.2 - 20.0 = -6.8$  dBm.

Transmitting at 904.5 MHz			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
30 - 200	169.4	-69.6	-6.8
200 - 500	312.2	-69.9	-6.8
500 - 901.9	897.9	-48.5	-6.8
928.1 - 1000	929.3	-57.9	-6.8
1000 - 2000	1814.0	-58.7	-6.8
2000 - 3000	2716.0	-45.8	-6.8
3000 - 4000	3622.0	-51.1	-6.8
4000 - 5000	4526.1	-50.0	-6.8
5000 - 6000	5427.0	-66.5 *	-6.8
6000 - 7000	6331.5	-67.0 *	-6.8
7000 - 8000	7236.0	-67.4 *	-6.8
8000 - 9000	8140.5	-66.8 *	-6.8
9000 - 10000	9045.0	-66.9 *	-6.8
* Noise Floor			

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 10.2 - 20.0 = -9.8 dBm.

Transmitting at 915.0 MHz			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
30 - 200	169.1	-70.6	-9.8
200 - 500	263.9	-68.9	-9.8
500 - 901.9	901.7	-50.8	-9.8
928.1 - 1000	928.2	-46.4	-9.8
1000 - 2000	1830.0	-53.2	-9.8
2000 - 3000	2745.0	-45.4	-9.8
3000 - 4000	3660.0	-55.6	-9.8
4000 - 5000	4575.0	-53.8	-9.8
5000 - 6000	5490.0	-72.2 *	-9.8
6000 - 7000	6405.0	-67.0 *	-9.8
7000 - 8000	7320.0	-67.1 *	-9.8
8000 - 9000	8235.0	-67.3 *	-9.8
9000 - 10000	9150.0	-65.8 *	-9.8

\* Noise Floor

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 14.7 - 20.0 = -5.3 dBm.

Transmitting at 925.5 MHz			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
30 - 200	169.4	-70.4	-5.3
200 - 500	264.2	-69.3	-5.3
500 - 901.9	900.2	-56.0	-5.3
928.1 - 1000	928.9	-28.7	-5.3
1000 - 2000	1851.0	-60.3	-5.3
2000 - 3000	2776.5	-45.1	-5.3
3000 - 4000	3702.0	-66.7	-5.3
4000 - 5000	4627.5	-67.4	-5.3
5000 - 6000	5553.0	-72.9 *	-5.3
6000 - 7000	6478.5	-67.0 *	-5.3
7000 - 8000	7404.0	-67.4 *	-5.3
8000 - 9000	8329.5	-66.8 *	-5.3
9000 - 10000	9255.0	-66.9 *	-5.3

\* Noise Floor

**Base Station**

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 15.4 - 20.0 = -4.6 dBm.

Transmitting at 904.5 MHz			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
30 - 200	167.7	-72.0	-4.6
200 - 500	204.8	-72.5	-4.6
500 - 901.9	893.1	-56.6	-4.6
928.1 - 1000	929.2	-48.6	-4.6
1000 - 2000	1809.0	-61.4	-4.6
2000 - 3000	2713.5	-55.9	-4.6
3000 - 4000	3618.0	-56.0	-4.6
4000 - 5000	4522.5	-71.1	-4.6
5000 - 6000	5427.0	-66.5 *	-4.6
6000 - 7000	6331.5	-67.0 *	-4.6
7000 - 8000	7236.0	-67.4 *	-4.6
8000 - 9000	8140.5	-66.8 *	-4.6
9000 - 10000	9045.0	-66.9 *	-4.6

\* Noise Floor

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 15.7 - 20.0 = -4.3 dBm.

Transmitting at 915.0 MHz			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
30 - 200	94.9	-72.6	-4.3
200 - 500	213.2	-73.1	-4.3
500 - 901.9	901.9	-48.2	-4.3
928.1 - 1000	928.4	-47.3	-4.3
1000 - 2000	1830.0	-52.2	-4.3
2000 - 3000	2745.0	-54.7	-4.3
3000 - 4000	3660.0	-55.7	-4.3
4000 - 5000	4575.0	-72.6 *	-4.3
5000 - 6000	5490.0	-72.2 *	-4.3
6000 - 7000	6405.0	-67.0 *	-4.3
7000 - 8000	7320.0	-67.1 *	-4.3
8000 - 9000	8235.0	-67.3 *	-4.3
9000 - 10000	9150.0	-65.8 *	-4.3

\* Noise Floor

The emissions must be attenuated 20 dB below the highest power level measured; therefore, the criteria is 16.5 - 20.0 = -3.5 dBm.

Transmitting at 925.5 MHz			
Frequency Range MHz	Frequency MHz	Corrected Level dBm	Criteria dBm
30 - 200	94.9	-70.8	-3.5
200 - 500	338.0	-73.4	-3.5
500 - 901.9	900.8	-50.8	-3.5
928.1 - 1000	928.9	-30.7	-3.5
1000 - 2000	1851.0	-61.5	-3.5
2000 - 3000	2776.5	-43.8	-3.5
3000 - 4000	3702.0	-55.6	-3.5
4000 - 5000	4627.5	-72.1 *	-3.5
5000 - 6000	5553.0	-72.9 *	-3.5
6000 - 7000	6478.5	-67.0 *	-3.5
7000 - 8000	7404.0	-67.4 *	-3.5
8000 - 9000	8329.5	-66.8 *	-3.5
9000 - 10000	9255.0	-66.9 *	-3.5

\* Noise Floor

**Measurement Data Radiated Emissions Restricted Bands § 15.205:**

The frequency range from 30 MHz to 10 GHz was investigated to measure any radiated emissions in the restricted bands.

A diagram of the test configuration is enclosed in Appendix A and a list of reference codes for test equipment used is enclosed in Appendix B.

Test equipment used: 1, 3, 4, 7, 8, 9 and 12.

**AVERAGE FACTOR**

The pulse train in 100 msec consists of 49 pulses that are on for 1.02 msec each. Therefore, the total pulse period in 100 msec is 49.98 msec (49 x 1.02 msec).

The average factor for the 242C9 is -6.0 dB. This factor is derived using the following formula:

$$20 \log \frac{49.98 \text{ msec}}{100 \text{ msec}} = 20 \log 0.4998 = -6.0 \text{ dB}$$

See Appendix C for the pulse trains that were used to compute this average factor.

It was not possible to place the 242C9 in continuous transmit mode; therefore, the average factor was not subtracted from the average readings.

**Vertical Polarity**  
**Handset**

Transmitting at 904.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2713.5 P	20.0	36.8	-6.0	50.8	74.0
2713.5 A	7.8	36.8	0.0	44.6	54.0
3618.0 P	15.2	39.9	-6.0	49.1	74.0
3618.0 A	1.7	39.9	0.0	41.6	54.0
4522.5 P	23.0	41.4	-6.0	58.4	74.0
4522.5 A	6.4	41.4	0.0	47.8	54.0
5427.0 P	11.2 *	45.5	-6.0	50.7	74.0
5427.0 A	-0.8 *	45.5	0.0	44.7	54.0
8140.5 P	13.4 *	40.5	-6.0	47.9	74.0
8140.5 A	2.3 *	40.5	0.0	42.8	54.0
9045.0 P	12.6 *	42.1	-6.0	48.7	74.0
9045.0 A	3.7 *	42.1	0.0	45.8	54.0

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 915.0 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2745.0 P	24.0	36.8	-6.0	54.8	74.0
2745.0 A	9.5	36.8	0.0	46.3	54.0
3660.0 P	12.4	39.9	-6.0	46.3	74.0
3660.0 A	-0.8	39.9	0.0	39.1	54.0
4575.0 P	17.1	41.4	-6.0	52.5	74.0
4575.0 A	3.7	41.4	0.0	45.1	54.0
7320.0 P	11.2 *	38.9	-6.0	44.1	74.0
7320.0 A	1.6 *	38.9	0.0	40.5	54.0
8235.0 P	13.4 *	40.8	-6.0	48.2	74.0
8235.0 A	1.8 *	40.8	0.0	42.6	54.0
9150.0 P	12.6 *	42.4	-6.0	49.0	74.0
9150.0 A	2.9 *	42.4	0.0	45.3	54.0

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 925.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2776.5 P	21.7	36.8	-6.0	52.5	74.0
2776.5 A	11.2	36.8	0.0	48.0	54.0
3702.0 P	14.7	39.9	-6.0	48.6	74.0
3702.0 A	2.9	39.9	0.0	42.8	54.0
4627.5 P	10.0	41.4	-6.0	45.1	74.0
4627.5 A	-2.0	41.4	0.0	39.4	54.0
7404.0 P	11.2 *	38.9	-6.0	44.1	74.0
7404.0 A	1.6 *	38.9	0.0	40.5	54.0
8329.5 P	13.4 *	40.8	-6.0	48.2	74.0
8329.5 A	1.8 *	40.8	0.0	42.6	54.0

P = Peak Detection

A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

**Horizontal Polarity**  
**Handset**

Transmitting at 904.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2713.5 P	18.2	36.8	-6.0	49.0	74.0
2713.5 A	5.2	36.8	0.0	42.0	54.0
3618.0 P	13.2	39.9	-6.0	47.1	74.0
3618.0 A	1.3	39.9	0.0	41.2	54.0
4522.5 P	18.0	41.4	-6.0	53.4	74.0
4522.5 A	5.4	41.4	0.0	46.8	54.0
5427.0 P	11.2 *	45.5	-6.0	50.7	74.0
5427.0 A	-0.8 *	45.5	0.0	44.7	54.0
8140.5 P	13.4 *	40.5	-6.0	47.9	74.0
8140.5 A	2.3 *	40.5	0.0	42.8	54.0
9045.0 P	12.6 *	42.1	-6.0	48.7	74.0
9045.0 A	3.7 *	42.1	0.0	45.8	54.0

P = Peak Detection  
A = Average Detection  
\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 915.0 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2745.0 P	18.0	36.8	-6.0	48.8	74.0
2745.0 A	9.5	36.8	0.0	46.3	54.0
3660.0 P	13.4	39.9	-6.0	47.3	74.0
3660.0 A	-0.7	39.9	0.0	39.2	54.0
4575.0 P	17.5	41.4	-6.0	52.9	74.0
4575.0 A	1.7	41.4	0.0	43.1	54.0
7320.0 P	11.2 *	38.9	-6.0	44.1	74.0
7320.0 A	1.6 *	38.9	0.0	40.5	54.0
8235.0 P	13.4 *	40.8	-6.0	48.2	74.0
8235.0 A	1.8 *	40.8	0.0	42.6	54.0
9150.0 P	12.6 *	42.4	-6.0	49.0	74.0
9150.0 A	2.9 *	42.4	0.0	45.3	54.0

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 925.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2776.5 P	25.1	36.8	-6.0	55.9	74.0
2776.5 A	12.5	36.8	0.0	49.3	54.0
3702.0 P	13.2	39.9	-6.0	47.1	74.0
3702.0 A	2.1	39.9	0.0	42.0	54.0
4627.5 P	18.0	41.4	-6.0	53.4	74.0
4627.5 A	-2.3	41.4	0.0	39.1	54.0
7404.0 P	11.2 *	38.9	-6.0	44.1	74.0
7404.0 A	1.6 *	38.9	0.0	40.5	54.0
8329.5 P	13.4 *	40.8	-6.0	48.2	74.0
8329.5 A	1.8 *	40.8	0.0	42.6	54.0

P = Peak Detection

A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

**Vertical Polarity**  
**Base Station**

Transmitting at 904.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2713.5 P	20.0	36.8	-6.0	50.8	74.0
2713.5 A	6.8	36.8	0.0	43.6	54.0
3618.0 P	12.4	39.9	-6.0	46.3	74.0
3618.0 A	1.9	39.9	0.0	41.8	54.0
4522.5 P	13.9	41.4	-6.0	49.3	74.0
4522.5 A	1.1	41.4	0.0	42.5	54.0
5427.0 P	11.2 *	45.5	-6.0	50.7	74.0
5427.0 A	-0.8 *	45.5	0.0	44.7	54.0
8140.5 P	13.4 *	40.5	-6.0	47.9	74.0
8140.5 A	2.3 *	40.5	0.0	42.8	54.0
9045.0 P	12.6 *	42.1	-6.0	48.7	74.0
9045.0 A	3.7 *	42.1	0.0	45.8	54.0

P = Peak Detection  
A = Average Detection  
\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 915.0 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2745.0 P	21.8	36.8	-6.0	52.6	74.0
2745.0 A	7.6	36.8	0.0	44.4	54.0
3660.0 P	11.5	39.9	-6.0	45.4	74.0
3660.0 A	-0.5	39.9	0.0	39.4	54.0
4575.0 P	12.8	41.4	-6.0	48.2	74.0
4575.0 A	-1.8	41.4	0.0	39.6	54.0
7320.0 P	11.2 *	38.9	-6.0	44.1	74.0
7320.0 A	1.6 *	38.9	0.0	40.5	54.0
8235.0 P	13.4 *	40.8	-6.0	48.2	74.0
8235.0 A	1.8 *	40.8	0.0	42.6	54.0
9150.0 P	12.6 *	42.4	-6.0	49.0	74.0
9150.0 A	2.9 *	42.4	0.0	45.3	54.0

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 925.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2776.5 P	19.8	36.8	-6.0	50.6	74.0
2776.5 A	9.6	36.8	0.0	46.4	54.0
3702.0 P	16.9	39.9	-6.0	50.8	74.0
3702.0 A	3.6	39.9	0.0	43.5	54.0
4627.5 P	9.9	41.4	-6.0	45.3	74.0
4627.5 A	-2.8	41.4	0.0	38.6	54.0
7404.0 P	11.2 *	38.9	-6.0	44.1	74.0
7404.0 A	1.6 *	38.9	0.0	40.5	54.0
8329.5 P	13.4 *	40.8	-6.0	48.2	74.0
8329.5 A	1.8 *	40.8	0.0	42.6	54.0

P = Peak Detection

A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

**Horizontal Polarity**  
**Base Station**

Transmitting at 904.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2713.5 P	18.8	36.8	-6.0	49.6	74.0
2713.5 A	7.8	36.8	0.0	44.6	54.0
3618.0 P	13.0	39.9	-6.0	46.9	74.0
3618.0 A	1.2	39.9	0.0	41.1	54.0
4522.5 P	13.3	41.4	-6.0	48.7	74.0
4522.5 A	0.2	41.4	0.0	41.6	54.0
5427.0 P	11.2 *	45.5	-6.0	50.7	74.0
5427.0 A	-0.8 *	45.5	0.0	44.7	54.0
8140.5 P	13.4 *	40.5	-6.0	47.9	74.0
8140.5 A	2.3 *	40.5	0.0	42.8	54.0
9045.0 P	12.6 *	42.1	-6.0	48.7	74.0
9045.0 A	3.7 *	42.1	0.0	45.8	54.0

P = Peak Detection  
A = Average Detection  
\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 915.0 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2745.0 P	18.5	36.8	-6.0	49.3	74.0
2745.0 A	9.5	36.8	0.0	46.3	54.0
3660.0 P	11.3	39.9	-6.0	45.2	74.0
3660.0 A	-1.3	39.9	0.0	38.6	54.0
4575.0 P	11.6	41.4	-6.0	47.0	74.0
4575.0 A	-1.8	41.4	0.0	39.6	54.0
7320.0 P	11.2 *	38.9	-6.0	44.1	74.0
7320.0 A	1.6 *	38.9	0.0	40.5	54.0
8235.0 P	13.4 *	40.8	-6.0	48.2	74.0
8235.0 A	1.8 *	40.8	0.0	42.6	54.0
9150.0 P	12.6 *	42.4	-6.0	49.0	74.0
9150.0 A	2.9 *	42.4	0.0	45.3	54.0

P = Peak Detection  
A = Average Detection

\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

Transmitting at 925.5 MHz					
Frequency MHz	Receiver Reading dB $\mu$ V	Correction Factor dB	Average Factor dB	Corrected Reading dB $\mu$ V/m	Limit dB $\mu$ V/m
2776.5 P	20.5	36.8	-6.0	51.3	74.0
2776.5 A	10.4	36.8	0.0	47.2	54.0
3702.0 P	21.1	39.9	-6.0	55.0	74.0
3702.0 A	5.7	39.9	0.0	45.6	54.0
4627.5 P	9.8	41.4	-6.0	45.2	74.0
4627.5 A	-2.9	41.4	0.0	38.5	54.0
7404.0 P	11.2 *	38.9	-6.0	44.1	74.0
7404.0 A	1.6 *	38.9	0.0	40.5	54.0
8329.5 P	13.4 *	40.8	-6.0	48.2	74.0
8329.5 A	1.8 *	40.8	0.0	42.6	54.0

P = Peak Detection  
A = Average Detection  
\* No emissions were detected with the antenna 1 meter from the EUT, the indicated readings are the noise floor measurements from the spectrum analyzer

#### Sample Field Strength Calculation:

The field strength is calculated by adding the Correction Factor (Antenna Factor + Cable Factor), to the measured level from the receiver. The basic equation with a sample calculation is shown below:

FS = RA + CF - AF Where

FS = Field Strength

RA = Receiver Amplitude (Receiver Reading - Amplifier Gain)

CF = Correction Factor (Antenna Factor + Cable Factor)

AF = Average Factor

#### **RESULT**

In the configuration tested, the EUT complied with the requirements of the specification.

**6.2.4 § 15.247 (d) Power Spectral Density:****Measurement Data:**

The maximum power spectral density measured for this device was 4.4 dBm (Base Station). Shown below is the measured power spectral density.

A diagram of the test configuration is enclosed in Appendix A and a list of reference codes for test equipment used is enclosed in Appendix B.

Test equipment used: 1, 3 and 4.

**Handset**

Frequency (MHz)	Measured Power Spectral Density (dBm)
904.50	-0.2
915.00	-4.1
925.50	0.2

**Base Station**

Frequency (MHz)	Measured Power Spectral Density (dBm)
904.50	1.7
915.00	3.2
925.50	4.4

**RESULT**

In the configuration tested, the EUT complied with the requirements of the specification (see spectrum analyzer plots in Appendix C).

**6.2.5 § 15.247 (e) Processing Gain:**

The minimum processing gain measured for this device was 10 dB.

The 240 Series uses a LXT810B digital spread spectrum telephone transceiver chip manufactured by Level One. The same chip set is used in both the handset and base station. The processing gain was measured on the LXT810B by Level One, enclosed below are the processing gain measurements.

**Processing Gain Measurement:  
LXT810B**

**March 3, 1999**

**Summary**

This document describes how the processing gain was measured for the Level One LXT810B digital spread spectrum telephone transceiver. Included are specifications, test setup, and test results.

**Requirements**

According to the FCC requirement 15.247 for direct sequence spread spectrum systems, the minimum processing gain is 10 dB. The CW jamming method was used to determine the LXT810B processing gain. The processing gain was calculated using the following equation:

$$G_p = S/I + J/S + L_{sys} \text{ where:}$$

$G_p$  = Processing Gain

$S/I$  = Signal to noise required for a given error probability. In this case  $1 \times 10^{-4}$  was used.

$J/S$  = Jammer to signal ratio required to produce given error probability.

$L_{sys}$  = System loss to due non ideal performance. Maximum allowed by the FCC is 2.0 dB.

The  $S/I$  ratio was determined to be 11.0 dB according to Jakes "Microwave Mobile Communications". Page 229 indicates the relevant curve showing error probability Vs  $S/I$  for a non-coherent FM system with a peak deviation equal to .35 of the modulation frequency:

$$F_d = .35 F_s.$$

Given a minimum processing gain of 10 dB, the minimum allowable  $J/S$  ratio is -3.0 dB.

### Test Setup

The processing gain was measured using the test setup shown in Figure 1:

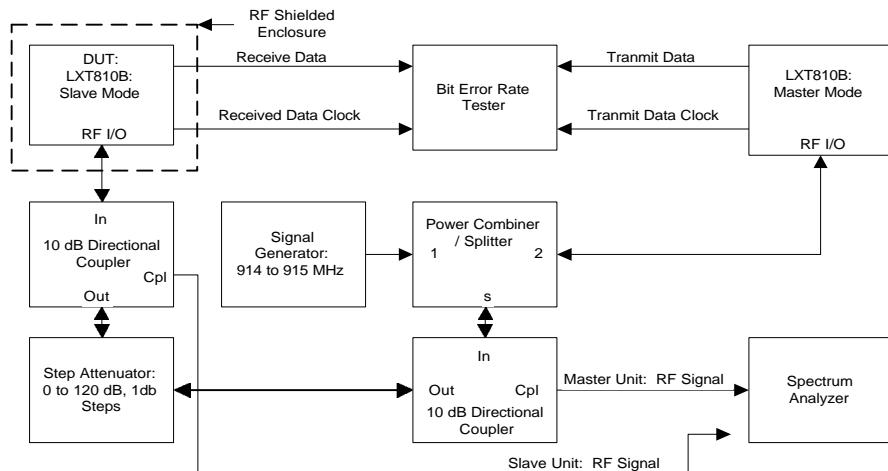


Figure 1: Processing Gain Test Setup

The following test equipment was used for this setup:

- LDB810 Demonstration system: Used LXT810B RFIC's.
- Hewlett Packard ESG D3000A Signal Generator
- Hewlett Packard HP8563E Spectrum Analyzer
- Hewlett Packard HP 8494A and HP 8496A Step Attenuators
- Mini Circuits ZFDC-10-5 10 dB Directional Coupler (2)
- Mini Circuits ZFSC-2-4 Power Combiner
- Ramsey STE-3000 Shielded Test Enclosure
- Telecommunication Techniques Corp. Firebird MC6000 Communication Analyzer (BER tester) with Lab Interface Card
- Semflex SMA cables

The LDB810 demonstration system was set up at the middle channel 915.0 MHz. The LXT810B base band 3dB bandwidth is less than 1.0 MHz; therefore, the signal generator was used to inject a C / W jammer from 914.0 MHz to 916.0 MHz in 50 kHz increments. The DUT received input power was set at -49.7 dBm. The jammer power was adjusted to achieve a bit error rate of  $1 \times 10^{-4}$  at each jammer frequency. The jammer power was recorded and the processing gain calculated for each jammer frequency from 914.0 MHz to 916.0 MHz.

## Test Results

The worse case processing gain was 10.0 dB for jamming frequencies of 914.40 MHz and 915.65 MHz. For all other jamming frequencies, the processing gain was greater than 10.0 dB. All of the measured test data is recorded in Figure 2:

Channel Frequency =	915.00 MHz		
Bit Error Rate =	<u>1.00E-04</u>		
Required S/N for BER =	<u>11.0</u> dB		
System Losses =	<u>2.0</u> dB		
Signal Strength at Receiver =	<u>-49.7</u> dBm		
Jammer Frequency (MHz)	Jammer Power (dBm)	Jammer to Signal Ratio J / S (dB)	Processing Gain (dB)
914.00	-40.7	9.0	22.0
914.05	-42.4	7.3	20.3
914.10	-44.7	5.0	18.0
914.15	-48.7	1.0	14.0
914.20	-49.2	0.5	13.5
914.25	-49.4	0.3	13.3
914.30	-50.9	-1.2	11.8
914.35	-50.9	-1.2	11.8
914.40	-52.7	-3.0	10.0
914.45	-51.4	-1.7	11.3
914.50	-51.7	-2.0	11.0
914.55	-50.9	-1.2	11.8
914.60	-50.6	-0.9	12.1
914.65	-50.4	-0.7	12.3
914.70	-50.1	-0.4	12.6
914.75	-50.4	-0.7	12.3
914.80	-49.4	0.3	13.3
914.85	-50.6	-0.9	12.1
914.90	-50.1	-0.4	12.6
914.95	-50.6	-0.9	12.1
915.00	-50.7	-1.0	12.0
915.05	-51.4	-1.7	11.3
915.10	-50.1	-0.4	12.6
915.15	-50.4	-0.7	12.3
915.20	-49.7	0.0	13.0

915.25	-50.4	-0.7	12.3
915.30	-50.4	-0.7	12.3
915.35	-50.6	-0.9	12.1
915.40	-50.9	-1.2	11.8
915.45	-50.9	-1.2	11.8
915.50	-51.6	-1.9	11.1
915.55	-51.6	-1.9	11.1
915.60	-51.7	-2.0	11.0
915.65	-52.6	-2.9	10.1
915.70	-52.4	-2.7	10.3
915.75	-50.7	-1.0	12.0
915.80	-49.7	0.0	13.0
915.85	-49.1	0.6	13.6
915.90	-45.9	3.8	16.8
915.95	-43.6	6.1	19.1
916.00	-41.6	8.1	21.1

Figure 2: Processing Gain Measurements

The processing gain Vs jammer frequency is shown in Figure 3:

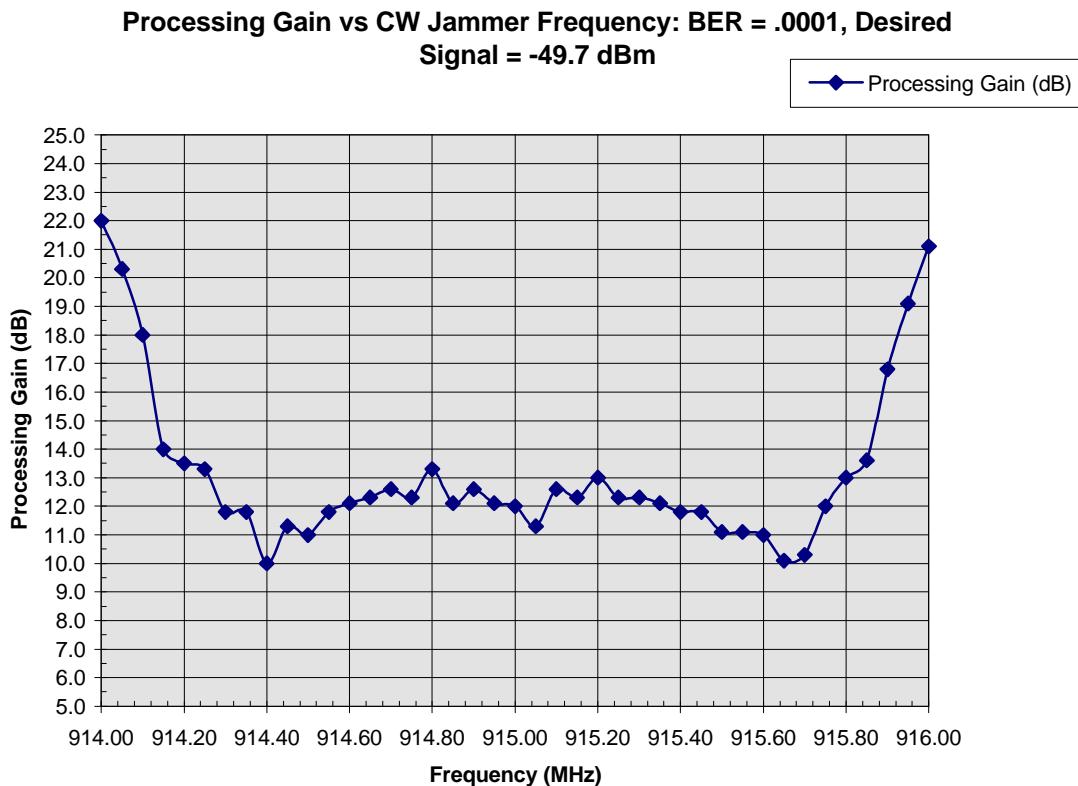


Figure 3: Processing Gain Vs Jammer Frequency

### Conclusions

The LXT810B meets the 10.0 dB requirement for processing gain. The worse case processing gain of 10 dB was only seen at 914.40 MHz and 915.65 MHz. The FCC allows the worst 20% of the data to be ignored.

### 6.2.6 § 15.207 Line Conducted Emissions:

The frequency range from 450 kHz to 30 MHz was investigated to measure any AC line conducted emissions.

A diagram of the test configuration is enclosed in Appendix A and a list of reference codes for test equipment used is enclosed in Appendix B.

Test equipment used: 1, 3, 4 and 13.

Exhibit 6

The handset operates via batteries; therefore, the line conducted emissions testing was performed with the handset in the charger in the transmit mode.

**Line Conducted Data - (Hot Lead) Handset**

Frequency MHz	Detector	Measured Level dB $\mu$ V	Limit dB $\mu$ V
0.52	Peak	34.6	48.0
1.06	Peak	32.0	48.0
1.24	Peak	34.7	48.0
1.53	Peak	32.3	48.0
1.73	Peak	29.7	48.0

**Line Conducted Data - (Neutral Lead) Handset**

Frequency MHz	Detector	Measured Level dB $\mu$ V	Limit dB $\mu$ V
0.89	Peak	25.6	48.0
1.38	Peak	23.4	48.0

Line Conducted Data - (Hot Lead) Base Station

Frequency MHz	Detector	Measured Level dB $\mu$ V	Limit dB $\mu$ V
0.48	Peak	36.2	48.0
1.00	Peak	33.1	48.0
1.26	Peak	34.9	48.0
1.50	Peak	33.5	48.0
1.70	Peak	29.8	48.0
1.98	Peak	28.4	48.0

Line Conducted Data - (Neutral Lead) Base Station

Frequency MHz	Detector	Measured Level dB $\mu$ V	Limit dB $\mu$ V
0.48	Peak	32.8	48.0
0.97	Peak	25.9	48.0
1.53	Peak	25.5	48.0

**APPENDIX A. TEST EQUIPMENT USED:**

Reference No.	Type	Manufacturer	Model
1	Anechoic Chamber	EMC Test Systems	N/A
2	Wanship Open Area Test Site	CCL	N/A
3	Spectrum Analyzer	Hewlett Packard	8568B or 8566B
4	Quasi-Peak Detector	Hewlett Packard	8565A
5	Biconical Antenna	EMCO	3108 or 3104P
6	Log-Periodic Antenna	EMCO	3146
7	Biconilog Antenna	EMCO	3142
8	Double Ridged Guide Antenna	EMCO	3115
9	Pre-Amplifier	Hewlett Packard	8447D
10	Power Amplifier	Hewlett Packard	8447E
11	Power Amplifier	Hewlett Packard	8449A
12	Power Amplifier	Hewlett Packard	8449B
13	LISN Anechoic Chamber	EMCO	3825/2
14	LISN Wanship	EMCO	3725

An independent calibration laboratory following outlined calibration procedures calibrates all the equipment listed above every 12 months.

**APPENDIX B. TEST PROCEDURES:****Line Conducted Emissions:**

The line-conducted emission from the digital apparatus was measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 450 kHz to 30 MHz frequency ranges.

The line conducted emissions measurements are performed in a screen room using a (50  $\Omega$ /50  $\mu$ H) Line Impedance Stabilization Network (LISN).


Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of digital apparatus with each digital apparatus having its own power cord, the point of connection for the LISN is determined from the following rules:

- a) Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- b) Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- c) Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.

Desktop digital apparatus are placed on a non-conducting table at least 80 cm from the metallic floor. The equipment is placed a minimum of 40 cm from all walls. Floor standing equipment is placed directly on the earth grounded floor.

## Line Conducted Emissions Test

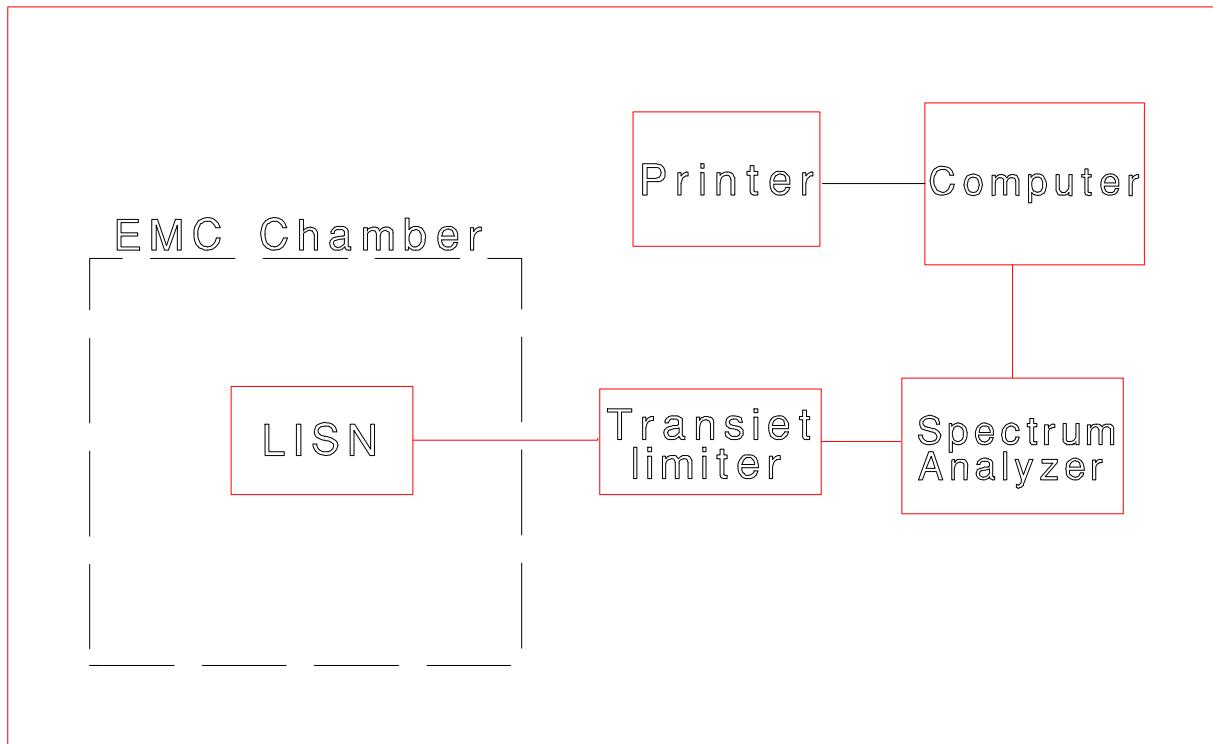

### Radiated Spurious Emissions:

The radiated emission from the transmitter was measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings. A preamplifier with a fixed gain of 30 dB was used to increase the sensitivity of the measuring instrumentation.


A Biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range 1 GHz to 10 GHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.

The configuration of the transmitter was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.4 via the interconnecting cables listed in Section 2.5. These interconnecting cable were

manipulated manually by a technician to obtain worst case radiated emissions. The digital apparatus was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.

Transmitters are measured on a non-conducting table one-meter above the ground plane. The table is placed on a turntable which is level with the ground plane. The turntable has slip rings, which supply AC power to the digital apparatus. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

### R a d i a t e d   E m i s s i o n s   T e s t

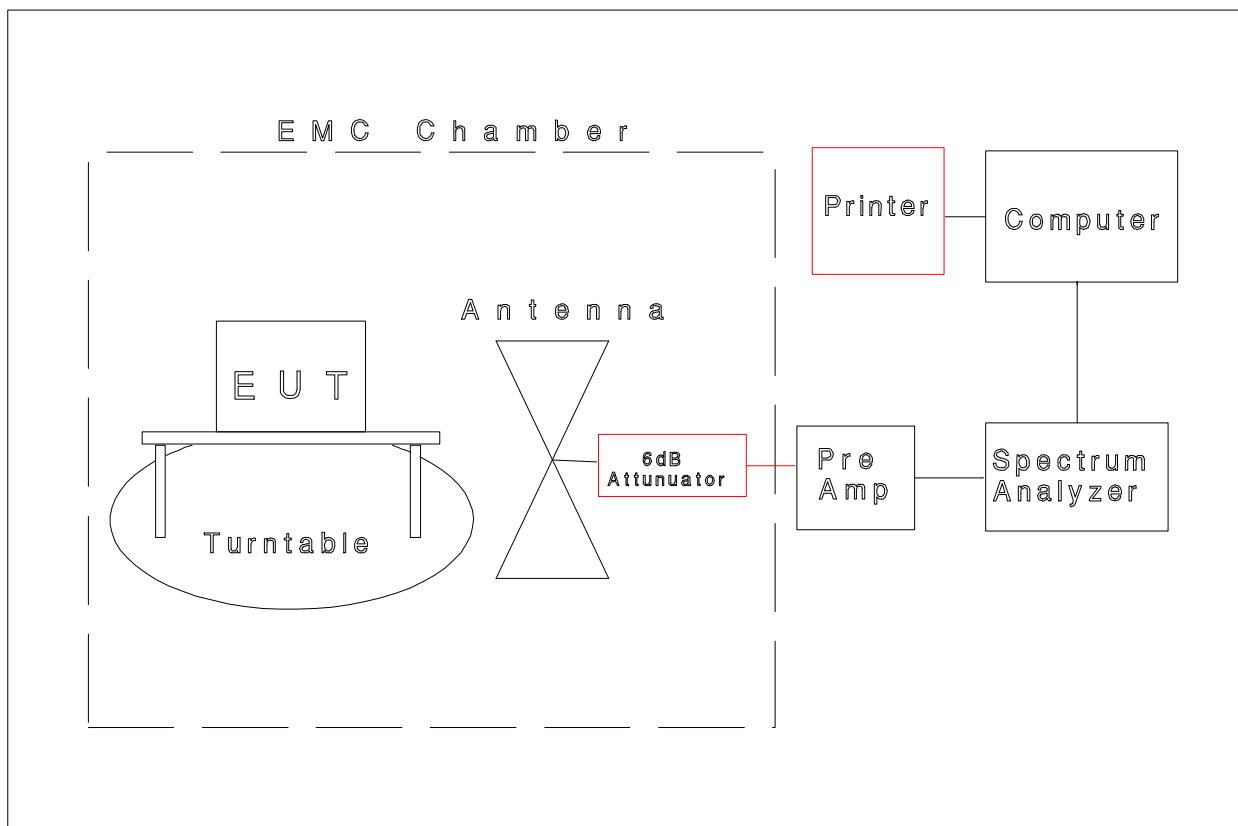

**FCC Sections 15.247 Peak Transmit Power, Emission Bandwidth and Spurious Emissions (antenna conducted)**

The EUT was directly connected to the spectrum analyzer via the antenna output port as shown in the block diagram below.

The measurements were performed on three channels, as per 47 CFR 15.31(m), one near the bottom of the spectrum, one near the middle of the spectrum and one near the top of the spectrum.

The spectrum analyzer's resolution bandwidth and video bandwidth were set as follows:

**Peak Transmit Power**

RBW = 3 MHz

VBW = 3 MHz

**Emission Bandwidth**

RBW = 3 kHz

VBW = 10 kHz

**Spurious Emissions (Antenna Conducted)**

RBW = 100 kHz - 30 MHz to 1000 MHz

VBW = 300 kHz

**Peak Detection**


RBW = 1 MHz - 1 GHz to 10 GHz


VBW = 3 MHz

**Average Detection**


RBW = 1 MHz - 1 GHz to 10 GHz


VBW = 10 Hz

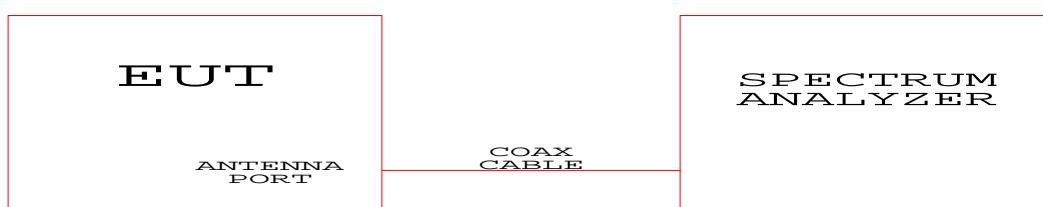
**Test Configuration Block Diagram**

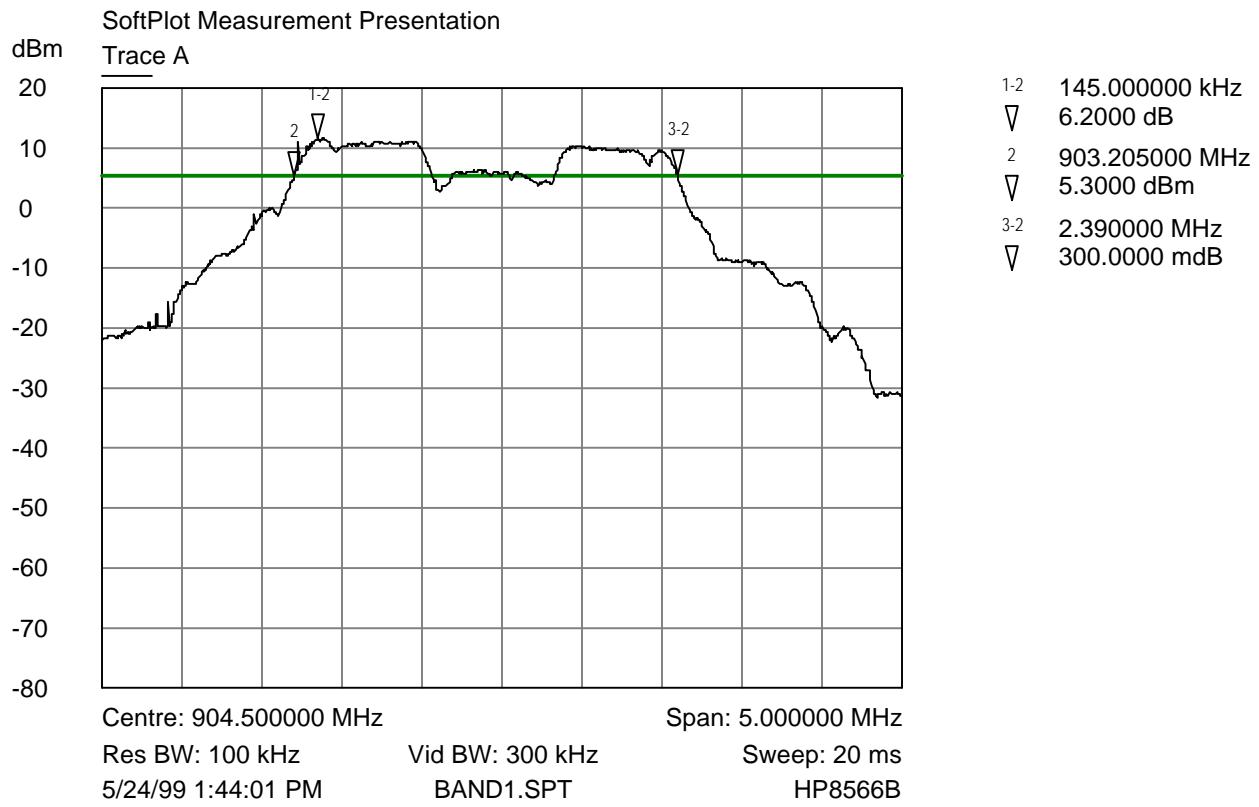
**APPENDIX C. SPECTRUM ANALYZER PLOTS:**

Emission Bandwidth Plot - Handset (Low Channel)

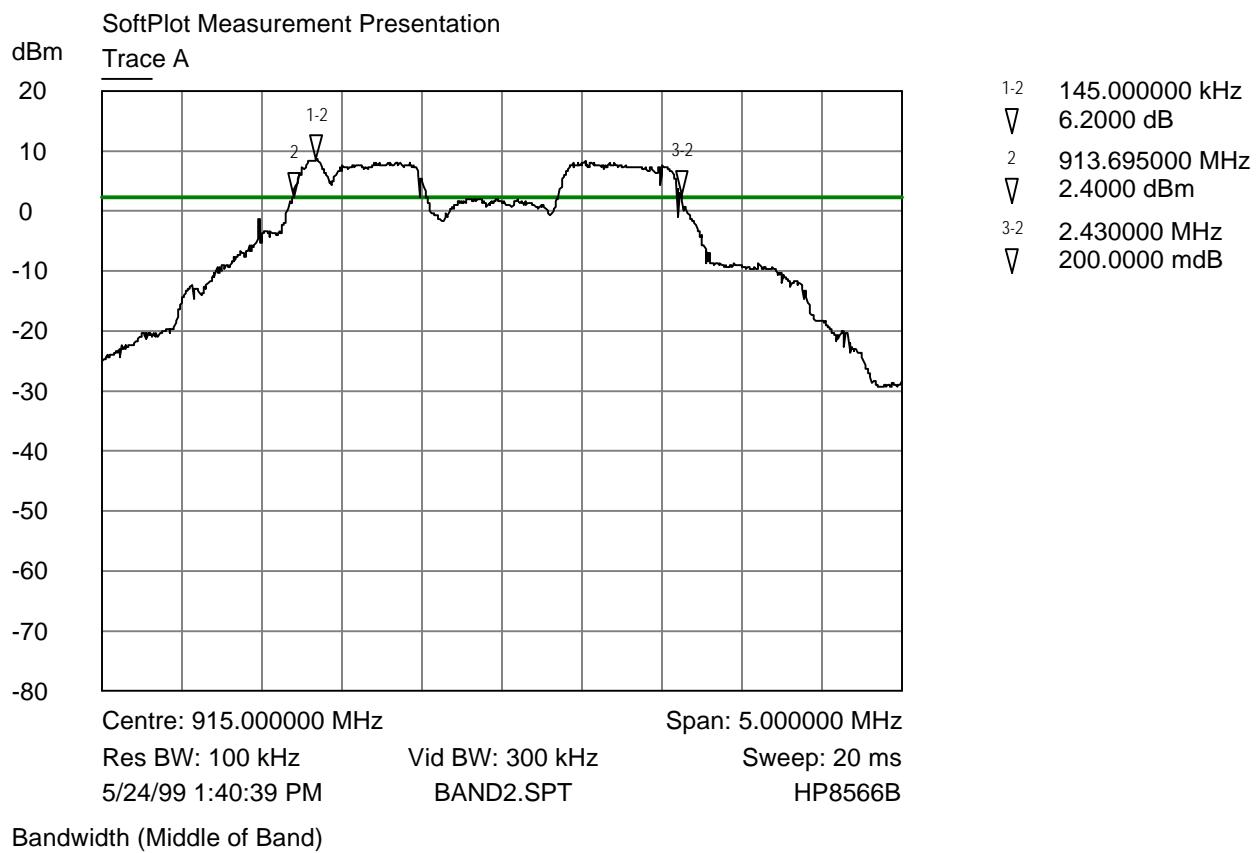


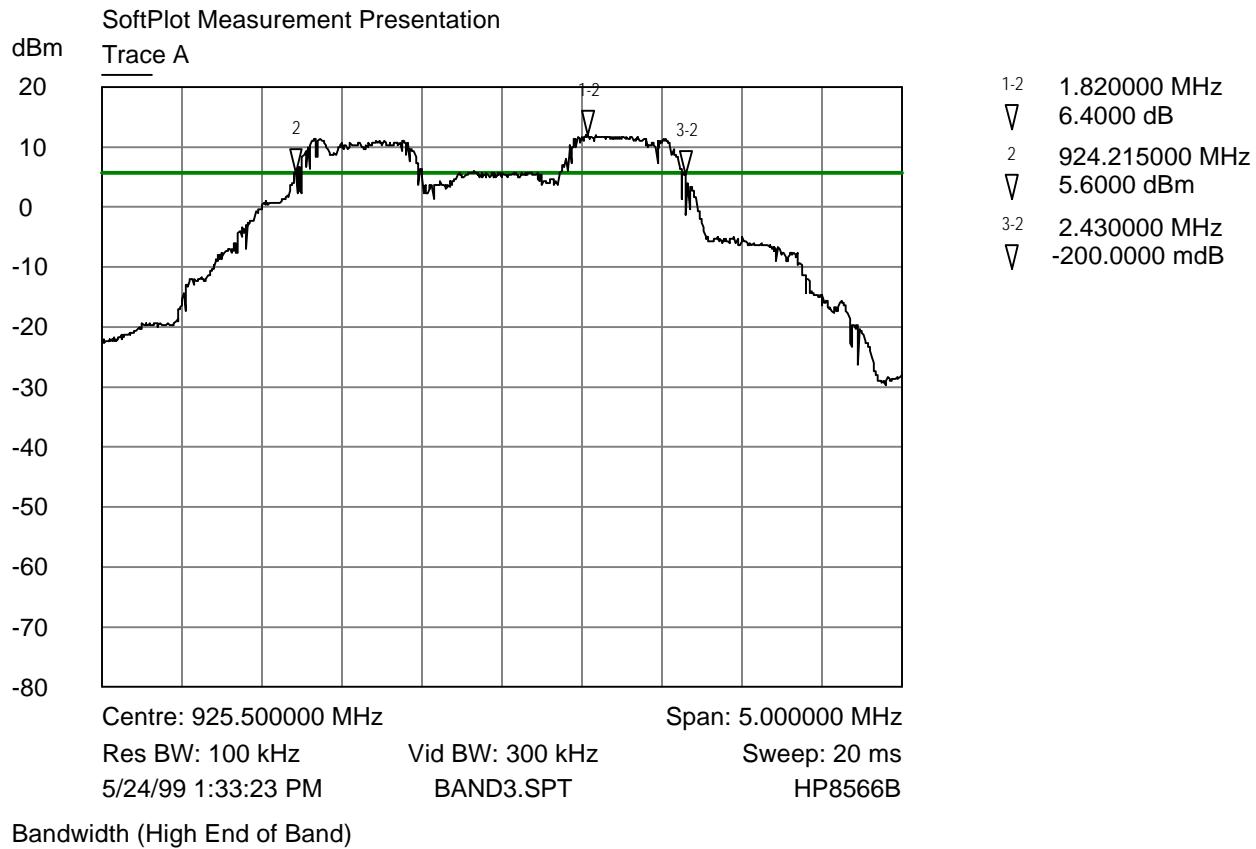

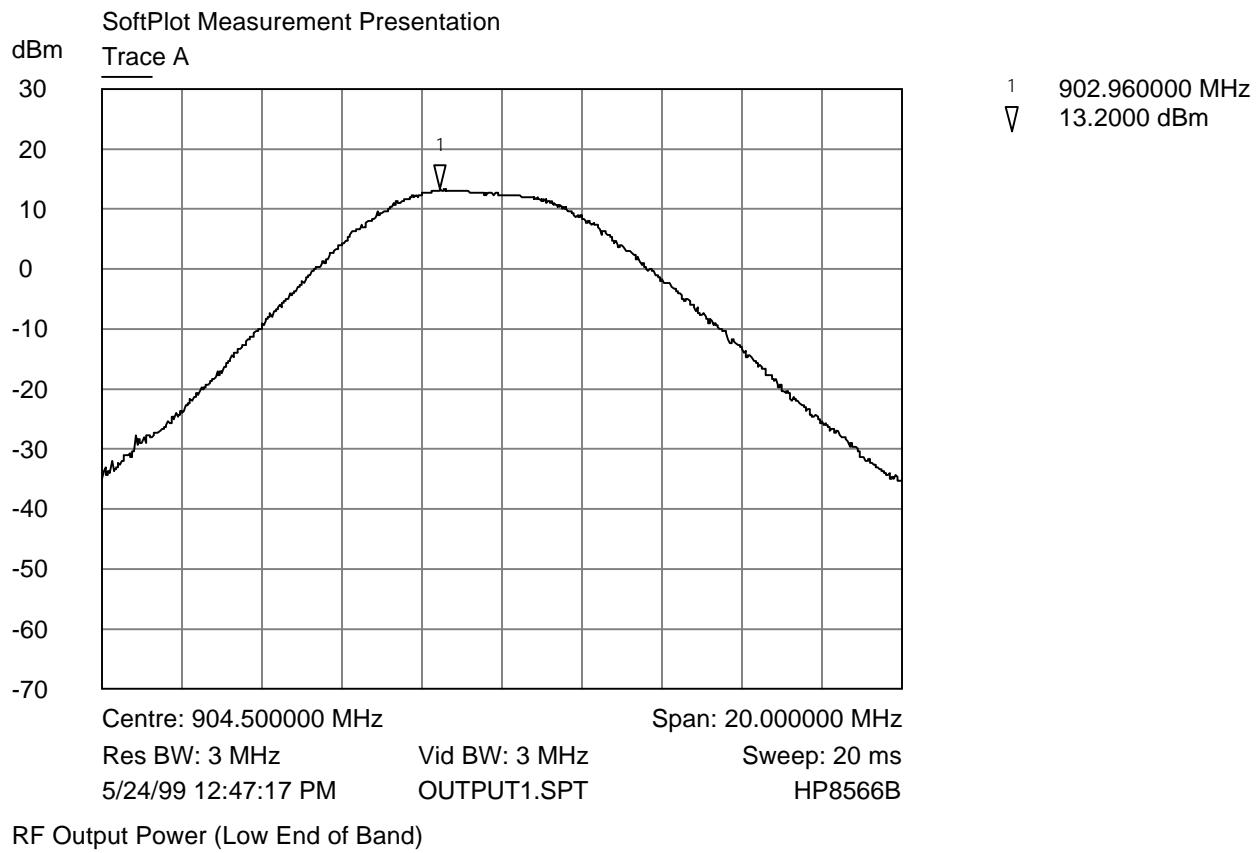


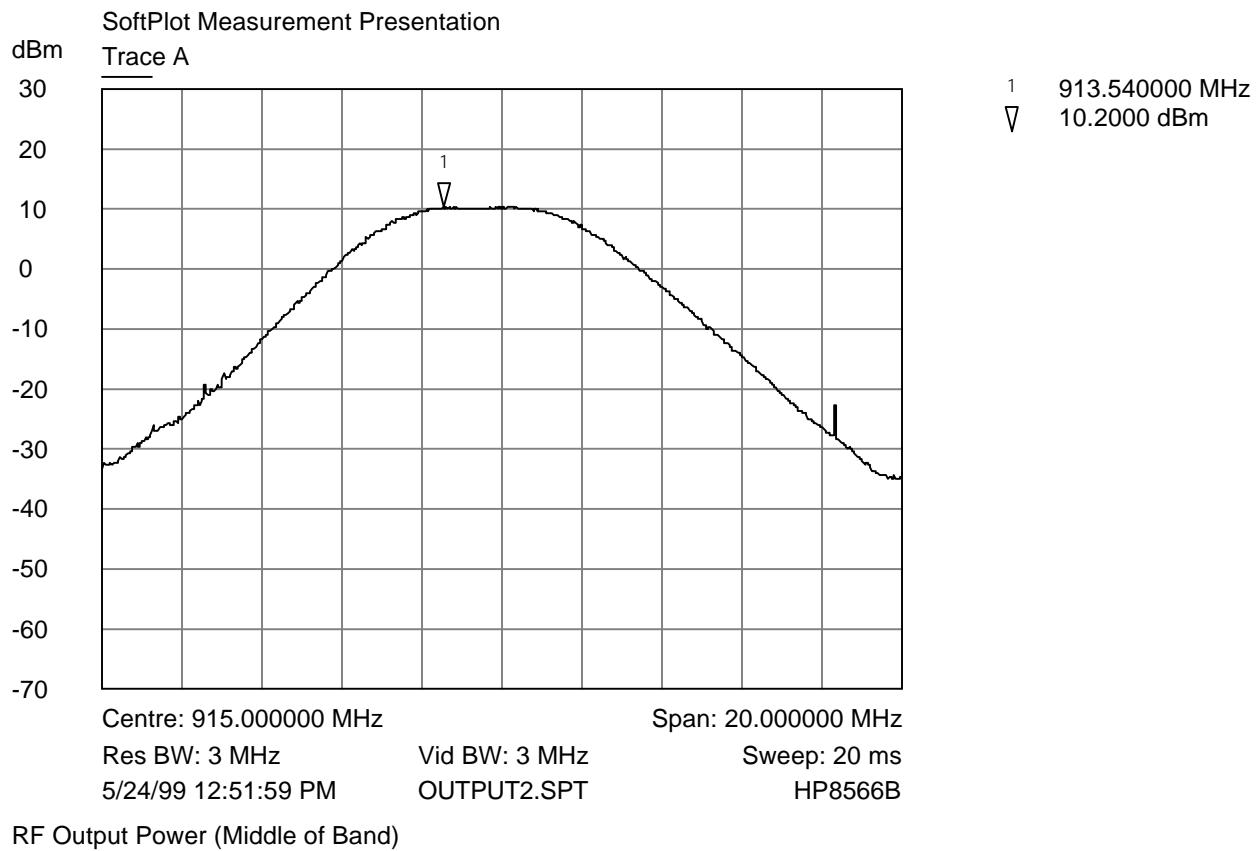


Power Output Plot - Handset (Middle Channel)

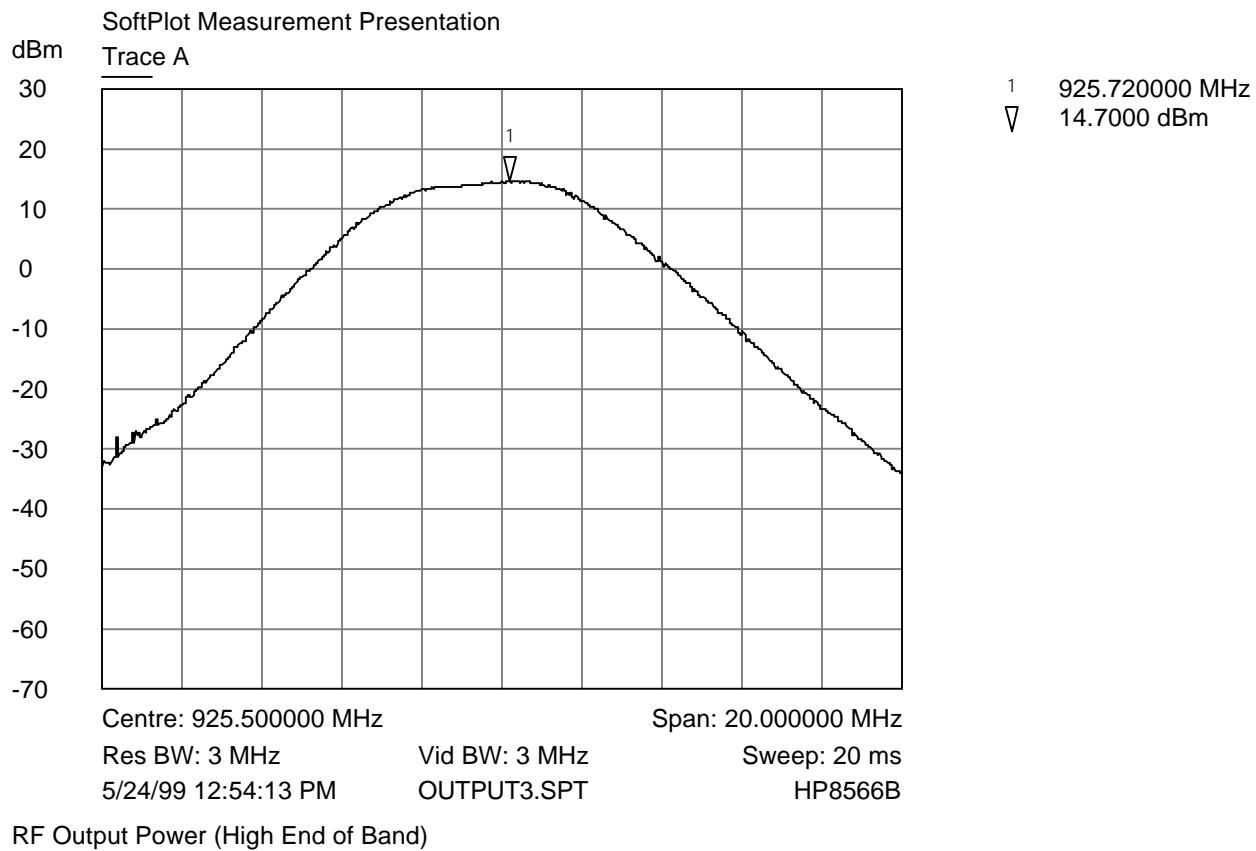


Power Output Plot - Handset (High Channel)

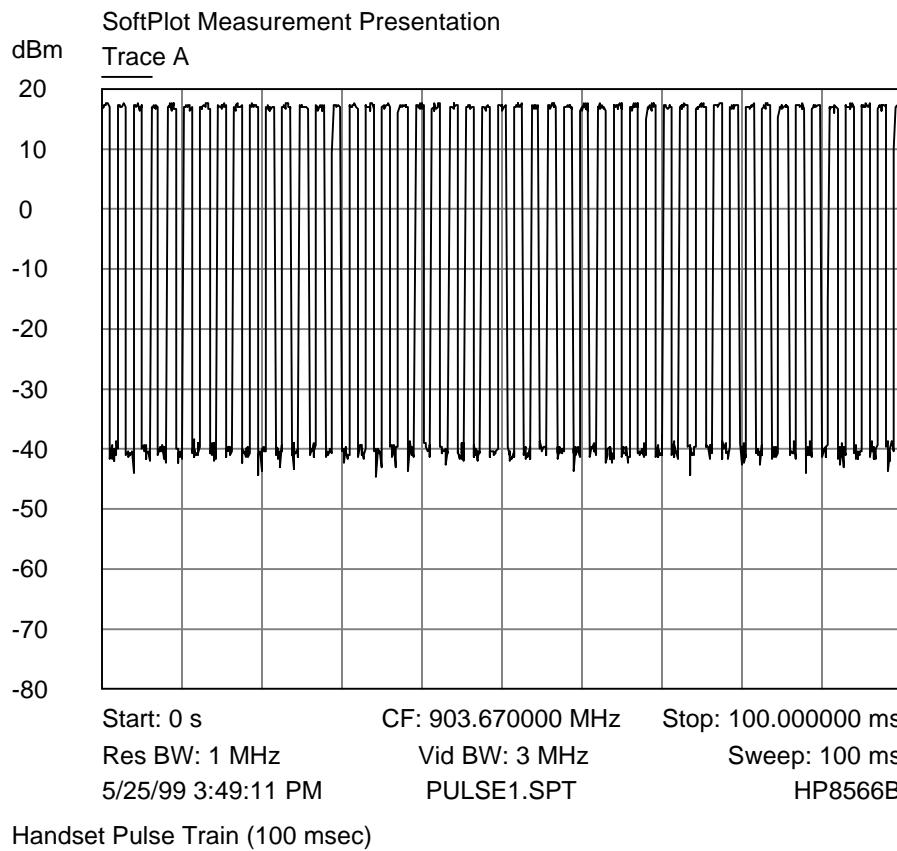


Pulse Train Plot (100 msec)

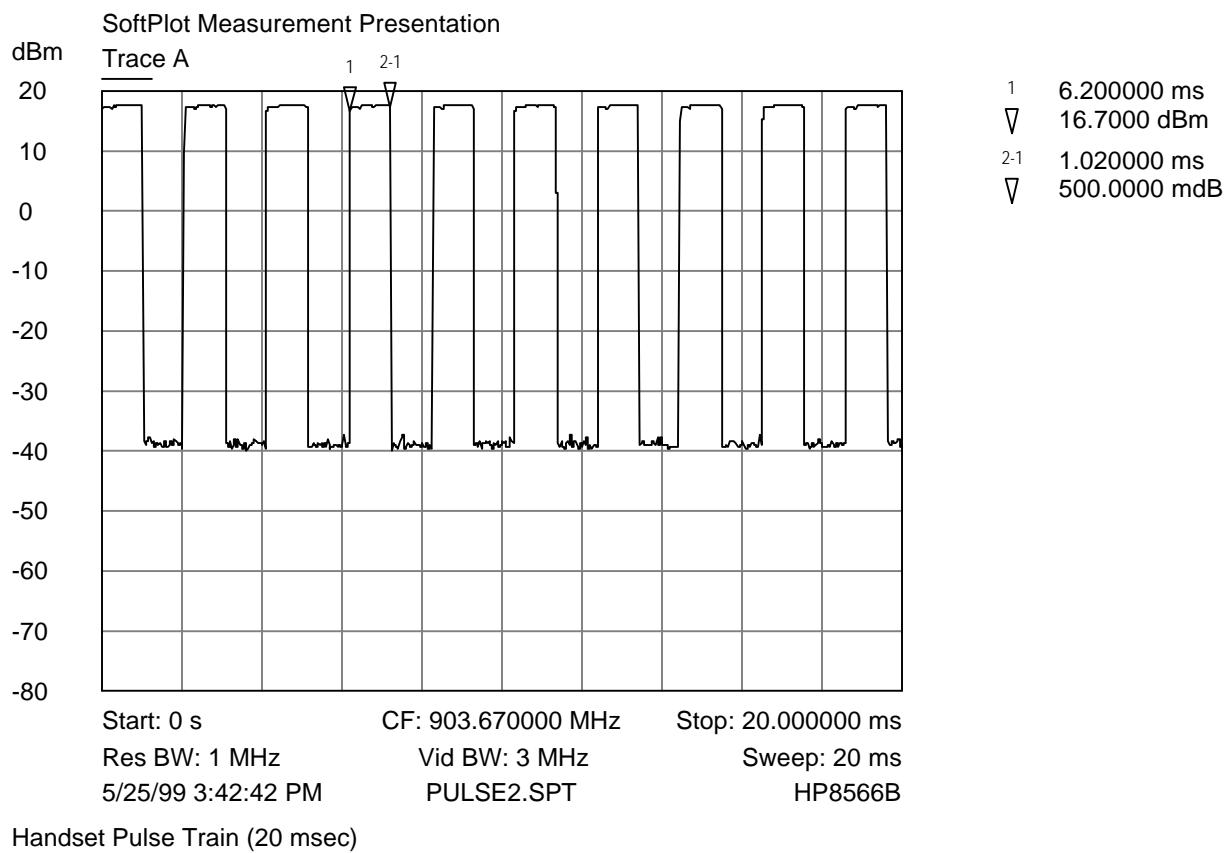


Pulse Train Plot (20 msec)

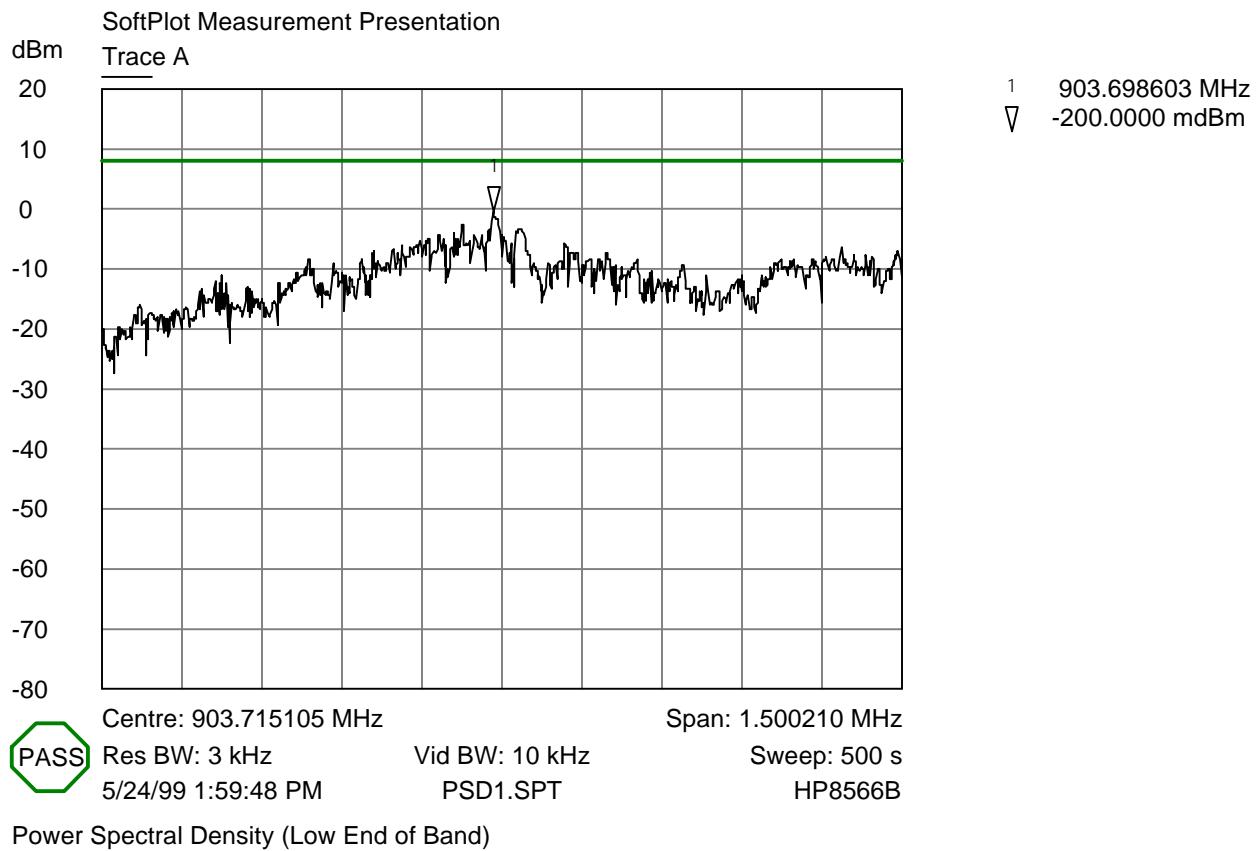


Power Spectral Density Plot - Handset (Low Channel)

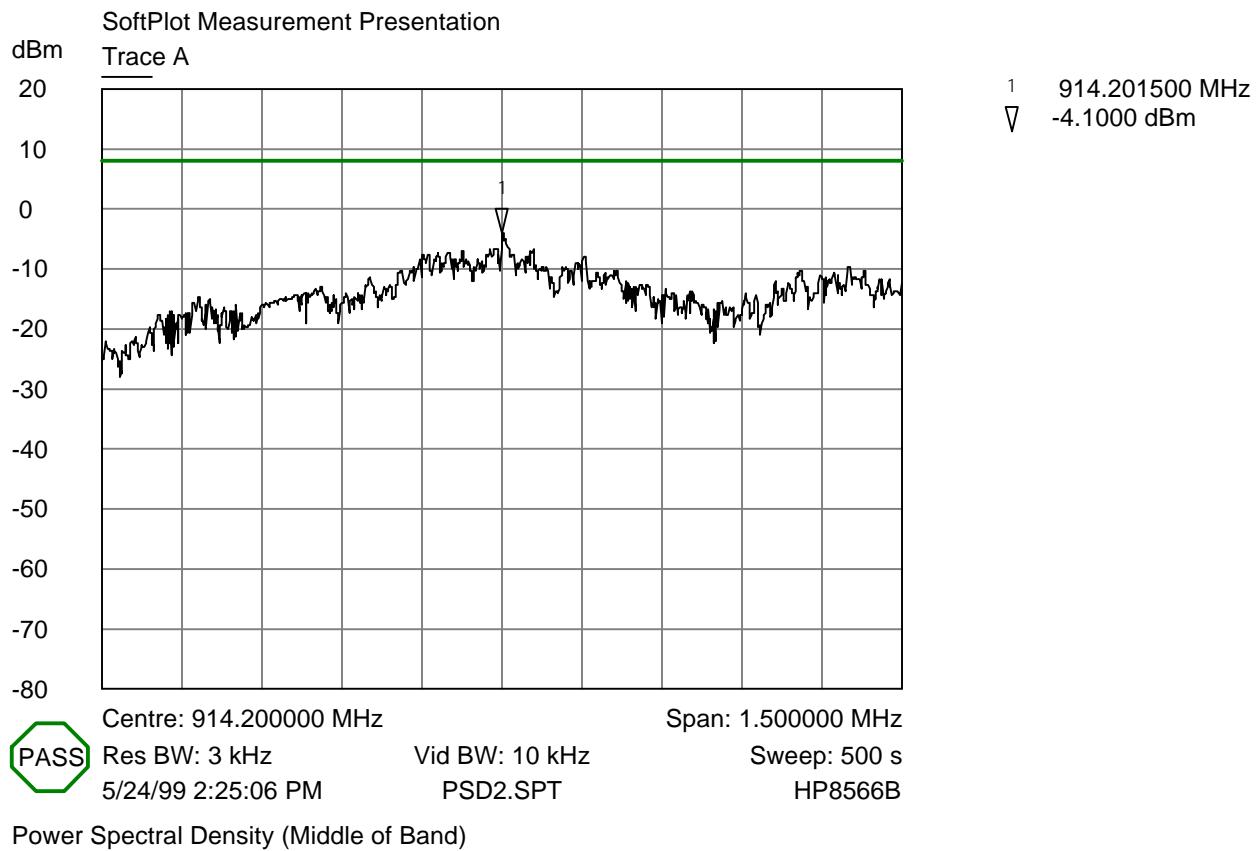


Power Spectral Density Plot - Handset (Middle Channel)

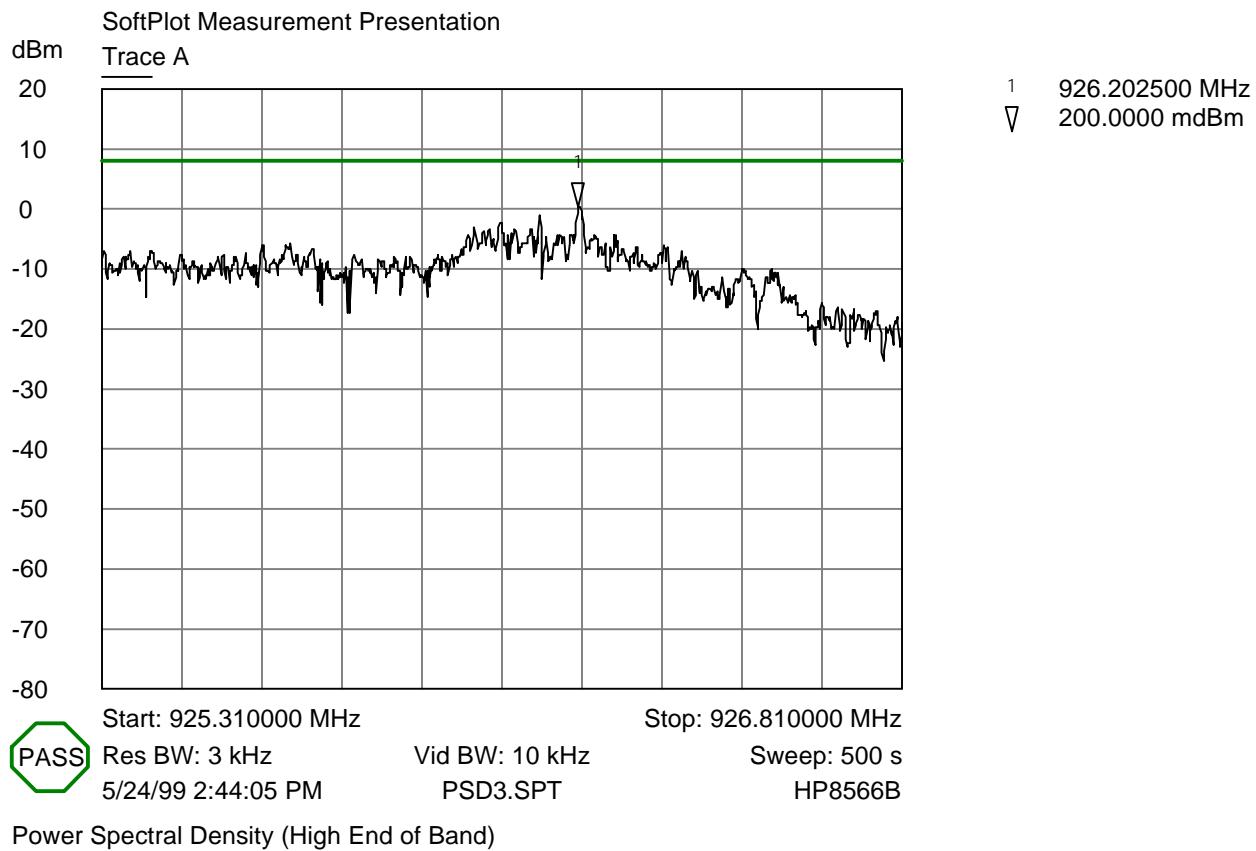


Power Spectral Density Plot - Handset (High Channel)

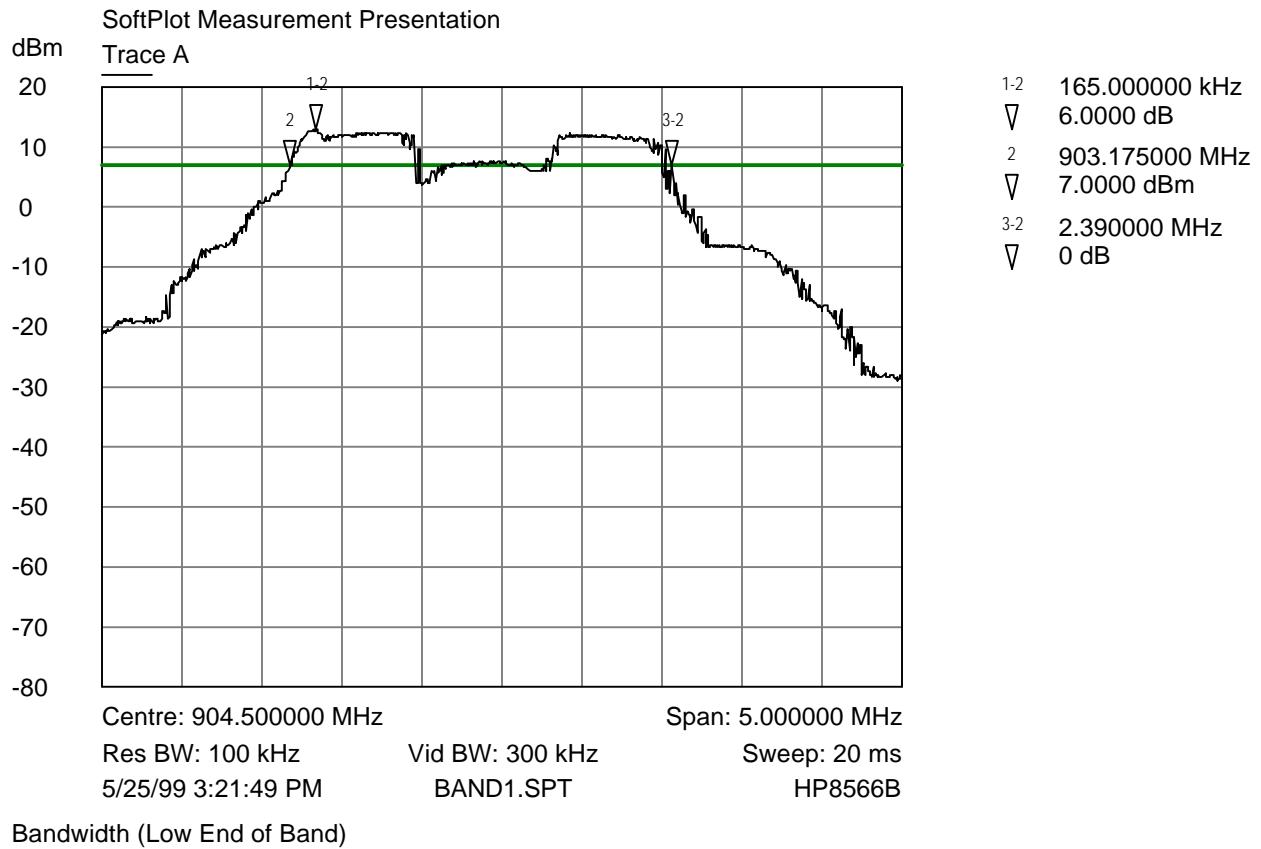


Emission Bandwidth Plot - Base Station (Low Channel)

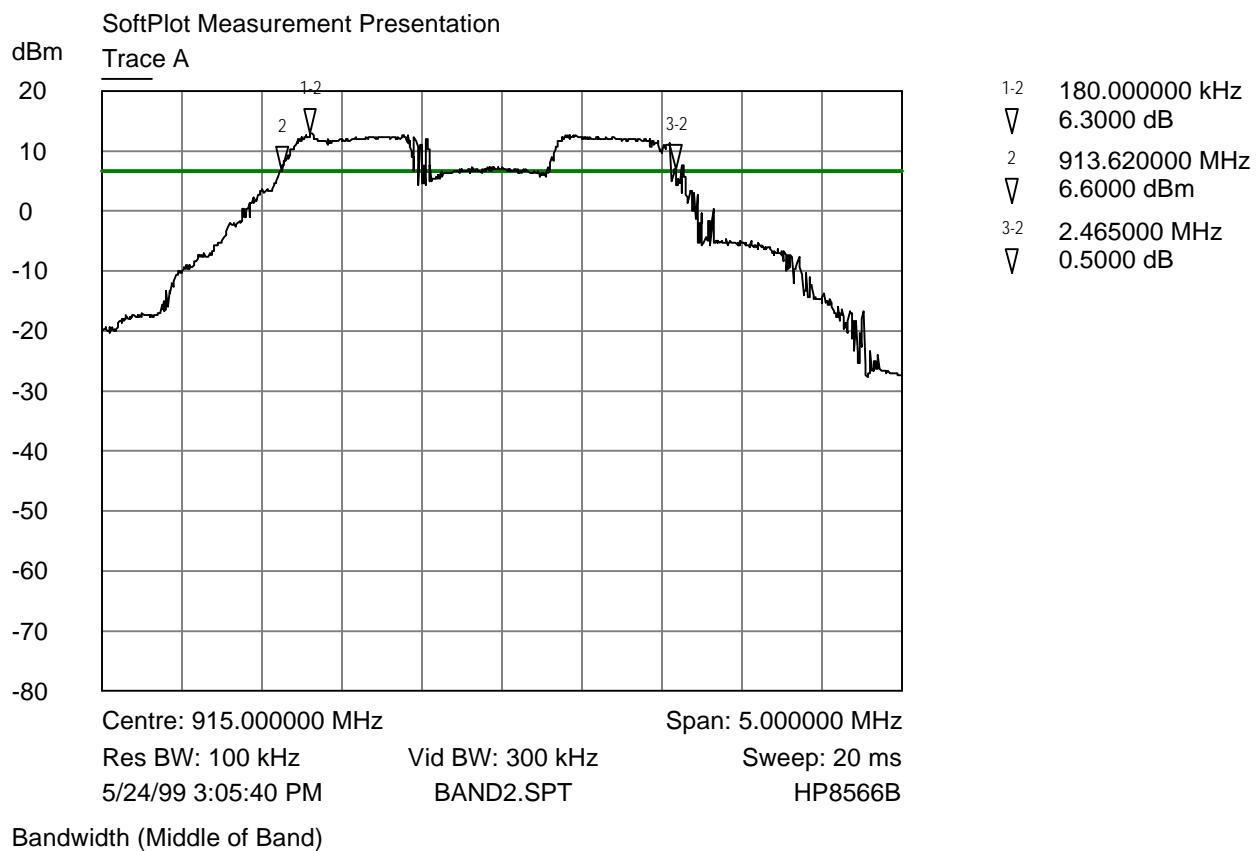


Emission Bandwidth Plot - Base Station (Middle Channel)

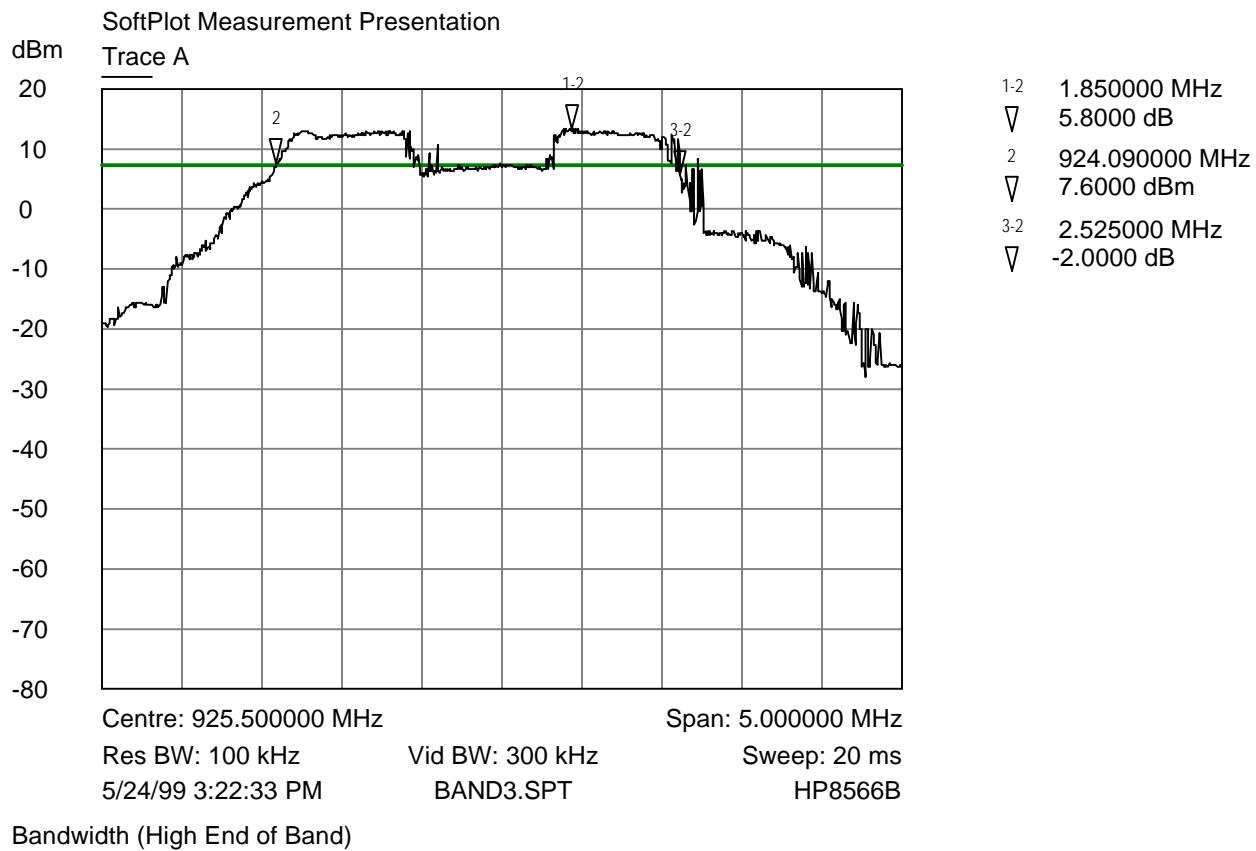



Emission Bandwidth Plot - Base Station (High Channel)

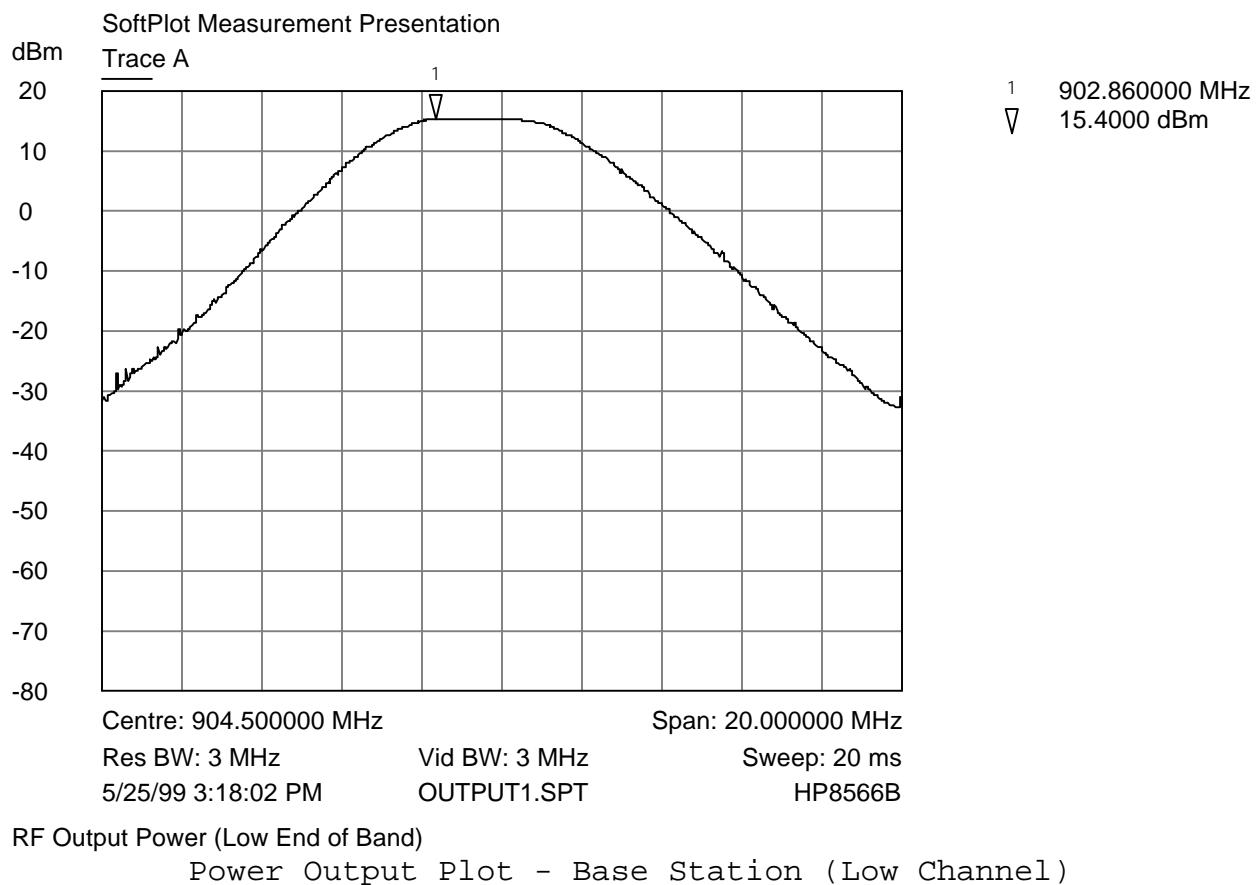

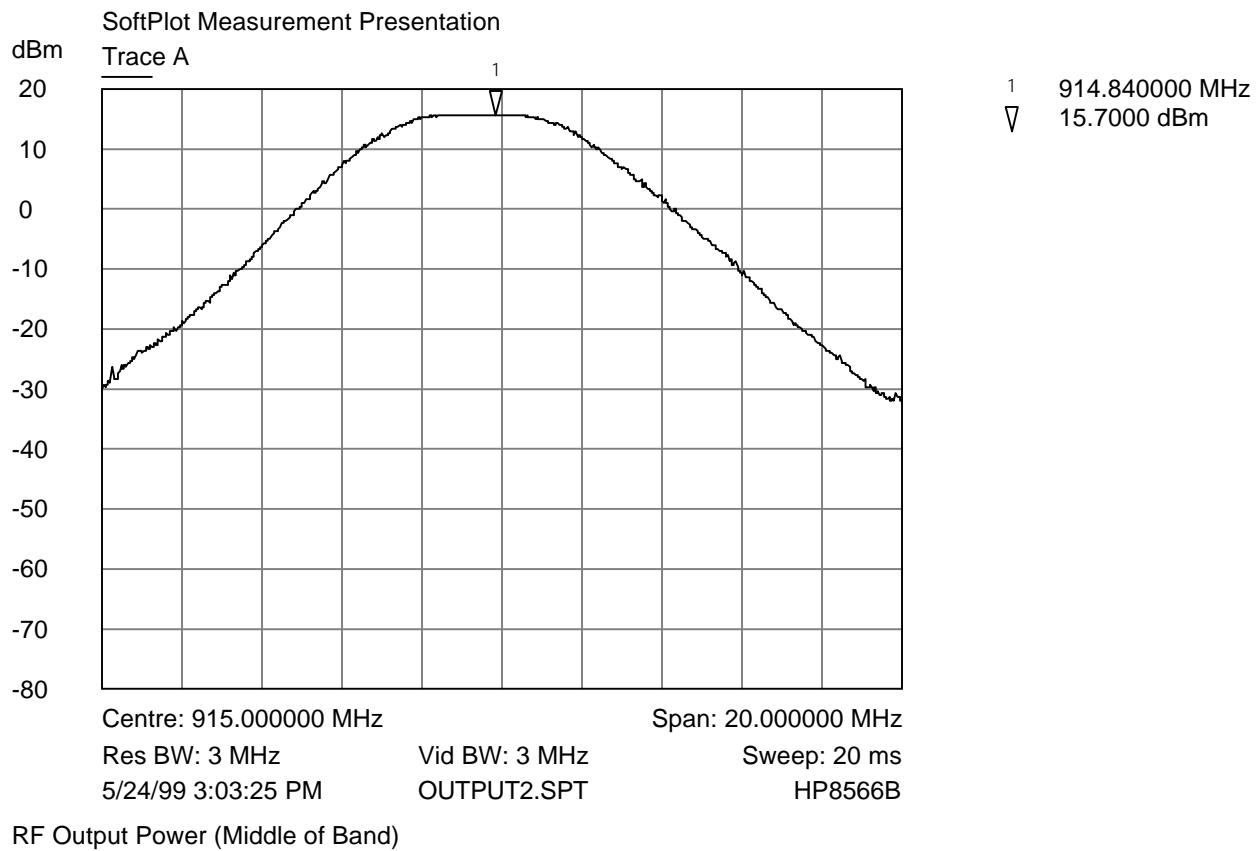


Power Output Plot - Base Station (Middle Channel)

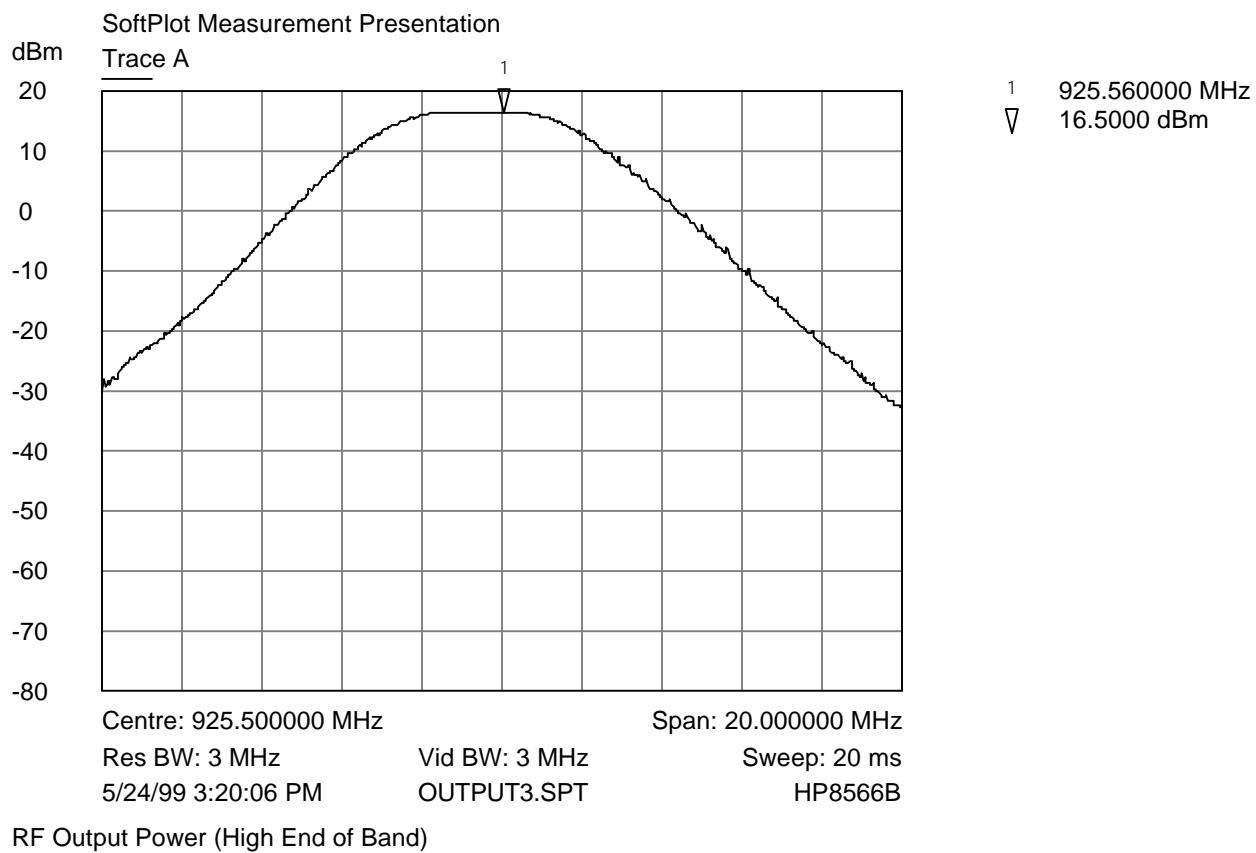

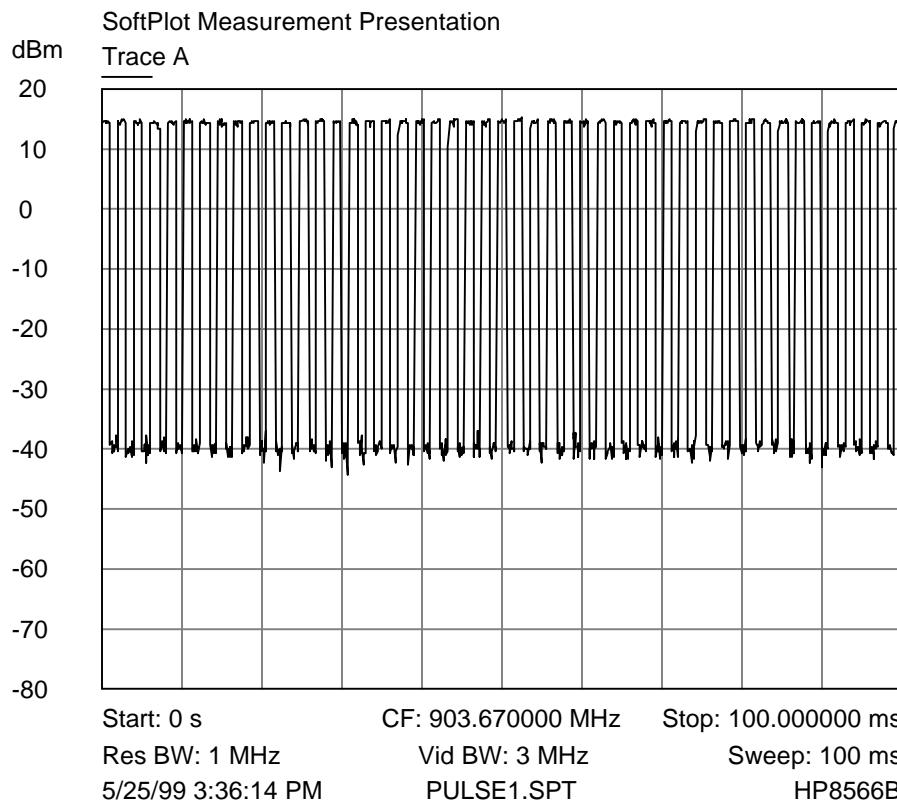


Base Station Pulse Train


Pulse Train Plot (100 msec)

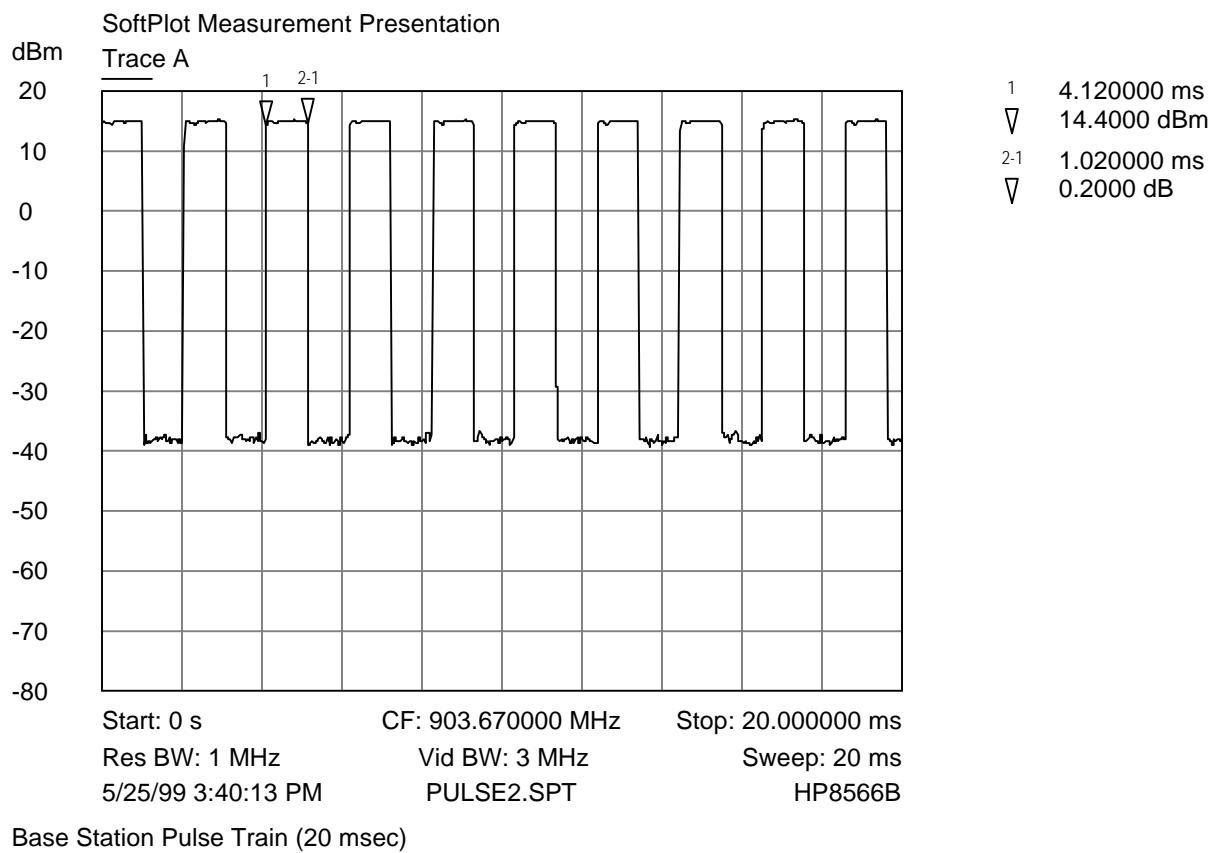


Pulse Train Plot (20 msec)

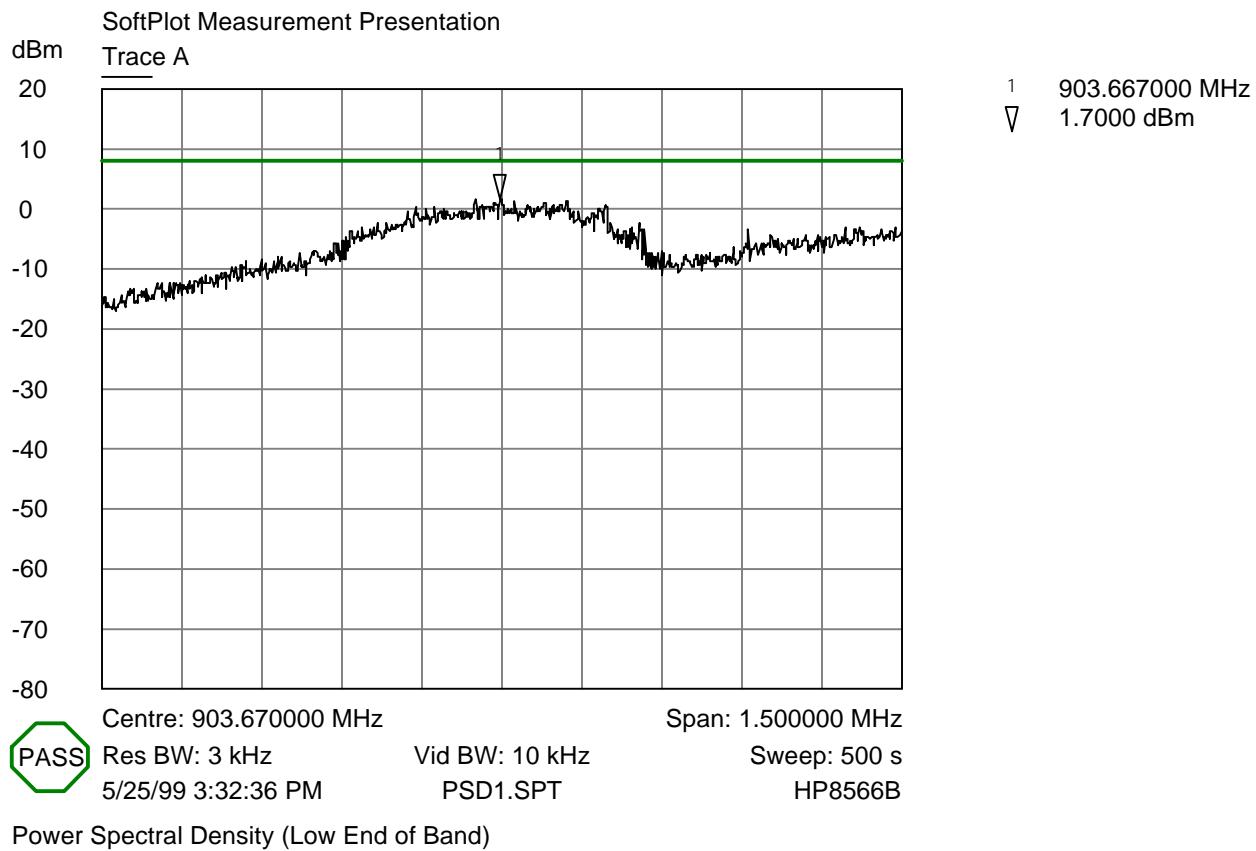

Power Spectral Density Plot - Base Station (Low Channel)

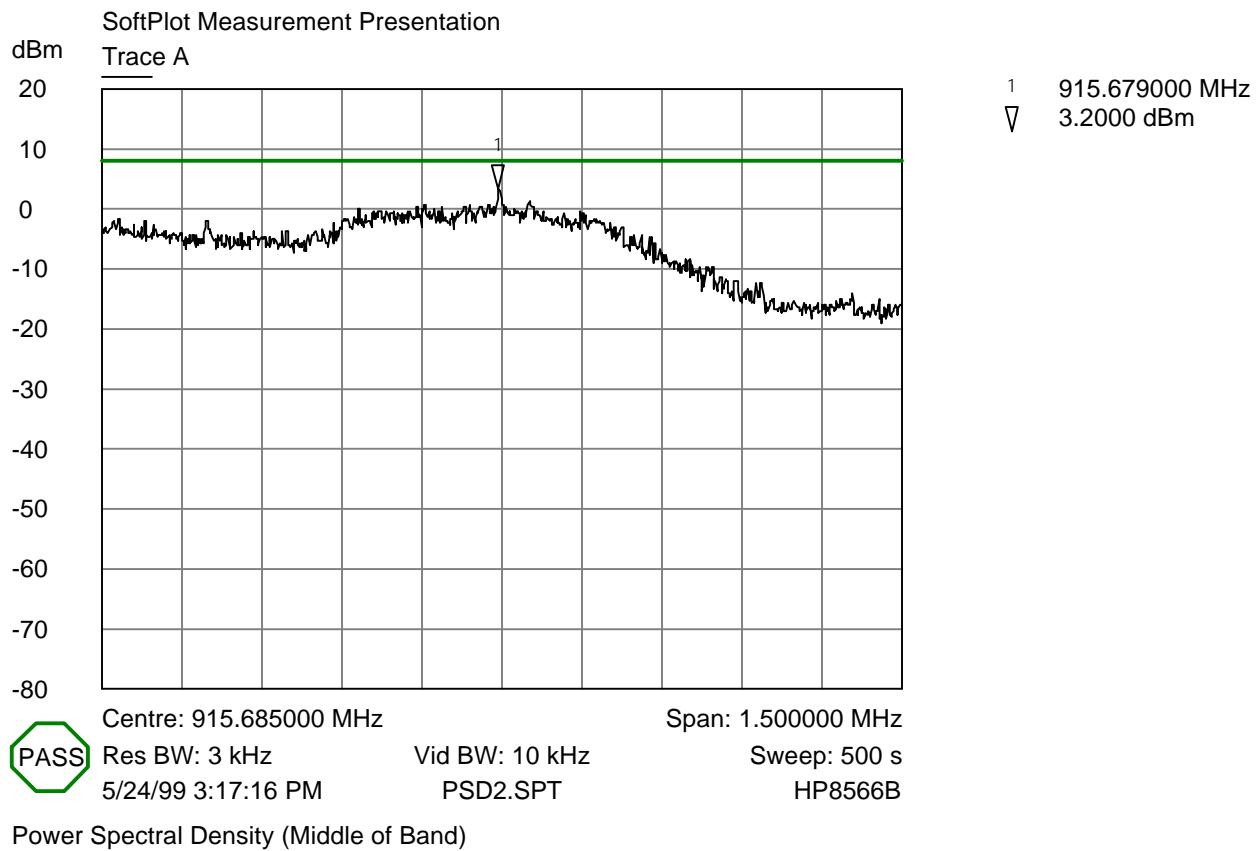

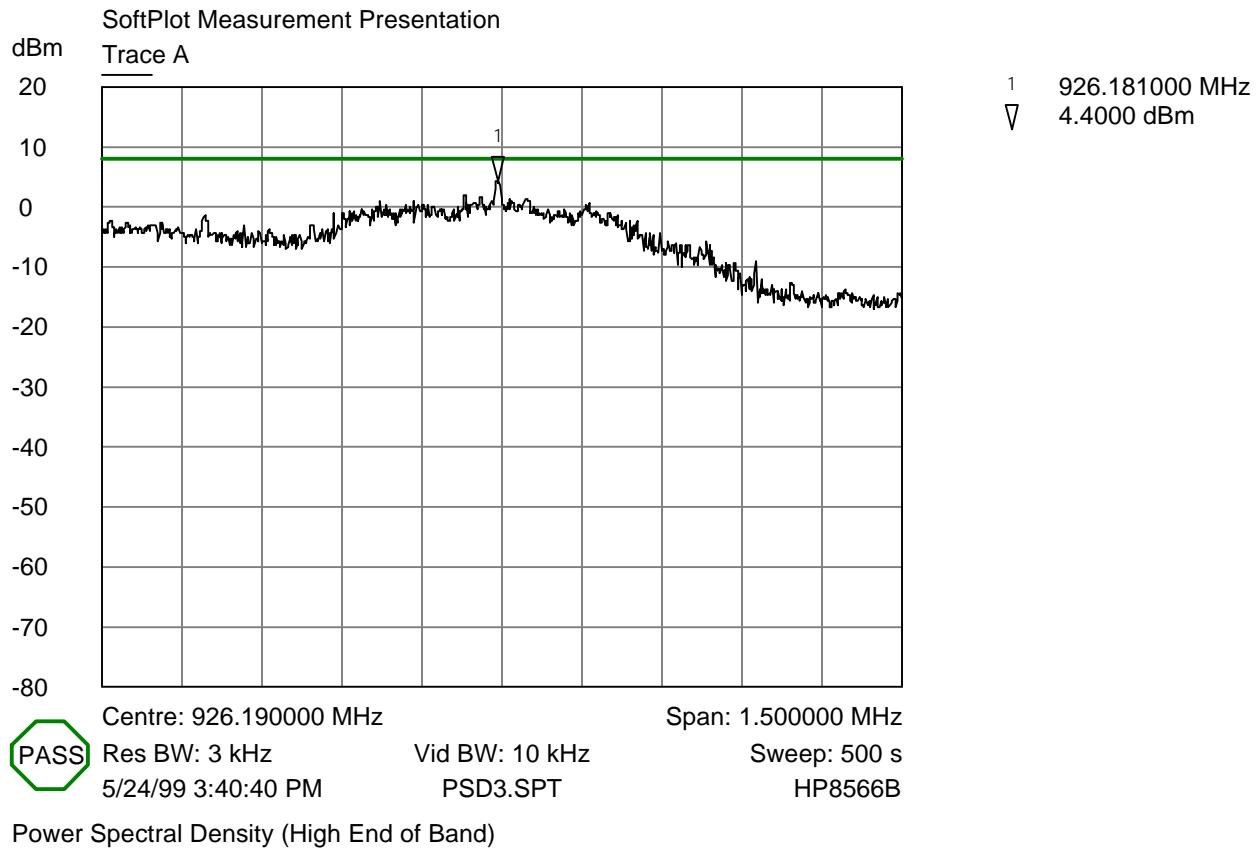

Power Spectral Density Plot - Base Station (High Channel)