

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-0

Telefax: -9075

RSC14

issue test report consist of 65 Pages

Page 1 (65)



TTI-P-G166/98-30

Accredited Testing Laboratory

**DAR-Registration number:
TTI-P-G 166/98-20**

Accredited Bluetooth™ Test Facility (BQTF)

**Test Report No.: 5-4215-01-02/02
FCC Part 15.247/CANADA RSS-210
SIEMENS WDCT-PHONE
GIGASET SL 3501 (Base station)
FCC ID: L82-SL3501**

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test Laboratory Manager:

<u>2003-29-01</u>	<u>RSC8414</u>	<u>Ames H.</u>
Date	Section	Name

**Signature**

Technical Responsibility for Area of Testing:

<u>2003-29-01</u>	<u>RSC8411</u>	<u>Berg M.</u>
Date	Section	Name

**Signature**

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 0

Telefax : + 49 681 598 - 9075

E-mail : Harro.Ames@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G 166/98-20

1.3 Details of applicant

Name : SIEMENS AG

Street : Frankenstrasse 2

City : D-46395 Bocholt

Country : Germany

Telephone : +49 2871 91 0

Telefax : +49 2871 91 2495

Contact : Mr. Uwe Alt

Telephone: +49 2871 91 2948

1.4 Application details

Date of receipt of application : 2003-01-16

Date of receipt of test item : 2003-01-16

Date of test : 2003-01-21

1.5 Test item

Type of equipment : **WDCT - Phone, Base part**
Type designation : **GIGASET SL 3501**
Manufacturer : applicant
Street :
City :
Country :
Serial number :
Additional information :
Frequency : 2401.06 – 2482.28 MHz
Type of modulation : 800KFXD / 79M8FXD (FHSS)
Number of channels : 95
Antenna : Integrated inverted F-antenna
Power supply : Base station 9.5V AC via Adapter
Output power max : rad. 173.8 mW EIRP(22.4 dBm), cond. 171.4mW (22.3dBm)
Type of equipment :

1.6 Test standards: FCC Part 15 §15.247

CANADA RSS-210

2 Technical test

2.1 Summary of test results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705.

No deviations from the technical specification(s) were found in the course of the tests.

Final verdict : PASS

The product fullfills also the requirements for CANADA RSS-210.

2.2 Test Report

TEST REPORT

Test Report no. : 5-4215-01-02/02

TEST REPORT REFERENCE**LIST OF MEASUREMENTS**

Paragraph	PARAMETER TO BE MEASURED	PAGE
	Transmitter parameters	
§ 15.204	Antenna gain	9
§ 15.247 (a)	Carrier frequency separation	10
§ 15.247 (a)	Number of hopping channels	11
§ 15.247 (a)	Time of occupancy (dwell time)	12
§ 15.247 (a)(1)	Spectrum bandwidth of a FHSS System	14
§ 15.247 (b)(2)	Maximum peak output power	18
§ 15.247	Band edge compliance	23
§ 15.247 (c)(1)	Emission limitations	31
§ 15.107/207	low frequency emissions	49
	Receiver parameters	
§ 15.209	Spurious radiations - Radiated	51
	Test equipment listing	55
	Photographs of the equipment	57

Antenna Gain (calculated)

SUBCLAUSE § 15.204**GIGASET SL 3501**

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.


	low channel	mid channel	high channel
Conducted power	22.34 dBm	21.93 dBm	21.42 dBm
Radiated power	21.50 dBm	22.40 dBm	22.18 dBm
Gain	-0.84 dB	+0.47 dB	+0.76 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Carrier frequency separation

§15.247(a)(1)


Cursor 1 to cursor 2 ~ 866 kHz; cursor 2 to cursor 3 ~ 902 kHz

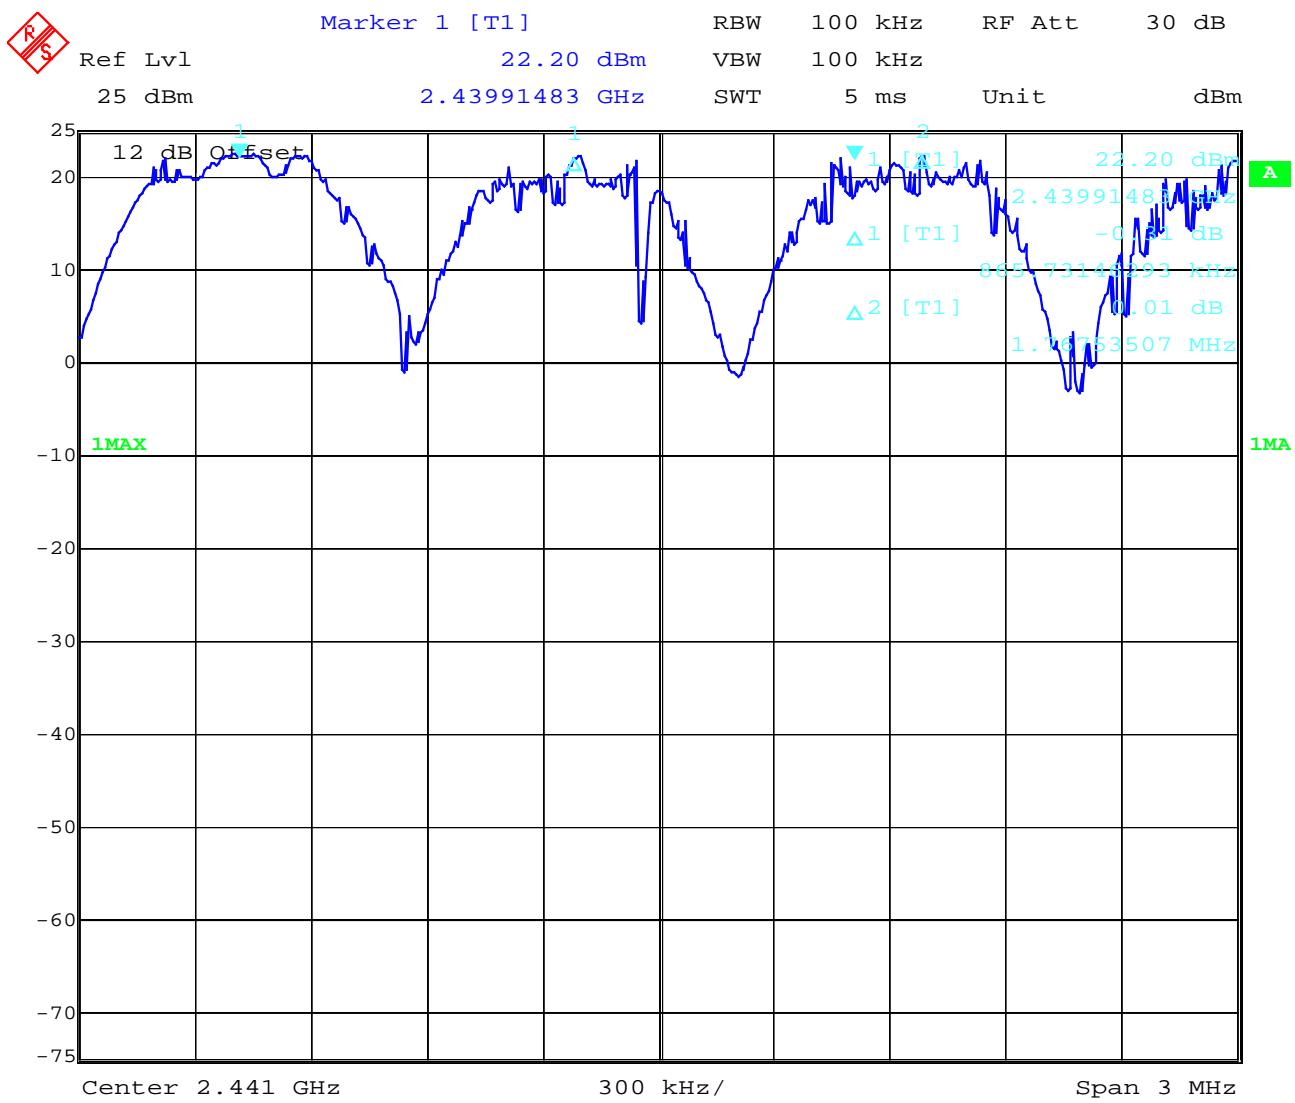

Date: 22.JAN.2003 15:42:13

Limit: minimum 25 kHz or the 20 dB Bandwidth of the hopping system


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

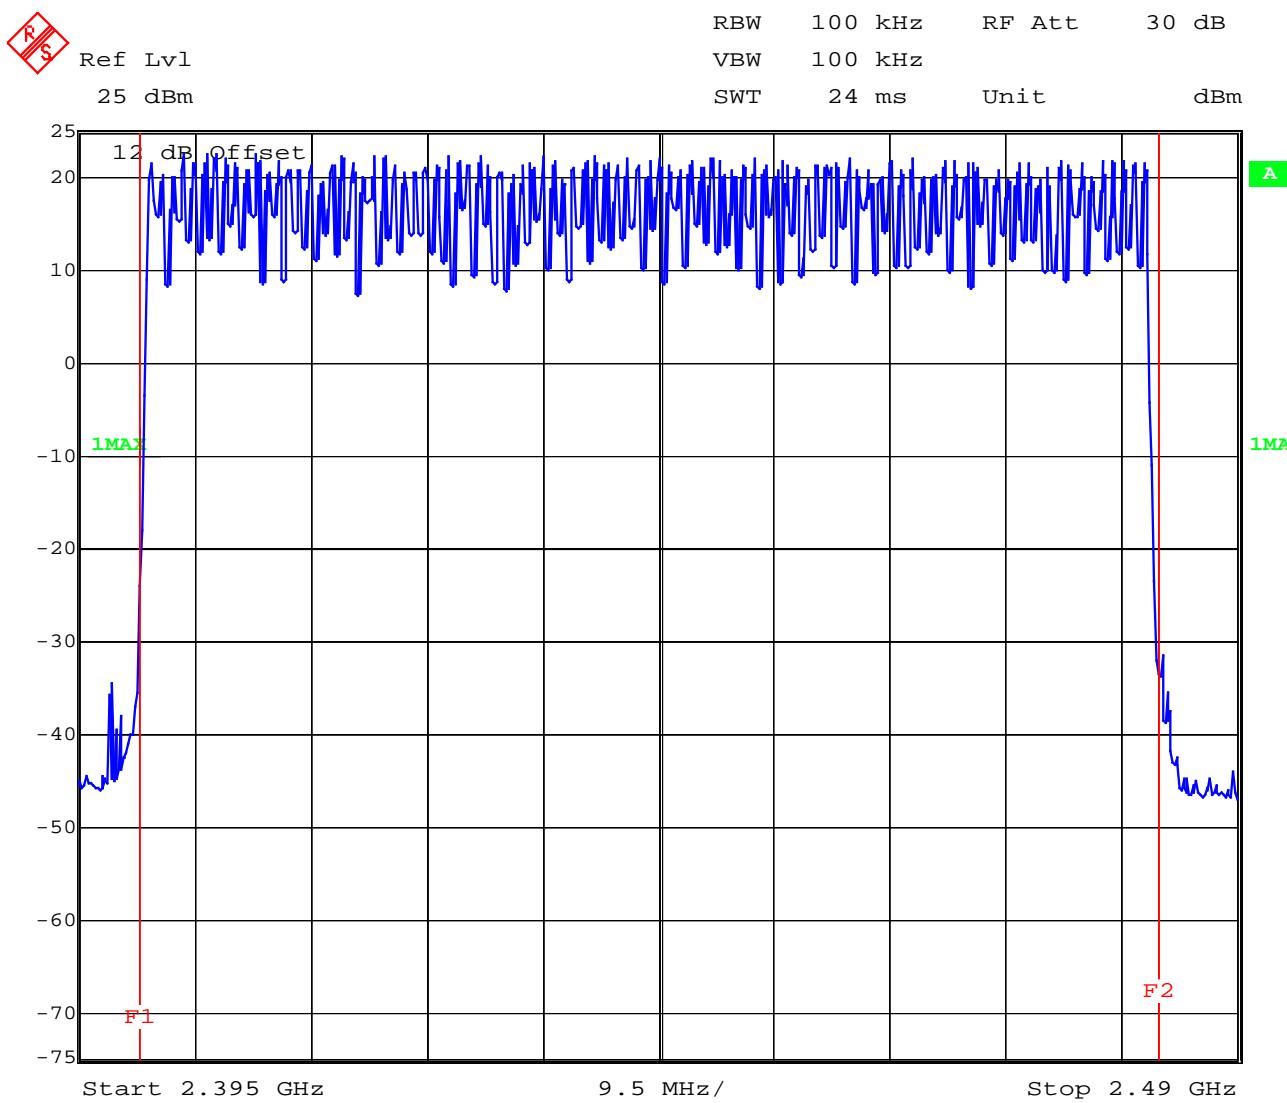Number of hopping channels**§15.247(a)(1)****The number of hopping channels is 95.****The red frequency lines show the limit of the band.****Limit: at least 15 non-overlapping channels****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

Time of occupancy (dwell time)

§15.247(a)(1) iii

The max. duration of signal is 0.833 ms.

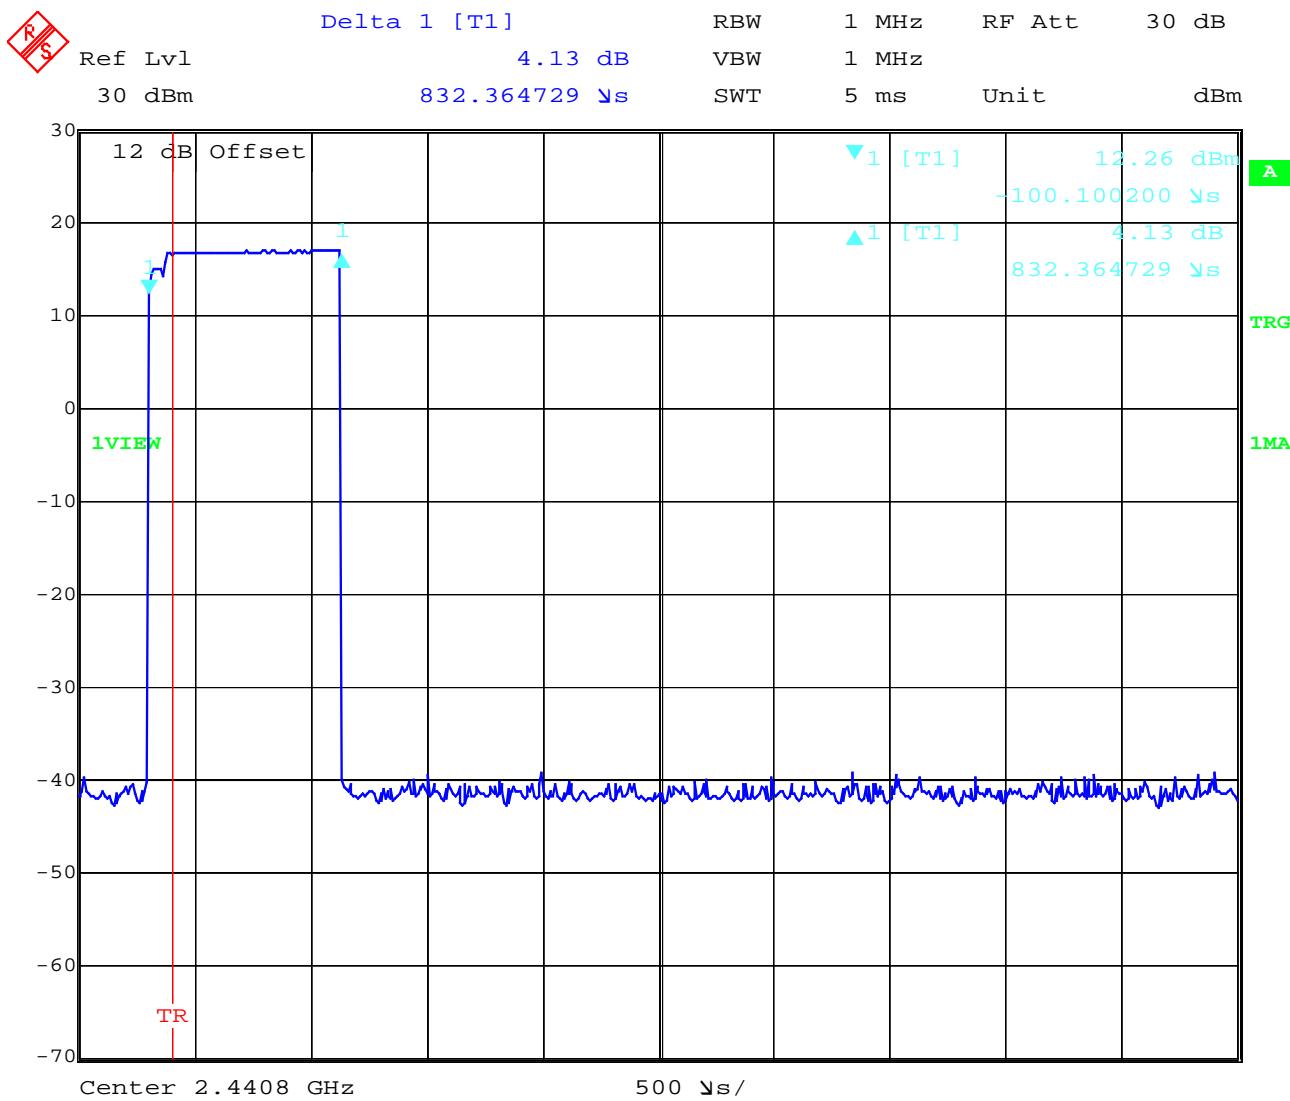

Date: 22.JAN.2003 16:07:06

Limit: the average time of occupancy on any channel shall not be grater than 0.4s within a period of 0.4s x number of hopping channels

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Time of occupancy (dwell time)

§15.247(a)(1) iii

Dwell time

Dwell time = time slot length * hop rate / number of hopping channels *0.4s* number of hopping channels

Manufacturer declaration : max 400 hopps / 1s

4 Mobiles connected to the base station (max. configuration)

[833 µs] *[400(1/s) / 95 channels] * [0.4 s]*[95 channels] = 133.28 ms

Limit: the average time of occupancy on any channel shall not be grater than 0.4s within a period of 0.4s x number of hopping channels

Spectrum Bandwidth of a FHSS System**§15.247(a)****20 dB bandwidth**

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
Frequency (MHz)		2401.06	2441.66	2482.28
T_{nom} (22)°C	V_{nom} (120)V	685	679	695
Measurement uncertainty		$\pm 1\text{kHz}$		


RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Spectrum Bandwidth of a FHSS System
20 dB bandwidth**

§15.247(a)

Channel 1 (lowest Channel)

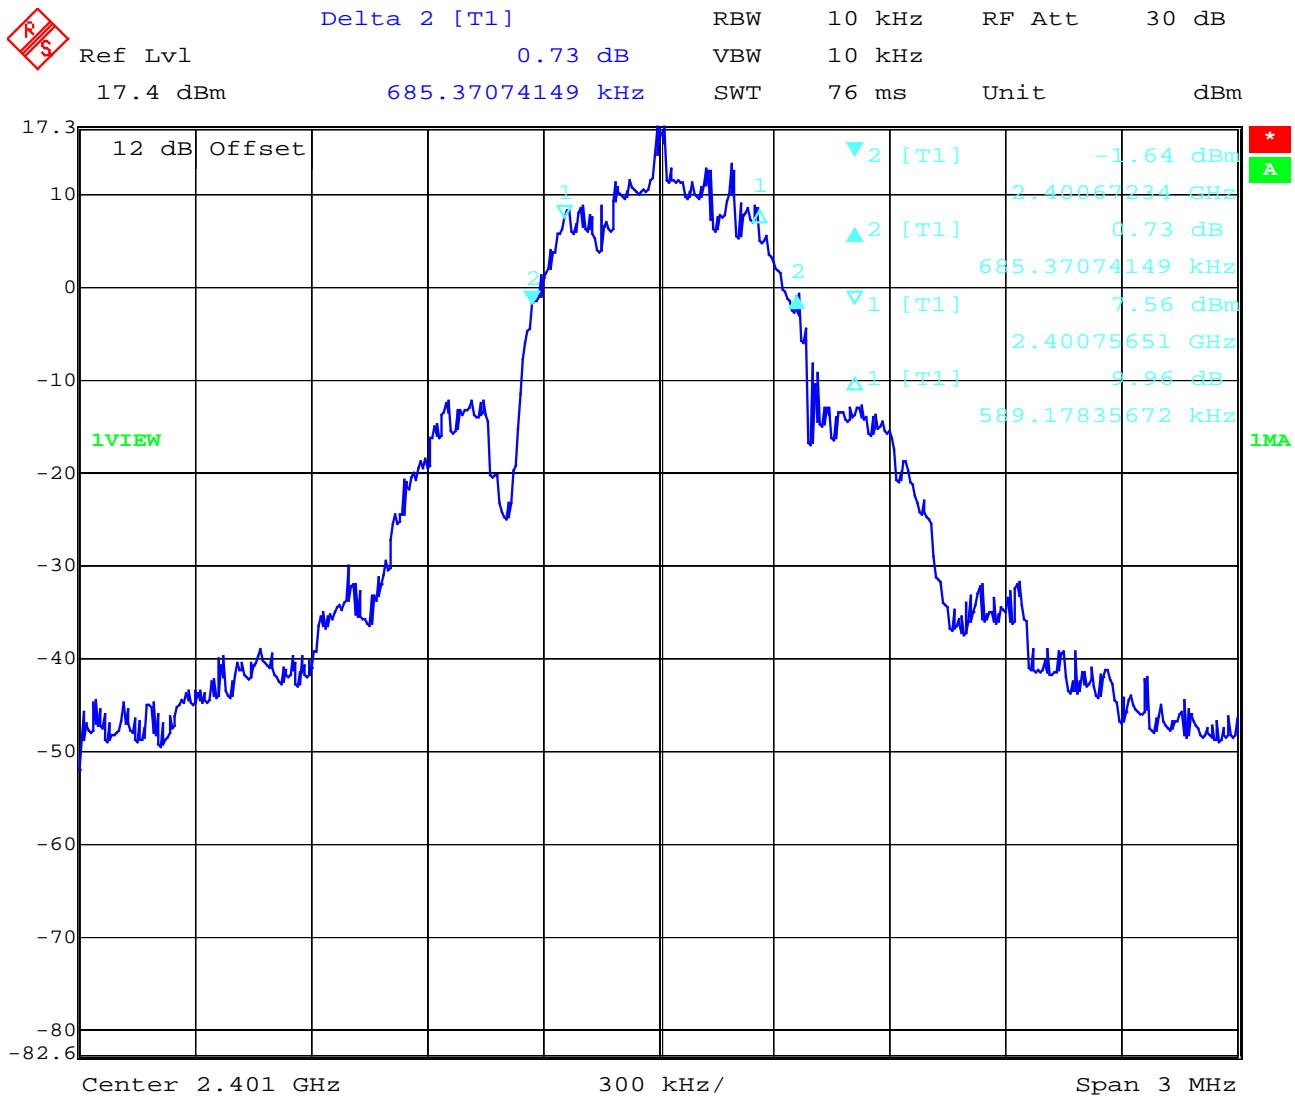


Date: 22.JAN.2003 16:13:15

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Spectrum Bandwidth of a FHSS System
20 dB bandwidth**

§15.247(a)

Channel 2 (middle Channel)

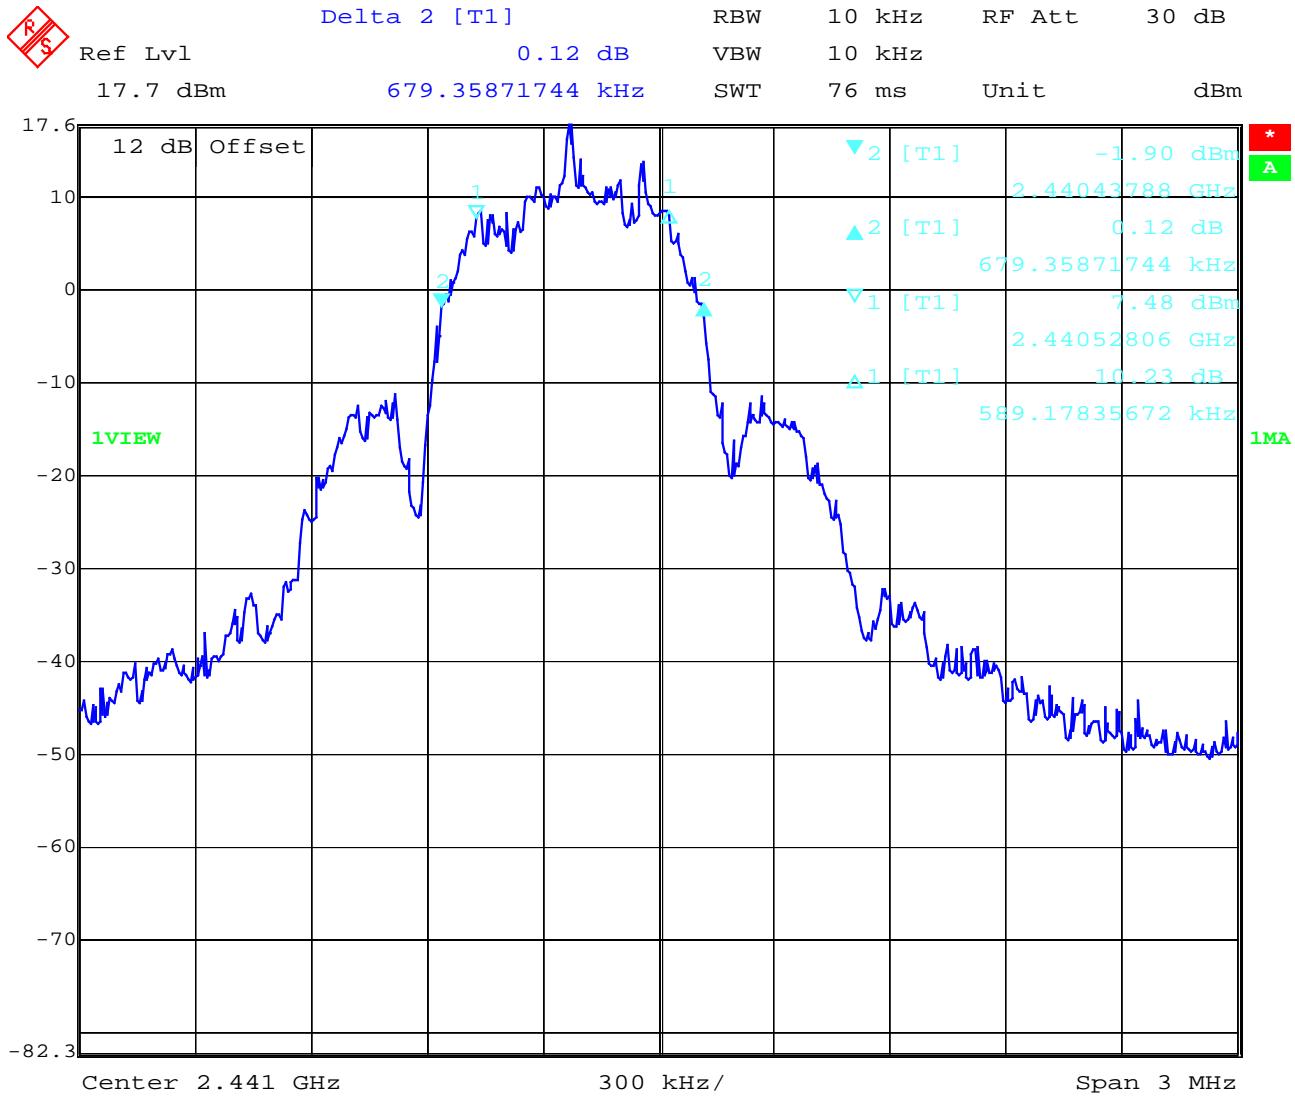


Date: 22.JAN.2003 16:18:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Spectrum Bandwidth of a FHSS System
20 dB bandwidth**

§15.247(a)

Channel 3 (highest Channel)

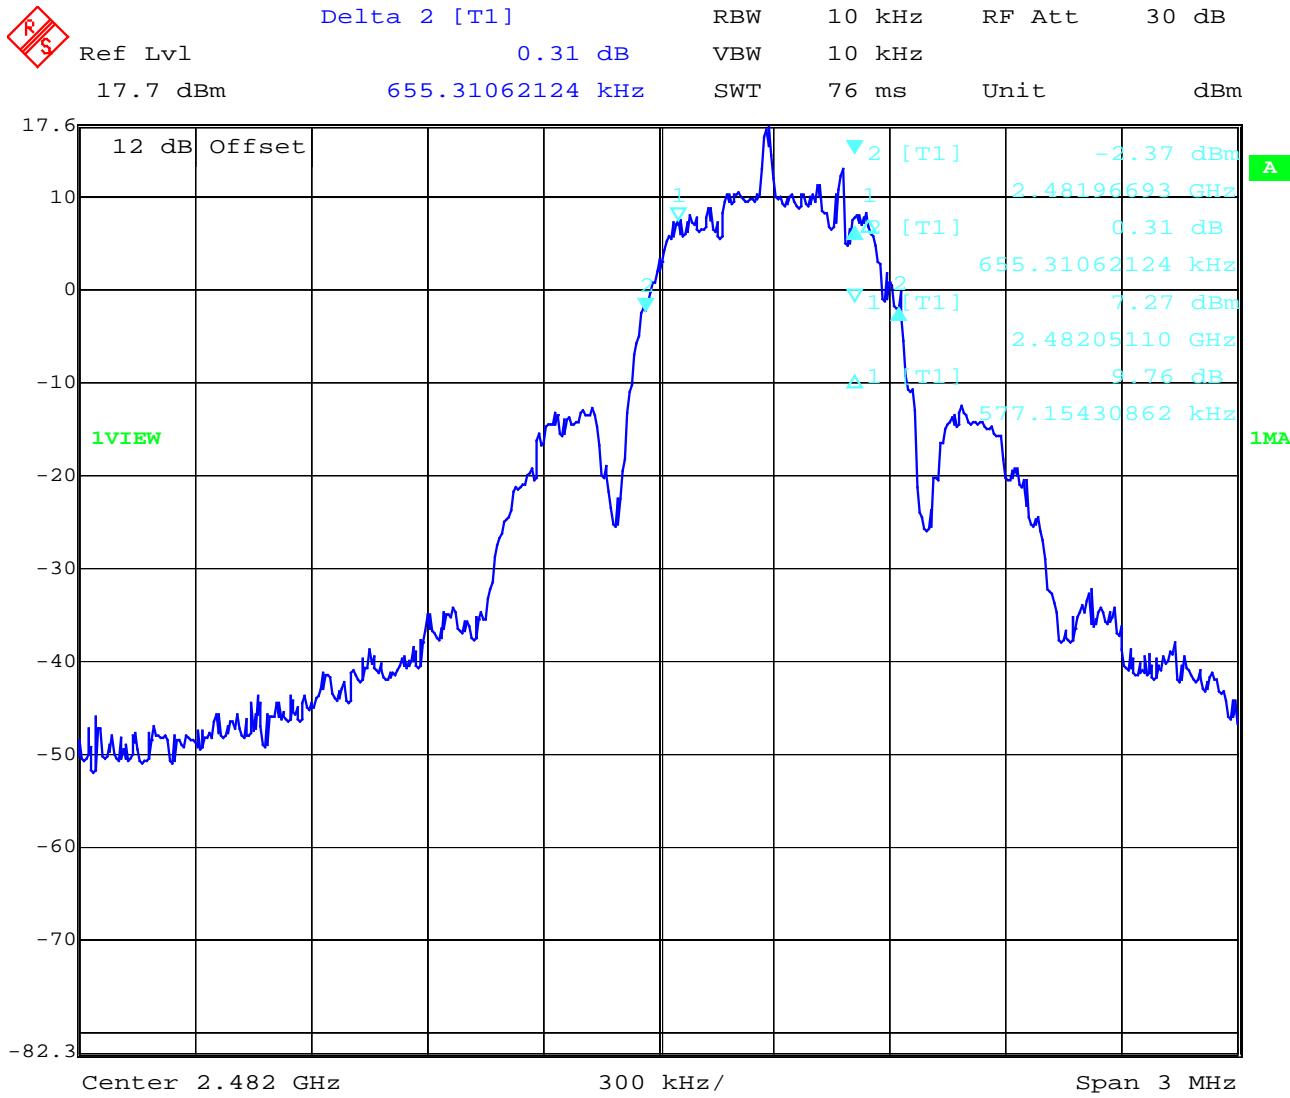

Date: 22.JAN.2003 16:22:04

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

**MAXIMUM PEAK OUTPUT POWER
(conducted)****SUBCLAUSE § 15.247 (b) (1)**

The conducted measurements were performed with a temporary coax connector.

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm) GIGASET SL 3501		
		Frequency (MHz)	2401.06	2441.66
T_{nom} (22)°C	V_{nom} (120)V	PK	22.34 (171.4 mW)	21.93 (156.0 mW)
Measurement uncertainty		±3dB		

RBW / VBW : 1 MHz**LIMIT****SUBCLAUSE § 15.247 (b) (1)**


Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

Peak output power (conducted)

§15.247 (b)(1)

Channel 1 (lowest Channel): 22.34 dBm

De facto EIRP with -0.84 db max. antenna gain is +21.50 dBm

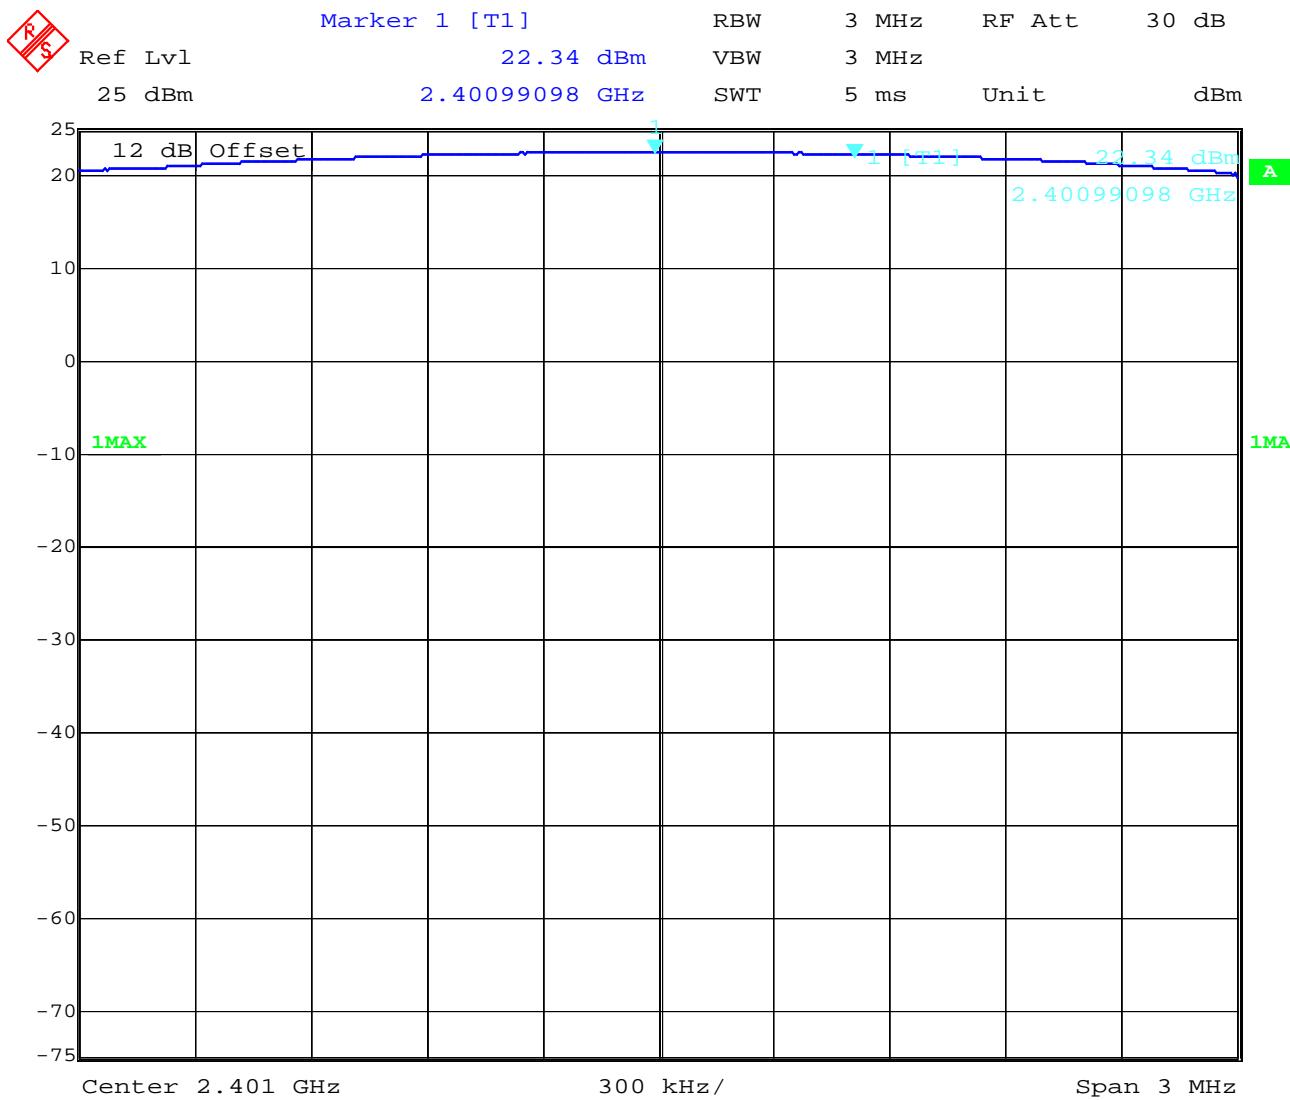

Date: 22.JAN.2003 16:28:26


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Peak output power (conducted)

§15.247 (b)(1)

Channel 2 (middle Channel): 21.93Bm

De facto EIRP with +0.47 db max. antenna gain is +22.40 dBm

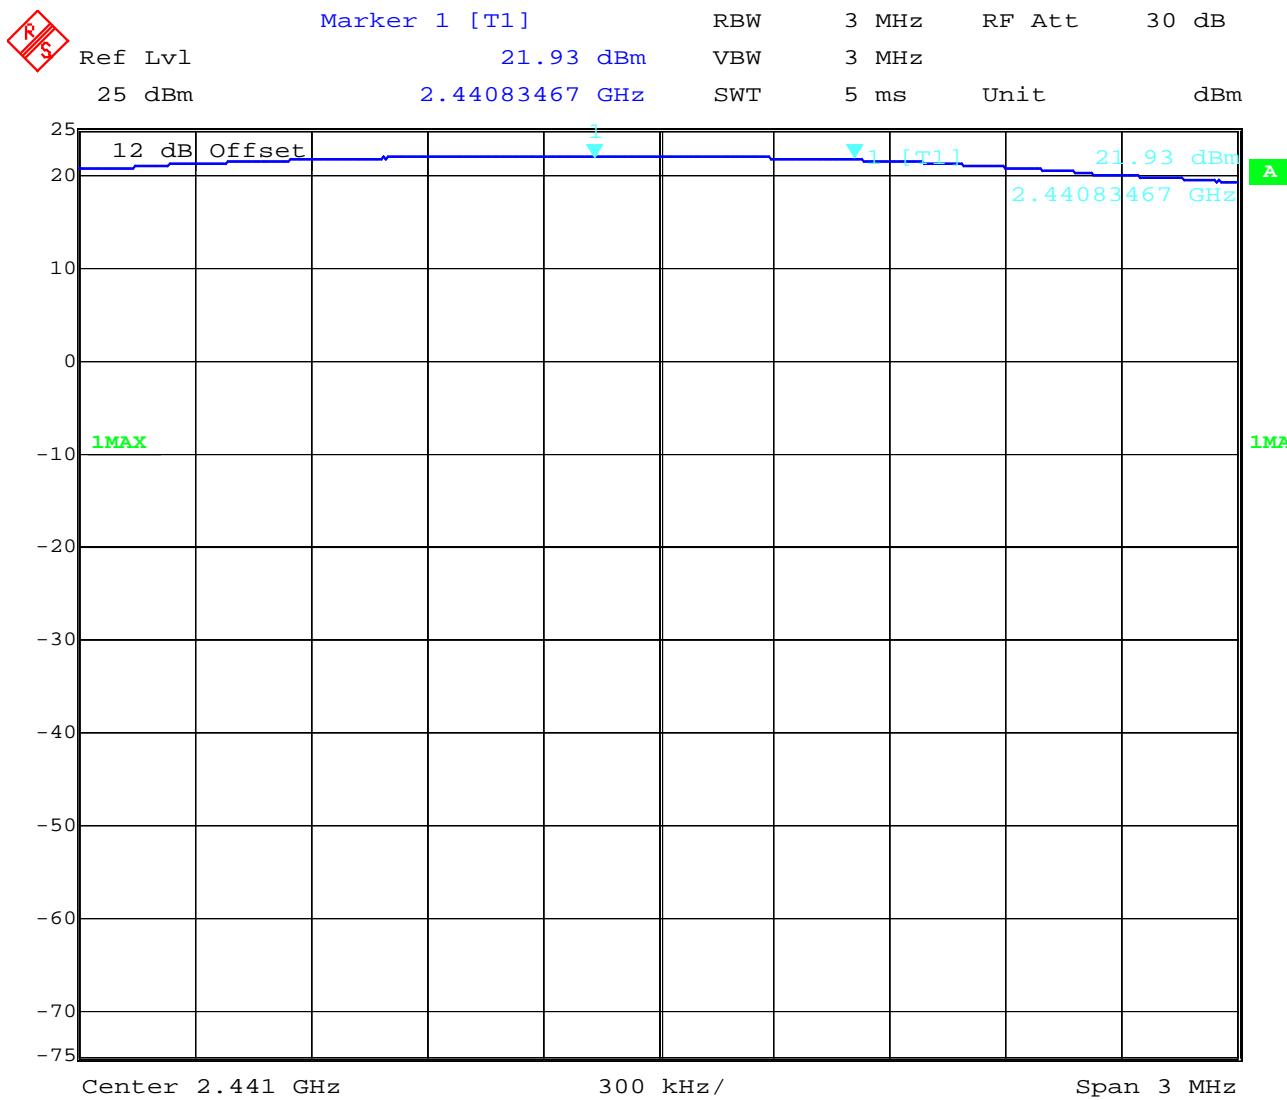

Date: 22.JAN.2003 16:27:05


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Peak output power (conducted)

§15.247 (b)/1)

Channel 3 (highest Channel): 21.42 dBm

De facto EIRP with +0.76 db max. antenna gain is +22.18 dBm

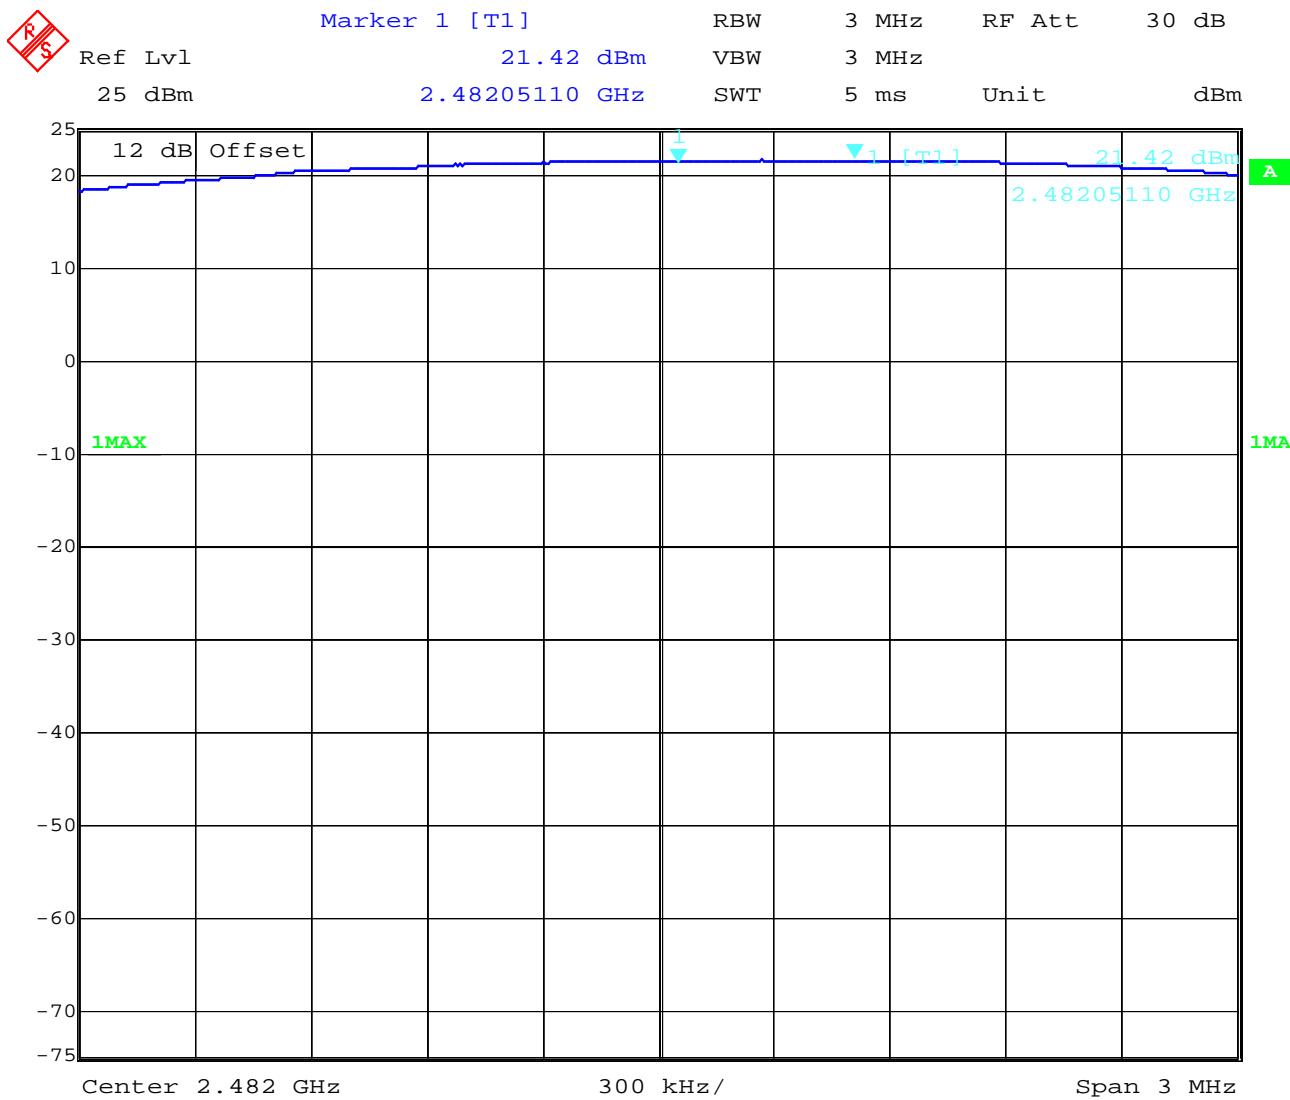

Date: 22.JAN.2003 16:25:26

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)****SUBCLAUSE § 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm) GIGASET SL 3501		
		2401	2441	2482
T_{nom} (22)°C	V_{nom} (120)V	21.5 (141.3 mW)	22.4 (173.8 mW)	22.18 (165.2 mW)
Measurement uncertainty		±3dB		


RBW/VBW : 3 MHz**Measured at a distance of 3m****LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

Band-edge compliance of conducted emissions

§15.247 (c)

Low frequency section (hopping off) :

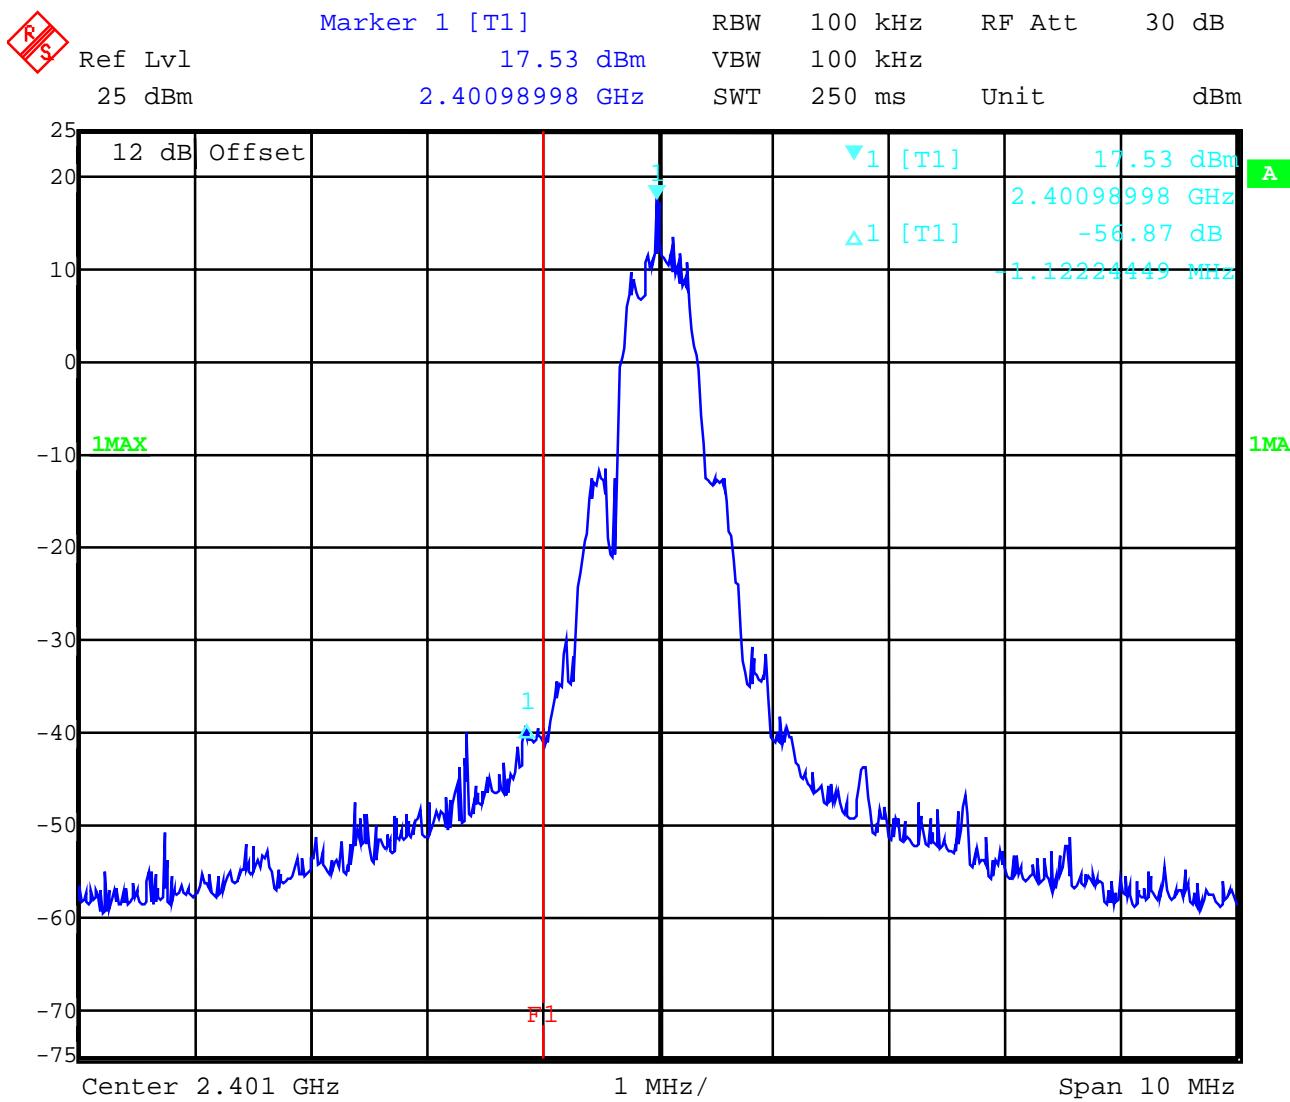

Date: 23.JAN.2003 08:21:41


Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Band-edge compliance of conducted emissions

§15.247 (c)

Low frequency section (hopping on):

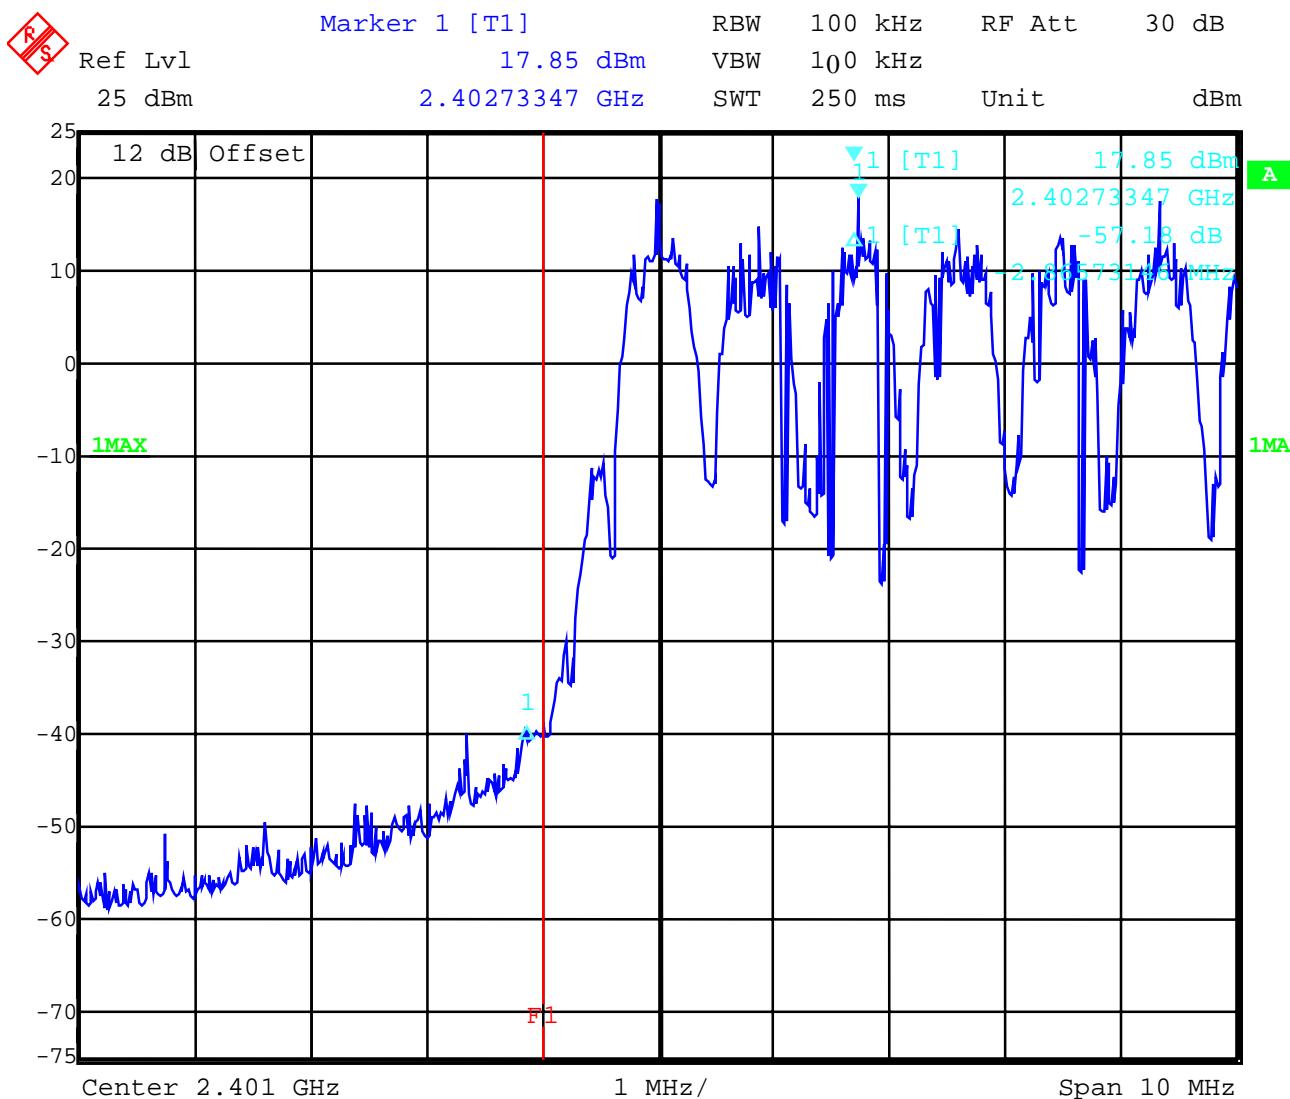

Date: 23.JAN.2003 08:29:26


Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Band-edge compliance of conducted emissions

§15.247 (c)

high frequency section (hopping off):

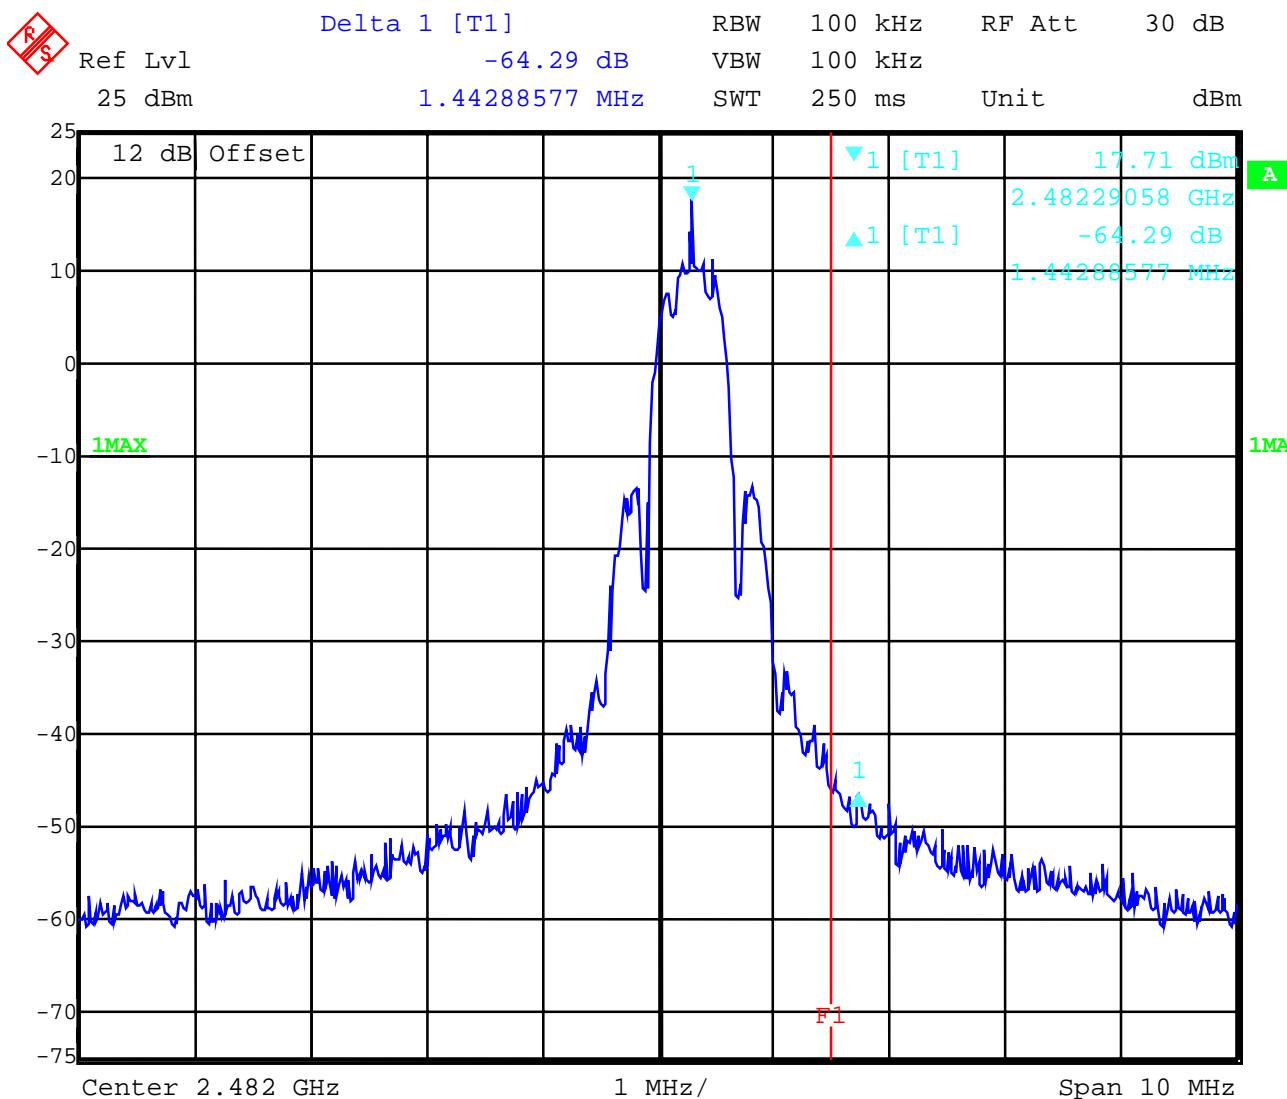

Date : 23.JAN.2003 08:32:41


Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance of conducted emissions

§15.247 (c)

high frequency section (hopping on):

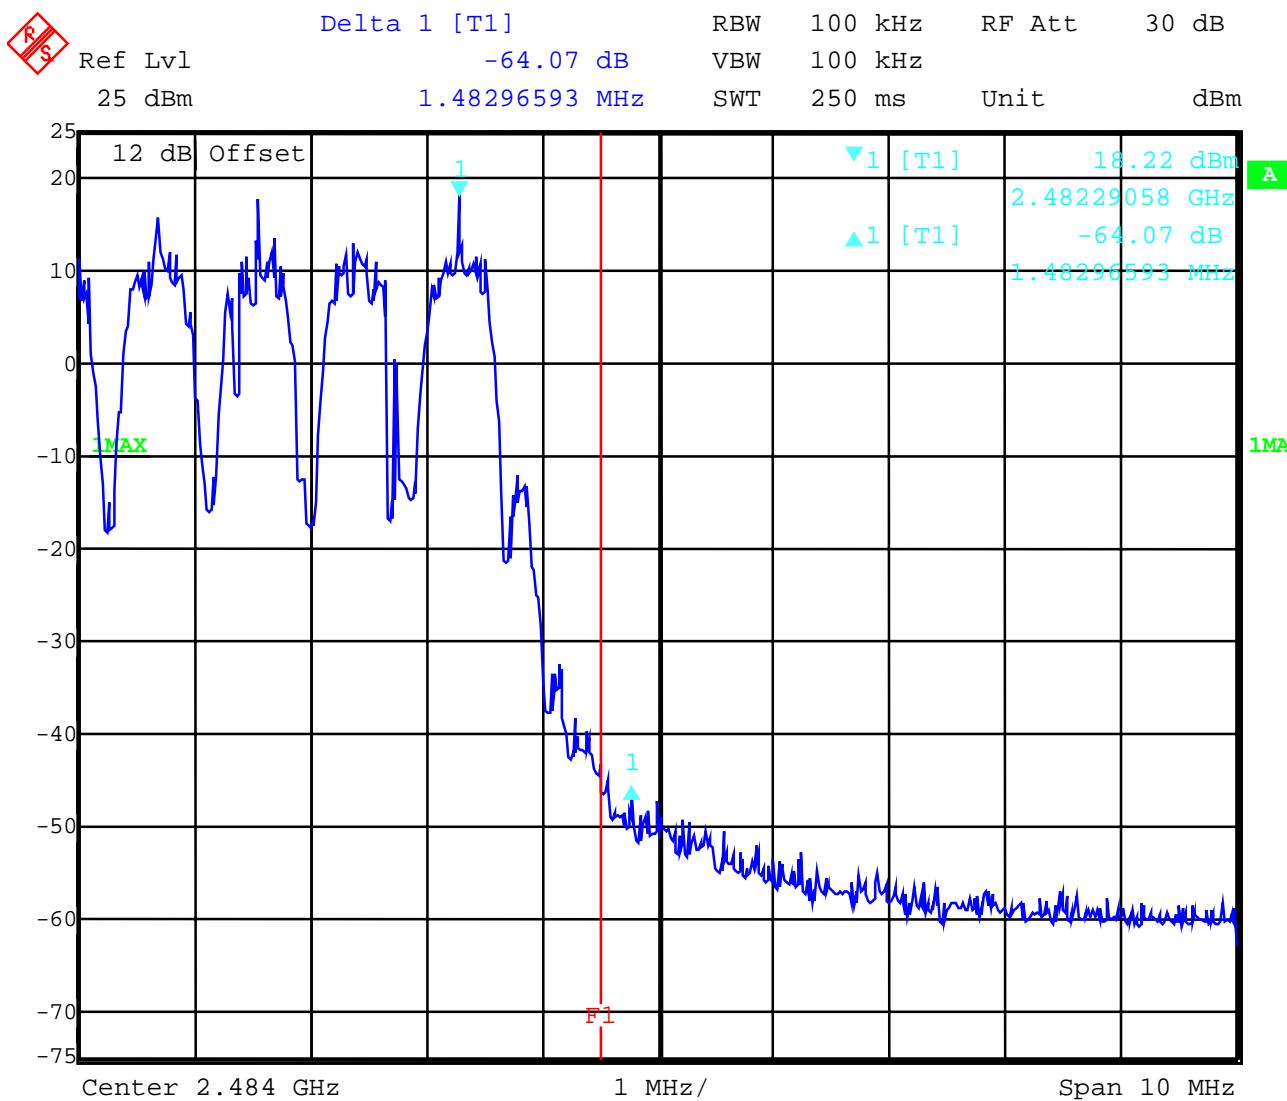

Date: 23.JAN.2003 08:46:21

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance of radiated emissions**§15.205****Radiated field strength**

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

The correction factor is the summation of antenna factor, cable loss and amplifier gain.


high channel	setup	measured value (3m)	correction factor	calculated value (3m)
Peak value	1 MHz RBW 1 MHz VBW	117.0 dB μ V/m	+0.6 dB	117.6 dB μ V/m
Average value (calculated)	1 MHz RBW 10 Hz VBW	Duty cycle 0.08266 => -21.6 dB	-21.6 dB	96.0 dB μ V/m
Delta value	Peak 100 kHz RBW/VBW 30 kHz hopping 100 kHz	61.4 dB 68.2 dB 61.7 dB	-	-
Value at band edge 100 kHz RBW 30 kHz RBW hopping	limit 54 dB μ V/m			34.6 dB μ V/m 27.8 dB μ V/m 34.3 dB μ V/m
Statement:				Complies

The product complies with the limit of the restricted bands.

Delta marker plots see next pages

Band-edge compliance of radiated emissions**§15.205**


This measurement was made to show, that the radiated emissions complies to the rules.

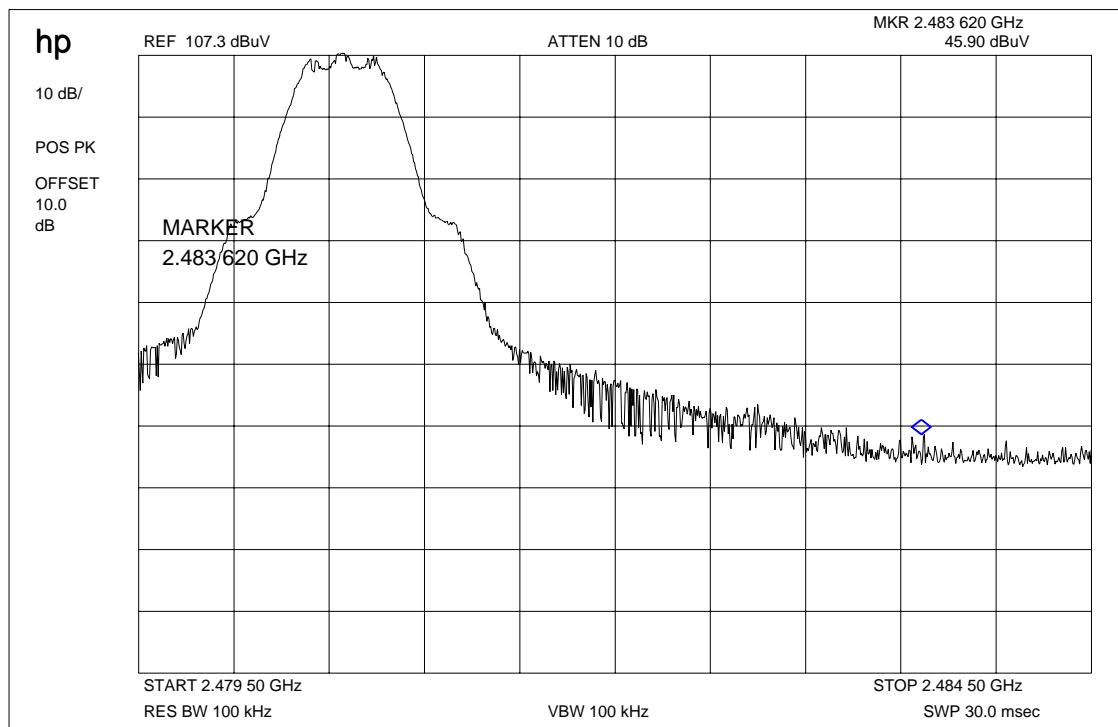RBW/VBW 100 kHz

The marker shows the highest level in the restricted band.

Band-edge compliance of radiated emissions**§15.205**


This measurement was made to show, that the radiated emissions complies to the rules.

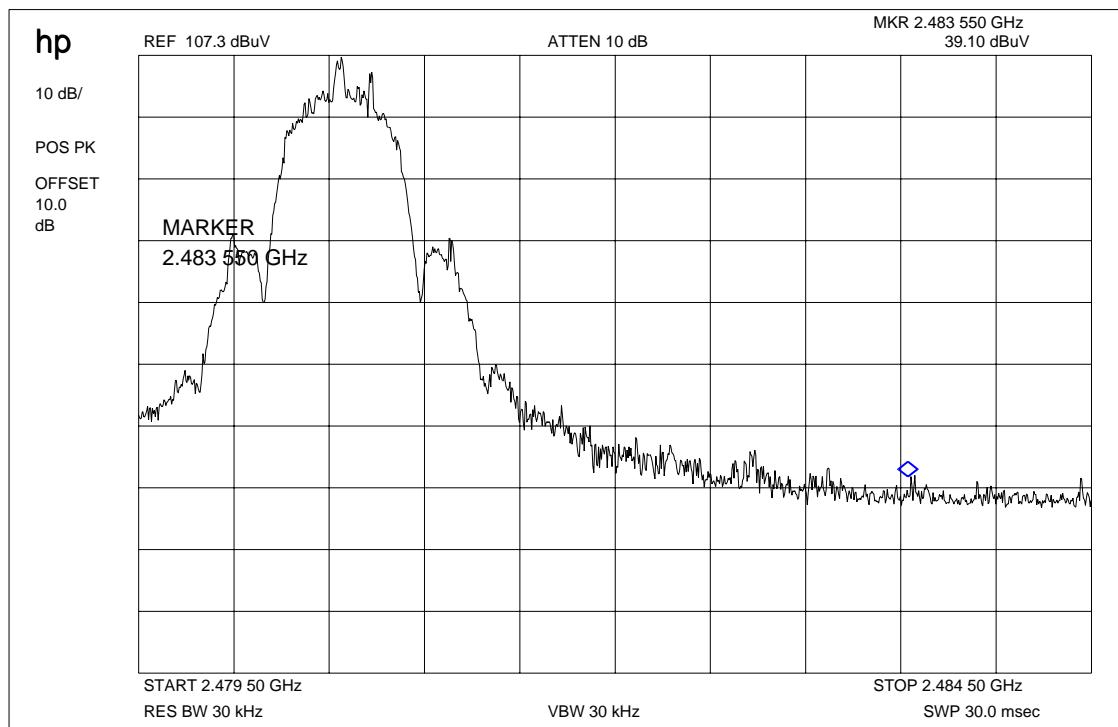RBW/VBW 30 kHz

The marker shows the highest level in the restricted band.

Band-edge compliance of radiated emissions**§15.205**

This measurement was made to show, that the radiated emissions complies to the rules.

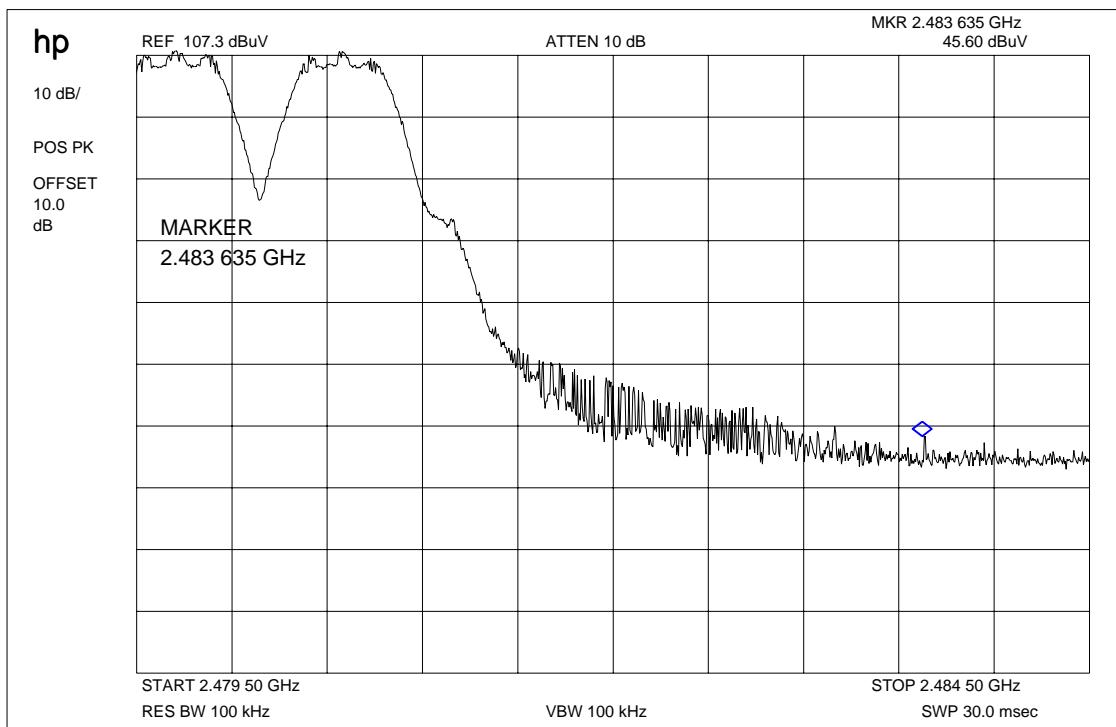RBW/VBW 100 kHz hopping

The marker shows the highest level in the restricted band.

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emmision power	actual attenuation below frequency of operation (dB)	results
2401		+22.34	30 dBm	-	Operating frequency
	all peaks <<limit		-20 dBc	see plots	complies
2441		+21.93	30 dBm	-	Operating frequency
	all peaks <<limit		-20 dBc	see plots	complies
2482		+21.42	30 dBm		Operating frequency
	all peaks <<limit		-20 dBc	see plot	complies
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 1 MHz

For emissions that fall into restricted bands you find the radiated emissions later in the report.


LIMITS**SUBCLAUSE § 15.247 (c)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 1 (lowest Channel): 30 MHz - 1 GHz peak

§ 15.247 (c) (1)

The ref-line is referenced to the max. output at 2401 MHz in the next plot.

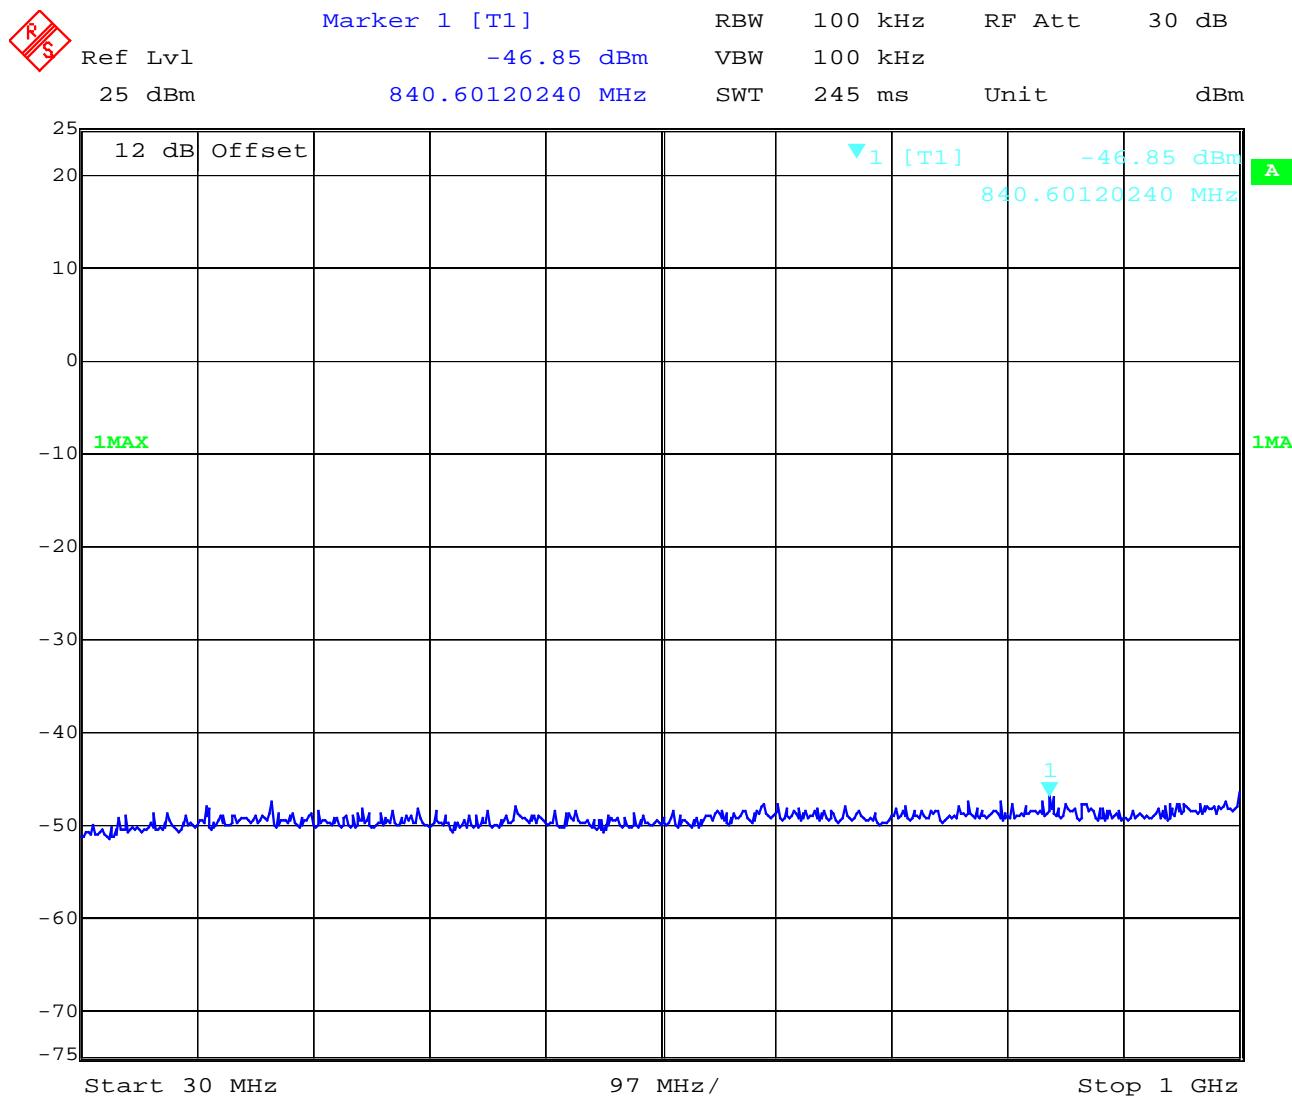


Date: 23.JAN.2003 08:48:43

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

Channel 1 (lowest Channel): 1 – 12 GHz peak

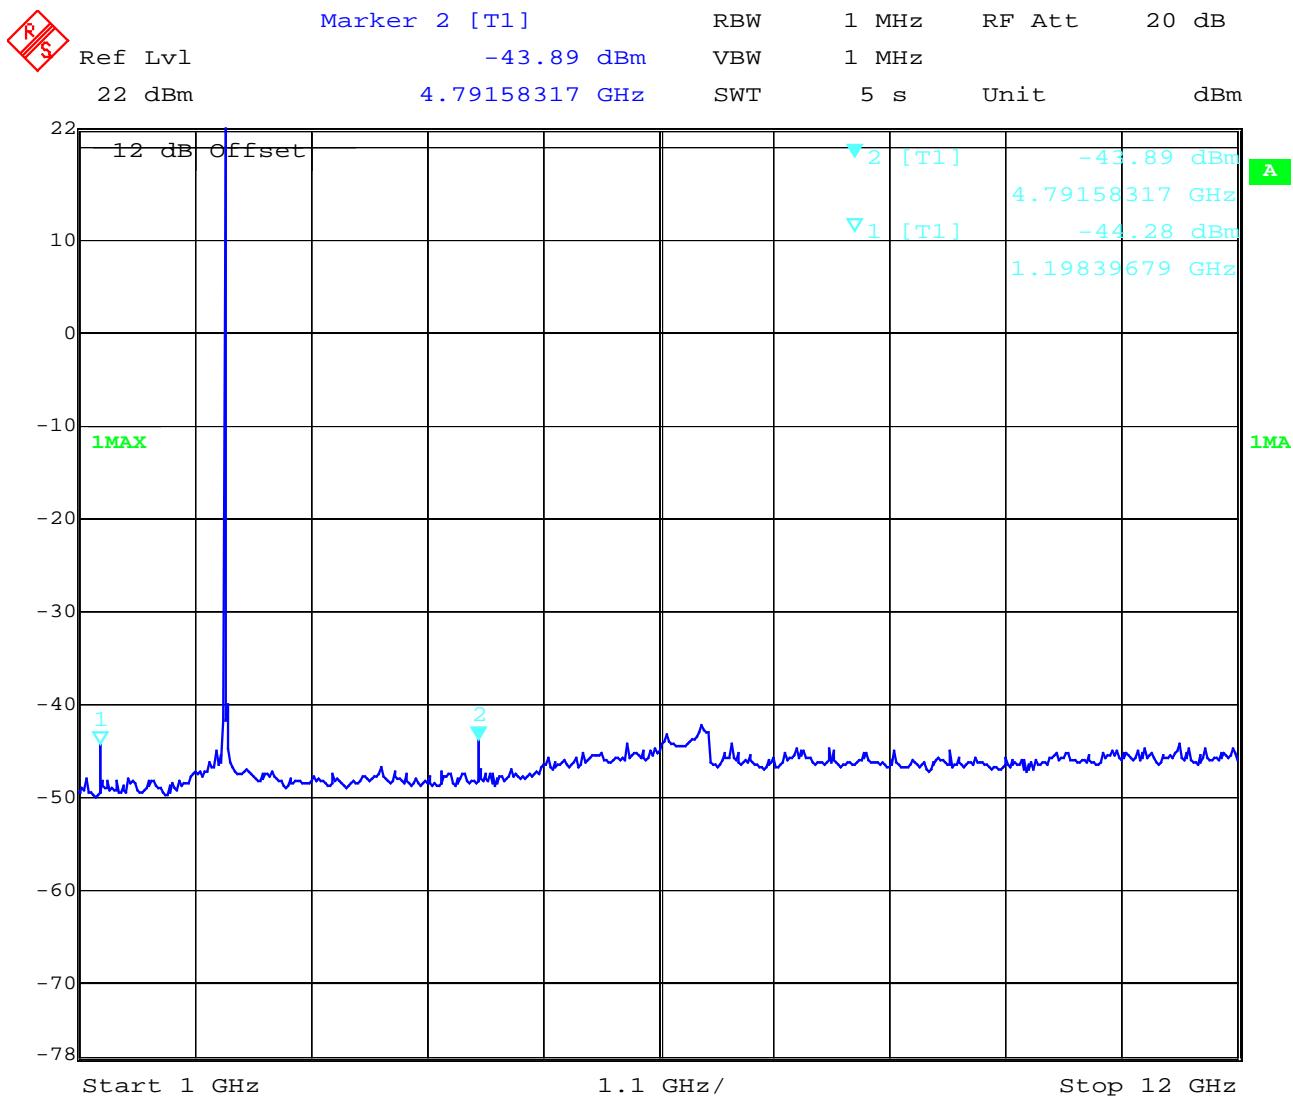

Date: 23.JAN.2003 08:51:54


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

Channel 1 (lowest Channel): 12 - 25 GHz peak

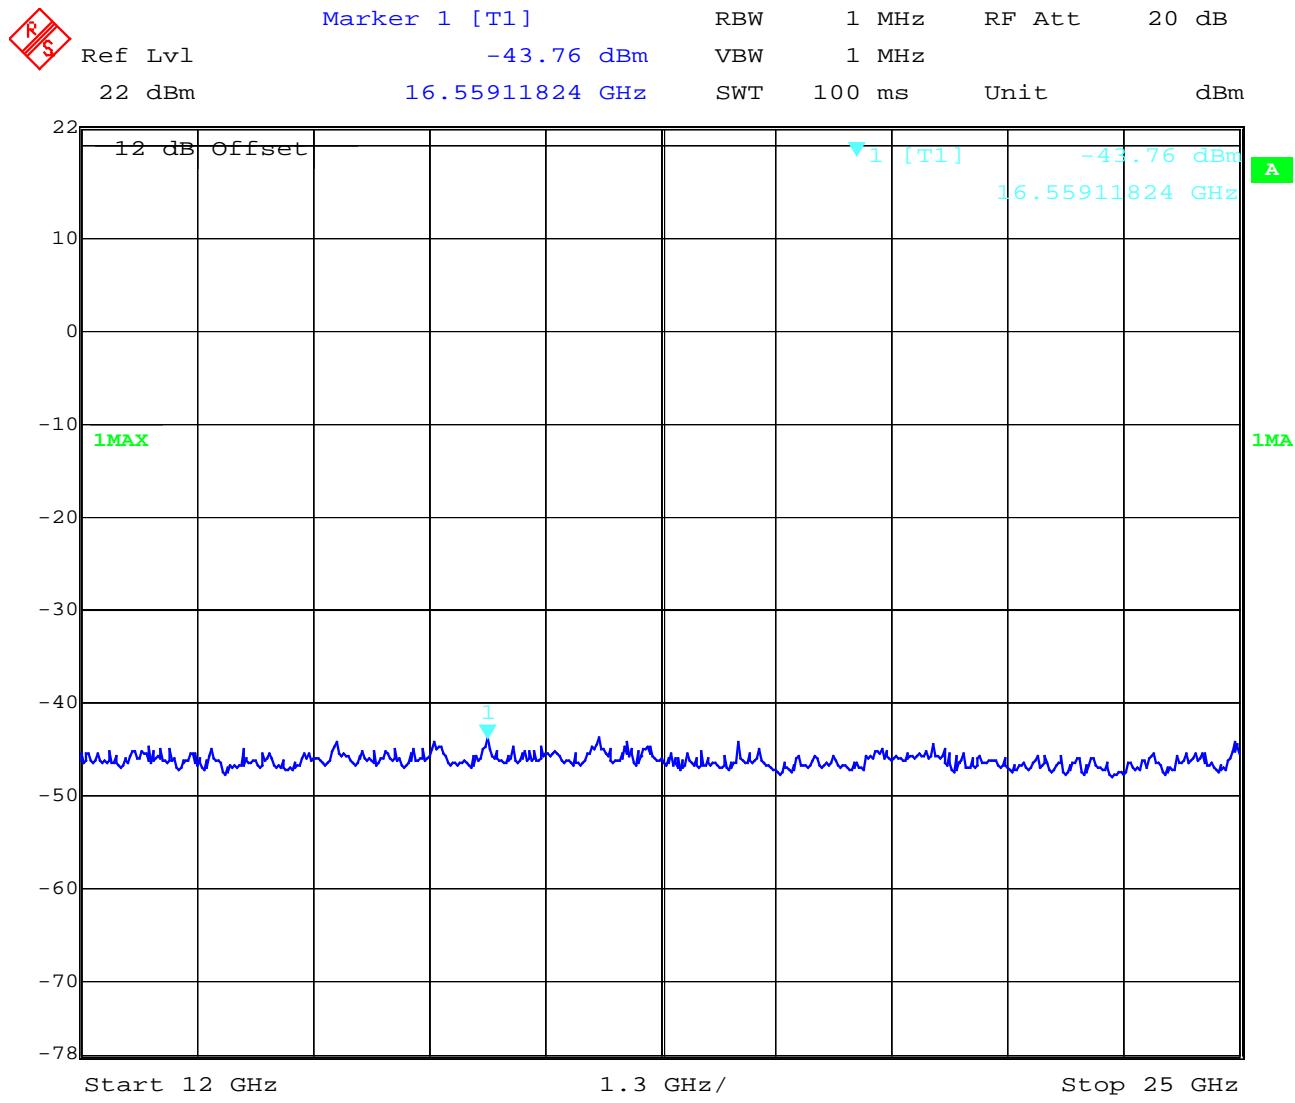

Date: 23.JAN.2003 08:54:06


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 2 (middle Channel): 30 MHz - 1GHz peak

§ 15.247 (c) (1)

The ref-line is referenced to the max. output at 2441 MHz in the next plot.

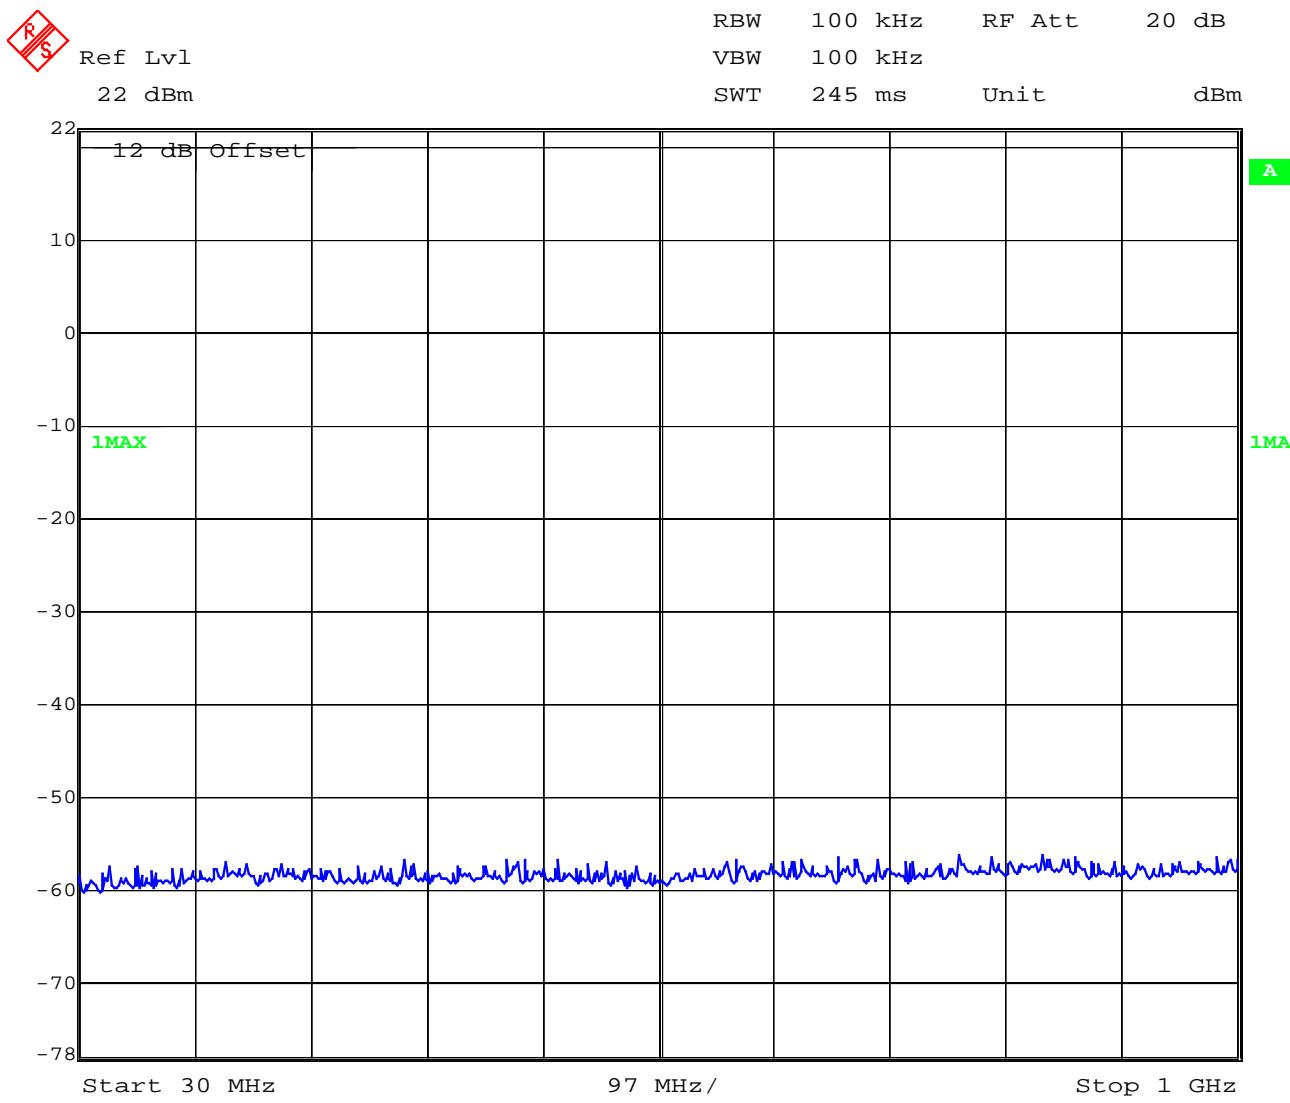


Date: 23.JAN.2003 08:57:00

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 2 (middle Channel): 1 –12 GHz peak

§ 15.247 (c) (1)

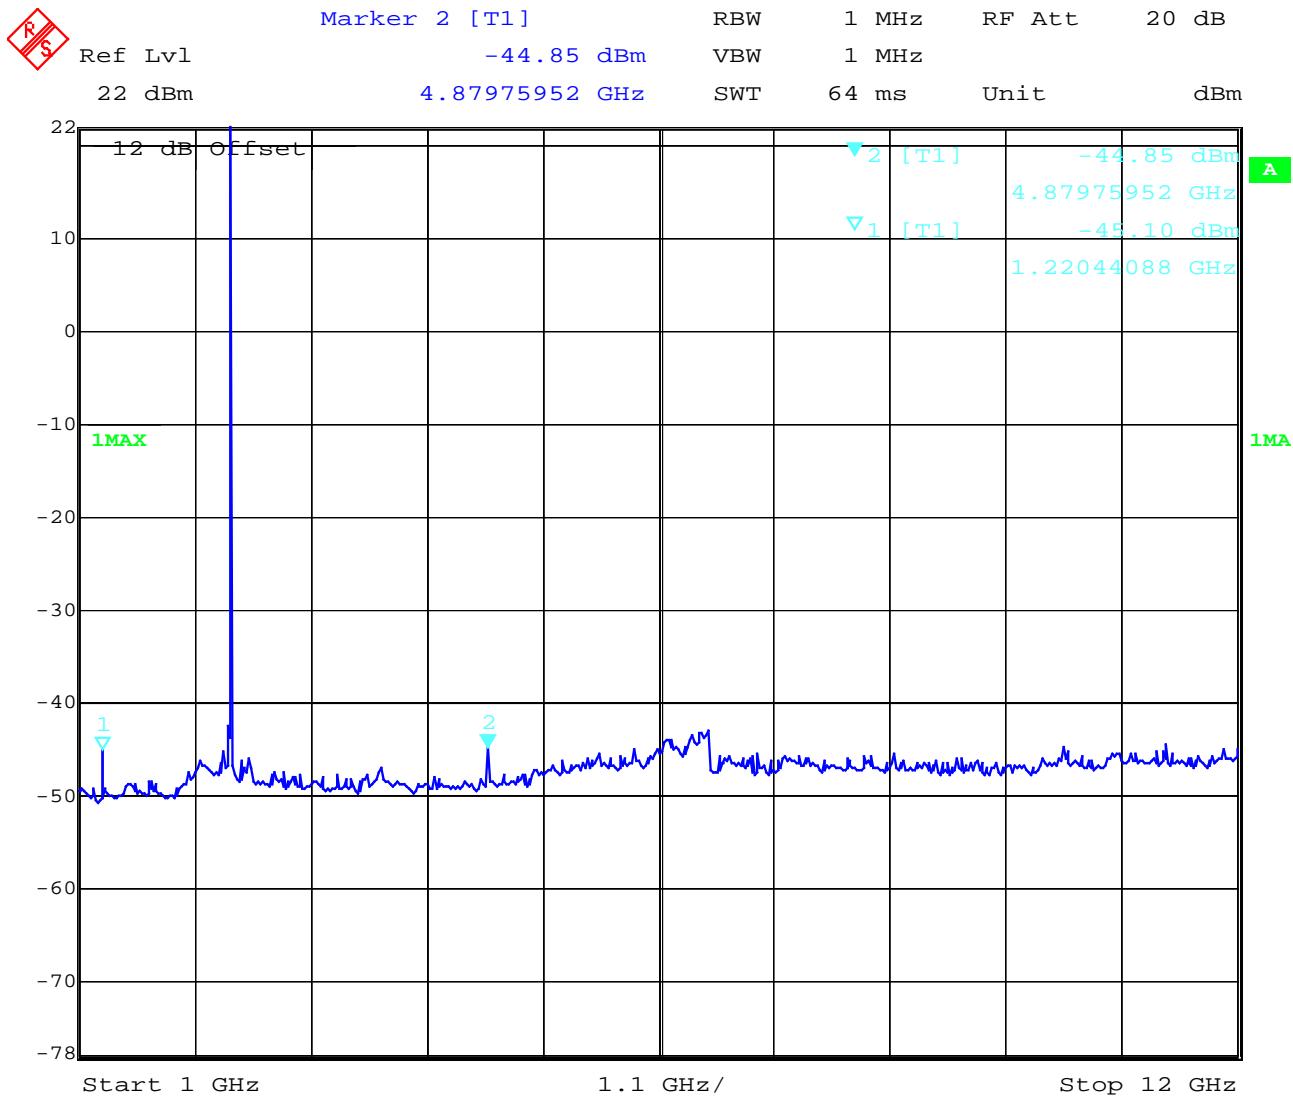


Date: 23.JAN.2003 09:01:20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 2 (middle Channel): 12 – 25 GHz peak

§ 15.247 (c) (1)

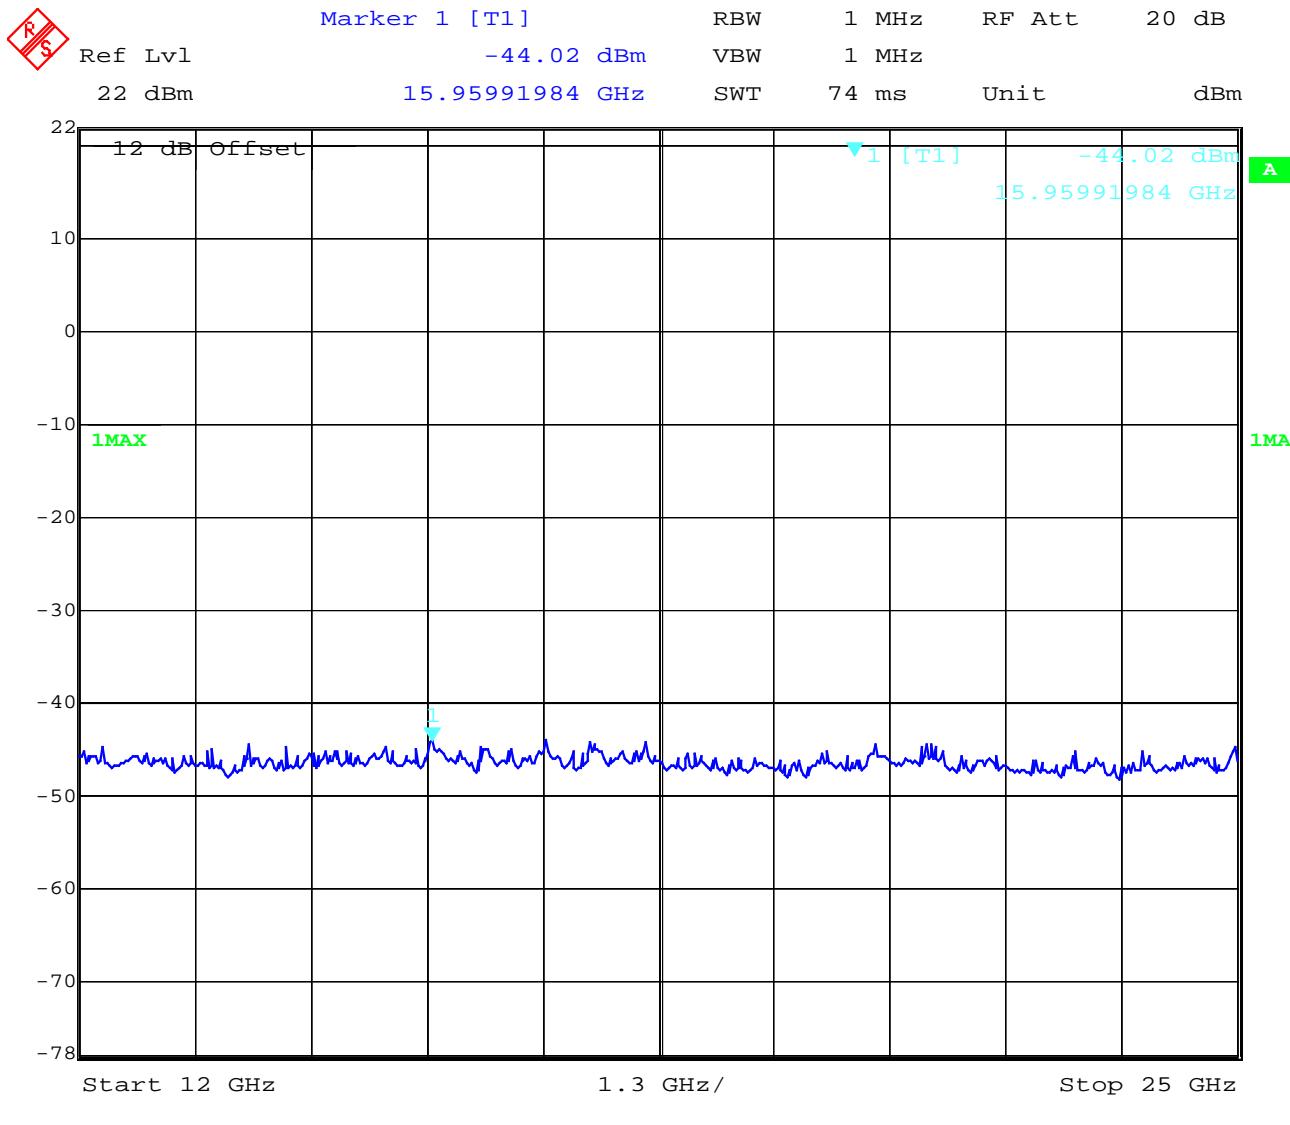


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 3 (highest Channel): 30 MHz - 1 GHz peak

§ 15.247 (c) (1)

The ref-line is referenced to the max. output at 2441 MHz in the next plot.

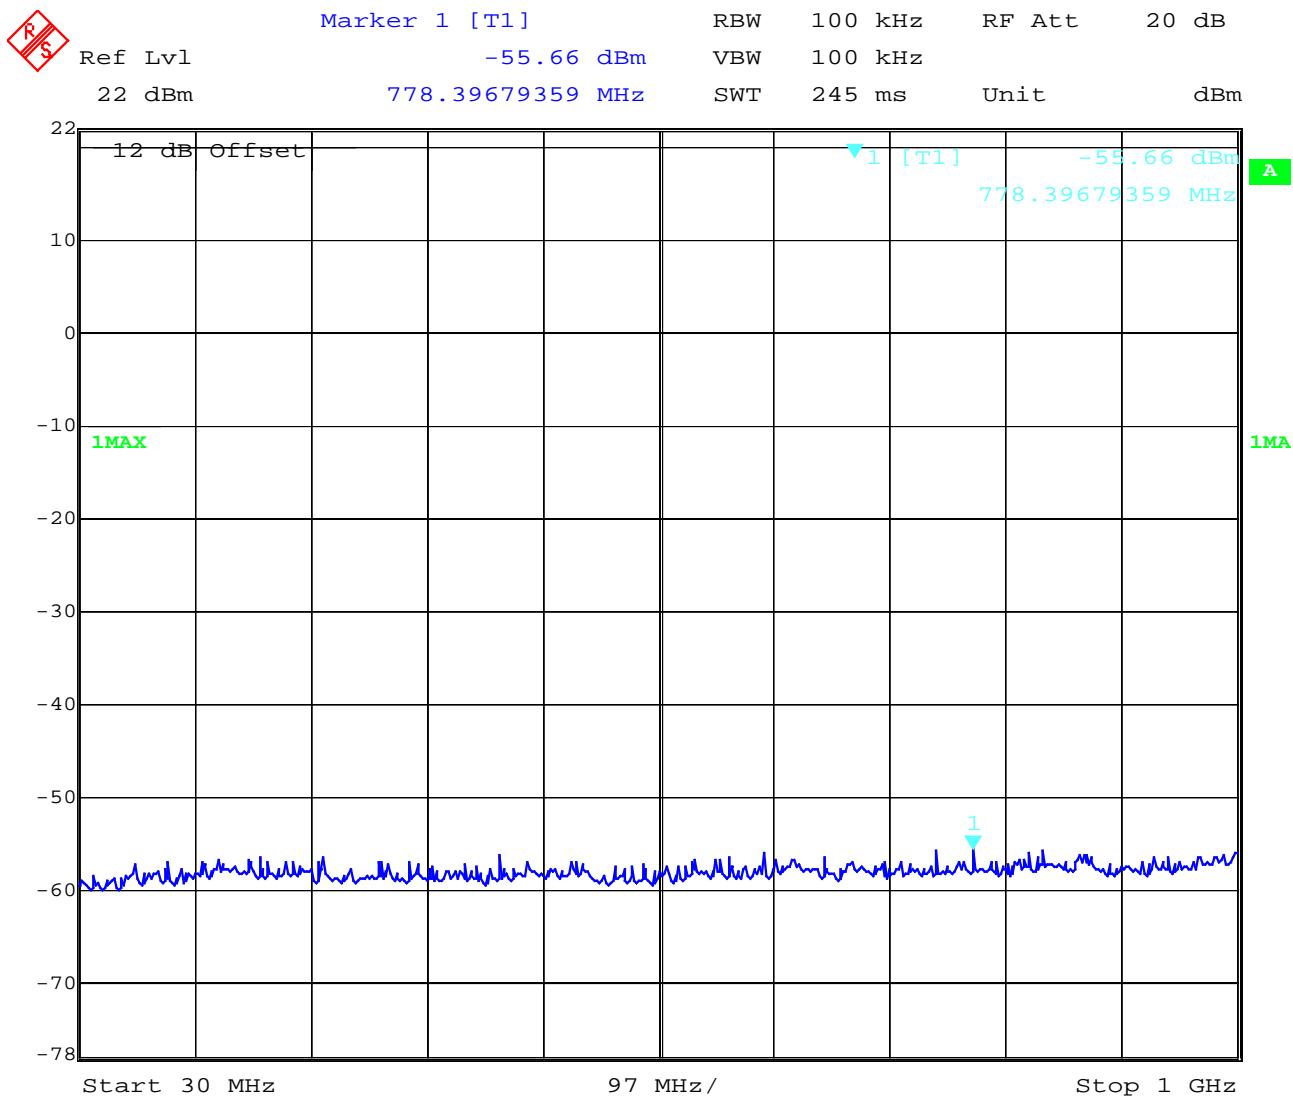


Date: 23.JAN.2003 09:23:37

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 3 (highest Channel): 1 - 12 GHz peak

§ 15.247 (c) (1)

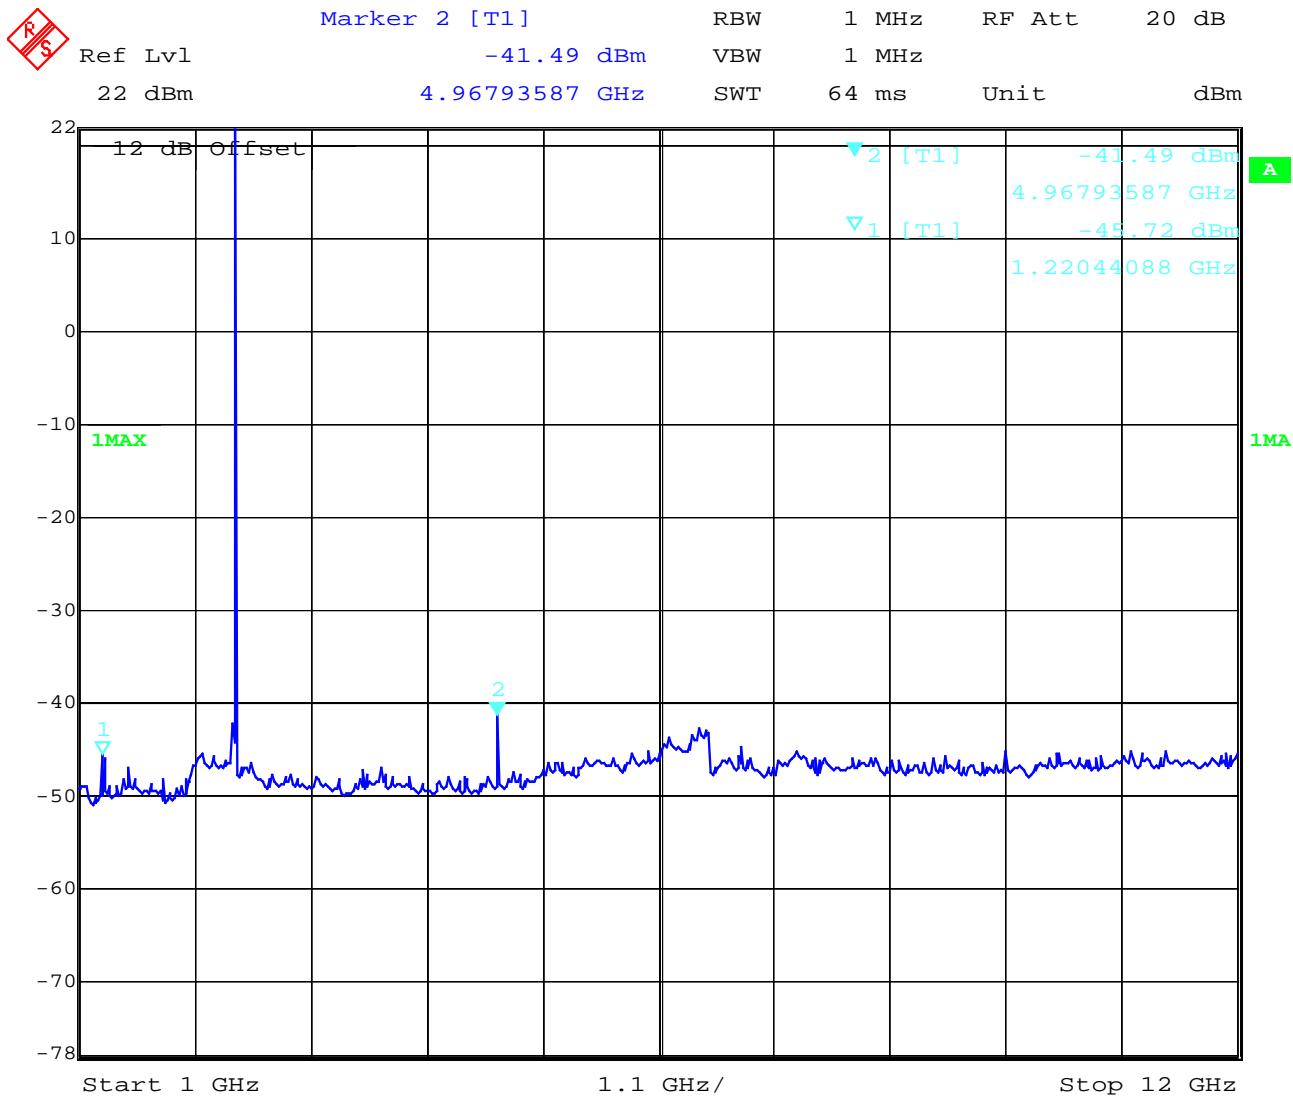


Date: 23.JAN.2003 09:24:32

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 3 (highest Channel): 12 - 25 GHz peak

§ 15.247 (c) (1)

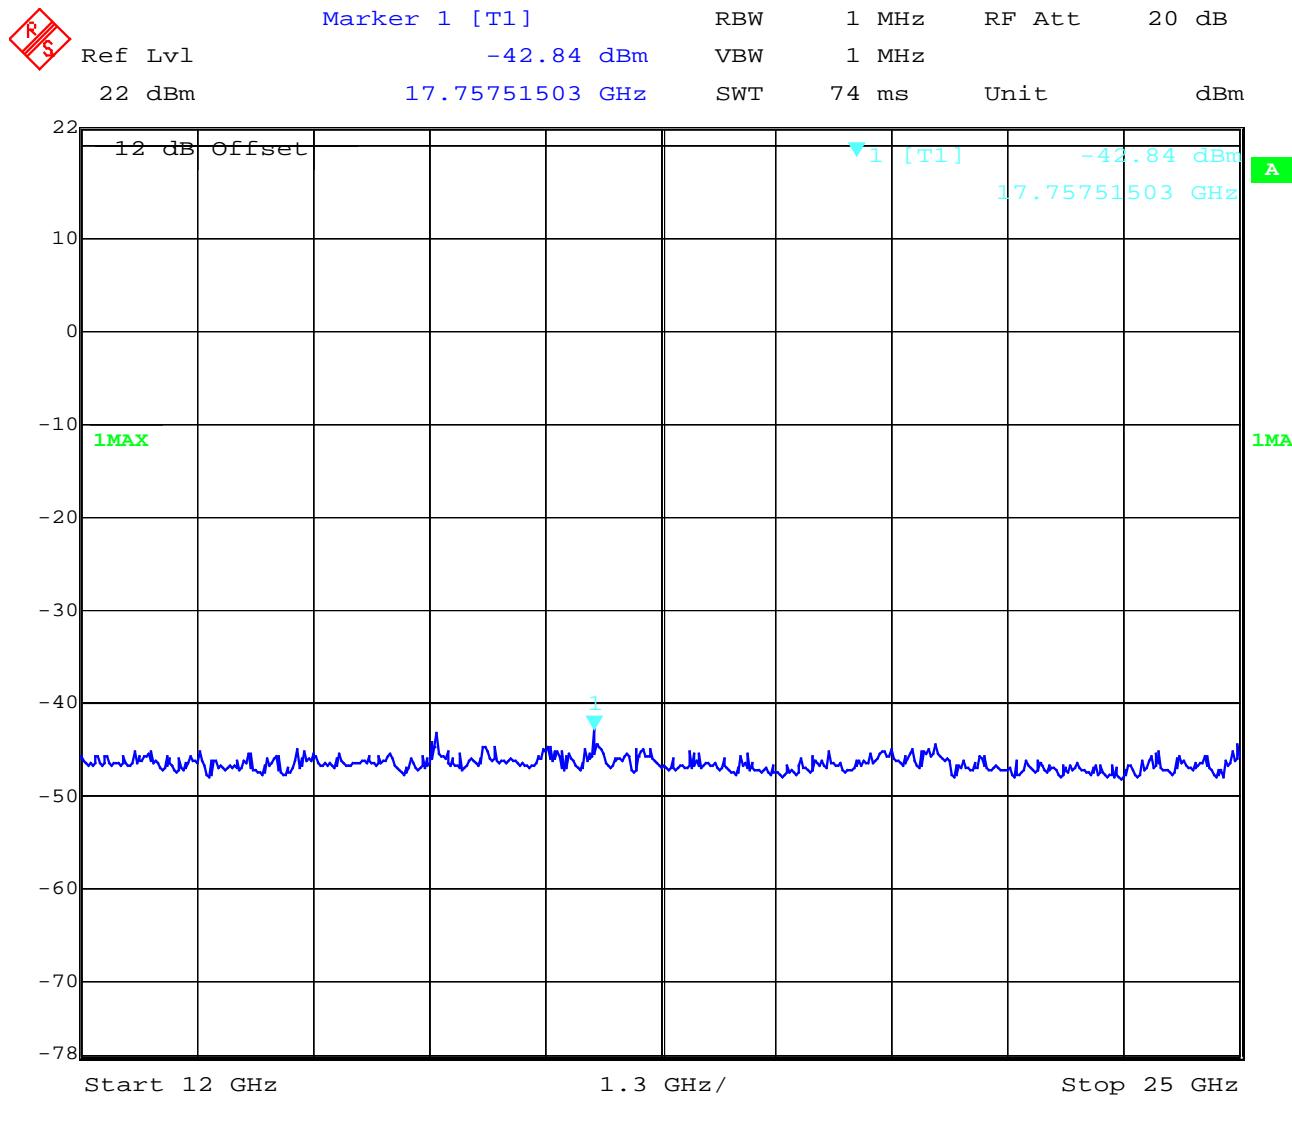

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

17-24

SPURIOUS RADIATED EMISSION

§ 15.247 (c) (1)

The measurements below 1 GHz were performed with an CISPR Quasi Peak Adapter.

EMISSION LIMITATIONS					
f (MHz)	polari- zation	amplitude of emission (dB μ V/m) QP/Peak	amplitude of emission (dB μ V/m) average	limit max. allowed emmision power (dB μ V/m)	results
2401 MHz					
4802	vertical		25.5	54.0	complies
2441 MHz					
no	peaks	found	< 20 dB	below	limit
2482 MHz					
4964	vertical		29.4	54.0	complies
Measurement uncertainty		$\pm 3\text{dB}$			

Horizontal measurements were more then 7 dB lower

LIMITS


SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

30-4000 MHz, vertical, lowest channel

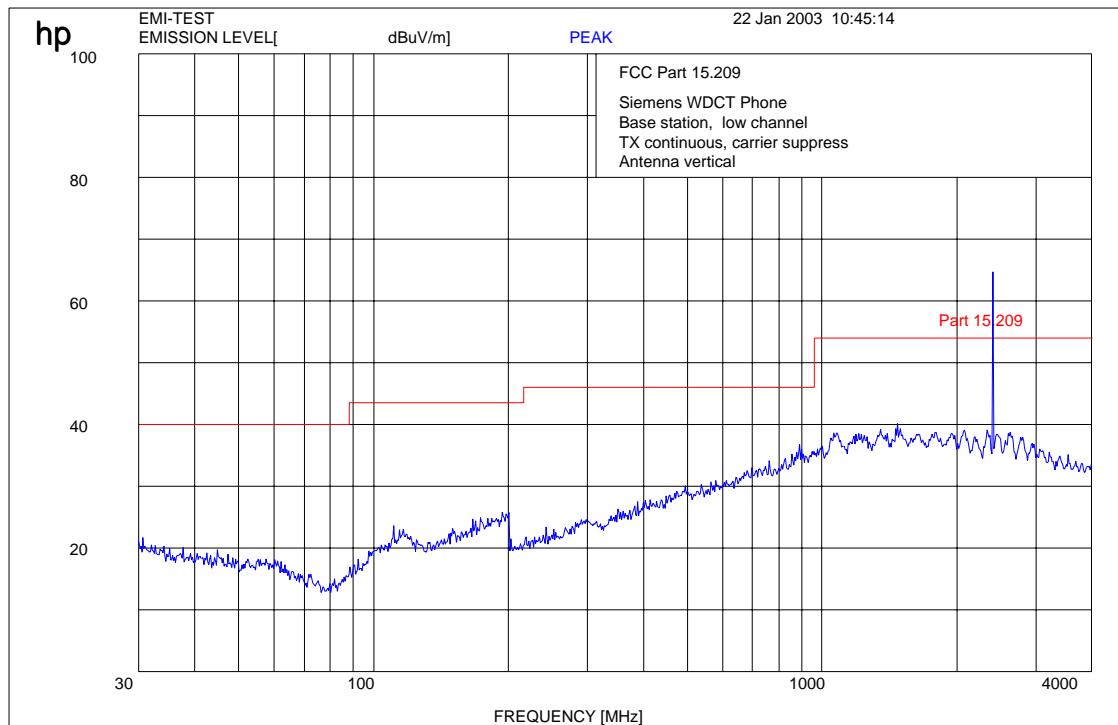
 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Carrier was suppressed by a stubb tuner to avoid overload of the system.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

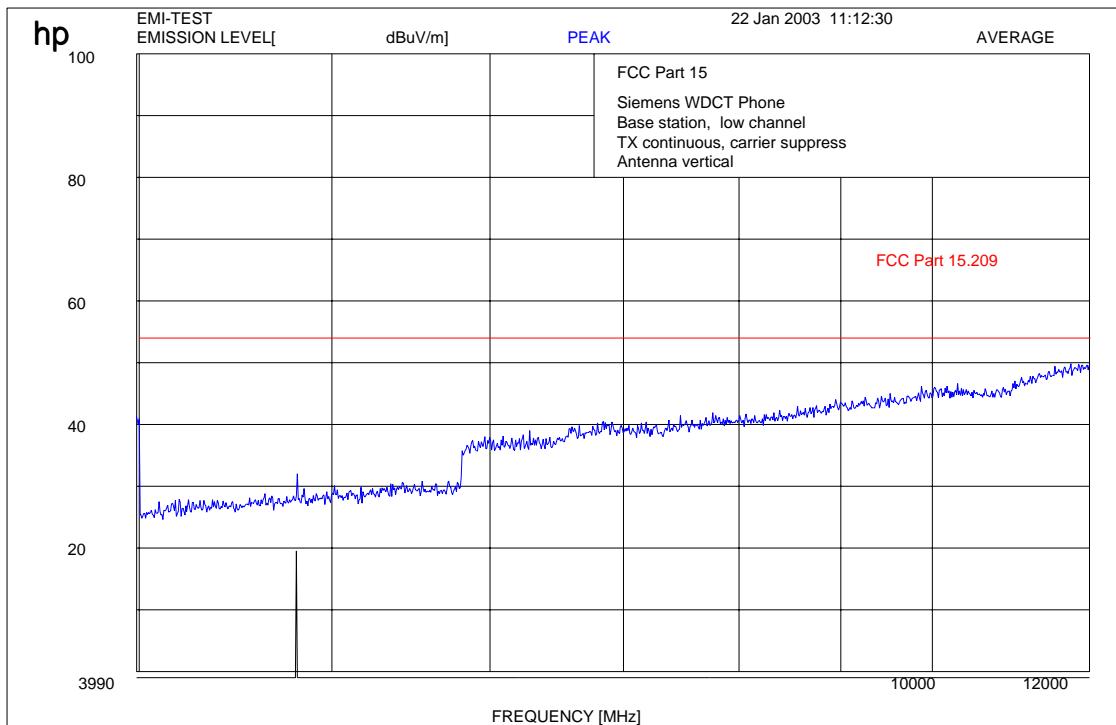
EMISSION LIMITATIONS (Transmitter)**SUBCLAUSE § 15.247 (c) (1)****4000 - 12000 MHz, vertical, lowest channel****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW: 1 MHz****LIMITS****SUBCLAUSE § 15.247 (c)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

12000 - 25000 MHz, vertical, peak, valid for all three channels

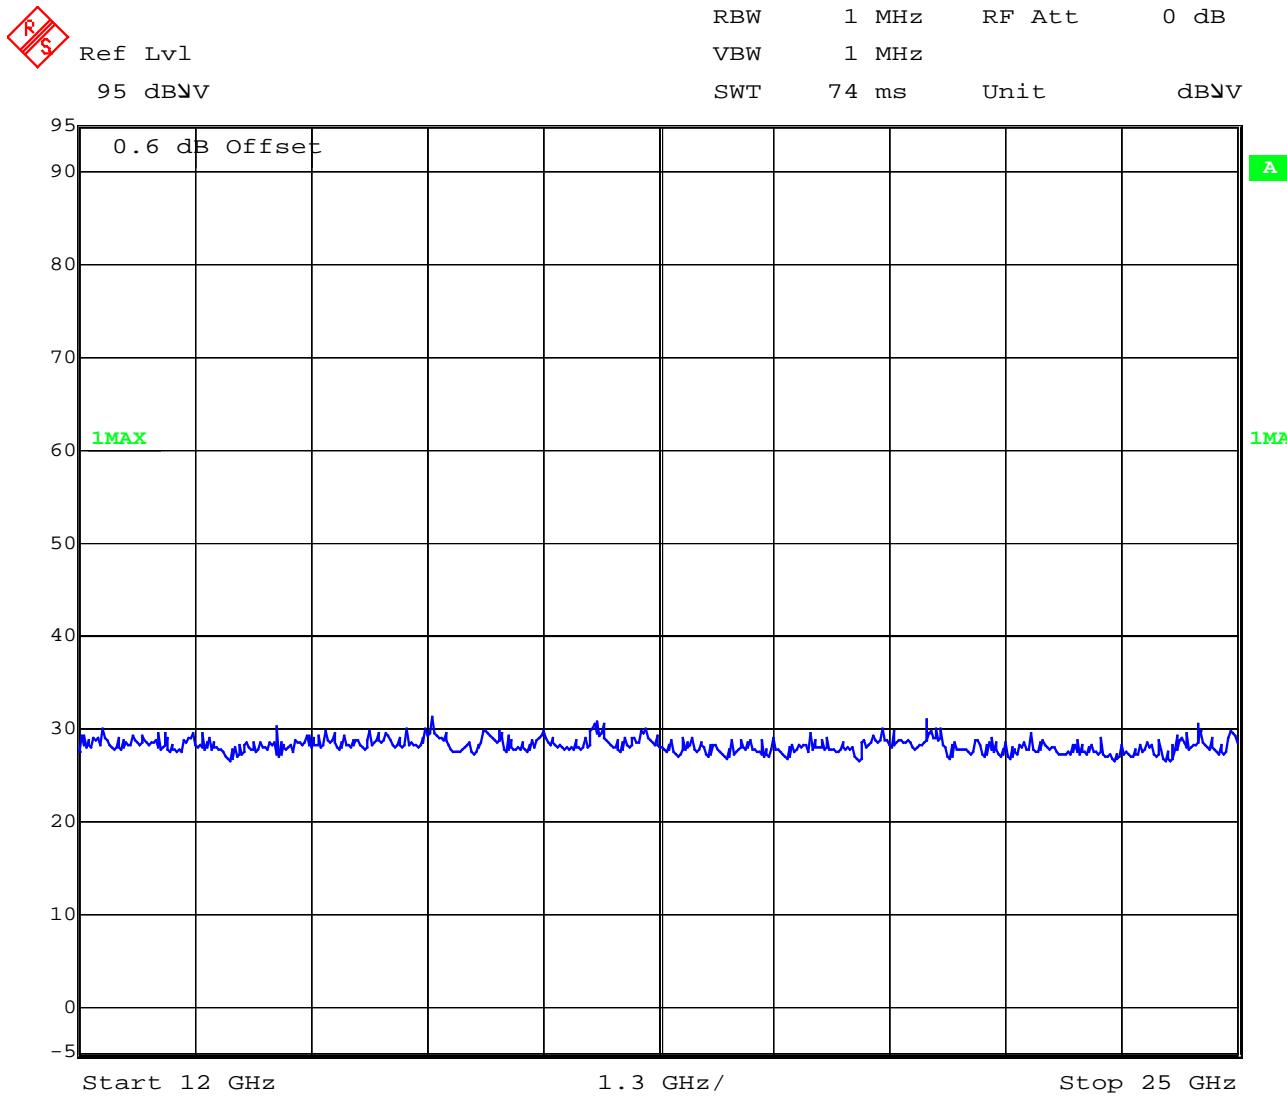

Date: 23.JAN.2003 09:30:09

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

30-4000 MHz, vertical, middle channel

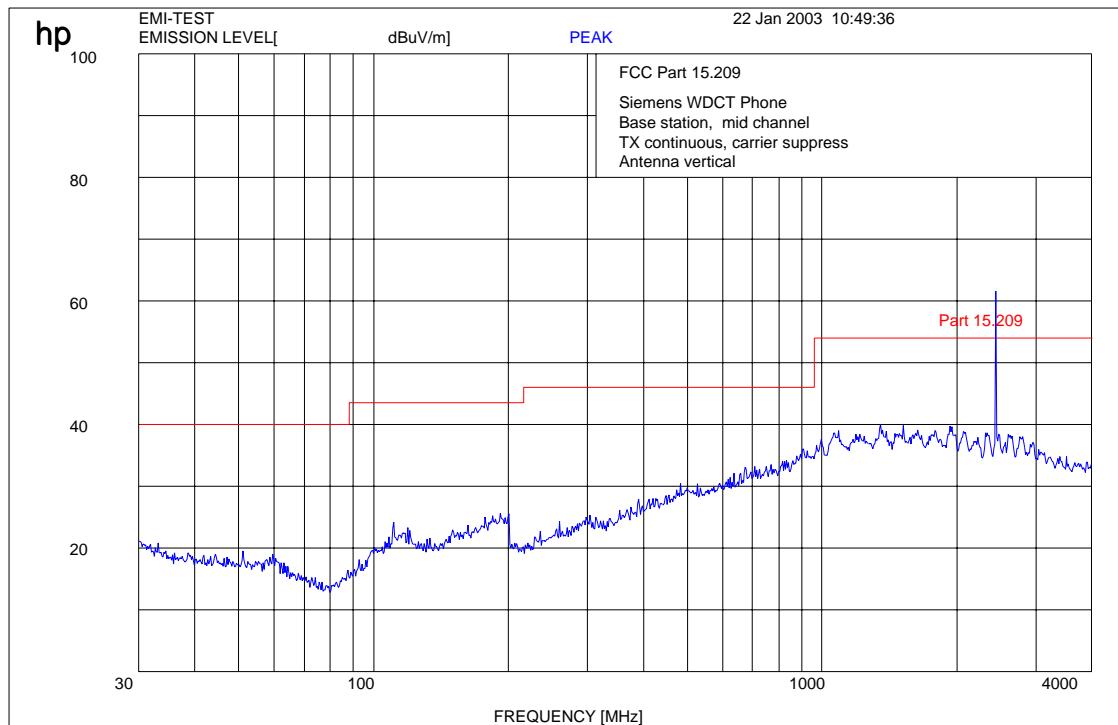 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

4000 - 12000 MHz, vertical, middle channel

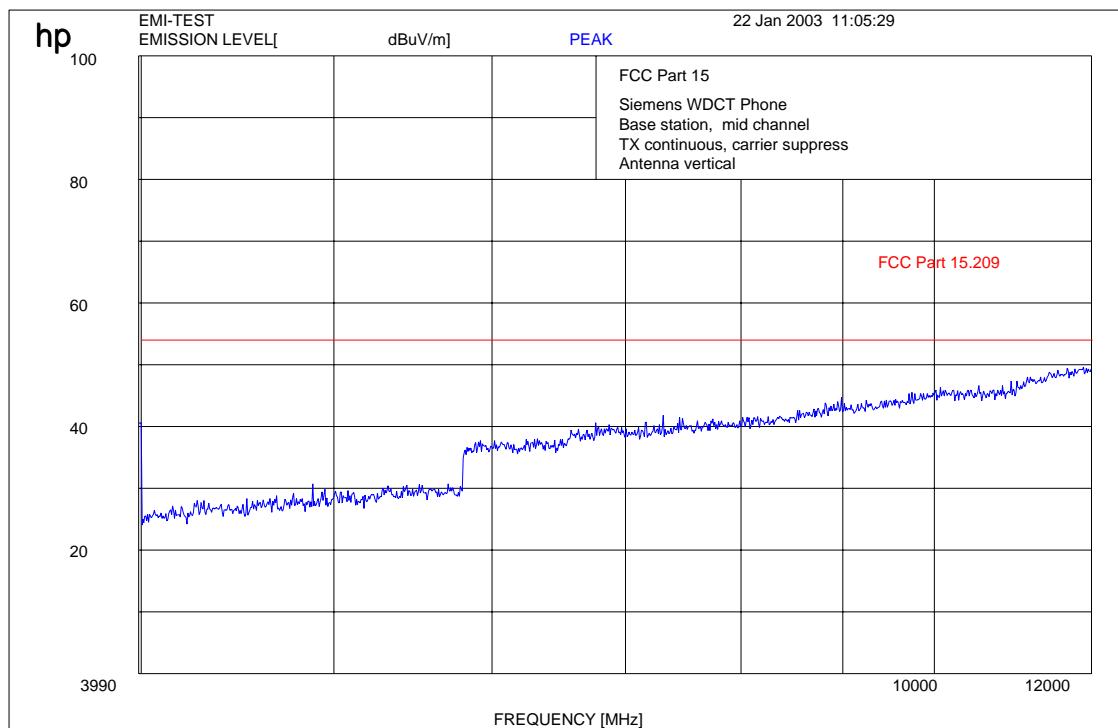 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS


SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

30-4000 MHz, vertical, highest channel

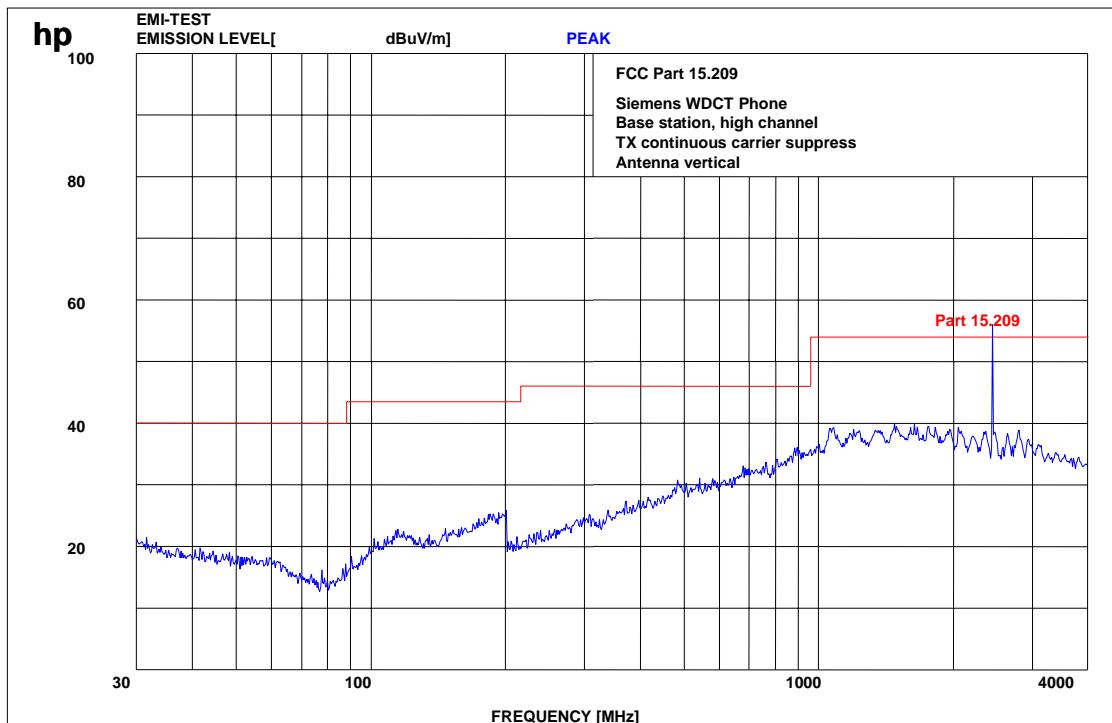 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Carrier was suppressed by a stubb tuner to avoid overload of the system.

LIMITS

SUBCLAUSE § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

4000-12000 MHz, vertical, highest channel

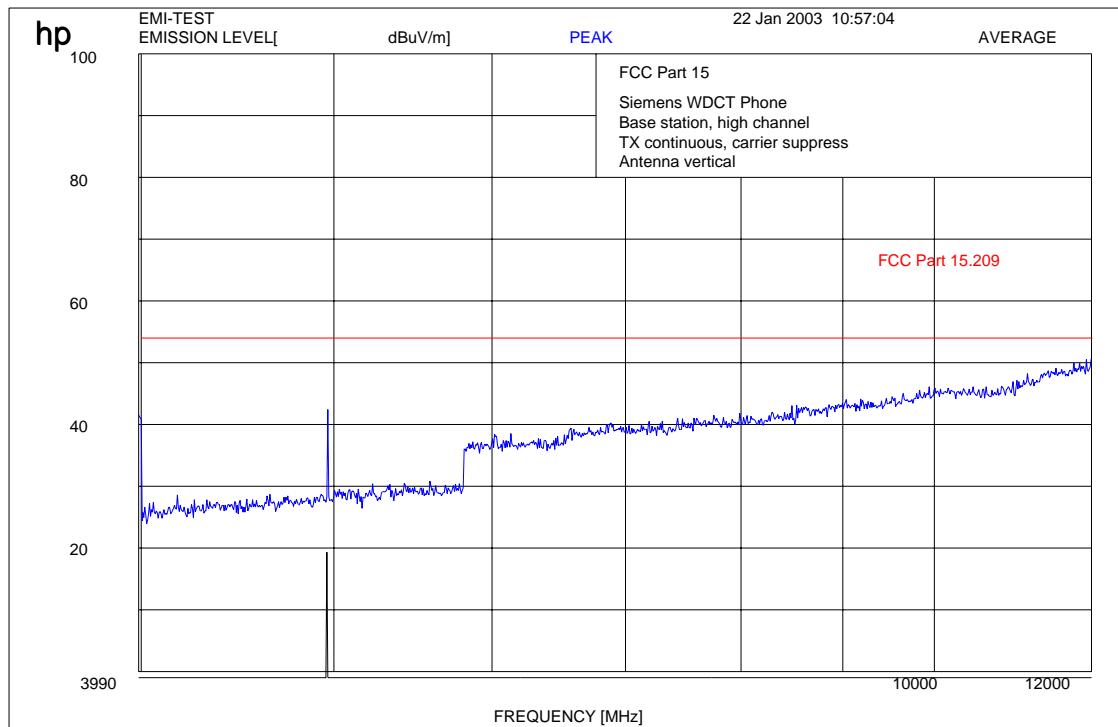 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Carrier was suppressed by a stubb tuner to avoid overload of the system.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Low frequency emissions (conducted)

§ 15.107/207

EUT: WDCT Phone Base station
 Manufacturer: Siemens
 Operating Condition: Traffic mode
 Test Site: Room 006
 Operator: Ames
 Comment: 110 V AC / 60 Hz L1 and N

SCAN TABLE: "EN 55022 V"

Short Description:			Voltage	Mains	1.60	Detector	Meas.	IF	Transducer
Start Frequency	Stop Frequency	Step Width							
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5	L1	1458	Average

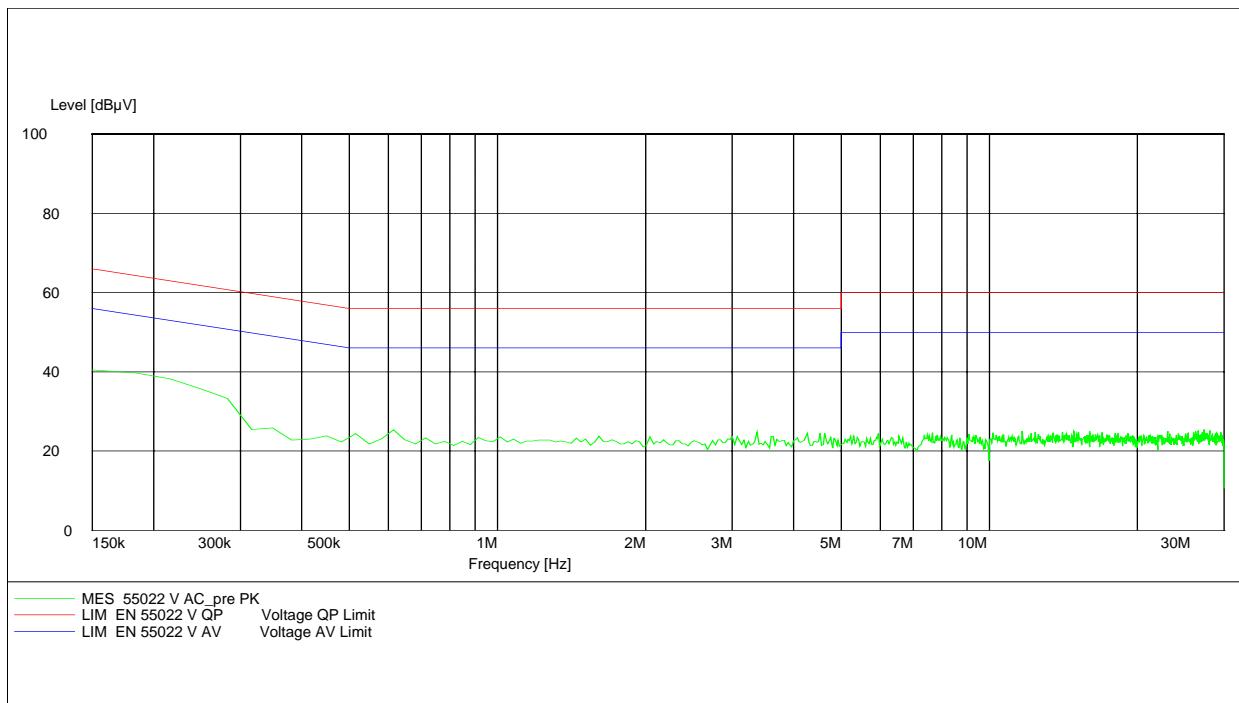

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

EMISSION LIMITATIONS < 30 MHz (Transmitter)

SUBCLAUSE § 15.209

measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

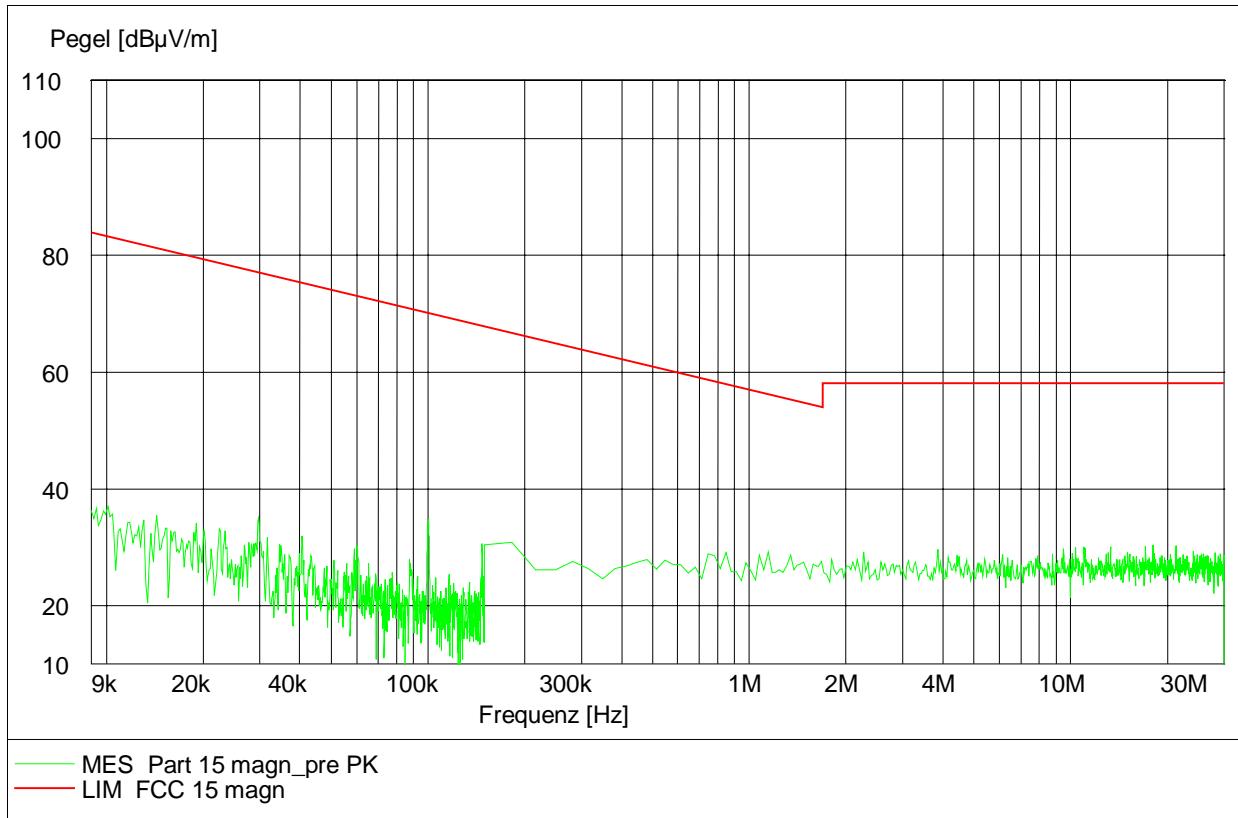

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB μ V/m	30
30 - 88	100 / 40 dB μ V/m	3
88 - 216	150 / 43.5 dB μ V/m	3
216 - 960	200 / 46 dB μ V/m	3
above 960	500 / 54 dB μ V/m	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

RECEIVER SPURIOUS RADIATION**§ 15.209**


SPURIOUS EMISSIONS LEVEL (μV/m)								
f (MHz)	Detector	Level (dBμV/ m)	f (MHz)	Detector	Level (dBμV/ m)	f (MHz)	Detector	Level (dBμV/ m)
no	peaks	found						
Measurement uncertainty			± 3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

Measurement distance see table**Limits****SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

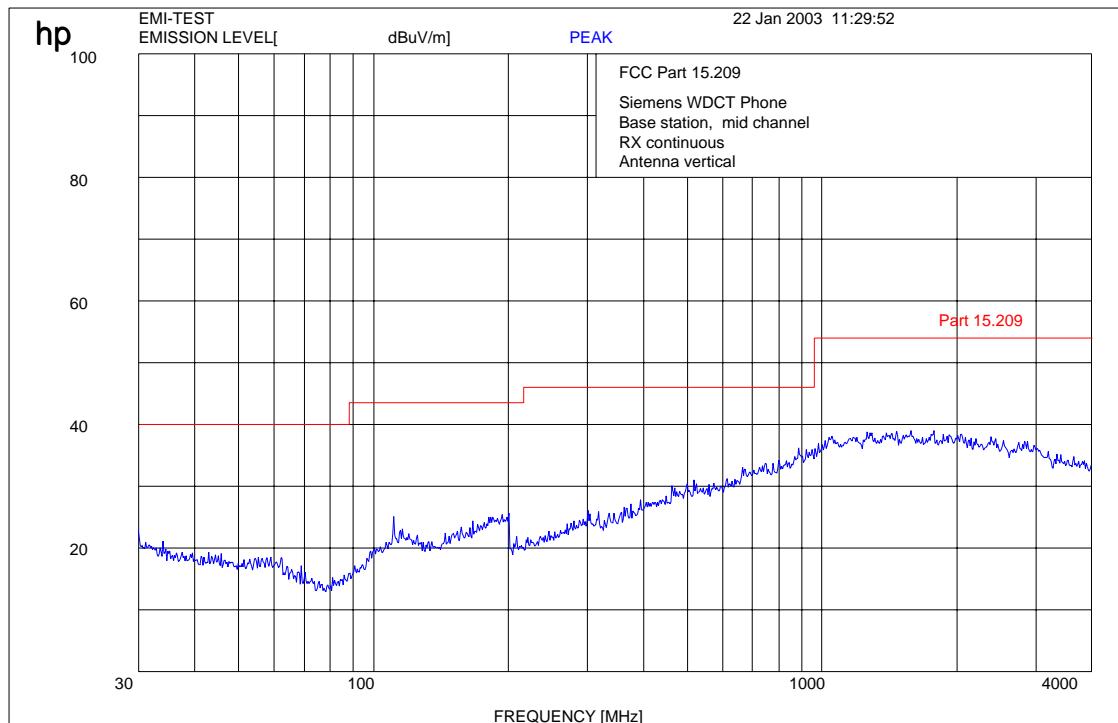
RECEIVER SPURIOUS RADIATION**§ 15.209** $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz**Limits****SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

RECEIVER SPURIOUS RADIATION

§ 15.209

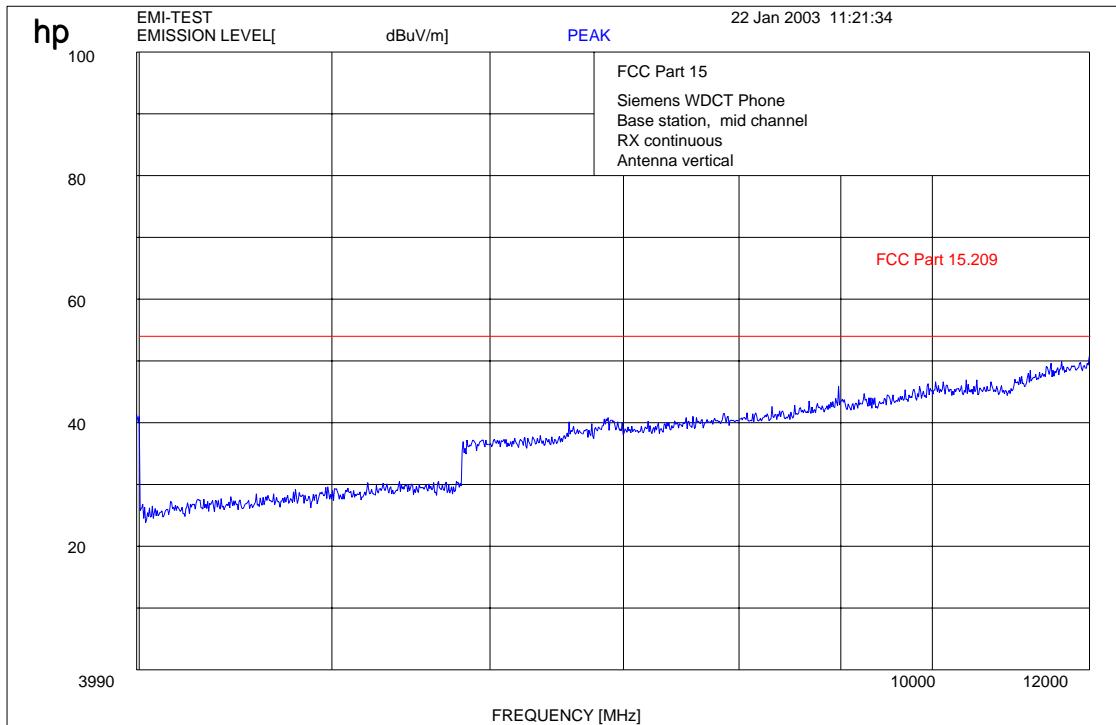 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.209


Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

RECEIVER SPURIOUS RADIATION

§ 15.209

This measurement was made with a low noise analyzer FSIQ from R&S with an additional lownoise amplifier to reduce system noise.

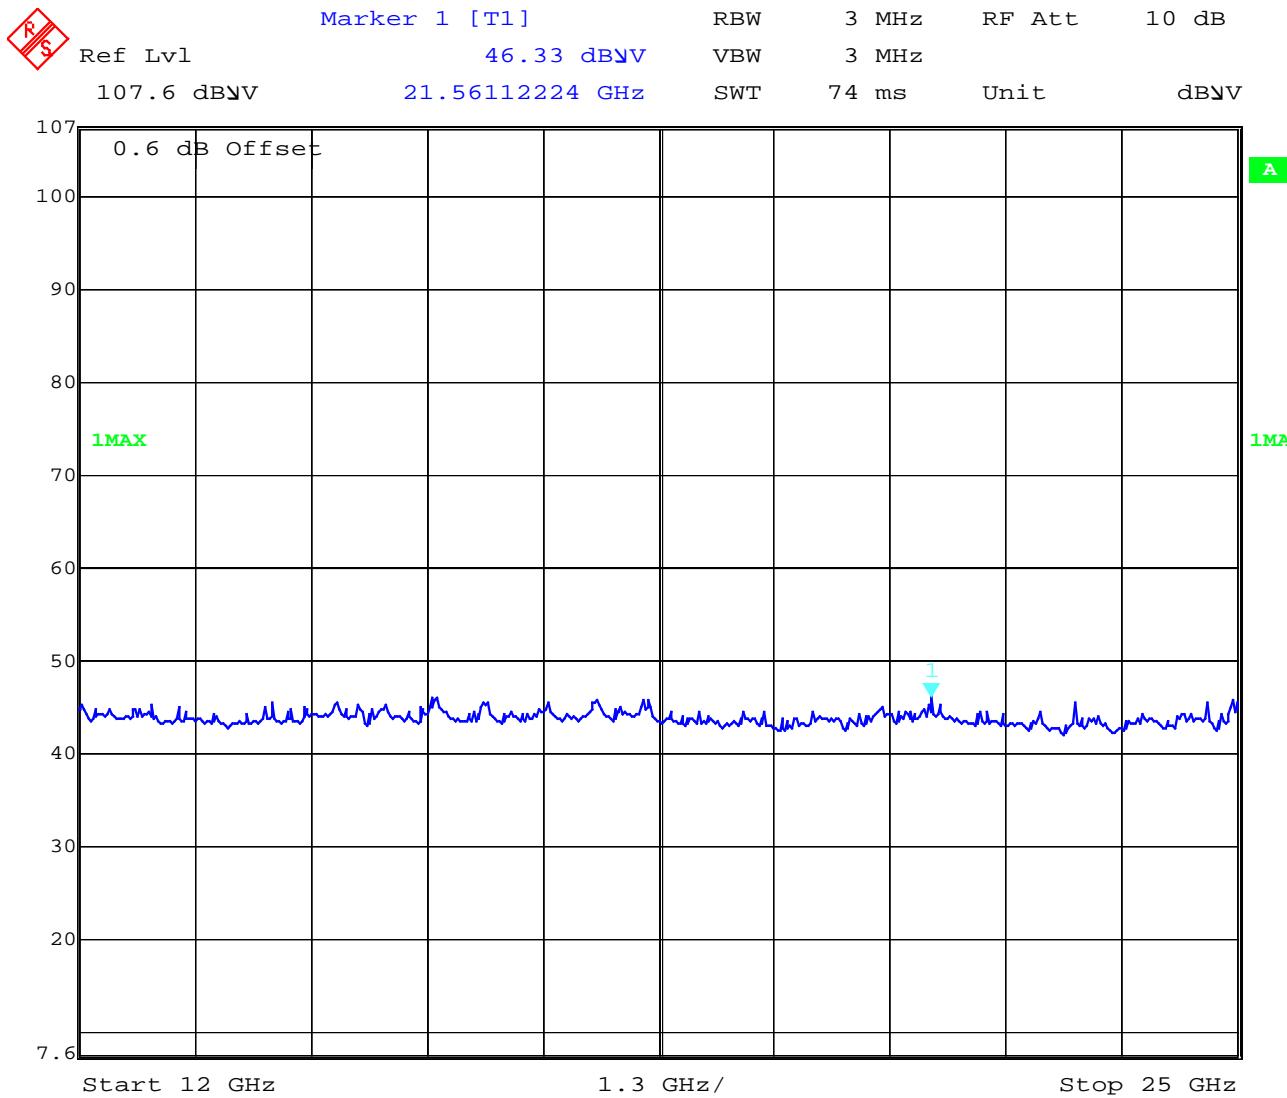

Date: 24.JAN.2003 07:58:01

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Signal Generator	AFGU	Rohde & Schwarz	862 480/032
09	Transformer	MPL	Erfi	91350
10	AC-Line Simulator	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Deviation meter	9008	Racal-Dana	2647
16	Frequency counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic chamber		Frankonia	
33	Controler	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Reiciver	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetwork	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenn0 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V- Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V- Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V- Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power supply	6032A	Rohde & Schwarz	2933A05441
59	Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				

Test site

RADIATED EMISSIONS




Test site

RADIATED EMISSIONS




Test site

RADIATED EMISSIONS

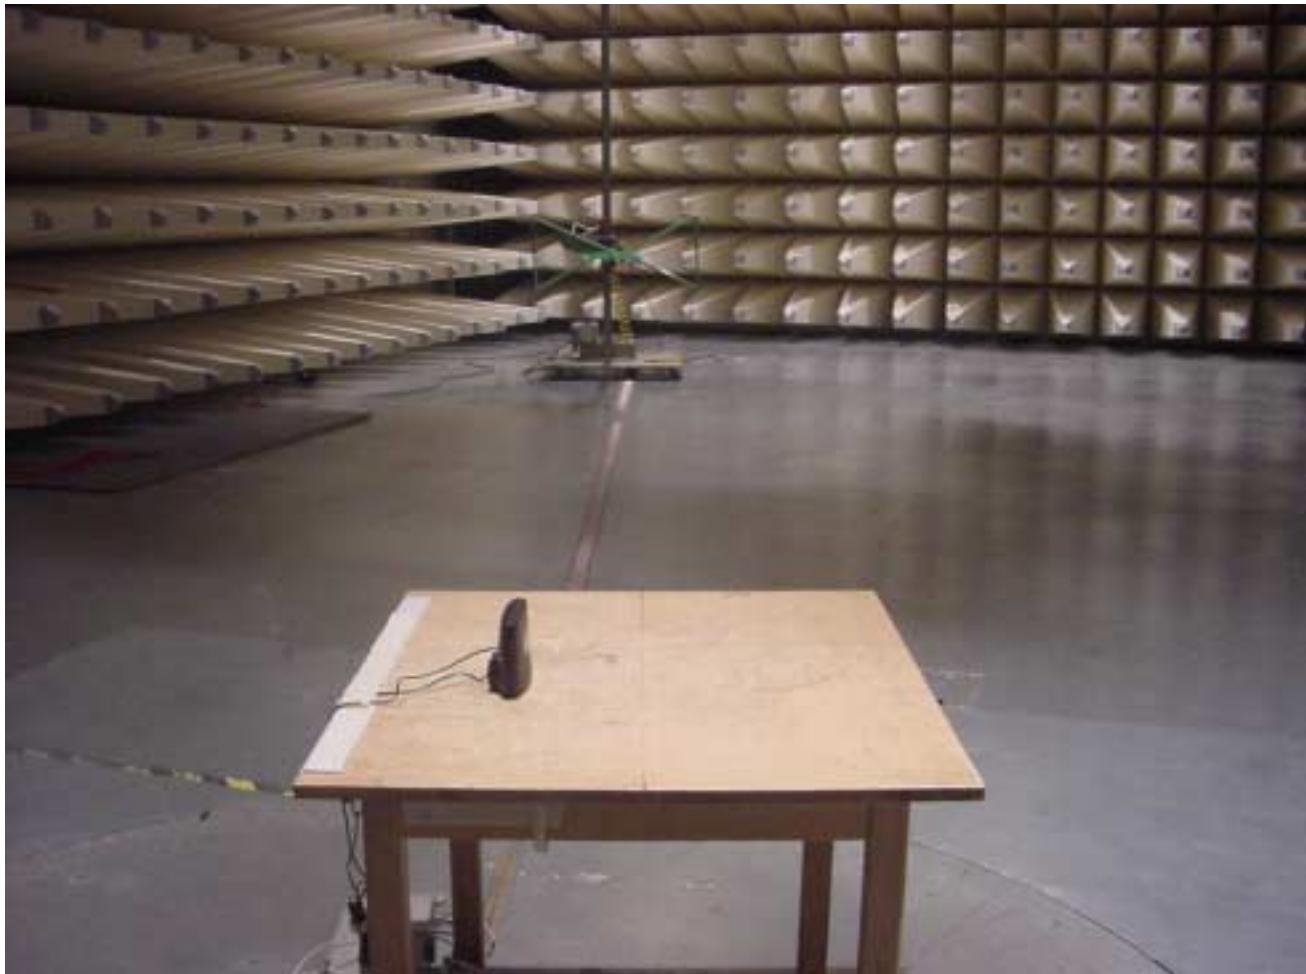

Test site

CONDUCTED EMISSIONS

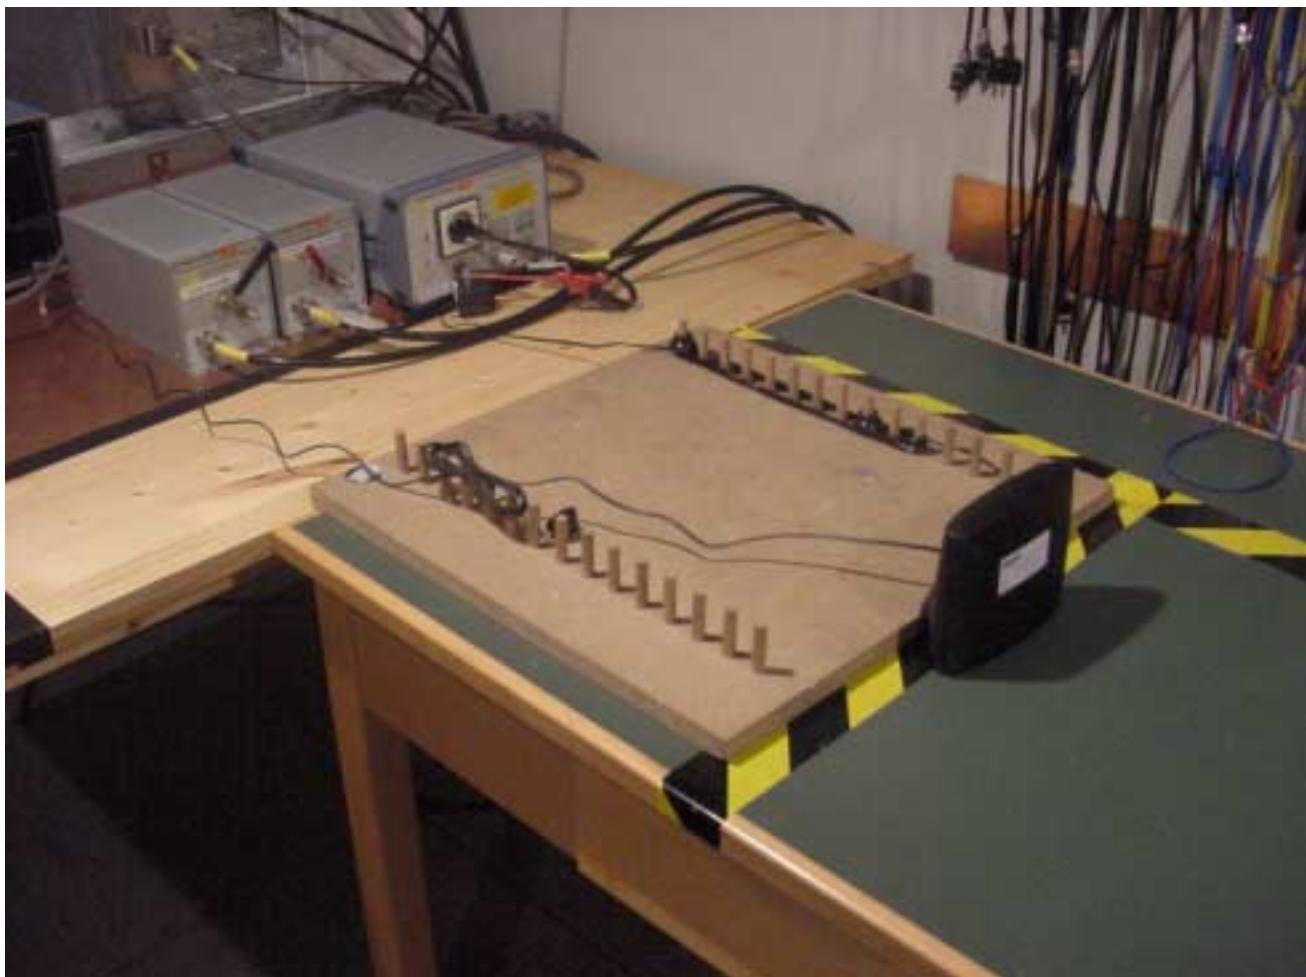

Photographs of the equipment

Photograph no.: 1



Photographs of the equipment

Photograph no.: 2




Photographs of the equipment

Photograph no.: 3



Photographs of the equipment

Photograph no.: 4

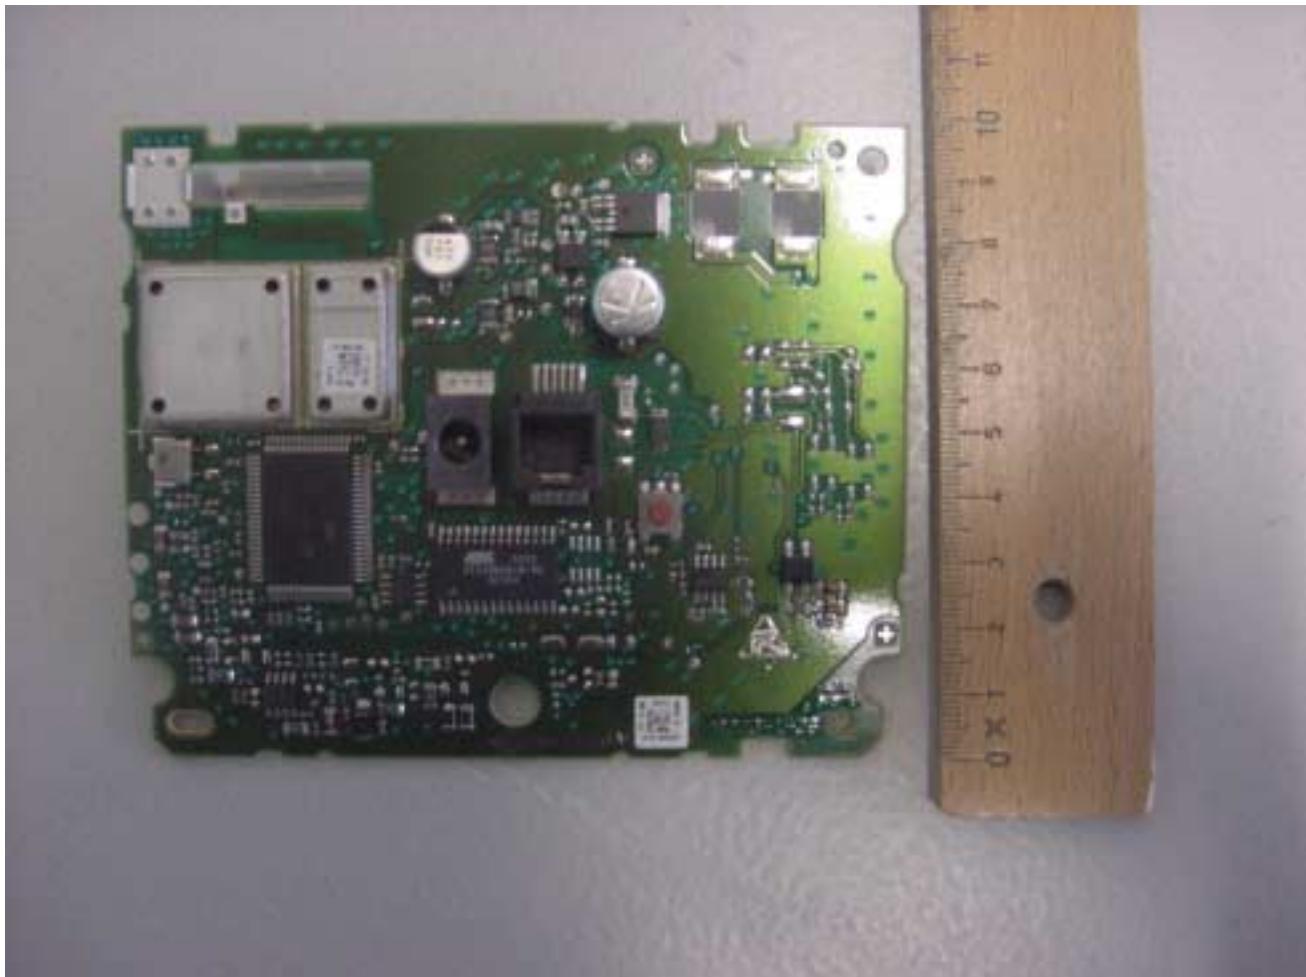

Photographs of the equipment

Photograph no.: 5

