

F C C TEST REPORT

REPORT NO.: 21167/9/400F

Units 602-605, 6/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong **Tel**: [852] 2305-2570 **Fax**: [852] 2756-4480



FCC - Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 2 of 11

FCC listed testlab acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of ANSI C63.4 - 1992

Product : Remote Control Transmitter -- 27

MHz Transmitter

Model : 47191

Applicant : ARTIN INDUSTRIAL CO LTD

Manufacturer: ARTIN INDUSTRIAL CO LTD



FCC – Test Report

No. 21167/9/400F

Date: <u>1999-11-26</u>

Page 3 of 11

TABLE OF CONTENTS

- 1. Cover sheet
- 2. Introduction
- 3. Table of Contents
- 4. Laboratory Report
- 5. Summary of Testresults
- 6. Test Equipment List
- 7. Radiated Emission Testprocedure
- 8. Interference Radiation (Datasheet)
- 9. Notes for Radiation Measurement (acc. to ANSI C63.4 1992)
- 10. Measurement of Emissions within Band Edges (Datasheet)
- 11. Notes for Measurement of Emissions within Band Edges



FCC - Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 4 of 11

LABORATORY - REPORT

APPLICANT: ARTIN INDUSTRIAL CO LTD ADDRESS: 2/F, Lee Sum Factory Building

21-25 Sze Mei Street San Po Kong, Kowloon

HONG KONG

DATE OF SAMPLE RECEIVED: 1999-11-24

DATE OF TESTING: 1999-11-26

DESCRIPTION OF SAMPLE:

Product: Remote Control Transmitter -- 27 MHz Transmitter

Manufacturer: ARTIN INDUSTRIAL CO LTD

Model number: 47191

Band combination:

Rating: DC 9V ('6F22' Size Battery x 1)

Country of Origin: P.R. CHINA

INVESTIGATIONS Measurements to the relevant clauses of F.C.C. Rules and Regulations

REQUESTED: Part 15 Subpart C - Intentional Radiators

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered

to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Signed in the original copy to the client	
0 17	

Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests



FCC – Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 5 of 11

Summary of Test Results

Interference Radiation:

Test result: O.K.

Test data: See attached data sheet

Interference Voltage:

Test result: N.A. Test data: N.A.

Measurement of Emissions within Band Edges

Test result: O.K.

Test data: See attached data sheet



FCC – Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 6 of 11

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark	
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz	
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz	
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127		2 x 10A, 50Ω, 50μH 10KHz-30MHz	
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107		30MHz – 1000MHz	
Antenna Mast System	Schwarzbeck	AM9104		Max. 4 meters height	
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz	
Interface for Spectrum 2712	Tektronix	TD3F14A			
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz	
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz	
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2			
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127		2 x 10A, 50Ω, 50μH 10KHz-30MHz	
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107		30MHz – 1000MHz	
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz	
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW10555	10KHz – 30MHz	
Turntable with Controller	Drehtisch	DT312		ф120 cm	




FCC – Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 7 of 11

Radiated Emission Test Procedure

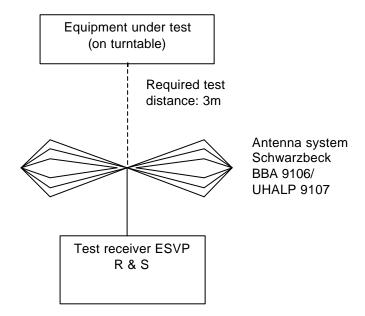



Interference Radiation

Measurement of Radiated Emissions (27MHz-1000MHz)

International Electrical Cartification Centre List

Ace: FCC Part 16 Subport C

IECC Ref: Model: **Applicant**

21167/9/400F 47191 ARTIN INDUSTRIAL CO LTD


Test Equipment Receiver: ESVP Ronde & Schwarz Antenna: Schwarzbeck BBA 9108 and DHALP 9107

Ser.Nr.:

Set under test: Connected sets: Operating mode: Remole Control Transmitter

Power "On"

	Frequency (MHz)	Horz Reading dB(pV)	Vert. Reading dB(µV)	Antenna Factor (dB)	Horiz, Test Result (µV/m)		Test ruit (m)	Limit (µV/m)
Pesk	27.12	4C	52	15.1	566		2252	100,000
Av.	27.12	39	51	15.1	504		2007	10,000
Harm. 2	54.24	26,5	26	6.3	44		52	100
Harm. 3	61.36	< 16	< 16	5.2	< 12	4	12	100
Harm. 4	108.48	< 16	< 16	9.5	< 19	4	19	150
Harm, 5	135.8	< 16	< 16	12.2	< 28	<	26	150
Напп. 6[162.72	< 16	< 16	13.6	< 30	<	30	150
Harm. /	189.64	< 15	< 15	14.8	< 35	4	. 35	150
Harm. 6	216.96	< 16	< 16	15.7	< 38		38	200
Harm. 9	244.08	s 16	< 16	16.5	< 42		42	20 Q
Harm. 10	271.2	< 16	< <u>1</u> 6	17.3			46	200
Harm. 11	286.32	< 10	< 10	18.0	< 50	5	50	200
Harm. 12	325.44	< 16	< 18	18.8	< 44		44	200
Harm. 13	352.58	< 16	< 19	17.4	< 47		47	200
Herm. 14	379.68	< 18	< 18 [°]	17,9	< 50		50	200
Herm. 15	4D8,8	< 18	< 1G	18.4	52		_ 52	200
Harm. 16	433.92	< 16	< 16	188	<u>< 55</u>	٧	55	200
Harm. 17	461.04	< 16	< 16	19.2	< 57	٧	57	200
Harm. 16	488.16	< 16	< 18	19.5	< 60	v	60	200
Harm. 19	515.28	< 16	< 10	10.0	< 82	Y	62	200
Налп. 20	542.4	< 16	< 16	20.1	< 64	ν	64	200
Harm. 21	569.52	< 16	< 16	20.5	< 87	2	67	200
Harm. 22	596.64	< 18	< 16	20.9	< 70		70	200
Harm. 23	623.76	< 16	< 16	21.2	c 73		73	200
Harm. 24	650.88	< 18_	< 18	21.9	< 76	v	76	200
Harm. 25	678	<16	< 18	22.1	< 80	4	80	200
Harm. 26	705.12	< 18_	< 18	22.5	< 84	4	84	200
Harm. 27(732.24	< 18	< 18	22.8	< 87	<	87	200
Harm. 28	759.36	< 18	< 18	23.2	< '81		91	200
Harm. 29	786.48	< 16	< 16	23.5	, 99		95	200
Harm. 30	813.6	< 16	< 16	23.9	< 99		99	200
Harm, 31	640.72	< 16	< 16	24.2	< 103	۲.	103	200
Harm, 32	867.84	< 18	< 18	24.6	< 107	< '	107	200
Harm. 33	684.86	< 18	< 18	24.9	< 111		111	200
Harm. 34	922.08	< 18	< 16	25.3	< 117	<	117	200
Harm. 35	949.2	< 16	< 16	25.8	< 122		122	200
Ham. 36	978.32	< 18	< 16	26.2	< 128	∢	128	500

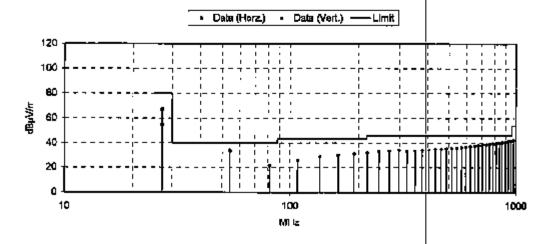

2 6 NOV 1

Test result:

Date: (l Operator:



FCC - Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 9 of 11

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

In the frequency range above 1000 MHz Spectrum Analyzer FMSM26 and Analyzer Display Unit FSA-D are used, bandwidth set at 100 kHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

In the frequnecy range above 1 GHz horn-antenna RGA 50/60 is used.

5. Frequency range scanned:

The frequency range 30 - 5000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.

Measurement of Emissions within band edges

International Electrical Certification Centra Ltd.

Acc: FCC Part 15 Subpart C

IECC Ref:

21167/9/400F

Model: Applicant: 47191 ARTIN INDUSTRIAL CO LTD

Remote Control Transmitter

Ser.Nr.:


Set under test: Connected sets:

Operating mode:

::

Power "On"

Test Equipment Spectrum Analyzer: Tektronix 2712

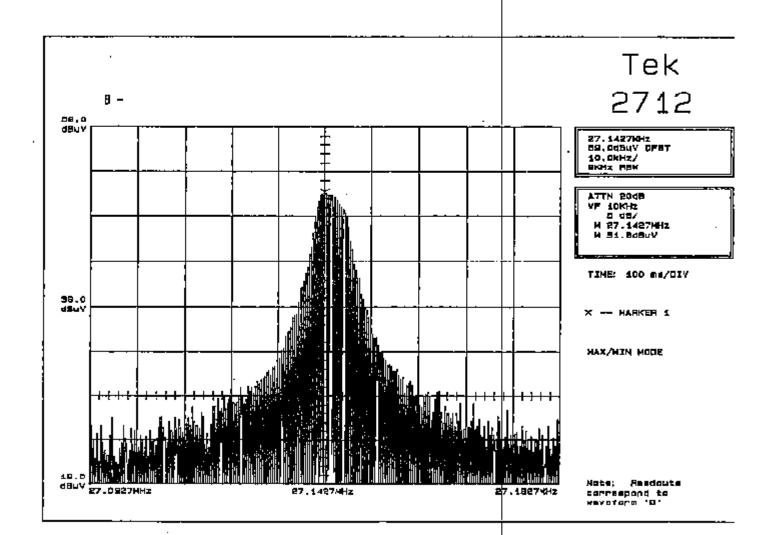

2 6 NOV 1999

Date: __



FCC - Test Report

No. 21167/9/400F

Date: 1999-11-26

Page 11 of 11

Notes for Measurement of Emissions within Band Edges

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Measuring instrumentations:

Spectrum Analyzer: Tektronix 2712

3. Frequency range scanned:

The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.

4. Arrangement of EUT:

During the test, the sample was operated.

5. Measuring Procedure:

In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement od Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.