



FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant : Comtrend Corporation

Product Type : Wireless Gateway

Trade Name : COMTREND

Model Number : NexusLink 3240u, NexusLink 3240, NexusLink 3120ua,
NexusLink 3120, WAP-5895ua, WR-6895

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Receive Date : Apr. 19, 2016

Test Period : Apr. 28 ~ Jun. 20, 2016

Issue Date : Aug. 17, 2016

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Eoundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Aug. 17, 2016	Initial Issue	Snow Wang



Verification of Compliance

Issued Date: Aug. 17, 2016

Applicant : Comtrend Corporation

Product Type : Wireless Gateway

Trade Name : COMTREND

Model Number : NexusLink 3240u, NexusLink 3240, NexusLink 3120ua,
NexusLink 3120, WAP-5895ua, WR-6895

FCC ID : L9VNL3240U

EUT Rated Voltage : DC 12V, 2.5A

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Exercise Software	13
3.3.	Configuration of Test System Details	14
3.4.	Test Site Environment	15
4	AC Power Line Conducted Emission Measurement.....	16
4.1.	Limit.....	16
4.2.	Test Instruments	16
4.3.	Test Setup	16
4.4.	Test Procedure	17
4.5.	Test Result	18
5	Radiated Emission Measurement.....	24
5.1.	Limit.....	24
5.2.	Test Instruments	24
5.3.	Setup.....	25
5.4.	Test Procedure	27
5.5.	Test Result	29
6	Maximum Conducted Output Power Measurement	48
6.1.	Limit.....	48
6.2.	Test Setup	48
6.3.	Test Instruments	48
6.4.	Test Procedure	48
6.5.	Test Result	49
7	6dB RF Bandwidth Measurement.....	53
7.1.	Limit.....	53
7.2.	Test Setup	53
7.3.	Test Instruments	53
7.4.	Test Procedure	53
7.5.	Test Result	54
7.6.	Test Graphs	55



8	Maximum Power Density Measurement.....	61
8.1.	Limit.....	61
8.2.	Test Setup	61
8.3.	Test Instruments	61
8.4.	Test Procedure	61
8.5.	Test Result	62
8.6.	Test Graphs	63
9	Out of Band Conducted Emissions Measurement.....	69
9.1.	Limit.....	69
9.2.	Test Setup	69
9.3.	Test Instruments	69
9.4.	Test Procedure	69
9.5.	Test Graphs	70
10	Antenna Measurement.....	88
10.1.	Limit.....	88
10.2.	Antenna Description	88
10.3.	Directional Gain Calculated.....	88

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	9kHz ~ 30MHz	1.457
	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	



2 EUT Description

Applicant	Comtrend Corporation 3F-1, No. 10, Lane 609, Chung Hsin Road, Section 5, San Chung Dist, New Taipei City 24159, Taiwan				
Manufacturer	Comtrend Corporation 3F-1, No. 10, Lane 609, Chung Hsin Road, Section 5, San Chung Dist, New Taipei City 24159, Taiwan				
Product Type	Wireless Gateway				
Trade Name	COMTREND				
Model Number	NexusLink 3240u, NexusLink 3240, NexusLink 3120ua, NexusLink 3120, WAP-5895ua, WR-6895 (Refer to Model Different description table)				
FCC ID	L9VNL3240U				
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 GI (ns)	
IEEE 802.11b	2412 ~ 2462	DSSS	20MHz	Up to 11Mbps	
IEEE 802.11g	2412 ~ 2462	OFDM (64QAM)	20MHz	Up to 54Mbps	
IEEE 802.11n 2.4GHz 20MHz	2412 ~ 2462	OFDM (64QAM)	20MHz	Up to 144.4Mbps	
IEEE 802.11n 2.4GHz 40MHz	2422 ~ 2452	OFDM (64QAM)	40MHz	Up to 300Mbps	
Antenna information	ANT	Trade Name	Model Number	Type	Max. Gain (dBi)
	ANT-0	Cortec	AN2450-64D02BBF	External antenna (Reversed-SMA Connector)	2.5
	ANT-1	Cortec	AN2450-64D03BBF	External antenna (Reversed-SMA Connector)	1.2
Antenna Delivery	See section 3.1				



Model Different description table

Model	NexusLink 3240u NexusLink 3240	NexusLink 3120ua NexusLink 3120	WAP-5895ua WR-6895
DSL	V	V	X
USB	V	V	V
ETH1-4	V	V	V
ETH WAN	V	V	V
PHONE1-2(VOIP)	V	X	X
A Main borad	V	V	V

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.152
IEEE 802.11g	0.662
IEEE 802.11n 2.4GHz 20MHz	0.818
IEEE 802.11n 2.4GHz 40MHz	0.662

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal operation mode
Mode 2: IEEE 802.11b link mode
Mode 3: IEEE 802.11g link mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Note: These models PCB Layout are the same. The AC Power Conduction Emission evaluating the test all models, the worst result is NexusLink 3240u. So, other test item is to test the NexusLink 3240u.

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2: IEEE 802.11b link mode	V	X	X
Mode 3: IEEE 802.11g link mode	V	X	X
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	V	V	V
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	V	V	V

Test Mode	Antenna Delivery	Test Channel	Data Rate 400GI (ns)
Mode 2: IEEE 802.11b link mode	1TX / 1RX	1, 6, 11	1
Mode 3: IEEE 802.11g link mode	1TX / 1RX	1, 6, 11	6
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2TX / 2RX (MIMO)	1, 6, 11	13
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	2TX / 2RX (MIMO)	3, 6, 9	27

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2: IEEE 802.11b link mode	2412	12.480	13.020	0.959	0.184	0.080
Mode 3: IEEE 802.11g link mode	2412	2.200	2.290	0.961	0.174	0.455
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2412	1.930	2.020	0.955	0.198	0.518
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	2422	2.050	2.135	0.960	0.176	0.488



Duty Cycle Graphs

Mode 2: IEEE 802.11b link mode

On time




On+off time





Mode 3: IEEE 802.11g Mode

On time

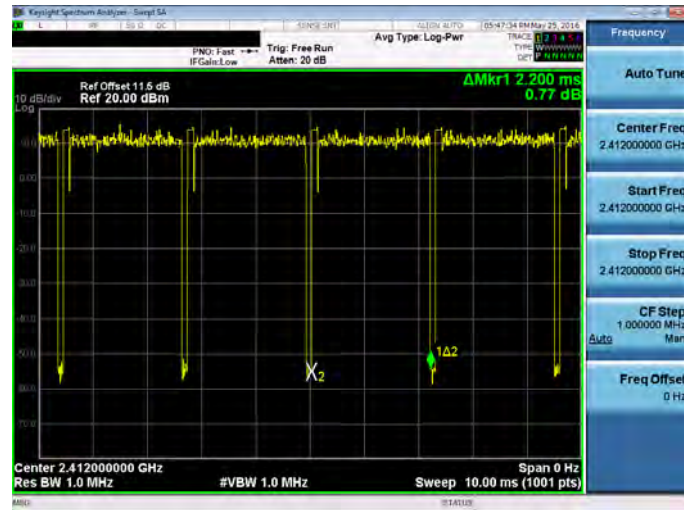


On+off time






Mode 4: IEEE 802.11n 2.4GHz 20MHz Mode

On time

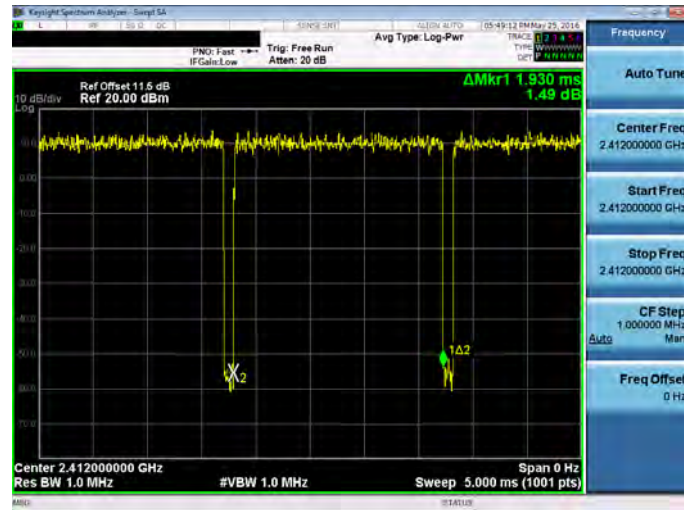

On+off time

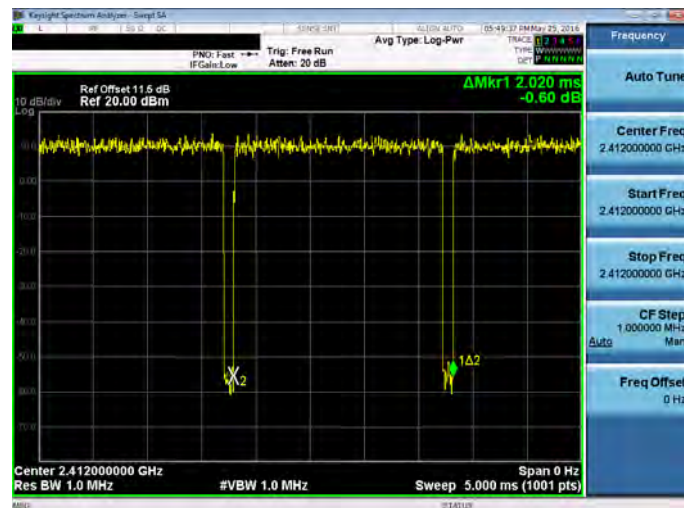

Mode 5: IEEE 802.11n 2.4GHz 40MHz Mode

On time	
On+off time	

3.2. EUT Exercise Software


1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn Wi-Fi function link to or Notebook.
4. EUT run test program.

Measurement Software


- | | |
|---|--------------------------|
| 1 | EZ-EMC Ver. ATL-03A1-1 |
| 2 | EZ-EMC Ver ATL-ITC-3A1-1 |

3.3. Configuration of Test System Details

Conducted Emissions

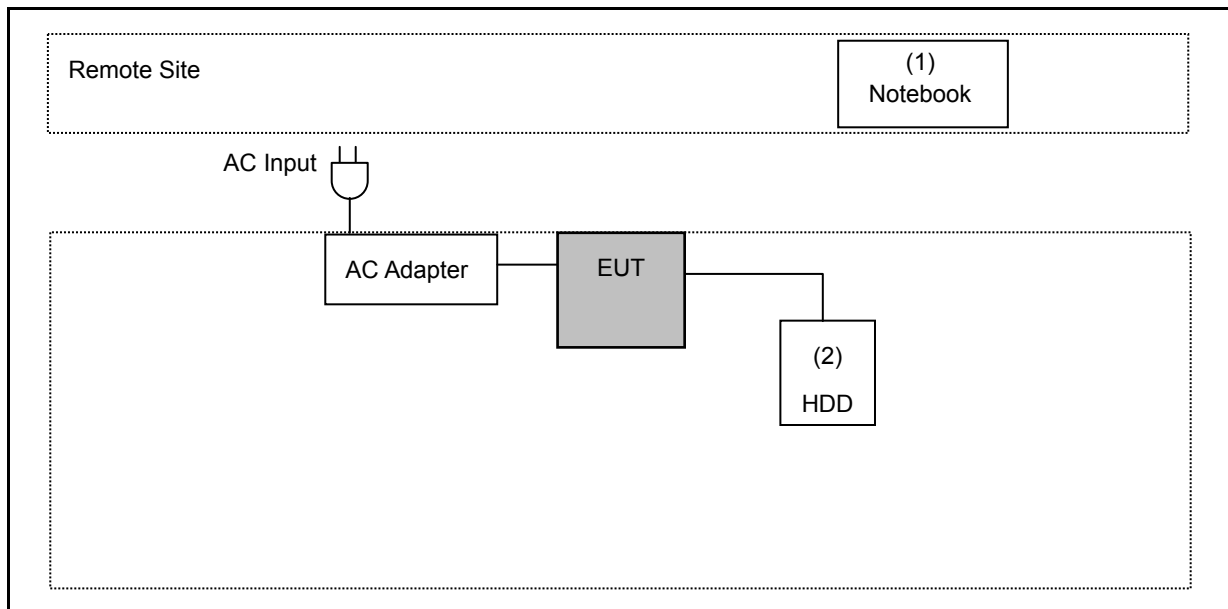

Radiated Emissions

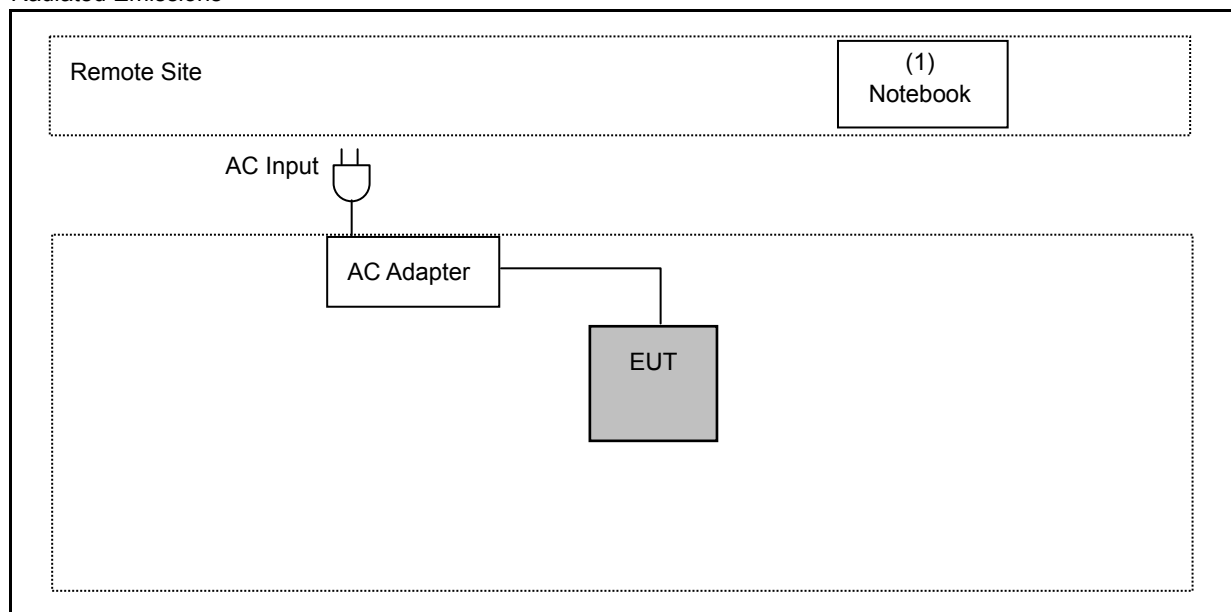

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LAPTITU	6699565657	Non-Shielded, 0.8m
(2)	HDD	WD	My Passport	WX21A33S7013	Power by EUT



3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 AC Power Line Conducted Emission Measurement

4.1. Limit


Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	06/25/2015	1 year
LISN	R&S	ENV216	101040	03/15/2016	1 year
LISN	R&S	ENV216	101041	03/07/2016	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	06/26/2015	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

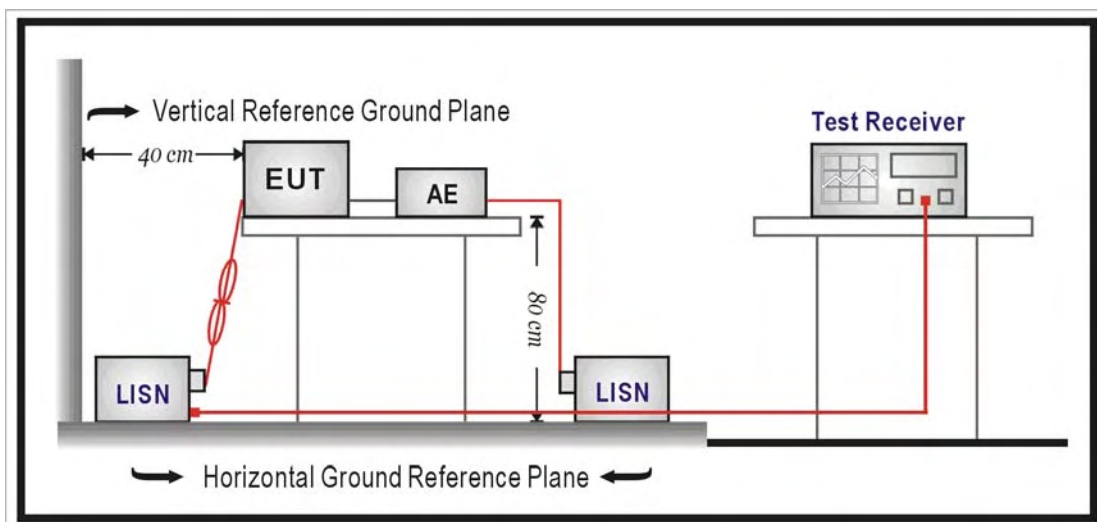

4.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega//50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega//50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3240u	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	04/28/2016
		Test By:	Eric Ou Yang
Description:			

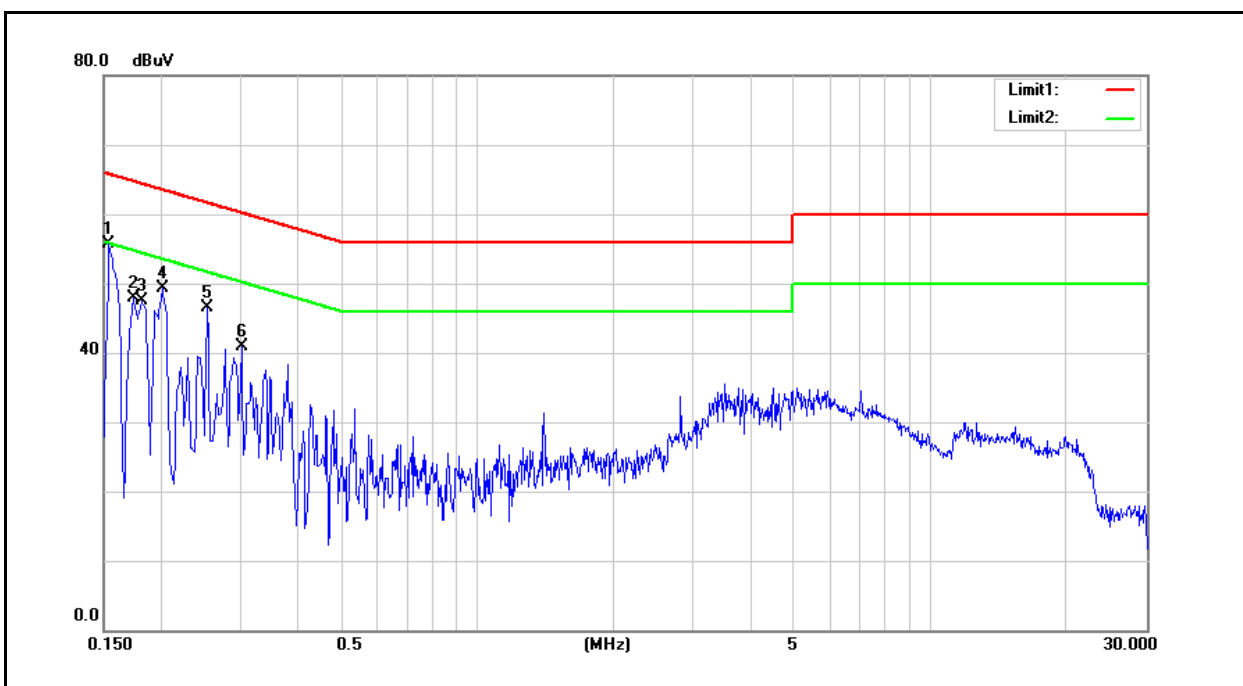


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	44.14	26.51	9.60	53.74	36.11	65.78	55.78	-12.04	-19.67	Pass
2	0.1740	39.05	21.61	9.60	48.65	31.21	64.77	54.77	-16.12	-23.56	Pass
3	0.1820	36.44	21.07	9.59	46.03	30.66	64.39	54.39	-18.36	-23.73	Pass
4	0.2020	35.47	20.19	9.59	45.06	29.78	63.53	53.53	-18.47	-23.75	Pass
5	0.2540	32.50	20.55	9.60	42.10	30.15	61.63	51.63	-19.53	-21.48	Pass
6	0.3020	25.73	14.86	9.60	35.33	24.46	60.19	50.19	-24.86	-25.73	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3240u	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	04/28/2016
		Test By:	Eric Ou Yang
Description:			

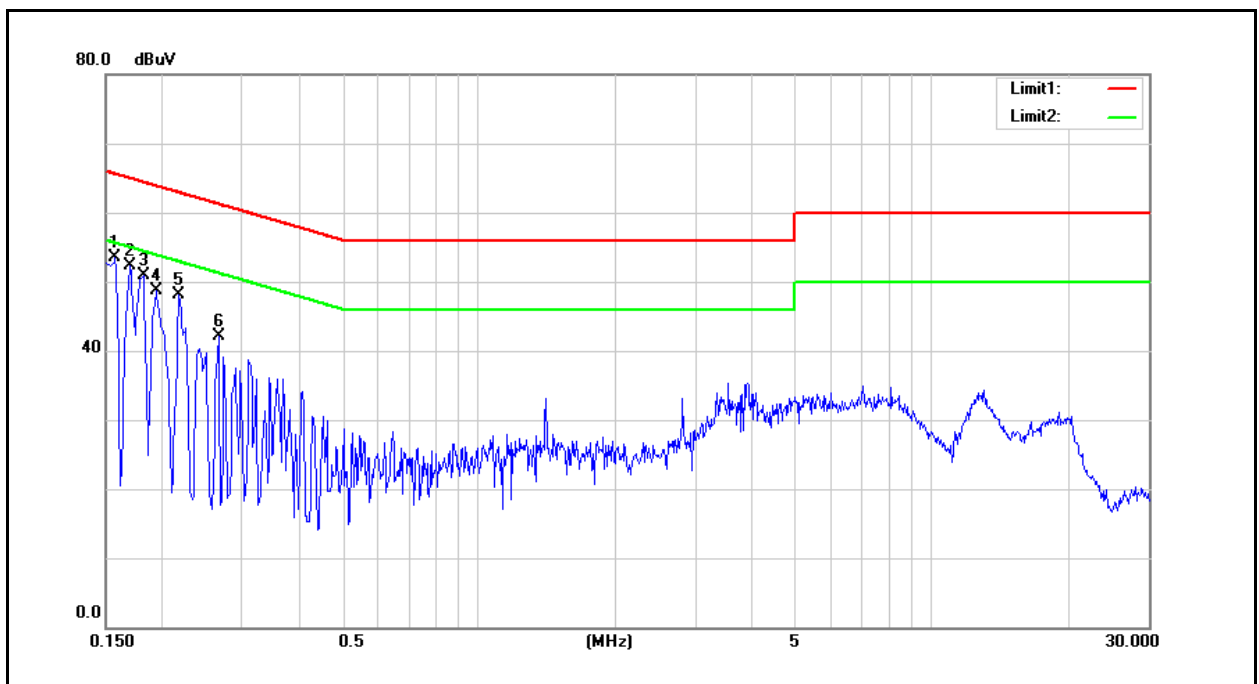


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	40.85	23.25	9.59	50.44	32.84	65.57	55.57	-15.13	-22.73	Pass
2	0.1700	37.92	20.04	9.59	47.51	29.63	64.96	54.96	-17.45	-25.33	Pass
3	0.1820	36.09	19.75	9.58	45.67	29.33	64.39	54.39	-18.72	-25.06	Pass
4	0.1940	33.60	15.21	9.58	43.18	24.79	63.86	53.86	-20.68	-29.07	Pass
5	0.2180	31.52	13.27	9.58	41.10	22.85	62.89	52.89	-21.79	-30.04	Pass
6	0.2660	30.56	15.42	9.59	40.15	25.01	61.24	51.24	-21.09	-26.23	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3120ua	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	04/28/2016
		Test By:	Eric Ou Yang
Description:			

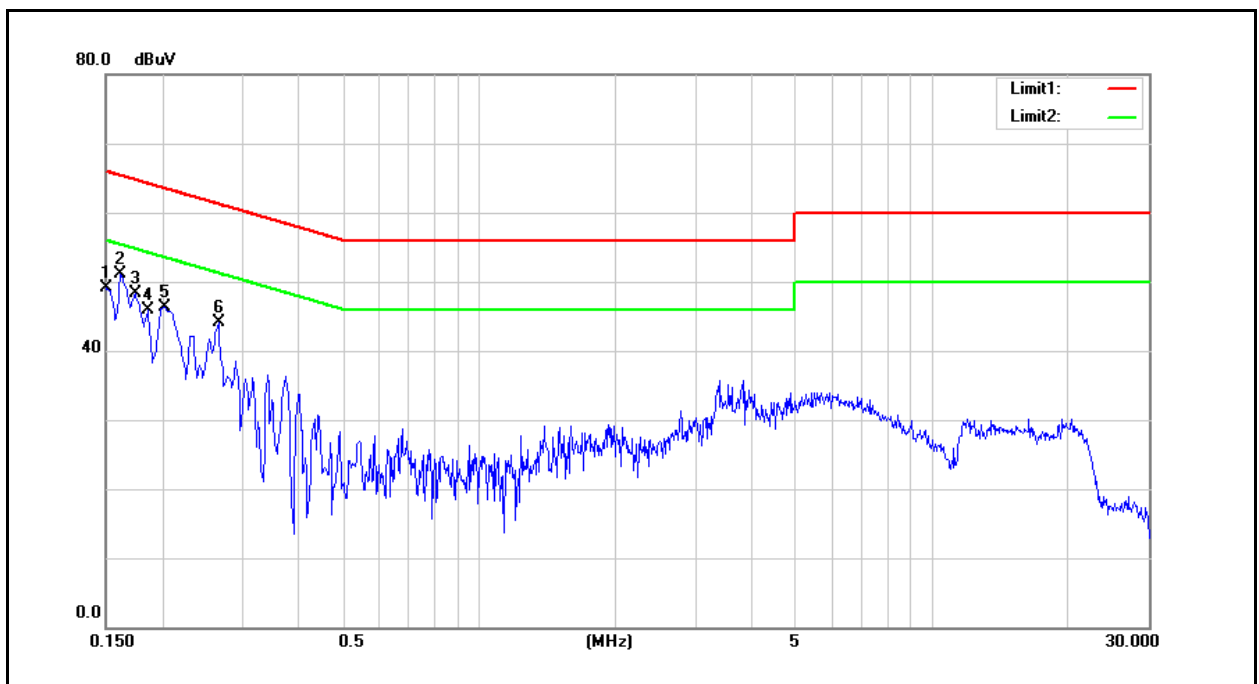


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	41.16	25.84	9.60	50.76	35.44	66.00	56.00	-15.24	-20.56	Pass
2	0.1620	38.55	23.26	9.60	48.15	32.86	65.36	55.36	-17.21	-22.50	Pass
3	0.1740	39.13	24.31	9.60	48.73	33.91	64.77	54.77	-16.04	-20.86	Pass
4	0.1860	38.51	23.68	9.59	48.10	33.27	64.21	54.21	-16.11	-20.94	Pass
5	0.1986	35.05	21.94	9.59	44.64	31.53	63.67	53.67	-19.03	-22.14	Pass
6	0.2660	27.25	14.81	9.60	36.85	24.41	61.24	51.24	-24.39	-26.83	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3120ua	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	04/28/2016
		Test By:	Eric Ou Yang
Description:			

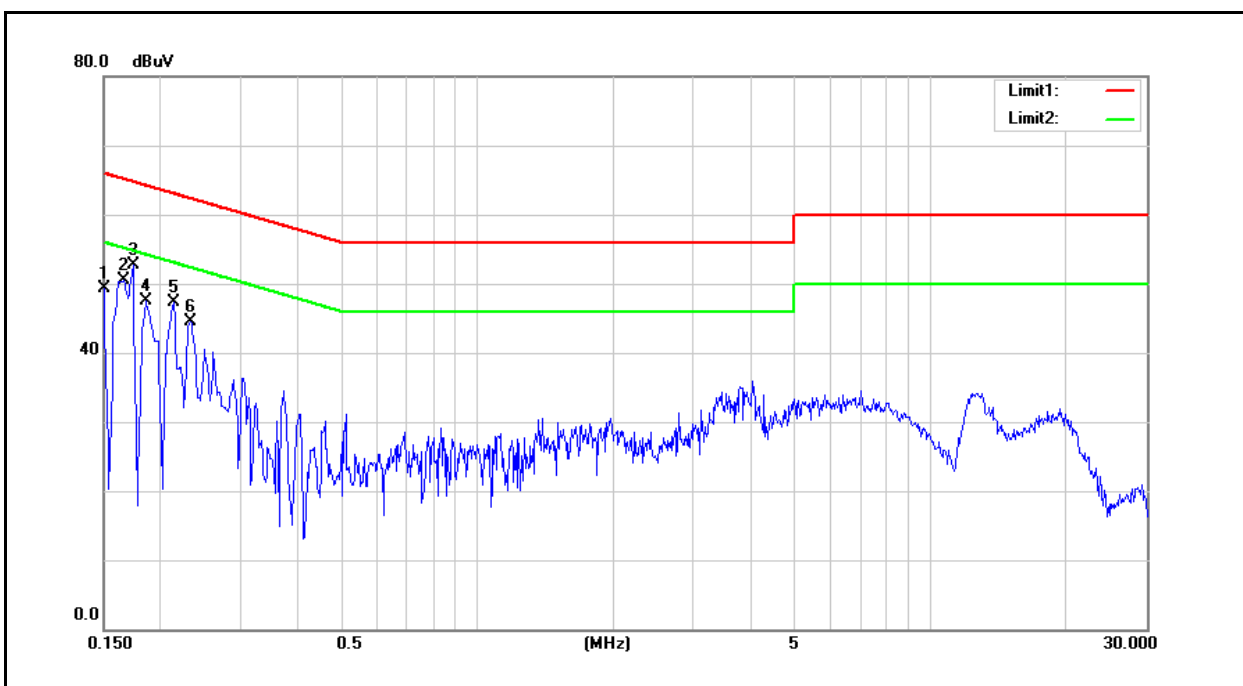


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	41.89	26.00	9.59	51.48	35.59	66.00	56.00	-14.52	-20.41	Pass
2	0.1660	37.37	21.38	9.59	46.96	30.97	65.16	55.16	-18.20	-24.19	Pass
3	0.1740	38.78	23.89	9.59	48.37	33.48	64.77	54.77	-16.40	-21.29	Pass
4	0.1860	37.09	20.29	9.58	46.67	29.87	64.21	54.21	-17.54	-24.34	Pass
5	0.2140	28.21	11.36	9.58	37.79	20.94	63.05	53.05	-25.26	-32.11	Pass
6	0.2340	31.05	16.99	9.58	40.63	26.57	62.31	52.31	-21.68	-25.74	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	WAP-5895ua	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	04/28/2016
		Test By:	Eric Ou Yang
Description:			

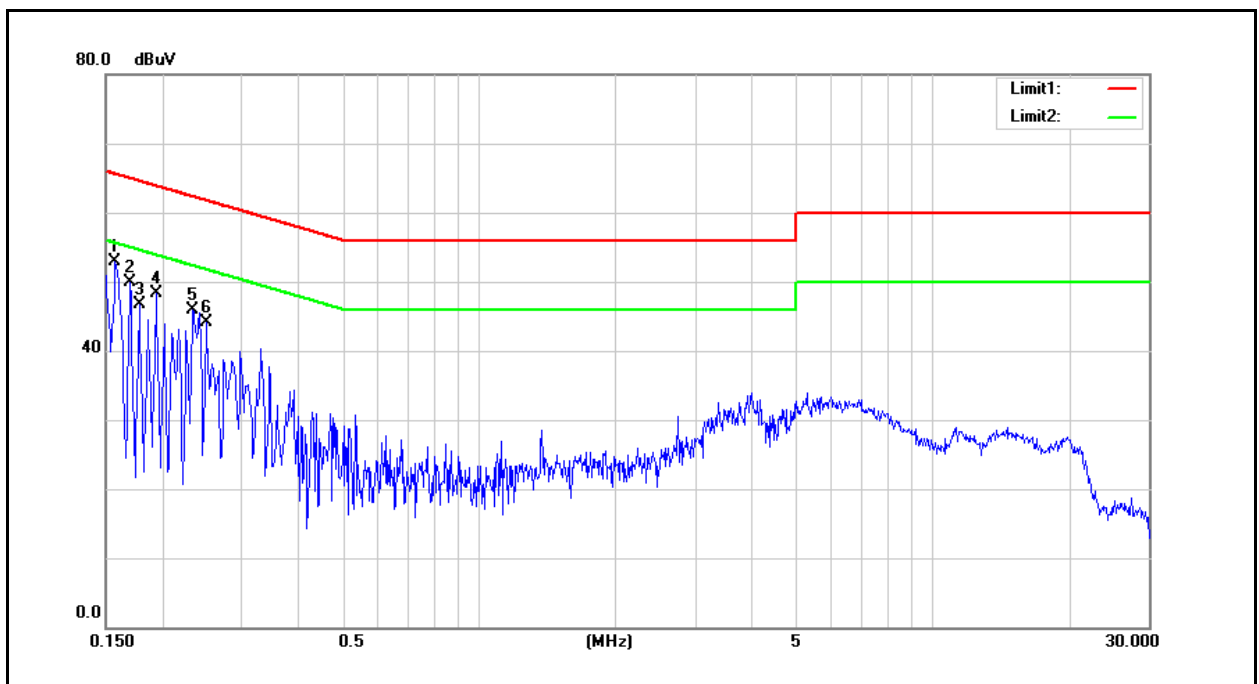


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	38.39	19.38	9.60	47.99	28.98	65.57	55.57	-17.58	-26.59	Pass
2	0.1700	36.97	19.69	9.60	46.57	29.29	64.96	54.96	-18.39	-25.67	Pass
3	0.1780	36.14	17.63	9.59	45.73	27.22	64.58	54.58	-18.85	-27.36	Pass
4	0.1940	33.37	16.10	9.59	42.96	25.69	63.86	53.86	-20.90	-28.17	Pass
5	0.2340	30.40	16.83	9.59	39.99	26.42	62.31	52.31	-22.32	-25.89	Pass
6	0.2500	26.37	9.90	9.60	35.97	19.50	61.76	51.76	-25.79	-32.26	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	WAP-5895ua	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	04/28/2016
		Test By:	Eric Ou Yang
Description:			

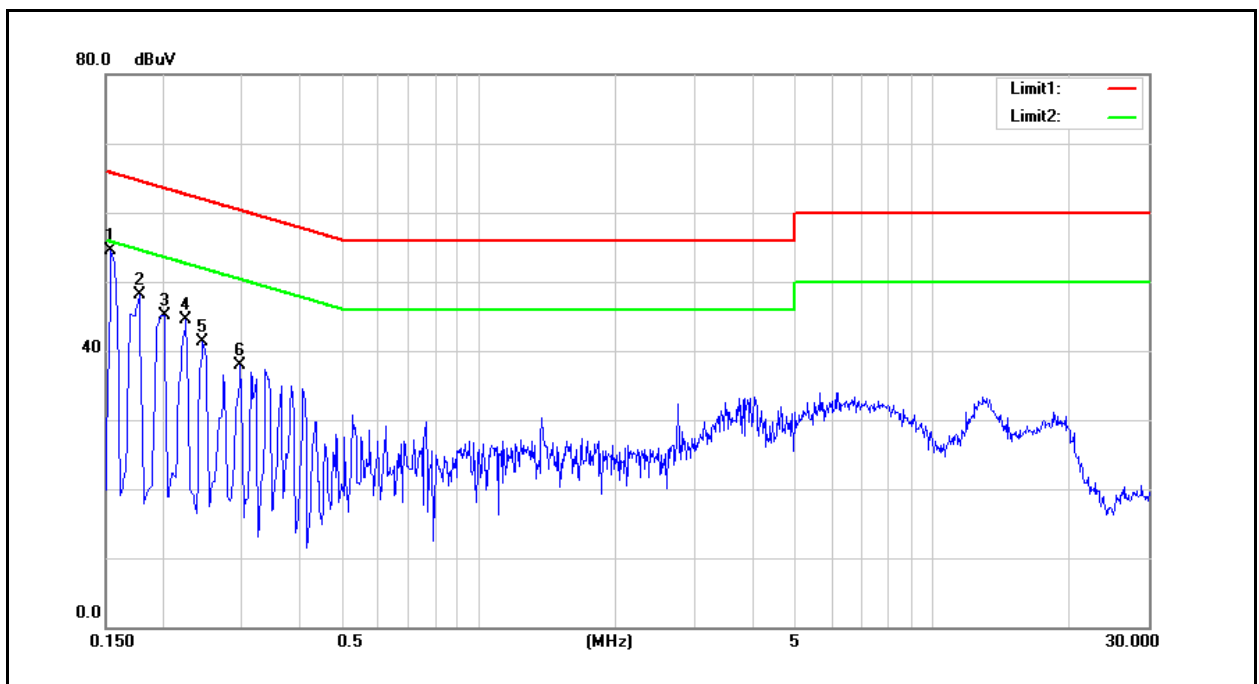

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	41.35	20.70	9.59	50.94	30.29	65.78	55.78	-14.84	-25.49	Pass
2	0.1768	35.40	16.08	9.58	44.98	25.66	64.63	54.63	-19.65	-28.97	Pass
3	0.2020	31.35	12.33	9.58	40.93	21.91	63.53	53.53	-22.60	-31.62	Pass
4	0.2260	28.42	9.45	9.58	38.00	19.03	62.60	52.60	-24.60	-33.57	Pass
5	0.2460	26.60	6.77	9.58	36.18	16.35	61.89	51.89	-25.71	-35.54	Pass
6	0.2980	21.53	2.10	9.59	31.12	11.69	60.30	50.30	-29.18	-38.61	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/08/2016	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	1 year
Pre Amplifier	Agilent	8449B	3008A02237	10/07/2015	1 year
Pre Amplifier	Agilent	8447D	2944A11119	01/11/2016	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	09/25/2015	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/01/2015	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/01/2016	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	10/15/2015	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	10/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-600	140301	10/15/2015	1 year
Test Site	ATL	TE01	888001	08/27/2015	1 year


Note: N.C.R. = No Calibration Request.

5.3. Setup


9kHz ~ 30MHz

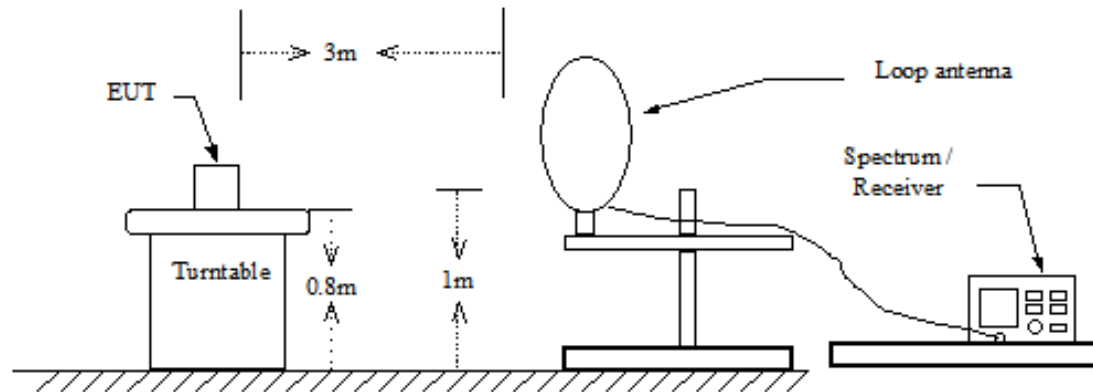

Below 1GHz

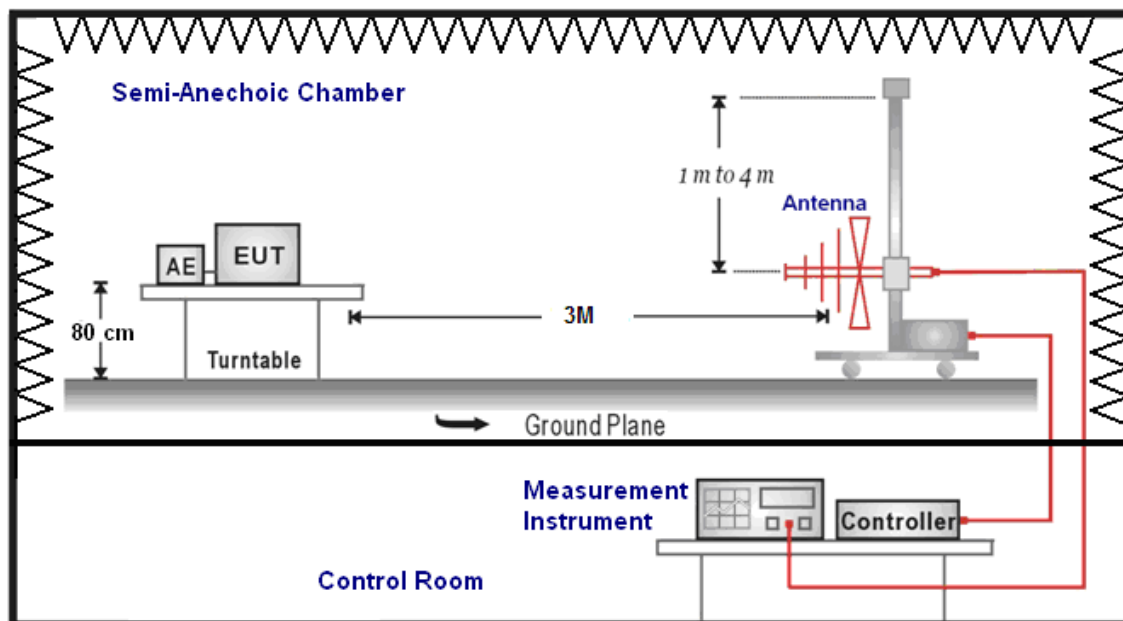

Above 1GHz

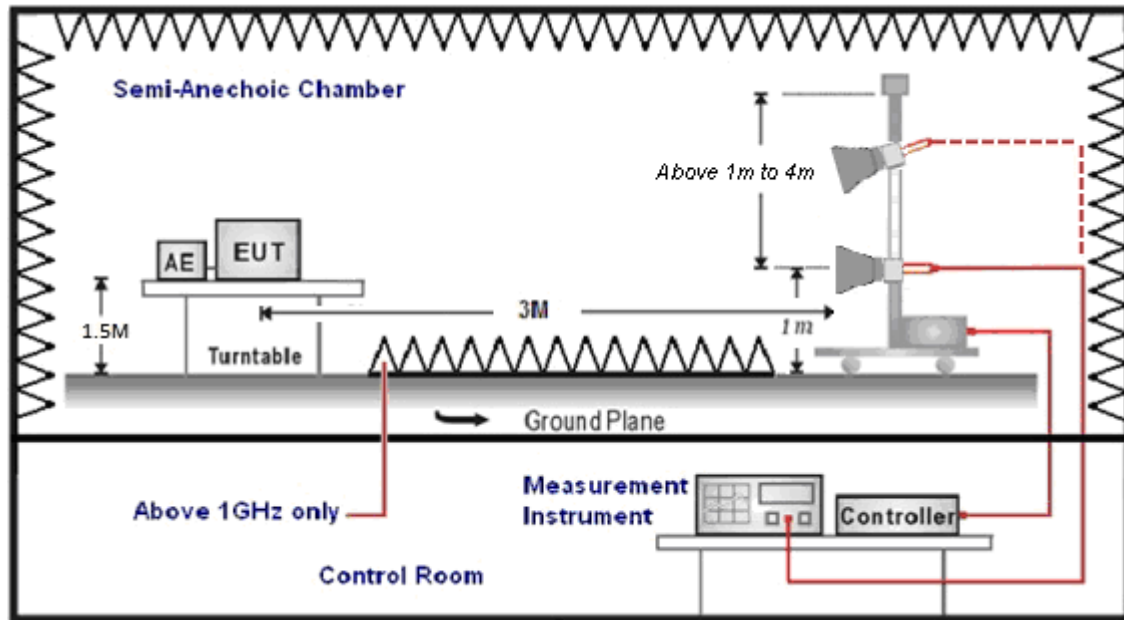



5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		NexusLink 3240u		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 1		Date:		05/19/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
222.5000	44.91	-7.33	37.58	46.00	-8.42	QP	H
285.0000	40.24	-3.82	36.42	46.00	-9.58	QP	H
375.0000	46.67	-2.18	44.49	46.00	-1.51	QP	H
500.0000	42.40	0.74	43.14	46.00	-2.86	QP	H
573.5000	34.77	2.15	36.92	46.00	-9.08	QP	H
875.0000	36.63	8.07	44.70	46.00	-1.30	QP	H
222.5000	43.78	-7.33	36.45	46.00	-9.55	QP	V
375.0000	46.80	-2.18	44.62	46.00	-1.38	QP	V
420.5000	41.02	-1.07	39.95	46.00	-6.05	QP	V
500.0000	42.90	0.74	43.64	46.00	-2.36	QP	V
625.0000	39.84	3.41	43.25	46.00	-2.75	QP	V
875.0000	35.05	8.07	43.12	46.00	-2.88	QP	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	05/31/2016		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	57.65	-7.86	49.79	74.00	-24.21	peak	H
4824.000	75.55	-7.86	67.69	74.00	-6.31	peak	V
4824.000	61.47	-7.86	53.61	54.00	-0.39	AVG	V
7236.000	61.13	-1.01	60.12	74.00	-13.88	peak	V
7236.000	42.79	-1.01	41.78	54.00	-12.22	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	05/31/2016		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4876.000	58.98	-7.69	51.29	74.00	-22.71	peak	H
4874.000	63.66	-7.70	55.96	74.00	-18.04	peak	V
4874.000	61.14	-7.70	53.44	54.00	-0.56	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 2		Date:	05/31/2016			
Frequency:	2462MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4927.000	57.81	-7.53	50.28	74.00	-23.72	peak	H
4924.000	63.67	-7.55	56.12	74.00	-17.88	peak	V
4924.000	61.04	-7.55	53.49	54.00	-0.51	AVG	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 3		Date:	05/31/2016			
Frequency:	2412MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4825.000	57.18	-7.85	49.33	74.00	-24.67	peak	H
4824.000	63.09	-7.86	55.23	74.00	-18.77	peak	V
4824.000	56.26	-7.86	48.40	54.00	-5.60	peak	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 3		Date:	05/31/2016			
Frequency:	2437MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	56.72	-7.70	49.02	74.00	-24.98	peak	H
4874.000	62.79	-7.70	55.09	74.00	-18.91	peak	V
4874.000	53.68	-7.70	45.98	54.00	-8.02	AVG	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 3		Date:	05/31/2016			
Frequency:	2462MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	52.85	-7.55	45.30	74.00	-28.70	peak	H
4924.000	57.25	-7.55	49.70	74.00	-24.30	peak	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	05/31/2016		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	55.68	-7.86	47.82	74.00	-26.18	peak	H
4824.000	63.20	-7.86	55.34	74.00	-18.66	peak	V
4824.000	54.98	-7.86	47.12	54.00	-6.88	AVG	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(℃)/Hum.(%RH):	26(℃)/60%RH			
Mode:	Mode 4		Date:	05/31/2016			
Frequency:	2437MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	56.12	-7.70	48.42	74.00	-25.58	peak	H
4874.000	62.42	-7.70	54.72	74.00	-19.28	peak	V
4874.000	54.31	-7.70	46.61	54.00	-7.39	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	NexusLink 3240u	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 4	Date:	05/31/2016				
Frequency:	2462MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	55.48	-7.55	47.93	74.00	-26.07	peak	H
4924.000	59.24	-7.55	51.69	74.00	-22.31	peak	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 5		Date:	05/31/2016			
Frequency:	2422MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4844.000	55.27	-7.78	47.49	74.00	-26.51	peak	H
4844.000	56.98	-7.78	49.20	74.00	-24.80	peak	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	NexusLink 3240u		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 5		Date:	05/31/2016			
Frequency:	2437MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	50.57	-7.70	42.87	74.00	-31.13	peak	H
4874.000	56.69	-7.70	48.99	74.00	-25.01	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	NexusLink 3240u	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH				
Mode:	Mode 5	Date:	05/31/2016				
Frequency:	2452MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4904.000	50.94	-7.60	43.34	74.00	-30.66	peak	H
4904.000	55.90	-7.60	48.30	74.00	-25.70	peak	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Simultaneous Transmitting			Date:	06/20/2016		
	(DTS+NII)			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2751.000	48.37	-13.59	34.78	74.00	-39.22	peak	H
4638.000	45.68	-8.44	37.24	74.00	-36.76	peak	H
7613.000	44.18	0.39	44.57	74.00	-29.43	peak	H
2751.000	49.12	-13.59	35.53	74.00	-38.47	peak	V
4570.000	45.33	-8.65	36.68	74.00	-37.32	peak	V
7579.000	44.11	0.30	44.41	74.00	-29.59	peak	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

**Band Edge**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	05/30/2016		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.540	53.88	-0.22	53.66	74.00	-20.34	peak	H
2388.540	43.90	-0.22	43.68	54.00	-10.32	AVG	H
2390.000	53.39	-0.22	53.17	74.00	-20.83	peak	H
2390.000	44.13	-0.22	43.91	54.00	-10.09	AVG	H
2387.220	64.73	-0.22	64.51	74.00	-9.49	peak	V
2387.220	52.46	-0.22	52.24	54.00	-1.76	AVG	V
2390.000	64.89	-0.22	64.67	74.00	-9.33	peak	V
2390.000	53.88	-0.22	53.66	54.00	-0.34	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	05/30/2016		
Frequency:	2437 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2377.450	57.54	-0.27	57.27	74.00	-16.73	peak	H
2377.450	44.57	-0.27	44.30	54.00	-9.70	AVG	H
2390.000	56.45	-0.22	56.23	74.00	-17.77	peak	H
2390.000	44.58	-0.22	44.36	54.00	-9.64	AVG	H
2483.500	55.17	0.14	55.31	74.00	-18.69	peak	H
2483.500	45.13	0.14	45.27	54.00	-8.73	AVG	H
2490.690	57.64	0.17	57.81	74.00	-16.19	peak	H
2490.690	44.98	0.17	45.15	54.00	-8.85	AVG	H
2378.970	61.97	-0.25	61.72	74.00	-12.28	peak	V
2378.970	49.88	-0.25	49.63	54.00	-4.37	AVG	V
2390.000	60.67	-0.22	60.45	74.00	-13.55	peak	V
2390.000	50.23	-0.22	50.01	54.00	-3.99	AVG	V
2483.500	64.27	0.14	64.41	74.00	-9.59	peak	V
2483.500	53.57	0.14	53.71	54.00	-0.29	AVG	V
2497.530	66.97	0.19	67.16	74.00	-6.84	peak	V
2497.530	52.42	0.19	52.61	54.00	-1.39	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	05/30/2016		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	55.22	0.14	55.36	74.00	-18.64	peak	H
2483.500	44.58	0.14	44.72	54.00	-9.28	AVG	H
2489.840	57.35	0.16	57.51	74.00	-16.49	peak	H
2489.840	44.47	0.16	44.63	54.00	-9.37	AVG	H
2483.500	65.34	0.14	65.48	74.00	-8.52	peak	V
2483.500	53.33	0.14	53.47	54.00	-0.53	AVG	V
2485.040	67.55	0.14	67.69	74.00	-6.31	peak	V
2485.040	52.45	0.14	52.59	54.00	-1.41	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	05/30/2016		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2385.570	57.86	-0.24	57.62	74.00	-16.38	peak	H
2385.570	45.03	-0.24	44.79	54.00	-9.21	AVG	H
2390.000	56.72	-0.22	56.50	74.00	-17.50	peak	H
2390.000	45.30	-0.22	45.08	54.00	-8.92	AVG	H
2389.420	73.60	-0.22	73.38	74.00	-0.62	peak	V
2389.420	53.20	-0.22	52.98	54.00	-1.02	AVG	V
2390.000	70.84	-0.22	70.62	74.00	-3.38	peak	V
2390.000	53.61	-0.22	53.39	54.00	-0.61	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		NexusLink 3240u		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		05/30/2016	
Frequency:		2437 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2350.660	57.31	-0.37	56.94	74.00	-17.06	peak	H
2350.660	45.19	-0.37	44.82	54.00	-9.18	AVG	H
2390.000	55.55	-0.22	55.33	74.00	-18.67	peak	H
2390.000	44.96	-0.22	44.74	54.00	-9.26	AVG	H
2483.500	54.98	0.14	55.12	74.00	-18.88	peak	H
2483.500	45.88	0.14	46.02	54.00	-7.98	AVG	H
2492.590	56.96	0.17	57.13	74.00	-16.87	peak	H
2492.590	45.66	0.17	45.83	54.00	-8.17	AVG	H
2359.780	62.54	-0.33	62.21	74.00	-11.79	peak	V
2359.780	48.67	-0.33	48.34	54.00	-5.66	AVG	V
2390.000	61.21	-0.22	60.99	74.00	-13.01	peak	V
2390.000	49.78	-0.22	49.56	54.00	-4.44	AVG	V
2483.500	65.11	0.14	65.25	74.00	-8.75	peak	V
2483.500	53.46	0.14	53.60	54.00	-0.40	AVG	V
2484.420	67.06	0.14	67.20	74.00	-6.80	peak	V
2484.420	52.68	0.14	52.82	54.00	-1.18	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	05/30/2016		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	55.20	0.14	55.34	74.00	-18.66	peak	H
2483.500	45.05	0.14	45.19	54.00	-8.81	AVG	H
2486.200	56.69	0.14	56.83	74.00	-17.17	peak	H
2486.200	45.14	0.14	45.28	54.00	-8.72	AVG	H
2483.500	66.00	0.14	66.14	74.00	-7.86	peak	V
2483.500	53.63	0.14	53.77	54.00	-0.23	AVG	V
2484.480	68.39	0.14	68.53	74.00	-5.47	peak	V
2484.480	52.79	0.14	52.93	54.00	-1.07	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3240u	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	05/30/2016
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.650	54.35	-0.22	54.13	74.00	-19.87	peak	H
2388.650	44.15	-0.22	43.93	54.00	-10.07	AVG	H
2390.000	52.49	-0.22	52.27	74.00	-21.73	peak	H
2390.000	44.30	-0.22	44.08	54.00	-9.92	AVG	H
2389.530	66.06	-0.22	65.84	74.00	-8.16	peak	V
2389.530	53.32	-0.22	53.10	54.00	-0.90	AVG	V
2390.000	63.74	-0.22	63.52	74.00	-10.48	peak	V
2390.000	53.68	-0.22	53.46	54.00	-0.54	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3240u	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	05/30/2016
Frequency:	2437 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2360.730	53.21	-0.33	52.88	74.00	-21.12	peak	H
2360.730	43.74	-0.33	43.41	54.00	-10.59	AVG	H
2390.000	50.42	-0.22	50.20	74.00	-23.80	peak	H
2483.500	50.09	0.14	50.23	74.00	-23.77	peak	H
2486.320	51.93	0.14	52.07	74.00	-21.93	peak	H
2486.320	43.12	0.14	43.26	54.00	-10.74	AVG	H
2361.300	59.49	-0.33	59.16	74.00	-14.84	peak	V
2361.300	46.69	-0.33	46.36	54.00	-7.64	AVG	V
2390.000	57.48	-0.22	57.26	74.00	-16.74	peak	V
2390.000	47.09	-0.22	46.87	54.00	-7.13	AVG	V
2483.500	60.92	0.14	61.06	74.00	-12.94	peak	V
2483.500	53.55	0.14	53.69	54.00	-0.31	AVG	V
2493.160	62.71	0.17	62.88	74.00	-11.12	peak	V
2493.160	51.93	0.17	52.10	54.00	-1.90	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	05/30/2016		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	50.73	0.14	50.87	74.00	-23.13	peak	H
2484.200	53.99	0.14	54.13	74.00	-19.87	peak	H
2484.200	43.30	0.14	43.44	54.00	-10.56	AVG	H
2483.500	68.17	0.14	68.31	74.00	-5.69	peak	V
2483.500	53.56	0.14	53.70	54.00	-0.30	AVG	V
2484.640	71.36	0.14	71.50	74.00	-2.50	peak	V
2484.640	52.38	0.14	52.52	54.00	-1.48	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NexusLink 3240u	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	05/31/2016
Frequency:	2422 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2387.040	55.96	-0.22	55.74	74.00	-18.26	peak	H
2387.040	43.80	-0.22	43.58	54.00	-10.42	AVG	H
2390.000	52.00	-0.22	51.78	74.00	-22.22	peak	H
2386.320	72.02	-0.24	71.78	74.00	-2.22	peak	V
2386.320	52.53	-0.24	52.29	54.00	-1.71	AVG	V
2390.000	70.57	-0.22	70.35	74.00	-3.65	peak	V
2390.000	53.87	-0.22	53.65	54.00	-0.35	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	05/31/2016		
Frequency:	2437 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2381.440	52.96	-0.25	52.71	74.00	-21.29	peak	H
2381.440	43.96	-0.25	43.71	54.00	-10.29	AVG	H
2390.000	50.41	-0.22	50.19	74.00	-23.81	peak	H
2483.500	50.45	0.14	50.59	74.00	-23.41	peak	H
2495.820	51.77	0.18	51.95	74.00	-22.05	peak	H
2383.530	58.30	-0.24	58.06	74.00	-15.94	peak	V
2383.530	46.35	-0.24	46.11	54.00	-7.89	AVG	V
2390.000	57.55	-0.22	57.33	74.00	-16.67	peak	V
2390.000	47.87	-0.22	47.65	54.00	-6.35	AVG	V
2483.500	62.19	0.14	62.33	74.00	-11.67	peak	V
2483.500	53.49	0.14	53.63	54.00	-0.37	AVG	V
2492.400	63.82	0.17	63.99	74.00	-10.01	peak	V
2492.400	51.21	0.17	51.38	54.00	-2.62	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NexusLink 3240u			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	05/31/2016		
Frequency:	2452 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	51.79	0.14	51.93	74.00	-22.07	peak	H
2486.300	54.74	0.14	54.88	74.00	-19.12	peak	H
2486.300	43.63	0.14	43.77	54.00	-10.23	AVG	H
2483.500	66.75	0.14	66.89	74.00	-7.11	peak	V
2483.500	53.49	0.14	53.63	54.00	-0.37	AVG	V
2486.500	70.39	0.14	70.53	74.00	-3.47	peak	V
2486.500	51.92	0.14	52.06	54.00	-1.94	AVG	V

Note:1.Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.

6.2. Test Setup

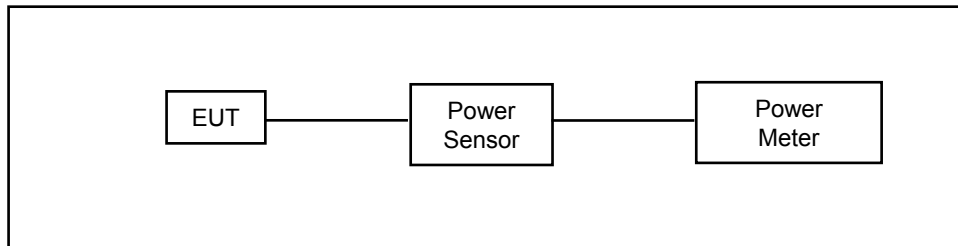

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/24/2015	1 year
Power Meter	Anritsu	ML2495A	1135009	08/24/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.



6.5. Test Result

Test Item	Maximum Conducted Output Power						
Date of Test	04/28/2016						
ANT-0							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			(dBm)	(W)	(dBm)	(W)	(dBm)
Mode 2	2412	1M	16.21	0.042	20.13	0.103	< 30
	2437		16.79	0.048	20.80	0.120	< 30
	2462		17.70	0.059	21.82	0.152	< 30
	2437	2M	16.71	0.047	20.85	0.122	< 30
	2437	5.5M	16.74	0.047	19.97	0.099	< 30
	2437	11M	16.66	0.046	20.69	0.117	< 30
Mode 3	2412	6M	17.85	0.061	28.21	0.662	< 30
	2437		17.47	0.056	27.73	0.593	< 30
	2462		16.58	0.045	26.99	0.500	< 30
	2437	9M	17.26	0.053	27.42	0.552	< 30
	2437	12M	17.20	0.052	27.56	0.570	< 30
	2437	18M	17.25	0.053	27.04	0.506	< 30
	2437	24M	17.15	0.052	26.79	0.478	< 30
	2437	36M	17.19	0.052	27.46	0.557	< 30
	2437	48M	17.18	0.052	27.94	0.622	< 30
	2437	54M	17.16	0.052	27.26	0.532	< 30

Note: The relevant measured result has the offset with cable loss already.



Test Item	Maximum Conducted Output Power						
Date of Test	04/28/2016						
ANT-0							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			(dBm)	(W)	(dBm)	(W)	(dBm)
Mode 4	2412	13M	16.18	0.041	25.95	0.394	< 30
	2437		16.03	0.040	26.11	0.408	< 30
	2462		15.85	0.038	25.98	0.396	< 30
	2437	26M	15.87	0.039	25.81	0.381	< 30
	2437	39M	15.68	0.037	25.72	0.373	< 30
	2437	52M	15.94	0.039	25.79	0.379	< 30
	2437	78M	15.59	0.036	25.84	0.384	< 30
	2437	104M	15.95	0.039	25.98	0.396	< 30
	2437	117M	15.98	0.040	25.62	0.365	< 30
	2437	130M	15.93	0.039	25.72	0.373	< 30
Mode 5	2422	27M	14.70	0.030	25.23	0.333	< 30
	2437		14.44	0.028	25.39	0.346	< 30
	2452		15.23	0.033	25.04	0.319	< 30
	2437	54M	14.50	0.028	25.13	0.326	< 30
	2437	81M	14.19	0.026	24.44	0.278	< 30
	2437	108M	14.41	0.028	24.50	0.282	< 30
	2437	162M	14.30	0.027	24.89	0.308	< 30
	2437	216M	14.53	0.028	24.59	0.288	< 30
	2437	243M	14.25	0.027	24.72	0.296	< 30
	2437	270M	13.53	0.023	24.77	0.300	< 30

Note: The relevant measured result has the offset with cable loss already.



Test Item	Maximum Conducted Output Power						
Date of Test	04/28/2016						
ANT-1							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			(dBm)	(W)	(dBm)	(W)	(dBm)
Mode 4	2412	13M	15.85	0.038	26.28	0.425	< 30
	2437		15.37	0.034	25.90	0.389	< 30
	2462		14.90	0.031	25.74	0.375	< 30
	2437	26M	15.31	0.034	25.76	0.377	< 30
	2437	39M	15.39	0.035	25.56	0.360	< 30
	2437	52M	15.22	0.033	25.55	0.359	< 30
	2437	78M	15.31	0.034	25.69	0.371	< 30
	2437	104M	15.27	0.034	25.49	0.354	< 30
	2437	117M	15.36	0.034	25.30	0.339	< 30
	2437	130M	15.34	0.034	25.54	0.358	< 30
Mode 5	2422	27M	14.03	0.025	25.04	0.319	< 30
	2437		13.80	0.024	25.00	0.316	< 30
	2452		14.75	0.030	24.64	0.291	< 30
	2437	54M	13.60	0.023	24.06	0.255	< 30
	2437	81M	13.55	0.023	24.43	0.277	< 30
	2437	108M	13.59	0.023	24.27	0.267	< 30
	2437	162M	13.67	0.023	24.04	0.254	< 30
	2437	216M	13.63	0.023	23.96	0.249	< 30
	2437	243M	13.54	0.023	24.07	0.255	< 30
	2437	270M	13.63	0.023	23.95	0.248	< 30

Note: The relevant measured result has the offset with cable loss already.



Test Item	Maximum Conducted Output Power						
Date of Test	04/28/2016						
ANT-0+1							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			(dBm)	(W)	(dBm)	(W)	(dBm)
Mode 4	2412	13M	19.03	0.080	29.13	0.818	< 30
	2437		18.72	0.075	29.02	0.797	< 30
	2462		18.41	0.069	28.87	0.771	< 30
	2437	26M	18.61	0.073	28.80	0.758	< 30
	2437	39M	18.55	0.072	28.65	0.733	< 30
	2437	52M	18.61	0.073	28.68	0.738	< 30
	2437	78M	18.46	0.070	28.78	0.754	< 30
	2437	104M	18.63	0.073	28.75	0.750	< 30
	2437	117M	18.69	0.074	28.47	0.704	< 30
	2437	130M	18.66	0.073	28.64	0.731	< 30
Mode 5	2422	27M	17.39	0.055	28.15	0.653	< 30
	2437		17.14	0.052	28.21	0.662	< 30
	2452		18.01	0.063	27.85	0.610	< 30
	2437	54M	17.08	0.051	27.64	0.581	< 30
	2437	81M	16.89	0.049	27.45	0.555	< 30
	2437	108M	17.03	0.050	27.40	0.549	< 30
	2437	162M	17.01	0.050	27.50	0.562	< 30
	2437	216M	17.11	0.051	27.30	0.537	< 30
	2437	243M	16.92	0.049	27.42	0.552	< 30
	2437	270M	16.59	0.046	27.39	0.548	< 30


Note: The relevant measured result has the offset with cable loss already.

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

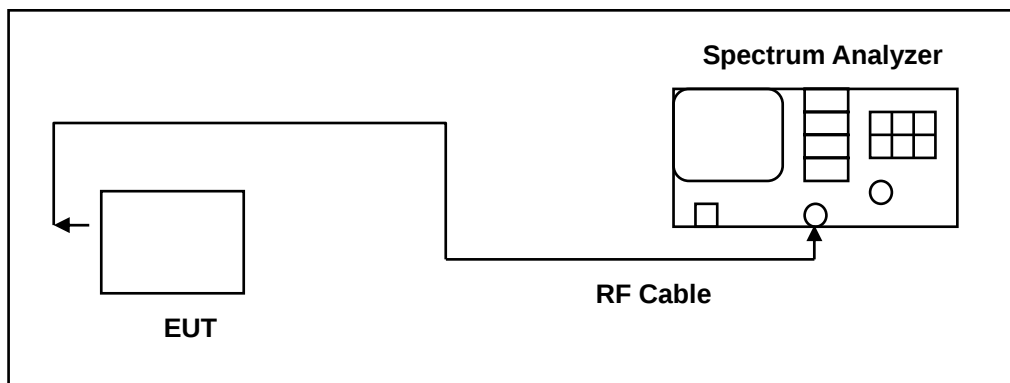

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)



7.5. Test Result

Test Item	6dB RF Bandwidth			
Date of Test	05/27/2016			
Test Mode	Frequency (MHz)	Measurement (kHz)		Limit (kHz)
		ANT-0	ANT-1	
Mode 2	2412	8093	---	> 500
	2437	8105	---	> 500
	2462	8084	---	> 500
Mode 3	2412	15090	---	> 500
	2437	16370	---	> 500
	2462	16380	---	> 500
Mode 4	2412	15130	17640	> 500
	2437	17600	17590	> 500
	2462	17590	17590	> 500
Mode 5	2422	35540	35510	> 500
	2437	35510	35520	> 500
	2452	35550	35370	> 500



7.6. Test Graphs

Mode 2: IEEE 802.11b link mode_ANT-0

2412 MHz



2437 MHz




2462 MHz





Mode 3: IEEE 802.11g link mode_ANT-0

2412 MHz

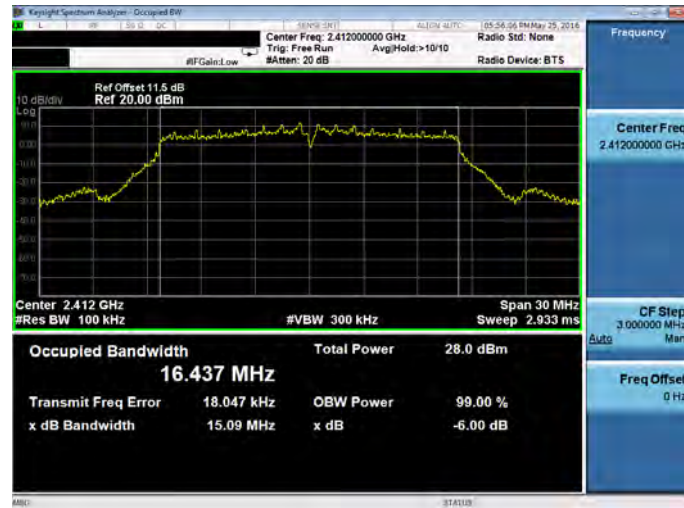

2437 MHz



2462 MHz





Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0


2412 MHz



2437 MHz



2462 MHz

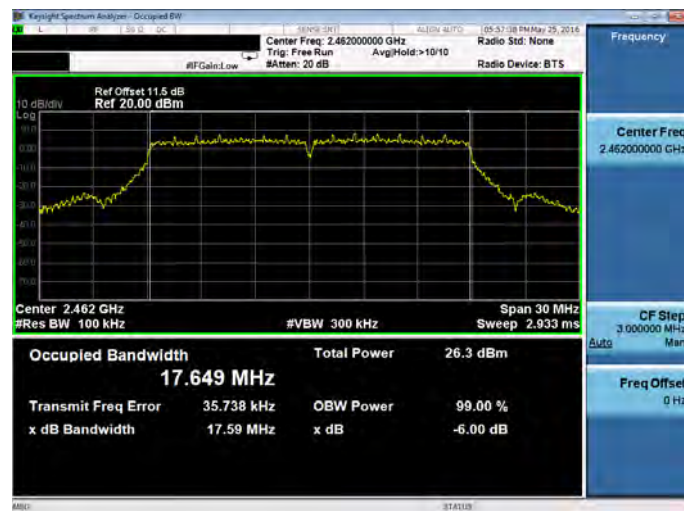



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2422 MHz



2437 MHz



2452 MHz

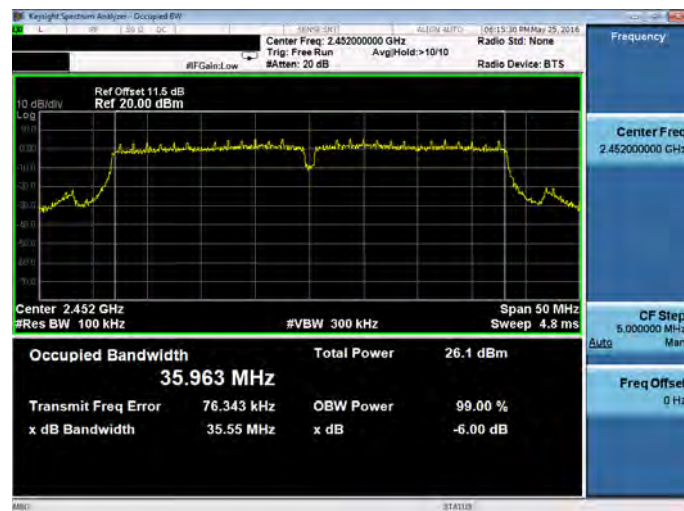



Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz



2437 MHz



2462 MHz

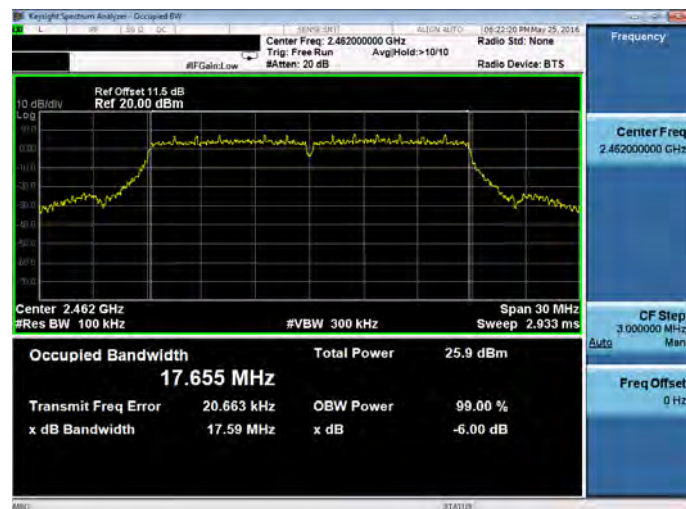



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1


2422 MHz



2437 MHz



2452 MHz

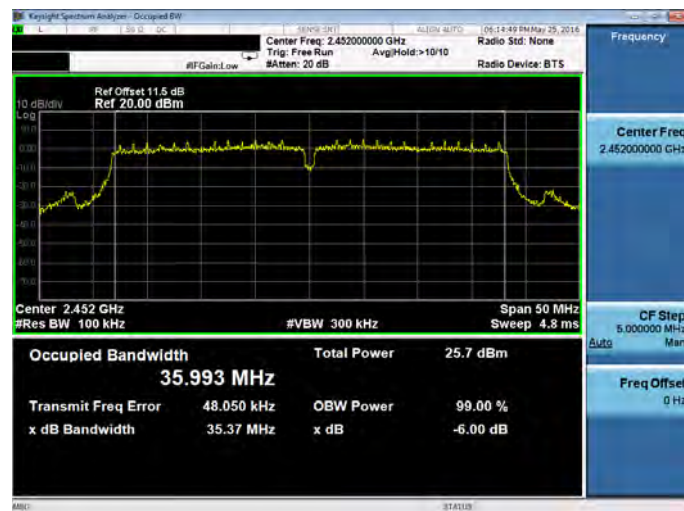


8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

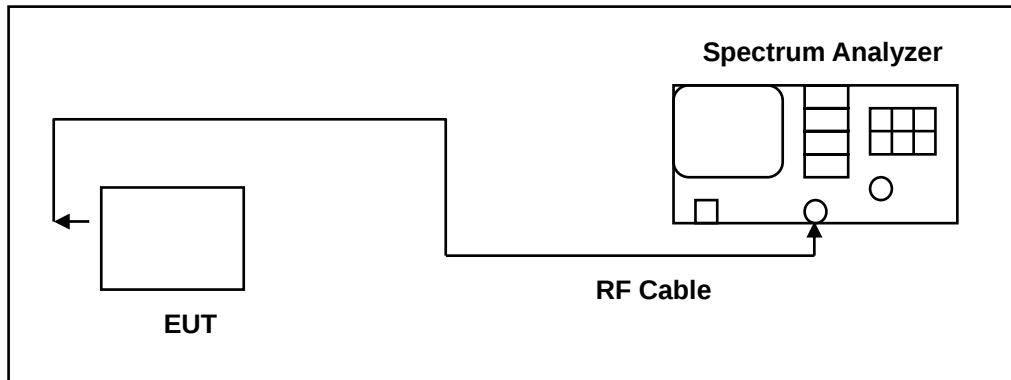

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



8.5. Test Result

Test Item	Maximum Power Density				
Date of Test	05/25/2016				
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)			Limit (dBm/3KHz)
		ANT-0	ANT-1	ANT-0+1	
Mode 2	2412	-0.435	---	---	< 8
	2437	-1.175	---	---	< 8
	2462	-1.470	---	---	< 8
Mode 3	2412	-4.448	---	---	< 8
	2437	-5.235	---	---	< 8
	2462	-5.174	---	---	< 8
Mode 4	2412	-4.750	-4.384	-1.553	< 8
	2437	-4.625	-4.375	-1.488	< 8
	2462	-4.334	-4.720	-1.512	< 8
Mode 5	2422	-7.829	-7.889	-4.849	< 8
	2437	-7.768	-7.044	-4.381	< 8
	2452	-7.092	-7.965	-4.496	< 8



8.6. Test Graphs

Mode 2: IEEE 802.11b link mode_ANT-0

2412 MHz



2437 MHz




2462 MHz






Mode 3: IEEE 802.11g link mode_ANT-0


2412 MHz

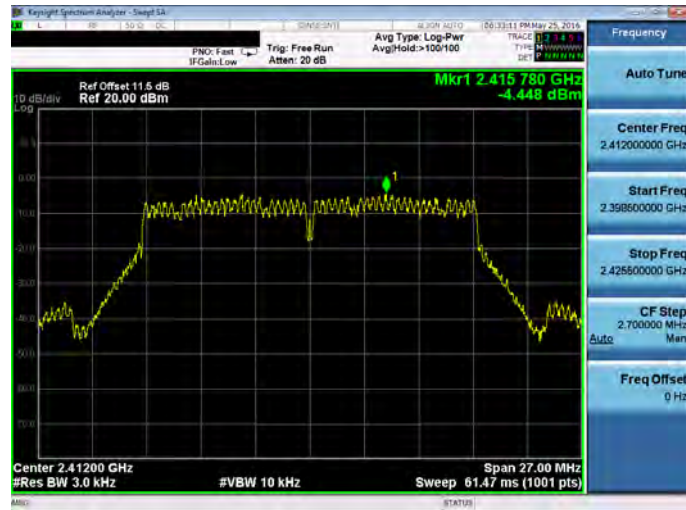

2437 MHz

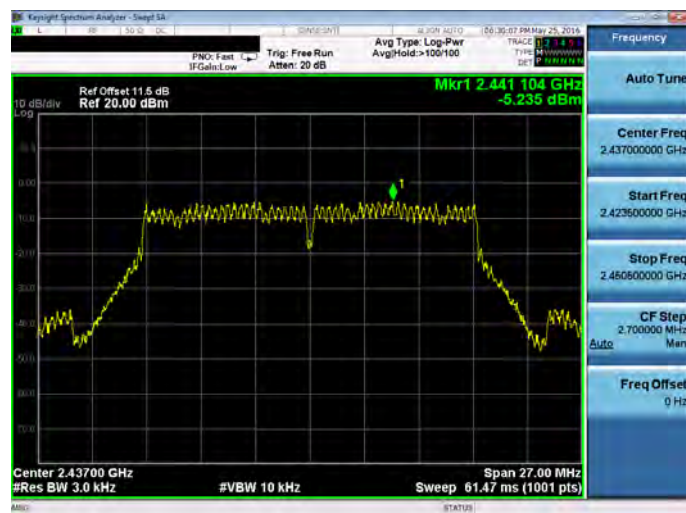


2462 MHz

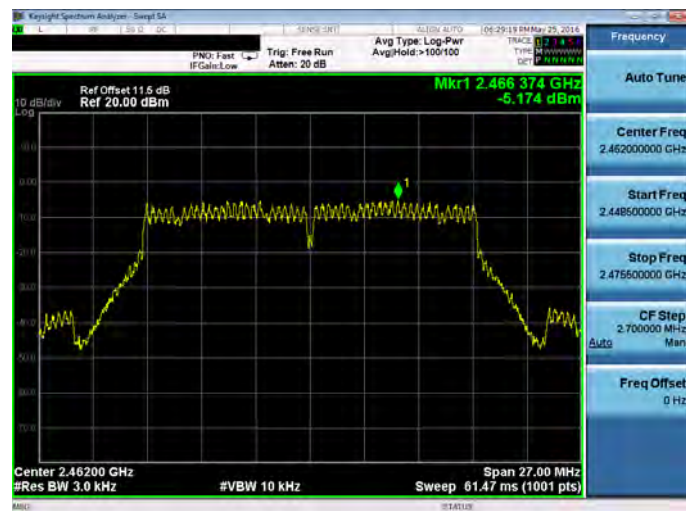




Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode _ANT-0


2412 MHz

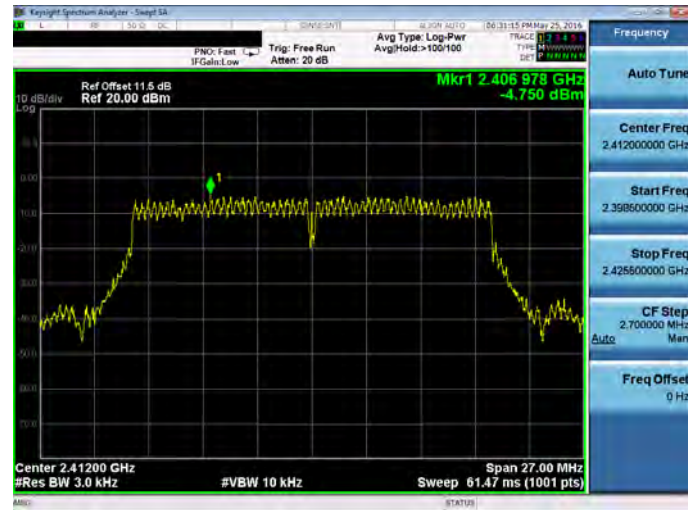

2437 MHz

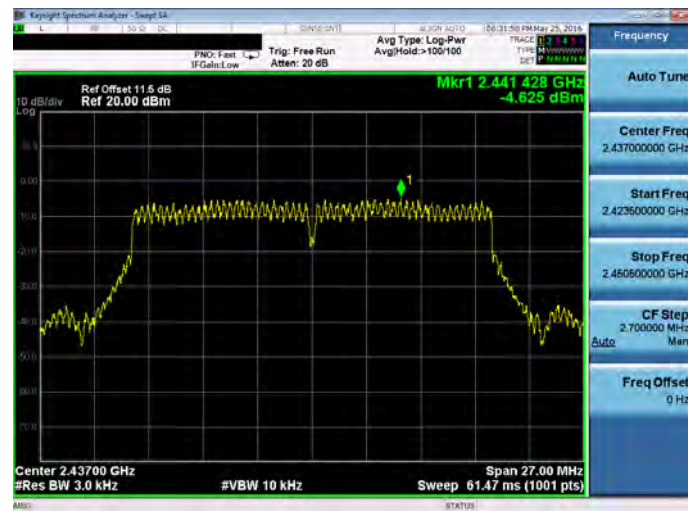


2462 MHz

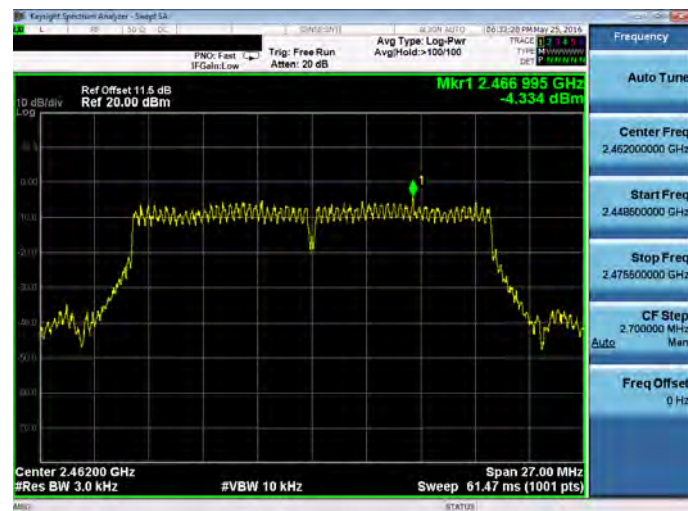




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode _ANT-0


2422 MHz

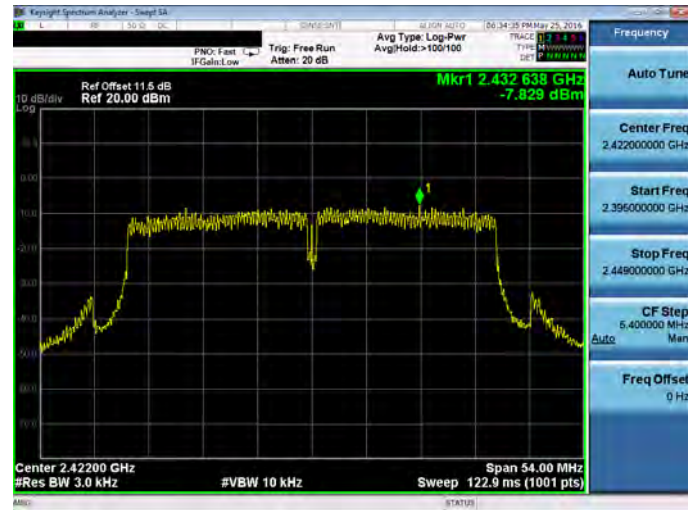

2437 MHz

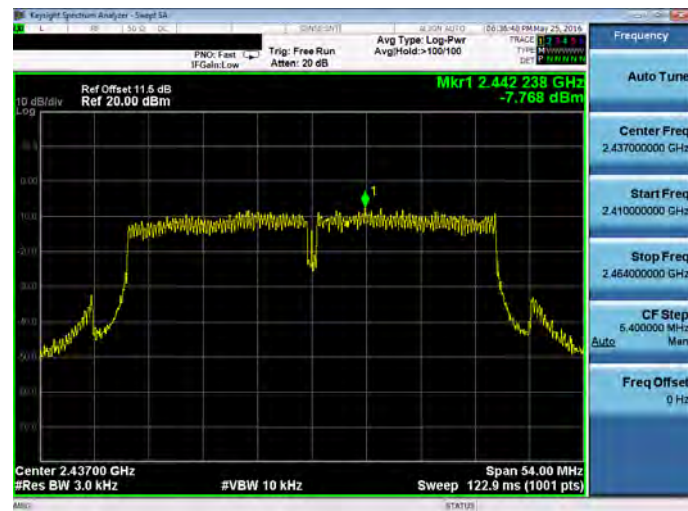


2452 MHz

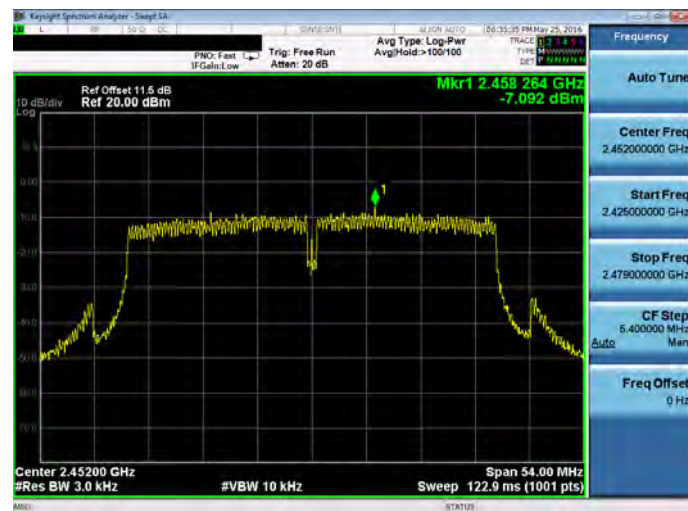




Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz

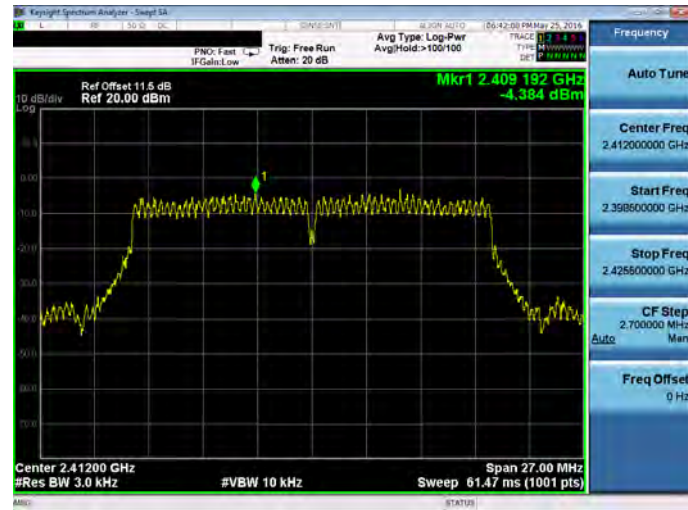

2437 MHz

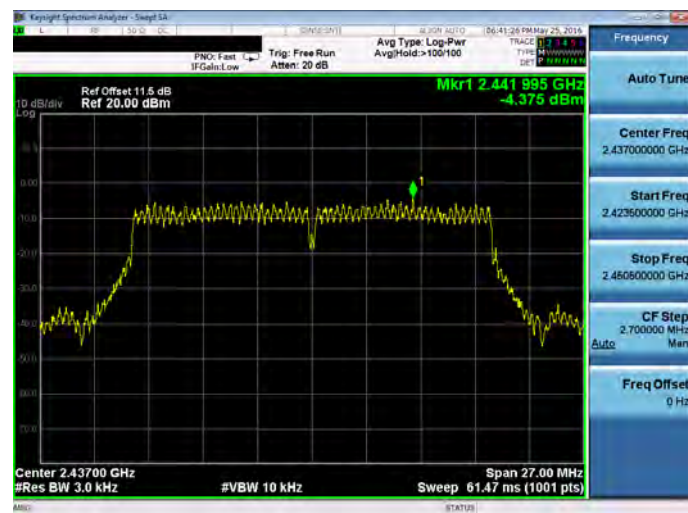


2462 MHz

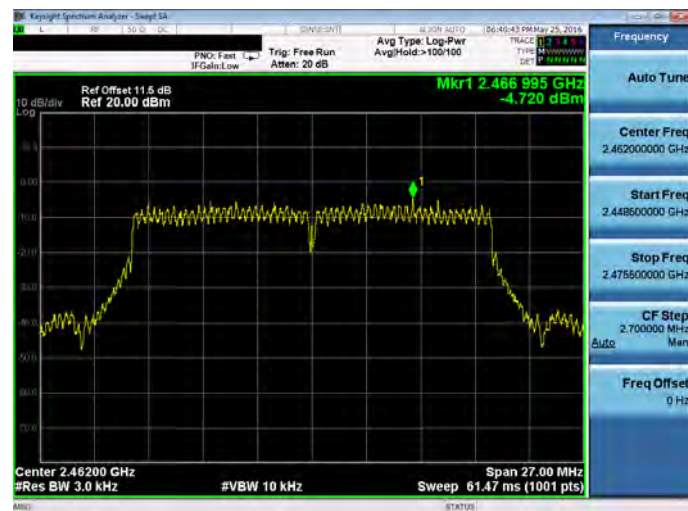




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode _ANT-1


2422 MHz

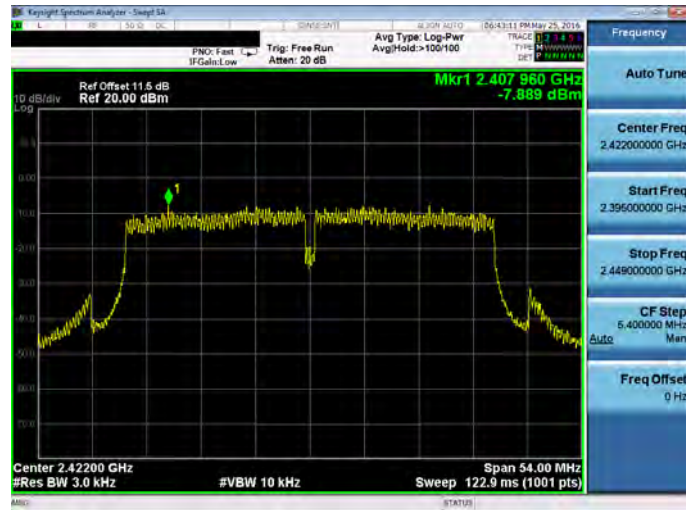

2437 MHz

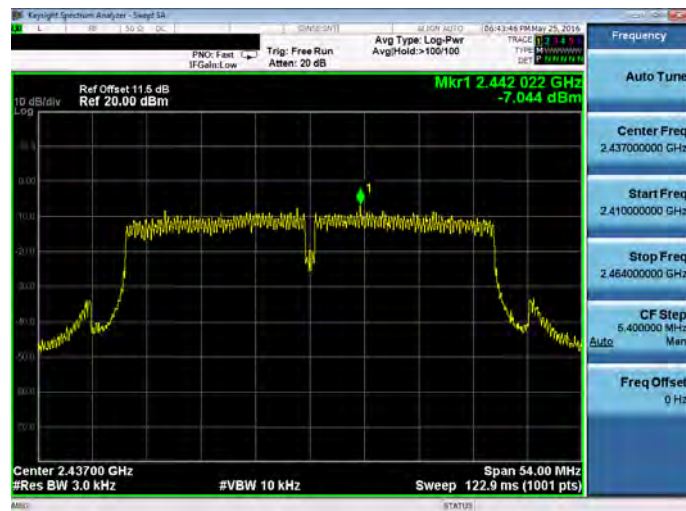

2452 MHz

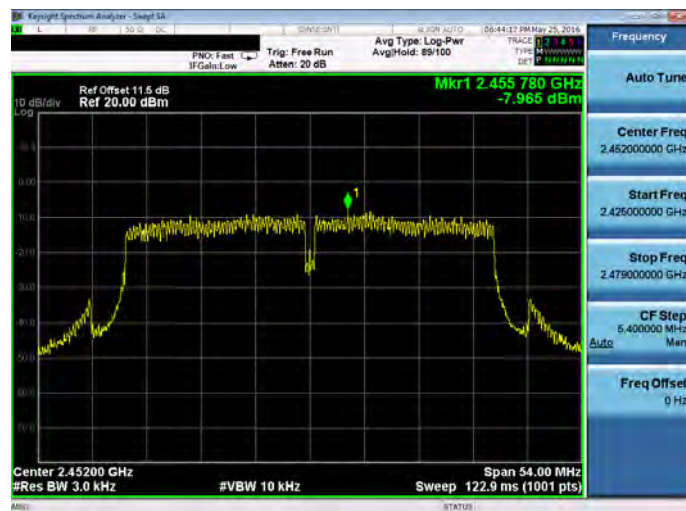


9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

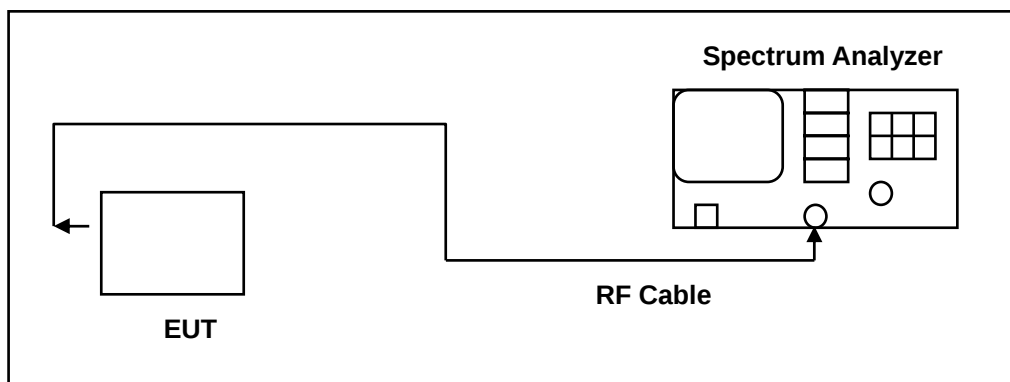

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

9.5. Test Graphs

Reference level

Mode 2: IEEE 802.11b link mode_ANT-0

2412 MHz



2437 MHz




2462 MHz





Mode 3: IEEE 802.11g link mode_ANT-0

2412 MHz

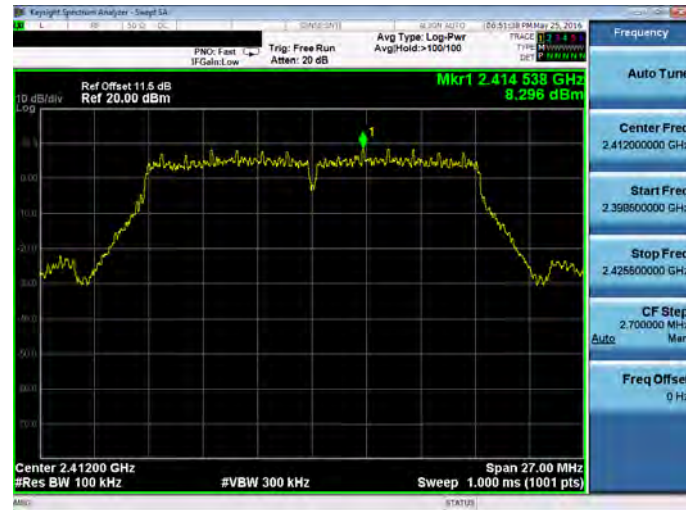

2437 MHz



2462 MHz





Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz



2437 MHz




2462 MHz





Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode _ANT-0

2422 MHz

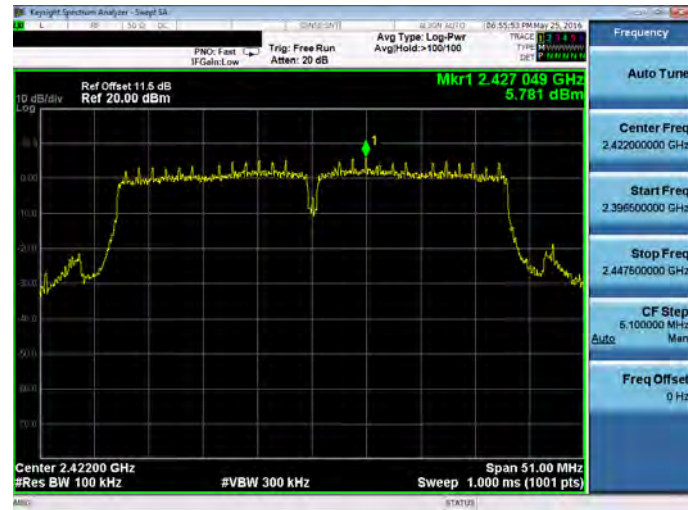

2437 MHz




2452 MHz






Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz

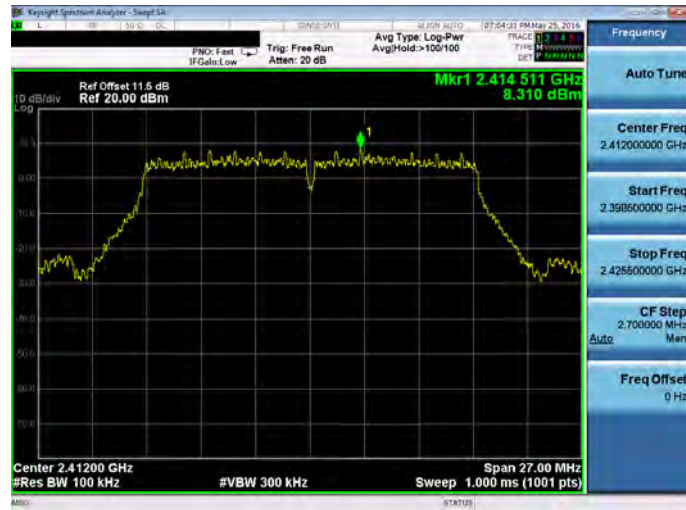

2437 MHz

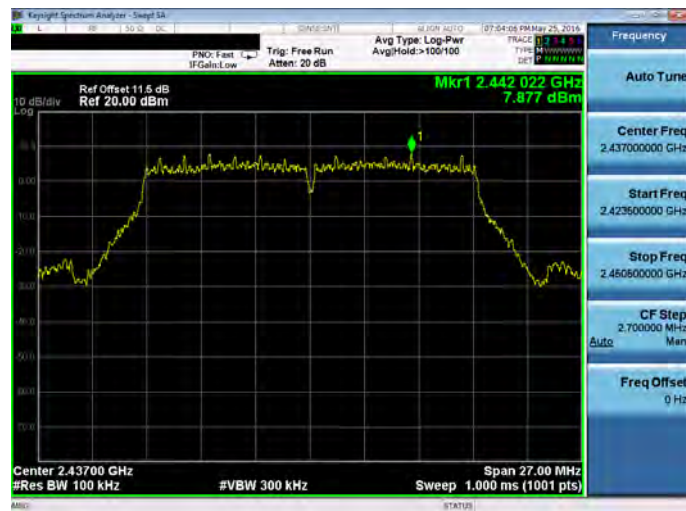


2462 MHz

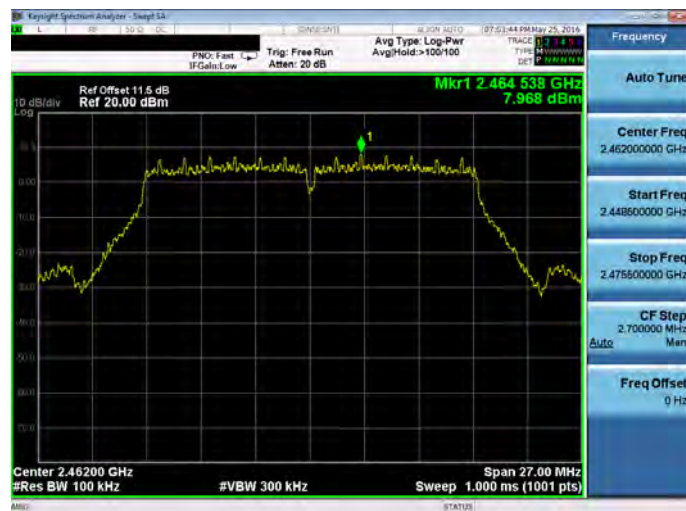




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2422 MHz

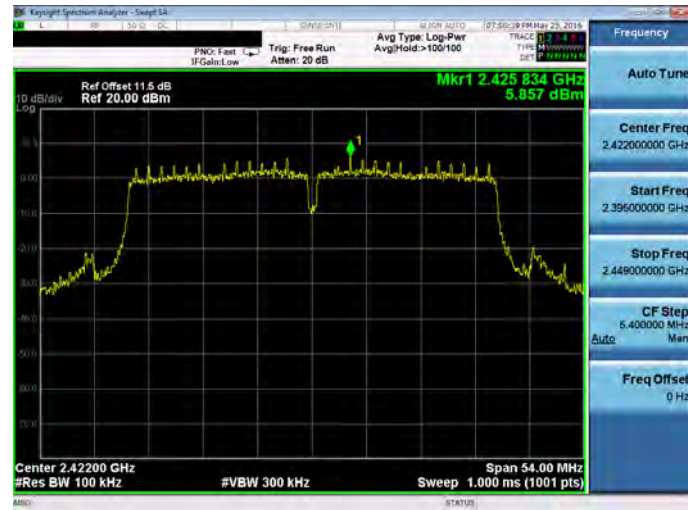

2437 MHz

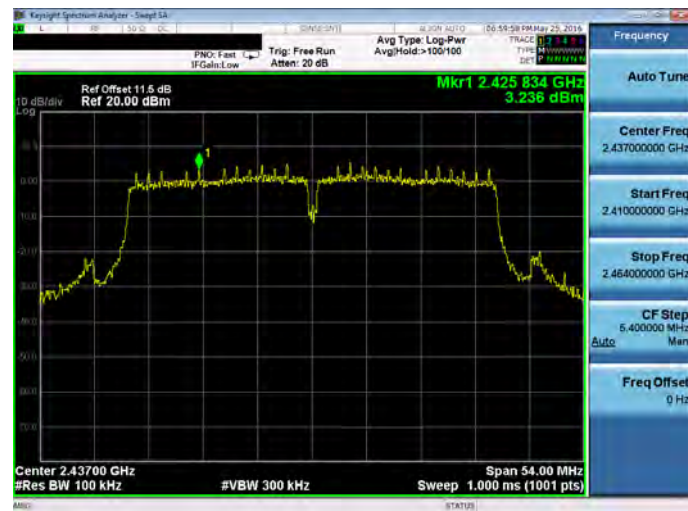

2452 MHz







Out of Band Conducted Emissions

Mode 2: IEEE 802.11b link mode_ANT-0


2412 MHz

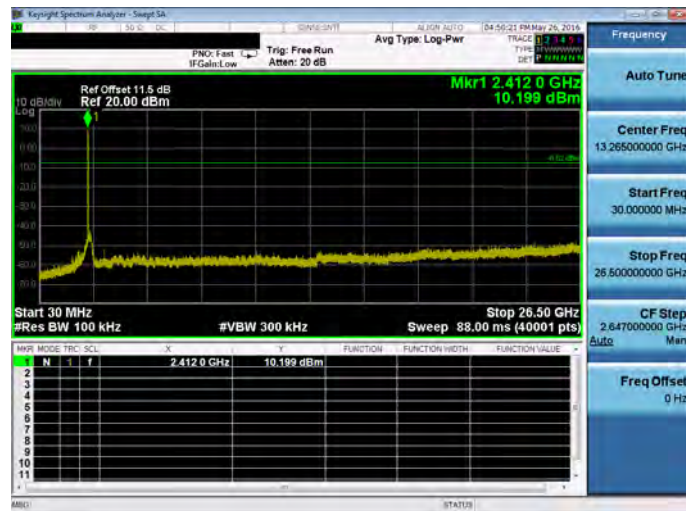

2437 MHz

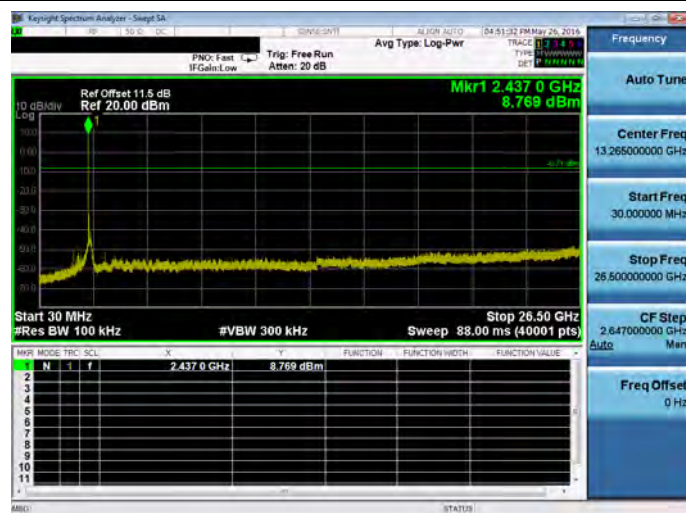


2462 MHz

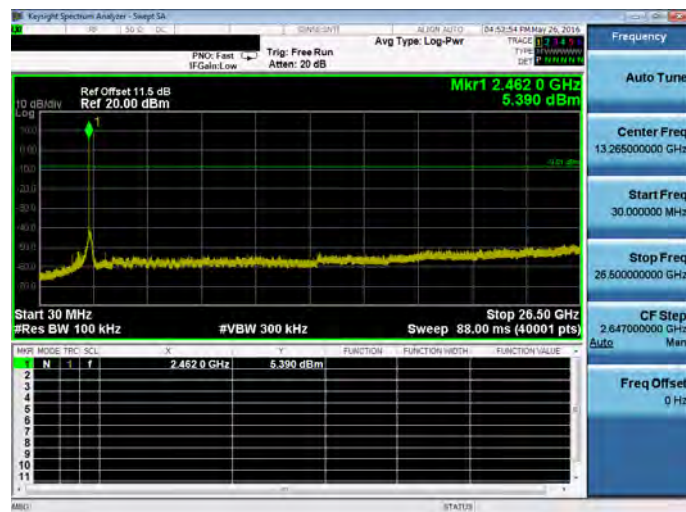




Mode 3: IEEE 802.11g link mode_ANT-0


2412 MHz

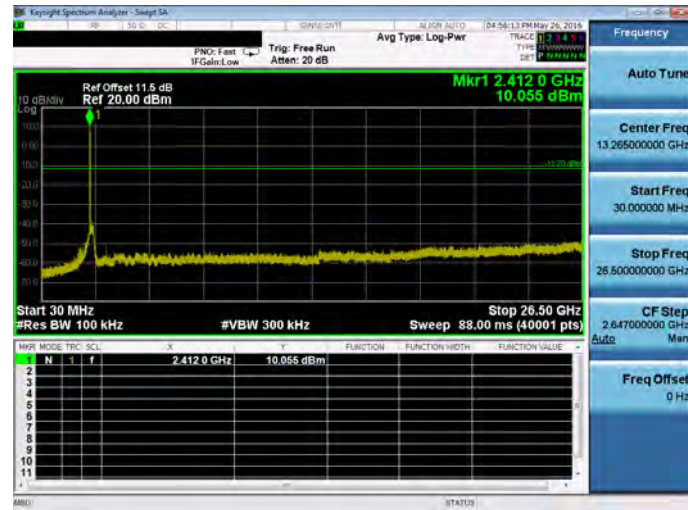

2437 MHz

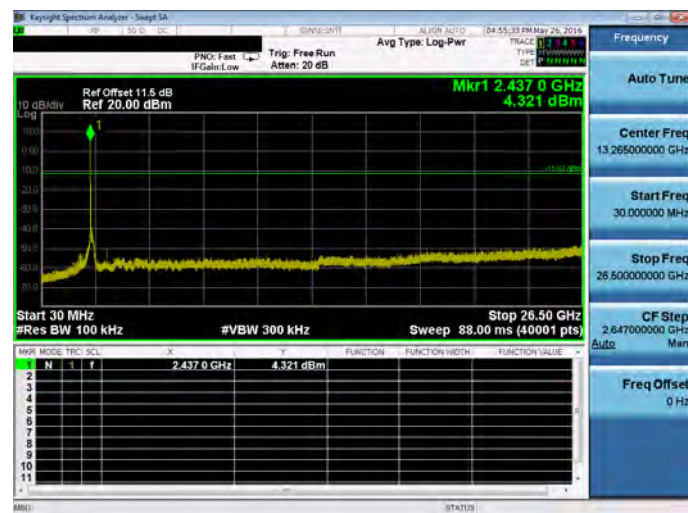


2462 MHz

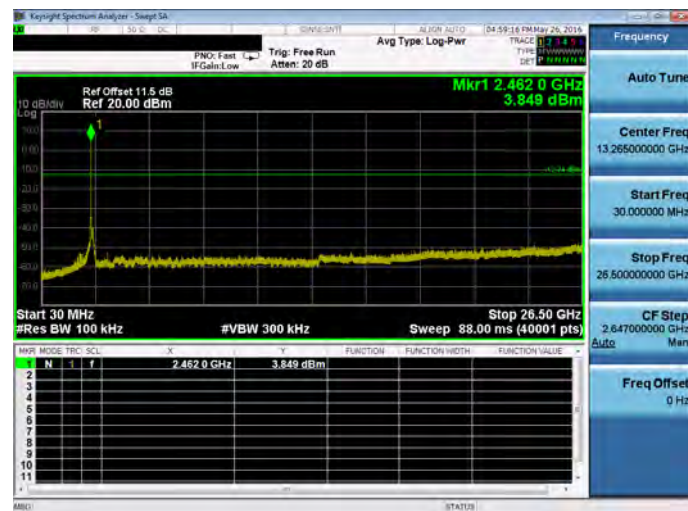

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz

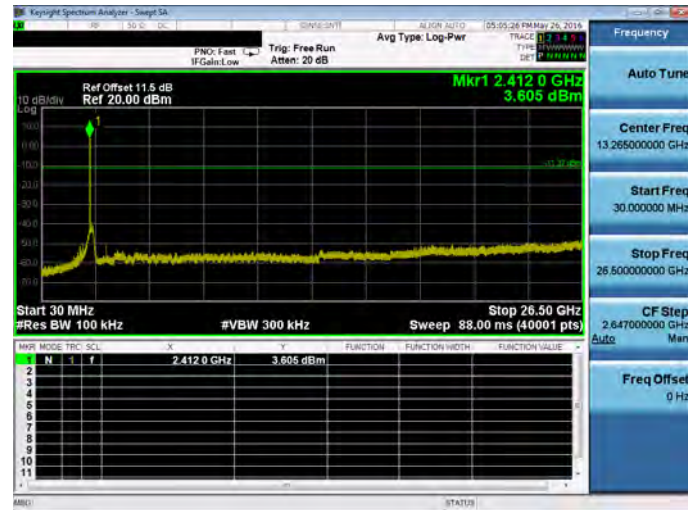

2437 MHz




2462 MHz





Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2422 MHz

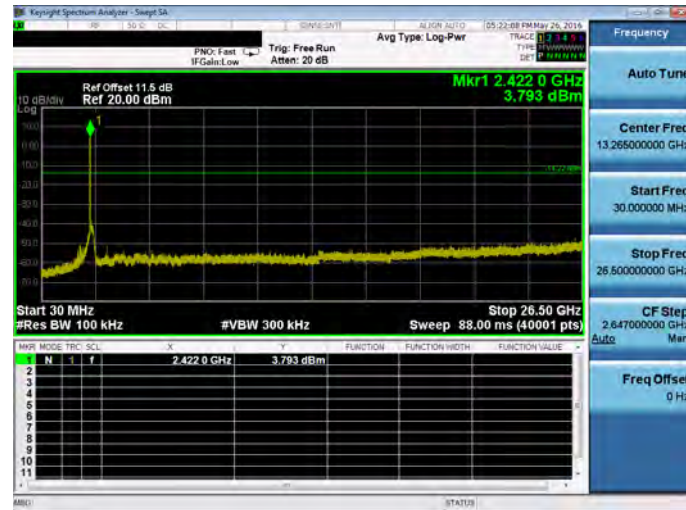

2437 MHz




2452 MHz





Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz

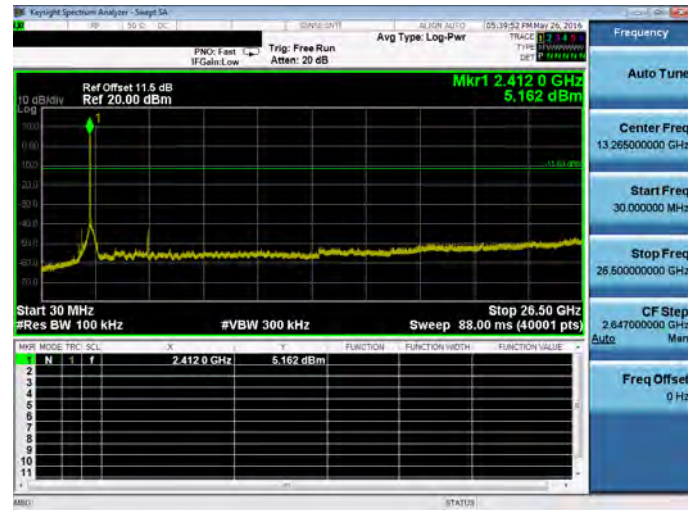

2437 MHz




2462 MHz

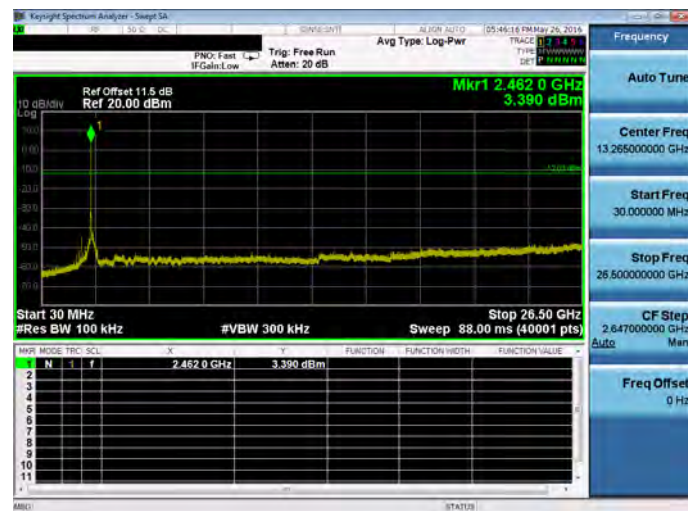

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1


2422 MHz

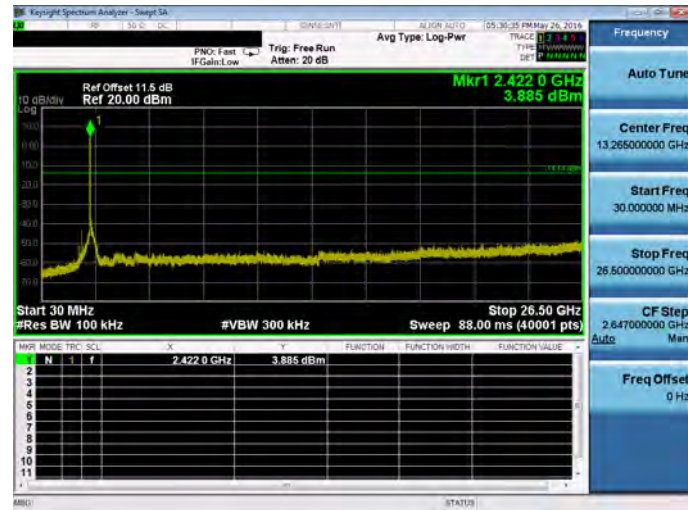

2437 MHz



2452 MHz

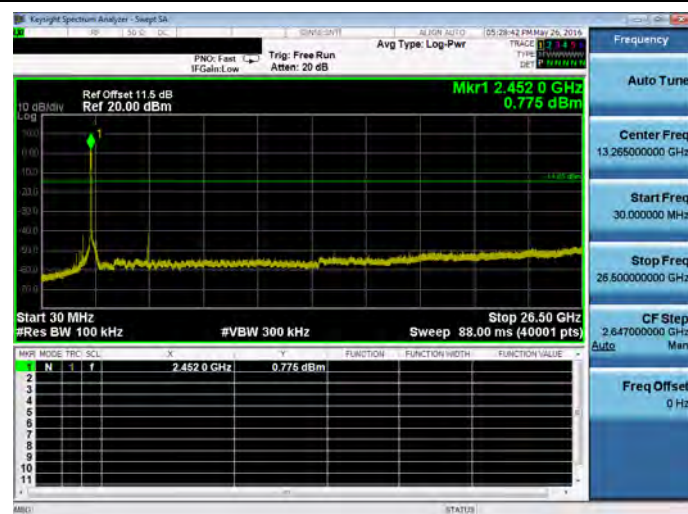





Conducted Band Edge

Mode 2: IEEE 802.11b link mode_ANT-0

2412 MHz

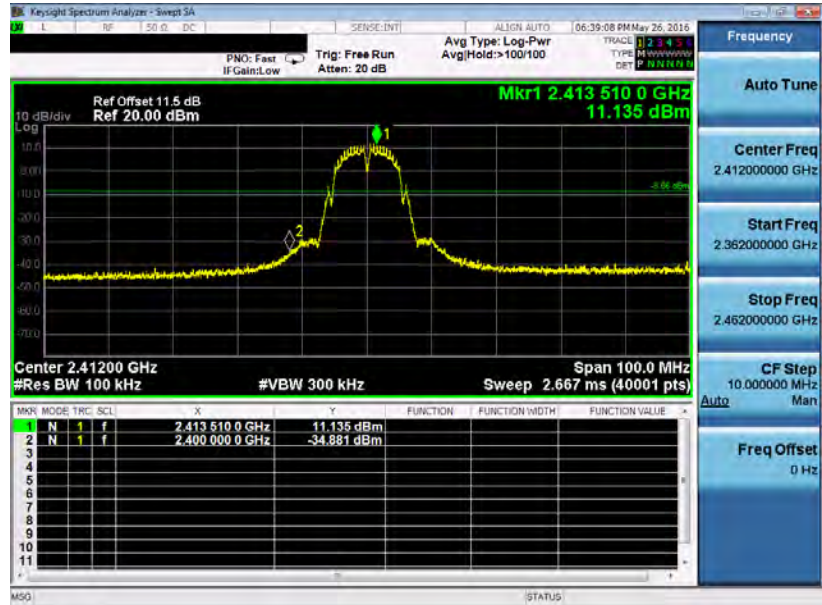


2462 MHz

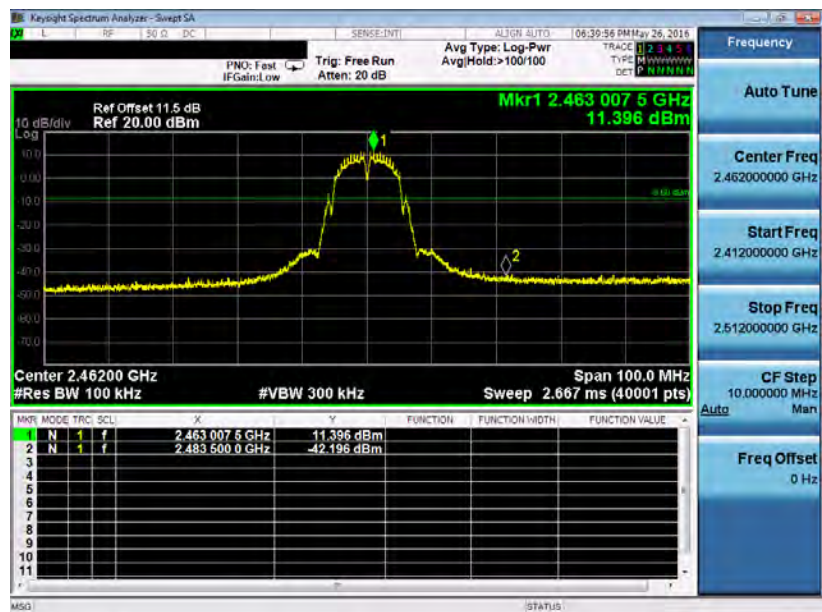




Mode 3: IEEE 802.11g link mode_ANT-0

2412 MHz

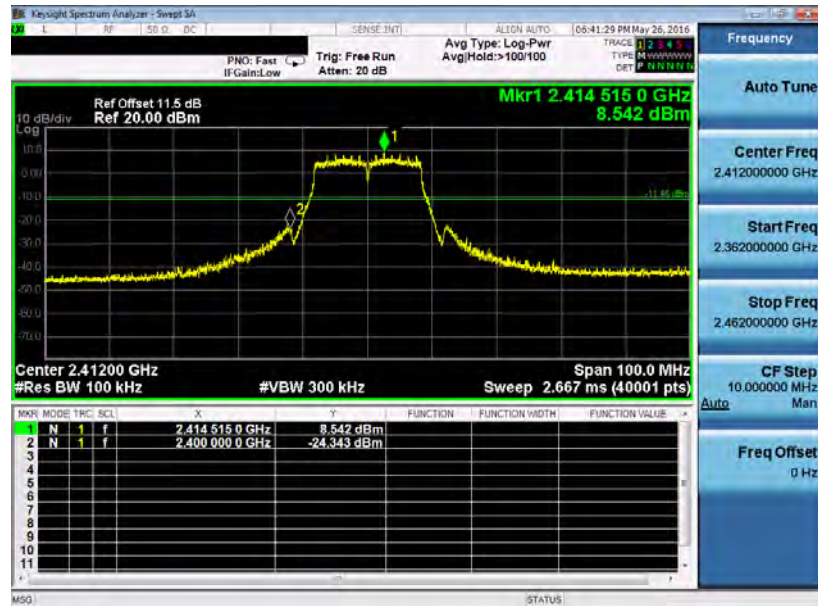


2462 MHz

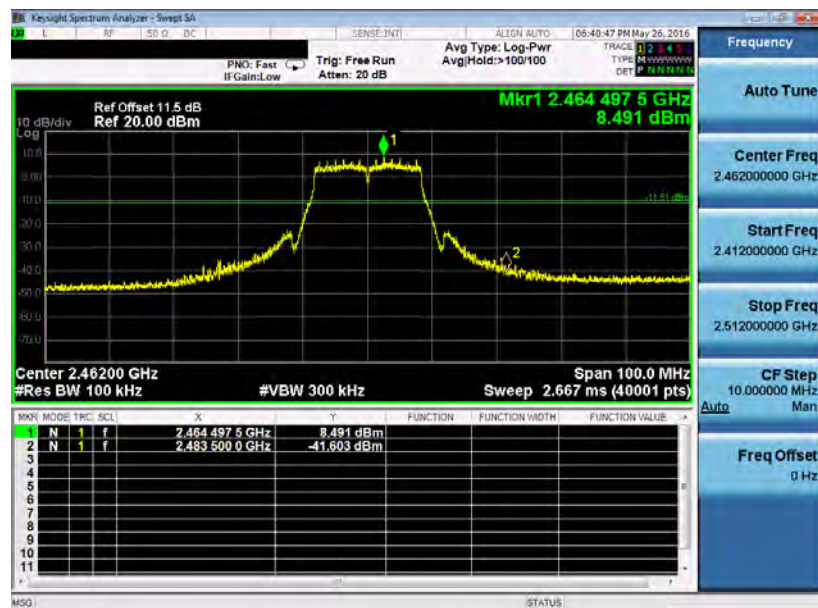




Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz

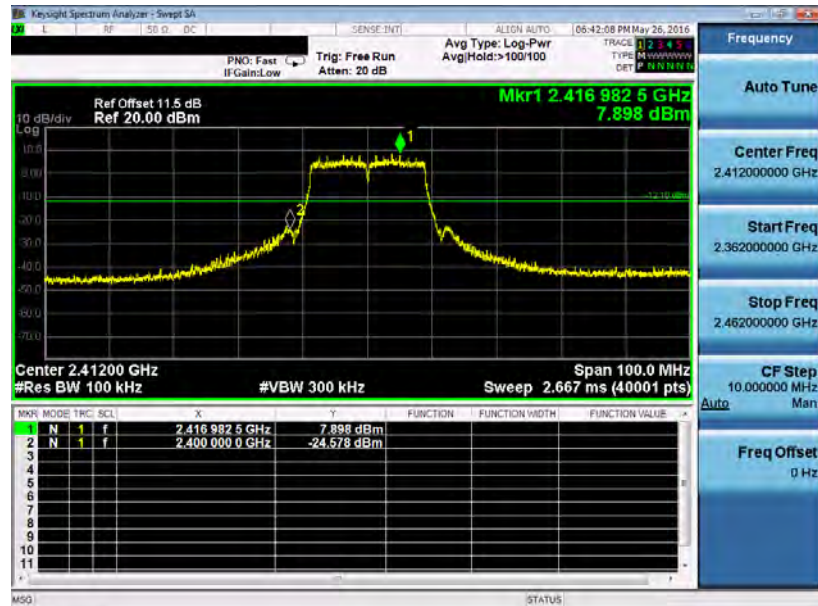

2462 MHz

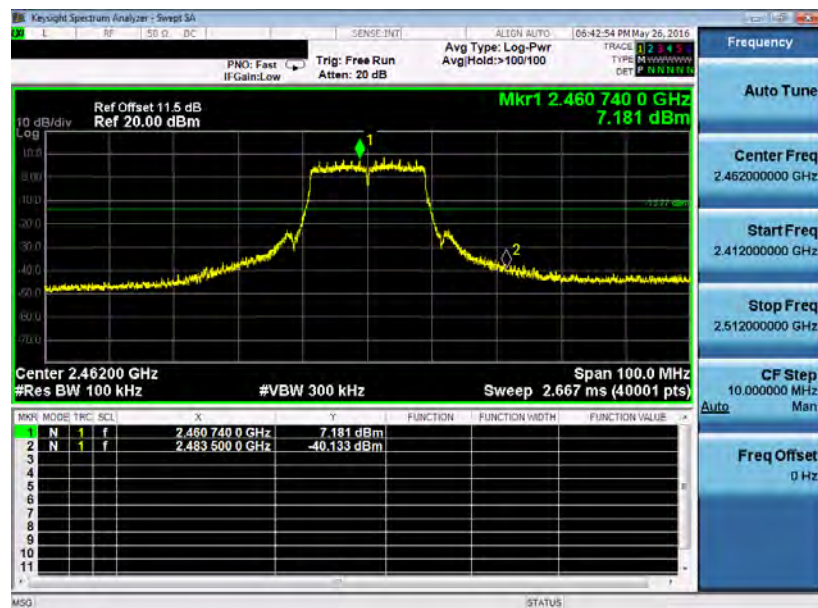



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2422 MHz




2452 MHz






Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

2412 MHz

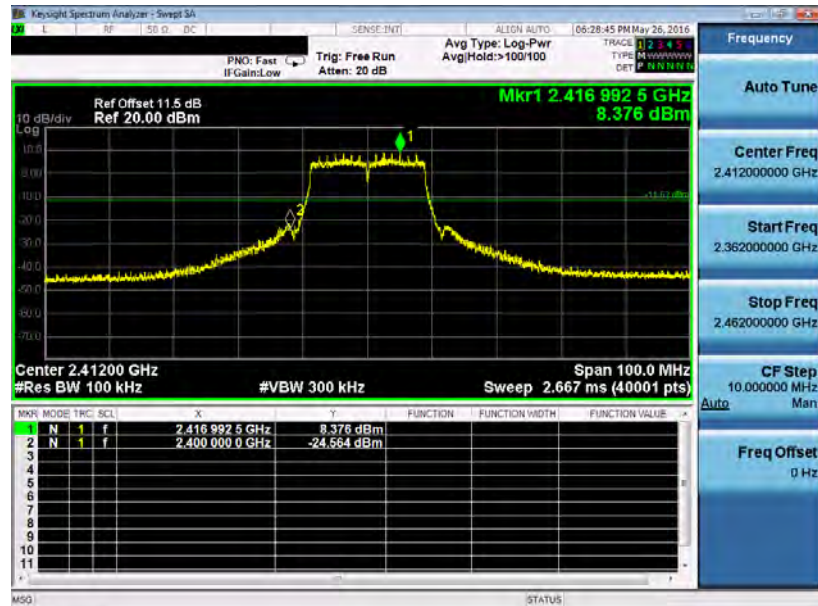

2462 MHz

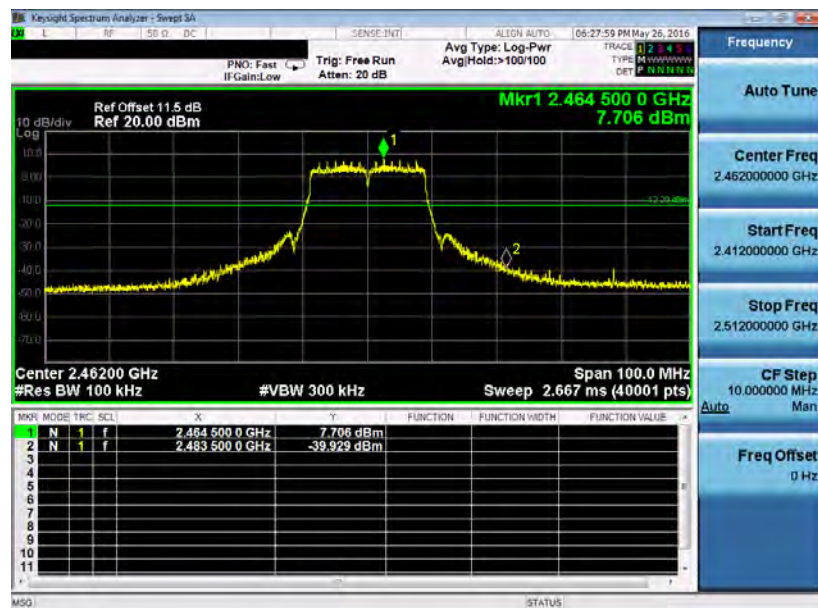



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2422 MHz



2452 MHz





10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Description

See section 2 – antenna information.

10.3.Directiona Gain Calculated

$$\text{Directional Gain} = 10 \cdot \log \left[\left(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20} \right)^2 / N_{\text{ANT}} \right] = 4.88 \text{ dBi} < 6 \text{ dBi}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11n 2.4GHz 20MHz	4.88
IEEE 802.11n 2.4GHz 40MHz	4.88