


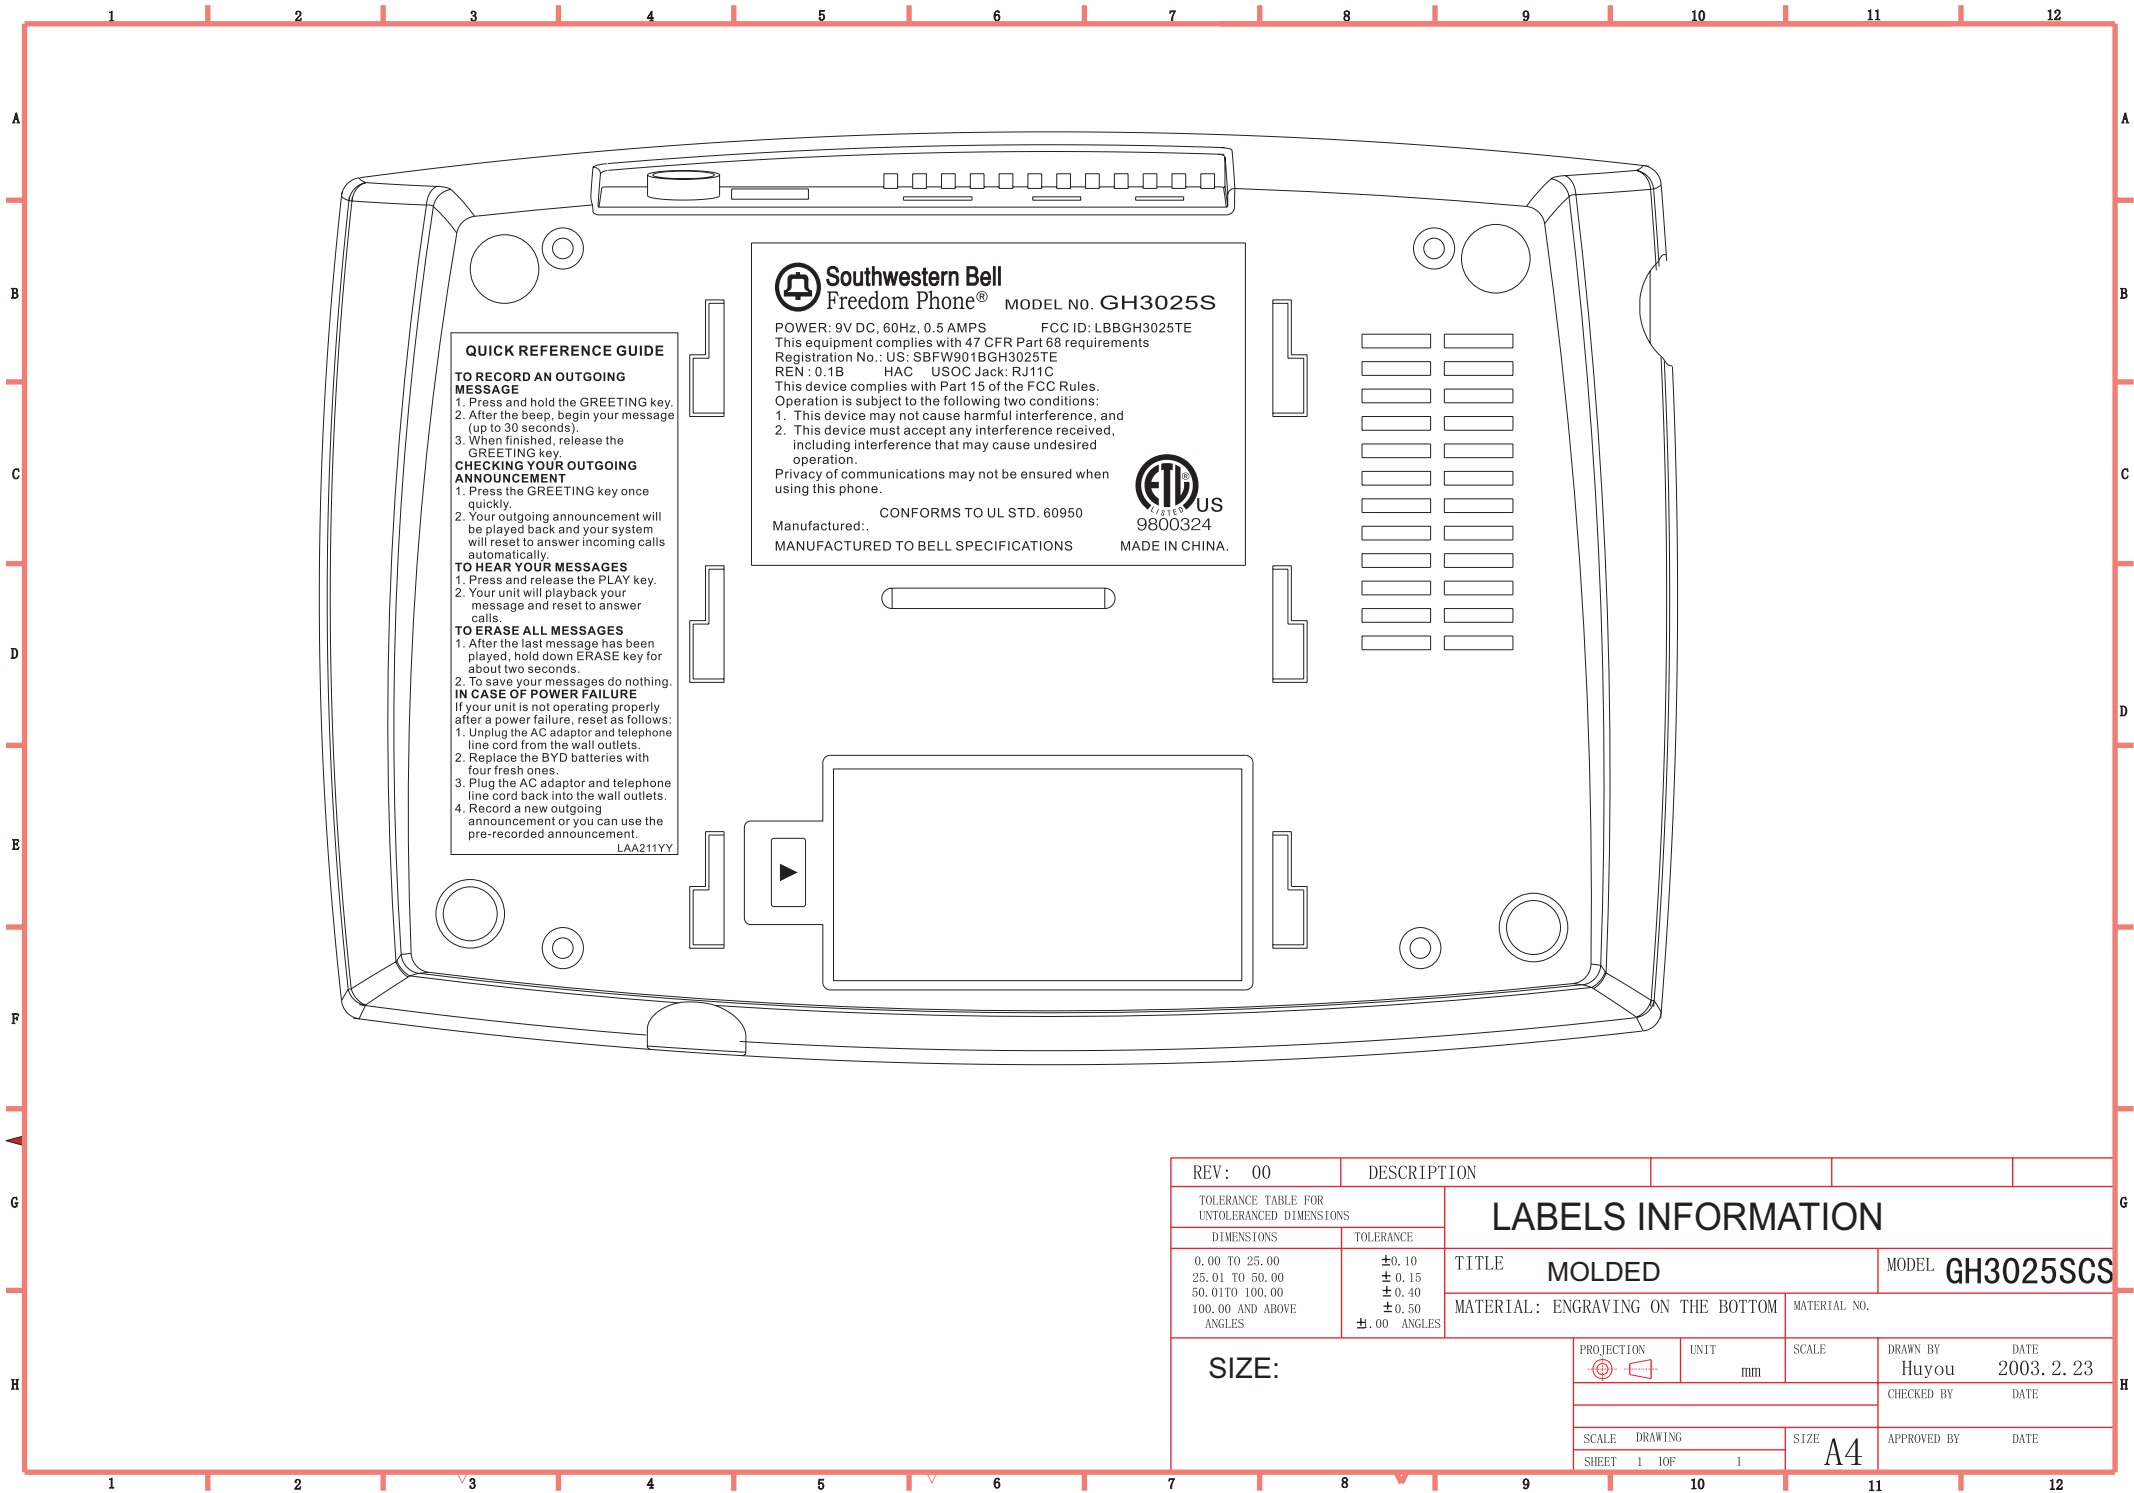

QUICK REFERENCE GUIDE

TO RECORD AN OUTGOING MESSAGE

1. Press and hold the GREETING key.
2. After the beep, begin your message (up to 30 seconds).
3. When finished, release the GREETING key.

CHECKING YOUR OUTGOING ANNOUNCEMENT

1. Press the GREETING key once quickly.
2. Your outgoing announcement will be played back and your system will reset to answer incoming calls automatically.

TO HEAR YOUR MESSAGES

1. Press and release the PLAY key.
2. Your unit will playback your message and reset to answer calls.

TO ERASE ALL MESSAGES

1. After the last message has been played, hold down ERASE key for about two seconds.
2. To save your messages do nothing.

IN CASE OF POWER FAILURE

If your unit is not operating properly after a power failure, reset as follows:

1. Unplug the AC adaptor and telephone line cord from the wall outlets.
2. Replace the BYD batteries with four fresh ones.
3. Plug the AC adaptor and telephone line cord back into the wall outlets.
4. Record a new outgoing announcement or you can use the pre-recorded announcement.

LAA211YY


 **Southwestern Bell**
Freedom Phone® MODEL NO. GH3025S

POWER: 9V DC, 60Hz, 0.5 AMPS FCC ID: LBBGH3025TE
This equipment complies with 47 CFR Part 68 requirements
Registration No.: US: SBFW901B8GH3025TE
REN : 0.1B HAC USOC Jack: RJ11C
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.
Privacy of communications may not be ensured when using this phone.


CONFORMS TO UL STD. 60950
Manufactured: .
MANUFACTURED TO BELL SPECIFICATIONS

 **US**
9800324
MADE IN CHINA.

REV: 00		DESCRIPTION											
TOLERANCE TABLE FOR UNTOLERANCED DIMENSIONS		LABELS INFORMATION											
DIMENSIONS								TOLERANCE					
0.00 TO 25.00		±0.10		TITLE MOLDED		MODEL GH3025SCS							
25.01 TO 50.00		±0.15											
50.01 TO 100.00		±0.40		MATERIAL: ENGRAVING ON THE BOTTOM									
100.00 AND ABOVE		±0.50											
ANGLES		±.00 ANGLES		MATERIAL NO.									
SIZE:				PROJECTION		UNIT		SCALE		DRAWN BY		DATE	
						mm				Huyou		2003. 2. 23	
										CHECKED BY		DATE	
				SCALE DRAWING				SIZE		APPROVED BY			
				SHEET 1 OF 1				A4		DATE			

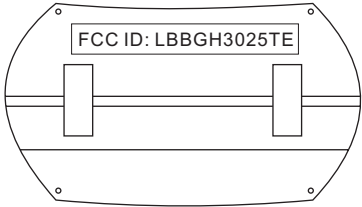

LOCATION

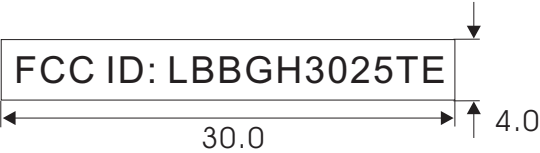

BLACK LETTER WITH TRANSPARENT BACKGROUND

REV: 00		DESCRIPTION											
TOLERANCE TABLE FOR UNTOLERANCED DIMENSIONS		LABELS INFORMATION											
DIMENSIONS								TOLERANCE					
0.00 TO 25.00		±0.10		TITLE MOLDED		MODEL GH3025SCS							
25.01 TO 50.00		±0.15											
50.01 TO 100.00		±0.40		MATERIAL		MATERIAL NO.							
100.00 AND ABOVE		±0.50											
ANGLES		±.00 ANGLES											
SIZE:				PROJECTION				UNIT		SCALE		DRAWN BY	
						mm				Huyouda		2003. 3. 25	
										CHECKED BY		DATE	
				SCALE		DRAWING		SIZE		APPROVED BY		DATE	
				SHEET		1 OF 1		A4					