

TEST REPORT

of

FCC Part 15 Subpart C

New Application; Class I PC; Class II PC

Product : WiFi DAS

Brand: FCC: Mapower / IC: PATRIOT MEMORY

Model for FCC: WI21, PCGTW25S

Model for IC: PCGTW25S

Model Difference: Model: PCGTW25S Add 4 LED

FCC ID: LD3WIFIDAS21

IC: 10374A-PCGTW25S

FCC Rule Part: §15.247, Cat: DTS

IC Rule Part: RSS-210 issue 8:2010, Annex 8

Applicant: Mapower Electronics Co.,Ltd

Address: No.50, Minquan Rd.,Luzhu Shiang, Taoyuan County 33846, Taiwan

Test Performed by:
International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-12LR076FC

Issue Date : 2012/05/31

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.



VERIFICATION OF COMPLIANCE

Applicant: Mapower Electronics Co.,Ltd
Product Description: WiFi DAS
Brand Name: FCC: Mapower / IC: PATRIOT MEMORY
Model for FCC: WI21, PCGTW25S
Model for IC: PCGTW25S
Model Difference: Model: PCGTW25S Add 4 LED
FCC ID: LD3WIFIDAS21
IC: 10374A-PCGTW25S
Date of test: 2012/05/02 ~ 2012/05/21
Date of EUT Received: 2012/05/02

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:



Date:

2012/05/31

Dion Chang / Engineer

Prepared By:



Date:

2012/05/31

Eva Kao / Technical Supervisor

Approved By:



Date:

2012/05/31

Vincent Su / Technical Manager

Version

Version No.	Date	Description
00	2012/05/31	Initial creation of document

Table of Contents

1	GENERAL INFORMATION	6
1.1	Related Submittal(s) / Grant (s)	7
1.2	Test Methodology	7
1.3	Test Facility	7
1.4	Special Accessories	7
1.5	Equipment Modifications	7
2	SYSTEM TEST CONFIGURATION	8
2.1	EUT Configuration	8
2.2	EUT Exercise	8
2.3	Test Procedure	8
2.4	Configuration of Tested System	9
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	10
5	CONDUCTED EMISSION TEST	11
5.1	Standard Applicable:	11
5.2	Measurement Equipment Used:	11
5.3	EUT Setup:	11
5.4	Measurement Procedure:	12
5.5	Measurement Result:	12
6	PEAK OUTPUT POWER MEASUREMENT	15
6.1	Standard Applicable:	15
6.2	Measurement Equipment Used:	16
6.3	Test Set-up:	16
6.4	Measurement Procedure:	16
6.5	Measurement Result:	17
7	6dB Bandwidth & 99% Bandwidth	18
7.1	Standard Applicable:	18
7.2	Measurement Equipment Used:	18
7.3	Test Set-up:	18
7.4	Measurement Procedure:	18
7.5	Measurement Result:	19
8	100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	26
8.1	Standard Applicable:	28
8.2	Measurement Equipment Used:	29
8.3	Test SET-UP:	30
8.4	Measurement Procedure:	31
8.5	Field Strength Calculation:	31
8.6	Measurement Result:	31
9	SPURIOUS RADIATED EMISSION TEST	38
9.1	Standard Applicable	40
9.2	Measurement Equipment Used:	40
9.3	Test SET-UP:	40
9.4	Measurement Procedure:	41
9.5	Field Strength Calculation	41
9.6	Measurement Result:	41

10	Peak Power Spectral Density	99
10.1	Standard Applicable:	102
10.2	Measurement Equipment Used:	102
10.3	Test Set-up:	102
10.4	Measurement Procedure:	102
10.5	Measurement Result:	103
11	ANTENNA REQUIREMENT	110
11.1	Standard Applicable:	112
11.2	Antenna Connected Construction:	112

1 GENERAL INFORMATION

General:

Product Name	WiFi DAS	
Brand Name	FCC: Mapower / IC: PATRIOT MEMORY	
Model for FCC:	WI21, PCGTW25S	
Model for IC:	PCGTW25S	
Model Difference	Model: PCGTW25S Add 4 LED	
Power Supply	3.7Vdc from Li-ion Battery or 5Vdc from AC/DC Adapter	
	Adapter:	Model: WA-10L05RU

WLAN:

Frequency Range:	802.11b/g/n HT20: 2412 – 2462MHz 802.11n HT40: 2422 – 2452MHz
Channel number:	802.11b/g/n HT20: 11 channels 802.11n HT40: 7 channels
Transmit Power:	802.11b: 18.23dBm Peak 802.11g: 19.92dBm Peak 802.11n HT20: 20.03dBm Peak 802.11n HT40: 20.20dBm Peak
Modulation Technology	11b/g: DSSS, OFDM 11n: OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n HT20MHz: 6.5 – 72Mbps 802.11 n HT40MHz: 13.5 – 150Mbps
Antenna Designation:	1TX, 1RX, Printed Antenna, 2.4dBi
Type of Emission:	802.11b/g: 16M5G1D 802.11n: 35M9D1D

The EUT is compliance with IEEE 802.11 b/g/n Standard.

EUT Outlook Dimension	140mm (L) X 85mm(W) X 23mm(H), Antenna location refer to DUT photographs
-----------------------	--

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: LD3WIFIDAS21** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and **IC: 10374A-PCGTW25S** filing to comply with Industry Canada RSS-210 issue 8: 2010 Annex 8. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2010. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd., Lung-Tan Hsiang, Tao Yuan County 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number is: TW1036, Canada Registration Number: 4067B-3.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

2.4 Configuration of Tested System

Fig. 2-1 AC Power line and Radiated Emission Configuration

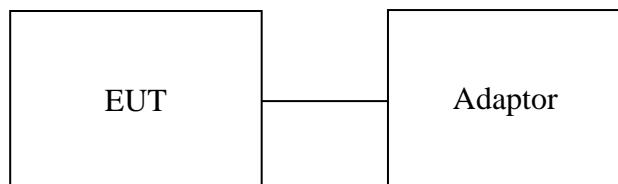


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	N/A					

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a) RSS-Gen §7.2.4	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4) §A8.4(4)	Peak Output Power	Compliant
§15.247(a)(2) §A8.2(a) RSS-Gen §4.6.1	6dB Bandwidth & 99% Power Bandwidth	Compliant
§15.247(d) §A8.5	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d) §A8.5	Spurious Emission	Compliant
§15.247(e) §A8.2(b) & §A8.3(2)	Peak Power Density	Compliant
§15.203 RSS-GEN 7.1.2, RSS-210 issue 8,§A8.4	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

802.11 b mode: Channel low (2412MHz)、 mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz)、 mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n _20MHz: Channel low (2412MHz)、 mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

802.11 n _40MHz: Channel low (2422MHz)、 mid (2437MHz) and high (2452MHz) with 13.5Mbps lowest data rate are chosen for full testing.

5 CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

AC Power Line Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 03 -1 Cable	WOKEN	CFD 300-NL	Conduction 0-1	06/27/2011	06/27/2012
EMI Receiver 12	ROHDE & SCHWARZ	ESCI	100804	07/12/2011	07/12/2012
LISN 07	FCC Inc.	FCC-LISN-50-100-4 -02	07040	07/13/2011	07/13/2012
LISN 08	FCC	FCC-LISN50-25-2-0 1	07039	07/13/2011	07/13/2012

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.


AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation Mode	Test Date:	2012/5/3
Test By:	Lake		

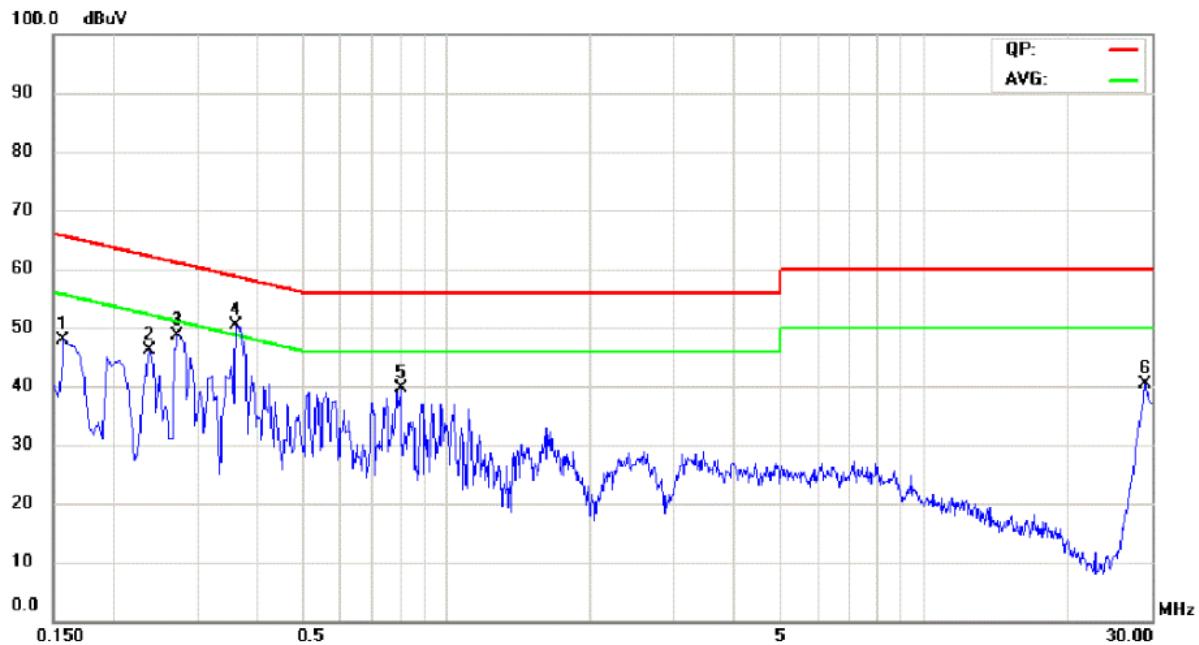

Site Conduction 04 Phase: **L1** Temperature: 26 °C
 Condition : CISPR22 CLASS B Humidity: 54 %

No.	Freq.	Reading_Level (dBuV)				Correct Factor	Measurement (dBuV)				Limit (dBuV)		Margin (dB)		
		MHz	Peak	QP	AVG		dB	peak	QP	AVG	P/Q	AVG	P/Q	AVG	P/F
1	0.1580	47.84	47.38	37.41	0.08	0.08	47.92	47.46	37.49	65.57	55.57	-18.11	-18.08		
2	0.2380	46.10	42.91	30.06	0.07	0.07	46.17	42.98	30.13	62.17	52.17	-19.19	-22.04		
3	0.2740	48.48	45.63	30.66	0.07	0.07	48.55	45.70	30.73	61.00	51.00	-15.30	-20.27		
4 *	0.3620	50.21	48.06	36.46	0.07	0.07	50.28	48.13	36.53	58.68	48.68	-10.55	-12.15		
5	0.8020	39.60	34.95	26.53	0.07	0.07	39.67	35.02	26.60	56.00	46.00	-20.98	-19.40		
6	29.1780	40.02	33.49	26.07	0.32	0.32	40.34	33.81	26.39	60.00	50.00	-26.19	-23.61		

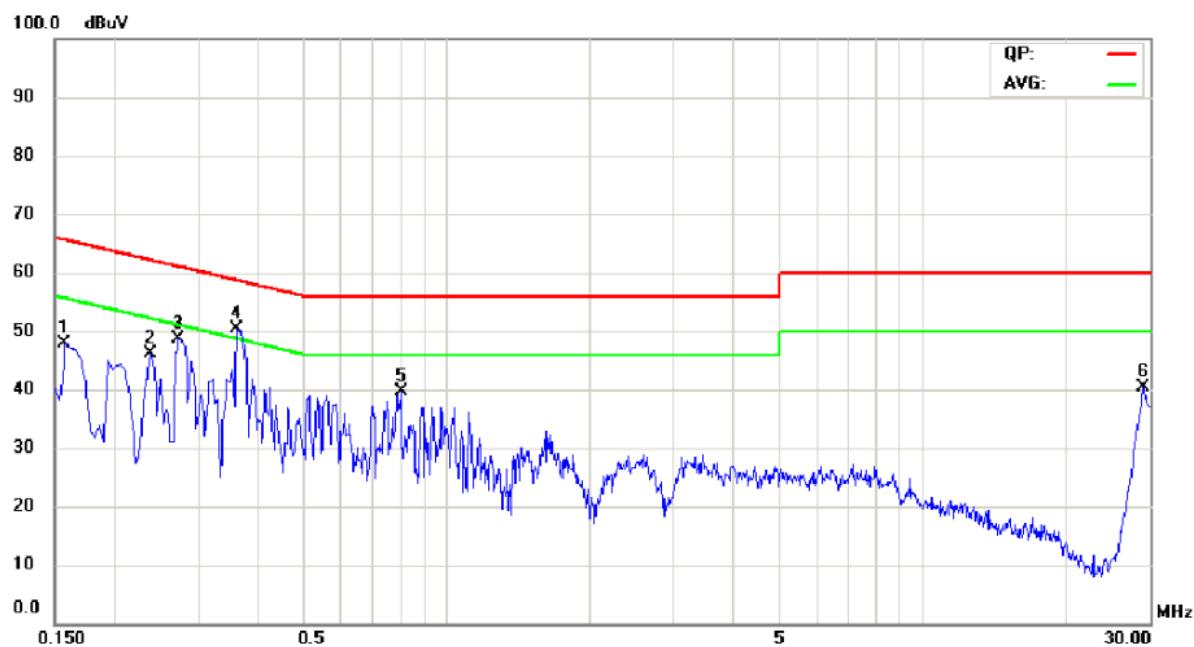

Site Conduction 04

 Phase: *L1*

Temperature: 26 °C

Condition : CISPR22 CLASS B

Humidity: 54 %

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		
		MHz	Peak	QP	Avg	peak	QP	Avg	P/Q	Avg	P/Q	Avg	P/F
1	0.1580	47.84	47.38	37.41	0.08	47.92	47.46	37.49	65.57	55.57	-18.11	-18.08	
2	0.2380	46.10	42.91	30.06	0.07	46.17	42.98	30.13	62.17	52.17	-19.19	-22.04	
3	0.2740	48.48	45.63	30.66	0.07	48.55	45.70	30.73	61.00	51.00	-15.30	-20.27	
4 *	0.3620	50.21	48.06	36.46	0.07	50.28	48.13	36.53	58.68	48.68	-10.55	-12.15	
5	0.8020	39.60	34.95	26.53	0.07	39.67	35.02	26.60	56.00	46.00	-20.98	-19.40	
6	29.1780	40.02	33.49	26.07	0.32	40.34	33.81	26.39	60.00	50.00	-26.19	-23.61	

6 PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

According to RSS-210 issue 8,§A8.4(4), For systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter 05	Anritsu	ML2495A	1116010	04/17/2012	04/16/2013
Power Sensor 05	Anritsu	MA2411B	34NKF50	04/16/2012	04/15/2013
Temperature Chamber	KSON	THS-B4H100	2287	03/03/2012	03/02/2013
DC Power supply	ABM	51850	N/A	06/17/2011	06/16/2012
AC Power supply	EXTECH	CFC105W	NA	12/19/2011	12/18/2012
Splitter	MCLI	PS4-199	12465	07/18/2011	07/17/2012
Spectrum analyzer	Agilent	N9030A	MY51360021	03/11/2012	03/10/2013

6.3 Test Set-up:

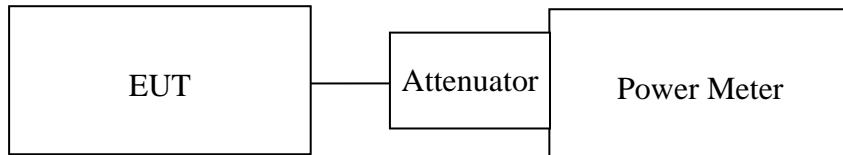

6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5 Measurement Result:

802.11b

Cable loss = 0		Output Power		Limit (dBm)	
CH	Frequency (MHz)	Detector			
		PK (dBm)	AV (dBm)		
1	2412	18.23	16.32	30	
6	2437	18.19	16.24		
11	2462	18.08	16.15		

802.11g

Cable loss = 0		Output Power		Limit (dBm)	
CH	Frequency (MHz)	Detector			
		PK (dBm)	AV (dBm)		
1	2412	19.69	12.74	30	
6	2437	19.92	13.89		
11	2462	19.74	13.11		

802.11N 20MHz

Cable loss = 0		Output Power		Limit (dBm)	
CH	Frequency (MHz)	Detector			
		PK (dBm)	AV (dBm)		
1	2412	20.03	12.82	30	
6	2437	20.0	12.81		
11	2462	19.8	12.77		

802.11N 40MHz

Cable loss = 0		Output Power		Limit (dBm)	
CH	Frequency (MHz)	Detector			
		PK (dBm)	AV (dBm)		
3	2422	20.18	12.86	30	
6	2437	20.2	12.88		
9	2452	20.12	12.83		

7 6dB Bandwidth & 99% Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

According to RSS 210 issue 8, §8.2(a) Systems employing digital modulation techniques (which includes direct sequence) can now be certified under RSS-210 provided they comply with the following requirements: The minimum -6 dB bandwidth shall be at least 500 kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100KHz, VBW = 3*RBW, Span= cover the complete power envelope of the signal of the UUT Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

7.5 Measurement Result:

802.11b

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	12.12	14.85	> 500	PASS
2437	12.12	14.838	> 500	PASS
2462	12.13	14.878	> 500	PASS

802.11g

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	16.58	16.452	> 500	PASS
2437	16.56	16.454	> 500	PASS
2462	16.56	16.426	> 500	PASS

802.11n_20M

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	17.66	17.556	> 500	PASS
2437	17.66	17.557	> 500	PASS
2462	17.65	17.557	> 500	PASS

802.11n_40M

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	36.4	35.872	> 500	PASS
2437	36.39	35.879	> 500	PASS
2462	36.38	35.869	> 500	PASS

offset 10dB

Note: Refer to next page for plots.

802.11b

6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid




6dB Band Width Test Data CH-High




802.11g


6dB Band Width Test Data CH-Low

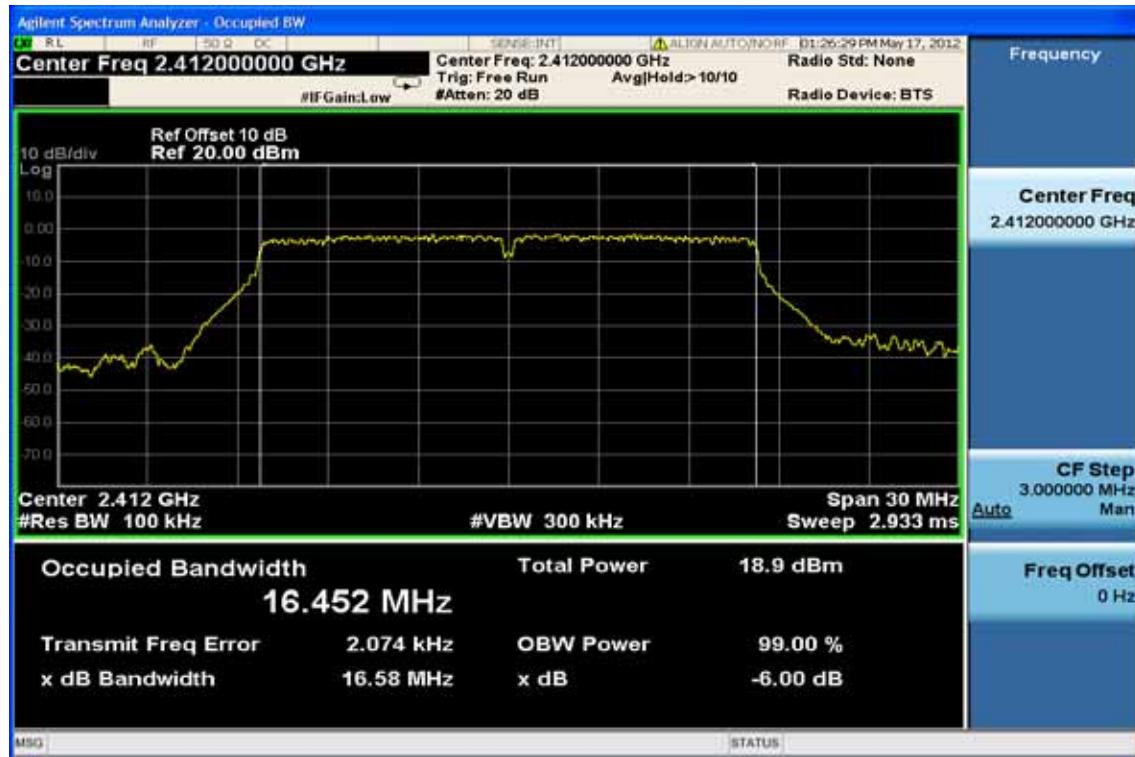

6dB Band Width Test Data CH-Mid

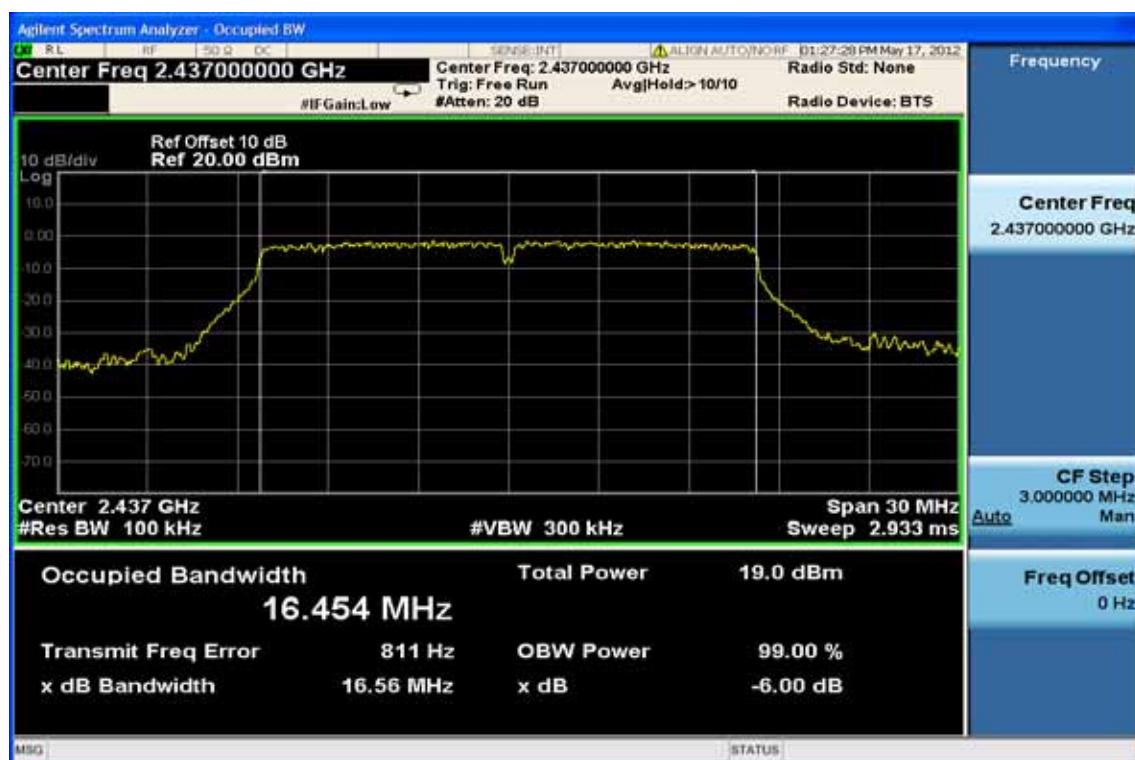


6dB Band Width Test Data CH-High

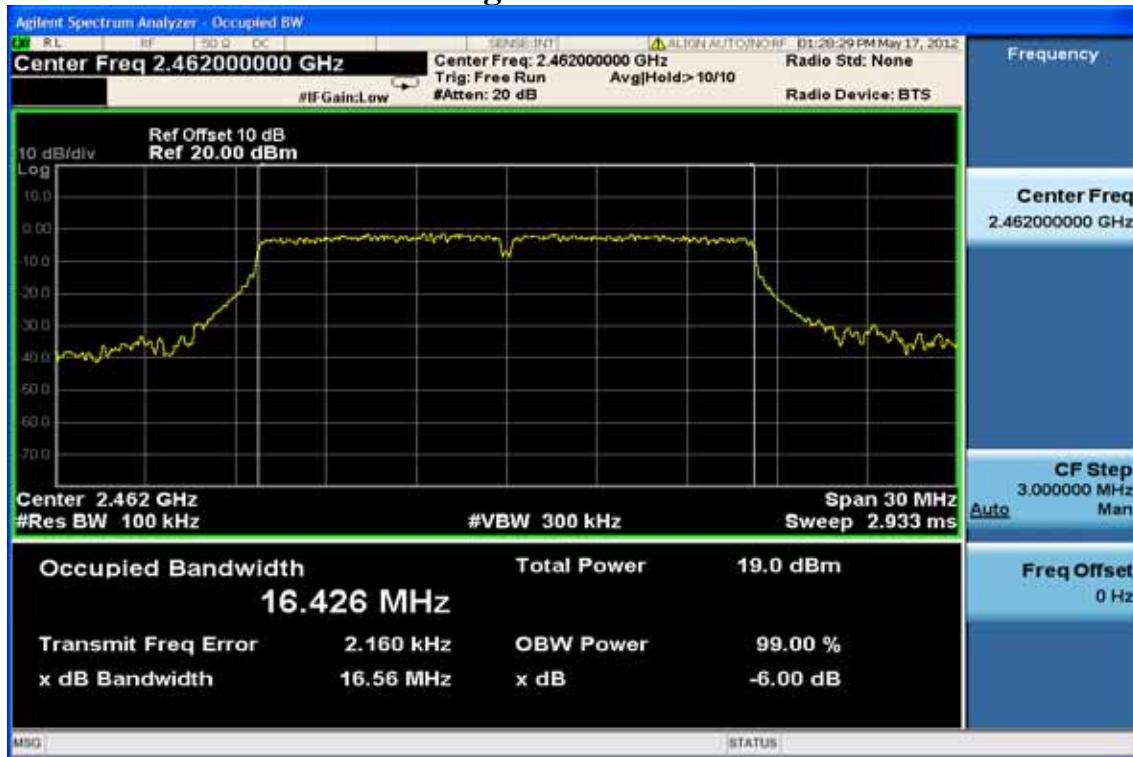

802.11n_20M


6dB Band Width Test Data CH-Low

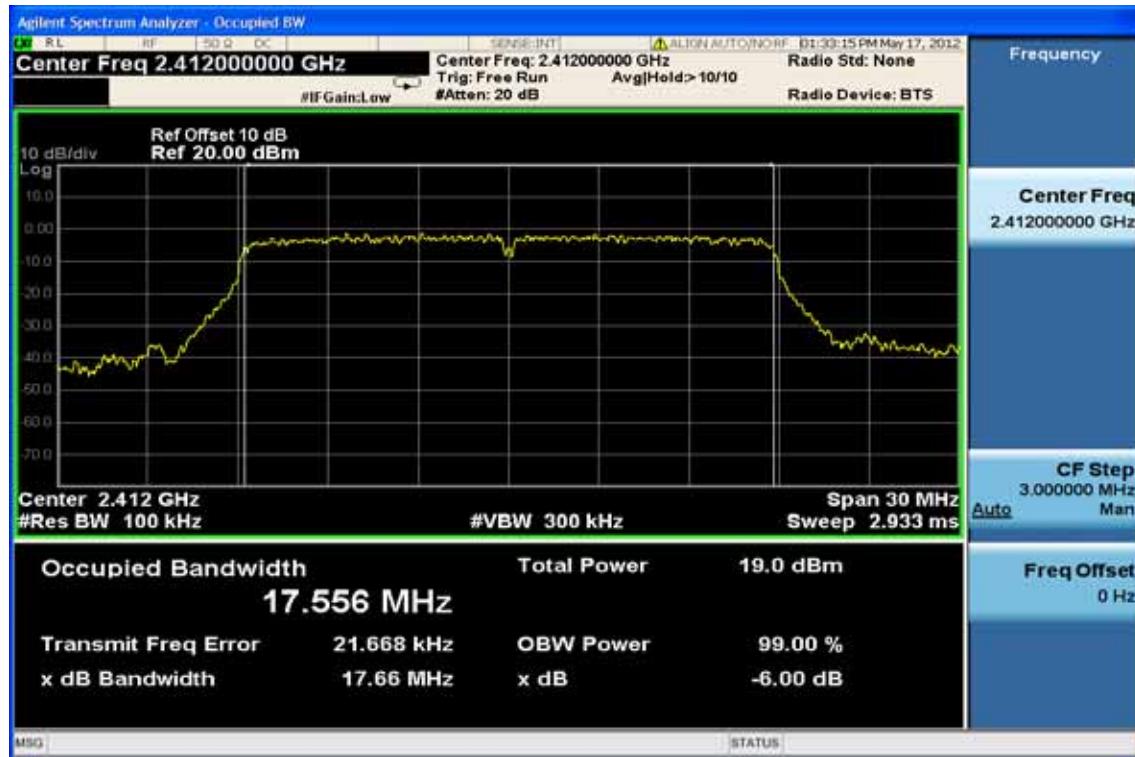

6dB Band Width Test Data CH-Mid



6dB Band Width Test Data CH-High

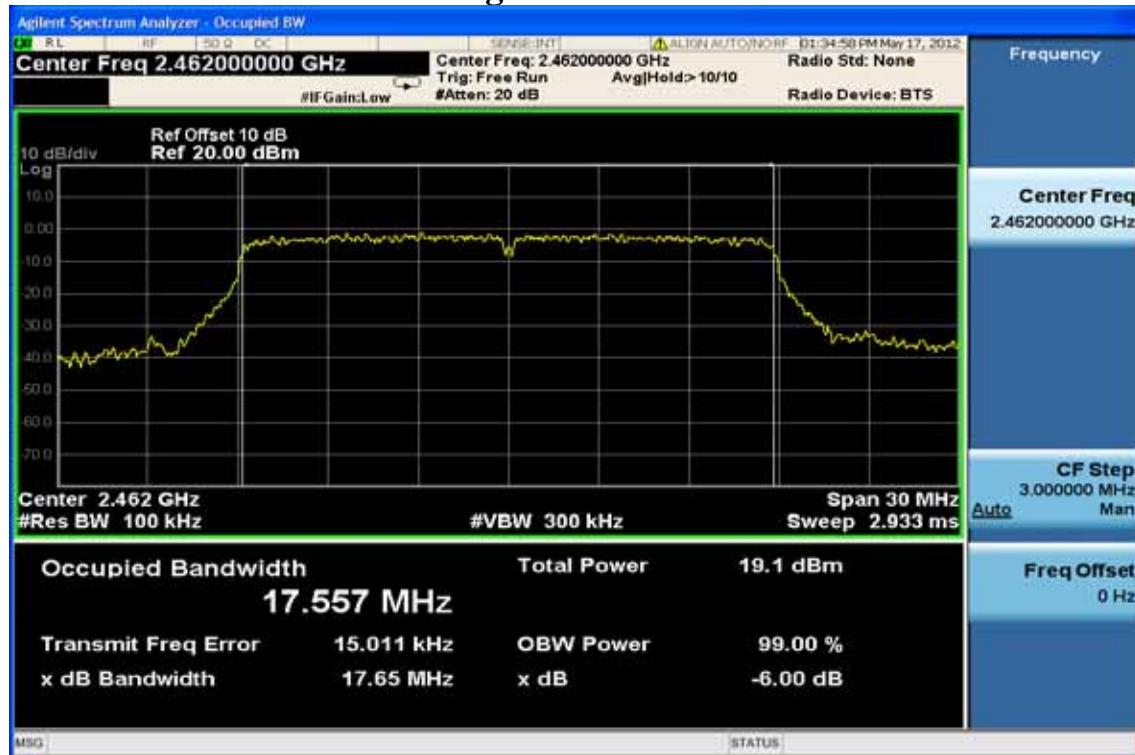

802.11n_40M


6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid



6dB Band Width Test Data CH-High

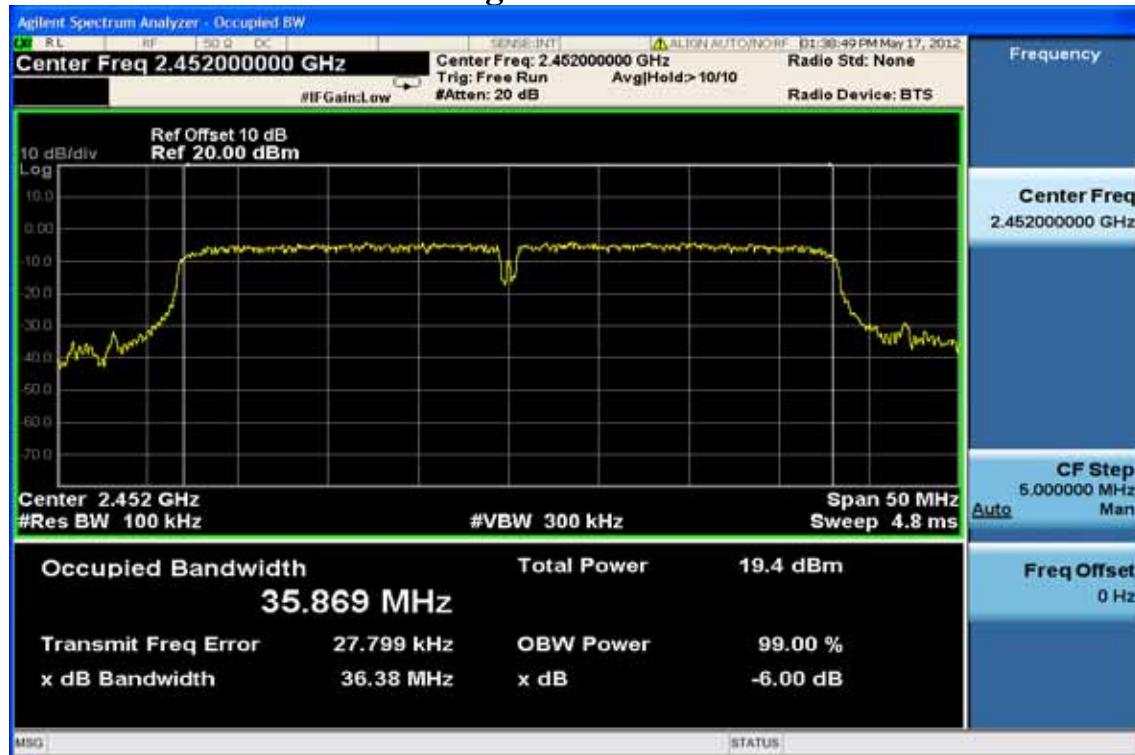

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to RSS-210 issue 8, §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

Chamber 14(966)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21	Agilent	N9010A	MY49060537	07/18/2011	07/17/2012
Loop Antenna9K-30M	A.H.SYSTEM	SAS-564	294	02/28/2011	02/27/2013
Bilog Antenna30-1G	Schaffner	CBL 6111B	2756	12/27/2011	12/26/2012
Horn antenna1-18G	COM-POWER	AH118	2011071401	03/01/2012	02/29/2013
Horn antenna1-18G(06)	EMCO	3117	0006665	09/21/2011	09/20/2012
Horn antenna26-40G(05)	Com-power	AH-640	100A	01/11/2011	01/10/2013
Horn antenna18-26G(04)	Com-power	AH-826	081001	05/04/2011	05/03/2013
Preamplifier9-1000M	HP	8447D	NA	02/10/2012	02/09/2013
Preamplifier1-18G	MITEQ	AFS44-001018 00-25-10P-44	1329256	07/19/2011	07/18/2012
Preamplifier1-26G	EM	EM01M26G	NA	02/21/2012	02/20/2013
Preamplifier26-40G	MITEQ	JS-26004000-2 7-5A	818471	05/21/2011	05/20/2013
Cable1-18G	HUBER SUHNER	Sucoflex 106	NA	02/10/2012	02/09/2013
Cable UP to 1G	HUBER SUHNER	RG 214/U	NA	12/14/2011	12/13/2012
SUCOFLEX 1GHz~40GHz cable	HUBER SUHNER	Sucoflex 102	27963/2&3742 1/2	09/21/2011	09/20/2012
2.4G Filter	Micro-Tronics	Brm50702	76	10/22/2011	10/21/2012
5G Filter	Micro-Tronics	Brm50716	005	10/22/2011	10/21/2012


8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

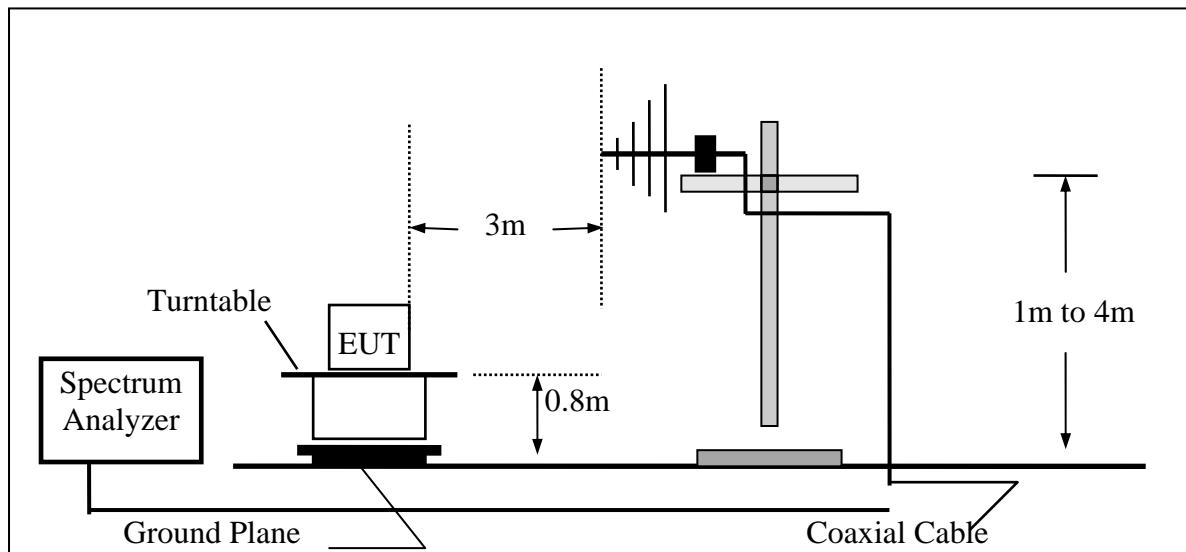

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

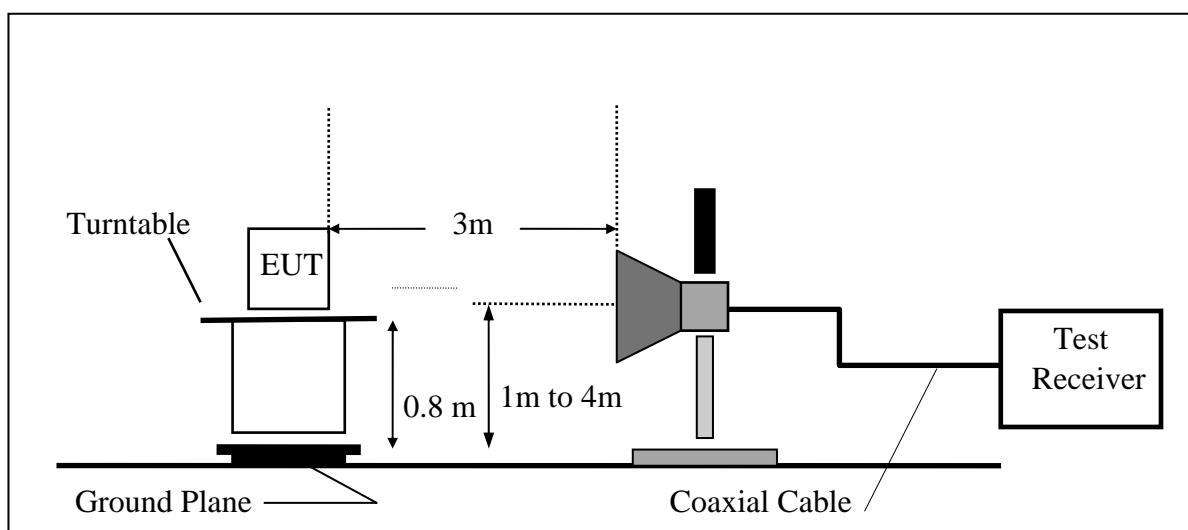

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

802.11b

Conducted Band Edges Test Data CH-Low



Conducted Band Edges Test Data CH-High



Radiated Emission: 802.11 b mode

Operation Mode	TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2316.00	61.85	-11.67	50.18	74.00	-23.82	Peak	VERTICAL
2	2390.00	59.24	-11.48	47.76	74.00	-26.24	Peak	VERTICAL
1	2313.72	61.71	-11.68	50.03	74.00	-23.97	Peak	HORIZONTAL
2	2390.00	59.32	-11.48	47.84	74.00	-26.16	Peak	HORIZONTAL

Operation Mode	TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	59.26	-11.25	48.01	74.00	-25.99	Peak	VERTICAL
2	2487.96	61.96	-11.24	50.72	74.00	-23.28	Peak	VERTICAL
1	2483.50	58.67	-11.25	47.42	74.00	-26.58	Peak	HORIZONTAL
2	2497.36	61.08	-11.21	49.87	74.00	-24.13	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

802.11g

Conducted Band Edges Test Data CH-Low



Conducted Band Edges Test Data CH-High



Radiated Emission: 802.11 g mode

Operation Mode	TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2365.68	62.15	-11.54	50.61	74.00	-23.39	Peak	VERTICAL
2	2390.00	59.49	-11.48	48.01	74.00	-25.99	Peak	VERTICAL
1	2389.44	62.49	-11.48	51.01	74.00	-22.99	Peak	HORIZONTAL
2	2390.00	60.58	-11.48	49.10	74.00	-24.90	Peak	HORIZONTAL

Operation Mode	TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	54.00	-11.25	42.75	54.00	-11.25	Average	VERTICAL
2	2483.50	61.61	-11.25	50.36	74.00	-23.64	Peak	VERTICAL
3	2484.22	53.98	-11.25	42.73	54.00	-11.27	Average	VERTICAL
4	2484.22	64.97	-11.25	53.72	74.00	-20.28	Peak	VERTICAL
1	2483.50	56.51	-11.25	45.26	54.00	-8.74	Average	HORIZONTAL
2	2483.50	65.04	-11.25	53.79	74.00	-20.21	Peak	HORIZONTAL
3	2483.89	56.35	-11.25	45.10	54.00	-8.90	Average	HORIZONTAL
4	2483.89	72.08	-11.25	60.83	74.00	-13.17	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

802.11n_20M

Conducted Band Edges Test Data CH-Low



Conducted Band Edges Test Data CH-High



Radiated Emission: 802.11 n_20M mode

Operation Mode	TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2355.24	61.64	-11.57	50.07	74.00	-23.93	Peak	VERTICAL
2	2390.00	60.51	-11.48	49.03	74.00	-24.97	Peak	VERTICAL
1	2389.32	54.36	-11.48	42.88	54.00	-11.12	Average	HORIZONTAL
2	2389.32	67.72	-11.48	56.24	74.00	-17.76	Peak	HORIZONTAL
3	2390.00	63.62	-11.48	52.14	74.00	-21.86	Peak	HORIZONTAL

Operation Mode	TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	64.24	-11.25	52.99	74.00	-21.01	Peak	VERTICAL
2	2483.89	50.63	-11.25	39.38	54.00	-14.62	Average	VERTICAL
3	2483.89	65.39	-11.25	54.14	74.00	-19.86	Peak	VERTICAL
1	2483.50	56.24	-11.25	44.99	54.00	-9.01	Average	HORIZONTAL
2	2483.50	70.75	-11.25	59.50	74.00	-14.50	Peak	HORIZONTAL
3	2483.72	55.98	-11.25	44.73	54.00	-9.27	Average	HORIZONTAL
4	2483.72	73.37	-11.25	62.12	74.00	-11.88	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

802.11n_40M

Conducted Band Edges Test Data CH-Low



Conducted Band Edges Test Data CH-High



Radiated Emission: 802.11 n_40M mode

Operation Mode	TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2390.00	61.84	-11.48	50.36	74.00	-23.64	Peak	VERTICAL
1	2389.50	53.01	-11.48	41.53	54.00	-12.47	Average	HORIZONTAL
2	2389.50	68.72	-11.48	57.24	74.00	-16.76	Peak	HORIZONTAL
3	2390.00	53.22	-11.48	41.74	54.00	-12.26	Average	HORIZONTAL
4	2390.00	65.57	-11.48	54.09	74.00	-19.91	Peak	HORIZONTAL

Operation Mode	TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462 MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	55.02	-11.25	43.77	54.00	-10.23	Average	VERTICAL
2	2483.50	70.24	-11.25	58.99	74.00	-15.01	Peak	VERTICAL
3	2486.21	53.86	-11.24	42.62	54.00	-11.38	Average	VERTICAL
4	2486.21	71.54	-11.24	60.30	74.00	-13.70	Peak	VERTICAL
1	2483.50	61.85	-11.25	50.60	54.00	-3.40	Average	HORIZONTAL
2	2483.50	74.01	-11.25	62.76	74.00	-11.24	Peak	HORIZONTAL
3	2487.19	60.03	-11.24	48.79	54.00	-5.21	Average	HORIZONTAL
4	2487.19	77.38	-11.24	66.14	74.00	-7.86	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-210 issue 8, §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Refer to section 7.2 for details.

9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2 Radiated emission:

Refer to section 7.3 for details.

9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Conducted Spurious Emission Measurement Result (802.11b)


Ch Low 30MHz – 3GHz

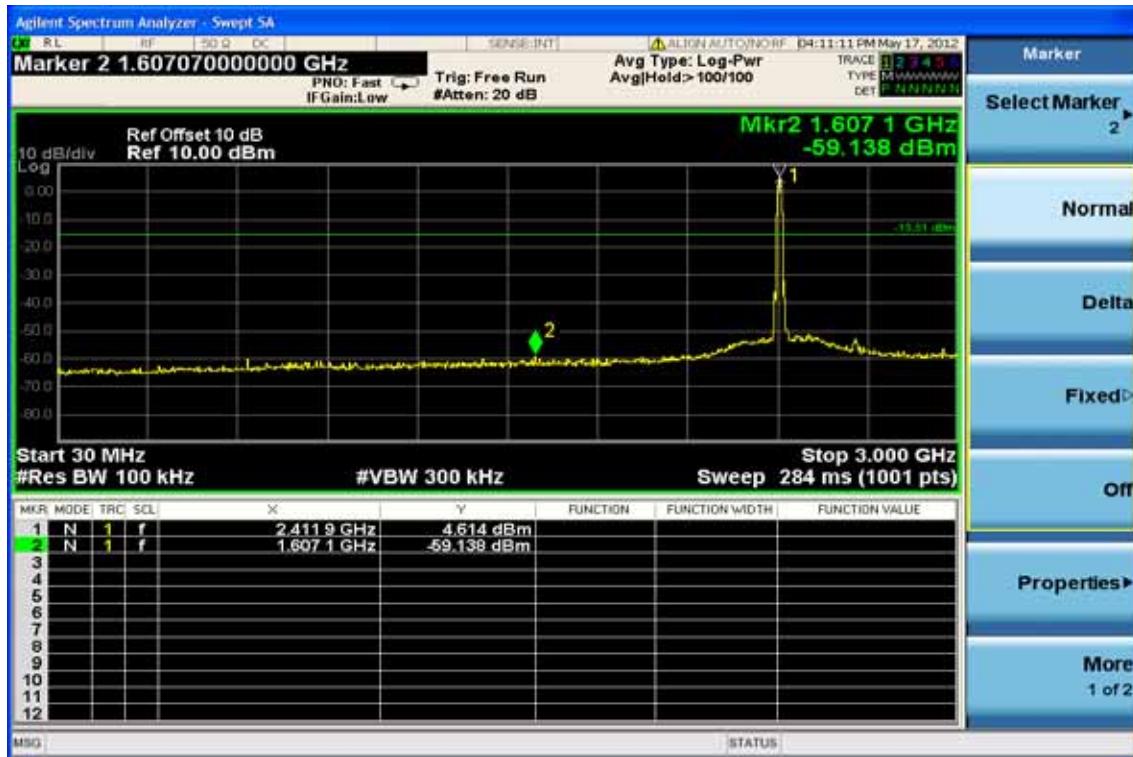


Ch Low 3GHz – 26.5GHz

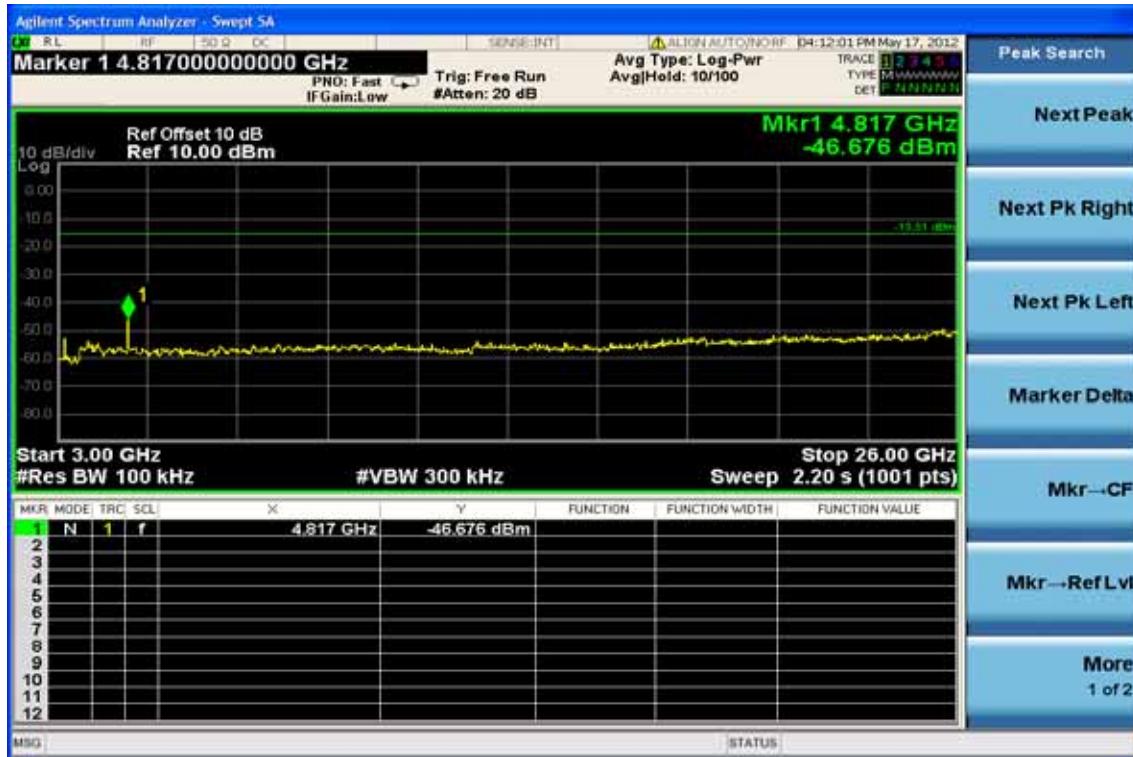


Ch Mid 30MHz – 3GHz

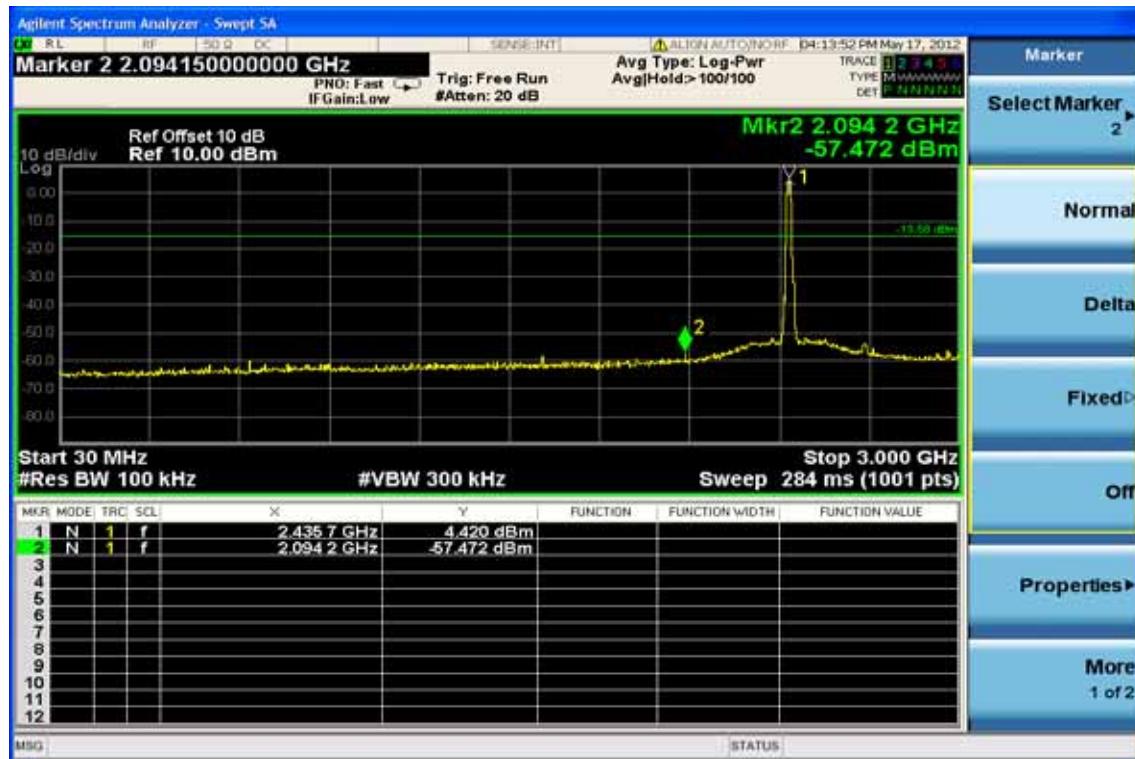


Ch Mid 3GHz – 26.5GHz

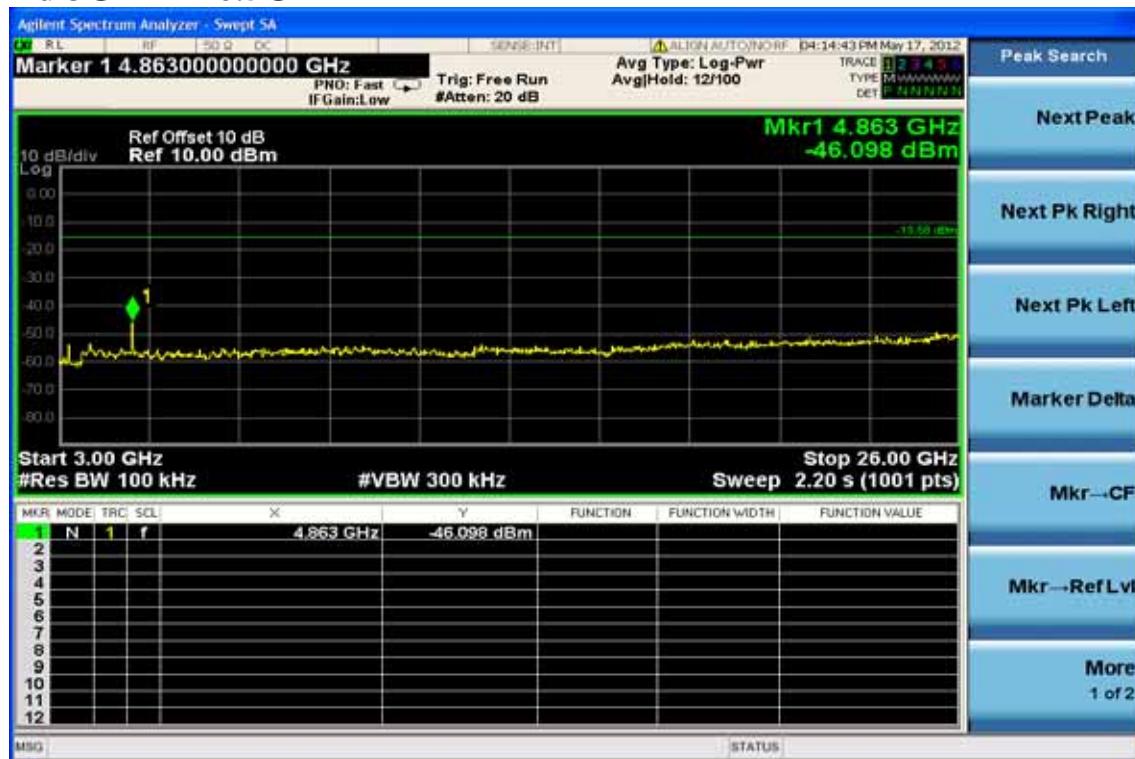

Ch High 30MHz – 3GHz

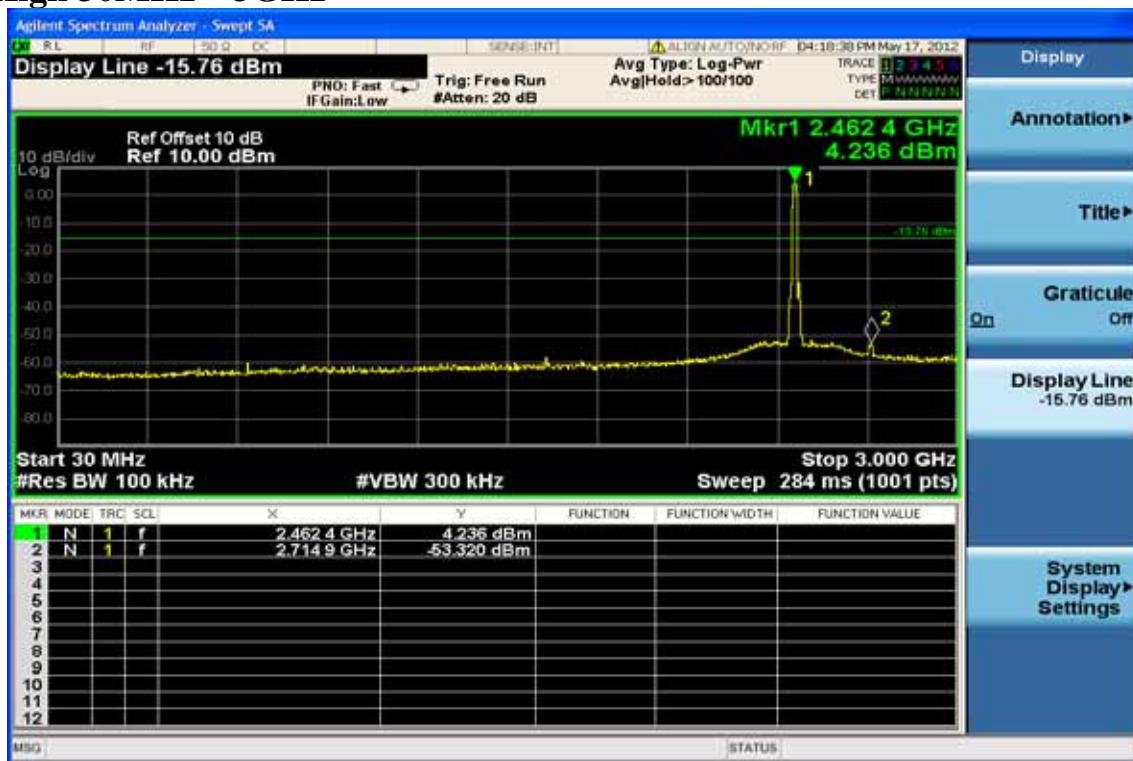


Ch High 3GHz – 26.5GHz

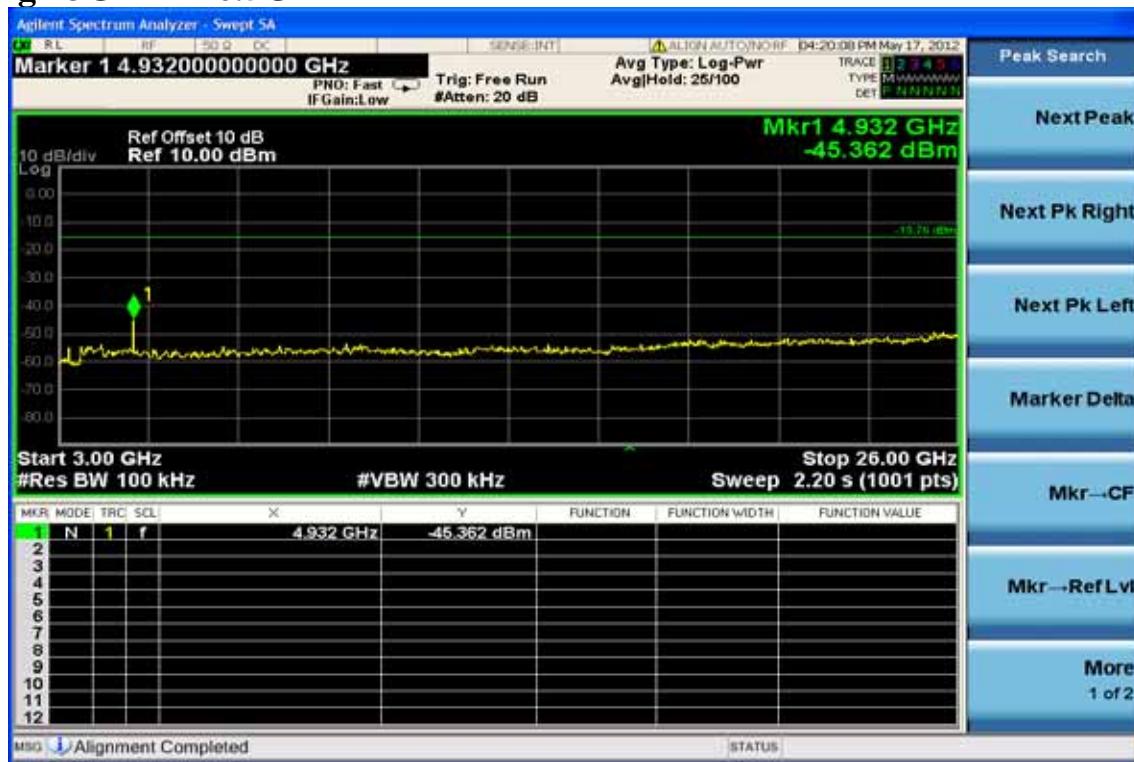


Conducted Spurious Emission Measurement Result (802.11g)


Ch Low 30MHz – 3GHz

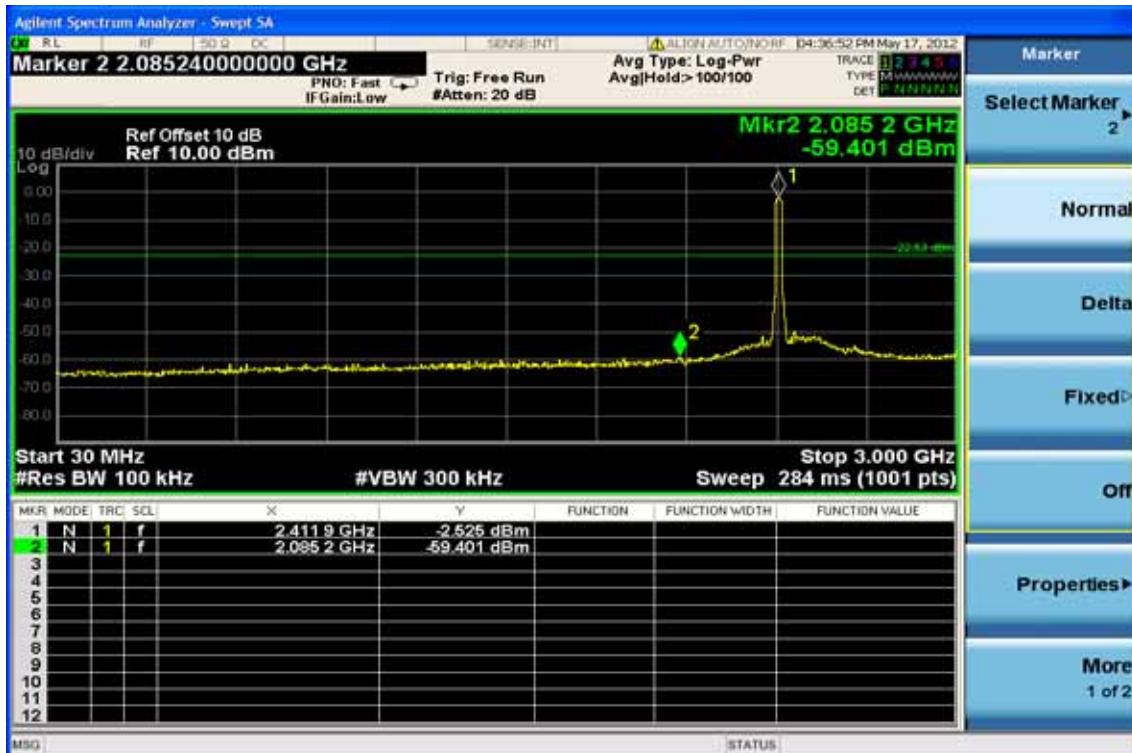


Ch Low 3GHz – 26.5GHz

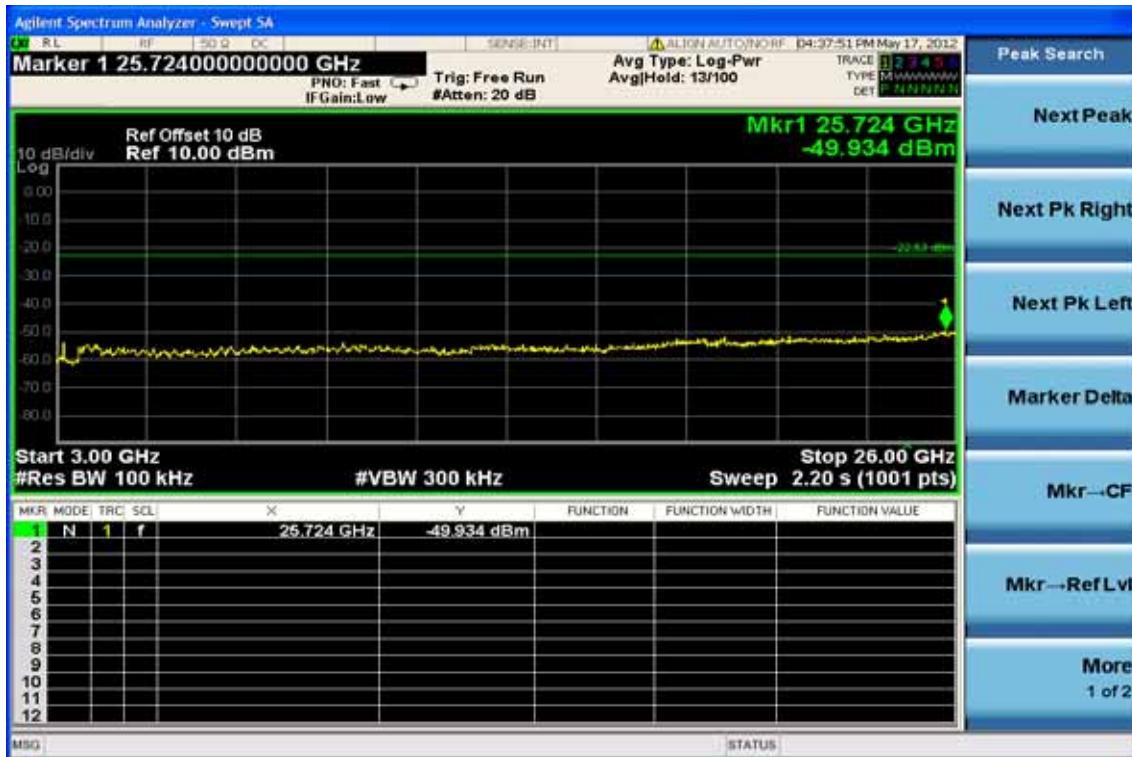


Ch Mid 30MHz – 3GHz

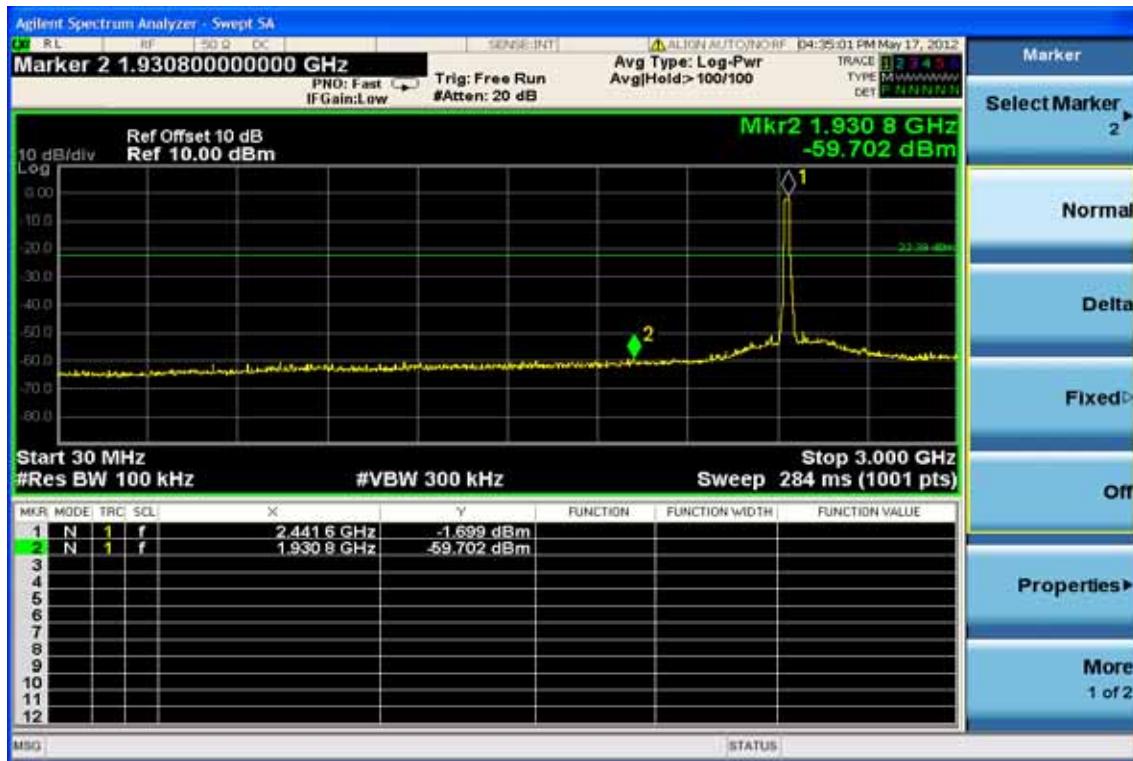


Ch Mid 3GHz – 26.5GHz

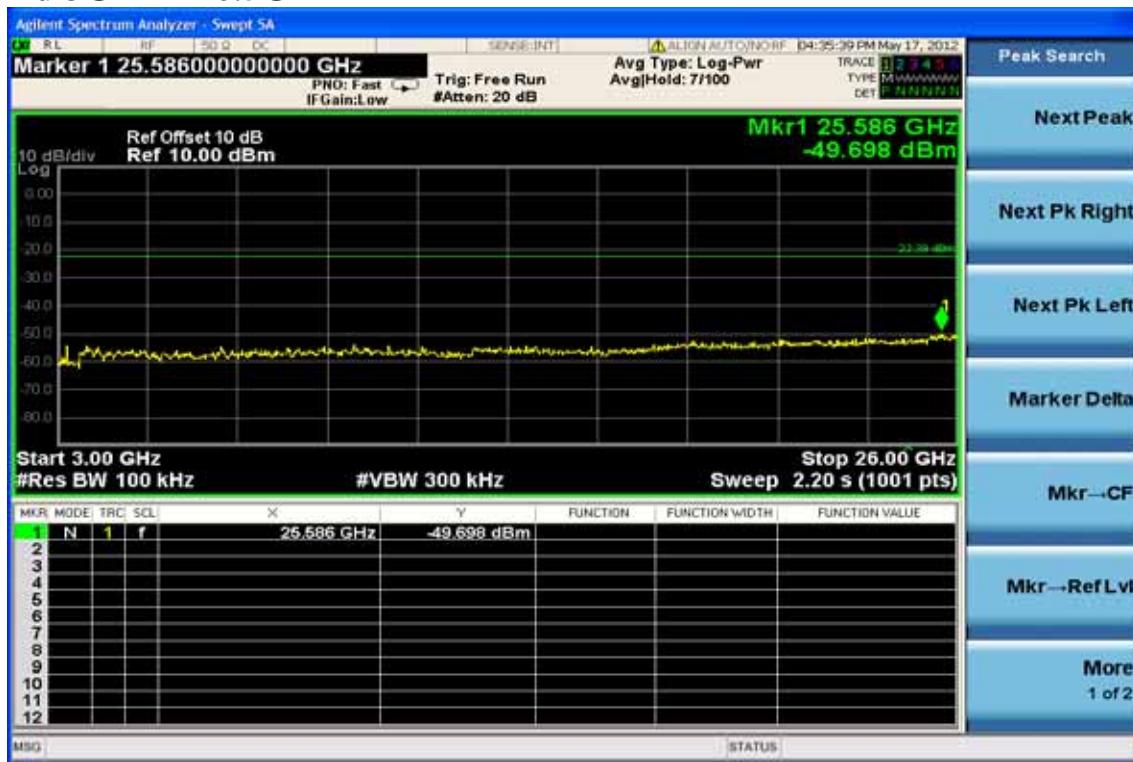

Ch High 30MHz – 3GHz

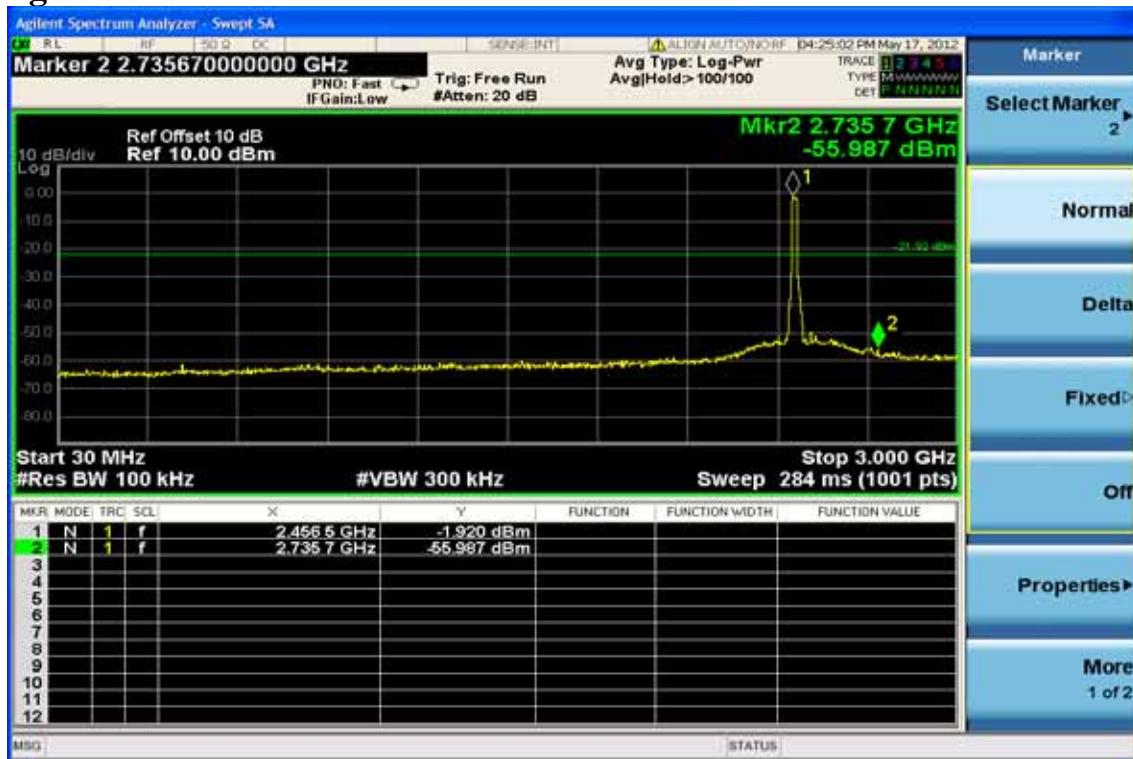


Ch High 3GHz – 26.5GHz

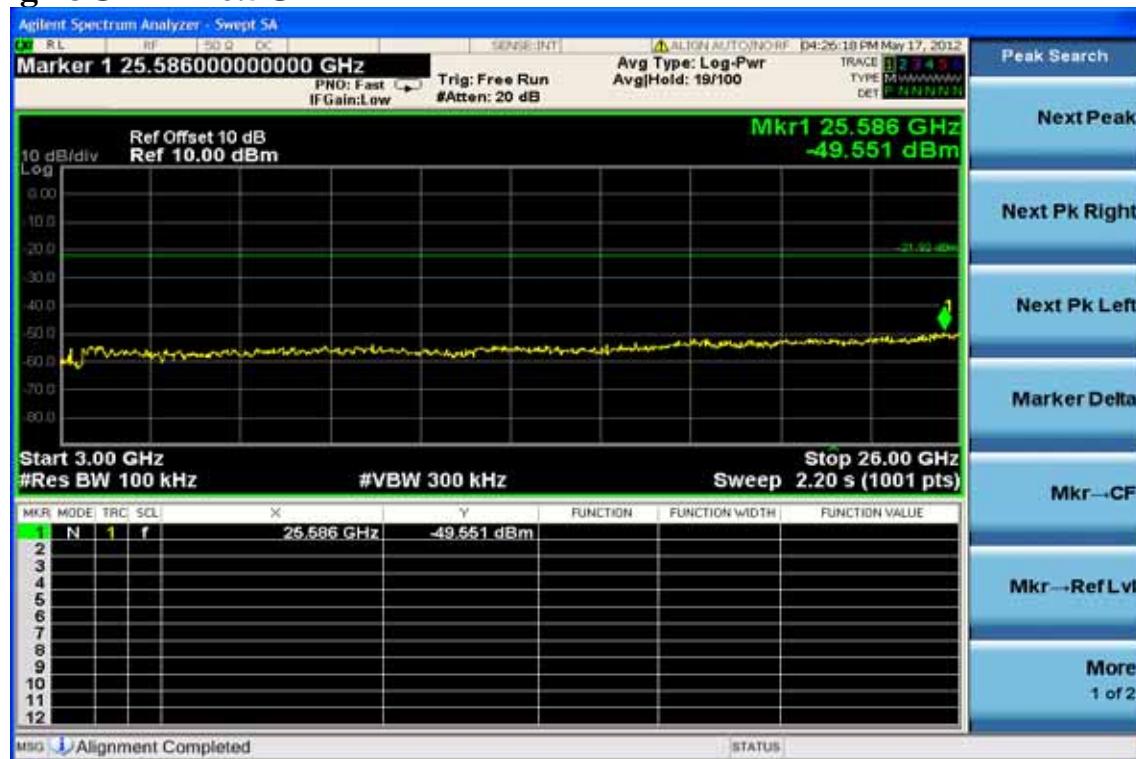


Conducted Spurious Emission Measurement Result (802.11n_20M)


Ch Low 30MHz – 3GHz

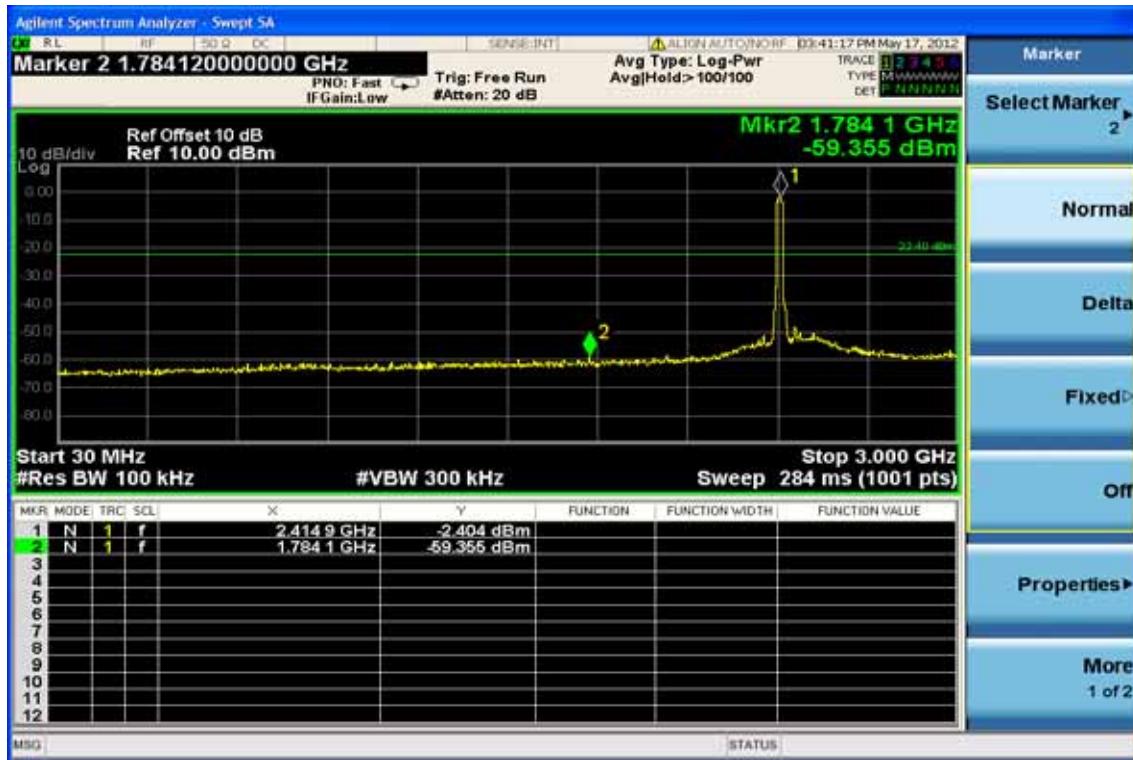


Ch Low 3GHz – 26.5GHz

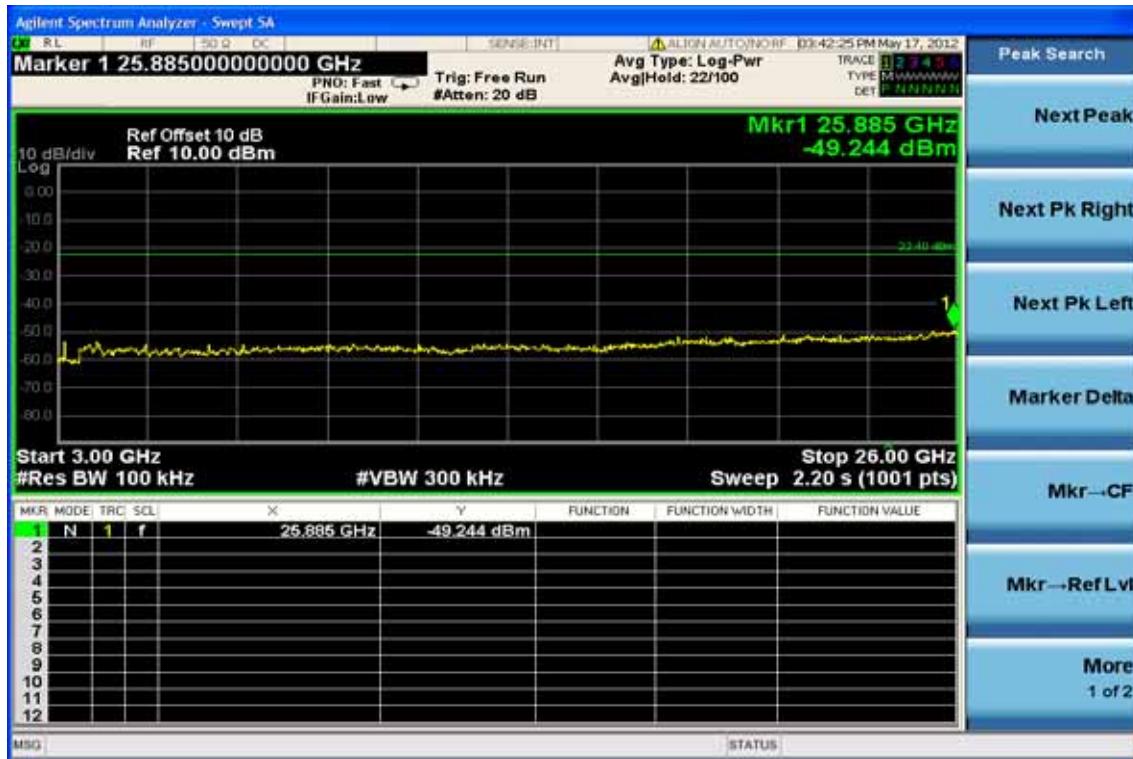


Ch Mid 30MHz – 3GHz

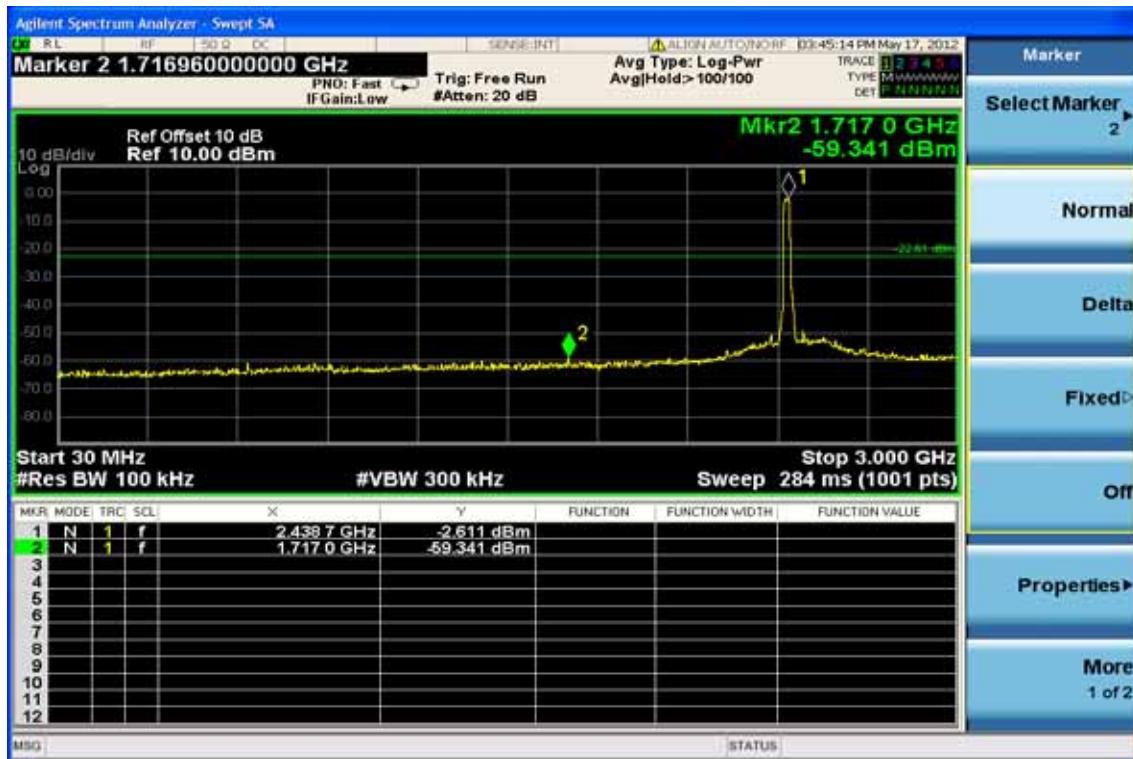


Ch Mid 3GHz – 26.5GHz

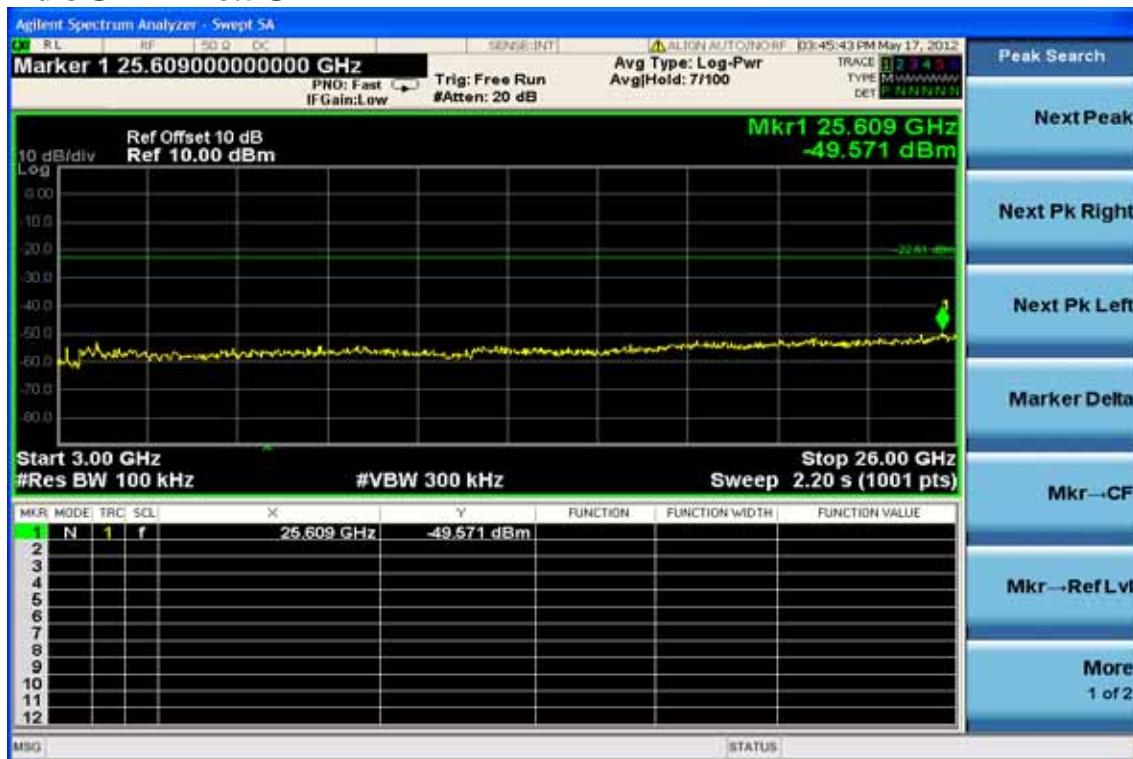


Ch High 30MHz – 3GHz

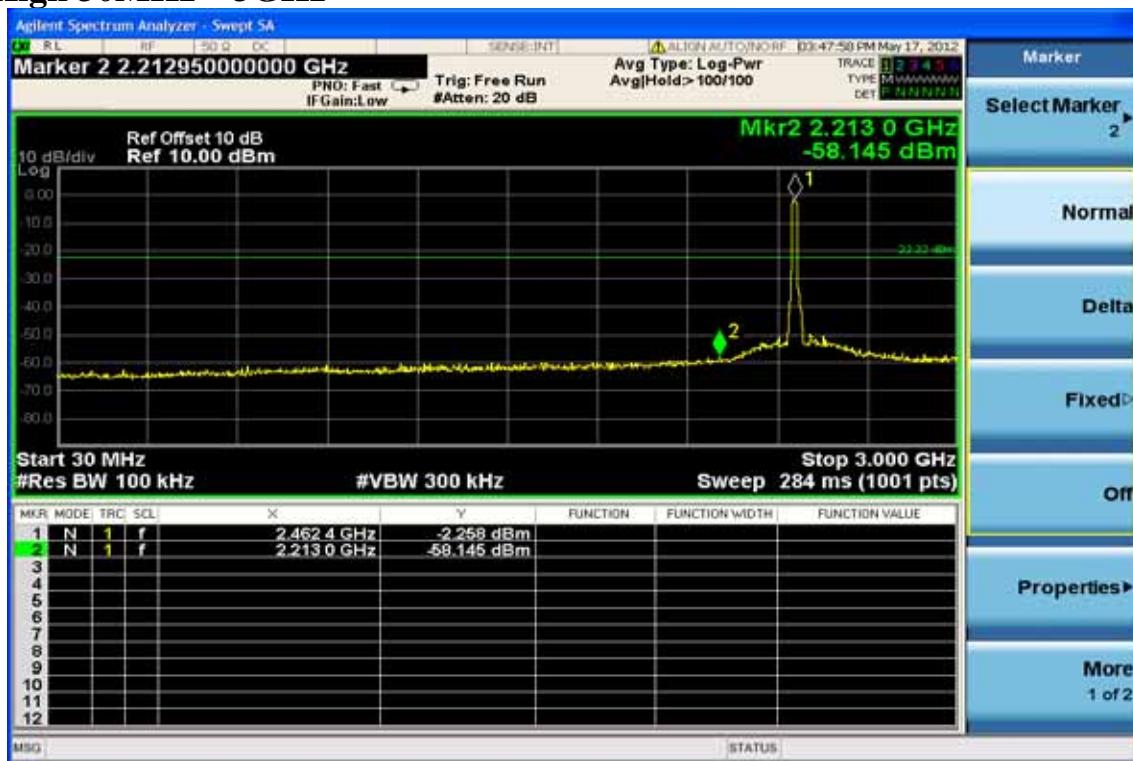


Ch High 3GHz – 26.5GHz

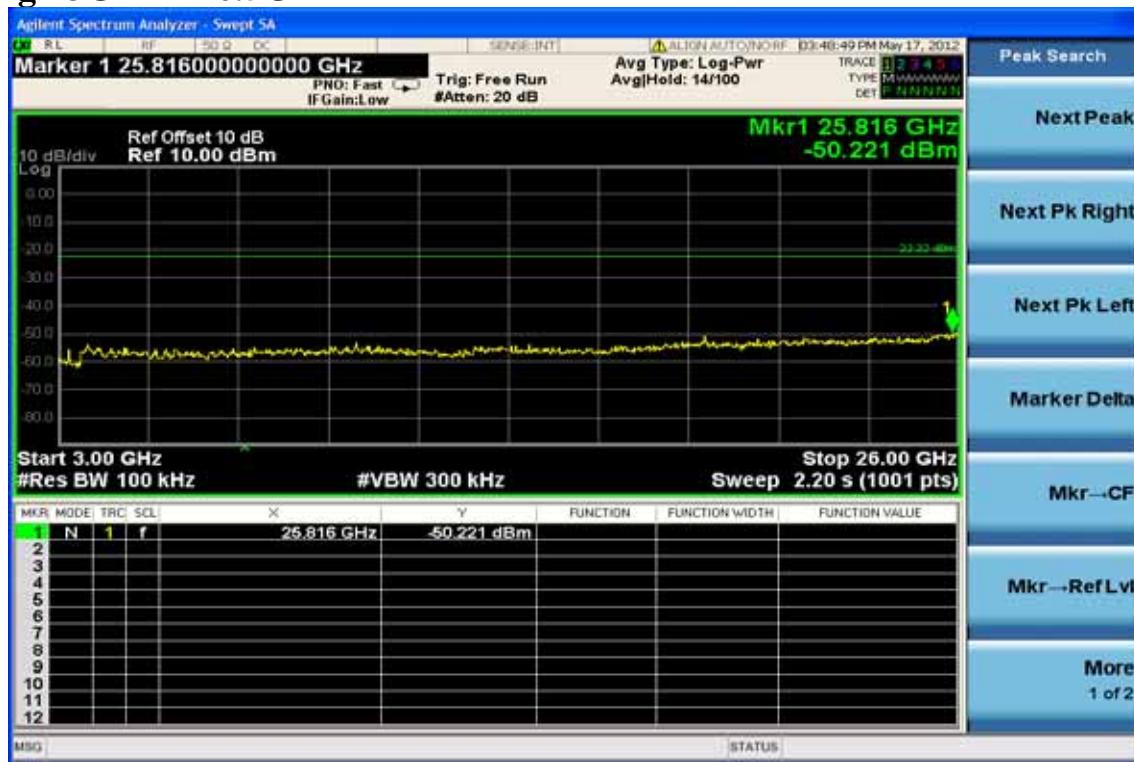


Conducted Spurious Emission Measurement Result (802.11n_40M) Ch Low 30MHz – 3GHz

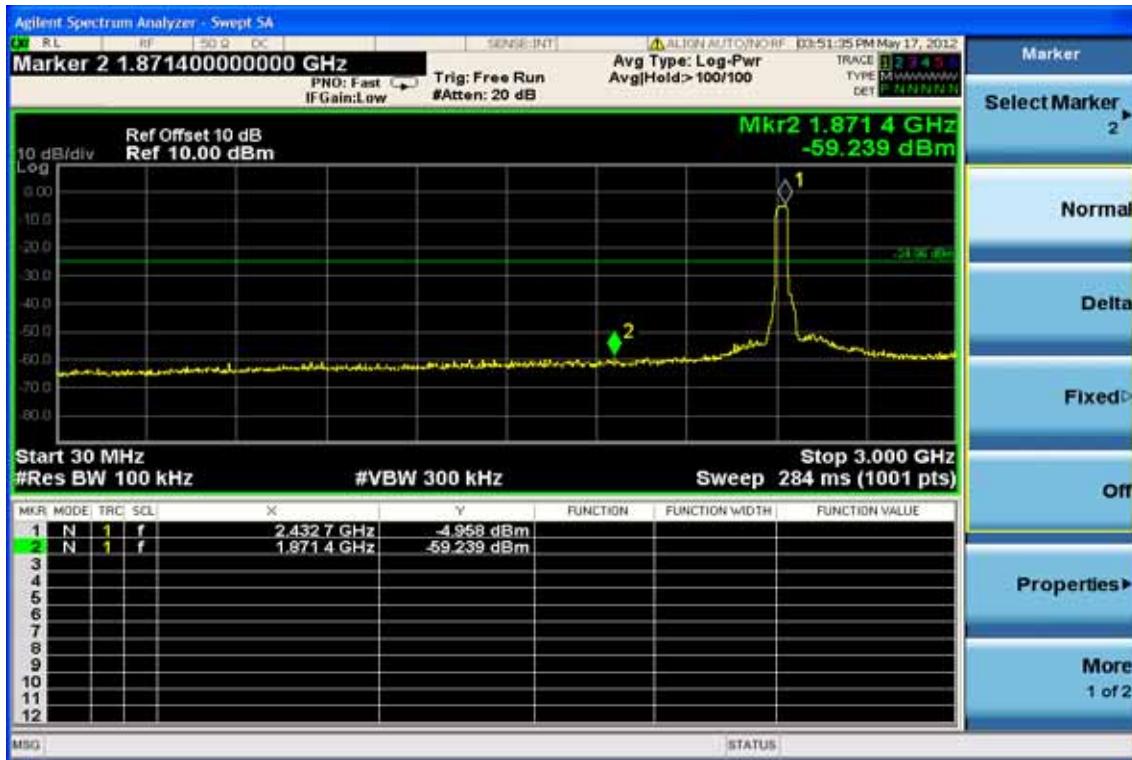


Ch Low 3GHz – 26.5GHz

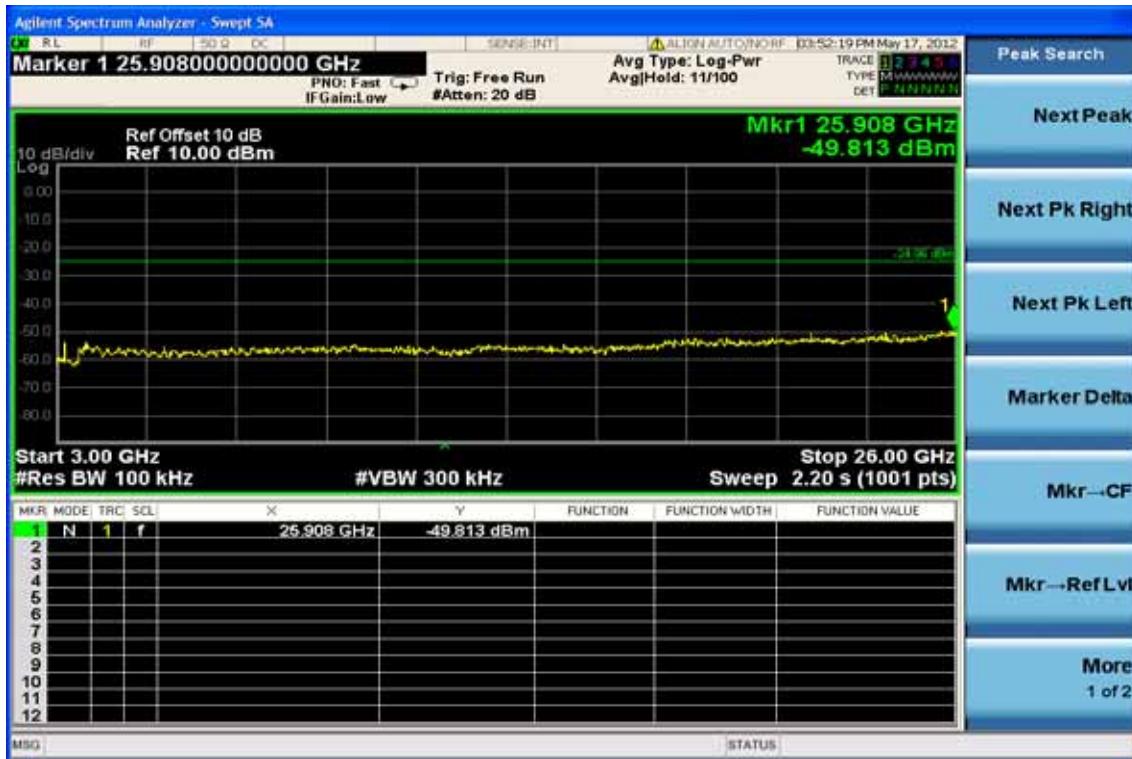


Ch Mid 30MHz – 3GHz

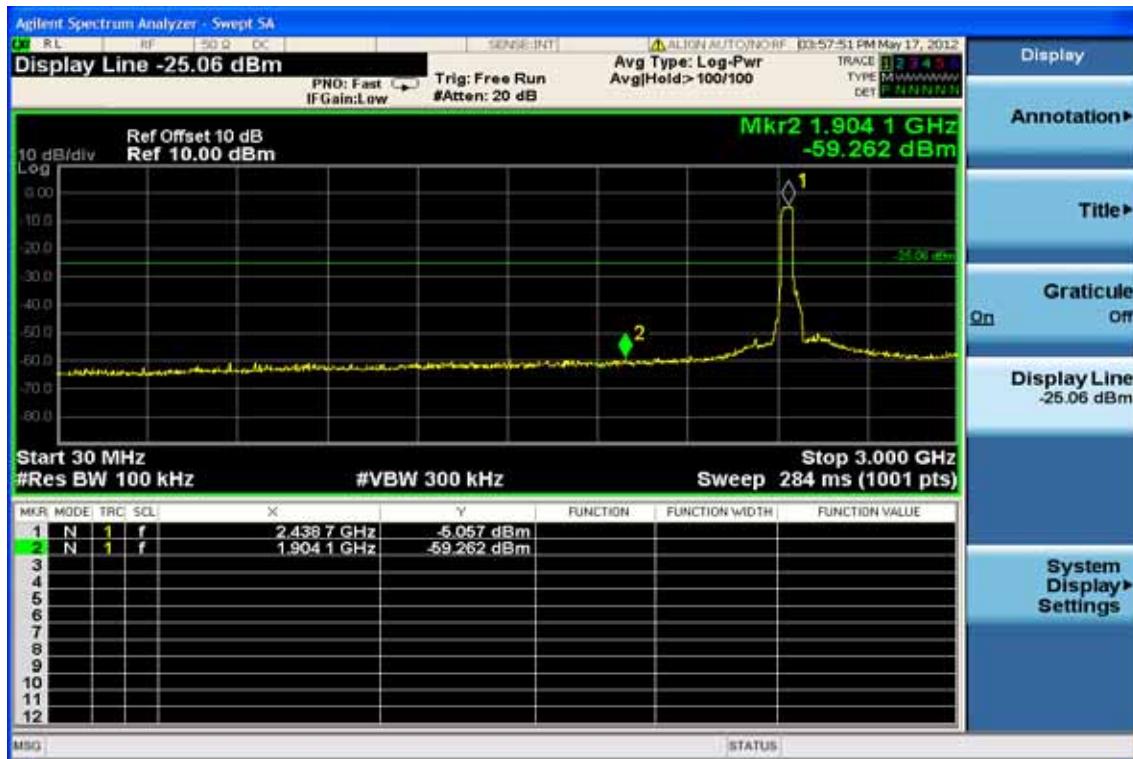


Ch Mid 3GHz – 26.5GHz

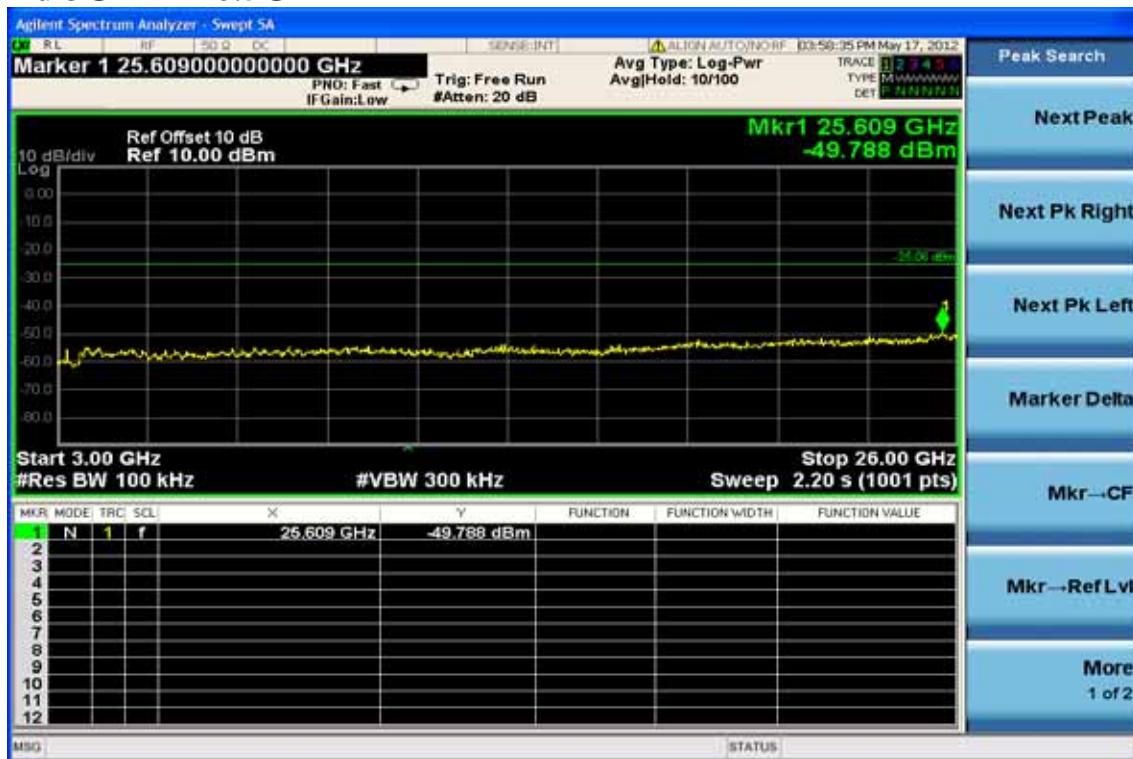

Ch High 30MHz – 3GHz

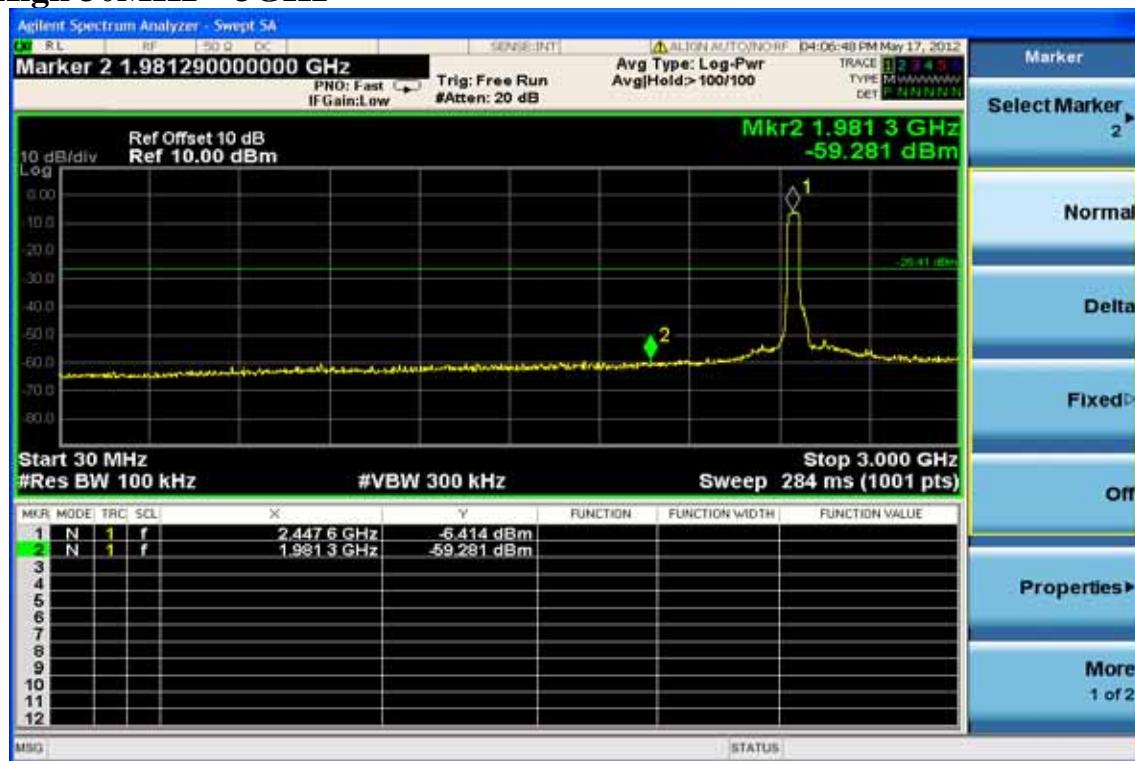

Ch High 3GHz – 26.5GHz

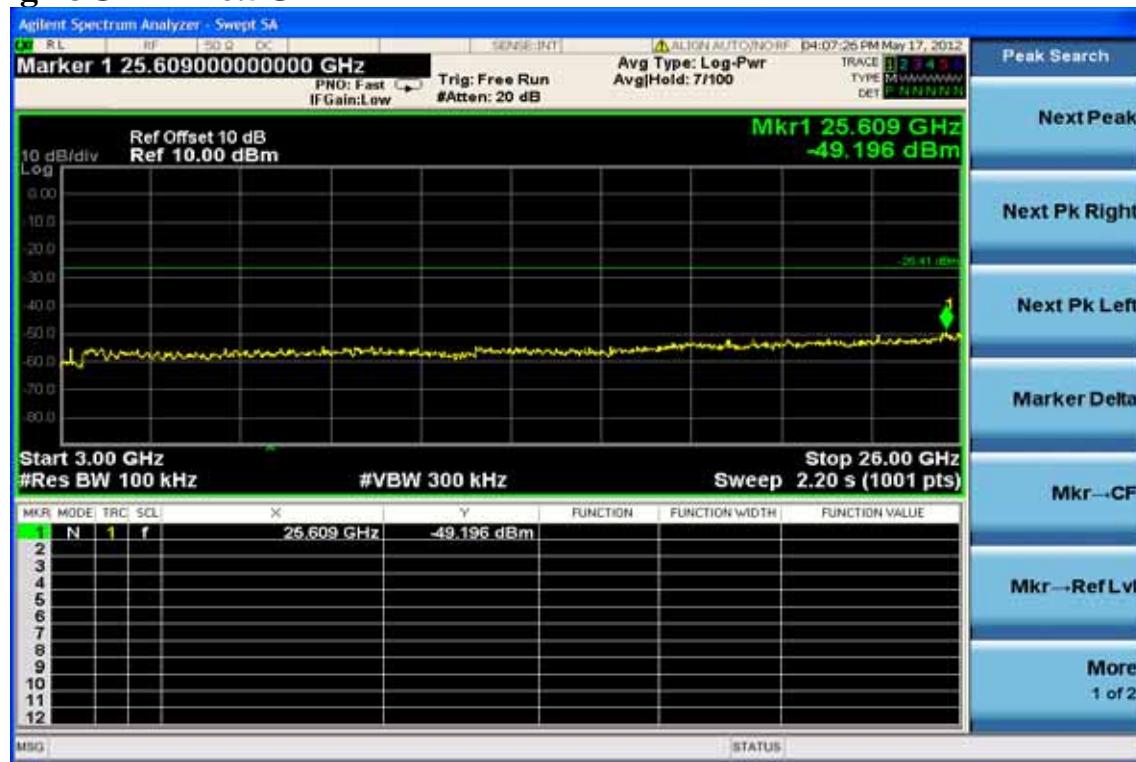

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	45.63	-16.04	29.59	43.50	-13.91	Peak	VERTICAL
2	161.92	37.32	-15.73	21.59	43.50	-21.91	Peak	VERTICAL
3	359.80	45.06	-10.35	34.71	46.00	-11.29	Peak	VERTICAL
4	600.36	31.82	-7.44	24.38	46.00	-21.62	Peak	VERTICAL
5	839.95	34.89	-4.84	30.05	46.00	-15.95	Peak	VERTICAL
6	947.62	32.10	-3.59	28.51	46.00	-17.49	Peak	VERTICAL
1	96.93	44.35	-16.04	28.31	43.50	-15.19	Peak	HORIZONTAL
2	191.02	45.11	-16.35	28.76	43.50	-14.74	Peak	HORIZONTAL
3	359.80	43.61	-10.35	33.26	46.00	-12.74	Peak	HORIZONTAL
4	600.36	34.07	-7.44	26.63	46.00	-19.37	Peak	HORIZONTAL
5	719.67	33.24	-6.29	26.95	46.00	-19.05	Peak	HORIZONTAL
6	839.95	37.74	-4.84	32.90	46.00	-13.10	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	46.91	-16.04	30.87	43.50	-12.63	Peak	VERTICAL
2	161.92	36.97	-15.73	21.24	43.50	-22.26	Peak	VERTICAL
3	359.80	44.95	-10.35	34.60	46.00	-11.40	Peak	VERTICAL
4	492.69	32.89	-8.82	24.07	46.00	-21.93	Peak	VERTICAL
5	839.95	38.71	-4.84	33.87	46.00	-12.13	Peak	VERTICAL
6	960.23	31.05	-3.48	27.57	54.00	-26.43	Peak	VERTICAL
1	96.93	44.52	-16.04	28.48	43.50	-15.02	Peak	HORIZONTAL
2	192.96	46.94	-16.22	30.72	43.50	-12.78	Peak	HORIZONTAL
3	359.80	43.57	-10.35	33.22	46.00	-12.78	Peak	HORIZONTAL
4	600.36	35.41	-7.44	27.97	46.00	-18.03	Peak	HORIZONTAL
5	839.95	43.08	-4.84	38.24	46.00	-7.76	Peak	HORIZONTAL
6	960.23	32.70	-3.48	29.22	54.00	-24.78	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	45.72	-16.04	29.68	43.50	-13.82	Peak	VERTICAL
2	161.92	37.29	-15.73	21.56	43.50	-21.94	Peak	VERTICAL
3	359.80	45.16	-10.35	34.81	46.00	-11.19	Peak	VERTICAL
4	600.36	30.04	-7.44	22.60	46.00	-23.40	Peak	VERTICAL
5	839.95	32.50	-4.84	27.66	46.00	-18.34	Peak	VERTICAL
6	960.23	30.35	-3.48	26.87	54.00	-27.13	Peak	VERTICAL
1	96.93	43.04	-16.04	27.00	43.50	-16.50	Peak	HORIZONTAL
2	192.96	46.65	-16.22	30.43	43.50	-13.07	Peak	HORIZONTAL
3	359.80	43.52	-10.35	33.17	46.00	-12.83	Peak	HORIZONTAL
4	600.36	34.31	-7.44	26.87	46.00	-19.13	Peak	HORIZONTAL
5	839.95	36.88	-4.84	32.04	46.00	-13.96	Peak	HORIZONTAL
6	960.23	30.85	-3.48	27.37	54.00	-26.63	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11g TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	45.59	-16.04	29.55	43.50	-13.95	Peak	VERTICAL
2	161.92	37.90	-15.73	22.17	43.50	-21.33	Peak	VERTICAL
3	359.80	44.73	-10.35	34.38	46.00	-11.62	Peak	VERTICAL
4	600.36	30.67	-7.44	23.23	46.00	-22.77	Peak	VERTICAL
5	839.95	32.80	-4.84	27.96	46.00	-18.04	Peak	VERTICAL
6	960.23	29.80	-3.48	26.32	54.00	-27.68	Peak	VERTICAL
1	96.93	44.59	-16.04	28.55	43.50	-14.95	Peak	HORIZONTAL
2	194.90	46.58	-16.10	30.48	43.50	-13.02	Peak	HORIZONTAL
3	359.80	43.71	-10.35	33.36	46.00	-12.64	Peak	HORIZONTAL
4	600.36	34.78	-7.44	27.34	46.00	-18.66	Peak	HORIZONTAL
5	839.95	39.01	-4.84	34.17	46.00	-11.83	Peak	HORIZONTAL
6	900.09	34.94	-4.37	30.57	46.00	-15.43	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11g TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	45.94	-16.04	29.90	43.50	-13.60	Peak	VERTICAL
2	169.68	37.18	-15.92	21.26	43.50	-22.24	Peak	VERTICAL
3	359.80	45.12	-10.35	34.77	46.00	-11.23	Peak	VERTICAL
4	600.36	31.01	-7.44	23.57	46.00	-22.43	Peak	VERTICAL
5	839.95	32.66	-4.84	27.82	46.00	-18.18	Peak	VERTICAL
6	960.23	31.27	-3.48	27.79	54.00	-26.21	Peak	VERTICAL
1	96.93	45.07	-16.04	29.03	43.50	-14.47	Peak	HORIZONTAL
2	193.93	49.89	-16.16	33.73	43.50	-9.77	Peak	HORIZONTAL
3	359.80	43.61	-10.35	33.26	46.00	-12.74	Peak	HORIZONTAL
4	600.36	34.44	-7.44	27.00	46.00	-19.00	Peak	HORIZONTAL
5	839.95	37.55	-4.84	32.71	46.00	-13.29	Peak	HORIZONTAL
6	945.68	31.79	-3.61	28.18	46.00	-17.82	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11g TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	46.90	-16.04	30.86	43.50	-12.64	Peak	VERTICAL
2	167.74	38.12	-15.86	22.26	43.50	-21.24	Peak	VERTICAL
3	359.80	45.11	-10.35	34.76	46.00	-11.24	Peak	VERTICAL
4	719.67	29.10	-6.29	22.81	46.00	-23.19	Peak	VERTICAL
5	839.95	34.44	-4.84	29.60	46.00	-16.40	Peak	VERTICAL
6	947.62	34.54	-3.59	30.95	46.00	-15.05	Peak	VERTICAL
1	96.93	43.02	-16.04	26.98	43.50	-16.52	Peak	HORIZONTAL
2	192.96	49.26	-16.22	33.04	43.50	-10.46	Peak	HORIZONTAL
3	359.80	43.38	-10.35	33.03	46.00	-12.97	Peak	HORIZONTAL
4	600.36	34.74	-7.44	27.30	46.00	-18.70	Peak	HORIZONTAL
5	719.67	32.17	-6.29	25.88	46.00	-20.12	Peak	HORIZONTAL
6	839.95	36.98	-4.84	32.14	46.00	-13.86	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_20M TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	45.92	-16.04	29.88	43.50	-13.62	Peak	VERTICAL
2	166.77	38.14	-15.84	22.30	43.50	-21.20	Peak	VERTICAL
3	359.80	45.31	-10.35	34.96	46.00	-11.04	Peak	VERTICAL
4	517.91	39.38	-8.39	30.99	46.00	-15.01	Peak	VERTICAL
5	839.95	33.80	-4.84	28.96	46.00	-17.04	Peak	VERTICAL
6	940.83	32.37	-3.70	28.67	46.00	-17.33	Peak	VERTICAL
1	96.93	41.83	-16.04	25.79	43.50	-17.71	Peak	HORIZONTAL
2	195.87	46.29	-16.04	30.25	43.50	-13.25	Peak	HORIZONTAL
3	359.80	43.48	-10.35	33.13	46.00	-12.87	Peak	HORIZONTAL
4	461.65	33.85	-9.13	24.72	46.00	-21.28	Peak	HORIZONTAL
5	839.95	37.67	-4.84	32.83	46.00	-13.17	Peak	HORIZONTAL
6	960.23	31.96	-3.48	28.48	54.00	-25.52	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_20M TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	42.99	-16.04	26.95	43.50	-16.55	Peak	VERTICAL
2	163.86	38.63	-15.78	22.85	43.50	-20.65	Peak	VERTICAL
3	359.80	45.07	-10.35	34.72	46.00	-11.28	Peak	VERTICAL
4	600.36	30.06	-7.44	22.62	46.00	-23.38	Peak	VERTICAL
5	839.95	33.58	-4.84	28.74	46.00	-17.26	Peak	VERTICAL
6	960.23	30.30	-3.48	26.82	54.00	-27.18	Peak	VERTICAL
1	96.93	41.87	-16.04	25.83	43.50	-17.67	Peak	HORIZONTAL
2	193.93	46.60	-16.16	30.44	43.50	-13.06	Peak	HORIZONTAL
3	359.80	43.57	-10.35	33.22	46.00	-12.78	Peak	HORIZONTAL
4	600.36	35.44	-7.44	28.00	46.00	-18.00	Peak	HORIZONTAL
5	839.95	38.17	-4.84	33.33	46.00	-12.67	Peak	HORIZONTAL
6	900.09	33.56	-4.37	29.19	46.00	-16.81	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_20M TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	42.58	-16.04	26.54	43.50	-16.96	Peak	VERTICAL
2	166.77	37.42	-15.84	21.58	43.50	-21.92	Peak	VERTICAL
3	359.80	45.04	-10.35	34.69	46.00	-11.31	Peak	VERTICAL
4	557.68	30.81	-7.69	23.12	46.00	-22.88	Peak	VERTICAL
5	839.95	32.44	-4.84	27.60	46.00	-18.40	Peak	VERTICAL
6	960.23	31.59	-3.48	28.11	54.00	-25.89	Peak	VERTICAL
1	96.93	43.04	-16.04	27.00	43.50	-16.50	Peak	HORIZONTAL
2	180.35	46.79	-16.37	30.42	43.50	-13.08	Peak	HORIZONTAL
3	359.80	43.36	-10.35	33.01	46.00	-12.99	Peak	HORIZONTAL
4	600.36	34.43	-7.44	26.99	46.00	-19.01	Peak	HORIZONTAL
5	719.67	33.90	-6.29	27.61	46.00	-18.39	Peak	HORIZONTAL
6	839.95	38.91	-4.84	34.07	46.00	-11.93	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2422MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	42.31	-16.04	26.27	43.50	-17.23	Peak	VERTICAL
2	157.07	35.97	-15.52	20.45	43.50	-23.05	Peak	VERTICAL
3	359.80	45.17	-10.35	34.82	46.00	-11.18	Peak	VERTICAL
4	682.81	27.60	-6.63	20.97	46.00	-25.03	Peak	VERTICAL
5	839.95	32.85	-4.84	28.01	46.00	-17.99	Peak	VERTICAL
6	960.23	31.10	-3.48	27.62	54.00	-26.38	Peak	VERTICAL
1	96.93	42.86	-16.04	26.82	43.50	-16.68	Peak	HORIZONTAL
2	192.96	45.42	-16.22	29.20	43.50	-14.30	Peak	HORIZONTAL
3	359.80	43.28	-10.35	32.93	46.00	-13.07	Peak	HORIZONTAL
4	600.36	34.41	-7.44	26.97	46.00	-19.03	Peak	HORIZONTAL
5	839.95	45.61	-4.84	40.77	46.00	-5.23	Peak	HORIZONTAL
6	901.06	34.12	-4.36	29.76	46.00	-16.24	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.83	-16.04	27.79	43.50	-15.71	Peak	VERTICAL
2	166.77	36.38	-15.84	20.54	43.50	-22.96	Peak	VERTICAL
3	359.80	45.60	-10.35	35.25	46.00	-10.75	Peak	VERTICAL
4	497.54	38.14	-8.77	29.37	46.00	-16.63	Peak	VERTICAL
5	839.95	32.21	-4.84	27.37	46.00	-18.63	Peak	VERTICAL
6	960.23	30.78	-3.48	27.30	54.00	-26.70	Peak	VERTICAL
1	96.93	42.93	-16.04	26.89	43.50	-16.61	Peak	HORIZONTAL
2	195.87	46.40	-16.04	30.36	43.50	-13.14	Peak	HORIZONTAL
3	359.80	43.48	-10.35	33.13	46.00	-12.87	Peak	HORIZONTAL
4	600.36	34.78	-7.44	27.34	46.00	-18.66	Peak	HORIZONTAL
5	719.67	33.36	-6.29	27.07	46.00	-18.93	Peak	HORIZONTAL
6	839.95	38.77	-4.84	33.93	46.00	-12.07	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M TX CH High	Test Date	2012/05/17
Fundamental Frequency	2452MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	42.50	-16.04	26.46	43.50	-17.04	Peak	VERTICAL
2	166.77	36.58	-15.84	20.74	43.50	-22.76	Peak	VERTICAL
3	359.80	45.15	-10.35	34.80	46.00	-11.20	Peak	VERTICAL
4	600.36	29.13	-7.44	21.69	46.00	-24.31	Peak	VERTICAL
5	839.95	33.37	-4.84	28.53	46.00	-17.47	Peak	VERTICAL
6	960.23	29.85	-3.48	26.37	54.00	-27.63	Peak	VERTICAL
1	96.93	42.07	-16.04	26.03	43.50	-17.47	Peak	HORIZONTAL
2	179.38	47.17	-16.34	30.83	43.50	-12.67	Peak	HORIZONTAL
3	359.80	43.22	-10.35	32.87	46.00	-13.13	Peak	HORIZONTAL
4	461.65	33.12	-9.13	23.99	46.00	-22.01	Peak	HORIZONTAL
5	600.36	35.17	-7.44	27.73	46.00	-18.27	Peak	HORIZONTAL
6	839.95	38.35	-4.84	33.51	46.00	-12.49	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3002.00	47.21	-9.55	37.66	74.00	-36.34	Peak	VERTICAL
2	4824.00	54.79	-2.59	52.20	74.00	-21.80	Peak	VERTICAL
3	7236.00	---						VERTICAL
4	9648.00	---						VERTICAL
5	12060.00	---						VERTICAL
1	1203.00	60.07	-16.49	43.58	74.00	-30.42	Peak	HORIZONTAL
2	4824.00	49.34	-2.59	46.75	74.00	-27.25	Peak	HORIZONTAL
3	7236.00	---						HORIZONTAL
4	9648.00	---						HORIZONTAL
5	12060.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1847.00	50.76	-13.46	37.30	74.00	-36.70	Peak	VERTICAL
2	4874.00	54.40	-2.42	51.98	74.00	-22.02	Peak	VERTICAL
3	7311.00	---						VERTICAL
4	9748.00	---						VERTICAL
5	12185.00	---						VERTICAL
1	1203.00	60.11	-16.49	43.62	74.00	-30.38	Peak	HORIZONTAL
2	4874.00	50.13	-2.42	47.71	74.00	-26.29	Peak	HORIZONTAL
3	7311.00	---						HORIZONTAL
4	9748.00	---						HORIZONTAL
5	12185.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3002.00	47.42	-9.55	37.87	74.00	-36.13	Peak	VERTICAL
2	4924.00	54.57	-2.25	52.32	74.00	-21.68	Peak	VERTICAL
3	7386.00	---						VERTICAL
4	9848.00	---						VERTICAL
5	12310.00	---						VERTICAL
1	1203.00	59.92	-16.49	43.43	74.00	-30.57	Peak	HORIZONTAL
2	4924.00	49.63	-2.25	47.38	74.00	-26.62	Peak	HORIZONTAL
3	7386.00	---						HORIZONTAL
4	9848.00	---						HORIZONTAL
5	12310.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2995.00	48.51	-9.56	38.95	74.00	-35.05	Peak	VERTICAL
2	4824.00	40.59	-2.59	38.00	74.00	-36.00	Peak	VERTICAL
3	7236.00	---						VERTICAL
4	9648.00	---						VERTICAL
5	12060.00	---						VERTICAL
1	1203.00	60.09	-16.49	43.60	74.00	-30.40	Peak	HORIZONTAL
2	4824.00	37.85	-2.59	35.26	74.00	-38.74	Peak	HORIZONTAL
3	7236.00	36.99	16.16	53.15	74.00	-20.85	Peak	HORIZONTAL
4	9648.00	---						HORIZONTAL
5	12060.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2995.00	48.55	-9.56	38.99	74.00	-35.01	Peak	VERTICAL
2	4874.00	40.73	-2.42	38.31	74.00	-35.69	Peak	VERTICAL
3	7311.00	---						VERTICAL
4	9748.00	---						VERTICAL
5	12185.00	---						VERTICAL
1	1203.00	59.63	-16.49	43.14	74.00	-30.86	Peak	HORIZONTAL
2	4874.00	38.55	-2.42	36.13	74.00	-37.87	Peak	HORIZONTAL
3	7311.00	36.02	15.89	51.91	74.00	-22.09	Peak	HORIZONTAL
4	9748.00	---						HORIZONTAL
5	12185.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2442.00	49.77	-11.35	38.42	74.00	-35.58	Peak	VERTICAL
2	4924.00	39.93	-2.25	37.68	74.00	-36.32	Peak	VERTICAL
3	7386.00	---						VERTICAL
4	9848.00	---						VERTICAL
5	12310.00	---						VERTICAL
1	3002.00	48.74	-9.55	39.19	74.00	-34.81	Peak	HORIZONTAL
2	4924.00	38.26	-2.25	36.01	74.00	-37.99	Peak	HORIZONTAL
3	7386.00	---						HORIZONTAL
4	9848.00	---						HORIZONTAL
5	12310.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_20M TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3002.00	48.06	-9.55	38.51	74.00	-35.49	Peak	VERTICAL
2	4824.00	40.44	-2.59	37.85	74.00	-36.15	Peak	VERTICAL
3	7236.00	---						VERTICAL
4	9648.00	---						VERTICAL
5	12060.00	---						VERTICAL
1	1203.00	59.98	-16.49	43.49	74.00	-30.51	Peak	HORIZONTAL
2	4822.00	37.39	-2.59	34.80	74.00	-39.20	Peak	HORIZONTAL
3	7236.00	---						HORIZONTAL
4	9648.00	---						HORIZONTAL
5	12060.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_20M TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2995.00	46.78	-9.56	37.22	74.00	-36.78	Peak	VERTICAL
2	4874.00	39.47	-2.42	37.05	74.00	-36.95	Peak	VERTICAL
3	7311.00	---						VERTICAL
4	9748.00	---						VERTICAL
5	12185.00	---						VERTICAL
1	1203.00	60.27	-16.49	43.78	74.00	-30.22	Peak	HORIZONTAL
2	4874.00	38.50	-2.42	36.08	74.00	-37.92	Peak	HORIZONTAL
3	7311.00	---						HORIZONTAL
4	9748.00	---						HORIZONTAL
5	12185.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_20M TX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2995.00	48.50	-9.56	38.94	74.00	-35.06	Peak	VERTICAL
2	4924.00	40.43	-2.25	38.18	74.00	-35.82	Peak	VERTICAL
3	7386.00	---					Peak	VERTICAL
4	9848.00	---						VERTICAL
5	12310.00	---						VERTICAL
1	1203.00	60.09	-16.49	43.60	74.00	-30.40	Peak	HORIZONTAL
2	4924.00	40.73	-2.25	38.48	74.00	-35.52	Peak	HORIZONTAL
3	7386.00	---						HORIZONTAL
4	9848.00	---						HORIZONTAL
5	12310.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_40M TX CH Low	Test Date	2012/05/17
Fundamental Frequency	2422MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3002.00	47.05	-9.55	37.50	74.00	-36.50	Peak	VERTICAL
2	4844.00	39.27	-2.52	36.75	74.00	-37.25	Peak	VERTICAL
3	7266.00	---						VERTICAL
4	9688.00	---						VERTICAL
5	12110.00	---						VERTICAL
1	1203.00	60.44	-16.49	43.95	74.00	-30.05	Peak	HORIZONTAL
2	4844.00	38.07	-2.52	35.55	74.00	-38.45	Peak	HORIZONTAL
3	7266.00	---						HORIZONTAL
4	9688.00	---						HORIZONTAL
5	12110.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_40M TX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3002.00	48.83	-9.55	39.28	74.00	-34.72	Peak	VERTICAL
2	4874.00	38.95	-2.42	36.53	74.00	-37.47	Peak	VERTICAL
3	7311.00	---						VERTICAL
4	9748.00	---						VERTICAL
5	12185.00	---						VERTICAL
1	1203.00	59.85	-16.49	43.36	74.00	-30.64	Peak	HORIZONTAL
2	4874.00	38.75	-2.42	36.33	74.00	-37.67	Peak	HORIZONTAL
3	7311.00	---						HORIZONTAL
4	9748.00	---						HORIZONTAL
5	12185.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_40M TX CH High	Test Date	2012/05/17
Fundamental Frequency	2452MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3002.00	48.05	-9.55	38.50	74.00	-35.50	Peak	VERTICAL
2	4904.00	39.12	-2.32	36.80	74.00	-37.20	Peak	VERTICAL
3	7356.00	---					Peak	VERTICAL
4	9808.00	---						VERTICAL
5	12260.00	---						VERTICAL
1	1203.00	59.63	-16.49	43.14	74.00	-30.86	Peak	HORIZONTAL
2	4904.00	37.63	-2.32	35.31	74.00	-38.69	Peak	HORIZONTAL
3	7356.00	---						HORIZONTAL
4	9808.00	---						HORIZONTAL
5	12260.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.13	-16.04	27.09	43.50	-16.41	Peak	VERTICAL
2	359.80	40.30	-10.35	29.95	46.00	-16.05	Peak	VERTICAL
3	418.97	36.60	-9.46	27.14	46.00	-18.86	Peak	VERTICAL
4	600.36	31.26	-7.44	23.82	46.00	-22.18	Peak	VERTICAL
5	839.95	36.40	-4.84	31.56	46.00	-14.44	Peak	VERTICAL
6	960.23	32.94	-3.48	29.46	54.00	-24.54	Peak	VERTICAL
1	96.93	42.74	-16.04	26.70	43.50	-16.80	Peak	HORIZONTAL
2	197.81	46.63	-15.91	30.72	43.50	-12.78	Peak	HORIZONTAL
3	422.85	41.23	-9.43	31.80	46.00	-14.20	Peak	HORIZONTAL
4	600.36	34.64	-7.44	27.20	46.00	-18.80	Peak	HORIZONTAL
5	839.95	37.64	-4.84	32.80	46.00	-13.20	Peak	HORIZONTAL
6	960.23	33.95	-3.48	30.47	54.00	-23.53	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	44.72	-16.04	28.68	43.50	-14.82	Peak	VERTICAL
2	164.83	38.46	-15.79	22.67	43.50	-20.83	Peak	VERTICAL
3	359.80	40.17	-10.35	29.82	46.00	-16.18	Peak	VERTICAL
4	600.36	31.02	-7.44	23.58	46.00	-22.42	Peak	VERTICAL
5	839.95	35.77	-4.84	30.93	46.00	-15.07	Peak	VERTICAL
6	960.23	32.23	-3.48	28.75	54.00	-25.25	Peak	VERTICAL
1	96.93	43.26	-16.04	27.22	43.50	-16.28	Peak	HORIZONTAL
2	180.35	47.73	-16.37	31.36	43.50	-12.14	Peak	HORIZONTAL
3	421.88	38.99	-9.44	29.55	46.00	-16.45	Peak	HORIZONTAL
4	600.36	35.20	-7.44	27.76	46.00	-18.24	Peak	HORIZONTAL
5	839.95	40.66	-4.84	35.82	46.00	-10.18	Peak	HORIZONTAL
6	960.23	33.28	-3.48	29.80	54.00	-24.20	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11b RX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.52	-16.04	27.48	43.50	-16.02	Peak	VERTICAL
2	166.77	40.09	-15.84	24.25	43.50	-19.25	Peak	VERTICAL
3	359.80	40.34	-10.35	29.99	46.00	-16.01	Peak	VERTICAL
4	600.36	30.22	-7.44	22.78	46.00	-23.22	Peak	VERTICAL
5	839.95	35.95	-4.84	31.11	46.00	-14.89	Peak	VERTICAL
6	960.23	31.23	-3.48	27.75	54.00	-26.25	Peak	VERTICAL
1	96.93	42.62	-16.04	26.58	43.50	-16.92	Peak	HORIZONTAL
2	200.72	43.34	-15.74	27.60	43.50	-15.90	Peak	HORIZONTAL
3	418.97	41.97	-9.46	32.51	46.00	-13.49	Peak	HORIZONTAL
4	600.36	34.44	-7.44	27.00	46.00	-19.00	Peak	HORIZONTAL
5	839.95	37.95	-4.84	33.11	46.00	-12.89	Peak	HORIZONTAL
6	902.03	34.45	-4.34	30.11	46.00	-15.89	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11g RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.79	-16.04	27.75	43.50	-15.75	Peak	VERTICAL
2	180.35	44.79	-16.37	28.42	43.50	-15.08	Peak	VERTICAL
3	359.80	40.72	-10.35	30.37	46.00	-15.63	Peak	VERTICAL
4	600.36	31.37	-7.44	23.93	46.00	-22.07	Peak	VERTICAL
5	839.95	36.22	-4.84	31.38	46.00	-14.62	Peak	VERTICAL
6	960.23	34.30	-3.48	30.82	54.00	-23.18	Peak	VERTICAL
1	96.93	42.36	-16.04	26.32	43.50	-17.18	Peak	HORIZONTAL
2	198.78	44.96	-15.84	29.12	43.50	-14.38	Peak	HORIZONTAL
3	418.97	38.63	-9.46	29.17	46.00	-16.83	Peak	HORIZONTAL
4	600.36	35.17	-7.44	27.73	46.00	-18.27	Peak	HORIZONTAL
5	839.95	37.69	-4.84	32.85	46.00	-13.15	Peak	HORIZONTAL
6	960.23	33.10	-3.48	29.62	54.00	-24.38	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11g RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.14	-16.04	27.10	43.50	-16.40	Peak	VERTICAL
2	179.38	44.21	-16.34	27.87	43.50	-15.63	Peak	VERTICAL
3	359.80	40.17	-10.35	29.82	46.00	-16.18	Peak	VERTICAL
4	407.33	34.55	-9.54	25.01	46.00	-20.99	Peak	VERTICAL
5	839.95	35.50	-4.84	30.66	46.00	-15.34	Peak	VERTICAL
6	960.23	33.53	-3.48	30.05	54.00	-23.95	Peak	VERTICAL
1	96.93	41.28	-16.04	25.24	43.50	-18.26	Peak	HORIZONTAL
2	180.35	45.94	-16.37	29.57	43.50	-13.93	Peak	HORIZONTAL
3	359.80	38.32	-10.35	27.97	46.00	-18.03	Peak	HORIZONTAL
4	600.36	34.20	-7.44	26.76	46.00	-19.24	Peak	HORIZONTAL
5	719.67	34.88	-6.29	28.59	46.00	-17.41	Peak	HORIZONTAL
6	839.95	43.36	-4.84	38.52	46.00	-7.48	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11g RX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.93	-16.04	27.89	43.50	-15.61	Peak	VERTICAL
2	359.80	40.31	-10.35	29.96	46.00	-16.04	Peak	VERTICAL
3	411.21	33.76	-9.52	24.24	46.00	-21.76	Peak	VERTICAL
4	600.36	30.44	-7.44	23.00	46.00	-23.00	Peak	VERTICAL
5	839.95	37.29	-4.84	32.45	46.00	-13.55	Peak	VERTICAL
6	960.23	32.12	-3.48	28.64	54.00	-25.36	Peak	VERTICAL
1	96.93	40.81	-16.04	24.77	43.50	-18.73	Peak	HORIZONTAL
2	197.81	46.34	-15.91	30.43	43.50	-13.07	Peak	HORIZONTAL
3	359.80	38.78	-10.35	28.43	46.00	-17.57	Peak	HORIZONTAL
4	600.36	34.22	-7.44	26.78	46.00	-19.22	Peak	HORIZONTAL
5	839.95	38.17	-4.84	33.33	46.00	-12.67	Peak	HORIZONTAL
6	960.23	32.78	-3.48	29.30	54.00	-24.70	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_20M RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.06	-16.04	27.02	43.50	-16.48	Peak	VERTICAL
2	359.80	40.32	-10.35	29.97	46.00	-16.03	Peak	VERTICAL
3	419.94	35.98	-9.46	26.52	46.00	-19.48	Peak	VERTICAL
4	600.36	31.22	-7.44	23.78	46.00	-22.22	Peak	VERTICAL
5	839.95	35.13	-4.84	30.29	46.00	-15.71	Peak	VERTICAL
6	960.23	31.29	-3.48	27.81	54.00	-26.19	Peak	VERTICAL
1	96.93	43.05	-16.04	27.01	43.50	-16.49	Peak	HORIZONTAL
2	198.78	46.27	-15.84	30.43	43.50	-13.07	Peak	HORIZONTAL
3	419.94	39.84	-9.46	30.38	46.00	-15.62	Peak	HORIZONTAL
4	600.36	35.00	-7.44	27.56	46.00	-18.44	Peak	HORIZONTAL
5	839.95	44.46	-4.84	39.62	46.00	-6.38	Peak	HORIZONTAL
6	947.62	34.53	-3.59	30.94	46.00	-15.06	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_20M RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.50	-16.04	27.46	43.50	-16.04	Peak	VERTICAL
2	163.86	37.88	-15.78	22.10	43.50	-21.40	Peak	VERTICAL
3	359.80	40.61	-10.35	30.26	46.00	-15.74	Peak	VERTICAL
4	600.36	30.17	-7.44	22.73	46.00	-23.27	Peak	VERTICAL
5	839.95	35.40	-4.84	30.56	46.00	-15.44	Peak	VERTICAL
6	946.65	34.20	-3.60	30.60	46.00	-15.40	Peak	VERTICAL
1	96.93	42.55	-16.04	26.51	43.50	-16.99	Peak	HORIZONTAL
2	197.81	49.61	-15.91	33.70	43.50	-9.80	Peak	HORIZONTAL
3	420.91	40.54	-9.44	31.10	46.00	-14.90	Peak	HORIZONTAL
4	719.67	36.12	-6.29	29.83	46.00	-16.17	Peak	HORIZONTAL
5	839.95	38.90	-4.84	34.06	46.00	-11.94	Peak	HORIZONTAL
6	960.23	34.20	-3.48	30.72	54.00	-23.28	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_20M RX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.37	-16.04	27.33	43.50	-16.17	Peak	VERTICAL
2	239.52	38.94	-13.82	25.12	46.00	-20.88	Peak	VERTICAL
3	359.80	40.72	-10.35	30.37	46.00	-15.63	Peak	VERTICAL
4	600.36	30.28	-7.44	22.84	46.00	-23.16	Peak	VERTICAL
5	839.95	35.08	-4.84	30.24	46.00	-15.76	Peak	VERTICAL
6	960.23	33.23	-3.48	29.75	54.00	-24.25	Peak	VERTICAL
1	120.21	42.25	-13.66	28.59	43.50	-14.91	Peak	HORIZONTAL
2	196.84	48.61	-15.98	32.63	43.50	-10.87	Peak	HORIZONTAL
3	418.97	41.03	-9.46	31.57	46.00	-14.43	Peak	HORIZONTAL
4	719.67	33.09	-6.29	26.80	46.00	-19.20	Peak	HORIZONTAL
5	839.95	38.08	-4.84	33.24	46.00	-12.76	Peak	HORIZONTAL
6	960.23	33.15	-3.48	29.67	54.00	-24.33	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2422MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.00	-16.04	26.96	43.50	-16.54	Peak	VERTICAL
2	162.89	37.27	-15.75	21.52	43.50	-21.98	Peak	VERTICAL
3	359.80	40.92	-10.35	30.57	46.00	-15.43	Peak	VERTICAL
4	600.36	29.63	-7.44	22.19	46.00	-23.81	Peak	VERTICAL
5	839.95	34.65	-4.84	29.81	46.00	-16.19	Peak	VERTICAL
6	960.23	31.74	-3.48	28.26	54.00	-25.74	Peak	VERTICAL
1	96.93	42.51	-16.04	26.47	43.50	-17.03	Peak	HORIZONTAL
2	196.84	47.12	-15.98	31.14	43.50	-12.36	Peak	HORIZONTAL
3	359.80	37.65	-10.35	27.30	46.00	-18.70	Peak	HORIZONTAL
4	421.88	42.86	-9.44	33.42	46.00	-12.58	Peak	HORIZONTAL
5	719.67	35.37	-6.29	29.08	46.00	-16.92	Peak	HORIZONTAL
6	839.95	38.36	-4.84	33.52	46.00	-12.48	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	42.78	-16.04	26.74	43.50	-16.76	Peak	VERTICAL
2	163.86	37.62	-15.78	21.84	43.50	-21.66	Peak	VERTICAL
3	359.80	40.93	-10.35	30.58	46.00	-15.42	Peak	VERTICAL
4	560.59	29.26	-7.69	21.57	46.00	-24.43	Peak	VERTICAL
5	839.95	34.48	-4.84	29.64	46.00	-16.36	Peak	VERTICAL
6	960.23	31.59	-3.48	28.11	54.00	-25.89	Peak	VERTICAL
1	96.93	42.01	-16.04	25.97	43.50	-17.53	Peak	HORIZONTAL
2	196.84	44.03	-15.98	28.05	43.50	-15.45	Peak	HORIZONTAL
3	419.94	41.15	-9.46	31.69	46.00	-14.31	Peak	HORIZONTAL
4	600.36	34.50	-7.44	27.06	46.00	-18.94	Peak	HORIZONTAL
5	839.95	39.73	-4.84	34.89	46.00	-11.11	Peak	HORIZONTAL
6	960.23	36.50	-3.48	33.02	54.00	-20.98	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	802.11 n_40M RX CH High	Test Date	2012/05/17
Fundamental Frequency	2452MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	96.93	43.91	-16.04	27.87	43.50	-15.63	Peak	VERTICAL
2	165.80	39.89	-15.82	24.07	43.50	-19.43	Peak	VERTICAL
3	359.80	40.91	-10.35	30.56	46.00	-15.44	Peak	VERTICAL
4	600.36	31.27	-7.44	23.83	46.00	-22.17	Peak	VERTICAL
5	839.95	33.66	-4.84	28.82	46.00	-17.18	Peak	VERTICAL
6	960.23	31.26	-3.48	27.78	54.00	-26.22	Peak	VERTICAL
1	96.93	42.30	-16.04	26.26	43.50	-17.24	Peak	HORIZONTAL
2	197.81	50.23	-15.91	34.32	43.50	-9.18	Peak	HORIZONTAL
3	359.80	38.27	-10.35	27.92	46.00	-18.08	Peak	HORIZONTAL
4	420.91	50.65	-9.44	41.21	46.00	-4.79	Peak	HORIZONTAL
5	600.36	34.71	-7.44	27.27	46.00	-18.73	Peak	HORIZONTAL
6	839.95	43.52	-4.84	38.68	46.00	-7.32	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1161.00	61.00	-16.61	44.39	74.00	-29.61	Peak	VERTICAL
2	1329.00	57.06	-16.15	40.91	74.00	-33.09	Peak	VERTICAL
1	1161.00	61.82	-16.61	45.21	74.00	-28.79	Peak	HORIZONTAL
2	2400.00	49.39	-11.47	37.92	74.00	-36.08	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1161.00	64.40	-16.61	47.79	74.00	-26.21	Peak	VERTICAL
2	1329.00	61.66	-16.15	45.51	74.00	-28.49	Peak	VERTICAL
1	1490.00	60.12	-15.72	44.40	74.00	-29.60	Peak	HORIZONTAL
2	1707.00	60.93	-14.35	46.58	74.00	-27.42	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11b RX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1161.00	61.84	-16.61	45.23	74.00	-28.77	Peak	VERTICAL
2	1707.00	56.87	-14.35	42.52	74.00	-31.48	Peak	VERTICAL
1	1490.00	59.81	-15.72	44.09	74.00	-29.91	Peak	HORIZONTAL
2	1707.00	60.74	-14.35	46.39	74.00	-27.61	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	59.10	-15.72	43.38	74.00	-30.62	Peak	VERTICAL
2	1917.00	57.14	-13.02	44.12	74.00	-29.88	Peak	VERTICAL
1	1161.00	61.17	-16.61	44.56	74.00	-29.44	Peak	HORIZONTAL
2	1707.00	60.55	-14.35	46.20	74.00	-27.80	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1707.00	59.24	-14.35	44.89	74.00	-29.11	Peak	VERTICAL
2	2134.00	56.53	-12.15	44.38	74.00	-29.62	Peak	VERTICAL
1	1168.00	61.25	-16.59	44.66	74.00	-29.34	Peak	HORIZONTAL
2	1707.00	58.79	-14.35	44.44	74.00	-29.56	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g RX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	59.71	-15.72	43.99	74.00	-30.01	Peak	VERTICAL
2	1707.00	60.38	-14.35	46.03	74.00	-27.97	Peak	VERTICAL
1	1168.00	60.58	-16.59	43.99	74.00	-30.01	Peak	HORIZONTAL
2	1707.00	57.68	-14.35	43.33	74.00	-30.67	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_20M RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2412MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	59.66	-15.72	43.94	74.00	-30.06	Peak	VERTICAL
2	1707.00	59.92	-14.35	45.57	74.00	-28.43	Peak	VERTICAL
1	1168.00	60.42	-16.59	43.83	74.00	-30.17	Peak	HORIZONTAL
2	1707.00	56.91	-14.35	42.56	74.00	-31.44	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_20M RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	58.80	-15.72	43.08	74.00	-30.92	Peak	VERTICAL
2	1707.00	58.11	-14.35	43.76	74.00	-30.24	Peak	VERTICAL
1	1161.00	61.00	-16.61	44.39	74.00	-29.61	Peak	HORIZONTAL
2	1707.00	58.52	-14.35	44.17	74.00	-29.83	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_20M RX CH High	Test Date	2012/05/17
Fundamental Frequency	2462MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	58.88	-15.72	43.16	74.00	-30.84	Peak	VERTICAL
2	1707.00	59.00	-14.35	44.65	74.00	-29.35	Peak	VERTICAL
1	1161.00	62.92	-16.61	46.31	74.00	-27.69	Peak	HORIZONTAL
2	2134.00	52.91	-12.15	40.76	74.00	-33.24	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_40M RX CH Low	Test Date	2012/05/17
Fundamental Frequency	2422MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	59.30	-15.72	43.58	74.00	-30.42	Peak	VERTICAL
2	1707.00	58.73	-14.35	44.38	74.00	-29.62	Peak	VERTICAL
1	1161.00	60.63	-16.61	44.02	74.00	-29.98	Peak	HORIZONTAL
2	1917.00	56.86	-13.02	43.84	74.00	-30.16	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_40M RX CH Mid	Test Date	2012/05/17
Fundamental Frequency	2437MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1490.00	60.22	-15.72	44.50	74.00	-29.50	Peak	VERTICAL
2	1707.00	60.46	-14.35	46.11	74.00	-27.89	Peak	VERTICAL
1	1490.00	60.35	-15.72	44.63	74.00	-29.37	Peak	HORIZONTAL
2	1707.00	60.67	-14.35	46.32	74.00	-27.68	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11n_40M RX CH High	Test Date	2012/05/17
Fundamental Frequency	2452MHz	Test By	Lake
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1707.00	59.81	-14.35	45.46	74.00	-28.54	Peak	VERTICAL
2	2134.00	56.75	-12.15	44.60	74.00	-29.40	Peak	VERTICAL
1	1490.00	59.49	-15.72	43.77	74.00	-30.23	Peak	HORIZONTAL
2	1707.00	60.02	-14.35	45.67	74.00	-28.33	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-210 issue 8, §A8.2(b) and §A8.3(2), The transmitter power spectral density (into the antenna) shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW =100KHz, VBW = 300KHz, Span =5 to 30% greater than emission BW, Sweep=Auto
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.

10.5 Measurement Result:

802.11b Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2412	2.586	-15.2	-12.614	8
2437	1.985	-15.2	-13.215	8
2462	1.885	-15.2	-13.315	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{kHz})$

kHz = -15.2 dB)

802.11g Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2412	-3.639	-15.2	-18.839	8
2437	-4.039	-15.2	-19.239	8
2462	-3.97	-15.2	-19.17	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{kHz})$

kHz = -15.2 dB)

802.11n HT20 Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2412	-3.119	-15.2	-18.319	8
2437	-3.445	-15.2	-18.645	8
2462	-3.818	-15.2	-19.018	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{kHz})$

kHz = -15.2 dB)

802.11n HT40 Mode

Frequency MHz	Power Density Reading (dBm)/100KHz	BWCF (dB)	Power Density Level (dBm)/3KHz	Maximum Limit (dBm)
2422	-6.12	-15.2	-21.32	8
2437	-6.488	-15.2	-21.688	8
2452	-2.454	-15.2	-17.654	8

BWCF(bandwidth correction factor)= $10\log(3\text{ kHz}/100\text{kHz})$

kHz = -15.2 dB)

802.11b

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)



802.11g

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)



802.11n_20M

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)




802.11n_40M

Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)

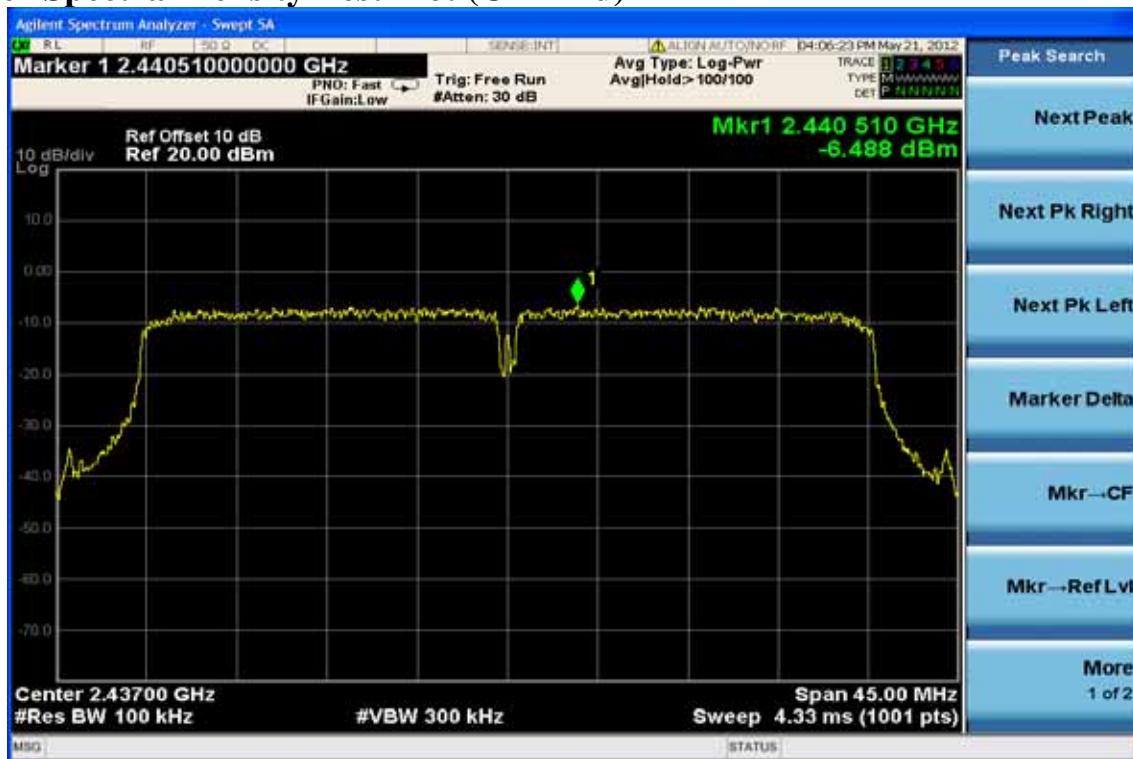

Power Spectral Density Test Plot (CH-High)



11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

11.2 Antenna Connected Construction:

The directional gain of antenna used for transmitting is 2.4 dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.


APPENDIX 1

PHOTOGRAPHS OF SET UP

Conducted Emission Setup Photos



Radiated Emission Setup Photos

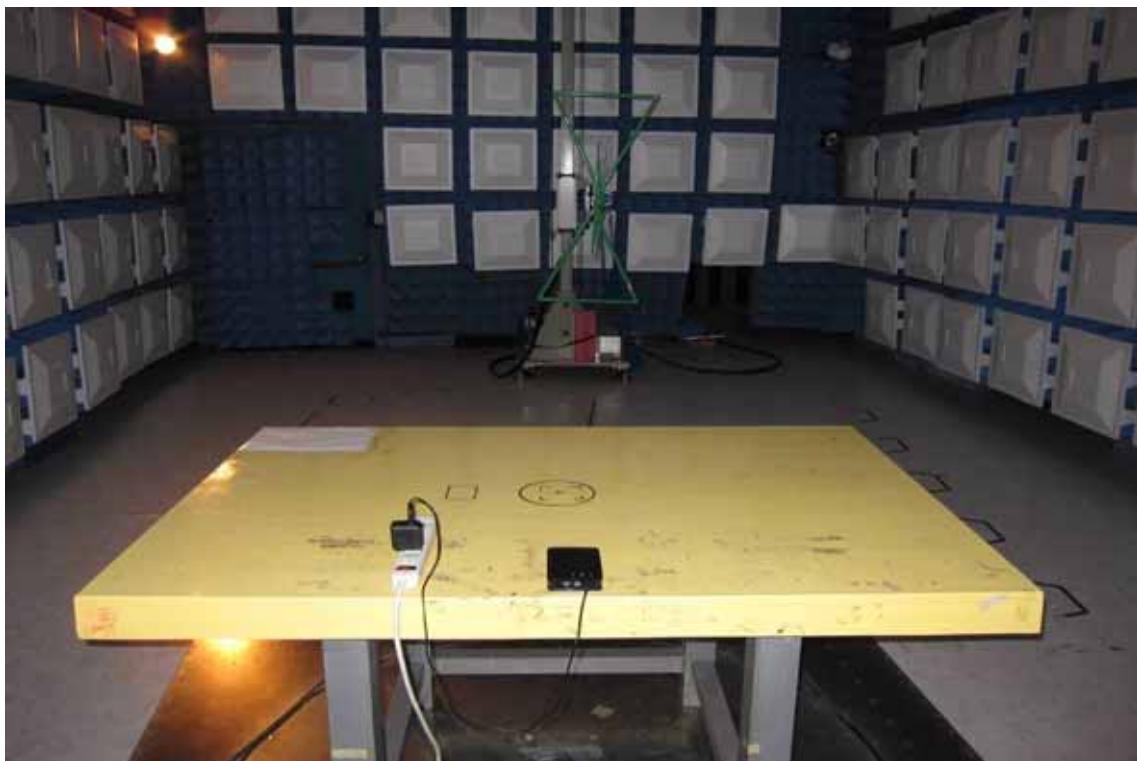

APPENDIX 2

PHOTOGRAPHS OF EUT


External of EUT - 1



External of EUT - 2 (model: WI21)



External of EUT - 3

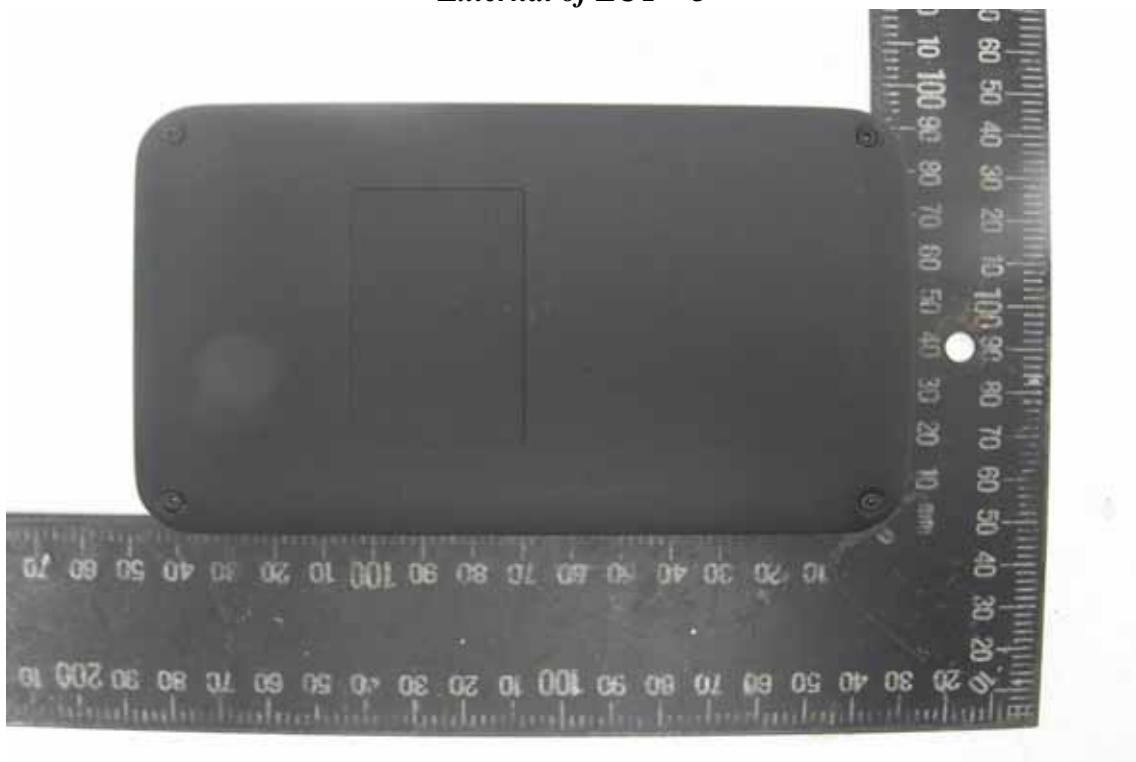

External of EUT - 4



External of EUT – 5 (model: PCGTW25S)



External of EUT – 6 (model: PCGTW25S)



External of EUT - 7



External of EUT - 8



Open View of EUT - 1




Internal View of EUT - 1




Internal View of EUT – 2




Internal View of EUT – 3

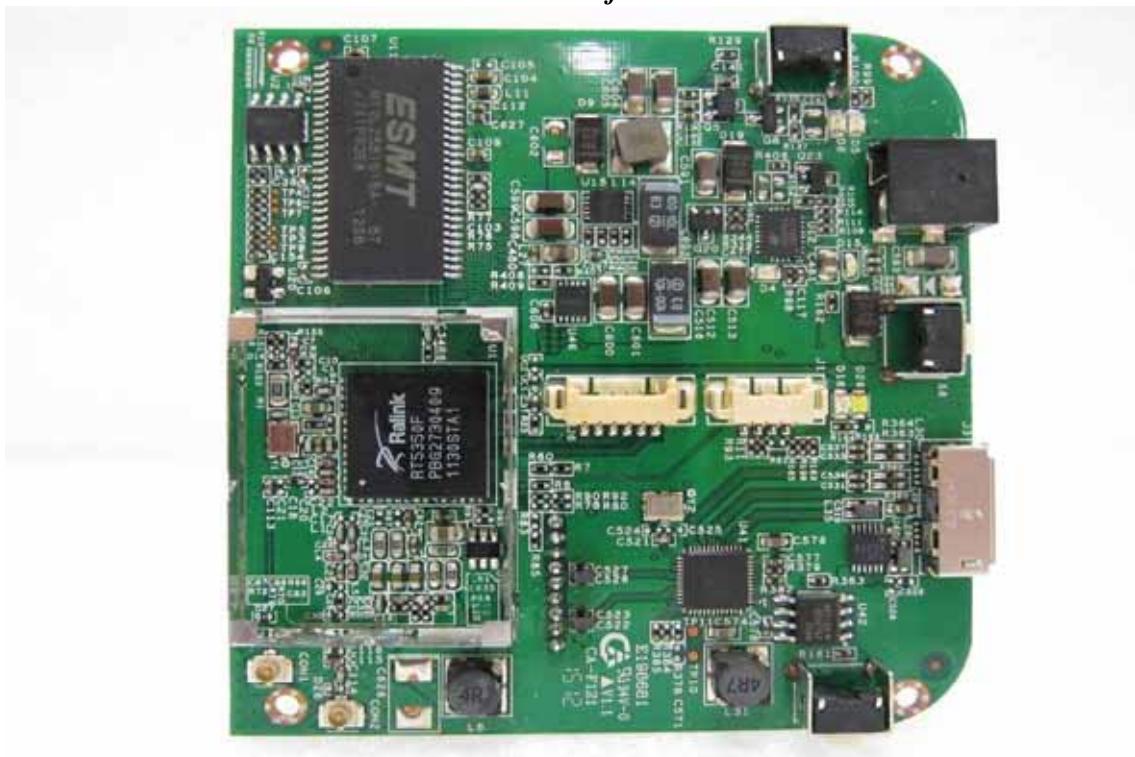


Internal View of EUT - 4

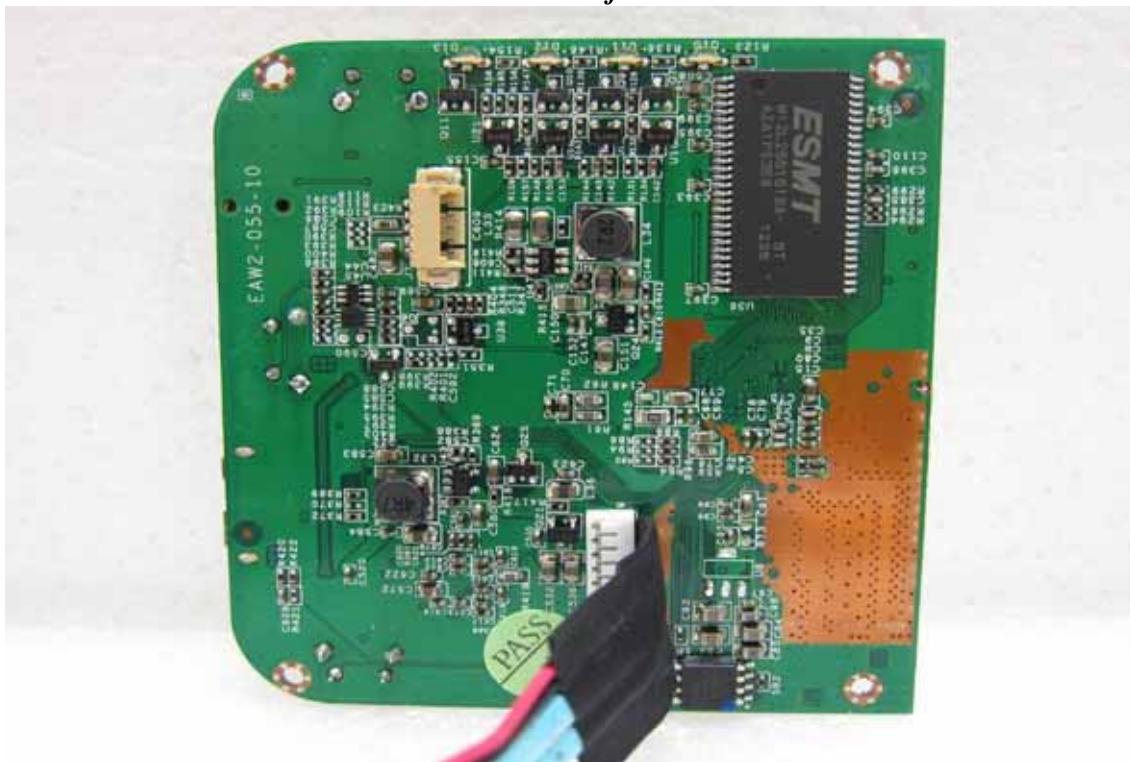

Internal View of EUT - 5

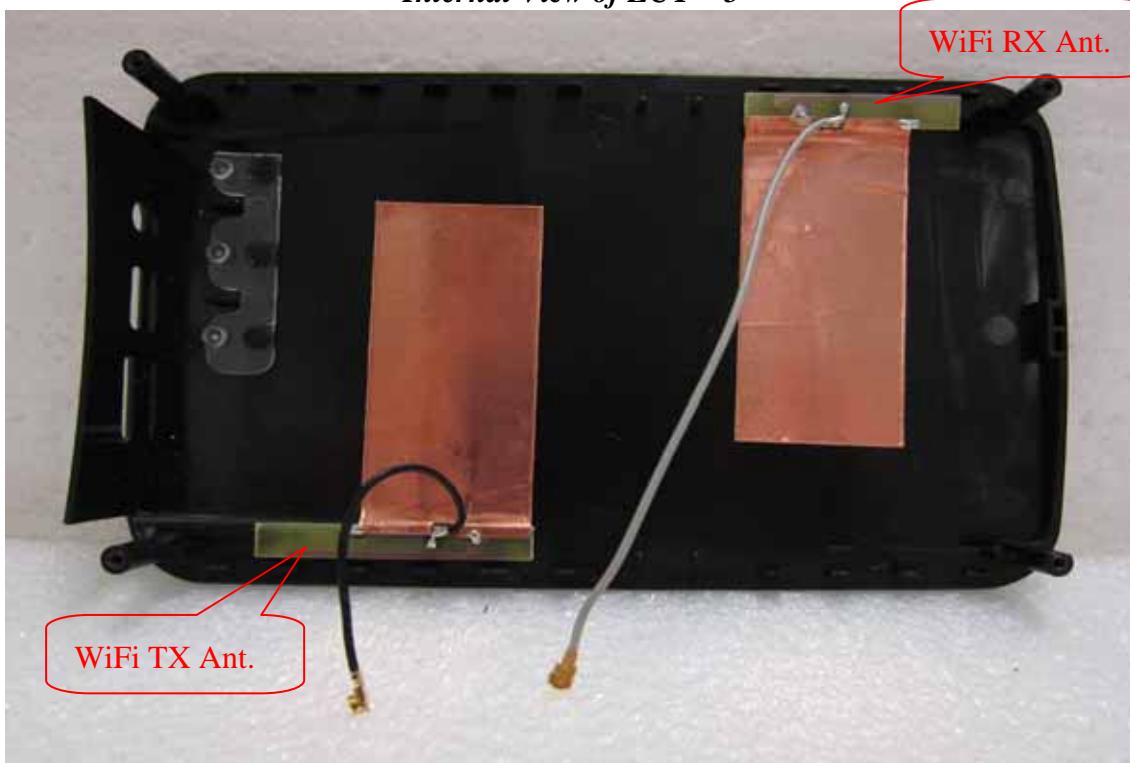

edge of distance and Top of surface

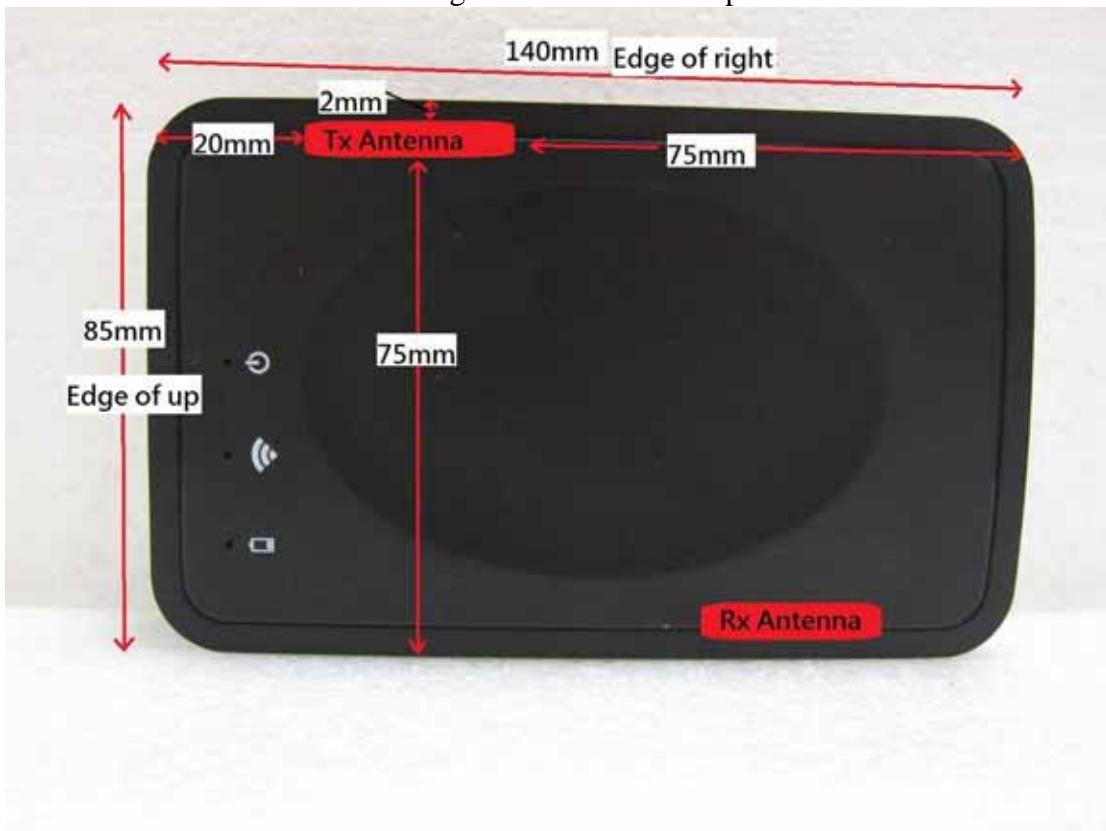

bottom of surface



~ End of Report ~