



# **CERTIFICATION TEST REPORT**

**Report Number. :** 11526345-E3V2

**Applicant :** NVIDIA CORP.  
2701 SAN TOMAS EXPY  
SANTA CLARA, CA 95050

**Model :** P3310

**FCC ID :** VOB-P3310

**IC :** 7361A-P3310

**EUT Description :** WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS - 247 ISSUE 1  
INDUSTRY CANADA RSS-GEN ISSUE 4

**Date Of Issue:**  
January 14, 2017

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

| Rev. | Issue Date | Revisions                                                              | Revised By |
|------|------------|------------------------------------------------------------------------|------------|
| V1   | 01/05/17   | Initial Issue                                                          | D. Corona  |
| V2   | 01/14/17   | Updates Section 1, 2, 7 & correct antenna port name from Core to Chain | D. Corona  |

## TABLE OF CONTENTS

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b>                | <b>5</b>  |
| <b>2. TEST METHODOLOGY</b>                           | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION</b>               | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY</b>                | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION                | 6         |
| 4.2. SAMPLE CALCULATION                              | 6         |
| 4.3. MEASUREMENT UNCERTAINTY                         | 7         |
| <b>5. EQUIPMENT UNDER TEST</b>                       | <b>8</b>  |
| 5.1. DESCRIPTION OF EUT                              | 8         |
| 5.2. MAXIMUM OUTPUT POWER                            | 8         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS               | 8         |
| 5.4. SOFTWARE AND FIRMWARE                           | 8         |
| 5.5. WORST-CASE CONFIGURATION AND MODE               | 8         |
| 5.6. DESCRIPTION OF TEST SETUP                       | 9         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT</b>             | <b>11</b> |
| <b>7. MEASUREMENT METHODS</b>                        | <b>12</b> |
| <b>8. SUMMARY TABLE</b>                              | <b>13</b> |
| <b>9. ON TIME AND DUTY CYCLE MEASUREMENT METHODS</b> | <b>14</b> |
| <b>11. ANTENNA PORT TEST RESULTS</b>                 | <b>17</b> |
| 11.1. 11b Chain 0 SISO MODE IN THE 2.4GHz BAND       | 17        |
| 11.1.1. 6 dB BANDWIDTH                               | 17        |
| 11.1.2. 99% BANDWIDTH                                | 21        |
| 11.1.3. OUTPUT POWER                                 | 25        |
| 11.1.4. POWER SPECTRAL DENSITY                       | 27        |
| 11.1.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS    | 31        |
| 11.2. 11b Chain 1 SISO MODE IN THE 2.4GHz BAND       | 36        |
| 11.2.1. 6 dB BANDWIDTH                               | 36        |
| 11.2.2. 99% BANDWIDTH                                | 40        |
| 11.2.3. OUTPUT POWER                                 | 44        |
| 11.2.4. POWER SPECTRAL DENSITY                       | 46        |
| 11.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS    | 50        |
| 11.3. 11g Chain 0 SISO MODE IN THE 2.4GHz BAND       | 55        |
| 11.3.1. 6 dB BANDWIDTH                               | 55        |

|            |                                                            |            |
|------------|------------------------------------------------------------|------------|
| 11.3.2.    | 99% BANDWIDTH .....                                        | 59         |
| 11.3.3.    | OUTPUT POWER .....                                         | 63         |
| 11.3.4.    | POWER SPECTRAL DENSITY .....                               | 65         |
| 11.3.5.    | CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS .....            | 69         |
| 11.4.      | <i>11g Chain 1 SISO MODE IN THE 2.4GHz BAND .....</i>      | <i>74</i>  |
| 11.4.1.    | 6 dB BANDWIDTH .....                                       | 74         |
| 11.4.2.    | 99% BANDWIDTH .....                                        | 78         |
| 11.4.3.    | OUTPUT POWER .....                                         | 82         |
| 11.4.4.    | POWER SPECTRAL DENSITY .....                               | 84         |
| 11.4.5.    | CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS .....            | 88         |
| 11.5.      | <i>11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND .....</i> | <i>93</i>  |
| 11.5.1.    | 6 dB BANDWIDTH .....                                       | 93         |
| 11.5.2.    | 99% BANDWIDTH .....                                        | 99         |
| 11.5.3.    | OUTPUT POWER .....                                         | 105        |
| 11.5.4.    | POWER SPECTRAL DENSITY .....                               | 107        |
| 11.5.5.    | CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS .....            | 113        |
| <b>12.</b> | <b>RADIATED TEST RESULTS .....</b>                         | <b>125</b> |
| 12.1.      | LIMITS AND PROCEDURE .....                                 | 125        |
| 12.2.      | TRANSMITTER ABOVE 1 GHz .....                              | 126        |
| 12.2.1.    | 11b Chain 0 SISO MODE IN THE 2.4GHz BAND .....             | 126        |
| 12.2.2.    | 11b Chain 1 SISO MODE IN THE 2.4GHz BAND .....             | 140        |
| 12.2.3.    | 11g Chain 0 SISO MODE IN THE 2.4GHz BAND .....             | 154        |
| 12.2.4.    | 11g Chain 1 SISO MODE IN THE 2.4GHz BAND .....             | 168        |
| 12.2.5.    | 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND .....        | 182        |
| 12.3.      | WORST-CASE BELOW 30 GHz .....                              | 196        |
| 12.1.      | WORST-CASE BELOW 1 GHz .....                               | 198        |
| 12.3.      | WORST-CASE 18 to 26 GHz .....                              | 200        |
| <b>13.</b> | <b>AC POWER LINE CONDUCTED EMISSIONS .....</b>             | <b>202</b> |
| 13.1.      | EUT POWERED BY AC/DC ADAPTER VIA USB CABLE .....           | 203        |
| 13.2.      | SETUP PHOTOS .....                                         | 205        |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** NVIDIA CORP.

**EUT DESCRIPTION:** WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

**MODEL:** P3310

**SERIAL NUMBER:** 0334916010248 (for Conducted)  
0334916000053 (for Radiated)

**DATE TESTED:** DECEMBER 13 - 28, 2016

| APPLICABLE STANDARDS            |              |
|---------------------------------|--------------|
| STANDARD                        | TEST RESULTS |
| CFR 47 Part 15 Subpart C        | Pass         |
| INDUSTRY CANADA RSS-247 Issue 1 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 4 | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



DAN CORONIA  
WiSE Project Lead  
UL VERIFICATION SERVICES INC.



JONATHAN HSU  
WiSE Lab Engineer  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                |                        | 47266 Benicia Street     |                        |
|-------------------------------------|------------------------|--------------------------|------------------------|
| <input type="checkbox"/>            | Chamber A (IC:2324B-1) | <input type="checkbox"/> | Chamber D (IC:2324B-4) |
| <input checked="" type="checkbox"/> | Chamber B (IC:2324B-2) | <input type="checkbox"/> | Chamber E (IC:2324B-5) |
| <input checked="" type="checkbox"/> | Chamber C (IC:2324B-3) | <input type="checkbox"/> | Chamber F (IC:2324B-6) |
|                                     |                        | <input type="checkbox"/> | Chamber G (IC:2324B-7) |
|                                     |                        | <input type="checkbox"/> | Chamber H (IC:2324B-8) |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                                           | Uncertainty |
|-----------------------------------------------------|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz  | 3.84 dB     |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz    | 3.65 dB     |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz     | 3.15 dB     |
| Worst Case Radiated Disturbance, 30 to 1000 MHz     | 5.36 dB     |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz  | 4.32 dB     |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.45 dB     |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.24 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

| Frequency Range (MHz) | Mode                 | Output Power (dBm) | Output Power (mW) |
|-----------------------|----------------------|--------------------|-------------------|
| 2412 - 2472           | 802.11b 1TX          | 18.40              | 69.18             |
| 2412 - 2472           | 802.11g 1TX          | 18.44              | 69.82             |
| 2412 - 2472           | 802.11n HT20 2TX CDD | 18.24              | 66.68             |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes a Dipole antenna with maximum gain of 2.86dBi across operation frequency 2.4GHz band.

### 5.4. SOFTWARE AND FIRMWARE

The software and firmware in the EUT during testing was C03A10019.0700.

### 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated bandedge, harmonics, and spurious emissions from 1 GHz to 18GHz were performed. The EUT was set to transmit at the Low/Middle/High channels with designed (target) output powers.

Radiated emission below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT was set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three transmitting antenna degrees: 0, 45, and 90. It was determined that 90 degrees was the worst case antenna position; therefore all final radiated testing was performed with the antenna position at 90 degrees.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20mode: MCS0

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Description       | Manufacturer          | Model    | Serial Number                | FCC ID |
|-------------------|-----------------------|----------|------------------------------|--------|
| EUT AC/DC Adapter | Mean Well Enterprises | GST90A19 | EB68F90444                   | NA     |
| Laptop            | Lenovo                | 7659     | L3-AL664 08/03               | NA     |
| Base Board        | NVIDIA                | P2597    | 0334916030630, 0334916030642 | DoC    |


### I/O CABLES (CONDUCTED & RADIATED TEST)

| I/O Cable List |      |                      |                |            |                  |         |
|----------------|------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | AC   | 1                    | US115V         | Unshielded | 0.5              | For EUT |
| 2              | DC   | 1                    | 19 Vdc         | Unshielded | 1                | For EUT |
| 3              | USB  | 1                    | USB            | Shielded   | 1.5              |         |

### TEST SETUP

The EUT was connected to a host Laptop via USB cable adapter. Test software exercised the EUT.

**SETUP DIAGRAM**

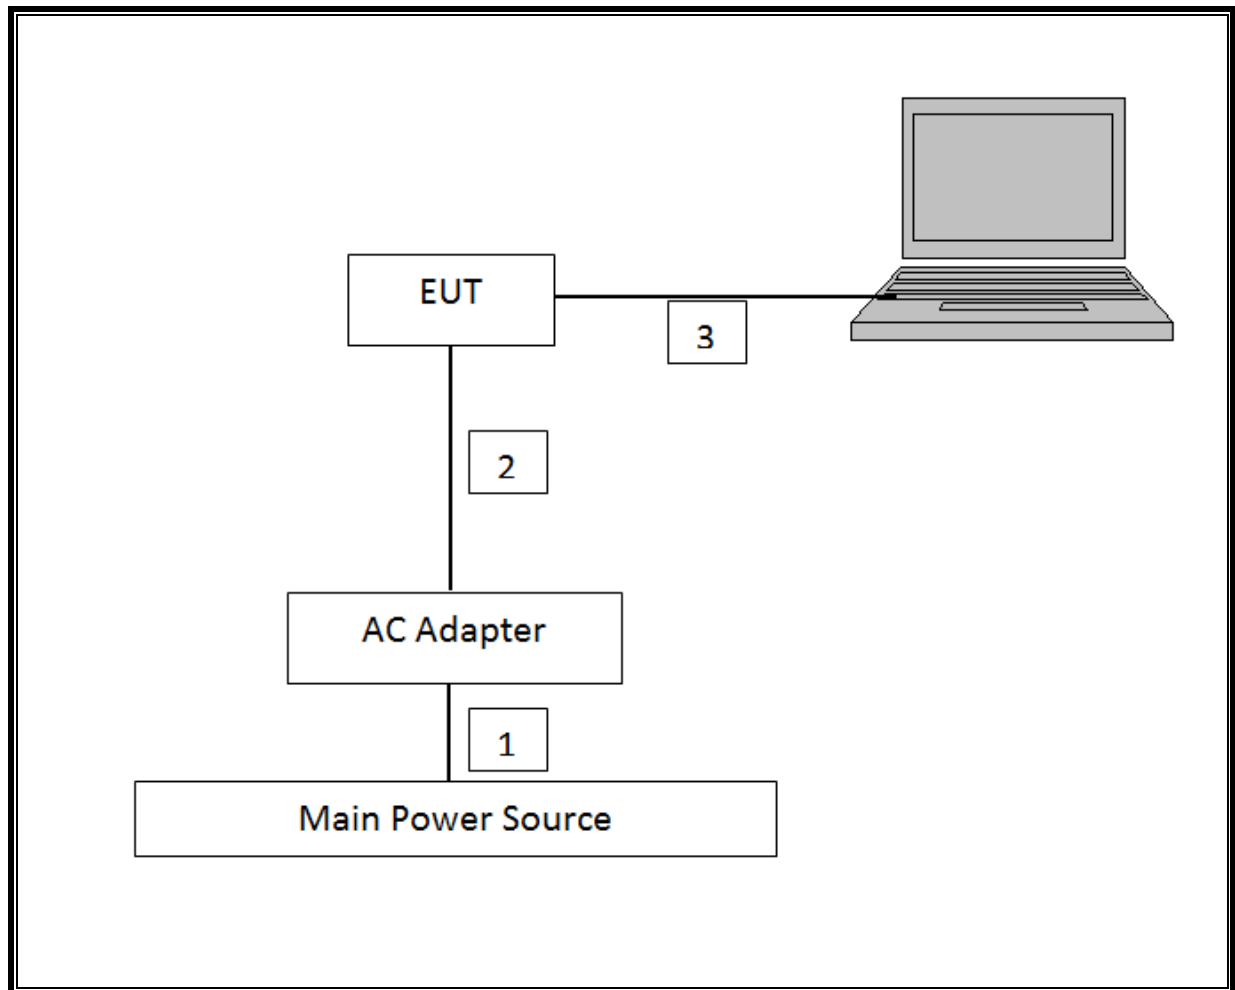

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                         |                 |                         |          |          |           |
|---------------------------------------------|-----------------|-------------------------|----------|----------|-----------|
| Description                                 | Manufacturer    | Model                   | T Number | Cal Date | Cal Due   |
| PSA Series Spectrum Analyzer, 3Hz - 44GHz   | Agilent         | E4446A                  | 146      | 07/13/16 | 07/13/17  |
| Spectrum Analyzer,                          | Agilent         | 8564E                   | 106      | 09/07/16 | 09/07/17  |
| Pre-Amp 1-26.5 GHz                          | Agilent         | 8449B                   | 404      | 07/05/16 | 07/05/17  |
| Amplifier, 1 to 18 GHz                      | Miteq           | AFS43-00101800-25-S-42  | 493      | 03/09/16 | 03/09/17  |
| Amplifier, 1 to 8 GHz                       | Miteq           | AMF-4D-01000800-30-29P  | 1156     | 03/09/16 | 03/09/17  |
| Amplifier, 10KHz to 1GHz, 32dB              | Keysight        | 8447D                   | 10       | 02/01/16 | 02/01/17  |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz | Sunol Sciences  | JB1                     | 477      | 06/22/16 | 06/22/17  |
| Antenna, Horn 1-18GHz                       | ETS Lindgren    | 3117                    | 345      | 03/07/16 | 03/07/17  |
| 18 - 26.5 GHz Horn Antenna                  | Seavey Division | MWH-1826/B              | 449      | 05/26/16 | 5/26/2017 |
| Loop Antenna                                | EMCO            | 6502                    | 35       | 03/24/16 | 03/24/17  |
| P-Series Power Meter                        | Agilent         | N1911A                  | 229      | 07/28/16 | 07/28/17  |
| EMI Receiver                                | Rohde & Schwarz | ESR-EMI                 | 1436     | 12/19/16 | 12/19/17  |
| LISN                                        | FISCHER         | FCC-LISN-50/250-25-2-01 | 1310     | 06/08/16 | 06/08/17  |

NOTE: \*testing is completed before equipment calibration expiration date.

## 7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 558074 D01 v03r05, Section 6.

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v03r05, Section 9.2.3.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.3.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

## 8. SUMMARY TABLE

| FCC Part Section          | RSS Section(s) | Test Description                        | Test Limit | Test Condition | Test Result |
|---------------------------|----------------|-----------------------------------------|------------|----------------|-------------|
| 15.247 (a)(2)             | RSS-247 5.2.1  | Occupied Band width (6dB)               | >500KHz    | Conducted      | Pass        |
| 2.1051, 15.247 (d)        | RSS-247 5.5    | Band Edge / Conducted Spurious Emission | -30dBc     |                | Pass        |
| 15.247                    | RSS-247 5.4.4  | TX conducted output power               | <30dBm     |                | Pass        |
| 15.247                    | RSS-247 5.2.2  | PSD                                     | <8dBm      |                | Pass        |
| 15.207 (a)                | RSS-GEN 8.8    | AC Power Line conducted emissions       | Section 10 | Radiated       | Pass        |
| 15.205, 15.209, 15.247(d) | RSS-GEN 8.9/7  | Radiated Spurious Emission              | < 54dBuV/m |                | Pass        |

## 9. ON TIME AND DUTY CYCLE MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.


### PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.

### ON TIME AND DUTY CYCLE RESULTS

| Mode     | ON Time B<br>(msec) | Period<br>(msec) | Duty Cycle x<br>(linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction<br>Factor (dB) | 1/B Minimum<br>VBW (khz) |
|----------|---------------------|------------------|--------------------------|----------------------|-----------------------------------------|--------------------------|
| 11b 1TX  | 8.580               | 8.685            | 0.987                    | 0.987                | 0.00                                    | 0.01                     |
| 11g 1TX  | 1.425               | 1.527            | 0.933                    | 0.933                | 0.30                                    | 0.70                     |
| HT20 CDD | 1.332               | 1.437            | 0.926                    | 0.926                | 0.33                                    | 0.75                     |

## DUTY CYCLE PLOTS

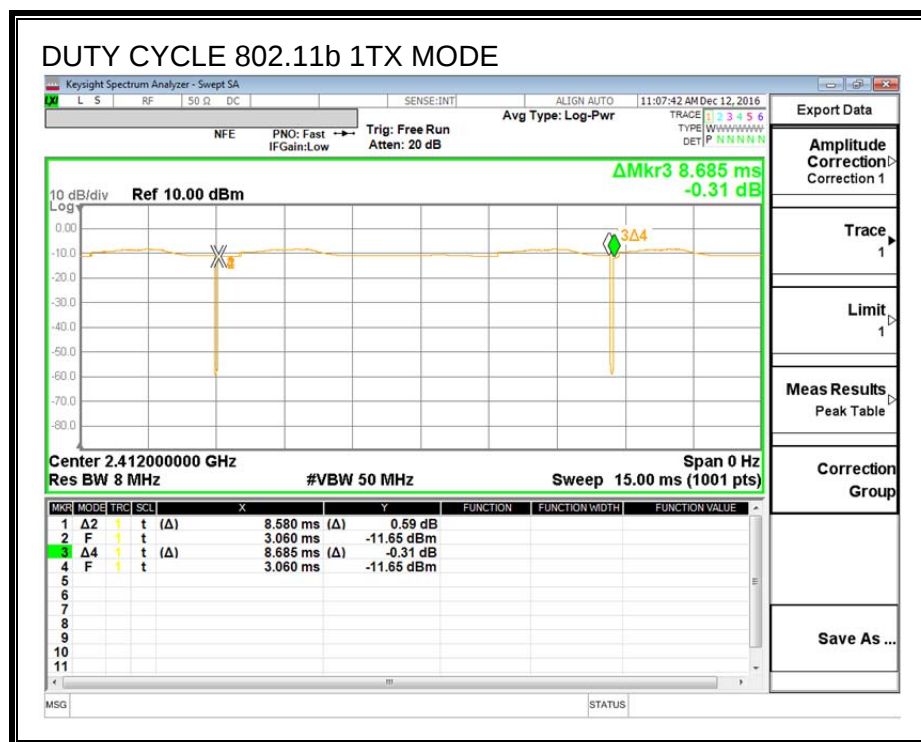

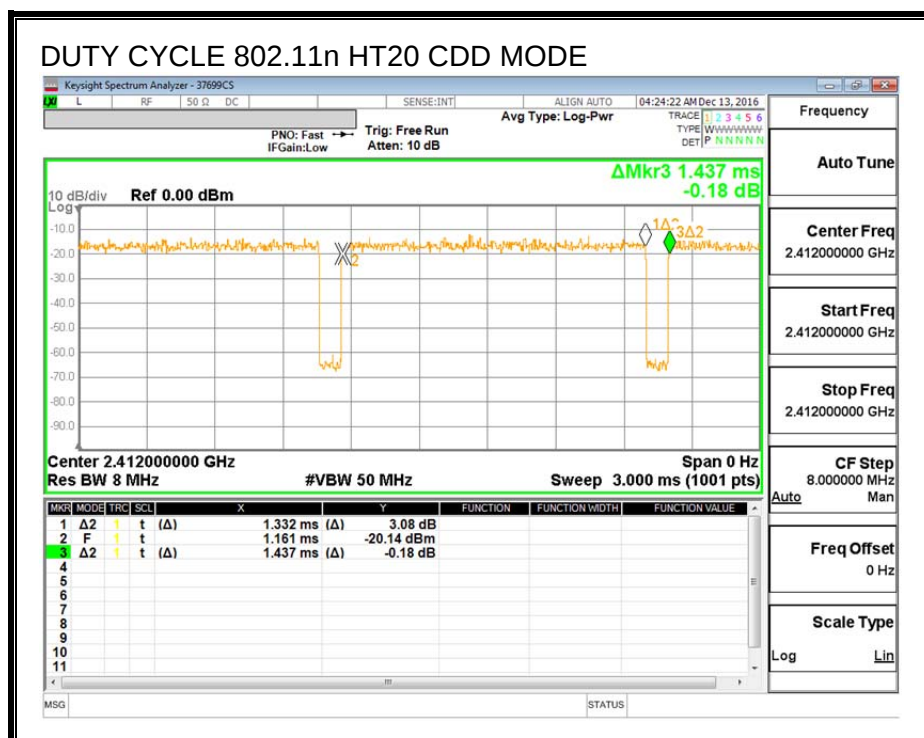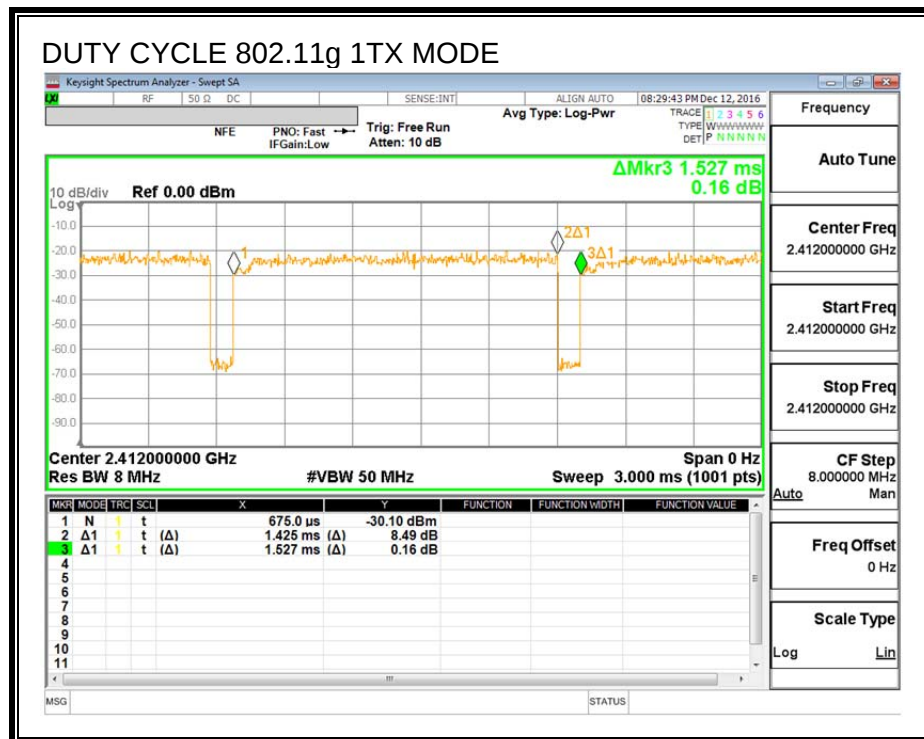

## 11. ANTENNA PORT TEST RESULTS

### 11.1. 11b Chain 0 SISO MODE IN THE 2.4GHz BAND

#### 11.1.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



##### TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

##### RESULTS

| Channel  | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | Minimum Limit (MHz) |
|----------|-----------------|-----------------------|---------------------|
| Low_1    | 2412            | 9.0700                | 0.5                 |
| Middle_6 | 2437            | 8.5600                | 0.5                 |
| High_11  | 2462            | 8.5600                | 0.5                 |
| High_12  | 2467            | 9.0575                | 0.5                 |
| High_13  | 2472            | 7.5750                | 0.5                 |

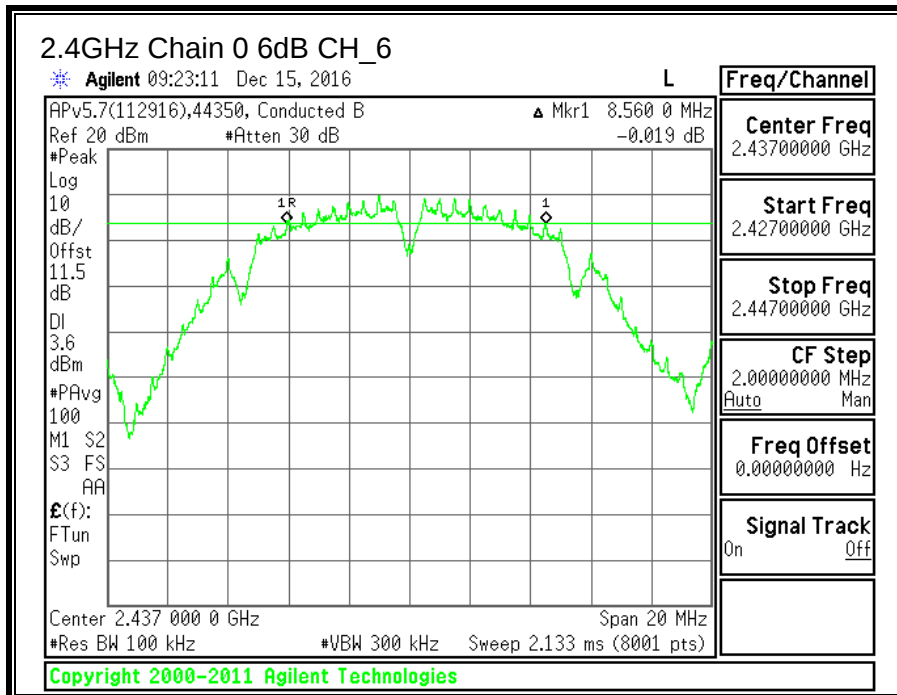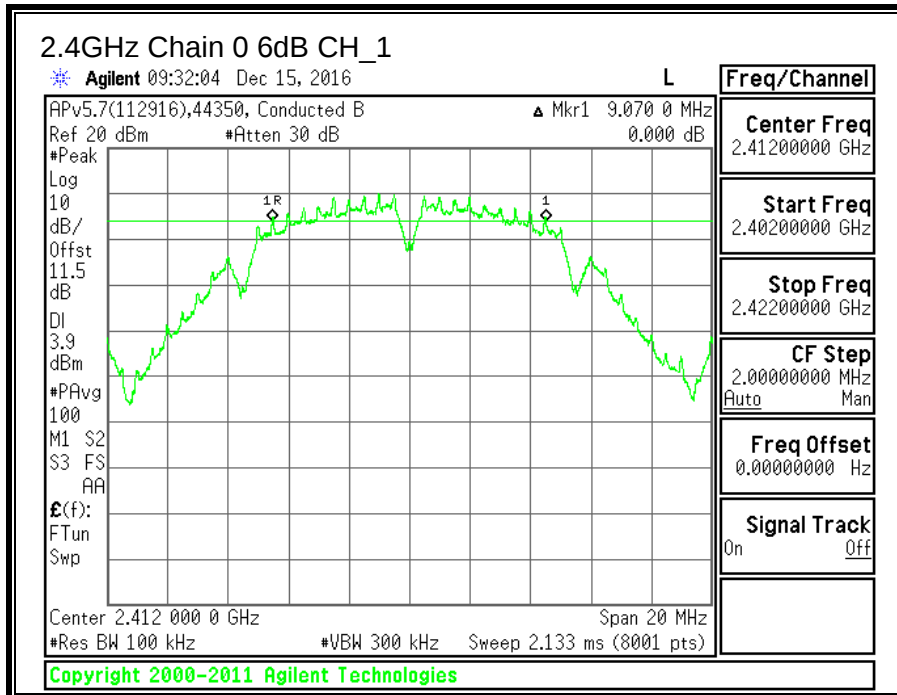

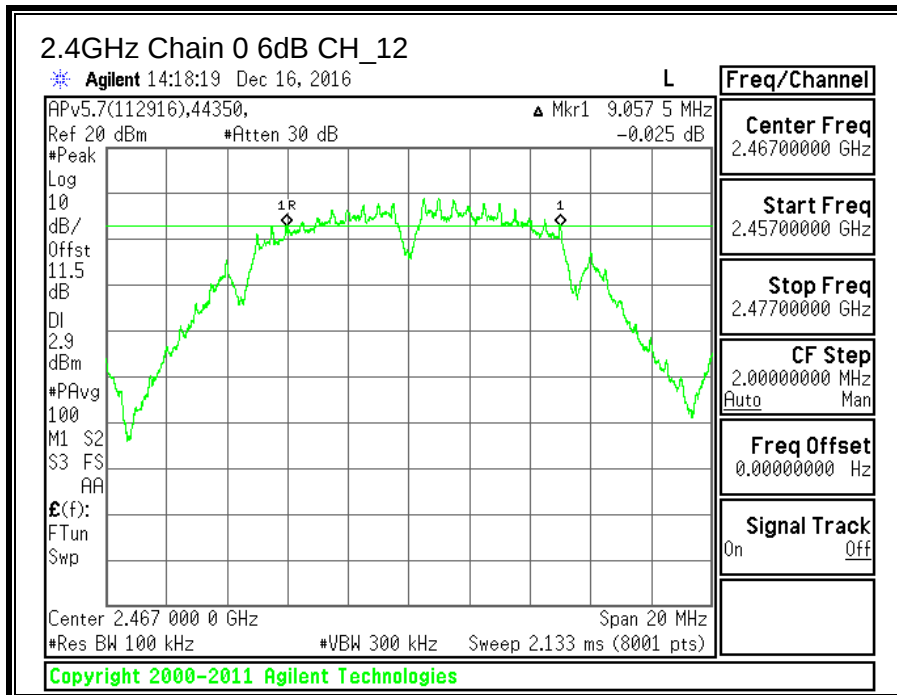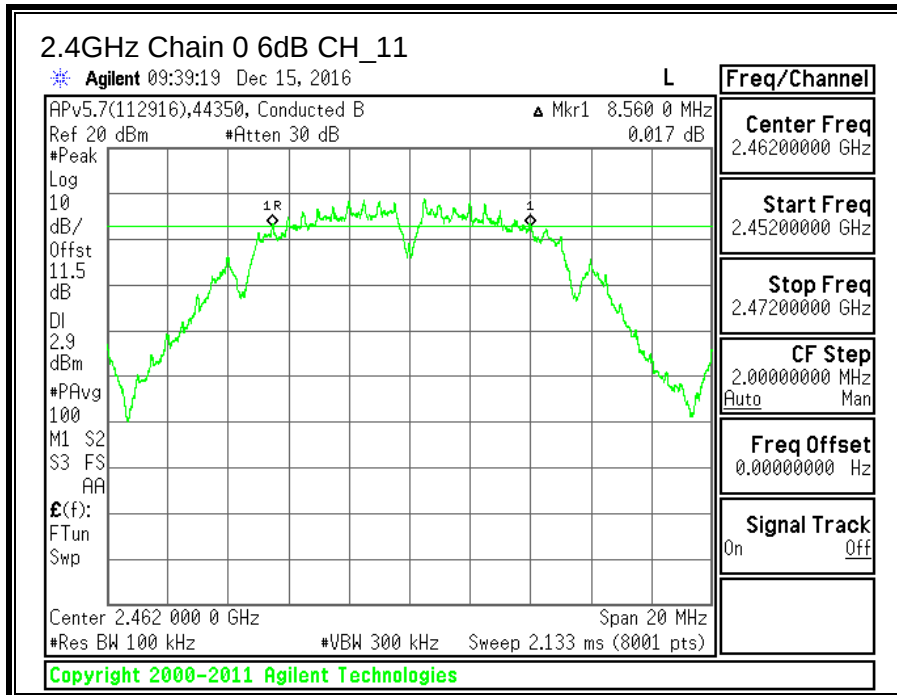

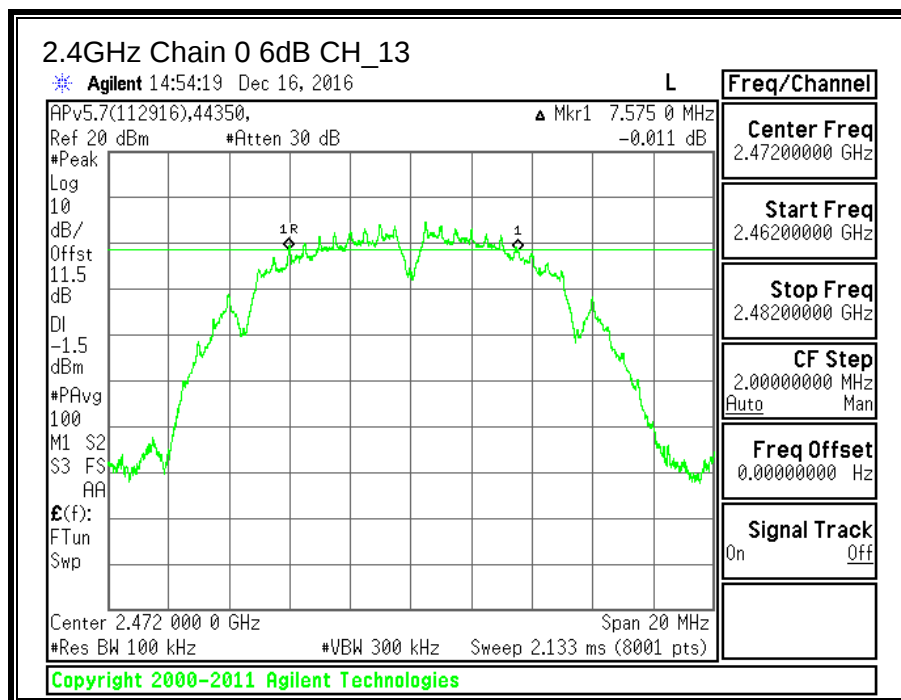

### 11.1.2. 99% BANDWIDTH

#### LIMITS



None; for reporting purposes only.



#### TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

#### RESULTS

| Channel  | Frequency (MHz) | 99% Bandwidth Chain 0 (MHz) |
|----------|-----------------|-----------------------------|
| Low_1    | 2412            | 11.9290                     |
| Middle_6 | 2437            | 11.6923                     |
| High_11  | 2462            | 11.8915                     |
| High_12  | 2467            | 11.8141                     |
| High_13  | 2472            | 10.2808                     |

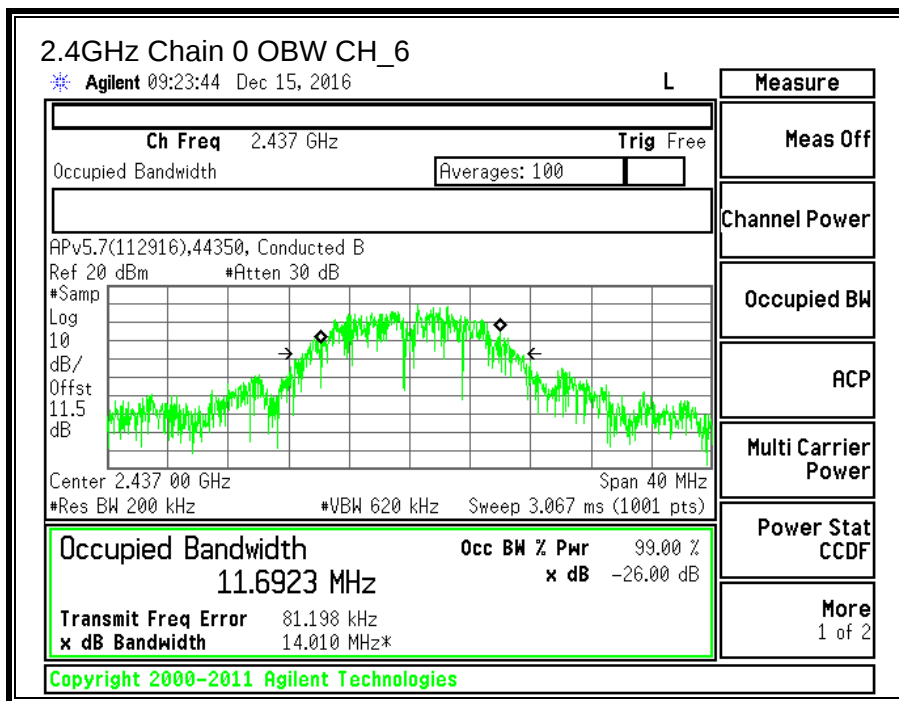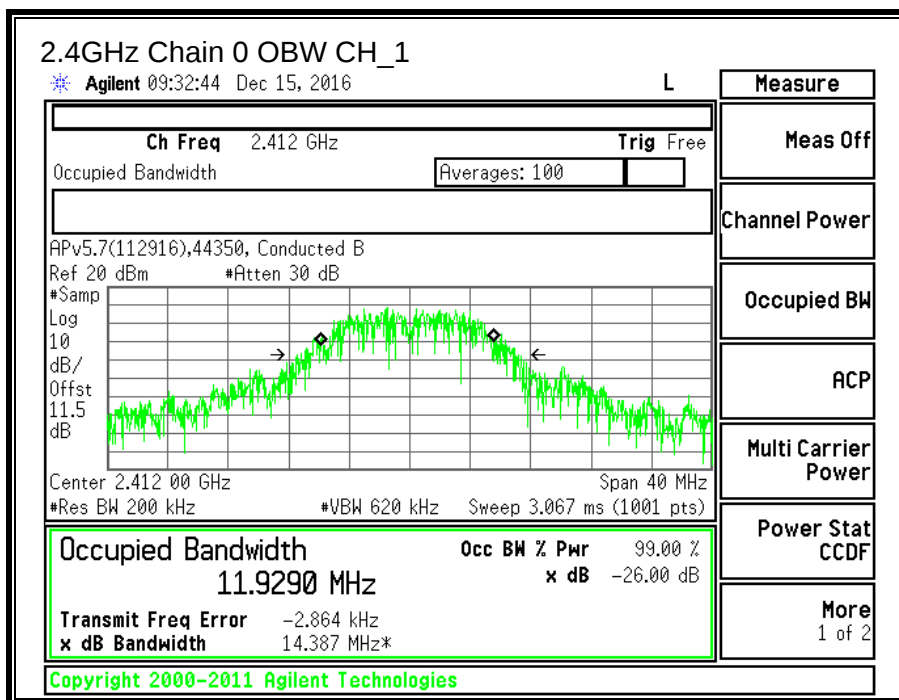

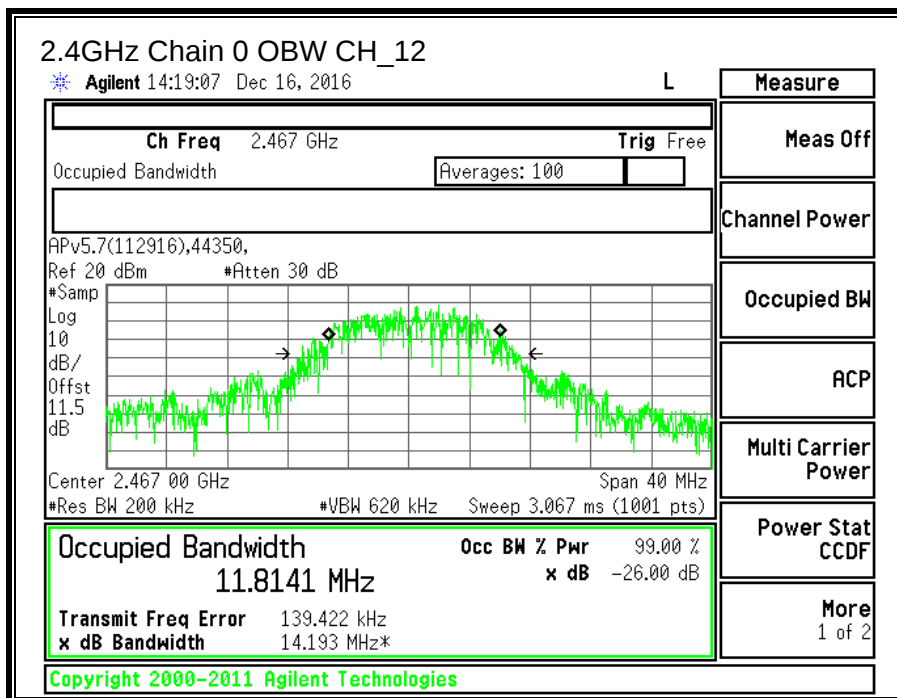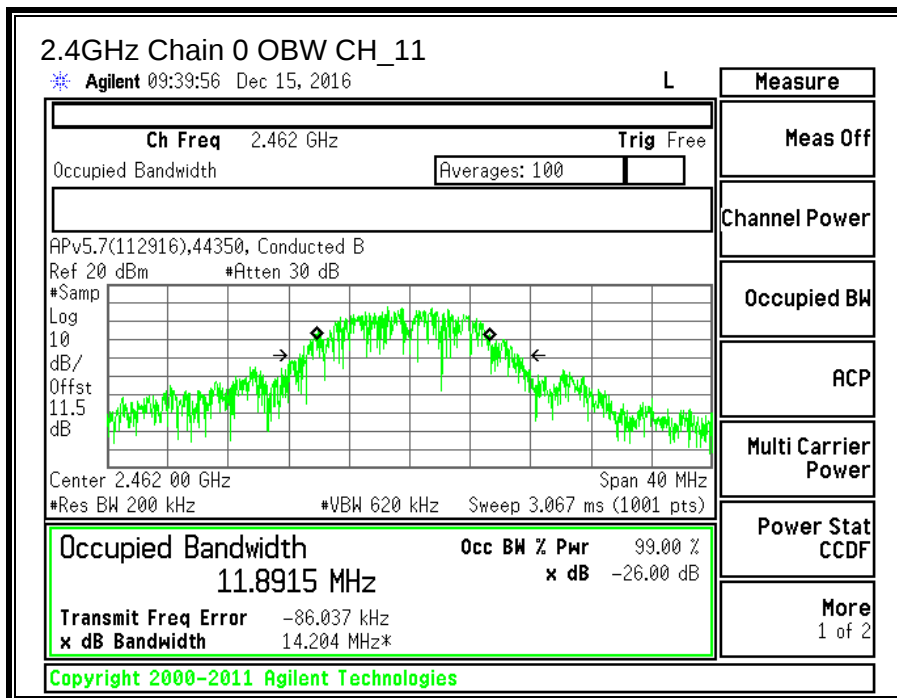

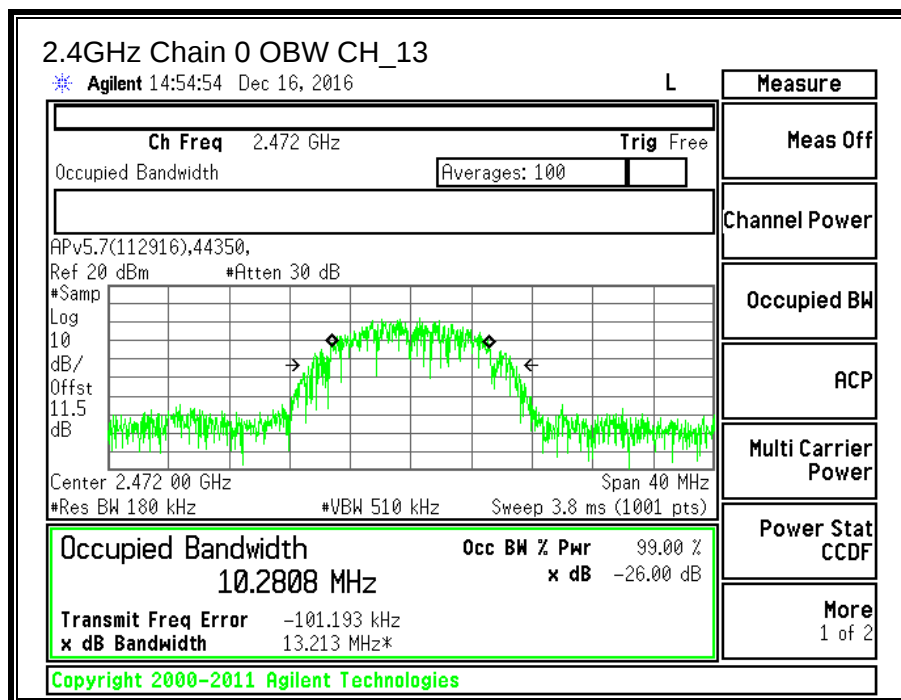

### **11.1.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

KDB 58074 D01 v03r05 Section 9.2.3.2

## RESULTS

|            |       |              |            |
|------------|-------|--------------|------------|
| <b>ID:</b> | 44350 | <b>Date:</b> | 12/19/2016 |
|------------|-------|--------------|------------|

### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low_1   | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid_6   | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_11 | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_12 | 2467               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_13 | 2472               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

### Results

| Channel | Frequency<br>(MHz) | Core 0<br>Meas<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|----------------------------------|-------------------------|----------------|
| Low_1   | 2412               | 18.10                            | 30.00                   | -11.90         |
| Mid_6   | 2437               | 18.10                            | 30.00                   | -11.90         |
| High_11 | 2462               | 18.00                            | 30.00                   | -12.00         |
| High_12 | 2467               | 16.91                            | 30.00                   | -13.09         |
| High_13 | 2472               | 12.16                            | 30.00                   | -17.84         |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

#### 11.1.4. POWER SPECTRAL DENSITY

##### LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

##### TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



##### RESULTS


|                           |      |                                               |
|---------------------------|------|-----------------------------------------------|
| <b>Duty Cycle CF (dB)</b> | 0.00 | <b>Included in Calculations of Corr'd PSD</b> |
|---------------------------|------|-----------------------------------------------|

##### **PSD Results**



| <b>Channel</b> | <b>Frequency<br/>(MHz)</b> | <b>Core 0<br/>Meas<br/>(dBm)</b> | <b>Limit<br/>(dBm)</b> | <b>Margin<br/>(dB)</b> |
|----------------|----------------------------|----------------------------------|------------------------|------------------------|
| Low_1          | 2412                       | -3.559                           | 8.0                    | -11.6                  |
| Mid_6          | 2437                       | -4.215                           | 8.0                    | -12.2                  |
| High_11        | 2462                       | -4.814                           | 8.0                    | -12.8                  |
| High_12        | 2467                       | -5.049                           | 8.0                    | -13.0                  |
| High_13        | 2472                       | -9.208                           | 8.0                    | -17.2                  |

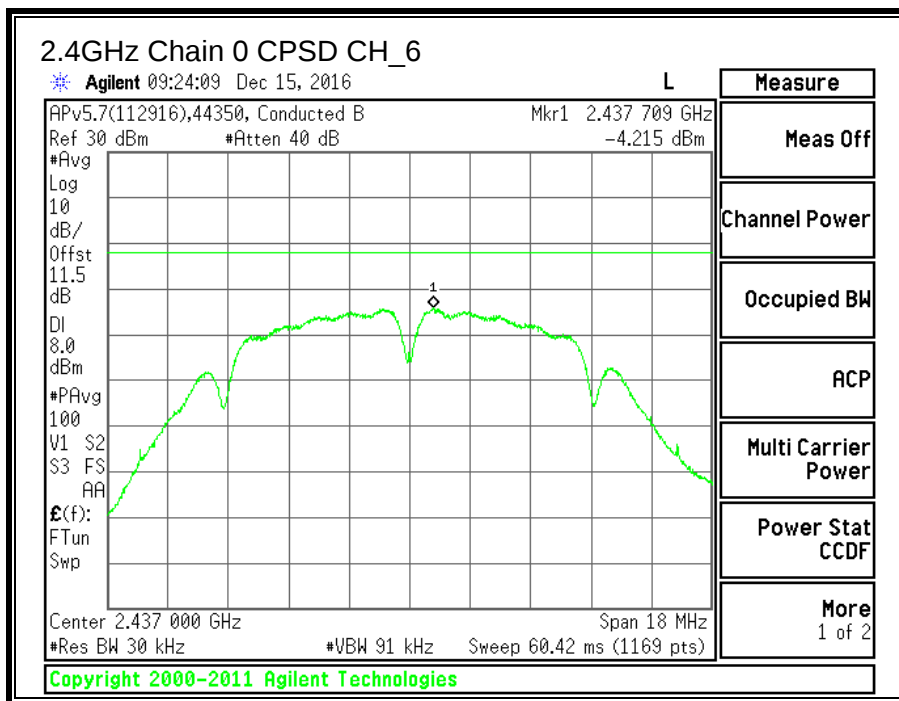
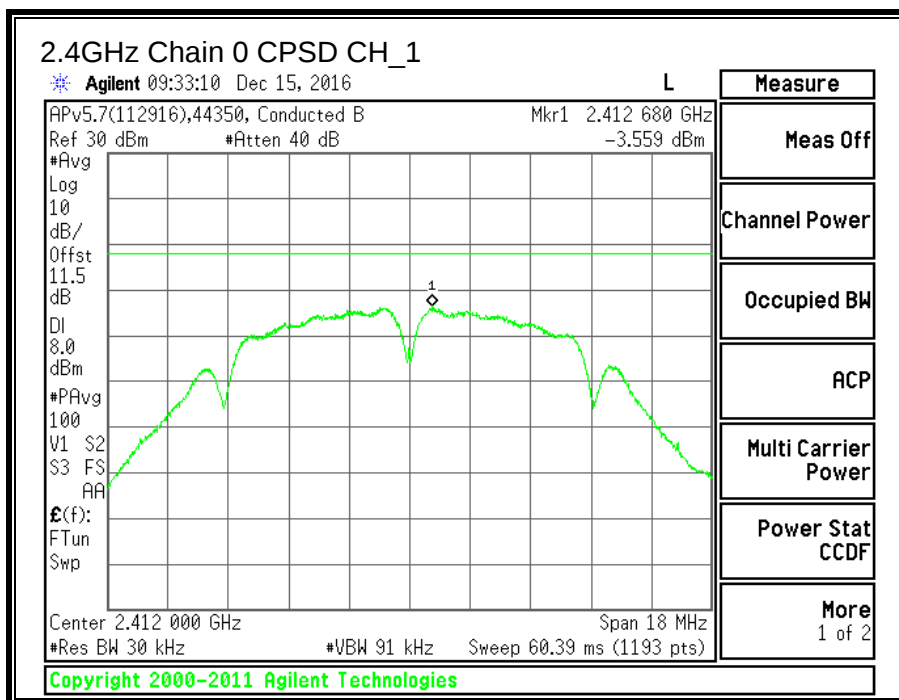


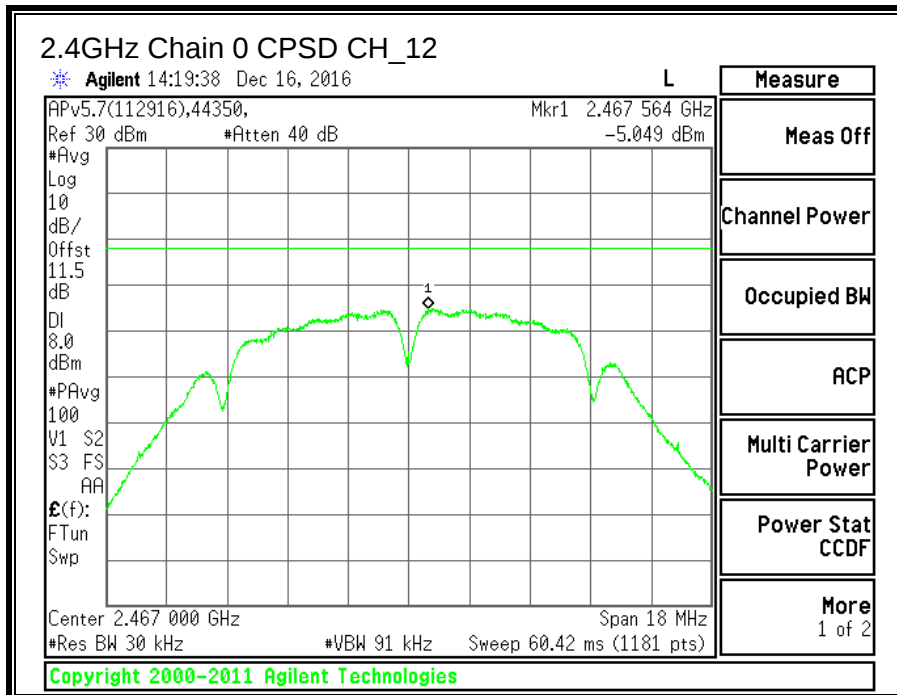
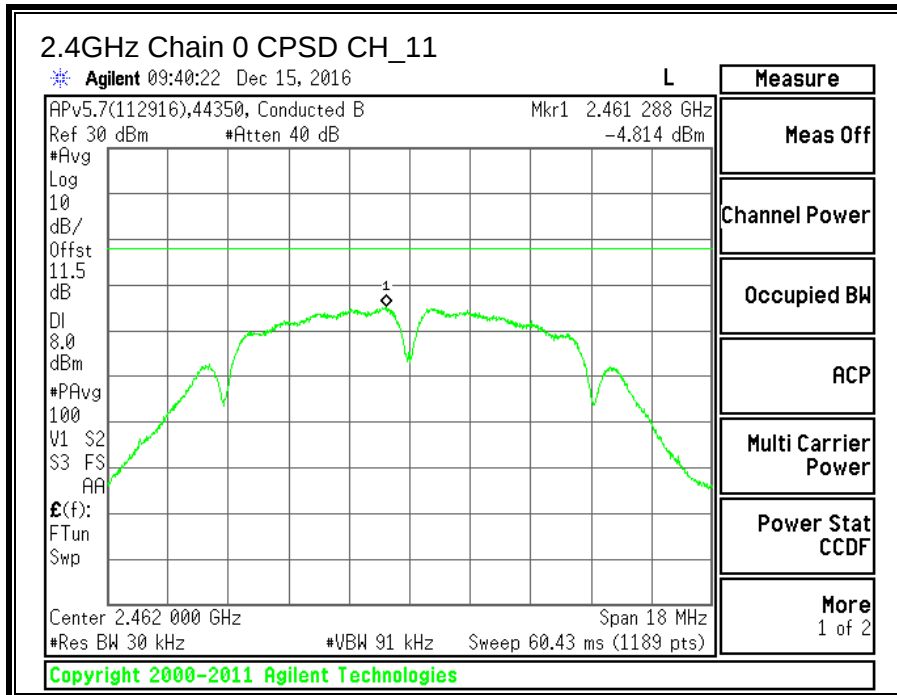



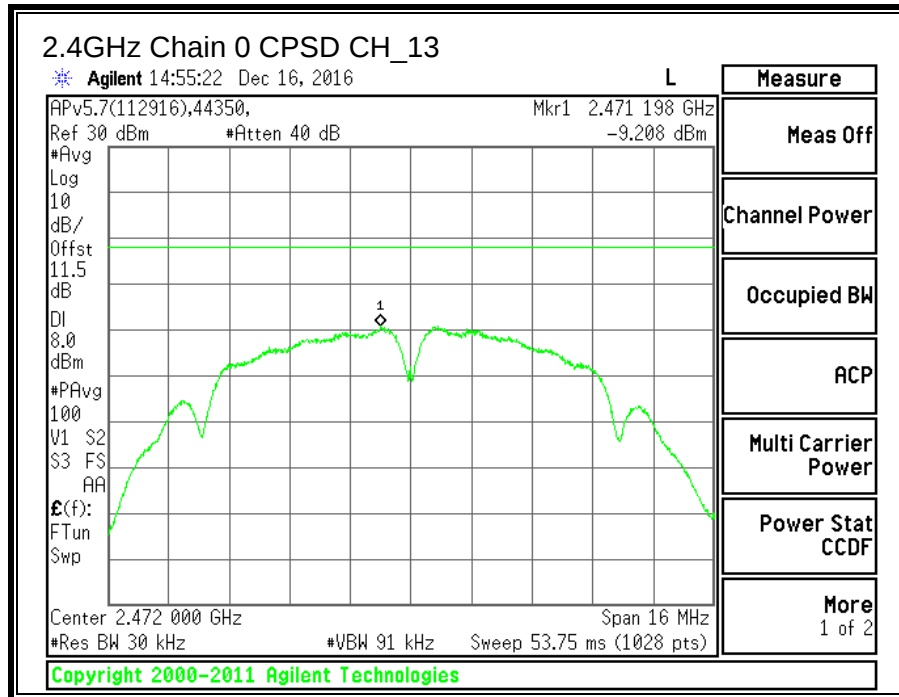




### 11.1.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

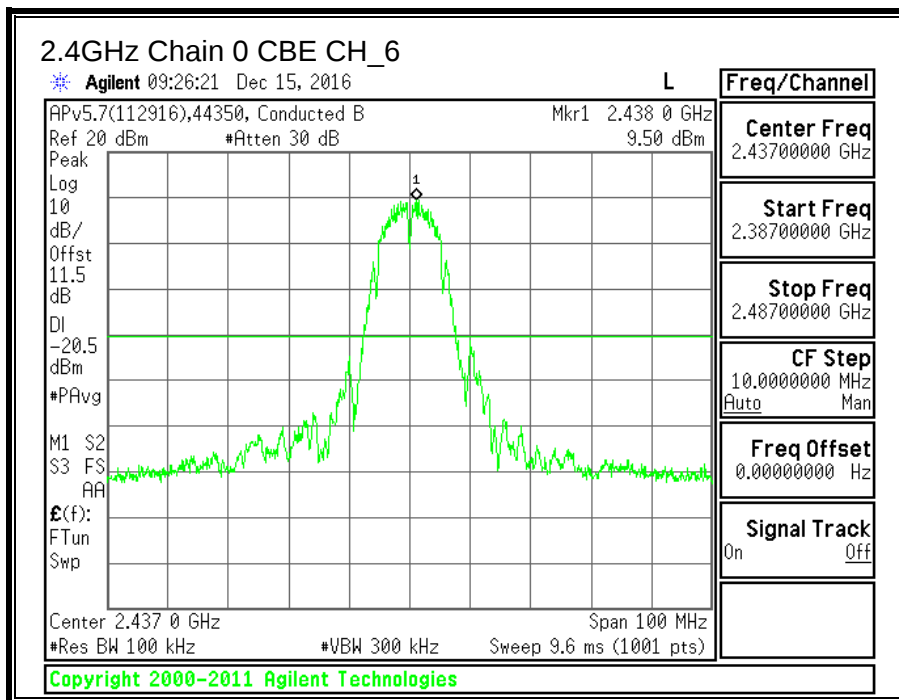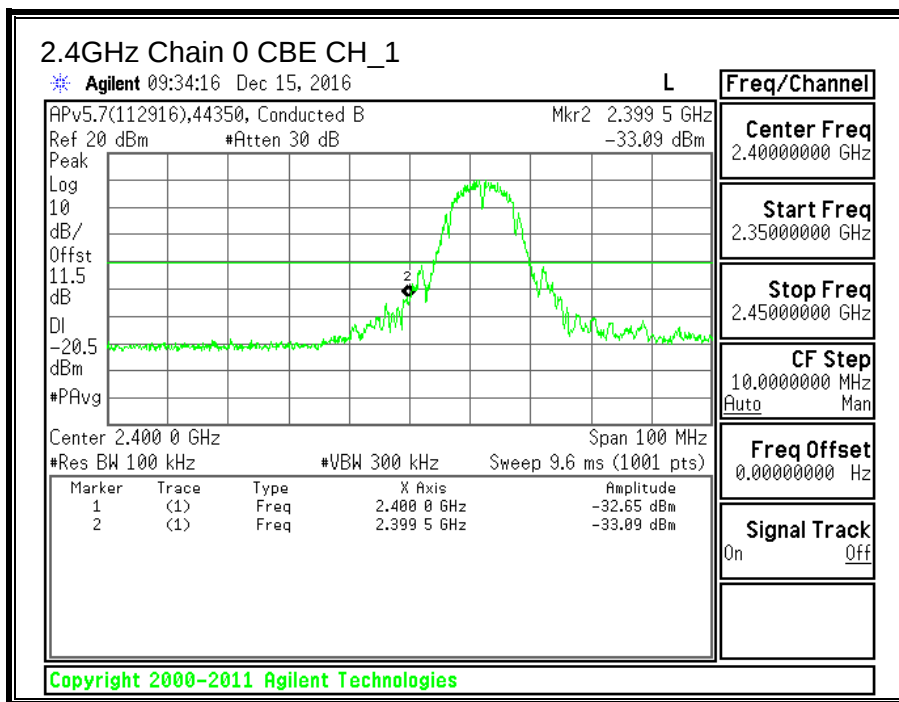

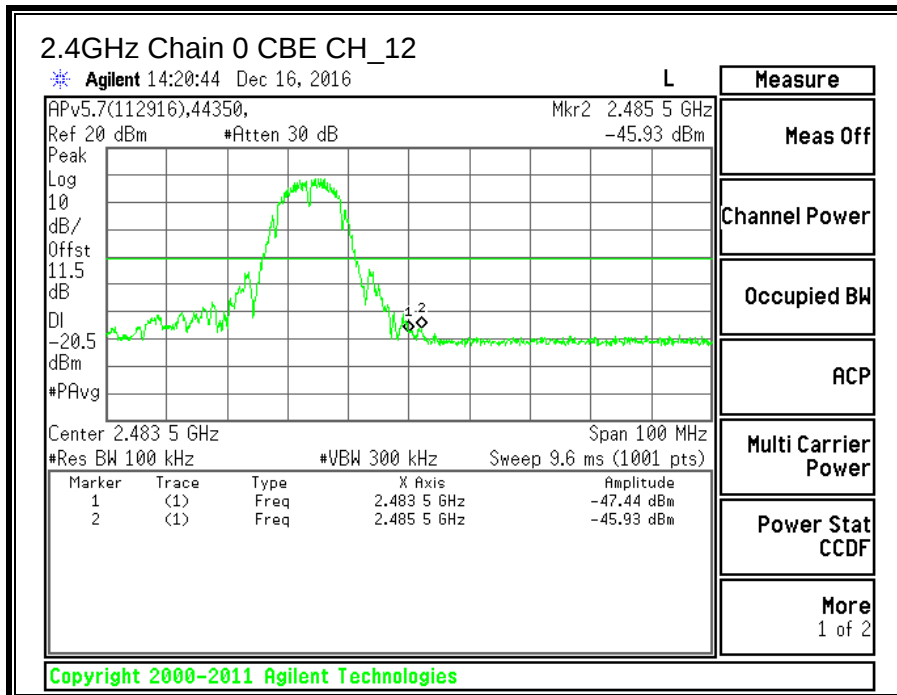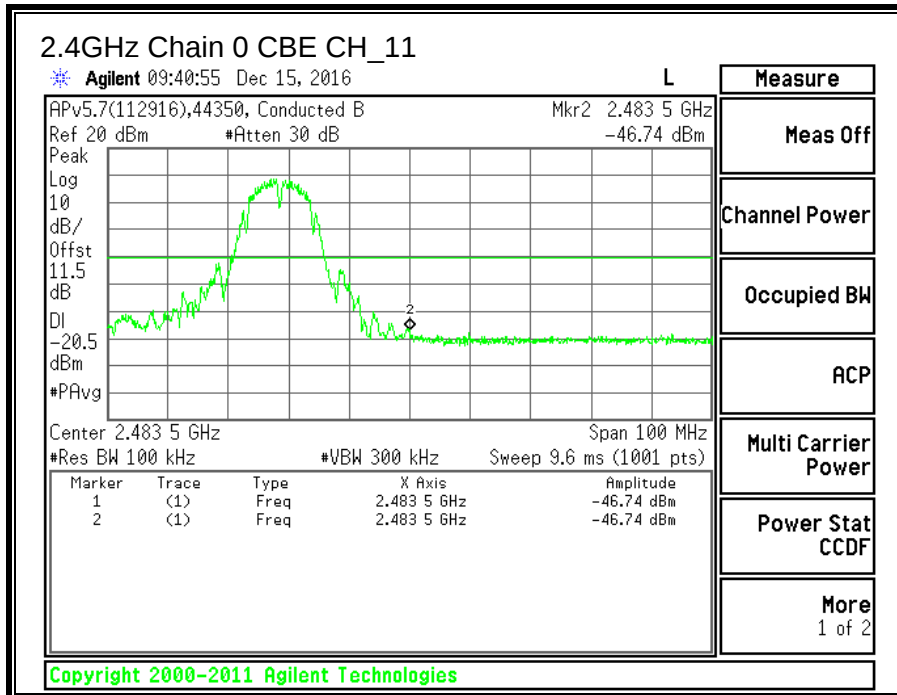

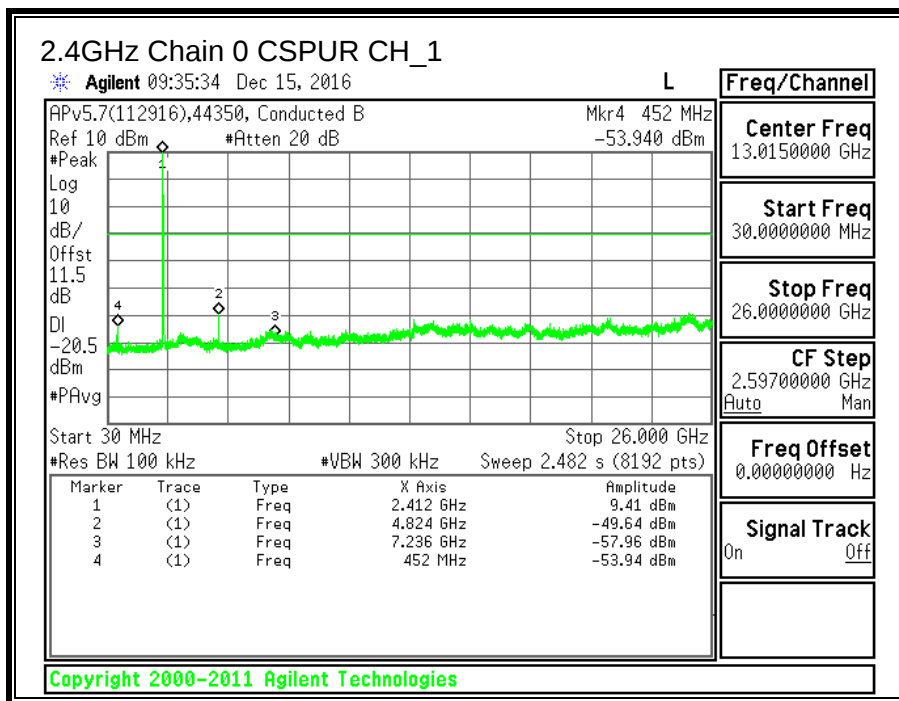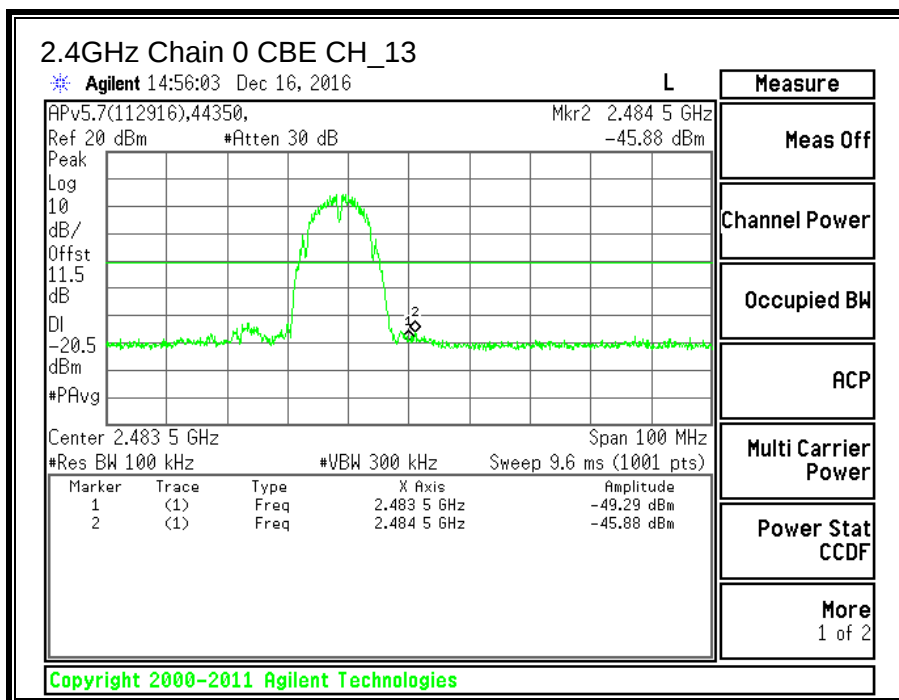

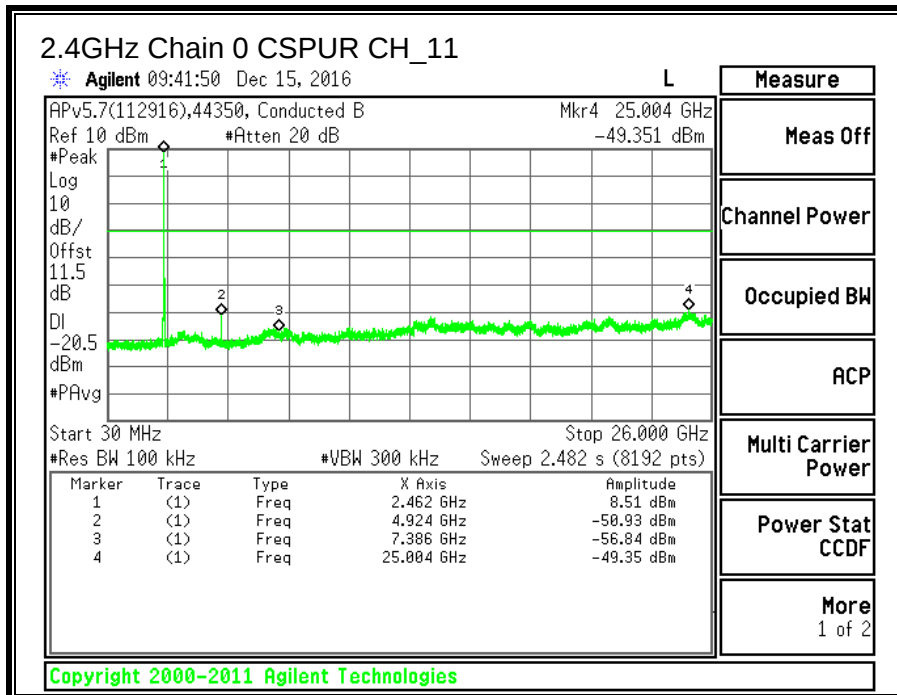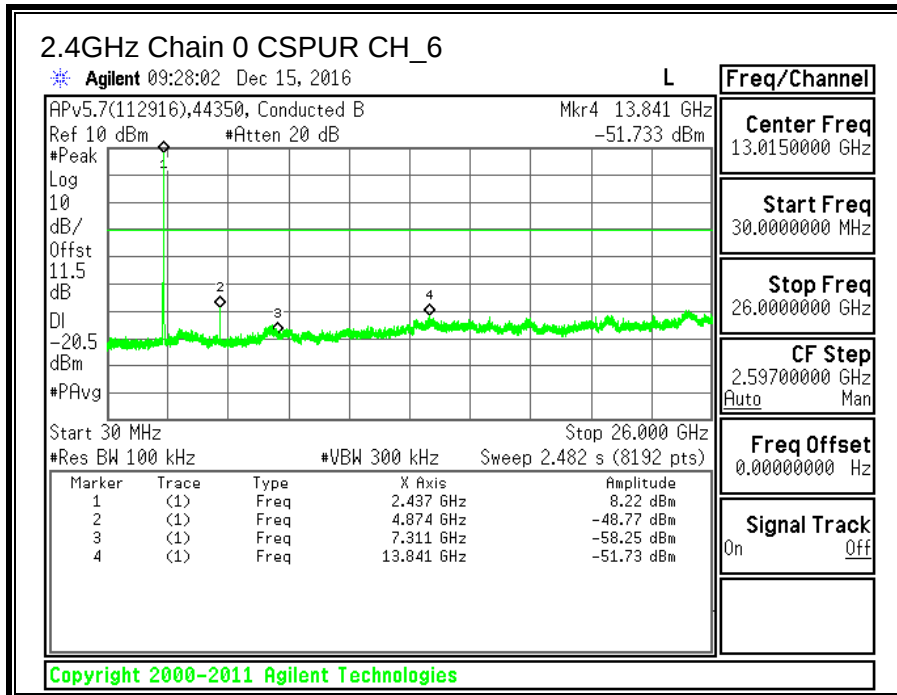

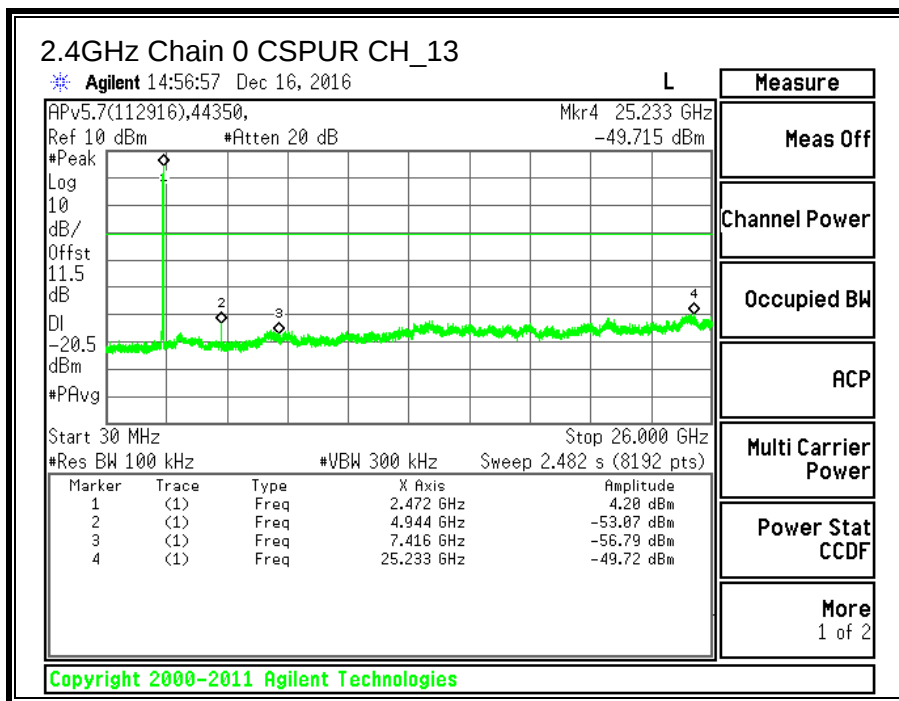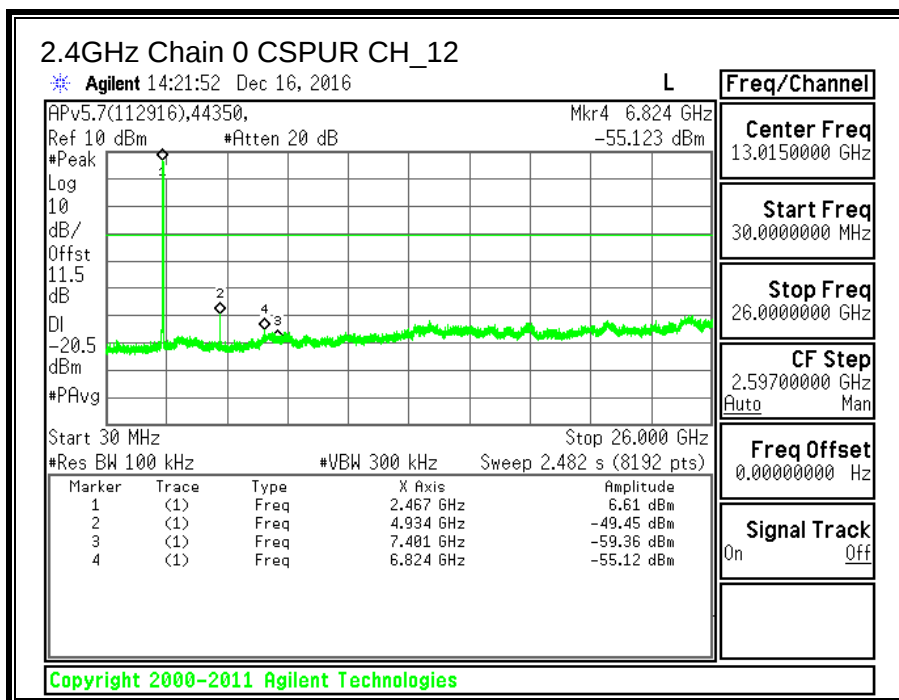

## 11.2. 11b Chain 1 SISO MODE IN THE 2.4GHz BAND

### 11.2.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



#### TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

#### RESULTS

| Channel  | Frequency (MHz) | 6 dB BW Chain 1 (MHz) | Minimum Limit (MHz) |
|----------|-----------------|-----------------------|---------------------|
| Low_1    | 2412            | 9.0700                | 0.5                 |
| Middle_6 | 2437            | 9.0625                | 0.5                 |
| High_11  | 2462            | 9.0975                | 0.5                 |
| High_12  | 2467            | 9.0775                | 0.5                 |
| High_13  | 2472            | 7.5725                | 0.5                 |

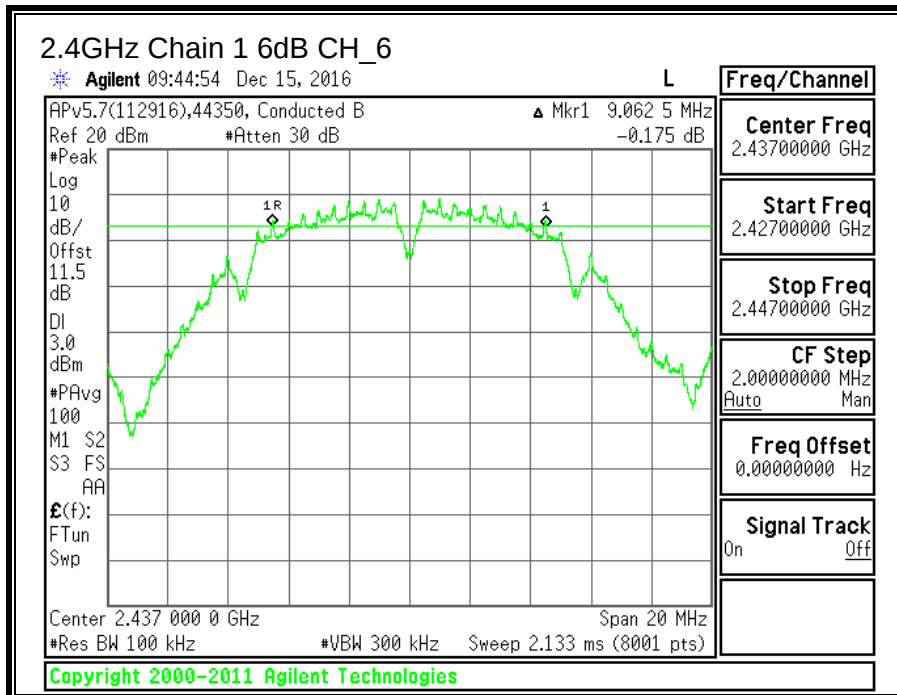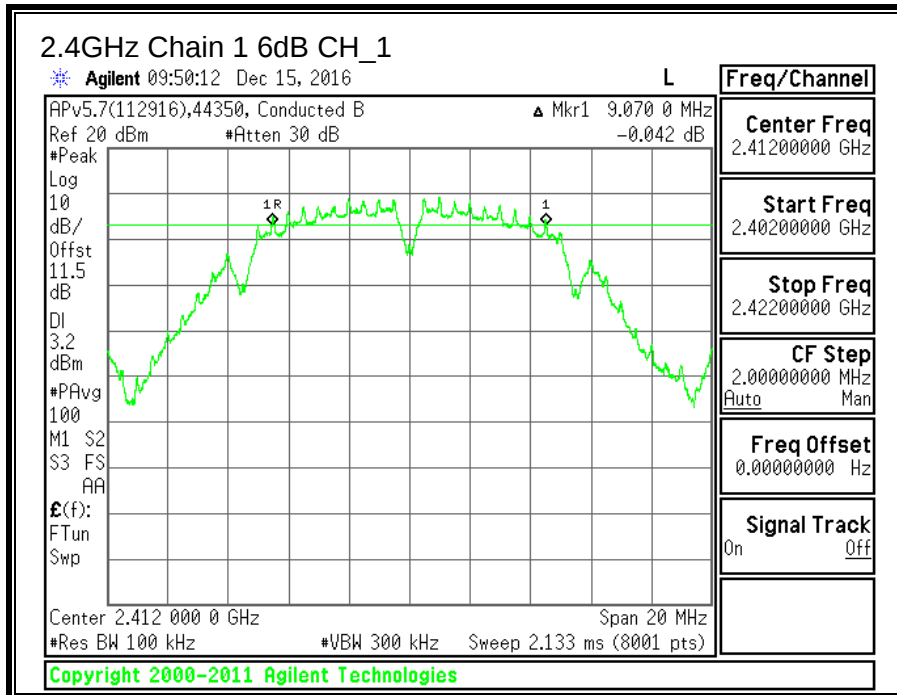

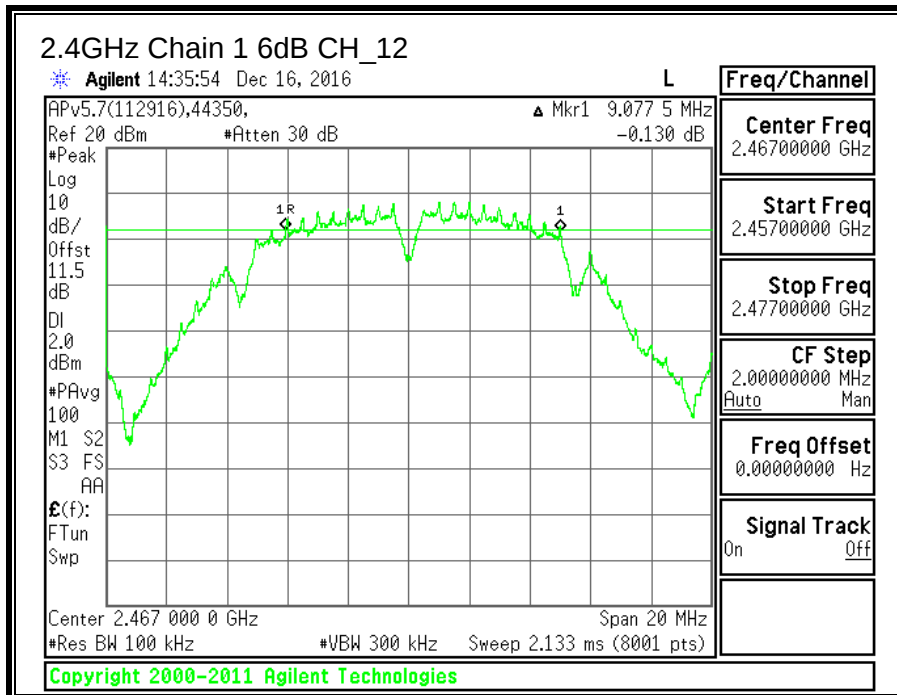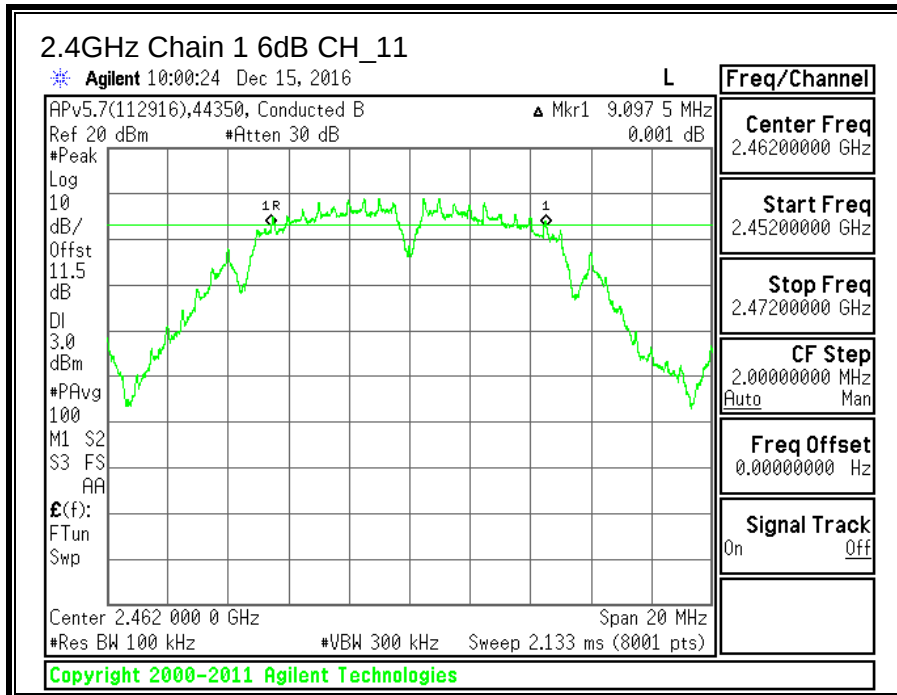

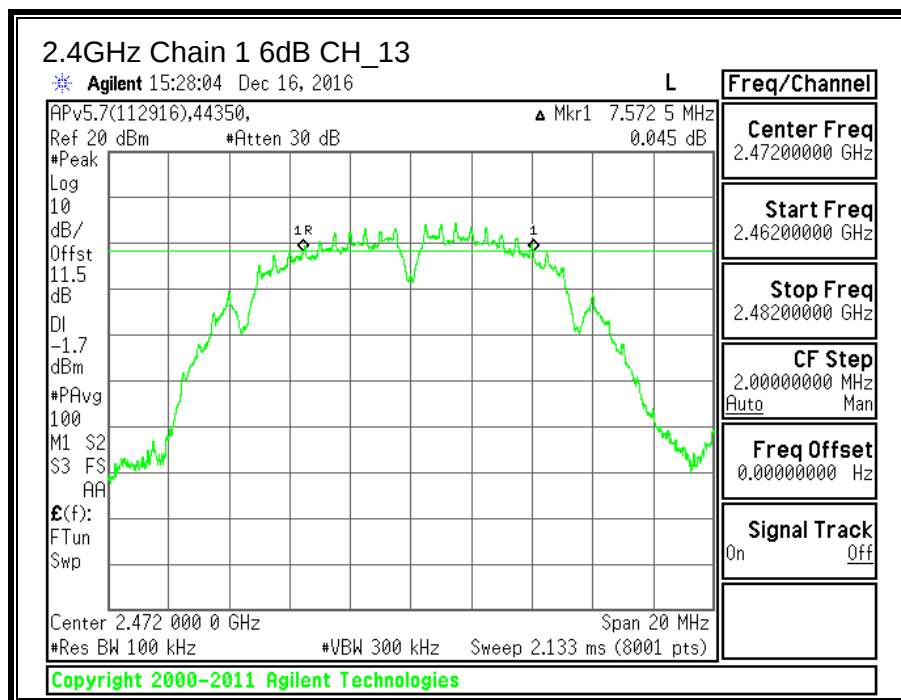

### 11.2.2. 99% BANDWIDTH

#### LIMITS



None; for reporting purposes only.



#### TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

#### RESULTS

| Channel  | Frequency (MHz) | 99% Bandwidth Chain 1 (MHz) |
|----------|-----------------|-----------------------------|
| Low_1    | 2412            | 11.8602                     |
| Middle_6 | 2437            | 11.8139                     |
| High_11  | 2462            | 11.9165                     |
| High_12  | 2467            | 11.9487                     |
| High_13  | 2472            | 10.6639                     |

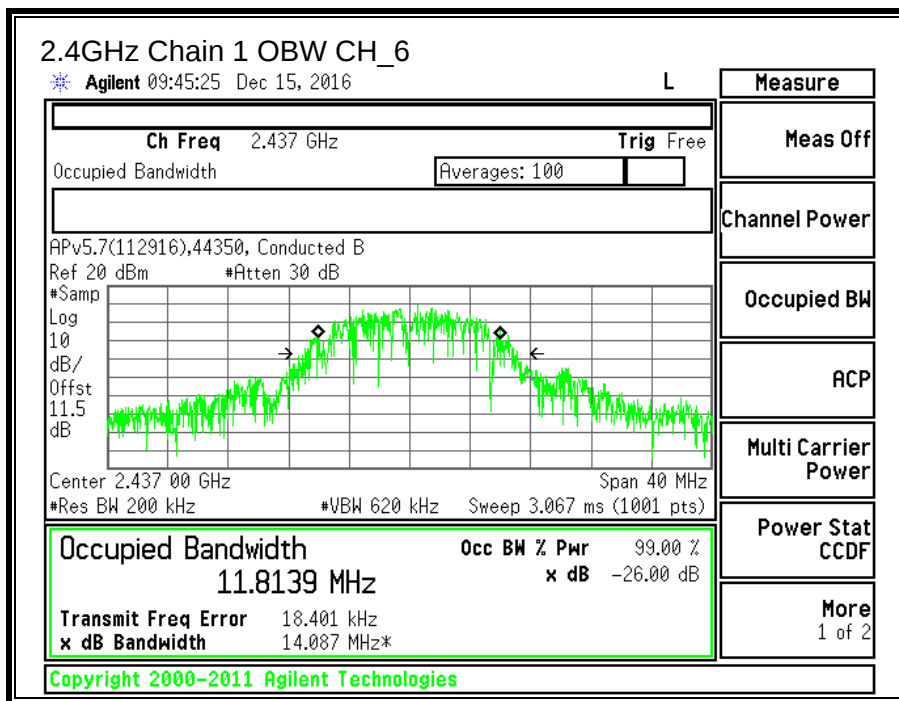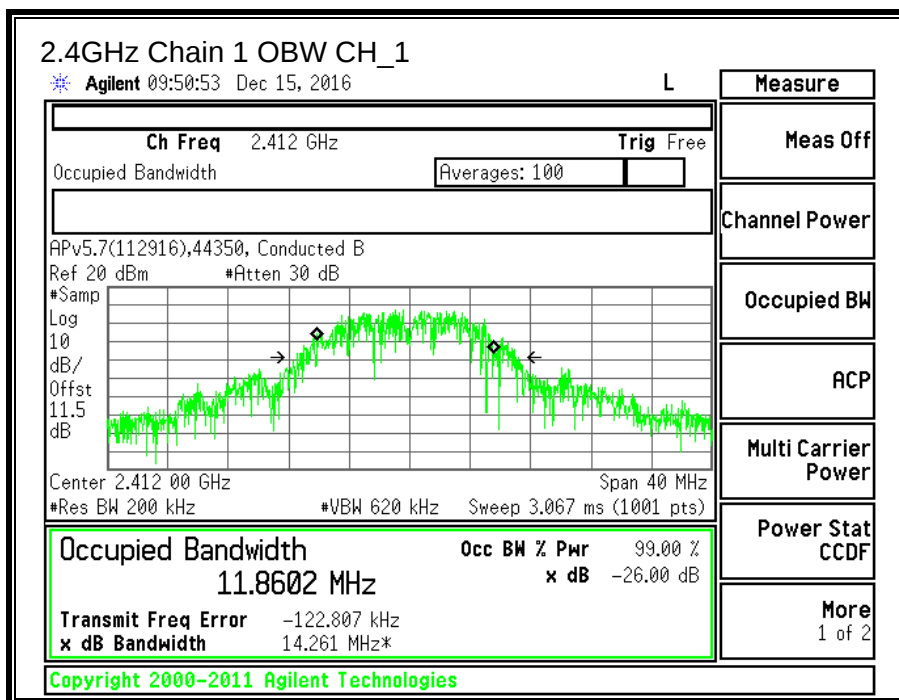

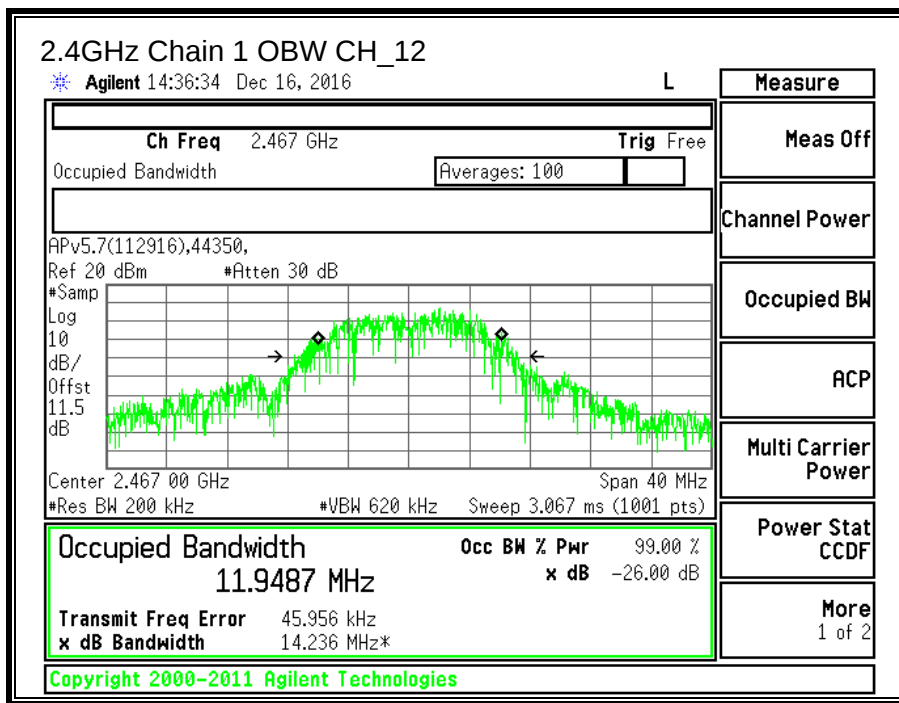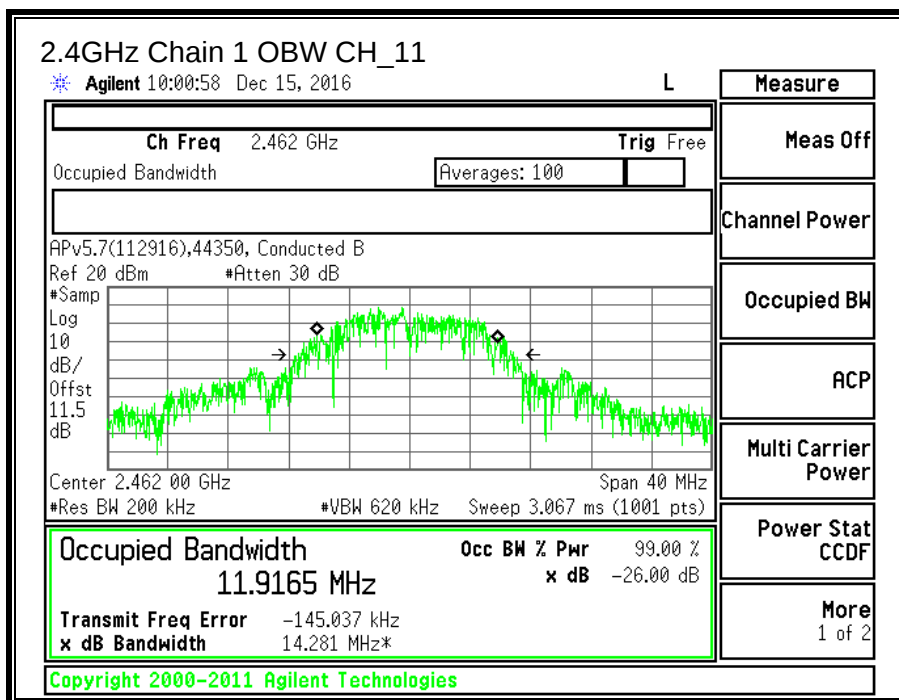

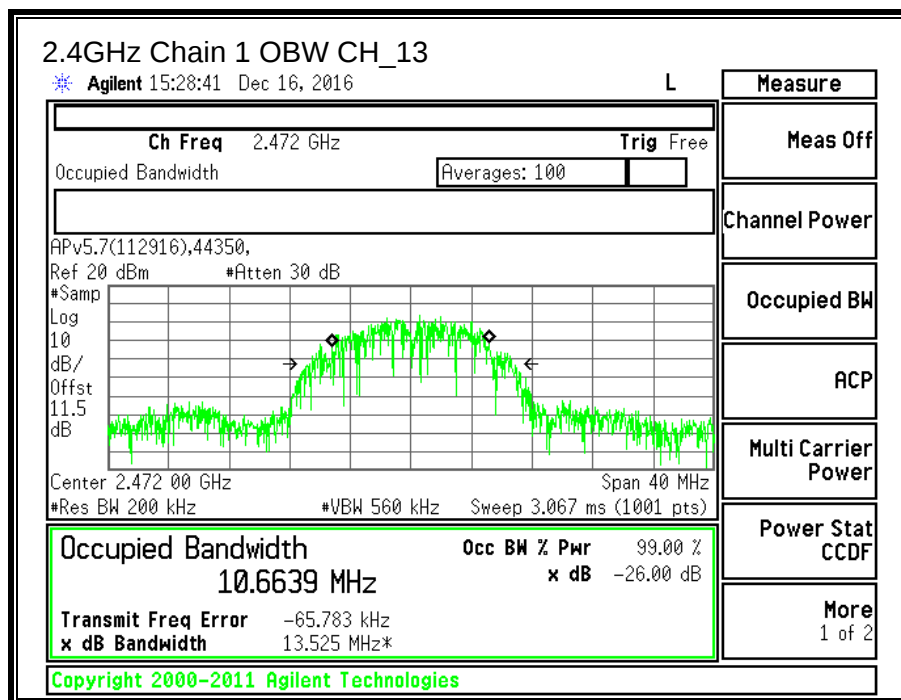

### **11.2.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

KDB 58074 D01 v03r05 Section 9.2.3.2

## RESULTS

|            |       |              |            |
|------------|-------|--------------|------------|
| <b>ID:</b> | 44350 | <b>Date:</b> | 12/19/2016 |
|------------|-------|--------------|------------|

### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low_1   | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid_6   | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_11 | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_12 | 2467               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_13 | 2472               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

### Results

| Channel | Frequency<br>(MHz) | Core 1<br>Meas<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|----------------------------------|-------------------------|----------------|
| Low_1   | 2412               | 18.40                            | 30.00                   | -11.60         |
| Mid_6   | 2437               | 18.40                            | 30.00                   | -11.60         |
| High_11 | 2462               | 18.40                            | 30.00                   | -11.60         |
| High_12 | 2467               | 16.92                            | 30.00                   | -13.08         |
| High_13 | 2472               | 12.09                            | 30.00                   | -17.91         |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

## 11.2.4. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

### TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



### RESULTS


|                    |      |                                        |
|--------------------|------|----------------------------------------|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|----------------------------------------|

#### PSD Results



| Channel | Frequency<br>(MHz) | Core 1<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-------------------------|----------------|----------------|
| Low_1   | 2412               | -4.239                  | 8.0            | -12.2          |
| Mid_6   | 2437               | -4.480                  | 8.0            | -12.5          |
| High_11 | 2462               | -4.522                  | 8.0            | -12.5          |
| High_12 | 2467               | -5.350                  | 8.0            | -13.4          |
| High_13 | 2472               | -9.542                  | 8.0            | -17.5          |

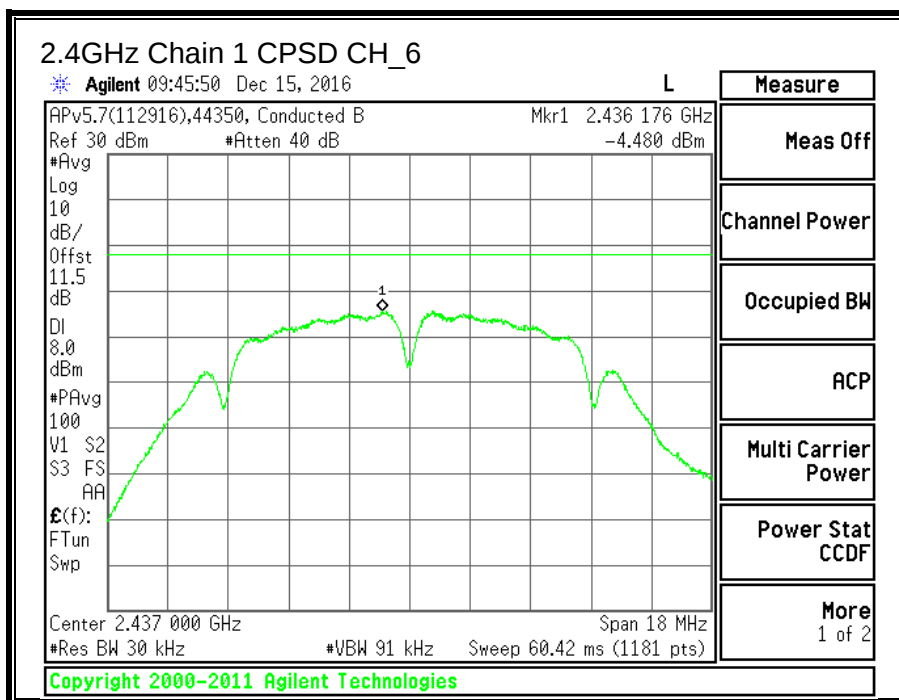
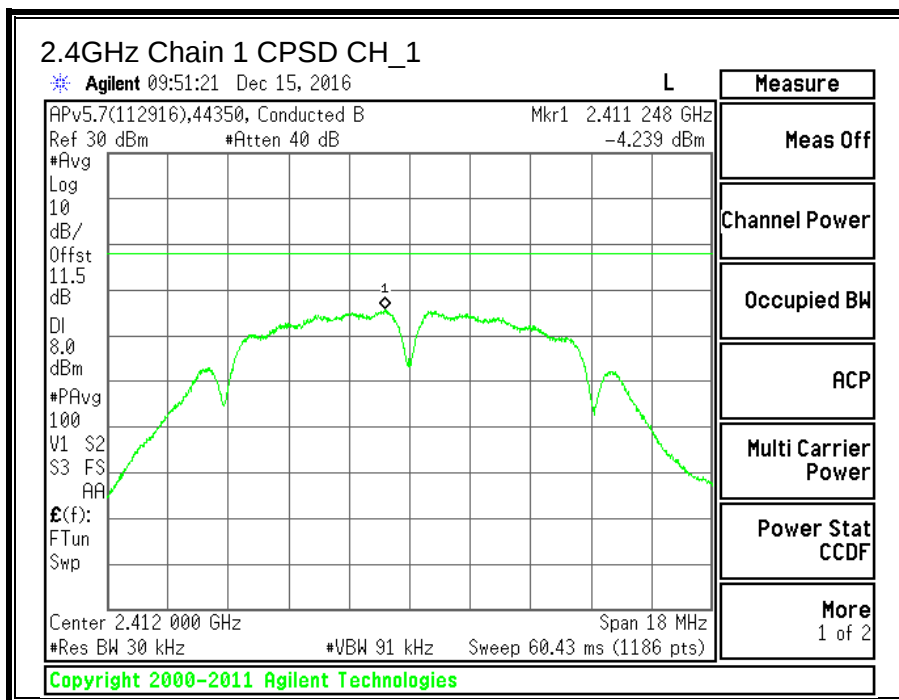


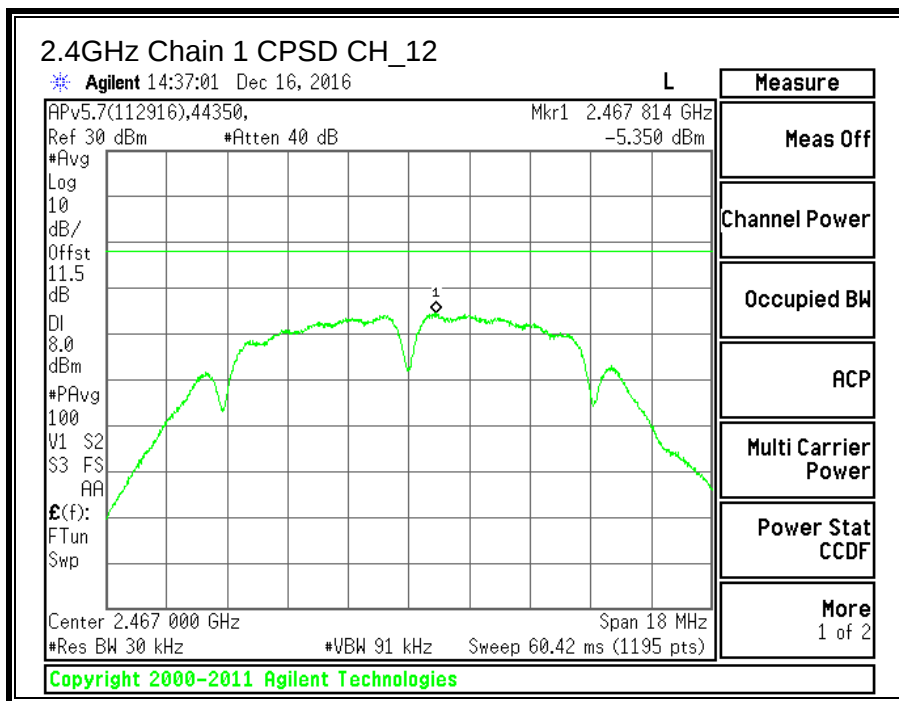
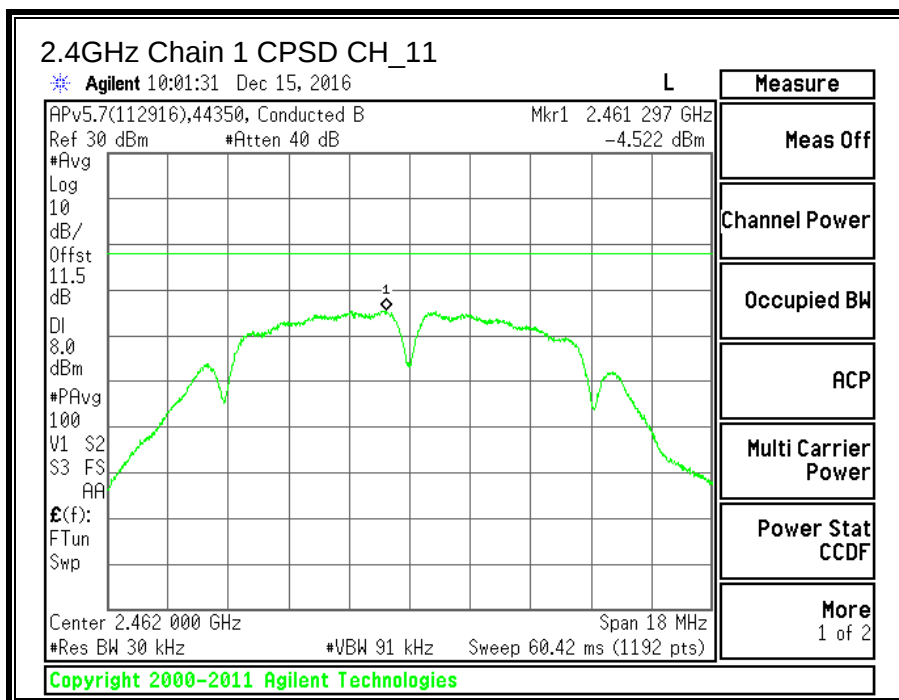



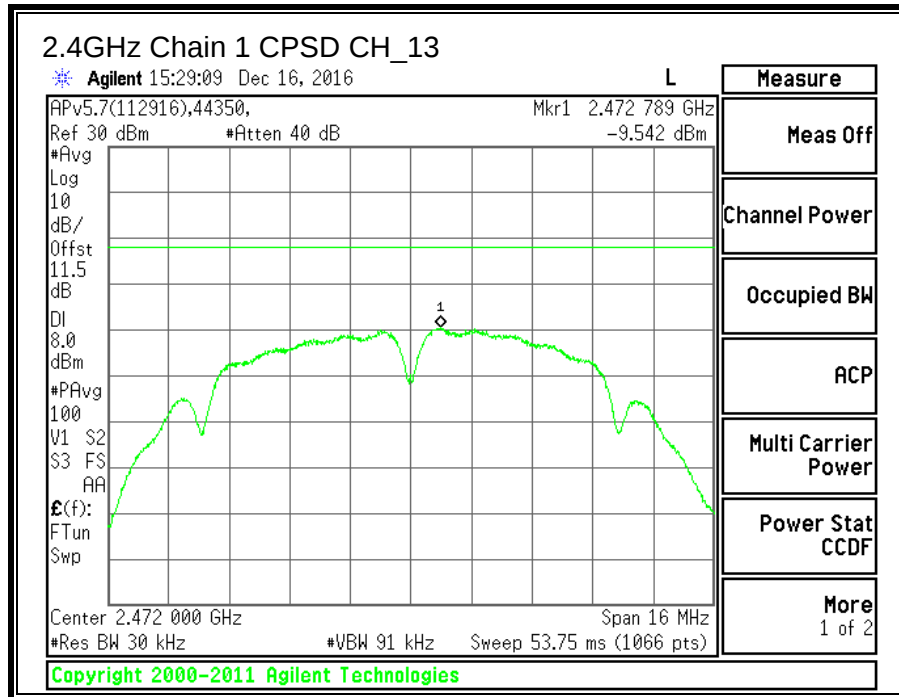




## 11.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

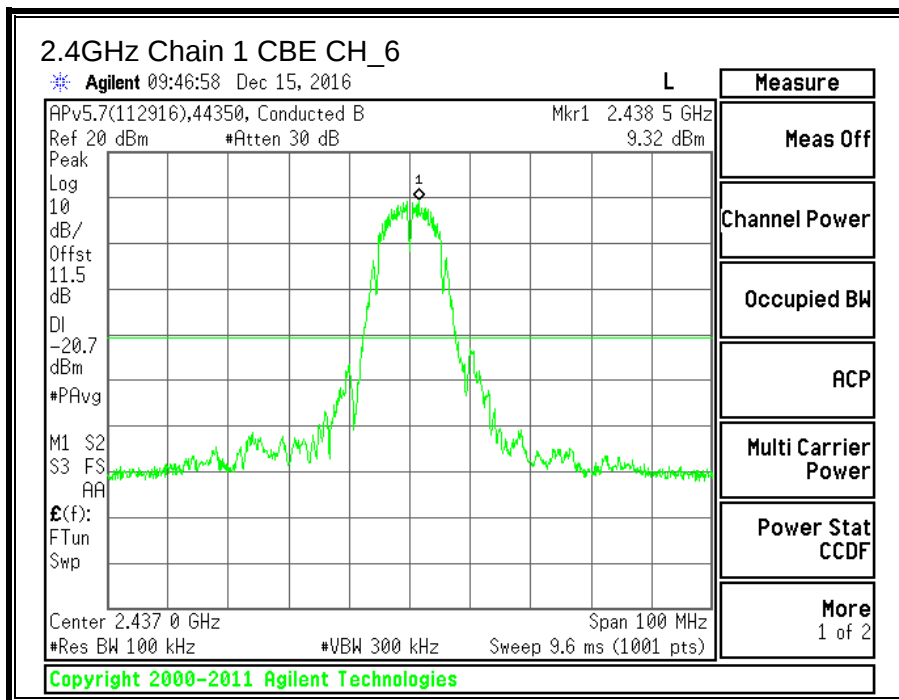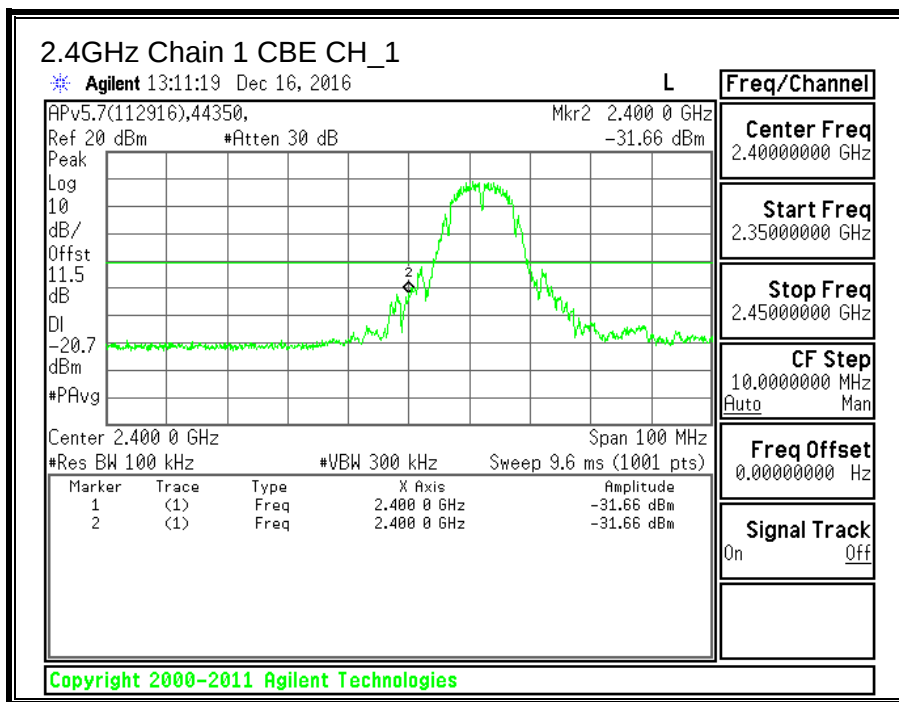

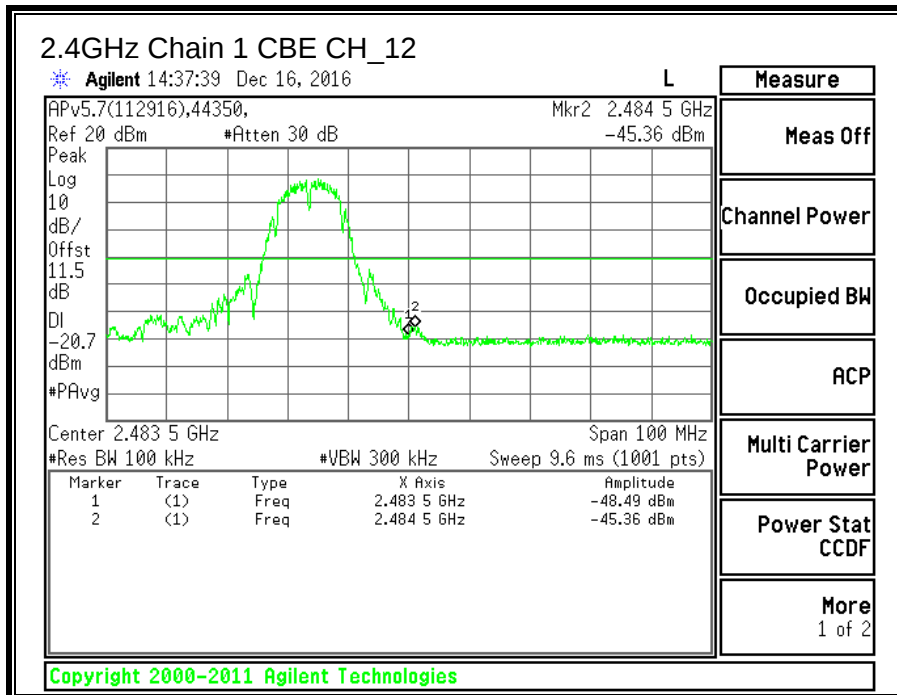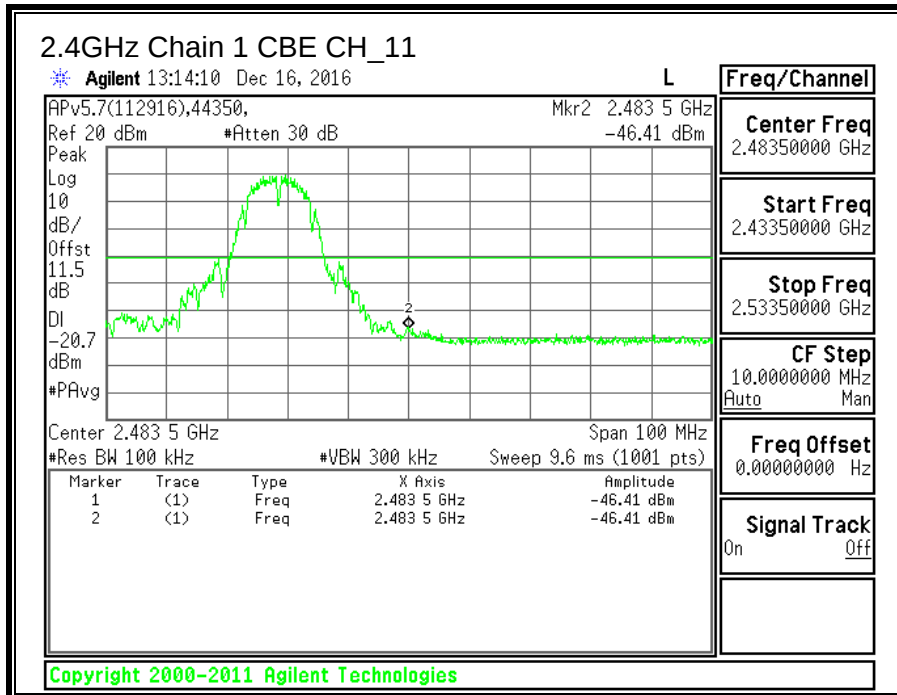

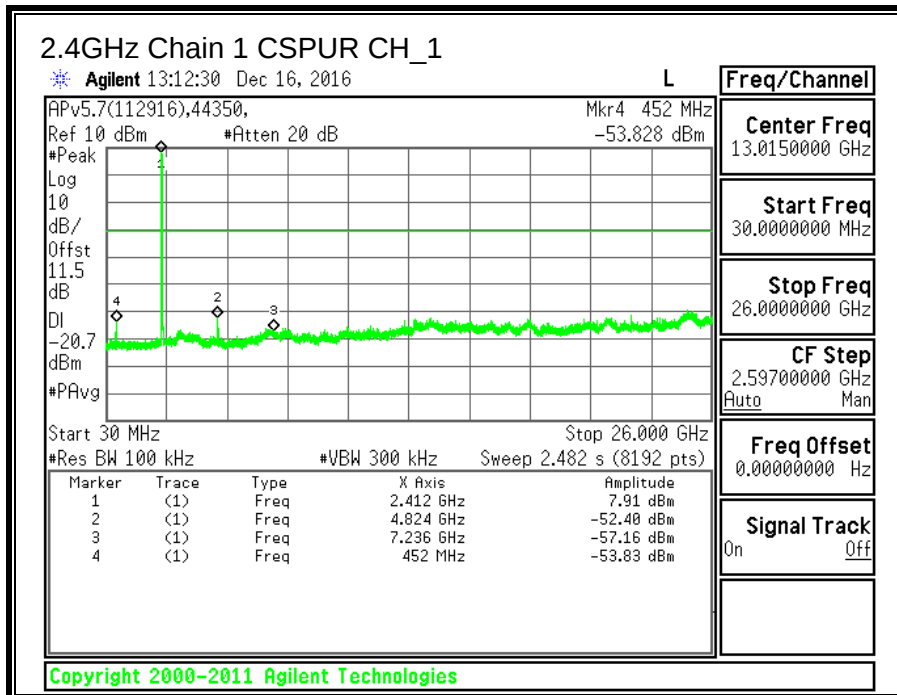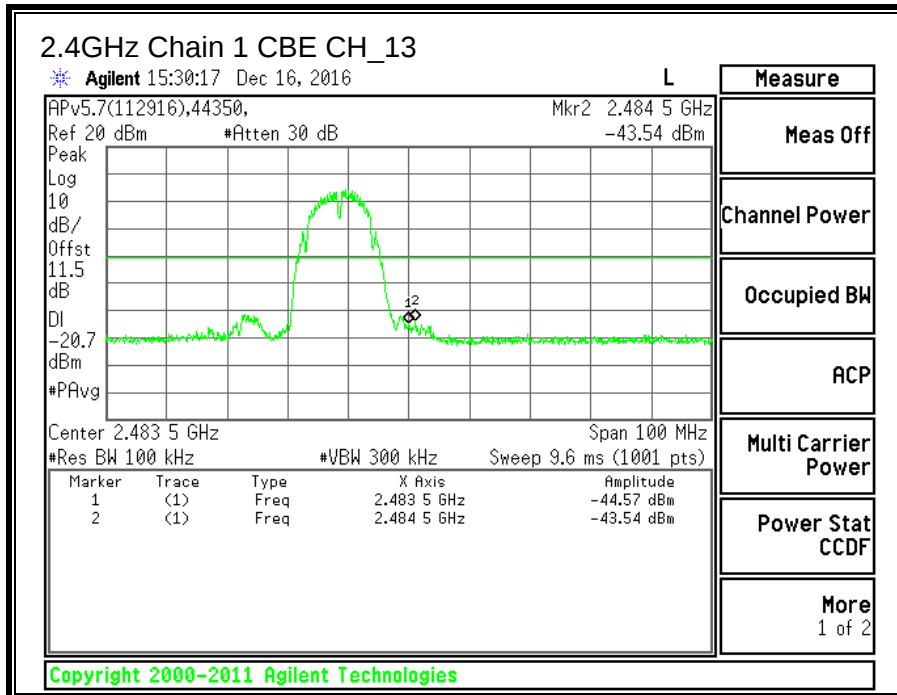

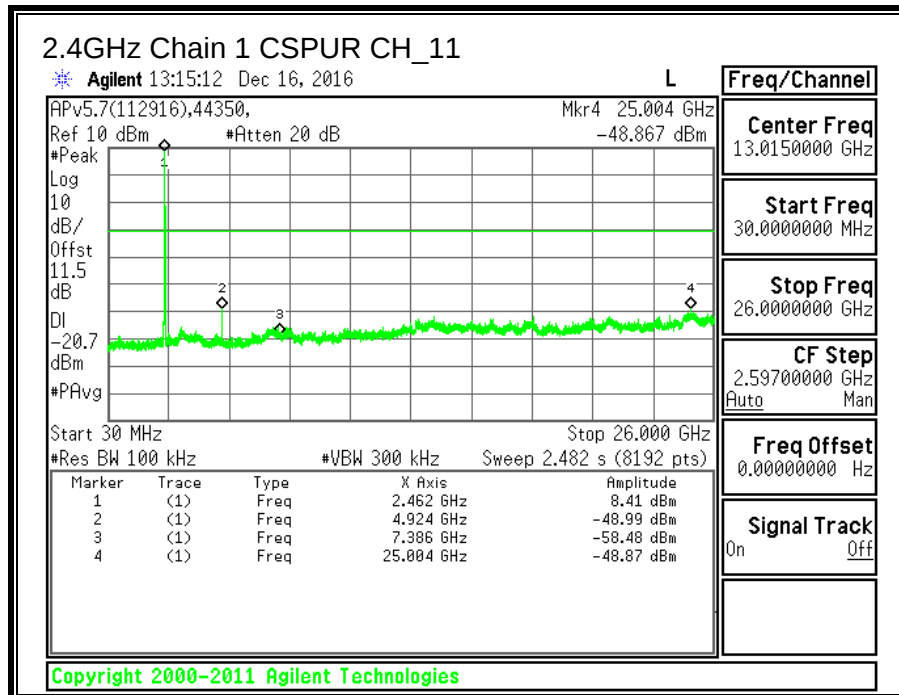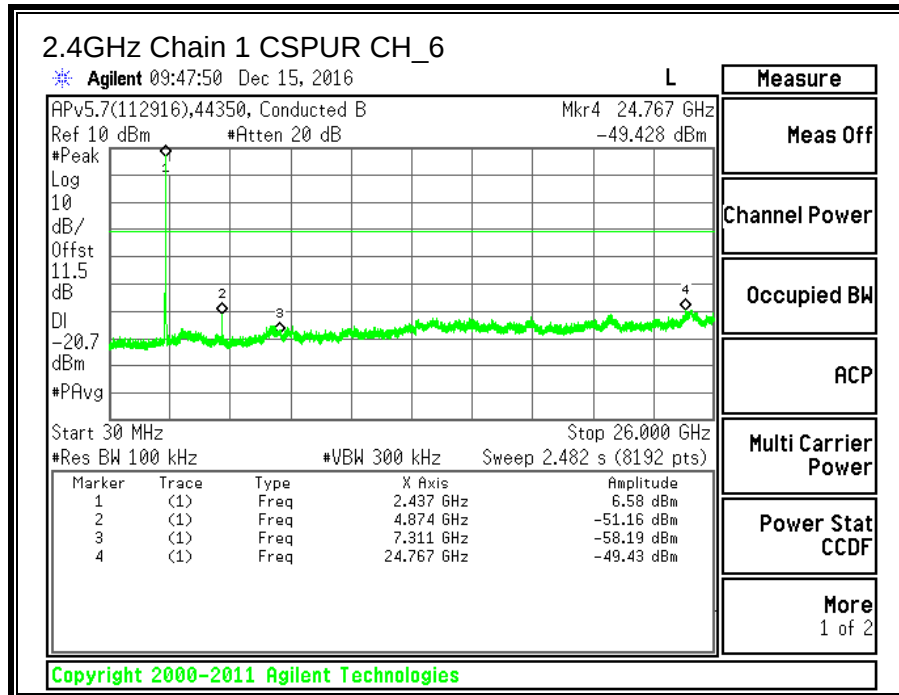

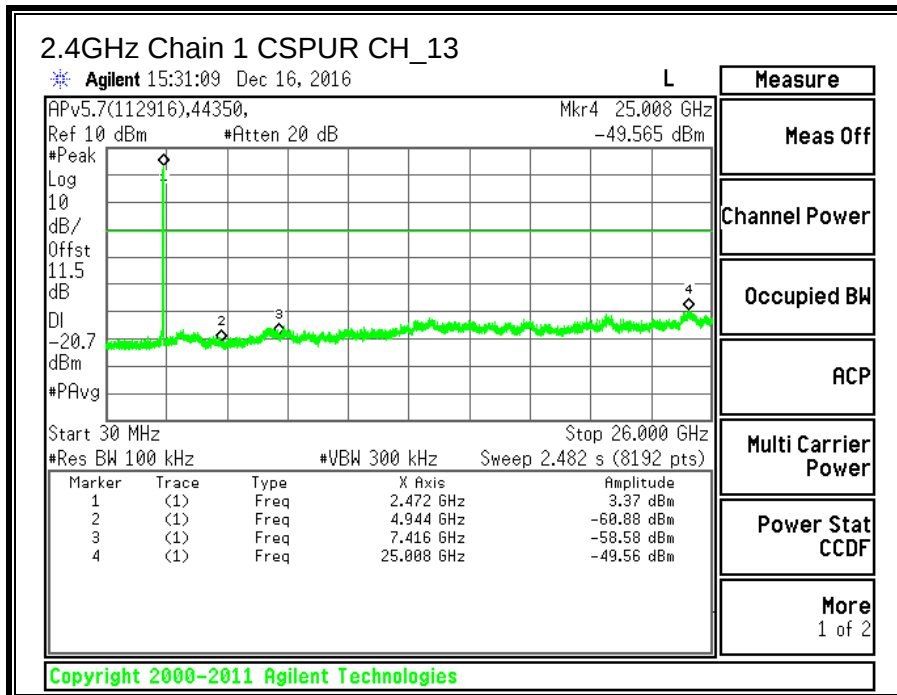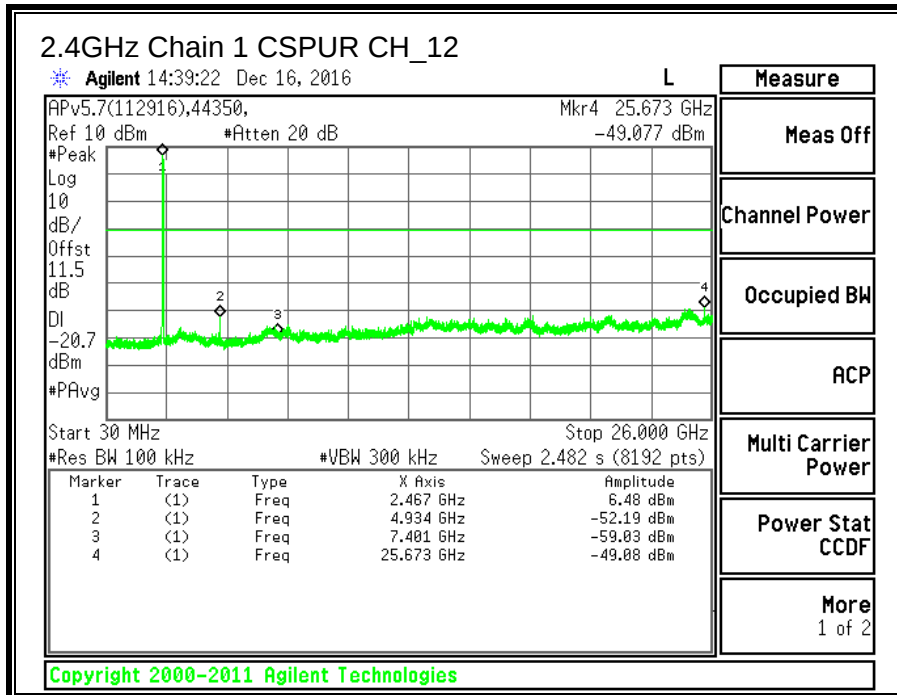

### 11.3. 11g Chain 0 SISO MODE IN THE 2.4GHz BAND

#### 11.3.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



##### TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

##### RESULTS

| Channel  | Frequency (MHz) | 6 dB BW Chain 0 (MHz) | Minimum Limit (MHz) |
|----------|-----------------|-----------------------|---------------------|
| Low_1    | 2412            | 16.340                | 0.5                 |
| Middle_6 | 2437            | 16.375                | 0.5                 |
| High_11  | 2462            | 16.375                | 0.5                 |
| High_12  | 2467            | 16.315                | 0.5                 |
| High_13  | 2472            | 15.455                | 0.5                 |

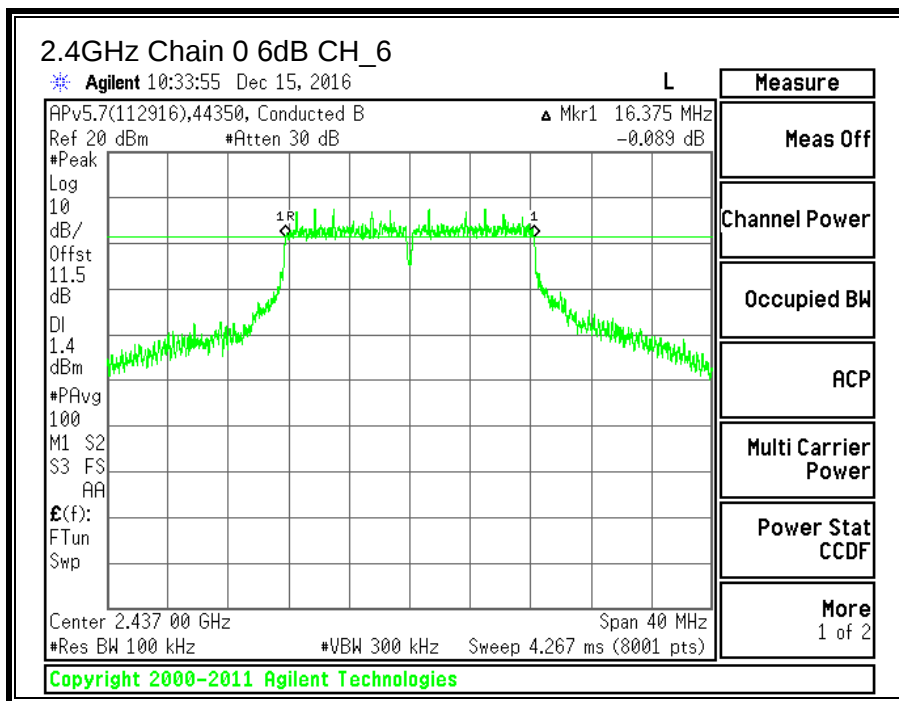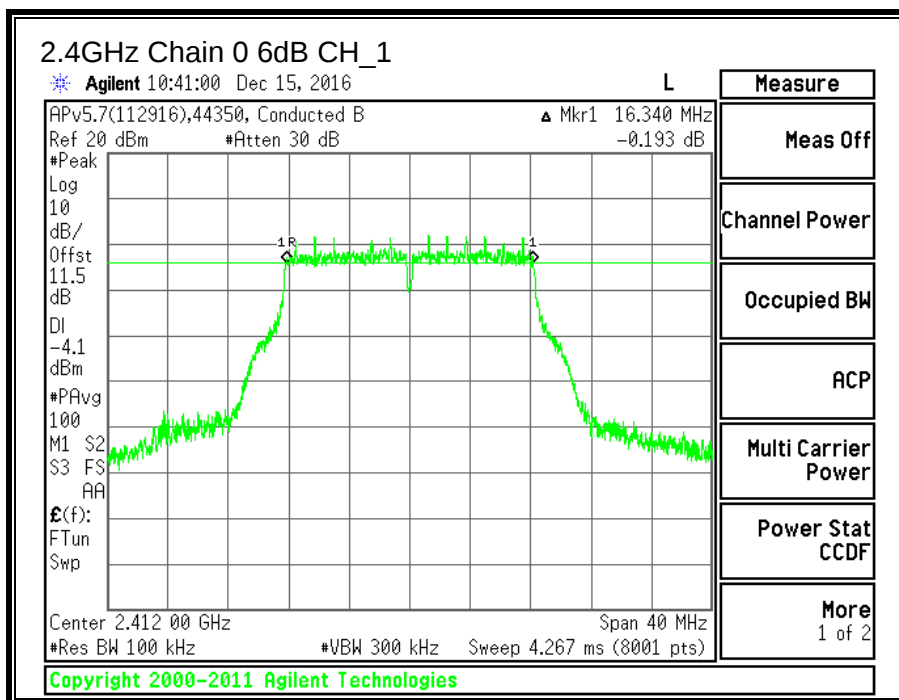

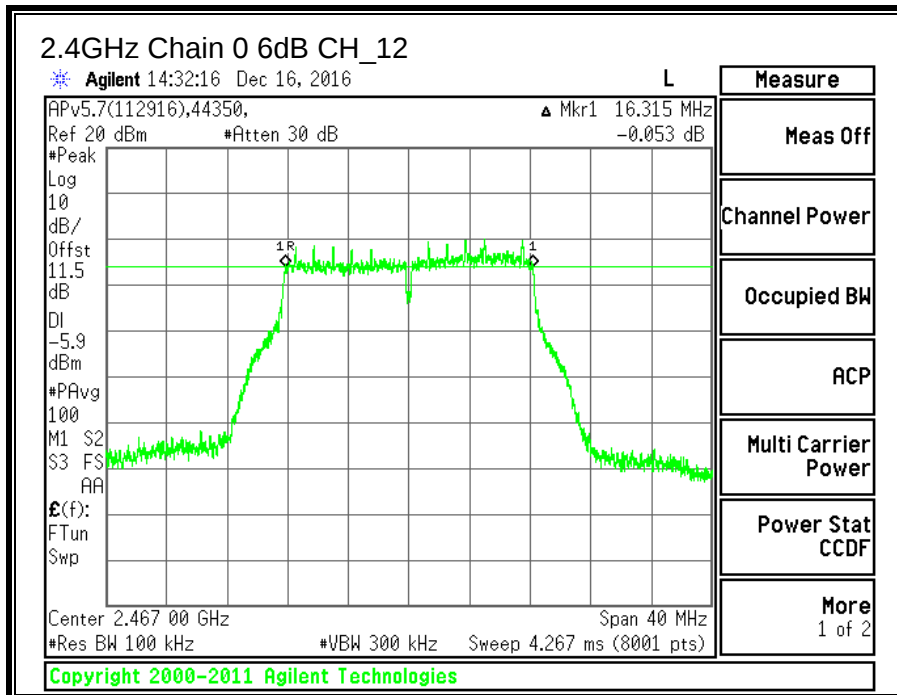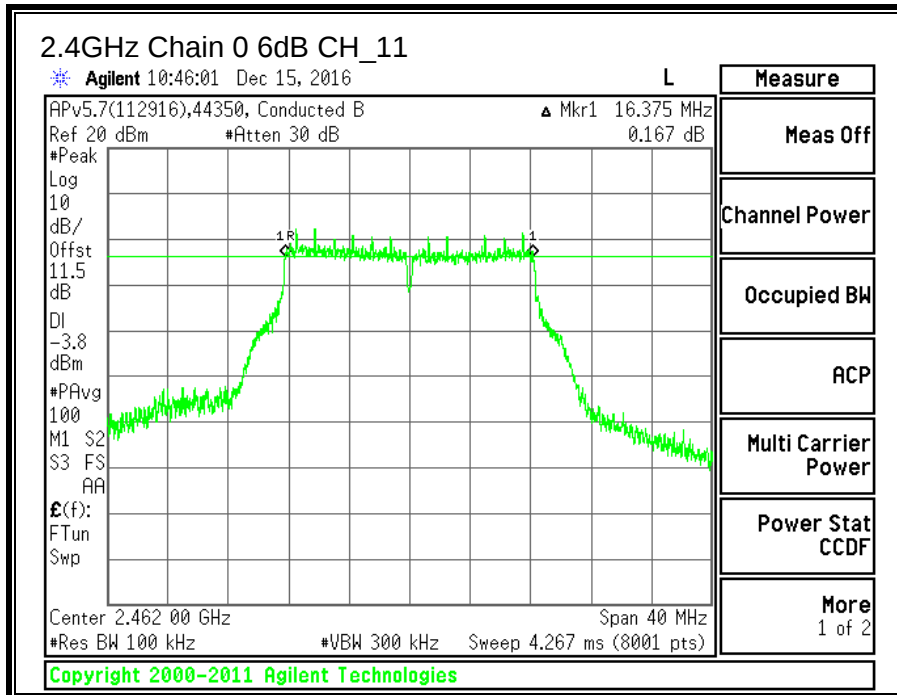

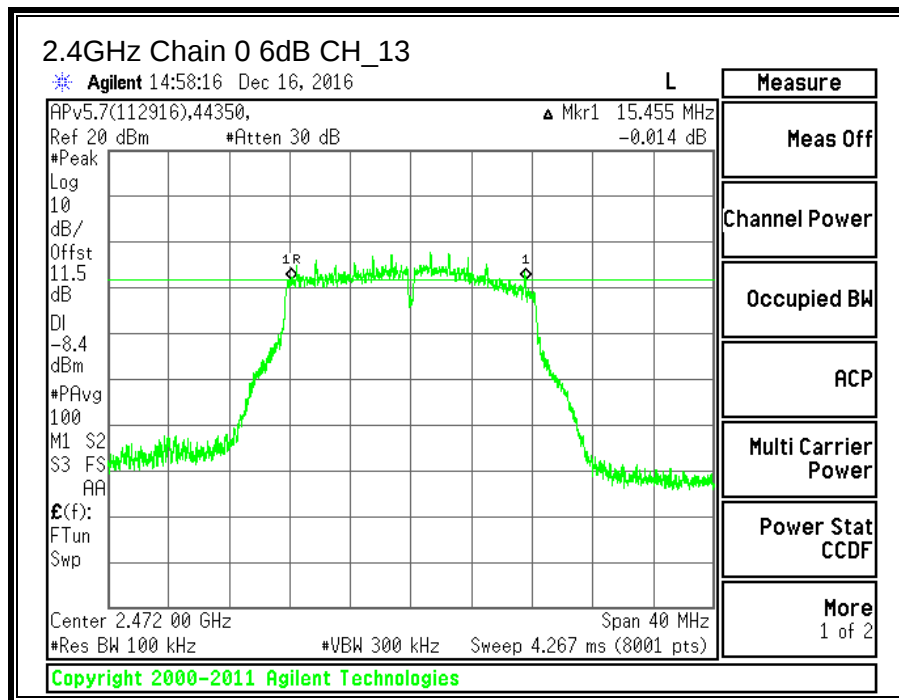

### 11.3.2. 99% BANDWIDTH

#### LIMITS



None; for reporting purposes only.



#### TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

#### RESULTS

| Channel  | Frequency (MHz) | 99% Bandwidth Chain 0 (MHz) |
|----------|-----------------|-----------------------------|
| Low_1    | 2412            | 16.3054                     |
| Middle_6 | 2437            | 16.5660                     |
| High_11  | 2462            | 16.4113                     |
| High_12  | 2467            | 16.3662                     |
| High_13  | 2472            | 16.1576                     |

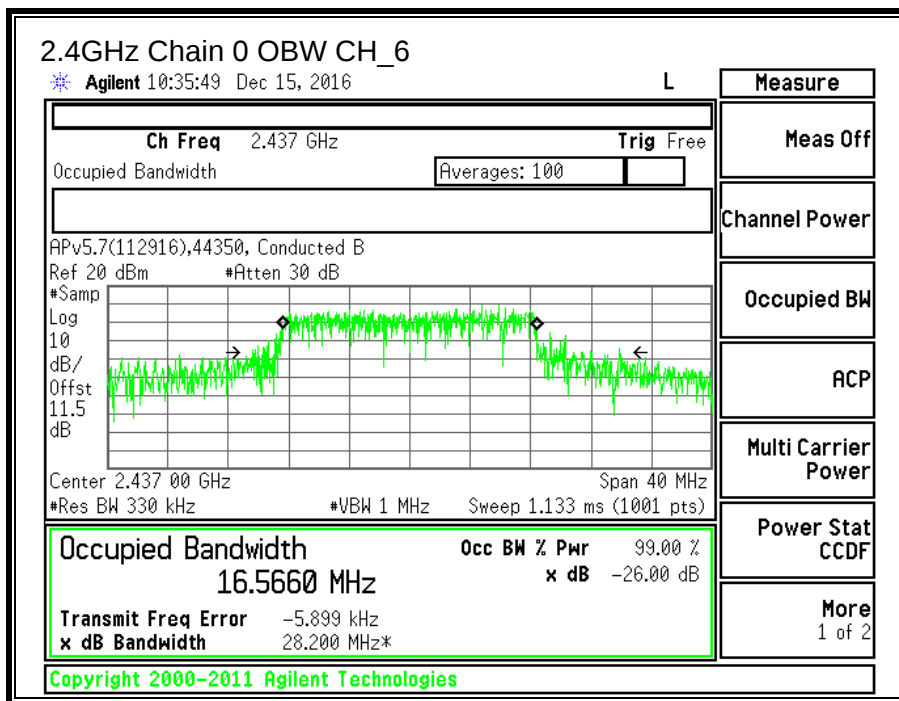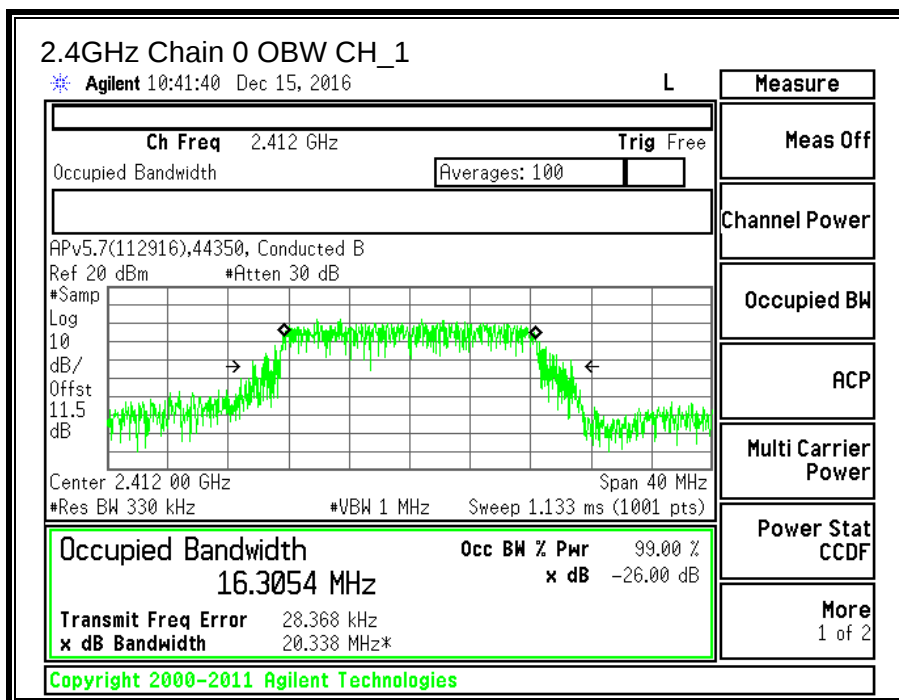

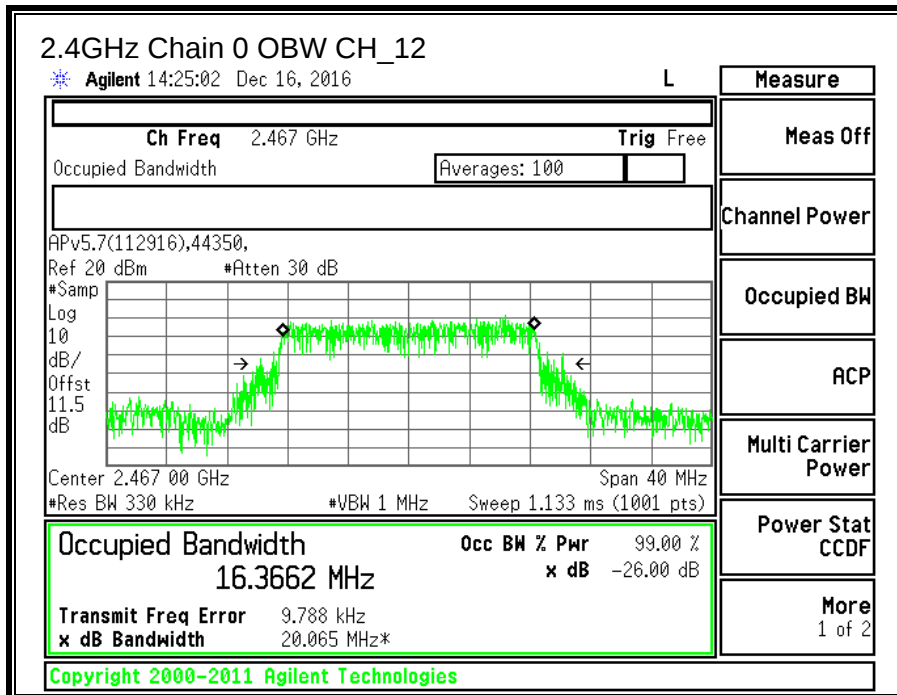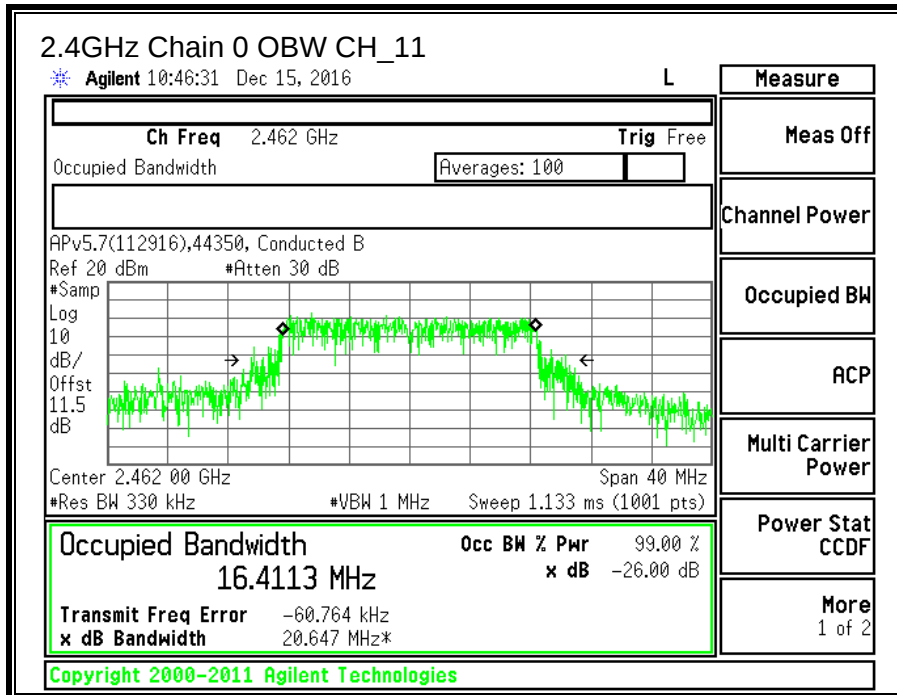

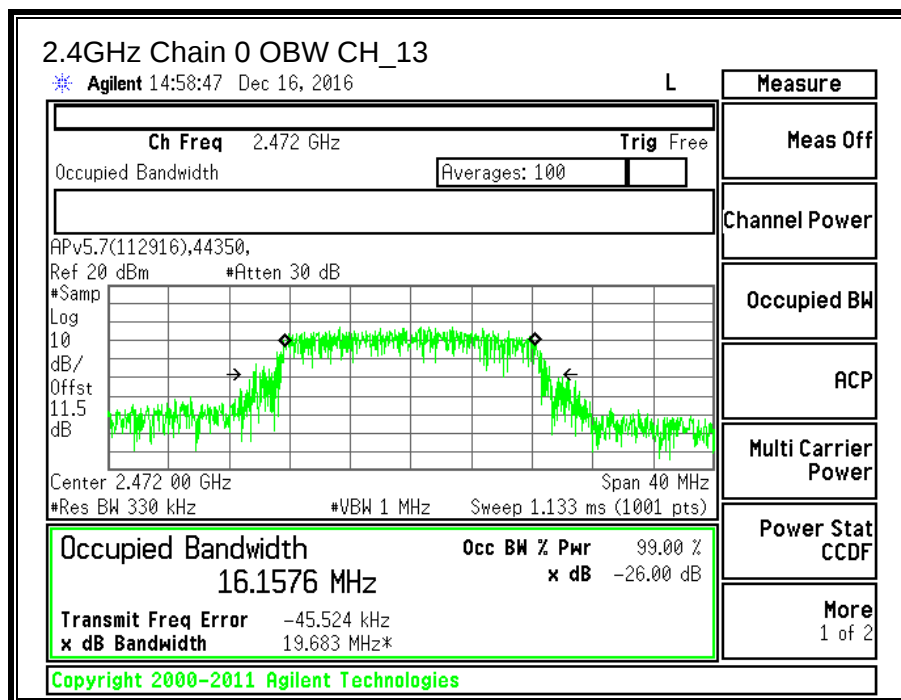

### **11.3.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

KDB 58074 D01 v03r05 Section 9.2.3.2

## RESULTS

|            |       |              |            |
|------------|-------|--------------|------------|
| <b>ID:</b> | 44350 | <b>Date:</b> | 12/19/2016 |
|------------|-------|--------------|------------|

### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low_1   | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid_6   | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_11 | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_12 | 2467               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_13 | 2472               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

### Results

| Channel | Frequency<br>(MHz) | Core 0<br>Meas<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|----------------------------------|-------------------------|----------------|
| Low_1   | 2412               | 15.10                            | 30.00                   | -14.90         |
| Mid_6   | 2437               | 18.44                            | 30.00                   | -11.56         |
| High_11 | 2462               | 13.53                            | 30.00                   | -16.47         |
| High_12 | 2467               | 10.66                            | 30.00                   | -19.34         |
| High_13 | 2472               | 8.16                             | 30.00                   | -21.84         |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

### 11.3.4. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

#### TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



#### RESULTS


|                    |      |                                        |
|--------------------|------|----------------------------------------|
| Duty Cycle CF (dB) | 0.30 | Included in Calculations of Corr'd PSD |
|--------------------|------|----------------------------------------|

##### PSD Results



| Channel | Frequency<br>(MHz) | Core 0<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-------------------------|----------------|----------------|
| Low_1   | 2412               | -8.958                  | 8.0            | -17.0          |
| Mid_6   | 2437               | -5.727                  | 8.0            | -13.7          |
| High_11 | 2462               | -10.227                 | 8.0            | -18.2          |
| High_12 | 2467               | -12.622                 | 8.0            | -20.6          |
| High_13 | 2472               | -15.244                 | 8.0            | -23.2          |

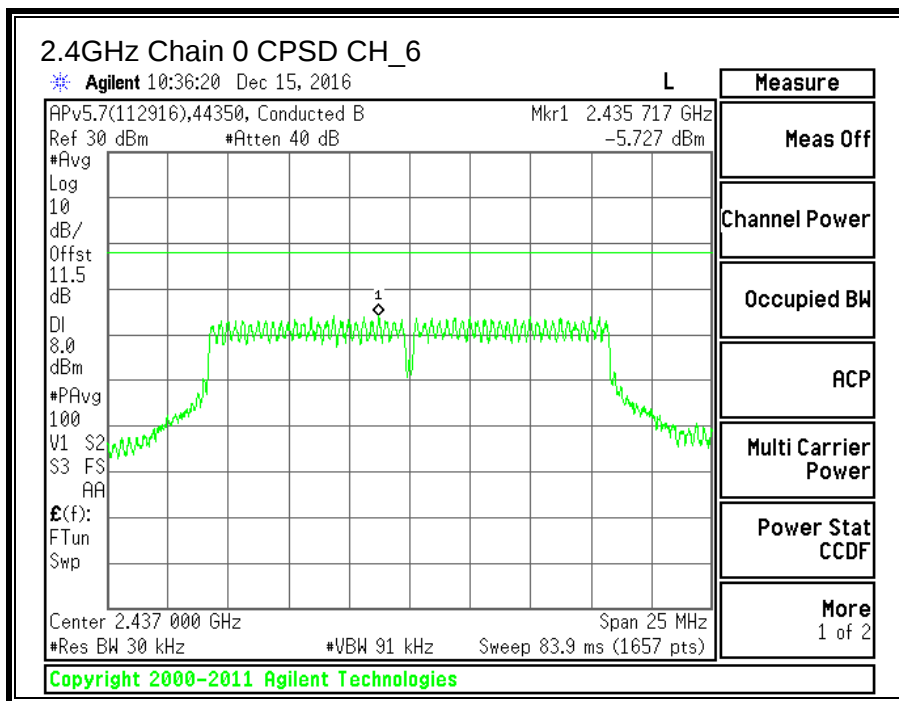
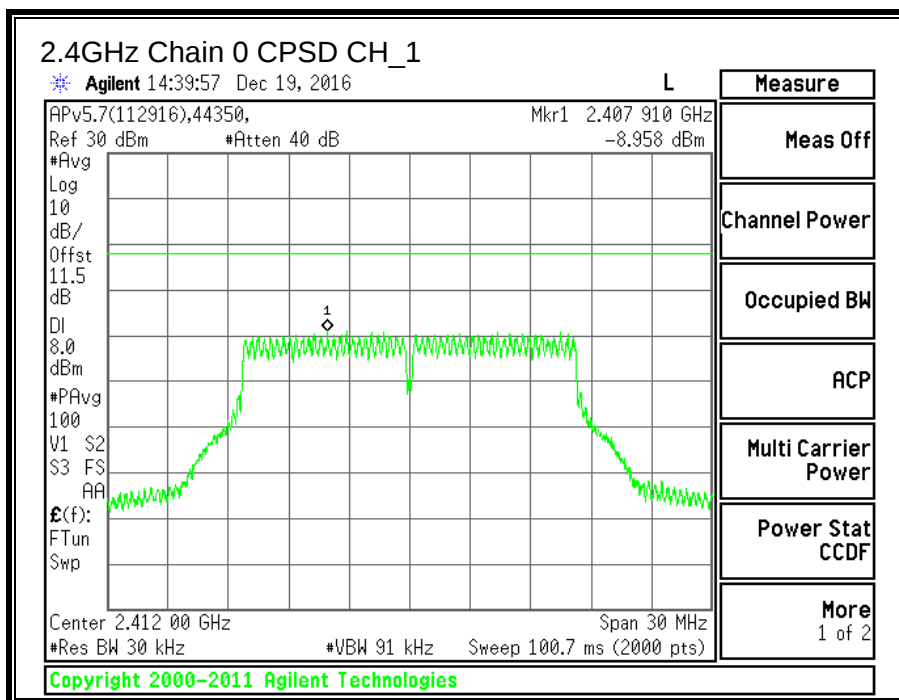


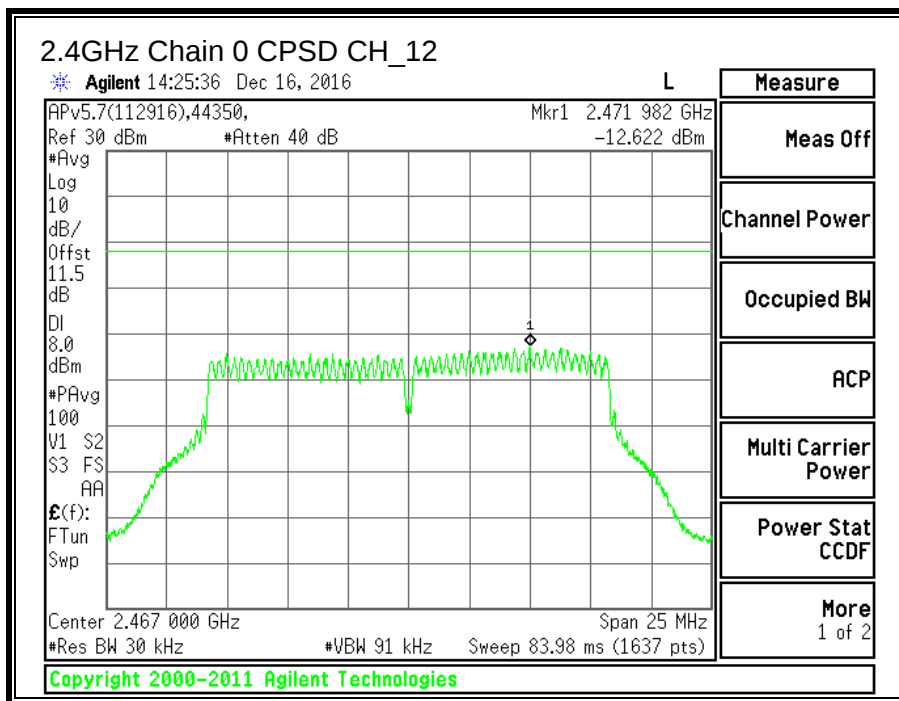
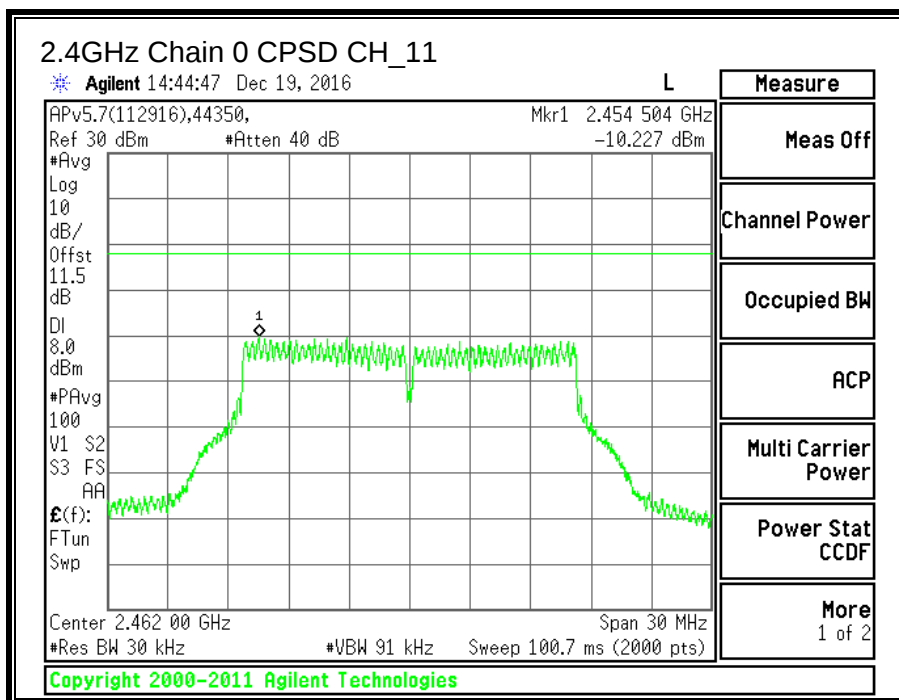



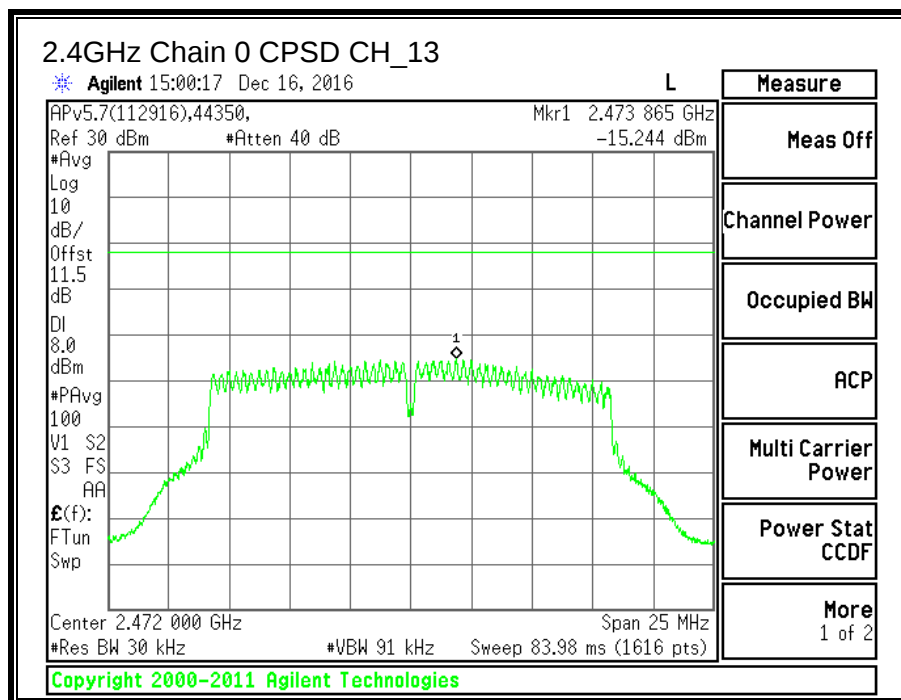




### 11.3.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS

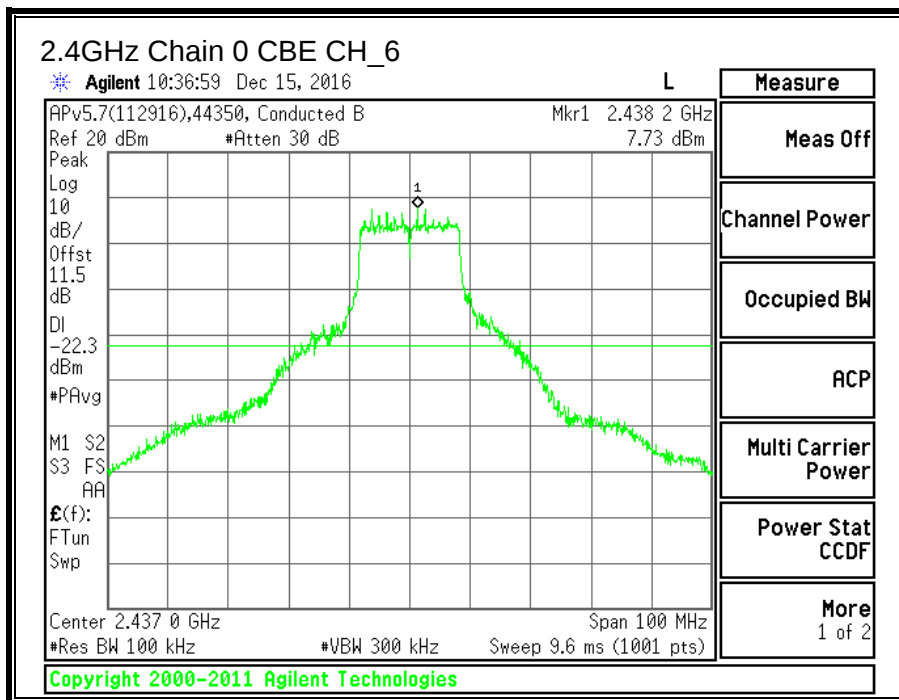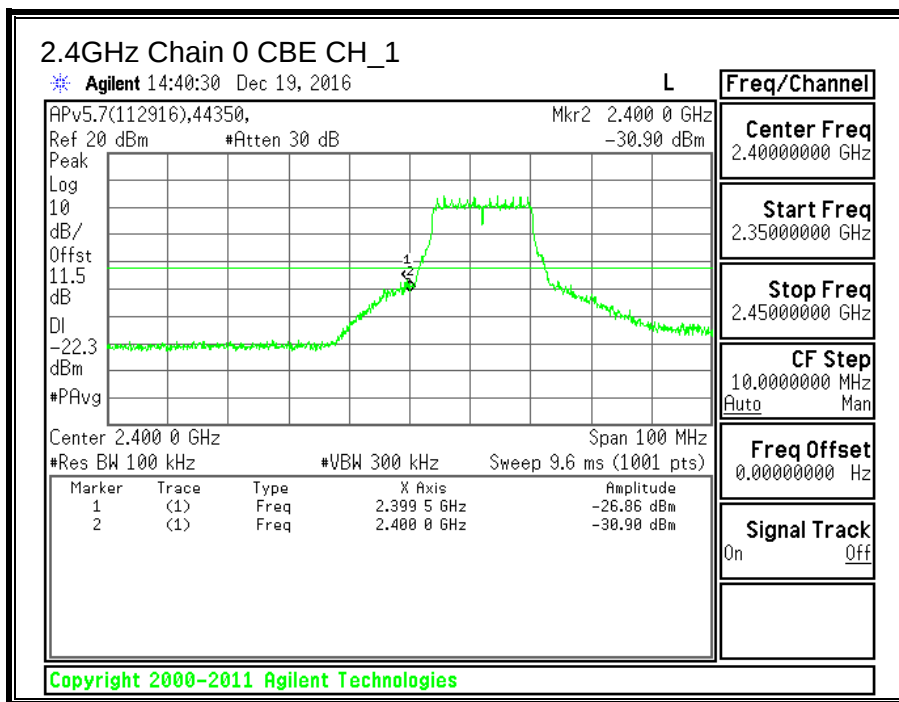

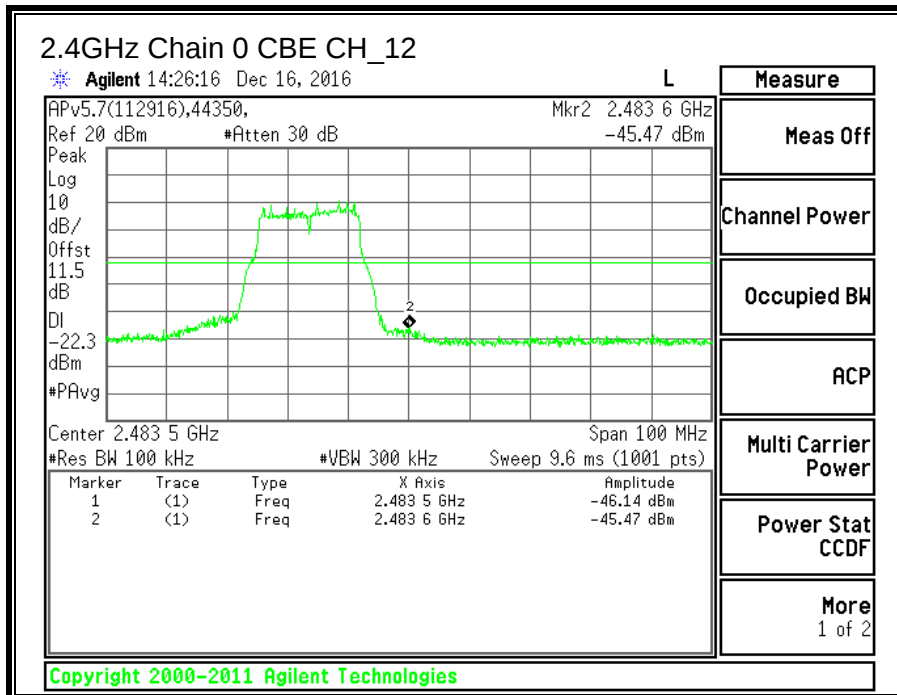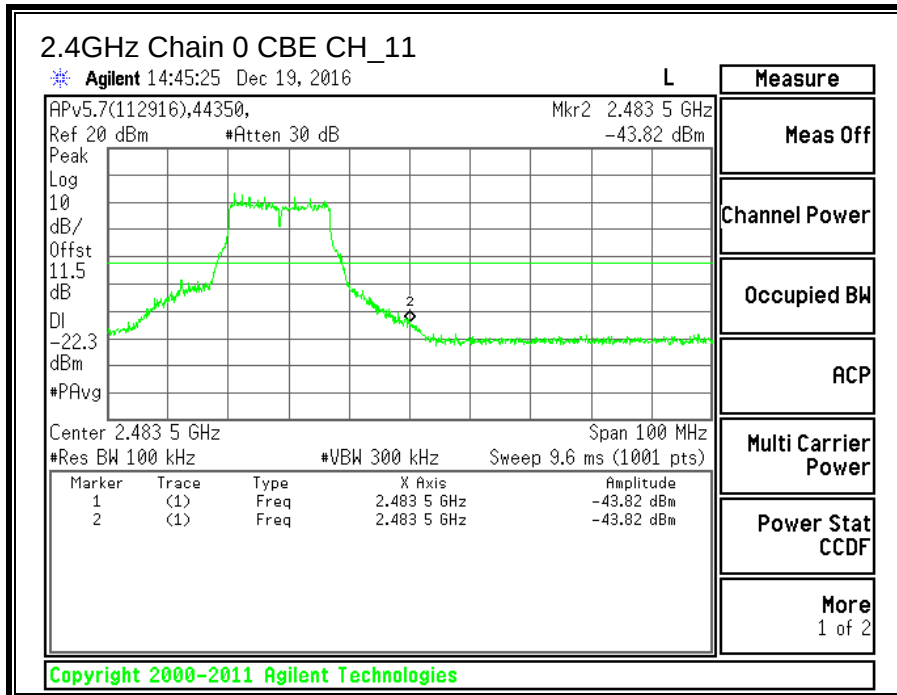

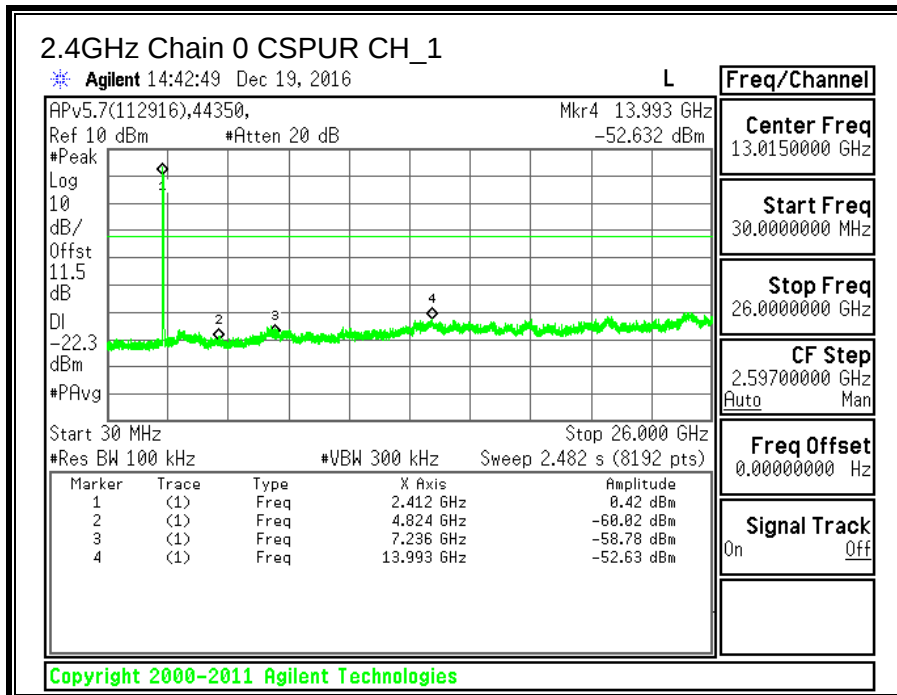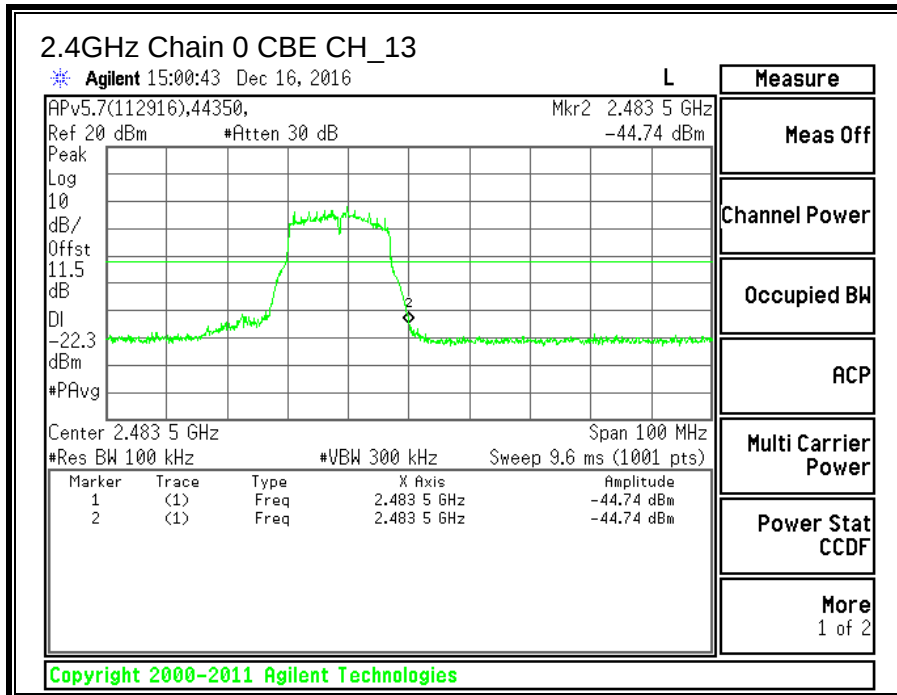

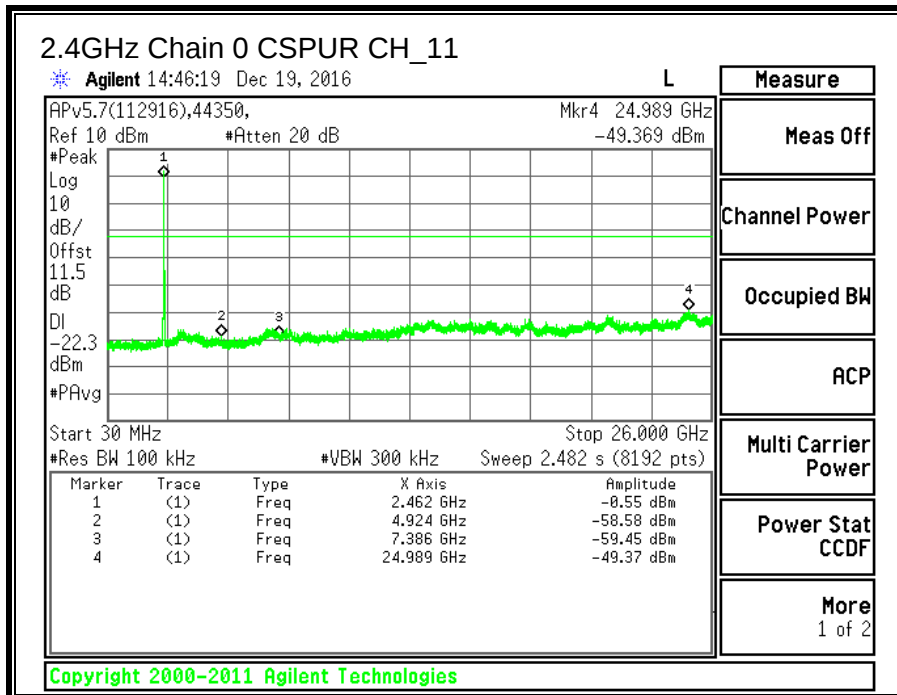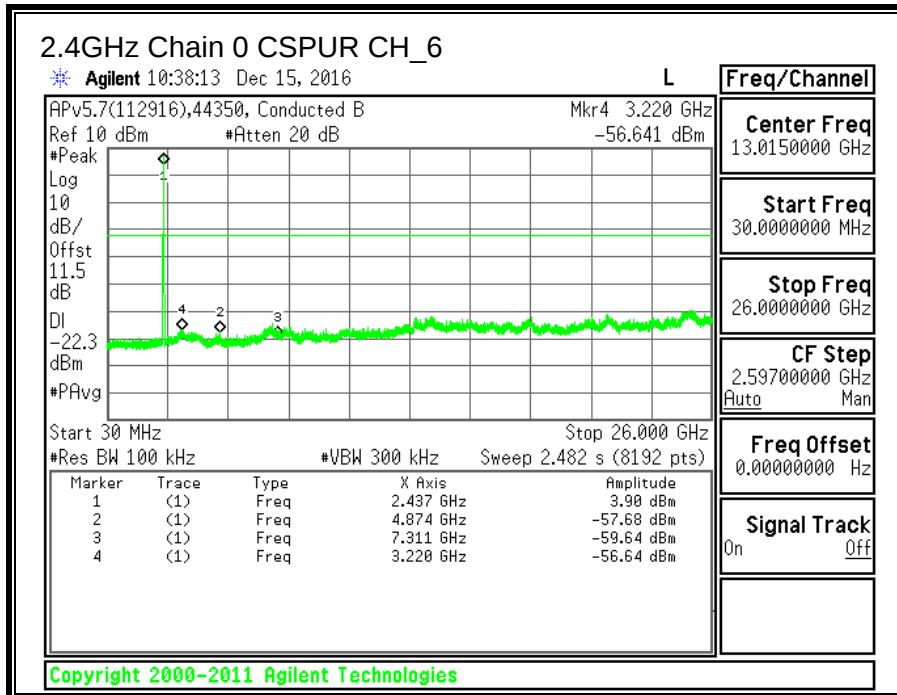

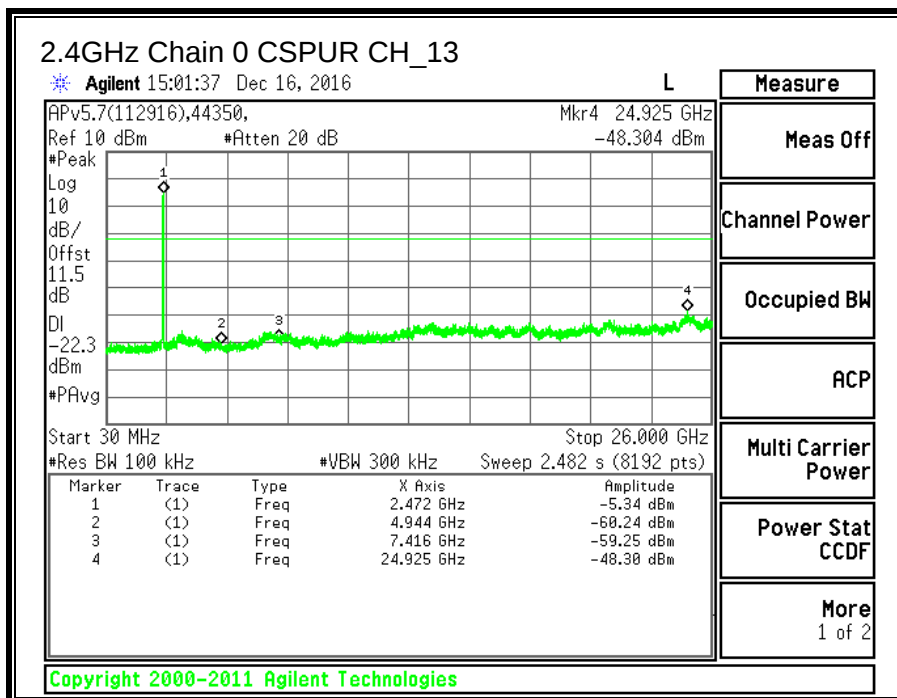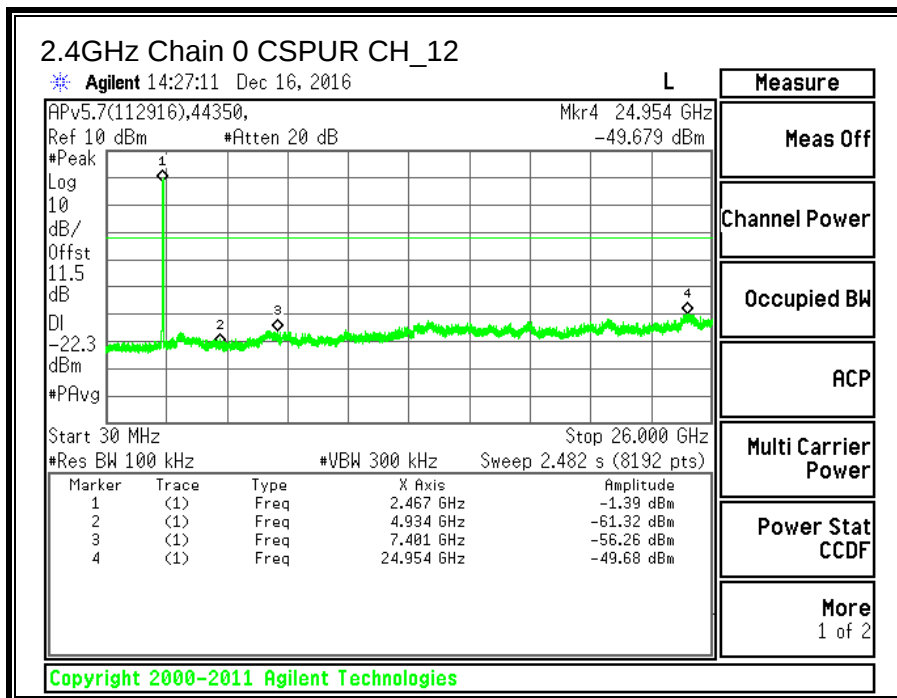

## **11.4. 11g Chain 1 SISO MODE IN THE 2.4GHz BAND**

### **11.4.1. 6 dB BANDWIDTH**

#### **LIMITS**

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



#### **TEST PROCEDURE**


KDB 58074 D01 v03r05 Section 8.1

#### **RESULTS**

| <b>Channel</b> | <b>Frequency<br/>(MHz)</b> | <b>6 dB BW<br/>Chain 1<br/>(MHz)</b> | <b>Minimum Limit<br/>(MHz)</b> |
|----------------|----------------------------|--------------------------------------|--------------------------------|
| Low_1          | 2412                       | 16.355                               | 0.5                            |
| Middle_6       | 2437                       | 16.345                               | 0.5                            |
| High_11        | 2462                       | 16.390                               | 0.5                            |
| High_12        | 2467                       | 16.345                               | 0.5                            |
| High_13        | 2472                       | 15.710                               | 0.5                            |

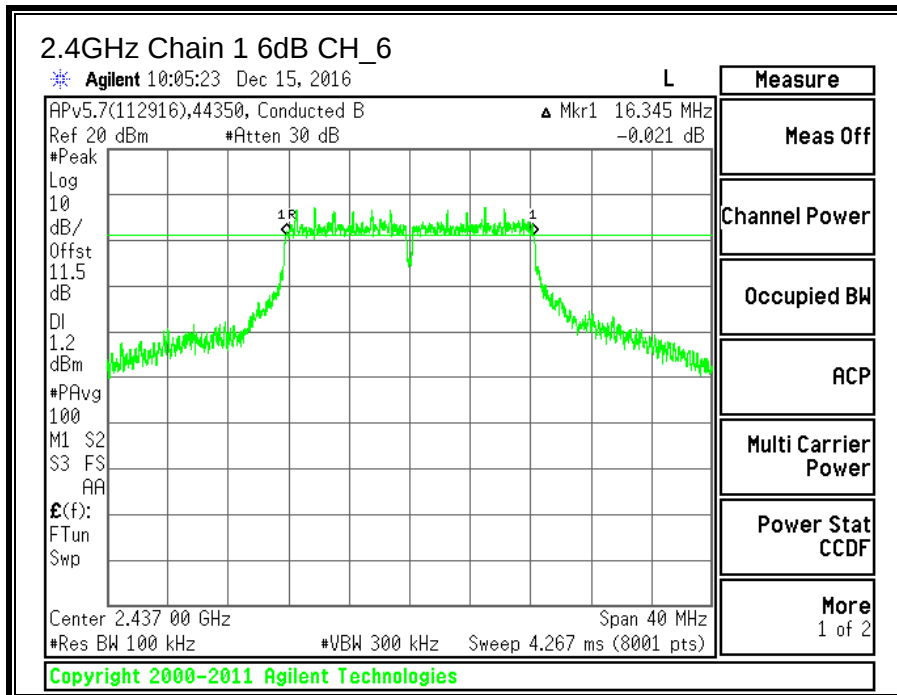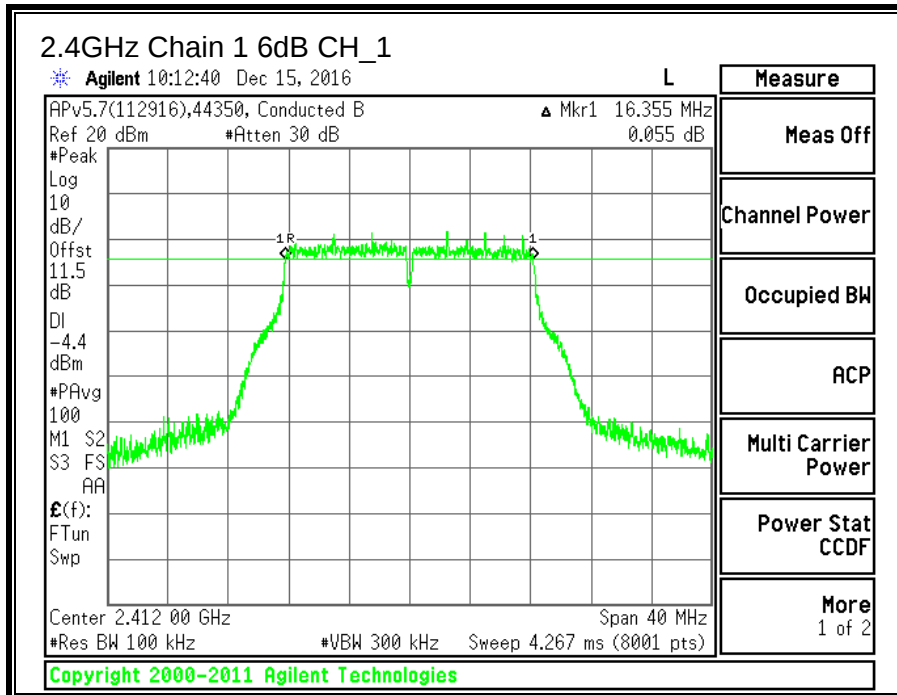

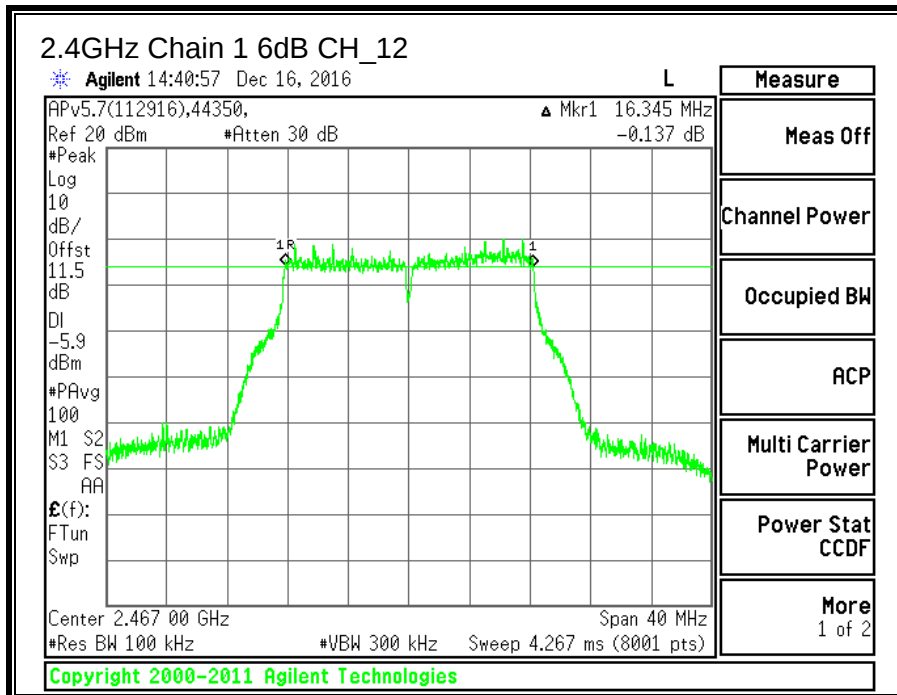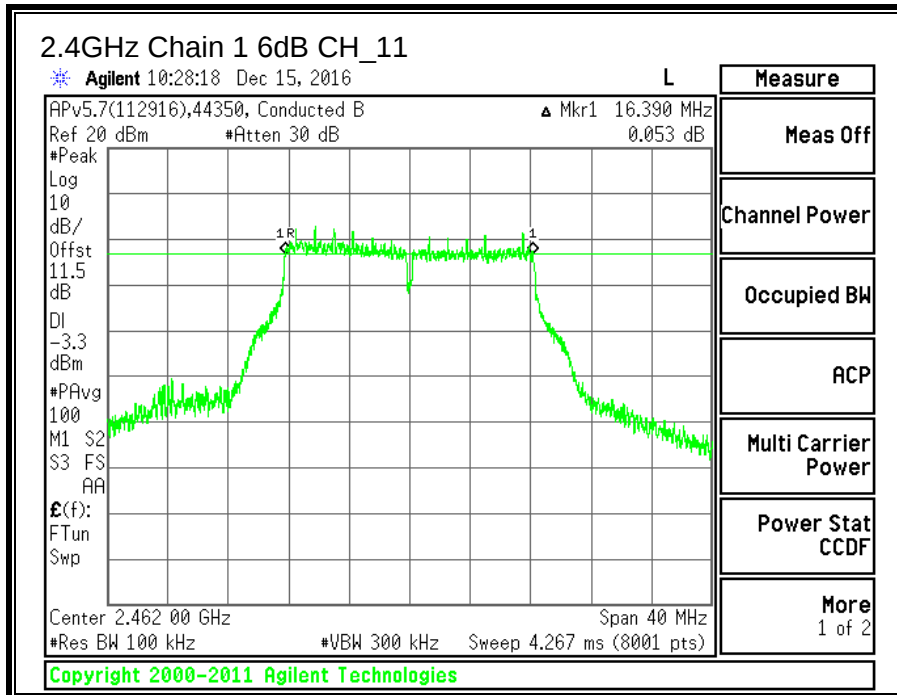

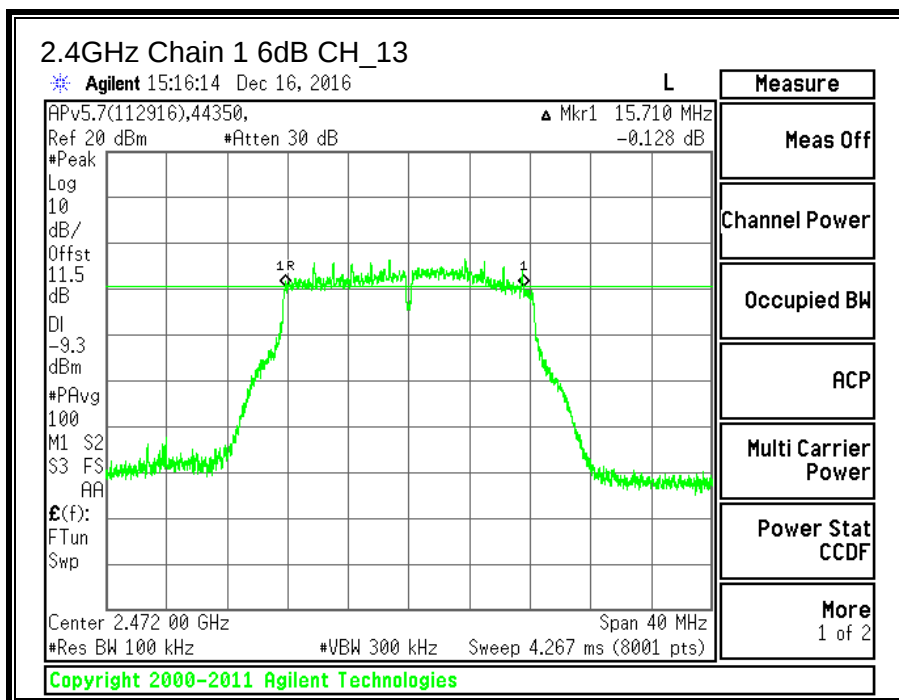

#### 11.4.2. 99% BANDWIDTH

##### LIMITS



None; for reporting purposes only.



##### TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

##### RESULTS

| Channel  | Frequency (MHz) | 99% Bandwidth Chain 1 (MHz) |
|----------|-----------------|-----------------------------|
| Low_1    | 2412            | 16.4091                     |
| Middle_6 | 2437            | 16.6500                     |
| High_11  | 2462            | 16.4727                     |
| High_12  | 2467            | 16.3440                     |
| High_13  | 2472            | 16.2457                     |

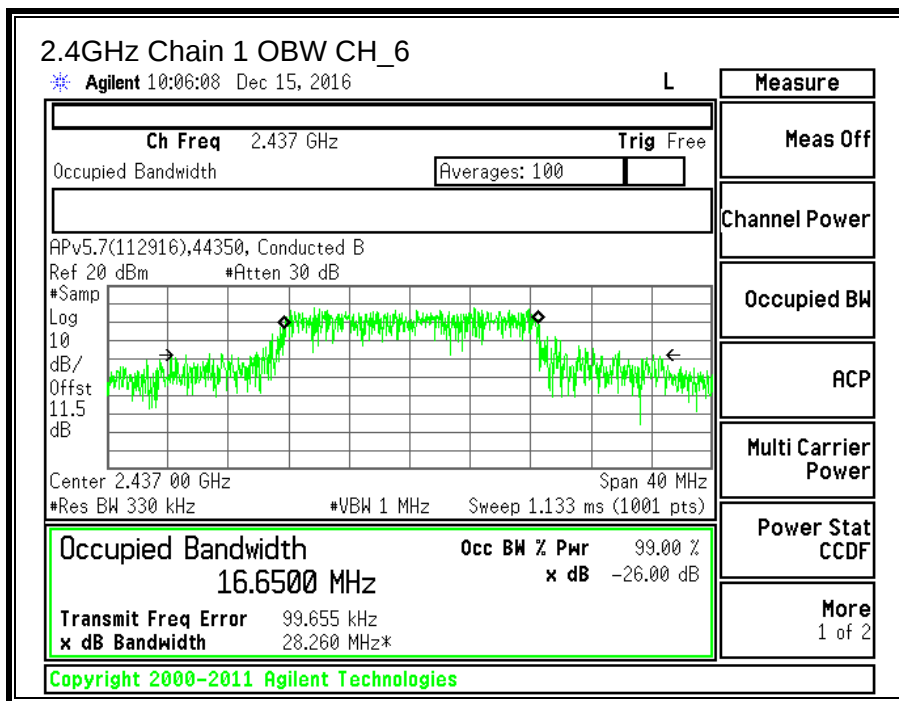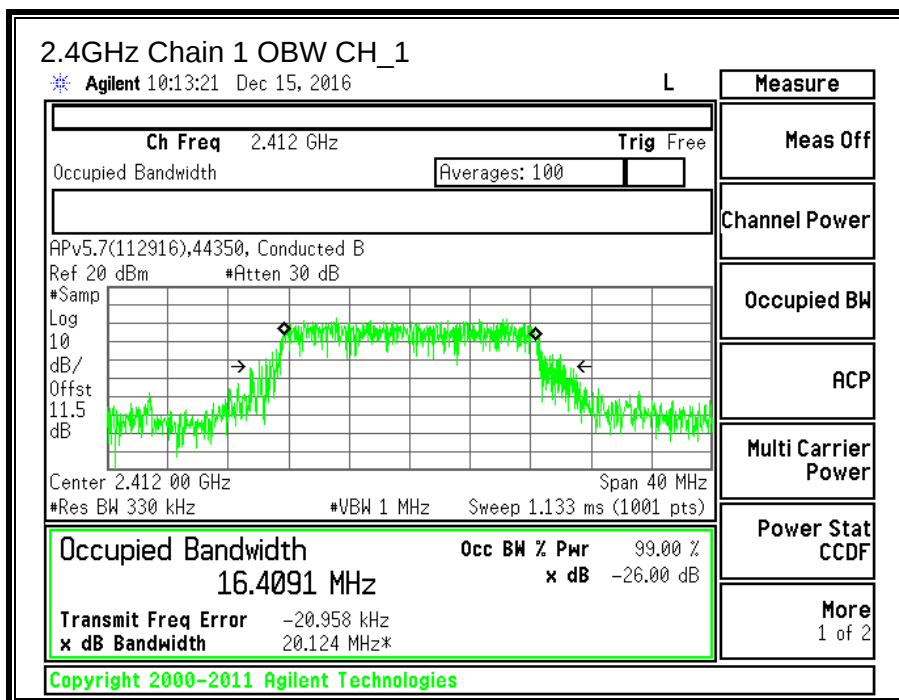

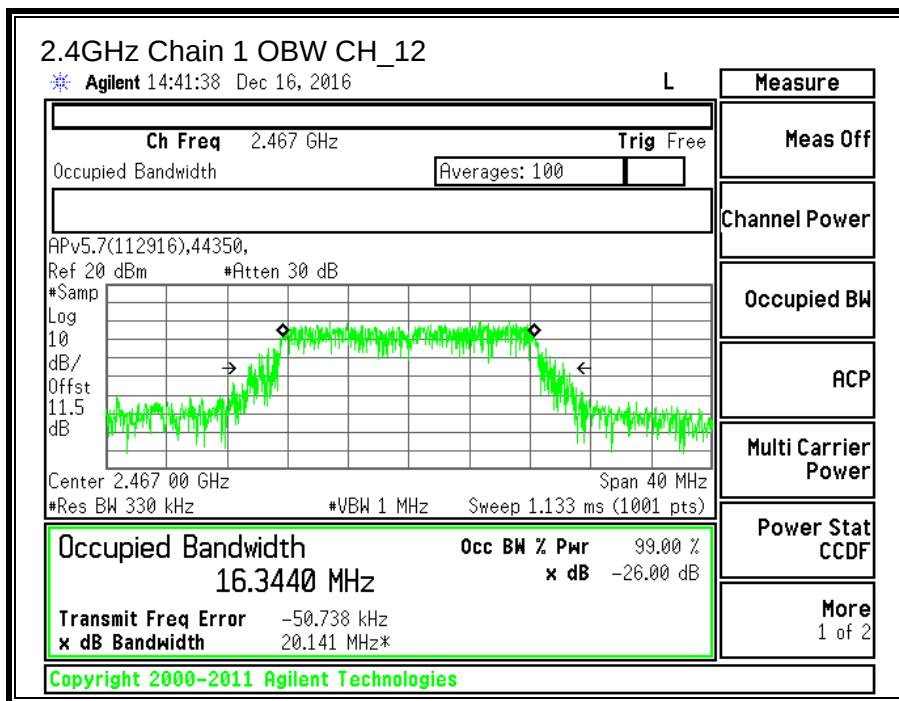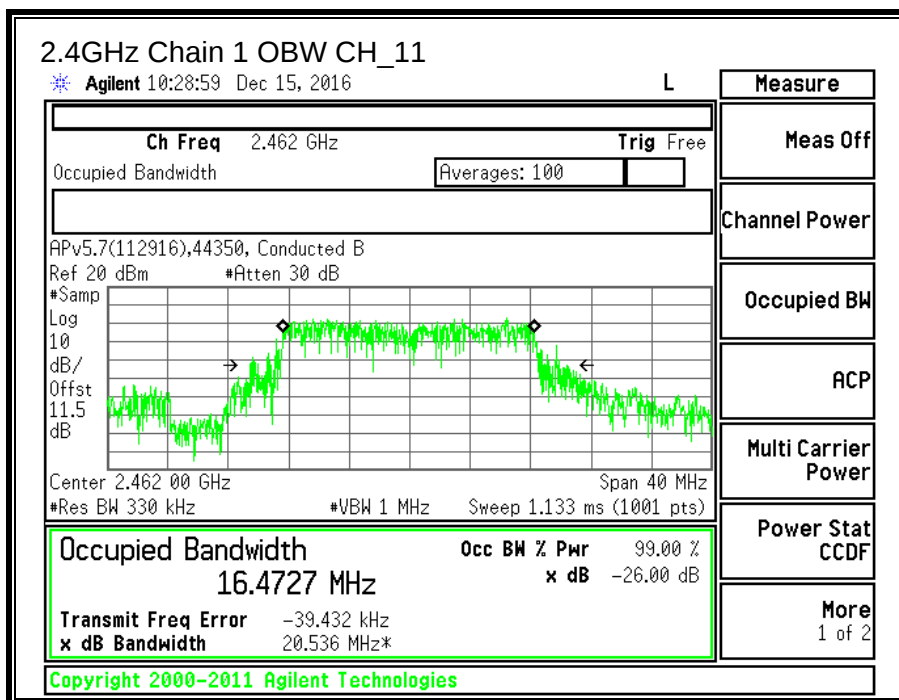

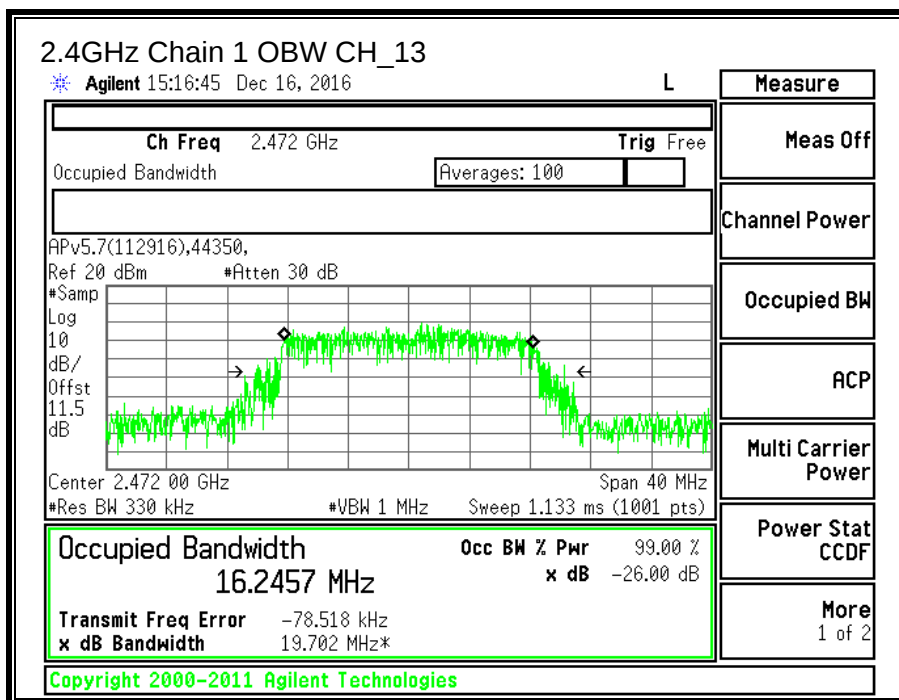

### **11.4.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

KDB 58074 D01 v03r05 Section 9.2.3.2

## RESULTS

|            |       |              |            |
|------------|-------|--------------|------------|
| <b>ID:</b> | 44350 | <b>Date:</b> | 12/19/2016 |
|------------|-------|--------------|------------|

### Limits

| Channel | Frequency<br>(MHz) | Directional<br>Gain<br>(dBi) | FCC<br>Power<br>Limit<br>(dBm) | IC<br>Power<br>Limit<br>(dBm) | IC<br>EIRP<br>Limit<br>(dBm) | Max<br>Power<br>(dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low_1   | 2412               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| Mid_6   | 2437               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_11 | 2462               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_12 | 2467               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |
| High_13 | 2472               | 2.86                         | 30.00                          | 30                            | 36                           | 30.00                 |

### Results

| Channel | Frequency<br>(MHz) | Core 1<br>Meas<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|----------------------------------|-------------------------|----------------|
| Low_1   | 2412               | 15.27                            | 30.00                   | -14.73         |
| Mid_6   | 2437               | 18.33                            | 30.00                   | -11.67         |
| High_11 | 2462               | 14.17                            | 30.00                   | -15.83         |
| High_12 | 2467               | 11.02                            | 30.00                   | -18.98         |
| High_13 | 2472               | 8.29                             | 30.00                   | -21.71         |

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

#### 11.4.4. POWER SPECTRAL DENSITY

##### LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

##### TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



##### RESULTS


|                    |      |                                        |
|--------------------|------|----------------------------------------|
| Duty Cycle CF (dB) | 0.30 | Included in Calculations of Corr'd PSD |
|--------------------|------|----------------------------------------|

##### PSD Results



| Channel | Frequency<br>(MHz) | Core 1<br>Meas<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-------------------------|----------------|----------------|
| Low_1   | 2412               | -8.634                  | 8.0            | -16.6          |
| Mid_6   | 2437               | -5.482                  | 8.0            | -13.5          |
| High_11 | 2462               | -9.570                  | 8.0            | -17.6          |
| High_12 | 2467               | -12.568                 | 8.0            | -20.6          |
| High_13 | 2472               | -15.421                 | 8.0            | -23.4          |

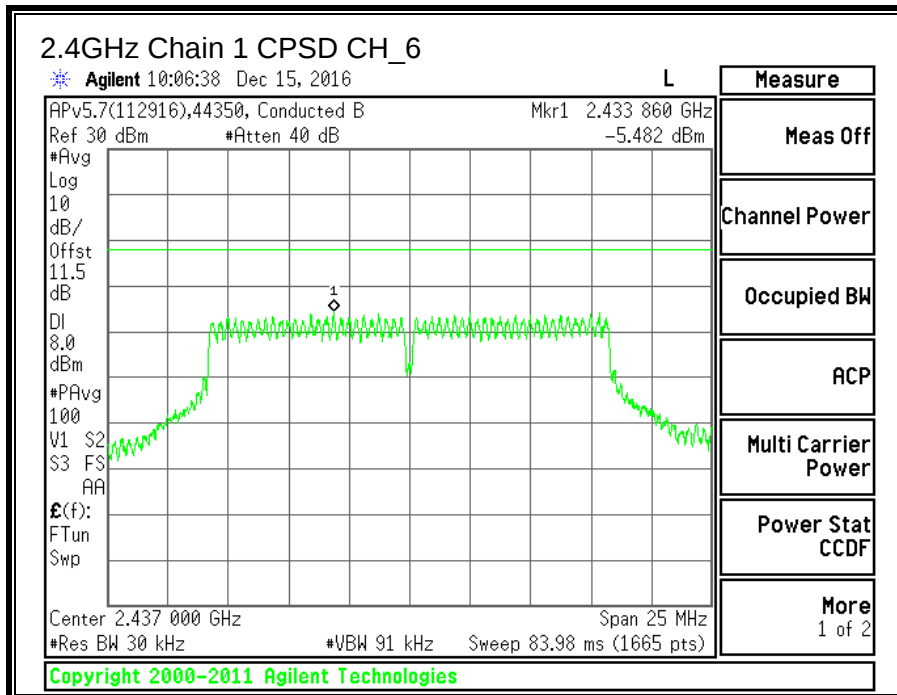
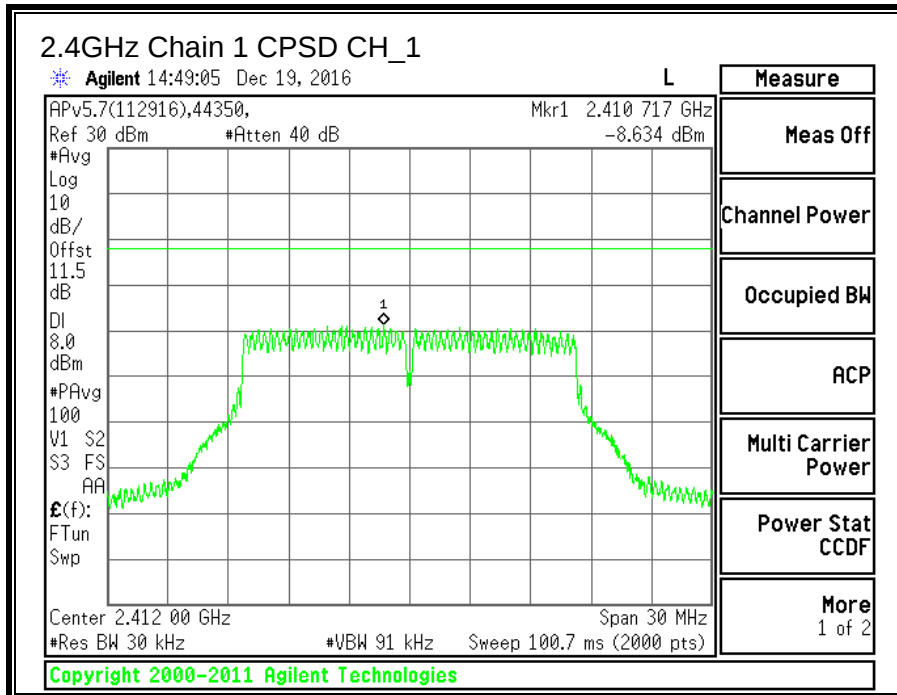


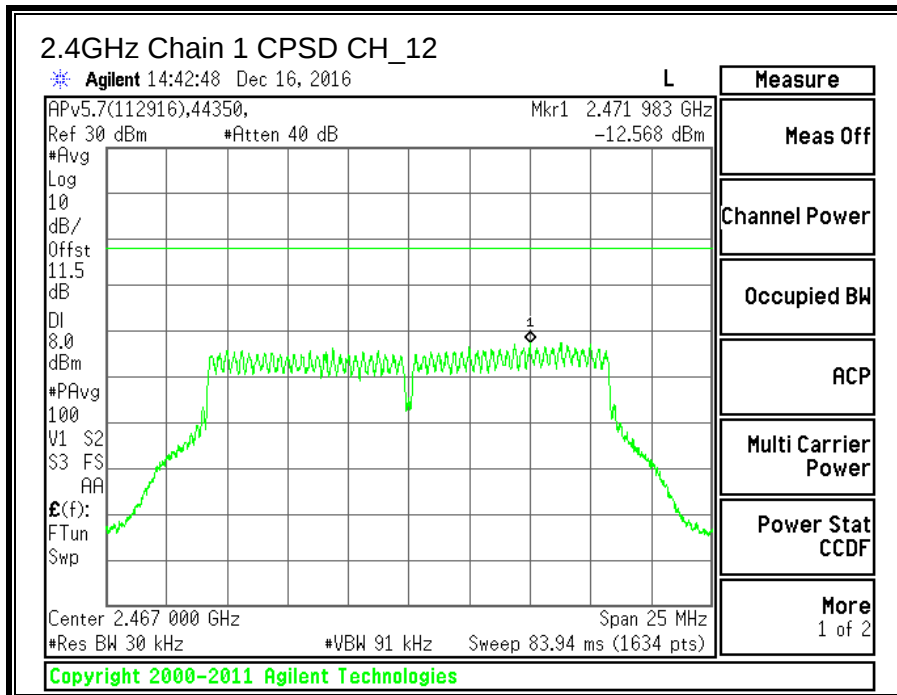
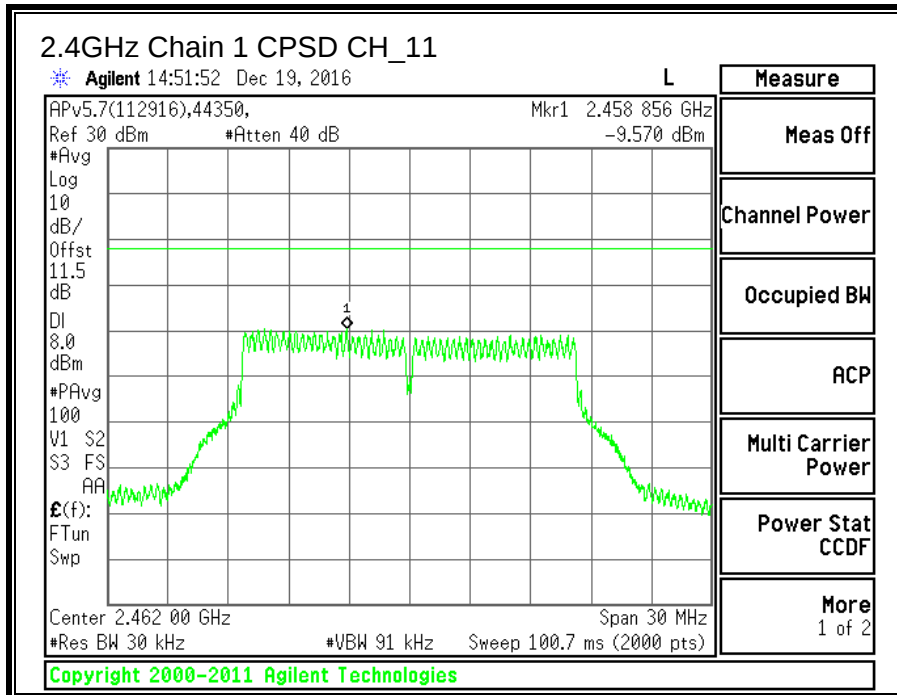



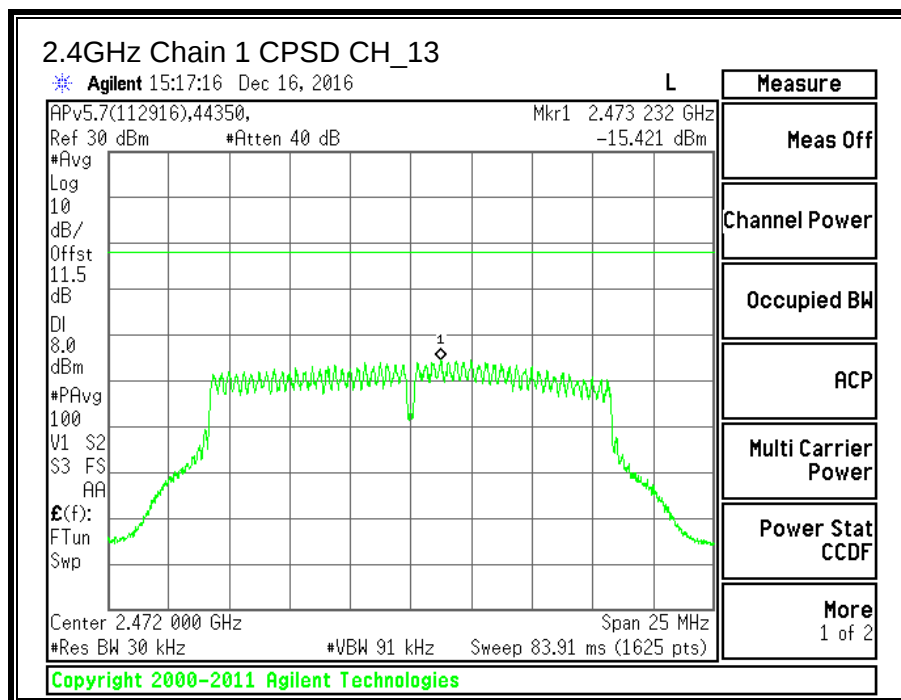




### 11.4.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

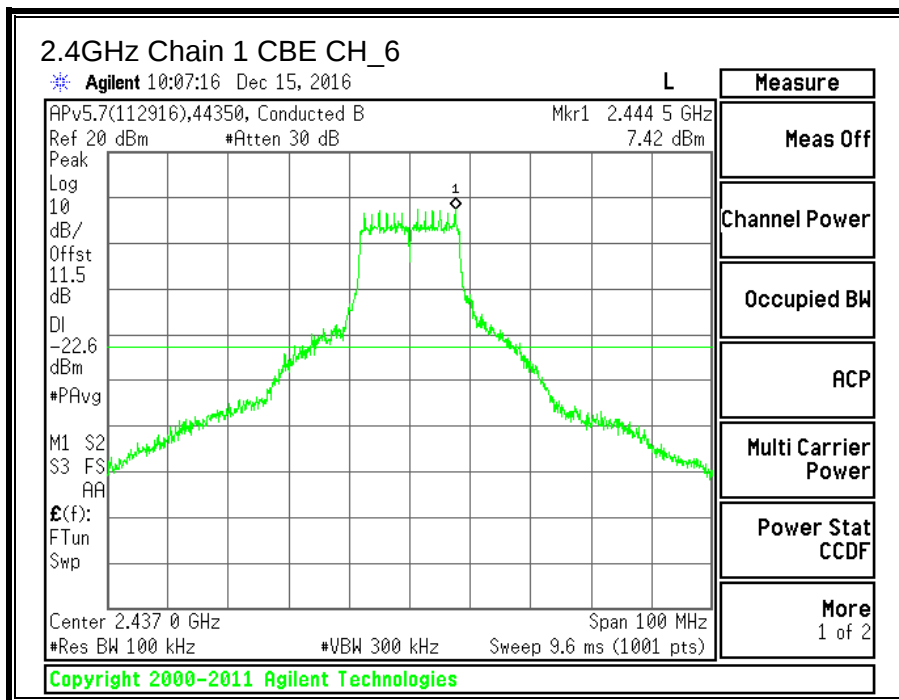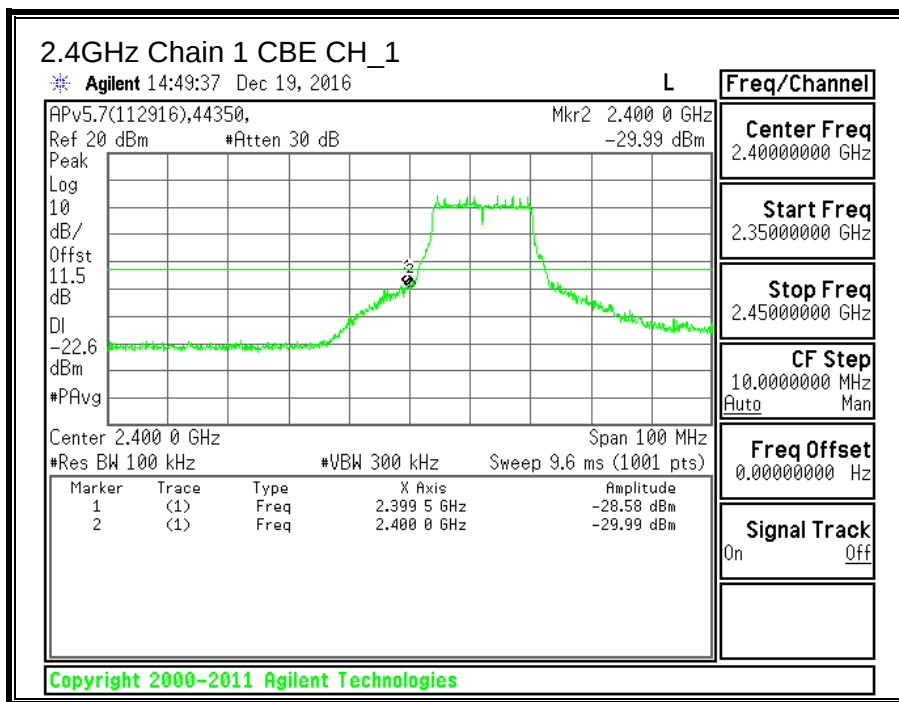

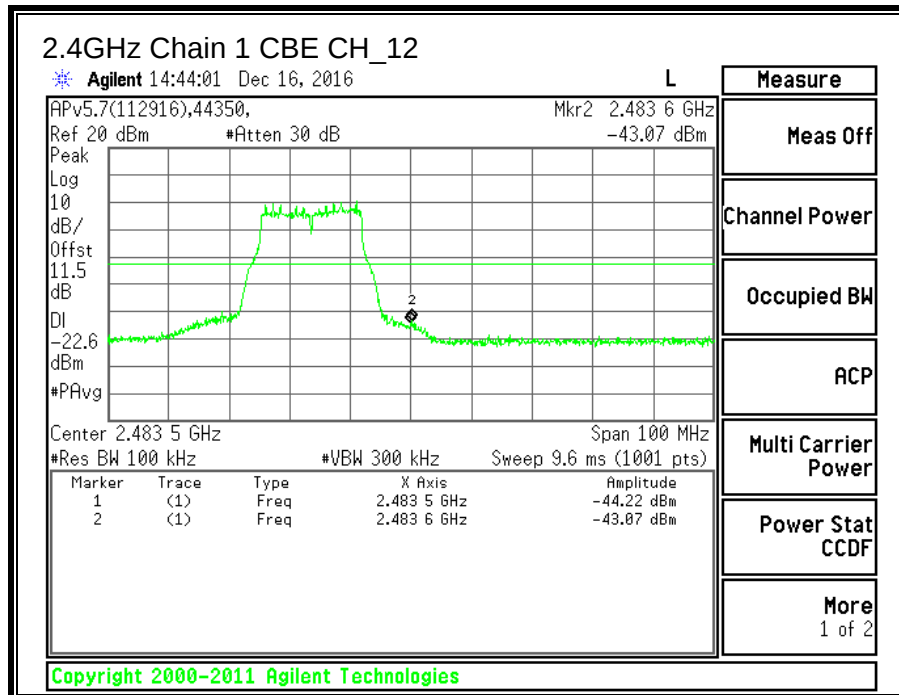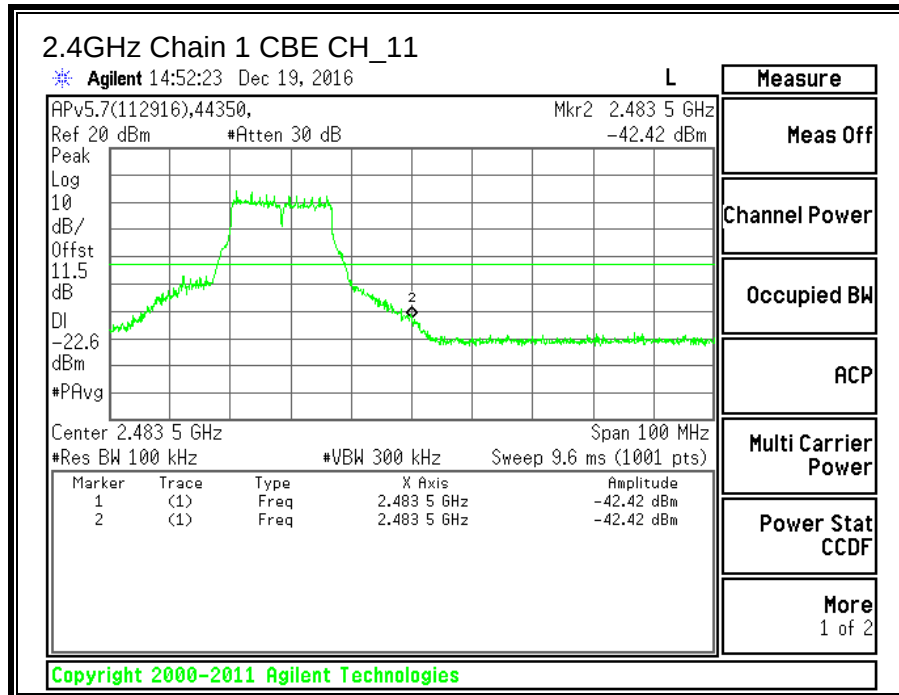

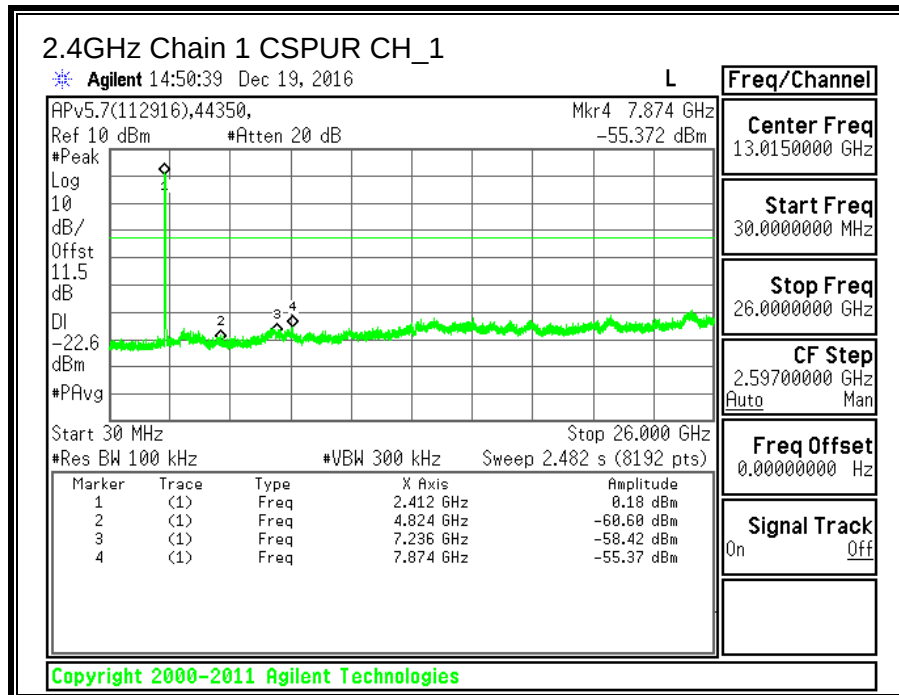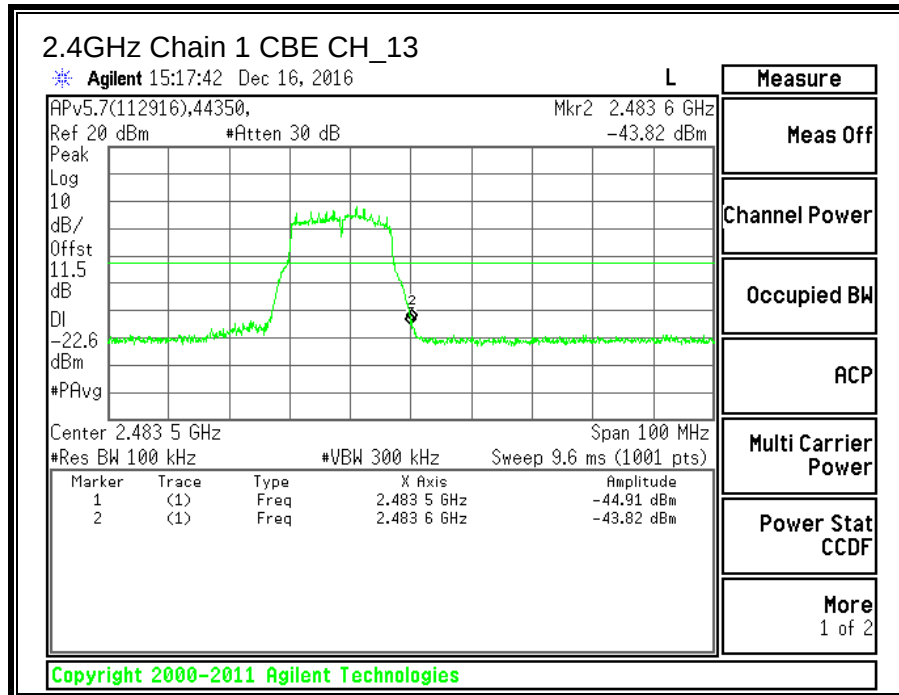

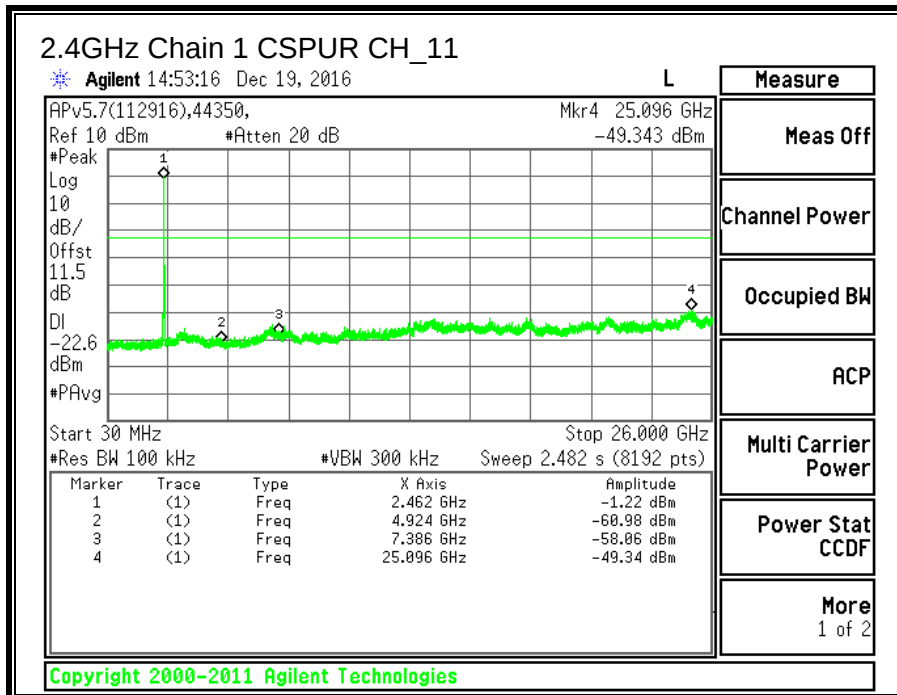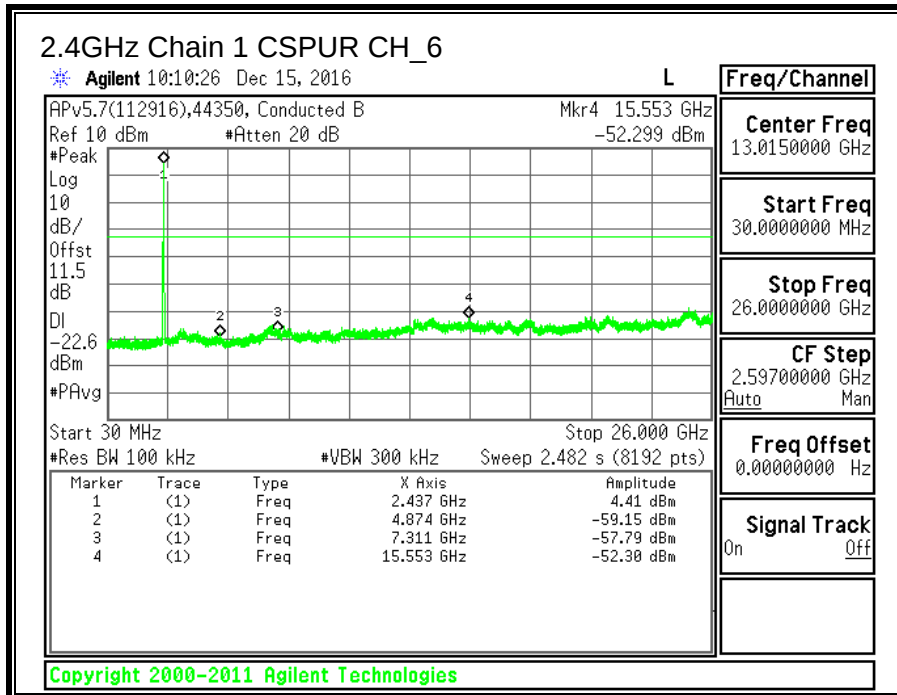

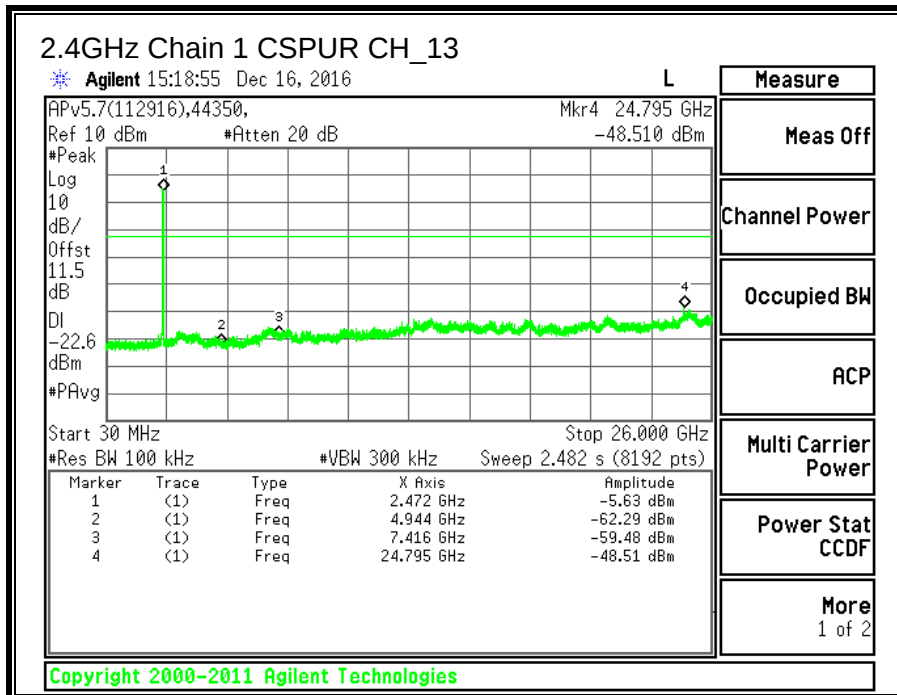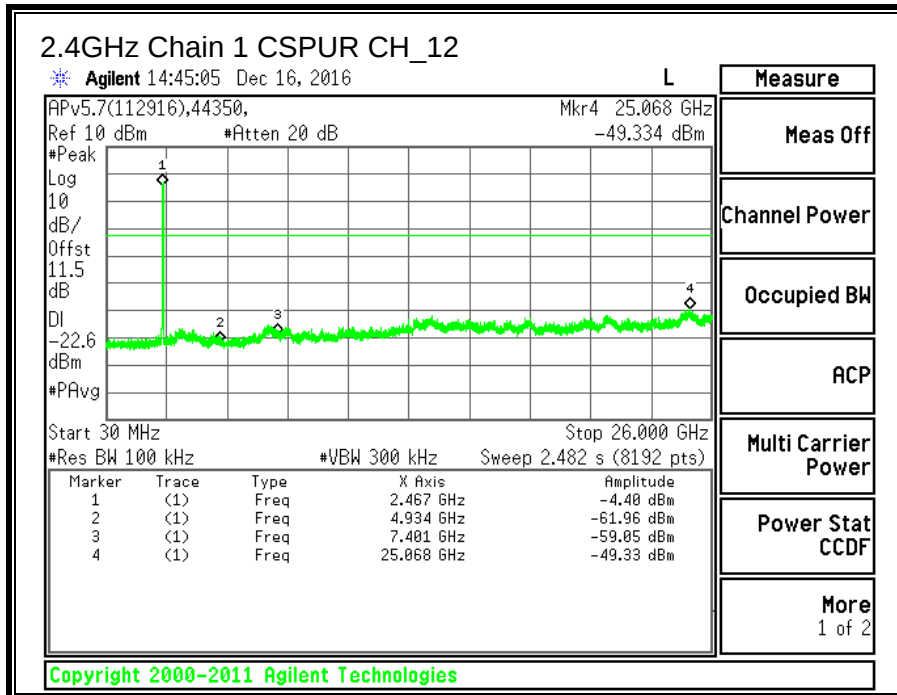

## 11.5. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND

### 11.5.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



#### TEST PROCEDURE



KDB 58074 D01 v03r05 Section 8.1



#### RESULTS



| Channel  | Frequency | 6 dB BW<br>Chain 0<br>(MHz) | 6 dB BW<br>Chain 1<br>(MHz) | Minimum<br>Limit (MHz) |
|----------|-----------|-----------------------------|-----------------------------|------------------------|
| Low_1    | 2412      | 17.575                      | 17.620                      | 0.5                    |
| Middle_6 | 2437      | 17.605                      | 17.605                      | 0.5                    |
| High_11  | 2462      | 17.625                      | 17.615                      | 0.5                    |
| High_12  | 2467      | 17.590                      | 17.575                      | 0.5                    |
| High_13  | 2472      | 15.110                      | 15.685                      | 0.5                    |

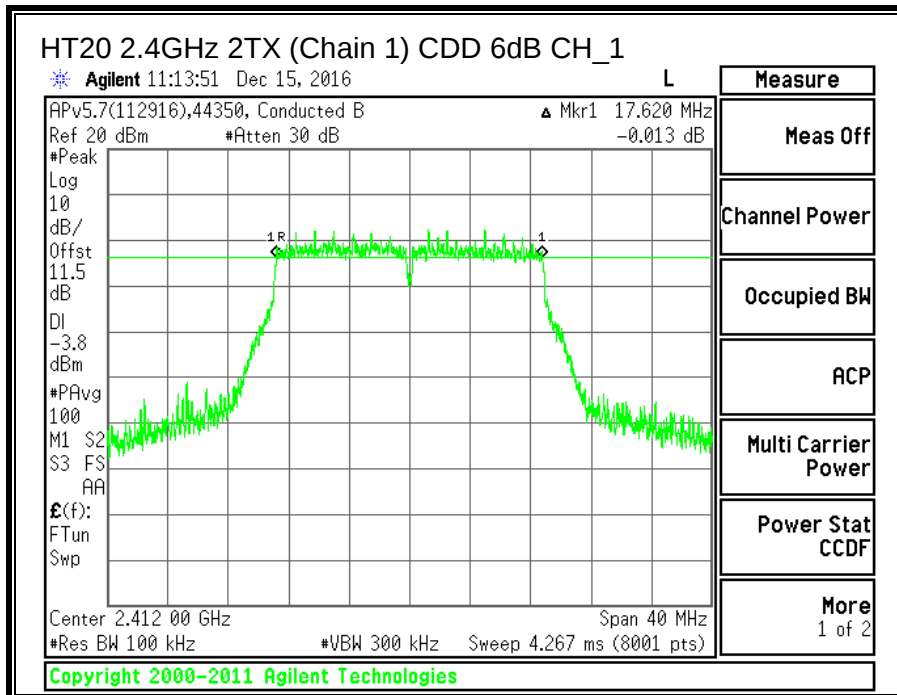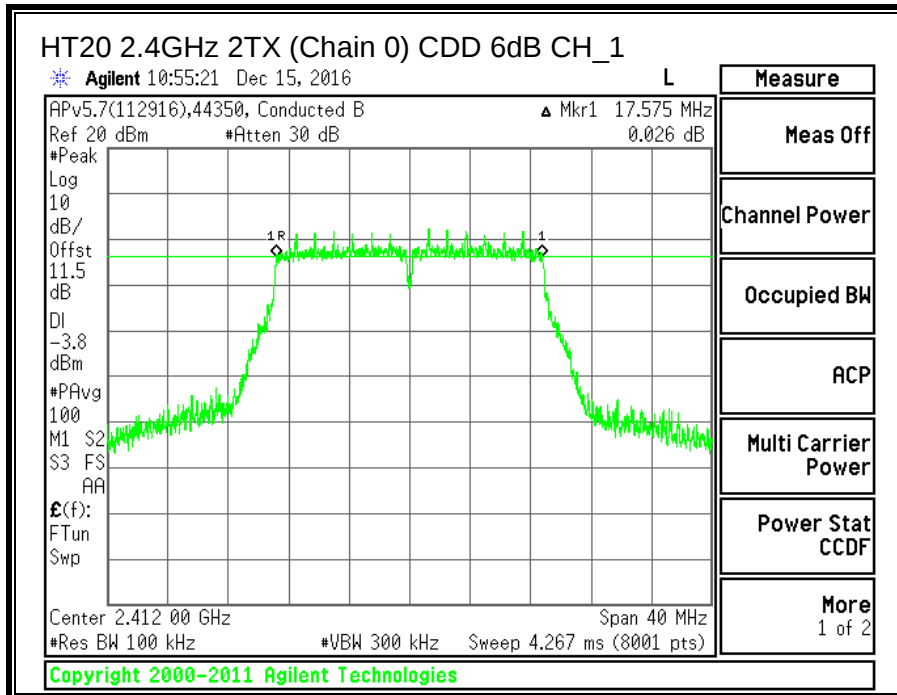

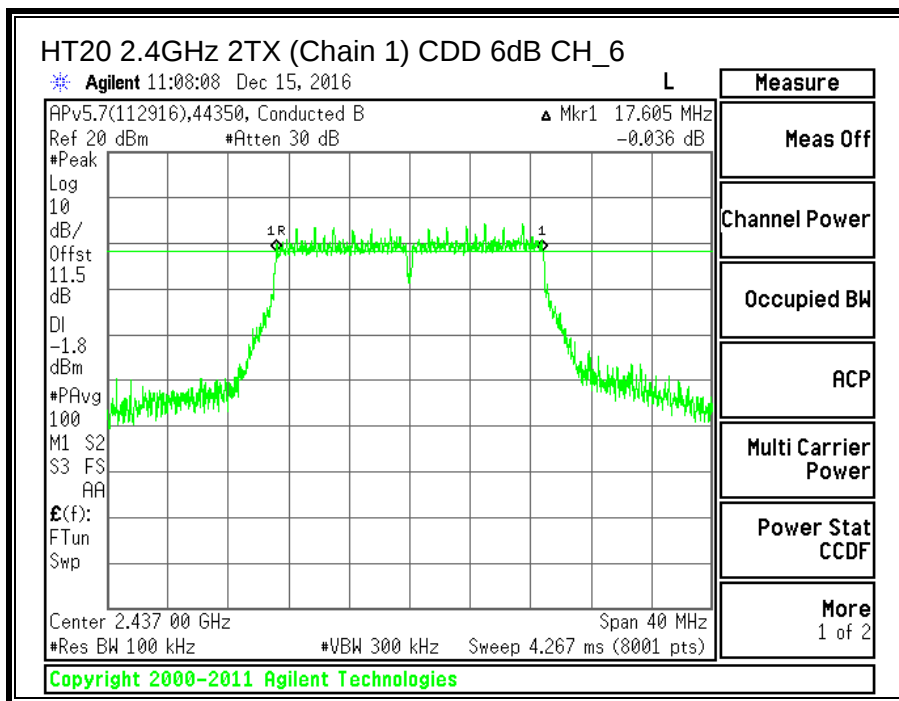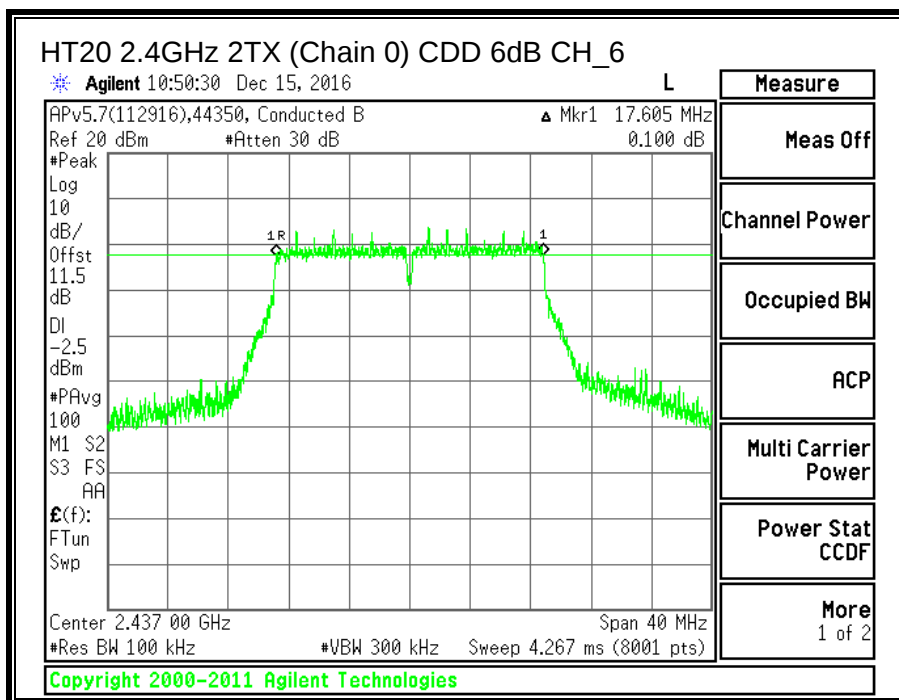

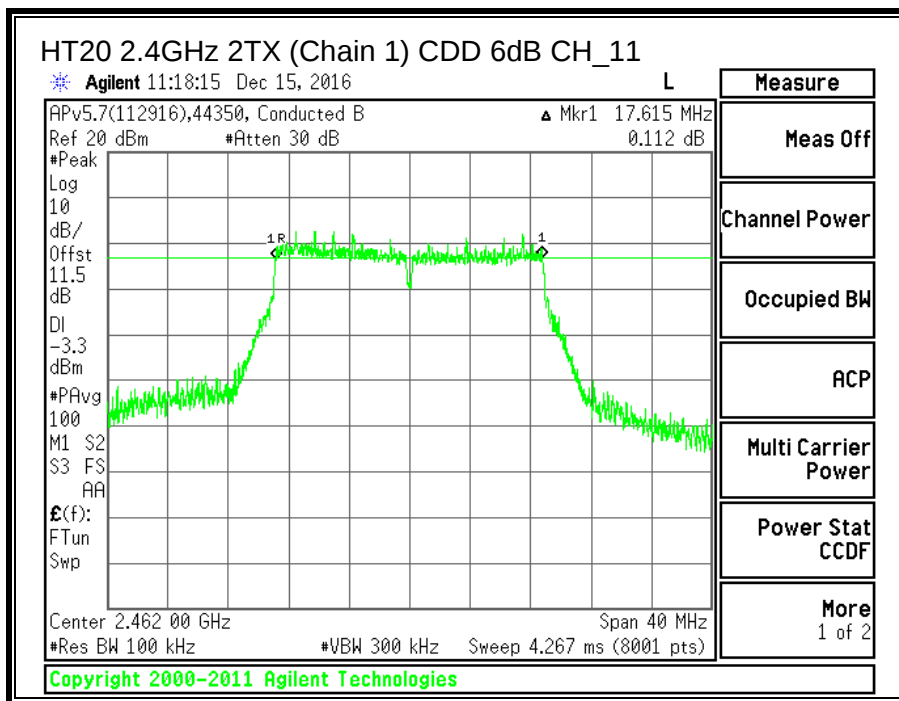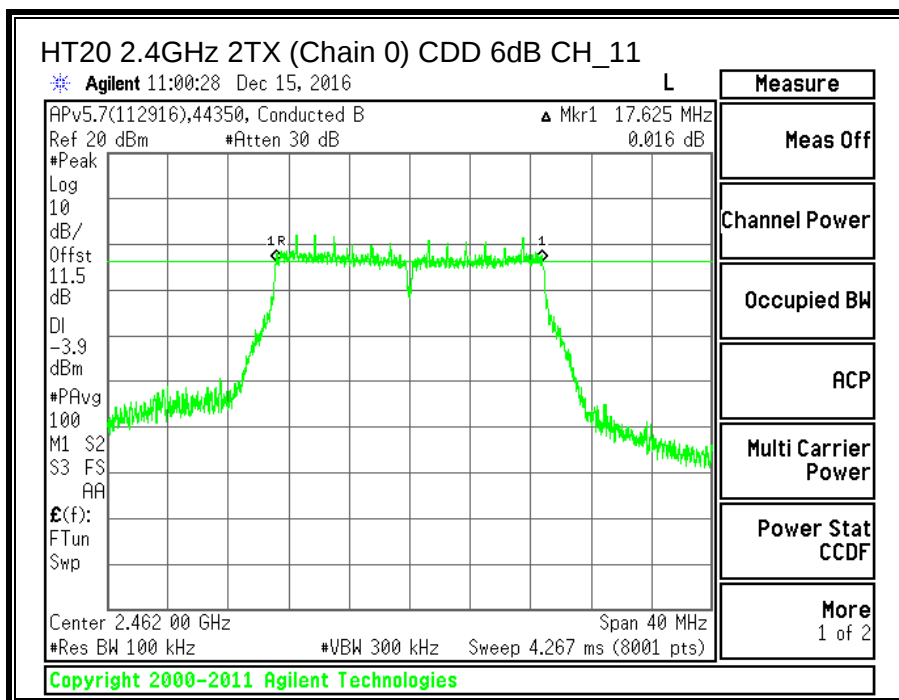

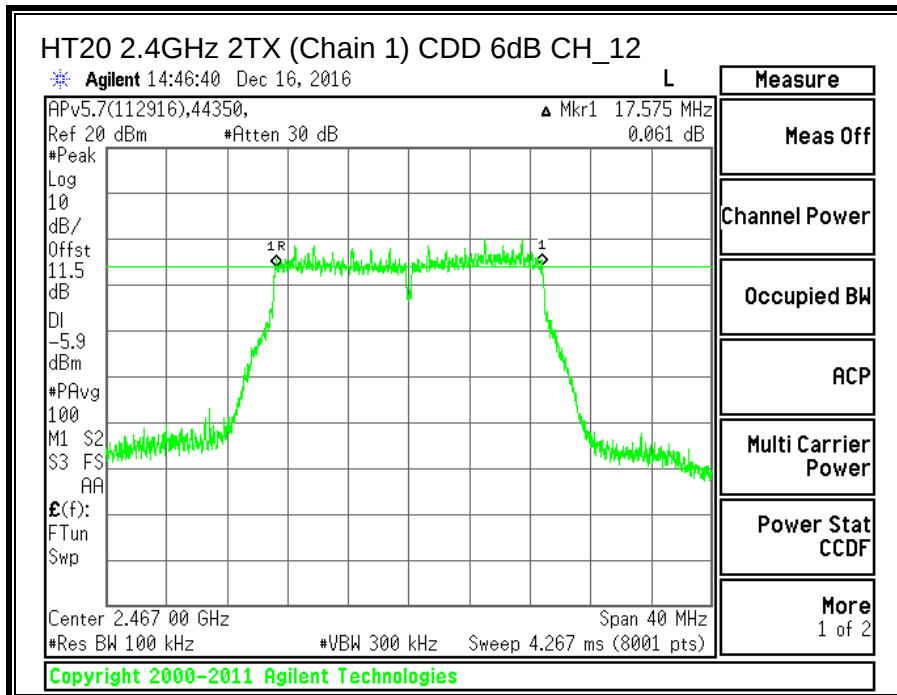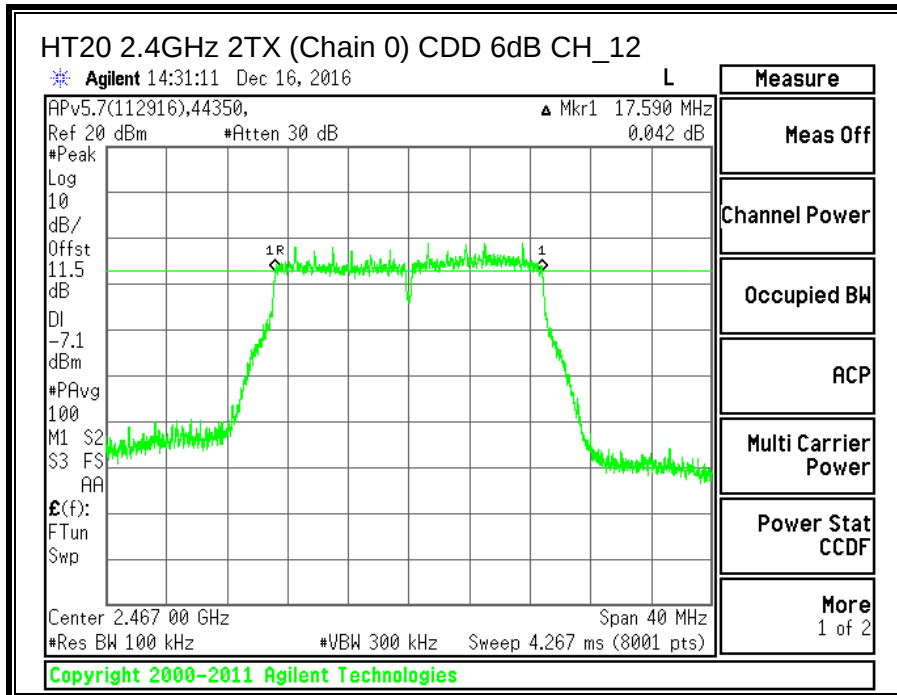

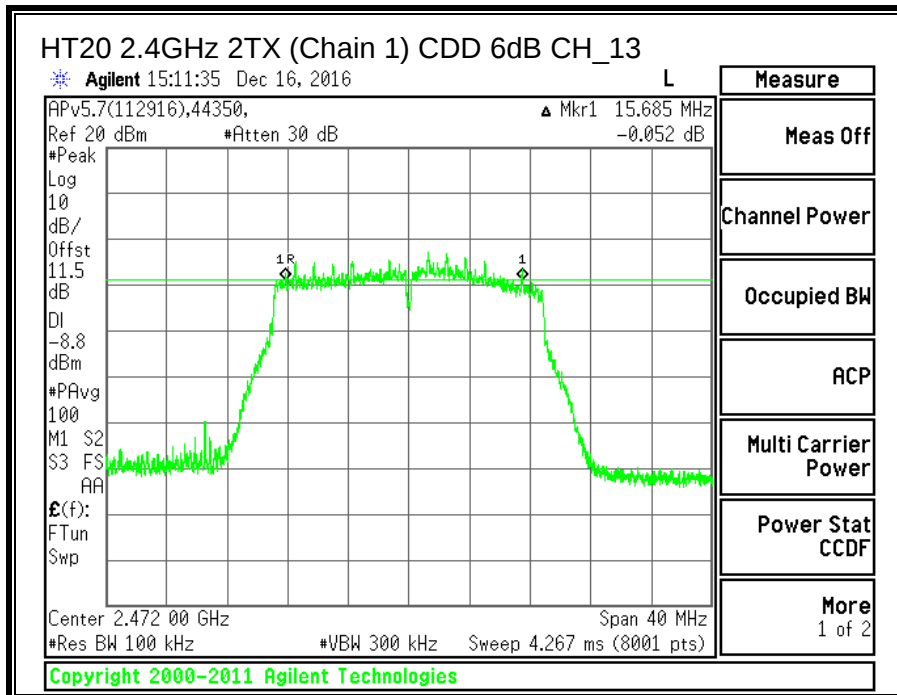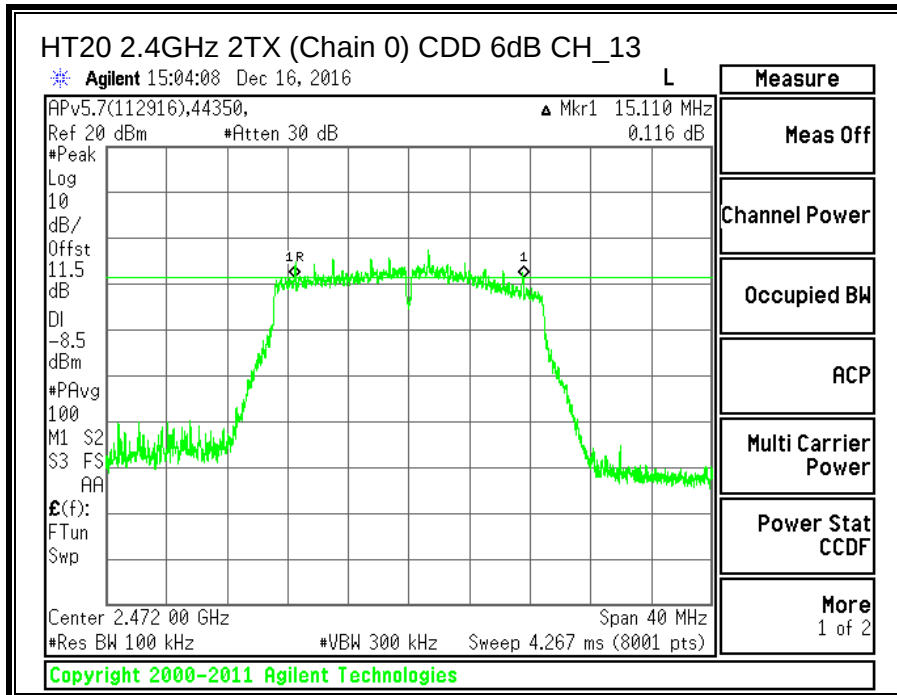

## 11.5.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

ANSI C63.10: 2013 Section 6.9.3

### RESULTS

| Channel  | Frequency (MHz) | 99% Bandwidth Chain 0 (MHz) | 99% Bandwidth Chain 1 (MHz) |
|----------|-----------------|-----------------------------|-----------------------------|
| Low_1    | 2412            | 17.4112                     | 17.5148                     |
| Middle_6 | 2437            | 17.4288                     | 17.4933                     |
| High_11  | 2462            | 17.5817                     | 17.4361                     |
| High_12  | 2467            | 17.3420                     | 17.3680                     |
| High_13  | 2472            | 17.1676                     | 17.2285                     |

