

Test Report

Product	Codec for Telepresence Unit
Name and address of the applicant	Cisco Systems Norway AS Philip Pedersens vei 1 1366 Lysaker, NORWAY
Name and address of the manufacturer	Cisco Systems, Inc. 170 West Tasman Drive San Jose, CA 95134, USA
Model	TTC6-15
Rating	Mains (100-240V AC, 50-60Hz, 2.0-1.2A)
Trademark	CISCO
Additional information	Bluetooth LE, Bluetooth Classic, WiFi 6
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Industry Canada RSS-247, Issue 2 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
Order number	PRJ0014735
Tested in period	2022-08-29 to 2023-01-06
Issue date	2023-01-25
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway www.nemko.com CAB Number: FCC: NO0001 ISED: NO0470   An accredited technical test executed under the Norwegian accreditation scheme
 Prepared by [Frode Sveinsen]  Approved by [G.Suhanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.	

Revision history

Revision	Date	Comment	Sign
A	2023-01-16	First edition	FS
B	2023-01-25	Added Power Levels and comments to Power measurements	FS



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above-named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

CONTENTS

1	INFORMATION	4
1.1	Test Item	4
1.2	Normal test conditions	4
1.3	Test Engineer(s)	4
1.4	Antenna Requirement.....	5
1.5	Power Levels.....	5
1.6	Comments.....	5
2	TEST REPORT SUMMARY	6
2.1	General	6
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	Power Line Conducted Emissions	7
3.2	Occupied Bandwidth (99% BW).....	8
3.3	DTS Bandwidth	10
3.4	Output Power	14
3.5	Conducted Emissions at Antenna Connector.....	24
3.6	Restricted Bands of operation.....	32
3.7	Radiated Emissions, Band Edge.....	33
3.8	Radiated Emissions, 30 – 1000 MHz.	51
3.9	Radiated Emissions, 1 – 26 GHz	54
3.10	Power Spectral Density (PSD).....	63
4	Measurement Uncertainty.....	72
5	LIST OF TEST EQUIPMENT.....	73
6	BLOCK DIAGRAM.....	74
6.1	Power Line Conducted Emission	74
6.2	Conducted Tests	74
6.3	Test Site Radiated Emission.....	75

1 INFORMATION

1.1 Test Item

Name	Cisco
Model/version	TTC6-15
FCC ID	LDK0615C2718
ISED ID	2461N-0615C2718
Serial number	FOC2641N3SK
Hardware identity and/or version	DV1
Software identity and/or version	RoomOS 10.20.X
Frequency Range	2412 – 2462 MHz
Number of Channels	11
Operating Modes	802.11b/g/n/ax (only 20 MHz mode)
Type of Modulation	DSSS / OFDM / OFDMA
Conducted Output Power	DSS: 78 mW OFDM: 105 mW OFDMA: 33 mW
Antenna Connector	RP-SMA
Number of Antennas	2
Antenna Diversity	YES
Smart Antennas	MIMO
Power Supply	Powered from Mains (120V 60Hz AC)
Antennas	BT/BLE/WIFI: SMARTEQ Model 710689 EUT has 3 identical antennas, one for BT/BLE and two for WiFi 2.4GHz/5GHz All antennas have RP-SMA connectors

Description of Test Item

The EUT is a Codec for Telepresence Unit.

The 2.4GHz WiFi part has been tested as a DTS system and fulfils all requirements for DTS systems.

1.2 Normal test conditions

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	120 V 60 Hz

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Antenna Requirement

Does the EUT have detachable antenna(s)?	☐ YES	☒ NO
If detachable, is the antenna connector(s) non-standard?	☐ YES	☐ NO
The tested equipment has only integral antennas. Conducted tests were performed with a temporary antenna connector.		

Requirement: FCC 15.203, 15.204

1.5 Power Levels

Ch.No.	Freq MHz	11b	11g	11n SISO	11n MIMO	11ax SISO		11ax MIMO	
						MCS0-MCS8	MCS9-MCS11	MCS0-MCS8	MCS9-MCS11
1	2412	15	14	13	10	11	11	8	8
2	2417	15	14	13	10	11	11	8	8
3	2422	18	16	15	13	14	12	11	9
4	2427	18	17	16	13	14	12	11	9
5	2432	18	17	16	13	14	12	11	9
6	2437	18	17	16	13	14	12	11	9
7	2442	18	17	16	13	14	12	11	9
8	2447	18	16	16	13	14	12	11	9
9	2452	18	15	15	13	14	12	11	9
10	2457	15	14	13	10	11	11	8	8
11	2462	15	13	13	10	11	11	8	8

Power levels above were used for all tests and shall also be programmed WiFi transmitter when put on the market.
Levels in red were modified from the default levels.

1.6 Comments

The measurements were done with the EUT powered by 120 V AC. It was checked that power variations between 85% and 115% did not have any influence on the measurements.

MIMO measurements were performed with the EUT transmitting in MIMO mode on both antennas (P0 and P1). When measuring radiated the direction was locked and the maximum position was found.

Measurements in SISO mode was performed on P0 when measuring at the antenna connector, and on both antennas when measuring radiated.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and ISSED RSS-247 Issue 2 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were performed in a semi-anechoic chamber at measuring distances of 3m.

A description of the test facility is on file with the FCC and ISSED.

☒ New Submission	☒ Production Unit
☐ Class II Permissive Change	☐ Pre-production Unit
DTS Equipment Code	☐ Family Listing

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	ANSI C63.10-2013 Reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	5.13	Complies
Antenna Requirement	15.203	6.8 (RSS-GEN)	5.8	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	6.2	Complies
Occupied Bandwidth (99% BW)	N/A	6.7 (RSS-GEN)	6.9.3	Complies
DTS Bandwidth	15.247(a)(2)	5.2 (1) (RSS-247)	11.8 Option 2	Complies
Peak Power Output	15.247(b)	5.4 (RSS-247)	11.9.1.1	Complies
Power Spectral Density	15.247(d)	5.2 (2) (RSS-247)	11.10.2 PKPSD (DTS)	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	5.5 (RSS-247)	6.7 11.11 (DTS)	Complies
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	6.3, 6.5, 6.6, 6.10 11.12, 11.13 (DTS)	Complies

3 TEST RESULTS

3.1 Power Line Conducted Emissions

FCC Part 15.207

ISED RSS-GEN Issue 5, Clause 7.2 / 8.8

Measurement procedure: ANSI C63.4-2014 using 50 μ H/50 ohms LISN


Test Results: Complies

Measurement Data: 120V 60Hz, See attached plots.

Highest measured value (L1 and N):

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.366000	---	38.46	48.59	10.13	15000.0	9.000	L1	ON	9.6
0.366000	40.56	---	58.59	18.03	15000.0	9.000	L1	ON	9.6
0.458000	---	36.08	46.73	10.65	15000.0	9.000	L1	ON	9.6
0.458000	38.62	---	56.73	18.11	15000.0	9.000	L1	ON	9.6
0.686000	---	28.45	46.00	17.55	15000.0	9.000	L1	ON	9.6
0.686000	33.22	---	56.00	22.78	15000.0	9.000	L1	ON	9.6

Full Spectrum

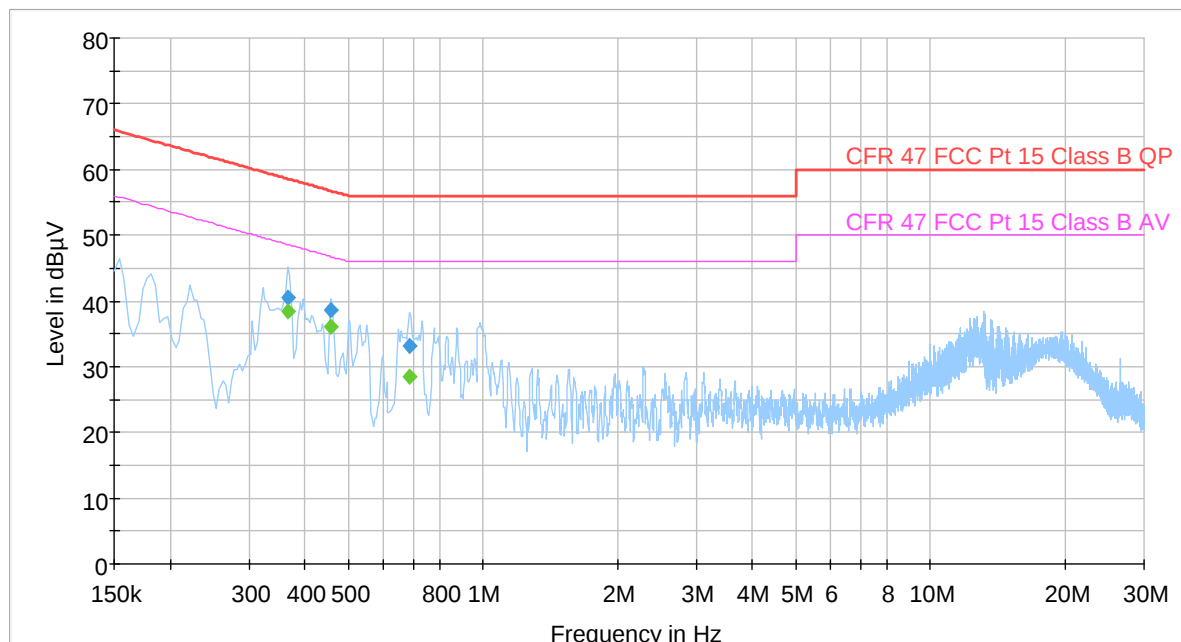

— Preview Result 1-PK+ — CFR 47 FCC Pt 15 Class B QP
— CFR 47 FCC Pt 15 Class B AV ◆ Final_Result QPK
◆ Final_Result CAV

3.2 Occupied Bandwidth (99% BW)

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.2

Test Results: Complies

Measurement Data:


Carrier Frequency, Modulation, Data Rate	Occupied Bandwidth (99% BW)
2437 MHz, 802.11b 1Mb	12.5 MHz
2437 MHz, 802.11g 6Mb	16.9 MHz
2437 MHz, 802.11n MCS0 SISO	17.7 MHz
2437 MHz, 802.11n MCS8 MIMO	17.9 MHz
2437 MHz, 802.11ax MCS0 SISO	19.1 MHz
2437 MHz, 802.11ax MCS0 MIMO	19.1 MHz

Occupied Bandwidth is the same for all channels


See attached plots

Requirements:


No requirements for Digital Transmission Systems.

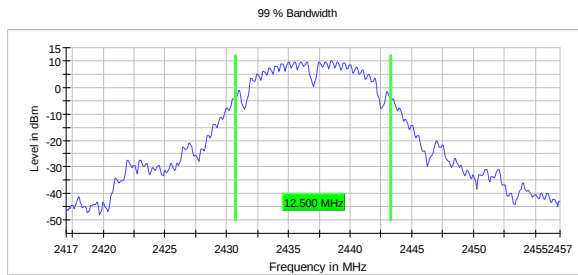


99% Occupied BW, 802.11b 1M

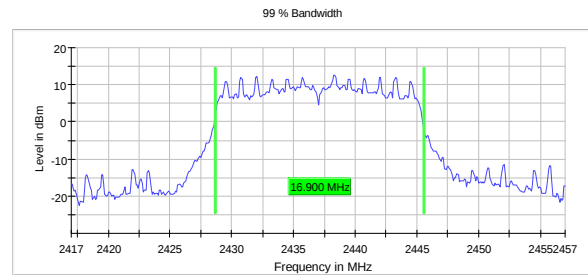


99% Occupied BW, 802.11g 6M

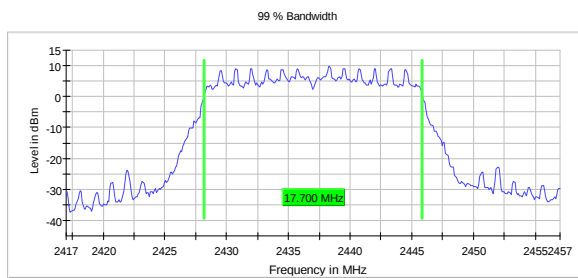


99% Occupied BW, 802.11n MCS0, SISO

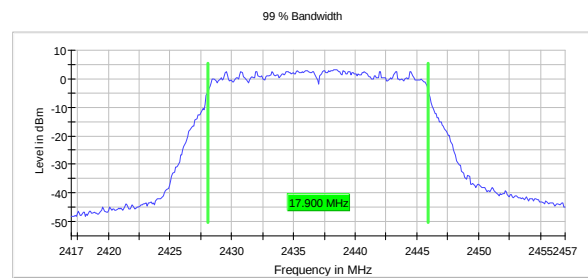

99% Occupied BW, 802.11n MCS8, MIMO

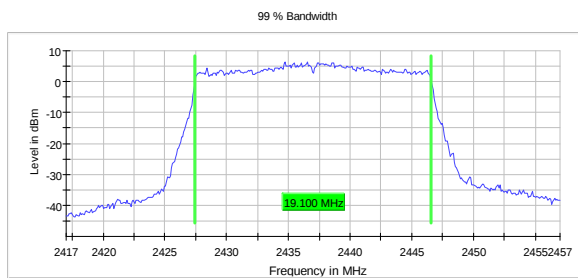

99% Occupied BW, 802.11ax MCS0, SISO

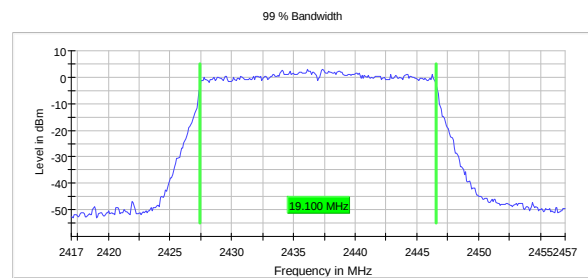

99% Occupied BW, 802.11ax MCS0, MIMO

3.3 DTS Bandwidth

FCC Part 15.247 (a)(2)

ISED Canada RSS-247 Issue 2, Clause 5.2 (a)

Measurement procedure: ANSI C63.10-2013 Clause 11.8

Test Results: Complies


Measurement Data:

Modulation Scheme and bitrate	Measured DTS Bandwidth (MHz)		
	2412 MHz	2437 MHz	2462 MHz
802.11b 1M	9.2	9.2	9.2
802.11b 11M	9.0	9.4	8.7
802.11g 6M	15.3	15.3	15.3
802.11g 54M	16.6	16.6	16.6
802.11n MCS0 SISO	15.3	15.3	15.3
802.11n MCS7 SISO	17.9	17.9	17.8
802.11ax MCS0 SISO	19.1	19.1	19.1
802.11ax MCS8 SISO	19.3	19.3	19.3
802.11ax MCS11 SISO	19.2	19.3	19.2
802.11ax MCS0 MIMO	19.1	19.1	19.1


Power supply variation within 85 % to 115% of nominal value has no influence on measured value.

Requirements:


For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.

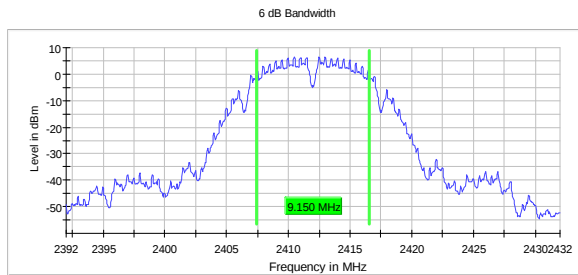


DTS BW, 2412 MHz, 802.11b 1M

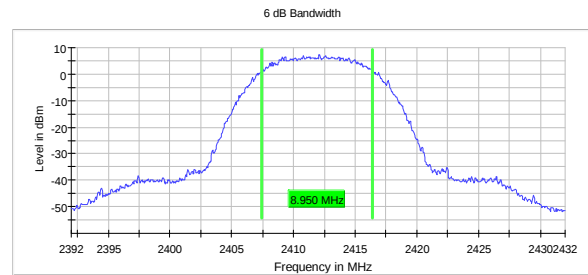


DTS BW, 2412 MHz, 802.11b 11M

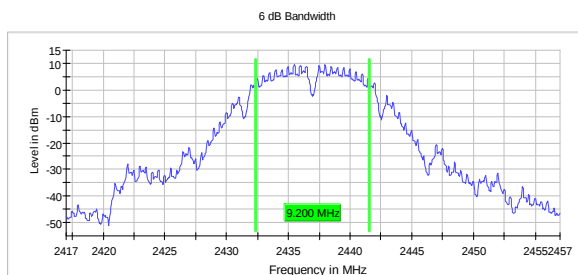


DTS BW, 2437 MHz, 802.11b 1M

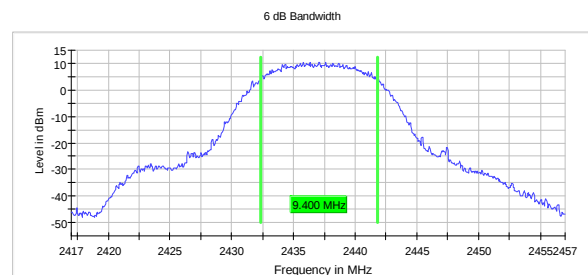


DTS BW, 2437 MHz, 802.11b 11M

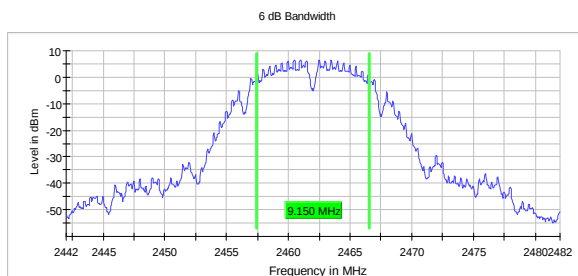


DTS BW, 2462 MHz, 802.11b 1M

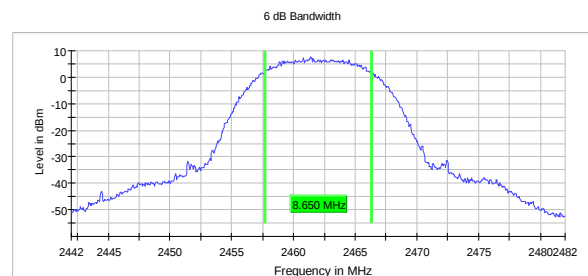


DTS BW, 2462 MHz, 802.11b 11M

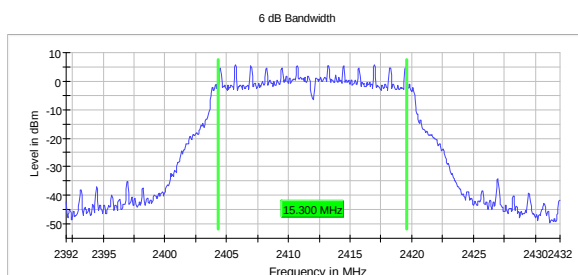


DTS BW, 2412 MHz, 802.11g 6M

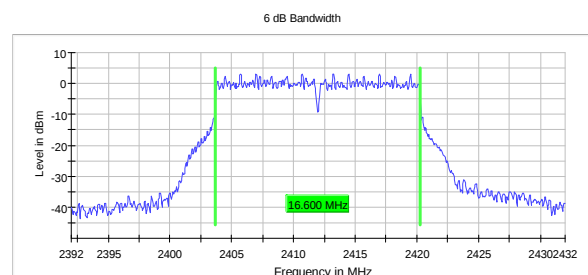


DTS BW, 2412 MHz, 802.11g 54M

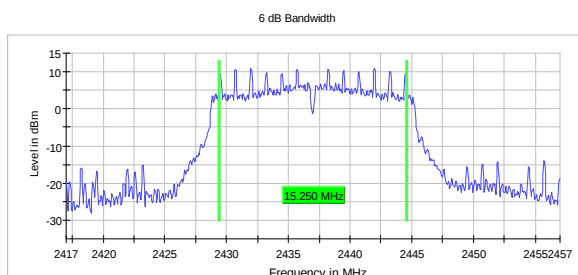


DTS BW, 2437 MHz, 802.11g 6M

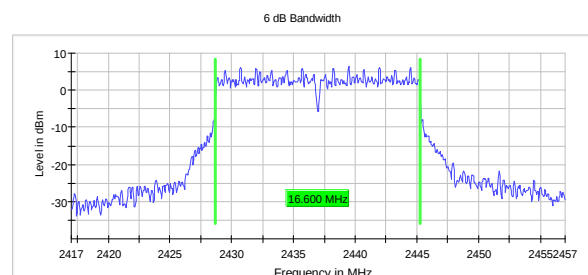


DTS BW, 2437 MHz, 802.11g 54M

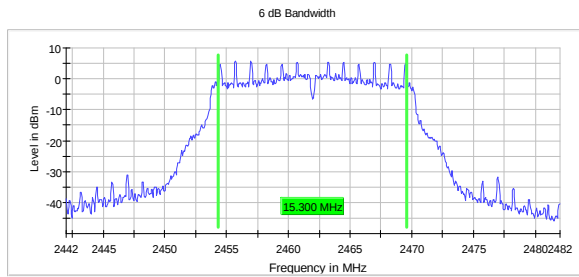


DTS BW, 2462 MHz, 802.11g 6M

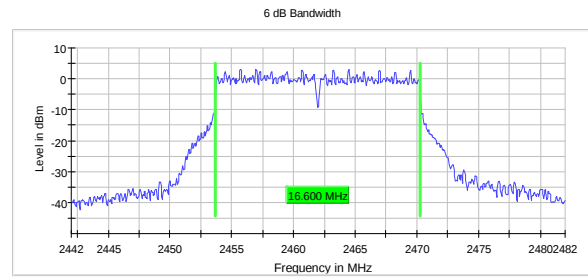


DTS BW, 2462 MHz, 802.11g 54M

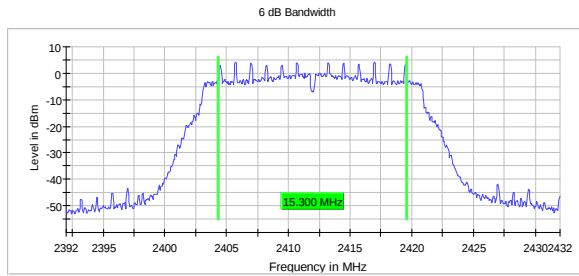


DTS BW, 2412 MHz, 802.11n MCS0, SISO

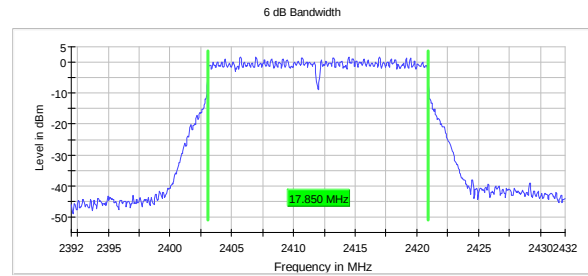


DTS BW, 2412 MHz, 802.11n MCS7, SISO

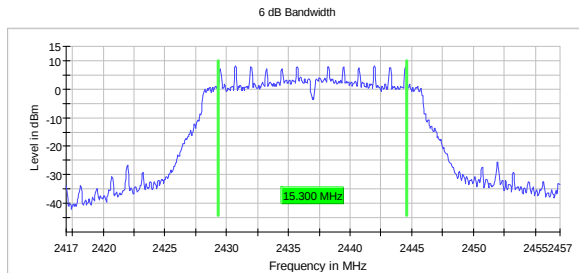


DTS BW, 2437 MHz, 802.11n MCS0, SISO

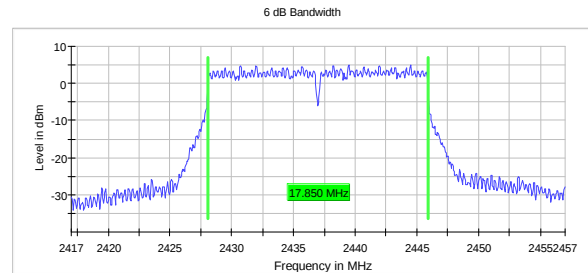


DTS BW, 2437 MHz, 802.11n MCS7, SISO

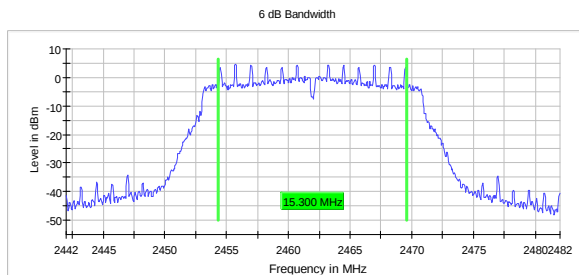


DTS BW, 2462 MHz, 802.11n MCS0, SISO

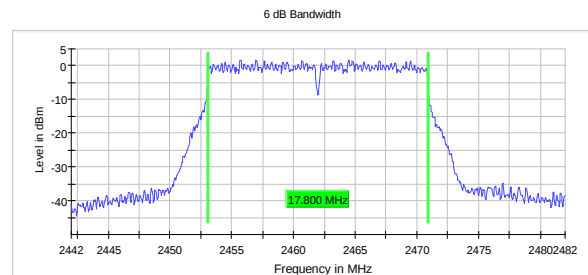


DTS BW, 2462 MHz, 802.11n MCS7, SISO

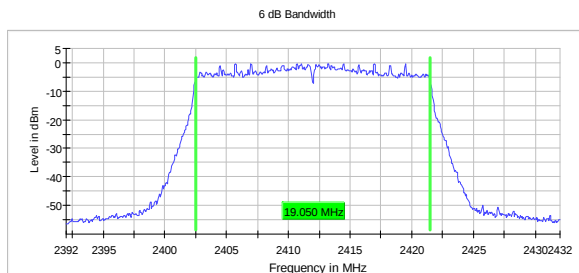


DTS BW, 2412 MHz, 802.11ax MCS0, SISO

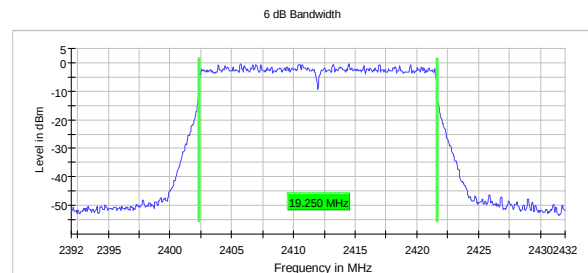


DTS BW, 2412 MHz, 802.11ax MCS8, SISO

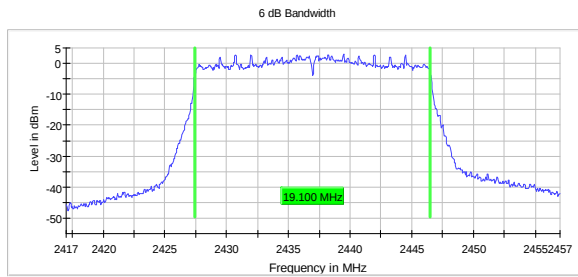


DTS BW, 2437 MHz, 802.11ax MCS0, SISO

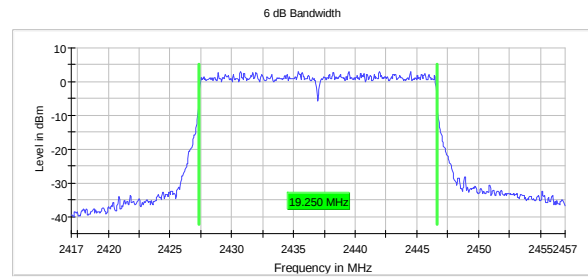


DTS BW, 2437 MHz, 802.11ax MCS8, SISO

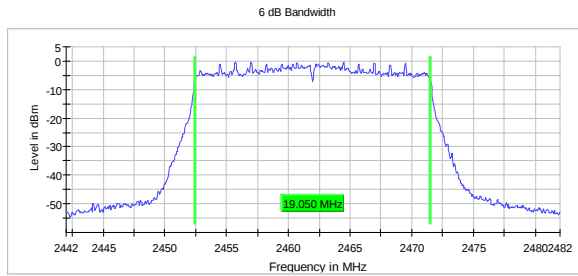


DTS BW, 2462 MHz, 802.11ax MCS0, SISO

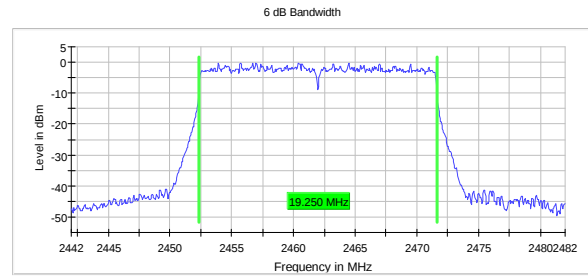


DTS BW, 2462 MHz, 802.11ax MCS8, SISO

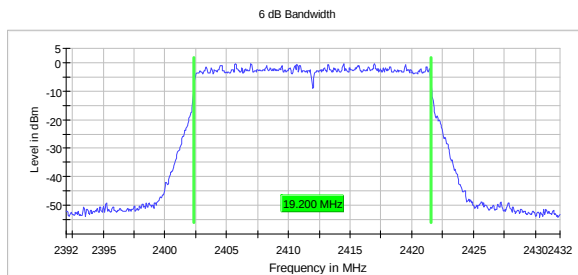


DTS BW, 2412 MHz, 802.11ax MCS11, SISO

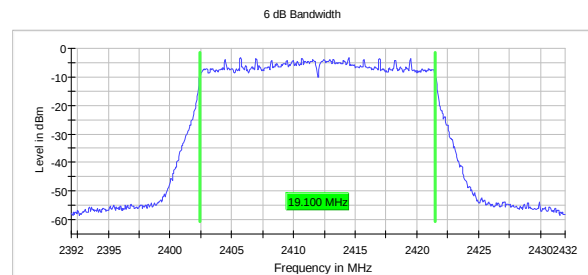


DTS BW, 2412 MHz, 802.11ax MCS0, MIMO

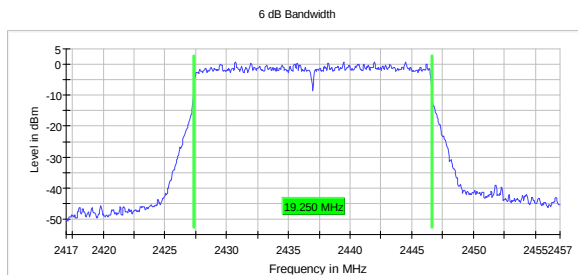


DTS BW, 2437 MHz, 802.11ax MCS11, SISO

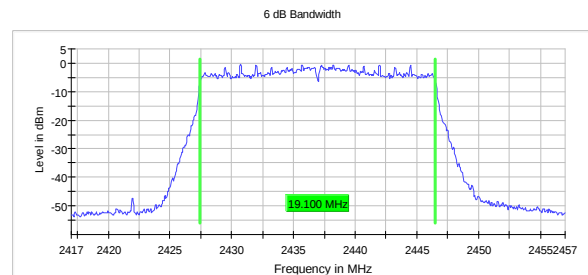

DTS BW, 2437 MHz, 802.11ax MCS0, MIMO

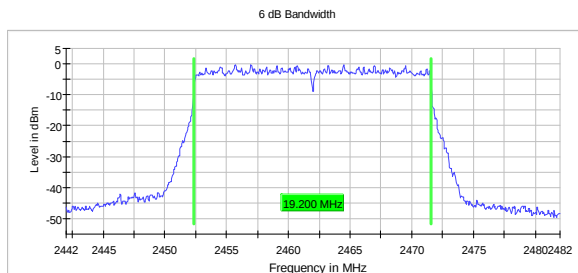

DTS BW, 2462 MHz, 802.11ax MCS11, SISO

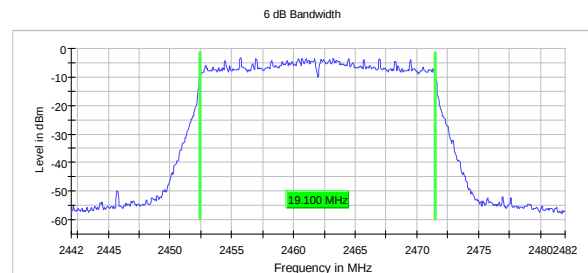

DTS BW, 2462 MHz, 802.11ax MCS0, MIMO

3.4 Output Power

FCC Part 15.247 (b)

ISED Canada RSS-247 Issue 2, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

Measurement Data:

Modulation and bitrate	Average Conducted Power, dBm							
	2412 MHz	2422 MHz	2427 MHz	2437 MHz	2442 MHz	2447 MHz	2452 MHz	2462 MHz
802.11b 1M	15.4	18.6		18.3			18.3	15.5
802.11b 11M	15.5	18.9		18.8			18.9	15.7
802.11g 6M	14.3	16.9	19.3	19.7	19.9	20.2	17.7	14.7
802.11g 54M	15.2	16.9	18.0	18.2	18.3	17.1	16.2	15.2
802.11n MCS0, SISO	13.0	17.1		16.9			17.2	13.4
802.11n MCS7, SISO	13.6	16.0	17.0	16.8		16.6	15.9	13.7
802.11n MCS8, MIMO	12.0	15.0		14.6			14.6	11.7
802.11n MCS15, MIMO	12.3	15.6		15.2			15.2	12.3
802.11ax MCS0, SISO	11.3	14.6		14.5			14.7	11.1
802.11ax MCS8, SISO	11.7	15.2		15.2			15.1	11.9
802.11ax MCS11, SISO	11.8	12.9		12.9			12.7	11.8
802.11ax MCS0, MIMO	10.2	13.1		12.7			12.7	9.9
802.11ax MCS8, MIMO	10.8	13.7		13.5			13.4	10.5
802.11ax MCS11, MIMO	10.7	11.9		11.5			11.4	10.5

Modulation and bitrate	Average Conducted Power, mW							
	2412 MHz	2422 MHz	2427 MHz	2437 MHz	2442 MHz	2447 MHz	2452 MHz	2462 MHz
802.11b 1M	34.7	72.4		67.6			67.6	35.5
802.11b 11M	35.5	77.6		75.9			77.6	37.2
802.11g 6M	26.9	49.0	85.1	93.3	97.7	104.7	58.9	29.5
802.11g 54M	33.1	49.0	63.1	66.1	67.6	51.3	41.7	33.1
802.11n MCS0, SISO	20.0	51.3		49.0			52.5	21.9
802.11n MCS7, SISO	22.9	39.8	50.1	47.9		45.7	38.9	23.4
802.11n MCS8, MIMO	15.8	31.6		28.8			28.8	14.8
802.11n MCS15, MIMO	17.0	36.3		33.1			33.1	17.0
802.11ax MCS0, SISO	13.5	28.8		28.2			29.5	12.9
802.11ax MCS8, SISO	14.8	33.1		33.1			32.4	15.5
802.11ax MCS11, SISO	15.1	19.5		19.5			18.6	15.1
802.11ax MCS0, MIMO	10.5	20.4		18.6			18.6	9.8
802.11ax MCS8, MIMO	12.0	23.4		22.4			21.9	11.2
802.11ax MCS11, MIMO	11.7	15.5		14.1			13.8	11.2

Output Power reported is Average Power measured with a wideband power meter.


Output Power on P0 and P1 in SISO mode is identical. All SISO measurements in conducted mode were performed on P0.

Output in MIMO mode is the sum power of P0+P1. The measurement was performed simultaneously with two power meters and the sum power was calculated. The R&S TS8997 Test System contains 8 identical power meters, however for this EUT only two of them were used.


Antenna Gain is less than 6 dBi.

See attached plots.

Requirements for Digital Modulation systems
For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the 1 Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the <i>maximum conducted output power</i> is the highest total transmit power occurring in any mode.
Maximum allowed Antenna Gain
If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

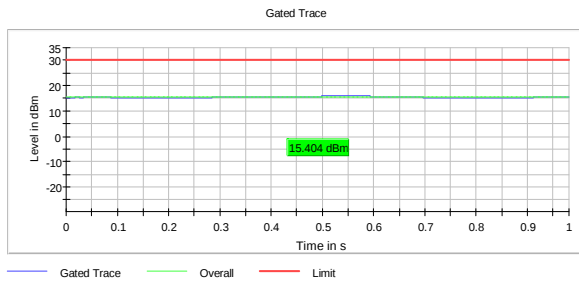


Output Power, 2412 MHz, 802.11b 1M

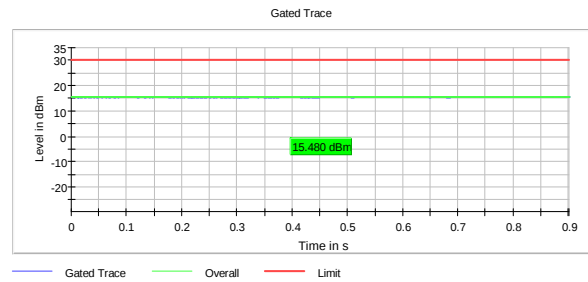

Output Power, 2412 MHz, 802.11b 11M




Output Power, 2422 MHz, 802.11b 1M

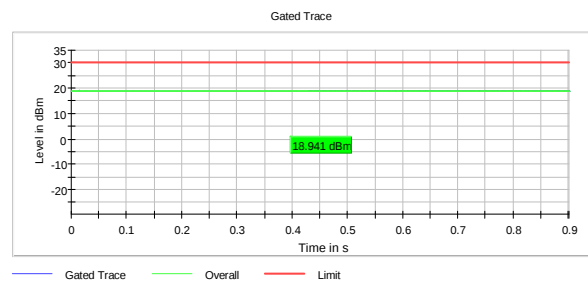


Output Power, 2422 MHz, 802.11b 11M




Output Power, 2437 MHz, 802.11b 1M

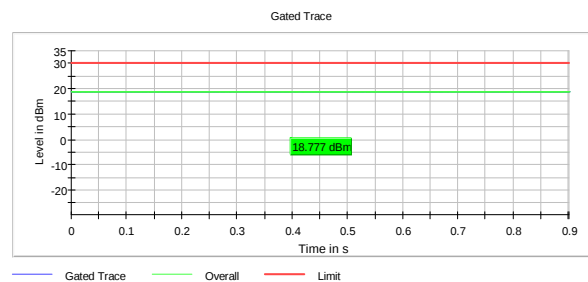


Output Power, 2437 MHz, 802.11b 11M

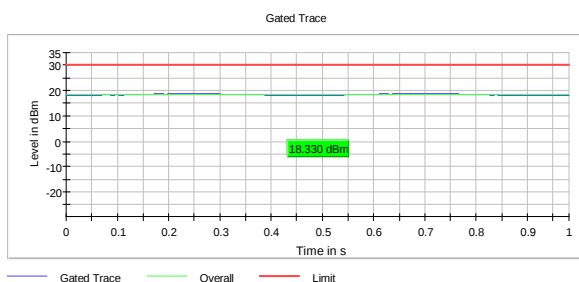


Output Power, 2452 MHz, 802.11b 1M

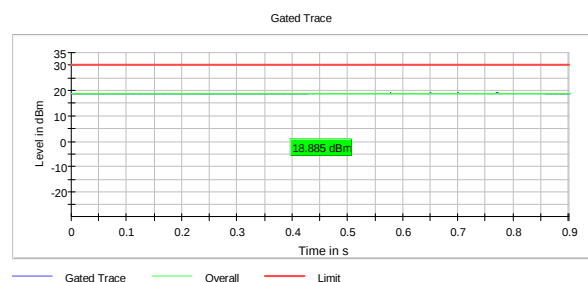


Output Power, 2452 MHz, 802.11b 11M

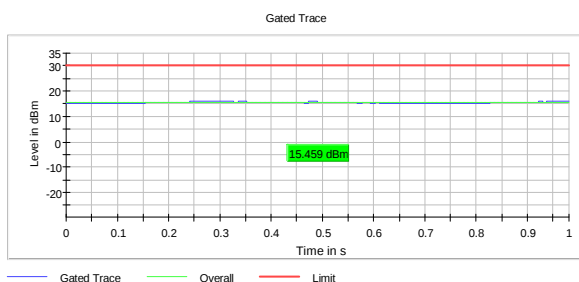


Output Power, 2462 MHz, 802.11b 1M

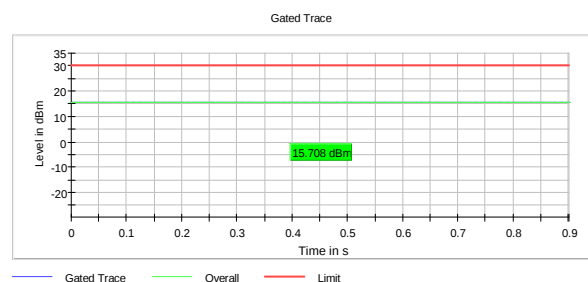


Output Power, 2462 MHz, 802.11b 11M

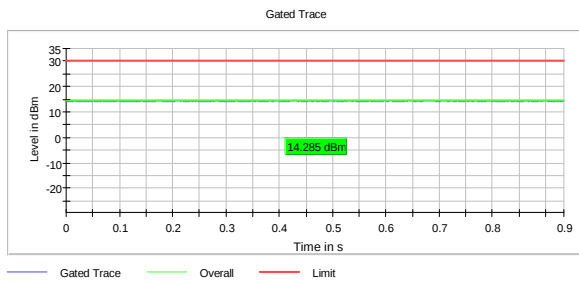


Output Power, 2412 MHz, 802.11g 6M

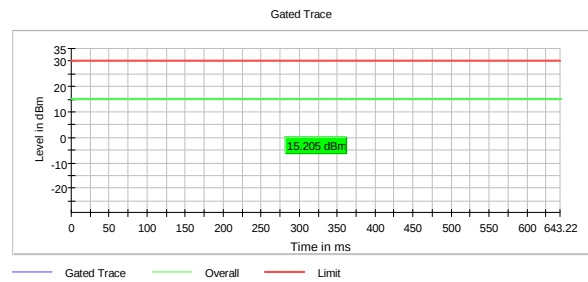

Output Power, 2412 MHz, 802.11g 54M

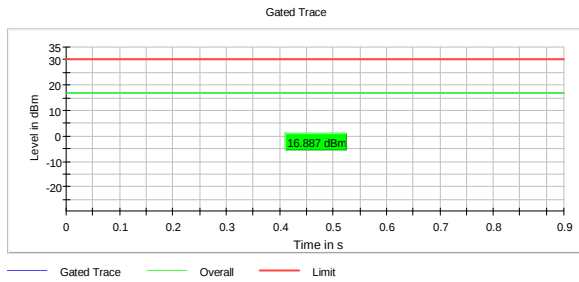


Output Power, 2422 MHz, 802.11g 6M

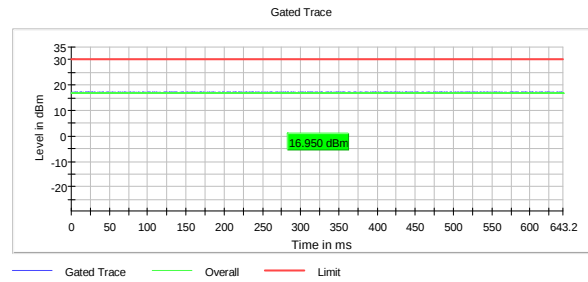

Output Power, 2422 MHz, 802.11g 54M




Output Power, 2427 MHz, 802.11g 6M

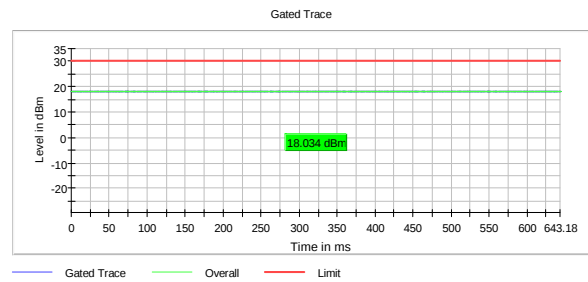

Output Power, 2427 MHz, 802.11g 54M




Output Power, 2437 MHz, 802.11g 6M

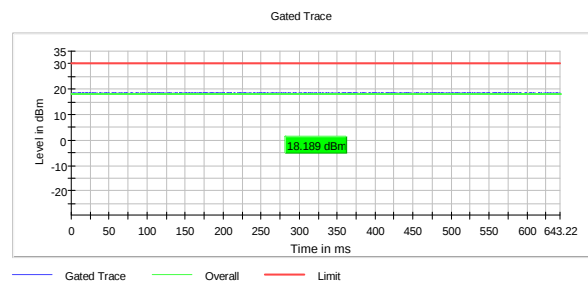


Output Power, 2437 MHz, 802.11g 54M




Output Power, 2442 MHz, 802.11g 6M

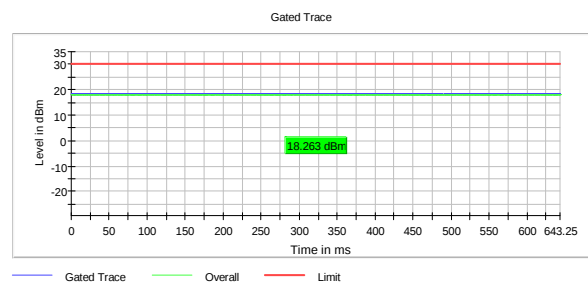


Output Power, 2442 MHz, 802.11g 54M

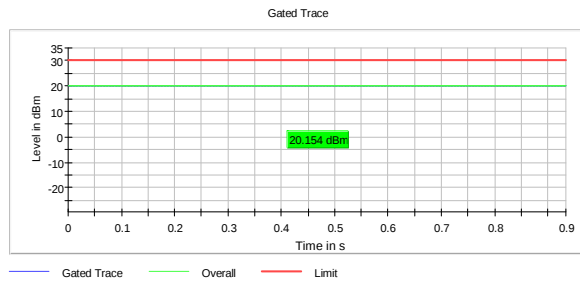


Output Power, 2447 MHz, 802.11g 6M

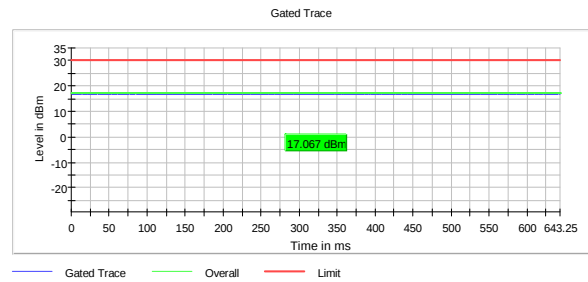


Output Power, 2447 MHz, 802.11g 54M

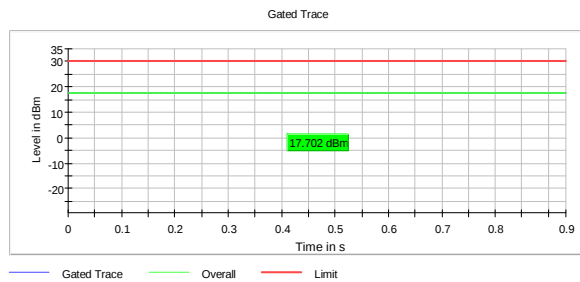


Output Power, 2452 MHz, 802.11g 6M

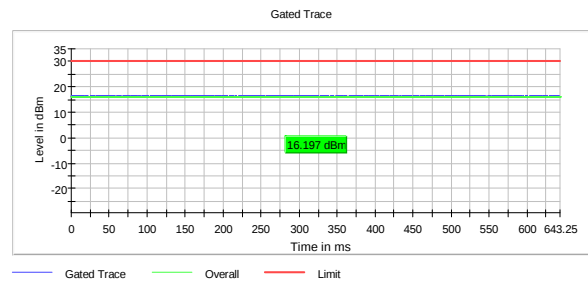


Output Power, 2452 MHz, 802.11g 54M

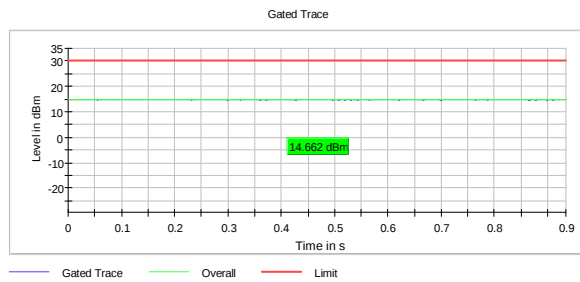


Output Power, 2462 MHz, 802.11g 6M

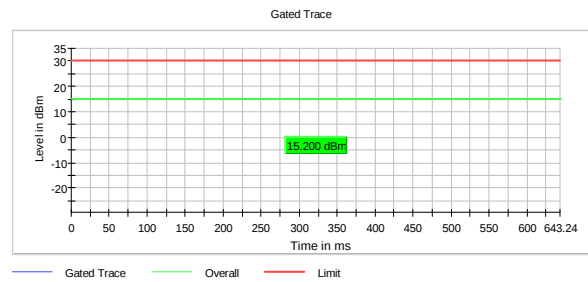


Output Power, 2462 MHz, 802.11g 54M

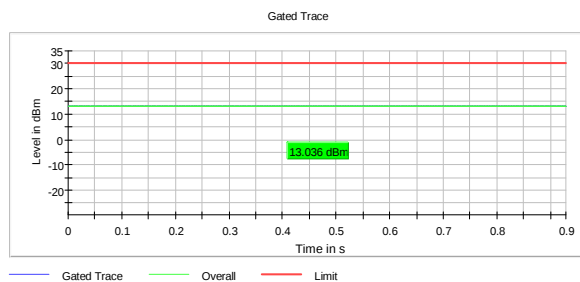


Output Power, 2412 MHz, 802.11n MCS0

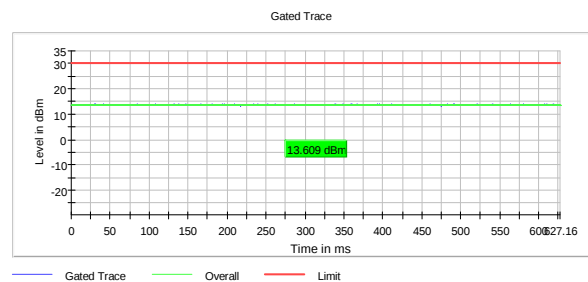


Output Power, 2412 MHz, 802.11n MCS7

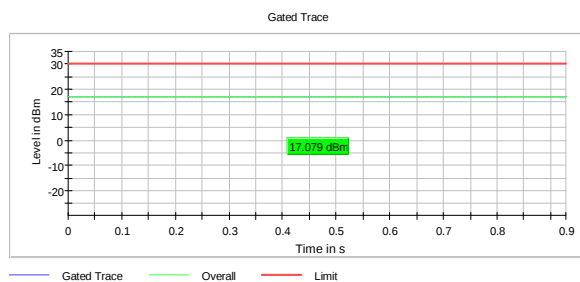


Output Power, 2422 MHz, 802.11n MCS0

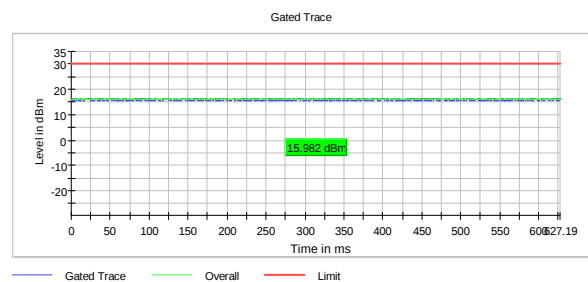


Output Power, 2422 MHz, 802.11n MCS7

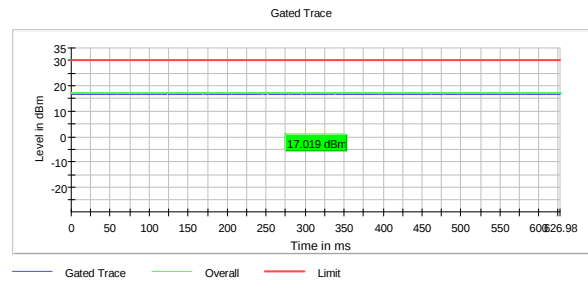


Output Power, 2427 MHz, 802.11n MCS7

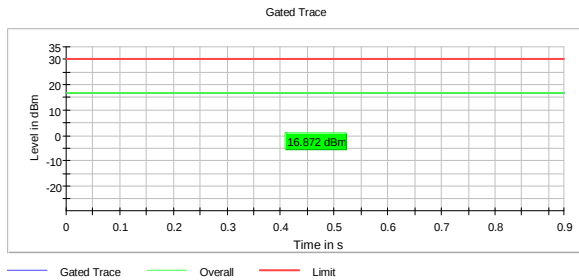


Output Power, 2437 MHz, 802.11n MCS0

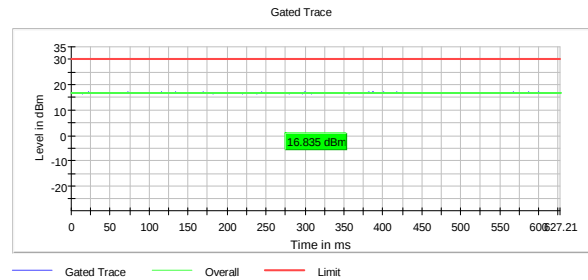


Output Power, 2437 MHz, 802.11n MCS7

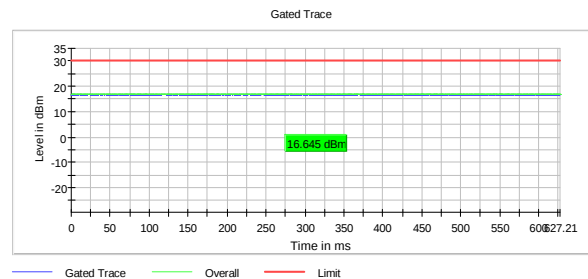


Output Power, 2447 MHz, 802.11n MCS7

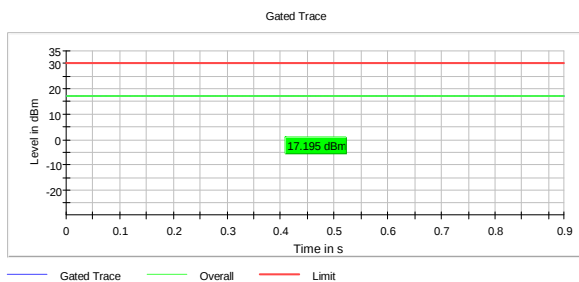


Output Power, 2452 MHz, 802.11n MCS0

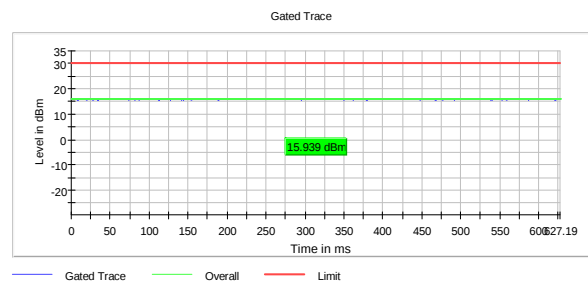


Output Power, 2452 MHz, 802.11n MCS7

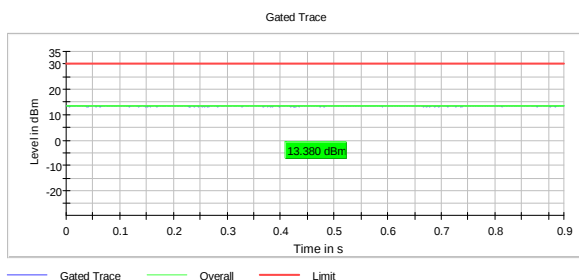


Output Power, 2462 MHz, 802.11n MCS0

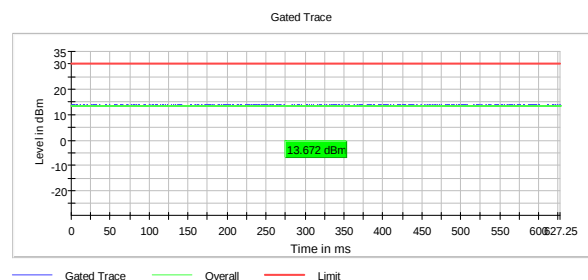


Output Power, 2462 MHz, 802.11n MCS7

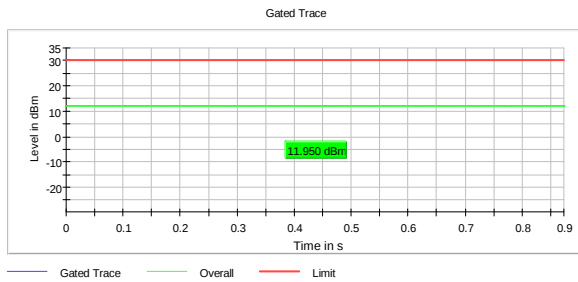


Output Power, 2412 MHz, 802.11n MCS8, MIMO

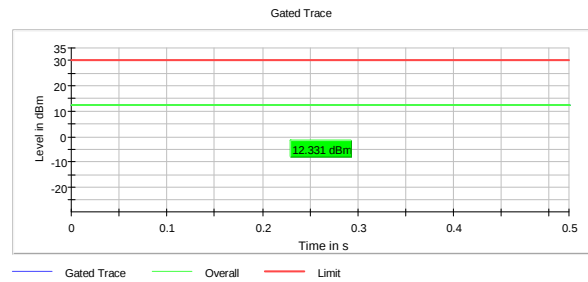

Output Power, 2412 MHz, 802.11n MCS15, MIMO

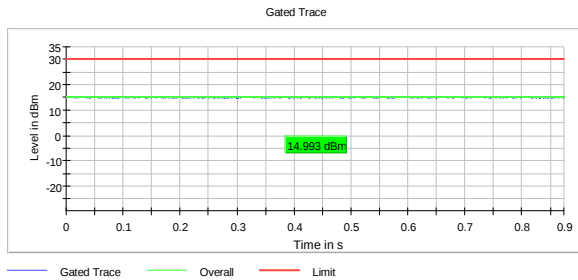

Output Power, 2422 MHz, 802.11n MCS8, MIMO

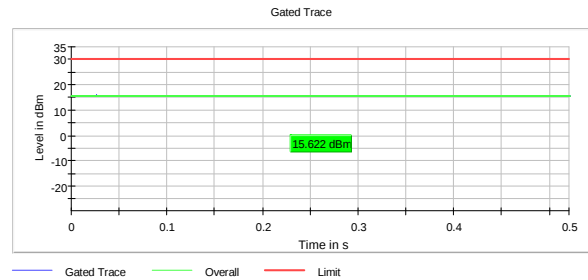


Output Power, 2422 MHz, 802.11n MCS15, MIMO




Output Power, 2437 MHz, 802.11n MCS8, MIMO




Output Power, 2437 MHz, 802.11n MCS15, MIMO

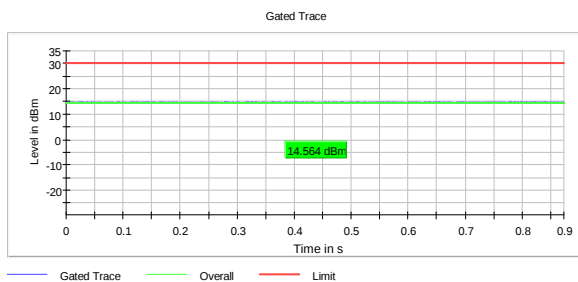


Output Power, 2452 MHz, 802.11n MCS8, MIMO

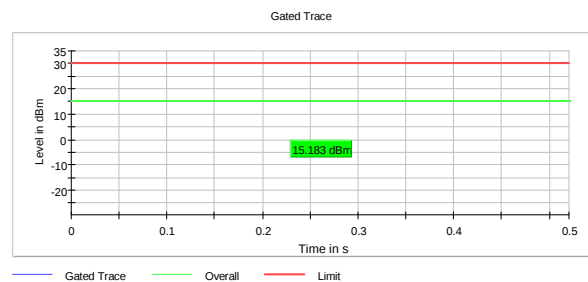


Output Power, 2452 MHz, 802.11n MCS15, MIMO

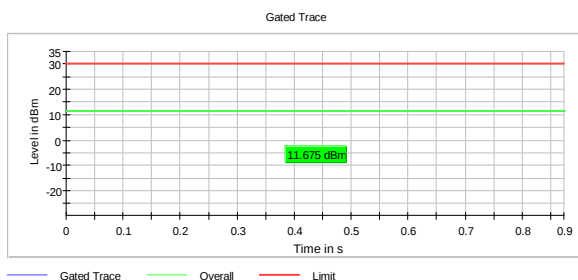


Output Power, 2462 MHz, 802.11n MCS8, MIMO

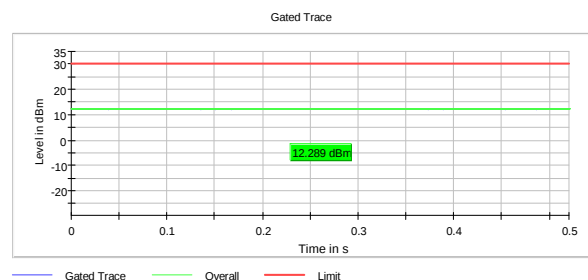


Output Power, 2462 MHz, 802.11n MCS15, MIMO

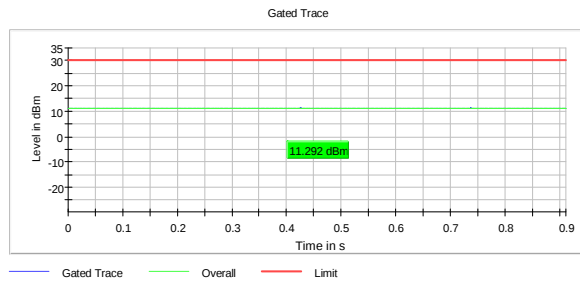


Output Power, 2412 MHz, 802.11ax MCS0

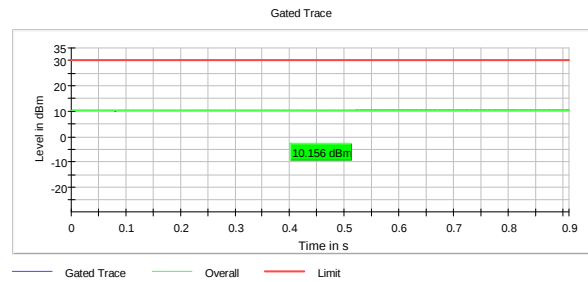


Output Power, 2412 MHz, 802.11ax MCS0, MIMO

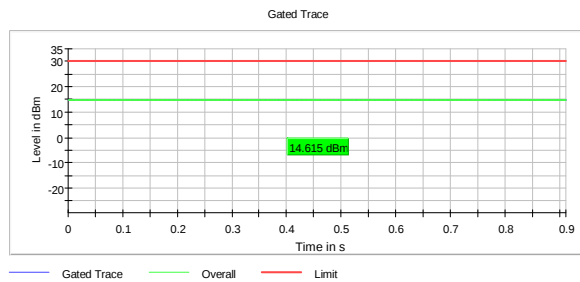


Output Power, 2422 MHz, 802.11ax MCS0

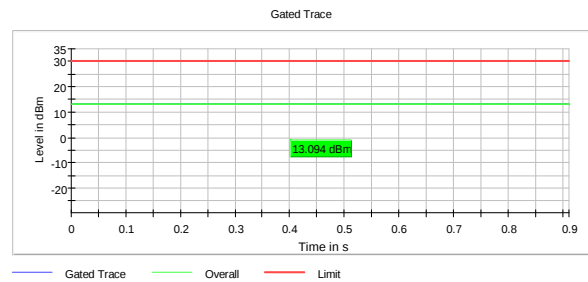


Output Power, 2422 MHz, 802.11ax MCS0, MIMO

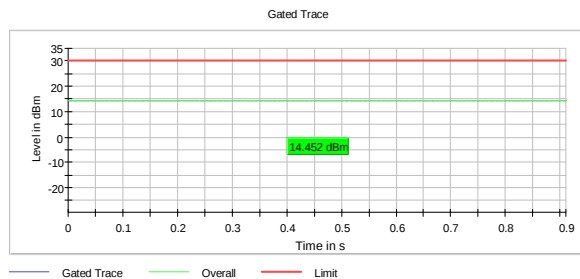


Output Power, 2437 MHz, 802.11ax MCS0

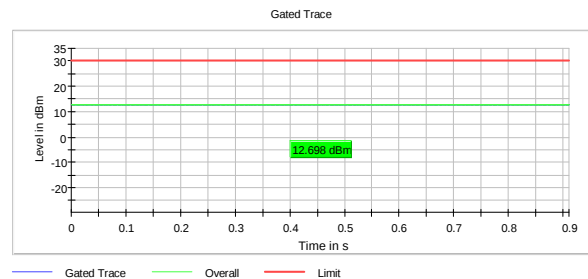


Output Power, 2437 MHz, 802.11ax MCS0, MIMO

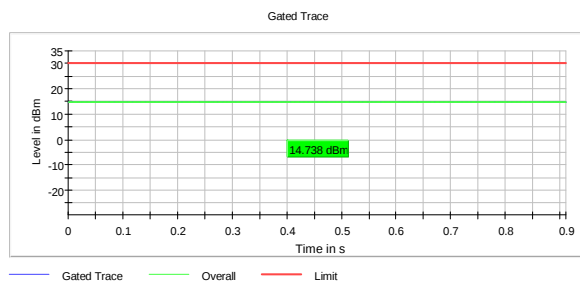


Output Power, 2452 MHz, 802.11ax MCS0

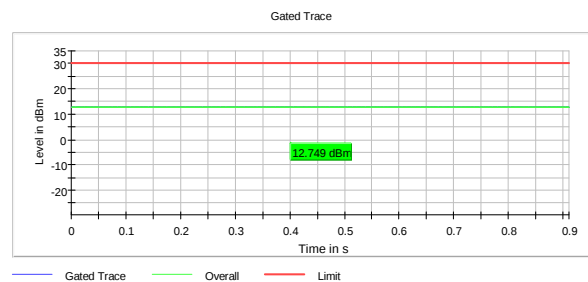


Output Power, 2452 MHz, 802.11ax MCS0, MIMO

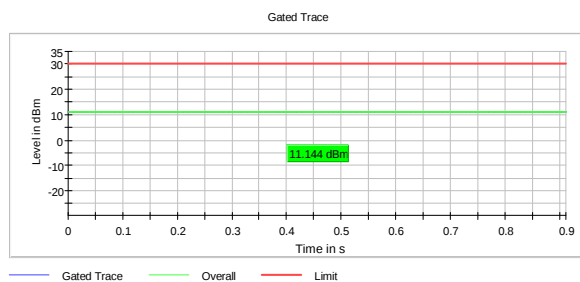


Output Power, 2462 MHz, 802.11ax MCS0

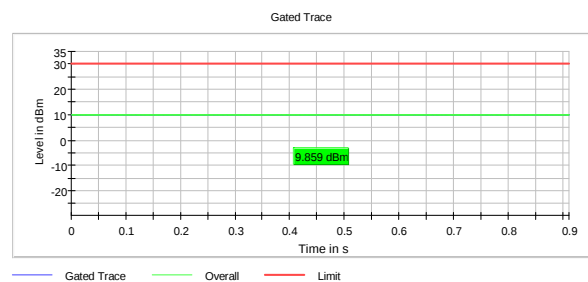


Output Power, 2462 MHz, 802.11ax MCS0, MIMO

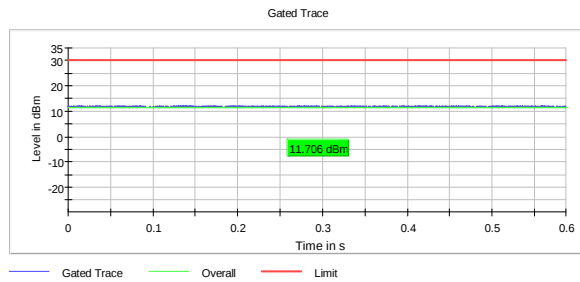


Output Power, 2412 MHz, 802.11ax MCS8

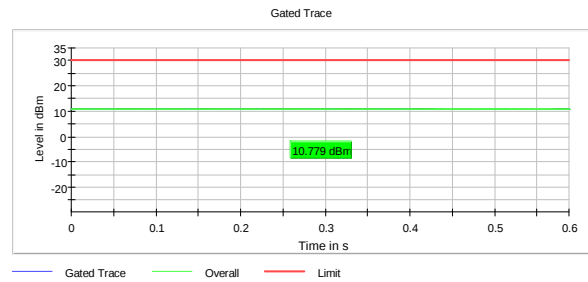


Output Power, 2412 MHz, 802.11ax MCS8, MIMO

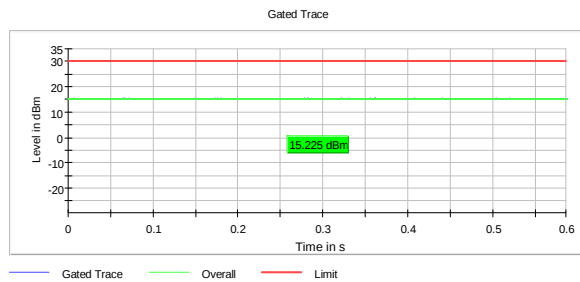


Output Power, 2422 MHz, 802.11ax MCS8

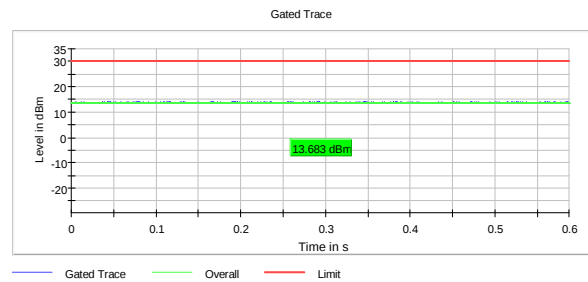


Output Power, 2422 MHz, 802.11ax MCS8, MIMO

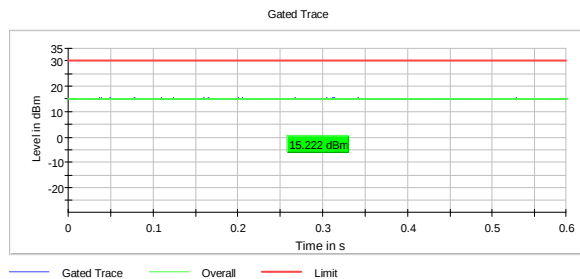


Output Power, 2437 MHz, 802.11ax MCS8

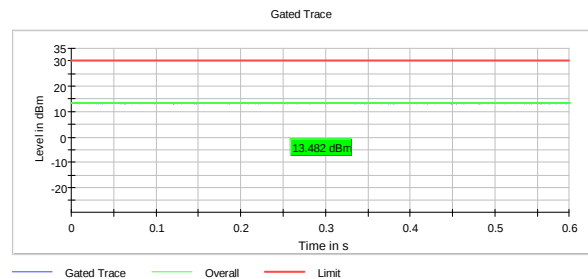


Output Power, 2437 MHz, 802.11ax MCS8, MIMO

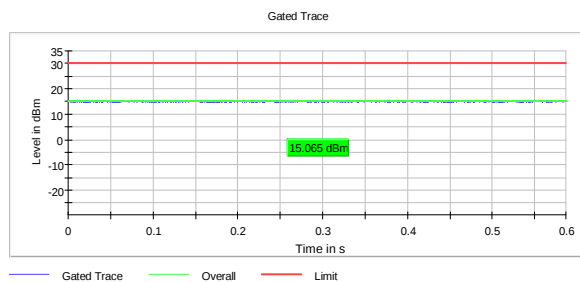


Output Power, 2452 MHz, 802.11ax MCS8

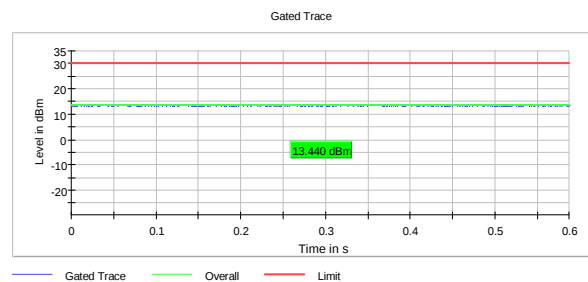


Output Power, 2452 MHz, 802.11ax MCS8, MIMO

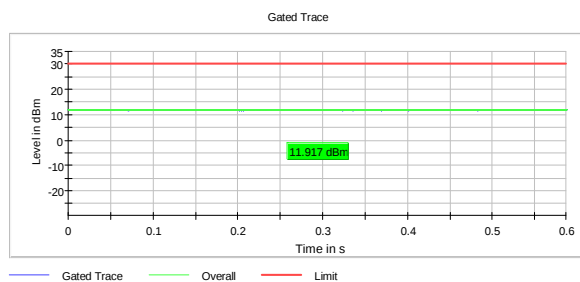


Output Power, 2462 MHz, 802.11ax MCS8

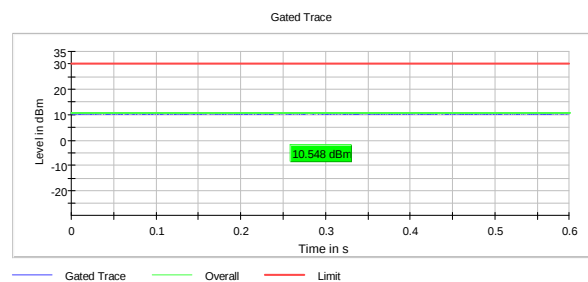


Output Power, 2462 MHz, 802.11ax MCS8, MIMO

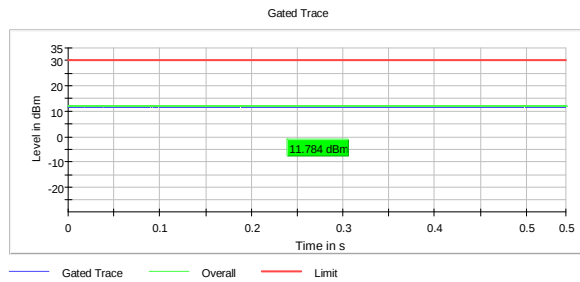


Output Power, 2412 MHz, 802.11ax MCS11

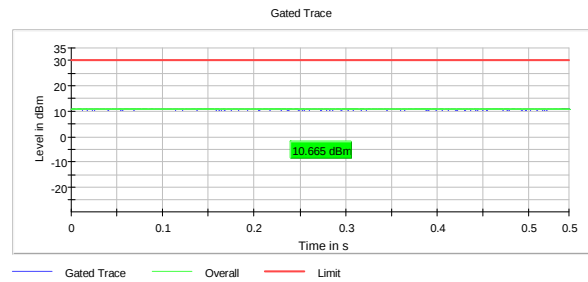


Output Power, 2412 MHz, 802.11ax MCS11, MIMO

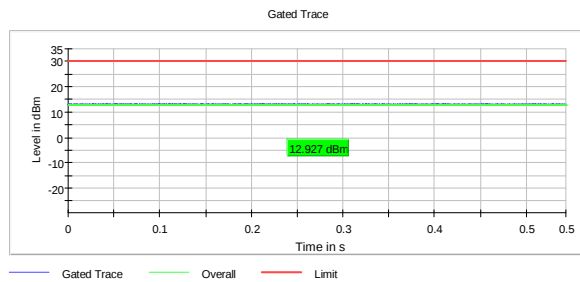

Output Power, 2422 MHz, 802.11ax MCS11

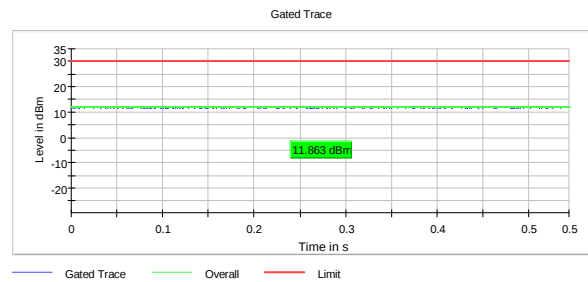


Output Power, 2422 MHz, 802.11ax MCS11, MIMO

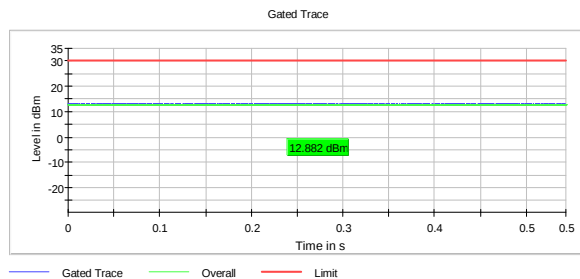


Output Power, 2437 MHz, 802.11ax MCS11




Output Power, 2437 MHz, 802.11ax MCS11, MIMO

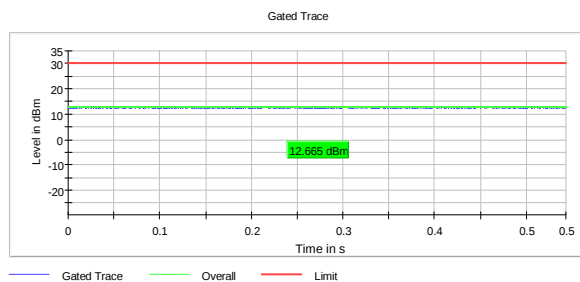


Output Power, 2452 MHz, 802.11ax MCS11

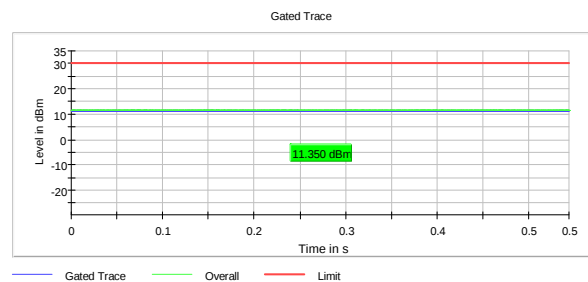

Output Power, 2452 MHz, 802.11ax MCS11, MIMO

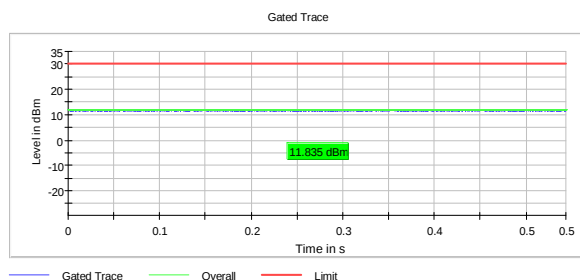

Output Power, 2462 MHz, 802.11ax MCS11

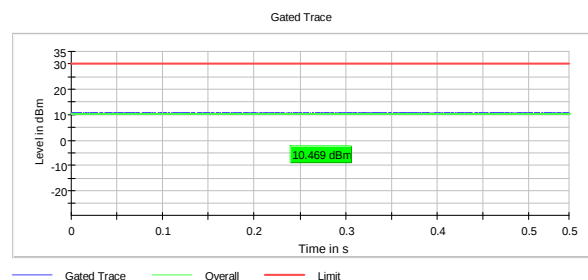

Output Power, 2462 MHz, 802.11ax MCS11, MIMO

3.5 Conducted Emissions at Antenna Connector

FCC Part 15.247 (d)

ISED Canada RSS-247 Issue 2, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies


Measurement Data:

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2412 MHz	> 40	> 20	Pass
2437 MHz	> 40	> 20	Pass
2462 MHz	> 40	> 20	Pass


Measured with Peak Detector

RF conducted power to 25 GHz: see attached plots.


Requirements for all systems	
Peak measurement	RMS averaging (alternative measurement)
20 dB or more below carrier measured in 100 kHz bandwidth	30 dB or more below carrier measured in 100 kHz bandwidth
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.	

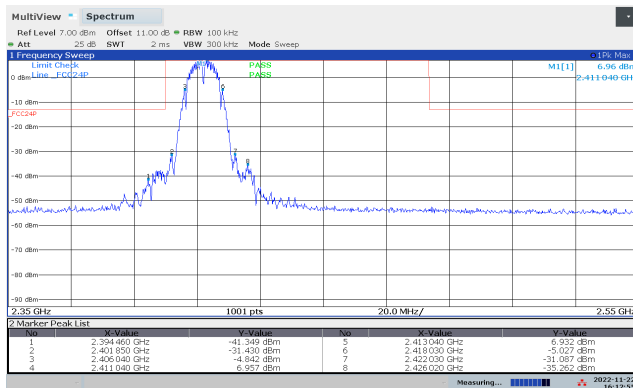


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11b 1M

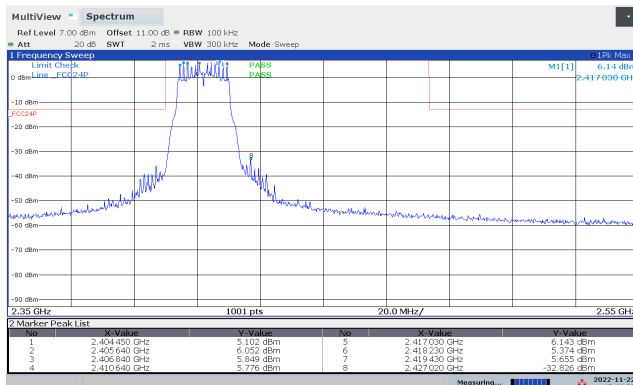


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11g 6M

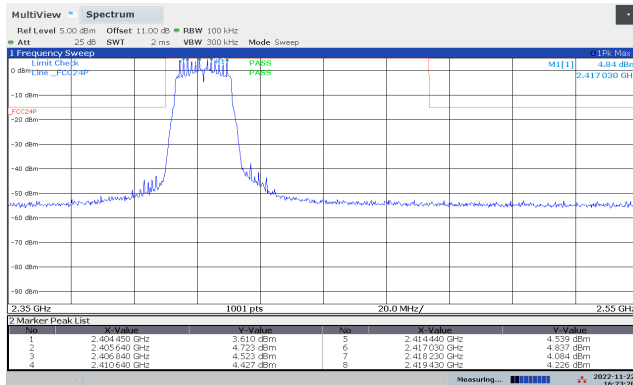


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11n MCS0

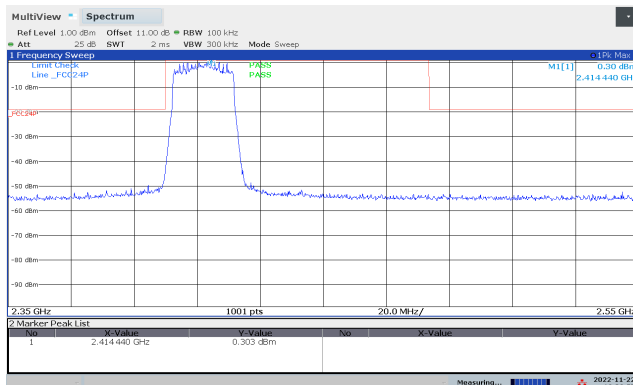


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11ax MCS0

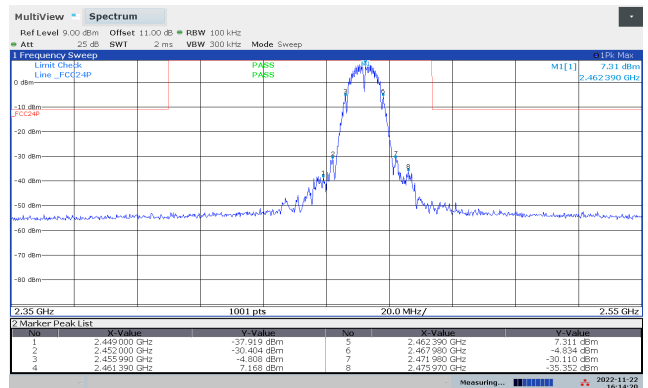


2462 MHz

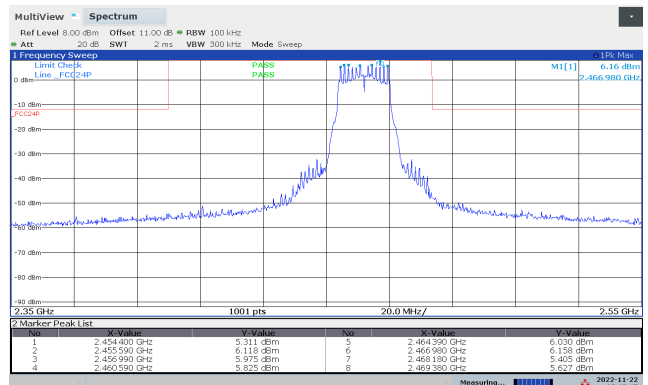


2462 MHz

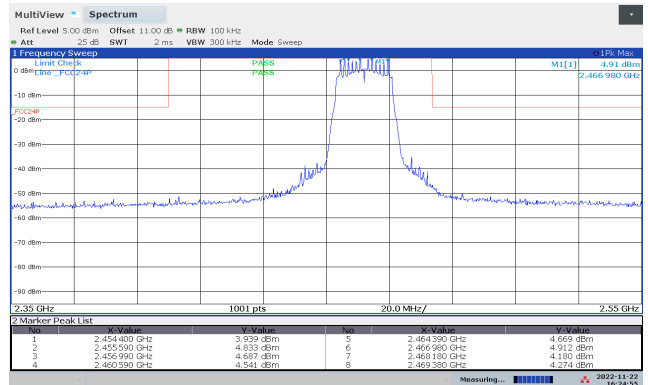


2462 MHz

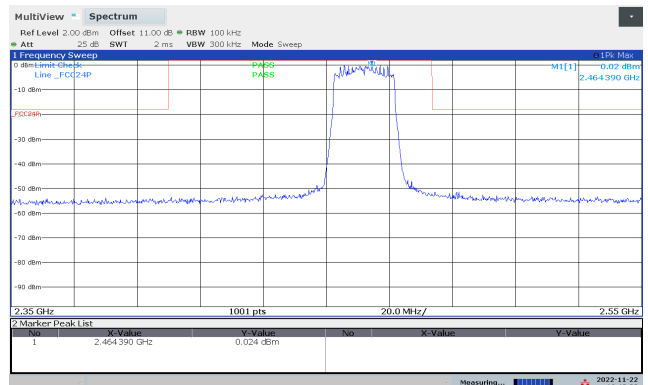


2462 MHz

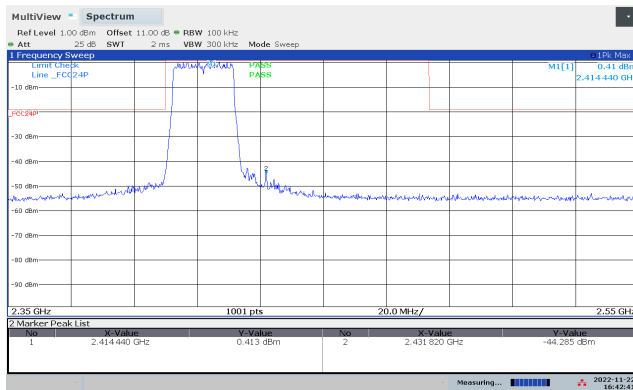


Conducted Emissions 2350-2550 MHz, 2412 MHz, 802.11ax MCS8

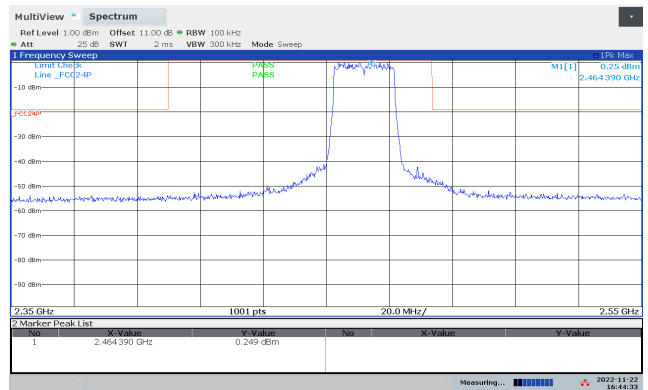


2462 MHz

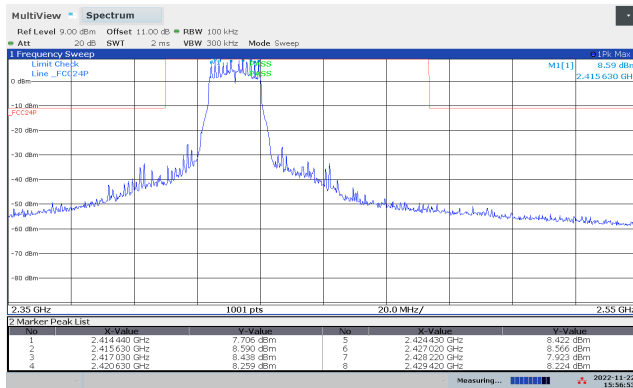


Conducted Emissions 2350-2550 MHz, 2422 MHz, 802.11g 6M

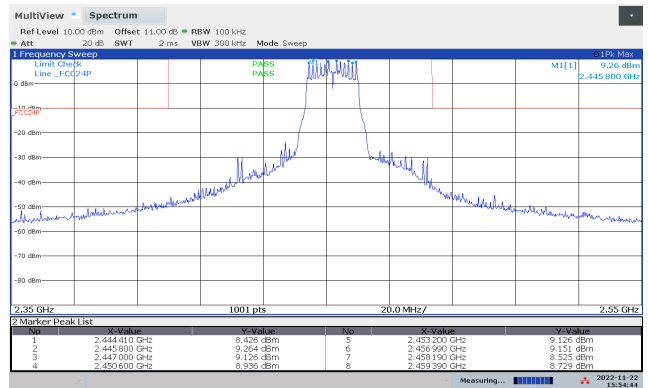


2452 MHz

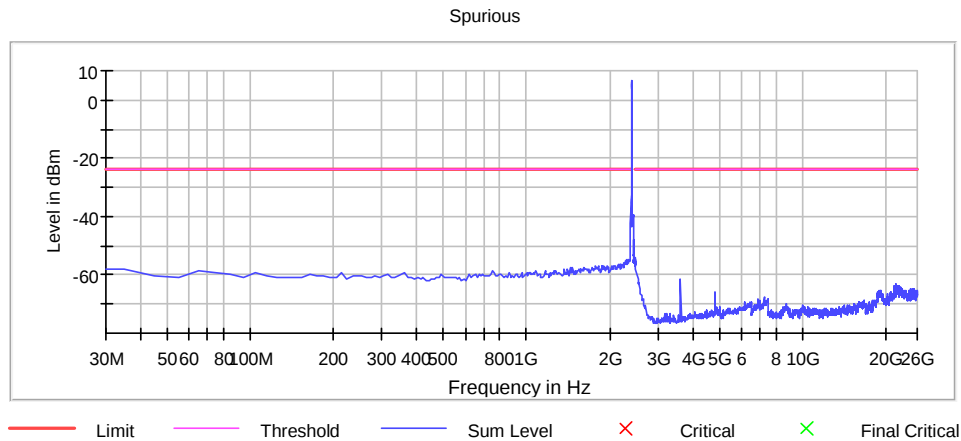


Conducted Emissions 30M-26G, 2412 MHz, 802.11b 1M

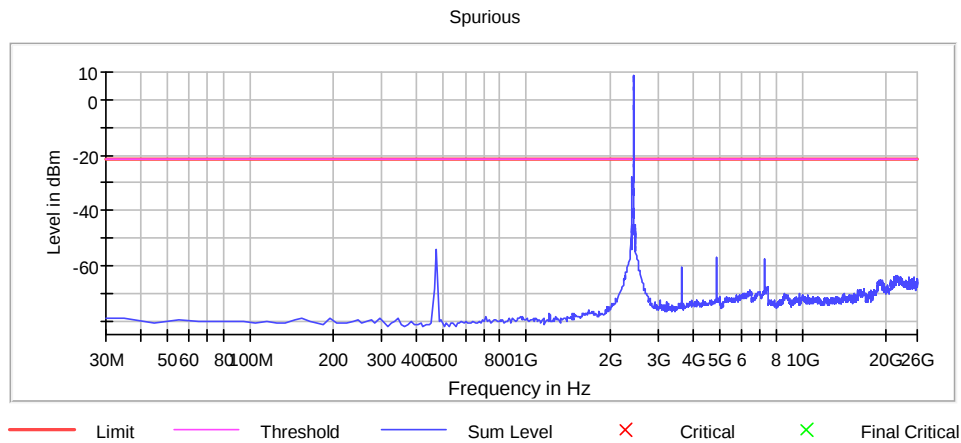


Conducted Emissions 30M-26G, 2437 MHz, 802.11b 1M

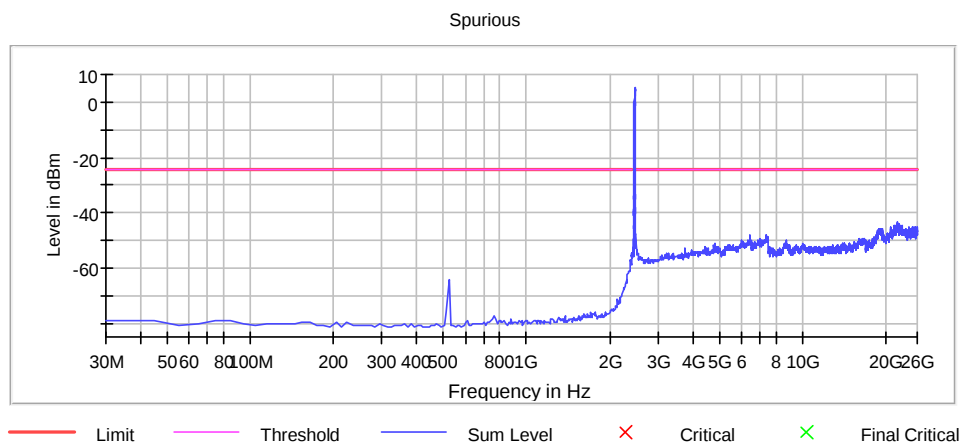


Conducted Emissions 30M-26G, 2462 MHz, 802.11b 1M

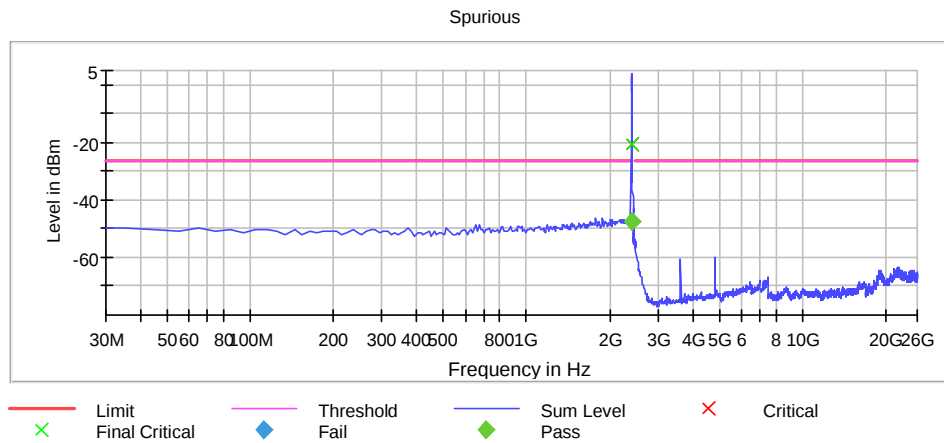


Conducted Emissions 30M-26G, 2412 MHz, 802.11g 6M

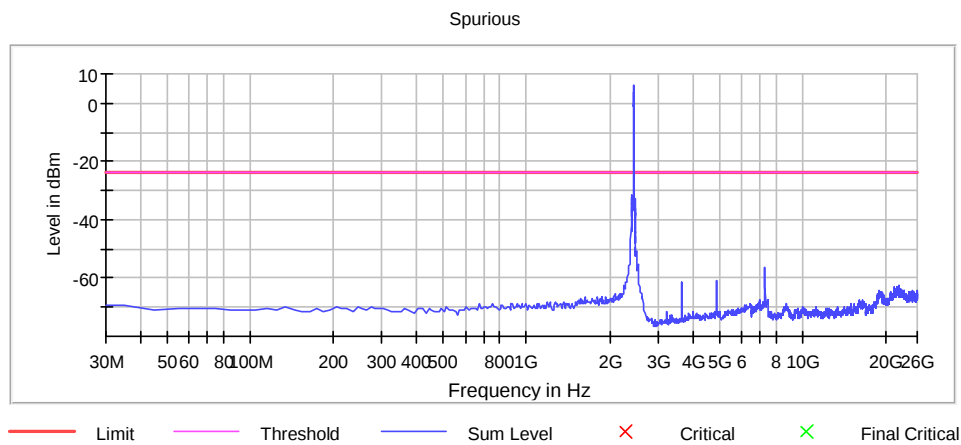


Conducted Emissions 30M-26G, 2437 MHz, 802.11g 6M

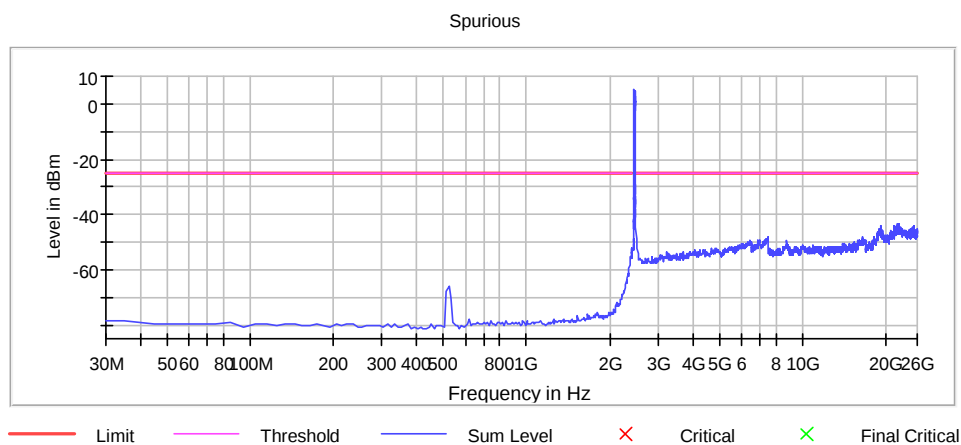


Conducted Emissions 30M-26G, 2462 MHz, 802.11g 6M

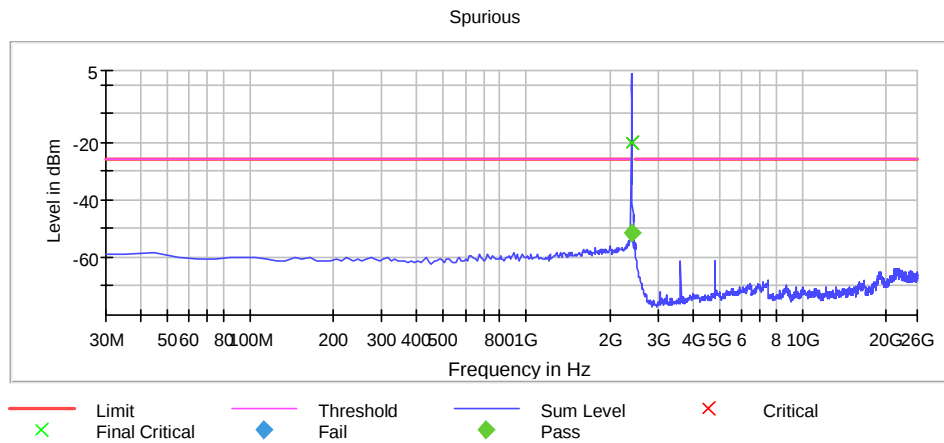


Conducted Emissions 30M-26G, 2412 MHz, 802.11n MCS0

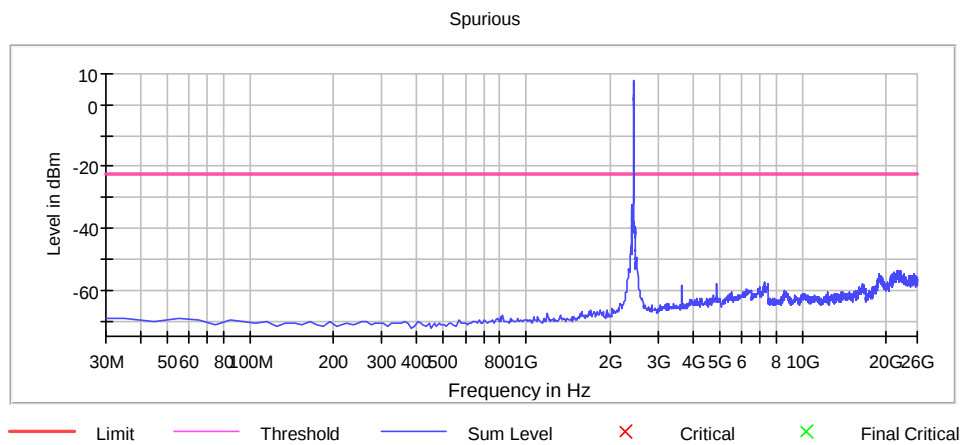


Conducted Emissions 30M-26G, 2437 MHz, 802.11n MCS0

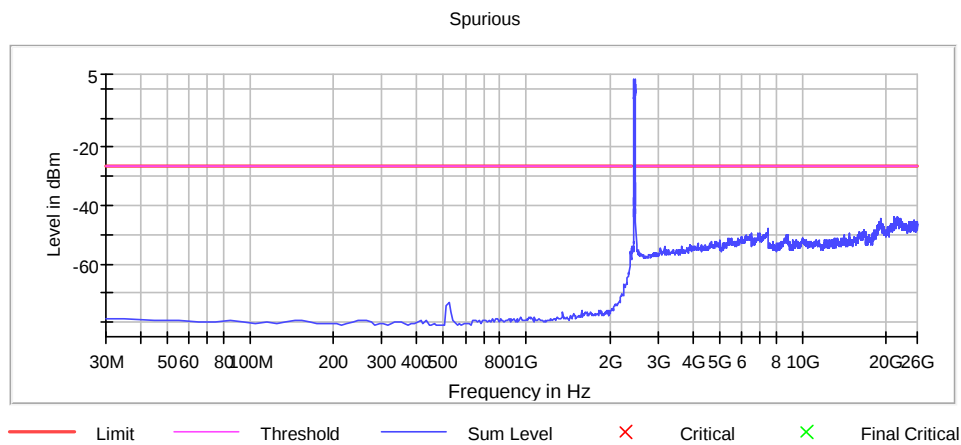


Conducted Emissions 30M-26G, 2462 MHz, 802.11n MCS0

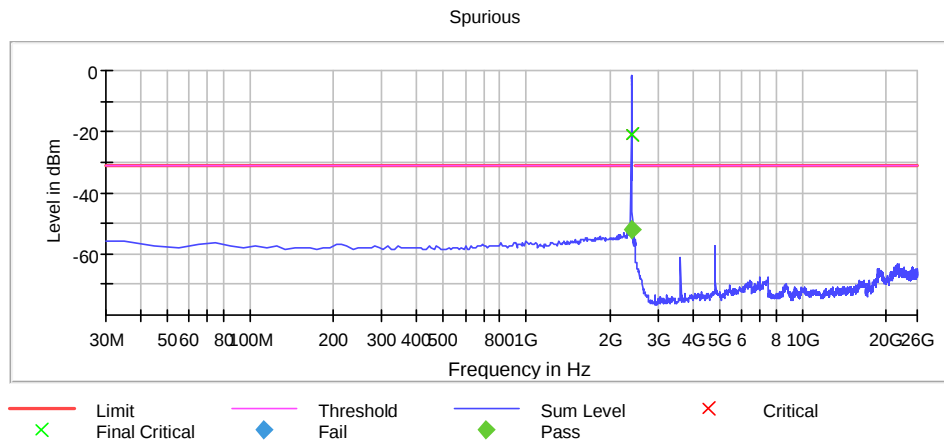


Conducted Emissions 30M-26G, 2412 MHz, 802.11n MCS8, MIMO

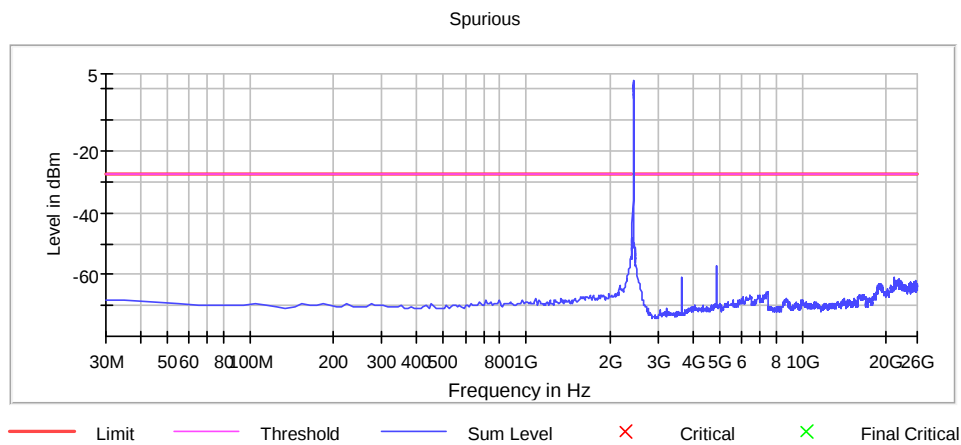


Conducted Emissions 30M-26G, 2437 MHz, 802.11n MCS8, MIMO

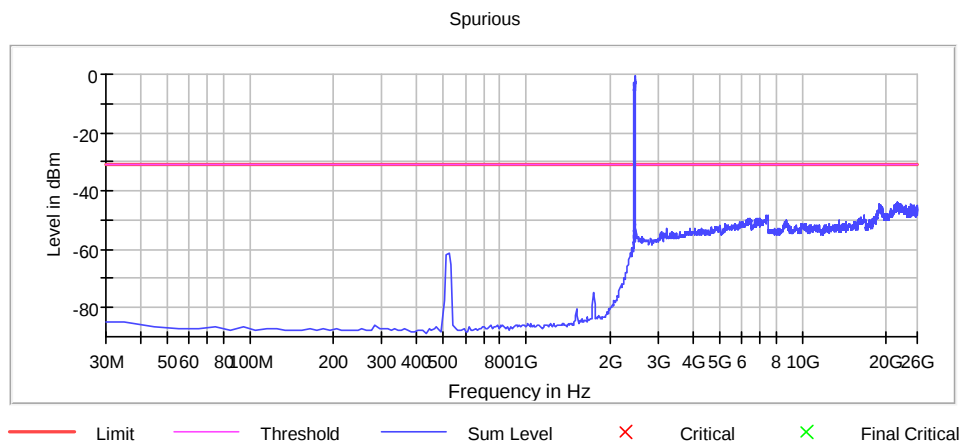


Conducted Emissions 30M-26G, 2462 MHz, 802.11n MCS8, MIMO

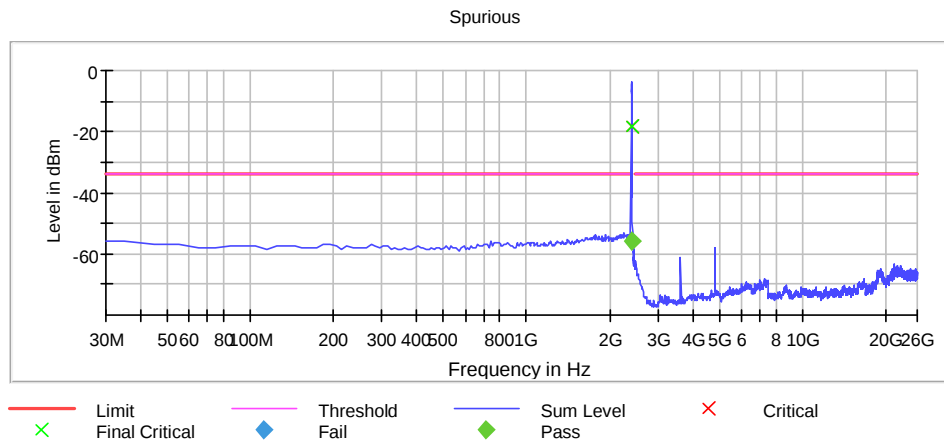

Conducted Emissions 30M-26G, 2412 MHz, 802.11ax MCS0, MIMO

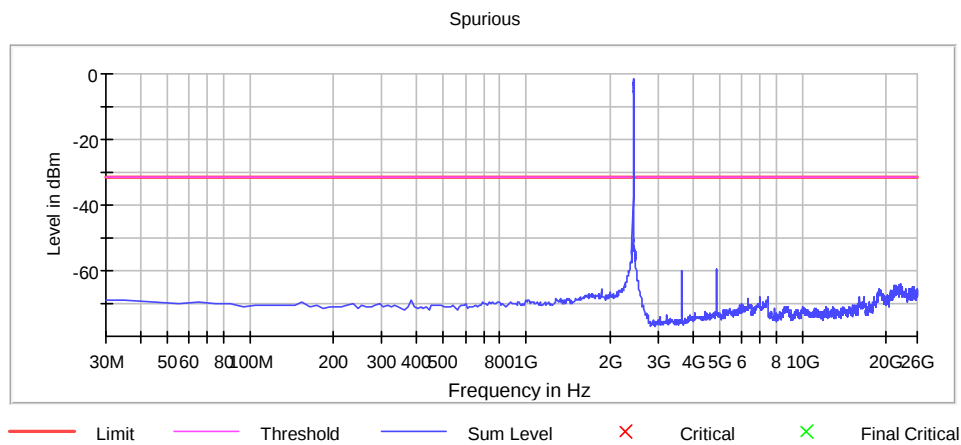

Conducted Emissions 30M-26G, 2437 MHz, 802.11ax MCS0, MIMO

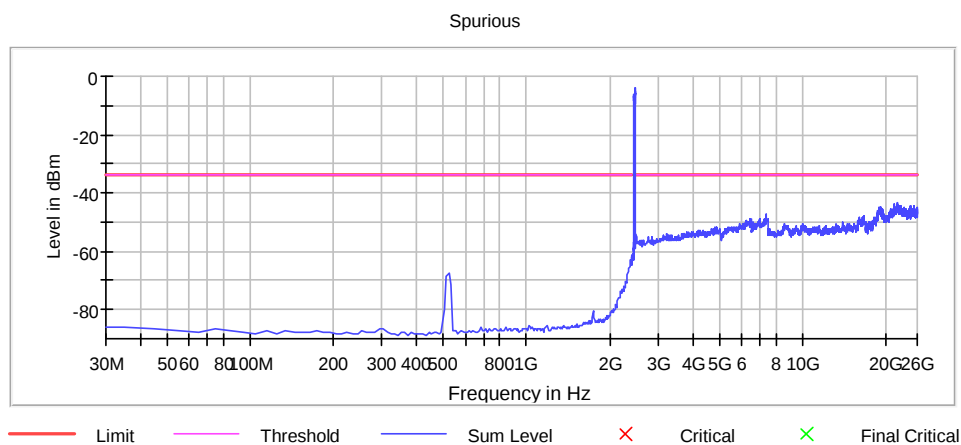

Conducted Emissions 30M-26G, 2462 MHz, 802.11ax MCS0, MIMO

3.6 Restricted Bands of operation

Restricted Bands of operation for FCC and ISSED are defined in FCC Part 15.205 and ISSED RSS-GEN, Issue 5 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISSED (MHz)	FCC (GHz)	ISSED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISSED, all other frequencies are common.

3.7 Radiated Emissions, Band Edge

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies


Measurement Data:

Peak Detector					
Modulation and Bitrate	Measured field strength (dBμV/m)		Limit dB	Margin	
	2390 MHz	2483.5 MHz		dB	
802.11b, 1 Mbps	61.8	62.4	74	12.2	11.6
802.11b, 11 Mbps	61.8	62.2	74	12.2	11.8
802.11g, 6 Mbps	66.5	68.9	74	7.5	5.1
802.11g, 54 Mbps	71.5	72.0	74	2.5	2.0
802.11n, MCS0	64.9	68.0	74	9.1	6.0
802.11n, MCS7	70.2	73.9	74	3.8	0.1
802.11n, MCS8, MIMO	60.1	59.6	74	13.9	14.4
802.11n, MCS15, MIMO	65.1	64.5	74	8.9	9.5
802.11ax, MCS0	65.1	63.1	74	8.9	10.9
802.11ax, MCS11	69.3	70.7	74	4.7	3.3
802.11ax, MCS0, MIMO	59.8	59.9	74	14.2	14.1
802.11ax, MCS11, MIMO	63.9	64.0	74	10.1	10.0

Average Detector					
Modulation and Bitrate	Measured field strength (dBμV/m)		Limit dB	Margin	
	2390 MHz	2483.5 MHz		dB	
802.11b, 1 Mbps	48.6	49.7	54	25.4	24.3
802.11b, 11 Mbps	48.0	48.7	54	26.0	25.3
802.11g, 6 Mbps	51.0	52.8	54	23.0	21.2
802.11g, 54 Mbps	51.2	52.8	54	22.8	21.2
802.11n, MCS0	48.9	51.9	54	25.1	22.1
802.11n, MCS7	50.2	51.1	54	23.8	22.9
802.11n, MCS8, MIMO	46.3	45.3	54	27.7	28.7
802.11n, MCS15, MIMO	45.5	44.6	54	28.5	29.4
802.11ax, MCS0	48.0	47.4	54	26.0	26.6
802.11ax, MCS11	48.3	49.5	54	25.7	24.5
802.11ax, MCS0, MIMO	46.1	45.4	54	27.9	28.6
802.11ax, MCS11, MIMO	46.2	45.9	54	27.8	28.1


Average values were measured using trace averaging as described in ANSI C63.10-2013 clause 11.12.2.5.1 (Duty Cycle ≈100%).

See attached plots.

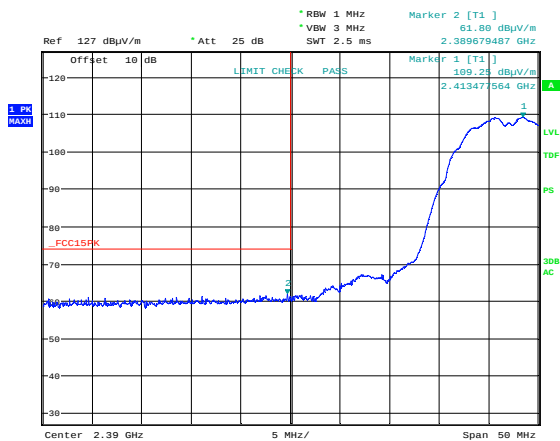


Date: 29.AUG.2022 13:37:50

Lower Band Edge, 2412 MHz, 802.11b 1M, Peak

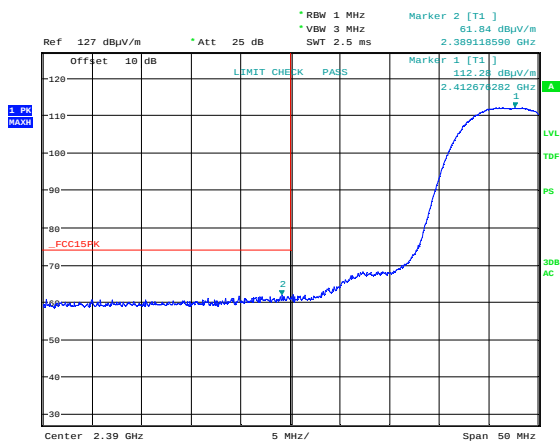


Date: 29.AUG.2022 13:41:31

Lower Band Edge, 2412 MHz, 802.11b 11M, Peak

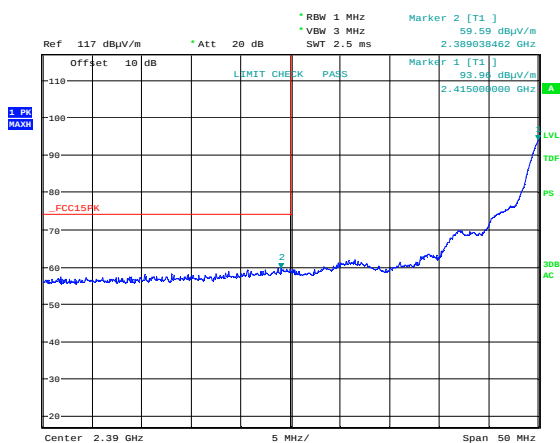


Date: 29.AUG.2022 14:47:28

Lower Band Edge, 2422 MHz, 802.11b 1M, Peak

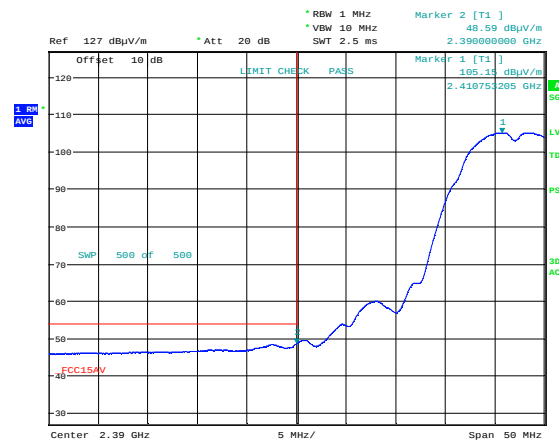


Date: 29.AUG.2022 13:38:29

Average

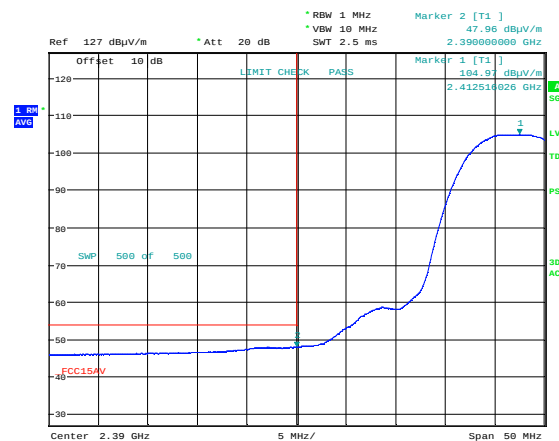


Date: 29.AUG.2022 13:41:59

Average

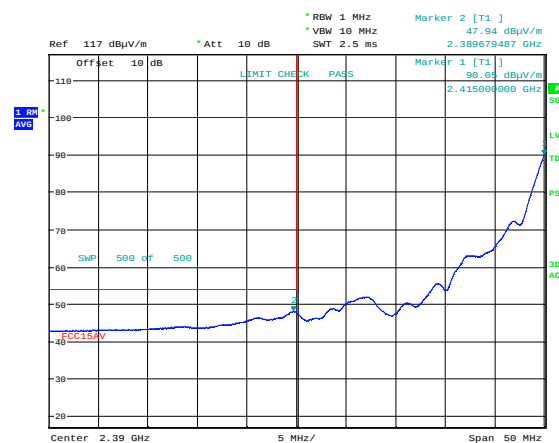


Date: 29.AUG.2022 14:48:01

Average

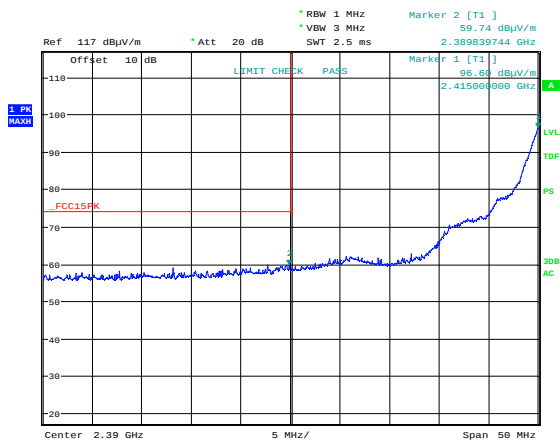


Date: 29.AUG.2022 14:51:11

Lower Band Edge, 2422 MHz, 802.11b 11M, Peak

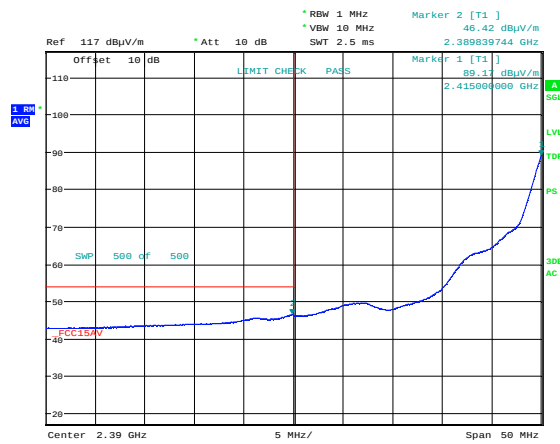


Date: 29.AUG.2022 14:51:39

Average

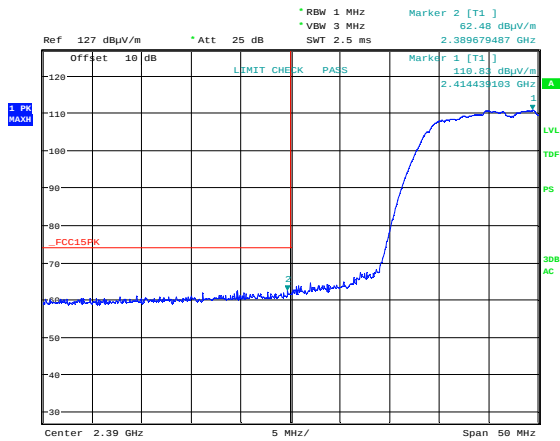


Date: 29.AUG.2022 13:46:07

Lower Band Edge, 2412 MHz, 802.11g 6M, Peak

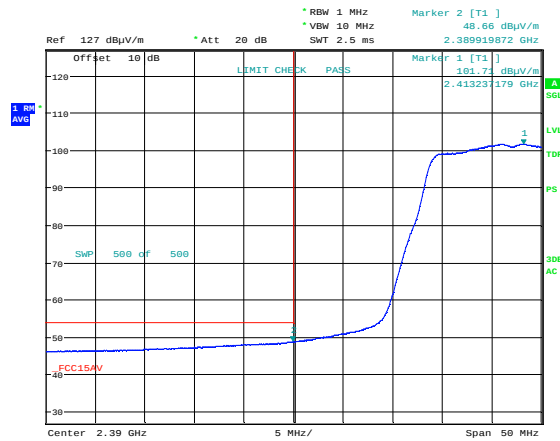


Date: 29.AUG.2022 13:46:39

Average

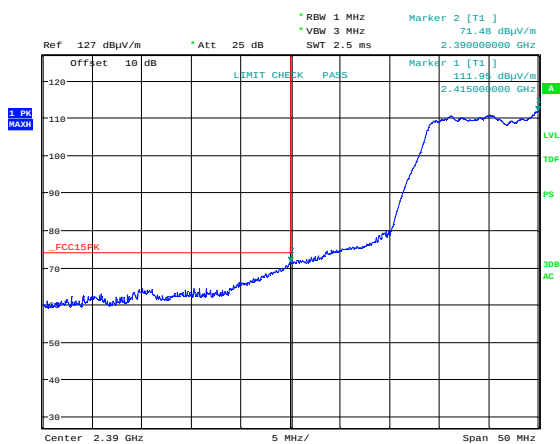


Date: 29.AUG.2022 13:49:41

Lower Band Edge, 2412 MHz, 802.11g 54M, Peak

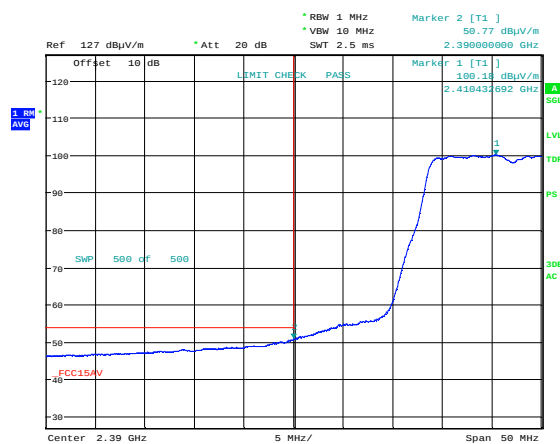


Date: 29.AUG.2022 13:50:20

Average

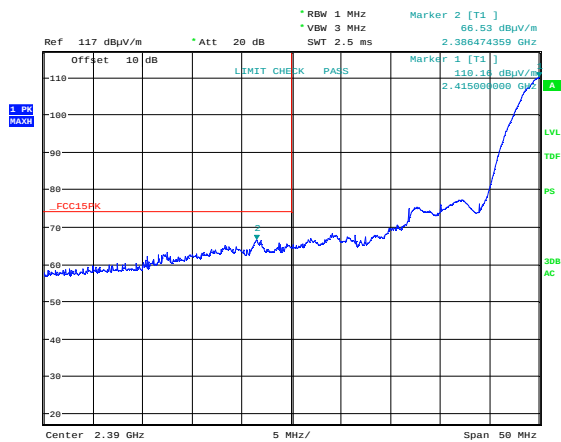


Date: 29.AUG.2022 14:35:31

Lower Band Edge, 2422 MHz, 802.11g 6M, Peak

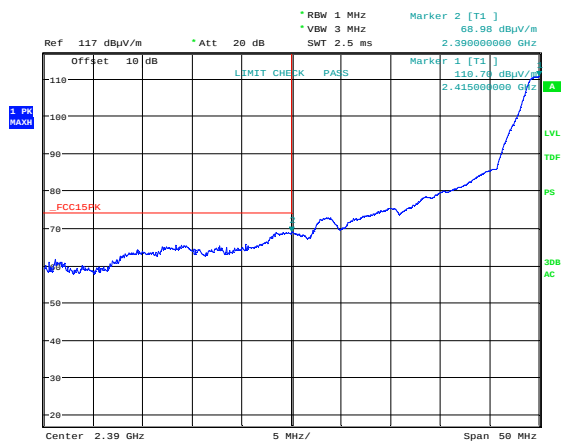


Date: 29.AUG.2022 14:40:00

Lower Band Edge, 2422 MHz, 802.11g 54M, Peak

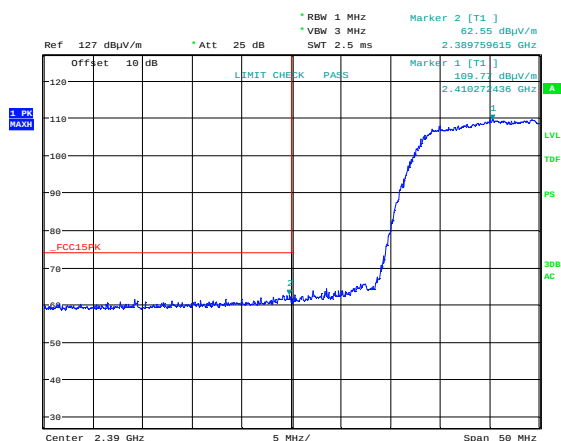


Date: 29.AUG.2022 13:54:18

Lower Band Edge, 2412 MHz, 802.11n MCS0, Peak

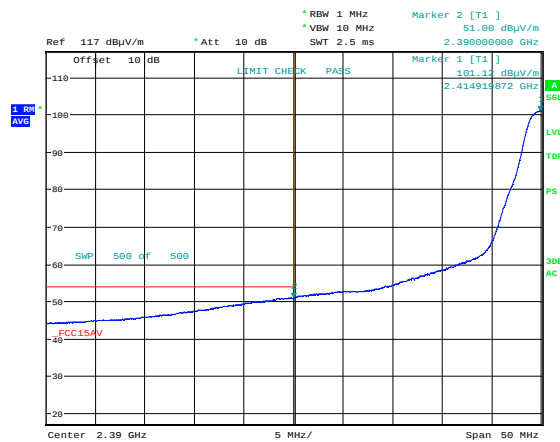


Date: 29.AUG.2022 14:36:02

Average

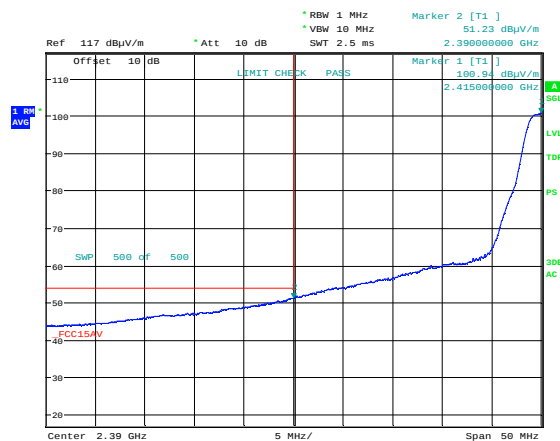


Date: 29.AUG.2022 14:40:53

Average

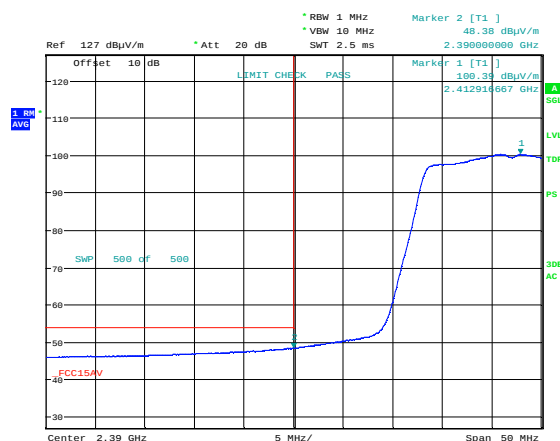


Date: 29.AUG.2022 13:54:52

Average

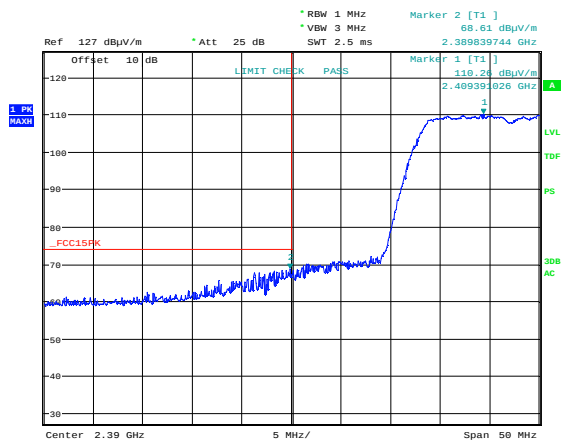


Date: 29.AUG.2022 13:57:47

Lower Band Edge, 2412 MHz, 802.11n MCS7, Peak

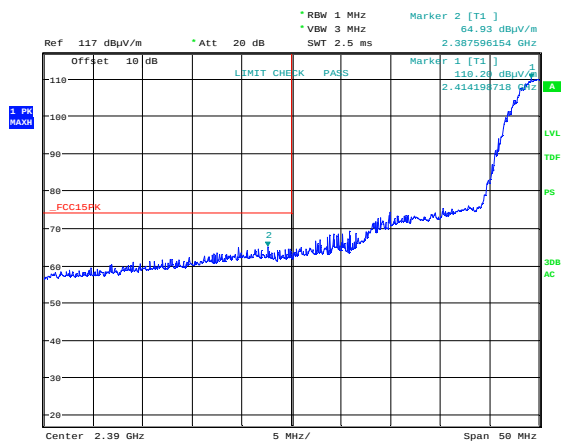


Date: 29.AUG.2022 14:17:42

Lower Band Edge, 2422 MHz, 802.11n MCS0, Peak

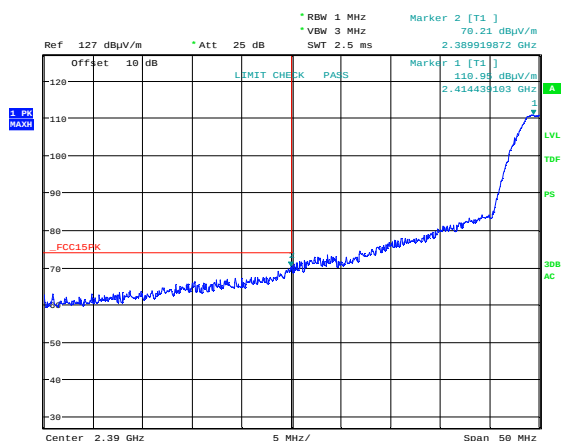


Date: 29.AUG.2022 14:13:25

Lower Band Edge, 2422 MHz, 802.11n MCS7, Peak

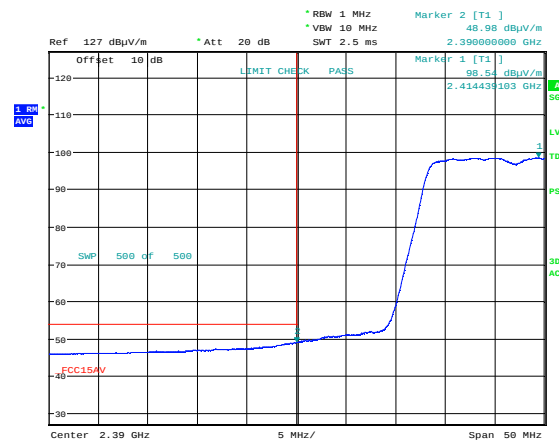


Date: 29.AUG.2022 13:58:45

Average

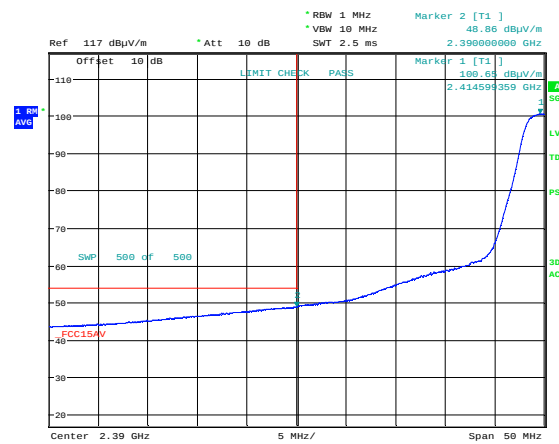


Date: 29.AUG.2022 14:15:29

Average

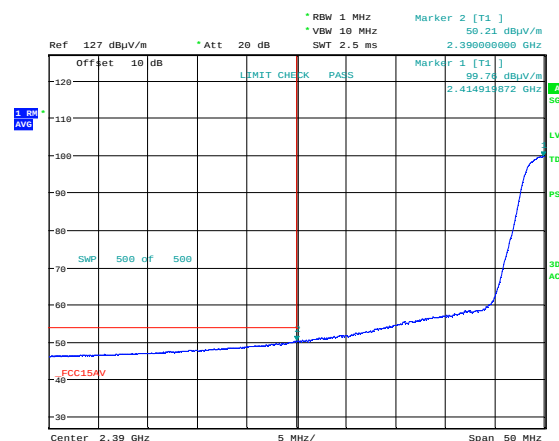


Date: 29.AUG.2022 14:08:35

Average

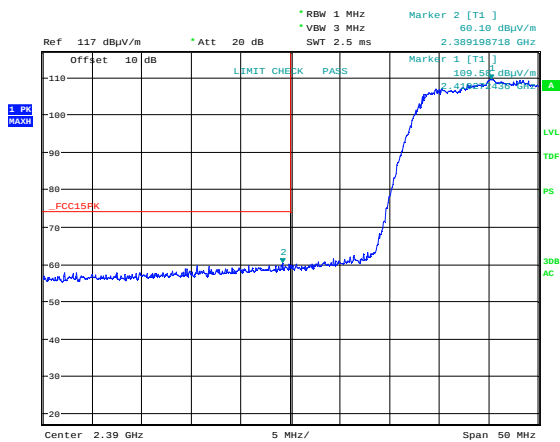


Date: 29.AUG.2022 16:19:54

Lower Band Edge, 2412 MHz, 802.11n MCS8, MIMO, Peak

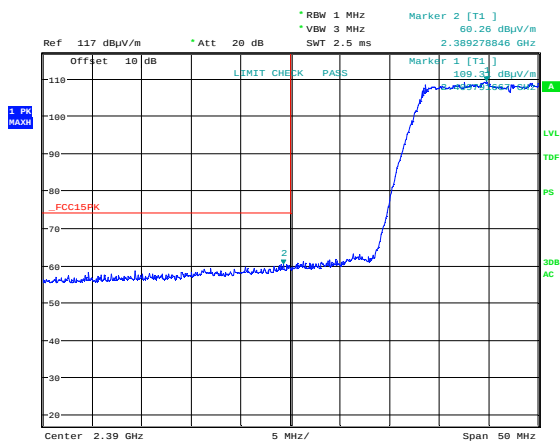


Date: 29.AUG.2022 16:24:33

Lower Band Edge, 2412 MHz, 802.11n MCS15, MIMO, Peak

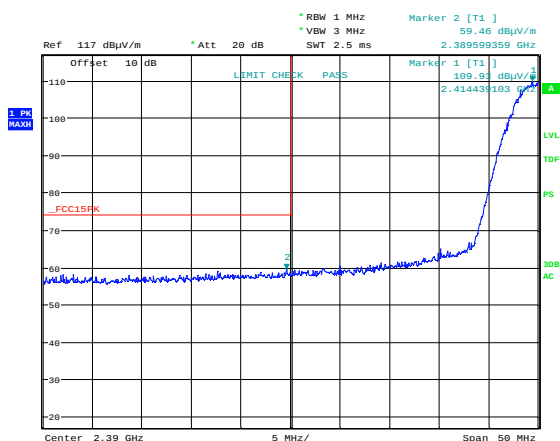


Date: 29.AUG.2022 16:09:45

Lower Band Edge, 2422 MHz, 802.11n MCS8, MIMO, Peak

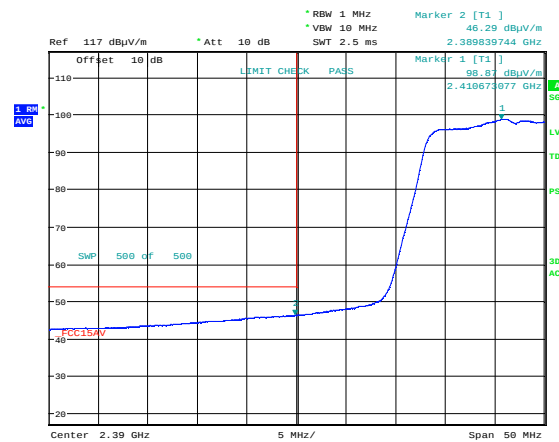


Date: 29.AUG.2022 16:21:15

Average

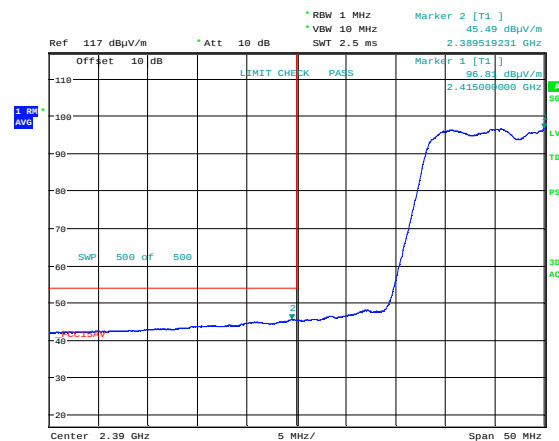


Date: 29.AUG.2022 16:25:02

Average

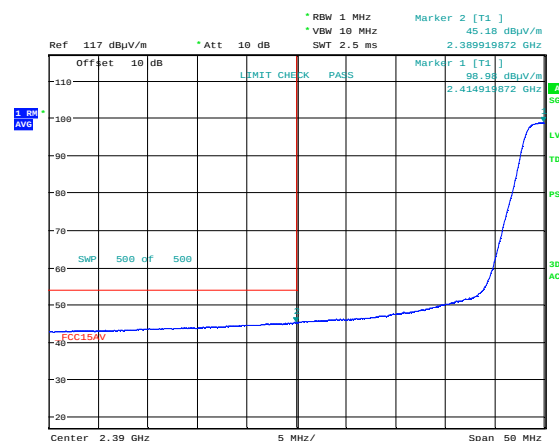


Date: 29.AUG.2022 16:10:14

Average

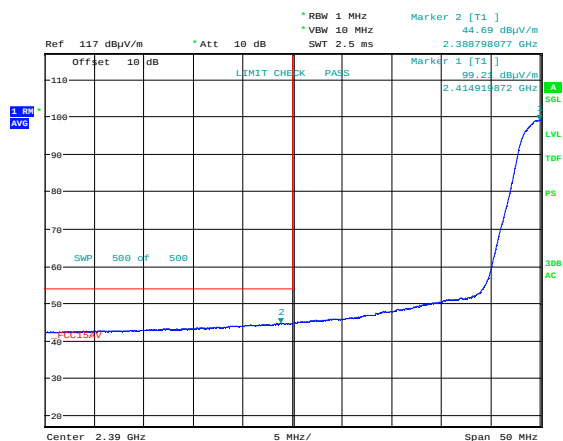


Date: 29.AUG.2022 16:14:14

Average

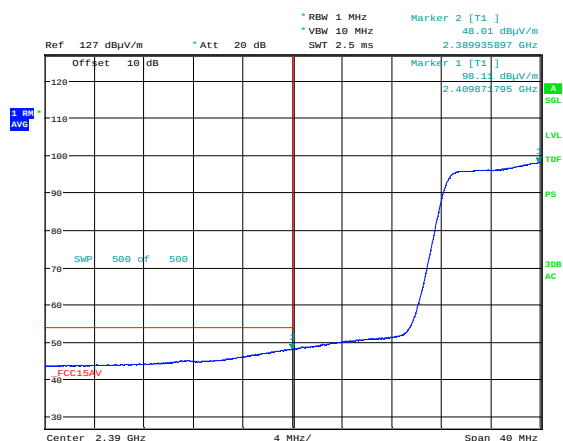


Date: 1,SEP,2022 13:49:52

Average

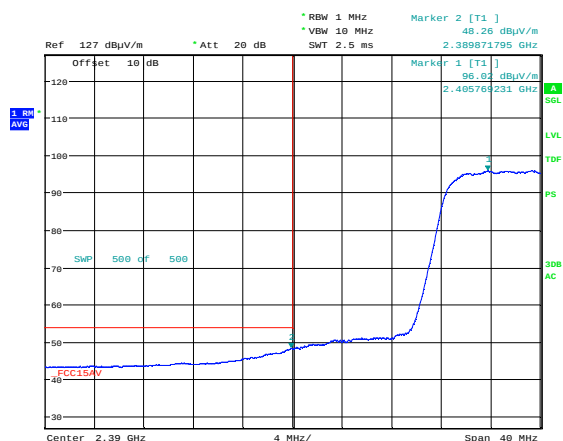


Date: 1.SEP.2022 13:54:23

Average

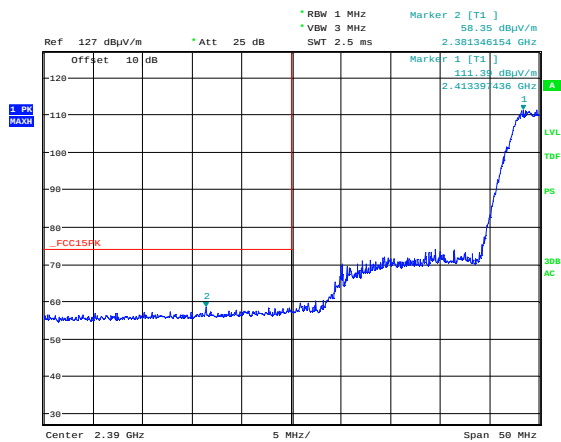


Date: 1.SEP.2022 13:58:43

Lower Band Edge, 2422 MHz, 802.11ax MCS0, Peak

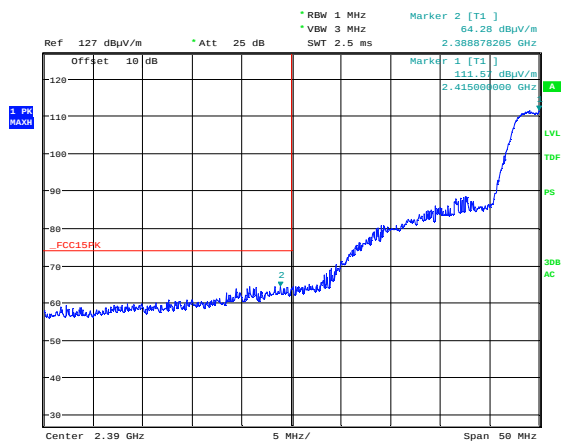


Date: 1.SEP.2022 14:02:22

Lower Band Edge, 2422 MHz, 802.11ax MCS11, Peak

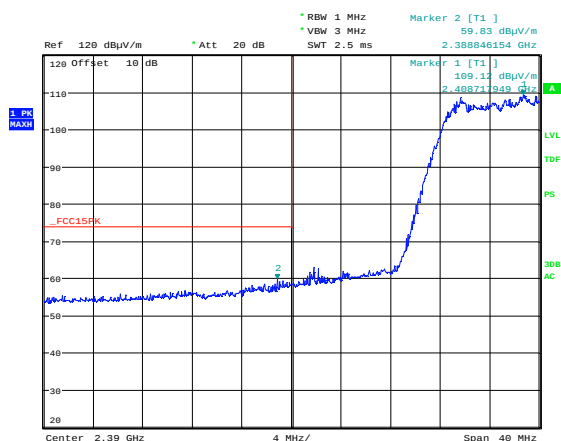


Date: 1.SEP.2022 12:24:11

Lower Band Edge, 2412 MHz, 802.11ax MCS0, MIMO, Peak

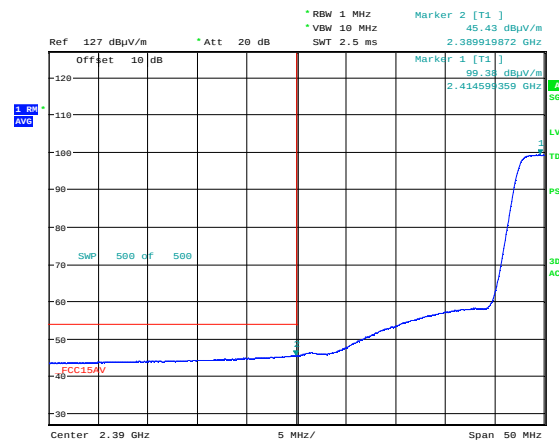


Date: 1.SEP.2022 13:59:13

Average

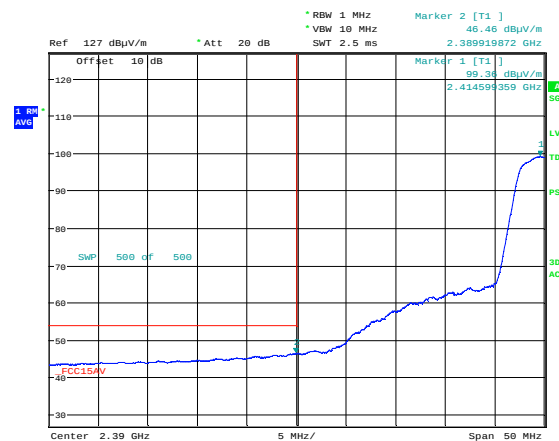


Date: 1.SEP.2022 14:03:08

Average

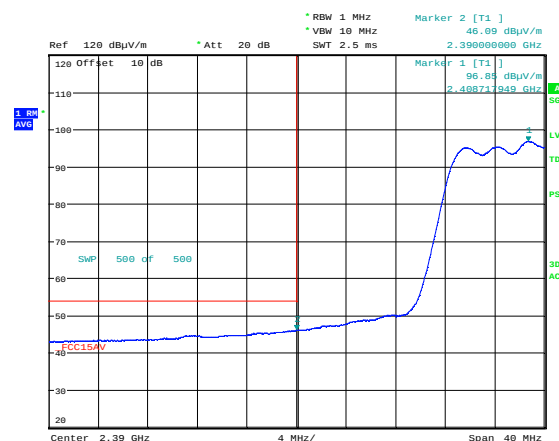


Date: 1.SEP.2022 12:24:40

Average

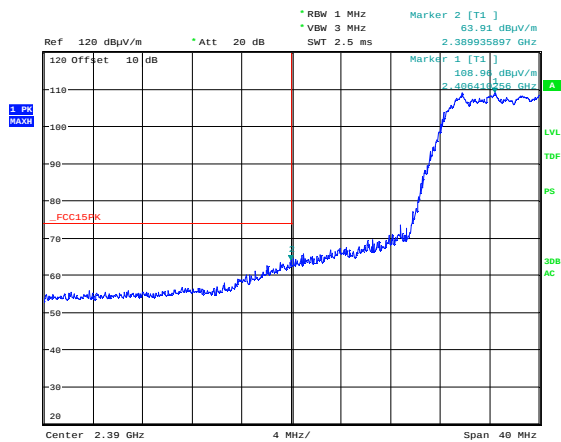


Date: 1.SEP.2022 12:28:27

Lower Band Edge, 2412 MHz, 802.11ax MCS11, MIMO, Peak

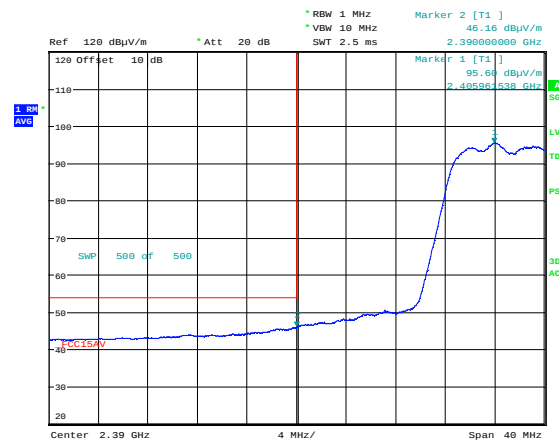


Date: 1.SEP.2022 12:28:56

Average

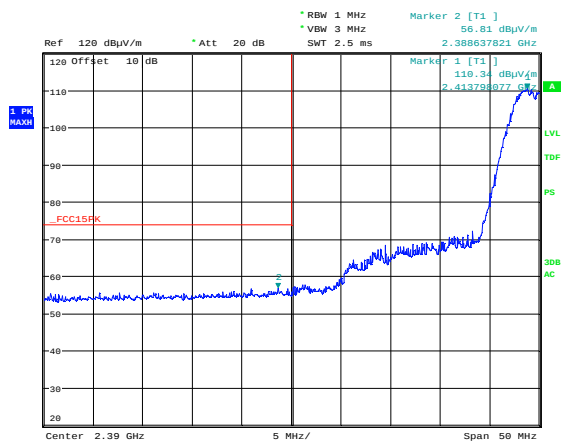


Date: 1.SEP.2022 12:32:49

Lower Band Edge, 2422 MHz, 802.11ax MCS0, MIMO, Peak

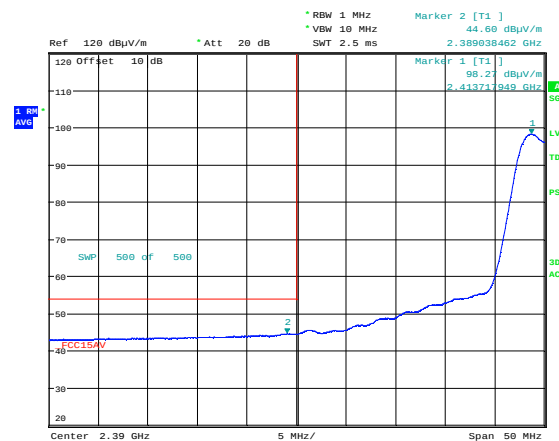


Date: 1.SEP.2022 12:33:16

Average

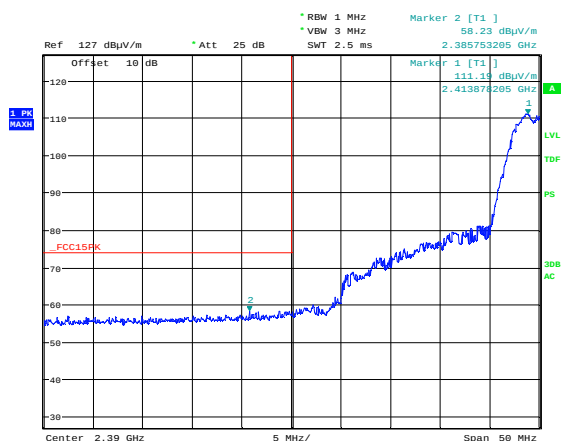


Date: 1.SEP.2022 13:40:53

Lower Band Edge, 2422 MHz, 802.11ax MCS8, MIMO, Peak

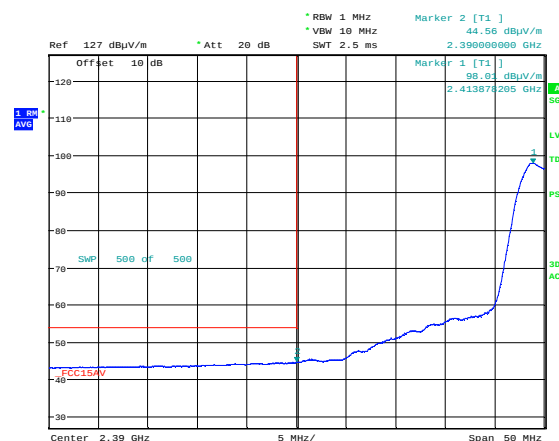


Date: 1.SEP.2022 13:41:28

Average

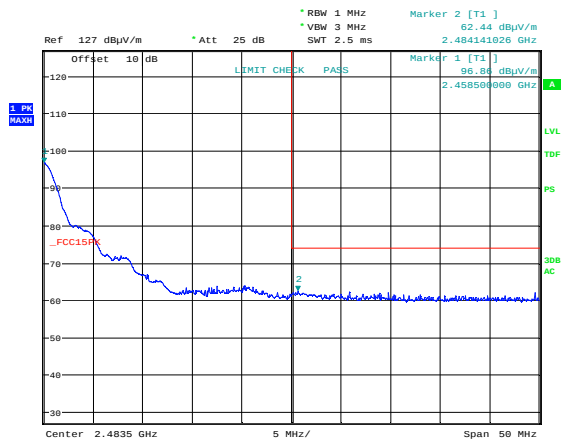


Date: 29.AUG.2022 13:31:45

Upper Band Edge, 2452 MHz, 802.11b 1M, Peak

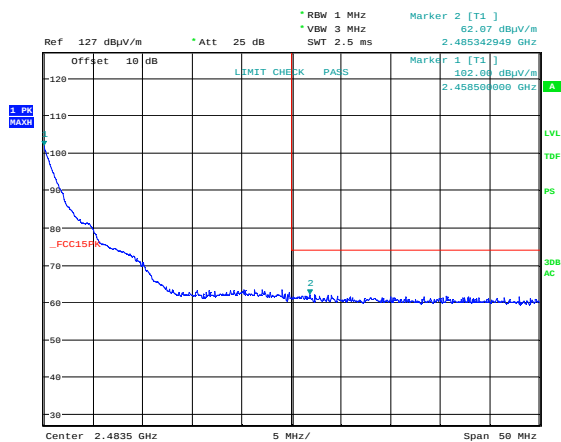


Date: 29.AUG.2022 13:25:05

Upper Band Edge, 2452 MHz, 802.11b 11M, Peak

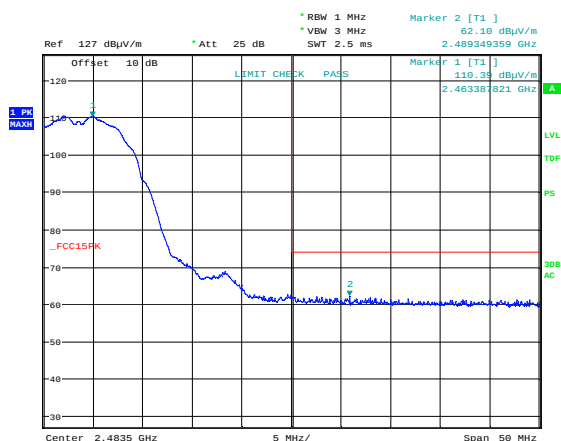


Date: 29.AUG.2022 13:10:26

Upper Band Edge, 2462 MHz, 802.11b 1M, Peak

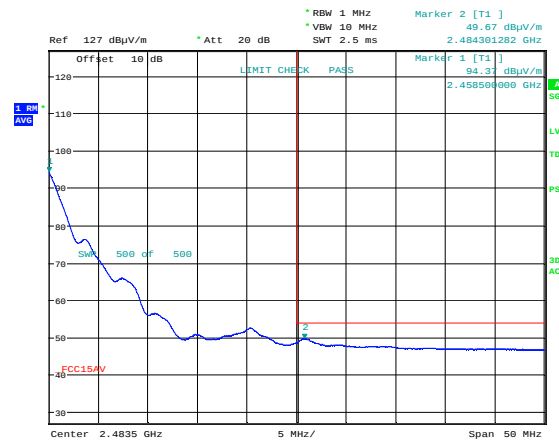


Date: 29.AUG.2022 13:32:13

Average

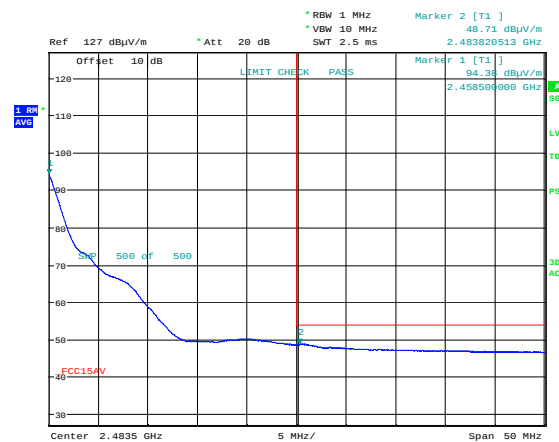


Date: 29.AUG.2022 13:21:03

Average

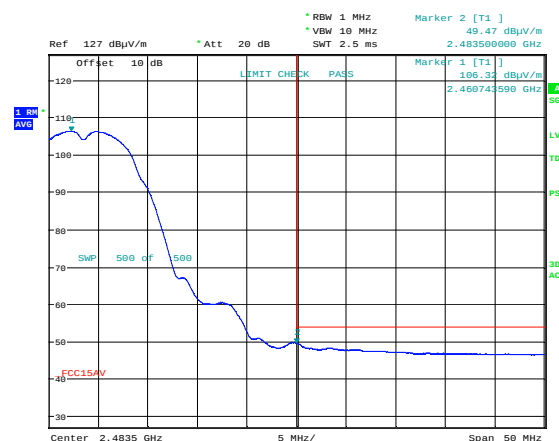


Date: 29.AUG.2022 13:10:54

Average

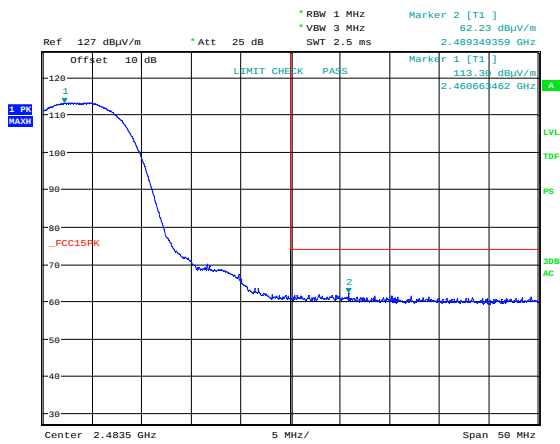


Date: 29.AUG.2022 13:18:35

Upper Band Edge, 2462 MHz, 802.11b 11M, Peak

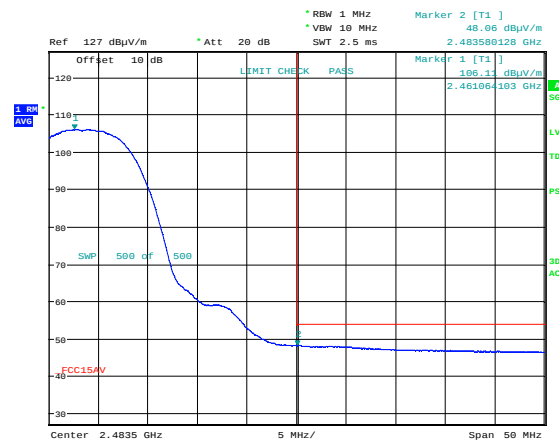


Date: 29.AUG.2022 13:19:05

Average

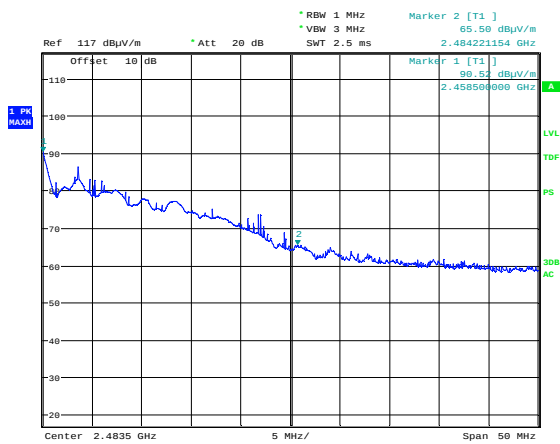


Date: 29.AUG.2022 10:27:48

Upper Band Edge, 2447 MHz, 802.11g 6M, Peak

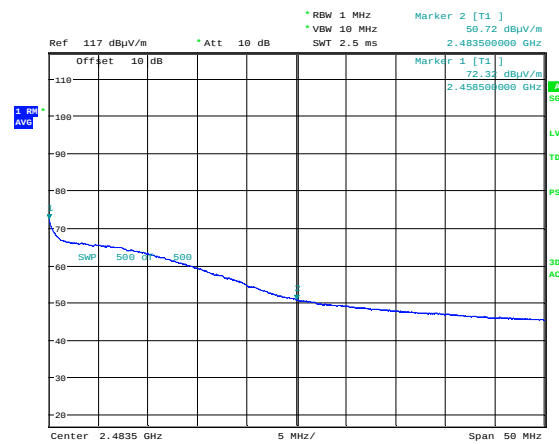


Date: 29.AUG.2022 10:28:14

Average

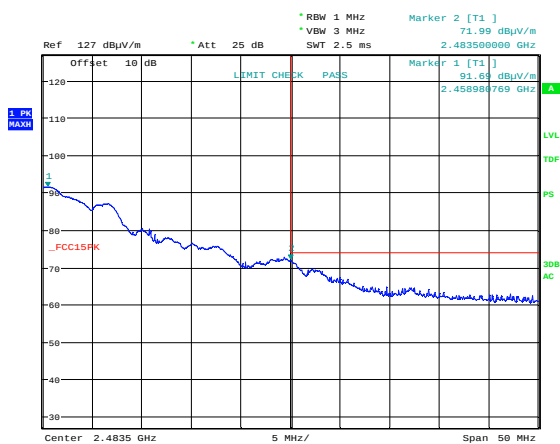


Date: 29.AUG.2022 11:02:53

Upper Band Edge, 2447 MHz, 802.11g 54M, Peak

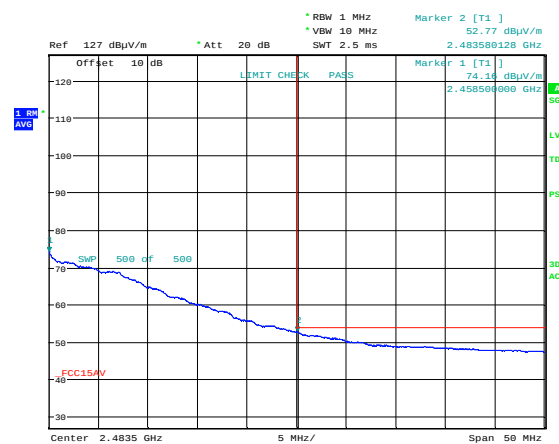


Date: 29.AUG.2022 11:03:22

Average

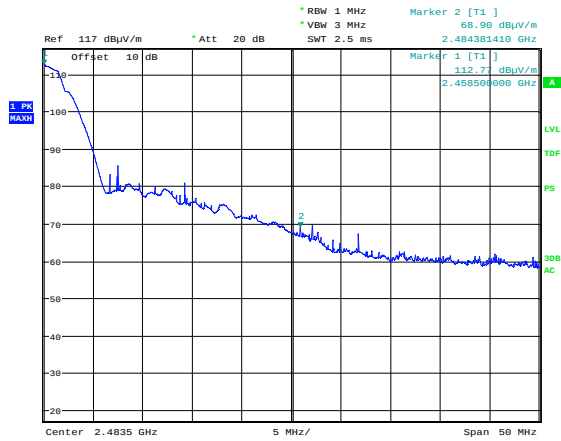


Date: 29.AUG.2022 10:20:45

Upper Band Edge, 2452 MHz, 802.11g 6M, Peak

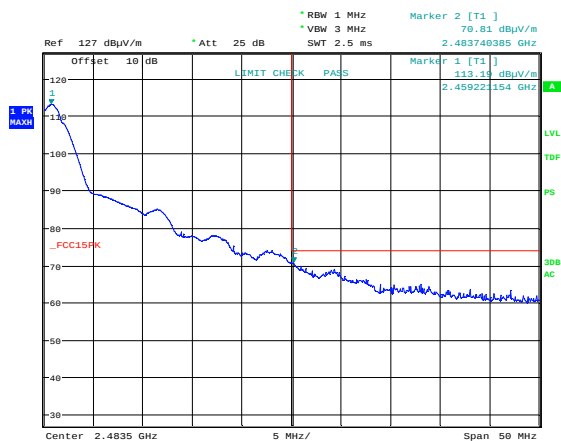


Date: 29.AUG.2022 10:57:12

Upper Band Edge, 2452 MHz, 802.11g 54M, Peak

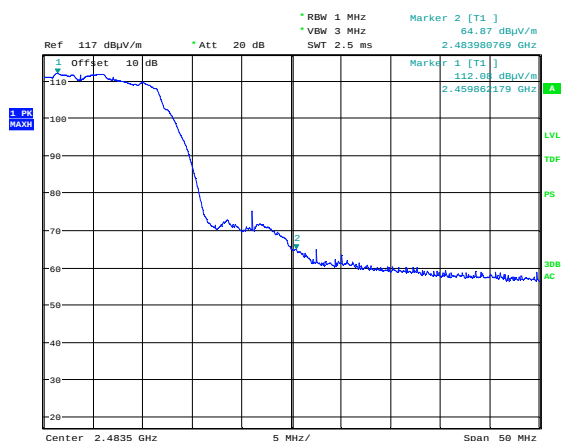


Date: 29.AUG.2022 09:56:34

Upper Band Edge, 2462 MHz, 802.11g 6M, Peak

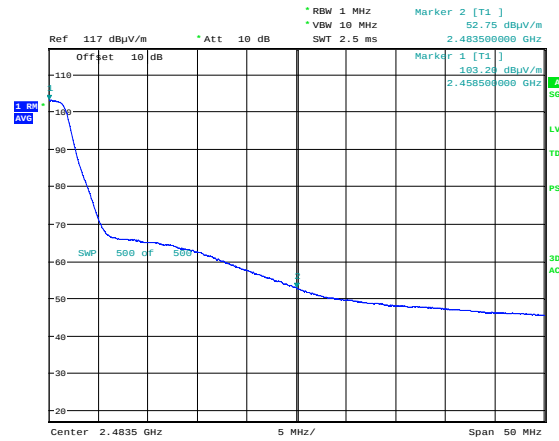


Date: 29.AUG.2022 10:19:09

Average

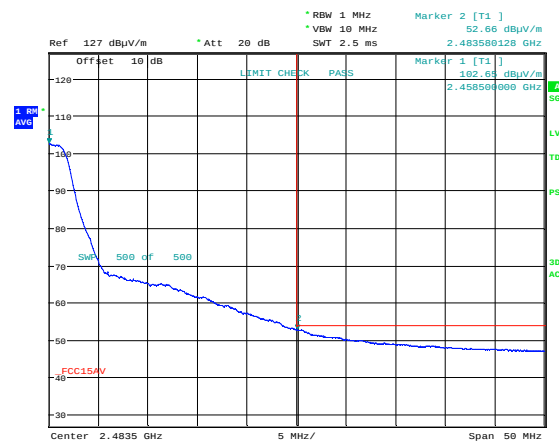


Date: 29.AUG.2022 10:57:38

Average

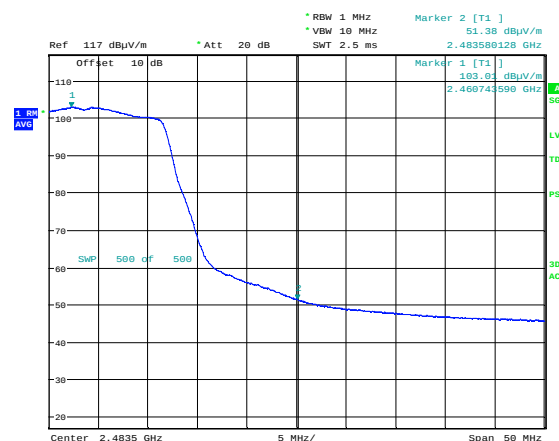


Date: 29.AUG.2022 09:57:11

Average

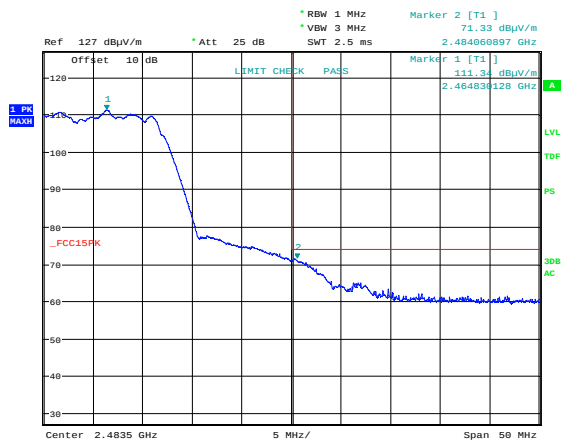


Date: 29.AUG.2022 10:46:13

Upper Band Edge, 2462 MHz, 802.11g 54M, Peak

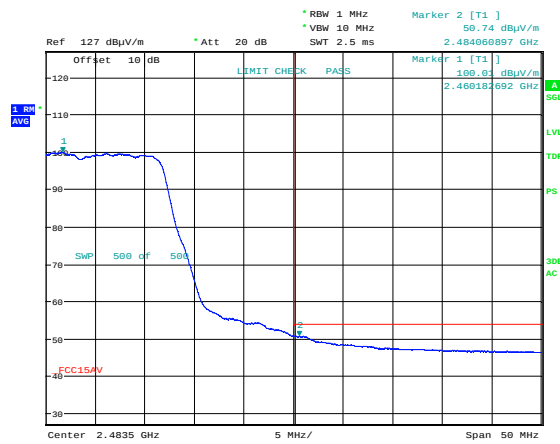


Date: 29.AUG.2022 10:46:58

Average

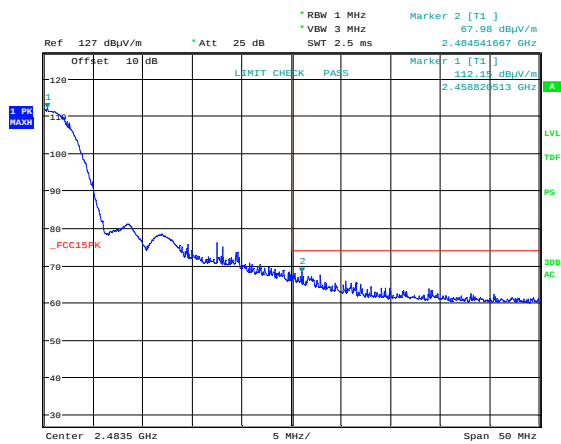


Date: 29.AUG.2022 12:38:31

Upper Band Edge, 2452 MHz, 802.11n MCS0, Peak

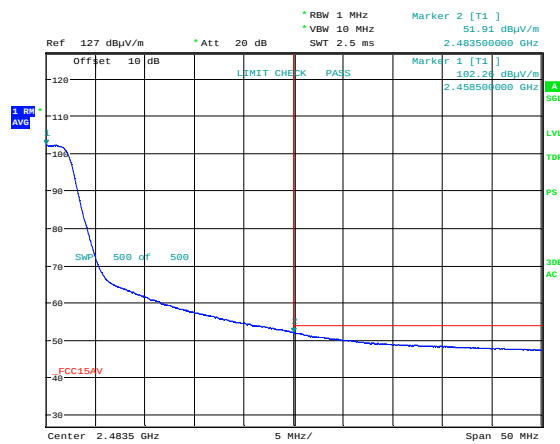


Date: 29.AUG.2022 12:39:51

Average

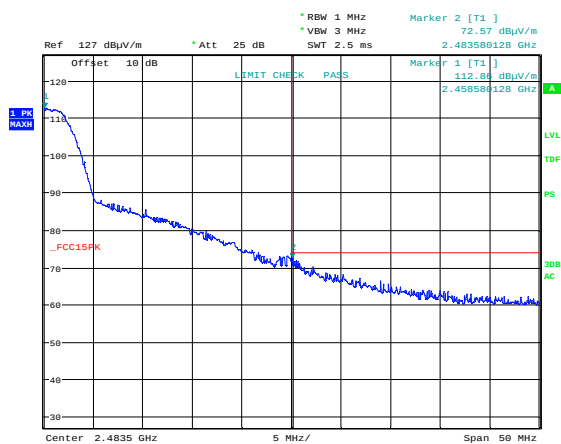


Date: 29.AUG.2022 12:22:36

Upper Band Edge, 2452 MHz, 802.11n MCS7, Peak

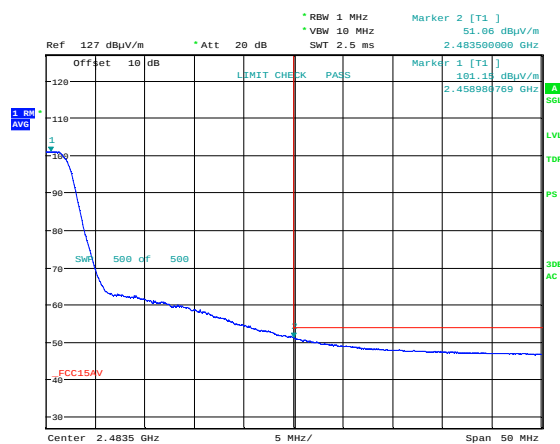


Date: 29.AUG.2022 12:21:28

Average

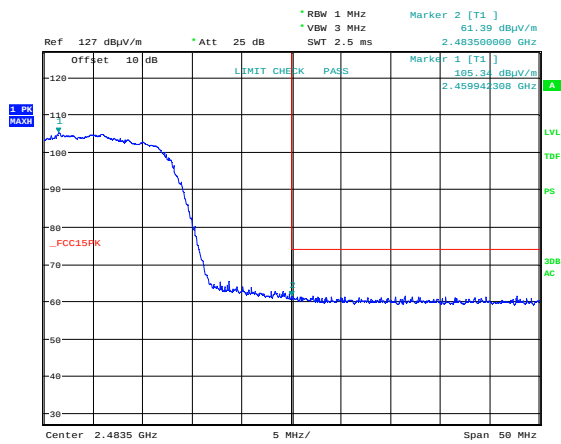


Date: 29.AUG.2022 11:56:48

Upper Band Edge, 2462 MHz, 802.11n MCS0, Peak

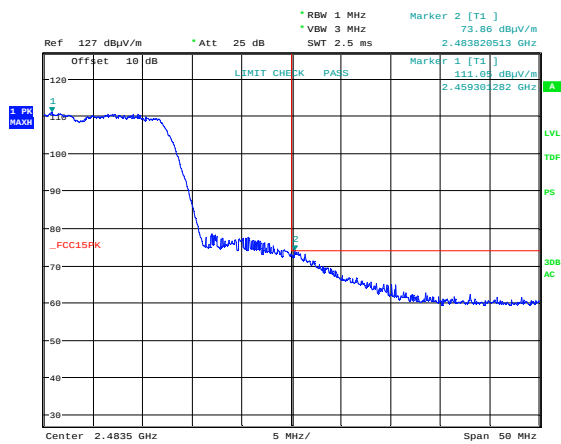


Date: 29.AUG.2022 12:04:03

Upper Band Edge, 2462 MHz, 802.11n MCS7, Peak

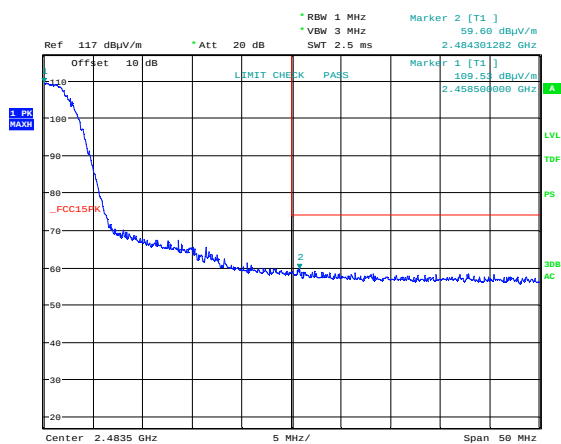


Date: 29.AUG.2022 15:58:32

Upper Band Edge, 2452 MHz, 802.11n MCS8, MIMO, Peak

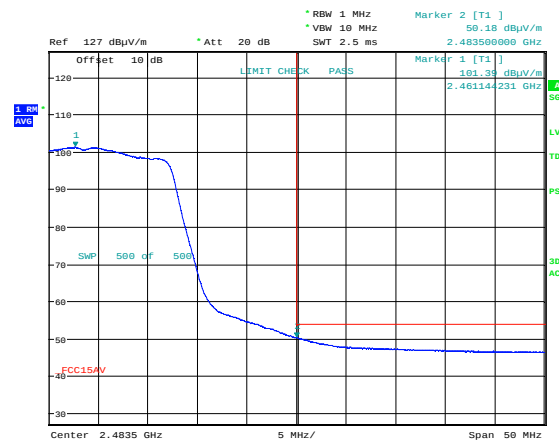


Date: 29.AUG.2022 11:09:35

Average

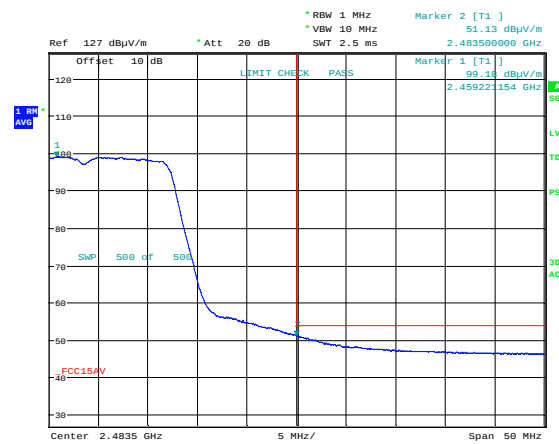


Date: 29.AUG.2022 12:04:39

Average

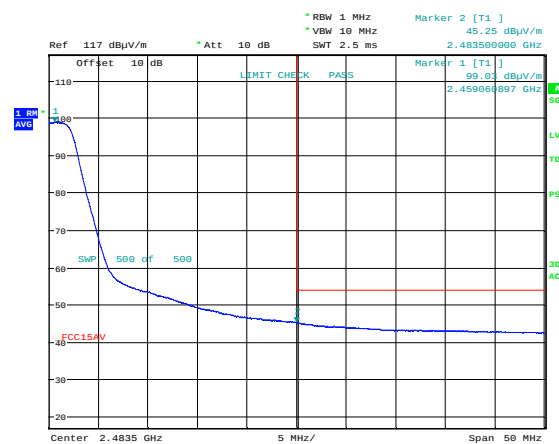


Date: 29.AUG.2022 15:57:25

Average

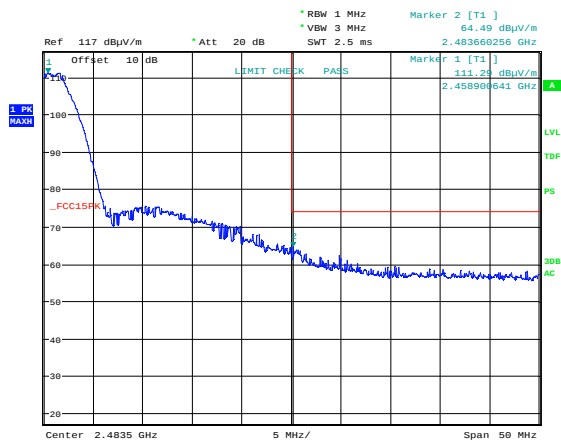


Date: 29.AUG.2022 16:02:48

Upper Band Edge, 2452 MHz, 802.11n MCS15, MIMO, Peak

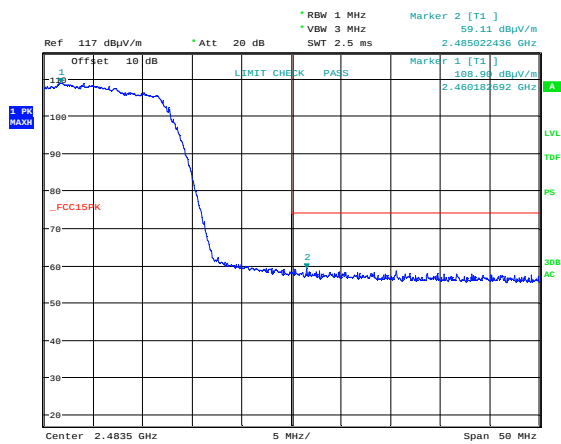


Date: 29.AUG.2022 15:48:46

Upper Band Edge, 2462 MHz, 802.11n MCS8, MIMO, Peak

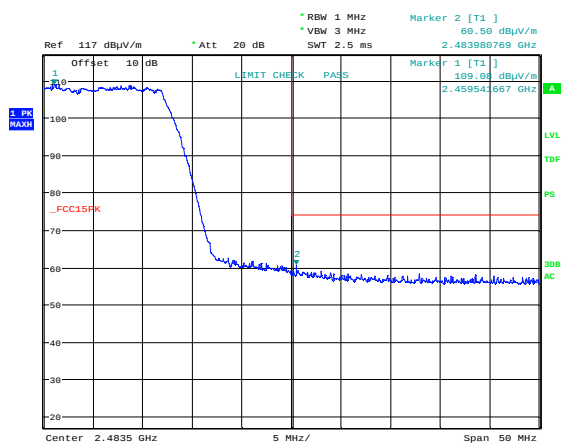


Date: 29.AUG.2022 15:52:09

Upper Band Edge, 2462 MHz, 802.11n MCS15, MIMO, Peak

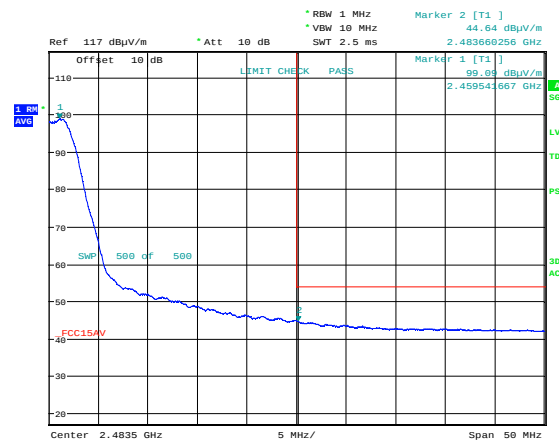


Date: 29.AUG.2022 16:03:45

Average

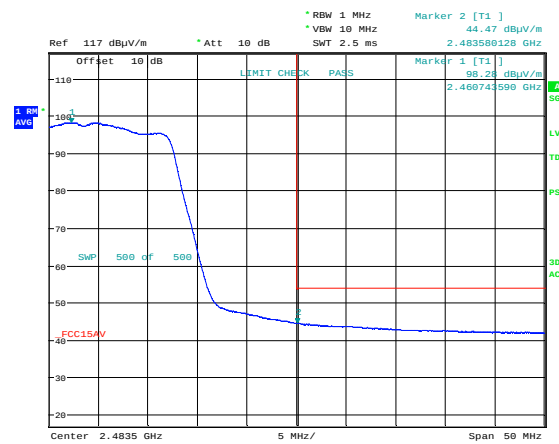


Date: 29.AUG.2022 15:49:24

Average

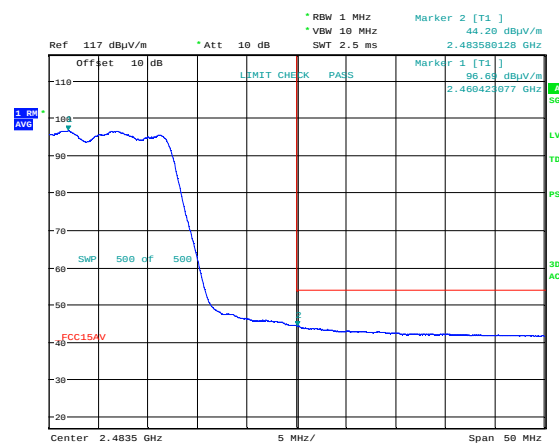


Date: 29.AUG.2022 15:51:03

Average

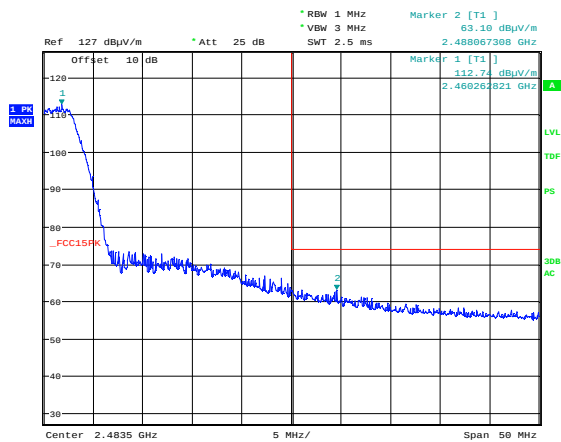


Date: 1.SEP.2022 13:19:30

Upper Band Edge, 2452 MHz, 802.11ax MCS0, Ant0, Peak

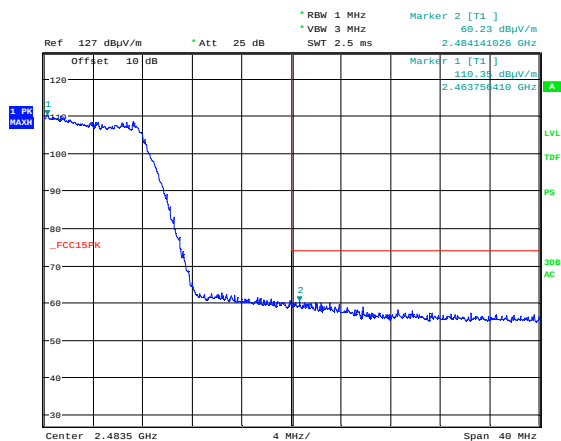


Date: 1.SEP.2022 13:03:48

Upper Band Edge, 2462 MHz, 802.11ax MCS0, Ant0, Peak

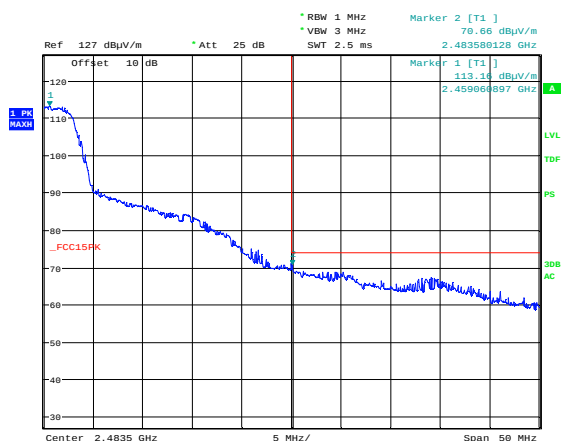


Date: 1.SEP.2022 13:25:16

Upper Band Edge, 2452 MHz, 802.11ax MCS11, Ant0, Peak

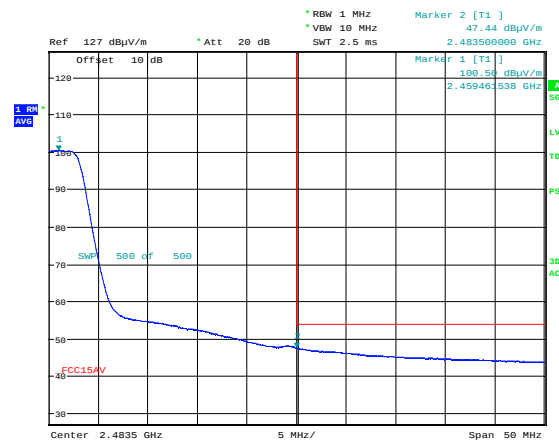


Date: 1.SEP.2022 13:20:08

Average

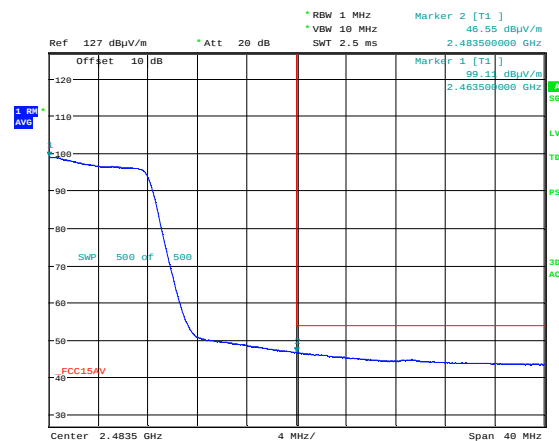


Date: 1.SEP.2022 13:04:29

Average

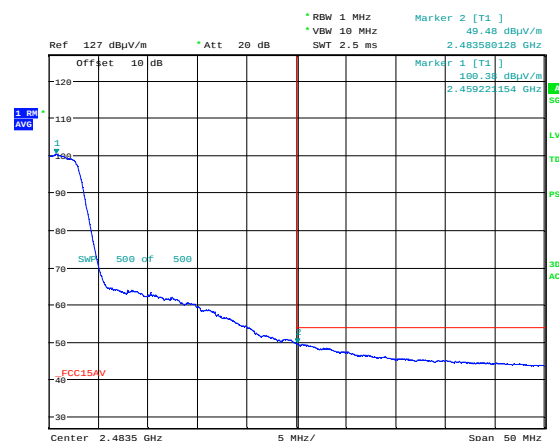


Date: 1.SEP.2022 13:25:42

Average

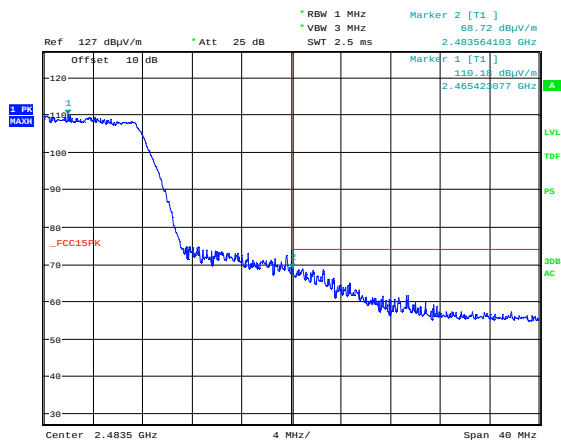


Date: 1.SEP.2022 13:30:50

Upper Band Edge, 2462 MHz, 802.11ax MCS11, Ant0, Peak

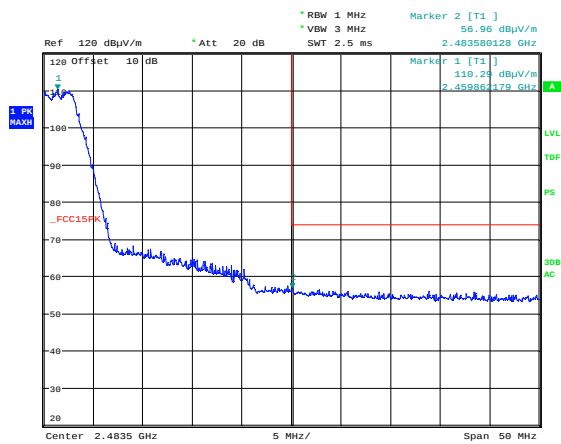


Date: 1.SEP.2022 12:11:32

Upper Band Edge, 2452 MHz, 802.11ax MCS0, MIMO, Peak

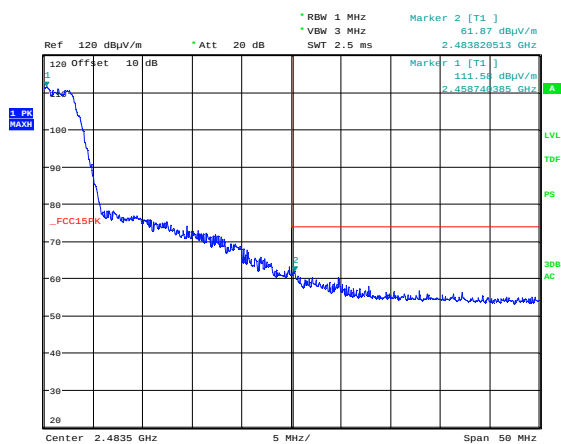


Date: 1.SEP.2022 12:15:56

Upper Band Edge, 2452 MHz, 802.11ax MCS11, MIMO, Peak

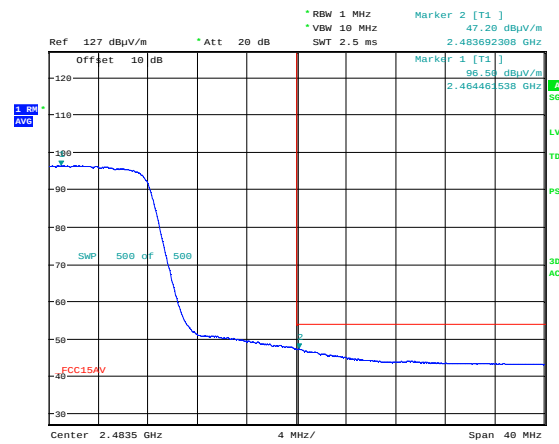


Date: 1.SEP.2022 13:32:24

Average

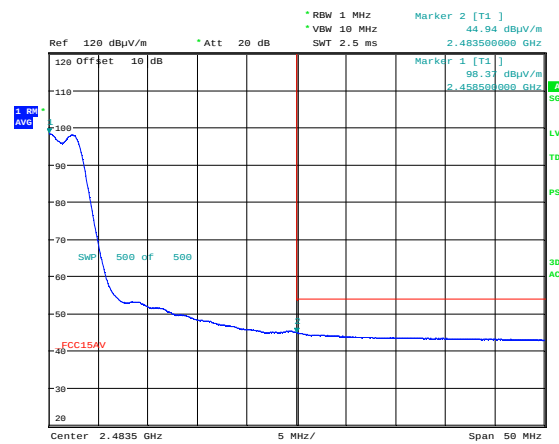


Date: 1.SEP.2022 12:12:36

Average

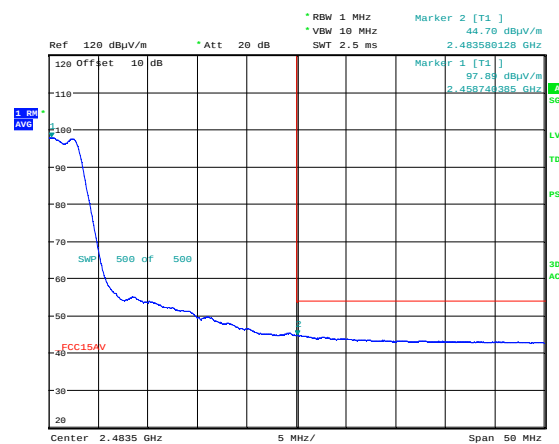


Date: 1.SEP.2022 12:16:27

Average

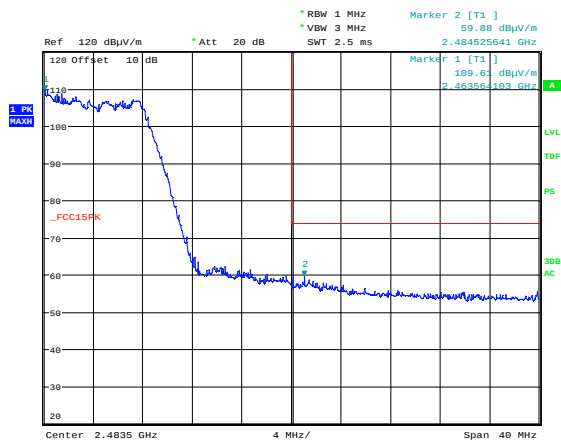


Date: 1.SEP.2022 11:58:18

Upper Band Edge, 2462 MHz, 802.11ax MCS0, MIMO, Peak

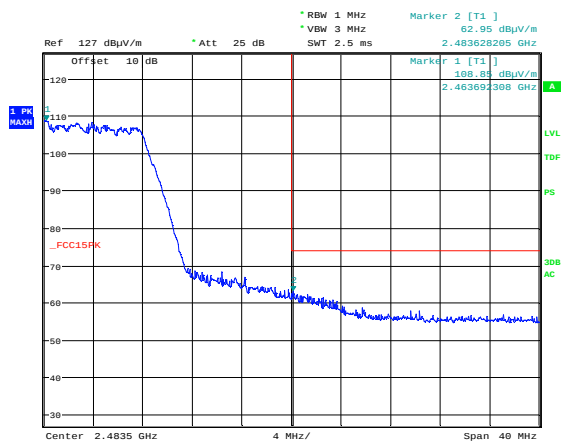


Date: 1.SEP.2022 13:36:38

Upper Band Edge, 2462 MHz, 802.11ax MCS11, MIMO, Peak

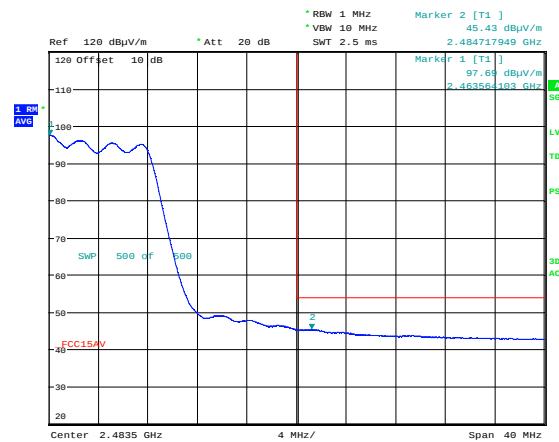

Date: 1.SEP.2022 11:58:43

Average

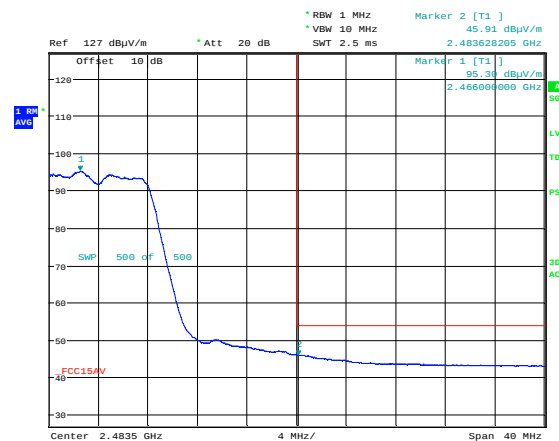

Date: 1.SEP.2022 13:37:04

Average

3.8 Radiated Emissions, 30 – 1000 MHz.

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Detector: Quasi-Peak (Pre Scan with Peak Detector)


Measuring distance 3 m

Measured Frequency (MHz)	Carrier Frequency (MHz)	Modulation	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30 – 88	Any	Any	< 35	40.0	> 5
88 – 216	Any	Any	< 30	43.5	> 13.5
216 – 960	Any	Any	< 35	46.0	> 11
960 – 1000	Any	Any	< 40	54.0	> 14
31.5	Any	Any	34.5	40.0	5.5

See attached plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Frequency	Radiated emission limit @3 meters	
30 – 88 MHz	100 µV/m	40.0 dBµV/m
88 – 216 MHz	150 µV/m	43.5 dBµV/m
216 – 960 MHz	200 µV/m	46.0 dBµV/m
960 – 1000 MHz	500 µV/m	54.0 dBµV/m
	Limits above are with Quasi Peak Detector	

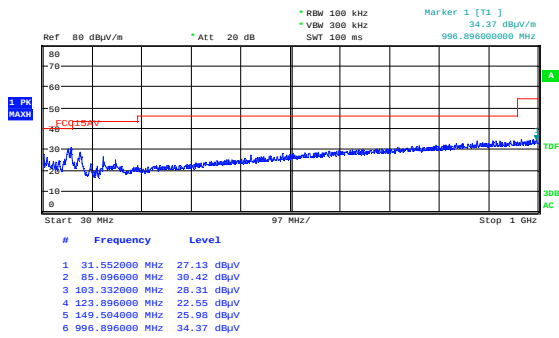


Date: 8.SEP.2022 09:56:19

Radiated Emissions 30 - 1000 MHz, 802.11b 1M, HP

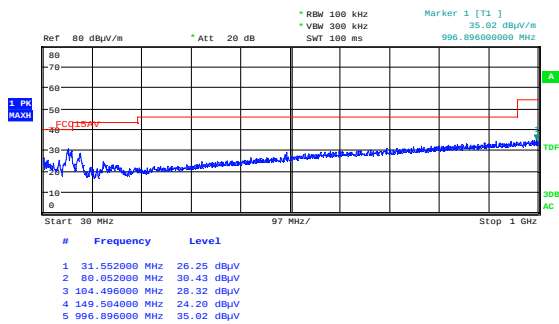


Date: 8.SEP.2022 10:01:13

Radiated Emissions 30 - 1000 MHz, 802.11g 6M, HP

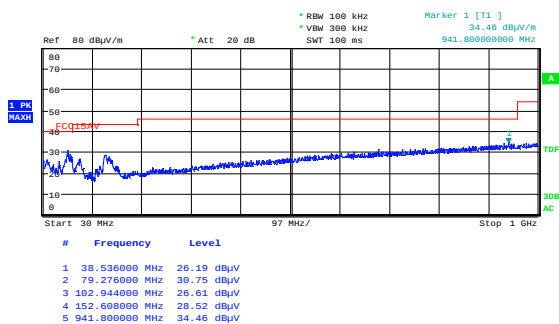


Date: 8.SEP.2022 10:08:38

Radiated Emissions 30 - 1000 MHz, 802.11n MCS8, HP

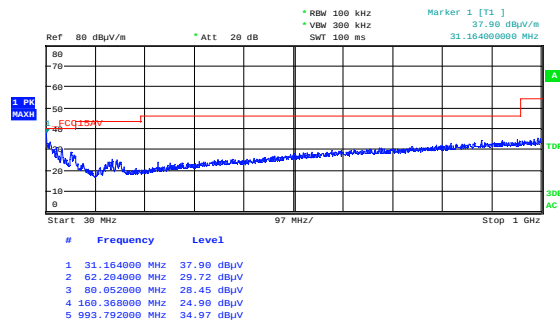


Date: 8.SEP.2022 09:54:24

Radiated Emissions 30 - 1000 MHz, 802.11b 1M, VP

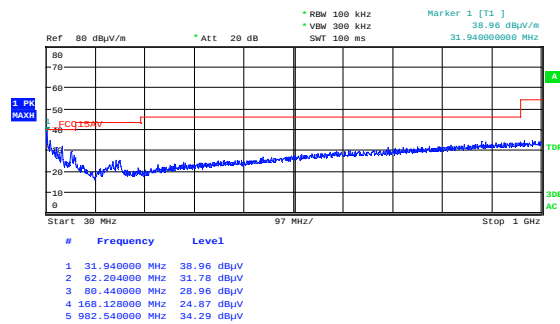


Date: 8.SEP.2022 09:59:18

Radiated Emissions 30 - 1000 MHz, 802.11g 6M, VP

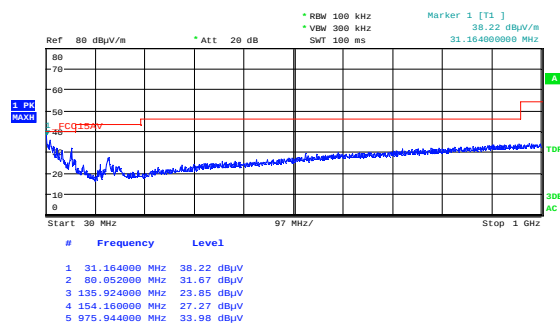


Date: 8.SEP.2022 10:06:44

Radiated Emissions 30 - 1000 MHz, 802.11n MCS8, VP

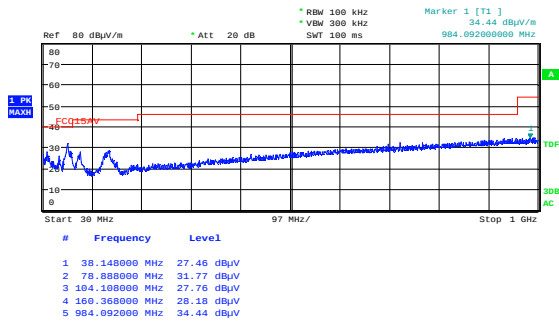

Date: 8.SEP.2022 10:14:35

Radiated Emissions 30 - 1000 MHz, 802.11ax MCS0, HP

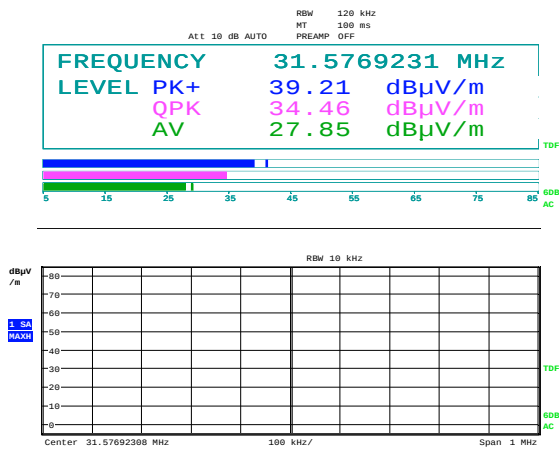

Date: 8.SEP.2022 10:12:40

Radiated Emissions 30 - 1000 MHz, 802.11ax MCS0, VP

Date: 7.SEP.2022 16:38:44

Emissions 31.5 MHz, Max: VP

3.9 Radiated Emissions, 1 – 26 GHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Measuring distance: 3m (1 – 18 GHz)

A pre-scan was performed above 18 GHz and no spurious emissions were detected.

RBW=1 MHz

Carrier freq. (MHz)	Measured Freq. (MHz)	Mode	Measured Emissions (dBµV/m)		Limit (dBµV/m)		Margin (dB)	
			Peak	Average	Pk	Av	Pk	Av
2422	4884	11b 1M	55.4	51.8	74	54	18.6	2.2
2437	4874	11b 1M	56.3	52.6	74	54	17.7	1.4
2452	4904	11b 1M	55.9	52.6	74	54	18.1	1.4
Any	Any	All other	< 54	/	74	54	> 20	/


A Band Reject Filter was used for measurements from 1 GHz to 18 GHz

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

See plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency	Average Detector	Peak Detector
1 – 26 GHz	54.0 dBµV/m	74.0 dBµV/m

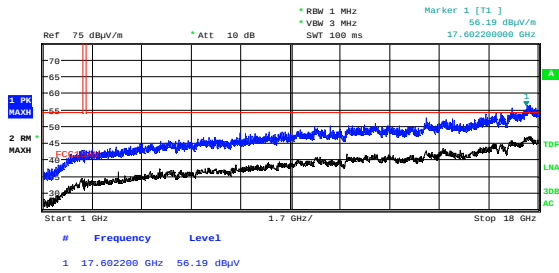


Date: 1.SEP.2022 14:12:43

Emissions 1 - 18 GHz, 2412 MHz, 802.11ax MCS0, MIMO, HP

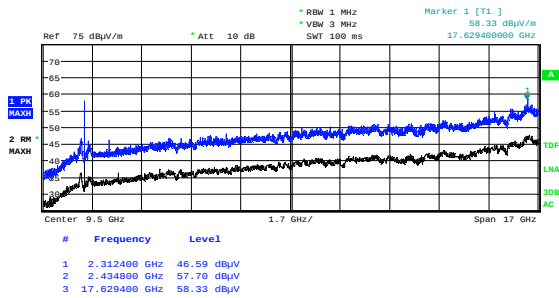


Date: 1.SEP.2022 09:19:09

Emissions 1 - 18 GHz, 2437 MHz, 802.11b 1M, Ant0 HP

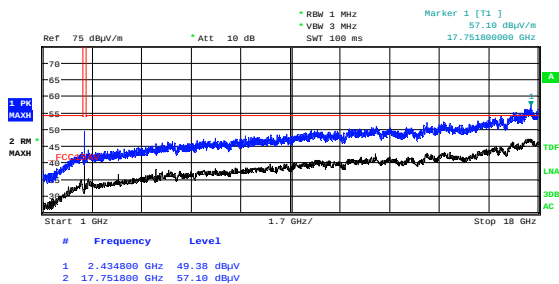


Date: 1.SEP.2022 09:30:39

Emissions 1 - 18 GHz, 2437 MHz, 802.11b 1M, Ant1 HP

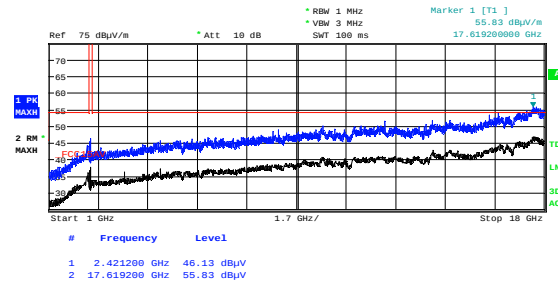


Date: 1.SEP.2022 14:10:47

VP

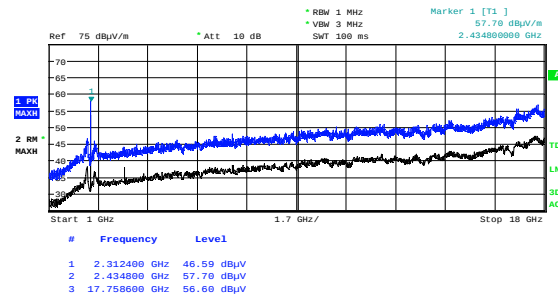


Date: 1.SEP.2022 09:17:20

VP

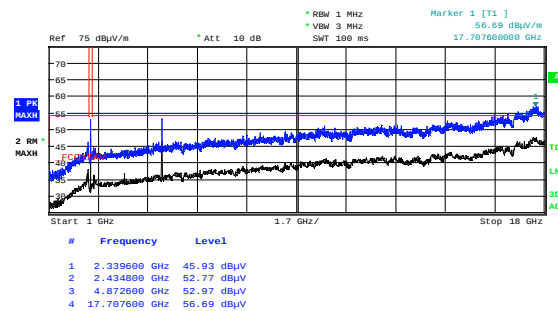


Date: 1.SEP.2022 09:28:39

VP

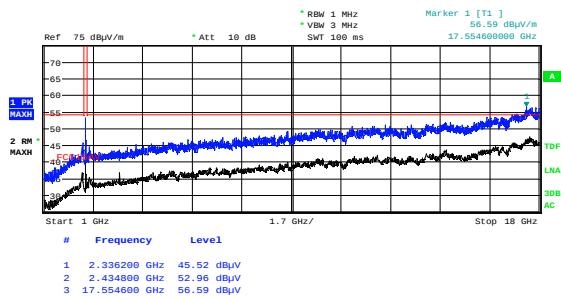


Date: 1.SEP.2022 10:28:28

Emissions 1 - 18 GHz, 2437 MHz, 802.11g 6M, Ant0 HP

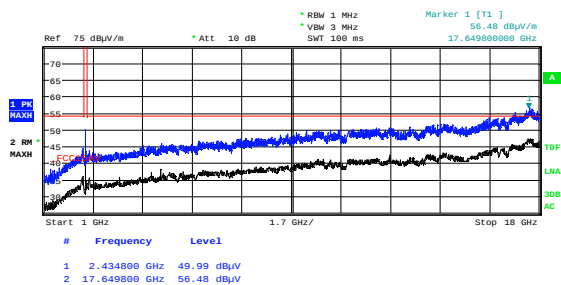


Date: 1.SEP.2022 10:16:08

Emissions 1 - 18 GHz, 2437 MHz, 802.11g 6M, Ant1 HP

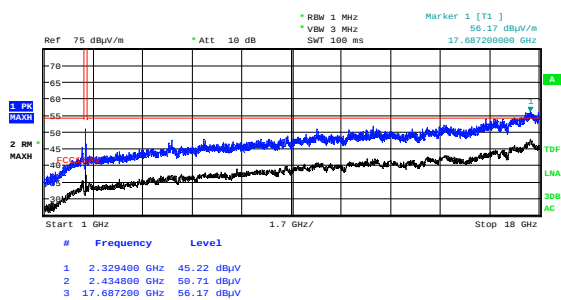


Date: 1.SEP.2022 10:35:05

Emissions 1 - 18 GHz, 2437 MHz, 802.11n MCS0, Ant0, HP

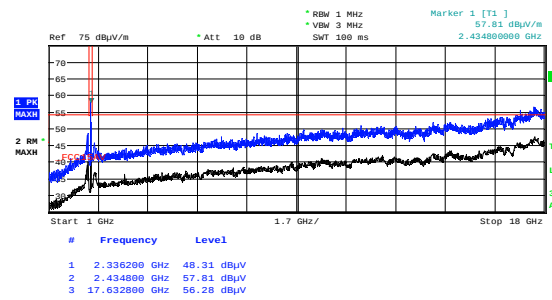


Date: 1.SEP.2022 10:26:33

VP

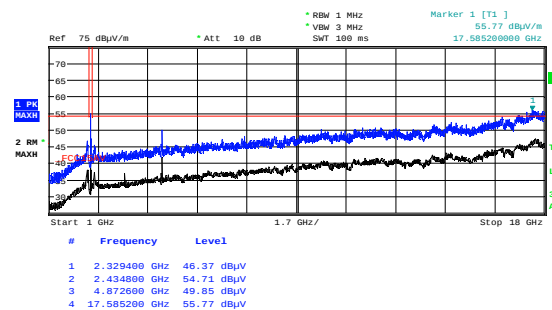


Date: 1.SEP.2022 10:14:19

VP

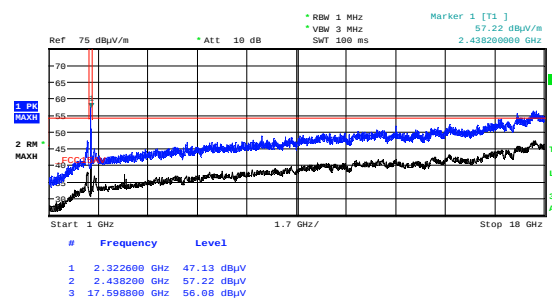


Date: 1.SEP.2022 10:33:10

VP

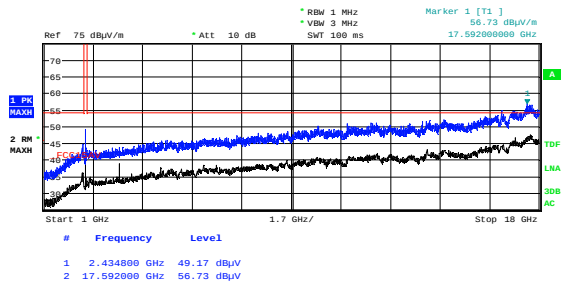


Date: 1.SEP.2022 10:10:47

Emissions 1 - 18 GHz, 2437 MHz, 802.11n MCS0, Ant1, HP

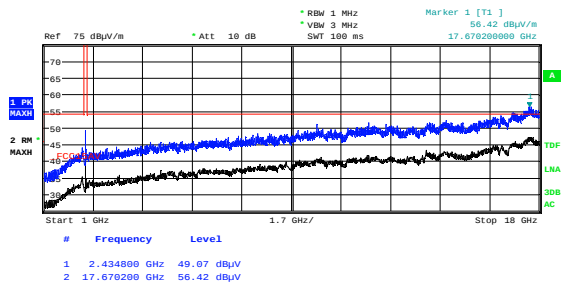


Date: 1.SEP.2022 11:05:08

Emissions 1 - 18 GHz, 2437 MHz, 802.11n MCS0, MIMO, HP

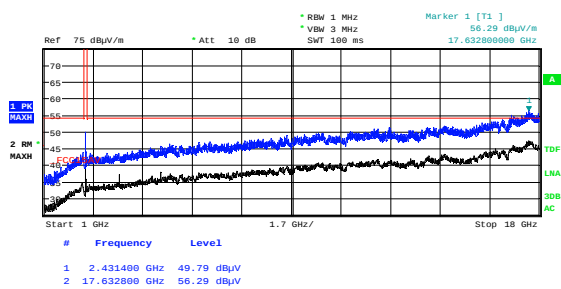


Date: 1.SEP.2022 10:42:18

Emissions 1 - 18 GHz, 2437 MHz, 802.11ax MCS0, Ant0, HP

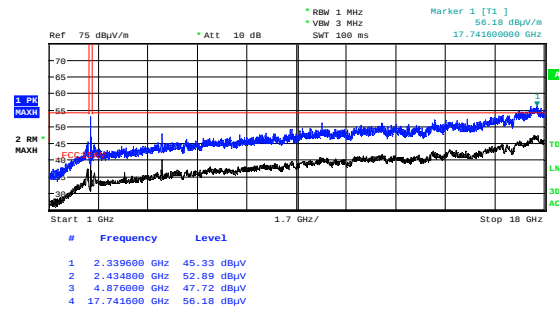


Date: 1.SEP.2022 10:08:51

VP

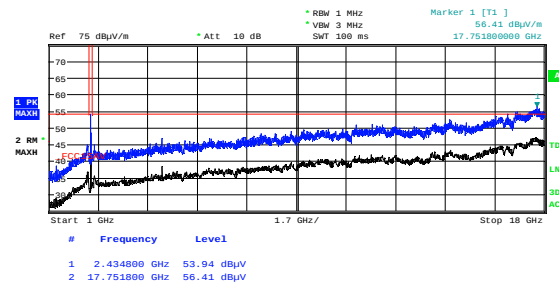


Date: 1.SEP.2022 11:03:13

VP

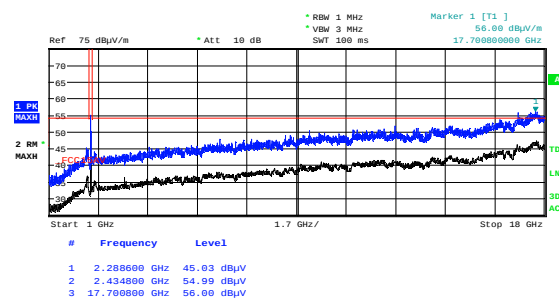


Date: 1.SEP.2022 10:40:23

VP

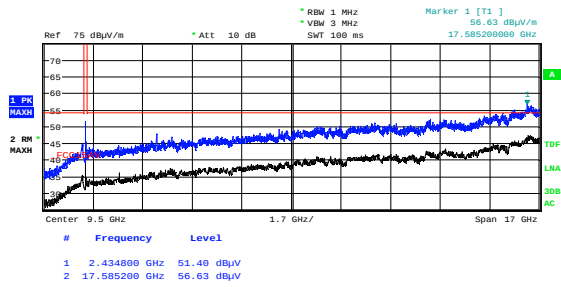


Date: 1.SEP.2022 10:48:44

Emissions 1 - 18 GHz, 2437 MHz, 802.11ax MCS0, Ant1, HP

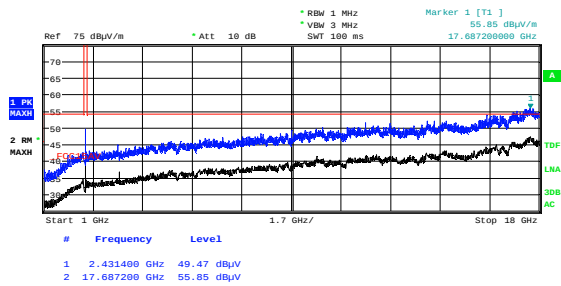


Date: 1.SEP.2022 10:57:29

Emissions 1 - 18 GHz, 2437 MHz, 802.11ax MCS0, MIMO, HP

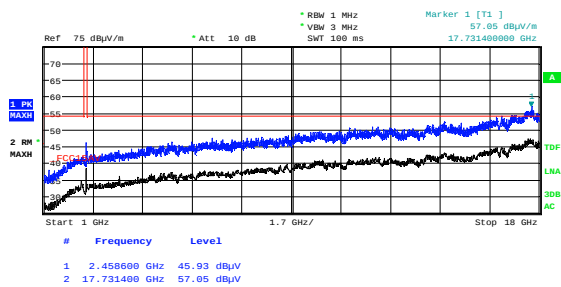


Date: 1.SEP.2022 11:14:45

Emissions 18 - 26 GHz, 2462 MHz, 802.11ax MCS0, MIMO, HP

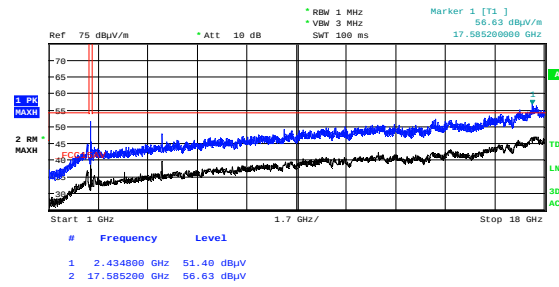


Date: 1.SEP.2022 10:46:49

VP

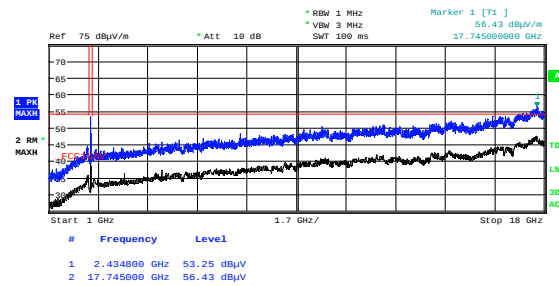


Date: 1.SEP.2022 10:55:34

VP

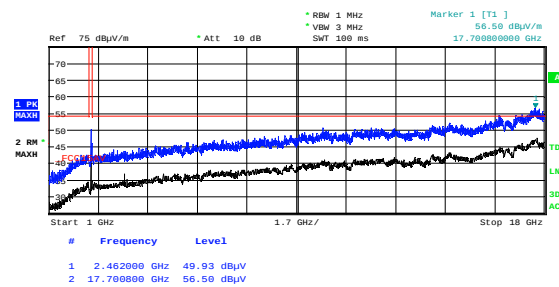


Date: 1.SEP.2022 11:12:49

VP

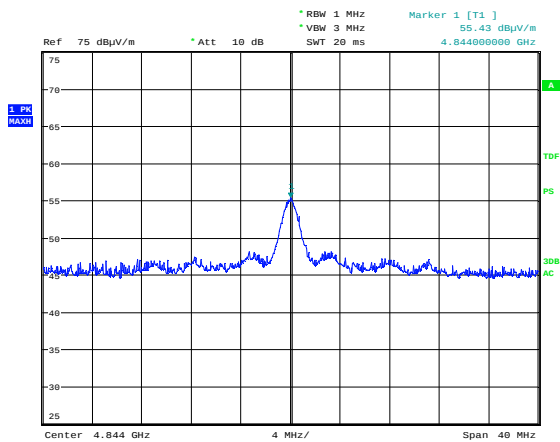


Date: 7.SEP.2022 11:11:39

Emissions 4844 MHz, 2422 MHz, 11b 1M, Max: Ant1, VP, Peak

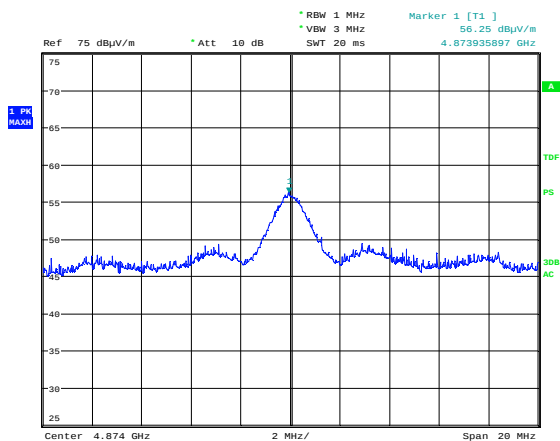


Date: 7.SEP.2022 10:55:00

Emissions 4874 MHz, 2437 MHz, 11b 1M, Max: Ant1, VP, Peak

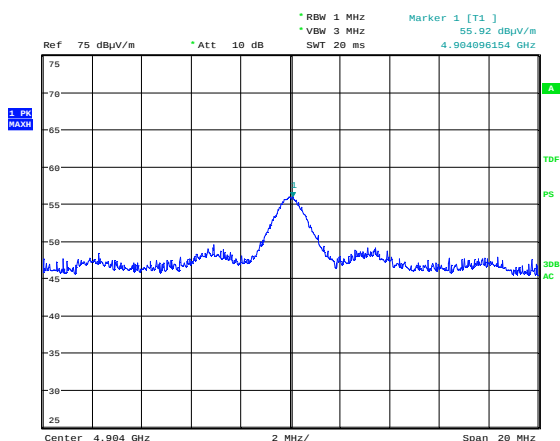


Date: 7.SEP.2022 11:16:58

Emissions 4904 MHz, 2452 MHz, 11b 1M, Max: Ant1, VP, Peak

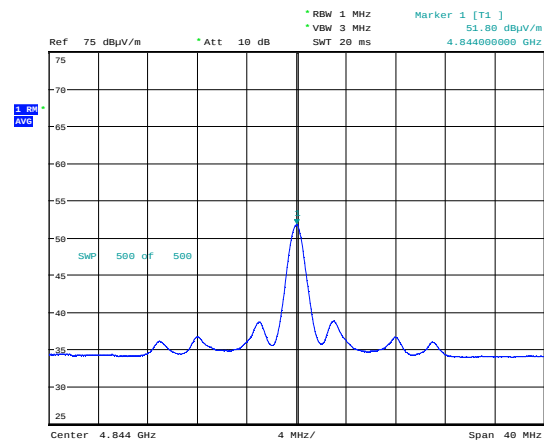


Date: 7.SEP.2022 11:12:12

Av

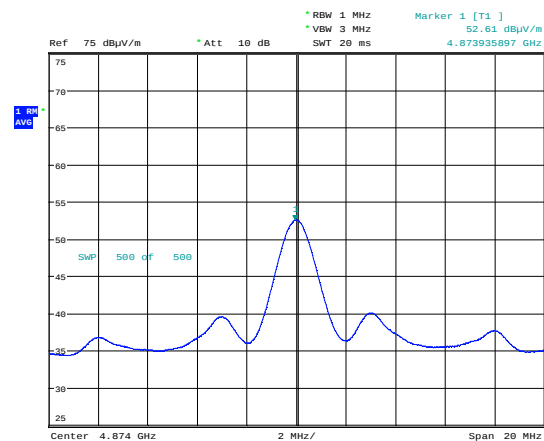


Date: 7.SEP.2022 10:55:51

Av

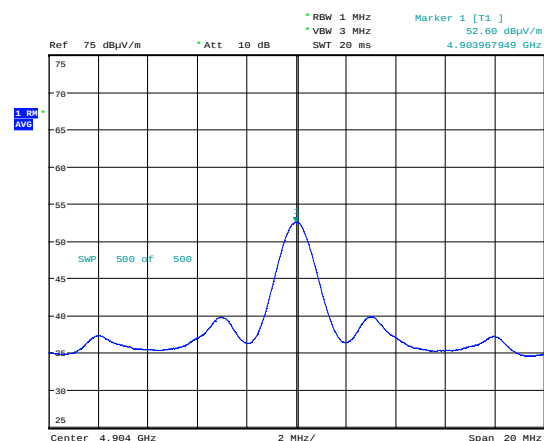


Date: 7.SEP.2022 11:17:57

Av

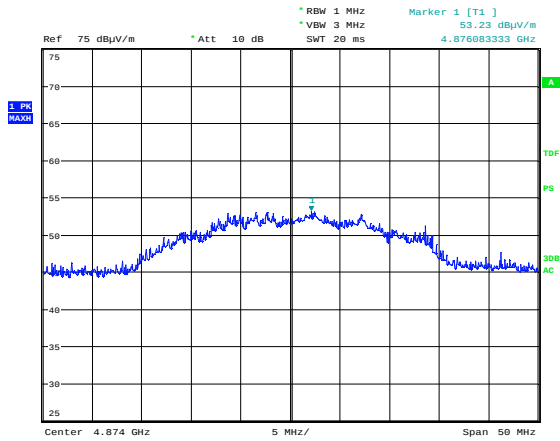


Date: 1.SEP.2022 10:18:51

Emissions 4874 MHz, 2437 MHz, 11g 6M, Max: Ant1, VP, Peak

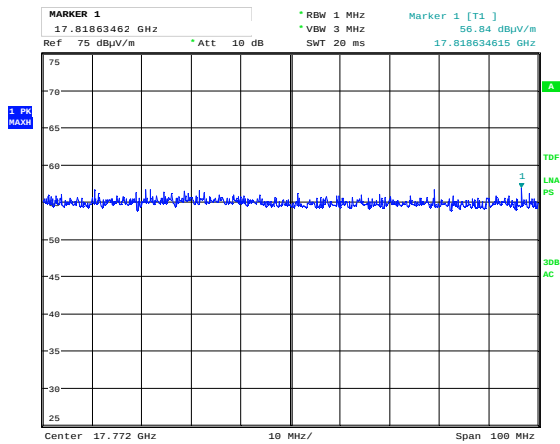


Date: 7.SEP.2022 11:50:50

Emissions 17772 MHz, 2452 MHz, 11b 1M, Max: Ant1, VP, Peak

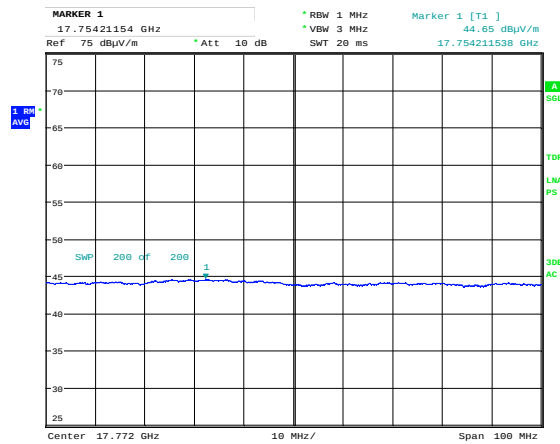


Date: 7.SEP.2022 11:51:39

Av

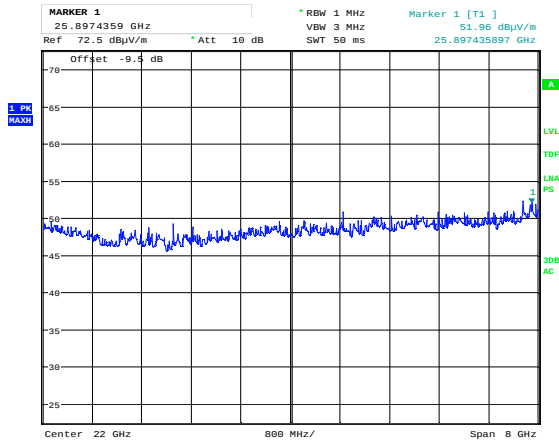


Date: 8.SEP.2022 12:48:58

Emissions 18 - 26 GHz, 2437 MHz, 802.11b 1M, Ant0 HP @1m

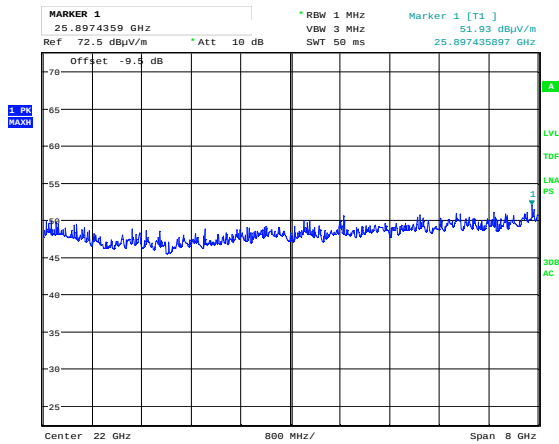


Date: 8.SEP.2022 12:50:10

Emissions 18 - 26 GHz, 2437 MHz, 802.11b 1M, Ant1 HP @1m

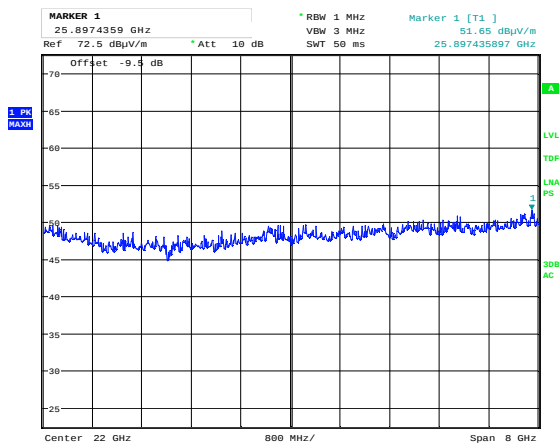


Date: 8.SEP.2022 12:53:43

Emissions 18 - 26 GHz, 2437 MHz, 802.11g 6M, Ant0 HP @1m

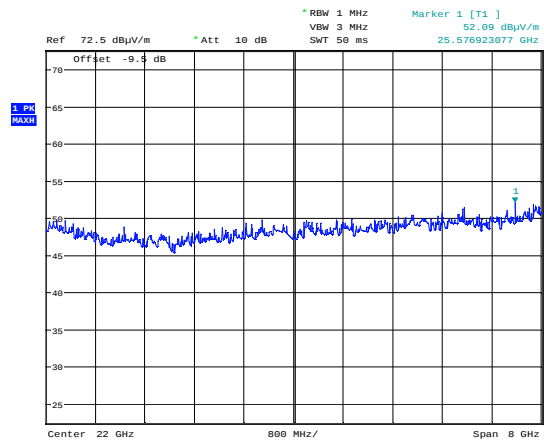


Date: 8.SEP.2022 12:47:44

VP

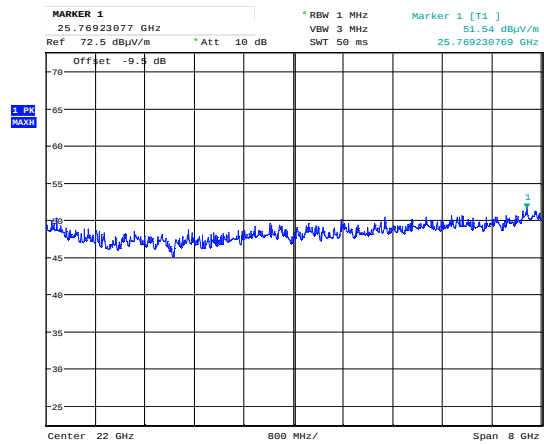


Date: 8.SEP.2022 12:50:58

VP

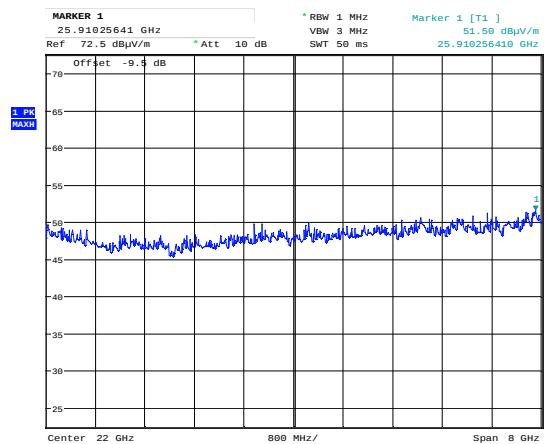


Date: 8.SEP.2022 12:52:51

VP

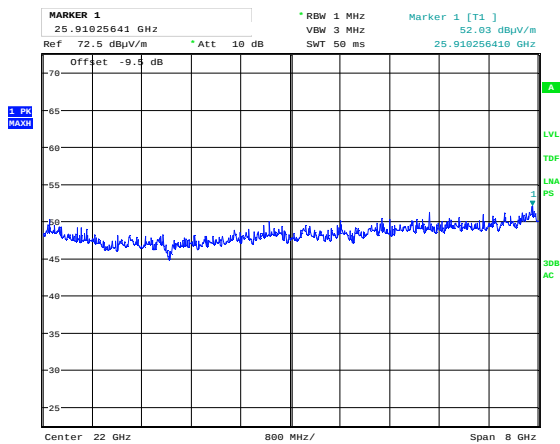


Date: 8.SEP.2022 12:54:57

Emissions 18 - 26 GHz, 2437 MHz, 802.11g 6M, Ant1 HP @1m

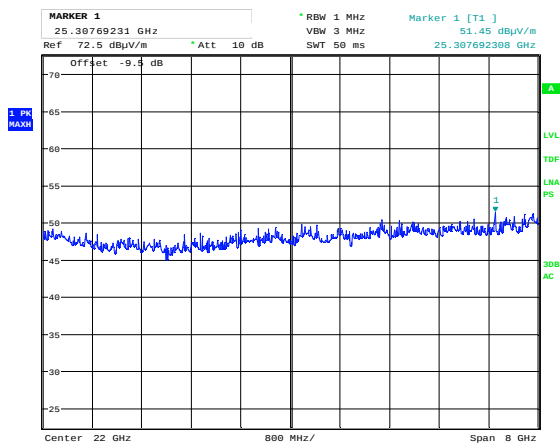


Date: 8.SEP.2022 12:58:59

Emissions 18 - 26 GHz, 2437 MHz, 802.11n MCS8 MIMO, HP @1m

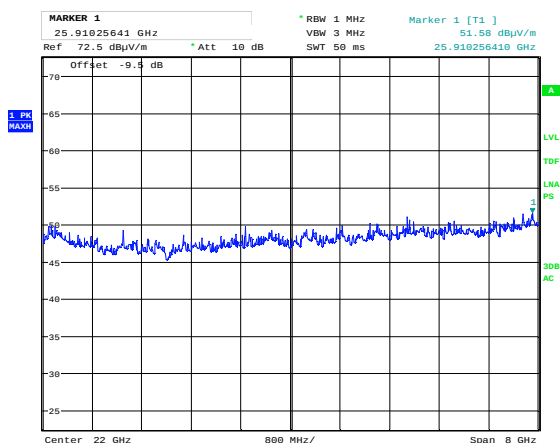


Date: 8.SEP.2022 13:01:20

Emissions 18 - 26 GHz, 2437 MHz, 802.11ax MCS11 MIMO, HP @1m

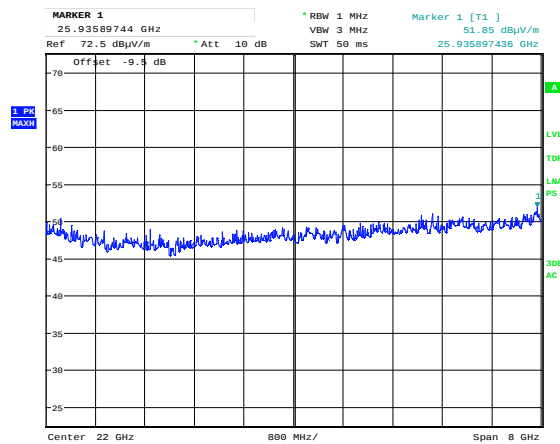


Date: 8.SEP.2022 12:55:48

VP

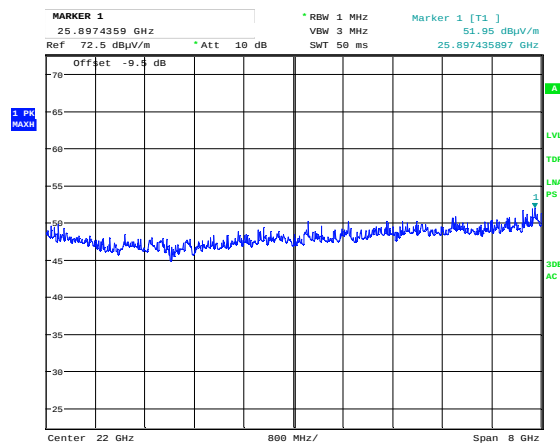

Date: 8.SEP.2022 12:58:07

VP

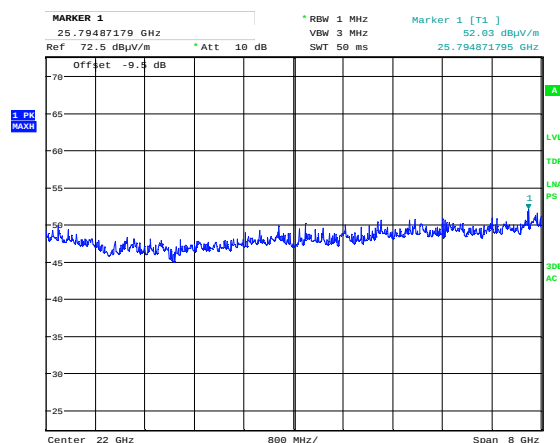

Date: 8.SEP.2022 13:02:08

VP

3.10 Power Spectral Density (PSD)

FCC part 15.247(d)

ISED Canada RSS-247 Issue 2, Clause 5.2 (2)

Measurement procedure: ANSI C63.10-2013 Clause 11.10

Test Results: Complies


Measurement Data:

The measurement procedure SA-2 described in ANSI C63.10-2013 was used.


Modulation Type	Measured Average Power Spectral Density (dBm/3kHz)				
	2412 MHz	2422 MHz	2437 MHz	2452 MHz	2462 MHz
802.11b	-1.9	1.1	0.8	0.7	-2.0
802.11g	-3.8	-1.8	1.1	-1.7	-4.2
802.11n SISO	-5.8	-2.3	-1.7	-2.0	-5.7
802.11n MIMO	-6.4	-3.0	-3.4	-3.4	-6.6
802.11ax SISO	-7.3	-3.8	-4.6	-4.8	-7.4
802.11ax MIMO	-8.3	-6.0	-6.5	-6.4	-8.7

Requirement for systems using Digital Modulation


The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

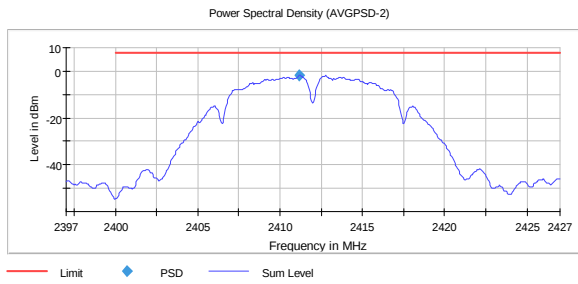


PSD, 2412 MHz, 802.11b 1M -1.9

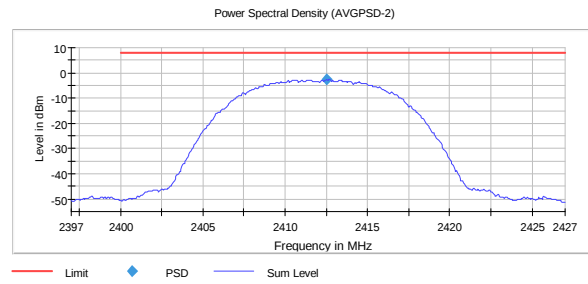


PSD, 2412 MHz, 802.11b 11M -2.5

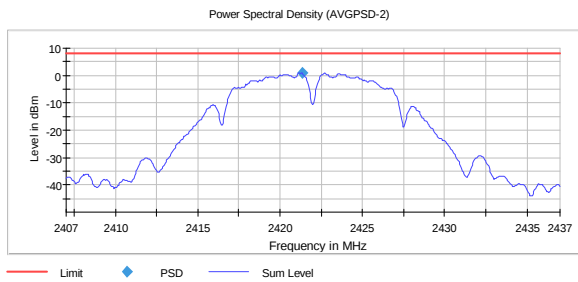


PSD, 2422 MHz, 802.11b 1M 1.1

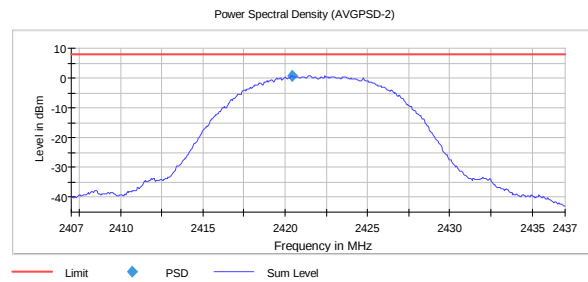


PSD, 2422 MHz, 802.11b 11M 0.9

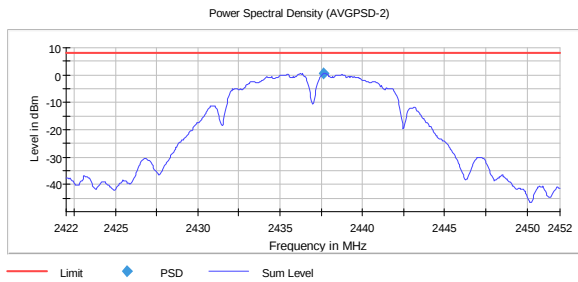


PSD, 2437 MHz, 802.11b 1M 0.6

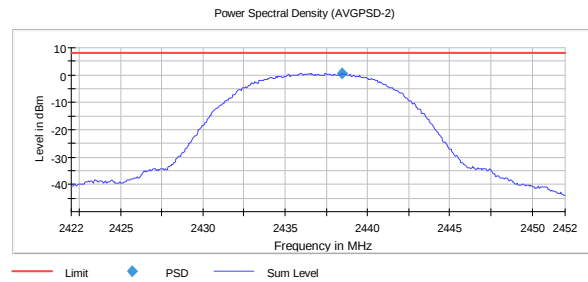


PSD, 2437 MHz, 802.11b 11M 0.8

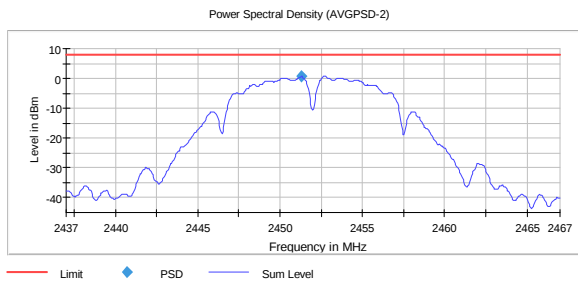


PSD, 2452 MHz, 802.11b 1M 0.7

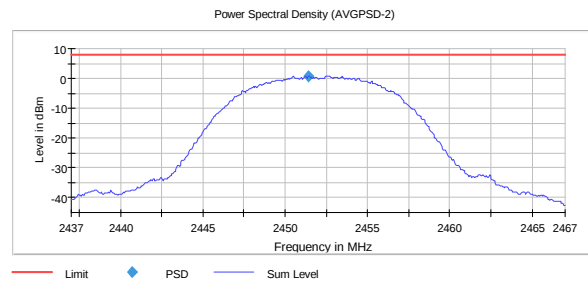


PSD, 2452 MHz, 802.11b 11M 0.7

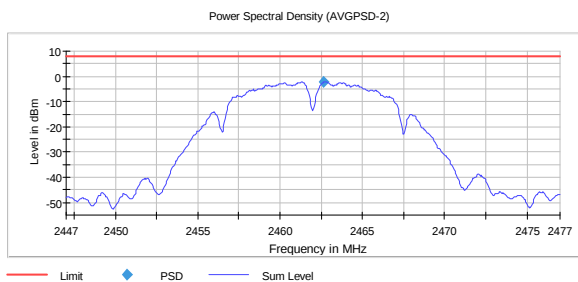


PSD, 2462 MHz, 802.11b 1M -2.0

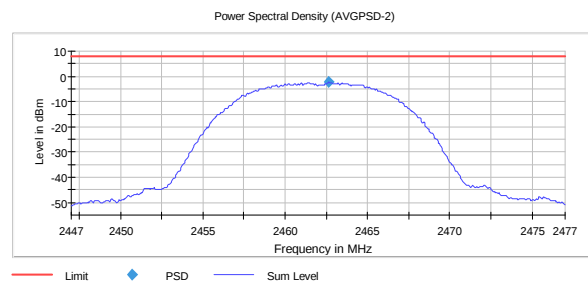


PSD, 2462 MHz, 802.11b 11M -2.4

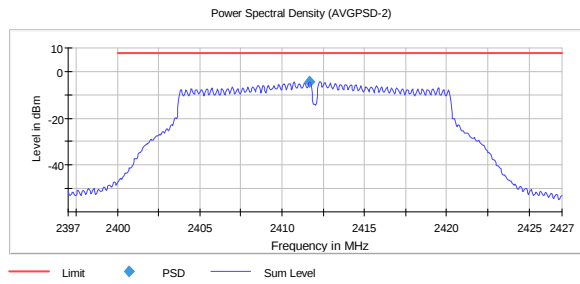


PSD, 2412 MHz, 802.11g 6M -4.5

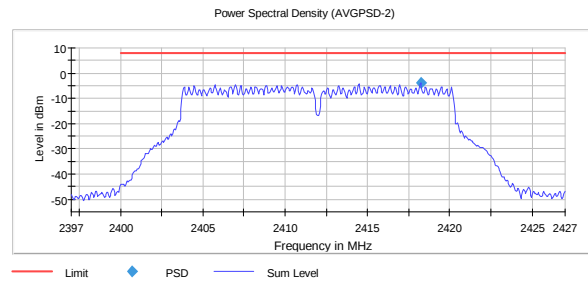


PSD, 2412 MHz, 802.11g 54M -3.8

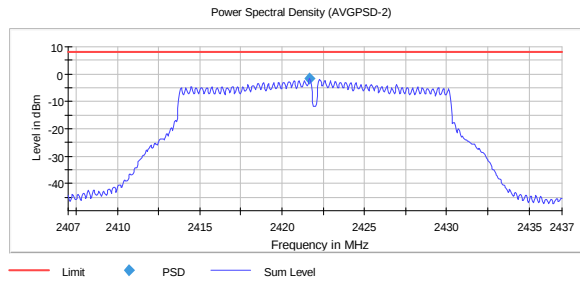


PSD, 2422 MHz, 802.11g 6M -1.8

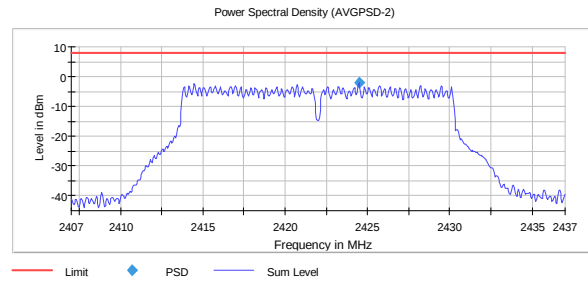


PSD, 2422 MHz, 802.11g 54M -2.2

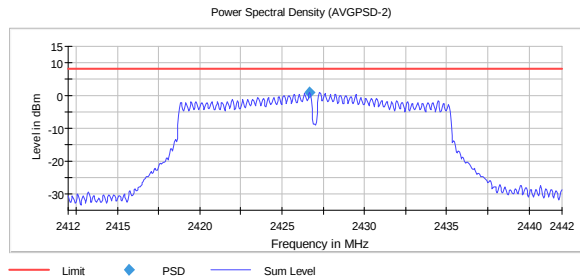


PSD, 2427 MHz, 802.11g 6M 1.0

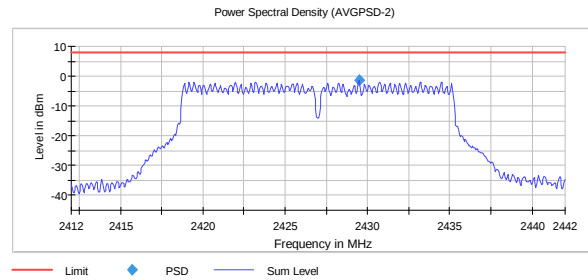


PSD, 2427 MHz, 802.11g 54M -1.2

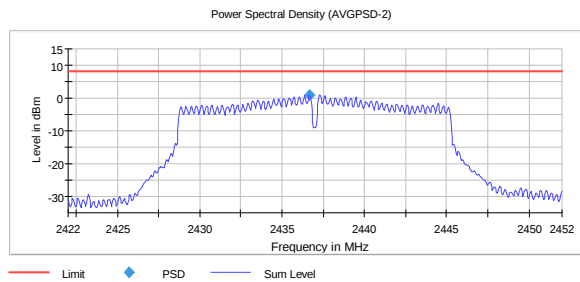


PSD, 2437 MHz, 802.11g 6M 1.1

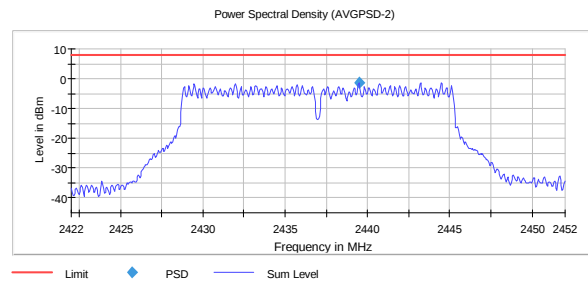


PSD, 2437 MHz, 802.11g 54M -1.3

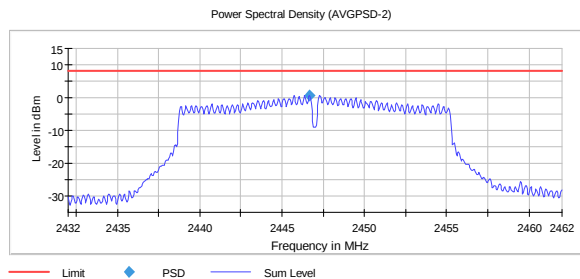


PSD, 2447 MHz, 802.11g 6M 0.8

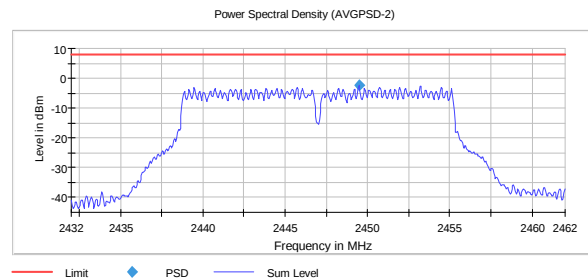


PSD, 2447 MHz, 802.11g 54M -2.4

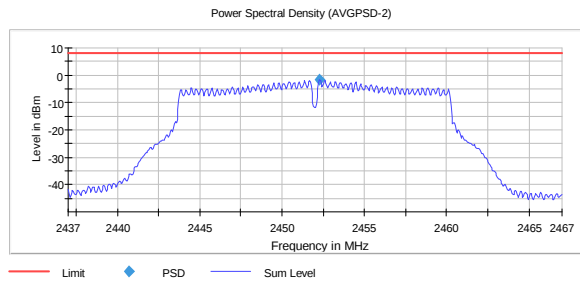


PSD, 2452 MHz, 802.11g 6M -1.7

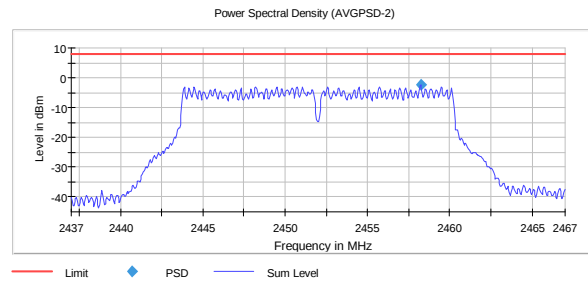


PSD, 2452 MHz, 802.11g 54M -2.3

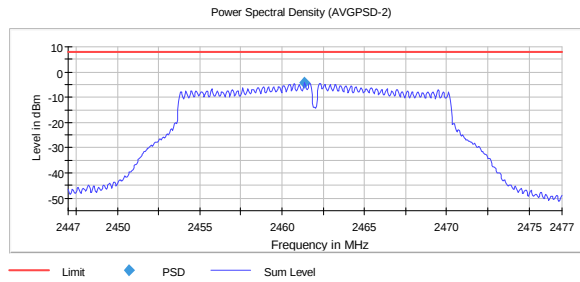


PSD, 2462 MHz, 802.11g 6M -4.2

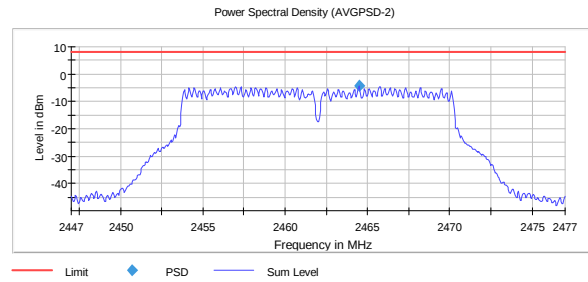


PSD, 2462 MHz, 802.11g 54M -4.4

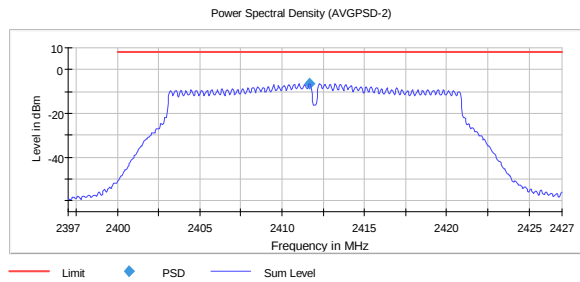


PSD, 2412 MHz, 802.11n MCS0 SISO -6.2

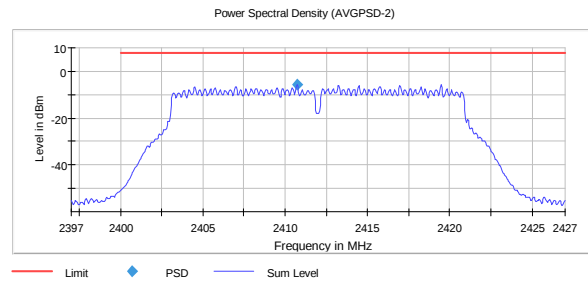


PSD, 2412 MHz, 802.11n MCS7 SISO -5.8

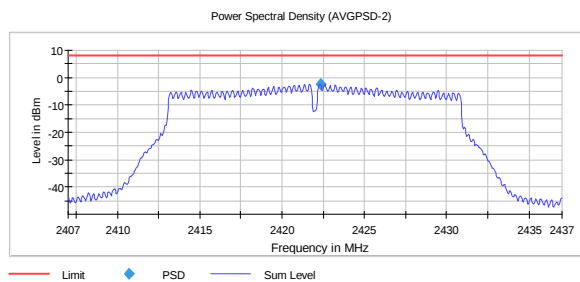


PSD, 2422 MHz, 802.11n MCS0 SISO -2.3

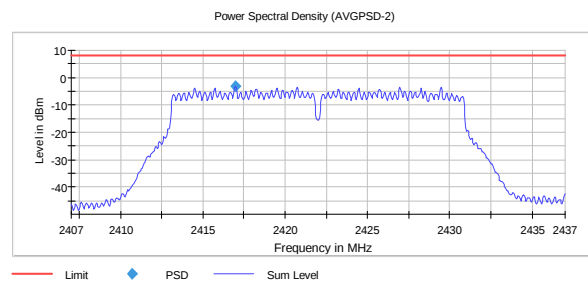


PSD, 2422 MHz, 802.11n MCS7 SISO -3.1

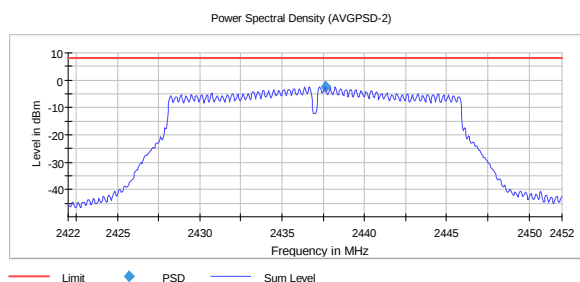


PSD, 2437 MHz, 802.11n MCS0 SISO -2.2

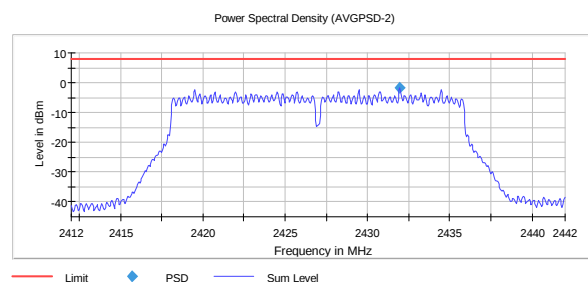


PSD, 2437 MHz, 802.11n MCS7 SISO -1.7

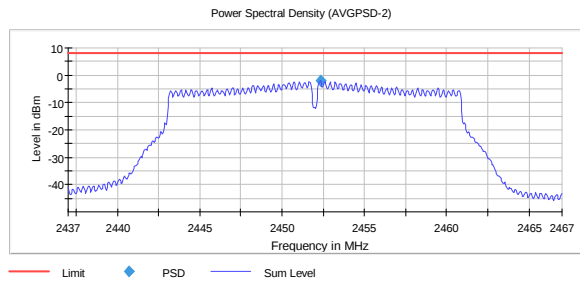


PSD, 2452 MHz, 802.11n MCS0 SISO -2.0

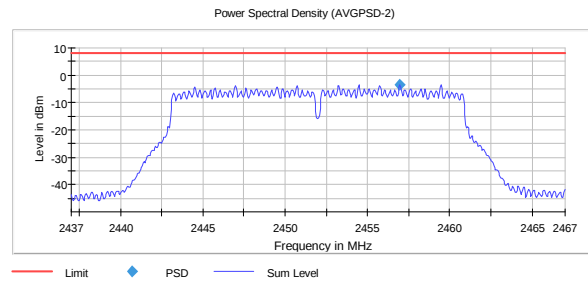


PSD, 2452 MHz, 802.11n MCS7 SISO -3.4

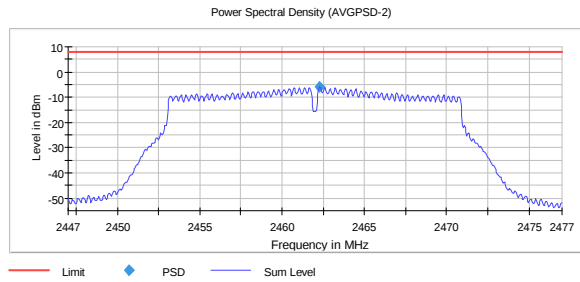


PSD, 2462 MHz, 802.11n MCS0 SISO -6.0

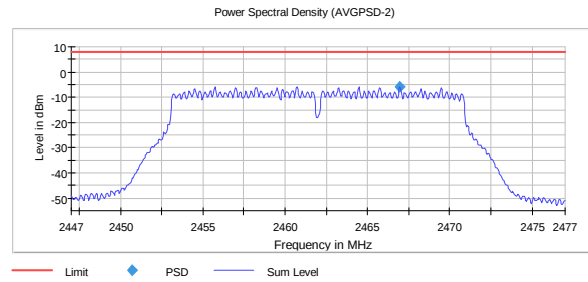


PSD, 2462 MHz, 802.11n MCS7 SISO -5.7

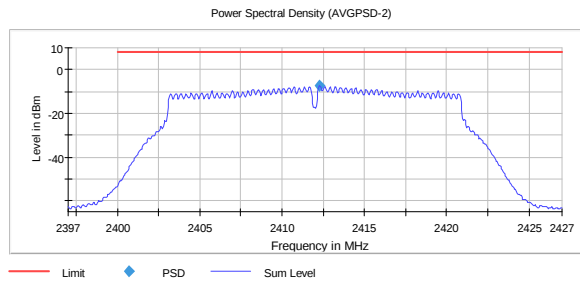


PSD, 2412 MHz, 802.11n MCS8 MIMO -7.4

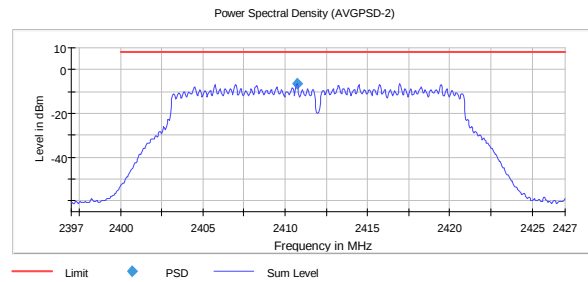


PSD, 2412 MHz, 802.11n MCS15 MIMO -6.4

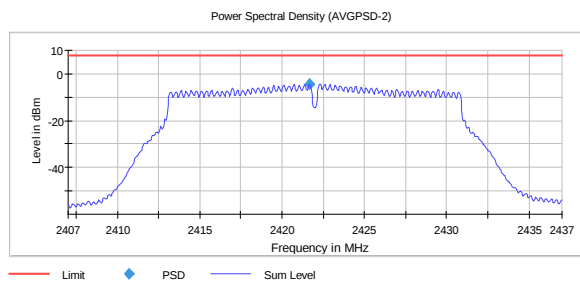


PSD, 2422 MHz, 802.11n MCS8 MIMO -4.4

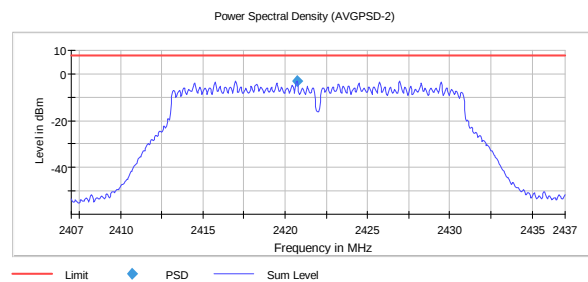


PSD, 2422 MHz, 802.11n MCS15 MIMO -3.0

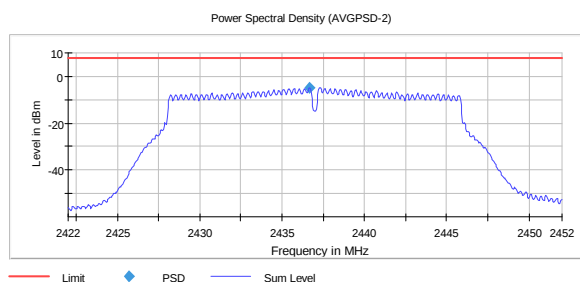


PSD, 2437 MHz, 802.11n MCS8 MIMO -4.8

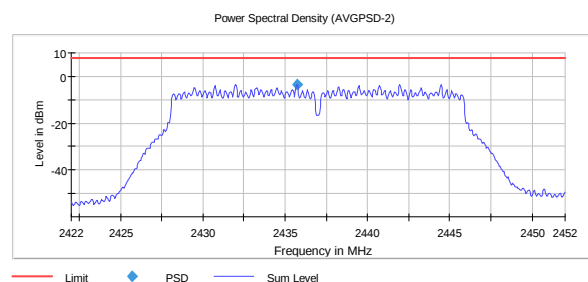


PSD, 2437 MHz, 802.11n MCS15 MIMO -3.4

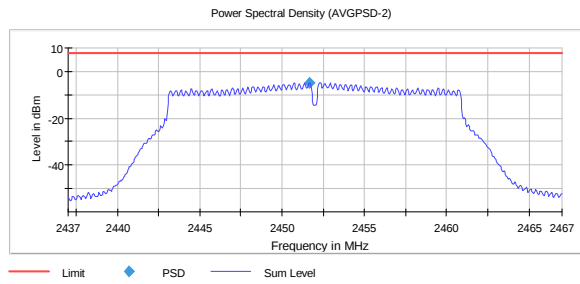


PSD, 2452 MHz, 802.11n MCS8 MIMO -4.8

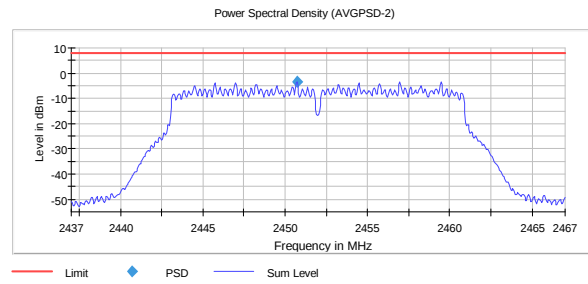


PSD, 2452 MHz, 802.11n MCS15 MIMO -3.4

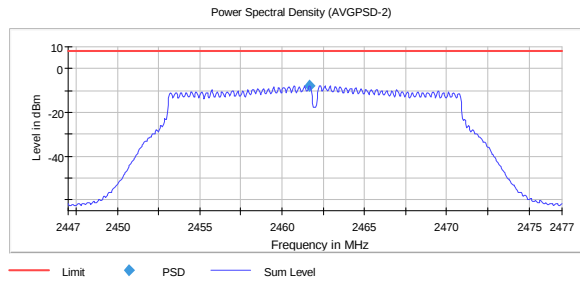


PSD, 2462 MHz, 802.11n MCS8 MIMO -7.8

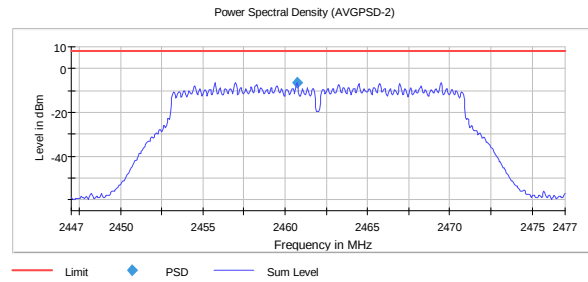


PSD, 2462 MHz, 802.11n MCS15 MIMO -6.6

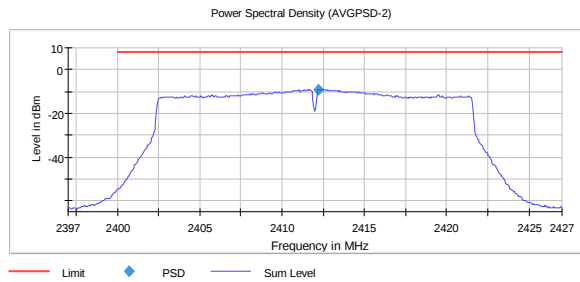


PSD, 2412 MHz, 802.11ax MCS0 SISO -9.0

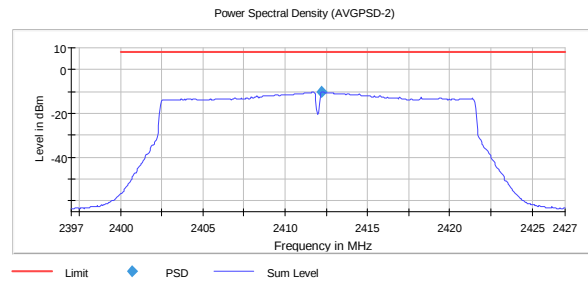


PSD, 2412 MHz, 802.11ax MCS0 MIMO -10.0

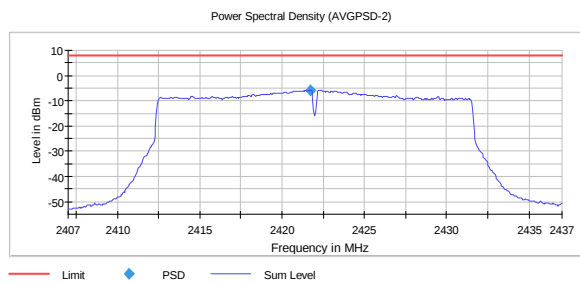


PSD, 2422 MHz, 802.11ax MCS0 SISO -5.7

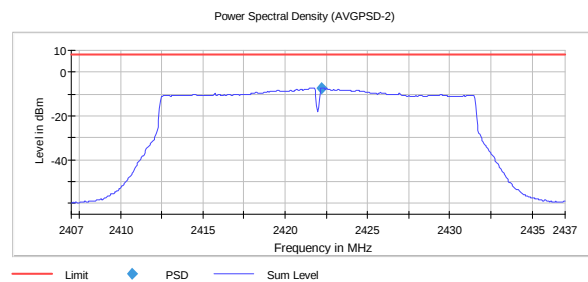


PSD, 2422 MHz, 802.11ax MCS0 MIMO -7.3

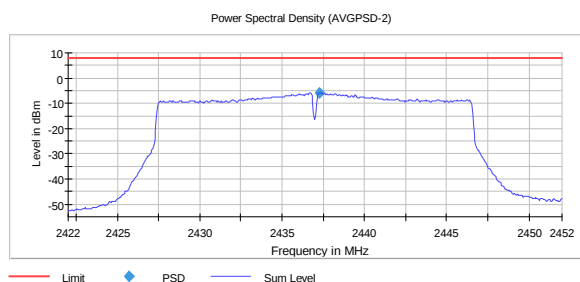


PSD, 2437 MHz, 802.11ax MCS0 SISO -5.8

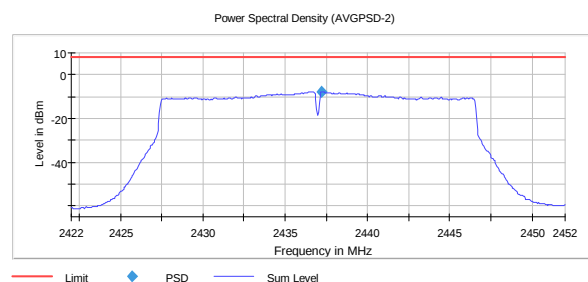


PSD, 2437 MHz, 802.11ax MCS0 MIMO -7.6

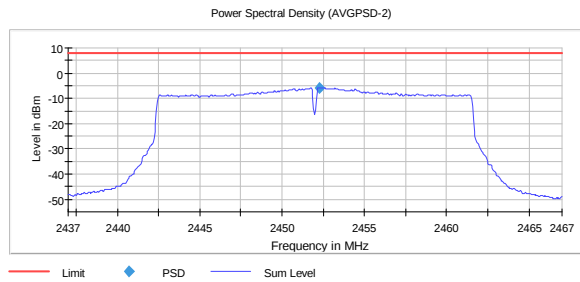


PSD, 2452 MHz, 802.11ax MCS0 SISO -5.7

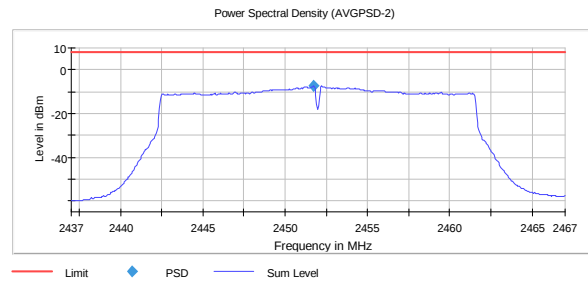


PSD, 2452 MHz, 802.11ax MCS0 MIMO -7.4

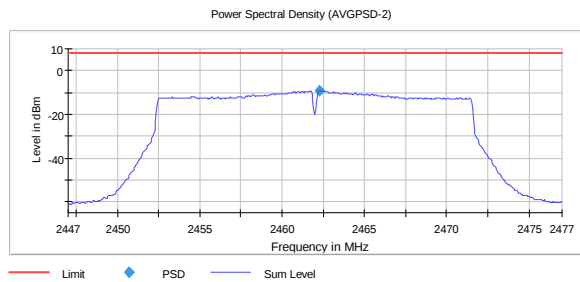


PSD, 2462 MHz, 802.11ax MCS0 SISO -9.3

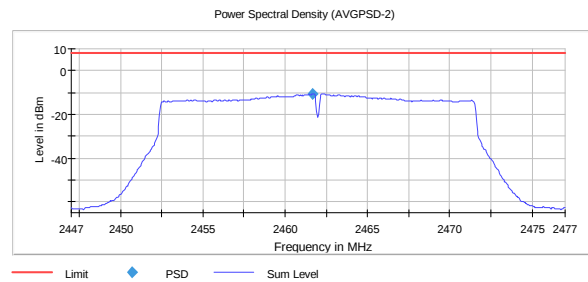


PSD, 2462 MHz, 802.11ax MCS0 MIMO -10.6

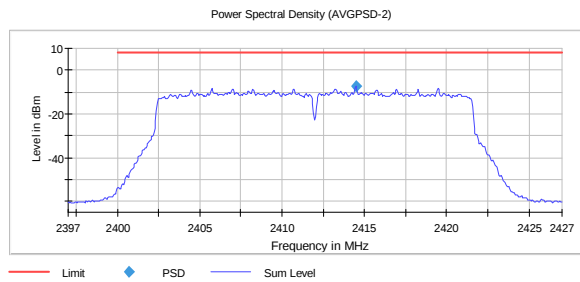


PSD, 2412 MHz, 802.11ax MCS8 SISO -7.3

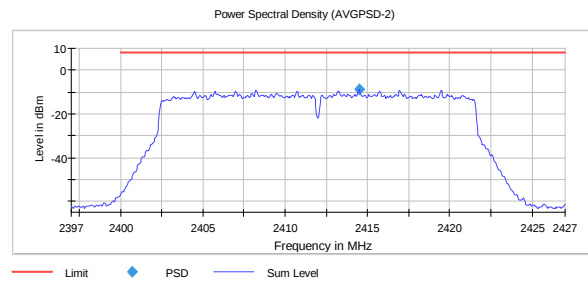


PSD, 2412 MHz, 802.11ax MCS8 MIMO -8.9

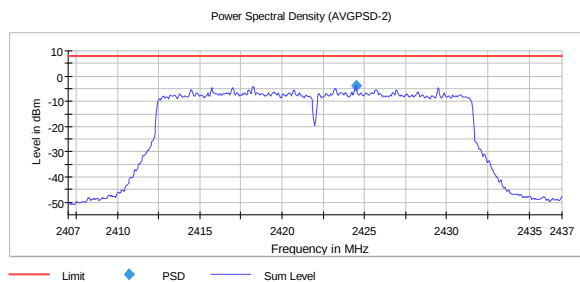


PSD, 2422 MHz, 802.11ax MCS8 SISO -3.8

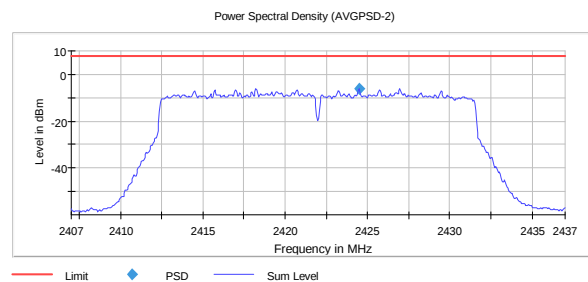


PSD, 2422 MHz, 802.11ax MCS8 MIMO -6.0

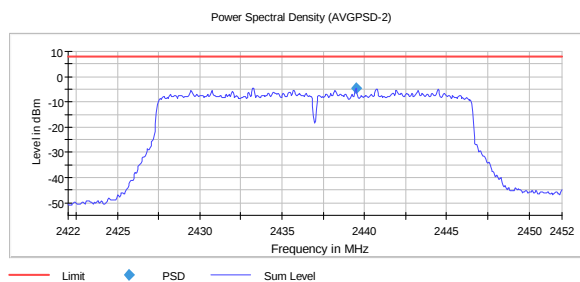


PSD, 2437 MHz, 802.11ax MCS8 SISO -4.6

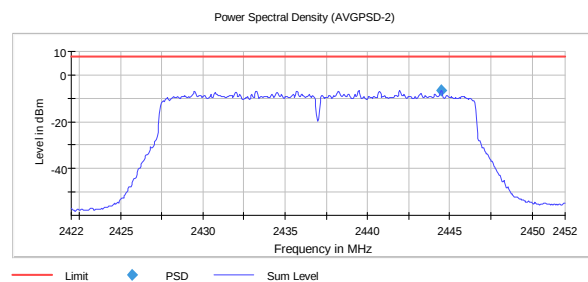


PSD, 2437 MHz, 802.11ax MCS8 MIMO -6.5

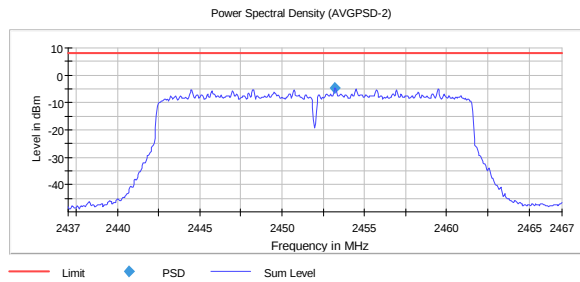


PSD, 2452 MHz, 802.11ax MCS8 SISO -4.8

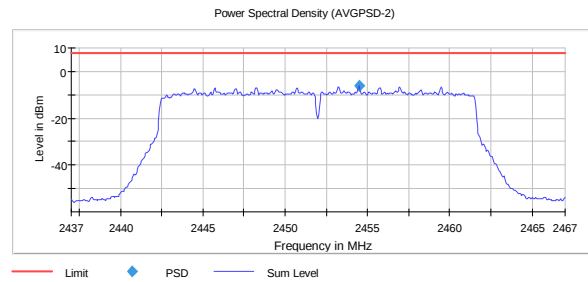


PSD, 2452 MHz, 802.11ax MCS8 MIMO -6.4

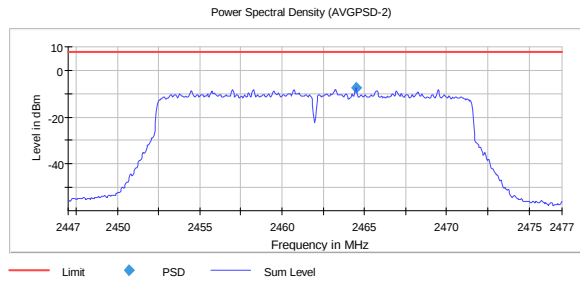


PSD, 2462 MHz, 802.11ax MCS8 SISO -7.4

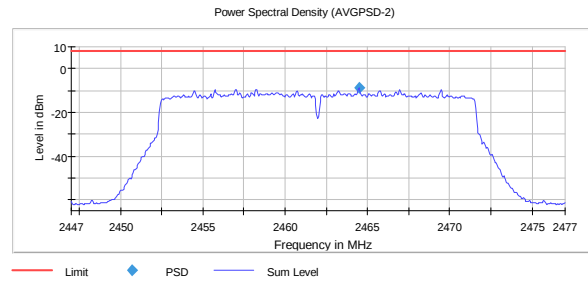


PSD, 2462 MHz, 802.11ax MCS8 MIMO -8.7

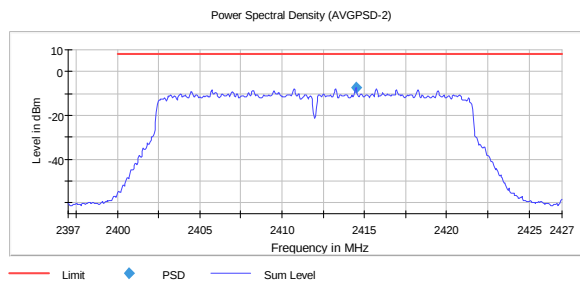


PSD, 2412 MHz, 802.11ax MCS11 SISO -7.4

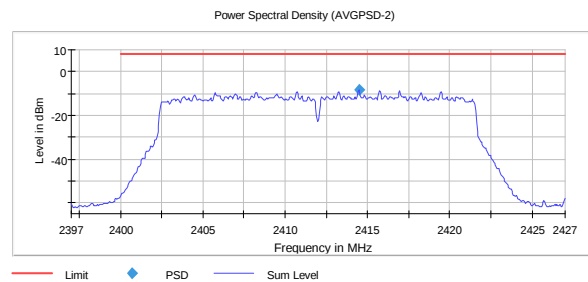


PSD, 2412 MHz, 802.11ax MCS11 MIMO -8.3

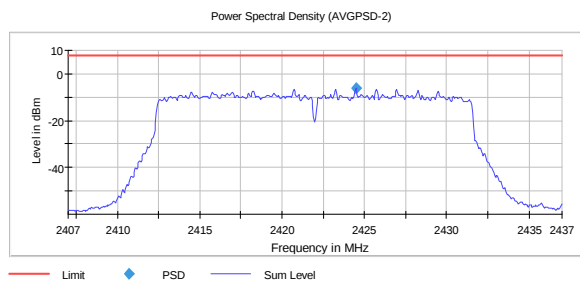


PSD, 2422 MHz, 802.11ax MCS11 SISO -6.3

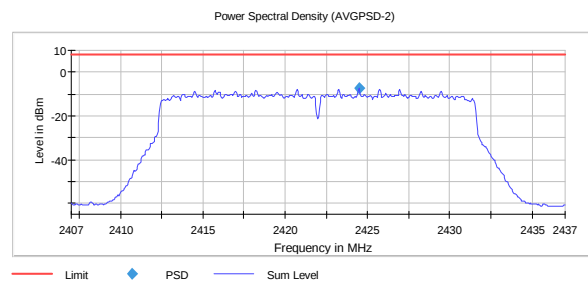


PSD, 2422 MHz, 802.11ax MCS11 MIMO -7.3

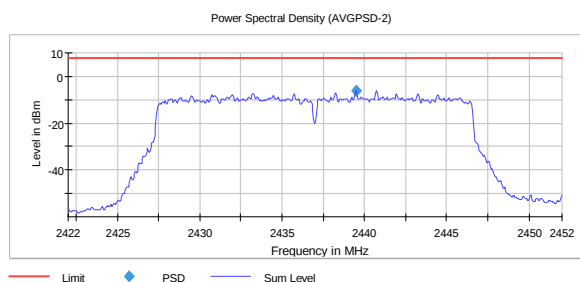


PSD, 2437 MHz, 802.11ax MCS11 SISO -6.1

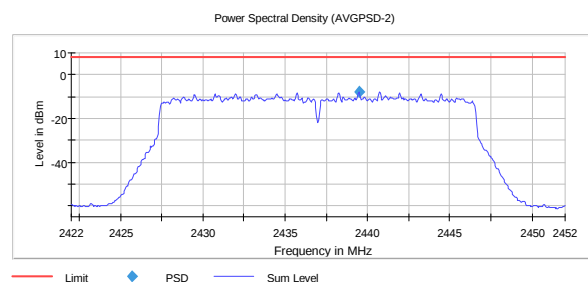


PSD, 2437 MHz, 802.11ax MCS11 MIMO -7.7

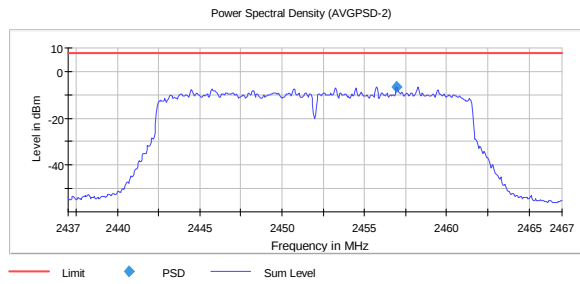


PSD, 2452 MHz, 802.11ax MCS11 SISO -6.6

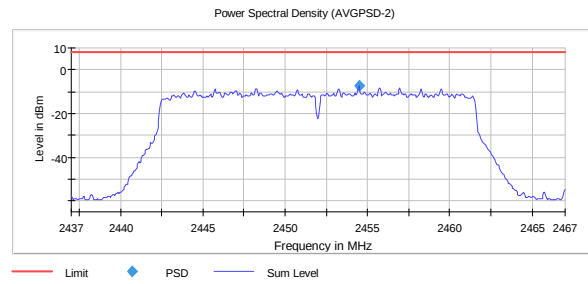

PSD, 2452 MHz, 802.11ax MCS11 MIMO -7.5

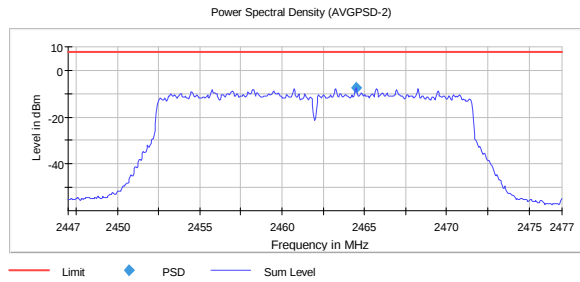

PSD, 2462 MHz, 802.11ax MCS11 SISO -7.5

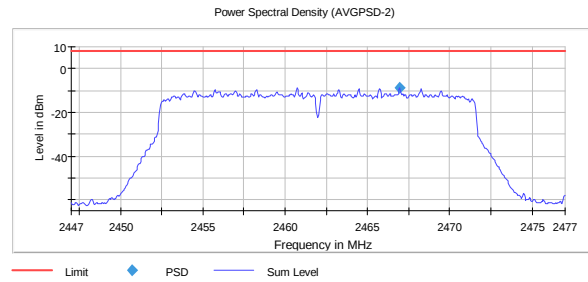

PSD, 2462 MHz, 802.11ax MCS11 MIMO -9.0

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSW43	Spectrum Analyzer	Rohde & Schwarz	LR 1690	2022-01	2023-01
2	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2022-01	2023-01
3	6810.17B	Attenuator	Suhner	LR 1669	2022-05	2023-05
4	NO324415	Band Reject Filter (2.4 GHz)	Microwave Circuits	LR 1760	COU	
5	VULB 9163	BiLog Antenna	Schwarzbech	LR 1616	2021-05	2024-05
6	317	Pre-amplifier	Sonoma Inst.	LR 1687	2022-08	2023-08
7	3117-PA	Horn Antenna +PreAmp	EMCO	LR 1717	2022-08	2023-08
8	L01G18G1	LowPass Filter (1 GHz)	Microwave Circuits	LR 1768	COU	
9	8449B	Pre-amplifier	Hewlett Packard	LR 1322	2022-08	2023-08
10	638	Antenna Horn	Narda	LR 1480	N/A	
11	6812B	AC Power Source	Agilent	LR 1515	2022-11	2024-11
12	Model 87V	Multimeter	Fluke	LR 1600	2022-03	2024-03
13	ENV216	Two Line V-Network	Rohde & Schwarz	LR 1665	2021-12	2023-12
14	ESC13	Measuring Receiver	Rohde & Schwarz	N-4259	2021-10	2023-10
15	ST18/SMA/N/36	RF Cable	Suhner	LR 1627	COU	
16	OSP-B157W8	Peak Power Meters	Rohde & Schwarz	LR 1793	2022-02	2023-02
17	OSP-B157WX	Switch Unit	Rohde & Schwarz	LR 1806	2022-08	2023-08
18	FSVA3044	Spectrum Analyzer	Rohde & Schwarz	LR 1808	2022-08	2023-08

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	EMC32	10.50.40	EMC test software
2	Nemko AS	RSPlot	1.0.8.0	Screen capture from R&S Spectrum Analyzers
3	Rohde & Schwarz	WMS	10.40.00	Radio Test Software

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

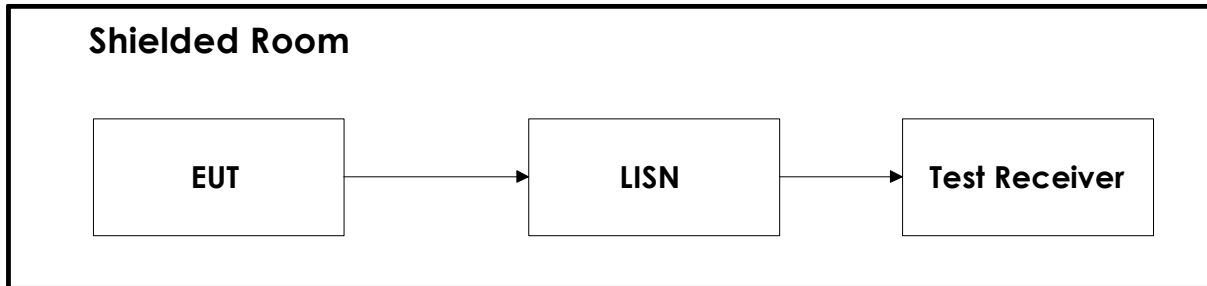


6.2 Conducted Tests



This test set-up is used for all Conducted tests.
For the Frequency Stability test the EUT was placed in a climatic chamber.

6.3 Test Site Radiated Emission

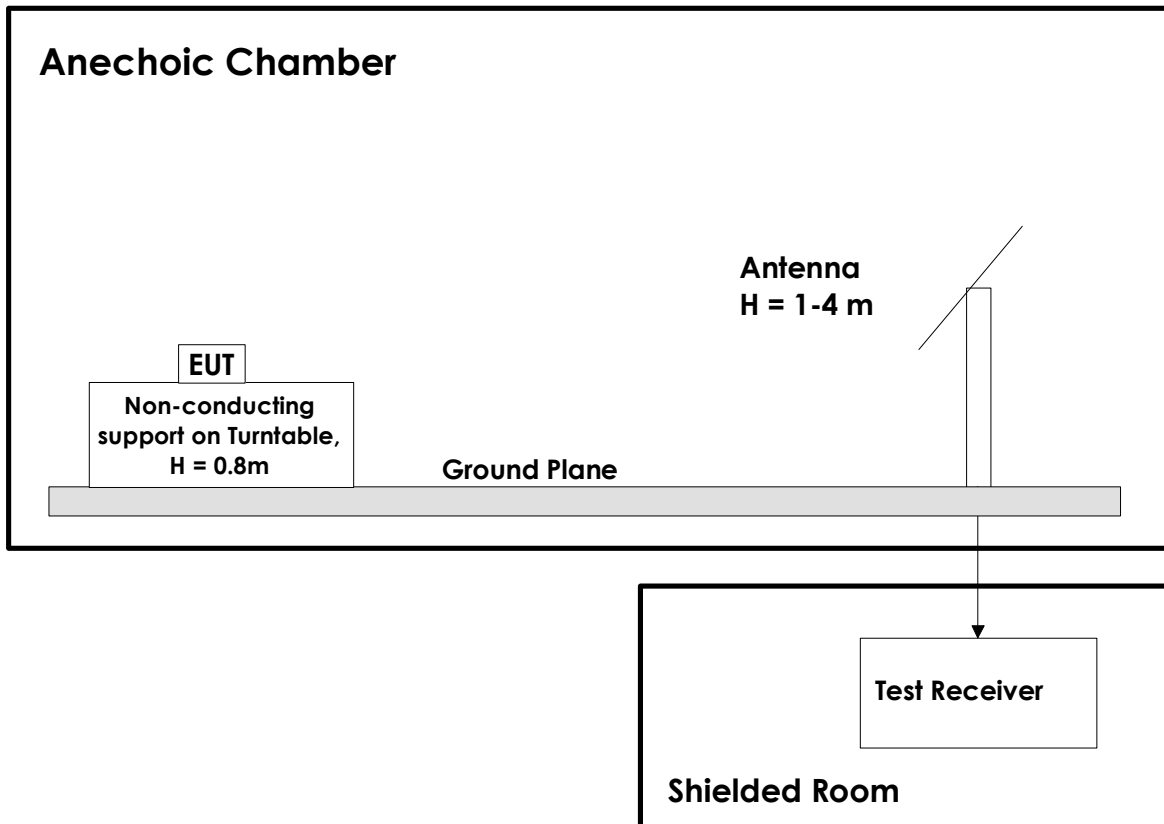

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.