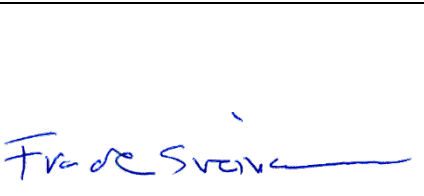
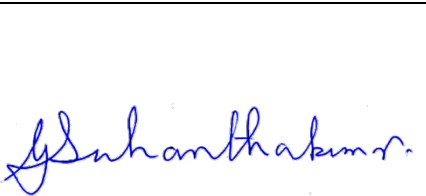


Test Report

Product	Digital Video Encoder/Decoder with WLAN and BT
Name and address of the applicant	Cisco Systems, Inc.
Name and address of the manufacturer	Cisco Norway AS Philip Pedersens vei 1 1366 Lysaker, Norway
Model	TTC7-25
Rating	120V AC
Trademark	Cisco
Serial number	/
Additional information	Bluetooth, 802.11a/b/g/n/ac
Tested according to	FCC Part 15.407 Unlicensed National Information Infrastructure Devices (U-NII) Industry Canada RSS-247, Issue 1 Licence-Exempt Local Area Network (LE-LAN) Devices
Order number	315772
Tested in period	2016.11.18 to 2016.12.12
Issue date	2016.12.23
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway FCC No: 994405 IC OATS: 2040D-1 TEL: +47 22 96 03 30 FAX: +47 22 96 05 50
 Prepared by [Frode Sveinsen]  Approved by [G.Sumanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.	

CONTENTS

1	INFORMATION	3
1.1	Test Item	3
1.2	Normal test conditions	3
1.3	Test Engineer(s)	3
1.4	Description of modification for Modification Filing	4
1.5	Family List Rational	4
1.6	Antenna Requirement	4
1.7	Worst-Case Configuration and Mode	4
1.8	Antenna Gain	4
1.9	EUT Operating Modes	4
1.10	EUT Power Levels	5
1.11	On Time and Duty Cycle Factors	6
1.12	Comments	6
2	TEST REPORT SUMMARY	7
2.1	General	7
2.2	Test Summary	8
3	TEST RESULTS	9
3.1	Power Line Conducted Emissions	9
3.2	Maximum Output Power, EIRP	10
3.3	Emission Bandwidth B	25
3.4	Peak Power Spectral Density, EIRP	40
3.5	Unwanted Emissions	56
3.6	Restricted Bands of operation	76
3.7	Radiated Emissions, below 1GHz	77
3.8	Radiated Emissions, above 1GHz	82
4	Measurement Uncertainty	118
5	LIST OF TEST EQUIPMENT	119
6	BLOCK DIAGRAM	120
6.1	Power Line Conducted Emission	120
6.2	Test Site Radiated Emission	120

1 INFORMATION

1.1 Test Item

Name :	Cisco
Model :	TTC7-25
FCC ID :	LDK07251456
Industry Canada ID :	2461L-07251456
Serial number :	/
Hardware identity and/or version:	Rev. B
Software identity and/or version :	S01828-1.0.0 Alpha7 ce913c0
Frequency Ranges :	U-NII 1 : 5180 – 5240 MHz: 4 channels U-NII 2A : 5260 – 5320 MHz: 4 channels U-NII 2C : 5500 – 5720 MHz: 12 channels U-NII 3 : 5745 – 5825 MHz: 5 channels
Operating Modes :	802.11a 802.11n (HT20 / HT40) 802.11ac (HT80)
Type of Modulation :	Digital (OFDM - Orthogonal frequency-division multiplexing)
Conducted Output Power :	5180 – 5240 MHz: 29 mW 5260 – 5320 MHz: 85 mW 5500 – 5720 MHz: 73 mW 5745 – 5825 MHz: 82 mW
Antenna Connector :	Internal Antennas connected to PCB with U-FL connector
Number of Antennas :	2
Antenna Diversity Supported :	Yes
Smart Antennas Supported :	Yes
DFS/TPC :	Slave Device
Power Supply :	FSP070-AHAN2

Description of Test Item

The EUT is a digital video encoder/decoder with WiFi and Bluetooth transceivers. The WiFi and Bluetooth transceivers are contained in a module with single modular certification (FCC ID: VOB-P2180), however the antennas used in this EUT are not certified.

1.2 Normal test conditions

Temperature:	21.4 – 23.4 °C
Relative humidity:	20 - 42 %
Normal test voltage:	120 V AC

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen
Kristian Osvoll (Power Line Conducted Test)

1.4 Description of modification for Modification Filing

Not applicable.

1.5 Family List Rational

Not Applicable.

1.6 Antenna Requirement

Is the antenna detachable?

☒ Yes

☐ No

If detachable, is the antenna connector non-standard?

☒ Yes

☐ No

Type of antenna connector: U-FL (The antennas are internal with connector on the PCB)

Ref. FCC §15.203

1.7 Worst-Case Configuration and Mode

Radiated Emissions and Power Line Conducted Emissions were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario.

The worst case data rates were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11n HT80 mode: MCS0

1.8 Antenna Gain

The EUT has two antennas that are connected to the main PCB with a cable and connector. The values below are the antenna gain values provided by the manufacturer:

Frequency (MHz)	Max Gain Ant #0 (dBi)	Max Gain Ant #1 (dBi)
5150	4.26	4.24
5250	4.39	4.34
5350	5.33	4.81
5470	4.95	5.12
5600	4.98	4.39
5725	5.02	4.58
5785	4.70	4.30
5800	5.10	4.52
5850	4.85	5.06

1.9 EUT Operating Modes

Description of operating modes	Additional information
Continuous TX, 5 GHz Mode	Continuous traffic, WLAN 5GHz 20, 40 or 80 MHz with Special software version

1.10 EUT Power Levels

Channel	Freq (MHz)	11a	11n HT20	11n HT40	11ac HT80	11ac HT160
36	5180	12.5	6.5			
40	5200	12.0	6.5			
44	5220	12.0	6.5			
48	5240	12.0	6.5			
52	5260	15.0	14.0			
56	5280	15.0	14.0			
60	5300	15.0	14.0			
64	5320	15.0	14.0			
100	5500	15.0	13.5			
104	5520	14.0	12.5			
108	5540	14.0	12.5			
112	5560	14.0	12.5			
116	5580	14.0	12.5			
120	5600	D	D			
124	5620	D	D			
128	5640	D	D			
132	5660	14.0	12.5			
136	5680	14.0	12.5			
140	5700	10.5	8.5			
144	5720	D	D			
149	5745	14.5	11.5			
153	5765	14.5	12.5			
157	5785	14.5	12.5			
161	5805	14.5	12.5			
165	5825	14.5	12.5			
38	5190			9.0		
46	5230			9.0		
54	5270			13.5		
62	5310			12.0		
102	5510			9.5		
110	5550			11.5		
118	5590			D		
126	5630			D		
134	5670			12.0		
142	5710			D		
151	5755			10.0		
159	5795			13.5		
42	5210				9.5	
58	5290				11.0	
106	5530				8.5	
122	5610				D	
138	5690				D	
155	5775				9.0	
50	5250					N/A
114	5550					N/A

D = Disabled/ Not Used

1.11 On Time and Duty Cycle Factors

Mode	On Time Burst (ms)	Period (msec)	Duty Cycle (linear)	Duty Cycle Correction: Power (dB)	Duty Cycle Correction: Voltage (dB)
802.11a CDD	1.428	1.528	0.9346	0.29	0.59
802.11n HT20 CDD	0.692	0.794	0.8715	0.60	1.19
802.11n HT40 CDD	0.356	0.455	0.7824	1.07	2.13
802.11n HT80 CDD	0.192	0.292	0.6575	1.82	3.64

The results above are from UL report no. 15U21878-E4V2

1.12 Comments

This report covers only limited radiated tests to show compliance with the new antenna in this EUT. All other radio tests for 2.4GHz WLAN are covered by UL reports no. 15U21878-E4V2.

The measurements were done with the EUT powered by 115 V AC. It was checked that power variations between 85% and 115% did not have any influence on the measurements.

All ports were populated during spurious emission measurements.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.407 and Industry Canada RSS-247 Issue 1.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were performed in a semi-anechoic chamber at measuring distances of 3m and 10m.

A description of the test facility is on file with the FCC and Industry Canada.

☒ New Submission

☒ Production Unit

☐ Class II Permissive Change

☐ Pre-production Unit

NII Equipment Code

☐ Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247, Issue 1 reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	Complies ¹
Antenna Requirement	15.203	8.3 (RSS-GEN)	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	8.8 (RSS-GEN)	Complies
Maximum Output Power	15.407(a)	6.2	Complies
Power Spectral Density	15.407(a)	6.2	Complies
Unwanted Emissions	15.407(b)	6.2	Complies
Discontinuation of Transmission	15.407(c)	6.3	Complies ¹
Frequency Stability	15.407(g)	N/A	Complies ¹
Transmit Power Control	15.407(h)	6.2.3	Complies ¹
Radiated Emissions	15.205 15.209	8.9 (RSS-GEN)	Complies

¹ Covered by UL Test Report no. 15U21878-E4V2

Dynamic Frequency Selection

Name of test	FCC Part 15 reference	RSS-247, Issue 1 reference	Result
Non-Occupancy Period	15.407(h)	6.3	N/A ²
DFS Detection Threshold	15.407(h)	6.3	N/A ²
Channel Availability Check Time	15.407(h)	6.3	N/A ²
U-NII Detection Bandwidth	15.407(h)	6.3	N/A ²
Channel Closing Transmission Time	15.407(h)	6.3	Complies ³
Channel Move Time	15.407(h)	6.3	Complies ³

² The EUT is a Slave Device without radar detection.

³ DFS tests for slave device are covered by UL report no. 15U21878-E5V1.

3 TEST RESULTS

3.1 Power Line Conducted Emissions

FCC Part 15.207 (a)

ISED RSS-GEN Issue 4, Clause 8.8

Test Performed By: Kristian Osvoll

Date of Test: 3-Nov-2016

Measurement procedure: ANSI C63.4-2014 using 50 μ H/50 ohms LISN.


Test Results: Complies.

Measurement Data: See attached graph, (Peak detector).

Highest measured value (L1 and N):

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
---	---	---	---	---	---	---			---

Full Spectrum

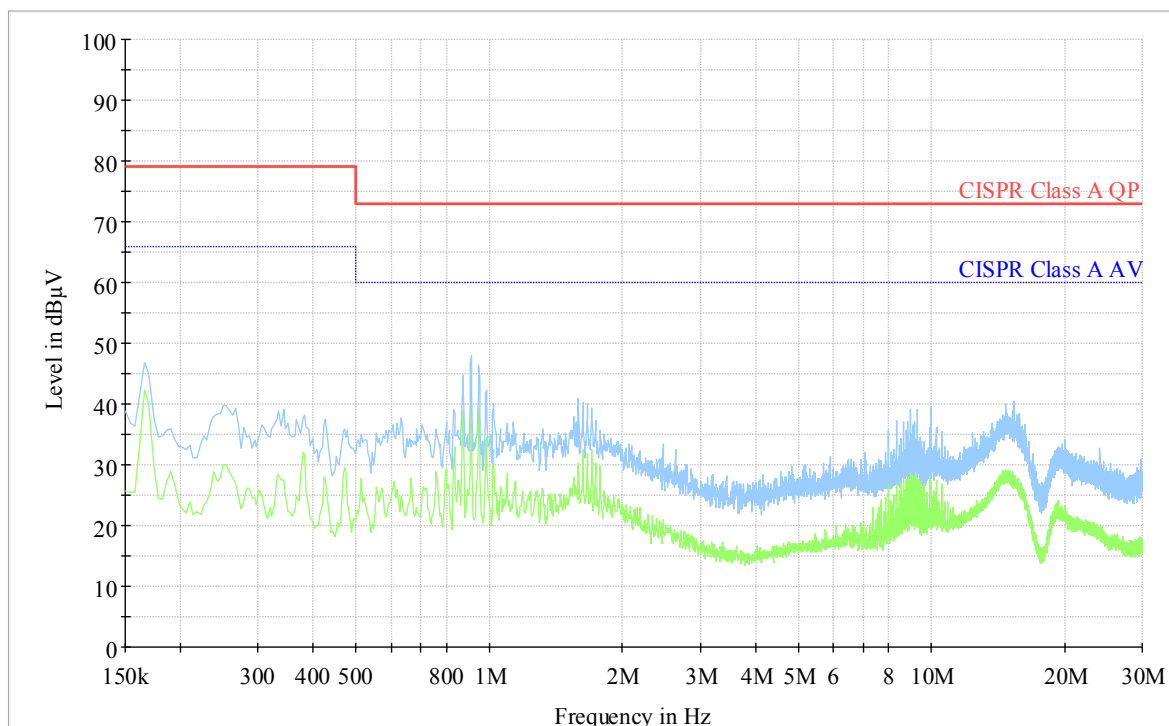

All emissions are below the limits in FCC 15.207

3.2 Maximum Output Power, EIRP

FCC 15.407 (a)

ISED RSS-247, Issue 1, Clause 6.2

Test Results: Complies

Measurement Data:

Ch. No.	Nominal Frequency (MHz)	Maximum E.I.R.P. (dBm)			
		802.11a	802.11n HT20	802.11n HT40	802.11n HT80
36	5180	9.4	6.0		
40	5200	13.0	11.8		
48	5240	14.0	12.5		
52	5260	15.8	19.4		
60	5300	16.1	20.1		
64	5320	10.3	10.8		
100	5500	11.2	9.9		
116	5580	16.3	20.0		
140	5700	5.1	5.3		
149	5745	9.4	8.2		
157	5785	19.6	23.1		
165	5825	8.9	7.8		
38	5190			9.2	
46	5230			14.2	
54	5270			19.0	
62	5310			9.9	
102	5510			6.9	
110	5550			20.3	
134	5670			9.9	
151	5755			7.4	
159	5795			10.3	
42	5210				8.6
58	5290				8.4
106	5530				5.7
155	5775				5.3

Measured values are corrected for Duty Cycle.


Values in boldface are measured values, all other values are from UL report no. 15U21878-E4V2.

Power limits


Frequency Band	Power limit	
5150 – 5250 MHz	Less than the lesser of 50mW or 4 dBm + 10 log B	16.9 dBm
5250 – 5350 MHz	Less than the lesser of 250 mW or 11 dBm + 10 log B	23.9 dBm
5470 – 5725 MHz		
5725 – 5825 MHz	Less than the lesser of 1 Watt (30 dBm) or 17 dBm + 10 log B	29.9 dBm

B is the 26 dB emission bandwidth in MHz


If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

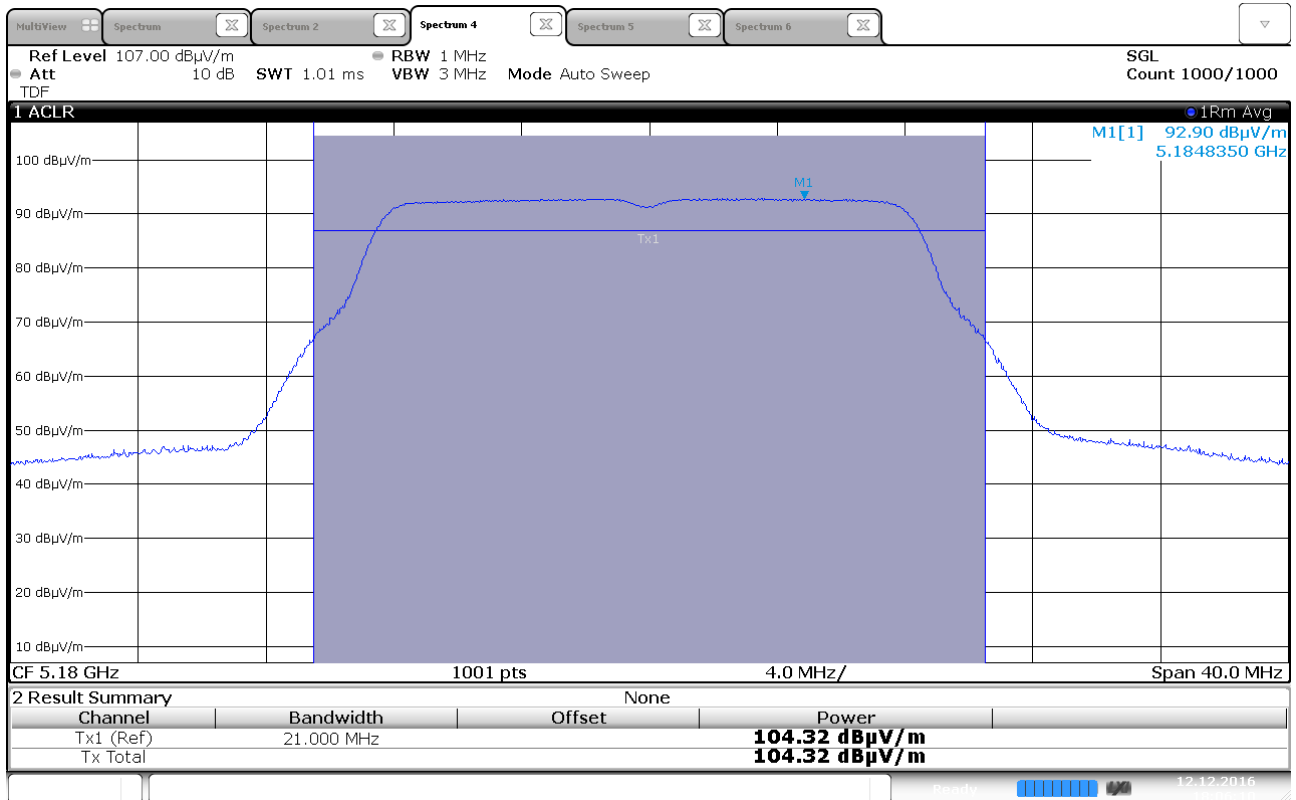


Maximum EIRP, 5180 MHz, 802.11a 6Mbps, Ant 0

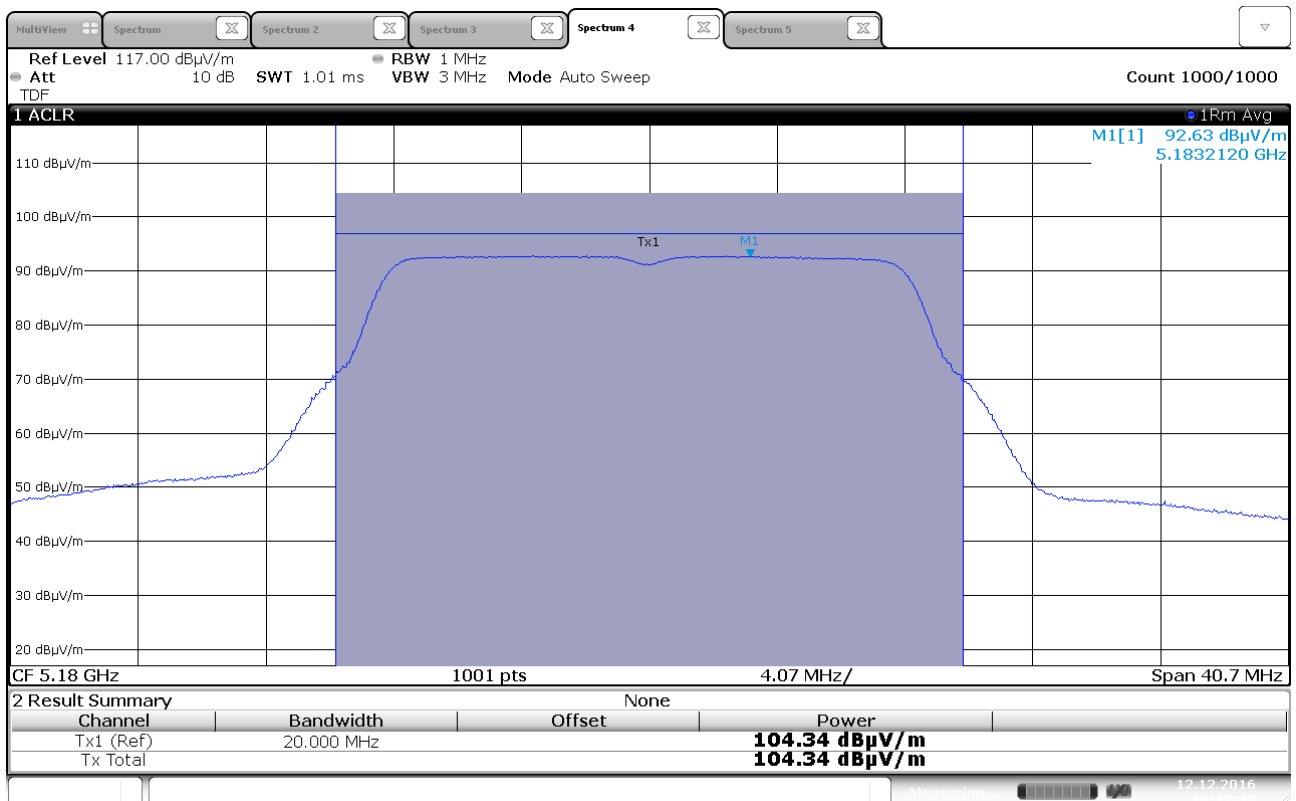


Maximum EIRP, 5180 MHz, 802.11a 6Mbps, Ant 1

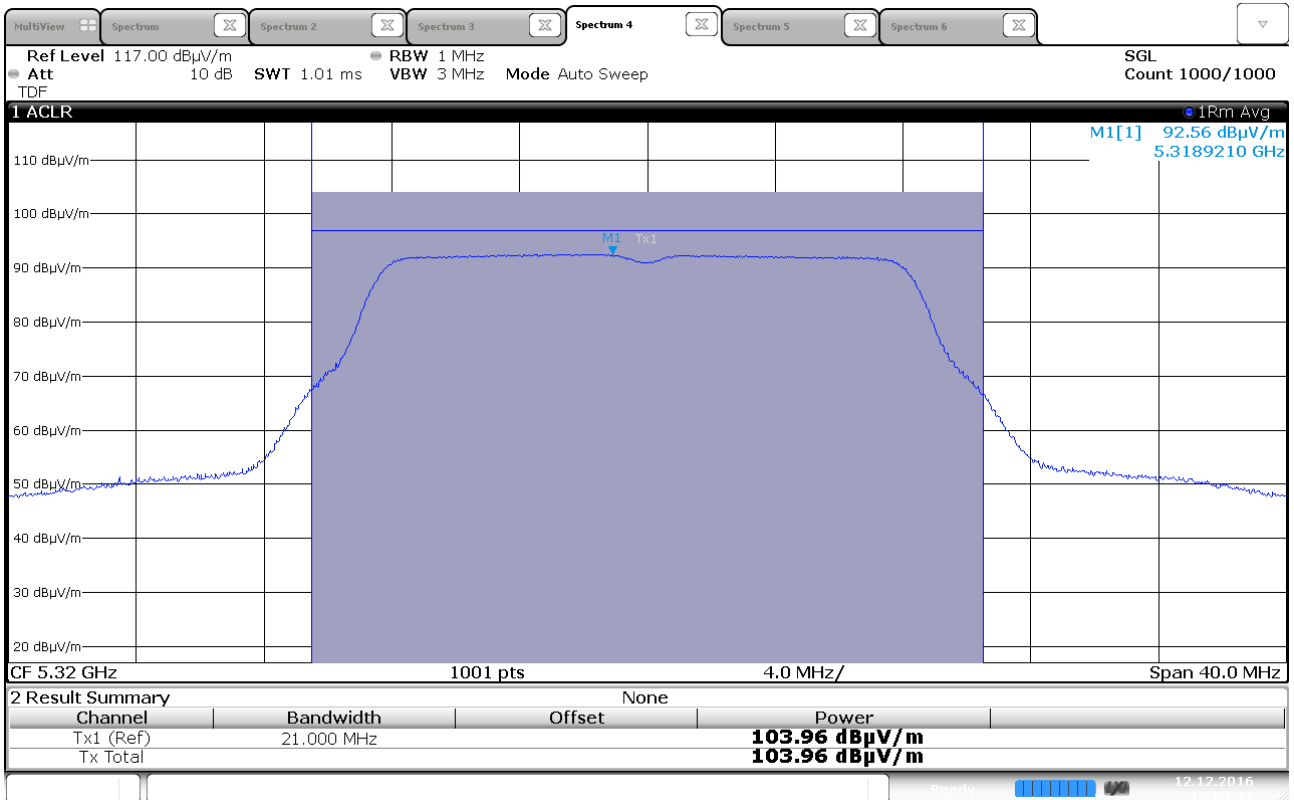


Maximum EIRP, 5320 MHz, 802.11a 6Mbps, Ant 0

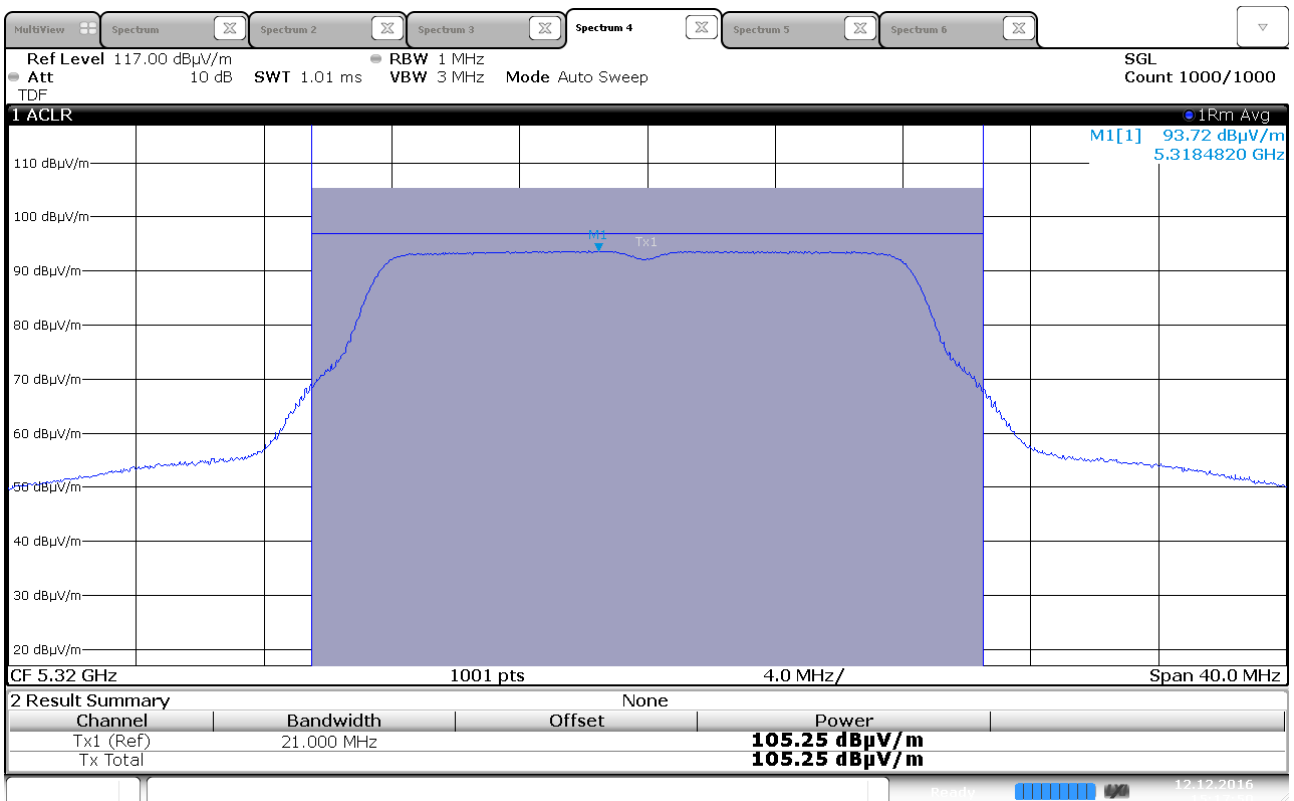


Maximum EIRP, 5320 MHz, 802.11a 6Mbps, Ant 1

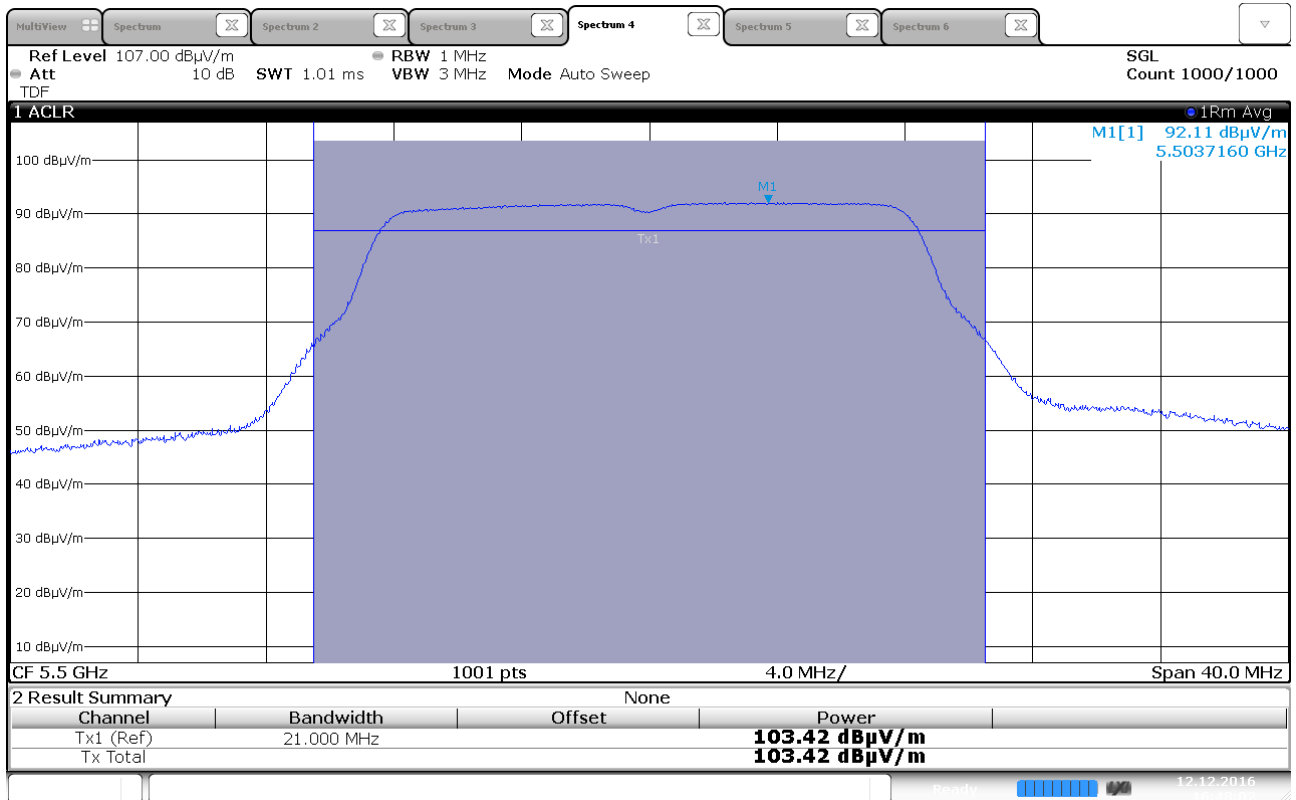


Maximum EIRP, 5500 MHz, 802.11a 6Mbps, Ant 0

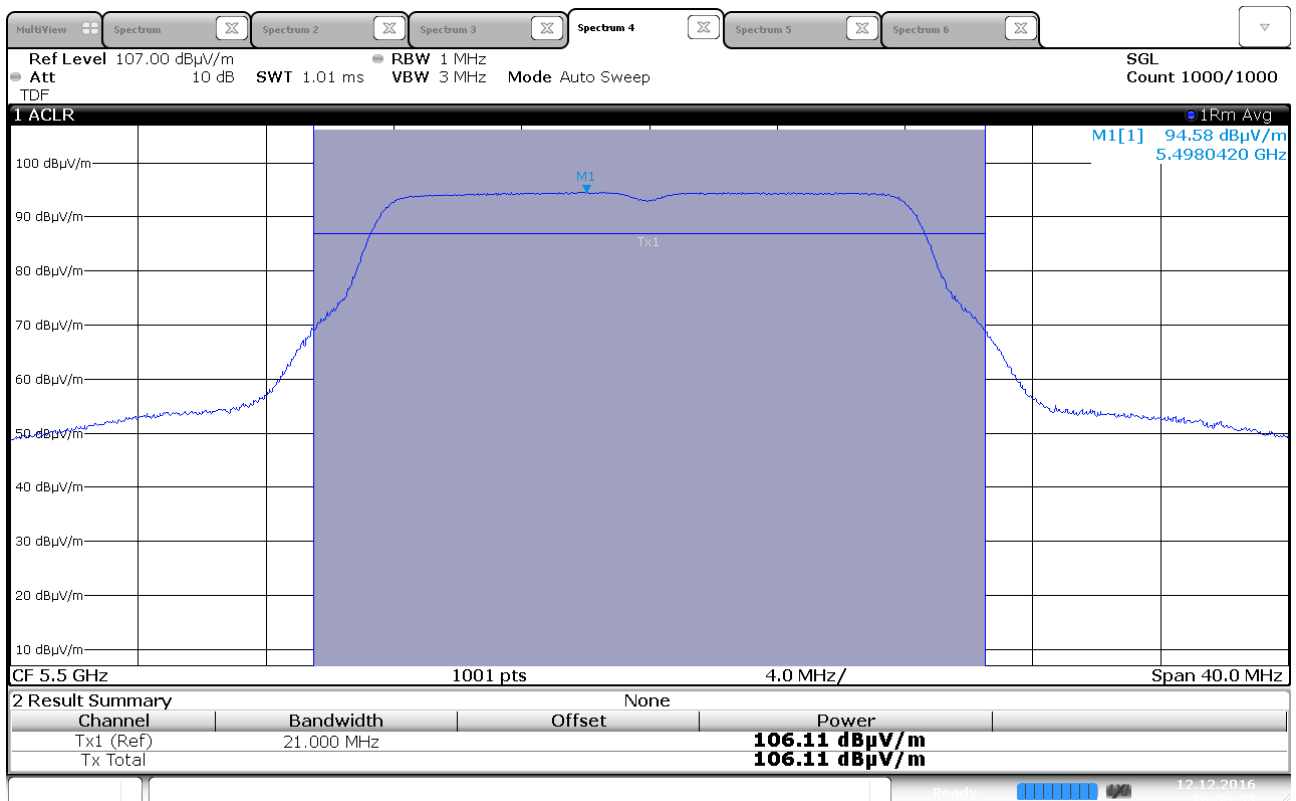


Maximum EIRP, 5500 MHz, 802.11a 6Mbps, Ant 1

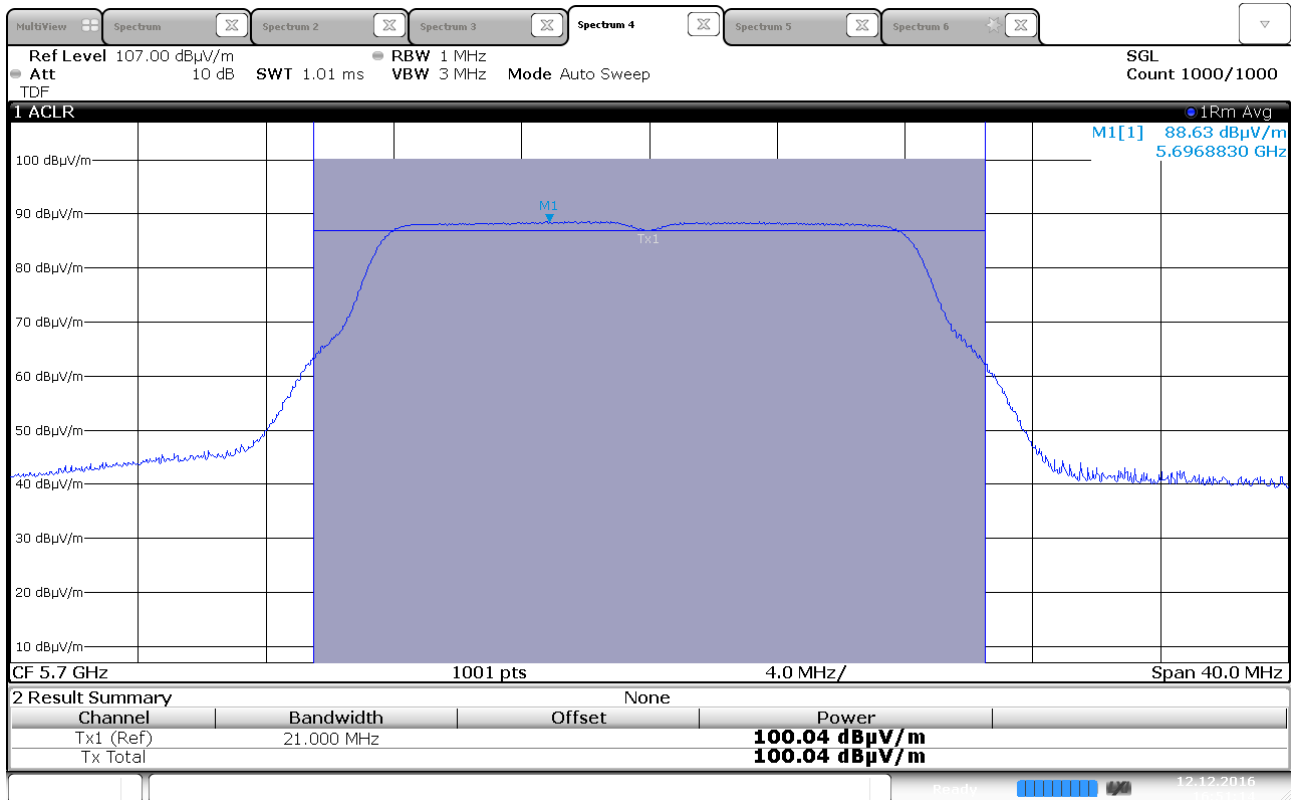


Maximum EIRP, 5700 MHz, 802.11a 6Mbps, Ant 0

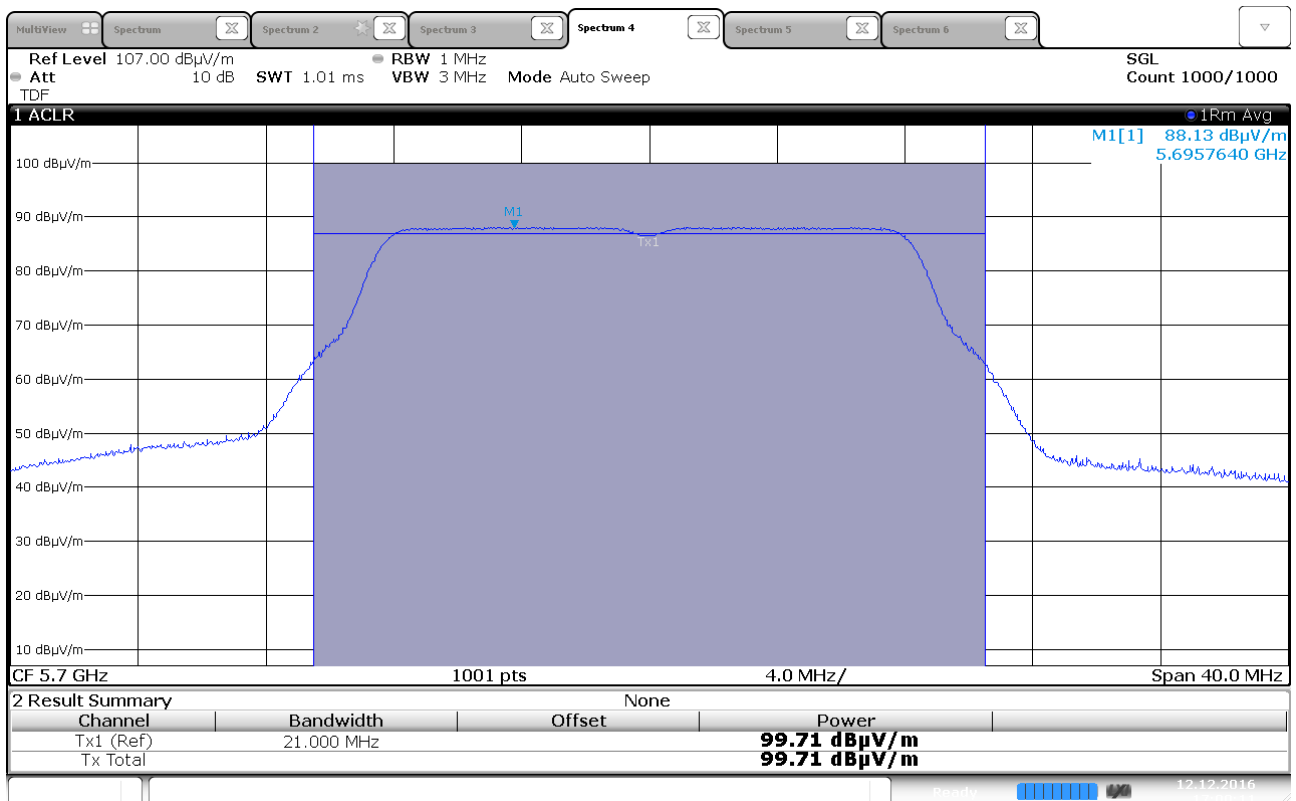


Maximum EIRP, 5700 MHz, 802.11a 6Mbps, Ant 1

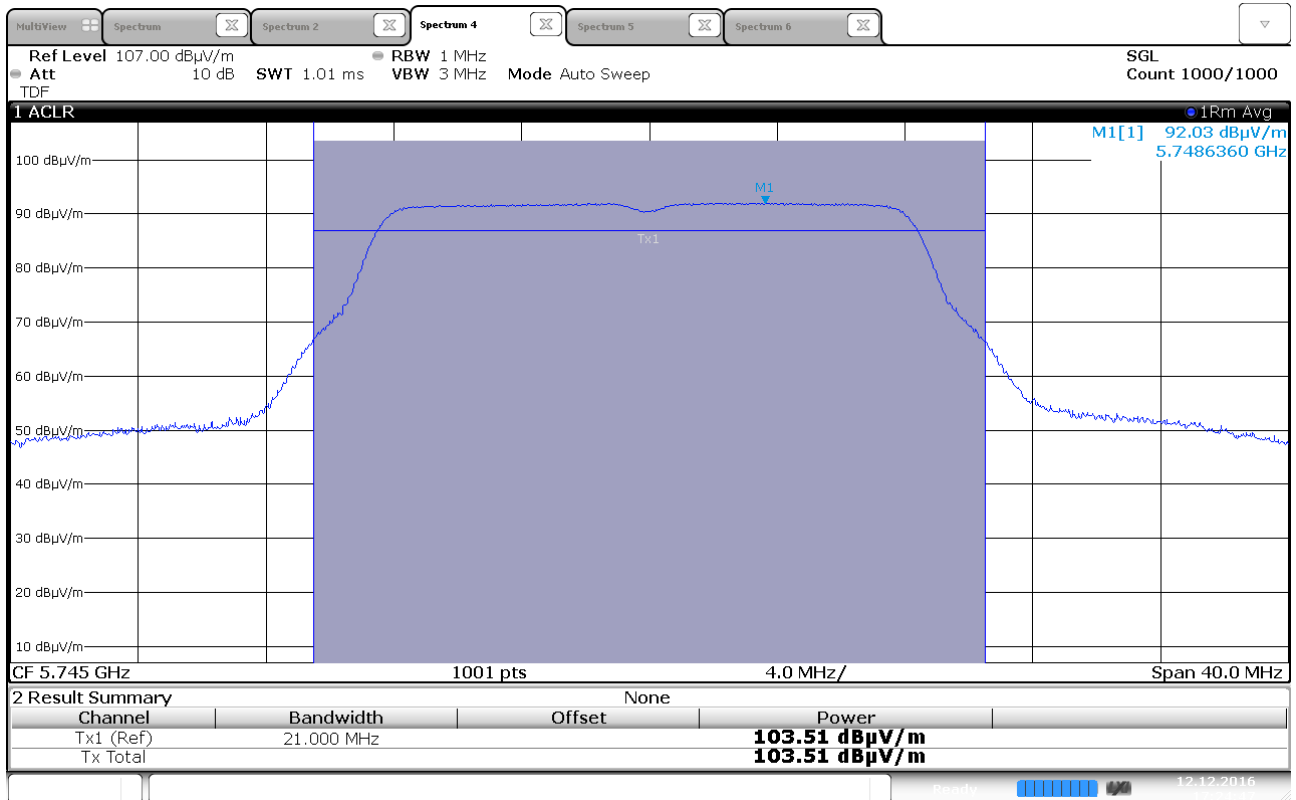


Maximum EIRP, 5745 MHz, 802.11a 6Mbps, Ant 0

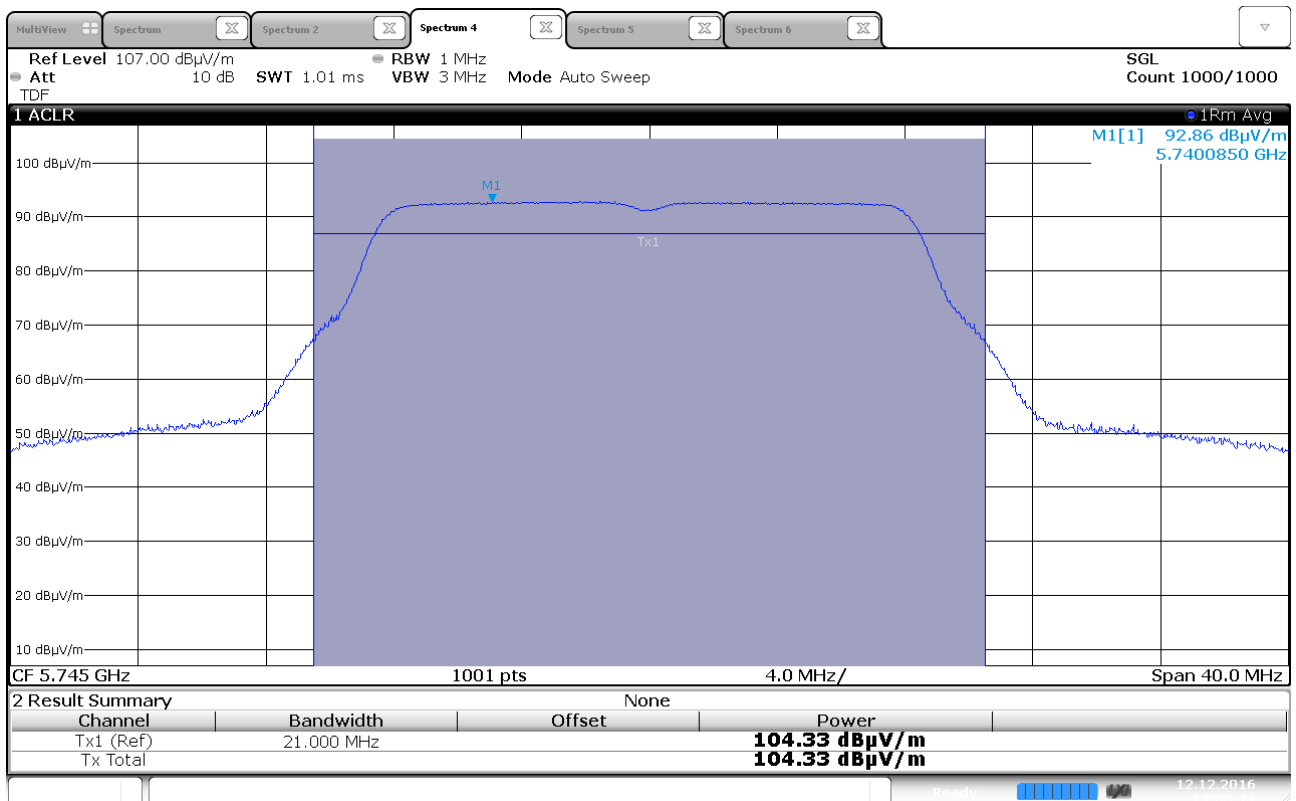


Maximum EIRP, 5745 MHz, 802.11a 6Mbps, Ant 1

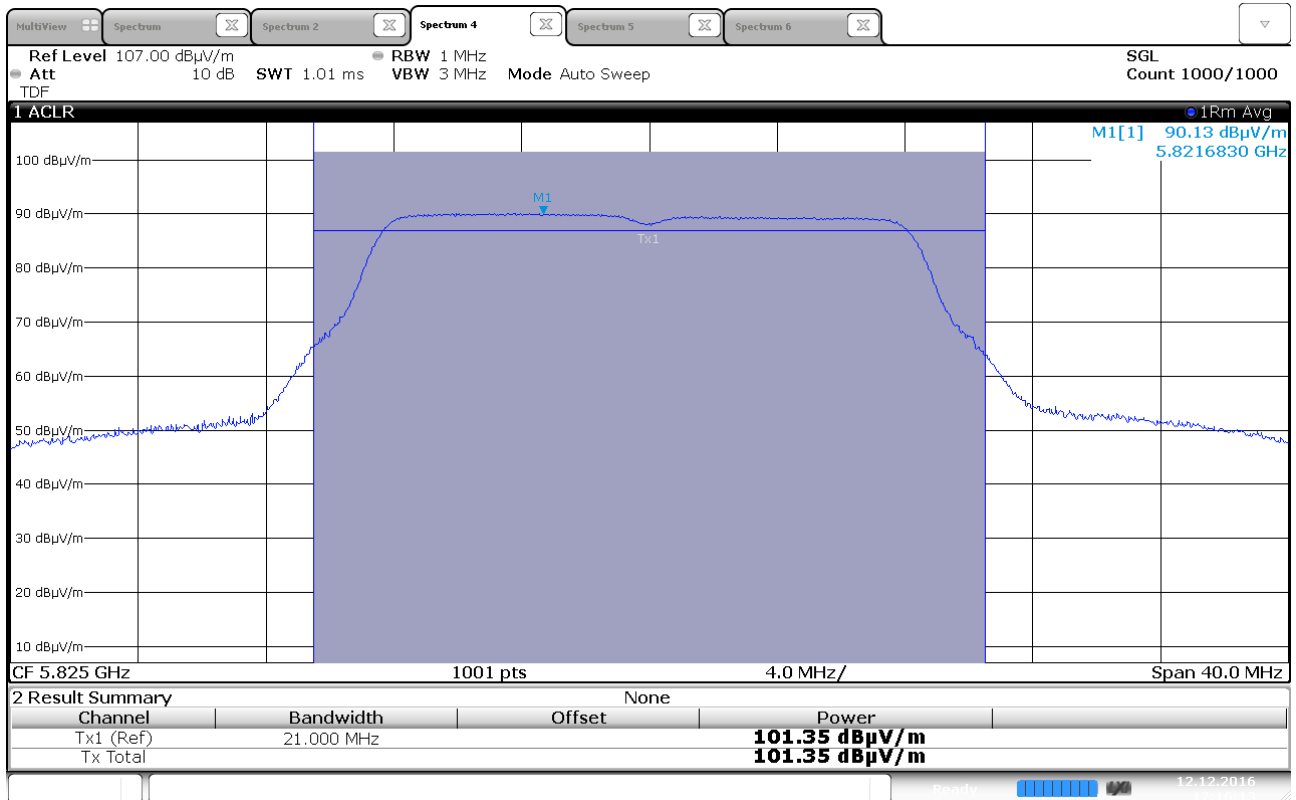


Maximum EIRP, 5825 MHz, 802.11a 6Mbps, Ant 0

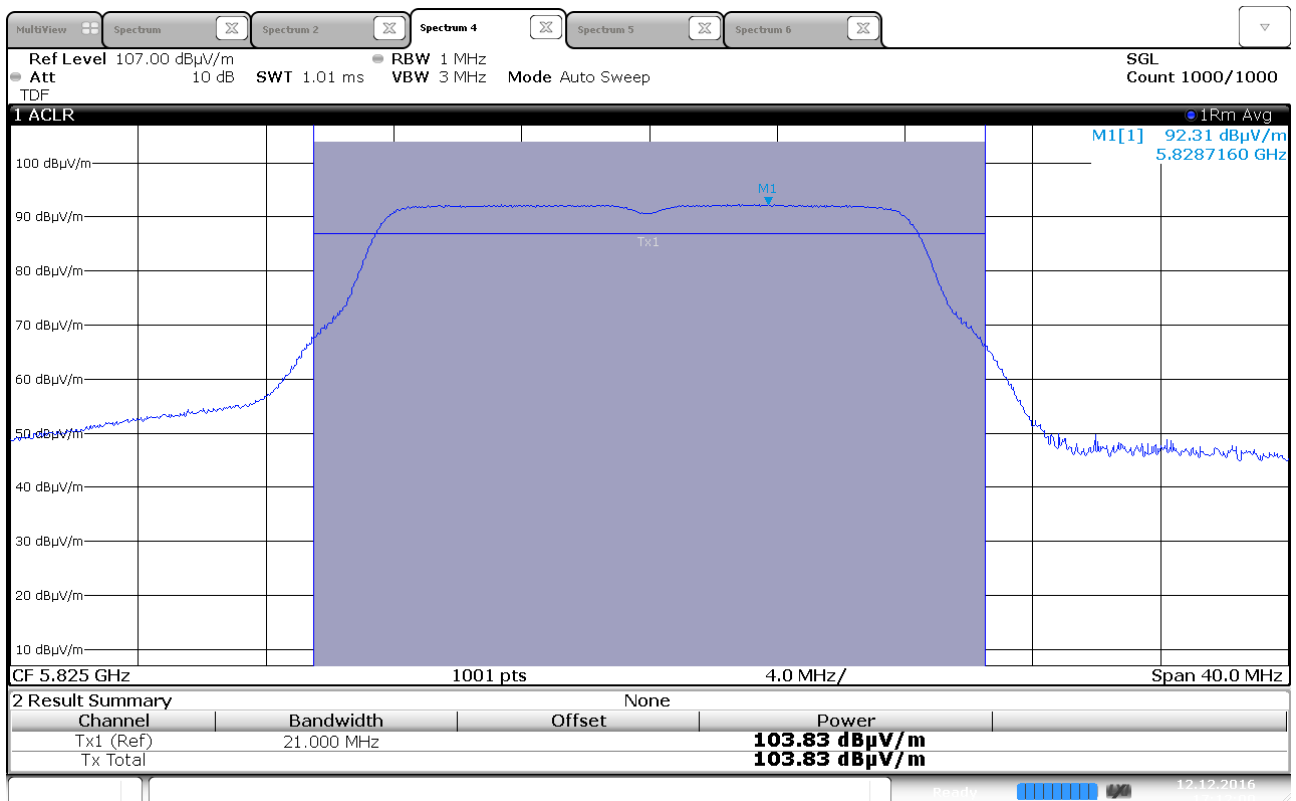


Maximum EIRP, 5825 MHz, 802.11a 6Mbps, Ant 1

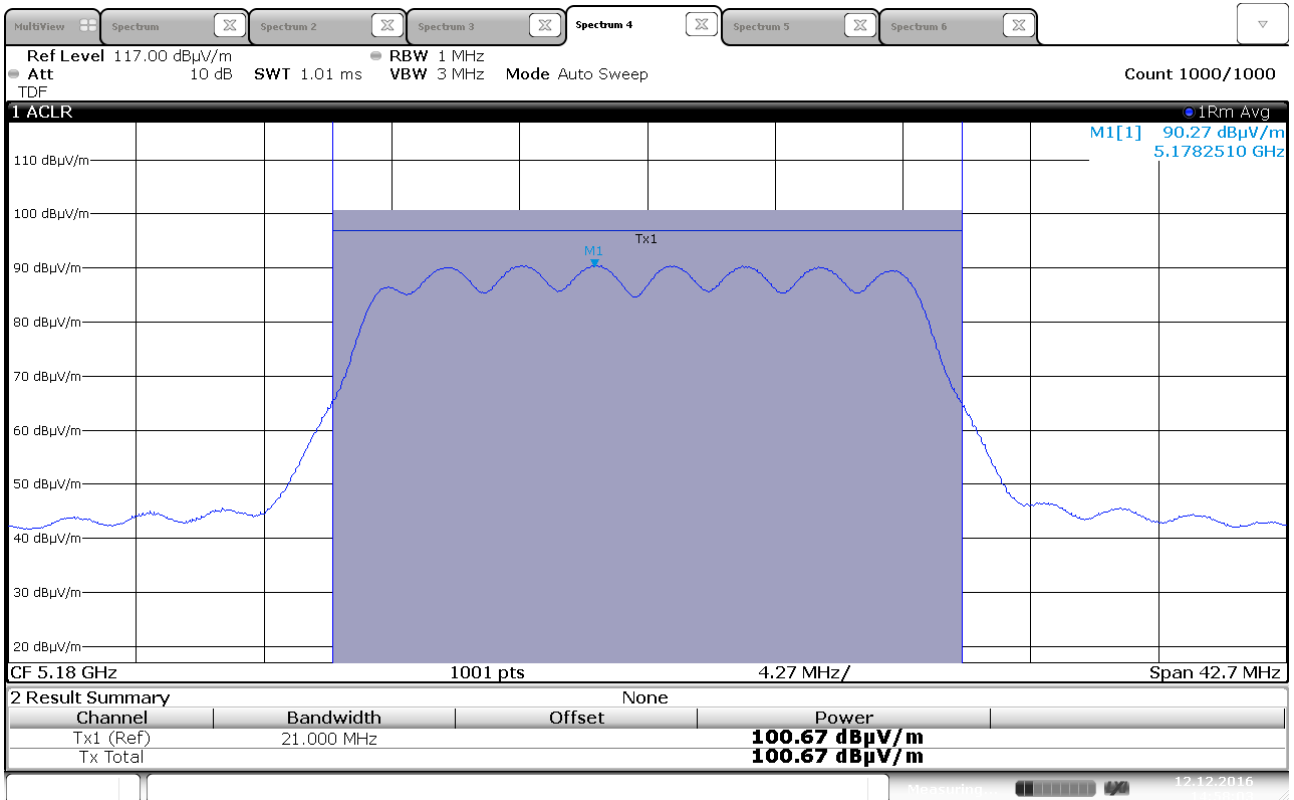


Maximum EIRP, 5180 MHz, 802.11n HT20, MIMO

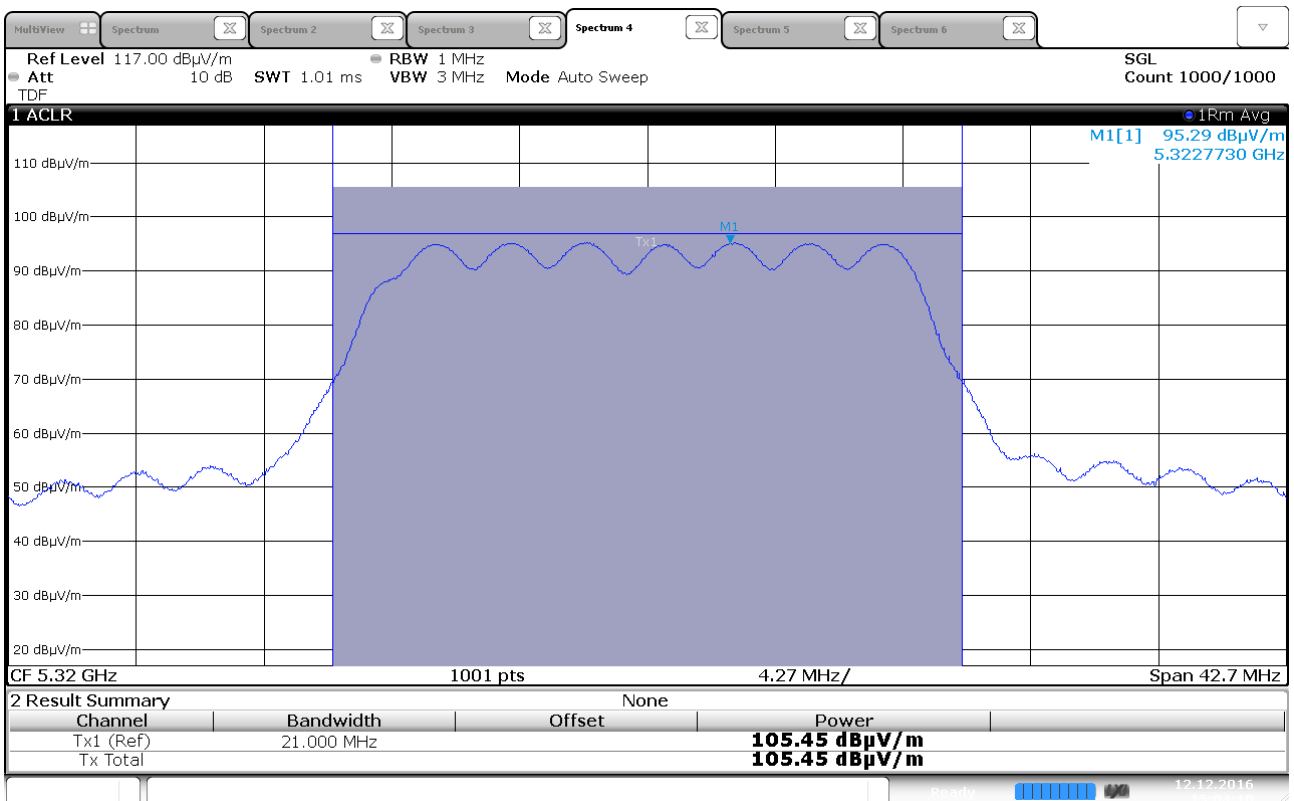


Maximum EIRP, 5320 MHz, 802.11n HT20, MIMO

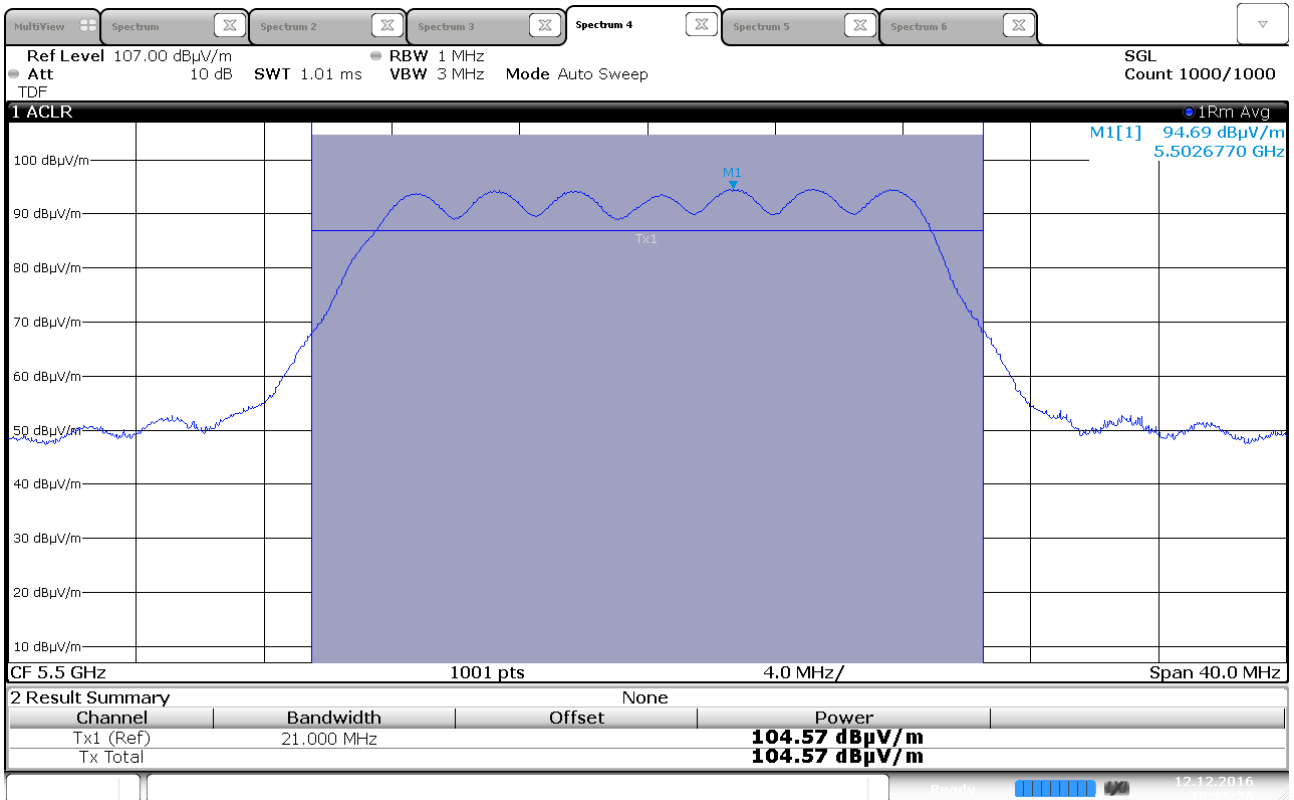


Maximum EIRP, 5500 MHz, 802.11n HT20, MIMO

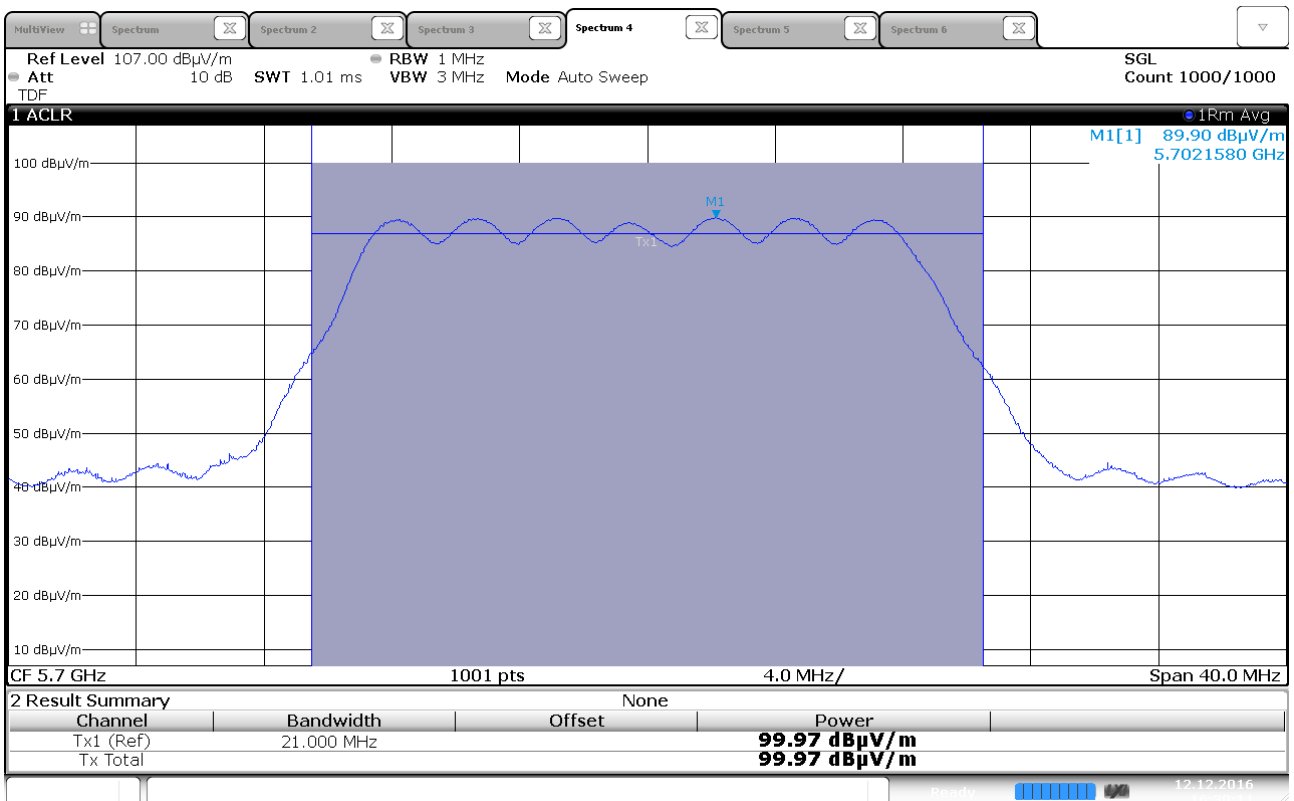


Maximum EIRP, 5700 MHz, 802.11n HT20, MIMO

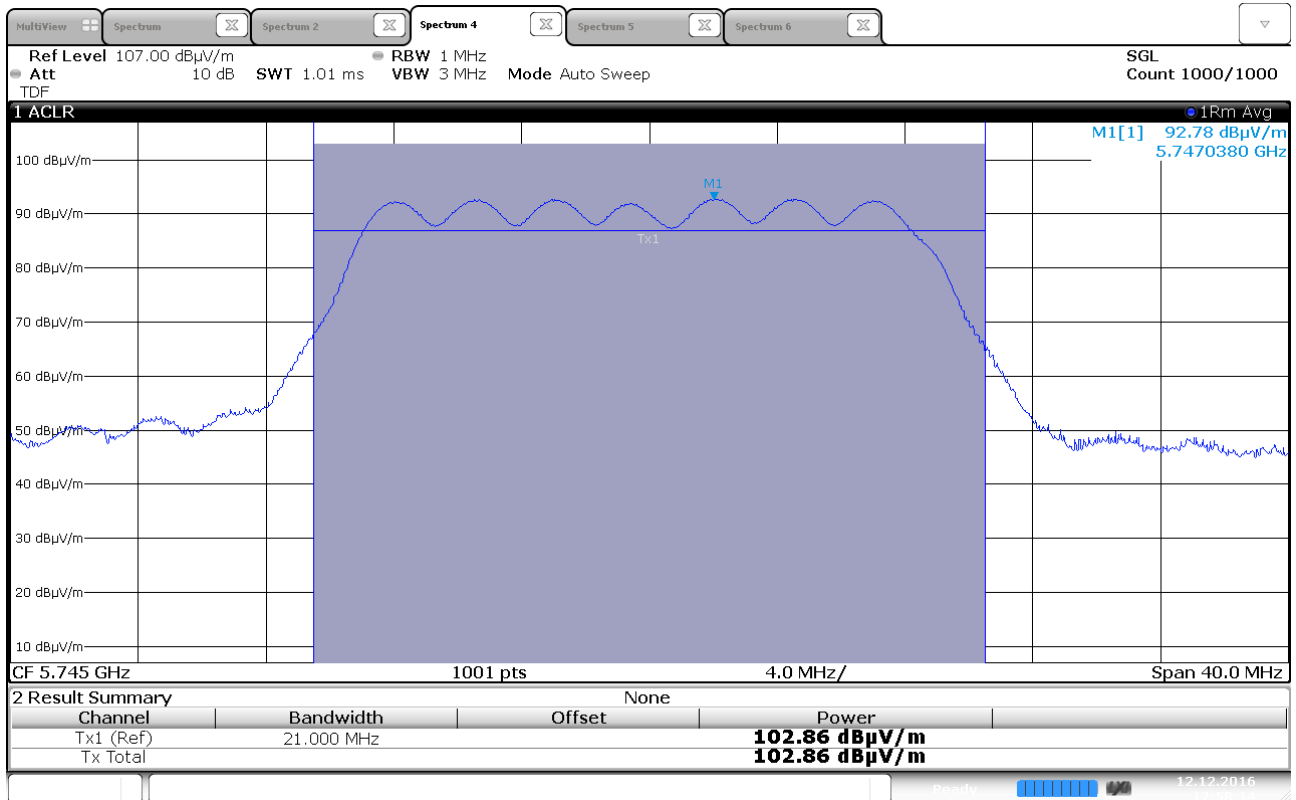


Maximum EIRP, 5745 MHz, 802.11n HT20, MIMO

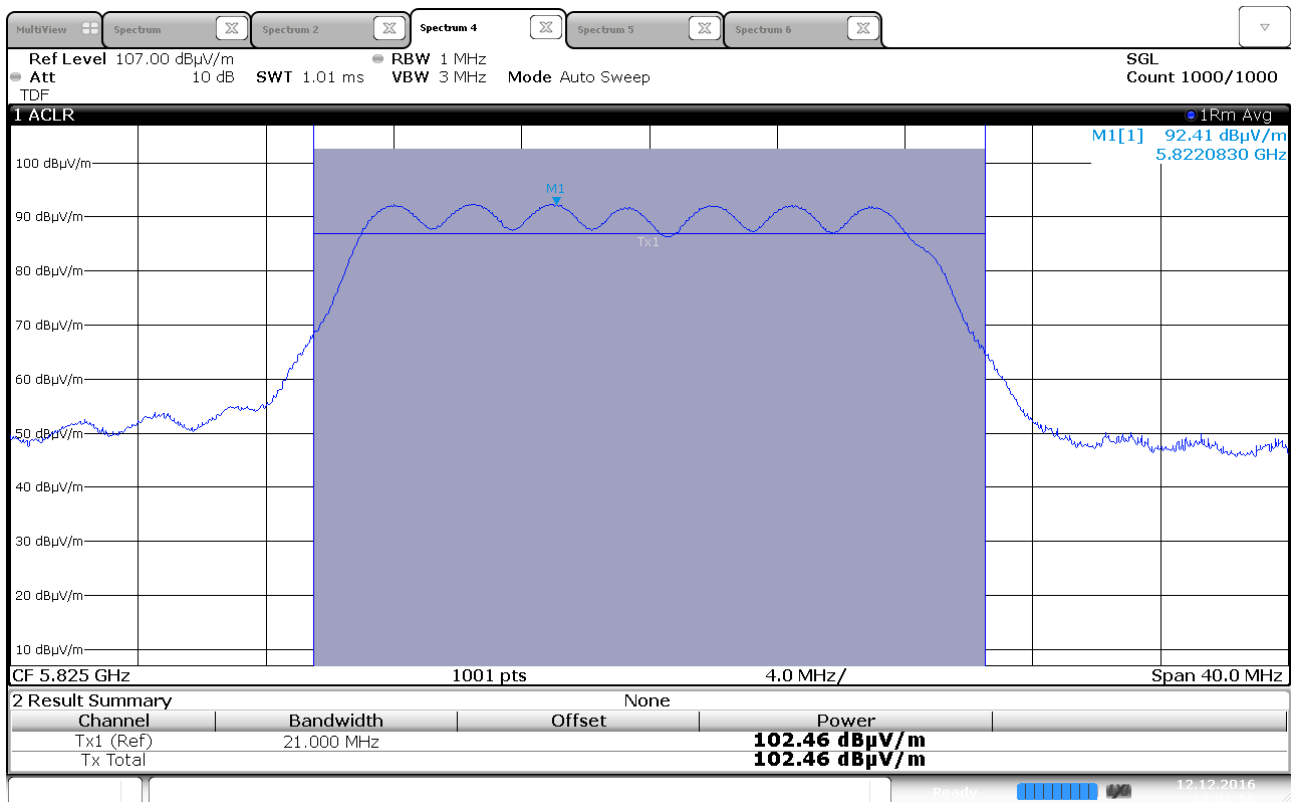


Maximum EIRP, 5825 MHz, 802.11n HT20, MIMO

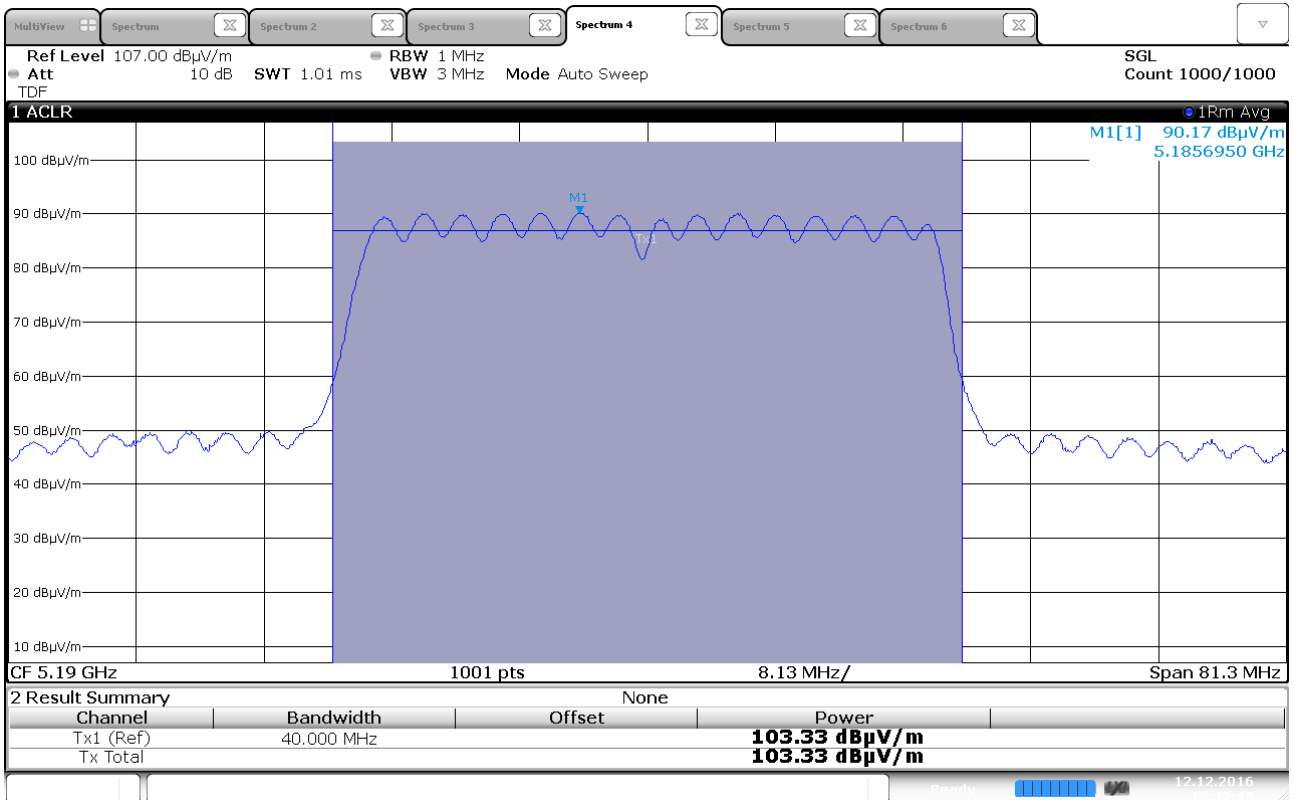


Maximum EIRP, 5190 MHz, 802.11n HT40, MIMO

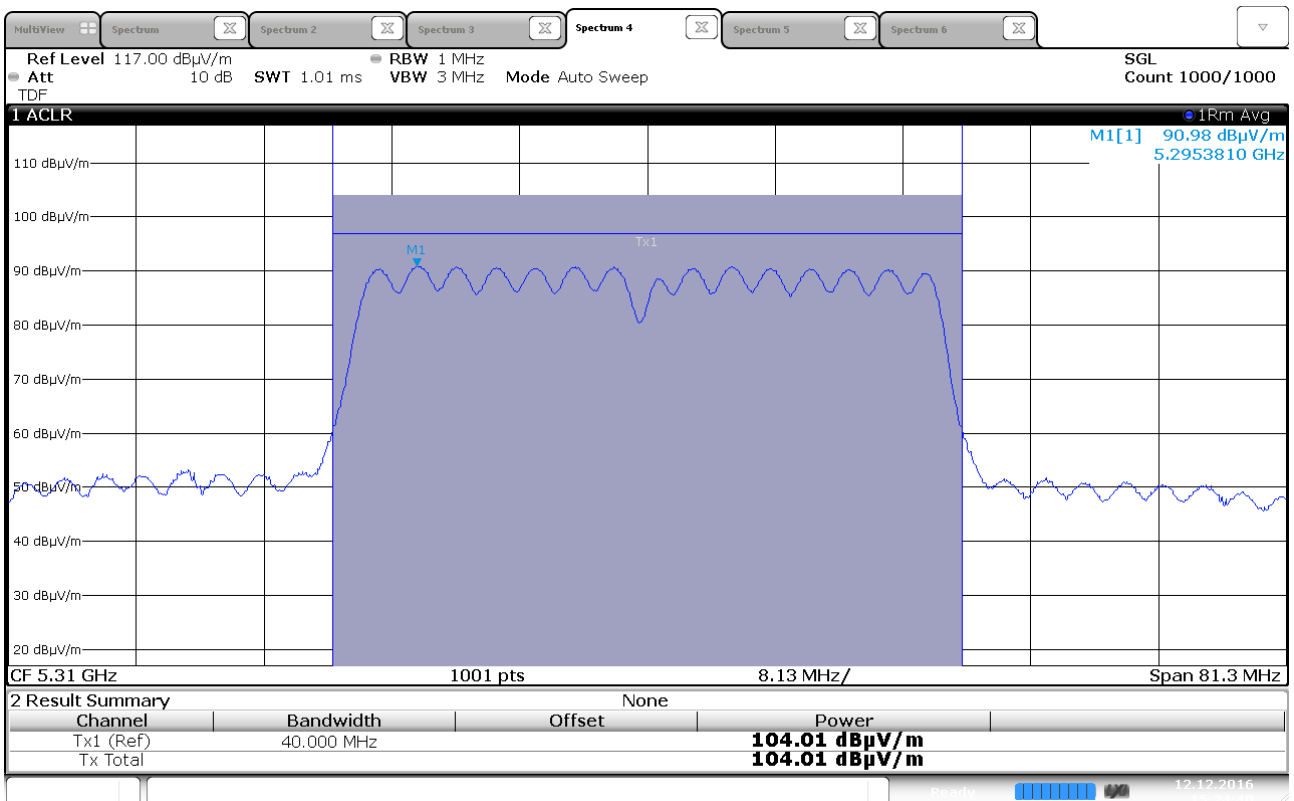


Maximum EIRP, 5310 MHz, 802.11n HT40, MIMO

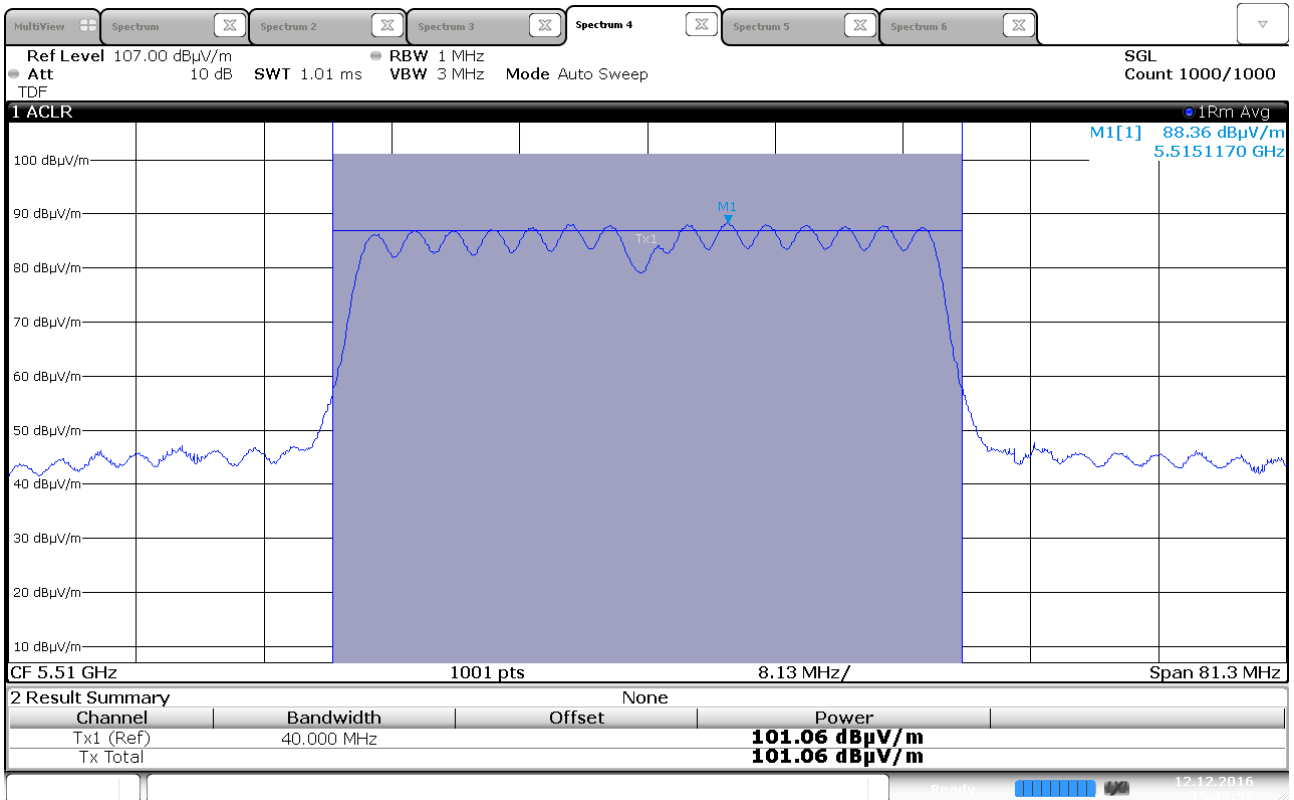


Maximum EIRP, 5510 MHz, 802.11n HT40, MIMO

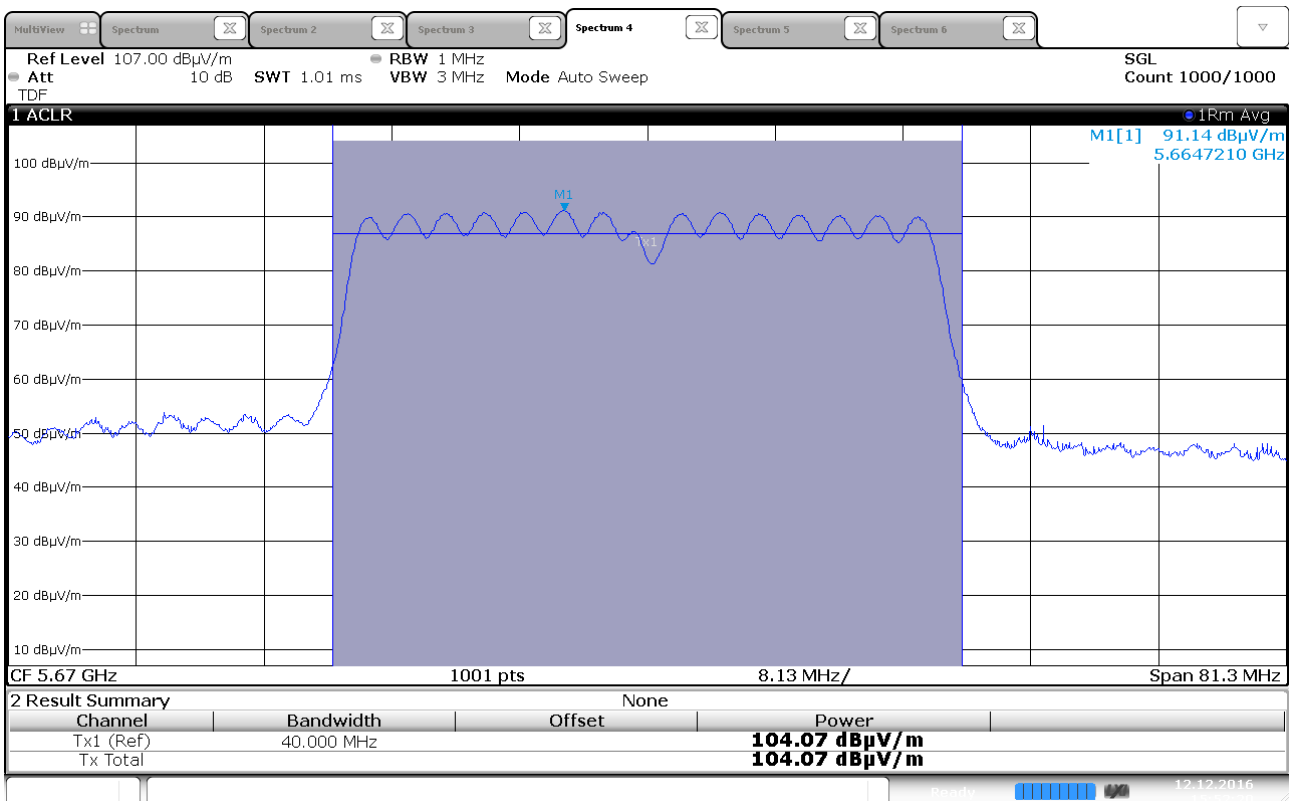


Maximum EIRP, 5670 MHz, 802.11n HT40, MIMO

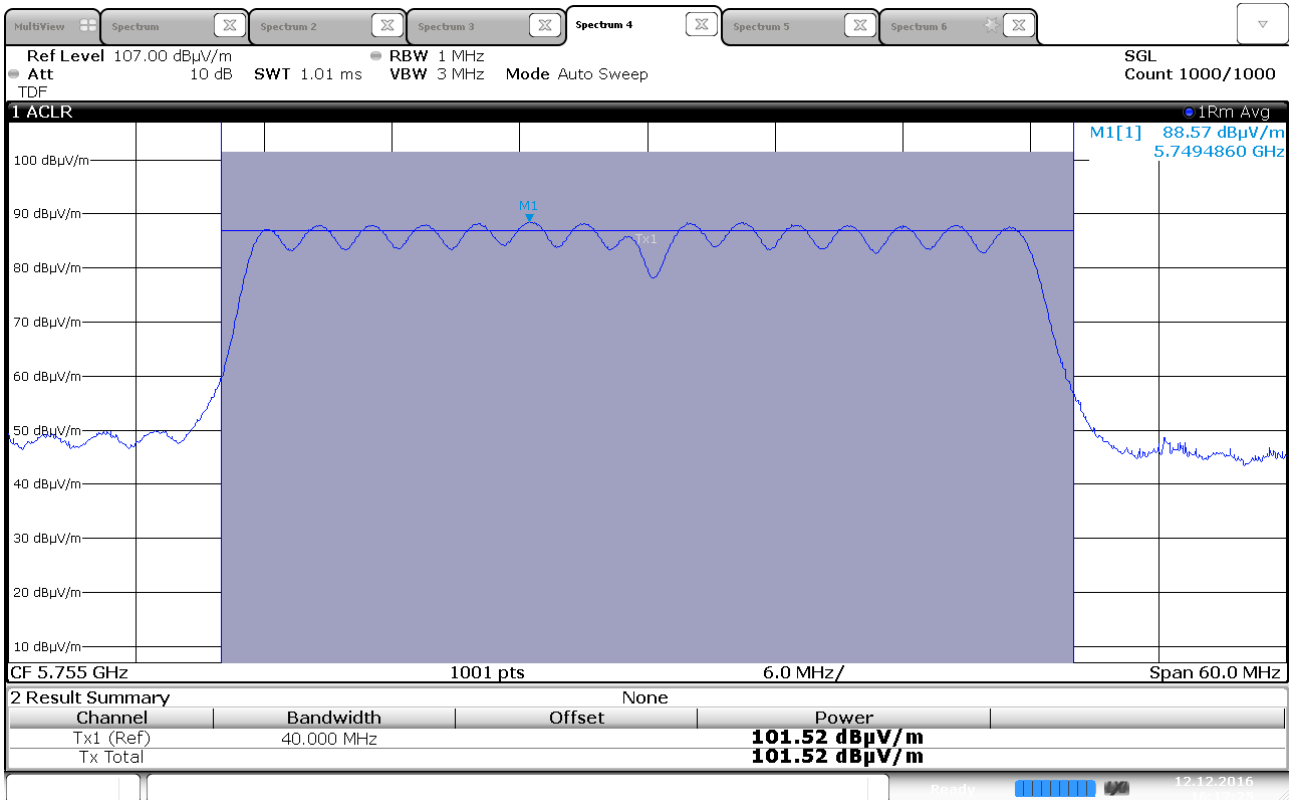


Maximum EIRP, 5755 MHz, 802.11n HT40, MIMO

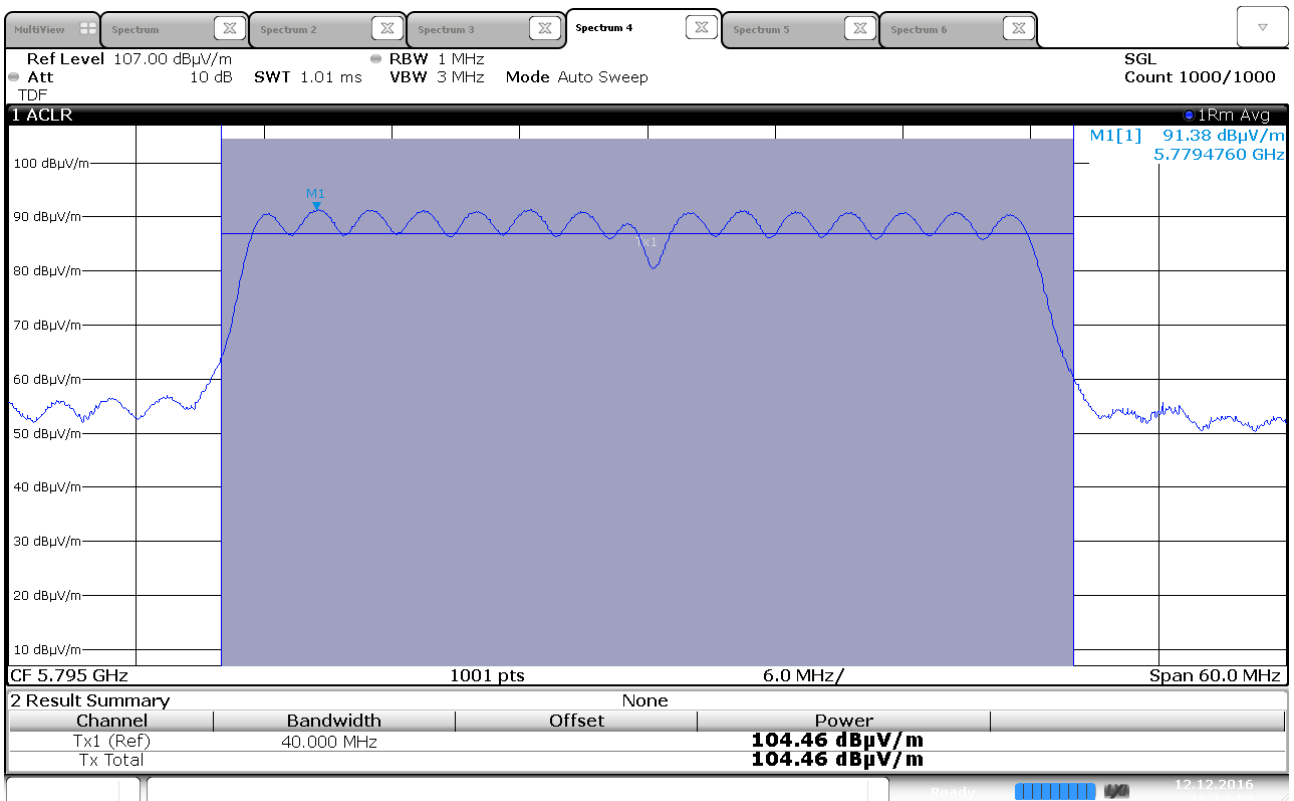


Maximum EIRP, 5795 MHz, 802.11n HT40, MIMO

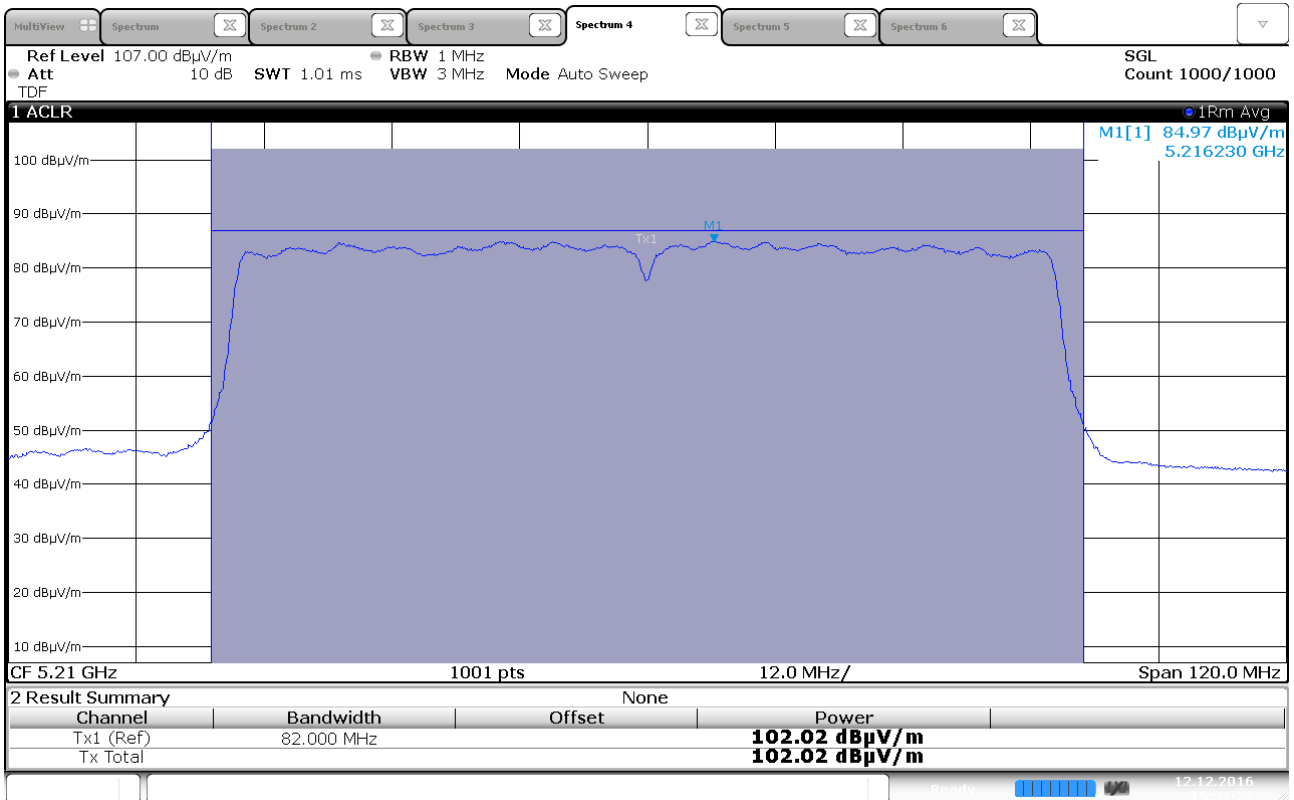


Maximum EIRP, 5210 MHz, 802.11n HT80, MIMO

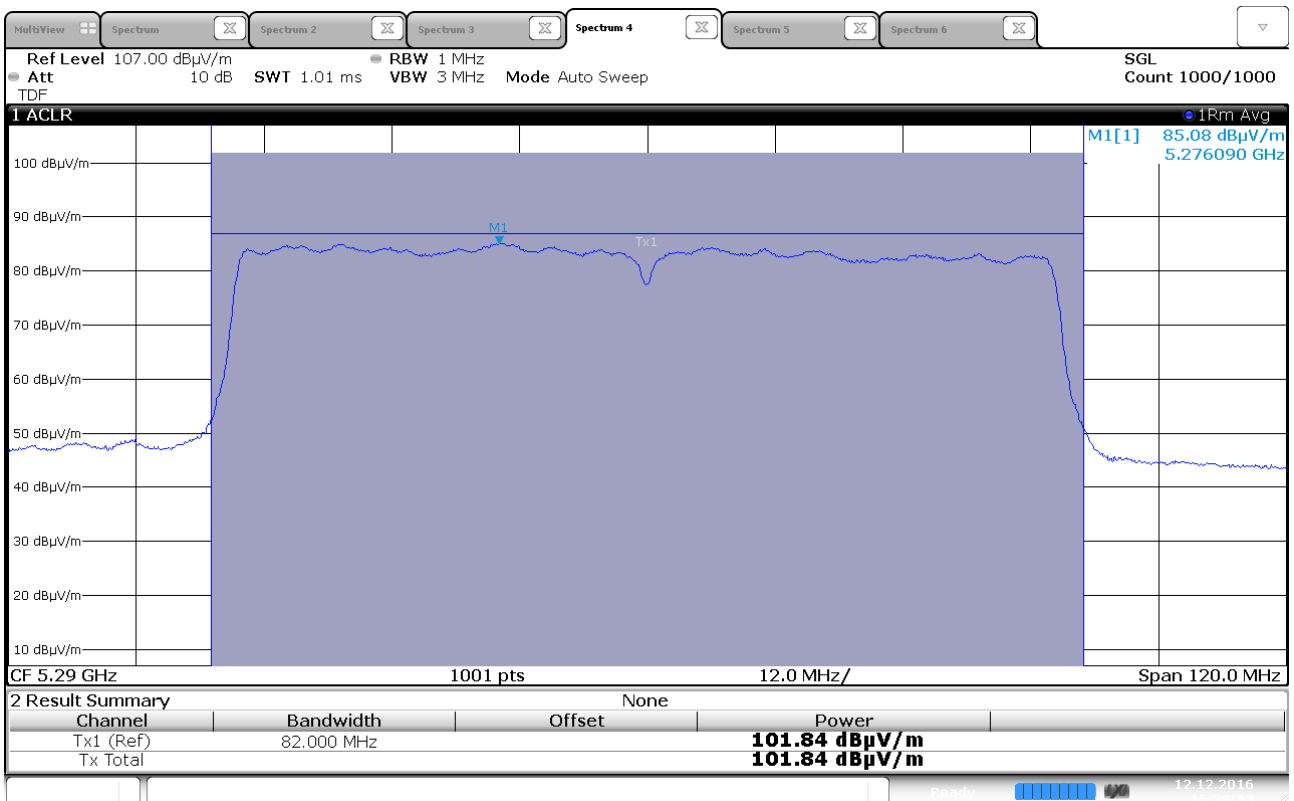

Maximum EIRP, 5290 MHz, 802.11n HT80, MIMO

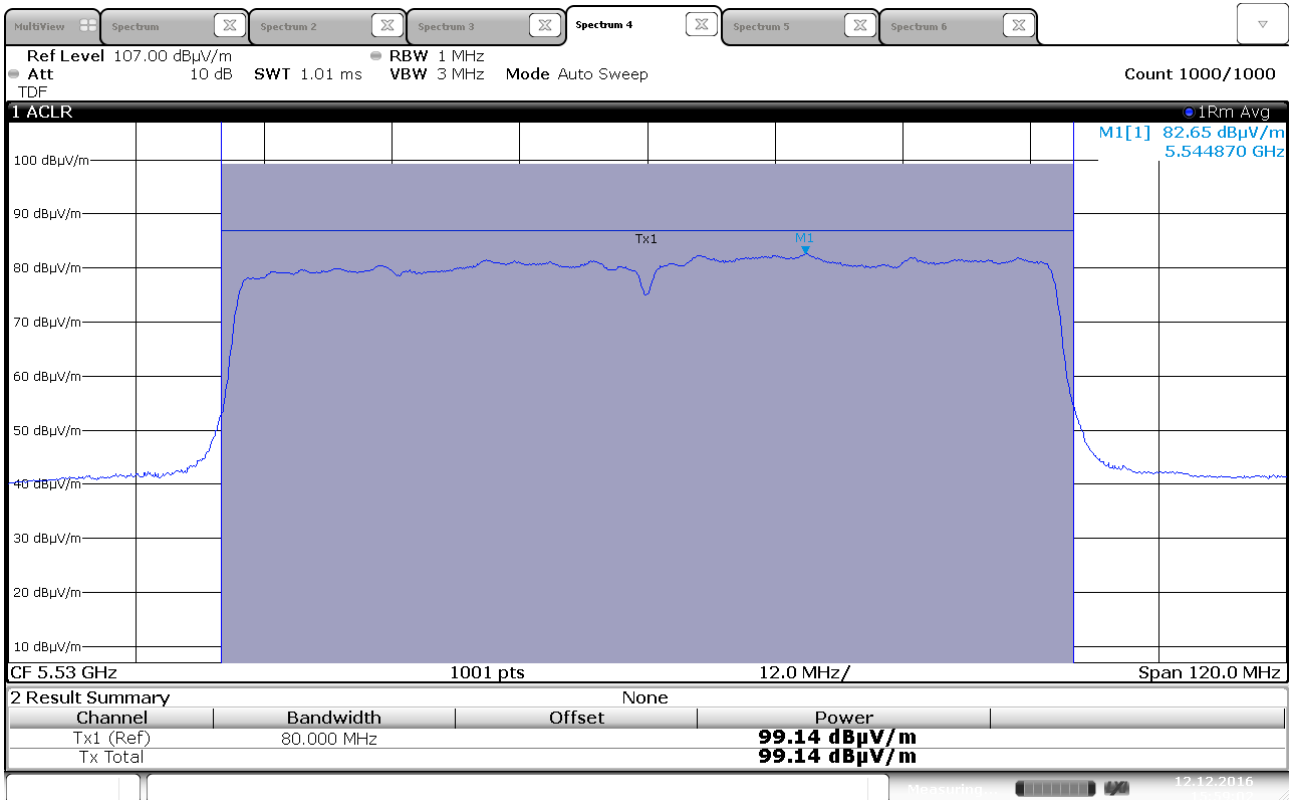

Maximum EIRP, 5530 MHz, 802.11n HT80, MIMO

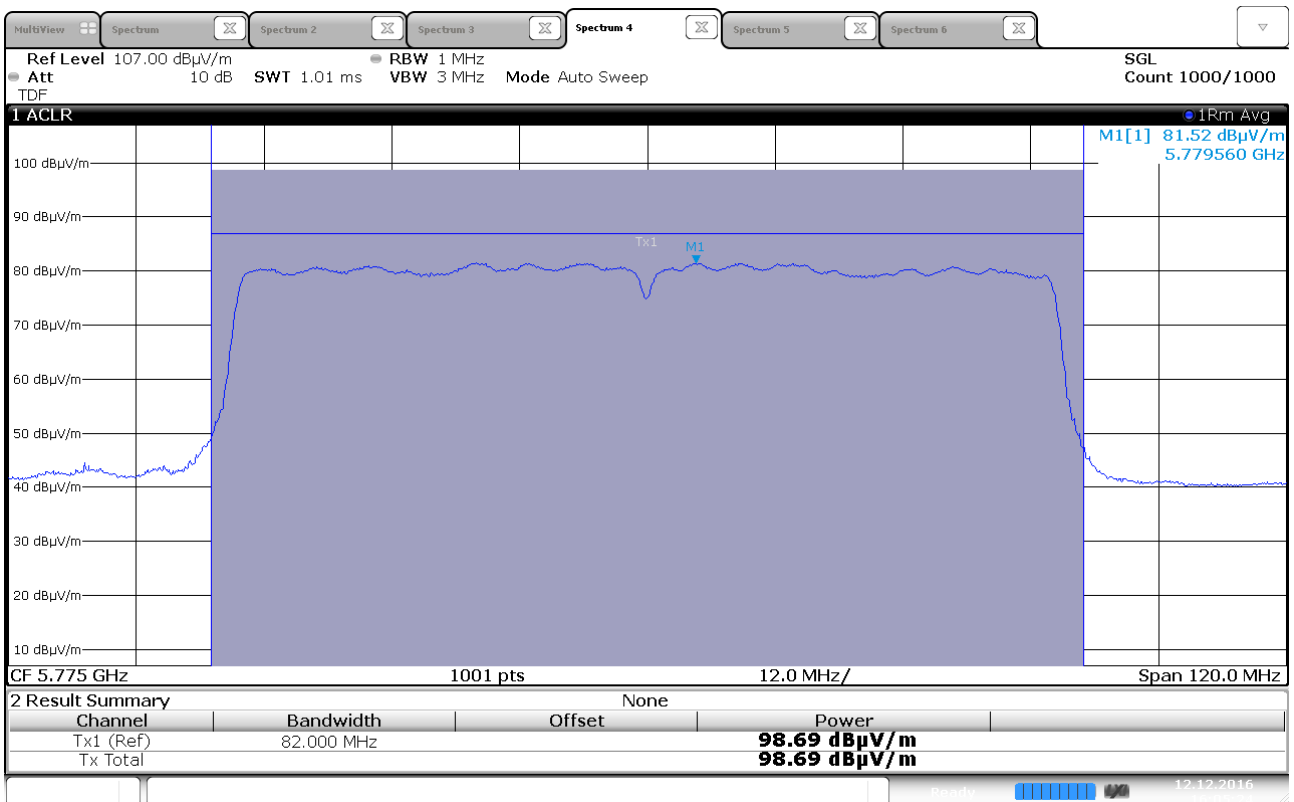

Maximum EIRP, 5775 MHz, 802.11n HT80, MIMO

3.3 Emission Bandwidth *B*

Para. No.: 15.407(a)

ISED RSS-GEN, Issue 4, Clause 6.6

Test Results: Complies


Measurement Data:

Ch. No.	Nominal Frequency (MHz)	26dB Bandwidth (MHz)			
		802.11a	802.11n HT20	802.11n HT40	802.11n HT80
36	5180	21.3	21.0		
40	5200	21.1	21.2		
48	5240	22.0	21.0		
52	5260	20.8	20.9		
60	5300	21.3	21.3		
64	5320	21.3	21.0		
100	5500	21.2	21.0		
116	5580	20.6	21.2		
140	5700	21.3	21.1		
149	5745	21.3	21.0		
157	5785	/	/		
165	5825	21.4	21.2		
38	5190			39.7	
46	5230			38.7	
54	5270			39.2	
62	5310			40.0	
102	5510			39.9	
110	5550			38.9	
134	5670			40.1	
151	5755			40.0	
159	5795			40.4	
42	5210				82.4
58	5290				82.1
106	5530				82.2
155	5775				83.8


Values in boldface are measured values, all other values are from UL report no. 15U21878-E4V2.

Limit:


No requirements as long as the emissions are within the band-edges.

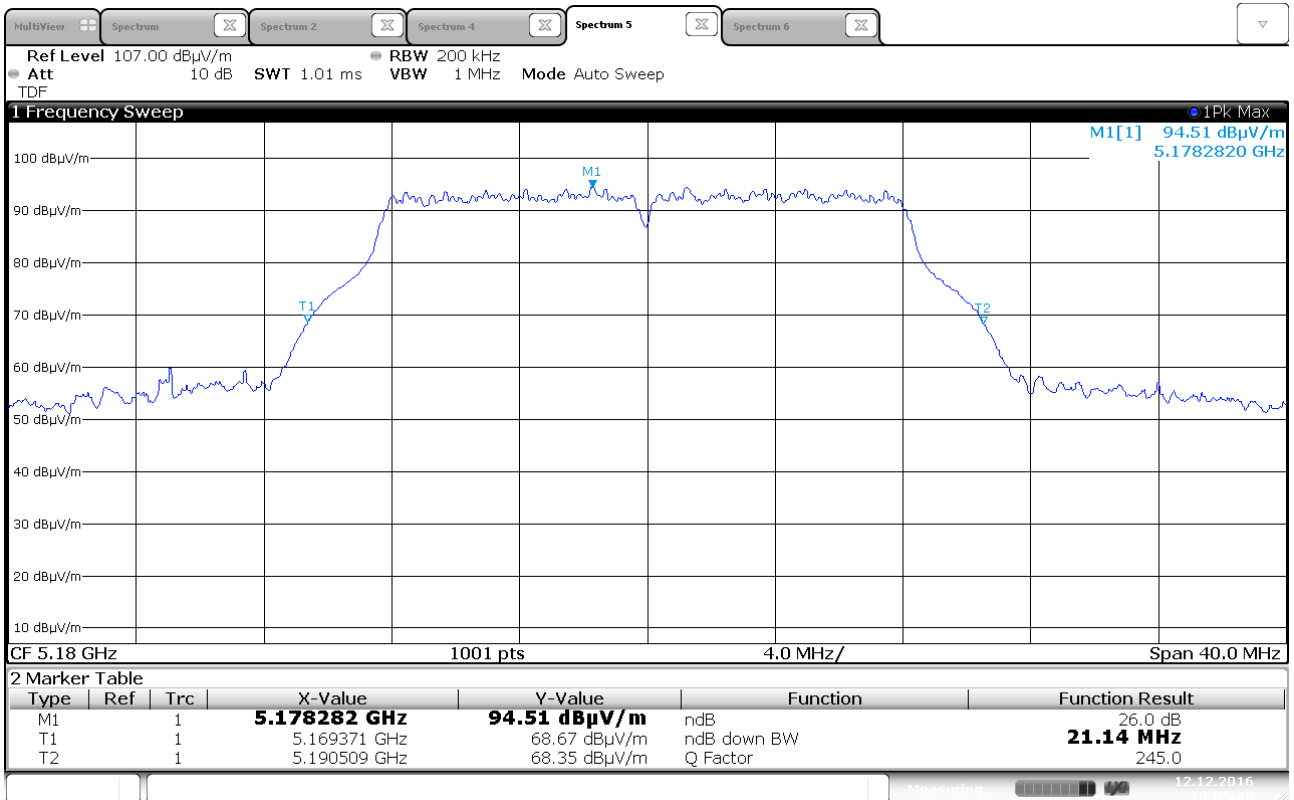


Emission Bandwidth B, 5180 MHz, 802.11a 6Mbps, Ant 0

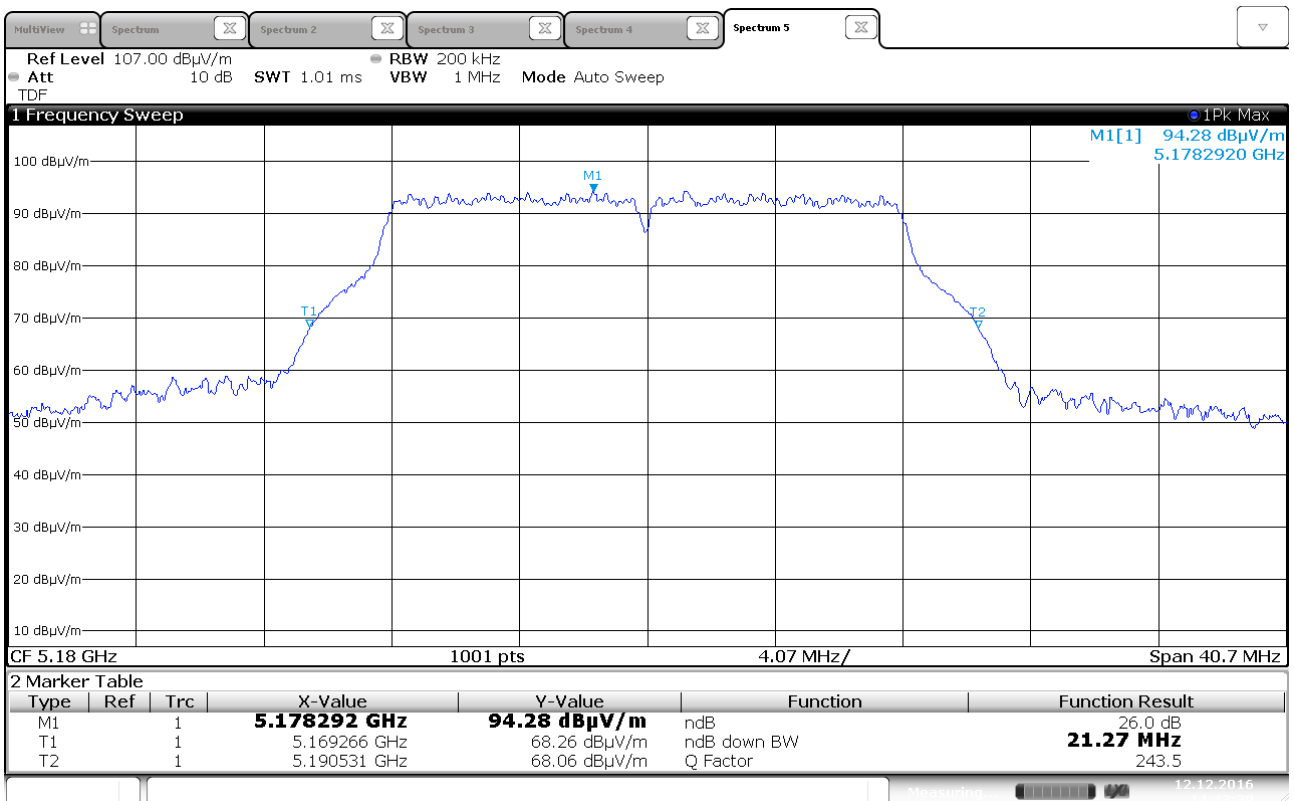


Emission Bandwidth B, 5180 MHz, 802.11a 6Mbps, Ant 1

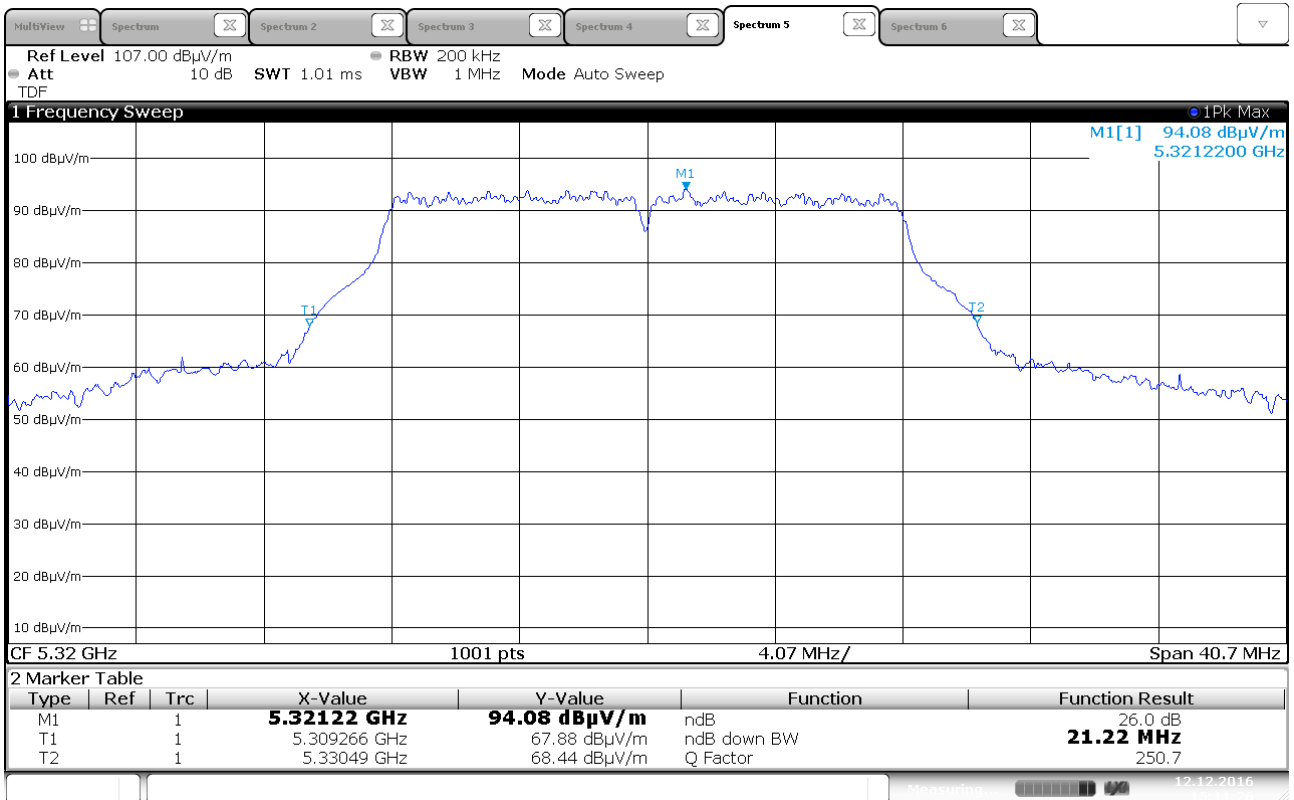


Emission Bandwidth B, 5320 MHz, 802.11a 6Mbps, Ant 0

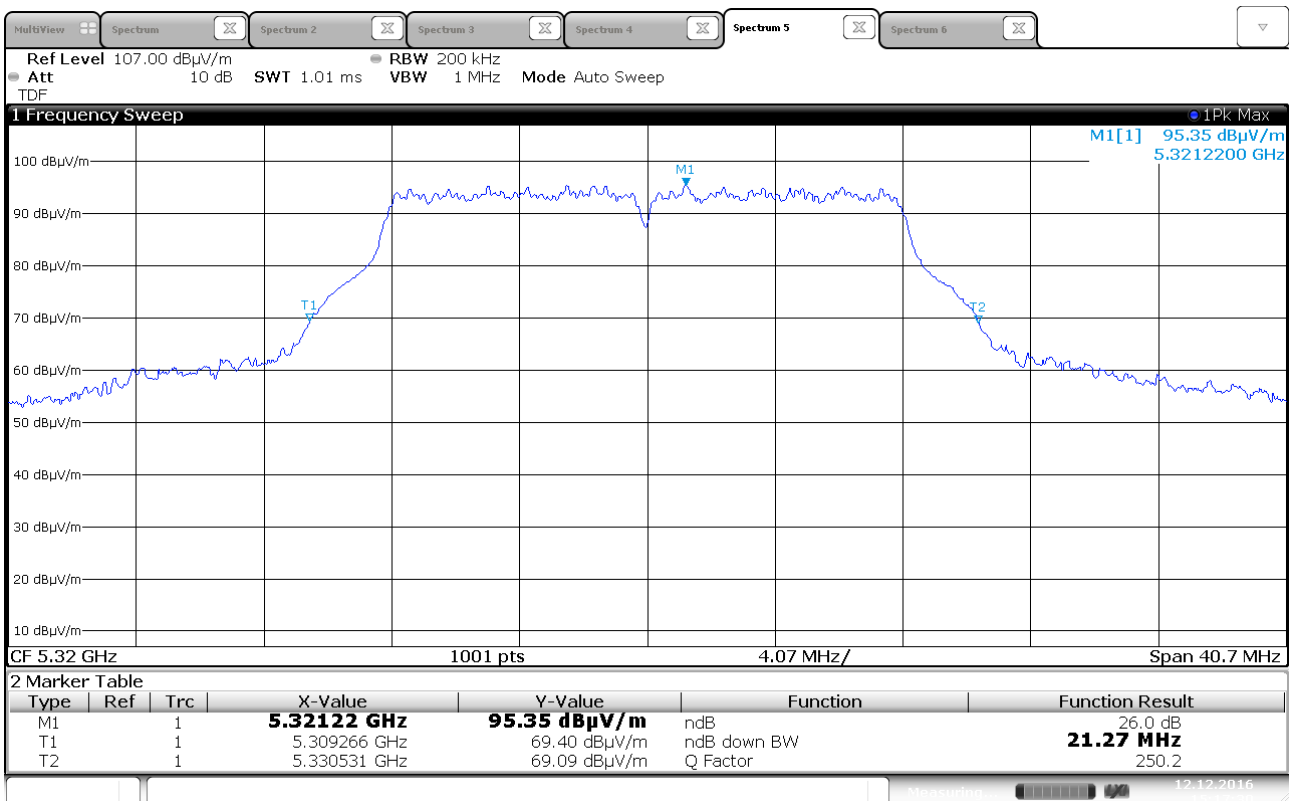


Emission Bandwidth B, 5320 MHz, 802.11a 6Mbps, Ant 1

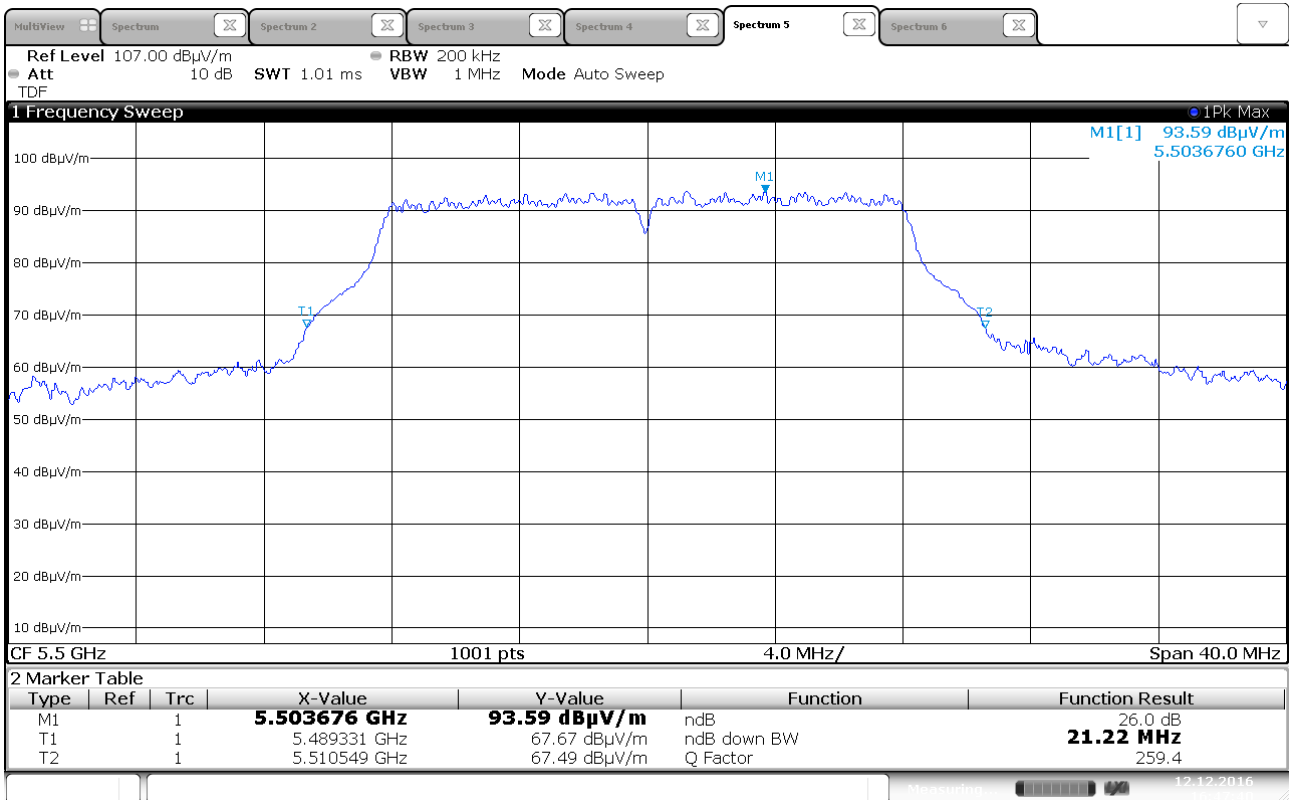


Emission Bandwidth B, 5500 MHz, 802.11a 6Mbps, Ant 0

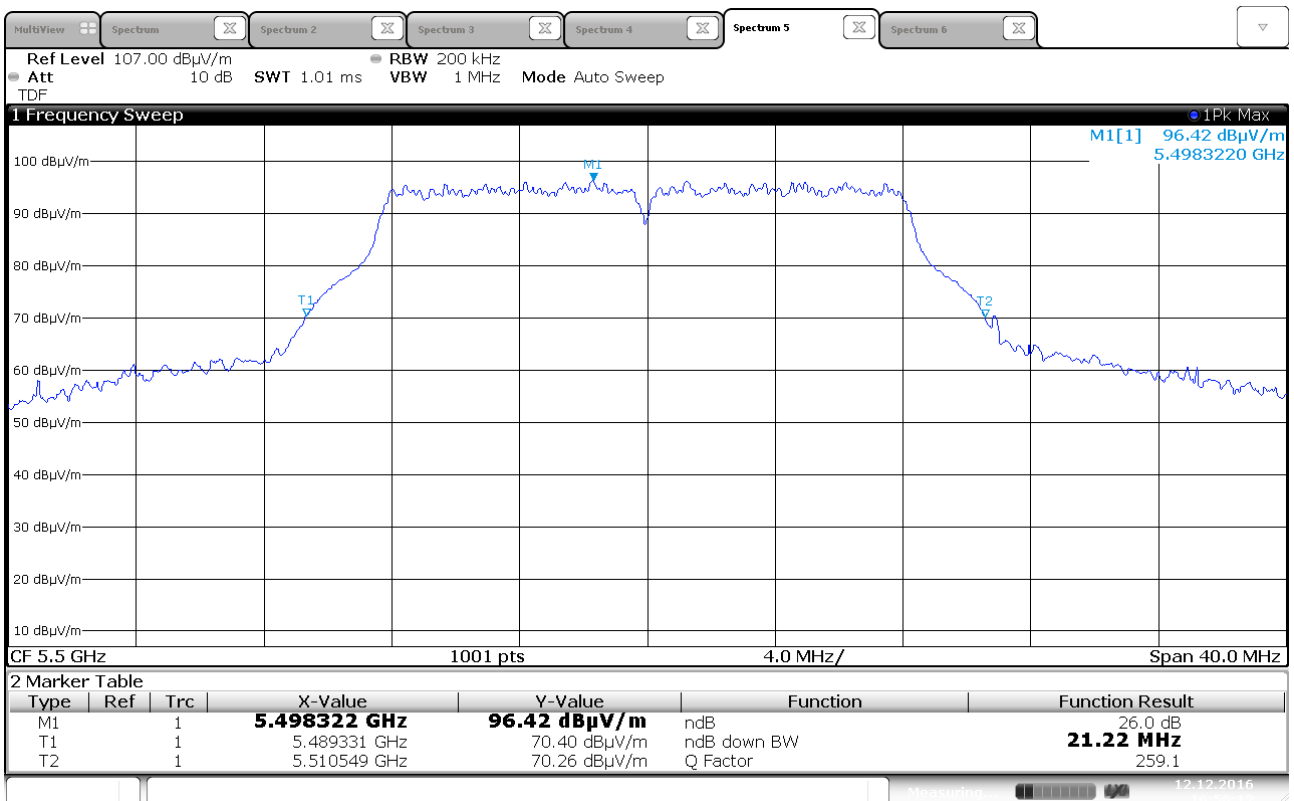


Emission Bandwidth B, 5500 MHz, 802.11a 6Mbps, Ant 1

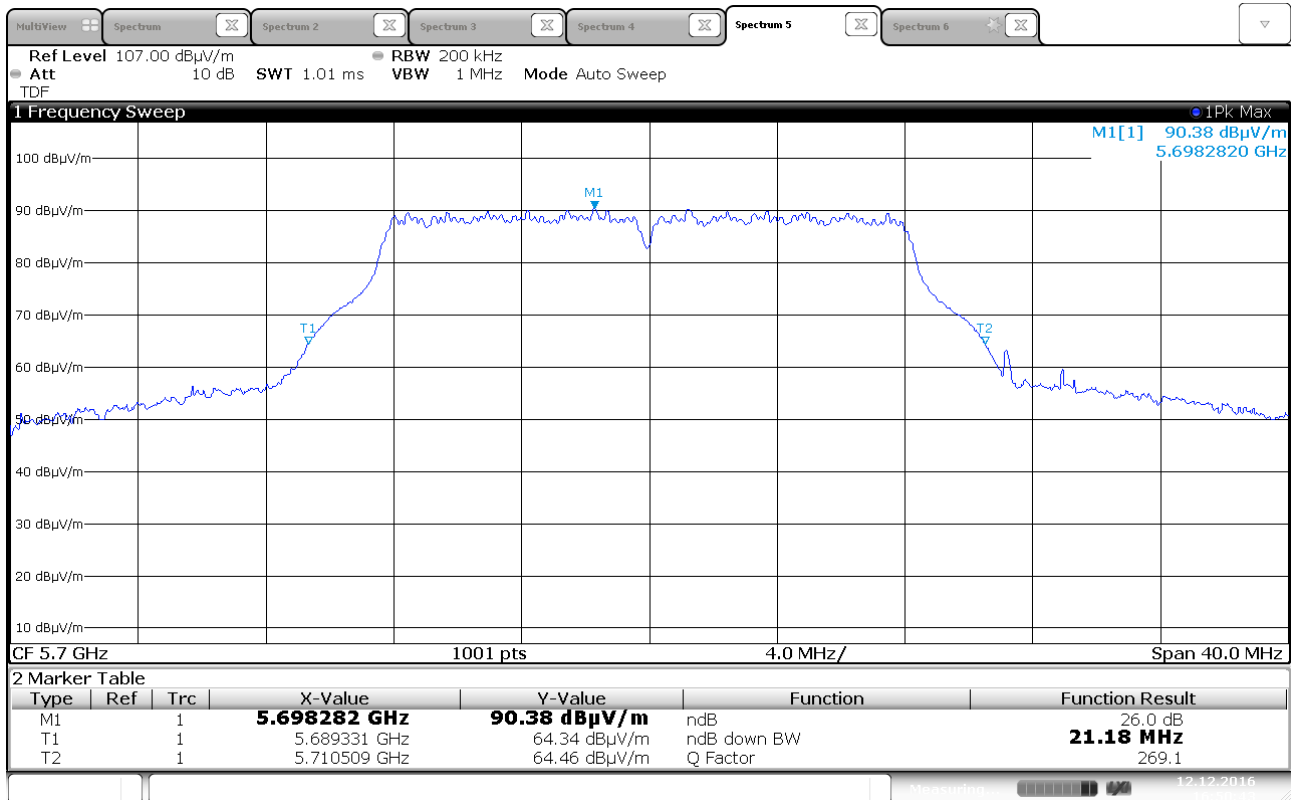


Emission Bandwidth B, 5700 MHz, 802.11a 6Mbps, Ant 0

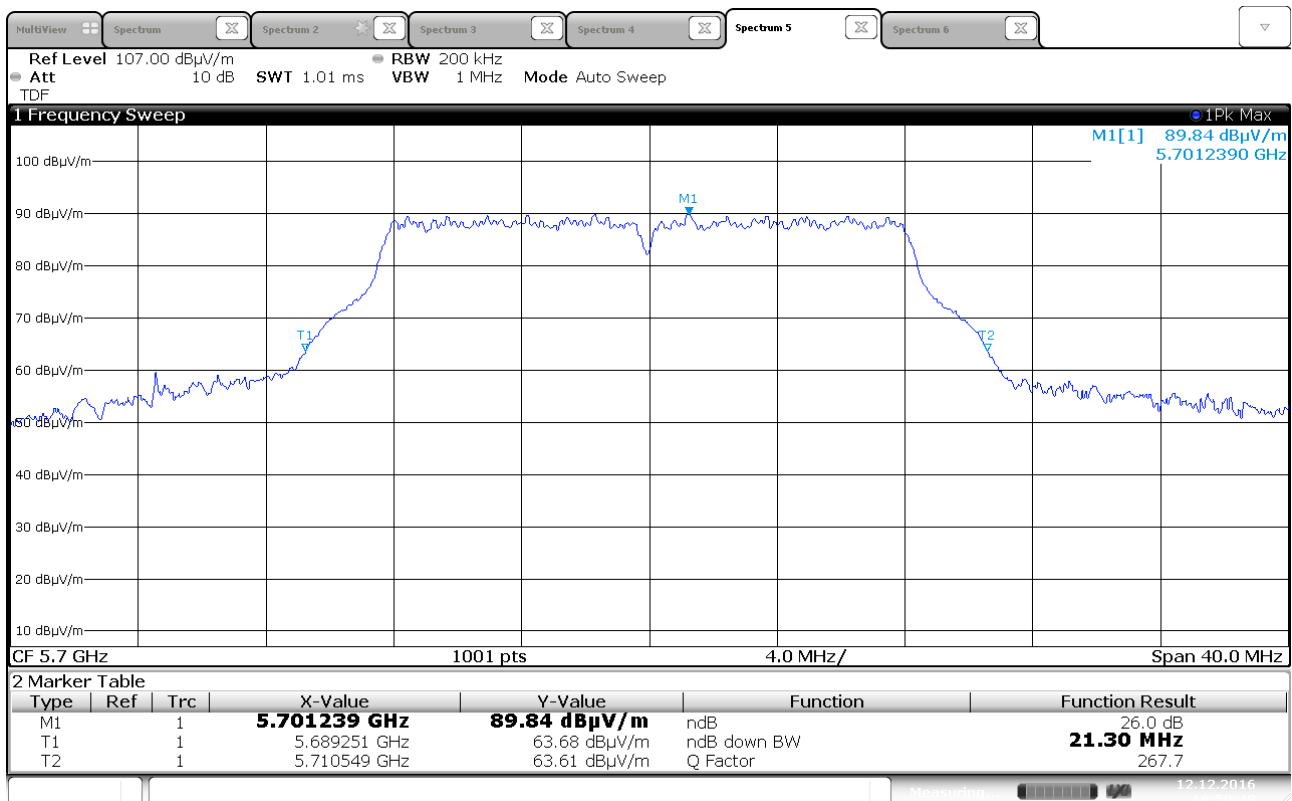


Emission Bandwidth B, 5700 MHz, 802.11a 6Mbps, Ant 1

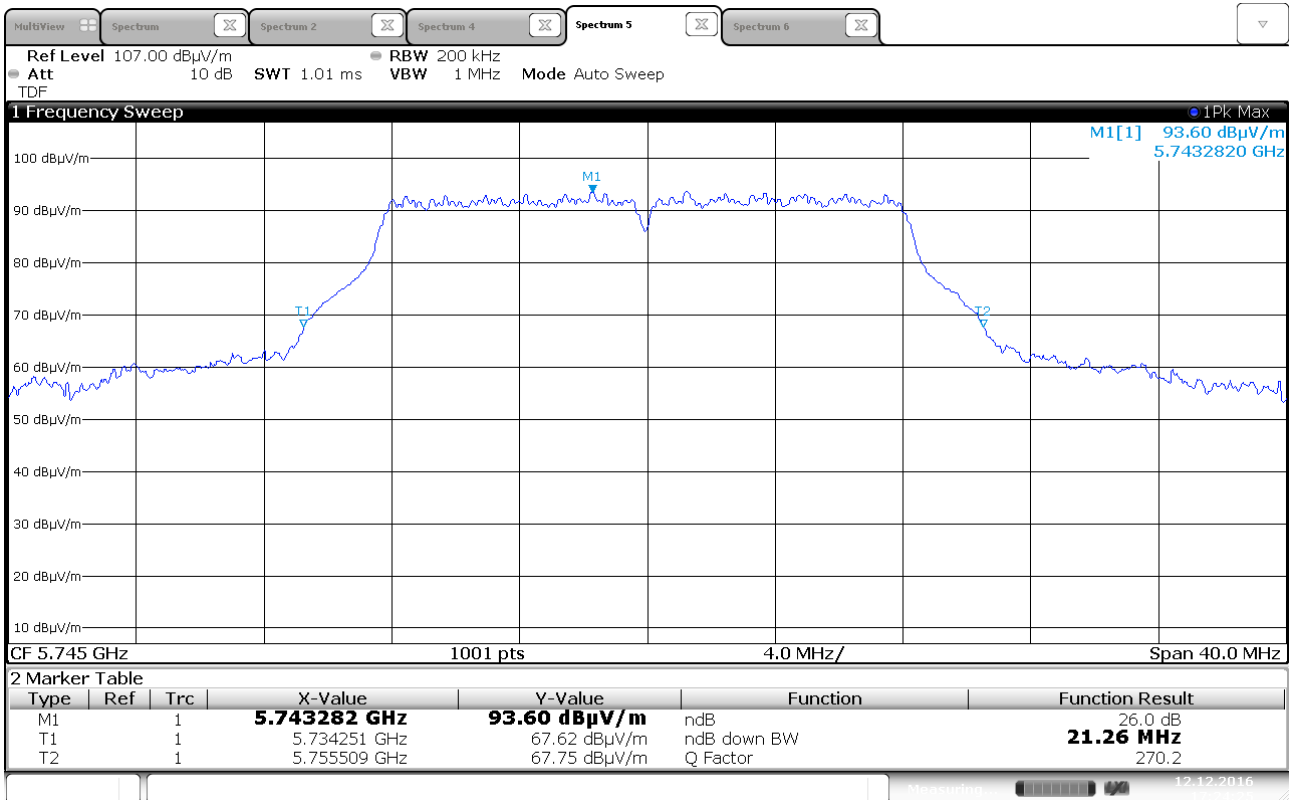


Emission Bandwidth B, 5745 MHz, 802.11a 6Mbps, Ant 0

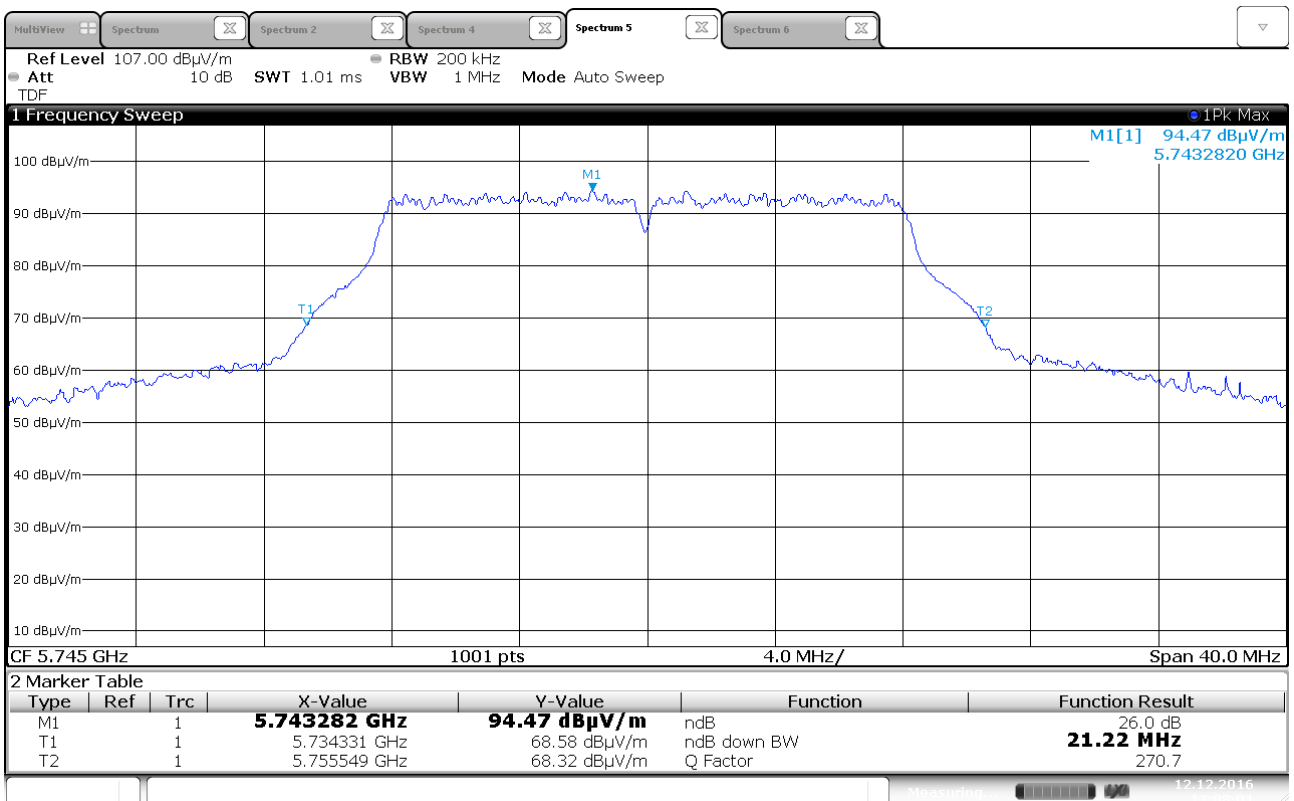


Emission Bandwidth B, 5745 MHz, 802.11a 6Mbps, Ant 1

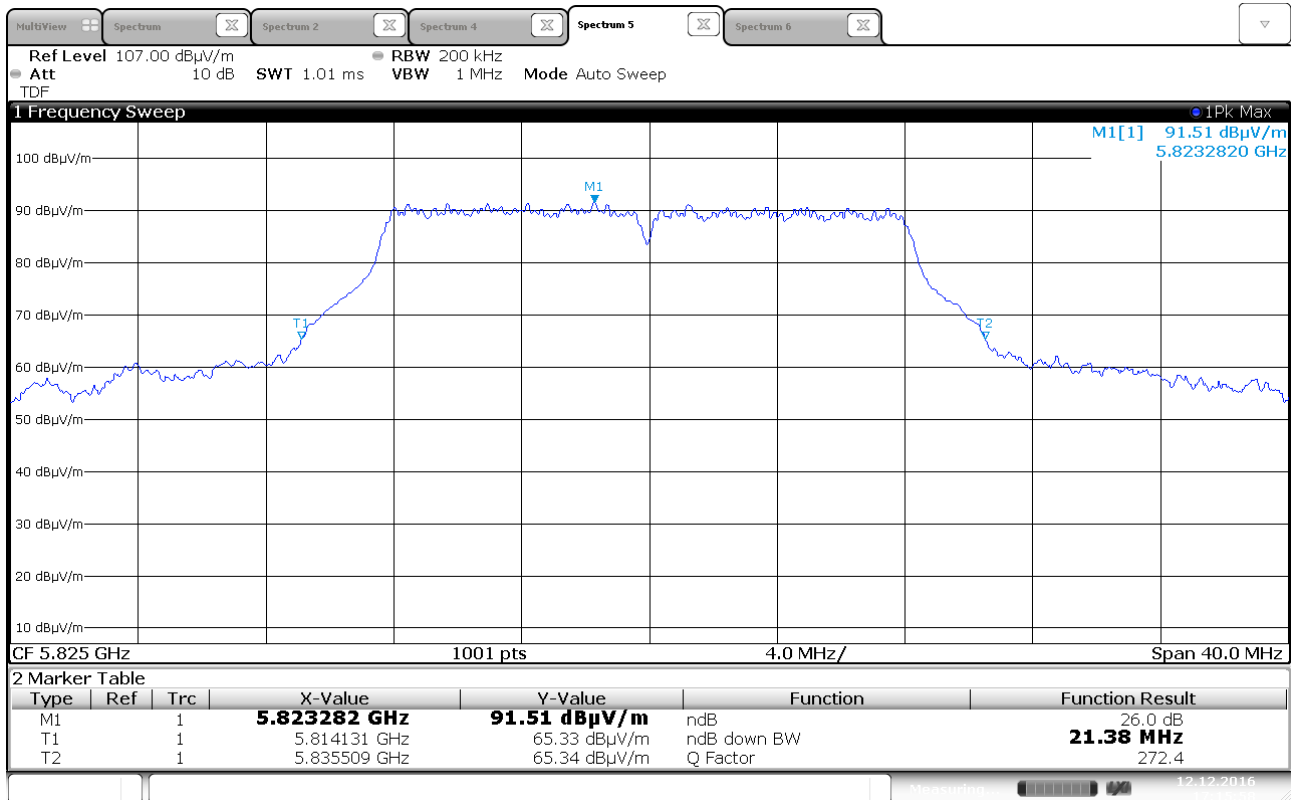


Emission Bandwidth B, 5825 MHz, 802.11a 6Mbps, Ant 0

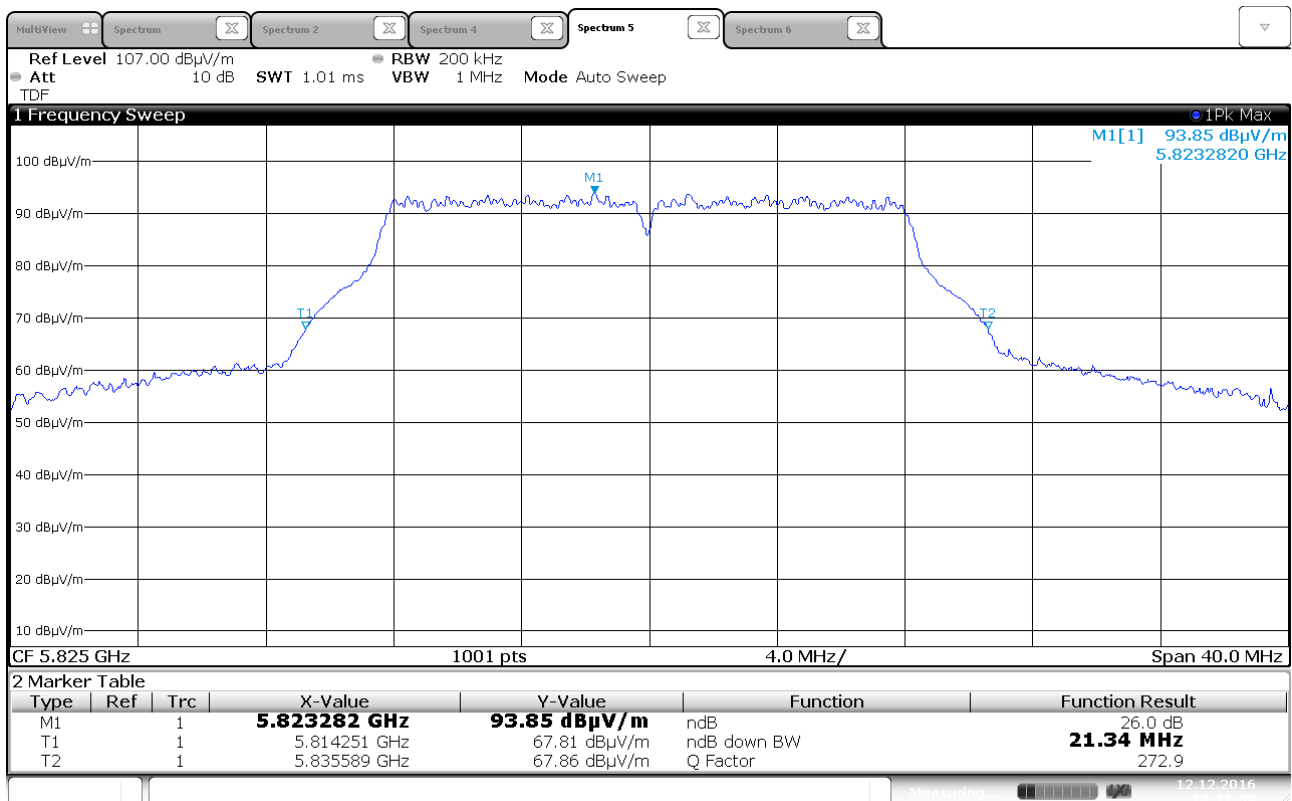


Emission Bandwidth B, 5825 MHz, 802.11a 6Mbps, Ant 1

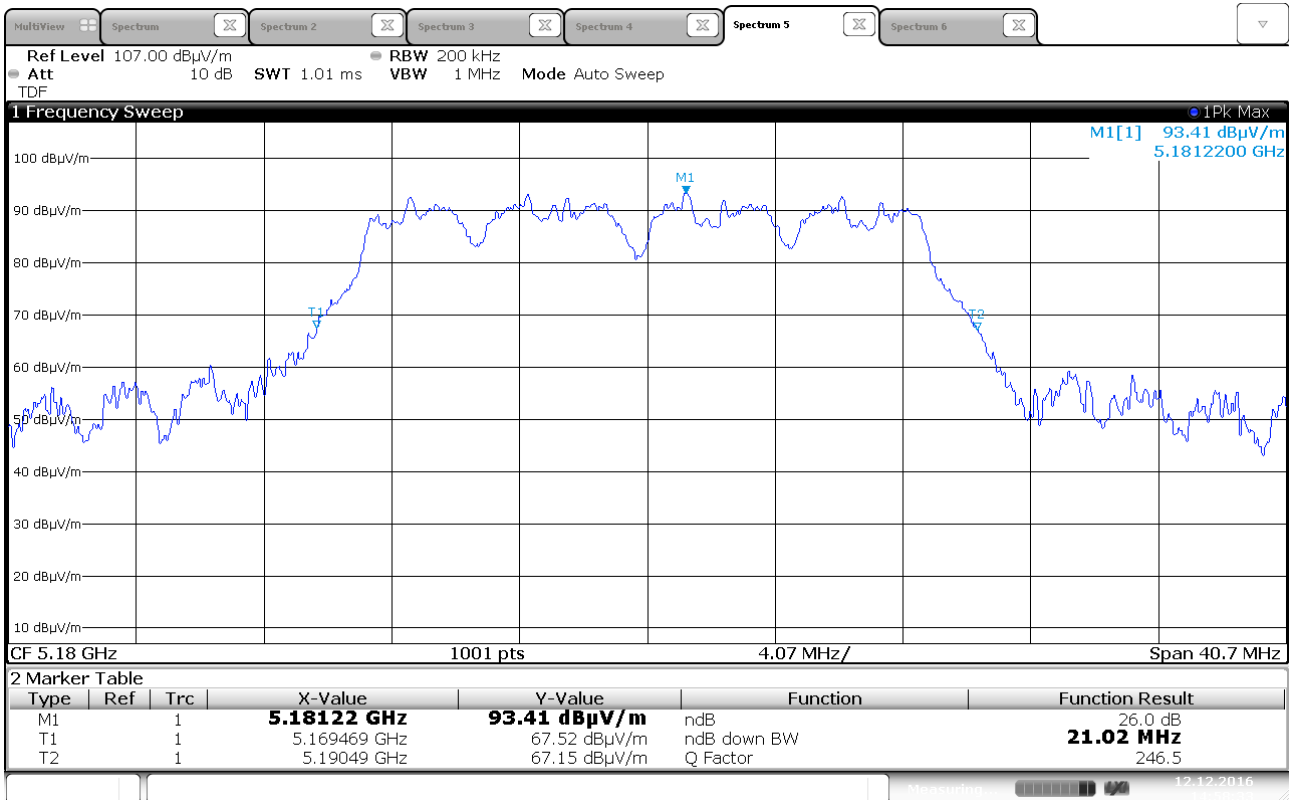


Emission Bandwidth B, 5180 MHz, 802.11n HT20, MIMO

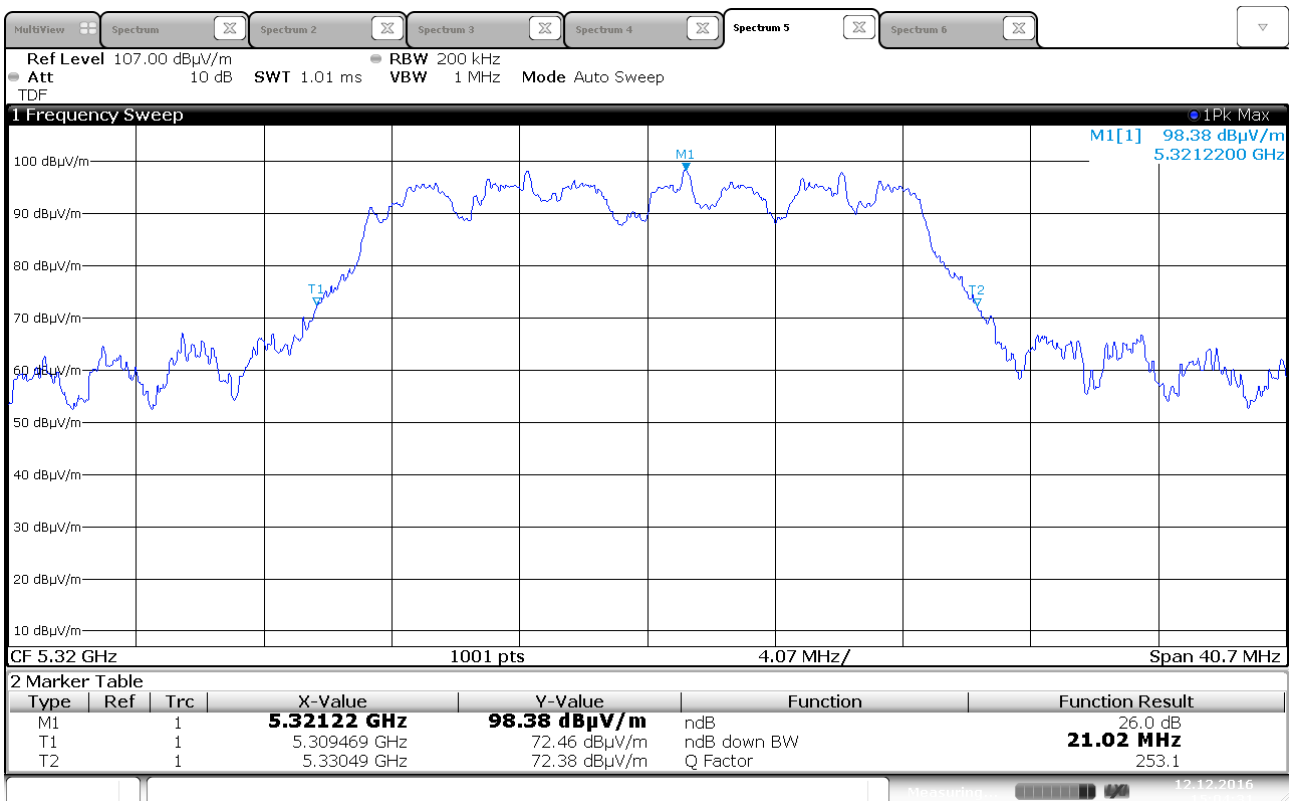


Emission Bandwidth B, 5320 MHz, 802.11n HT20, MIMO

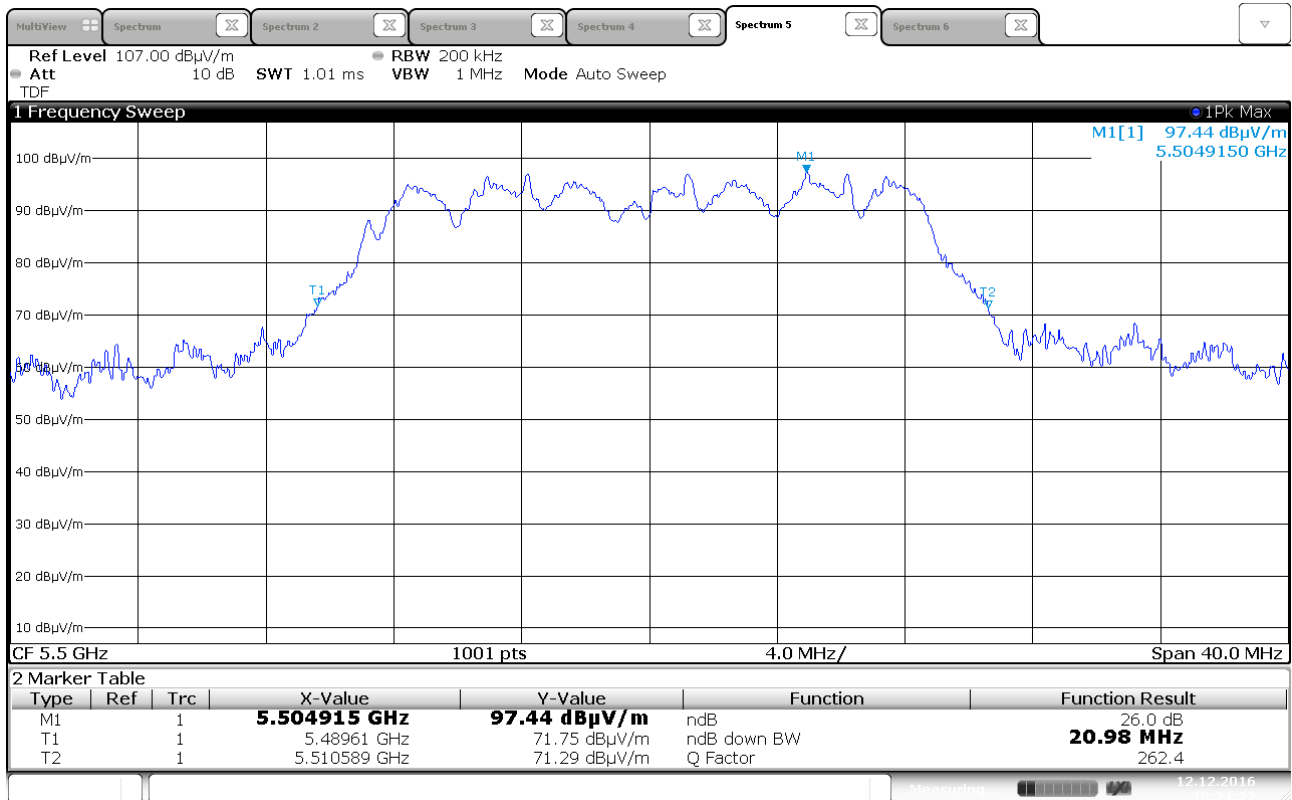


Emission Bandwidth B, 5500 MHz, 802.11n HT20, MIMO

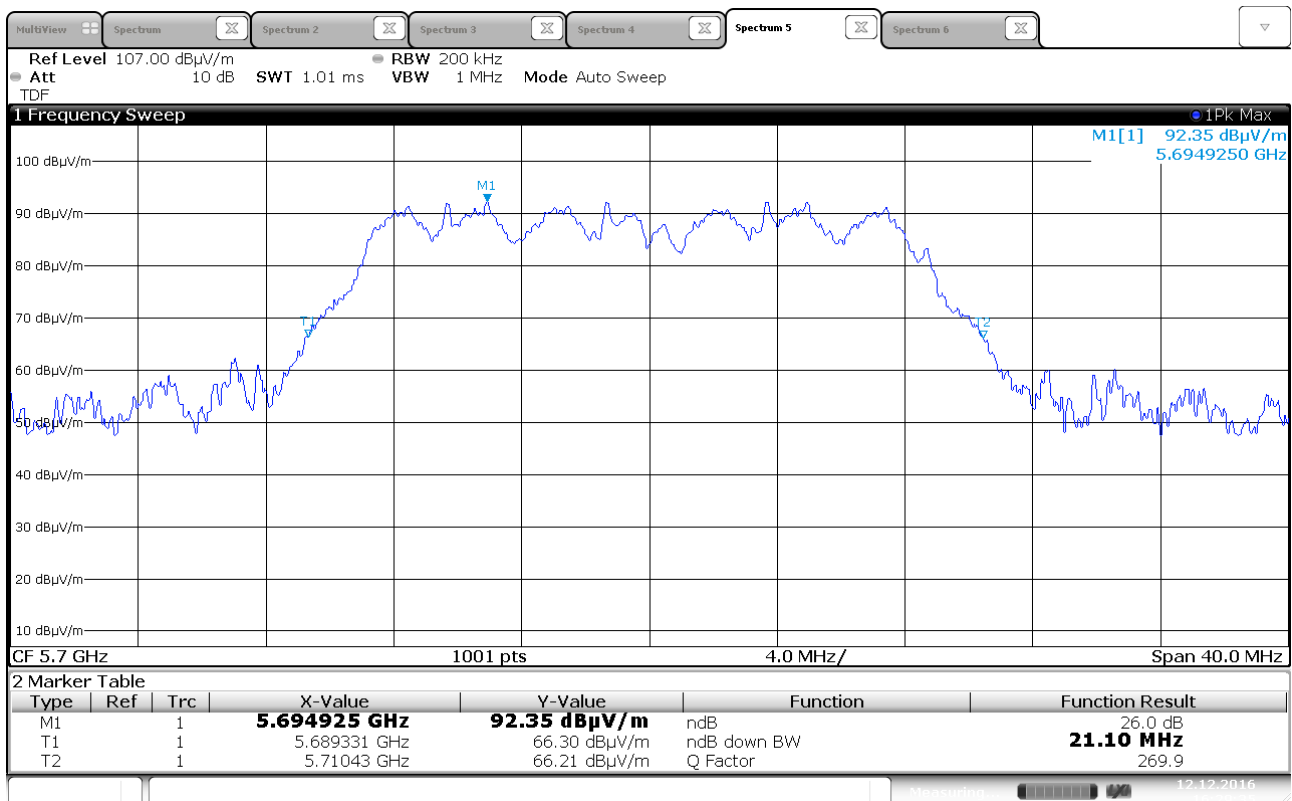


Emission Bandwidth B, 5700 MHz, 802.11n HT20, MIMO

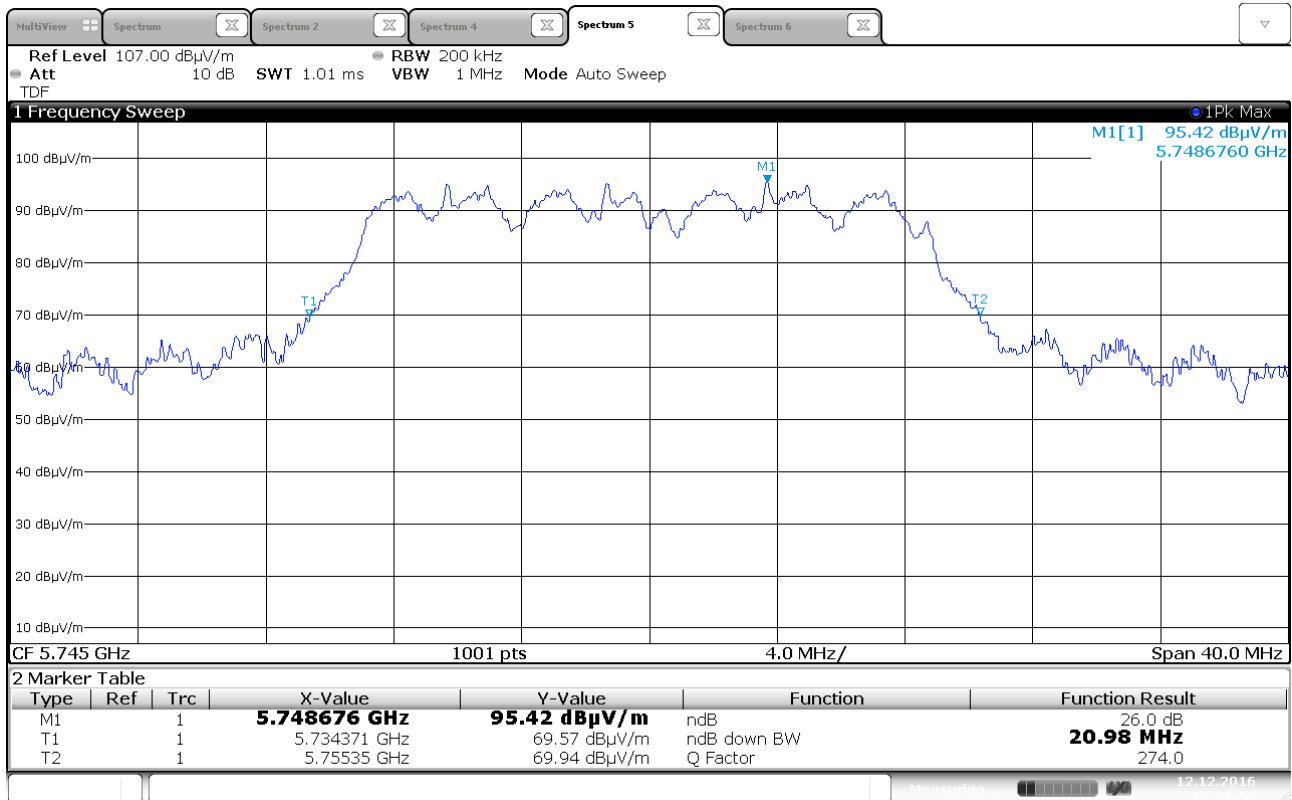


Emission Bandwidth B, 5745 MHz, 802.11n HT20, MIMO

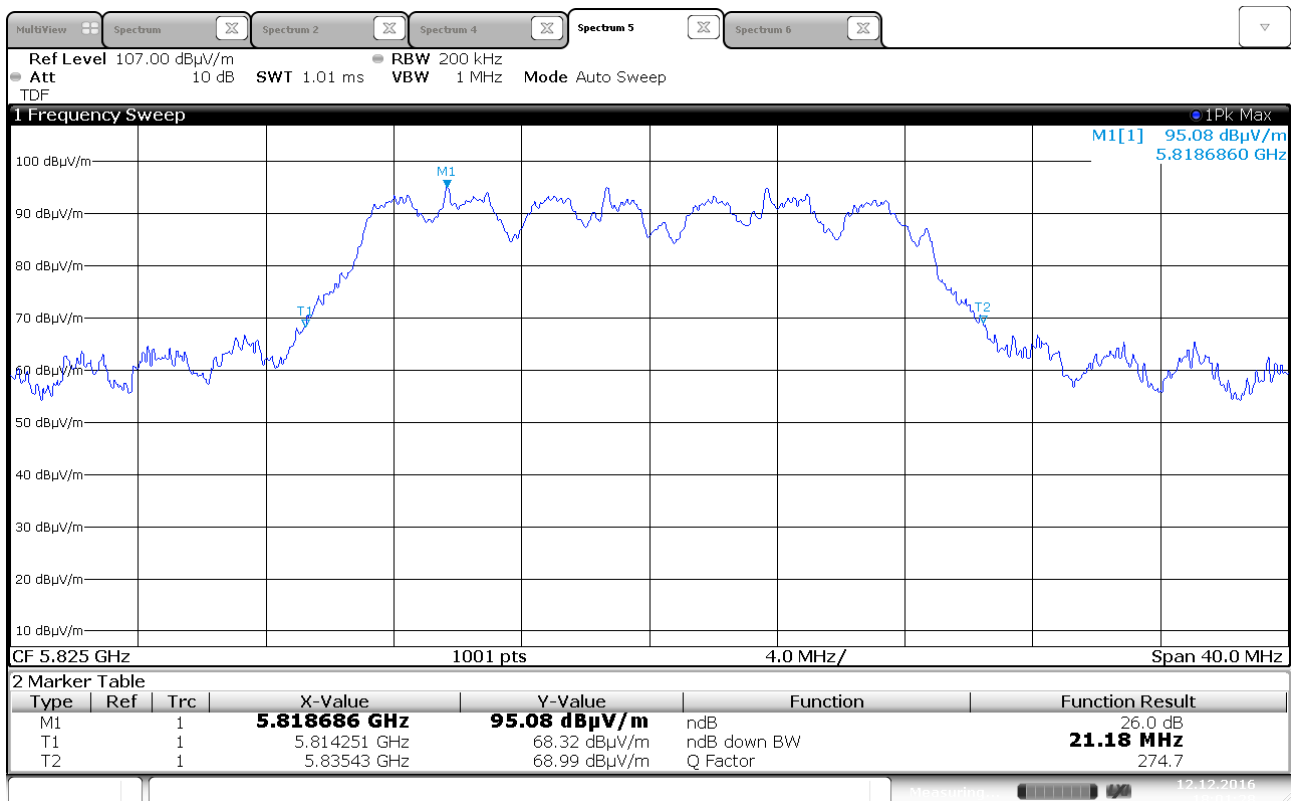


Emission Bandwidth B, 5825 MHz, 802.11n HT20, MIMO

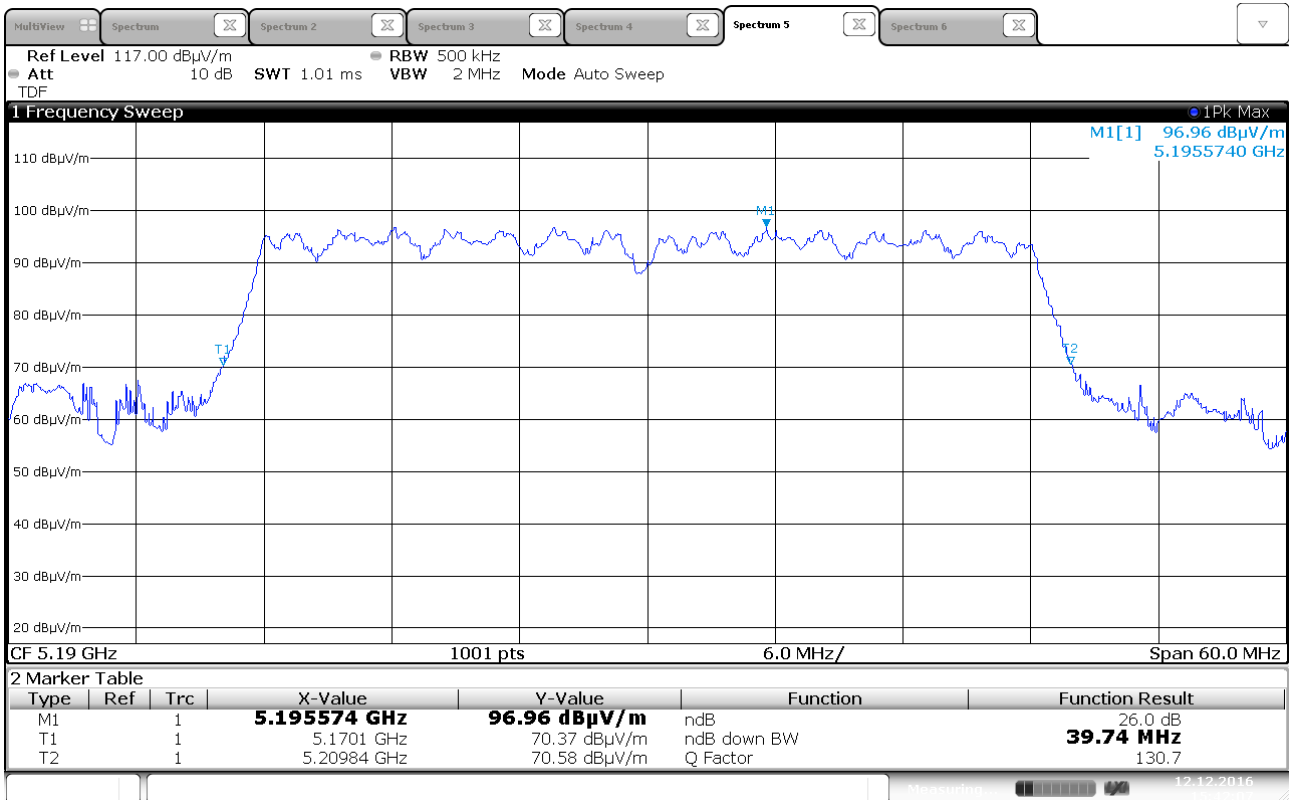


Emission Bandwidth B, 5190 MHz, 802.11n HT40, MIMO

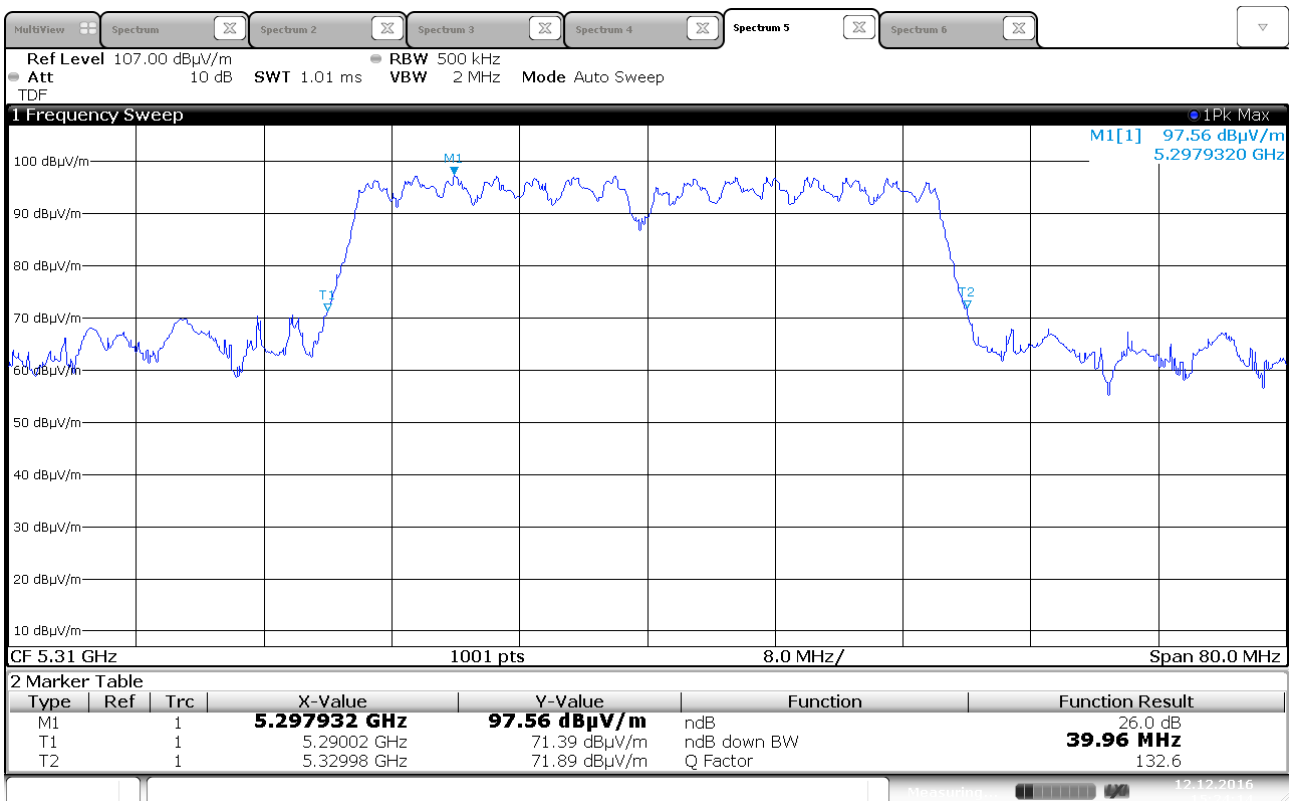


Emission Bandwidth B, 5310 MHz, 802.11n HT40, MIMO

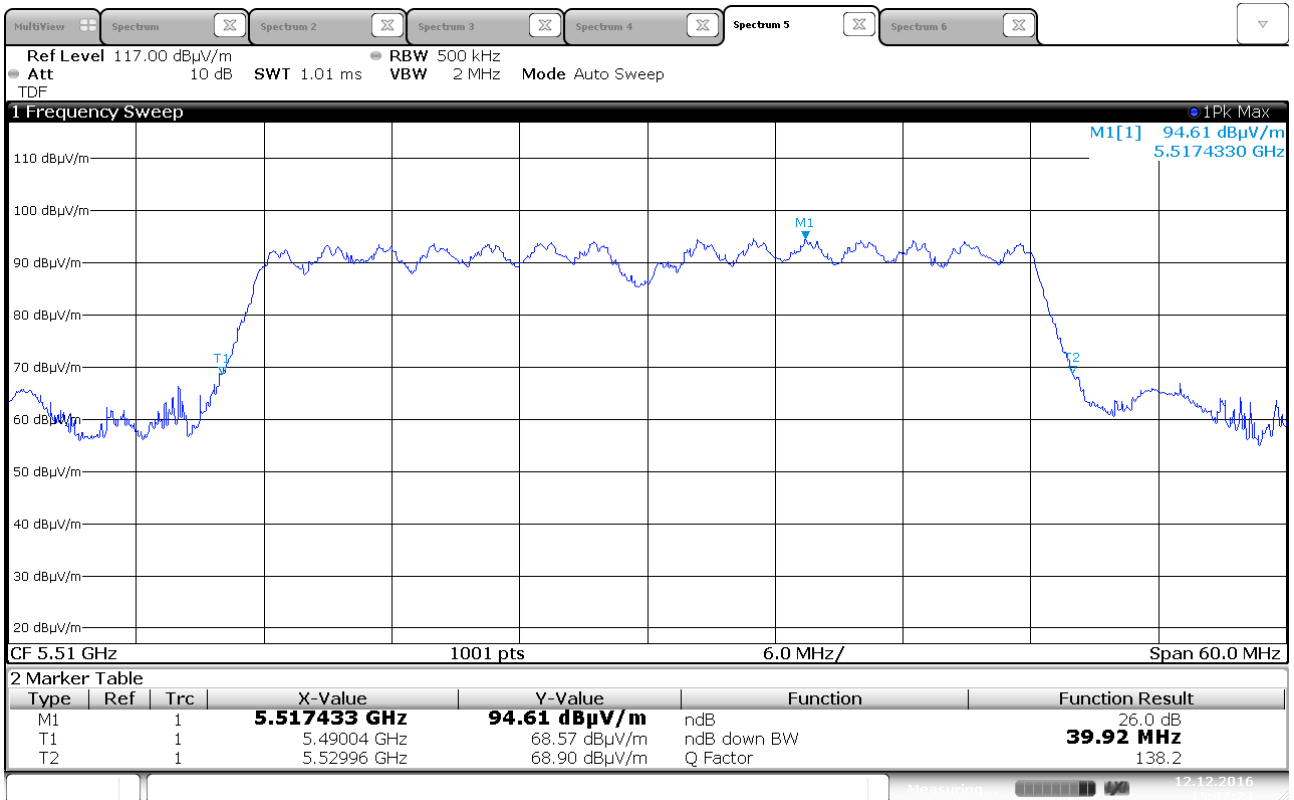


Emission Bandwidth B, 5510 MHz, 802.11n HT40, MIMO

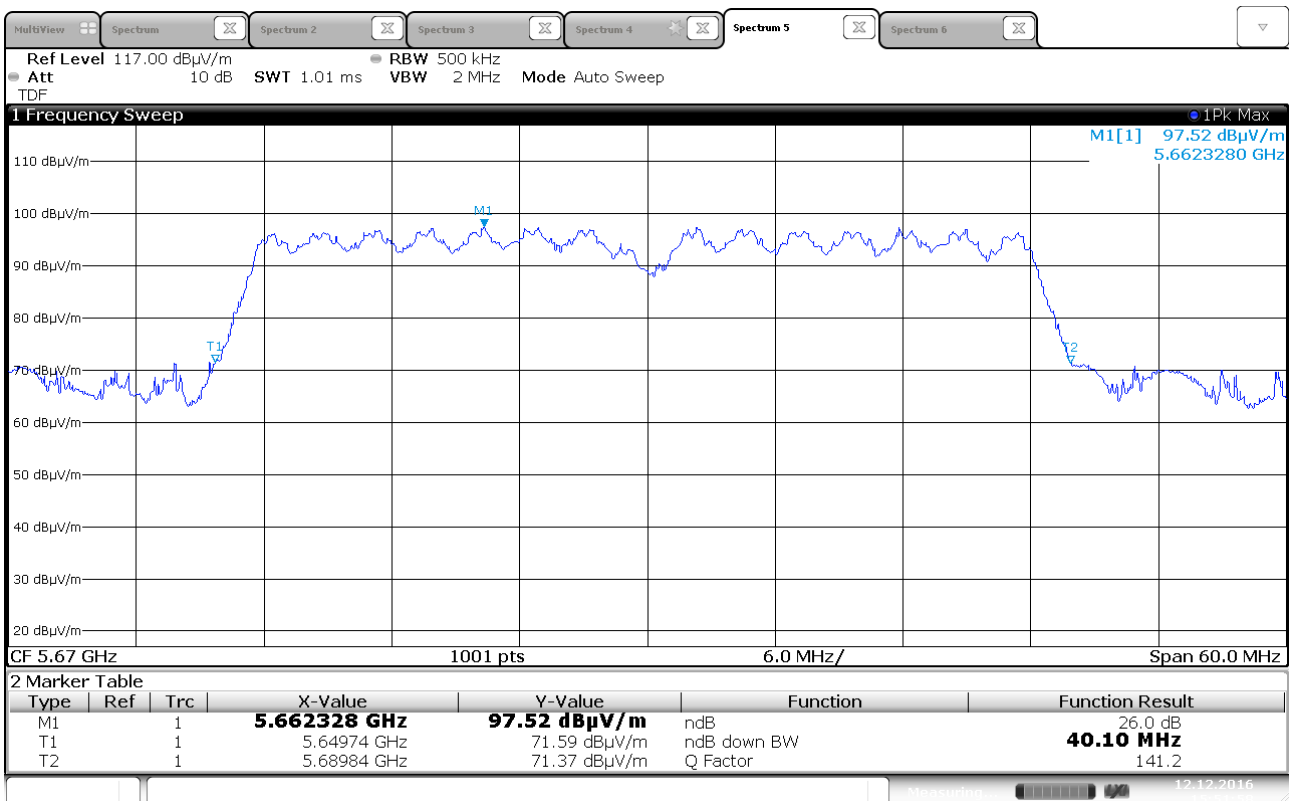


Emission Bandwidth B, 5670 MHz, 802.11n HT40, MIMO

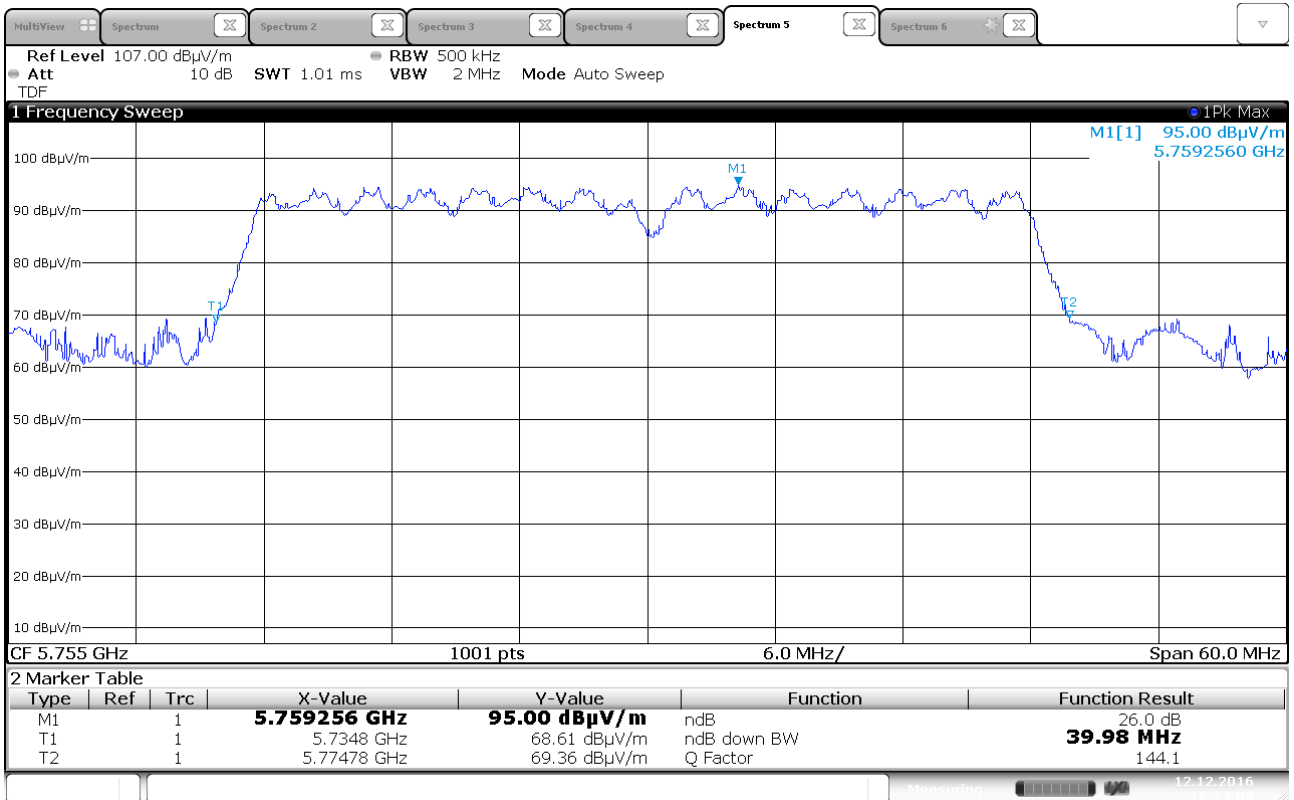


Emission Bandwidth B, 5755 MHz, 802.11n HT40, MIMO

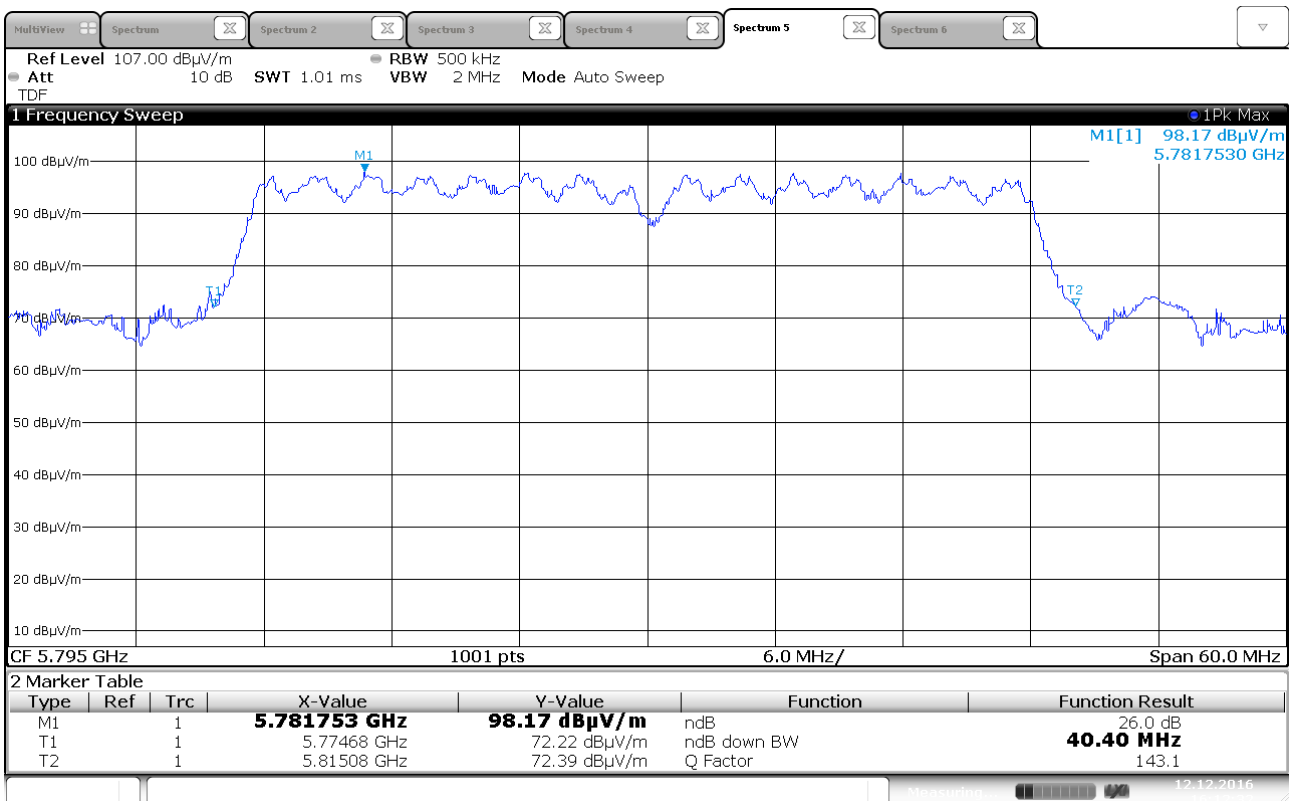


Emission Bandwidth B, 5795 MHz, 802.11n HT40, MIMO

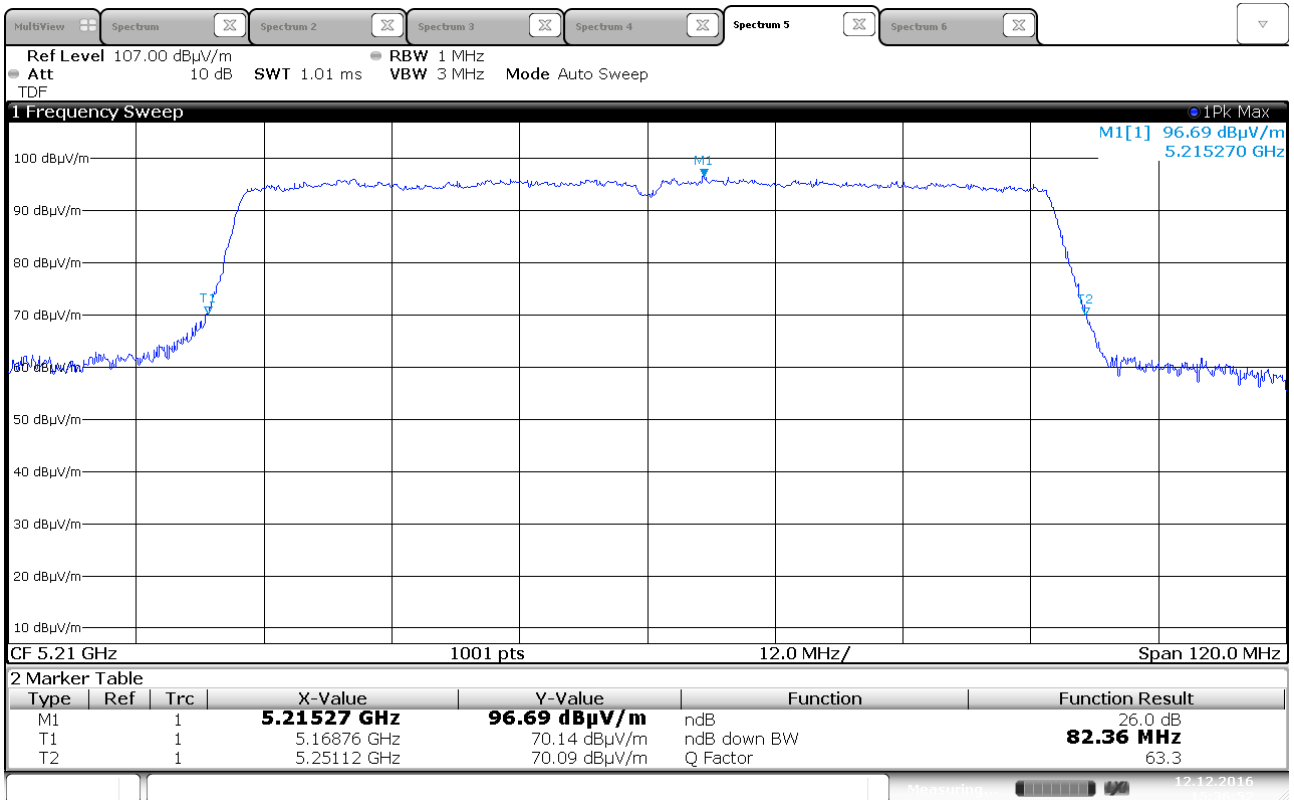


Emission Bandwidth B, 5210 MHz, 802.11n HT80, MIMO

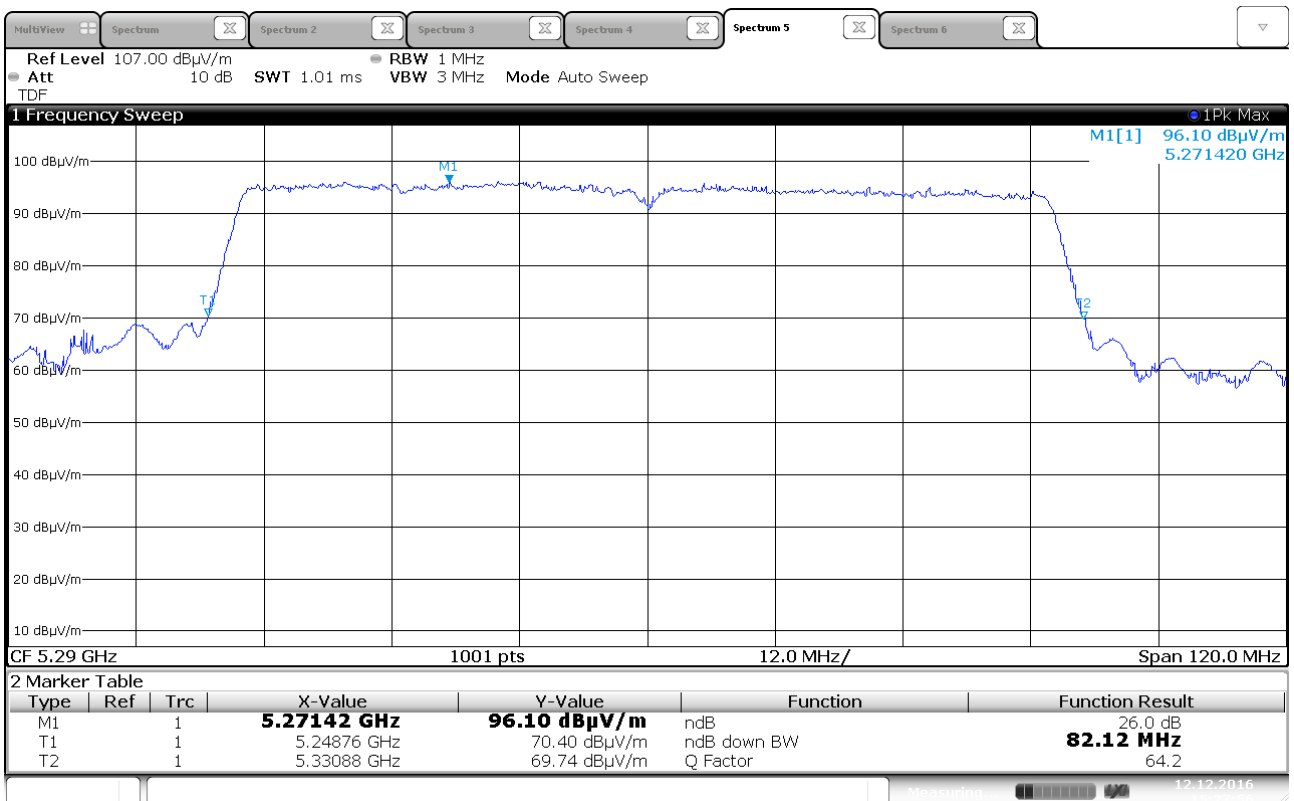

Emission Bandwidth B, 5290 MHz, 802.11n HT80, MIMO

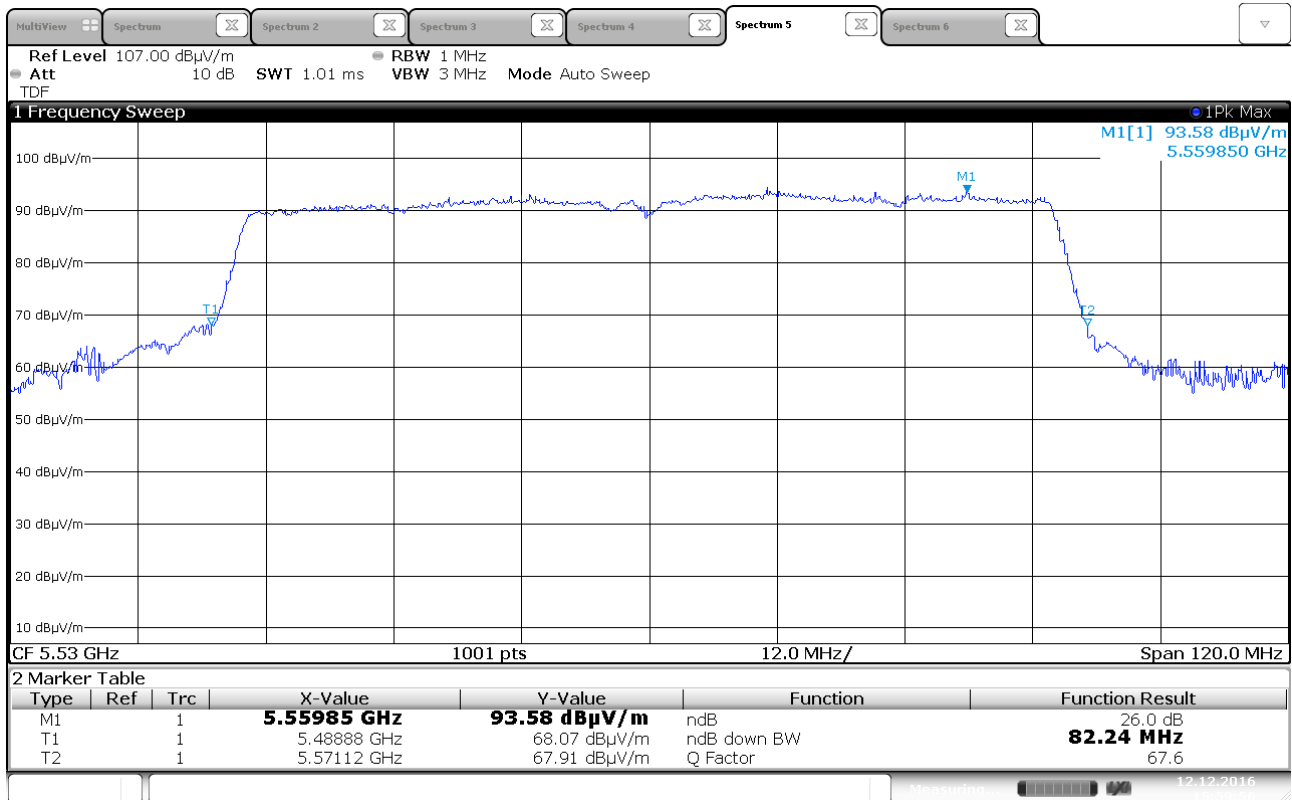

Emission Bandwidth B, 5530 MHz, 802.11n HT80, MIMO

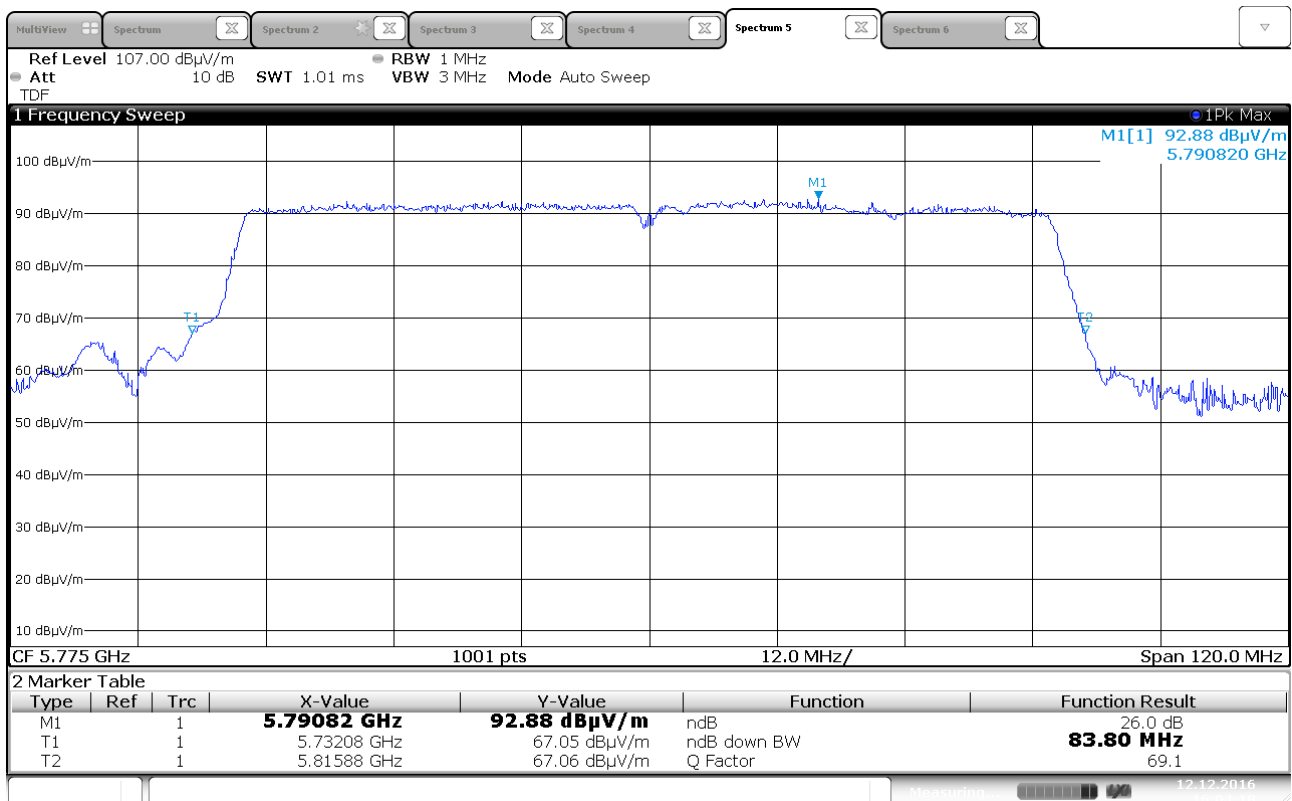

Emission Bandwidth B, 5775 MHz, 802.11n HT80, MIMO

3.4 Peak Power Spectral Density, EIRP

FCC 15.407(a)

ISED RSS-247, Issue 1, Clause 6.2

Test Results: Complies

Measurement Data:

Ch. No.	Nominal Frequency (MHz)	PPSD EIRP (dBm/MHz)			
		802.11a	802.11n HT20	802.11n HT40	802.11n HT80
36	5180	-2.1	-4.1		
40	5200	2.4	1.0		
48	5240	3.9	1.7		
52	5260	4.5	7.8		
60	5300	4.8	8.5		
64	5320	-1.1	0.7		
100	5500	-0.3	0.0		
116	5580	6.9	9.0		
140	5700	-6.3	-4.8		
149	5745	-2.1	-1.8		
157	5785	9.8*	12.4*		
165	5825	-2.6	-2.2		
38	5190			-3.9	
46	5230			1.2	
54	5270			4.7	
62	5310			-3.2	
102	5510			-5.8	
110	5550			7.1	
134	5670			-3.0	
151	5755			-5.6	
159	5795			-2.7	
42	5210				-8.4
58	5290				-8.5
106	5530				-10.6
155	5775				-11.7


* Values are dBm/500kHz

Values in boldface are measured values, all other values are calculated from values in UL report no. 15U21878-E4V2, and corrected for antenna gain.


Power Spectral Density limits:

Frequency Band	Max Conducted Power Spectral Density	
	FCC 15.407(a)	RSS-247, Issue 1
5150 – 5250 MHz	17 dBm/MHz for master device 11 dBm/MHz for mobile/ portable client device	10 dBm/MHz (only indoor allowed)
5250 – 5350 MHz	11 dBm/MHz	The lesser of 30 dBm/MHz or $17 + 10\log_{10}B$ dBm/MHz (B is 99% BW in MHz)
5470 – 5725 MHz	11 dBm/MHz	The lesser of 30 dBm/MHz or $17 + 10\log_{10}B$ dBm/MHz (B is 99% BW in MHz)
5725 – 5825 MHz	30 dBm/500kHz	30 dBm/500kHz


If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

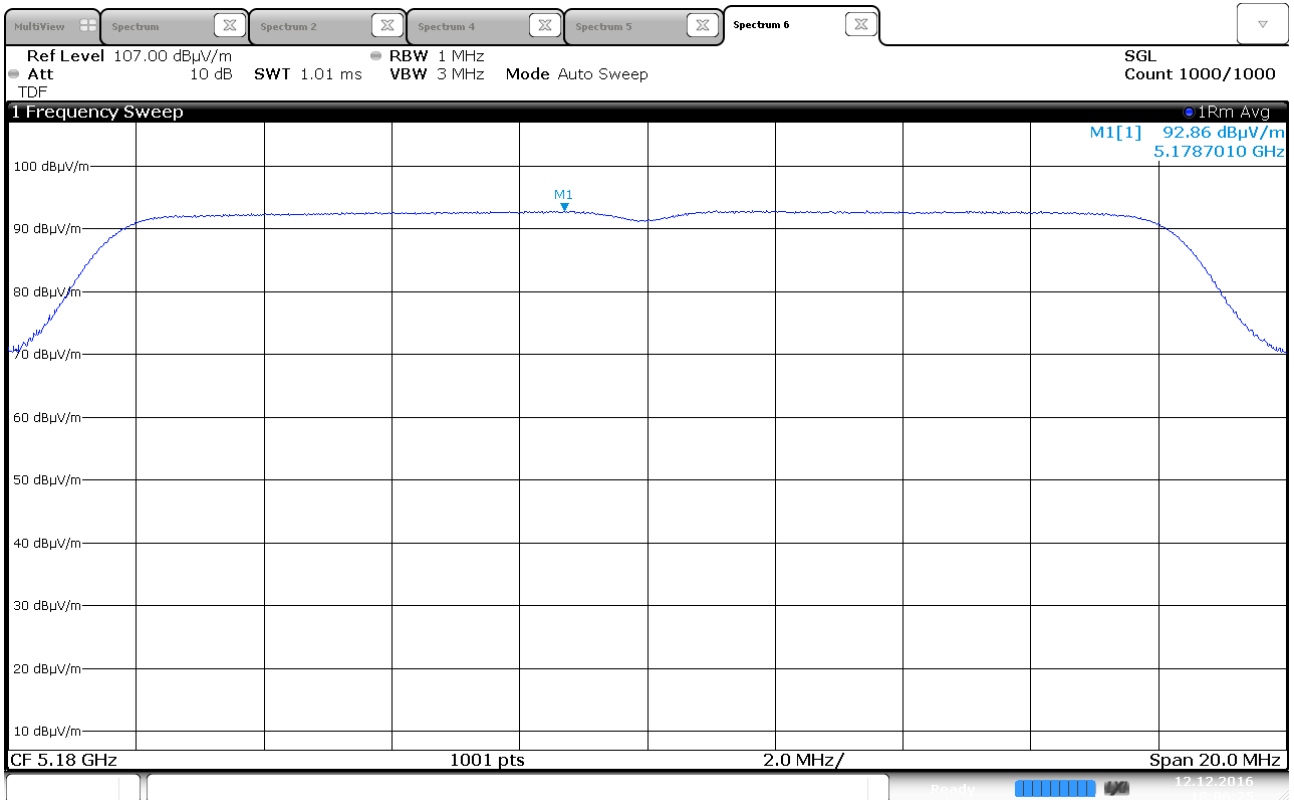


Power Spectral Density, 5180 MHz, 802.11a 6Mbps, Ant 0

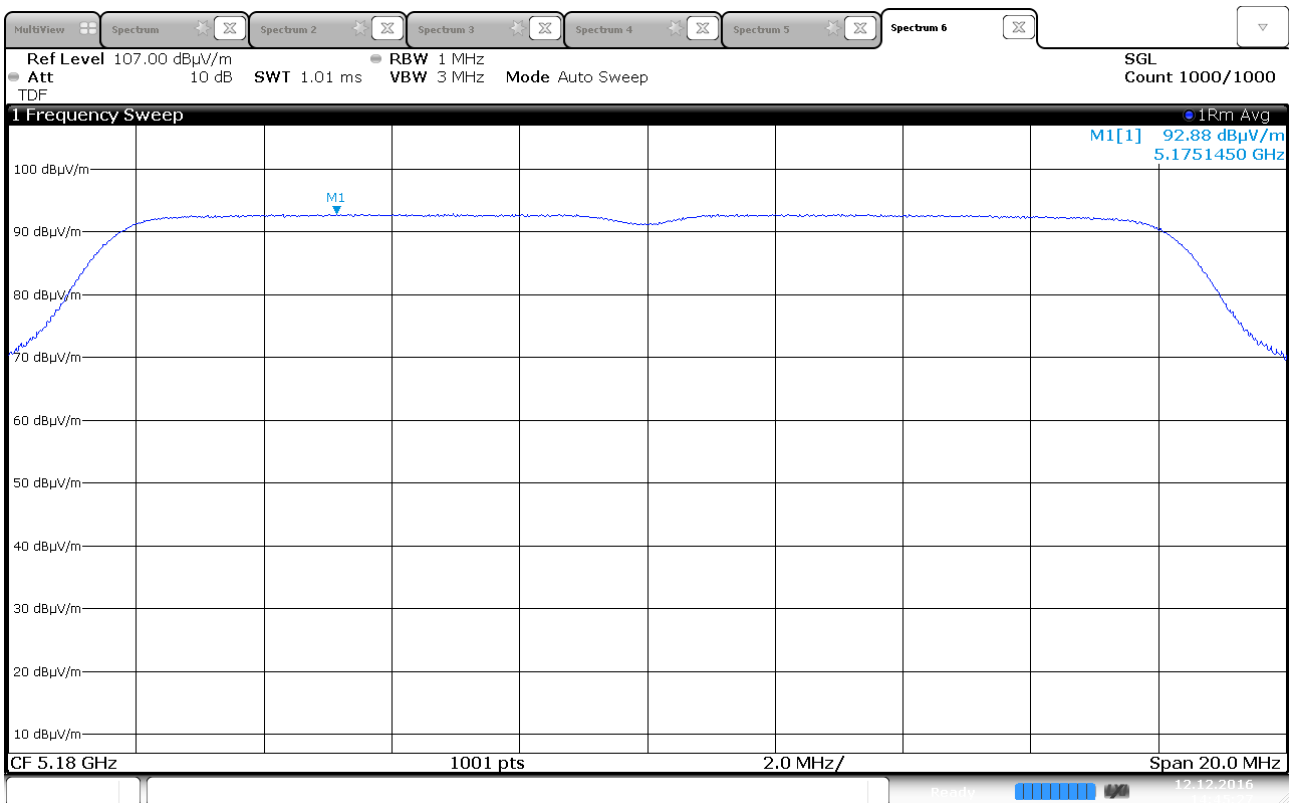


Power Spectral Density, 5180 MHz, 802.11a 6Mbps, Ant 1

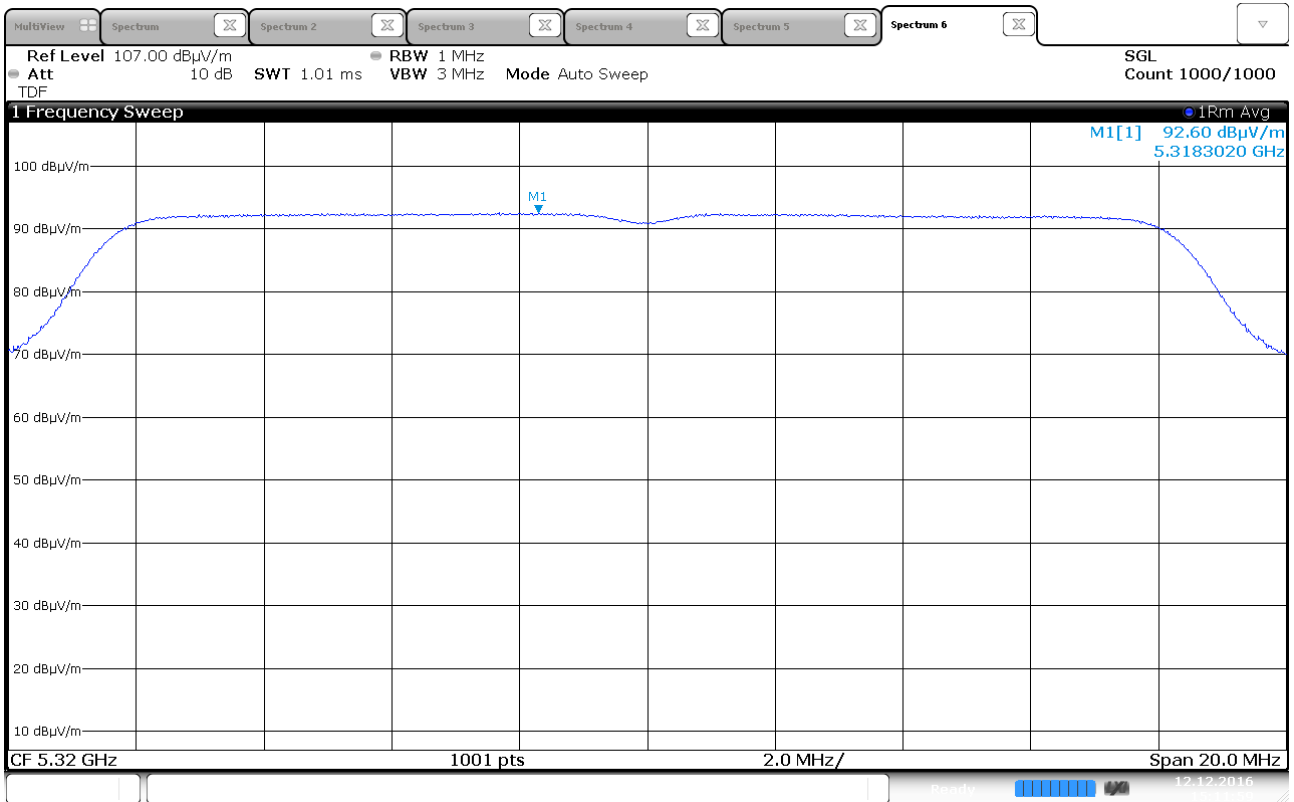


Power Spectral Density, 5320 MHz, 802.11a 6Mbps, Ant 0

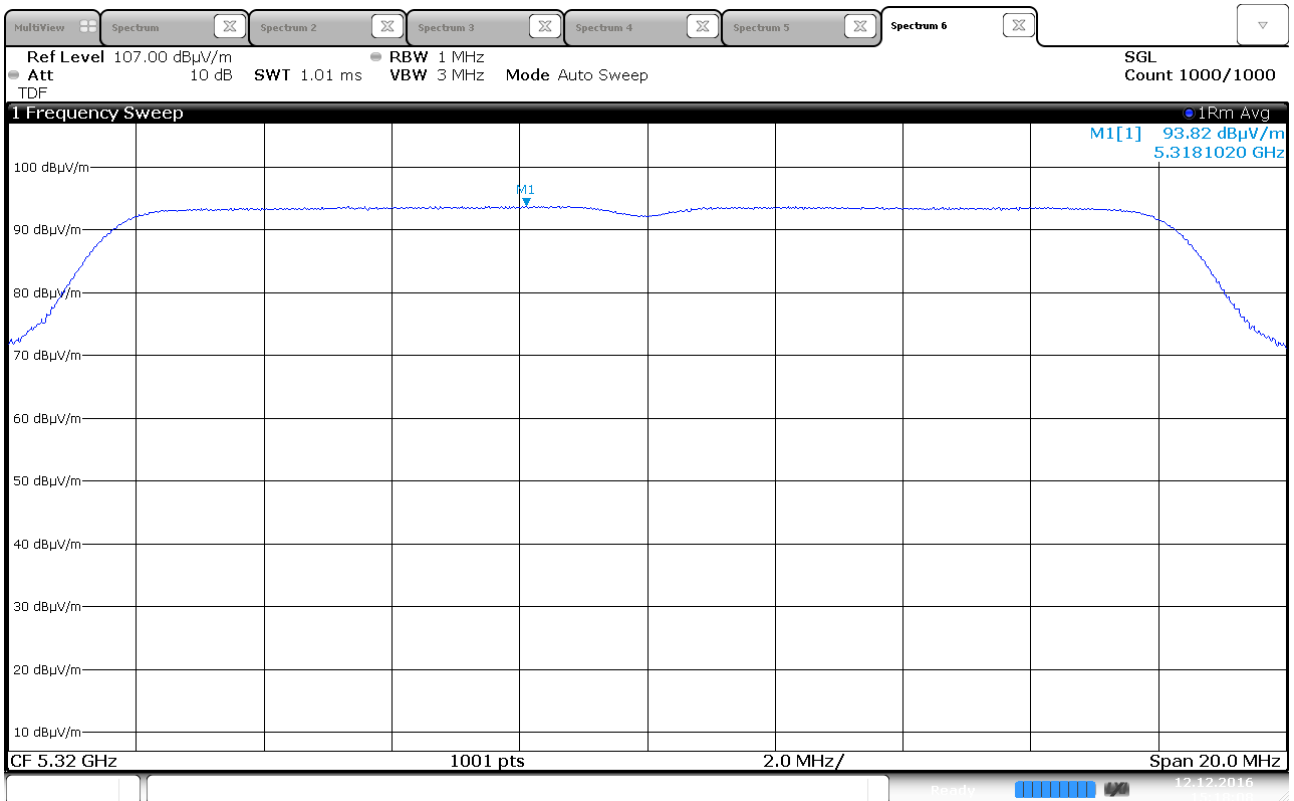


Power Spectral Density, 5320 MHz, 802.11a 6Mbps, Ant 1

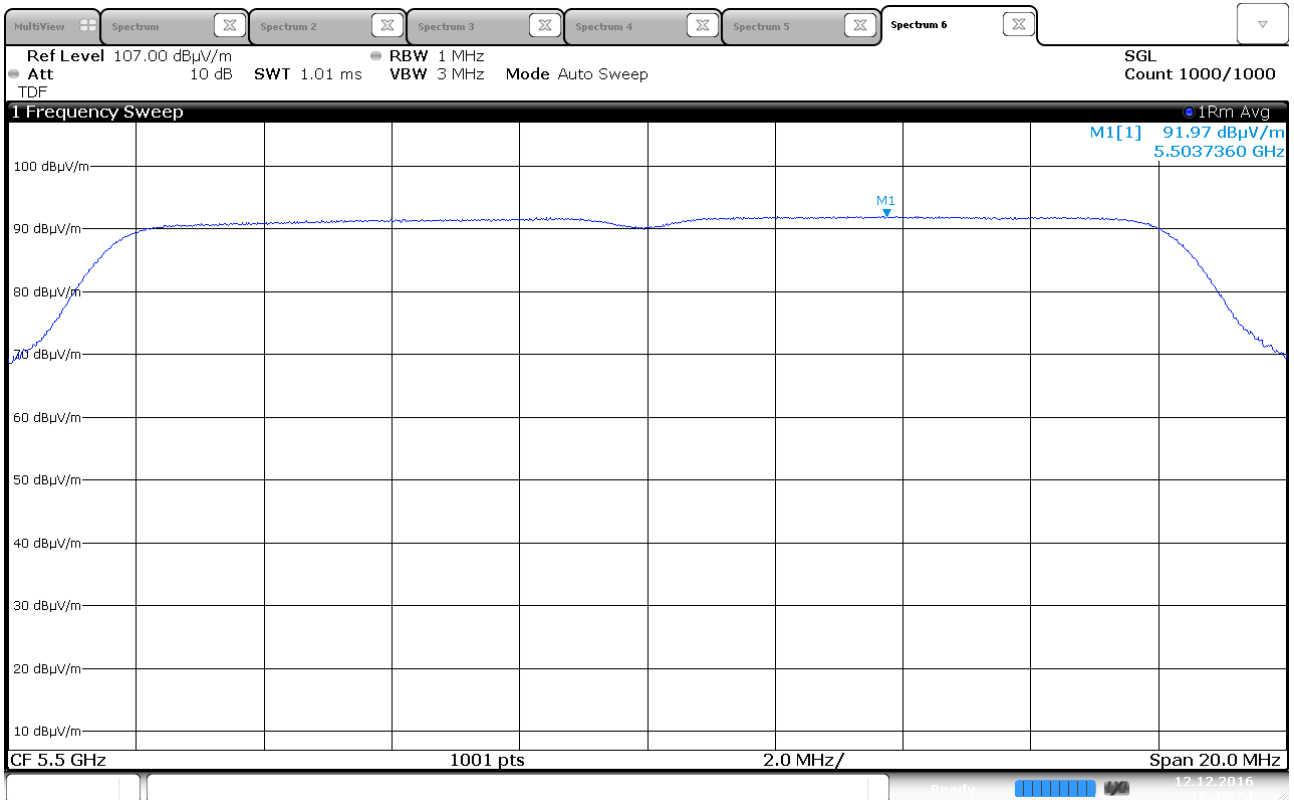


Power Spectral Density, 5500 MHz, 802.11a 6Mbps, Ant 0

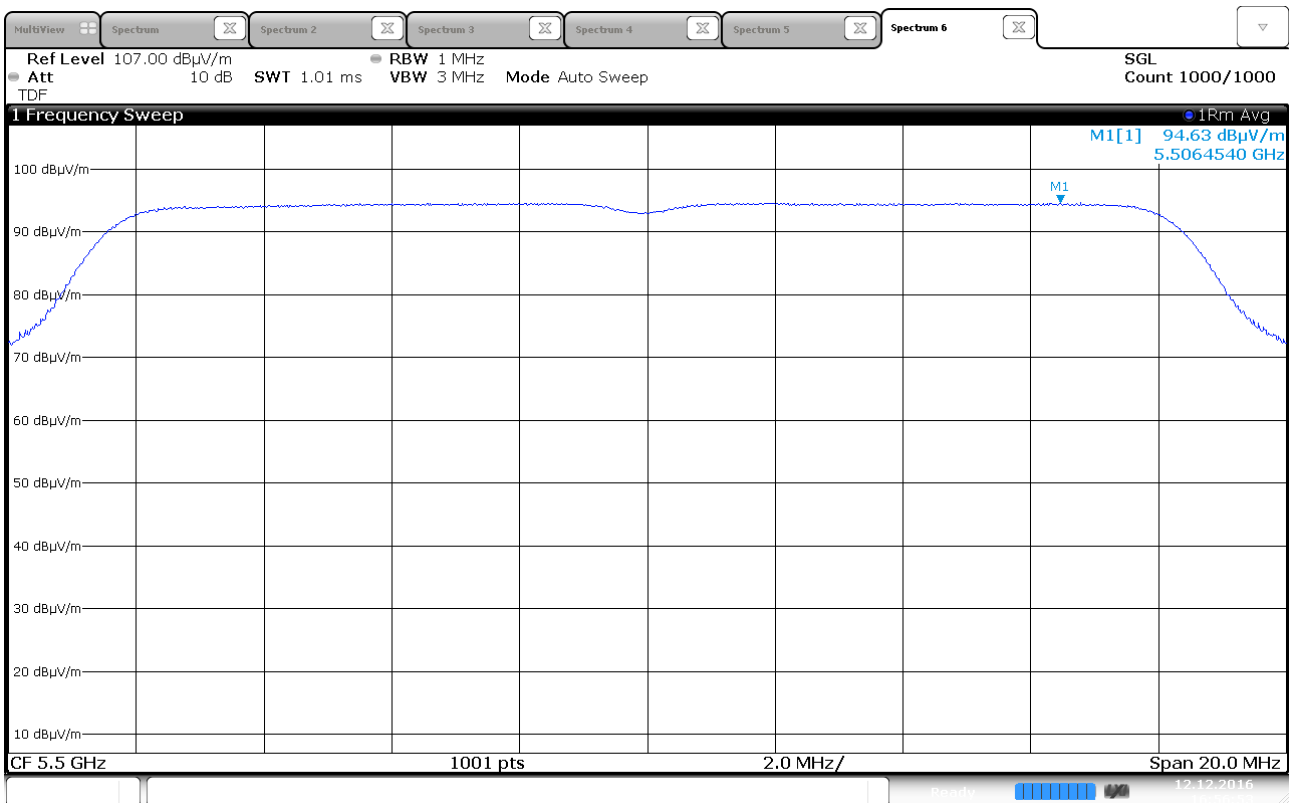


Power Spectral Density, 5500 MHz, 802.11a 6Mbps, Ant 1

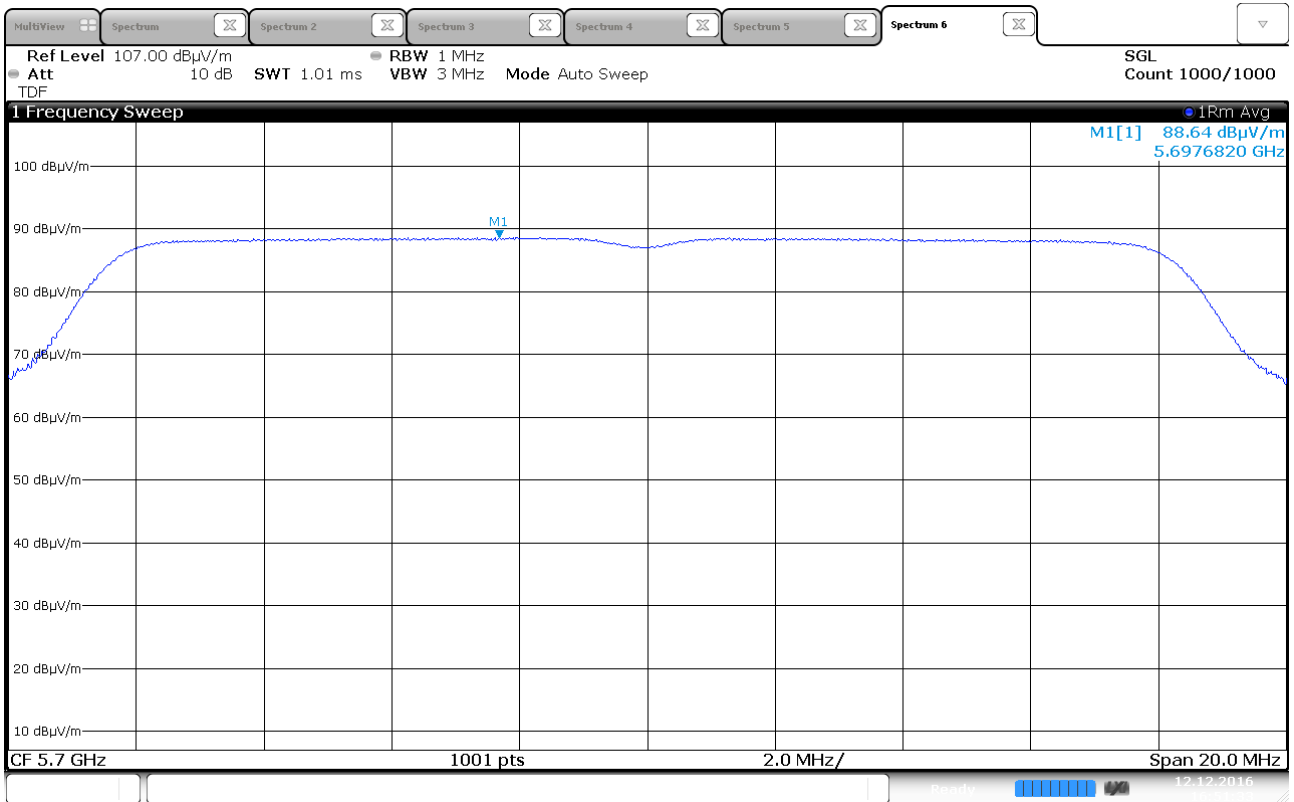


Power Spectral Density, 5700 MHz, 802.11a 6Mbps, Ant 0

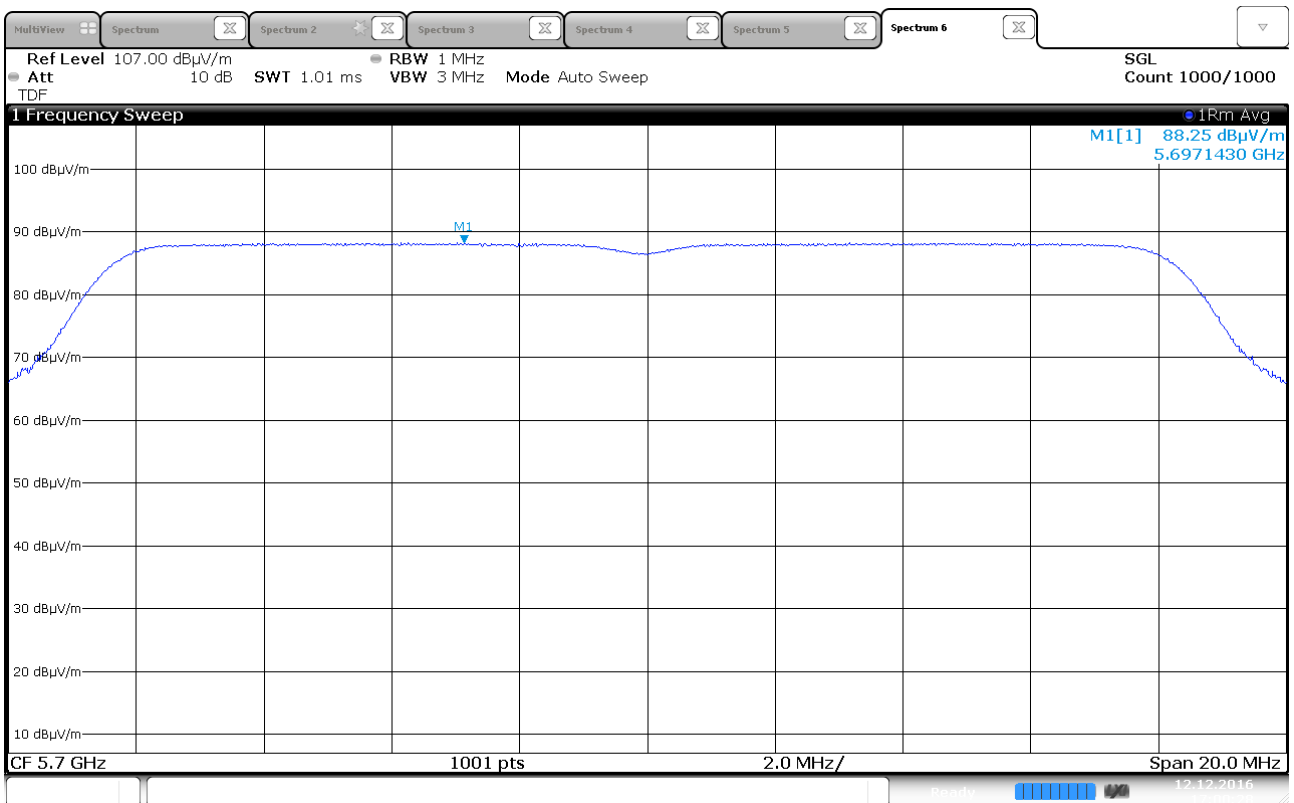


Power Spectral Density, 5700 MHz, 802.11a 6Mbps, Ant 1

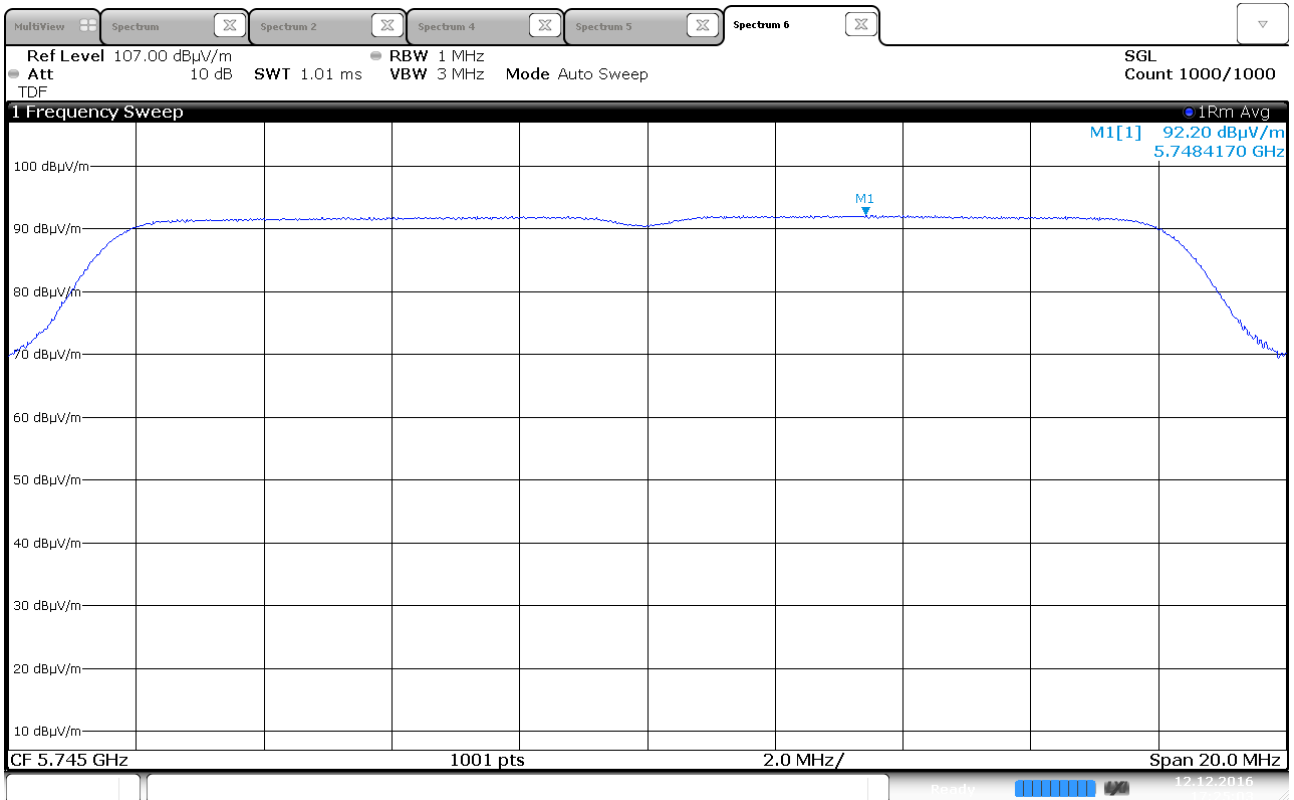


Power Spectral Density, 5745 MHz, 802.11a 6Mbps, Ant 0

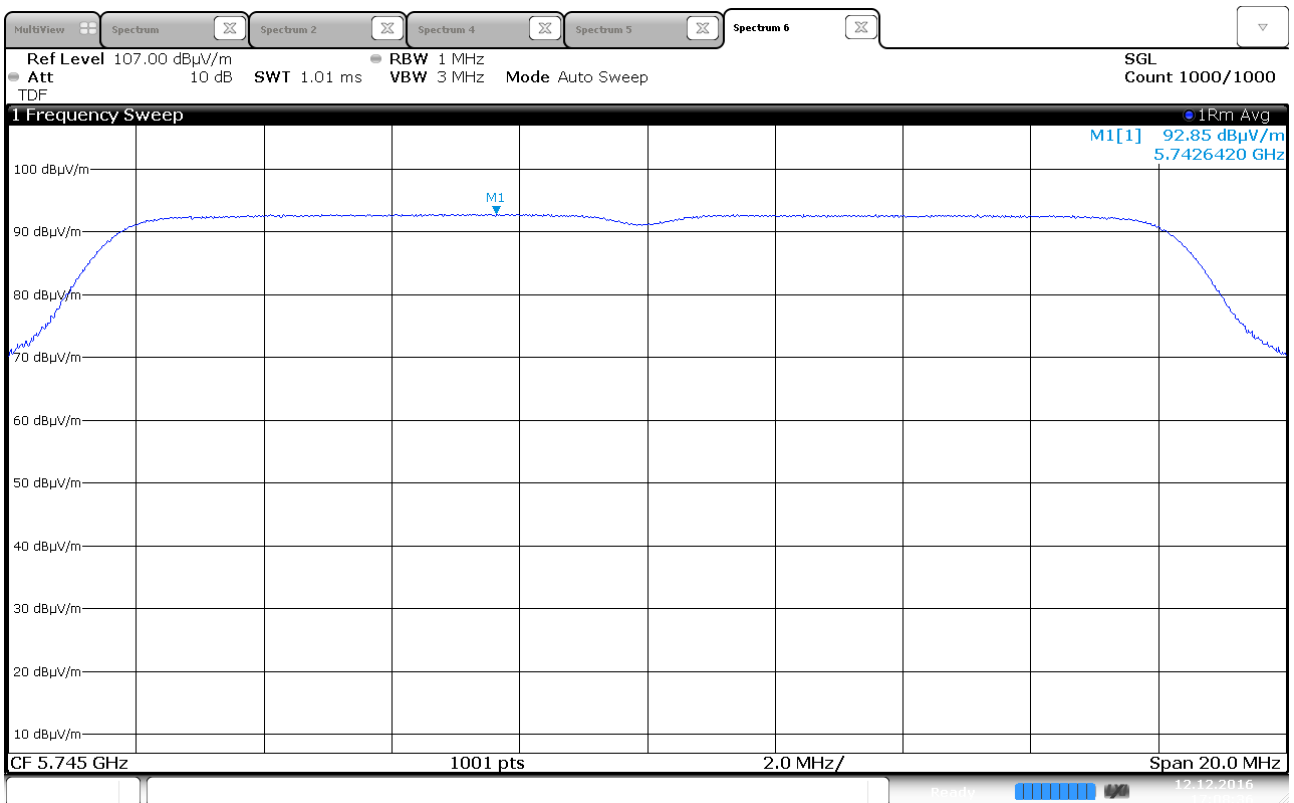


Power Spectral Density, 5745 MHz, 802.11a 6Mbps, Ant 1

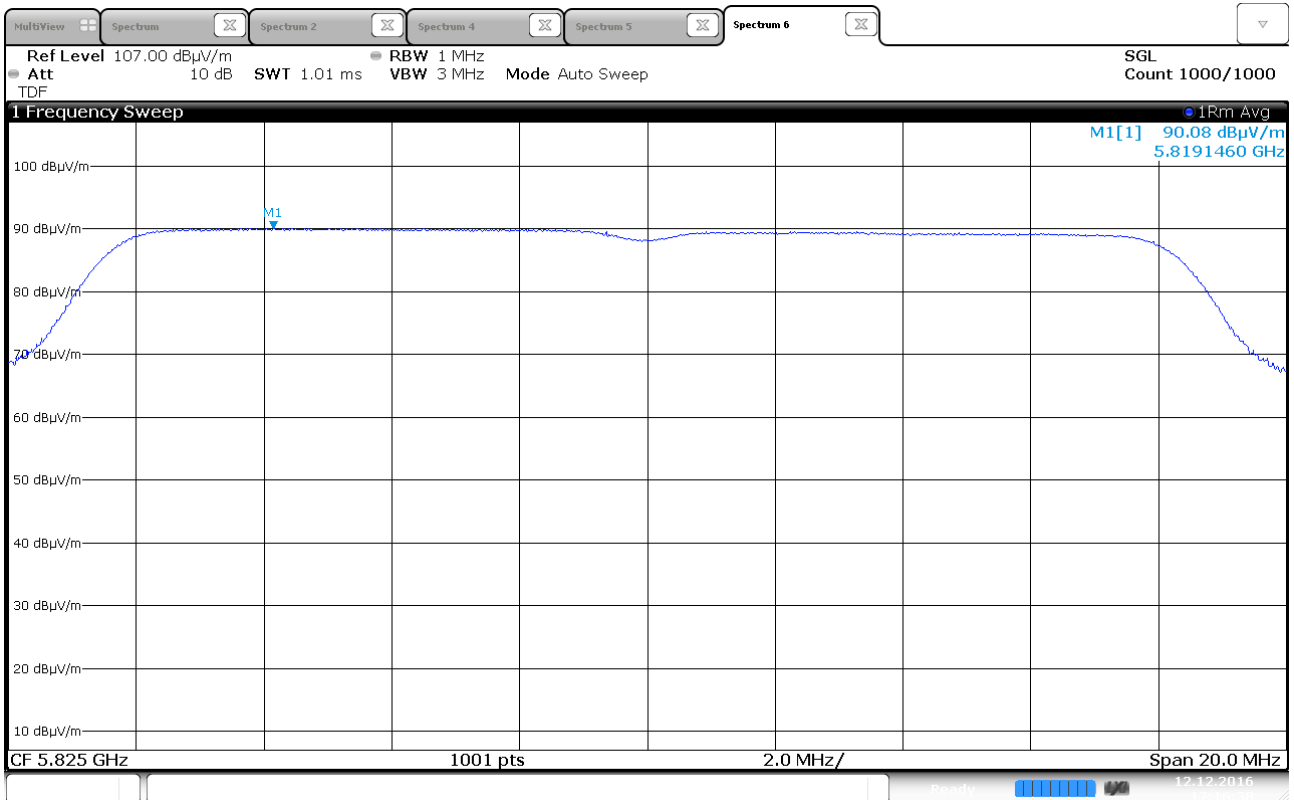


Power Spectral Density, 5825 MHz, 802.11a 6Mbps, Ant 0

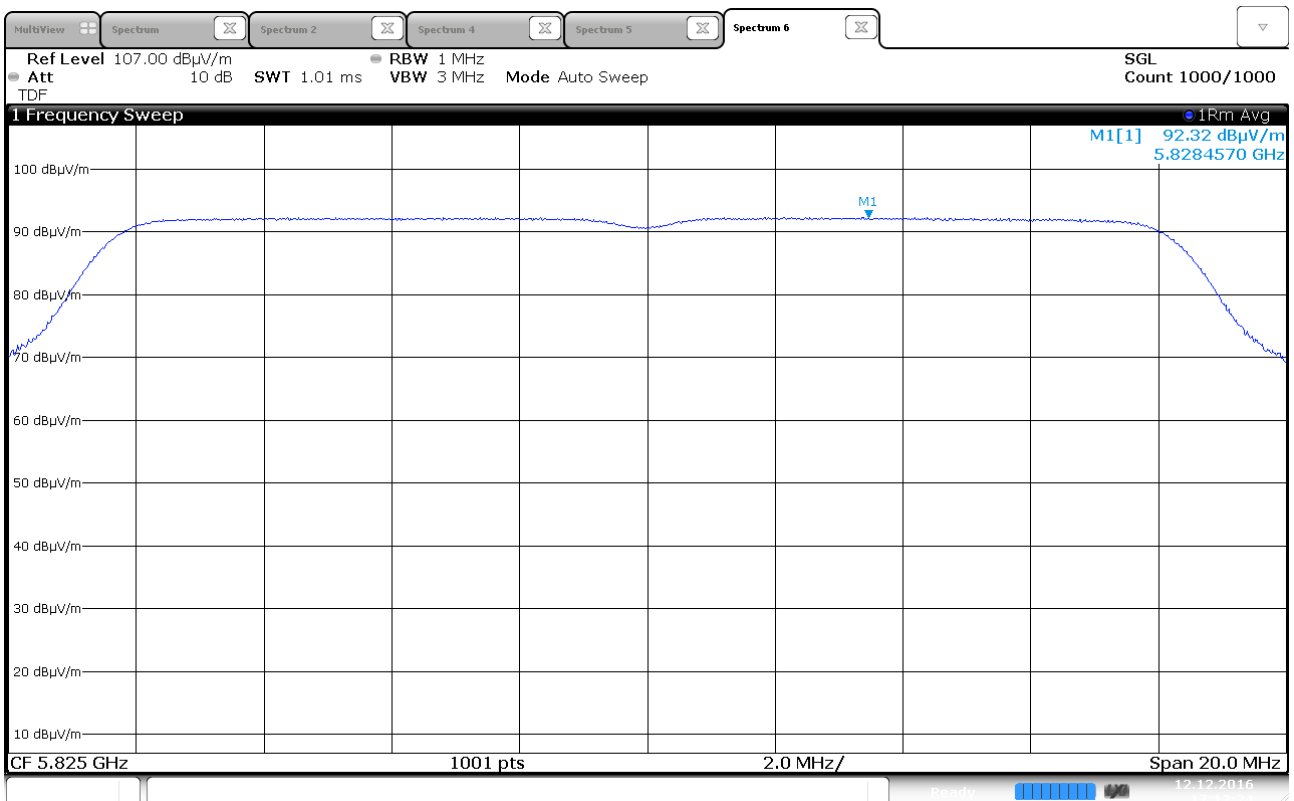


Power Spectral Density, 5825 MHz, 802.11a 6Mbps, Ant 1

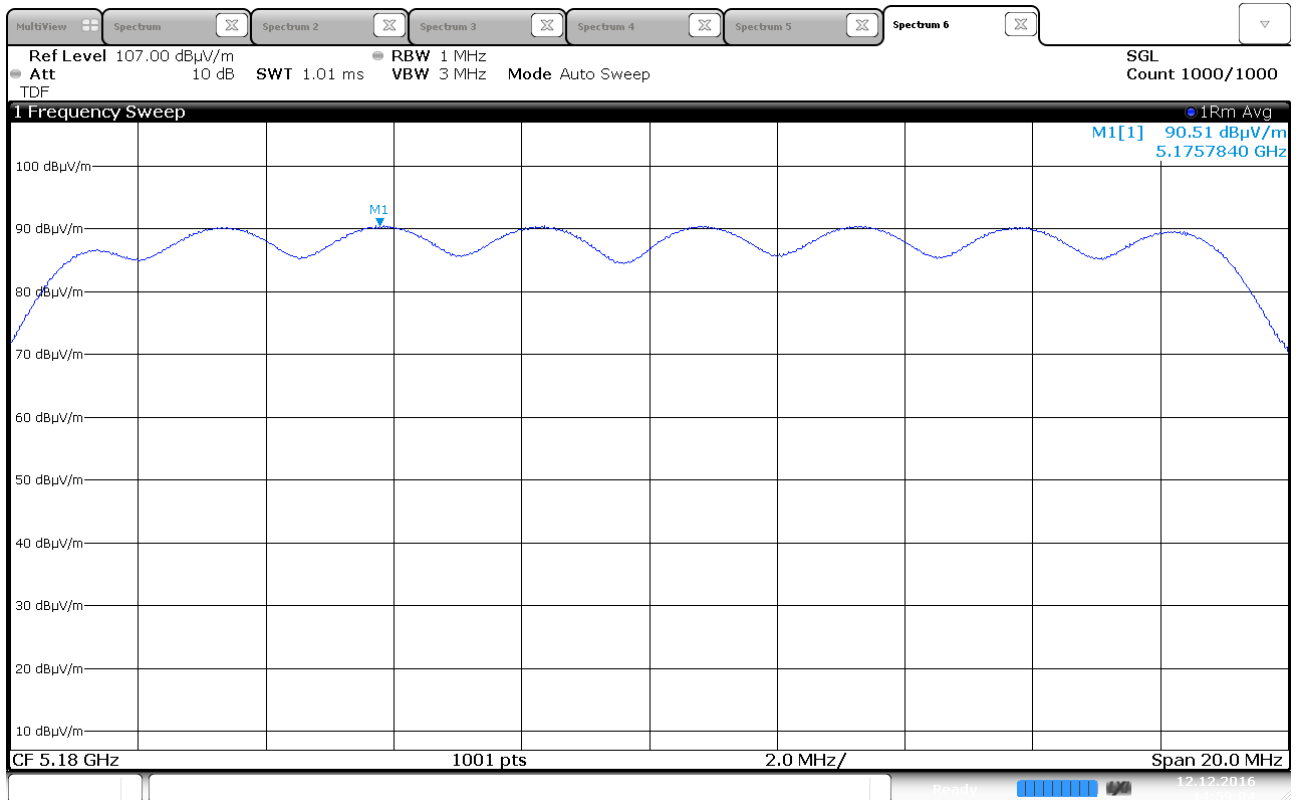


Power Spectral Density, 5180 MHz, 802.11n HT20, MIMO

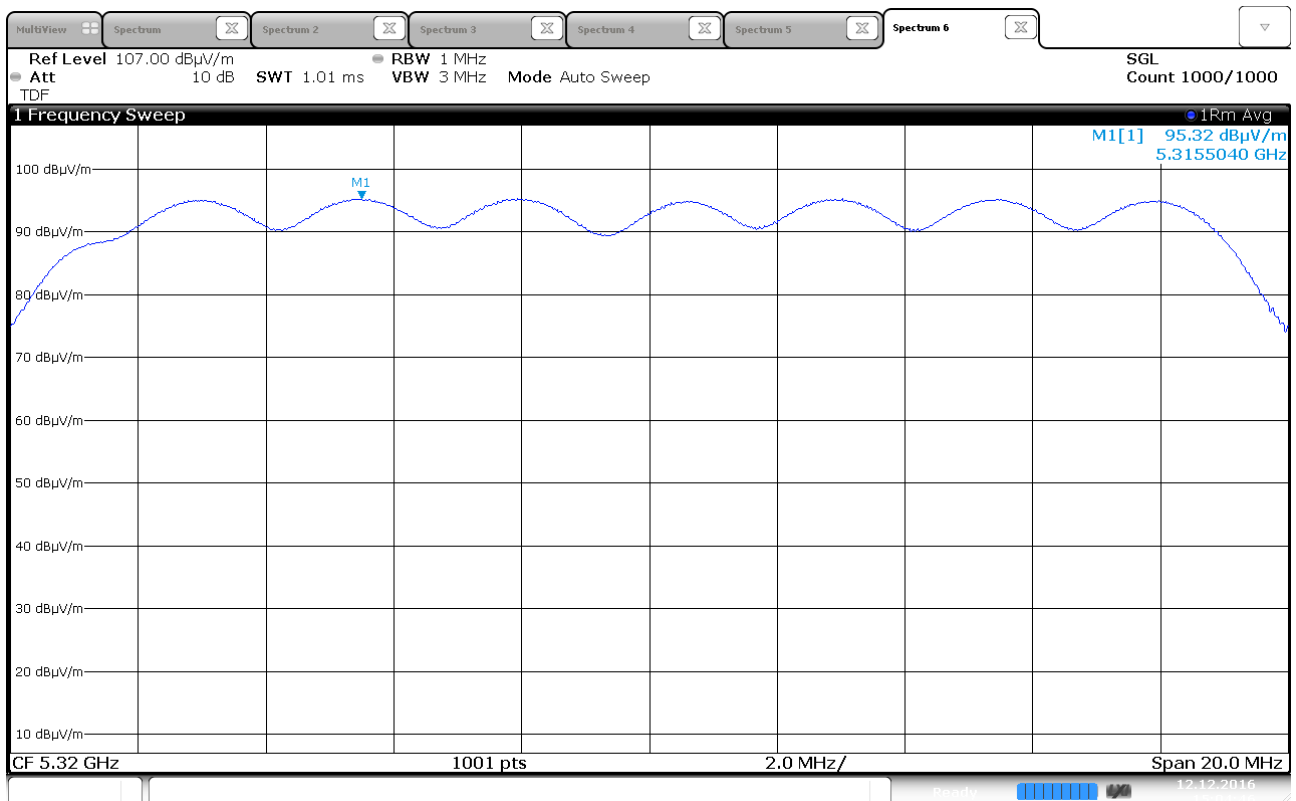


Power Spectral Density, 5320 MHz, 802.11n HT20, MIMO

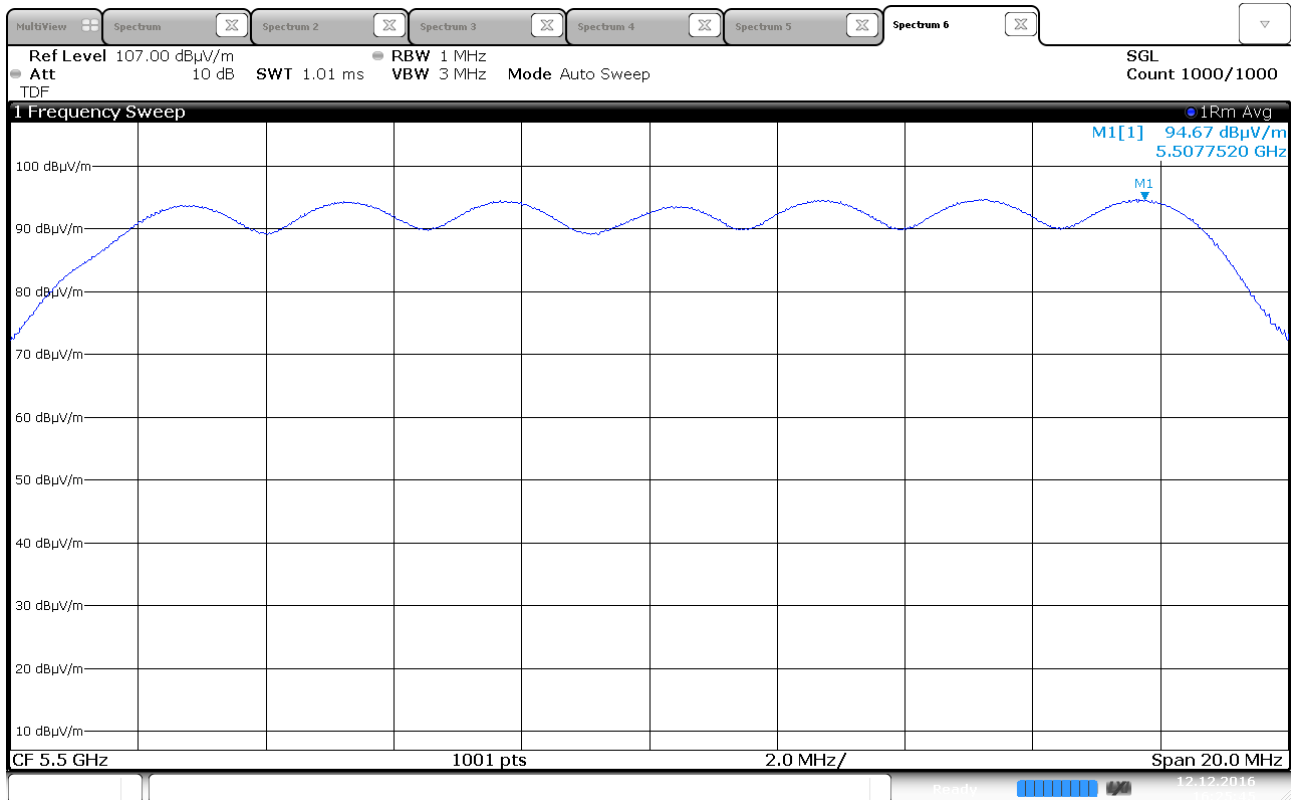


Power Spectral Density, 5500 MHz, 802.11n HT20, MIMO

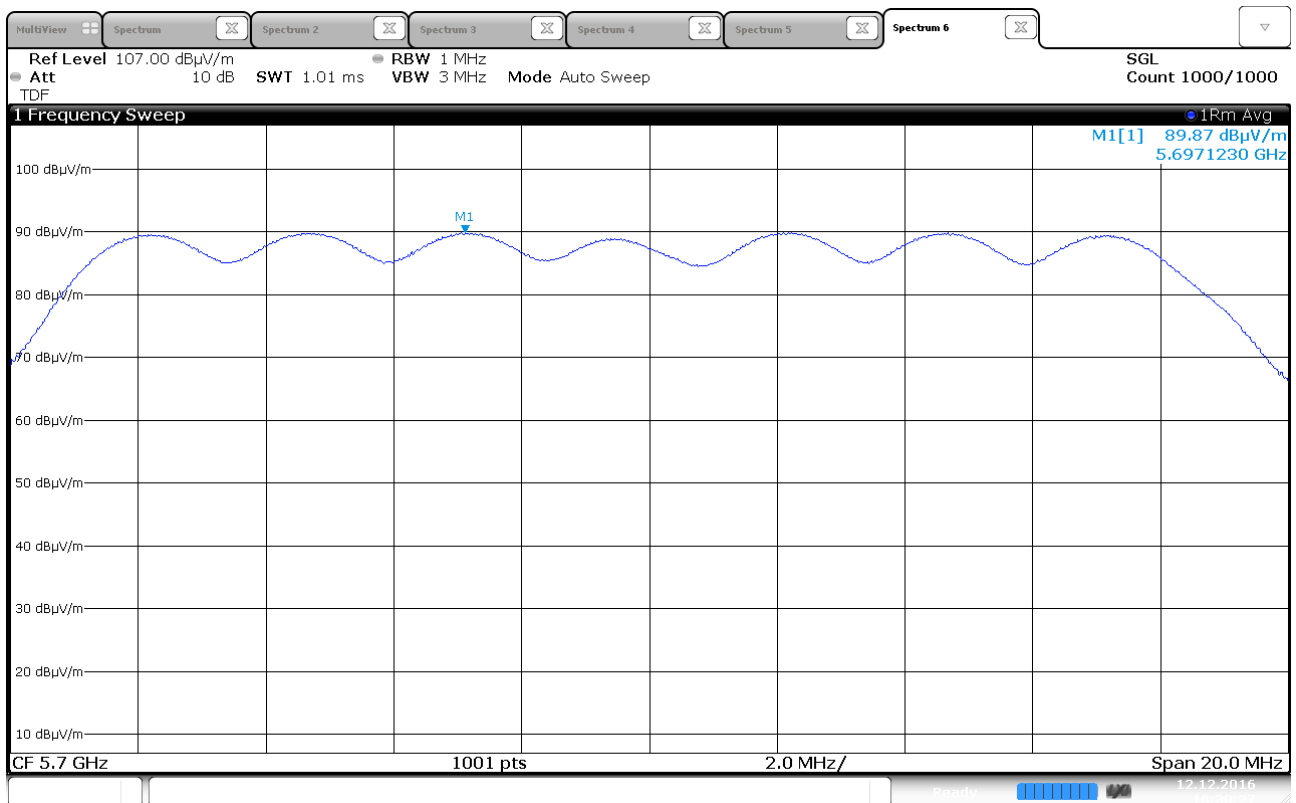


Power Spectral Density, 5700 MHz, 802.11n HT20, MIMO

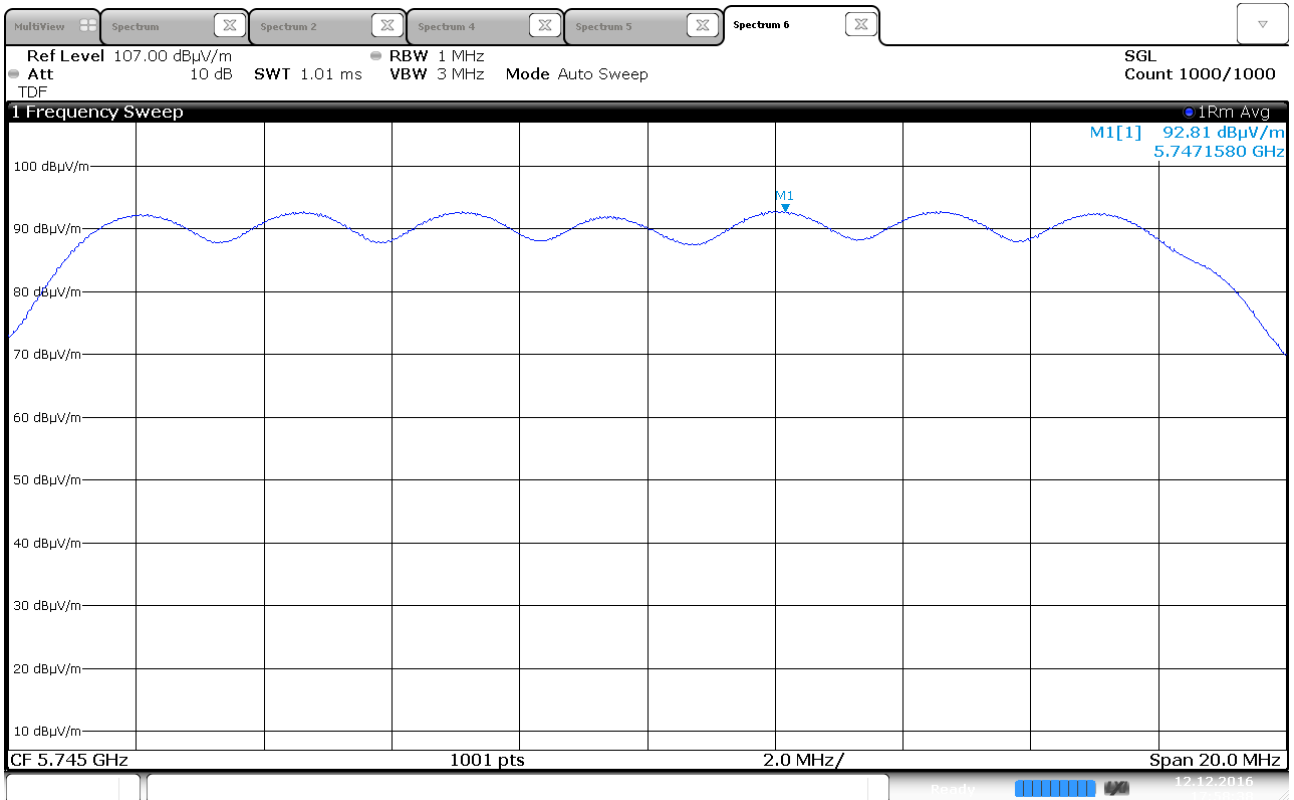


Power Spectral Density, 5745 MHz, 802.11n HT20, MIMO

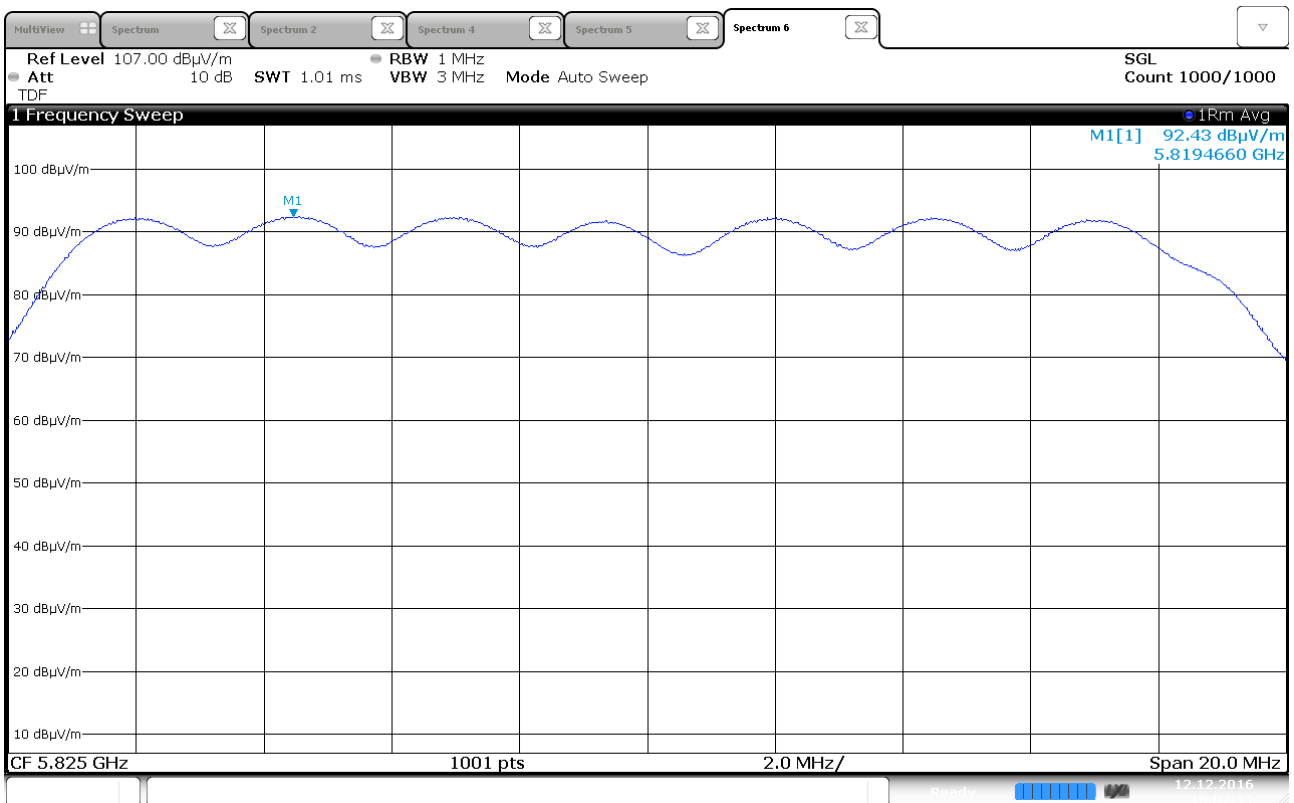


Power Spectral Density, 5825 MHz, 802.11n HT20, MIMO

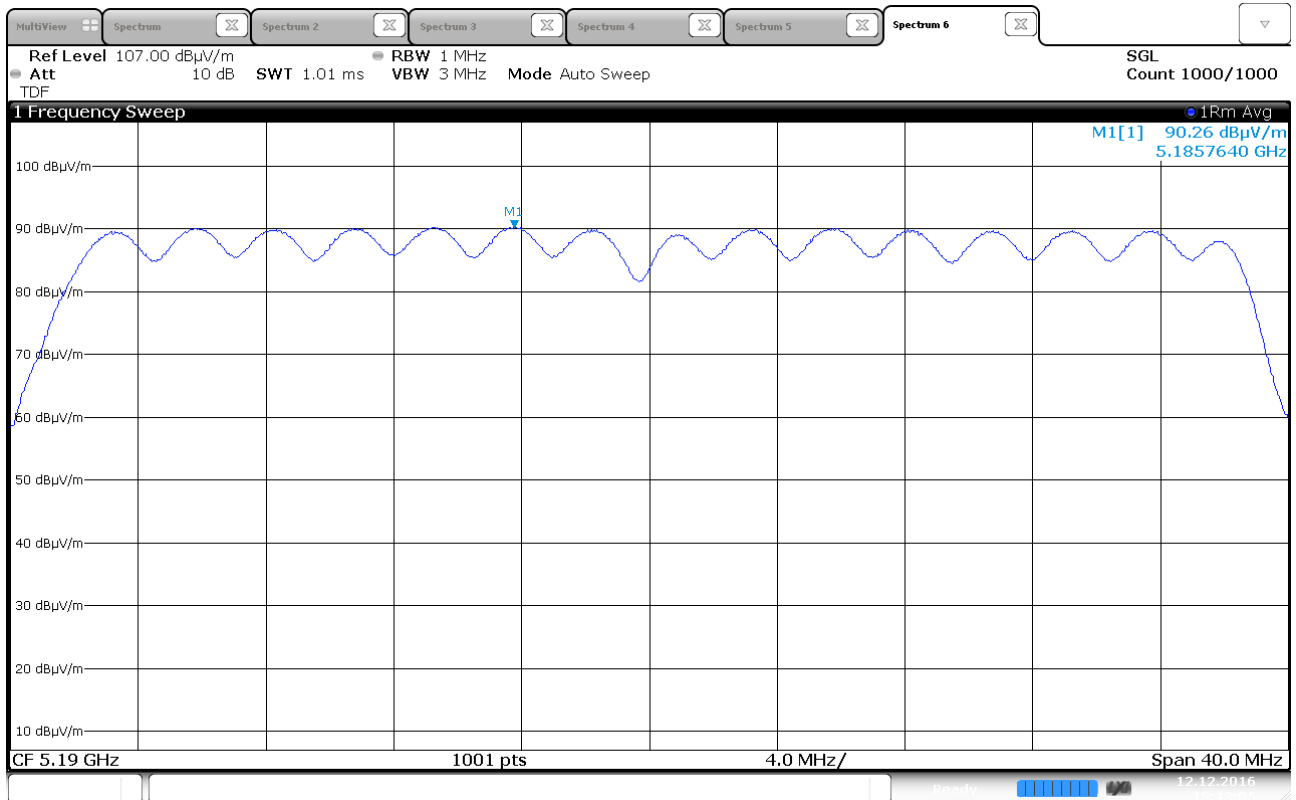


Power Spectral Density, 5190 MHz, 802.11n HT40, MIMO

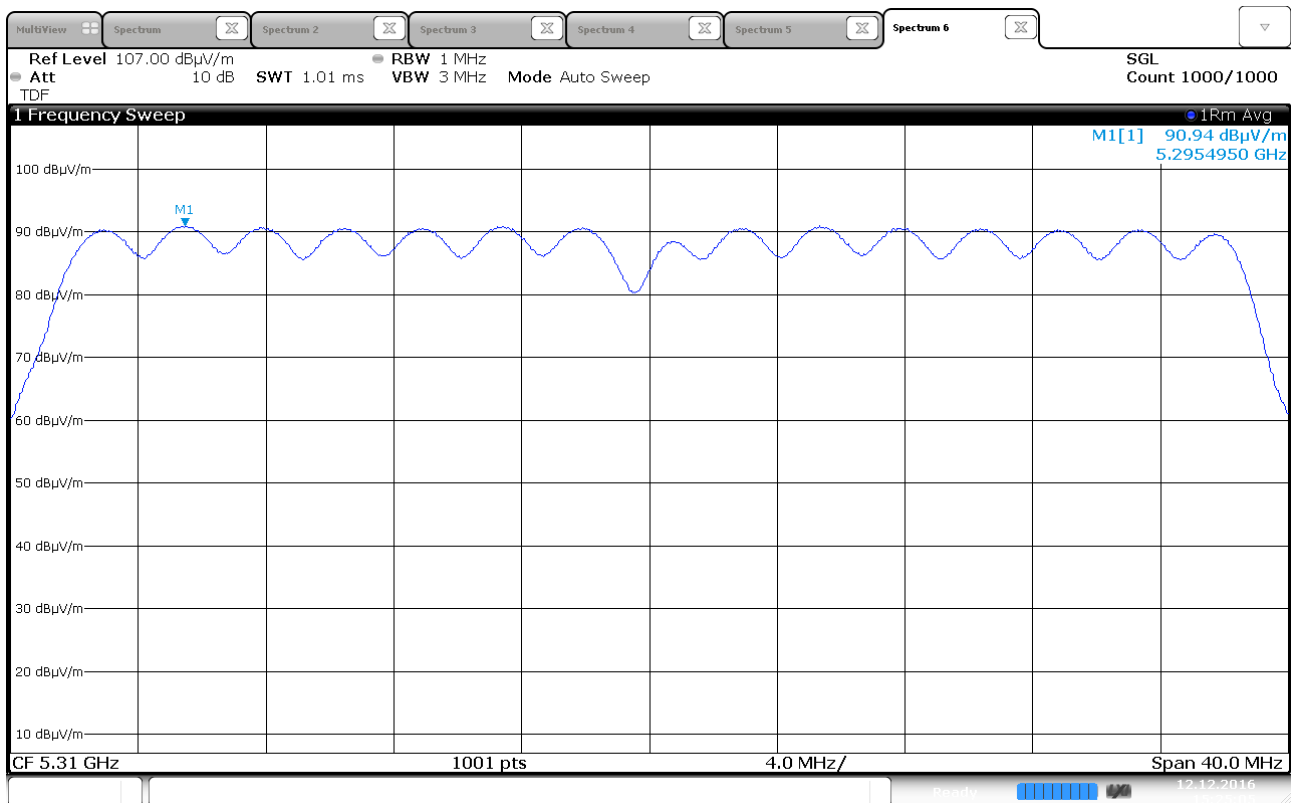


Power Spectral Density, 5310 MHz, 802.11n HT40, MIMO

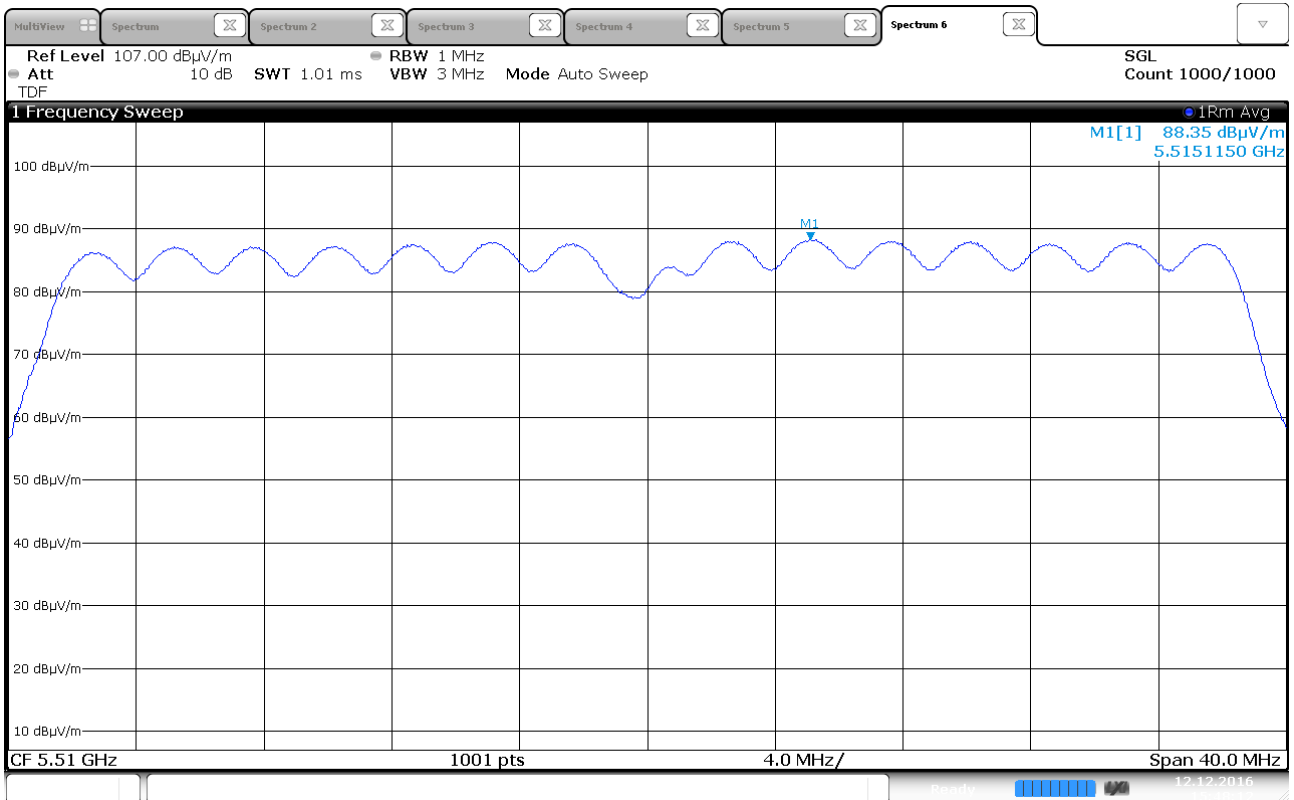


Power Spectral Density, 5510 MHz, 802.11n HT40, MIMO

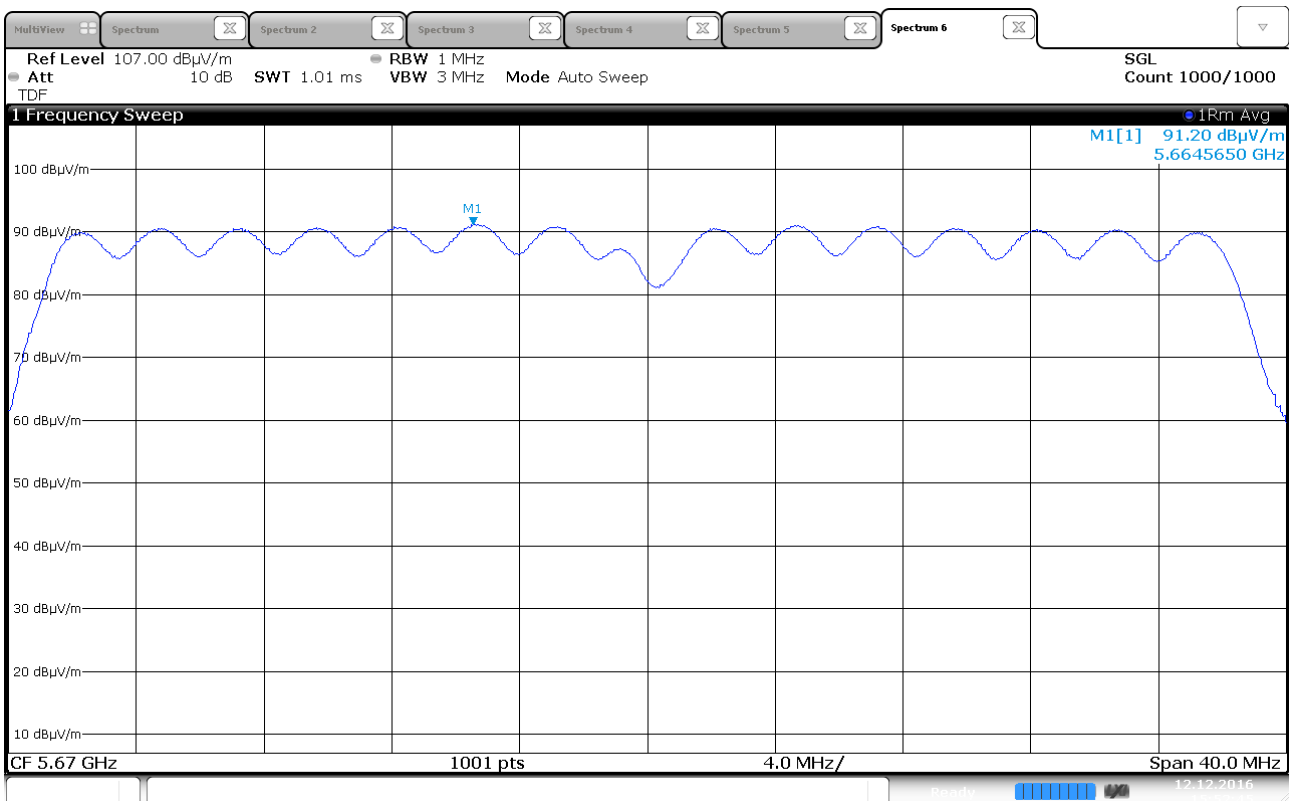


Power Spectral Density, 5670 MHz, 802.11n HT40, MIMO

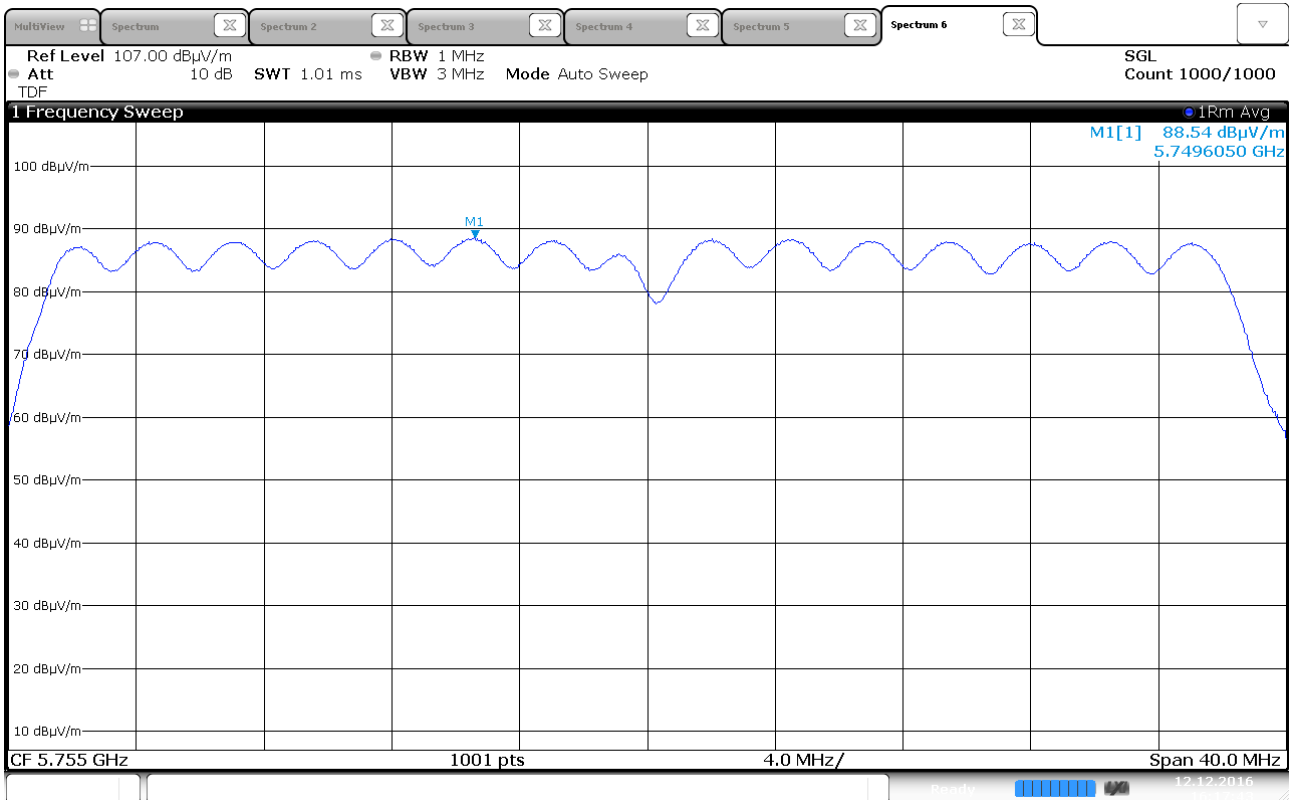


Power Spectral Density, 5755 MHz, 802.11n HT40, MIMO

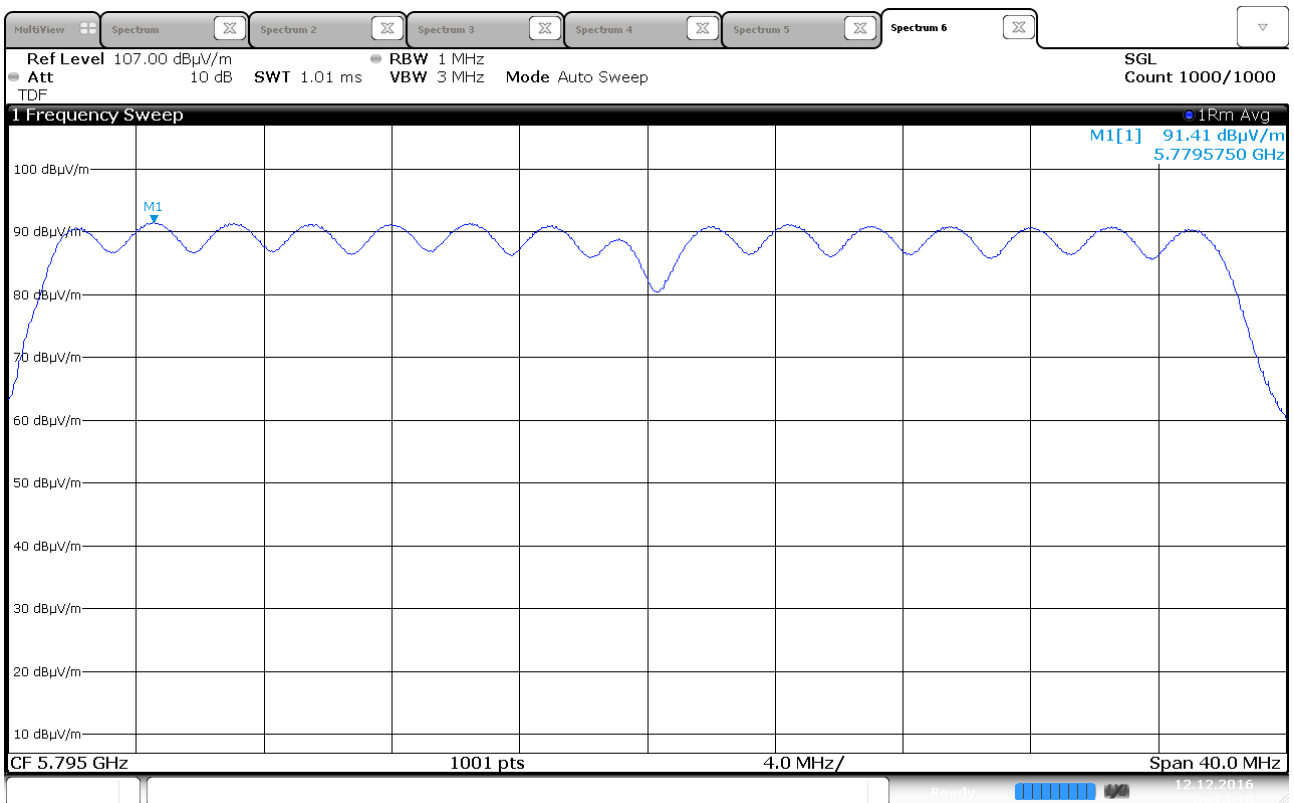


Power Spectral Density, 5795 MHz, 802.11n HT40, MIMO

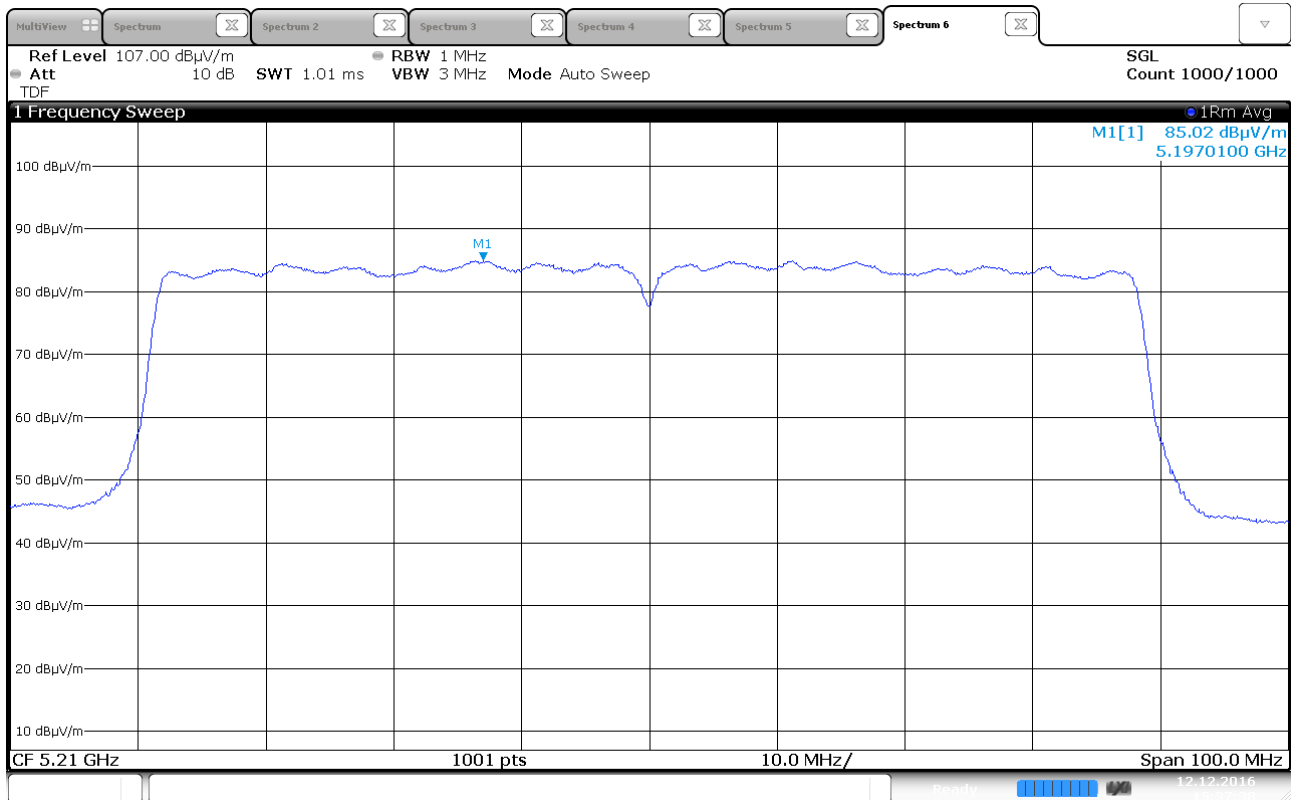


Power Spectral Density, 5210 MHz, 802.11n HT80, MIMO

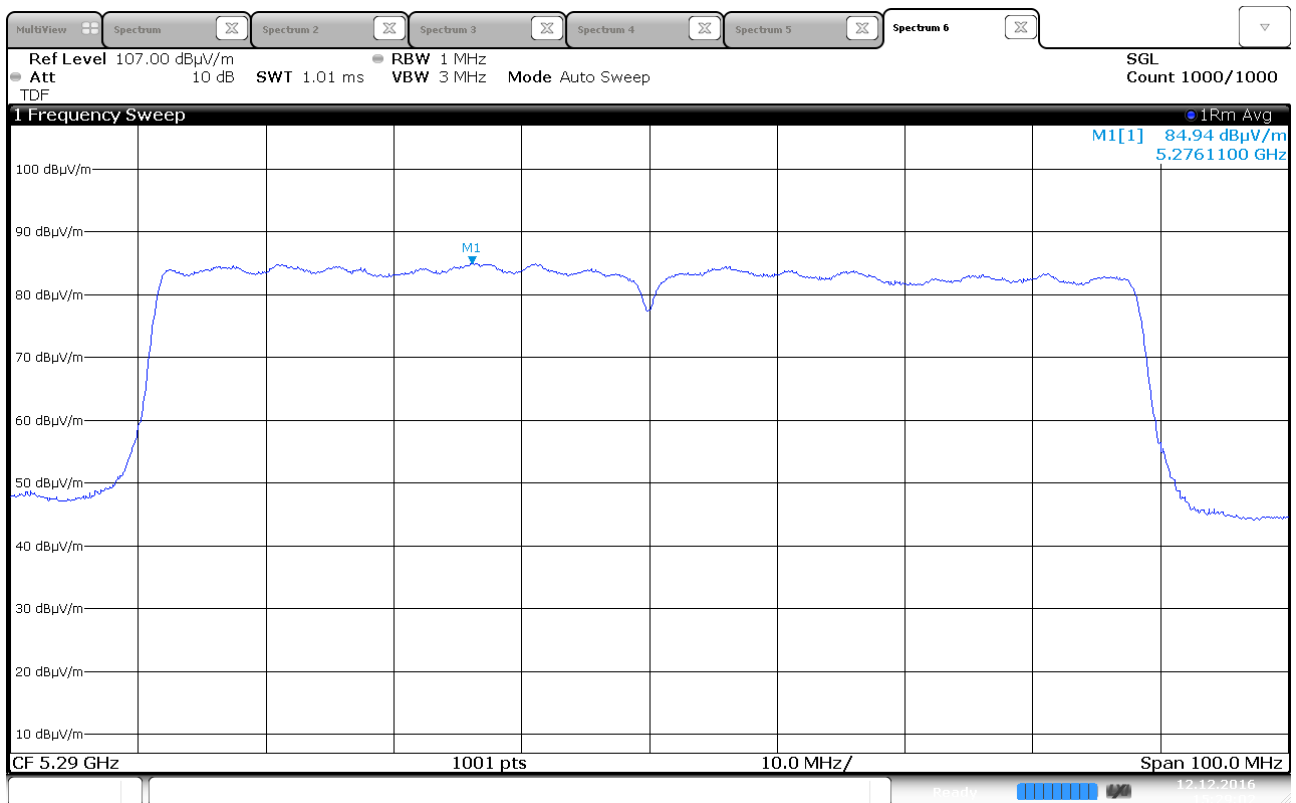

Power Spectral Density, 5290 MHz, 802.11n HT80, MIMO

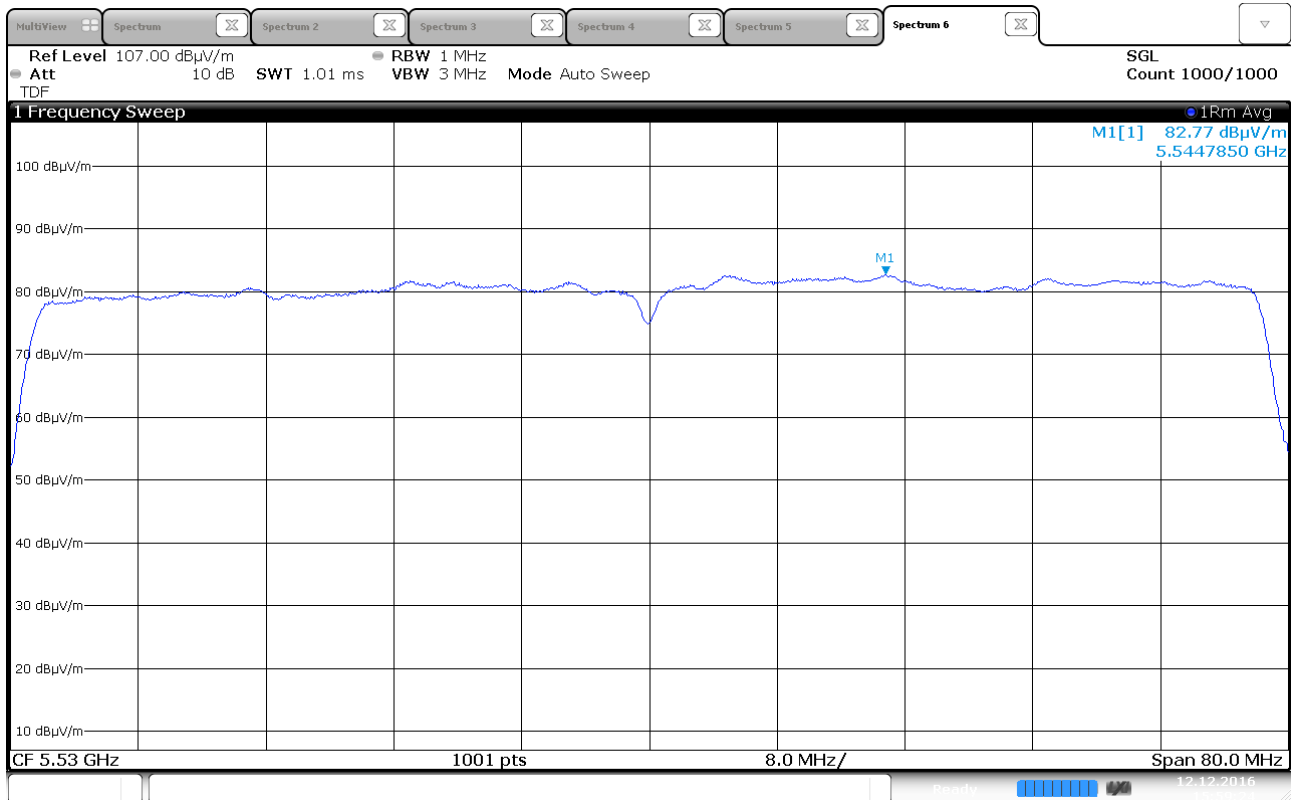

Power Spectral Density, 5530 MHz, 802.11n HT80, MIMO

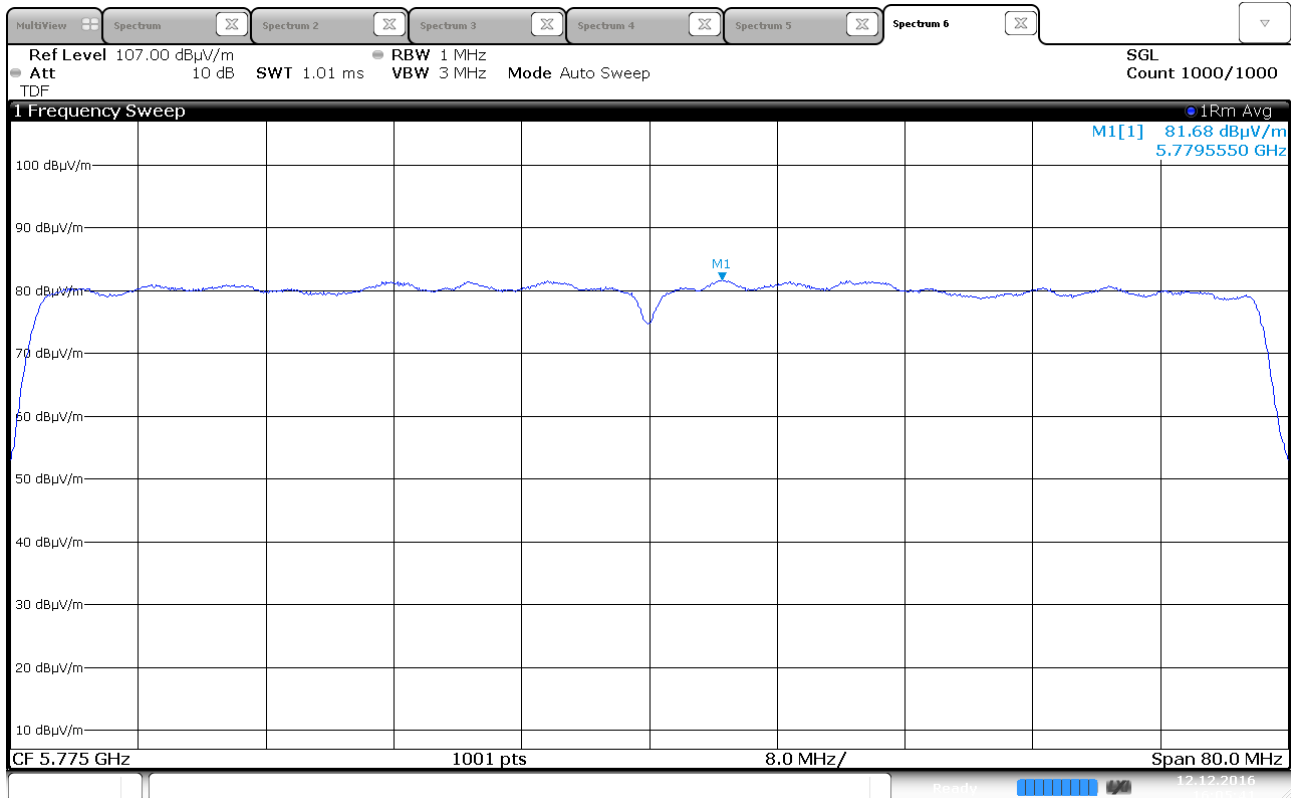

Power Spectral Density, 5775 MHz, 802.11n HT80, MIMO

3.5 Unwanted Emissions

FCC 15.407(b)

ISED RSS-247, Issue 1, clause 6.2

Test Results: Complies

Measurement Data:

Band Edge Emissions, 5150MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	36	5180	58.9	-36.4	-27	Complies
802.11a, Ant 1	36	5180	56.6	-38.7	-27	Complies
802.11n, HT20, MIMO	36	5180	54.0	-41.3	-27	Complies
802.11n, HT40, MIMO	38	5190	64.9	-30.4	-27	Complies
802.11n, HT80, MIMO	42	5210	61.6	-33.7	-27	Complies

Band Edge Emissions, 5350MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	64	5320	57.7	-37.5	-27	Complies
802.11a, Ant 1	64	5320	55.5	-39.7	-27	Complies
802.11n, HT20, MIMO	64	5320	61.4	-33.9	-27	Complies
802.11n, HT40, MIMO	62	5310	66.7	-28.5	-27	Complies
802.11n, HT80, MIMO	58	5290	61.3	-34.0	-27	Complies

Band Edge Emissions, 5470MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	100	5500	59.5	-35.7	-27	Complies
802.11a, Ant 1	100	5500	60.0	-35.2	-27	Complies
802.11n, HT20, MIMO	100	5500	62.5	-32.7	-27	Complies
802.11n, HT40, MIMO	102	5510	62.2	-33.1	-27	Complies
802.11n, HT80, MIMO	106	5530	58.7	-36.5	-27	Complies

Band Edge Emissions, 5725MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	140	5700	58.4	-36.9	-27	Complies
802.11a, Ant 1	140	5700	60.1	-35.1	-27	Complies
802.11n, HT20, MIMO	140	5700	61.5	-33.8	-27	Complies
802.11n, HT40, MIMO	134	5670	59.6	-35.6	-27	Complies
802.11n, HT80, MIMO	122	5610	N/A	N/A	-27	Complies

ISED RSS-247 Issue 1, Clause 6.2.4 (2)						
Band Edge Emissions, 5715MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	149	5745	60.1	-35.2	-27	Complies
802.11a, Ant 1	149	5745	31.1	-34.2	-27	Complies
802.11n, HT20, MIMO	149	5745	62.9	-32.3	-27	Complies
802.11n, HT40, MIMO	151	5755	67.1	-28.1	-27	Complies
802.11n, HT80, MIMO	155	5775	< 65.4	< 29.8	-27	Complies
Band Edge Emissions, 5725MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	149	5745	69.7	-25.6	-17	Complies
802.11a, Ant 1	149	5745	67.4	-27.9	-17	Complies
802.11n, HT20, MIMO	149	5745	74.0	-21.2	-17	Complies
802.11n, HT40, MIMO	151	5755	72.7	-22.5	-17	Complies
802.11n, HT80, MIMO	155	5775	64.4	-29.8	-17	Complies

ISED RSS-247 Issue 1, Clause 6.2.4 (2)						
Band Edge Emissions, 5850MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	165	5825	60.4	-34.8	-17	Complies
802.11a, Ant 1	165	5825	63.7	-31.5	-17	Complies
802.11n, HT20, MIMO	165	5825	65.9	-29.3	-17	Complies
802.11n, HT40, MIMO	159	5795	61.0	-34.3	-17	Complies
802.11n, HT80, MIMO	155	5775	54.9	-40.3	-17	Complies
Band Edge Emissions, 5860MHz						
Carrier Modulation	Ch. No.	Carrier Freq MHz	Measured value Peak dBμV/m @3m	Calculated value Peak dBm/MHz	Limit (dBm/MHz)	Verdict
802.11a, Ant 0	165	5825	53.7	-41.5	-27	Complies
802.11a, Ant 1	165	5825	55.5	-39.7	-27	Complies
802.11n, HT20, MIMO	165	5825	60.2	-35.0	-27	Complies
802.11n, HT40, MIMO	159	5795	58.0	-37.2	-27	Complies
802.11n, HT80, MIMO	155	5775	54.9	-40.3	-27	Complies

See plots.

The measurement was performed in a 3m fully anechoic chamber. The EUT was first rotated in 3 planes to find the maximum position.

The tested equipment is for indoor use only, no band-edge requirements apply at 5250 MHz.


No spurious emissions except the above listed harmonics and band-edge emissions were found.

Unwanted Emissions limit:


Operating Frequency band	Limit for Emissions Outside Operating Frequency Band
5150 – 5250 MHz	-27 dBm/MHz
5250 – 5350 MHz	-27 dBm/MHz
5470 – 5725 MHz	-27 dBm/MHz
5725 – 5850 MHz	See FCC 15.407(b)(4)(i) or 15.407(b)(4)(ii) and ISED RSS-247 Issue 1, Clause 6.2.4 (2)

Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.


The FCC limits for Band Edge emissions for the 5725 – 5850 MHz frequency band are less strict than the ISED requirements. An EUT that fulfils the ISED requirements will therefore also fulfil the FCC requirements.

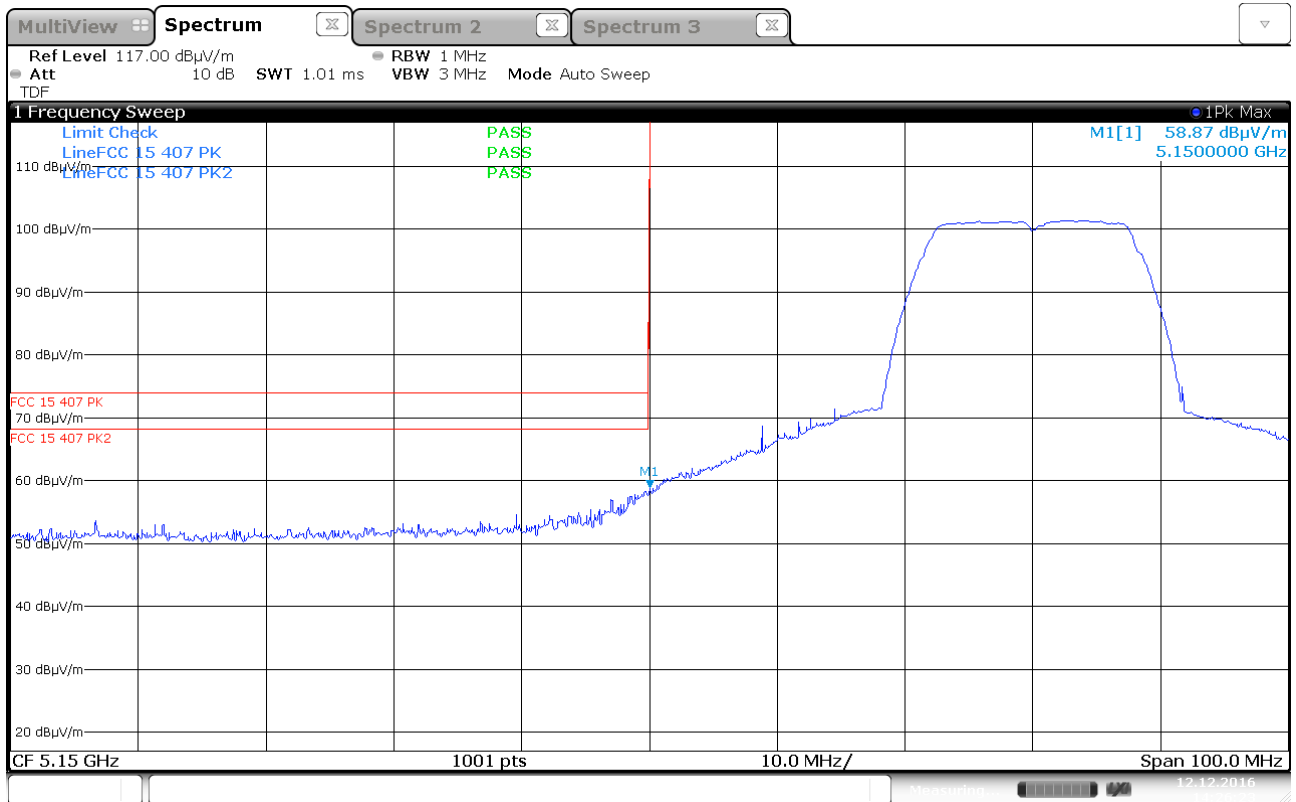


Unwanted Emissions, Band Edge, 5150MHz, ch36, 802.11a 6M, ant 0

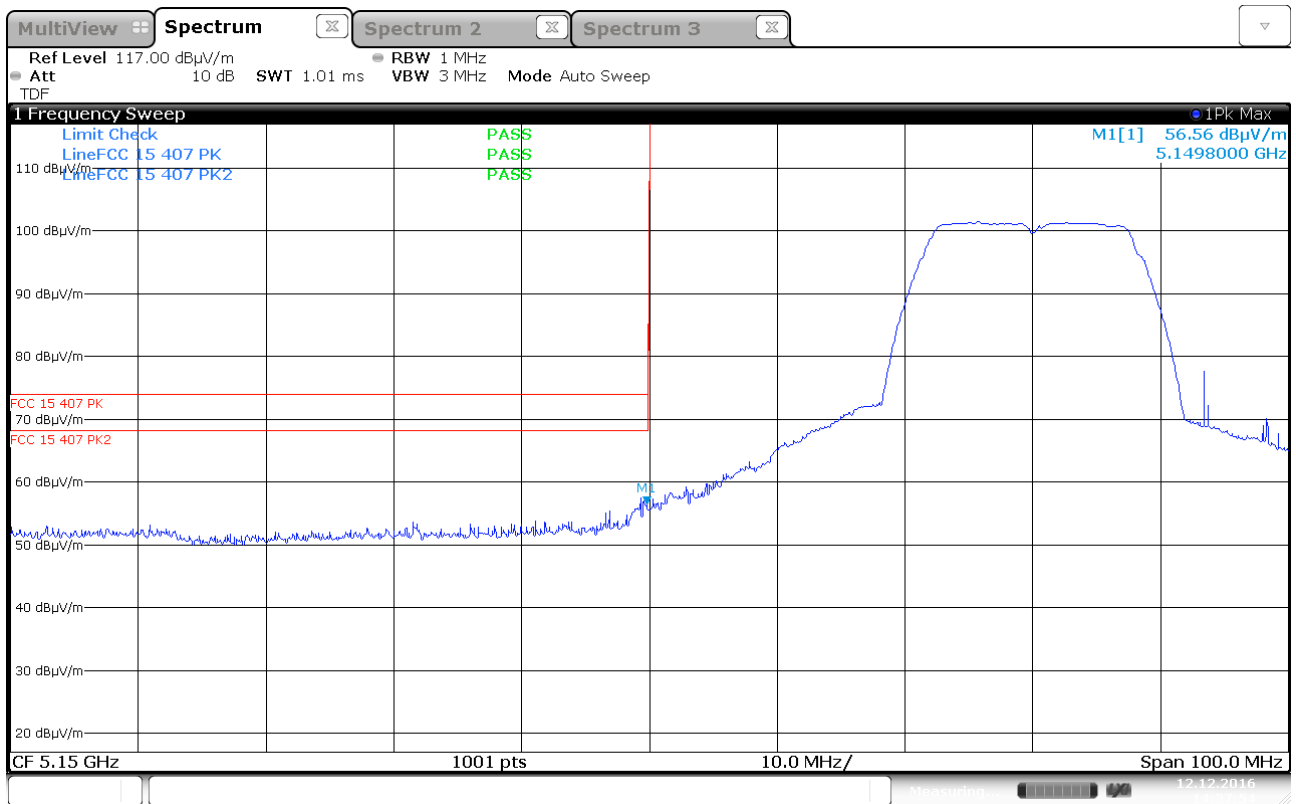

Unwanted Emissions, Band Edge, 5150MHz, ch36, 802.11a 6M, ant 1

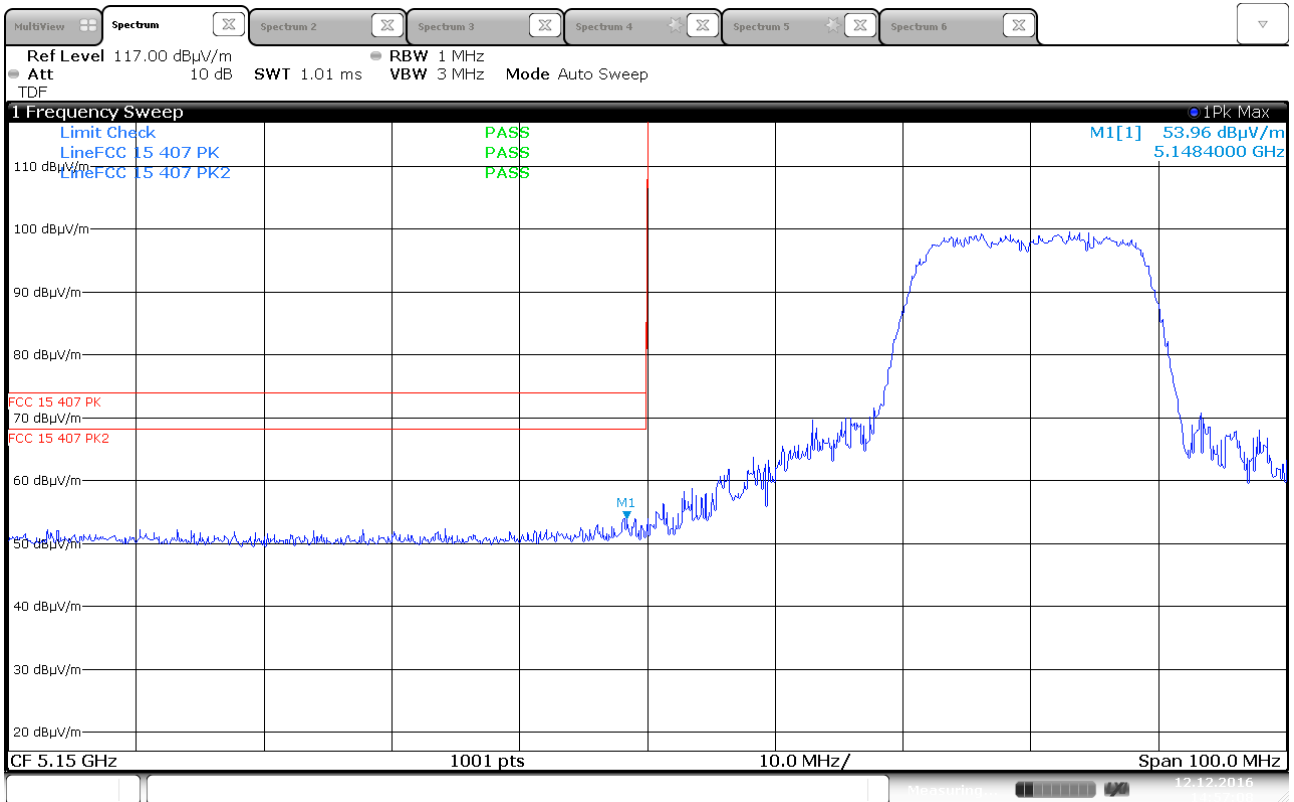

Unwanted Emissions, Band Edge, 5150MHz, ch36, 802.11n MCS0 HT20, MIMO

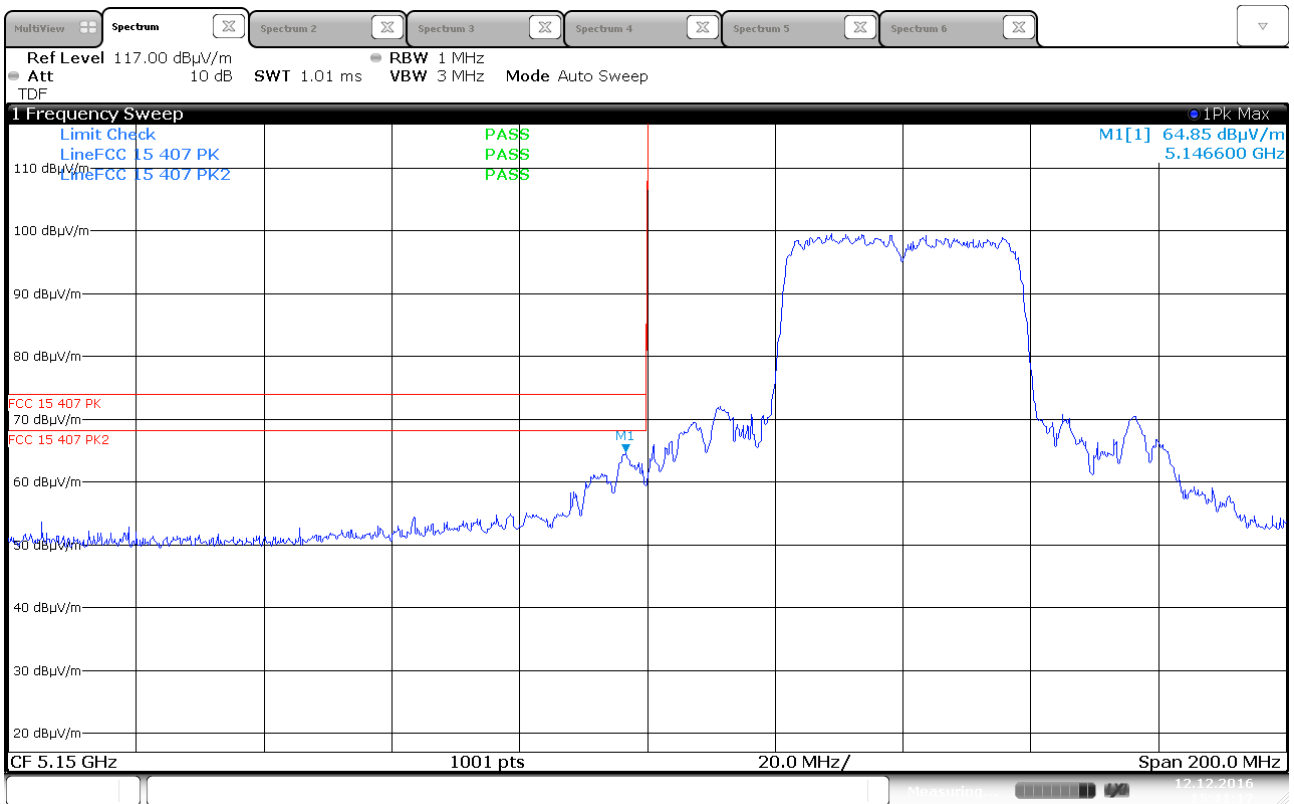

Unwanted Emissions, Band Edge, 5150MHz, ch38, 802.11n MCS0 HT40, MIMO