



Document Number: EDCS-437825
Revision: 2.0
Author: Steve Saliga
Manager: Fred Anderson

Coho Diversity 6.5 dBi Patch Antenna Specification (AIR-ANT2465P-R)



Headline

This document outlines the technical requirements for a 2.4 GHz, diversity 6.5 dBi patch antenna that can be connected directly to a Cisco AP via an RP-TNC connector.

Approvals

Name/Title	Signature	Date
Fred Anderson Manager, RF Engineering		
Jim Mass Manager, Mechanical Engineering		
Jenny Adams Product Manager		
David Stiff Manager, Technical Marketing		
Jim Nicholson EMC Compliance Engineer		

Reviewers

Name/Title	Signature	Date
Mike Smedley Manager, WNBUNPI Manufacturing		
Tom Dirrig New Product Introduction Engineer		
Tony Winston Manager, Manufacturing Engineering		

Revision History

Rev	Date	Author	Comment
1.0	3/18/2005	Steve Saliga	Initial Release, using simulated and prototype results for electrical specs
2.0	3/25/2005	Steve Saliga	Updates the dimensions of the patch.

1. Introduction

This document describes the set of specifications for a diversity patch antenna to be used in the 2.4 GHz band. The basic features of this antenna are as follows:

- Directional antenna for indoor/outdoor operation
- RP-TNC Connector with 3-ft of plenum rated, cold temperature capable cable.
- Operates over the entire 2.4 GHz band.
- Peak gain is around 6.5 dBi

In general, this antenna will be housed in a white polycarbonate radome very similar to the Coho AIR-ANT2485P-R except that there will be two cables. It will be built with 3 feet of off-white plenum rated cable and terminated in an RP-TNC.

The specifications for this antenna will be presented sequentially with Electrical Specifications first, followed by Mechanical/Environmental Specifications and General Specifications.

2. Physical Appearance

The actual antenna inside the radome is expected to be built on a fairly large ground plane of about 110 mm x 165 mm (3.94 in x 6.5 in). This large ground plane size allows for the placement of two patches over the same ground plane as well as the use of a simple radome that fits over the ground plane rather than use two pieces of plastic to form the enclosure. This will lend itself to a rectangular radome of about 110 mm x 165 mm x 25 mm. The actual antennas will be arranged on the ground plane as shown in Figure 2.1. The radome has not been designed at this time.

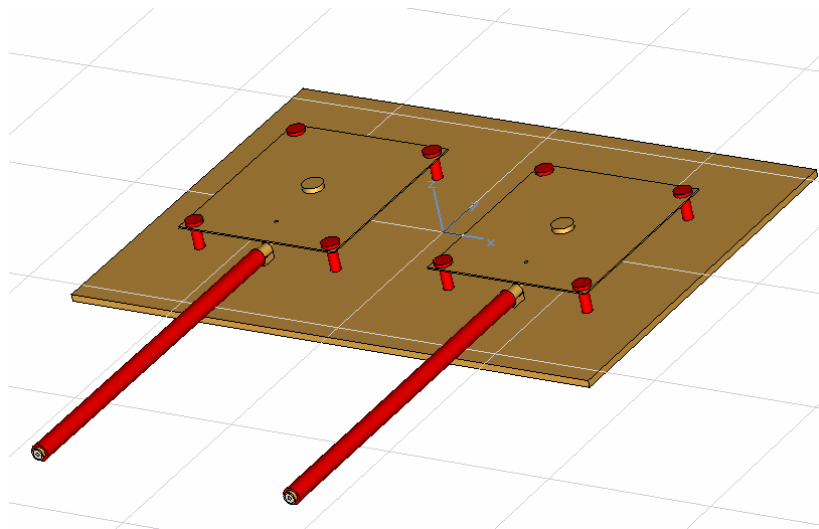


Figure 2.1
Simulated Model of AIR-ANT2465P-R

3. Diversity 6.5 dBi Patch Antenna Specification

This section contains both the electrical and mechanical specs for the Coho diversity 6.5 dBi patch antenna. Basically, this package contains two patch antennas built with an air dielectric over a ground plane. The antenna will have 3 feet of white/off-white plenum rated coaxial cable capable of operating down to -30 C.

3.1. Antenna Electrical Specifications and Patterns

The electrical specifications for this antenna are summarized in Table 3.1.1 below. H- and E-plane patterns are shown in Figures 3.1.1 and 3.1.2. Note that the patterns shown include all cable losses as well as the losses associated with a hand built radome.

Diversity 6.5 dBi Patch Antenna - Electrical Specifications					
	Parameter	Design Goal	Minimum Acceptable	Maximum Acceptable	Notes
1	Antenna Type	Diversity Patch Antenna			Two antennas in the same package
2	Operating Frequency Range	2400 MHz - 2484 MHz			
3	Nominal Input Impedance	50 Ω			
4	2:1 VSWR Bandwidth	2400 MHz – 2484 MHz			
5	Peak Gain	6.5 dBi			
6	Polarization	Linear, Vertical			
7	E-Plane 3 dB Beamwidth	65 degrees			Based on Single Antenna
8	H-Plane 3-dB Beamwidth	75 degrees			Based on single antenna
9	F/B Ratio	15 dB			
10	Cross-Pol Discrimination	15 dB			Within the main beam.
11	Construction	There are two antennas housed in a single radome, each with its own feed cable. Each patch is built with an air dielectric over the ground plane. Each patch is 40 mm W x 51 mm L and is formed from a single piece of brass. The ground plane is 110 mm x 165 mm and is built from 2.6 mm thick aluminum. The patches are placed 7 mm above the ground plane.			
12	Size	110 mm x 165 mm (4.3 in x 6.5 in)			

Table 3.1.1
Coho 6 dBi Patch Antenna, Electrical Specifications

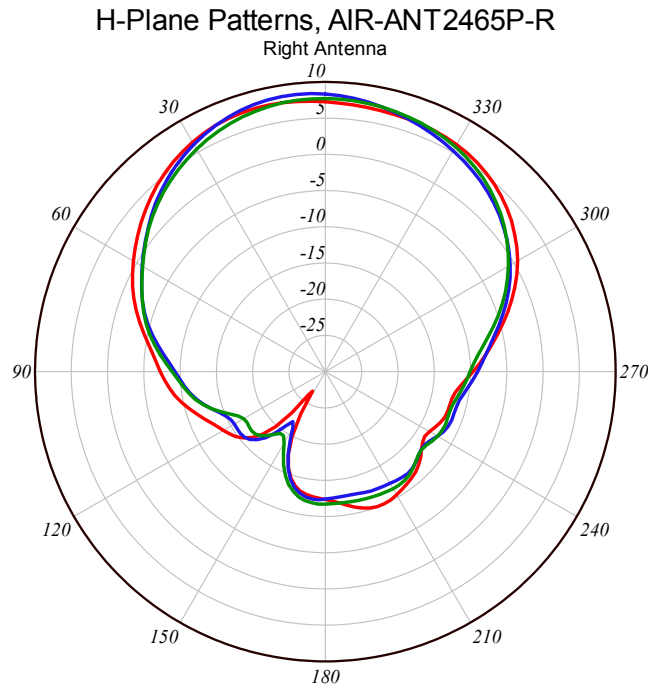


Figure 3.1.1
AIR-ANT2465P-R, Prototype H-Plane Patterns
Right Antenna



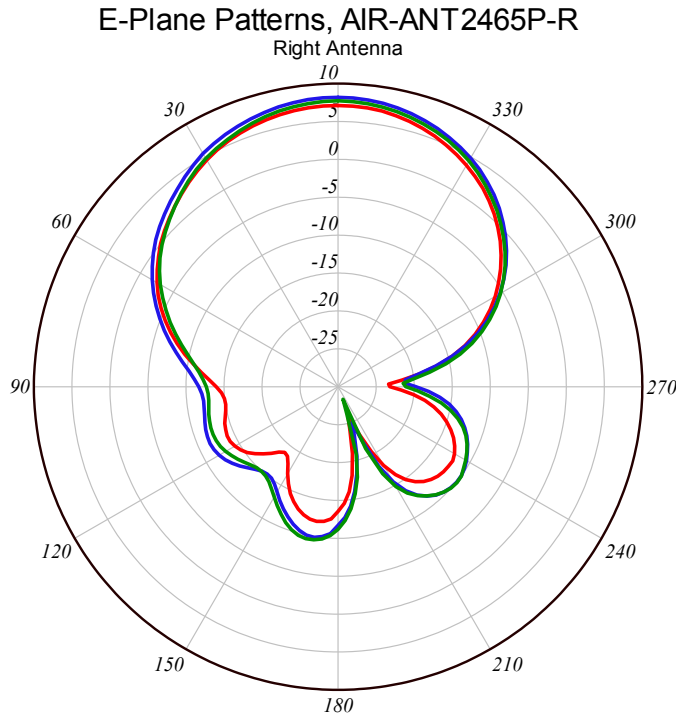


Figure 3.1.2
AIR-ANT2465P-R, Prototype E-Plane Patterns
Right Antenna

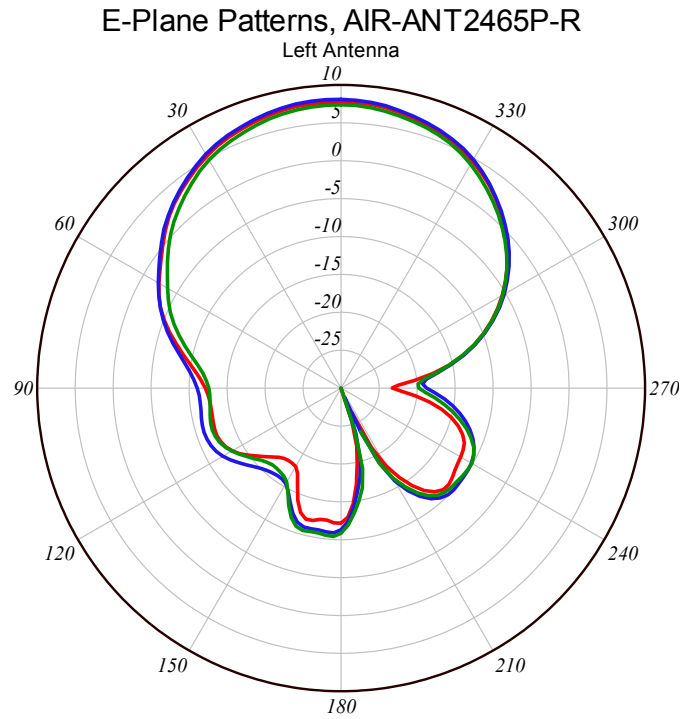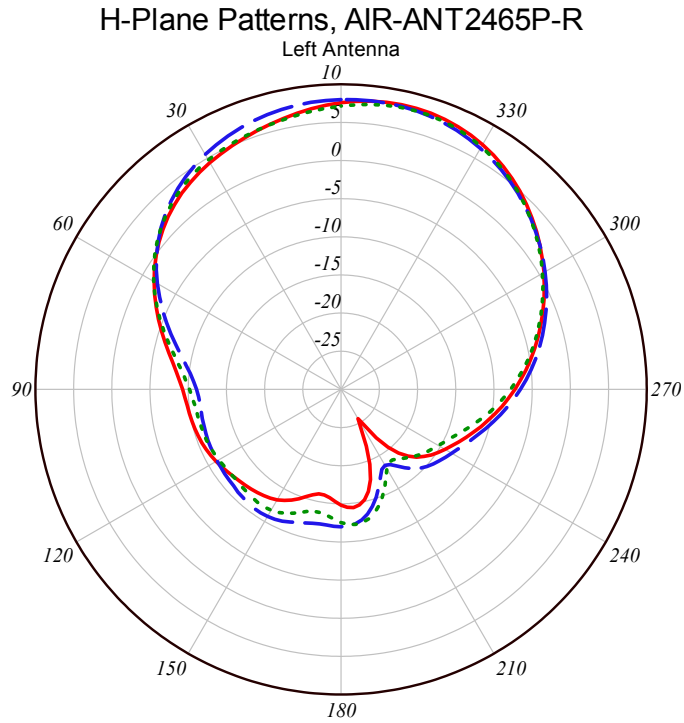

3.2. Antenna Mechanical and Environmental Specifications

The mechanical specifications will cover the physical appearance of the antenna as well as all mounting, cable and connectors. The mechanical and environmental specs are summarized in Table 3.2.1.

Diversity 6.5 dBi Patch Antenna - Mechanical /Environmental Specifications					
	Parameter	Design Goal	Minimum Acceptable	Max Acceptable	Notes
1	Radome Length	4.4 inches			
2	Radome Width	6.6 inches			
3	Radome Height	1 inch			
4	Radome Thickness	0.060 inches			
5	Radome Material	Lexan™ EXL 9330			
6	Radome Color	White			GE Color #WH9B084
7	Antenna Dielectric	AIR			Color is opaque white
8	Cable Type	Times AA-9303 or equivalent			Plenum Rated, UV Stable, Cold Temperature Capable
9	Cable Color	White/Off White			Pantone Cool Grey 2C
10	Cable Length	36 in	36 in	38 in	
11	Connector Type	RP-TNC Male			
12	Mounting Options	Wall mountable with four screws. Decorative screw caps will cover the screw heads.			
13	Environment	Indoor/Outdoor			
14	Operating Temperature Range	-30 C to +70 C	-30 C to +70 C		
15	Storage Temperature	-40 C to +85 C			
16	Water Tightness	IEC 60529, Code IP-X4, Splashing Water. Total test time is 10 minutes according to spec. VSWR still as specified.			
17	Salt Mist	MIL-STD-810F, Method 509.4, 5% salt solution. VSWR still as specified			
18	Vibration Test (non-operational)	Product shall be tested per section 4.3.5 of ENG-3396, Rev. 10, Industrial Product (Cisco standard test). VSWR still as specified and no deformation or exterior damage such that the product is considered "un-sellable".			

19	Humidity Test (non-operational)	Product shall be tested per section 4.3.3 of ENG-3396, Rev. 10, Industrial Product (Cisco standard test). VSWR still as specified and no deformation or exterior damage such that the product is considered "un-sellable".
20	Mechanical Shock (non-operational)	Product shall be tested per section 4.3.4 of ENG-3396, Rev. 10, Industrial Product (Cisco standard test). VSWR still as specified and no deformation or exterior damage such that the product is considered "un-sellable".
21	Temperature Shock (non-operational)	Product shall be tested per section 4.3.1 of ENG-3396, Rev. 10, Industrial Product (Cisco standard test). VSWR still as specified and no deformation or exterior damage such that the product is considered "un-sellable".
22	Cable Pull Test	15-lbs straight pull with antenna held fixed.
23	Drop Test	1 meter drop to tile, 3 drops vertically and horizontally, unpackaged. VSWR is still as specified. No damage to the radome that would render the product unusable.

Table 3.2.1

Coho Diversity 6.5 dBi Patch, Mechanical and Environmental Specifications

3.3. General Requirements

The antenna markings and documentation requirements are outlined below in Table 3.3.1.

Diversity 6.5 dBi Patch Antenna - General Requirements		
1	Antenna Marking	The radome will be Cisco branded with a pad-printed logo.
2	Samples	Samples will be created and submitted according to a mutually agreed upon plan between the program team and Cisco engineering.

Table 3.3.1

Coho Diversity 6.5 dBi Patch Antenna, General Requirements