

Radio Test Report
ISR-AP1101AC-I-B

C1109-4PLTE2PWB

FCC ID: LDKC11011757

5250-5350 MHz

Against the following Specifications:

CFR47 Part 15.407



Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

Author: Julian Land, Farida Rahmanzai Tested By: Julian Land and Nima Ardestani	Approved By: Diana Canafoglia Title: Compliance Manager Revision: 1.6

This report replaces any previously entered test report under EDCS – 12857632. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 1526149.

SECTION 1: OVERVIEW	4
1.1 TEST SUMMARY	4
SECTION 2: ASSESSMENT INFORMATION	5
2.1 GENERAL	5
2.2 UNITS OF MEASUREMENT	5
2.3 DATE OF TESTING (INITIAL SAMPLE RECEIPT DATE TO LAST DATE OF TESTING).....	7
2.4 REPORT ISSUE DATE	7
2.5 TESTING FACILITIES	7
2.6 EQUIPMENT ASSESSED (EUT).....	8
2.7 EUT DESCRIPTION	8
SECTION 3: RESULT SUMMARY.....	9
3.1 RESULTS SUMMARY TABLE	9
3.1.1 Radio Port Results.....	9
3.1.2 Radiated Emissions (General requirements).....	10
SECTION 4: SAMPLE DETAILS.....	11
4.1 SAMPLE DETAILS	11
4.2 SYSTEM DETAILS	11
4.3 MODE OF OPERATION DETAILS.....	11
SECTION 5: RADIO PORT RESULTS	12
5.1 DUTY CYCLE.....	12
5.1.1 Duty Cycle Test Requirement.....	12
5.1.2 Duty Cycle Test Method	13
5.1.3 Duty Cycle Test Information.....	14
5.1.4 Duty Cycle Data Table	15
5.1.5 Duty Cycle Data Screenshots.....	16
5.2 99% AND 26dB BANDWIDTH	19
5.2.1 99% and 26dB Bandwidth Test Requirement.....	19
5.2.2 99% and 26dB Bandwidth Test Procedure	20
5.2.3 99% and 26dB Bandwidth Test Information.....	21
5.2.4 99% and 26dB Bandwidth Data Table.....	22
5.2.5 99% and 26dB Bandwidth Plots	23
5.3 MAXIMUM CONDUCTED OUTPUT POWER	25
5.3.1 Maximum Conducted Output Power Test Requirement.....	25
5.3.2 Maximum Conducted Output Power Test Procedure	26
5.3.3 Maximum Conducted Output Power Test Information	27
5.3.4 Maximum Conducted Output Power Data Table.....	28
5.3.5 Maximum Conducted Output Power Plots	30
5.4 POWER SPECTRAL DENSITY	32
5.4.1 Power Spectral Density Test Requirement.....	32
5.4.2 Power Spectral Density Test Procedure	33
5.4.3 Power Spectral Density Test Information.....	35
5.4.4 Power Spectral Density Data Table	36
5.4.5 Power Spectral Density Plots.....	38

5.5	CONDUCTED SPURIOUS EMISSIONS	40
5.5.1	Conducted Spurious Emissions Test Requirement	40
5.5.2	Conducted Spurious Emissions Test Procedure	41
5.5.3	Conducted Spurious Test Information	42
5.5.4	Conducted Spurious Emissions Data Tables - Peak	43
5.5.5	Conducted Spurious Emissions Plots - Peak	45
5.5.6	Conducted Spurious Emissions Data Tables - Average	46
5.5.7	Conducted Spurious Emissions Data Plots - Average	48
5.5.8	Conducted Spurious Emissions Upper Frequency - Peak	49
5.5.9	Conducted Spurious Emissions Upper Frequency - Average	49
5.6	CONDUCTED BAND EDGE	50
5.6.1	Conducted Band Edge Test Requirement	50
5.6.2	Conducted Band Edge Test Procedure	51
5.6.3	Conducted Band Edge Test Information	53
5.6.4	Conducted Band Edge Data Tables – Peak	54
5.6.5	Conducted Band Edge Plot – Peak	55
5.6.6	Conducted Band Edge Data Tables – Average	56
5.6.7	Conducted Band Edge Plot – Average	57
SECTION 6:	EMISSION TEST RESULTS	58
6.1	TRANSMITTER RADIATED SPURIOUS EMISSIONS	58
6.1.1	Radiated Spurious Emissions Test Requirement	58
6.1.2	Radiated Spurious Emissions Test Procedure	59
6.1.3	Radiated Spurious Emissions Test Information	60
6.1.4	Transmitter Radiated Spurious Emissions Test Results	61
	Test Results for 30MHz – 1GHz:	61
	Test Results for 1GHz – 10GHz:	64
	Test Results for 10GHz – 18GHz:	67
	Test Results for 18GHz – 26.5GHz:	70
	Test Results for 26.5GHz – 40GHz:	71
6.2	AC CONDUCTED EMISSIONS	72
6.2.1	AC Conducted Emissions Requirements	72
6.2.2	AC Conducted Emissions Measurement Procedure	73
6.2.3	AC Conducted Emissions Information	74
6.2.4	AC Conducted Emissions Test Results	75
APPENDIX A:	LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	76
APPENDIX B:	ABBREVIATION KEY AND DEFINITIONS	79
APPENDIX C:	PHOTOGRAPHS OF TEST SETUPS	80
APPENDIX D:	SOFTWARE USED TO PERFORM TESTING	84
APPENDIX E:	TEST PROCEDURES	85
APPENDIX F:	SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01)	86
APPENDIX G:	TEST ASSESSMENT PLAN	87

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications
CFR47 15.407

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Radio Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

2.2 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^\circ$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line.
The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.3 Date of testing (initial sample receipt date to last date of testing)

09-Feb-2018 to 19-Sep-2018

2.4 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.5 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Site Identifier
Building P, 10m Chamber	Company #: 2461N-2
Building P, 5m Chamber	Company #: 2461N-1
Building I, 5m Chamber	Company #: 2461M-1

Test Engineers

Julian Land and Nima Ardestani

2.6 Equipment Assessed (EUT)

C1109-4PLTE2PWB with ISR-AP1101AC-I-B

2.7 EUT Description

The C1109 is a next generation Enterprise/MSP/M2M low end router with Wave 2 802.11ac WLAN, LTE pluggable architecture and Ethernet LAN/WAN.

The modes included in this report represent the worst case data for all modes.

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4GHz / 5GHz	07-100495-01	Dipole	2.14 / 4
2.4GHz / 5GHz	07-100497-01	Ceiling Mount Omnidirectional	2.14 / 4
2.4GHz / 5GHz	07-100496-01	Roof Mount	2.14 / 4

Section 3: Result Summary

3.1 Results Summary Table

3.1.1 Radio Port Results

<u>Basic Standard</u>	<u>Technical Requirements / Details</u>	<u>Result</u>
15.407	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
15.407	Output Power: For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
15.407	Power Spectral Density The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
15.407	Conducted Spurious Emissions / Band-Edge: 2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
15.407 15.205 15.209	Restricted band: Unwanted emissions must comply with the general field strength limits set forth in §15.209.	Pass

3.1.2 Radiated Emissions (General requirements)

<u>Basic Standard</u>	<u>Technical Requirements / Details</u>	<u>Result</u>
15.407 15.205 15.209	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Pass
15.207	AC conducted Emissions: U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.	Pass

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	C1109-4PLTE2PWB Router	Cisco Systems, Inc.	1.0	C1100-ROMMON-20171109	16.8.20180109	FOC214664N4
S02	ISR-AP1101AC-I-B WiFi Module	Cisco Systems, Inc.	2.2	e1c63a0bb171f78c5800c1478007abc1	8.4.1.10	FOC21454CEU
S03	AC/DC Power Supply	Delta Electronics, Inc.	02	N/A	N/A	DAB2142G1A3
S04	C1109-4PLTE2PWE	Cisco Systems, Inc.	1.0	C1100-ROMMON-20171109	16.8.20180109	FGL221793KW
S05	ISR-AP1101AC-I-B WiFi Module	Cisco Systems, Inc.	1.0	f1e77cf8ab1e497b17ad53633866ea42	8.5.1.10	FOC22120Z79

4.2 System Details

System #	Description	Samples
1	Host router, WiFi module, and Power Supply	S01, S02, and S03
2	Host router and WiFi module used for radiated receiver and transmitter spurious emissions	S04, S05, and S03

4.3 Mode of Operation Details

Mode#	Description	Comments
1	802.11a OFDM	Receive and Transmit
2	802.11n20 OFDM	Receive and Transmit
3	802.11n40 OFDM	Receive and Transmit
4	802.11ac20 OFDM	Receive and Transmit
5	802.11ac40 OFDM	Receive and Transmit
6	802.11ac80 OFDM	Receive and Transmit
7	802.11 unmodulated	Only for testing

Section 5: Radio Port Results

5.1 Duty Cycle

5.1.1 Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v01r02

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

5.1.2 Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v01r02:

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.1.3 Duty Cycle Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01, S02	☒	☐
	Support	S03	☐	☒

Tested By : Julian Land	Date of testing: March 26, 2018
Test Result : Pass	

Test Equipment



See Appendix A for list of test equipment



5.1.4 Duty Cycle Data Table



Duty Cycle table and screen captures are shown below for power/psd modes.

Mode	Data Rate	On-time (ms)	Total Time (ms)	Duty Cycle (%)	Correction Factor (dB)
NonHT20	6 to 54Mbps	2.065	2.140	96.50	0.15
NonHT40	6 to 54Mbps	2.066	2.143	96.41	0.16
NonHT80	6 to 54Mbps	2.066	2.146	96.27	0.16
HT20/VHT20	M0 to M15	5.011	5.097	98.31	0.07
HT40/VHT40	M0 to M15	2.435	2.525	96.44	0.16
VHT80	M0 to M9	3.356	4.056	82.74	0.82

5.1.5 Duty Cycle Data Screenshots

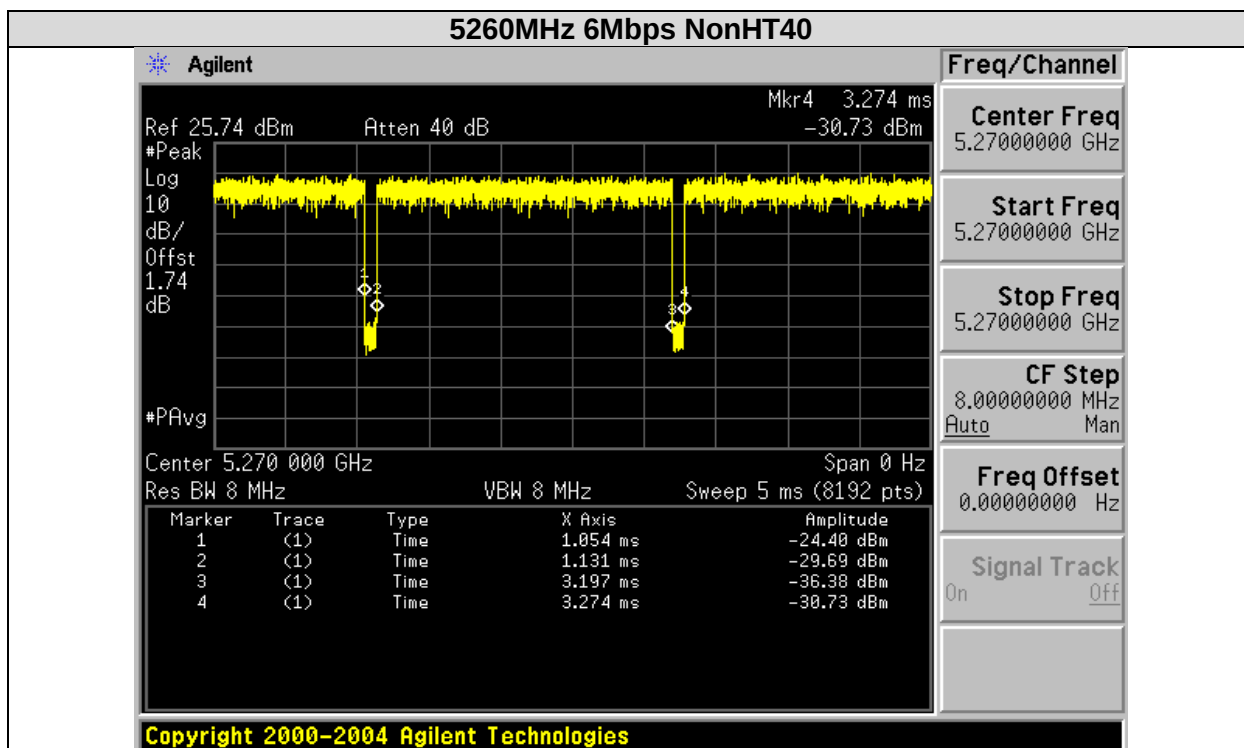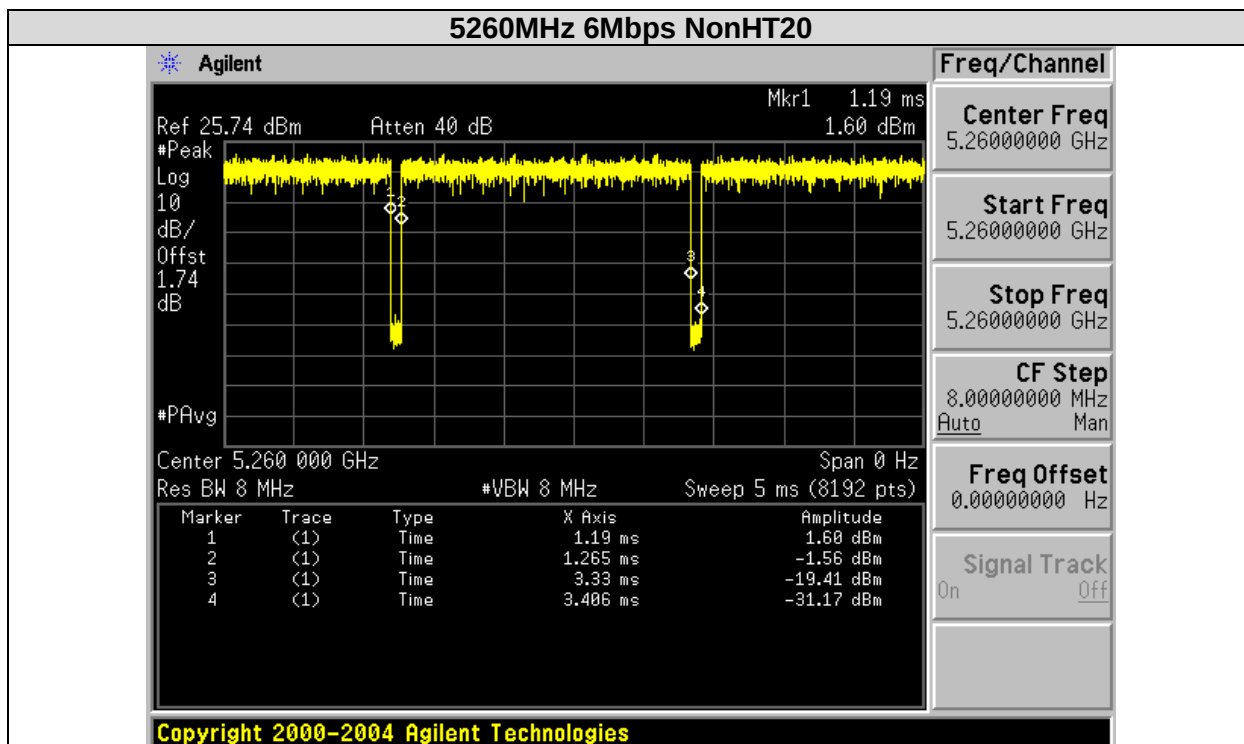

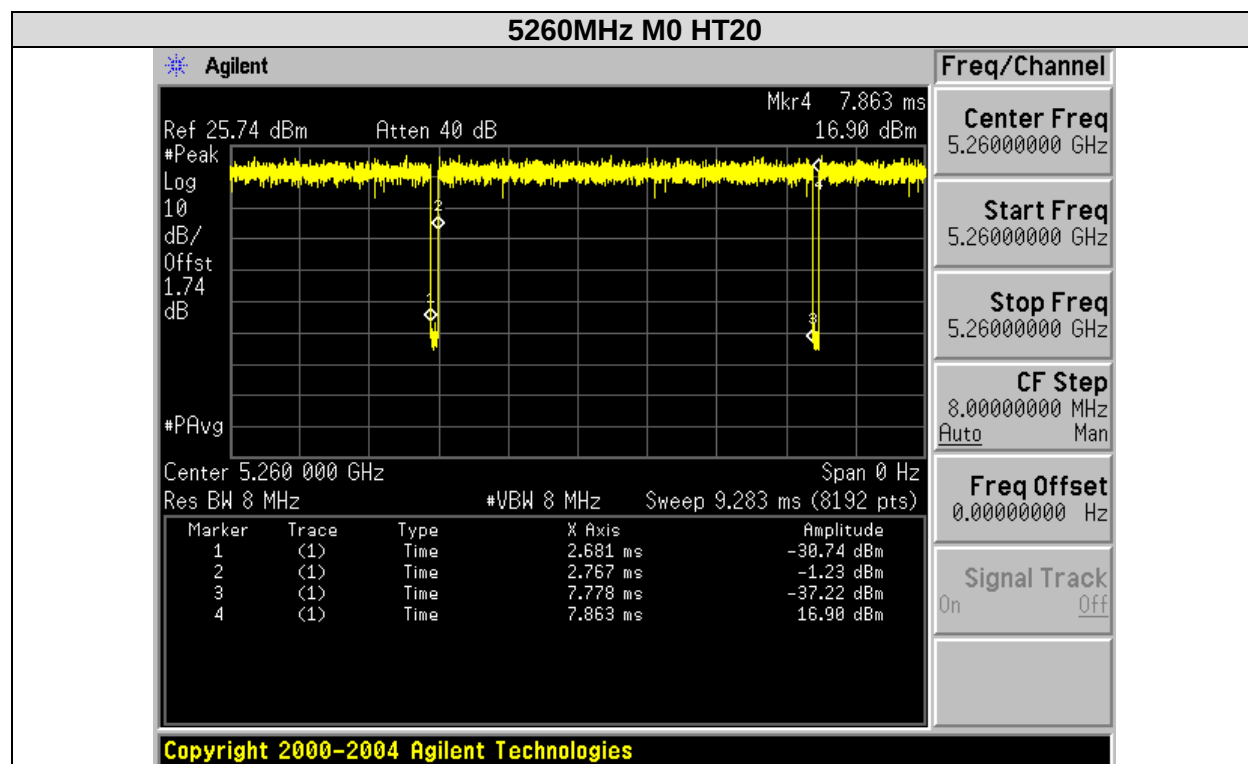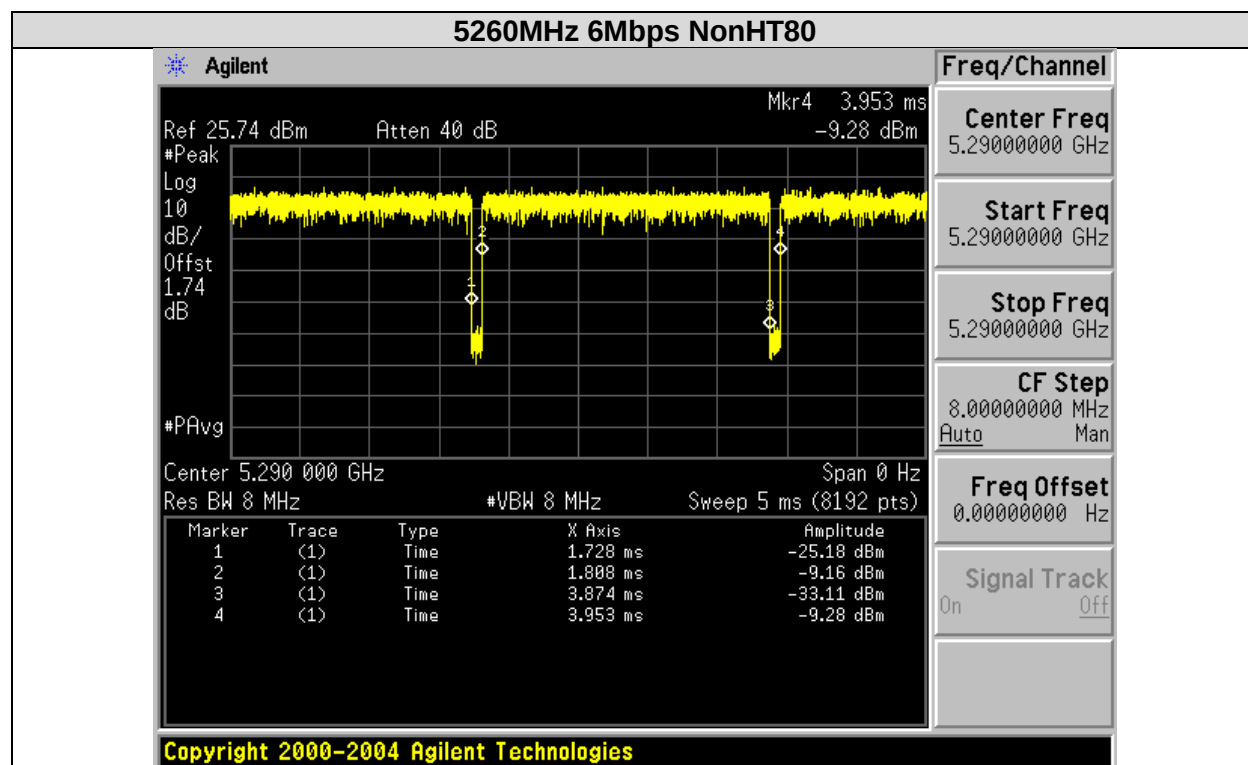

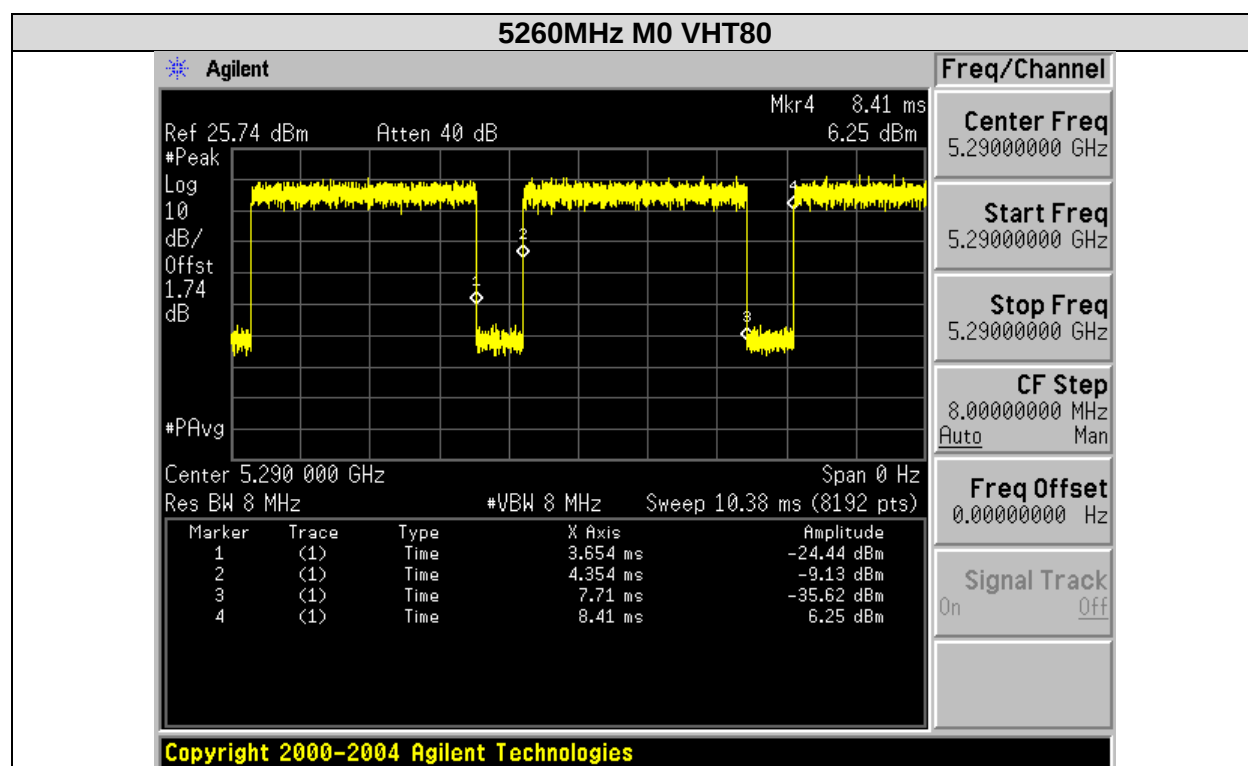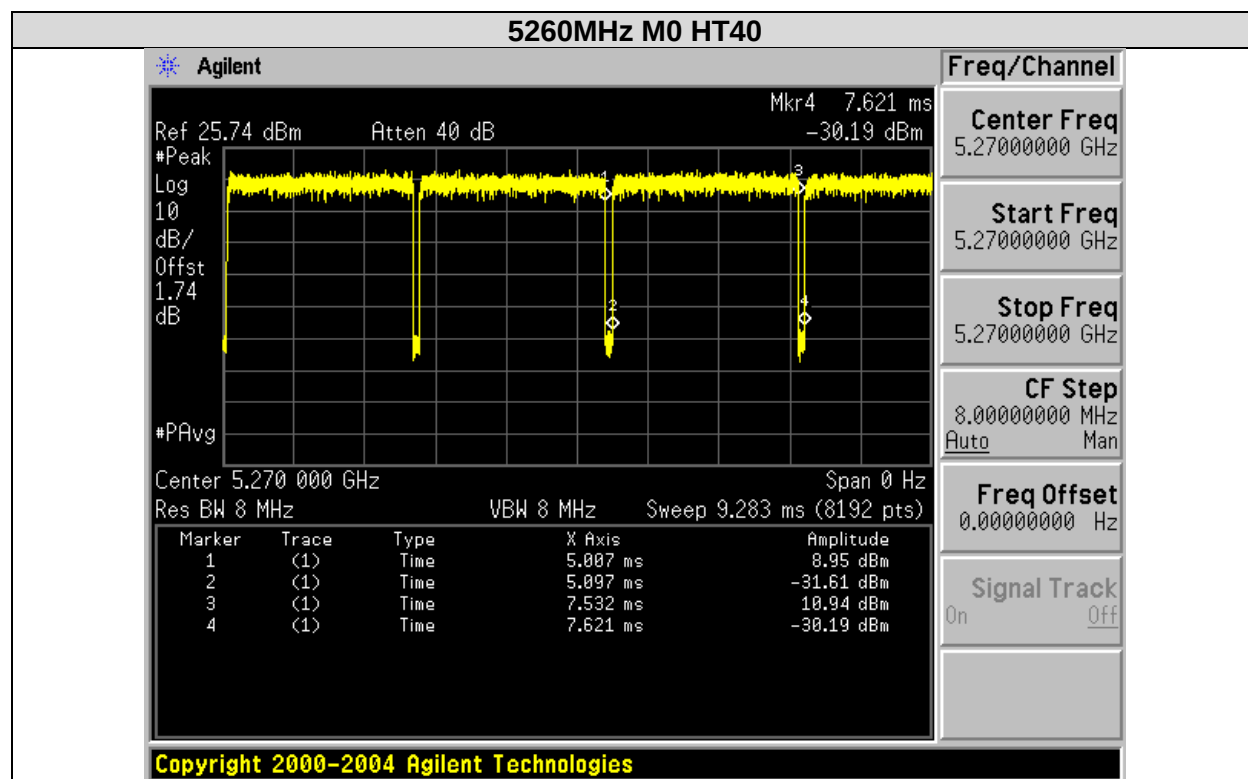

5.2 99% and 26dB Bandwidth

5.2.1 99% and 26dB Bandwidth Test Requirement

For the FCC

There is no requirement for the value of bandwidth.

However, the 26dB BW (EBW) is used to calculate the power limits in 15.407 (a) (2). Power measurements are made using the 99% Bandwidth as the integration bandwidth.

5.2.2 99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

Ref. KDB 789033 Section D. 99 Percent Occupied Bandwidth

99% BW
Test Parameters
1. Set center frequency to the nominal EUT channel center frequency. 2. Set span = 1.5 times to 5.0 times the OBW. 3. Set RBW = 1 % to 5 % of the OBW 4. Set VBW $\geq 3 \cdot$ RBW 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. 6. Use the 99 % power bandwidth function of the instrument (if available).

Ref KDB 789033 in Section C. Measurement Bandwidth, Section 1

26 BW
Test parameters
X dB BW = -26dB (using the OBW function of the spectrum analyzer) Emission Bandwidth (EBW) a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = Peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.2.3 99% and 26dB Bandwidth Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01, S02	☒	☐
	Support	S03	☐	☒

Tested By : Julian Land	Date of testing: February 09, 2018
Test Result : PASS	



Test Equipment


See Appendix A for list of test equipment

5.2.4 99% and 26dB Bandwidth Data Table

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5260	Non HT/VHT20, 6 to 54 Mbps	6	21.6	17.449
	HT/VHT20, M0 to M15	m0	23.0	18.419
5270	Non HT/VHT40, 6 to 54 Mbps	6	40.1	35.857
	HT/VHT40, M0 to M15	m0	55.6	36.450
5290	Non VHT80, 6 to 54 Mbps	6	83.6	75.787
	VHT80, M0 to M9, M0 to M9 1-1ss	m0x1	83.7	75.968
5300	Non HT/VHT20, 6 to 54 Mbps	6	23.4	17.507
	HT/VHT20, M0 to M15	m0	23.4	18.434
5310	Non HT/VHT40, 6 to 54 Mbps	6	39.9	35.655
	HT/VHT40, M0 to M15	m0	40.4	36.191
5320	Non HT/VHT20, 6 to 54 Mbps	6	26.1	17.506
	HT/VHT20, M0 to M15	m0	23.6	18.447

5.2.5 99% and 26dB Bandwidth Plots

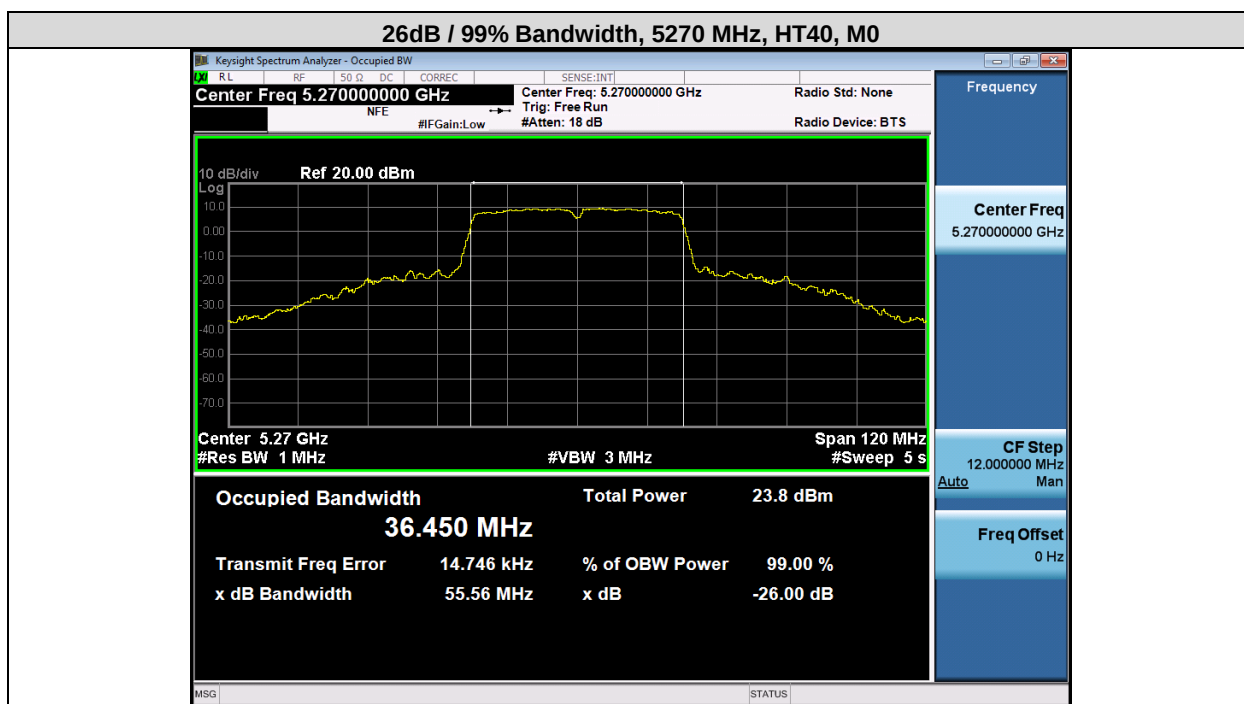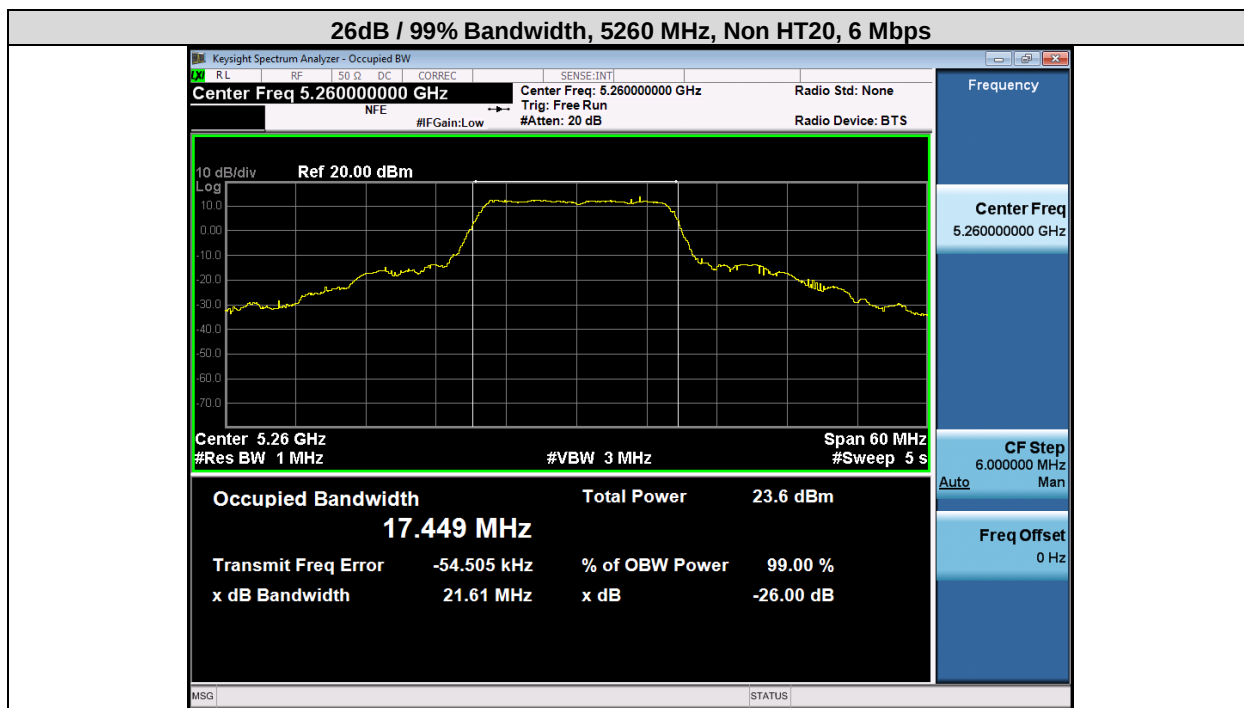

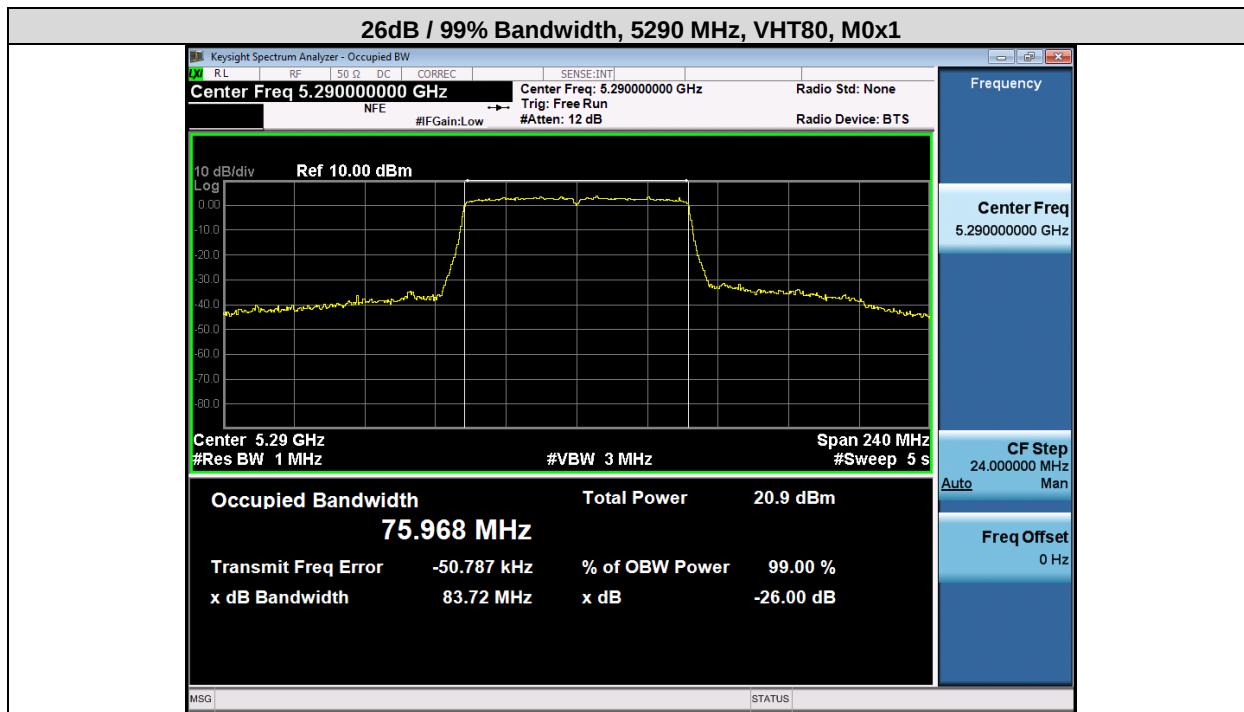

5.3 Maximum Conducted Output Power

5.3.1 Maximum Conducted Output Power Test Requirement

15.407 (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2 Maximum Conducted Output Power Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r02
ANSI C63.10: 2013

Maximum Conducted Output Power Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r02
2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Maximum Conducted Output Power Test parameters
Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction). (i) Measure the duty cycle, x, of the transmitter output signal as described in section II.B. (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal. (iii) Set RBW = 1 MHz. (iv) Set VBW $\geq$ 3 MHz. (v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.) (vi) Sweep time = auto. (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. (viii) Do not use sweep triggering. Allow the sweep to "free run". (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter. (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

5.3.3 Maximum Conducted Output Power Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01, S02	☒	☐
	Support	S03	☐	☒

Tested By : Julian Land	Date of testing: February 9, 2018
Test Result : PASS	

Test Equipment



See Appendix A for list of test equipment


5.3.4 Maximum Conducted Output Power Data Table

Frequency (MHz)	Mode	Tx Paths	Duty Cycle	Index Power (dBm)	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Total Conducted Power Including Duty Cycle (DbM)	Limit (dBm)	Margin (dB)
5260	Non HT/VHT20, 6 to 54 Mbps	1	96.50	17	4	15.4		15.4	15.55	24	8.45
	Non HT/VHT20, 6 to 54 Mbps	2	96.50	17	4	15.4	15.9	18.67	18.82	24	5.18
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	96.50	17	7	15.4	15.9	18.67	18.82	24	5.18
	HT/VHT20, M0 to M7	1	98.31	17	4	15.3		15.3	15.37	24	8.63
	HT/VHT20, M0 to M7	2	98.31	17	4	15.3	15.8	18.57	18.64	24	5.36
	HT/VHT20, M8 to M15	2	98.31	17	4	15.3	15.8	18.57	18.64	24	5.36
	HT/VHT20 Beam Forming, M0 to M7	2	98.31	17	7	15.3	15.8	18.57	18.64	24	5.36
	HT/VHT20 Beam Forming, M8 to M15	2	98.31	17	4	15.3	15.8	18.57	18.64	24	5.36
	HT/VHT20 STBC, M0 to M7	2	98.31	17	4	15.3	15.8	18.57	18.64	24	5.36
5270	Non HT/VHT40, 6 to 54 Mbps	1	96.41	17	4	15.0		15.0	15.16	24	8.84
	Non HT/VHT40, 6 to 54 Mbps	2	96.41	17	4	15.0	15.5	18.27	18.43	24	5.57
	HT/VHT40, M0 to M7	1	96.44	17	4	15.5		15.5	15.66	24	8.34
	HT/VHT40, M0 to M7	2	96.44	17	4	15.5	15.9	18.71	18.87	24	5.13
	HT/VHT40, M8 to M15	2	96.44	17	4	15.5	15.9	18.71	18.87	24	5.13
	HT/VHT40 Beam Forming, M0 to M7	2	96.44	17	7	15.5	15.9	18.71	18.87	24	5.13
	HT/VHT40 Beam Forming, M8 to M15	2	96.44	17	4	15.5	15.9	18.71	18.87	24	5.13
	HT/VHT40 STBC, M0 to M7	2	96.44	17	4	15.5	15.9	18.71	18.87	24	5.13
5290	Non VHT80, 6 to 54 Mbps	1	96.27	14	4	12.15		12.15	12.32	24	11.68
	Non VHT80, 6 to 54 Mbps	2	96.27	13	4	11.20	11.73	14.48	14.65	24	9.35
	VHT80, M0 to M9 1ss	1	82.74	13	4	11.50		11.5	12.32	24	11.68
	VHT80, M0 to M9 1ss	2	82.74	12	4	9.90	10.45	13.19	14.02	24	9.98
	VHT80, M0 to M9 2ss	2	82.74	12	4	9.90	10.45	13.19	14.02	24	9.98
	VHT80 Beam Forming, M0 to M9 1ss	2	82.74	11	7	8.93	9.51	12.24	13.06	24	10.94
	VHT80 Beam Forming, M0 to M9 2ss	2	82.74	12	4	9.90	10.45	13.19	14.02	24	9.98
	VHT80 STBC, M0 to M9 1ss	2	82.74	12	4	9.90	10.45	13.19	14.02	24	9.98

5300	Non HT/VHT20, 6 to 54 Mbps	1	96.50	17	4	15.3		15.3	15.45	24	8.55
	Non HT/VHT20, 6 to 54 Mbps	2	96.50	17	4	15.3	15.9	18.62	18.78	24	5.22
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	96.50	17	7	15.3	15.9	18.62	18.78	24	5.22
	HT/VHT20, M0 to M7	1	98.31	17	4	15.2		15.2	15.27	24	8.73
	HT/VHT20, M0 to M7	2	98.31	17	4	15.2	15.9	18.57	18.65	24	5.35
	HT/VHT20, M8 to M15	2	98.31	17	4	15.2	15.9	18.57	18.65	24	5.35
	HT/VHT20 Beam Forming, M0 to M7	2	98.31	17	7	15.2	15.9	18.57	18.65	24	5.35
	HT/VHT20 Beam Forming, M8 to M15	2	98.31	17	4	15.2	15.9	18.57	18.65	24	5.35
	HT/VHT20 STBC, M0 to M7	2	98.31	17	4	15.2	15.9	18.57	18.65	24	5.35
5310	Non HT/VHT40, 6 to 54 Mbps	1	96.41	14	4	12.11		12.11	12.27	24	11.73
	Non HT/VHT40, 6 to 54 Mbps	2	96.41	13	4	11.10	11.81	14.48	14.64	24	9.36
	HT/VHT40, M0 to M7	1	96.44	14	4	12.47		12.47	12.63	24	11.37
	HT/VHT40, M0 to M7	2	96.44	13	4	11.49	12.18	14.86	15.02	24	8.98
	HT/VHT40, M8 to M15	2	96.44	13	4	11.49	12.18	14.86	15.02	24	8.98
	HT/VHT40 Beam Forming, M0 to M7	2	96.44	12	7	10.46	11.16	13.83	13.99	24	10.01
	HT/VHT40 Beam Forming, M8 to M15	2	96.44	13	4	11.49	12.18	14.86	15.02	24	8.98
	HT/VHT40 STBC, M0 to M7	2	96.44	13	4	11.49	12.18	14.86	15.02	24	8.98
5320	Non HT/VHT20, 6 to 54 Mbps	1	96.50	17	4	15.39		15.39	15.54	24	8.46
	Non HT/VHT20, 6 to 54 Mbps	2	96.50	16	4	14.44	14.98	17.73	17.88	24	6.12
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	96.50	15	7	13.52	14.08	16.82	16.97	24	7.03
	HT/VHT20, M0 to M7	1	98.31	17	4	15.37		15.37	15.44	24	8.56
	HT/VHT20, M0 to M7	2	98.31	16	4	14.39	15.00	17.72	17.79	24	6.21
	HT/VHT20, M8 to M15	2	98.31	16	4	14.39	15.00	17.72	17.79	24	6.21
	HT/VHT20 Beam Forming, M0 to M7	2	98.31	14	7	12.55	13.09	15.84	15.91	24	8.09
	HT/VHT20 Beam Forming, M8 to M15	2	98.31	16	4	14.39	15.00	17.72	17.79	24	6.21
	HT/VHT20 STBC, M0 to M7	2	98.31	16	4	14.39	15.00	17.72	17.79	24	6.21

5.3.5 Maximum Conducted Output Power Plots

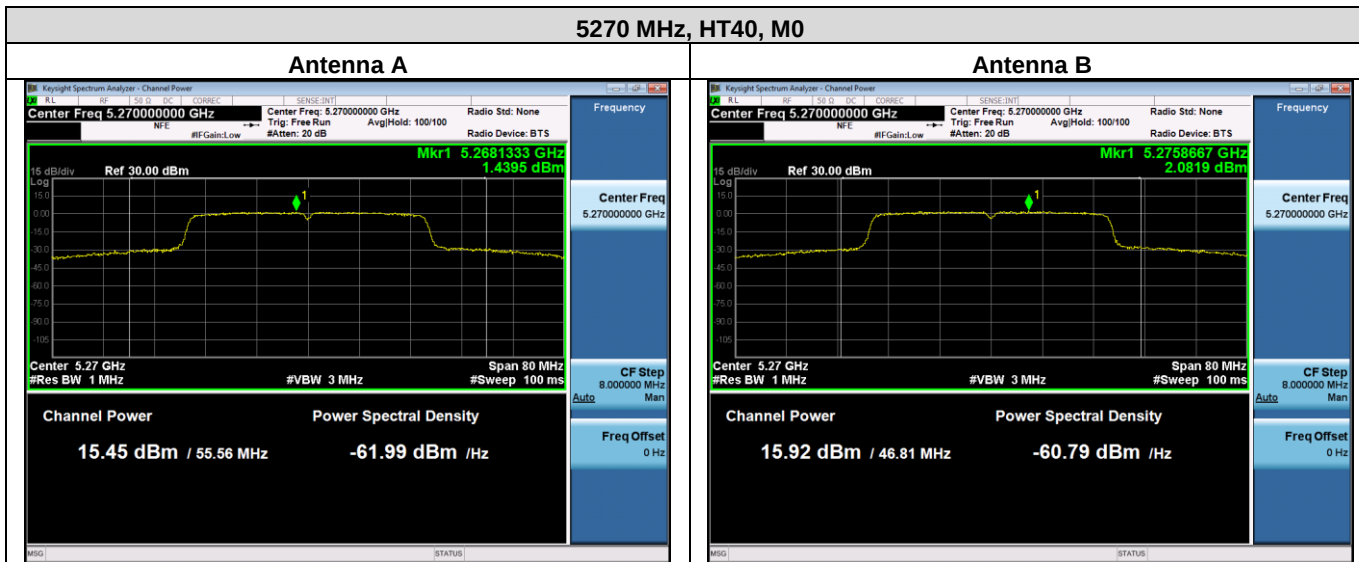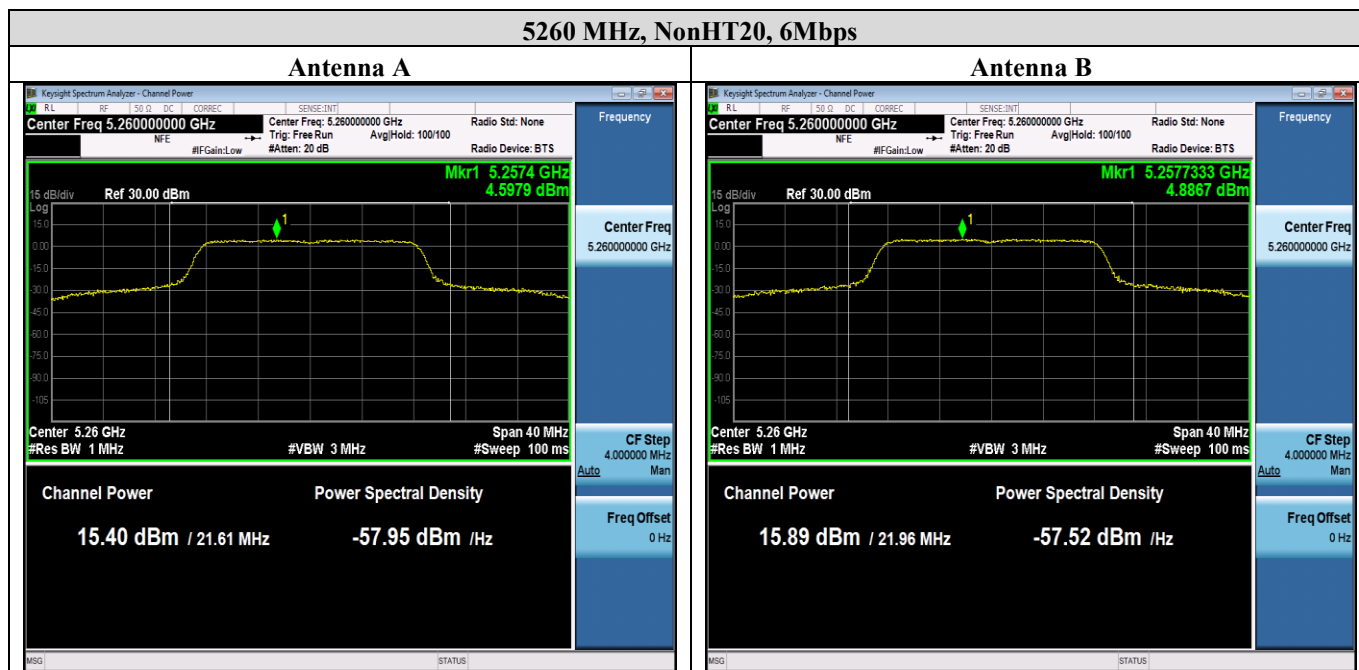

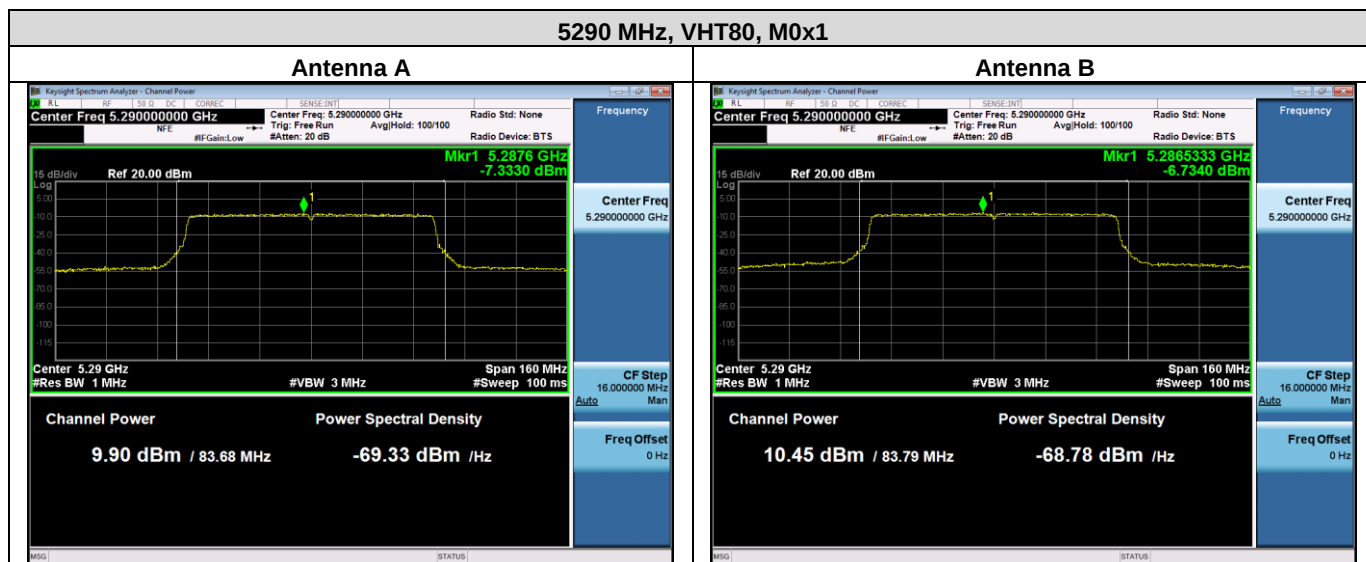

5.4 Power Spectral Density

5.4.1 Power Spectral Density Test Requirement

15.407 (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands ... the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.407 (5)

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.4.2 Power Spectral Density Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r02

F. Maximum Power Spectral Density (PSD)

Power Spectral Density Test Procedure
The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. 1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.) 2. Use the peak search function on the instrument to find the peak of the spectrum and record its value. 3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4. The result is the Maximum PSD over 1 MHz reference bandwidth.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r02

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Power Spectral Density Test parameters
Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction). (i) Measure the duty cycle, x, of the transmitter output signal as described in section II.B. (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal. (iii) Set RBW = 1 MHz. (iv) Set VBW $\geq$ 3 MHz. (v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.) (vi) Sweep time = auto. (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. (viii) Do not use sweep triggering. Allow the sweep to “free run”. (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter. (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) F. Maximum Power Spectral Density (PSD)

2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

5.4.3 Power Spectral Density Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01, S02	☒	☐
	Support	S03	☐	☒

Tested By : Julian Land	Date of testing: February 10, 2018
Test Result : PASS	

Test Equipment



See Appendix A for list of test equipment


5.4.4 Power Spectral Density Data Table

Frequency (MHz)	Mode	Tx Paths	Duty Cycle	Index Power (dBm)	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Total Tx PSD (dBm/MHz)	Total Conducted PSD Including Duty Cycle (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5260	Non HT/VHT20, 6 to 54 Mbps	1	96.50	17	4	4.6		4.6	4.75	11	6.25
	Non HT/VHT20, 6 to 54 Mbps	2	96.50	17	4	4.6	4.9	7.76	7.92	11	3.08
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	96.50	17	7	4.6	4.9	7.76	7.92	11	3.08
	HT/VHT20, M0 to M7	1	98.31	17	4	4.3		4.3	4.37	11	6.63
	HT/VHT20, M0 to M7	2	98.31	17	4	4.3	5.2	7.78	7.86	11	3.14
	HT/VHT20, M8 to M15	2	98.31	17	4	4.3	5.2	7.78	7.86	11	3.14
	HT/VHT20 Beam Forming, M0 to M7	2	98.31	17	7	4.3	5.2	7.78	7.86	11	3.14
	HT/VHT20 Beam Forming, M8 to M15	2	98.31	17	4	4.3	5.2	7.78	7.86	11	3.14
	HT/VHT20 STBC, M0 to M7	2	98.31	17	4	4.3	5.2	7.78	7.86	11	3.14
5270	Non HT/VHT40, 6 to 54 Mbps	1	96.41	17	4	2.5		2.5	2.66	11	8.34
	Non HT/VHT40, 6 to 54 Mbps	2	96.41	17	4	2.5	3.0	5.77	5.93	11	5.07
	HT/VHT40, M0 to M7	1	96.44	17	4	1.4		1.4	1.56	11	9.44
	HT/VHT40, M0 to M7	2	96.44	17	4	1.4	2.1	4.77	4.93	11	6.07
	HT/VHT40, M8 to M15	2	96.44	17	4	1.4	2.1	4.77	4.93	11	6.07
	HT/VHT40 Beam Forming, M0 to M7	2	96.44	17	7	1.4	2.1	4.77	4.93	11	6.07
	HT/VHT40 Beam Forming, M8 to M15	2	96.44	17	4	1.4	2.1	4.77	4.93	11	6.07
	HT/VHT40 STBC, M0 to M7	2	96.44	17	4	1.4	2.1	4.77	4.93	11	6.07
5290	Non VHT80, 6 to 54 Mbps	1	96.27	14	4	-4.56		-4.56	-4.39	11	15.39
	Non VHT80, 6 to 54 Mbps	2	96.27	13	4	-5.50	-5.12	-2.3	-2.13	11	13.13
	VHT80, M0 to M9 1ss	1	82.74	13	4	-5.60		-5.6	-4.78	11	15.78
	VHT80, M0 to M9 1ss	2	82.74	12	4	-7.33	-6.73	-4.01	-3.19	11	14.19
	VHT80, M0 to M9 2ss	2	82.74	12	4	-7.33	-6.73	-4.01	-3.19	11	14.19
	VHT80 Beam Forming, M0 to M9 1ss	2	82.74	11	7	-8.02	-7.58	-4.78	-3.96	11	14.96
	VHT80 Beam Forming, M0 to M9 2ss	2	82.74	12	4	-7.33	-6.73	-4.01	-3.19	11	14.19
	VHT80 STBC, M0 to M9 1ss	2	82.74	12	4	-7.33	-6.73	-4.01	-3.19	11	14.19

5300	Non HT/VHT20, 6 to 54 Mbps	1	96.50	17	4	4.7		4.7	4.85	11	6.15
	Non HT/VHT20, 6 to 54 Mbps	2	96.50	17	4	4.7	5.2	7.97	8.12	11	2.88
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	96.50	17	7	4.7	5.2	7.97	8.12	11	2.88
	HT/VHT20, M0 to M7	1	98.31	17	4	4.3		4.3	4.37	11	6.63
	HT/VHT20, M0 to M7	2	98.31	17	4	4.3	4.9	7.62	7.69	11	3.31
	HT/VHT20, M8 to M15	2	98.31	17	4	4.3	4.9	7.62	7.69	11	3.31
	HT/VHT20 Beam Forming, M0 to M7	2	98.31	17	7	4.3	4.9	7.62	7.69	11	3.31
	HT/VHT20 Beam Forming, M8 to M15	2	98.31	17	4	4.3	4.9	7.62	7.69	11	3.31
	HT/VHT20 STBC, M0 to M7	2	98.31	17	4	4.3	4.9	7.62	7.69	11	3.31
5310	Non HT/VHT40, 6 to 54 Mbps	1	96.41	14	4	-0.56		-0.56	-0.40	11	11.40
	Non HT/VHT40, 6 to 54 Mbps	2	96.41	13	4	-1.44	-0.94	1.83	1.99	11	9.01
	HT/VHT40, M0 to M7	1	96.44	14	4	-1.45		-1.45	-1.29	11	12.29
	HT/VHT40, M0 to M7	2	96.44	13	4	-2.43	-1.39	1.13	1.29	11	9.71
	HT/VHT40, M8 to M15	2	96.44	13	4	-2.43	-1.39	1.13	1.29	11	9.71
	HT/VHT40 Beam Forming, M0 to M7	2	96.44	12	7	-3.02	-2.83	0.09	0.24	11	10.76
	HT/VHT40 Beam Forming, M8 to M15	2	96.44	13	4	-2.43	-1.39	1.13	1.29	11	9.71
	HT/VHT40 STBC, M0 to M7	2	96.44	13	4	-2.43	-1.39	1.13	1.29	11	9.71
5320	Non HT/VHT20, 6 to 54 Mbps	1	96.50	17	4	4.66		4.66	4.81	11	6.19
	Non HT/VHT20, 6 to 54 Mbps	2	96.50	16	4	3.72	4.18	6.97	7.12	11	3.88
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	96.50	15	7	2.93	3.25	6.1	6.26	11	4.74
	HT/VHT20, M0 to M7	1	98.31	17	4	4.23		4.23	4.3	11	6.7
	HT/VHT20, M0 to M7	2	98.31	16	4	3.40	3.97	6.7	6.78	11	4.22
	HT/VHT20, M8 to M15	2	98.31	16	4	3.40	3.97	6.7	6.78	11	4.22
	HT/VHT20 Beam Forming, M0 to M7	2	98.31	14	7	1.33	1.94	4.66	4.73	11	6.27
	HT/VHT20 Beam Forming, M8 to M15	2	98.31	16	4	3.40	3.97	6.7	6.78	11	4.22
	HT/VHT20 STBC, M0 to M7	2	98.31	16	4	3.40	3.97	6.7	6.78	11	4.22

5.4.5 Power Spectral Density Plots

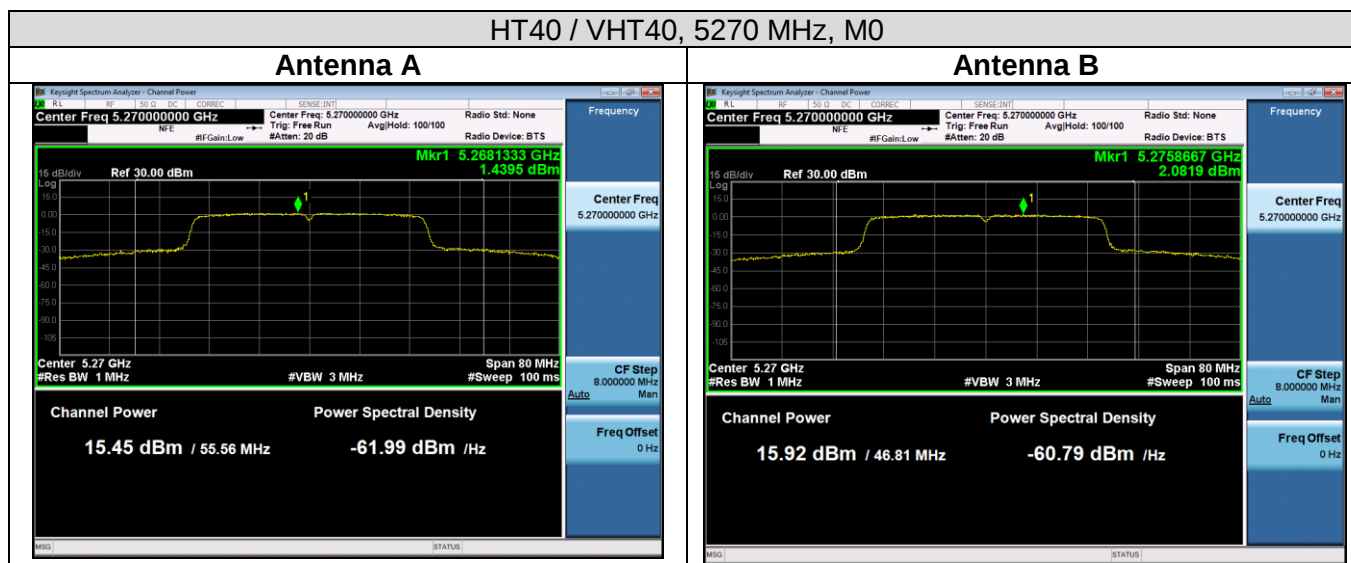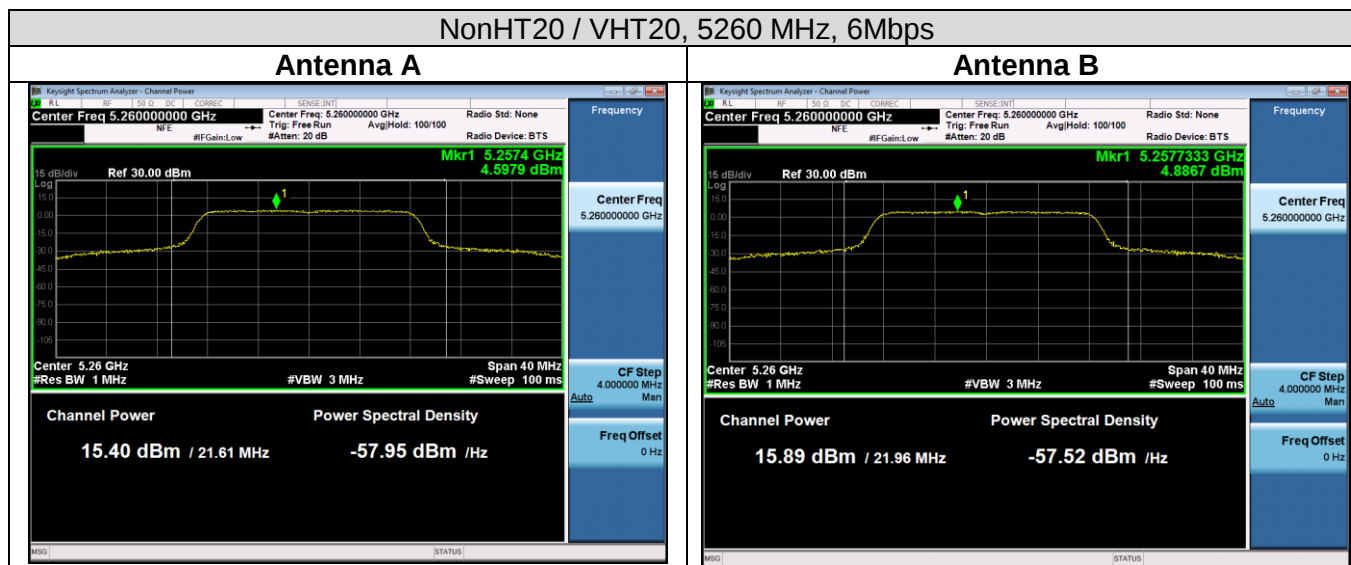

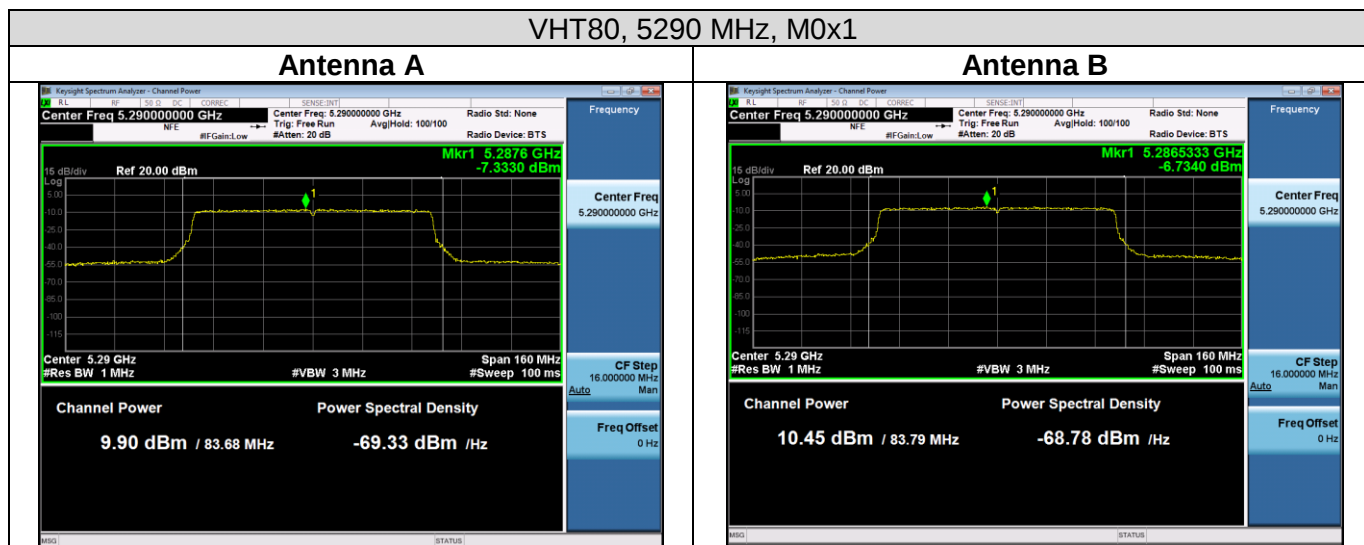

5.5 Conducted Spurious Emissions

5.5.1 Conducted Spurious Emissions Test Requirement

15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

Use formula below to substitute conducted measurements in place of radiated measurements

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and d = 3 meter

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

5.5.2 Conducted Spurious Emissions Test Procedure

Ref. 789033 D02 General UNII Test Procedures New Rules v01r02
ANSI C63.10: 2013

Conducted Spurious Emissions Test Procedure	
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01r02 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands 7. Capture graphs and record pertinent measurement data.	

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r04
Peak: KDB 789033 Section 5, Average (Method AD): KDB 789033 Section 6

Conducted Spurious Emissions Test parameters	
Peak RBW = 1 MHz VBW $\geq$ 3 MHz Sweep = Auto Detector = Peak Trace = Max Hold.	Average RBW = 1 MHz VBW $\geq$ 3 MHz Sweep = Auto Detector = RMS Power Averaging

5.5.3 Conducted Spurious Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01, S02	☒	☐
	Support	S03	☐	☒

Tested By : Julian Land	Date of testing: February 10, 2018
Test Result : PASS	

Test Equipment


See Appendix A for list of test equipment

5.5.4 Conducted Spurious Emissions Data Tables - Peak

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT/VHT20, 6 to 54 Mbps	1	4	-52.0		-48.0	-21.25	26.75
	Non HT/VHT20, 6 to 54 Mbps	2	4	-52.0	-55.3	-46.3	-21.25	25.05
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-52.0	-55.3	-43.3	-21.25	22.05
	HT/VHT20, M0 to M7	1	4	-51.9		-47.9	-21.25	26.65
	HT/VHT20, M0 to M7	2	4	-51.9	-56.3	-46.6	-21.25	25.35
	HT/VHT20, M8 to M15	2	4	-51.9	-56.3	-46.6	-21.25	25.35
	HT/VHT20 Beam Forming, M0 to M7	2	7	-51.9	-56.3	-43.6	-21.25	22.35
	HT/VHT20 Beam Forming, M8 to M15	2	4	-51.9	-56.3	-46.6	-21.25	25.35
	HT/VHT20 STBC, M0 to M7	2	4	-51.9	-56.3	-46.6	-21.25	25.35
5270	Non HT/VHT40, 6 to 54 Mbps	1	4	-54.4		-50.4	-21.25	29.15
	Non HT/VHT40, 6 to 54 Mbps	2	4	-54.4	-55.6	-47.9	-21.25	26.65
	HT/VHT40, M0 to M7	1	4	-52.4		-48.4	-21.25	27.15
	HT/VHT40, M0 to M7	2	4	-52.4	-55.3	-46.6	-21.25	25.35
	HT/VHT40, M8 to M15	2	4	-52.4	-55.3	-46.6	-21.25	25.35
	HT/VHT40 Beam Forming, M0 to M7	2	7	-52.4	-55.3	-43.6	-21.25	22.35
	HT/VHT40 Beam Forming, M8 to M15	2	4	-52.4	-55.3	-46.6	-21.25	25.35
	HT/VHT40 STBC, M0 to M7	2	4	-52.4	-55.3	-46.6	-21.25	25.35
5290	Non VHT80, 6 to 54 Mbps	1	4	-51.45		-51.45	-21.25	30.2
	Non VHT80, 6 to 54 Mbps	2	4	-51.59	-51.95	-48.76	-21.25	27.51
	VHT80, M0 to M9 1ss	1	4	-51.76		-51.76	-21.25	30.51
	VHT80, M0 to M9 1ss	2	4	-51.20	-53.45	-49.17	-21.25	27.92
	VHT80, M0 to M9 2ss	2	4	-51.20	-53.45	-49.17	-21.25	27.92
	VHT80 Beam Forming, M0 to M9 1ss	2	7	-54.76	-55.17	-51.95	-21.25	30.7
	VHT80 Beam Forming, M0 to M9 2ss	2	4	-51.20	-53.45	-49.17	-21.25	27.92
	VHT80 STBC, M0 to M9 1ss	2	4	-51.20	-53.45	-49.17	-21.25	27.92
5300	Non HT/VHT20, 6 to 54 Mbps	1	4	-52.9		-48.9	-21.25	27.65
	Non HT/VHT20, 6 to 54 Mbps	2	4	-52.9	-54.5	-46.6	-21.25	25.35
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-52.9	-54.5	-43.6	-21.25	22.35
	HT/VHT20, M0 to M7	1	4	-53.2		-49.2	-21.25	27.95
	HT/VHT20, M0 to M7	2	4	-53.2	-55.1	-47.0	-21.25	25.75

	HT/VHT20, M8 to M15	2	4	-53.2	-55.1	-47.0	-21.25	25.75
	HT/VHT20 Beam Forming, M0 to M7	2	7	-53.2	-55.1	-44.0	-21.25	22.75
	HT/VHT20 Beam Forming, M8 to M15	2	4	-53.2	-55.1	-47.0	-21.25	25.75
	HT/VHT20 STBC, M0 to M7	2	4	-53.2	-55.1	-47.0	-21.25	25.75
5310	Non HT/VHT40, 6 to 54 Mbps	1	4	-52.85		-52.85	-21.25	31.6
	Non HT/VHT40, 6 to 54 Mbps	2	4	-53.41	-53.70	-50.54	-21.25	29.29
	HT/VHT40, M0 to M7	1	4	-52.56		-52.56	-21.25	31.31
	HT/VHT40, M0 to M7	2	4	-53.04	-54.18	-50.56	-21.25	29.31
	HT/VHT40, M8 to M15	2	4	-53.04	-54.18	-50.56	-21.25	29.31
	HT/VHT40 Beam Forming, M0 to M7	2	7	-53.15	-54.17	-50.62	-21.25	29.37
	HT/VHT40 Beam Forming, M8 to M15	2	4	-53.04	-54.18	-50.56	-21.25	29.31
	HT/VHT40 STBC, M0 to M7	2	4	-53.04	-54.18	-50.56	-21.25	29.31
5320	Non HT/VHT20, 6 to 54 Mbps	1	4	-53.60		-49.6	-21.25	28.35
	Non HT/VHT20, 6 to 54 Mbps	2	4	-52.74	-54.77	-46.63	-21.25	25.38
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-53.78	-54.08	-43.92	-21.25	22.67
	HT/VHT20, M0 to M7	1	4	-52.04		-48.04	-21.25	26.79
	HT/VHT20, M0 to M7	2	4	-53.19	-54.21	-46.66	-21.25	25.41
	HT/VHT20, M8 to M15	2	4	-53.19	-54.21	-46.66	-21.25	25.41
	HT/VHT20 Beam Forming, M0 to M7	2	7	-53.01	-53.53	-43.25	-21.25	22.00
	HT/VHT20 Beam Forming, M8 to M15	2	4	-53.19	-54.21	-46.66	-21.25	25.41
	HT/VHT20 STBC, M0 to M7	2	4	-53.19	-54.21	-46.66	-21.25	25.41

5.5.5 Conducted Spurious Emissions Plots - Peak

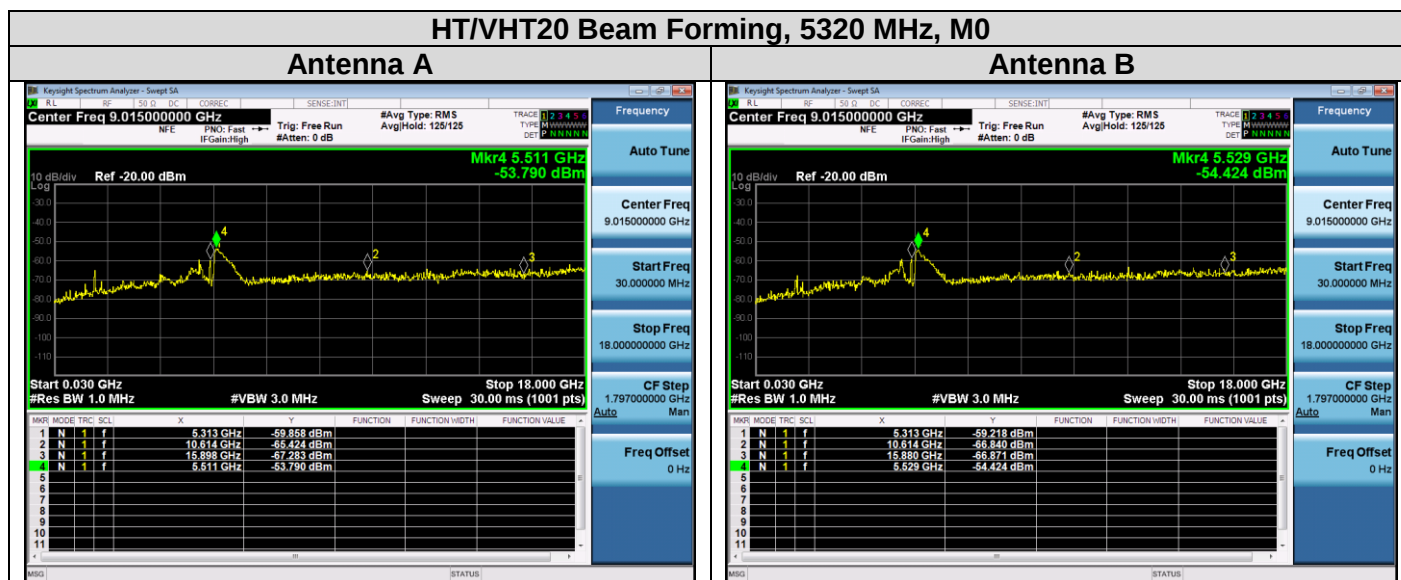


5.5.6 Conducted Spurious Emissions Data Tables - Average


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT/VHT20, 6 to 54 Mbps	1	4	-63.5		-59.5	-41.25	18.25
	Non HT/VHT20, 6 to 54 Mbps	2	4	-63.5	-67.2	-58.0	-41.25	16.75
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-63.5	-67.2	-55.0	-41.25	13.75
	HT/VHT20, M0 to M7	1	4	-63.6		-59.6	-41.25	18.35
	HT/VHT20, M0 to M7	2	4	-63.6	-67.2	-58.0	-41.25	16.75
	HT/VHT20, M8 to M15	2	4	-63.6	-67.2	-58.0	-41.25	16.75
	HT/VHT20 Beam Forming, M0 to M7	2	7	-63.6	-67.2	-55.0	-41.25	13.75
	HT/VHT20 Beam Forming, M8 to M15	2	4	-63.6	-67.2	-58.0	-41.25	16.75
	HT/VHT20 STBC, M0 to M7	2	4	-63.6	-67.2	-58.0	-41.25	16.75
5270	Non HT/VHT40, 6 to 54 Mbps	1	4	-65.2		-61.2	-41.25	19.95
	Non HT/VHT40, 6 to 54 Mbps	2	4	-65.2	-65.8	-58.5	-41.25	17.25
	HT/VHT40, M0 to M7	1	4	-63.8		-59.8	-41.25	18.55
	HT/VHT40, M0 to M7	2	4	-63.8	-66.3	-57.9	-41.25	16.65
	HT/VHT40, M8 to M15	2	4	-63.8	-66.3	-57.9	-41.25	16.65
	HT/VHT40 Beam Forming, M0 to M7	2	7	-63.8	-66.3	-54.9	-41.25	13.65
	HT/VHT40 Beam Forming, M8 to M15	2	4	-63.8	-66.3	-57.9	-41.25	16.65
	HT/VHT40 STBC, M0 to M7	2	4	-63.8	-66.3	-57.9	-41.25	16.65
5290	Non VHT80, 6 to 54 Mbps	1	4	-63.13		-59.13	-41.25	17.88
	Non VHT80, 6 to 54 Mbps	2	4	-62.97	-63.54	-56.24	-41.25	14.99
	VHT80, M0 to M9 1ss	1	4	-63.69		-59.69	-41.25	18.44
	VHT80, M0 to M9 1ss	2	4	-63.69	-63.79	-56.73	-41.25	15.48
	VHT80, M0 to M9 2ss	2	4	-63.69	-63.79	-56.73	-41.25	15.48
	VHT80 Beam Forming, M0 to M9 1ss	2	7	-66.85	-66.65	-56.74	-41.25	15.49
	VHT80 Beam Forming, M0 to M9 2ss	2	4	-63.69	-63.79	-56.73	-41.25	15.48
	VHT80 STBC, M0 to M9 1ss	2	4	-63.69	-63.79	-56.73	-41.25	15.48
5300	Non HT/VHT20, 6 to 54 Mbps	1	4	-64.9		-60.9	-41.25	19.65
	Non HT/VHT20, 6 to 54 Mbps	2	4	-64.9	-65.6	-58.2	-41.25	16.95
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-64.9	-65.6	-55.2	-41.25	13.95
	HT/VHT20, M0 to M7	1	4	-64.7		-60.7	-41.25	19.45

	HT/VHT20, M0 to M7	2	4	-64.7	-65.8	-58.2	-41.25	16.95
	HT/VHT20, M8 to M15	2	4	-64.7	-65.8	-58.2	-41.25	16.95
	HT/VHT20 Beam Forming, M0 to M7	2	7	-64.7	-65.8	-55.2	-41.25	13.95
	HT/VHT20 Beam Forming, M8 to M15	2	4	-64.7	-65.8	-58.2	-41.25	16.95
	HT/VHT20 STBC, M0 to M7	2	4	-64.7	-65.8	-58.2	-41.25	16.95
5310	Non HT/VHT40, 6 to 54 Mbps	1	4	-64.24		-60.24	-41.25	18.99
	Non HT/VHT40, 6 to 54 Mbps	2	4	-64.15	-65.18	-57.62	-41.25	16.37
	HT/VHT40, M0 to M7	1	4	-64.50		-60.5	-41.25	19.25
	HT/VHT40, M0 to M7	2	4	-64.41	-65.55	-57.93	-41.25	16.68
	HT/VHT40, M8 to M15	2	4	-64.41	-65.55	-57.93	-41.25	16.68
	HT/VHT40 Beam Forming, M0 to M7	2	7	-64.62	-65.10	-54.84	-41.25	13.59
	HT/VHT40 Beam Forming, M8 to M15	2	4	-64.41	-65.55	-57.93	-41.25	16.68
	HT/VHT40 STBC, M0 to M7	2	4	-64.41	-65.55	-57.93	-41.25	16.68
5320	Non HT/VHT20, 6 to 54 Mbps	1	4	-64.77		-60.77	-41.25	19.52
	Non HT/VHT20, 6 to 54 Mbps	2	4	-64.32	-65.22	-57.74	-41.25	16.49
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-64.21	-65.16	-54.65	-41.25	13.4
	HT/VHT20, M0 to M7	1	4	-64.72		-60.72	-41.25	19.47
	HT/VHT20, M0 to M7	2	4	-64.52	-65.26	-57.86	-41.25	16.61
	HT/VHT20, M8 to M15	2	4	-64.52	-65.26	-57.86	-41.25	16.61
	HT/VHT20 Beam Forming, M0 to M7	2	7	-64.16	-65.04	-54.57	-41.25	13.32
	HT/VHT20 Beam Forming, M8 to M15	2	4	-64.52	-65.26	-57.86	-41.25	16.61
	HT/VHT20 STBC, M0 to M7	2	4	-64.52	-65.26	-57.86	-41.25	16.61


5.5.7 Conducted Spurious Emissions Data Plots - Average

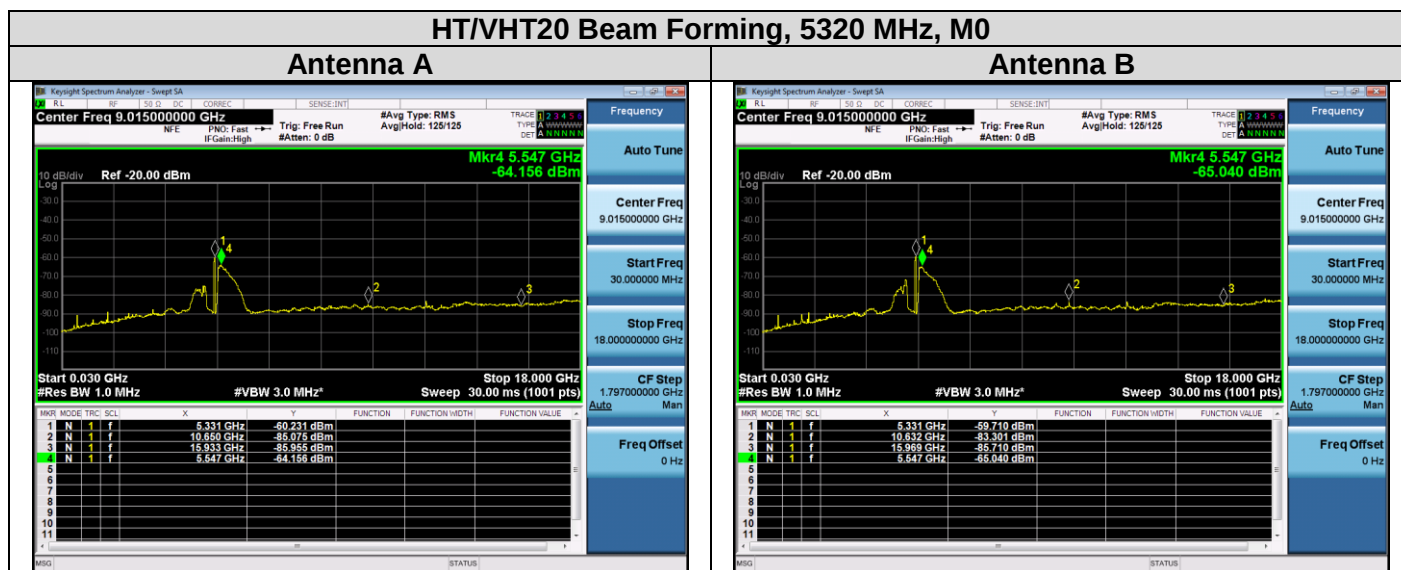

5.5.8 Conducted Spurious Emissions Upper Frequency - Peak

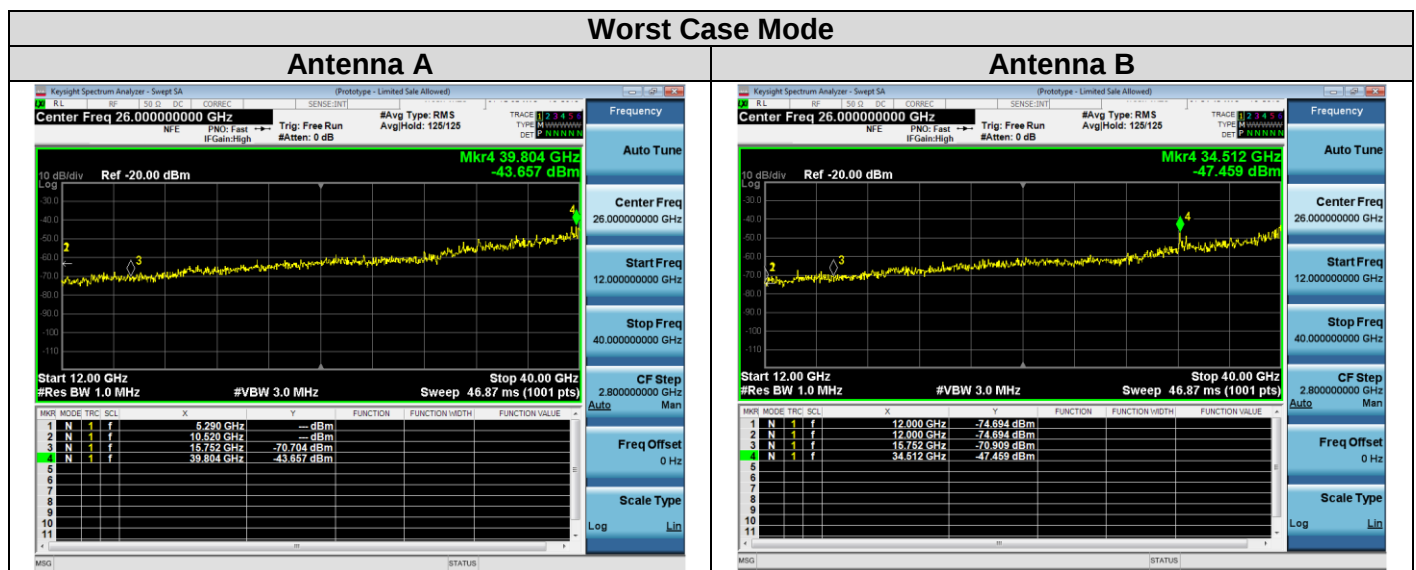

5.5.9 Conducted Spurious Emissions Upper Frequency - Average

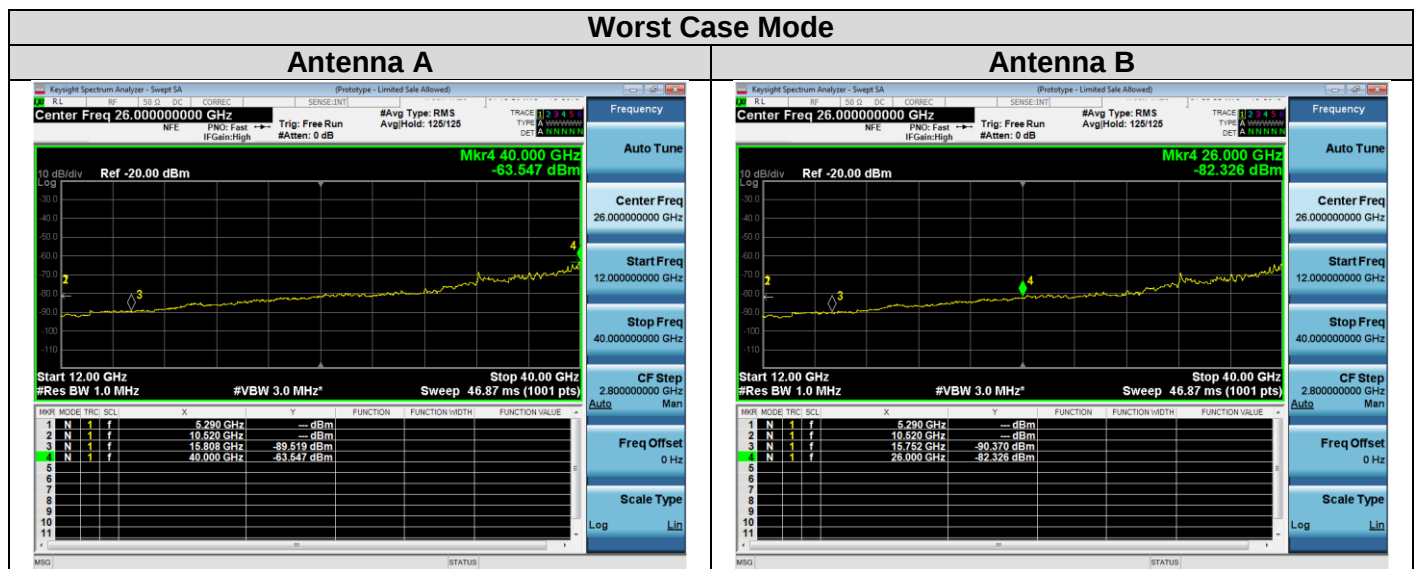

5.6 Conducted Band Edge

5.6.1 Conducted Band Edge Test Requirement

15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

KDB 789033 D02 General UNII Test Procedures New Rules v01r02 2. Unwanted Emissions that fall Outside of the Restricted Bands

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

5.6.2 Conducted Band Edge Test Procedure

Ref. 789033 D02 General UNII Test Procedures New Rules v01r02

ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
 2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01r02 to substitute conducted measurements in place of radiated measurements.
 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
 4. Record the marker. Also measure any emissions in the restricted bands.
 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
- Also measure any emissions in the restricted bands
7. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01r02

Peak: KDB 789033 Section 5, Average: KDB 789033 Section 6

Conducted Spurious Emissions

Test parameters

5. Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz

- a) Follow the requirements in section II.G.3., “General Requirements for Unwanted Emissions Measurements”.
- b) Maximum emission levels are measured by setting the analyzer as follows: (i) RBW = 1 MHz.
- (ii) VBW $\geq$ 3 MHz.
- (iii) Detector = Peak.
- (iv) Sweep time = auto.
- (v) Trace mode = max hold.
- (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

6. Procedures for Average Unwanted Emissions Measurements above 1000 MHz

- a) Follow the requirements in section II.G.3., “General Requirements for Unwanted Emissions Measurements”.
- b) Average emission levels shall be measured using one of the following two methods.

- d) **Method VB** (Averaging using reduced video bandwidth): Alternative method. (i) RBW = 1 MHz.
- (ii) Video bandwidth. • If the EUT is configured to transmit with duty cycle ≥ 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
- If the EUT duty cycle is < 98 percent, set $VBW \geq 1/T$, where T is defined in section II.B.1.a).
- (iii) Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).
- As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode.
- (iv) Detector = Peak.
- (v) Sweep time = auto.
- (vi) Trace mode = max hold.
- (vii) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

5.6.3 Conducted Band Edge Test Information

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01, S02	☒	☐
	Support	S03	☐	☒

Tested By : Julian Land	Date of testing: February 10, 2018, Sept 18 & 19, 2018
Test Result : PASS	


Test Equipment

See Appendix A for list of test equipment

5.6.4 Conducted Band Edge Data Tables – Peak

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5290	Non VHT80, 6 to 54 Mbps	1	4	-35.00		-31.00	-21.25	9.75
	Non VHT80, 6 to 54 Mbps	2	4	-43.51	-36.92	-32.06	-21.25	10.81
	VHT80, M0 to M9 1ss	1	4	-38.81		-34.81	-21.25	13.56
	VHT80, M0 to M9 1ss	2	4	-44.20	-41.22	-35.45	-21.25	14.2
	VHT80, M0 to M9 2ss	2	4	-44.20	-41.22	-35.45	-21.25	14.2
	VHT80 Beam Forming, M0 to M9 1ss	2	7	-46.75	-43.28	-34.67	-21.25	13.42
	VHT80 Beam Forming, M0 to M9 2ss	2	4	-44.20	-41.22	-35.45	-21.25	14.2
	VHT80 STBC, M0 to M9 1ss	2	4	-44.20	-41.22	-35.45	-21.25	14.2
5310	Non HT/VHT40, 6 to 54 Mbps	1	4	-40.68		-36.68	-21.25	15.43
	Non HT/VHT40, 6 to 54 Mbps	2	4	-43.76	-42.30	-35.96	-21.25	14.71
	HT/VHT40, M0 to M7	1	4	-38.42		-34.42	-21.25	13.17
	HT/VHT40, M0 to M7	2	4	-39.47	-40.04	-32.74	-21.25	11.49
	HT/VHT40, M8 to M15	2	4	-39.47	-40.04	-32.74	-21.25	11.49
	HT/VHT40 Beam Forming, M0 to M7	2	7	-45.29	-42.67	-33.78	-21.25	12.53
	HT/VHT40 Beam Forming, M8 to M15	2	4	-39.47	-40.04	-32.74	-21.25	11.49
	HT/VHT40 STBC, M0 to M7	2	4	-39.47	-40.04	-32.74	-21.25	11.49
5320	Non HT/VHT20, 6 to 54 Mbps	1	4	-36.47		-32.47	-21.25	11.22
	Non HT/VHT20, 6 to 54 Mbps	2	4	-37.17	-36.50	-29.81	-21.25	8.56
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	-41.61	-36.87	-28.61	-21.25	7.36
	HT/VHT20, M0 to M7	1	4	-36.31		-32.31	-21.25	11.06
	HT/VHT20, M0 to M7	2	4	-37.81	-32.74	-27.56	-21.25	6.31
	HT/VHT20, M8 to M15	2	4	-37.81	-32.74	-27.56	-21.25	6.31
	HT/VHT20 Beam Forming, M0 to M7	2	7	-42.99	-40.14	-31.32	-21.25	10.07
	HT/VHT20 Beam Forming, M8 to M15	2	4	-37.81	-32.74	-27.56	-21.25	6.31
	HT/VHT20 STBC, M0 to M7	2	4	-37.81	-32.74	-27.56	-21.25	6.31


5.6.5 Conducted Band Edge Plot – Peak

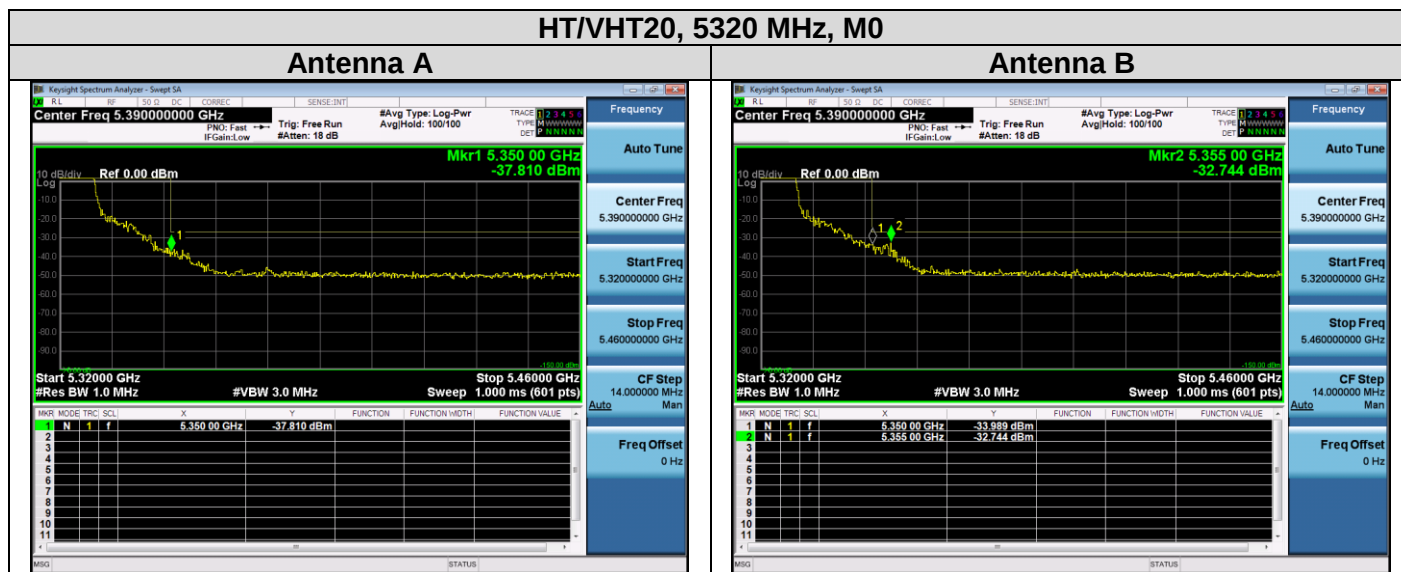

5.6.6 Conducted Band Edge Data Tables – Average

Frequency (MHz)	Mode	Index Power (dBm)	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5290	Non VHT80, 6 to 54 Mbps	14	1	4	-46.36		-42.36	-41.25	1.11
	Non VHT80, 6 to 54 Mbps	13	2	4	-49.48	-48.95	-42.20	-41.25	0.95
	VHT80, M0 to M9 1ss	13	1	4	-48.38		-44.38	-41.25	3.13
	VHT80, M0 to M9 1ss	12	2	4	-51.93	-51.38	-44.64	-41.25	3.39
	VHT80, M0 to M9 2ss	12	2	4	-51.93	-51.38	-44.64	-41.25	3.39
	VHT80 Beam Forming, M0 to M9 1ss	11	2	7	-54.21	-54.49	-44.34	-41.25	3.09
	VHT80 Beam Forming, M0 to M9 2ss	12	2	4	-51.93	-51.38	-44.64	-41.25	3.39
	VHT80 STBC, M0 to M9 1ss	12	2	4	-51.93	-51.38	-44.64	-41.25	3.39
5310	Non HT/VHT40, 6 to 54 Mbps	14	1	4	-48.59		-44.59	-41.25	3.34
	Non HT/VHT40, 6 to 54 Mbps	13	2	4	-52.95	-51.00	-44.86	-41.25	3.61
	HT/VHT40, M0 to M7	14	1	4	-47.23		-43.23	-41.25	1.98
	HT/VHT40, M0 to M7	13	2	4	-51.31	-49.66	-43.40	-41.25	2.15
	HT/VHT40, M8 to M15	13	2	4	-51.31	-49.66	-43.40	-41.25	2.15
	HT/VHT40 Beam Forming, M0 to M7	12	2	7	-55.13	-53.63	-44.31	-41.25	3.06
	HT/VHT40 Beam Forming, M8 to M15	13	2	4	-51.31	-49.66	-43.40	-41.25	2.15
	HT/VHT40 STBC, M0 to M7	13	2	4	-51.31	-49.66	-43.40	-41.25	2.15
5320	Non HT/VHT20, 6 to 54 Mbps	17	1	4	-47.36		-43.36	-41.25	2.11
	Non HT/VHT20, 6 to 54 Mbps	16	2	4	-50.45	-49.68	-43.04	-41.25	1.79
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	15	2	7	-52.98	-52.46	-41.70	-41.25	0.45
	HT/VHT20, M0 to M7	17	1	4	-46.70		-42.70	-41.25	1.45
	HT/VHT20, M0 to M7	16	2	4	-49.49	-48.88	-42.16	-41.25	0.91
	HT/VHT20, M8 to M15	16	2	4	-49.49	-48.88	-42.16	-41.25	0.91
	HT/VHT20 Beam Forming, M0 to M7	14	2	7	-56.13	-53.92	-44.88	-41.25	3.63
	HT/VHT20 Beam Forming, M8 to M15	16	2	4	-49.49	-48.88	-42.16	-41.25	0.91
	HT/VHT20 STBC, M0 to M7	16	2	4	-49.49	-48.88	-42.16	-41.25	0.91

5.6.7 Conducted Band Edge Plot – Average

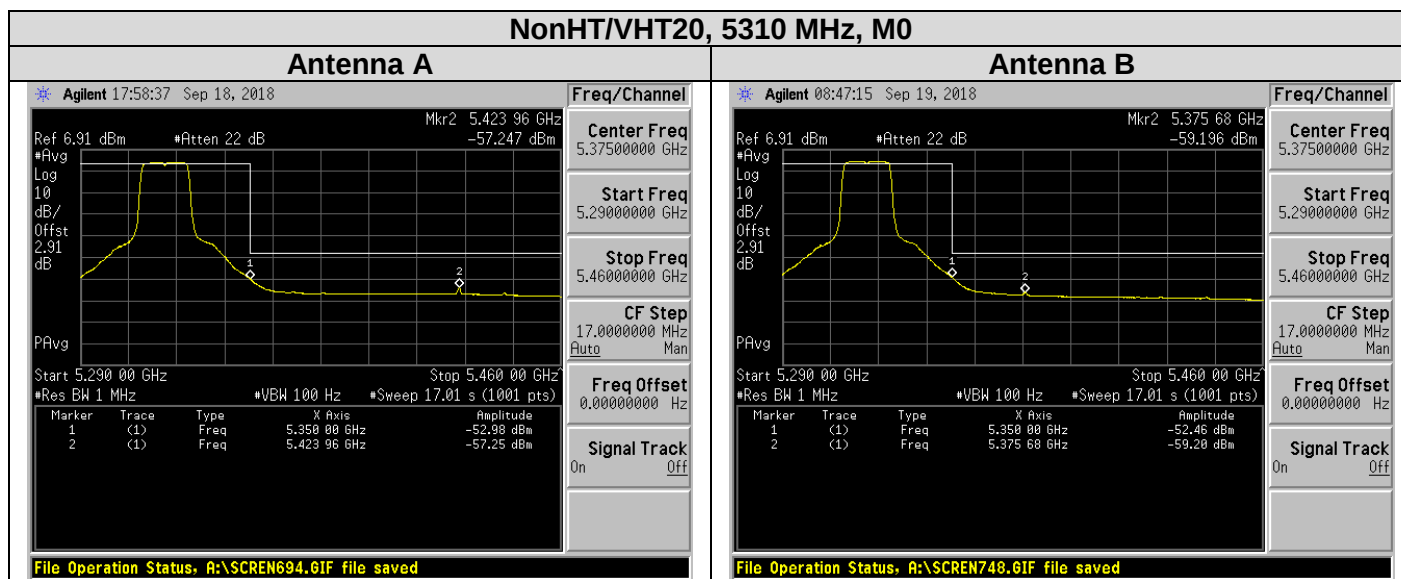

Section 6: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

6.1 Transmitter Radiated Spurious Emissions

6.1.1 Radiated Spurious Emissions Test Requirement

15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

15.205 / 15.209

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

15.209 / 15.205 / 15.407:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.1.2 Radiated Spurious Emissions Test Procedure

Ref. ANSI C63.10: 2013 section 6.5

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak
Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.	

Span:	1GHz – 40 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3 MHz for peak, 1 kHz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

6.1.3 Radiated Spurious Emissions Test Information

System Number	Description	Samples	System under test	Support equipment
2	EUT	S04 and S05	☒	☐
	Support	S03	☐	☒


Mode#	Description	Comments
1	HT/VHT40, M0 to M7	Transmit

Tested By : Nima Ardestani	Date of testing: 06/14/2018 – 08/15/2018
Test Result : Pass	


See Appendix A for list of test equipment

6.1.4 Transmitter Radiated Spurious Emissions Test Results


Test Results for 30MHz – 1GHz:

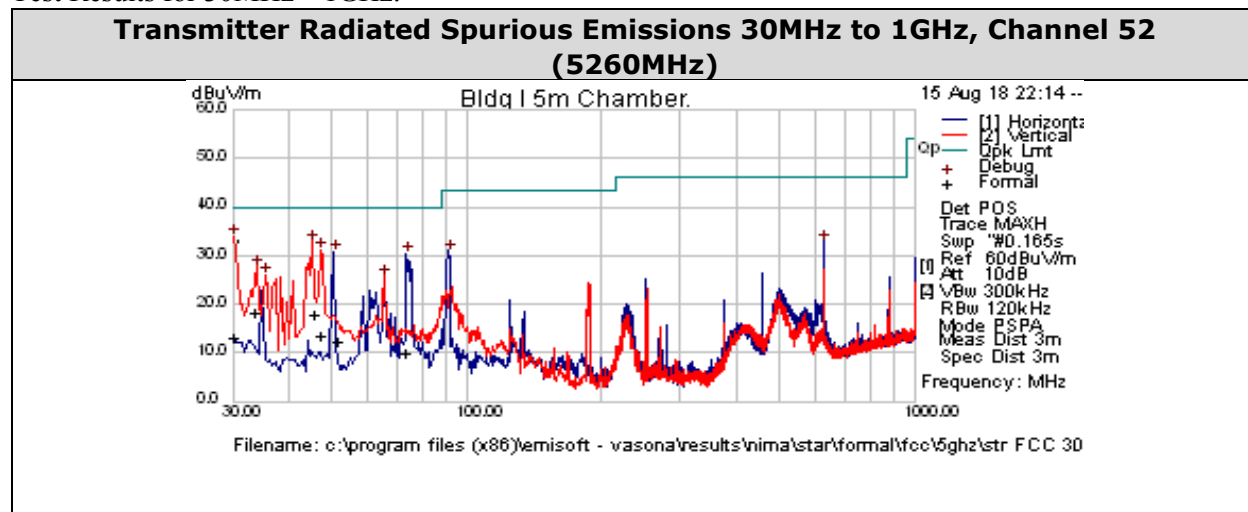

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
45.21925	45.57	0.58	-27.37	18.78	Quasi Max	V	103	23	40	-21.22	Pass	
33.6245	35.44	0.51	-18.84	17.11	Quasi Max	V	165	168	40	-22.89	Pass	
50.67175	41.3	0.63	-29.9	12.04	Quasi Max	V	134	11	40	-27.96	Pass	
46.886	39.34	0.59	-28.36	11.57	Quasi Max	V	167	185	40	-28.43	Pass	
30.00466	25.62	0.48	-16.04	10.06	Quasi Max	V	127	9	40	-29.94	Pass	
73.28525	38.3	0.74	-29.26	9.77	Quasi Max	V	193	39	40	-30.23	Pass	

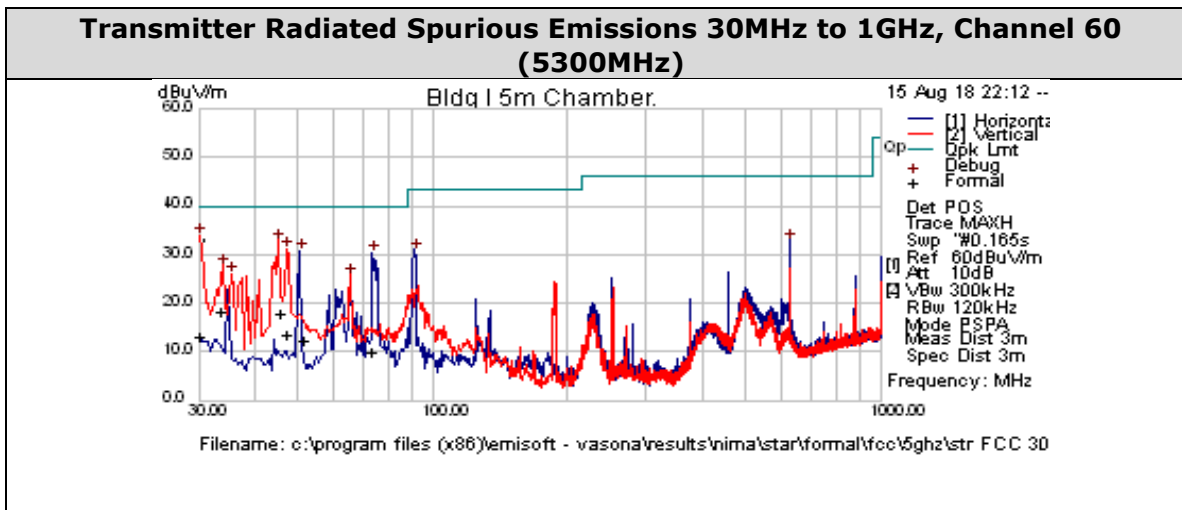


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
33.59975	36.75	0.51	-18.82	18.44	Quasi Max	V	101	190	40	-21.56	Pass	
45.297	45.02	0.58	-27.41	18.19	Quasi Max	V	102	39	40	-21.81	Pass	
46.7445	41.25	0.58	-28.28	13.56	Quasi Max	V	109	222	40	-26.44	Pass	
30.13866	28.99	0.48	-16.15	13.32	Quasi Max	V	110	256	40	-26.68	Pass	
51.075	41.67	0.64	-30.01	12.3	Quasi Max	V	117	41	40	-27.7	Pass	
72.93225	38.46	0.74	-29.26	9.94	Quasi Max	V	121	60	40	-30.06	Pass	

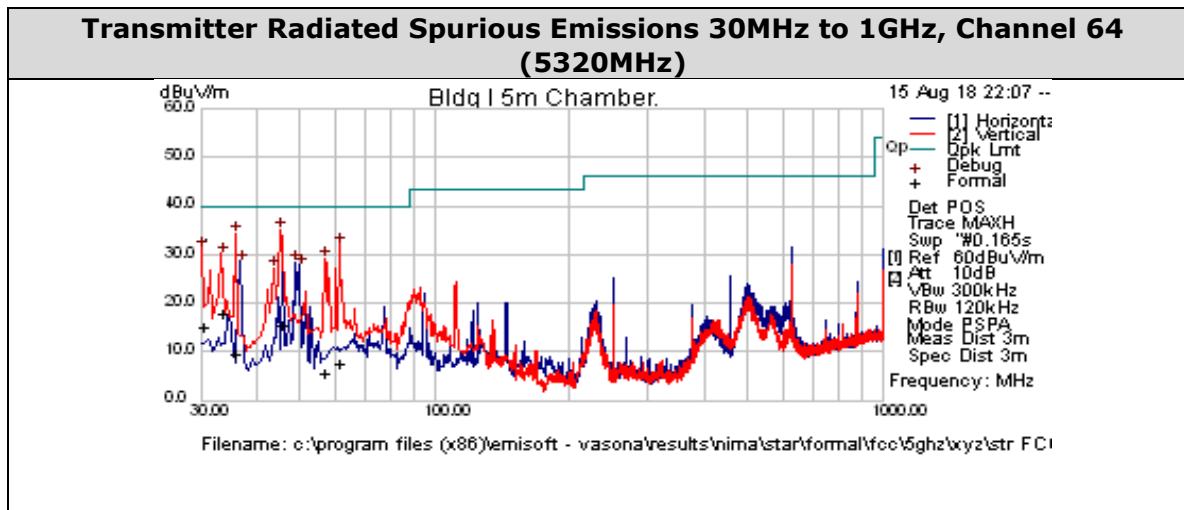


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
33.59525	36.31	0.51	-18.82	18	Quasi Max	V	123	201	40	-22	Pass	
45.18975	42.55	0.58	-27.35	15.78	Quasi Max	V	132	64	40	-24.22	Pass	
30.17621	30.77	0.48	-16.18	15.07	Quasi Max	V	101	221	40	-24.93	Pass	
35.8945	29.81	0.52	-20.45	9.88	Quasi Max	V	101	357	40	-30.12	Pass	
61.02525	36.82	0.69	-29.89	7.62	Quasi Max	V	124	256	40	-32.38	Pass	
56.6955	35.5	0.66	-30.43	5.74	Quasi Max	V	176	181	40	-34.26	Pass	

Test Results for 1GHz – 10GHz:

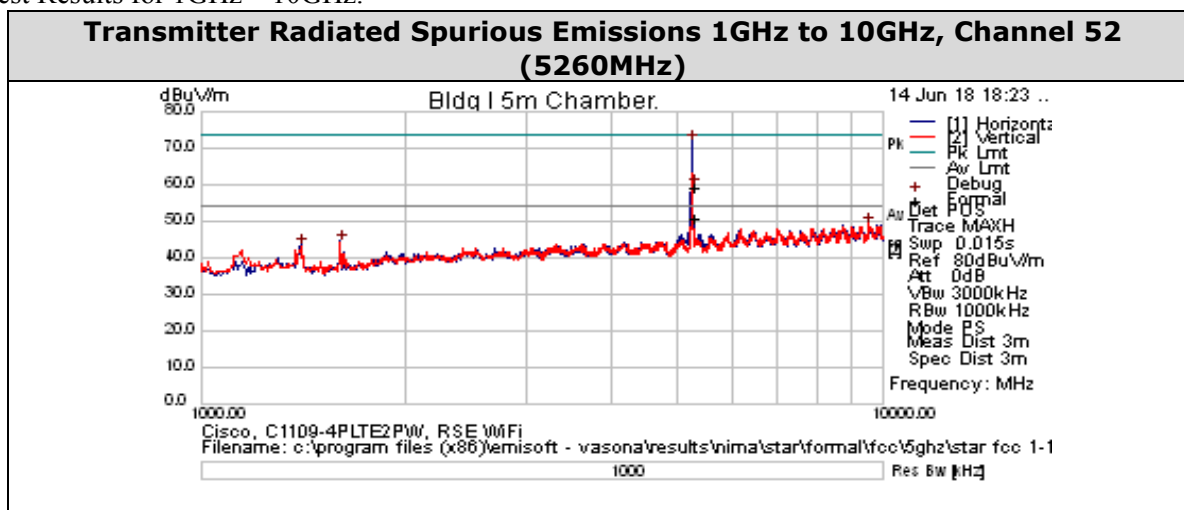


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5252.5	69.75	7.72	-5.55	71.92	Peak [Scan]	H	125	253	54	17.92	N/A	Fundamental
5268.133	48.95	7.76	-5.5	51.21	Average Max	H	186	237	54	-2.79	Pass	
5268.133	57.17	7.76	-5.5	59.43	Peak Max	H	186	237	74	-14.57	Pass	

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

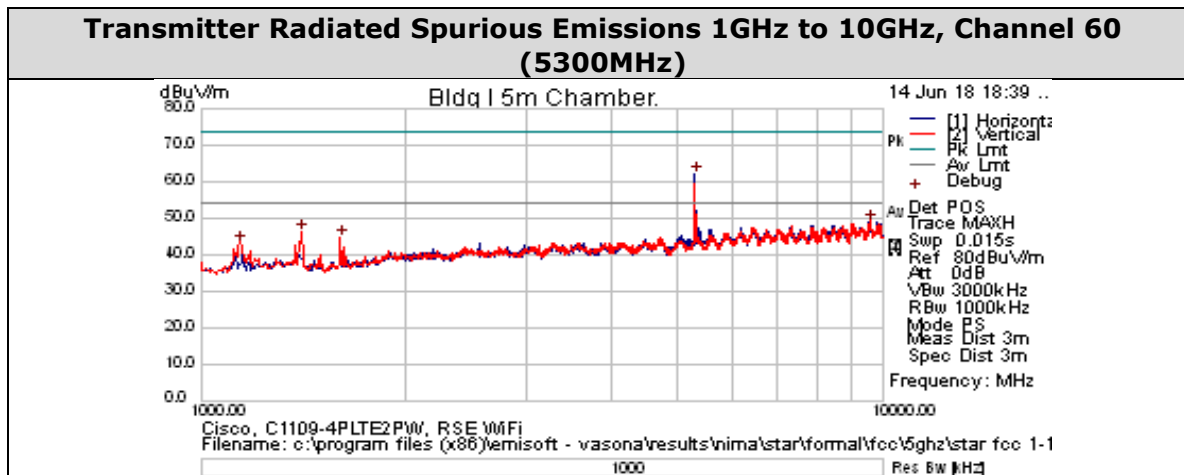

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5303.125	59.65	7.8	-5.38	62.07	Peak [Scan]	H	150	242	54	8.07	N/A	Fundamental
9583.75	39.93	11.06	-1.75	49.24	Peak [Scan]	V	275	281	54	-4.76	Pass	
1399.375	54.64	3.62	-11.86	46.4	Peak [Scan]	V	150	100	54	-7.6	Pass	
1601.875	53.41	3.88	-12.42	44.87	Peak [Scan]	V	200	158	54	-9.13	Pass	
1140.625	53.31	3.24	-13.18	43.38	Peak [Scan]	V	225	258	54	-10.63	Pass	


Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

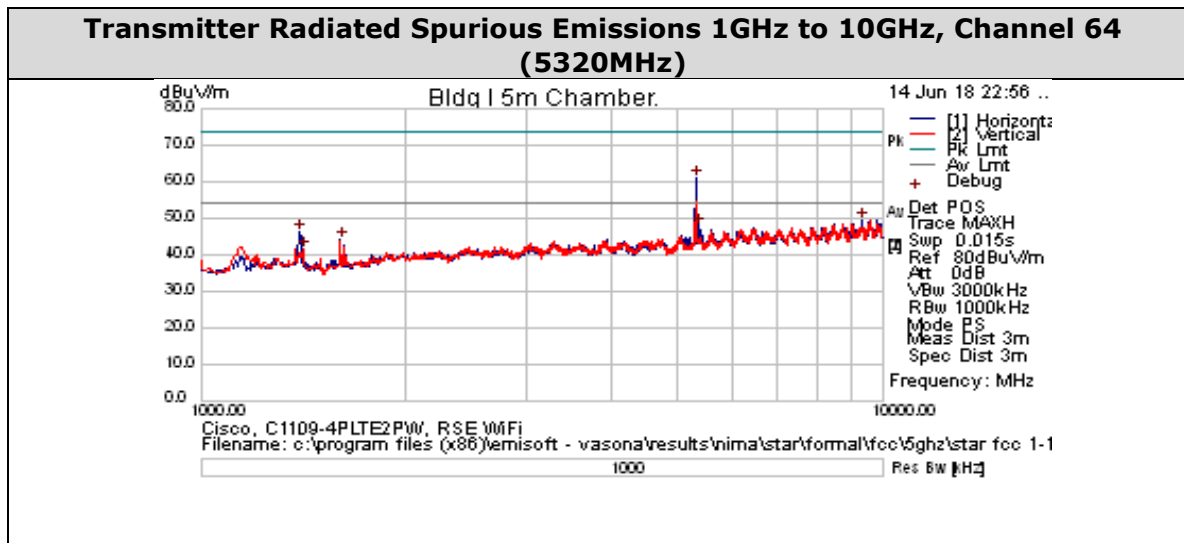


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5320	58.6	7.79	-5.2	61.18	Peak [Scan]	H	250	106	54	7.18	N/A	Fundamental
9313.75	40.93	10.91	-2.15	49.69	Peak [Scan]	H	250	104	54	-4.31	Pass	
5370.625	45.38	7.83	-5.05	48.17	Peak [Scan]	H	200	242	54	-5.83	Pass	
1393.75	54.55	3.61	-11.82	46.34	Peak [Scan]	H	200	326	54	-7.66	Pass	
1601.875	52.94	3.88	-12.42	44.4	Peak [Scan]	H	225	143	54	-9.61	Pass	
1410.625	49.96	3.64	-11.94	41.66	Peak [Scan]	V	250	187	54	-12.34	Pass	

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.


Test Results for 10GHz – 18GHz:

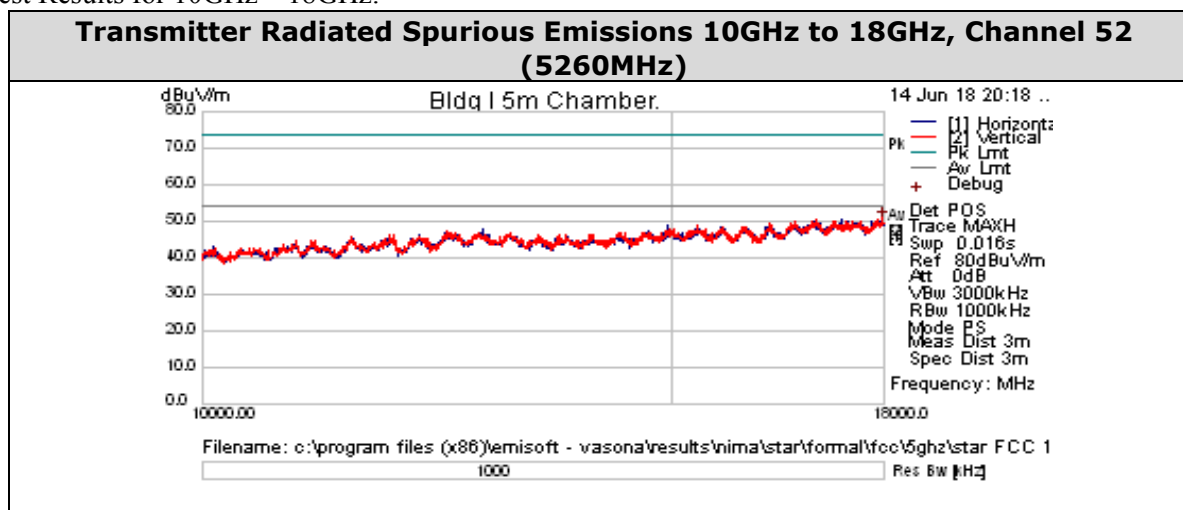

Note: No emissions were found in this range.

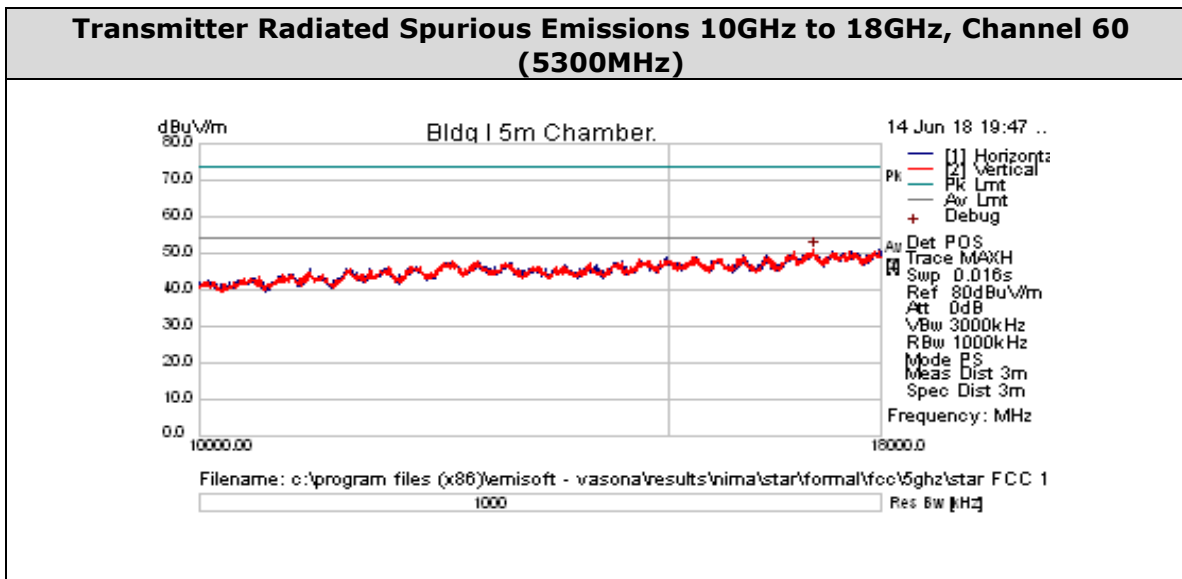


Note: No emissions were found in this range.

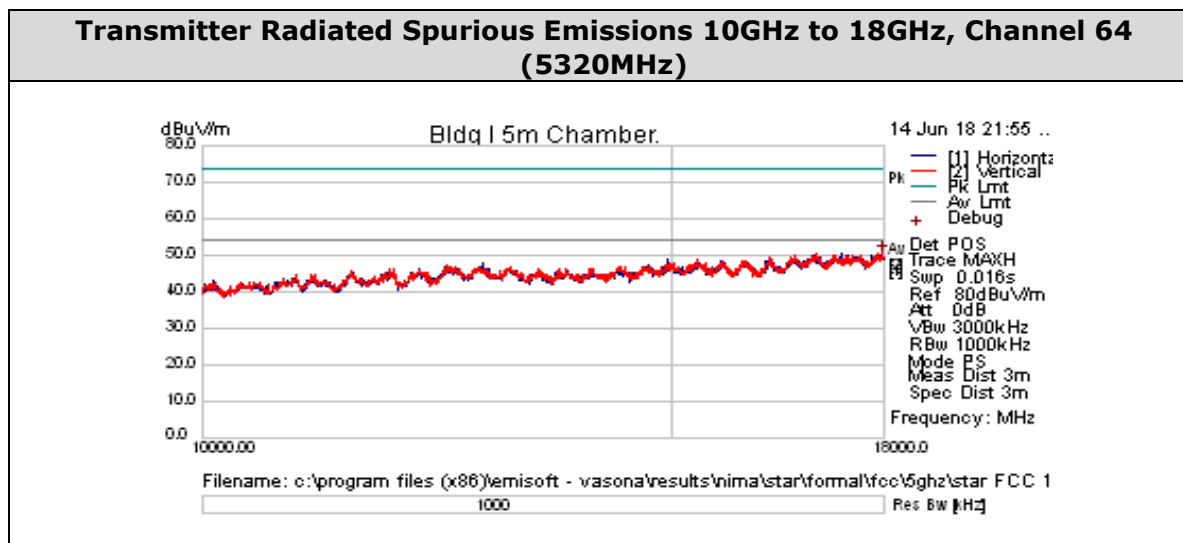


Note: No emissions were found in this range.

Test Results for 18GHz – 26.5GHz:

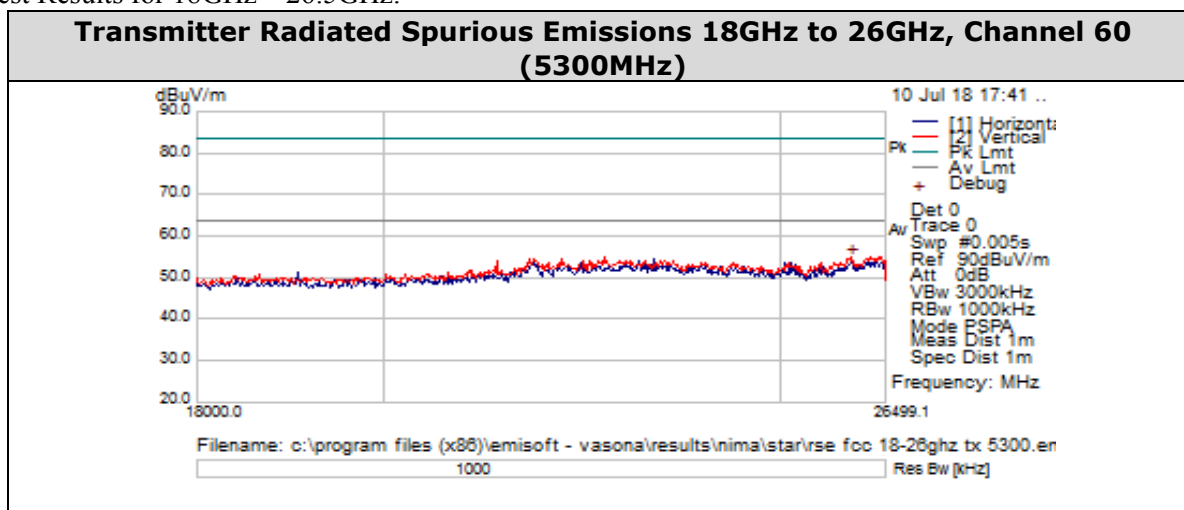

Note: No emissions were found in this range.

Test Results for 26.5GHz – 40GHz:

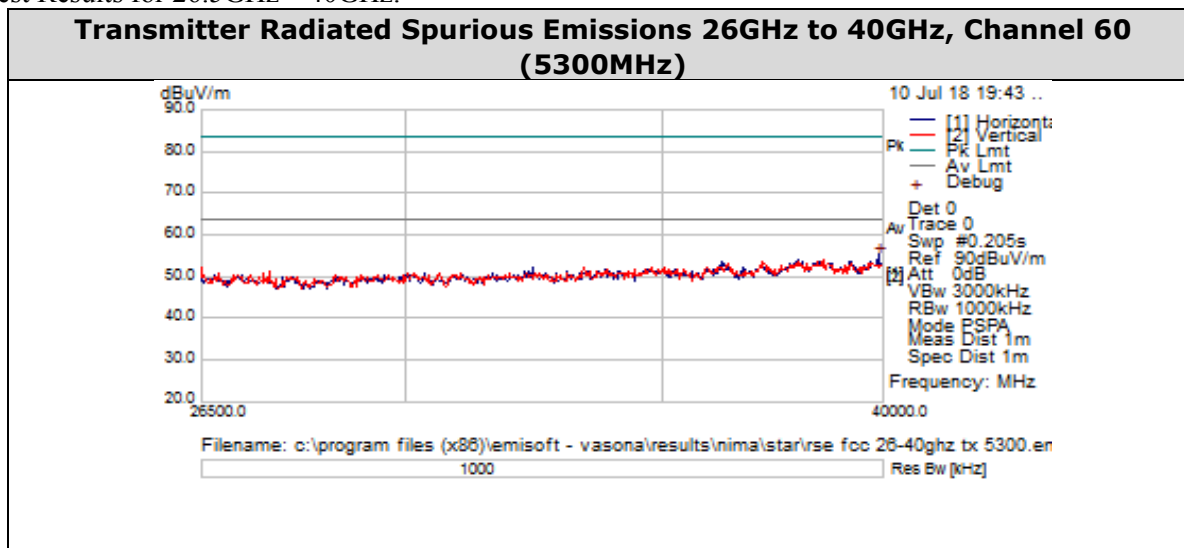

Note: No emissions were found in this range.

6.2 AC Conducted Emissions

6.2.1 AC Conducted Emissions Requirements

15.207

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

6.2.2 AC Conducted Emissions Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	150 KHz – 30 MHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	9 KHz
Video Bandwidth:	30 KHz
Detector:	Quasi-Peak / Average


6.2.3 AC Conducted Emissions Information

System Number	Description	Samples	System under test	Support equipment
2	EUT	S04 and S05	☒	☐
	Support	S03	☐	☒

Mode#	Description	Comments
1	HT/VHT40, M0 to M7	Transmit

Tested By : Nima Ardestani	Date of testing: 02-August-2018
Test Result : Pass	

6.2.4 AC Conducted Emissions Test Results

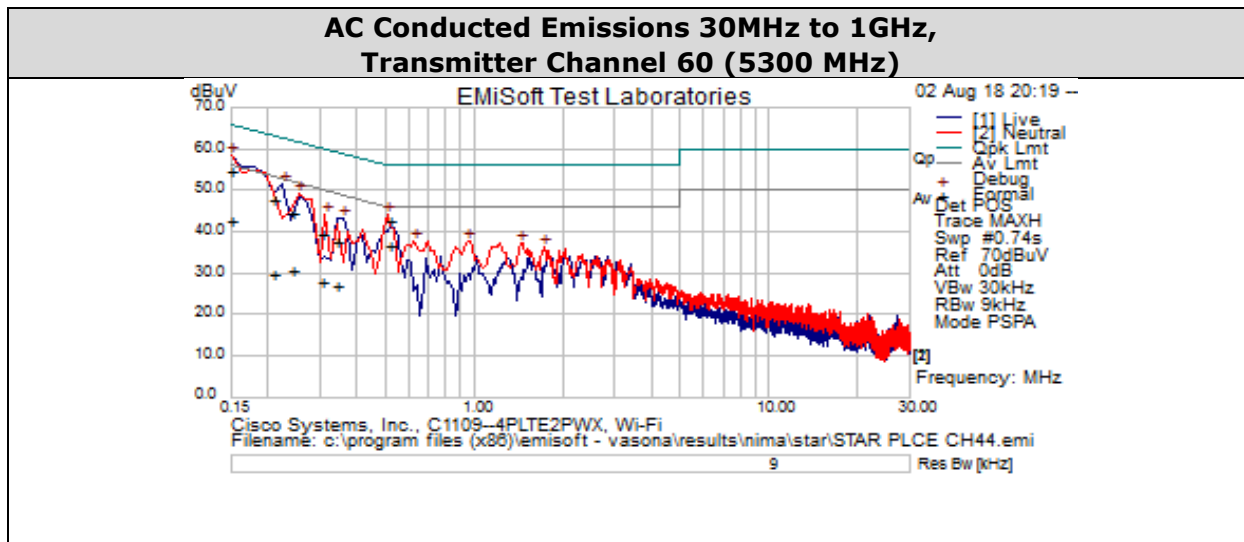

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.525915	14.95	20	0.04	34.99	Average	Neutral	46	-11.01	Pass	
0.163506	32.37	21.23	0.06	53.67	Quasi Peak	Neutral	65.28	-11.61	Pass	
0.163506	19.79	21.23	0.06	41.08	Average	Neutral	55.28	-14.2	Pass	
0.525915	21.41	20	0.04	41.45	Quasi Peak	Neutral	56	-14.55	Pass	
0.208785	26.6	20.94	0.05	47.59	Quasi Peak	Neutral	63.25	-15.67	Pass	
0.240327	23.7	20.76	0.05	44.52	Quasi Peak	Neutral	62.08	-17.57	Pass	
0.266361	21.52	20.64	0.04	42.2	Quasi Peak	Neutral	61.23	-19.03	Pass	
0.314304	17.89	20.44	0.04	38.37	Quasi Peak	Live	59.86	-21.48	Pass	
0.314304	7.81	20.44	0.04	28.29	Average	Live	49.86	-21.56	Pass	
0.208785	7.99	20.94	0.05	28.98	Average	Neutral	53.25	-24.28	Pass	
0.266361	2.17	20.64	0.04	22.85	Average	Neutral	51.23	-28.38	Pass	
0.240327	2.23	20.76	0.05	23.05	Average	Neutral	52.08	-29.04	Pass	

Appendix A: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due
Test Equipment for Radiated Emissions 30MHz – 1GHz				
45588	JB1 / Sunol Sciences	Combination Antenna	31 May 2018	31 May 2019
01066 *	34401A / HP	Multimeter	16-Aug-2018	16 Aug 2019
40507	SF26-S1S1-36 / Megaphase	RF Cable 26.5 GHz	12 Oct 2017	12 Oct 2018
56139	CMW500 / ROHDE & SCHWARZ	Wideband Radio Communication Tester	9 Nov 2017	9 Nov 2018
55937	Sucoflex 106PA / Huber + Suhner	N-Type 8m 18GHz Antenna Cable	10 Nov 2017	10 Nov 2018
30443	UFB311A-0-1560-520520 / Micro-Coax	RF Coaxial Cable, to 18GHz, 156 In.	10 Nov 2017	10 Nov 2018
08024	SF106A / Huber + Suhner	3 meter Sucoflex cable	10 Nov 2017	10 Nov 2018
45051	ESCI / Rohde & Schwarz	EMI Test Receiver	17 Nov 2017	17 Nov 2018
49413	iBTHP-5-DB9 / Newport	5 inch Temp/RH/Press Sensor w/20ft cable	28 Dec 2017	28 Dec 2018
06088	8447D / HP	PreAmplifier (.1-1GHz)	25 Jan 2018	25 Jan 2019
01937	NSA 5m Chamber / Cisco	NSA 5m Chamber	6 Feb 2018	6 Feb 2019
37235	50CB-015 / JFW	GPIB Control Box	Calibration not required	Calibration not required
35244	926-8ME / Klein Tools	8 Meter Tape Measure	Calibration not required	Calibration not required
27235	CNE V / York	Comparison Noise Emitter	Calibration not required	Calibration not required
Test Equipment for Radiated Emissions 1GHz to 40GHz				
42000	E4440A / Agilent	Spectrum Analyzer	22 Aug 2017	22 Aug 2018
45098	TH0118 / Cisco	Mast Mount Preamplifier Array, 1-18GHz	1 Nov 2017	1 Nov 2018
56139	CMW500 / ROHDE & SCHWARZ	Wideband Radio Communication Tester	9 Nov 2017	9 Nov 2018
55937	Sucoflex 106PA / Huber + Suhner	N-Type 8m 18GHz Antenna Cable	10 Nov 2017	10 Nov 2018
30443	UFB311A-0-1560-520520 / Micro-Coax	RF Coaxial Cable, to 18GHz, 156 In.	10 Nov 2017	10 Nov 2018
40507	SF26-S1S1-36 / Megaphase	RF Cable 26.5 GHz	12 Oct 2017	12 Oct 2018
37581	3117 / ETS-Lindgren	Double Ridged Waveguide Horn Antenna	7 Dec 2017	7 Dec 2018
49413	iBTHP-5-DB9 / Newport	5 inch Temp/RH/Press Sensor w/20ft cable	28 Dec 2017	28 Dec 2018
01937	NSA 5m Chamber / Cisco	NSA 5m Chamber	6 Feb 2018	6 Feb 2019
49535	Above 1GHz Site Cal / Cisco	Above 1GHz CISPR Site Validation	7 Feb 2018	7 Feb 2019
37235	50CB-015 / JFW	GPIB Control Box	Cal. not required	Cal. not required
35244	926-8ME / Klein Tools	8 Meter Tape Measure	Cal. not required	Cal. not required
34074	RSG 2000 / Schaffner	Reference Spectrum Generator, 1-18GHz	Cal. not required	Cal. not required
18314	3115 / EMC Test Systems	Double Ridged Guide Horn Antenna	Cal. not required	Cal. not required

24201	ROHDE & SCHWARZ / FSEK30	Spectrum analyzer 20Hz-40GHz	30 Nov 2017	30 Nov. 2018
Test Equipment for Duty Cycle				
6324	LUFFT / 5063-33W	Dial Hygrometer	03 Nov. 2017	03 Nov. 2018
33988	Keysight (Agilent/HP) / E4446A	Spectrum Analyzer 3Hz-44GHz	17 Nov. 2017	17 Nov. 2018
51801	HUBER + SUHNER / Sucoflex 101PE	40GHz Cable, K-Type	22 Dec. 2017	22 Dec. 2018
56329	PASTERNAK / PE5019-1	Torque Wrench	28 Feb. 2018	28 Feb. 2019
Test Equipment for AC Mains Conducted Emissions				
19336	FCC-LISN-50/250-50-2-01/FCC	LISN	22 Aug 2017	22 Aug 2018
23873	FCC-LISN-PA-NEMA-5-15/FCC	AC ADAPTOR	22 Aug 2017	22 Aug 2018
40523	ESCI/ROHDE & SCHWARZ	EMI Test Receiver	02 Feb 2018	02 Feb 2019
08477	5-T-MB/BIRD	TERMINATION	15 Nov 2017	15 Nov 2018
08196	H613-150K-50-21378/ TTE	Hi Pass Filter - 150KHz cutoff	04 Jan 2018	04 Jan 2019
08131	RG-223/SAXTON	RG-223 Cable	01 Nov 2017	01 Nov 2018
44554	FCC-801-M2-50A/FCC	CDN	20 Mar 2018	20 Mar 2019
18960	CNE V/YORK	COMPARISON NOISE EMITTER	Cal Not Required	Cal Not Required
47403	RG223/COLEMAN	BNC cable	15 May 2018	15 May 2019
08509	FCC-450B-2.4-N/ FCC	PULSE LIMITER	27 Jul 2018	27 Jul 2019
Test Equipment for RF Conducted at output antenna port				
055094	PXI-1042 National Instruments	Chassis	Cal. not required	Cal. not required
055562	MEGAPHASE F120-S1S1-48	SMA cable	27 Jul 2017	27 Jul 2018
055565	MEGAPHASE F120-S1S1-36	SMA cable	27 Jul 2017	27 Jul 2018
054623	MEGAPHASE RA08-S1S1-18	SMA cable	27 Jul 2017	27 Jul 2018
054624	MEGAPHASE RA08-S1S1-18	SMA cable	27 Jul 2017	27 Jul 2018
054620	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
054610	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
055112	Microtronics BRM50702-02	Band Reject Filter	27 Jul 2017	27 Jul 2018
054621	MEGAPHASE RA08-S1S1-18	SMA cable	27 Jul 2017	27 Jul 2018
054619	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
055353	Microtronics BRC50703-02	Band Reject Filter	27 Jul 2017	27 Jul 2018
054618	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
054617	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
054691	Microtronics BRC50704-02	Band Reject Filter	27 Jul 2017	27 Jul 2018
054616	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
054614	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
054693	Microtronics BRC50705-02	Band Reject Filter	27 Jul 2017	27 Jul 2018
054615	MEGAPHASE RA08-S1S1-12	SMA cable	27 Jul 2017	27 Jul 2018
055368	Pulsar PS4-09-452/4S	4 Way Divider	12 Apr 2017	12 Apr 2018
054686	NI PXI-2796 National Instruments	Multiplexer, 40 GHz 50 Ohm	NA	NA
053615	N9030A-550 Keysight	PXA Signal Analyzer	04 Apr 2017	04 Apr 2018

056329	Pasternack PE5019-1	Torque wrench	01 Mar 2017	01 Mar 2018
Test Equipment for Conducted Band Edge Average (09/18/2018 & 09/19/2018)				
6335	LUFFT / 5063-33W	Dial Hygrometer	28 Aug. 2018	28 Aug. 2019
54399	HUBER + SUHNER / Sucoflex 102	RF Cable 2.4mm – N Type 18GHz	19 Apr. 2018	19 Apr. 2019
54400	HUBER + SUHNER / Sucoflex 102	RF Cale 2.4mm – N Type 18GHz	19 Apr. 2018	19 Apr. 2019
54402	HUBER + SUHNER / Sucoflex 102	RF Cale 2.4mm – N Type 18GHz	19 Apr. 2018	19 Apr. 2019
54406	HUBER + SUHNER / Sucoflex 102	RF Cale 2.4mm – N Type 18GHz	19 Apr. 2018	19 Apr. 2019
54653	Micro-Tronics / BRM50702-02	Band Reject Filter	07 Aug. 2018	07 Aug. 2019
54654	Micro-Tronics / BRC50703-02	Notch Filter	07 Aug. 2018	07 Aug. 2019
54656	Micro-Tronics / BRC50705-02	Notch Filter	07 Aug. 2018	07 Aug. 2019
54660	AEROFLEX / BWS20-W2	20dB SMA Attenuator	07 Aug. 2018	07 Aug. 2019
54662	MEGAPHASE / SF18-S1S1-36	Coaxial Cable 36 inch	07 Aug. 2018	07 Aug. 2019
54663	MEGAPHASE / F120-S1S1-48	SMA Cable	07 Aug. 2018	07 Aug. 2019
54670	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54671	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54673	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54674	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54675	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54676	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54677	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
54678	MEGAPHASE / RA08-S1S1-12	SMA Cable	07 Aug. 2018	07 Aug. 2019
55108	Keysight (Agilent/HP) / N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	29 Sep. 2017	29 Sep. 2018
55586	AEROFLEX / BWS30-W2	30dB SMA Attenuator	07 Aug. 2018	07 Aug. 2019
55867	DYNAWAVE / SMSM-A2PH-024	SMA Cable, 24in.	09 Feb. 2018	09 Feb. 2019
55869	DYNAWAVE / SMSM-A2PH-024	SMA Cable, 24in.	09 Feb. 2018	09 Feb. 2019
55871	DYNAWAVE / SMSM-A2PH-024	SMA Cable, 24in.	09 Feb. 2018	09 Feb. 2019
55872	DYNAWAVE / SMSM-A2PH-024	SMA Cable, 24in.	09 Feb. 2018	09 Feb. 2019
55919	DYNAWAVE / SMSM-A2PH-012	SMA Cable, 12in.	23 Oct. 2017	23 Oct. 2018
55929	DYNAWAVE / SMSM-A2PH-012	SMA Cable, 12in.	23 Oct. 2017	23 Oct. 2018
57218	DYNAWAVE / SMSM-A2PH-012	SMA Cable, 12in.	27 Jun. 2018	27 Jun. 2019
40603	Keysight (Agilent/HP) / E4440A	Spectrum analyzer 3Hz-26.5GHz	19 Oct. 2017	19 Oct. 2018
47286	HUBER + SUHNER / Sucoflex 102E	40GHz Cable K Connector	04 Sep. 2018	04 Sep. 2019
54396	HUBER + SUHNER / Sucoflex 102	RF Cable 2.4mm – N Type 18GHz	22 Jun. 2018	22 Jun. 2019
54397	HUBER + SUHNER / Sucoflex 102	RF Cable 2.4mm – N Type 18GHz	24 Apr. 2018	24 Apr. 2019
54609	MINI-CIRCUITS / ZFSC-2-10G	Splitter, 2-10GHz	04 Sep. 2018	04 Sep. 2019



* The calibration dates listed for the multimeter are the most recent calibration dates, since the multimeter calibration cycle fell in between the test dates. The multimeter was used to check the wall supply voltage before the start of the test, and was covered under the previous calibration when used on August 14, 2018.

Appendix B: Abbreviation Key and Definitions


The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current


Appendix C: Photographs of Test Setups

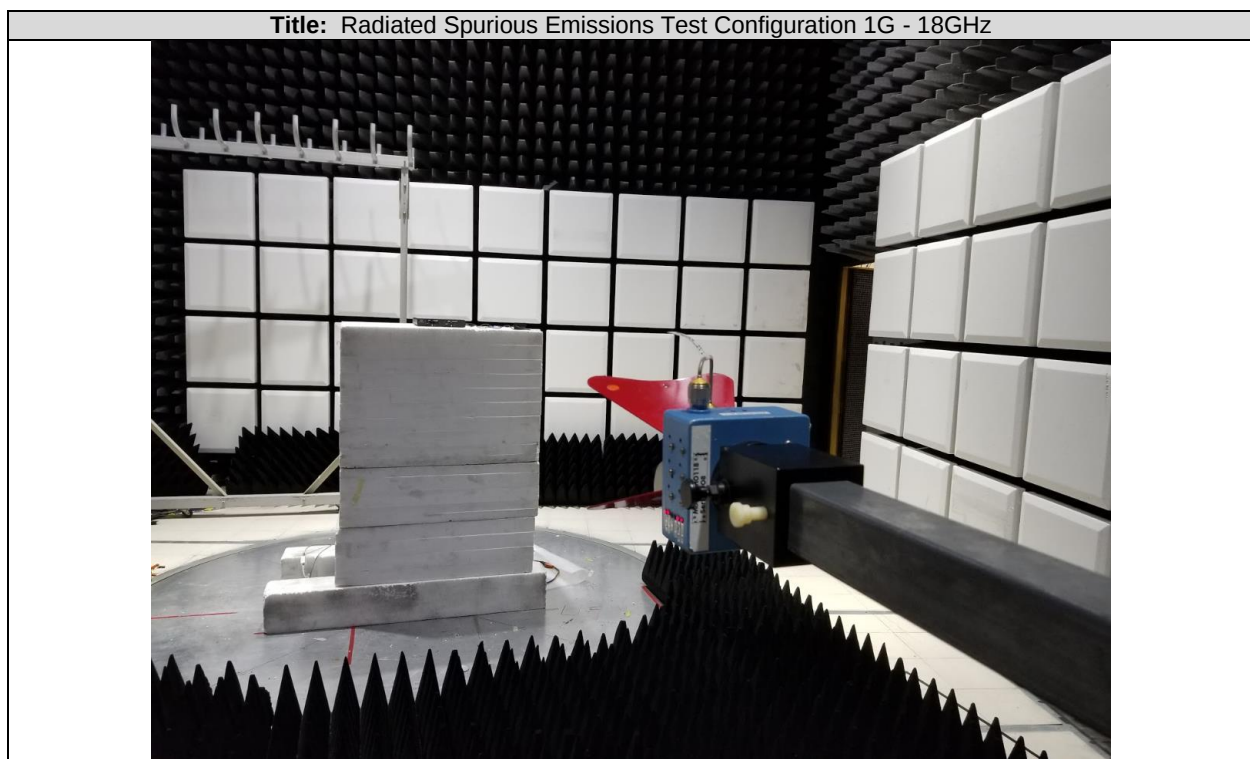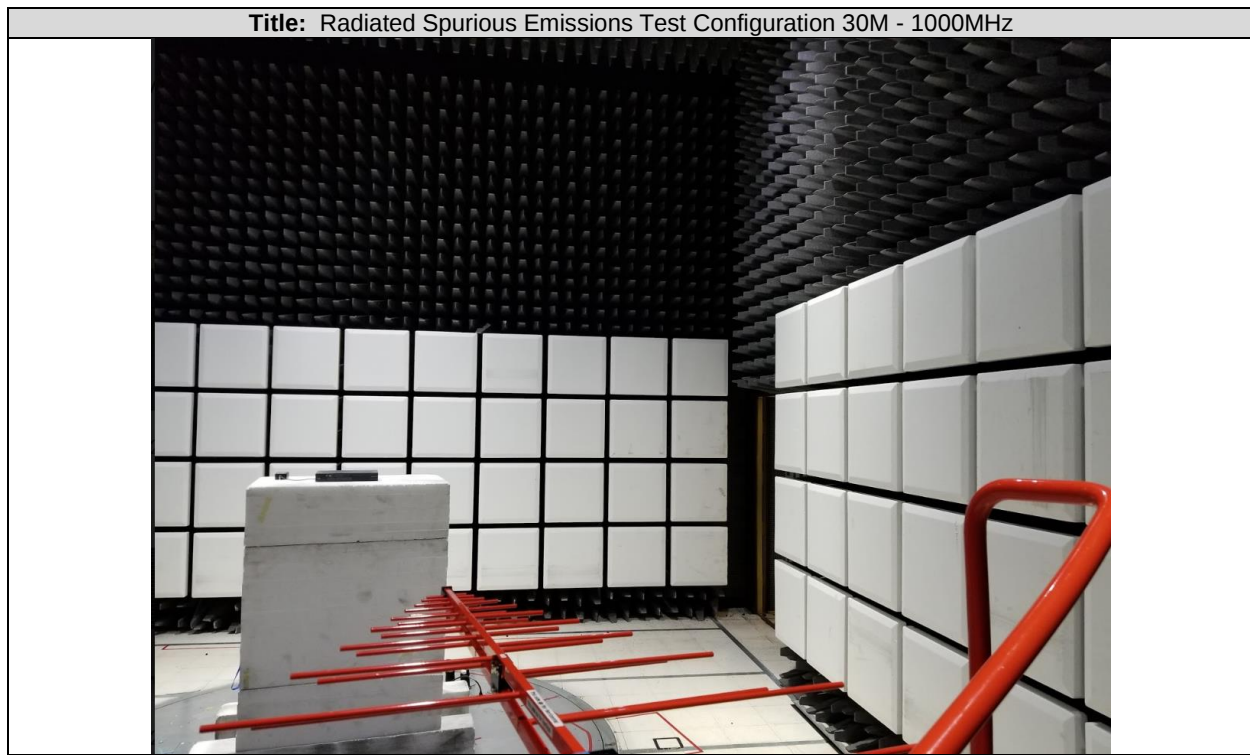


Title: Radiated Spurious Emissions Test Configuration 18 – 40GHz

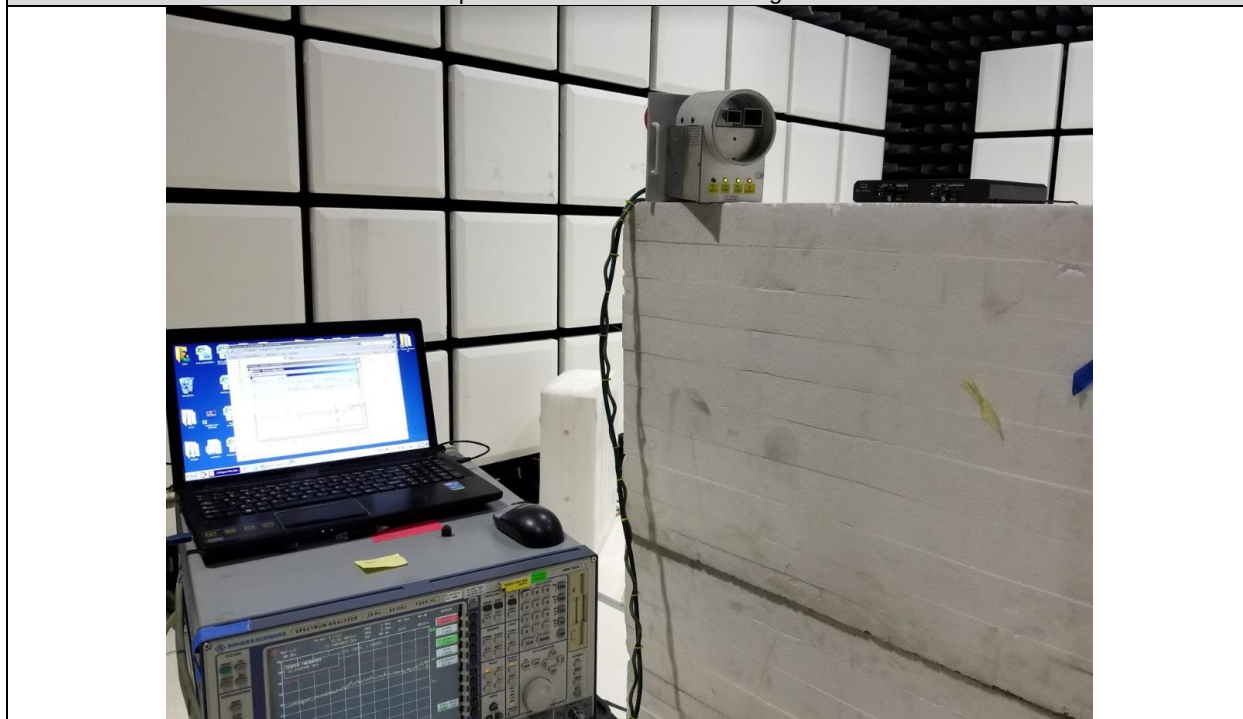

Title: Radio Conducted Test Setup

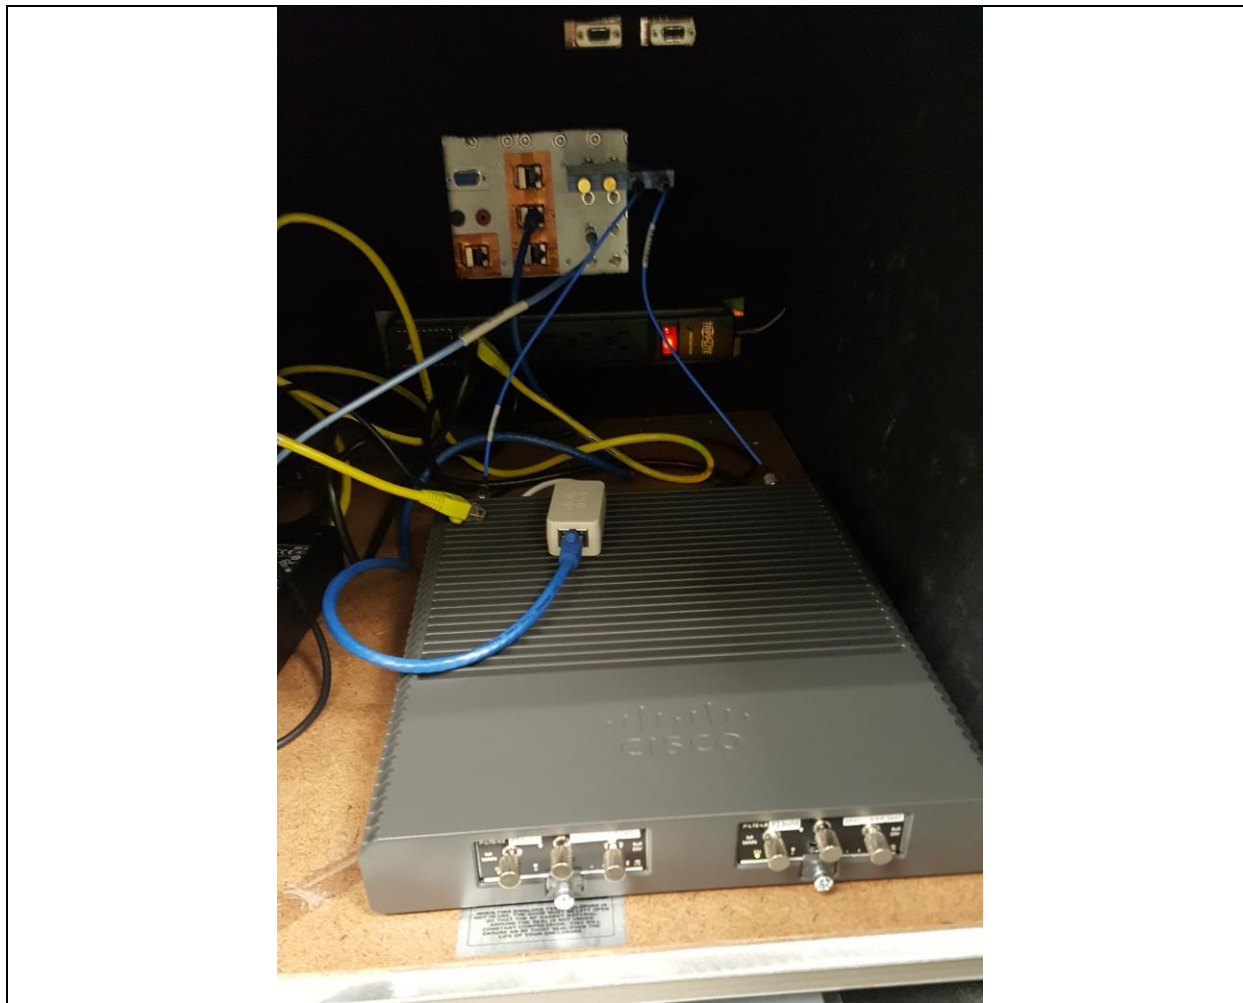

Title: Conducted AC Emissions

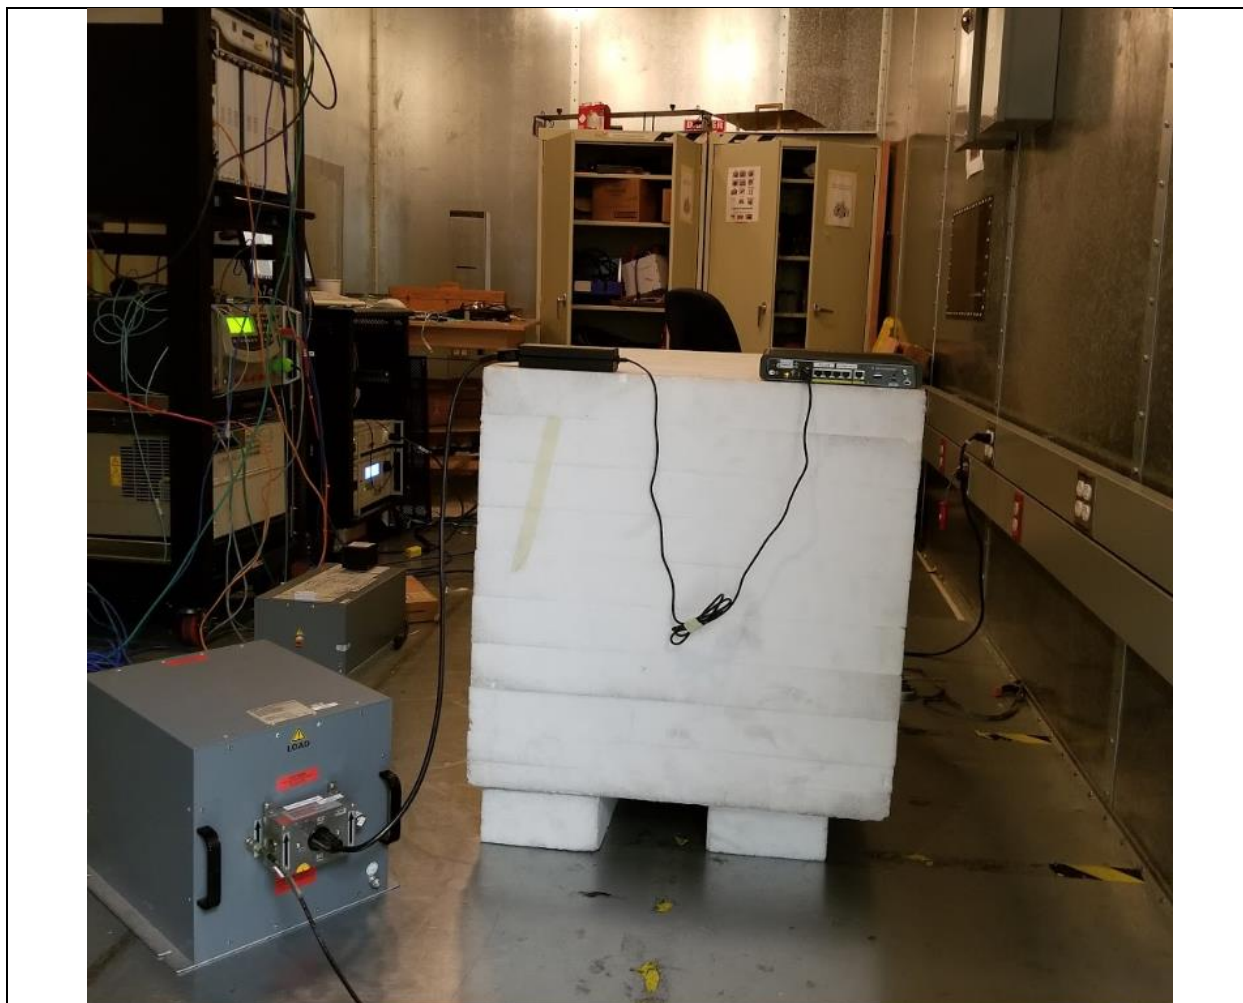

Appendix D: Software Used to Perform Testing

EMIssoft Vasona, version 6.054
RF_Automation_Main.vi, version 1.1.0.6

Appendix E: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v01r02
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

Appendix F: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix G: Test Assessment Plan

Test Assessment Plan EDCS# 11764739

Target Power Tables EDCS# 11883126