

## 5925-6425MHz Formal Test Report (15dBi antenna gain) IW9165E-B & IW9165E-ROW

Supports

BLE/4.9GHz/ 5GHz/6GHz  
802.11 a/ac/ax/n Wi-Fi radio

**FCC ID: LDKIW9165E**

Against the following Specifications:


47 CFR 15.205

47 CFR 15.209

47 CFR 15.407



Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134

|                                                                                     |                                                                                           |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
|  |       |
| <b>Author:</b> Ronak Patel<br><b>Tested By:</b> Ronak Patel                         | <b>Approved By:</b> Adam Walb<br><b>Title:</b> Compliance Manager<br><b>Revision:</b> 1.0 |

This report replaces any previously entered test report under EDCS – **25405539**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 23507586.

|                                                                                  |           |
|----------------------------------------------------------------------------------|-----------|
| <b>SECTION 1: OVERVIEW.....</b>                                                  | <b>3</b>  |
| <b>SECTION 2: ASSESSMENT INFORMATION .....</b>                                   | <b>4</b>  |
| 2.1: GENERAL.....                                                                | 4         |
| 2.2: DATE OF TESTING .....                                                       | 5         |
| 2.3: REPORT ISSUE DATE .....                                                     | 5         |
| 2.4: TESTING FACILITIES .....                                                    | 5         |
| 2.5: EQUIPMENT ASSESSED (EUT) .....                                              | 6         |
| 2.6: EUT DESCRIPTION .....                                                       | 6         |
| <b>SECTION 3: RESULT SUMMARY .....</b>                                           | <b>8</b>  |
| 3.1: RESULTS SUMMARY TABLE.....                                                  | 8         |
| <b>SECTION 4: SAMPLE DETAILS.....</b>                                            | <b>10</b> |
| 4.1: SAMPLE DETAILS.....                                                         | 10        |
| 4.2: SYSTEM DETAILS.....                                                         | 10        |
| 4.3: MODE OF OPERATION DETAILS .....                                             | 10        |
| <b>APPENDIX A: EMISSION TEST RESULTS.....</b>                                    | <b>11</b> |
| A.1: DUTY CYCLE .....                                                            | 12        |
| A.2: 99% AND 26dB BANDWIDTH .....                                                | 16        |
| A.3: MAXIMUM CONDUCTED OUTPUT POWER .....                                        | 20        |
| A.4: POWER SPECTRAL DENSITY.....                                                 | 32        |
| A.5: CONDUCTED SPURIOUS EMISSIONS .....                                          | 39        |
| A.6: CONDUCTED BANDEDGE.....                                                     | 51        |
| A.7: CONDUCTED IN-BAND EMISSIONS (MASK) .....                                    | 60        |
| <b>APPENDIX B: EMISSION TEST RESULTS.....</b>                                    | <b>70</b> |
| B.1: RADIATED SPURIOUS EMISSIONS.....                                            | 71        |
| B.2: RADIATED EMISSIONS 30MHz TO 1GHz .....                                      | 71        |
| B.3: AC CONDUCTED EMISSIONS .....                                                | 72        |
| <b>APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST .....</b>         | <b>78</b> |
| <b>APPENDIX D: ABBREVIATION KEY AND DEFINITIONS .....</b>                        | <b>80</b> |
| <b>APPENDIX E: PHOTOGRAPHS OF TEST SETUPS.....</b>                               | <b>81</b> |
| <b>APPENDIX F: SOFTWARE USED TO PERFORM TESTING.....</b>                         | <b>81</b> |
| <b>APPENDIX G: TEST PROCEDURES .....</b>                                         | <b>81</b> |
| <b>APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01).....</b> | <b>82</b> |
| <b>APPENDIX I: TEST ASSESSMENT PLAN .....</b>                                    | <b>82</b> |
| <b>APPENDIX J: WORST CASE JUSTIFICATION .....</b>                                | <b>82</b> |

## Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

|                                            |
|--------------------------------------------|
| <b>Specifications:</b>                     |
| CFR47 Part 15.407, 15.209, 15.207 & 15.205 |

## Section 2: Assessment Information

### 2.1: General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

|                      |                                        |
|----------------------|----------------------------------------|
| Temperature          | 15 °C to 35 °C (54 °F to 95 °F)        |
| Atmospheric Pressure | 860 mbar to 1060 mbar (25.4" to 31.3") |
| Humidity             | 10% to 75*%                            |

- e) testing was performed at one or more of the following supply voltages:

24-48vDC

#### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:

Antenna Factors, Pre-Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: To convert the results from dBuV/m to uV/m use the following formula:

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

#### Measurement Uncertainty Values

|                                   |                        |
|-----------------------------------|------------------------|
| voltage and power measurements    | ± 2 dB                 |
| conducted EIRP measurements       | ± 1.4 dB               |
| radiated measurements             | ± 3.2 dB               |
| frequency measurements            | ± 2.4 10 <sup>-7</sup> |
| temperature measurements          | ± 0.54°                |
| humidity measurements             | ± 2.3%                 |
| DC and low frequency measurements | ± 2.5%                 |

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

|                    |              |
|--------------------|--------------|
| 30 MHz – 300 MHz   | $\pm 3.8$ dB |
| 300 MHz – 1000 MHz | $\pm 4.3$ dB |
| 1 GHz – 10 GHz     | $\pm 4.0$ dB |
| 10 GHz – 18GHz     | $\pm 8.2$ dB |
| 18GHz – 26.5GHz    | $\pm 4.1$ dB |
| 26.5GHz – 40GHz    | $\pm 3.9$ dB |

Conducted emissions (expanded uncertainty, confidence interval 95%)

|                 |               |
|-----------------|---------------|
| 30 MHz – 40 GHz | $\pm 0.38$ dB |
|-----------------|---------------|

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

## 2.2: Date of testing

03/15/2024 - 03/25/2024

## 2.3: Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

| Date      | Version | Author      | Description        |
|-----------|---------|-------------|--------------------|
| 12/3/2024 | 1.0     | Ronak Patel | 15dBi antenna gain |

## 2.4: Testing facilities

This assessment was performed by: NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties: NCC (National Communications Commission) APEC Tel MRA – Phase I.

Testing Laboratory  
Cisco Systems, Inc.  
125 West Tasman Drive (Building P)  
San Jose, CA 95134  
USA

Headquarters  
Cisco Systems, Inc.,  
170 West Tasman Drive  
San Jose, CA 95134,  
USA

### Registration Number

| Cisco System Site       | Address                                  | Site Identifier    |
|-------------------------|------------------------------------------|--------------------|
| Building P, 10m Chamber | 125 West Tasman Dr<br>San Jose, CA 95134 | Company #: 2461N-2 |

**Test Engineer(s):**

Ronak Patel

**2.5: Equipment Assessed (EUT)**

IW9165E-B

**2.6: EUT Description**

| RF General Information |                                                  |                                                  |                                                                                                                                                                |
|------------------------|--------------------------------------------------|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Evaluation Mode        | Frequency Range (MHz)                            | Operating Frequency (MHz)                        | Modulation Type                                                                                                                                                |
| 5GHz WLAN              | 5150-5250<br>5250-5350<br>5470-5725<br>5725-5850 | 5180-5250<br>5250-5320<br>5500-5720<br>5745-5825 | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)<br>802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) |
| 4.9GHz WLAN            | 4940-4990                                        | 4945-4985                                        | OFDM (BPSK, QPSK, 16QAM, 64QAM)                                                                                                                                |
| Bluetooth              | 2400-2483.5                                      | 2402-2480                                        | LE: GFSK                                                                                                                                                       |
| 6GHz WLAN              | 5925-6425MHz<br>6525-6875MHz                     | 5925-6425MHz<br>6525-6875MHz                     | 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)                                                                                                    |

**For Radio1 - 5GHz UNII 1~UNII 3 and 4.9GHz:****For IEEE 802.11a/n/ac/ax mode (1TX, 2TX/2RX):****1TX**

Only Port 1 can be use as transmitting antenna.

**2TX**

Port 1, Port 2 can be use as transmitting antenna. Port 1, Port 2 could transmit simultaneously.

**2RX**

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas. Port 1 and Port 2 could receive simultaneously.

**For Radio 2 - 5GHz UNII 1~UNII 3, 4.9GHz & UNI 5 ~ UNII 7:****For IEEE 802.11a/n/ac/ax mode (1TX, 2TX/2RX):****1TX**

Only Port 1 can be use as transmitting antenna.

**2TX**

Port 1, Port 2 can be use as transmitting antenna. Port 1, Port 2 could transmit simultaneously.

**2RX**

Port 1, Port 2, Port 3, Port 4 can be used as receiving antennas. Port 1 and Port 2 could receive simultaneously.

**For Radio 3 - BLE****Bluetooth(1TX):**

Only Port 1 can be used as transmitting/receiving antenna.

**For Radio 4 – GNSS (1Rx)**

Only Port 1 can be used as receiving antenna.

The following antennas are supported by this product series. Please note, the antenna information has been provided by the customer (the Cisco business unit). The data included in this report represent the worst-case data for all antennas.

| Part Number        | Description                                                                                 | Peak Gain<br>2.4<br>GHz<br>(dBi) | Peak Gain<br>4.9<br>GHz<br>(dBi) | Peak Gain<br>5<br>GHz<br>(dBi) | Peak Gain<br>6<br>GHz<br>(dBi) | UNII-1<br>Gain<br>above<br>30°<br>elevation<br>(dBi) | UNII-5 &<br>7 Gain<br>above<br>30°<br>elevation<br>(dBi) |
|--------------------|---------------------------------------------------------------------------------------------|----------------------------------|----------------------------------|--------------------------------|--------------------------------|------------------------------------------------------|----------------------------------------------------------|
| IW-ANT-PNL5615-NS  | 5/6 GHz two-port cross-polarized directional array with SIA                                 | N/A                              | 15                               | 15                             | 15                             | 3                                                    | 3                                                        |
| IW-ANT-OMM-53-N=   | 5 GHz 3 dBi Omnidirectional Antenna, Multi-polarized, N Female Connector                    | N/A                              | 3                                | 3                              | N/A                            | 0                                                    | N/A                                                      |
| AIR-ANT5180V-N=    | 5 GHz 8 dBi Omnidirectional Colinear Array Antenna, N Male Connector                        | N/A                              | 7                                | 8                              | N/A                            | -3                                                   | N/A                                                      |
| IW-ANT-PNL-59-N=   | 5 GHz 9 dBi 2-Element Patch Array Antenna, Slant ±45 Polarized, N Female Connectors         | N/A                              | N/A                              | 10                             | N/A                            | 7                                                    | N/A                                                      |
| IW-ANT-H90-510-N=  | 5 GHz 10 dBi 2-Element Horn Antenna, H/V Polarized, N Female Connectors                     | N/A                              | N/A                              | 10                             | N/A                            | 8                                                    | N/A                                                      |
| AIR-ANT5114P2M-N=  | 5 GHz 13 dBi 2-Element Patch Array Antenna, N Male Connectors                               | N/A                              | N/A                              | 13                             | N/A                            | 4                                                    | N/A                                                      |
| IW-ANT-SKD-513-Q=  | 5 GHz 14 dBi 2-Element Shark Antenna, Slant ±45 Polarized, QMA Female Connectors            | N/A                              | 13                               | 13                             | N/A                            | 8                                                    | N/A                                                      |
| IW-ANT-SKS-514-Q=  | 5 GHz 14 dBi 2-Element Shark Antenna, Slant ±45 Polarized, QMA Female Connectors            | N/A                              | 13                               | 13                             | N/A                            | 8                                                    | N/A                                                      |
| AIR-ANT2547V-N=    | 2.4 GHz 4 dBi / 5 GHz 7 dBi Omnidirectional Colinear Array Antenna, N male connector        | 4                                | N/A                              | 7                              | N/A                            | -3                                                   | N/A                                                      |
| AIR-ANT2547VG-N=   | 2.4 GHz 4 dBi / 5 GHz 7 dBi Omnidirectional Colinear Array Antenna, N Male Connector        | 4                                | N/A                              | 7                              | N/A                            | -3                                                   | N/A                                                      |
| AIR-ANT2547VG-NS=  | 2.4 GHz 4 dBi / 5 GHz 7 dBi Omnidirectional Colinear Array Antenna, N Male Connector        | 4                                | N/A                              | 7                              | N/A                            | -3                                                   | N/A                                                      |
| AIR-ANT2568VG-N=   | 2.4 GHz 6 dBi / 5 GHz 8 dBi Omnidirectional Antenna, N Male Connector                       | 6                                | N/A                              | 8                              | N/A                            | 3                                                    | N/A                                                      |
| AIR-ANT2568VG-NS=  | 2.4 GHz 6 dBi / 5 GHz 8 dBi Omnidirectional Antenna, N Male Connector                       | 6                                | N/A                              | 8                              | N/A                            | 3                                                    | N/A                                                      |
| AIR-ANT2588P4M-NS= | 2.4 GHz 8 dBi / 5 GHz 8 dBi 4-Element Dual-Polarized Patch Antenna, N Female Connectors     | 8                                | N/A                              | 8                              | N/A                            | -2                                                   | N/A                                                      |
| AIR-ANT2513P4M-N=  | 2.4 GHz 13 dBi / 5 GHz 13 dBi Polarization Diverse Patch Array Antenna, N Female Connectors | 13                               | N/A                              | 13                             | N/A                            | 1                                                    | N/A                                                      |
| AIR-ANT2513P4M-NS= | 2.4 GHz 13 dBi / 5 GHz 13 dBi Polarization Diverse Patch Array Antenna, N Female Connectors | 13                               | N/A                              | 13                             | N/A                            | 1                                                    | N/A                                                      |
| IW-ANT-OMV-2567-N= | Tri-band Omnidirectional Colinear Array Antenna, Vertically Polarized, N Male Connector     | 4                                | 7                                | 7                              | 7                              | -9                                                   | -7                                                       |
| IW-ANT-OMH-2567-N= | Tri-band Omnidirectional Colinear Array Antenna, Horizontally Polarized, N Male Connector   | 4                                | 7                                | 7                              | 7                              | -3                                                   | -2                                                       |
| IW-ANT-DS9-516-N=  | 5 GHz Dual Slant ±45° Polarized 90° Sector Antenna, N Female Connectors                     | N/A                              | 15                               | 15                             | N/A                            | 4                                                    | N/A                                                      |
| IW-ANT-SS9-516-N=  | 5 GHz Dual H/V Polarized 90° Sector Antenna, N Female Connectors                            | N/A                              | 15                               | 15                             | N/A                            | -1                                                   | N/A                                                      |

IW-ANT-PNL5615-NS is the worst-case antenna for 6GHz

**Section 3: Result Summary****3.1: Results Summary Table**

6GHz UNII-5 through 8

**Conducted Emissions (General requirements)**

| Basic Standard                                                                                                                             | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Result |
|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| FCC 15.407(a)(10)                                                                                                                          | <p><b>Bandwidth:</b><br/>(10) The maximum transmitter channel bandwidth for U–NII devices in the 5.925 - 7.125 GHz band is 320 megahertz.</p> <p><b>99%- &amp; 26-dB Bandwidth:</b><br/>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.</p> <p>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Pass   |
| FCC 15.407(a)(4)<br>FCC 15.407(a)(5)<br>FCC 15.407(a)(6)<br>FCC 15.407(a)(7)<br>FCC 15.407(a)(8)<br>FCC 15.407(a)(11)<br>FCC 15.407(a)(12) | <p><b>Output Power &amp; Power Spectral Density:</b><br/>(4) For a standard power access point and fixed client device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).<br/>(5) For an indoor access point operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.<br/>(6) For a subordinate device operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.</p> <p>(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.</p> <p>(8) For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.</p> <p>(11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p> <p>(12) Power spectral density measurement: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725–5.895 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in all other bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.</p> | Pass   |



| Basic Standard                                                                                 | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Result |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| FCC 15.407(b)<br>FCC 15.407(b)(6)<br>FCC 15.407(b)(7)<br>FCC 15.407(b)(8)<br>FCC 15.407(b)(11) | <p><b>Conducted Spurious Emissions / Band-Edge:</b></p> <p>(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:</p> <p>(6) For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of –27 dBm/MHz.</p> <p>(7) For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.</p> <p>(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.</p> <p>(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.</p> | Pass   |
| FCC 15.407<br>FCC 15.205<br>FCC 15.209                                                         | <p><b>Restricted band:</b></p> <p>(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.</p> <p>(10) The provisions of § 15.205 apply to intentional radiators operating under this section.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Pass   |

**Radiated Emissions (General requirements)**

| Basic Standard                         | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Result                    |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| FCC 15.407<br>FCC 15.205<br>FCC 15.209 | <p><b>TX Spurious Emissions:</b></p> <p>Unwanted emissions must comply with the general field strength limits set forth in §15.209. (7) The provisions of §15.205 apply to intentional radiators operating under this section.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>EDCS #</b><br>25498048 |
| FCC 15.207                             | <p><b>AC conducted Emissions:</b></p> <p>Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.</p> <p>(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.</p> | Pass                      |

MPE calculation is recorded in a separate report.

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1: Sample Details

| Sample No. | Equipment Details | Manufacturer  | Hardware Rev. | Firmware Rev.                           | Software Rev.                                                  | Serial Number |
|------------|-------------------|---------------|---------------|-----------------------------------------|----------------------------------------------------------------|---------------|
| (S01)      | IW9165E-B         | Cisco Systems | A0            | ap1g6b-k9w8-tar.202407171915-1715-15dbi | QC_IMAGE_VERSION_STRING=WLAN.HK.2.7-04674-QCAHKSWP_L_SILICONZ- | FOC27095C9Z   |
| (S02)      | IW-PWRADPT-MFIT4P | Cisco Systems | V00           | -                                       | -                                                              | LIN264450C6   |

### 4.2: System Details

| System # | Description       | Samples |
|----------|-------------------|---------|
| 1        | IW9165E-B         | (S01)   |
| 2        | IW-PWRADPT-MFIT4P | S02     |


### 4.3: Mode of Operation Details

| Mode# | Description             | Comments |
|-------|-------------------------|----------|
| 1     | Continuous Transmitting |          |

| Function | Support Band           |
|----------|------------------------|
| AP       | BLE,5GHz,6GHz & 4.9GHz |
| P2P/P2MP | 5GHz, 6GHz and 4.9GHz  |

## Appendix A: Emission Test Results

### Conducted Test Setup Diagram

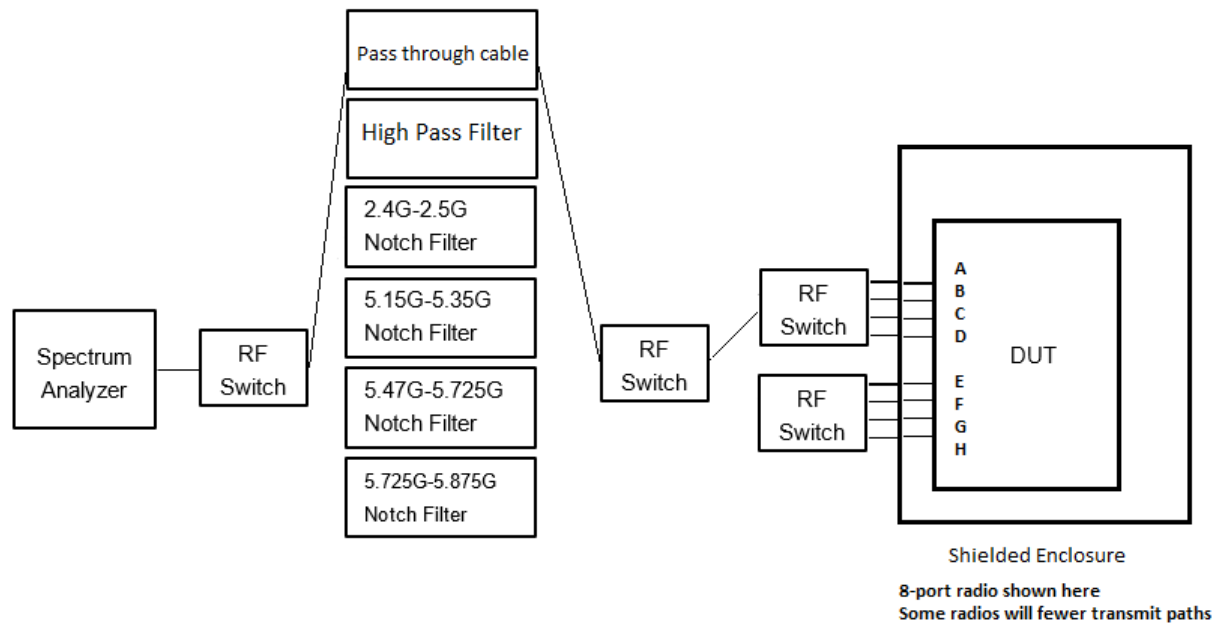

### Test Setup Description

The EUT was placed inside an RF shielded enclosure. RF cables connect to each antenna port on the EUT inside the enclosure. Those cables are routed to RF switch cards in a National Instruments chassis. There are different paths, some paths contain a notch filter or high pass filter as shown above. The signal is then routed to the spectrum analyzer where measurements are made.

Plots listed herein represent the measured worst-case per antenna, frequency, and modulation.

## A.1: Duty Cycle

### Duty Cycle Test Requirement

From KDB 987594, KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

#### B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

### Duty Cycle Test Method

From KDB 987594, KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

#### B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW  $\geq$  EBW if possible; otherwise, set RBW to the largest available value. Set VBW  $\geq$  RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

### Duty Cycle Test Information

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| <b>Tested By:</b> Ronak Patel | <b>Date of testing:</b> 03/15/2024 - 03/25/2024 |
| <b>Test Result:</b> PASS      |                                                 |

### Test Equipment

See Appendix C for list of test equipment


**Duty Cycle Data Table**

Duty Cycle table and screen captures are shown below for Power/PSD modes.

| Frequency (MHz) | Mode                 | Data Rate(Mbps) | Duty Cycle(dB) |
|-----------------|----------------------|-----------------|----------------|
| 5955            | HE20, M0 to M11 1ss  | m0h1            | 0.11           |
| 5965            | HE40, M0 to M11 1ss  | m0h1            | 0.14           |
| 5985            | HE80, M0 to M11 1ss  | m0h1            | 0.25           |
| 6025            | HE160, M0 to M11 1ss | m0h1            | 0.21           |
| 6175            | HE20, M0 to M11 1ss  | m0h1            | 0.11           |
| 6185            | HE160, M0 to M11 1ss | m0h1            | 0.21           |
| 6205            | HE40, M0 to M11 1ss  | m0h1            | 0.14           |
| 6225            | HE80, M0 to M11 1ss  | m0h1            | 0.25           |
| 6345            | HE160, M0 to M11 1ss | m0h1            | 0.21           |
| 6385            | HE80, M0 to M11 1ss  | m0h1            | 0.25           |
| 6405            | HE40, M0 to M11 1ss  | m0h1            | 0.14           |
| 6415            | HE20, M0 to M11 1ss  | m0h1            | 0.11           |


## Data Screenshots

5985 MHz: HE80, M0 to M11 1ss

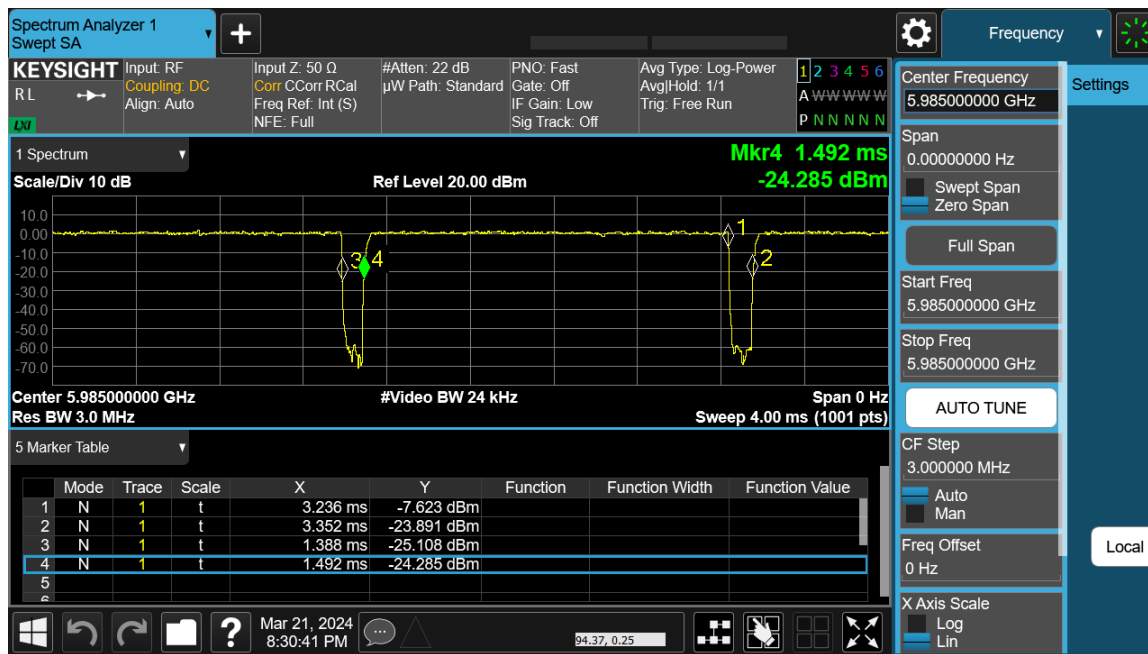


Antenna A

6225 MHz: HE80, M0 to M11 1ss

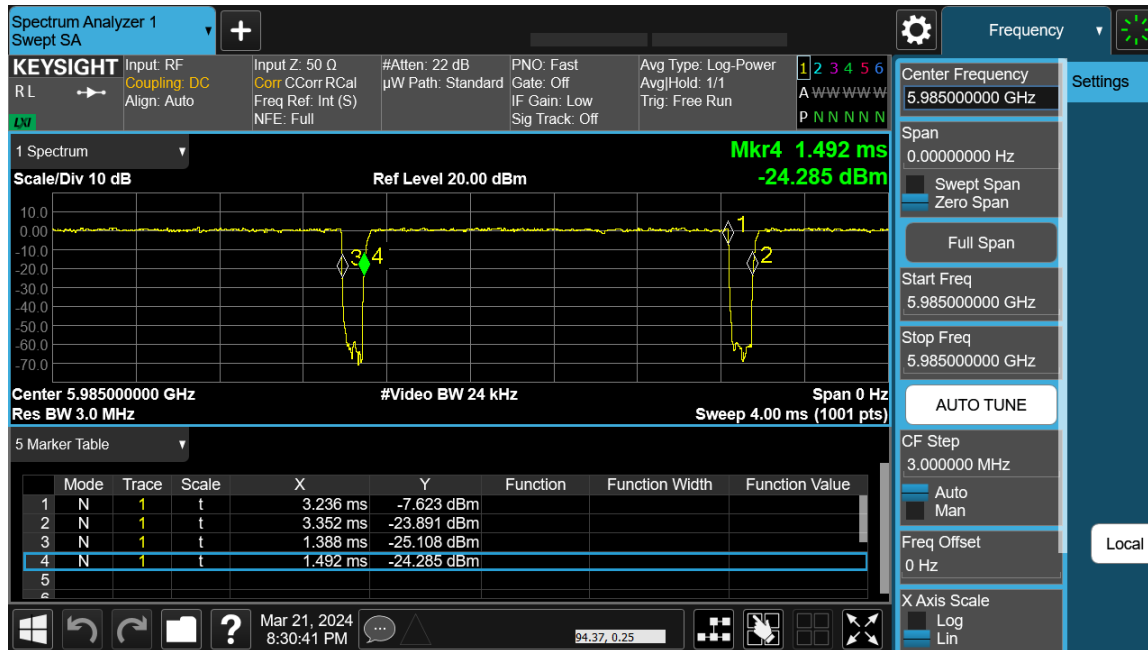

Antenna A

6385 MHz: HE80, M0 to M11 1ss

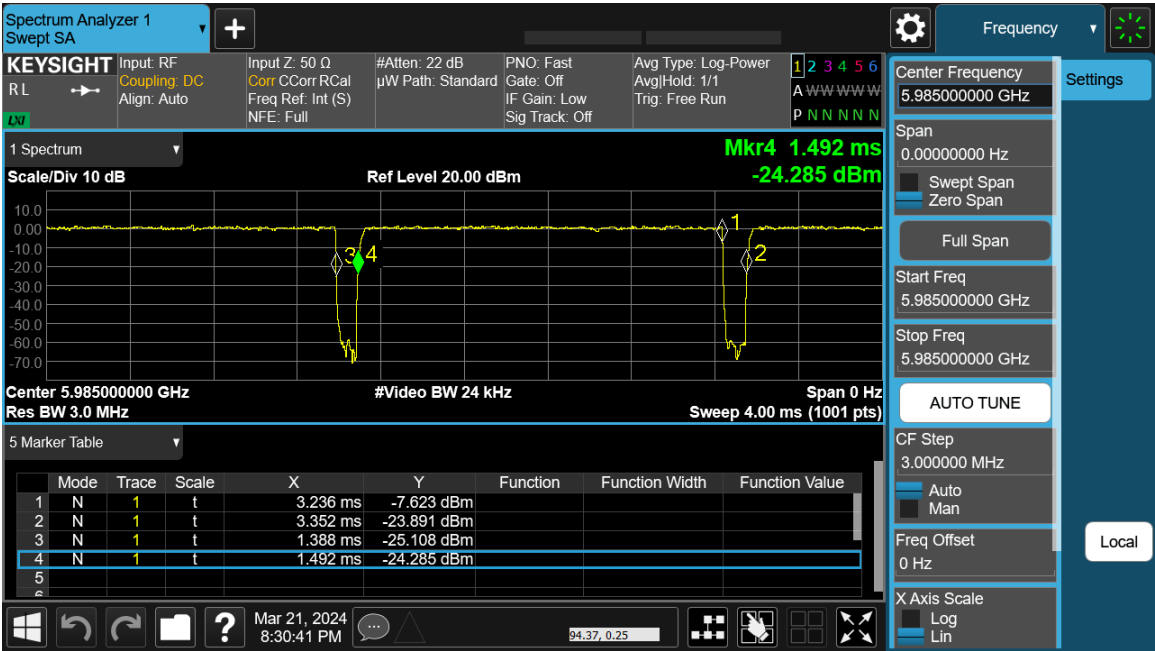

Antenna A

**A.2: 99% and 26dB Bandwidth****99% and 26dB Bandwidth Test Requirement**

FCC 15.407(a)(10)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925–7.125 GHz band is 320 megahertz.

The 26dB BW (EBW) is used to calculate the power limits in 15.407 (a)(2). Power measurements are made using the 99% Bandwidth as the integration bandwidth.

**99% and 26dB Bandwidth Test Procedure**

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

**ANSI C63.10: 2013****Ref. KDB 987594, KDB 789033 D02 General UNII Test Procedures New Rules v02r01****Section D. 99 Percent Occupied Bandwidth**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>99% BW</b><br>Test Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <ol style="list-style-type: none"><li>1. Set center frequency to the nominal EUT channel center frequency.</li><li>2. Set span = 1.5 times to 5.0 times the OBW.</li><li>3. Set RBW = 1 % to 5 % of the OBW</li><li>4. Set VBW <math>\geq 3 \cdot</math> RBW</li><li>5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.</li><li>6. Use the 99 % power bandwidth function of the instrument (if available).</li></ol> |

**Ref KDB 789033 D02 General UNII Test Procedures New Rules v02r01****Section C. Measurement Bandwidth, Section 1**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>26 BW</b><br>Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| X dB BW = -26dB (using the OBW function of the spectrum analyzer)<br>Emission Bandwidth (EBW)<br><ol style="list-style-type: none"><li>a) Set RBW = approximately 1% of the emission bandwidth.</li><li>b) Set the VBW &gt; RBW.</li><li>c) Detector = Peak.</li><li>d) Trace mode = max hold.</li><li>e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</li></ol> |

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| <b>Tested By:</b> Ronak Patel | <b>Date of testing:</b> 03/15/2024 - 03/25/2024 |
| <b>Test Result:</b> PASS      |                                                 |

**Test Equipment**

See Appendix C for list of test equipment




**99% and 26dB Bandwidth Table**

| Frequency (MHz) | Mode                 | Data Rate(Mbps) | 26dB BW(MHz) | 99% BW(MHz) |
|-----------------|----------------------|-----------------|--------------|-------------|
| 5955            | HE20, M0 to M11 1ss  | m0h1            | 21.272       | 18.937      |
| 5965            | HE40, M0 to M11 1ss  | m0h1            | 40.953       | 37.711      |
| 5985            | HE80, M0 to M11 1ss  | m0h1            | 83.308       | 77.077      |
| 6025            | HE160, M0 to M11 1ss | m0h1            | 166.337      | 154.543     |
| 6175            | HE20, M0 to M11 1ss  | m0h1            | 21.399       | 18.929      |
| 6185            | HE160, M0 to M11 1ss | m0h1            | 166.214      | 154.749     |
| 6205            | HE40, M0 to M11 1ss  | m0h1            | 41.066       | 37.725      |
| 6225            | HE80, M0 to M11 1ss  | m0h1            | 83.433       | 77.198      |
| 6345            | HE160, M0 to M11 1ss | m0h1            | 165.833      | 154.91      |
| 6385            | HE80, M0 to M11 1ss  | m0h1            | 83.225       | 77.186      |
| 6405            | HE40, M0 to M11 1ss  | m0h1            | 41.061       | 37.733      |
| 6415            | HE20, M0 to M11 1ss  | m0h1            | 21.368       | 18.926      |


## Data Screenshots

6415 MHz: HE20, M0 to M11 1ss

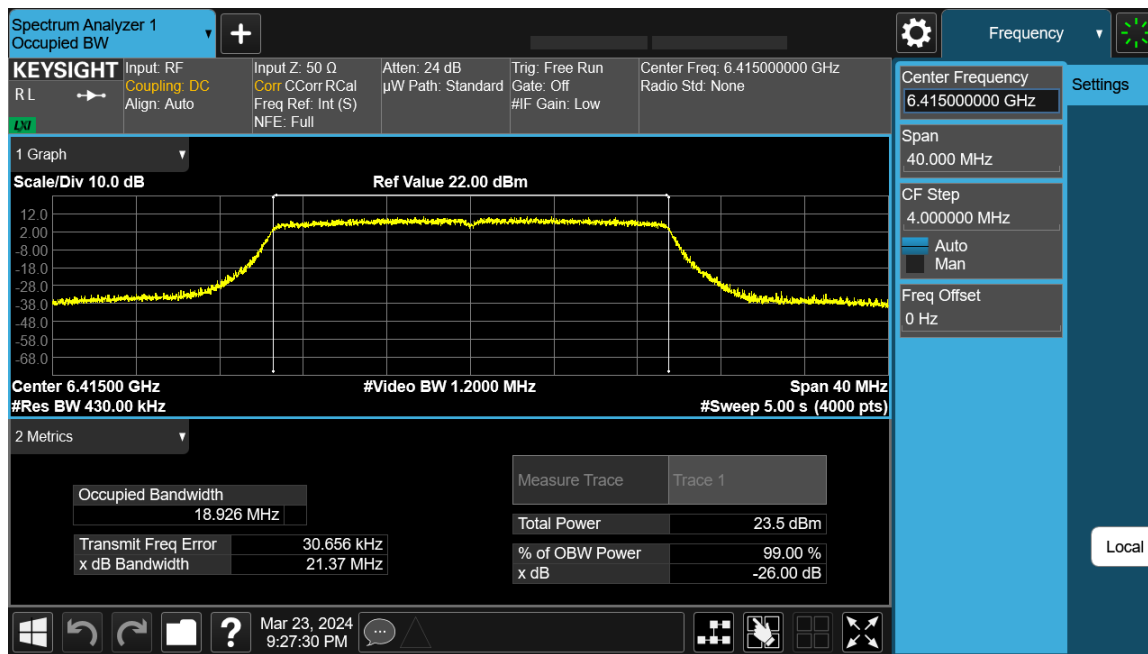


Antenna A

5965 MHz: HE40, M0 to M11 1ss

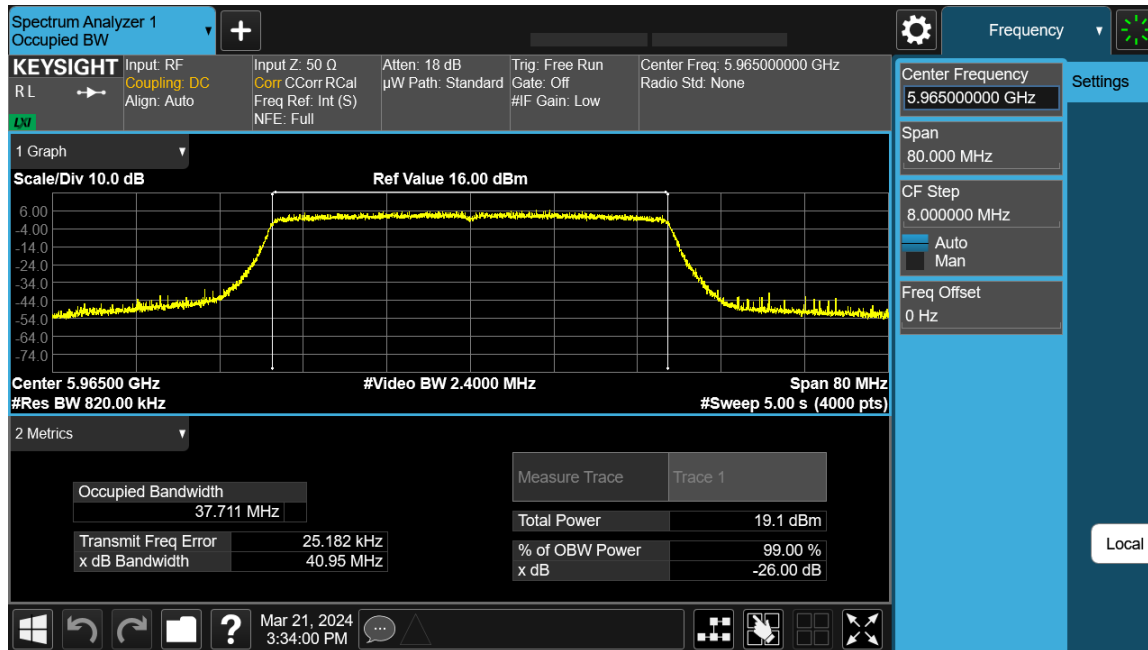


Antenna A

5985 MHz: HE80, M0 to M11 1ss

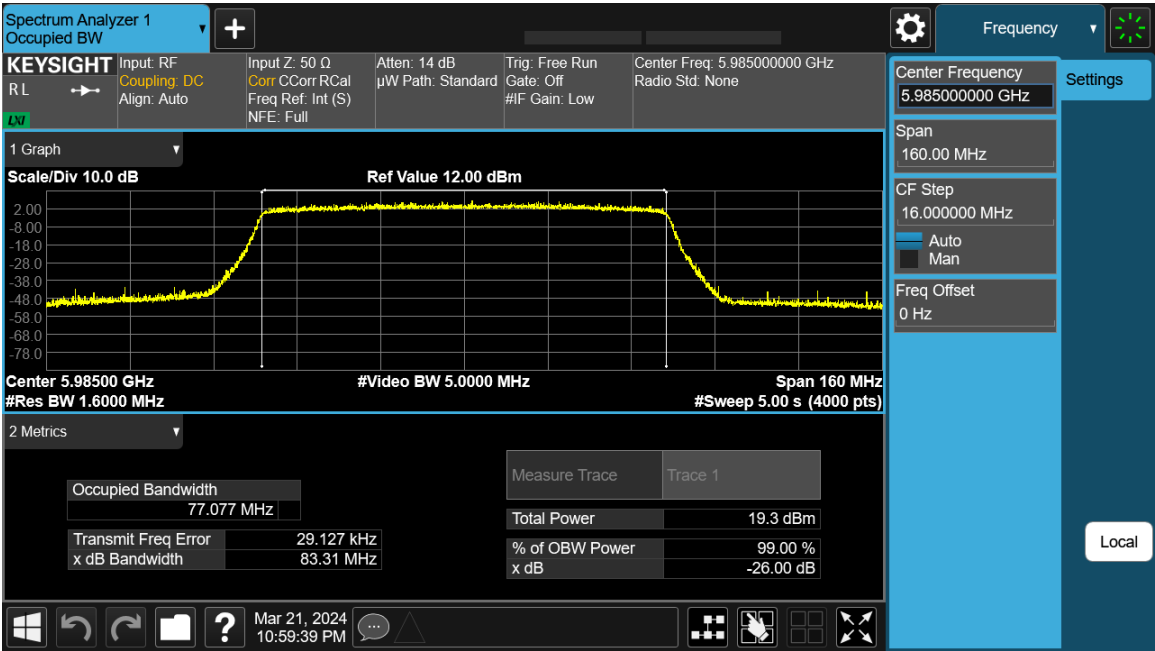

Antenna A

6025 MHz: HE160, M0 to M11 1ss

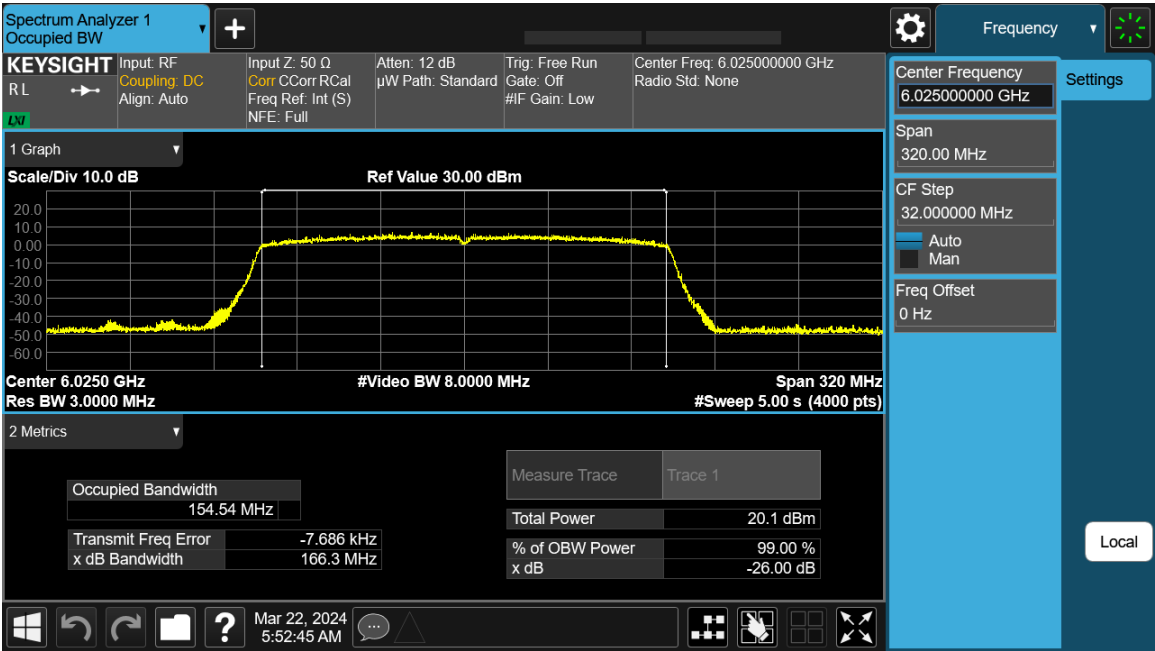

Antenna A

### A.3: Maximum Conducted Output Power

#### Maximum Conducted Output Power Test Requirement

##### FCC 15.407(a):

(4) For a standard power access point and fixed client device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(5) For an indoor access point operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

(6) For a subordinate device operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

(8) For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

(11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

#### Maximum Conducted Output Power Test Procedure

##### ANSI C63.10: 2013

##### Ref. KDB 987594, KDB 789033 D02 General UNII Test Procedures New Rules v02r01

| Maximum Conducted Output Power<br>Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode</li> <li>2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.</li> <li>3. Capture graphs and record pertinent measurement data.</li> </ol> |

##### Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

##### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

| Maximum Conducted Output Power<br>Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).</p> <ol style="list-style-type: none"> <li>(i) Measure the duty cycle, <math>x</math>, of the transmitter output signal as described in section II.B.</li> <li>(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.</li> <li>(iii) Set RBW = 1 MHz.</li> <li>(iv) Set VBW <math>\geq</math> 3 MHz.</li> <li>(v) Number of points in sweep <math>\geq</math> 2 Span / RBW. (This ensures that bin-to-bin spacing is <math>\leq</math> RBW/2, so that narrowband signals are not lost between frequency bins.)</li> <li>(vi) Sweep time = auto.</li> <li>(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</li> <li>(viii) Do not use sweep triggering. Allow the sweep to "free run".</li> <li>(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.</li> </ol> |

|                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| <b>Tested By:</b> Ronak Patel | <b>Date of testing:</b> 03/15/2024 - 03/25/2024 |
| <b>Test Result:</b> PASS      |                                                 |

**Test Equipment**

See Appendix C for list of test equipment

**Maximum EIRP – Antenna gain 15dBi – 20MHz.****Frequency 5955 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | 13.90                |                      | 0.11            | 29.01                     | 36          | 6.99        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | 11.59                | 11.99                | 0.11            | 29.92                     | 36          | 6.08        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | 11.59                | 11.99                | 0.11            | 29.92                     | 36          | 6.08        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.59                | 11.99                | 0.11            | 29.92                     | 36          | 6.08        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.59                | 11.99                | 0.11            | 29.92                     | 36          | 6.08        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.59                | 11.99                | 0.11            | 29.92                     | 36          | 6.08        |

**Frequency 6175 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | 14.60                |                      | 0.11            | 29.71                     | 36          | 6.29        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | 11.16                | 11.50                | 0.11            | 29.46                     | 36          | 6.54        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | 11.16                | 11.50                | 0.11            | 29.46                     | 36          | 6.54        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.16                | 11.50                | 0.11            | 29.46                     | 36          | 6.54        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.16                | 11.50                | 0.11            | 29.46                     | 36          | 6.54        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.16                | 11.50                | 0.11            | 29.46                     | 36          | 6.54        |

**Frequency 6415 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | 14.68                |                      | 0.11            | 29.80                     | 36          | 6.20        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | 11.71                | 11.59                | 0.11            | 29.78                     | 36          | 6.22        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | 11.71                | 11.59                | 0.11            | 29.78                     | 36          | 6.22        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.71                | 11.59                | 0.11            | 29.78                     | 36          | 6.22        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.71                | 11.59                | 0.11            | 29.78                     | 36          | 6.22        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.71                | 11.59                | 0.11            | 29.78                     | 36          | 6.22        |

**Maximum EIRP – Antenna gain 15dBi – 40MHz.****Frequency 5965 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | 12.03                |                      | 0.14            | 27.16                     | 36          | 8.84        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | 9.96                 | 10.22                | 0.14            | 28.24                     | 36          | 7.76        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | 9.96                 | 10.22                | 0.14            | 28.24                     | 36          | 7.76        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 9.96                 | 10.22                | 0.14            | 28.24                     | 36          | 7.76        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 9.96                 | 10.22                | 0.14            | 28.24                     | 36          | 7.76        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | 9.96                 | 10.22                | 0.14            | 28.24                     | 36          | 7.76        |

**Frequency 6205 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | 14.85                |                      | 0.14            | 29.99                     | 36          | 6.01        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | 11.50                | 11.50                | 0.14            | 29.65                     | 36          | 6.35        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | 11.50                | 11.50                | 0.14            | 29.65                     | 36          | 6.35        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.50                | 11.50                | 0.14            | 29.65                     | 36          | 6.35        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.50                | 11.50                | 0.14            | 29.65                     | 36          | 6.35        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.50                | 11.50                | 0.14            | 29.65                     | 36          | 6.35        |

**Frequency 6405 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | 14.76                |                      | 0.14            | 29.90                     | 36          | 6.10        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | 11.85                | 11.75                | 0.14            | 29.95                     | 36          | 6.05        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | 11.85                | 11.75                | 0.14            | 29.95                     | 36          | 6.05        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.85                | 11.75                | 0.14            | 29.95                     | 36          | 6.05        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.85                | 11.75                | 0.14            | 29.95                     | 36          | 6.05        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.85                | 11.75                | 0.14            | 29.95                     | 36          | 6.05        |

**Maximum EIRP – Antenna gain 15dBi – 80MHz.**  
**Frequency 5985 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | 11.20                |                      | 0.25            | 26.45                     | 36          | 9.55        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | 8.79                 | 9.76                 | 0.25            | 27.57                     | 36          | 8.43        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | 8.79                 | 9.76                 | 0.25            | 27.57                     | 36          | 8.43        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 8.79                 | 9.76                 | 0.25            | 27.57                     | 36          | 8.43        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 8.79                 | 9.76                 | 0.25            | 27.57                     | 36          | 8.43        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | 8.79                 | 9.76                 | 0.25            | 27.57                     | 36          | 8.43        |

**Frequency 6225 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | 13.95                |                      | 0.25            | 29.21                     | 36          | 6.79        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | 10.78                | 11.01                | 0.25            | 29.16                     | 36          | 6.84        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | 10.78                | 11.01                | 0.25            | 29.16                     | 36          | 6.84        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 10.78                | 11.01                | 0.25            | 29.16                     | 36          | 6.84        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 10.78                | 11.01                | 0.25            | 29.16                     | 36          | 6.84        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | 10.78                | 11.01                | 0.25            | 29.16                     | 36          | 6.84        |

**Frequency 6385 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | 14.74                |                      | 0.25            | 29.99                     | 36          | 6.01        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | 11.71                | 11.71                | 0.25            | 29.97                     | 36          | 6.03        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | 11.71                | 11.71                | 0.25            | 29.97                     | 36          | 6.03        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.71                | 11.71                | 0.25            | 29.97                     | 36          | 6.03        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.71                | 11.71                | 0.25            | 29.97                     | 36          | 6.03        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.71                | 11.71                | 0.25            | 29.97                     | 36          | 6.03        |



Maximum EIRP – Antenna gain 15dBi – 160MHz.

Frequency 6025 MHz

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | 11.77                |                      | 0.21            | 26.98                     | 36          | 9.02        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | 9.48                 | 9.97                 | 0.21            | 27.95                     | 36          | 8.05        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | 9.48                 | 9.97                 | 0.21            | 27.95                     | 36          | 8.05        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 9.48                 | 9.97                 | 0.21            | 27.95                     | 36          | 8.05        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 9.48                 | 9.97                 | 0.21            | 27.95                     | 36          | 8.05        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | 9.48                 | 9.97                 | 0.21            | 27.95                     | 36          | 8.05        |

Frequency 6185 MHz


| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | 14.75                |                      | 0.21            | 29.96                     | 36          | 6.04        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | 11.36                | 11.72                | 0.21            | 29.76                     | 36          | 6.24        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | 11.36                | 11.72                | 0.21            | 29.76                     | 36          | 6.24        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 11.36                | 11.72                | 0.21            | 29.76                     | 36          | 6.24        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 11.36                | 11.72                | 0.21            | 29.76                     | 36          | 6.24        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | 11.36                | 11.72                | 0.21            | 29.76                     | 36          | 6.24        |

Frequency 6345 MHz

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx EIRP Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | 13.77                |                      | 0.21            | 28.98                     | 36          | 7.02        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | 10.81                | 10.80                | 0.21            | 29.02                     | 36          | 6.98        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | 10.81                | 10.80                | 0.21            | 29.02                     | 36          | 6.98        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 10.81                | 10.80                | 0.21            | 29.02                     | 36          | 6.98        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 10.81                | 10.80                | 0.21            | 29.02                     | 36          | 6.98        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | 10.81                | 10.80                | 0.21            | 29.02                     | 36          | 6.98        |


Data Screenshots

6385 MHz: HE80, M0 to M11 1ss

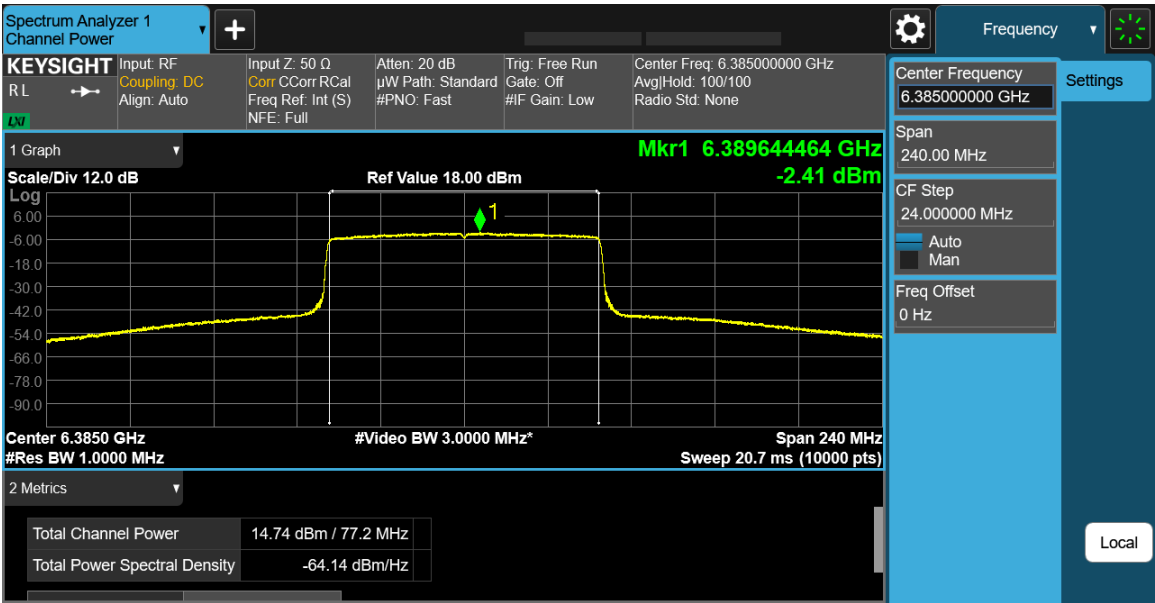


Antenna A

6205 MHz: HE40, M0 to M11 1ss

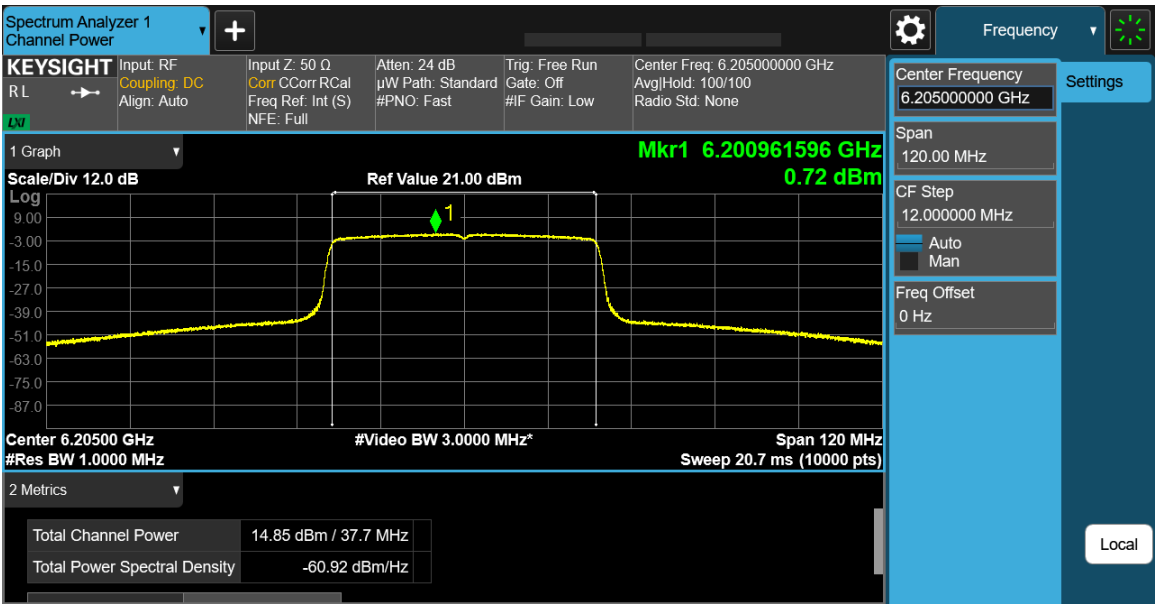


Antenna A

6385 MHz: HE80, M0 to M11 1ss

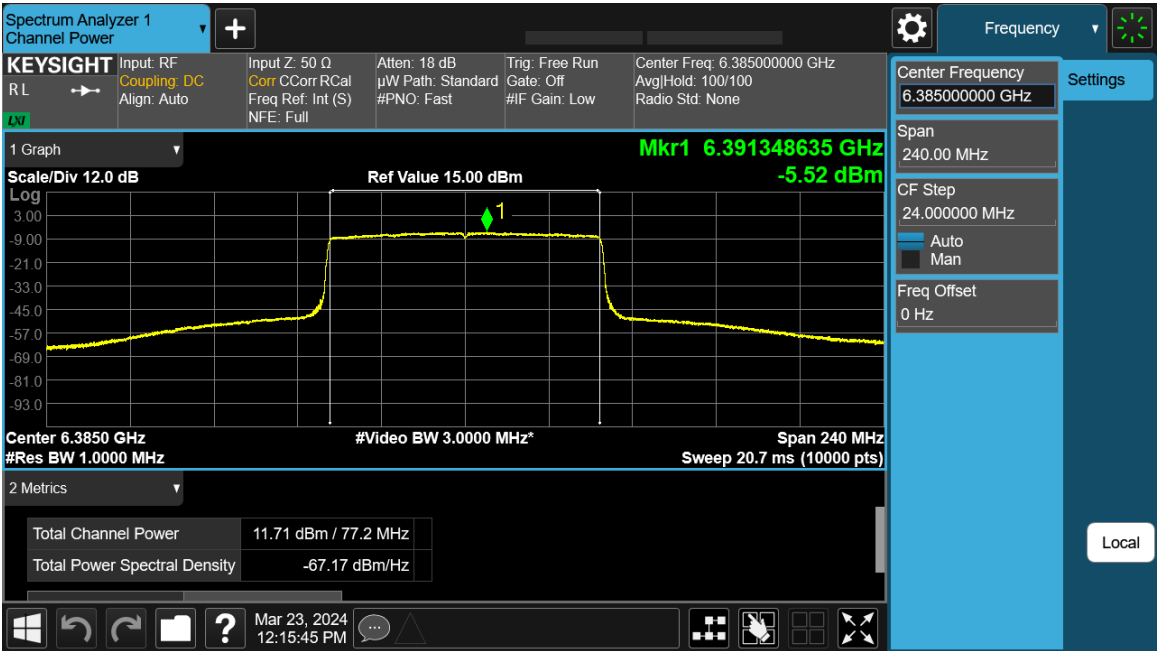

Antenna A

6385 MHz: HE80, M0 to M11 1ss

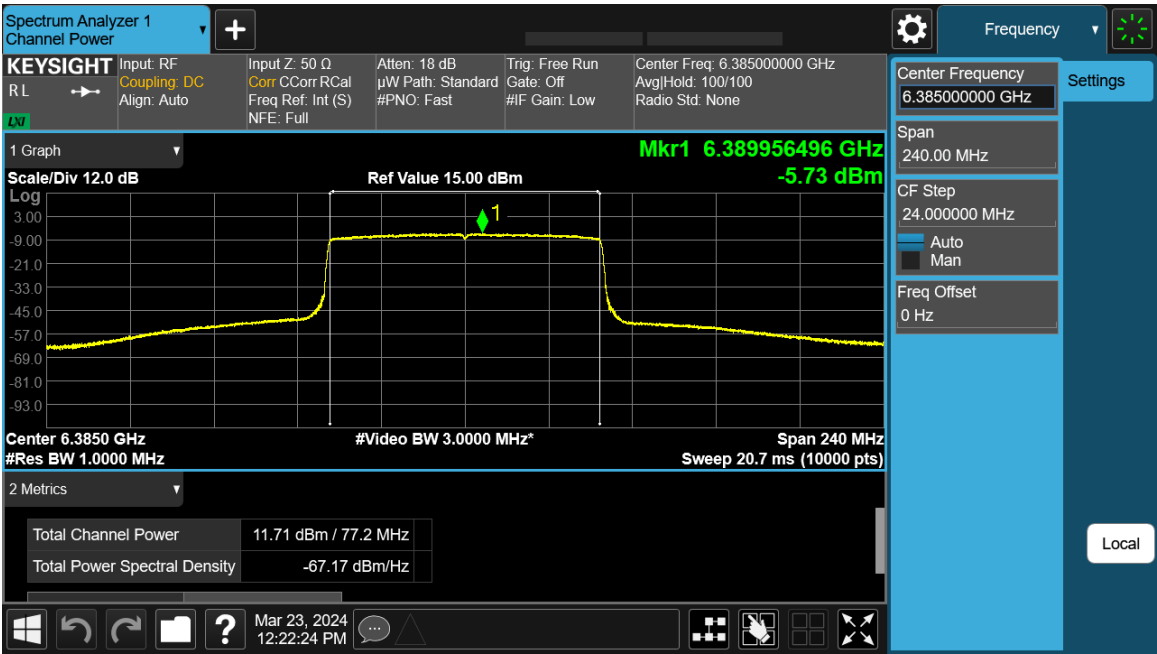

Antenna B

**Maximum Transmit Power > 30° - Antenna gain 15dBi (3dBi) – 20MHz.****Frequency 5955 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 3.00                          | 13.90                |                      | 0.11            | 17.01                       | 21               | 3.99        |
| HE20, M0 to M11 1ss              | 2        | 3.00                          | 11.59                | 11.99                | 0.11            | 17.92                       | 21               | 3.08        |
| HE20, M0 to M11 2ss              | 2        | 3.00                          | 11.59                | 11.99                | 0.11            | 17.92                       | 21               | 3.08        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.59                | 11.99                | 0.11            | 17.92                       | 21               | 3.08        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.59                | 11.99                | 0.11            | 17.92                       | 21               | 3.08        |
| HE20 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.59                | 11.99                | 0.11            | 17.92                       | 21               | 3.08        |

**Frequency 6175 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 3.00                          | 14.60                |                      | 0.11            | 17.71                       | 21               | 3.29        |
| HE20, M0 to M11 1ss              | 2        | 3.00                          | 11.16                | 11.50                | 0.11            | 17.46                       | 21               | 3.54        |
| HE20, M0 to M11 2ss              | 2        | 3.00                          | 11.16                | 11.50                | 0.11            | 17.46                       | 21               | 3.54        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.16                | 11.50                | 0.11            | 17.46                       | 21               | 3.54        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.16                | 11.50                | 0.11            | 17.46                       | 21               | 3.54        |
| HE20 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.16                | 11.50                | 0.11            | 17.46                       | 21               | 3.54        |

**Frequency 6415 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Channel Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|---------------------------|-------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 3.00                          | 14.68                |                      | 0.11            | 17.80                     | 21          | 3.20        |
| HE20, M0 to M11 1ss              | 2        | 3.00                          | 11.71                | 11.59                | 0.11            | 17.78                     | 21          | 3.22        |
| HE20, M0 to M11 2ss              | 2        | 3.00                          | 11.71                | 11.59                | 0.11            | 17.78                     | 21          | 3.22        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.71                | 11.59                | 0.11            | 17.78                     | 21          | 3.22        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.71                | 11.59                | 0.11            | 17.78                     | 21          | 3.22        |
| HE20 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.71                | 11.59                | 0.11            | 17.78                     | 21          | 3.22        |

**Maximum Transmit Power > 30° - Antenna gain 15dBi (3dBi) – 40MHz.  
Frequency 5965 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 3.00                          | 12.03                |                      | 0.14            | 15.16                       | 21               | 5.84        |
| HE40, M0 to M11 1ss              | 2        | 3.00                          | 9.96                 | 10.22                | 0.14            | 16.24                       | 21               | 4.76        |
| HE40, M0 to M11 2ss              | 2        | 3.00                          | 9.96                 | 10.22                | 0.14            | 16.24                       | 21               | 4.76        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 9.96                 | 10.22                | 0.14            | 16.24                       | 21               | 4.76        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 9.96                 | 10.22                | 0.14            | 16.24                       | 21               | 4.76        |
| HE40 STBC, M0 to M11 2ss         | 2        | 3.00                          | 9.96                 | 10.22                | 0.14            | 16.24                       | 21               | 4.76        |

**6205 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 3.00                          | 14.85                |                      | 0.14            | 17.99                       | 21               | 3.01        |
| HE40, M0 to M11 1ss              | 2        | 3.00                          | 11.50                | 11.50                | 0.14            | 17.65                       | 21               | 3.35        |
| HE40, M0 to M11 2ss              | 2        | 3.00                          | 11.50                | 11.50                | 0.14            | 17.65                       | 21               | 3.35        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.50                | 11.50                | 0.14            | 17.65                       | 21               | 3.35        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.50                | 11.50                | 0.14            | 17.65                       | 21               | 3.35        |
| HE40 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.50                | 11.50                | 0.14            | 17.65                       | 21               | 3.35        |

**Frequency 6405 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 3.00                          | 14.76                |                      | 0.14            | 17.90                       | 21               | 3.10        |
| HE40, M0 to M11 1ss              | 2        | 3.00                          | 11.85                | 11.75                | 0.14            | 17.95                       | 21               | 3.05        |
| HE40, M0 to M11 2ss              | 2        | 3.00                          | 11.85                | 11.75                | 0.14            | 17.95                       | 21               | 3.05        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.85                | 11.75                | 0.14            | 17.95                       | 21               | 3.05        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.85                | 11.75                | 0.14            | 17.95                       | 21               | 3.05        |
| HE40 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.85                | 11.75                | 0.14            | 17.95                       | 21               | 3.05        |

**Maximum Transmit Power > 30° - Antenna gain 15dBi (3dBi) – 80MHz.****Frequency 5985 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 3.00                          | 11.20                |                      | 0.25            | 14.45                       | 21               | 6.55        |
| HE80, M0 to M11 1ss              | 2        | 3.00                          | 8.79                 | 9.76                 | 0.25            | 15.57                       | 21               | 5.43        |
| HE80, M0 to M11 2ss              | 2        | 3.00                          | 8.79                 | 9.76                 | 0.25            | 15.57                       | 21               | 5.43        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 8.79                 | 9.76                 | 0.25            | 15.57                       | 21               | 5.43        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 8.79                 | 9.76                 | 0.25            | 15.57                       | 21               | 5.43        |
| HE80 STBC, M0 to M11 2ss         | 2        | 3.00                          | 8.79                 | 9.76                 | 0.25            | 15.57                       | 21               | 5.43        |

**Frequency 6225 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 3.00                          | 13.95                |                      | 0.25            | 17.21                       | 21               | 3.79        |
| HE80, M0 to M11 1ss              | 2        | 3.00                          | 10.78                | 11.01                | 0.25            | 17.16                       | 21               | 3.84        |
| HE80, M0 to M11 2ss              | 2        | 3.00                          | 10.78                | 11.01                | 0.25            | 17.16                       | 21               | 3.84        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 10.78                | 11.01                | 0.25            | 17.16                       | 21               | 3.84        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 10.78                | 11.01                | 0.25            | 17.16                       | 21               | 3.84        |
| HE80 STBC, M0 to M11 2ss         | 2        | 3.00                          | 10.78                | 11.01                | 0.25            | 17.16                       | 21               | 3.84        |

**Frequency 6385 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 3.00                          | 14.74                |                      | 0.25            | 17.99                       | 21               | 3.01        |
| HE80, M0 to M11 1ss              | 2        | 3.00                          | 11.71                | 11.71                | 0.25            | 17.97                       | 21               | 3.03        |
| HE80, M0 to M11 2ss              | 2        | 3.00                          | 11.71                | 11.71                | 0.25            | 17.97                       | 21               | 3.03        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.71                | 11.71                | 0.25            | 17.97                       | 21               | 3.03        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.71                | 11.71                | 0.25            | 17.97                       | 21               | 3.03        |
| HE80 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.71                | 11.71                | 0.25            | 17.97                       | 21               | 3.03        |

**Maximum Transmit Power > 30° - Antenna gain 15dBi (3dBi) – 160MHz.****Frequency 6025 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 3.00                          | 11.77                |                      | 0.21            | 14.98                       | 21               | 6.02        |
| HE160, M0 to M11 1ss              | 2        | 3.00                          | 9.48                 | 9.97                 | 0.21            | 15.95                       | 21               | 5.05        |
| HE160, M0 to M11 2ss              | 2        | 3.00                          | 9.48                 | 9.97                 | 0.21            | 15.95                       | 21               | 5.05        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 9.48                 | 9.97                 | 0.21            | 15.95                       | 21               | 5.05        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 9.48                 | 9.97                 | 0.21            | 15.95                       | 21               | 5.05        |
| HE160 STBC, M0 to M11 2ss         | 2        | 3.00                          | 9.48                 | 9.97                 | 0.21            | 15.95                       | 21               | 5.05        |

**Frequency 6185 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 3.00                          | 14.75                |                      | 0.21            | 17.96                       | 21               | 3.04        |
| HE160, M0 to M11 1ss              | 2        | 3.00                          | 11.36                | 11.72                | 0.21            | 17.76                       | 21               | 3.24        |
| HE160, M0 to M11 2ss              | 2        | 3.00                          | 11.36                | 11.72                | 0.21            | 17.76                       | 21               | 3.24        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 11.36                | 11.72                | 0.21            | 17.76                       | 21               | 3.24        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 11.36                | 11.72                | 0.21            | 17.76                       | 21               | 3.24        |
| HE160 STBC, M0 to M11 2ss         | 2        | 3.00                          | 11.36                | 11.72                | 0.21            | 17.76                       | 21               | 3.24        |

**Frequency 6345 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle (dB) | Total Tx Channel EIRP (dBm) | EIRP Limit (dBm) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|----------------------|----------------------|-----------------|-----------------------------|------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 3.00                          | 13.77                |                      | 0.21            | 16.98                       | 21               | 4.02        |
| HE160, M0 to M11 1ss              | 2        | 3.00                          | 10.81                | 10.80                | 0.21            | 17.02                       | 21               | 3.98        |
| HE160, M0 to M11 2ss              | 2        | 3.00                          | 10.81                | 10.80                | 0.21            | 17.02                       | 21               | 3.98        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 3.00                          | 10.81                | 10.80                | 0.21            | 17.02                       | 21               | 3.98        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 3.00                          | 10.81                | 10.80                | 0.21            | 17.02                       | 21               | 3.98        |
| HE160 STBC, M0 to M11 2ss         | 2        | 3.00                          | 10.81                | 10.80                | 0.21            | 17.02                       | 21               | 3.98        |

## A.4: Power Spectral Density

### Power Spectral Density Test Requirement

#### FCC 15.407(a):

(4) For a standard power access point and fixed client device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(5) For an indoor access point operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

(6) For a subordinate device operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

(8) For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

(11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(12) Power spectral density measurement: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725–5.895 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in all other bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### Power Spectral Density Test Procedure

Ref. KDB 987594, KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### F. Maximum Power Spectral Density (PSD)

| Power Spectral Density<br>Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The rules require “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.</p> <ol style="list-style-type: none"> <li>1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)</li> <li>2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.</li> <li>3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add <math>10 \log(1/x)</math>, where <math>x</math> is the duty cycle, to the peak of the spectrum.<br/>b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.</li> <li>4. The result is the Maximum PSD over 1 MHz reference bandwidth.</li> </ol> |



**Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01****2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power Spectral Density</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).<br>(i) Measure the duty cycle, $x$ , of the transmitter output signal as described in section II.B.<br>(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.<br>(iii) Set RBW = 1 MHz.<br>(iv) Set VBW $\geq$ 3 MHz.<br>(v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)<br>(vi) Sweep time = auto.<br>(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.<br>(viii) Do not use sweep triggering. Allow the sweep to "free run".<br>(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.<br>(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) |
| <b>F. Maximum Power Spectral Density (PSD)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.<br>3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$ , where $x$ is the duty cycle, to the peak of the spectrum.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| <b>Tested By:</b> Ronak Patel | <b>Date of testing:</b> 03/15/2024 - 03/25/2024 |
| <b>Test Result:</b> PASS      |                                                 |

**Test Equipment**

See Appendix C for list of test equipment

**Power Spectral Density EIRP – Antenna gain 15dBi – 20MHz.****Frequency 5955 MHz**

| Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE20, M0 to M11 1ss                     | 1        | 15.00                         | 2.63               |                    | 0.11            | 17.74               | 23              | 5.26        |
| <b>HE20, M0 to M11 1ss</b>              | <b>2</b> | <b>15.00</b>                  | <b>0.46</b>        | <b>0.69</b>        | <b>0.11</b>     | <b>18.70</b>        | <b>23</b>       | <b>4.30</b> |
| <b>HE20, M0 to M11 2ss</b>              | <b>2</b> | <b>15.00</b>                  | <b>0.46</b>        | <b>0.69</b>        | <b>0.11</b>     | <b>18.70</b>        | <b>23</b>       | <b>4.30</b> |
| <b>HE20 Beam Forming, M0 to M11 1ss</b> | <b>2</b> | <b>15.00</b>                  | <b>0.46</b>        | <b>0.69</b>        | <b>0.11</b>     | <b>18.70</b>        | <b>23</b>       | <b>4.30</b> |
| HE20 Beam Forming, M0 to M11 2ss        | 2        | 15.00                         | 0.46               | 0.69               | 0.11            | 18.70               | 23              | 4.30        |
| HE20 STBC, M0 to M11 2ss                | 2        | 15.00                         | 0.46               | 0.69               | 0.11            | 18.70               | 23              | 4.30        |

**Frequency 6175 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | 3.33               |                    | 0.11            | 18.44               | 23              | 4.56        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | 0.01               | 0.23               | 0.11            | 18.25               | 23              | 4.75        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | 0.01               | 0.23               | 0.11            | 18.25               | 23              | 4.75        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 0.01               | 0.23               | 0.11            | 18.25               | 23              | 4.75        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 0.01               | 0.23               | 0.11            | 18.25               | 23              | 4.75        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | 0.01               | 0.23               | 0.11            | 18.25               | 23              | 4.75        |

**Frequency 6415 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | 3.57               |                    | 0.11            | 18.69               | 23              | 4.31        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | 0.49               | 0.43               | 0.11            | 18.58               | 23              | 4.42        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | 0.49               | 0.43               | 0.11            | 18.58               | 23              | 4.42        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | 0.49               | 0.43               | 0.11            | 18.58               | 23              | 4.42        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | 0.49               | 0.43               | 0.11            | 18.58               | 23              | 4.42        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | 0.49               | 0.43               | 0.11            | 18.58               | 23              | 4.42        |

**Power Spectral Density EIRP – Antenna gain 15dBi – 40MHz.**  
**Frequency 5965 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -2.08              |                    | 0.14            | 13.05               | 23              | 9.95        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -4.09              | -3.80              | 0.14            | 14.20               | 23              | 8.80        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -4.09              | -3.80              | 0.14            | 14.20               | 23              | 8.80        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -4.09              | -3.80              | 0.14            | 14.20               | 23              | 8.80        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -4.09              | -3.80              | 0.14            | 14.20               | 23              | 8.80        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -4.09              | -3.80              | 0.14            | 14.20               | 23              | 8.80        |

**Frequency 6205 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | 0.72               |                    | 0.14            | 15.85               | 23              | 7.15        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -2.61              | -2.68              | 0.14            | 15.50               | 23              | 7.50        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -2.61              | -2.68              | 0.14            | 15.50               | 23              | 7.50        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -2.61              | -2.68              | 0.14            | 15.50               | 23              | 7.50        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -2.61              | -2.68              | 0.14            | 15.50               | 23              | 7.50        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -2.61              | -2.68              | 0.14            | 15.50               | 23              | 7.50        |

**Frequency 6405 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | 0.51               |                    | 0.14            | 15.65               | 23              | 7.35        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -2.37              | -2.38              | 0.14            | 15.77               | 23              | 7.23        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -2.37              | -2.38              | 0.14            | 15.77               | 23              | 7.23        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -2.37              | -2.38              | 0.14            | 15.77               | 23              | 7.23        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -2.37              | -2.38              | 0.14            | 15.77               | 23              | 7.23        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -2.37              | -2.38              | 0.14            | 15.77               | 23              | 7.23        |

**Power Spectral Density EIRP – Antenna gain 15dBi – 80MHz.**  
**Frequency 5985 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -6.01              |                    | 0.25            | 9.24                | 23              | 13.76       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -8.54              | -7.43              | 0.25            | 10.31               | 23              | 12.69       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -8.54              | -7.43              | 0.25            | 10.31               | 23              | 12.69       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -8.54              | -7.43              | 0.25            | 10.31               | 23              | 12.69       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -8.54              | -7.43              | 0.25            | 10.31               | 23              | 12.69       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -8.54              | -7.43              | 0.25            | 10.31               | 23              | 12.69       |

**Frequency 6225 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -3.35              |                    | 0.25            | 11.90               | 23              | 11.10       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -6.51              | -6.16              | 0.25            | 11.93               | 23              | 11.07       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -6.51              | -6.16              | 0.25            | 11.93               | 23              | 11.07       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -6.51              | -6.16              | 0.25            | 11.93               | 23              | 11.07       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -6.51              | -6.16              | 0.25            | 11.93               | 23              | 11.07       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -6.51              | -6.16              | 0.25            | 11.93               | 23              | 11.07       |

**Frequency 6385 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -2.41              |                    | 0.25            | 12.84               | 23              | 10.16       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -5.52              | -5.73              | 0.25            | 12.64               | 23              | 10.36       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -5.52              | -5.73              | 0.25            | 12.64               | 23              | 10.36       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -5.52              | -5.73              | 0.25            | 12.64               | 23              | 10.36       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -5.52              | -5.73              | 0.25            | 12.64               | 23              | 10.36       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -5.52              | -5.73              | 0.25            | 12.64               | 23              | 10.36       |

## Power Spectral Density EIRP – Antenna gain 15dBi – 160MHz.

## Frequency 6025 MHz

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -8.22              |                    | 0.21            | 6.98                | 23              | 16.02       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -10.40             | -9.93              | 0.21            | 8.06                | 23              | 14.94       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -10.40             | -9.93              | 0.21            | 8.06                | 23              | 14.94       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -10.40             | -9.93              | 0.21            | 8.06                | 23              | 14.94       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -10.40             | -9.93              | 0.21            | 8.06                | 23              | 14.94       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -10.40             | -9.93              | 0.21            | 8.06                | 23              | 14.94       |


## Frequency 6185 MHz

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -5.17              |                    | 0.21            | 10.04               | 23              | 12.96       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -8.62              | -8.31              | 0.21            | 9.76                | 23              | 13.24       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -8.62              | -8.31              | 0.21            | 9.76                | 23              | 13.24       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -8.62              | -8.31              | 0.21            | 9.76                | 23              | 13.24       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -8.62              | -8.31              | 0.21            | 9.76                | 23              | 13.24       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -8.62              | -8.31              | 0.21            | 9.76                | 23              | 13.24       |


## Frequency 6345 MHz

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------|--------------------|-----------------|---------------------|-----------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -6.36              |                    | 0.21            | 8.85                | 23              | 14.15       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -9.12              | -9.06              | 0.21            | 9.12                | 23              | 13.88       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -9.12              | -9.06              | 0.21            | 9.12                | 23              | 13.88       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -9.12              | -9.06              | 0.21            | 9.12                | 23              | 13.88       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -9.12              | -9.06              | 0.21            | 9.12                | 23              | 13.88       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -9.12              | -9.06              | 0.21            | 9.12                | 23              | 13.88       |

6415 MHz: HE20, M0 to M11 1ss

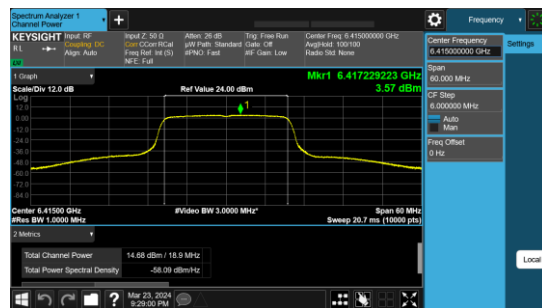


Antenna A

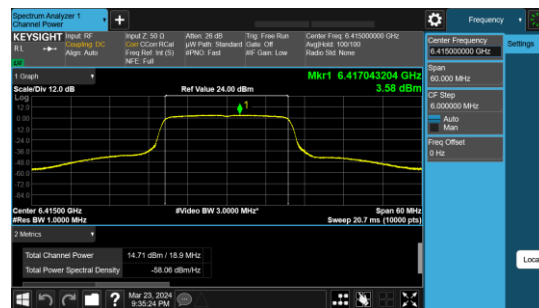


Antenna B

6415 MHz: HE20, M0 to M11 2ss

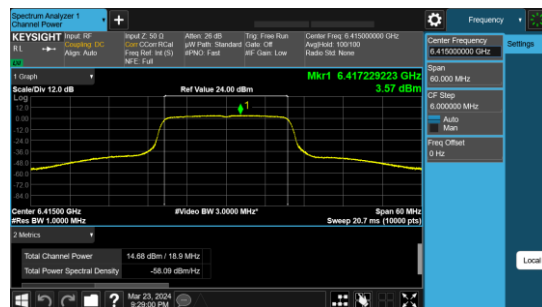


Antenna A

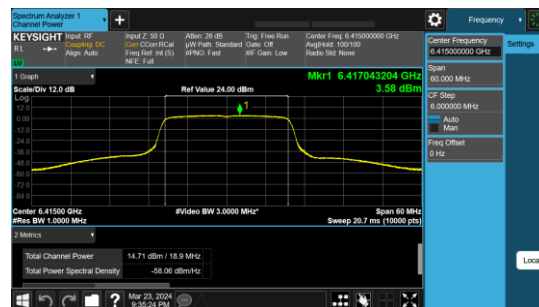


Antenna B

6415 MHz: HE20 Beam Forming, M0 to M11 1ss

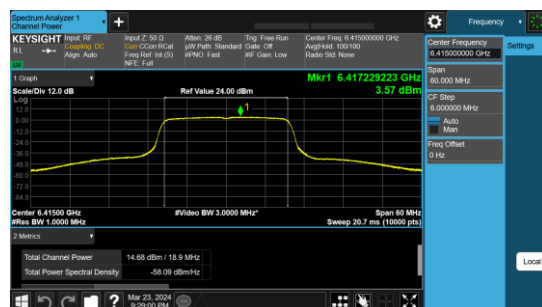

Antenna A

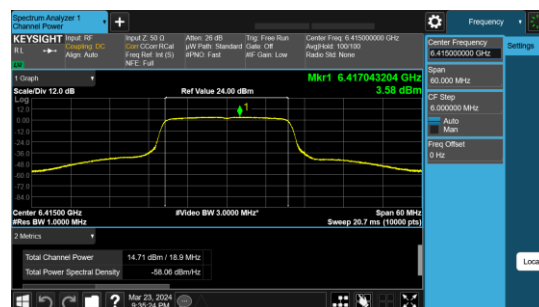

Antenna B

## **A.5: Conducted Spurious Emissions**

### **Conducted Spurious Emissions Test Requirement**

**15.407(b)** Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(6) For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

(7) For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements:

$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where E = field strength and d = 3 meter

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

### **Conducted Spurious Emissions Test Procedure**

**Ref. KDB 987594, KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

#### **2. Unwanted Emissions that fall Outside of the Restricted Bands**

- a) For all measurements, follow the requirements in II.G.3. *“General Requirements for Unwanted Emissions Measurements.”*
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. *“Procedure for Unwanted Emissions Measurements Below 1000 MHz.”*
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., *“Procedure for Unwanted Emissions Measurements Above 1000 MHz.”*
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

**Ref. ANSI C63.10: 2013****KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

| <b>Conducted Spurious Emissions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <ol style="list-style-type: none"><li>1. Connect the antenna port(s) to the spectrum analyzer input.</li><li>2. Place the radio in continuous transmit mode</li><li>3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).</li><li>4. Use the peak marker function to determine the maximum spurs amplitude level.</li><li>5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded. (See ANSI C63.10:2013 section 14.3.2.2)</li><li>6. Capture graphs and record pertinent measurement data.</li></ol> |

**Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)****KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

| <b>Conducted Spurious Emissions</b>                                                               |                                                                                                   |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Test parameters                                                                                   |                                                                                                   |
| <b>Peak</b><br>RBW = 1 MHz<br>VBW ≥ 3 MHz<br>Sweep = Auto<br>Detector = Peak<br>Trace = Max Hold. | <b>Average</b><br>RBW = 1 MHz<br>VBW ≥ 3 MHz<br>Sweep = Auto<br>Detector = RMS<br>Power Averaging |

Add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| <b>Tested By:</b> Ronak Patel | <b>Date of testing:</b> 03/15/2024 - 03/25/2024 |
| <b>Test Result: PASS</b>      |                                                 |

**Test Equipment**

See Appendix C for list of test equipment



**Conducted Spurious emissions Average – Antenna gain 15dBi – 20MHz BW.****Frequency 5955 MHz**

| Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE20, M0 to M11 1ss                     | 1        | 15.00                         | -58.80                    |                           | 0.11            | -43.69               | -41.25               | 2.44        |
| <b>HE20, M0 to M11 1ss</b>              | <b>2</b> | <b>15.00</b>                  | <b>-60.80</b>             | <b>-59.80</b>             | <b>0.11</b>     | <b>-42.15</b>        | <b>-41.25</b>        | <b>0.90</b> |
| <b>HE20, M0 to M11 2ss</b>              | <b>2</b> | <b>15.00</b>                  | <b>-60.80</b>             | <b>-59.80</b>             | <b>0.11</b>     | <b>-42.15</b>        | <b>-41.25</b>        | <b>0.90</b> |
| <b>HE20 Beam Forming, M0 to M11 1ss</b> | <b>2</b> | <b>15.00</b>                  | <b>-60.80</b>             | <b>-59.80</b>             | <b>0.11</b>     | <b>-42.15</b>        | <b>-41.25</b>        | <b>0.90</b> |
| HE20 Beam Forming, M0 to M11 2ss        | 2        | 15.00                         | -60.80                    | -59.80                    | 0.11            | -42.15               | -41.25               | 0.90        |
| HE20 STBC, M0 to M11 2ss                | 2        | 15.00                         | -60.80                    | -59.80                    | 0.11            | -42.15               | -41.25               | 0.90        |

**Frequency 6175 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -65.50                    |                           | 0.11            | -50.39               | -41.25               | 9.14        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -65.40                    | -66.60                    | 0.11            | -47.84               | -41.25               | 6.59        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -65.40                    | -66.60                    | 0.11            | -47.84               | -41.25               | 6.59        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -65.40                    | -66.60                    | 0.11            | -47.84               | -41.25               | 6.59        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -65.40                    | -66.60                    | 0.11            | -47.84               | -41.25               | 6.59        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -65.40                    | -66.60                    | 0.11            | -47.84               | -41.25               | 6.59        |

**Frequency 6415 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -61.00                    |                           | 0.11            | -45.89               | -41.25               | 4.64        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -64.10                    | -64.60                    | 0.11            | -46.22               | -41.25               | 4.97        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -64.10                    | -64.60                    | 0.11            | -46.22               | -41.25               | 4.97        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -64.10                    | -64.60                    | 0.11            | -46.22               | -41.25               | 4.97        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -64.10                    | -64.60                    | 0.11            | -46.22               | -41.25               | 4.97        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -64.10                    | -64.60                    | 0.11            | -46.22               | -41.25               | 4.97        |

**Conducted Spurious emissions Average – Antenna gain 15dBi – 40MHz BW.  
Frequency 5965 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -63.80                    |                           | 0.14            | -48.66               | -41.25               | 7.41        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -65.70                    | -65.10                    | 0.14            | -47.24               | -41.25               | 5.99        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -65.70                    | -65.10                    | 0.14            | -47.24               | -41.25               | 5.99        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -65.70                    | -65.10                    | 0.14            | -47.24               | -41.25               | 5.99        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -65.70                    | -65.10                    | 0.14            | -47.24               | -41.25               | 5.99        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -65.70                    | -65.10                    | 0.14            | -47.24               | -41.25               | 5.99        |

**Frequency 6205 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -64.90                    |                           | 0.14            | -49.76               | -41.25               | 8.51        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -65.20                    | -66.10                    | 0.14            | -47.48               | -41.25               | 6.23        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -65.20                    | -66.10                    | 0.14            | -47.48               | -41.25               | 6.23        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -65.20                    | -66.10                    | 0.14            | -47.48               | -41.25               | 6.23        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -65.20                    | -66.10                    | 0.14            | -47.48               | -41.25               | 6.23        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -65.20                    | -66.10                    | 0.14            | -47.48               | -41.25               | 6.23        |

**Frequency 6405 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -63.30                    |                           | 0.14            | -48.16               | -41.25               | 6.91        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -63.80                    | -64.80                    | 0.14            | -46.13               | -41.25               | 4.88        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -63.80                    | -64.80                    | 0.14            | -46.13               | -41.25               | 4.88        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -63.80                    | -64.80                    | 0.14            | -46.13               | -41.25               | 4.88        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -63.80                    | -64.80                    | 0.14            | -46.13               | -41.25               | 4.88        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -63.80                    | -64.80                    | 0.14            | -46.13               | -41.25               | 4.88        |

**Conducted Spurious emissions Average – Antenna gain 15dBi – 80MHz BW.  
Frequency 5985 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -66.70                    |                           | 0.25            | -51.45               | -41.25               | 10.20       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -68.90                    | -69.60                    | 0.25            | -50.97               | -41.25               | 9.72        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -68.90                    | -69.60                    | 0.25            | -50.97               | -41.25               | 9.72        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -68.90                    | -69.60                    | 0.25            | -50.97               | -41.25               | 9.72        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -68.90                    | -69.60                    | 0.25            | -50.97               | -41.25               | 9.72        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -68.90                    | -69.60                    | 0.25            | -50.97               | -41.25               | 9.72        |

**Frequency 6225 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -65.60                    |                           | 0.25            | -50.35               | -41.25               | 9.10        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -66.40                    | -66.70                    | 0.25            | -48.29               | -41.25               | 7.04        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -66.40                    | -66.70                    | 0.25            | -48.29               | -41.25               | 7.04        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -66.40                    | -66.70                    | 0.25            | -48.29               | -41.25               | 7.04        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -66.40                    | -66.70                    | 0.25            | -48.29               | -41.25               | 7.04        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -66.40                    | -66.70                    | 0.25            | -48.29               | -41.25               | 7.04        |

**Frequency 6385 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -64.30                    |                           | 0.25            | -49.05               | -41.25               | 7.80        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -65.60                    | -66.90                    | 0.25            | -47.94               | -41.25               | 6.69        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -65.60                    | -66.90                    | 0.25            | -47.94               | -41.25               | 6.69        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -65.60                    | -66.90                    | 0.25            | -47.94               | -41.25               | 6.69        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -65.60                    | -66.90                    | 0.25            | -47.94               | -41.25               | 6.69        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -65.60                    | -66.90                    | 0.25            | -47.94               | -41.25               | 6.69        |

**Conducted Spurious emissions Average – Antenna gain 15dBi – 160MHz BW.****Frequency 6025 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -66.90                    |                           | 0.21            | -51.69               | -41.25               | 10.44       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -66.80                    | -66.60                    | 0.21            | -48.48               | -41.25               | 7.23        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -66.80                    | -66.60                    | 0.21            | -48.48               | -41.25               | 7.23        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -66.80                    | -66.60                    | 0.21            | -48.48               | -41.25               | 7.23        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -66.80                    | -66.60                    | 0.21            | -48.48               | -41.25               | 7.23        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -66.80                    | -66.60                    | 0.21            | -48.48               | -41.25               | 7.23        |

**Frequency 6185 MHz**


| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -64.80                    |                           | 0.21            | -49.59               | -41.25               | 8.34        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -66.30                    | -66.20                    | 0.21            | -48.03               | -41.25               | 6.78        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -66.30                    | -66.20                    | 0.21            | -48.03               | -41.25               | 6.78        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -66.30                    | -66.20                    | 0.21            | -48.03               | -41.25               | 6.78        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -66.30                    | -66.20                    | 0.21            | -48.03               | -41.25               | 6.78        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -66.30                    | -66.20                    | 0.21            | -48.03               | -41.25               | 6.78        |

**Frequency 6345 MHz**


| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -61.70                    |                           | 0.21            | -46.49               | -41.25               | 5.24        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -64.10                    | -65.20                    | 0.21            | -46.40               | -41.25               | 5.15        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -64.10                    | -65.20                    | 0.21            | -46.40               | -41.25               | 5.15        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -64.10                    | -65.20                    | 0.21            | -46.40               | -41.25               | 5.15        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -64.10                    | -65.20                    | 0.21            | -46.40               | -41.25               | 5.15        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -64.10                    | -65.20                    | 0.21            | -46.40               | -41.25               | 5.15        |

Data Screenshots

5955 MHz: HE20, M0 to M11 1ss

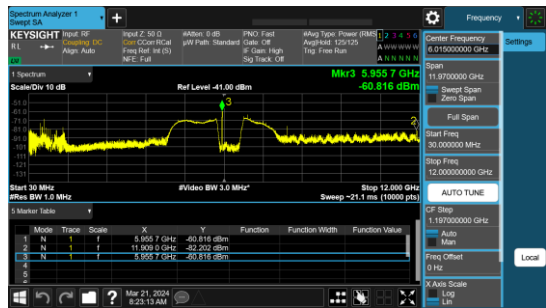


Antenna A

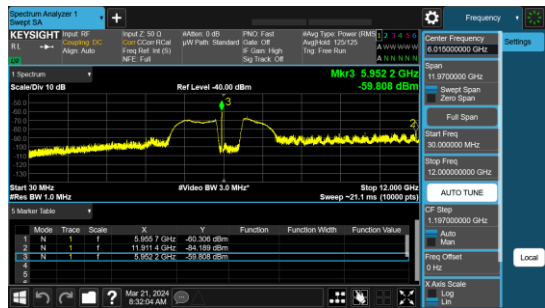


Antenna B

5955 MHz: HE20, M0 to M11 2ss

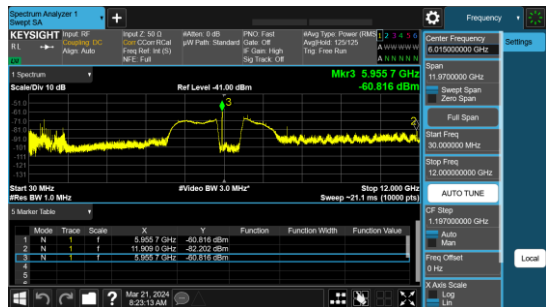


Antenna A

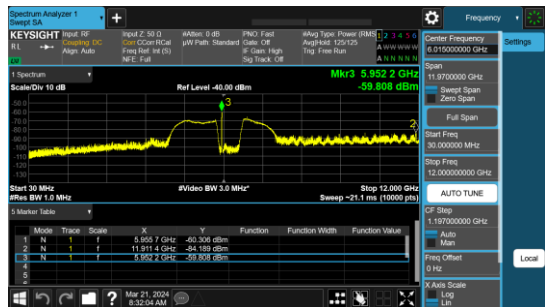


Antenna B

5955 MHz: HE20 Beam Forming, M0 to M11 1ss

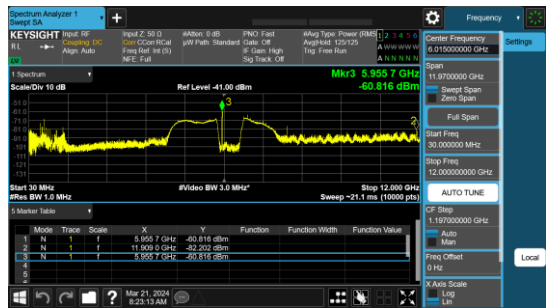

Antenna A

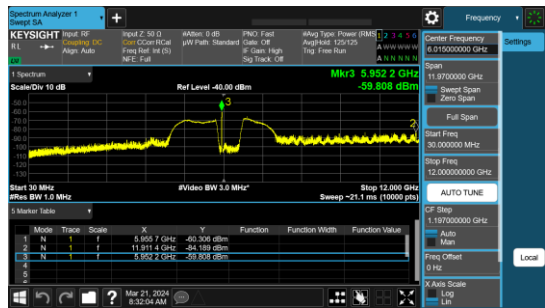

Antenna B

**Conducted Spurious emissions Peak – Antenna gain 15dBi – 20MHz BW.  
Frequency 5955 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -60.60                    |                           | 0.11            | -45.49               | -27                  | 18.49       |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -60.40                    | -57.70                    | 0.11            | -40.72               | -27                  | 13.72       |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -60.40                    | -57.70                    | 0.11            | -40.72               | -27                  | 13.72       |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -60.40                    | -57.70                    | 0.11            | -40.72               | -27                  | 13.72       |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -60.40                    | -57.70                    | 0.11            | -40.72               | -27                  | 13.72       |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -60.40                    | -57.70                    | 0.11            | -40.72               | -27                  | 13.72       |

**Frequency 6175 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -58.90                    |                           | 0.11            | -43.79               | -27                  | 16.79       |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -60.00                    | -58.80                    | 0.11            | -41.24               | -27                  | 14.24       |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -60.00                    | -58.80                    | 0.11            | -41.24               | -27                  | 14.24       |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -60.00                    | -58.80                    | 0.11            | -41.24               | -27                  | 14.24       |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -60.00                    | -58.80                    | 0.11            | -41.24               | -27                  | 14.24       |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -60.00                    | -58.80                    | 0.11            | -41.24               | -27                  | 14.24       |

**Frequency 6415 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -59.80                    |                           | 0.11            | -44.69               | -27                  | 17.69       |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -60.40                    | -58.70                    | 0.11            | -41.34               | -27                  | 14.34       |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -60.40                    | -58.70                    | 0.11            | -41.34               | -27                  | 14.34       |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -60.40                    | -58.70                    | 0.11            | -41.34               | -27                  | 14.34       |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -60.40                    | -58.70                    | 0.11            | -41.34               | -27                  | 14.34       |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -60.40                    | -58.70                    | 0.11            | -41.34               | -27                  | 14.34       |

**Conducted Spurious emissions peak – Antenna gain 15dBi – 40MHz BW.****Frequency 5965 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -58.40                    |                           | 0.14            | -43.26               | -27                  | 16.26       |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -63.00                    | -58.00                    | 0.14            | -41.67               | -27                  | 14.67       |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -63.00                    | -58.00                    | 0.14            | -41.67               | -27                  | 14.67       |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -63.00                    | -58.00                    | 0.14            | -41.67               | -27                  | 14.67       |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -63.00                    | -58.00                    | 0.14            | -41.67               | -27                  | 14.67       |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -63.00                    | -58.00                    | 0.14            | -41.67               | -27                  | 14.67       |

**Frequency 6205 MHz**

| Mode                                    | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB)  |
|-----------------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|--------------|
| HE40, M0 to M11 1ss                     | 1        | 15.00                         | -57.00                    |                           | 0.14            | -41.86               | -27                  | 14.86        |
| <b>HE40, M0 to M11 1ss</b>              | <b>2</b> | <b>15.00</b>                  | <b>-57.80</b>             | <b>-56.40</b>             | <b>0.14</b>     | <b>-38.90</b>        | <b>-27</b>           | <b>11.90</b> |
| <b>HE40, M0 to M11 2ss</b>              | <b>2</b> | <b>15.00</b>                  | <b>-57.80</b>             | <b>-56.40</b>             | <b>0.14</b>     | <b>-38.90</b>        | <b>-27</b>           | <b>11.90</b> |
| <b>HE40 Beam Forming, M0 to M11 1ss</b> | <b>2</b> | <b>15.00</b>                  | <b>-57.80</b>             | <b>-56.40</b>             | <b>0.14</b>     | <b>-38.90</b>        | <b>-27</b>           | <b>11.90</b> |
| HE40 Beam Forming, M0 to M11 2ss        | 2        | 15.00                         | -57.80                    | -56.40                    | 0.14            | -38.90               | -27                  | 11.90        |
| HE40 STBC, M0 to M11 2ss                | 2        | 15.00                         | -57.80                    | -56.40                    | 0.14            | -38.90               | -27                  | 11.90        |

**Frequency 6405 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -58.50                    |                           | 0.14            | -43.36               | -27                  | 16.36       |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -58.30                    | -56.80                    | 0.14            | -39.34               | -27                  | 12.34       |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -58.30                    | -56.80                    | 0.14            | -39.34               | -27                  | 12.34       |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -58.30                    | -56.80                    | 0.14            | -39.34               | -27                  | 12.34       |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -58.30                    | -56.80                    | 0.14            | -39.34               | -27                  | 12.34       |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -58.30                    | -56.80                    | 0.14            | -39.34               | -27                  | 12.34       |

**Conducted Spurious emissions peak – Antenna gain 15dBi – 80MHz BW.  
Frequency 5985 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -60.00                    |                           | 0.25            | -44.75               | -27                  | 17.75       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -63.00                    | -62.60                    | 0.25            | -44.53               | -27                  | 17.53       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -63.00                    | -62.60                    | 0.25            | -44.53               | -27                  | 17.53       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -63.00                    | -62.60                    | 0.25            | -44.53               | -27                  | 17.53       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -63.00                    | -62.60                    | 0.25            | -44.53               | -27                  | 17.53       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -63.00                    | -62.60                    | 0.25            | -44.53               | -27                  | 17.53       |

**Frequency 6225 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -58.50                    |                           | 0.25            | -43.25               | -27                  | 16.25       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -59.10                    | -57.20                    | 0.25            | -39.78               | -27                  | 12.78       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -59.10                    | -57.20                    | 0.25            | -39.78               | -27                  | 12.78       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -59.10                    | -57.20                    | 0.25            | -39.78               | -27                  | 12.78       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -59.10                    | -57.20                    | 0.25            | -39.78               | -27                  | 12.78       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -59.10                    | -57.20                    | 0.25            | -39.78               | -27                  | 12.78       |

**Frequency 6385 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -58.80                    |                           | 0.25            | -43.55               | -27                  | 16.55       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -58.80                    | -57.50                    | 0.25            | -39.84               | -27                  | 12.84       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -58.80                    | -57.50                    | 0.25            | -39.84               | -27                  | 12.84       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -58.80                    | -57.50                    | 0.25            | -39.84               | -27                  | 12.84       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -58.80                    | -57.50                    | 0.25            | -39.84               | -27                  | 12.84       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -58.80                    | -57.50                    | 0.25            | -39.84               | -27                  | 12.84       |



**Conducted Spurious emissions peak – Antenna gain 15dBi – 160MHz BW.  
Frequency 6185 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -58.50                    |                           | 0.21            | -43.29               | -27                  | 16.29       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -59.50                    | -57.60                    | 0.21            | -40.23               | -27                  | 13.23       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -59.50                    | -57.60                    | 0.21            | -40.23               | -27                  | 13.23       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -59.50                    | -57.60                    | 0.21            | -40.23               | -27                  | 13.23       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -59.50                    | -57.60                    | 0.21            | -40.23               | -27                  | 13.23       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -59.50                    | -57.60                    | 0.21            | -40.23               | -27                  | 13.23       |

**Frequency 6025 MHz**



| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -59.70                    |                           | 0.21            | -44.49               | -27                  | 17.49       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -60.50                    | -59.10                    | 0.21            | -41.53               | -27                  | 14.53       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -60.50                    | -59.10                    | 0.21            | -41.53               | -27                  | 14.53       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -60.50                    | -59.10                    | 0.21            | -41.53               | -27                  | 14.53       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -60.50                    | -59.10                    | 0.21            | -41.53               | -27                  | 14.53       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -60.50                    | -59.10                    | 0.21            | -41.53               | -27                  | 14.53       |

**Frequency 6345 MHz**


| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm/MHz) | Tx 2 Spur Power (dBm/MHz) | Duty Cycle (dB) | Total Spur (dBm/MHz) | EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|---------------------------|---------------------------|-----------------|----------------------|----------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -59.70                    |                           | 0.21            | -44.49               | -27                  | 17.49       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -60.30                    | -58.20                    | 0.21            | -40.91               | -27                  | 13.91       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -60.30                    | -58.20                    | 0.21            | -40.91               | -27                  | 13.91       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -60.30                    | -58.20                    | 0.21            | -40.91               | -27                  | 13.91       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -60.30                    | -58.20                    | 0.21            | -40.91               | -27                  | 13.91       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -60.30                    | -58.20                    | 0.21            | -40.91               | -27                  | 13.91       |

Data Screenshots



6205 MHz: HE40, M0 to M11 1ss

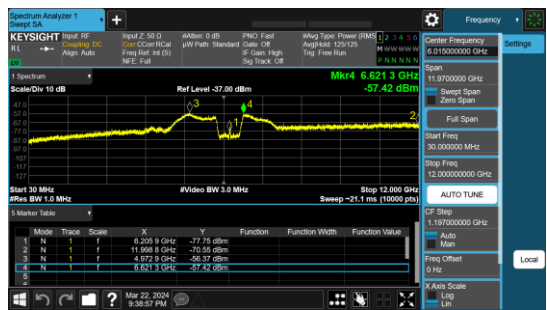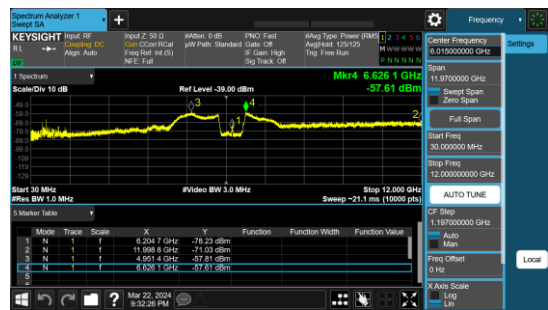

6205 MHz: HE40, M0 to M11 2ss

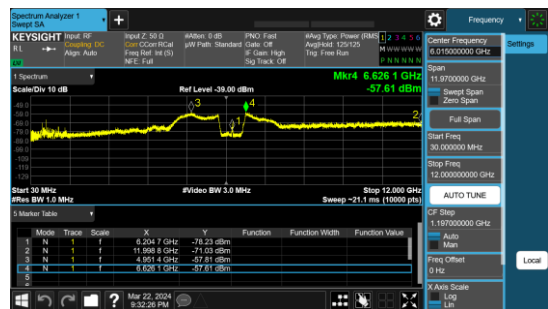

6205 MHz: HE40 Beam Forming, M0 to M11 1ss

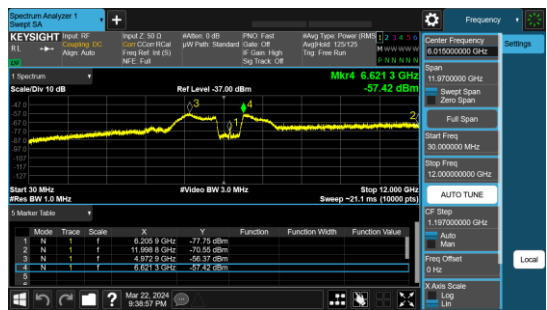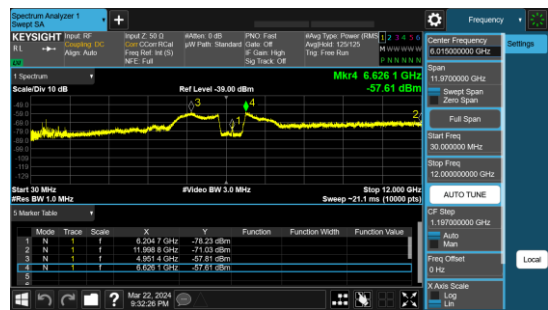

## A.6: Conducted Band Edge

### Conducted Band Edge Test Requirement

#### 15.407(b):

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(6) For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

#### 15.205 | 15.209:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements

$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where E = field strength and d = 3 meter

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### 2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. *“General Requirements for Unwanted Emissions Measurements.”*
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. *“Procedure for Unwanted Emissions Measurements Below 1000 MHz.”*
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., *“Procedure for Unwanted Emissions Measurements Above 1000 MHz.”*
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

### Conducted Band Edge Test Procedure

#### Ref. ANSI C63.10: 2013

#### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

##### Conducted Spurious Emissions

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded. (See ANSI C63.10:2013 section 14.3.2.2)
6. Capture graphs and record pertinent measurement data.

**Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

|                                                                                                   |                                                                                                   |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Conducted Spurious Emissions</b><br>Test parameters                                            |                                                                                                   |
| <b>Peak</b><br>RBW = 1 MHz<br>VBW ≥ 3 MHz<br>Sweep = Auto<br>Detector = Peak<br>Trace = Max Hold. | <b>Average</b><br>RBW = 1 MHz<br>VBW ≥ 3 MHz<br>Sweep = Auto<br>Detector = RMS<br>Power Averaging |
| <b>Tested By:</b> Ronak Patel                                                                     | <b>Date of testing:</b> 03/15/2024 - 03/25/2024                                                   |
| <b>Test Result: PASS</b>                                                                          |                                                                                                   |

**Test Equipment**

See Appendix C for list of test equipment

**Conducted Band edge Average. – Antenna gain 15dBi.****Frequency 5955 MHz**

| <b>Mode</b>                      | <b>Tx Paths</b> | <b>Correlated Antenna Gain (dBi)</b> | <b>Tx 1 Band Edge Level (dBm/MHz)</b> | <b>Tx 2 Band Edge Level (dBm/MHz)</b> | <b>Duty Cycle (dB)</b> | <b>Total Tx Band Edge Level (dBm/MHz)</b> | <b>Band Edge EIRP Limit (dBm/MHz)</b> | <b>Margin (dB)</b> |
|----------------------------------|-----------------|--------------------------------------|---------------------------------------|---------------------------------------|------------------------|-------------------------------------------|---------------------------------------|--------------------|
| HE20, M0 to M11 1ss              | 1               | 15.00                                | -57.30                                |                                       | 0.11                   | -42.19                                    | -41.25                                | 0.94               |
| HE20, M0 to M11 1ss              | 2               | 15.00                                | -60.70                                | -60.40                                | 0.11                   | -42.42                                    | -41.25                                | 1.17               |
| HE20, M0 to M11 2ss              | 2               | 15.00                                | -60.70                                | -60.40                                | 0.11                   | -42.42                                    | -41.25                                | 1.17               |
| HE20 Beam Forming, M0 to M11 1ss | 2               | 15.00                                | -60.70                                | -60.40                                | 0.11                   | -42.42                                    | -41.25                                | 1.17               |
| HE20 Beam Forming, M0 to M11 2ss | 2               | 15.00                                | -60.70                                | -60.40                                | 0.11                   | -42.42                                    | -41.25                                | 1.17               |
| HE20 STBC, M0 to M11 2ss         | 2               | 15.00                                | -60.70                                | -60.40                                | 0.11                   | -42.42                                    | -41.25                                | 1.17               |

**Frequency 5965 MHz**

| <b>Mode</b>                      | <b>Tx Paths</b> | <b>Correlated Antenna Gain (dBi)</b> | <b>Tx 1 Band Edge Level (dBm/MHz)</b> | <b>Tx 2 Band Edge Level (dBm/MHz)</b> | <b>Duty Cycle (dB)</b> | <b>Total Tx Band Edge Level (dBm/MHz)</b> | <b>Band Edge EIRP Limit (dBm/MHz)</b> | <b>Margin (dB)</b> |
|----------------------------------|-----------------|--------------------------------------|---------------------------------------|---------------------------------------|------------------------|-------------------------------------------|---------------------------------------|--------------------|
| HE40, M0 to M11 1ss              | 1               | 15.00                                | -56.40                                |                                       | 0.14                   | -41.26                                    | -41.25                                | 0.01               |
| HE40, M0 to M11 1ss              | 2               | 15.00                                | -61.00                                | -59.20                                | 0.14                   | -41.86                                    | -41.25                                | 0.61               |
| HE40, M0 to M11 2ss              | 2               | 15.00                                | -61.00                                | -59.20                                | 0.14                   | -41.86                                    | -41.25                                | 0.61               |
| HE40 Beam Forming, M0 to M11 1ss | 2               | 15.00                                | -61.00                                | -59.20                                | 0.14                   | -41.86                                    | -41.25                                | 0.61               |
| HE40 Beam Forming, M0 to M11 2ss | 2               | 15.00                                | -61.00                                | -59.20                                | 0.14                   | -41.86                                    | -41.25                                | 0.61               |
| HE40 STBC, M0 to M11 2ss         | 2               | 15.00                                | -61.00                                | -59.20                                | 0.14                   | -41.86                                    | -41.25                                | 0.61               |

**Frequency 5985 MHz**


| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Band Edge Level (dBm/MHz) | Tx 2 Band Edge Level (dBm/MHz) | Duty Cycle (dB) | Total Tx Band Edge Level (dBm/MHz) | Band Edge EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------|--------------------------------|-----------------|------------------------------------|--------------------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -58.50                         |                                | 0.25            | -43.25                             | -41.25                         | 2.00        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -63.30                         | -60.10                         | 0.25            | -43.15                             | -41.25                         | 1.90        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -63.30                         | -60.10                         | 0.25            | -43.15                             | -41.25                         | 1.90        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -63.30                         | -60.10                         | 0.25            | -43.15                             | -41.25                         | 1.90        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -63.30                         | -60.10                         | 0.25            | -43.15                             | -41.25                         | 1.90        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -63.30                         | -60.10                         | 0.25            | -43.15                             | -41.25                         | 1.90        |

**Frequency 6025 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Band Edge Level (dBm/MHz) | Tx 2 Band Edge Level (dBm/MHz) | Duty Cycle (dB) | Total Tx Band Edge Level (dBm/MHz) | Band Edge EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------------------|--------------------------------|-----------------|------------------------------------|--------------------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -57.00                         |                                | 0.21            | -41.79                             | -41.25                         | 0.54        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -61.80                         | -61.20                         | 0.21            | -43.27                             | -41.25                         | 2.02        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -61.80                         | -61.20                         | 0.21            | -43.27                             | -41.25                         | 2.02        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -61.80                         | -61.20                         | 0.21            | -43.27                             | -41.25                         | 2.02        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -61.80                         | -61.20                         | 0.21            | -43.27                             | -41.25                         | 2.02        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -61.80                         | -61.20                         | 0.21            | -43.27                             | -41.25                         | 2.02        |


## Data Screenshots

5965 MHz: HE40, M0 to M11 1ss

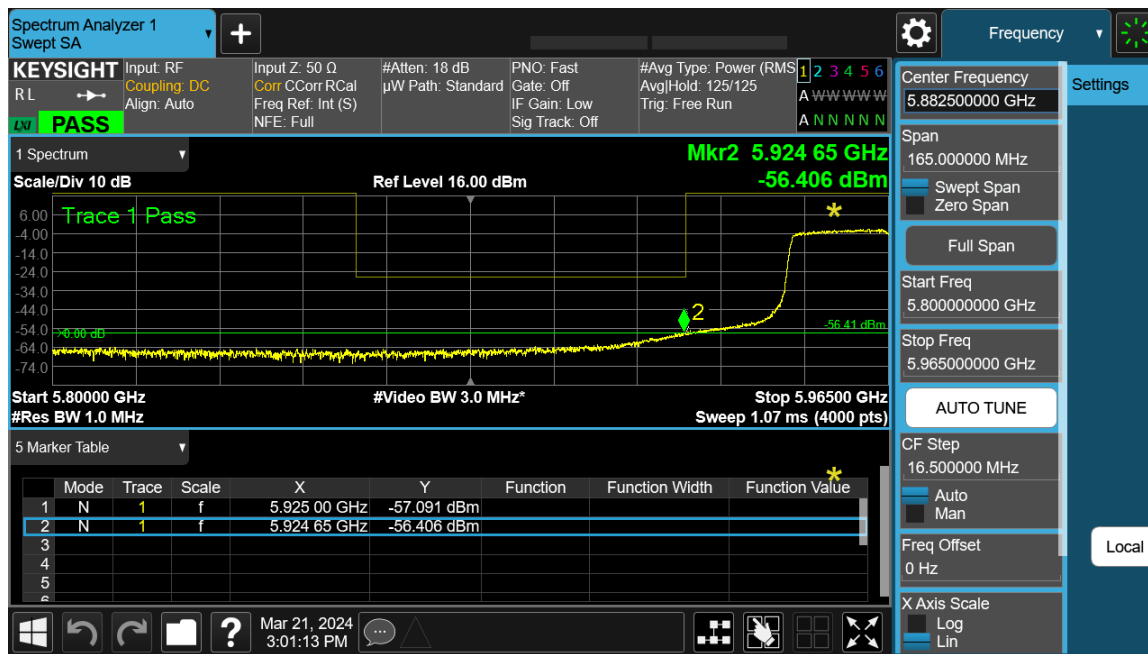


Antenna A

6025 MHz: HE160, M0 to M11 1ss

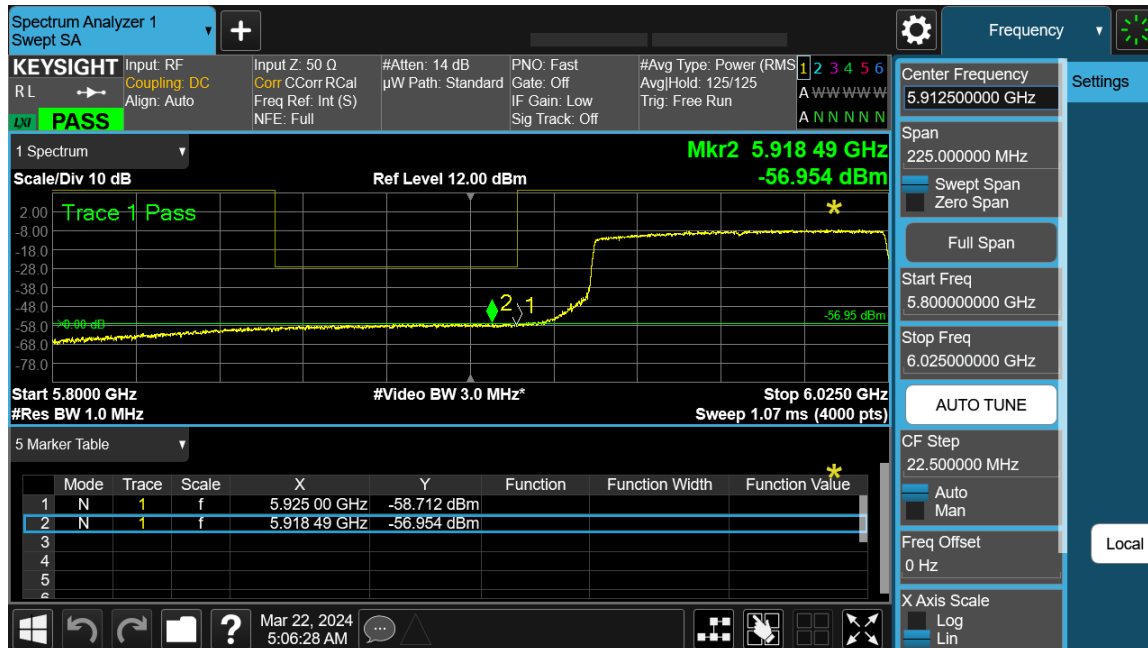


Antenna A

5965 MHz: HE40, M0 to M11 1ss – Antenna A

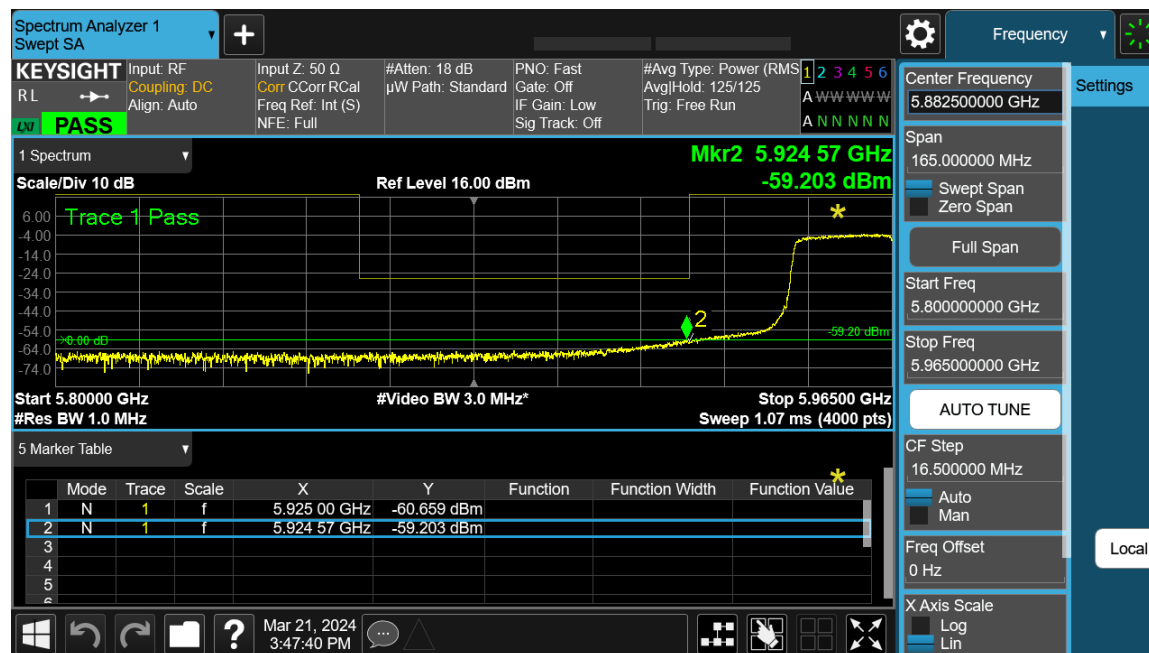

5965 MHz: HE40, M0 to M11 1ss – Antenna B

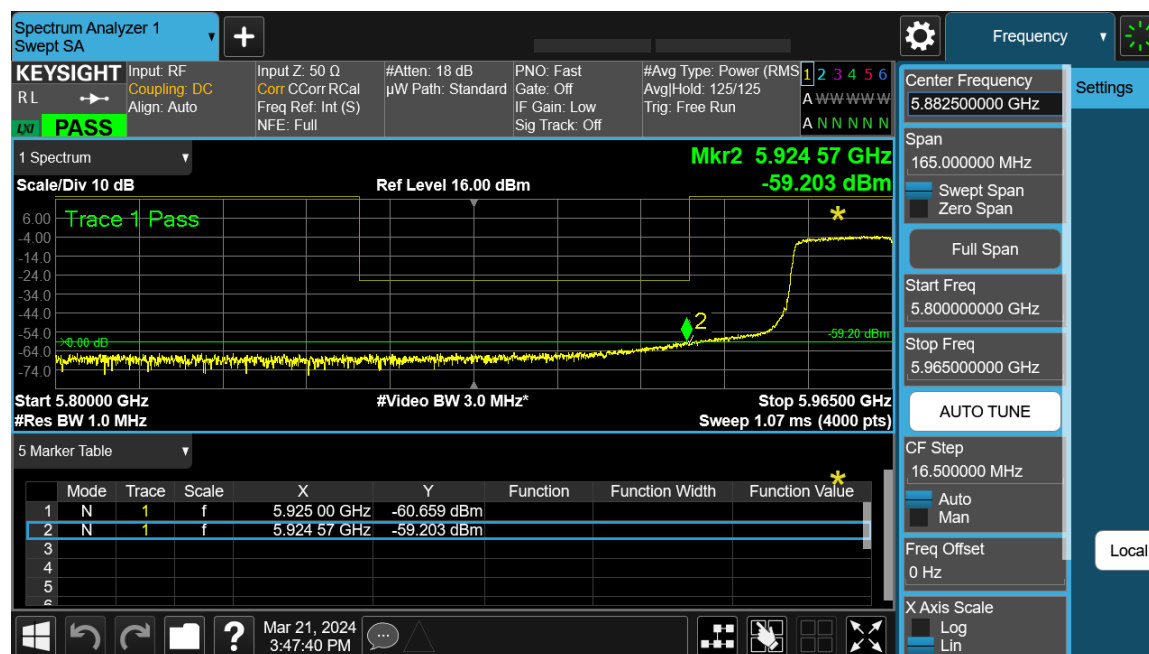



**Conducted Band edge peak. – Antenna gain 15dBi.****Frequency 5955 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Band edge Level (dBm/MHz) | Tx 2 Band edge Level (dBm/MHz) | Total Tx Band Edge Level (dBm/MHz) | Band Edge EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------|--------------------------------|------------------------------------|--------------------------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -44.80                         |                                | -29.69                             | -27                            | 2.69        |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -48.10                         | -48.00                         | -29.93                             | -27                            | 2.93        |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -48.10                         | -48.00                         | -29.93                             | -27                            | 2.93        |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -48.10                         | -48.00                         | -29.93                             | -27                            | 2.93        |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -48.10                         | -48.00                         | -29.93                             | -27                            | 2.93        |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -48.10                         | -48.00                         | -29.93                             | -27                            | 2.93        |

**Frequency 5965 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Band edge Level (dBm/MHz) | Tx 2 Band edge Level (dBm/MHz) | Total Tx Band Edge Level (dBm/MHz) | Band Edge EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------|--------------------------------|------------------------------------|--------------------------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -45.10                         |                                | -29.96                             | -27                            | 2.96        |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -47.70                         | -49.30                         | -30.28                             | -27                            | 3.28        |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -47.70                         | -49.30                         | -30.28                             | -27                            | 3.28        |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -47.70                         | -49.30                         | -30.28                             | -27                            | 3.28        |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -47.70                         | -49.30                         | -30.28                             | -27                            | 3.28        |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -47.70                         | -49.30                         | -30.28                             | -27                            | 3.28        |

**Frequency 5985 MHz**


| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Band edge Level (dBm/MHz) | Tx 2 Band edge Level (dBm/MHz) | Total Tx Band Edge Level (dBm/MHz) | Band Edge EIRP Limit (dBm/MHz) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------|--------------------------------|------------------------------------|--------------------------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -48.40                         |                                | -33.15                             | -27                            | 6.15        |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -53.10                         | -48.90                         | -32.25                             | -27                            | 5.25        |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -53.10                         | -48.90                         | -32.25                             | -27                            | 5.25        |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -53.10                         | -48.90                         | -32.25                             | -27                            | 5.25        |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -53.10                         | -48.90                         | -32.25                             | -27                            | 5.25        |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -53.10                         | -48.90                         | -32.25                             | -27                            | 5.25        |

**Frequency 6025 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Band edge Level (dBm/MHz) | Tx 2 Band edge Level (dBm/MHz) | Total Tx Band Edge Level (dBm/MHz) | Band Edge EIRP Limit (dBm/MHz) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------------------|--------------------------------|------------------------------------|--------------------------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -45.90                         |                                | -30.69                             | -27                            | 3.69        |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -51.90                         | -50.10                         | -32.69                             | -27                            | 5.69        |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -51.90                         | -50.10                         | -32.69                             | -27                            | 5.69        |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -51.90                         | -50.10                         | -32.69                             | -27                            | 5.69        |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -51.90                         | -50.10                         | -32.69                             | -27                            | 5.69        |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -51.90                         | -50.10                         | -32.69                             | -27                            | 5.69        |


## Data Screenshots

5955 MHz: HE20, M0 to M11 1ss

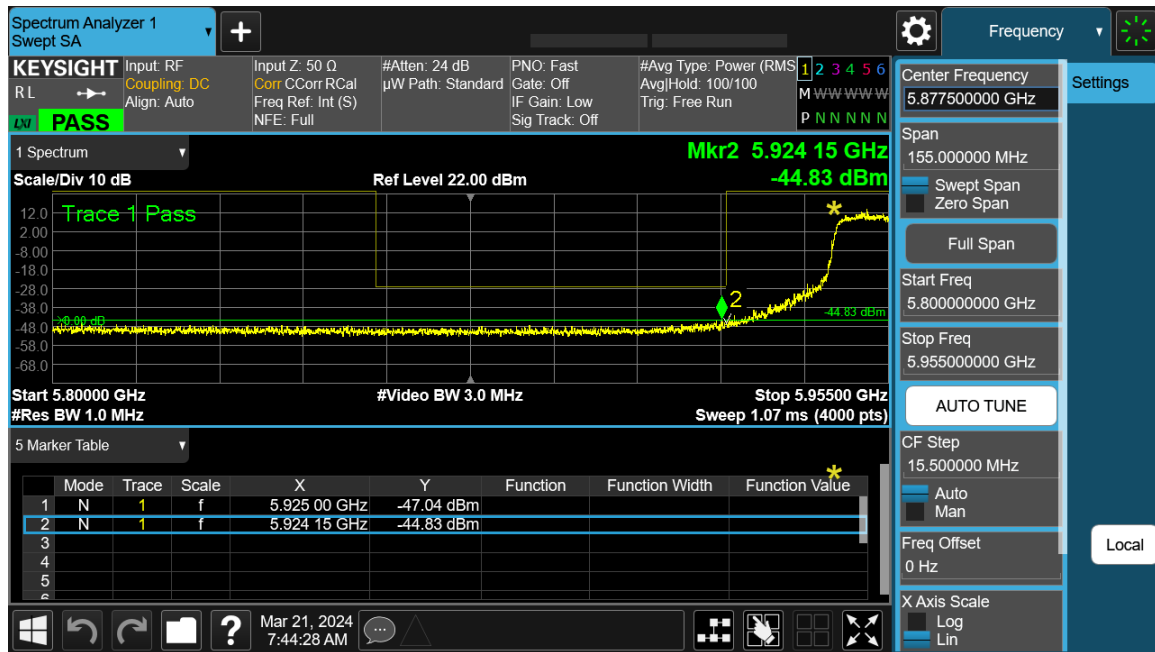


Antenna A

5955 MHz: HE20, M0 to M11 1ss

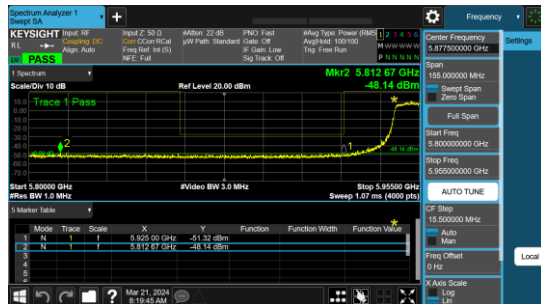


Antenna A

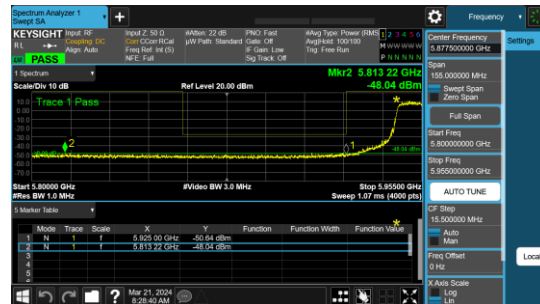


Antenna B

5955 MHz: HE20, M0 to M11 2ss

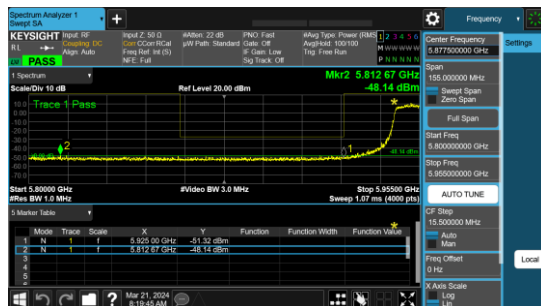

Antenna A

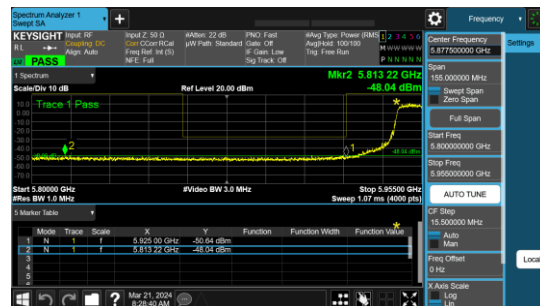

Antenna B

## A.7: Conducted In-Band Emissions (Mask)

### Conducted In-Band Emissions Test Requirement

**15.407(b)** Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(7) For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### Conducted In-Band Emissions Test Procedure

Ref. KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01

#### J. In-Band Emissions (Mask Figure 5)

##### Conducted In-Band Emissions Test Procedure

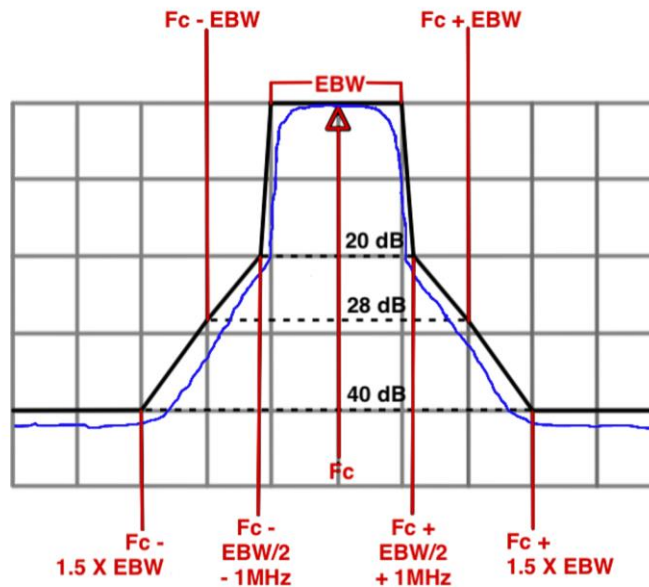


Figure 5. Generic Emission Mask

**Ref. KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01****J. In-Band Emissions (Mask Figure 5)****Conducted Spurious Emissions**

## Test parameters

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW or 99% of the occupied bandwidth.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
  - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
  - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

**Tested By:** Ronak Patel**Date of testing:** 03/15/2024 - 03/25/2024**Test Result:** PASS**Test Equipment**

See Appendix C for list of test equipment

## Conducted In-Band Emissions – Antenna gain 15dBi.

## Frequency 5955 MHz

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -37.04                               |                                      | -37.04                              | -19.602         | 17.44       |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -41.44                               | -41.13                               | -41.13                              | -21.722         | 19.41       |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -41.44                               | -41.13                               | -41.13                              | -21.722         | 19.41       |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -41.44                               | -41.13                               | -41.13                              | -21.722         | 19.41       |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -41.44                               | -41.13                               | -41.13                              | -21.722         | 19.41       |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -41.44                               | -41.13                               | -41.13                              | -21.722         | 19.41       |

## Frequency 5965 MHz

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -43.56                               |                                      | -43.56                              | -22.55          | 21.01       |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -44.27                               | -64.90                               | -64.90                              | -43.855         | 21.05       |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -44.27                               | -64.90                               | -64.90                              | -43.855         | 21.05       |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -44.27                               | -64.90                               | -64.90                              | -43.855         | 21.05       |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -44.27                               | -64.90                               | -64.90                              | -43.855         | 21.05       |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -44.27                               | -64.90                               | -64.90                              | -43.855         | 21.05       |

## Frequency 5985 MHz

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -63.75                               |                                      | -63.75                              | -43.55          | 20.21       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -65.57                               | -44.80                               | -65.57                              | -45.71          | 19.86       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -65.57                               | -44.80                               | -65.57                              | -45.71          | 19.86       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -65.57                               | -44.80                               | -65.57                              | -45.71          | 19.86       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -65.57                               | -44.80                               | -65.57                              | -45.71          | 19.86       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -65.57                               | -44.80                               | -65.57                              | -45.71          | 19.86       |

## Frequency 6025 MHz

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -61.46                               |                                      | -61.46                              | -42.395         | 19.06       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -62.42                               | -61.85                               | -61.85                              | -44.177         | 17.67       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -62.42                               | -61.85                               | -61.85                              | -44.177         | 17.67       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -62.42                               | -61.85                               | -61.85                              | -44.177         | 17.67       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -62.42                               | -61.85                               | -61.85                              | -44.177         | 17.67       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -62.42                               | -61.85                               | -61.85                              | -44.177         | 17.67       |

**Frequency 6175 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -56.50                               |                                      | -56.50                              | -38.294         | 18.20       |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -39.83                               | -58.67                               | -58.67                              | -38.769         | 19.90       |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -39.83                               | -58.67                               | -58.67                              | -38.769         | 19.90       |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -39.83                               | -58.67                               | -58.67                              | -38.769         | 19.90       |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -39.83                               | -58.67                               | -58.67                              | -38.769         | 19.90       |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -39.83                               | -58.67                               | -58.67                              | -38.769         | 19.90       |

**Frequency 6185 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -48.75                               |                                      | -48.75                              | -38.509         | 10.24       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -56.75                               | -56.15                               | -56.15                              | -40.531         | 15.62       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -56.75                               | -56.15                               | -56.15                              | -40.531         | 15.62       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -56.75                               | -56.15                               | -56.15                              | -40.531         | 15.62       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -56.75                               | -56.15                               | -56.15                              | -40.531         | 15.62       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -56.75                               | -56.15                               | -56.15                              | -40.531         | 15.62       |



## Frequency 6205 MHz

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -50.77                               |                                      | -50.77                              | -37.738         | 13.04       |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -55.50                               | -55.63                               | -55.50                              | -39.154         | 16.34       |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -55.50                               | -55.63                               | -55.50                              | -39.154         | 16.34       |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -55.50                               | -55.63                               | -55.50                              | -39.154         | 16.34       |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -55.50                               | -55.63                               | -55.50                              | -39.154         | 16.34       |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -55.50                               | -55.63                               | -55.50                              | -39.154         | 16.34       |

## Frequency 6225 MHz

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -49.85                               |                                      | -49.85                              | -38.367         | 11.49       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -57.73                               | -57.36                               | -57.36                              | -40.546         | 16.81       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -57.73                               | -57.36                               | -57.36                              | -40.546         | 16.81       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -57.73                               | -57.36                               | -57.36                              | -40.546         | 16.81       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -57.73                               | -57.36                               | -57.36                              | -40.546         | 16.81       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -57.73                               | -57.36                               | -57.36                              | -40.546         | 16.81       |

**Frequency 6345 MHz**

| Mode                              | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|-----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE160, M0 to M11 1ss              | 1        | 15.00                         | -52.07                               |                                      | -52.07                              | -38.461         | 13.61       |
| HE160, M0 to M11 1ss              | 2        | 15.00                         | -55.45                               | -56.10                               | -55.45                              | -40.604         | 14.85       |
| HE160, M0 to M11 2ss              | 2        | 15.00                         | -55.45                               | -56.10                               | -55.45                              | -40.604         | 14.85       |
| HE160 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -55.45                               | -56.10                               | -55.45                              | -40.604         | 14.85       |
| HE160 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -55.45                               | -56.10                               | -55.45                              | -40.604         | 14.85       |
| HE160 STBC, M0 to M11 2ss         | 2        | 15.00                         | -55.45                               | -56.10                               | -55.45                              | -40.604         | 14.85       |

**Frequency 6385 MHz**

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE80, M0 to M11 1ss              | 1        | 15.00                         | -49.08                               |                                      | -49.08                              | -37.293         | 11.79       |
| HE80, M0 to M11 1ss              | 2        | 15.00                         | -53.74                               | -55.25                               | -53.74                              | -39.55          | 14.19       |
| HE80, M0 to M11 2ss              | 2        | 15.00                         | -53.74                               | -55.25                               | -53.74                              | -39.55          | 14.19       |
| HE80 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -53.74                               | -55.25                               | -53.74                              | -39.55          | 14.19       |
| HE80 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -53.74                               | -55.25                               | -53.74                              | -39.55          | 14.19       |
| HE80 STBC, M0 to M11 2ss         | 2        | 15.00                         | -53.74                               | -55.25                               | -53.74                              | -39.55          | 14.19       |

## Frequency 6405 MHz


| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE40, M0 to M11 1ss              | 1        | 15.00                         | -48.49                               |                                      | -48.49                              | -35.48          | 13.01       |
| HE40, M0 to M11 1ss              | 2        | 15.00                         | -56.03                               | -56.56                               | -56.03                              | -39.12          | 16.91       |
| HE40, M0 to M11 2ss              | 2        | 15.00                         | -56.03                               | -56.56                               | -56.03                              | -39.12          | 16.91       |
| HE40 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -56.03                               | -56.56                               | -56.03                              | -39.12          | 16.91       |
| HE40 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -56.03                               | -56.56                               | -56.03                              | -39.12          | 16.91       |
| HE40 STBC, M0 to M11 2ss         | 2        | 15.00                         | -56.03                               | -56.56                               | -56.03                              | -39.12          | 16.91       |

## Frequency 6415 MHz

| Mode                             | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Emission Nearest Mask (dBm/RBW) | Tx 2 Emission Nearest Mask (dBm/RBW) | Worst Case Emission Total (dBm/RBW) | Limit (dBm/RBW) | Margin (dB) |
|----------------------------------|----------|-------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|-----------------|-------------|
| HE20, M0 to M11 1ss              | 1        | 15.00                         | -53.56                               |                                      | -53.56                              | -36.987         | 16.57       |
| HE20, M0 to M11 1ss              | 2        | 15.00                         | -58.91                               | -38.79                               | -38.79                              | -19.031         | 19.76       |
| HE20, M0 to M11 2ss              | 2        | 15.00                         | -58.91                               | -38.79                               | -38.79                              | -19.031         | 19.76       |
| HE20 Beam Forming, M0 to M11 1ss | 2        | 15.00                         | -58.91                               | -38.79                               | -38.79                              | -19.031         | 19.76       |
| HE20 Beam Forming, M0 to M11 2ss | 2        | 15.00                         | -58.91                               | -38.79                               | -38.79                              | -19.031         | 19.76       |
| HE20 STBC, M0 to M11 2ss         | 2        | 15.00                         | -58.91                               | -38.79                               | -38.79                              | -19.031         | 19.76       |


## Data Screenshots

6185 MHz: HE160, M0 to M11 1ss

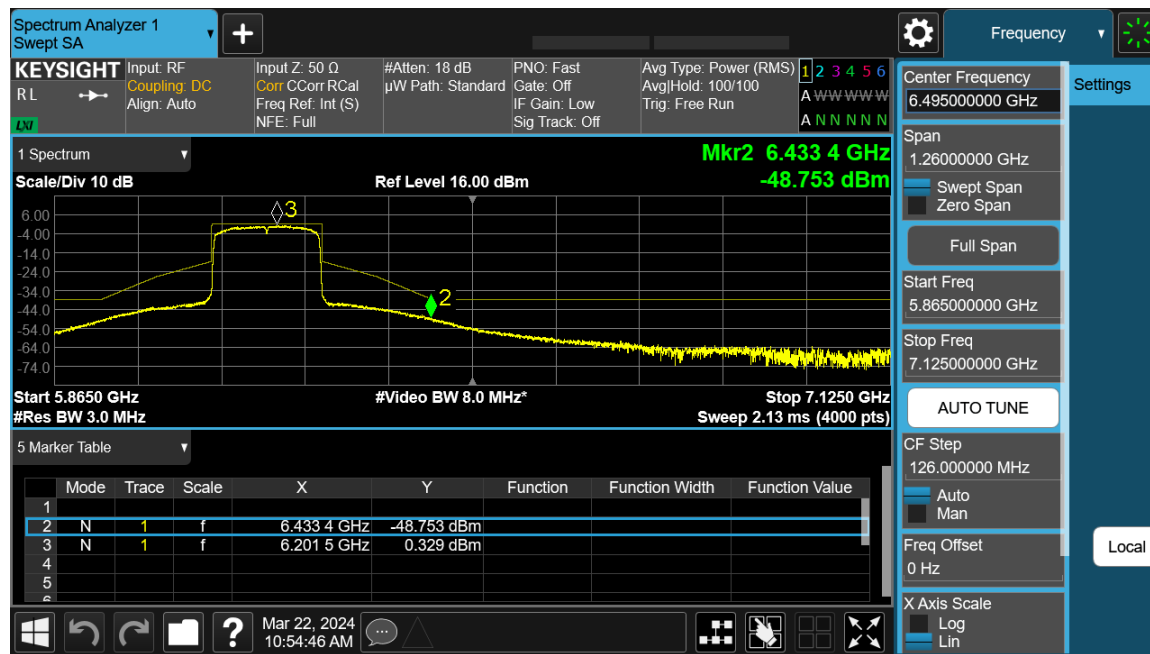


Antenna A

6225 MHz: HE80, M0 to M11 1ss

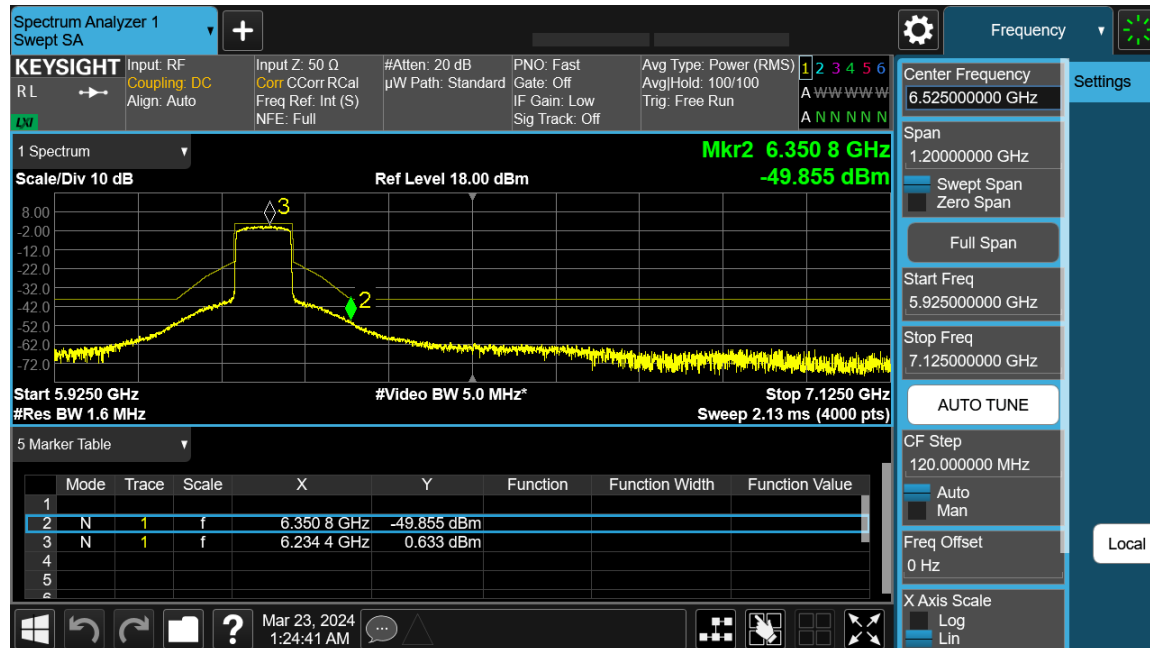

Antenna A

6385 MHz: HE80, M0 to M11 1ss

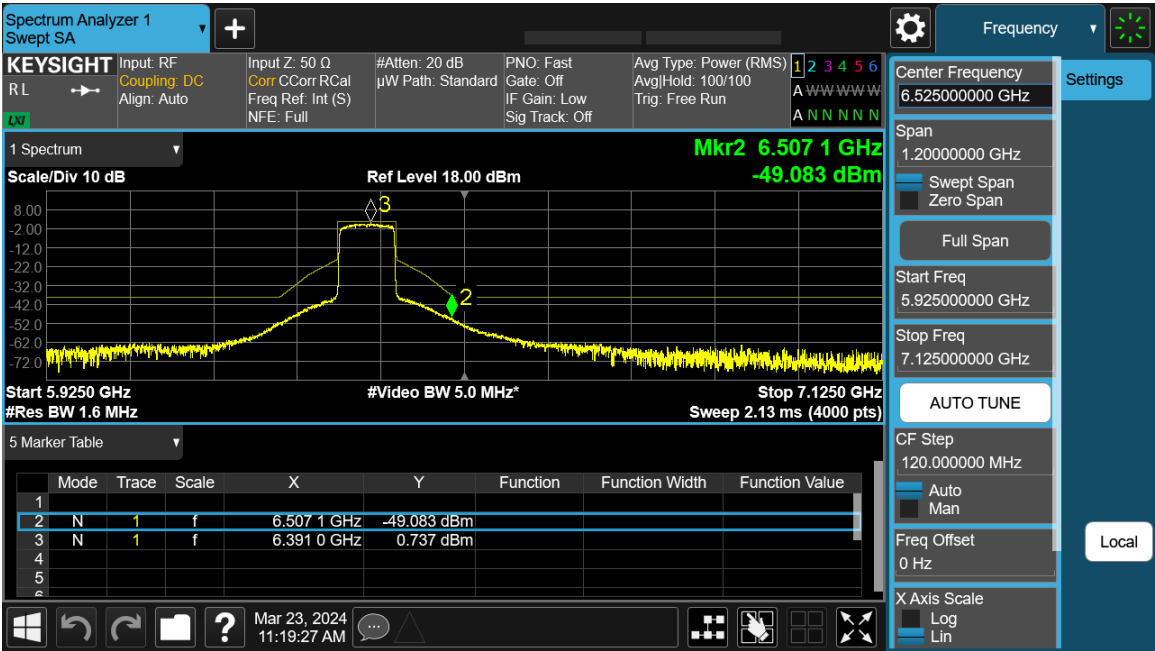


Antenna A


## Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

**Radiated Emission Setup Diagram-Below 1G**

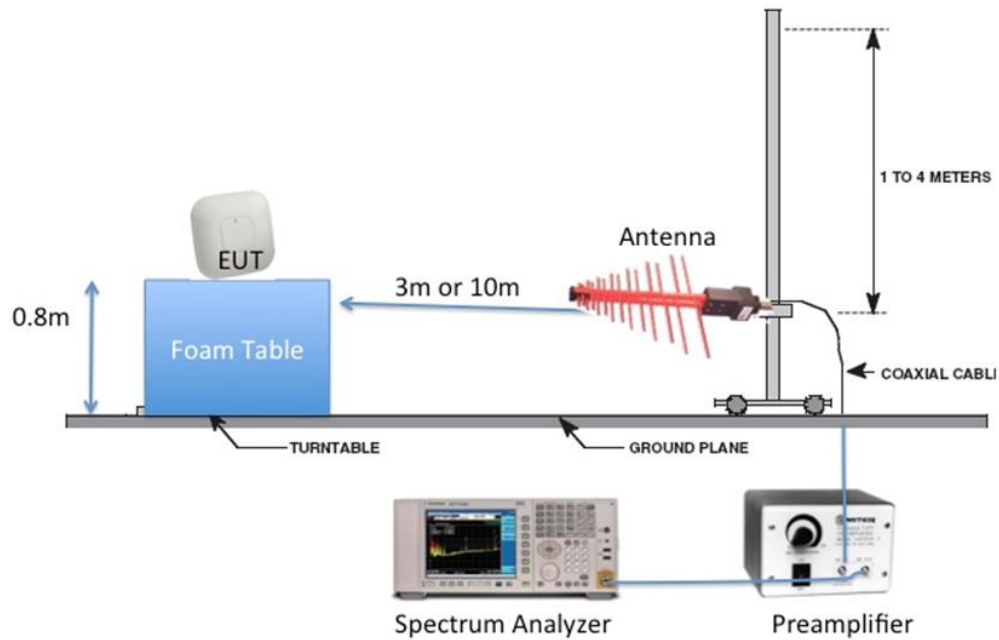

**Radiated Emission Setup Diagram-Above 1G**

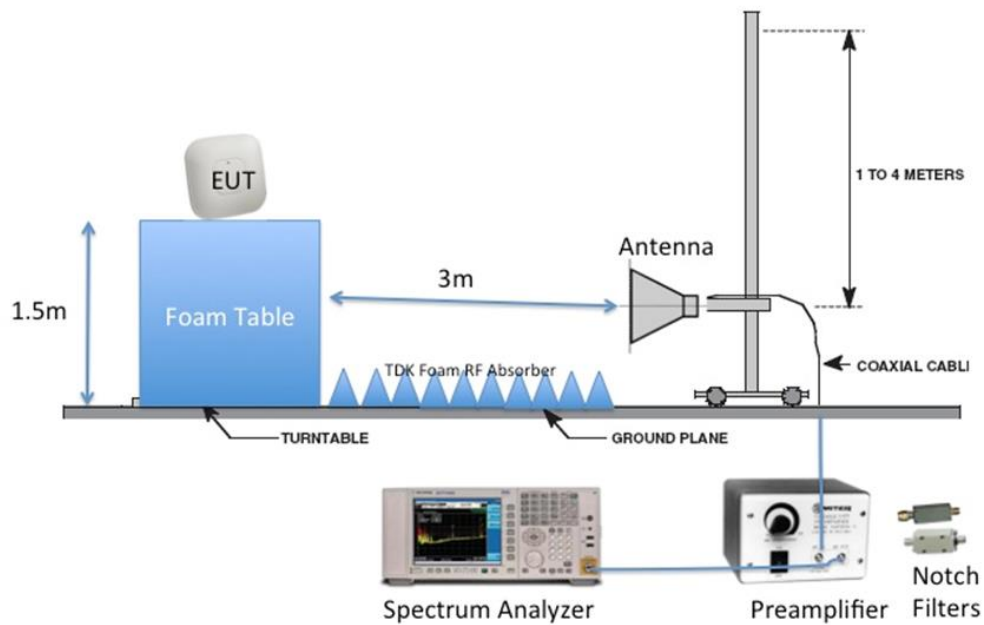

## **B.1: Radiated Spurious Emissions**

### **FCC 15.205 | 15.407 | LP0002 (2018-01-10) (3.6)**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Radiated Spurious emissions results are covered in **EDCS # 25498048**

## **B.2: Radiated Emissions 30MHz to 1GHz**

### **FCC 15.209 | 15.205 | 15.407**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen §8.9.

**Ref.** ANSI C63.10: 2013 section 6.5

Radiated Spurious emissions results are covered in **EDCS # 25498048**

**B.3: AC Conducted Emissions****FCC 15.207 | LP0002 (2020-07-01) (3.3)**

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

**Measurement Procedure****Accordance with ANSI C63.10:2013 section 6.2****Section 1 : Test Case Details**

| Test Case ID: 5088 |             | Test Type: Conducted Emissions                                                                                                                                                                                                                |  |             |
|--------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------|
| Product Standard   | Port Type   | Test Details                                                                                                                                                                                                                                  |  | Comments    |
| 15.207             | DC (Indoor) | Start Freq: 0.15MHz - Stop Freq: 30MHz<br>Power: DC<br>Range : 150KHz to 30MHz.<br>Class: N/A<br>Measure: Voltage(dBuV)<br>Detector(s): Quasi-Peak and Average<br>150kHz - 500kHz - 89dBuV (QP) 76(AV)<br>500kHz - 30MHz - 83dBuV (QP) 70(AV) |  | ANSI C63.4. |
| Overall Result     |             | Pass                                                                                                                                                                                                                                          |  |             |
| Deviation          |             | NA                                                                                                                                                                                                                                            |  |             |

**Section 2:****Subtest Details**

|                                                 |                                                                                           |                |
|-------------------------------------------------|-------------------------------------------------------------------------------------------|----------------|
| Subtest Number: 5088-1 Subtest Date : 5/31/2023 |                                                                                           |                |
| Engineer                                        | Evelyn Preza                                                                              |                |
| Lab Information                                 | Bldg. P - Shield Room 1                                                                   |                |
| Subtest Results                                 |                                                                                           |                |
| Subtest Title                                   | 5088-1                                                                                    |                |
| Port Reference                                  | [J] DC Input                                                                              |                |
| Measured Voltage                                | 48.1VDC                                                                                   |                |
| Transducer                                      | LISN                                                                                      |                |
| Subtest Result                                  | Pass                                                                                      |                |
| Comments on the above Test Results              | EUT powered by 48VDC. DC Input unit is under test. Test results verified by Jose Huamani. |                |
| Environmental Conditions                        |                                                                                           |                |
| Temperature: (59 to 95)°F                       | 70.6                                                                                      |                |
| Humidity: (10 to 75)%                           | 60                                                                                        |                |
| Test Result File                                | Start Freq[MHz]                                                                           | Stop Freq[MHz] |
| plce_48vdc_return [26-5-2023 10.23]             | .15                                                                                       | 30             |
| plce_48vdc_supply [26-5-2023 10.23]             | .15                                                                                       | 30             |



**Section 3:****Operation Mode**

| Mode# | Title       | Description                                                                                                                                                                  |
|-------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | Formal Test | EUT is set to auto-boot with Linux version 4.4.60 (root@137067b22dab) (gcc version 5.2.0 (OpenWrt GCC 5.2.0 c17576669+r49254) ) #41 SMP PREEMPT Tue Oct 25 15:03:29 UTC 2022 |


**Section 4:****Hardware Configuration**

| Config# | Title                             | Description                                                           |
|---------|-----------------------------------|-----------------------------------------------------------------------|
| 1       | Mode-1 (DC Generator without M12) | Configuration 1: IW9165E powered up through DC Generator, without M12 |


**Section 5:****Systems Details**

| System Number | Description                                                              | Samples    | System under Test |
|---------------|--------------------------------------------------------------------------|------------|-------------------|
| 5             | IXIA Traffic Generator (Support)                                         | 1, 3, 2    | No                |
| 3             | Support: 2.4GHz & 5GHz Clients, Switch, and Laptop                       | 4, 5, 8, 9 | No                |
| 1             | EUT - Configuration 1: M22D powered up through DC Generator, without M12 | 2          | Yes               |

## Section 6: Test Results Details

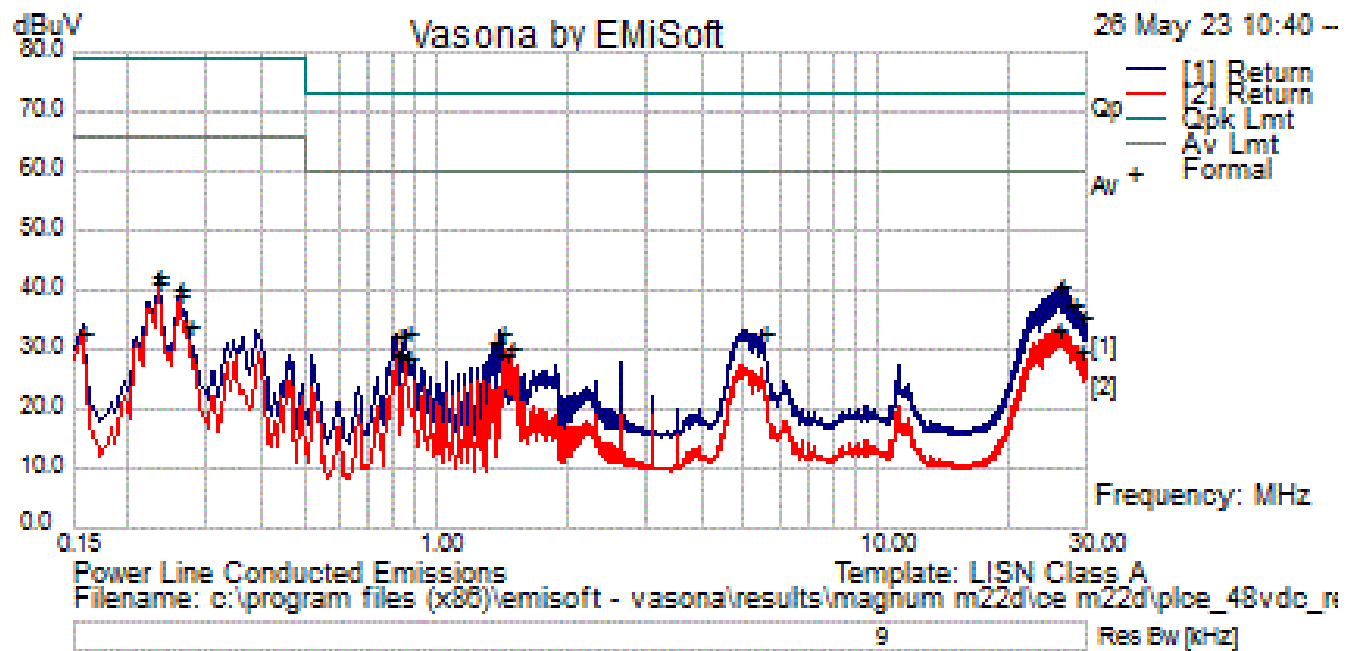

| Formal Data |               |          |            |            |            |                  |        |            |           |            |          |
|-------------|---------------|----------|------------|------------|------------|------------------|--------|------------|-----------|------------|----------|
| No          | Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line   | Limit dBuV | Margin dB | Pass /Fail | Comments |
| 1           | .233          | 21.3     | 19.9       | .0         | 41.2       | Average          | Return | 66.0       | -24.8     | Pass       |          |
| 2           | 25.865        | 12.6     | 20.5       | .3         | 33.5       | Average          | Return | 60.0       | -26.5     | Pass       |          |
| 3           | .260          | 19.4     | 19.9       | .0         | 39.3       | Average          | Return | 66.0       | -26.7     | Pass       |          |
| 4           | 1.478         | 10.4     | 19.9       | .0         | 30.3       | Average          | Return | 60.0       | -29.7     | Pass       |          |
| 5           | 28.646        | 8.6      | 20.6       | .4         | 29.6       | Average          | Return | 60.0       | -30.4     | Pass       |          |
| 6           | 1.433         | 9.4      | 19.9       | .0         | 29.3       | Average          | Return | 60.0       | -30.7     | Pass       |          |
| 7           | .814          | 9.4      | 19.9       | .0         | 29.3       | Average          | Return | 60.0       | -30.7     | Pass       |          |
| 8           | .852          | 9.1      | 19.9       | .0         | 29.0       | Average          | Return | 60.0       | -31.0     | Pass       |          |
| 9           | .272          | 14.4     | 19.8       | .0         | 34.3       | Average          | Return | 66.0       | -31.7     | Pass       |          |
| 10          | 26.140        | 20.2     | 20.5       | .3         | 41.1       | Quasi Peak       | Return | 73.0       | -31.9     | Pass       |          |
| 11          | .157          | 12.3     | 20.9       | .1         | 33.3       | Average          | Return | 66.0       | -32.7     | Pass       |          |
| 12          | 27.825        | 17.0     | 20.6       | .4         | 37.9       | Quasi Peak       | Return | 73.0       | -35.1     | Pass       |          |
| 13          | .233          | 22.6     | 19.9       | .0         | 42.5       | Quasi Peak       | Return | 79.0       | -36.5     | Pass       |          |
| 14          | 29.528        | 14.5     | 20.6       | .4         | 35.5       | Quasi Peak       | Return | 73.0       | -37.5     | Pass       |          |
| 15          | .260          | 20.6     | 19.9       | .0         | 40.5       | Quasi Peak       | Return | 79.0       | -38.5     | Pass       |          |
| 16          | 1.392         | 13.3     | 19.9       | .0         | 33.2       | Quasi Peak       | Return | 73.0       | -39.8     | Pass       |          |
| 17          | .852          | 13.3     | 19.9       | .0         | 33.2       | Quasi Peak       | Return | 73.0       | -39.8     | Pass       |          |
| 18          | 5.498         | 13.1     | 20.0       | .1         | 33.1       | Quasi Peak       | Return | 73.0       | -39.9     | Pass       |          |
| 19          | .814          | 12.7     | 19.9       | .0         | 32.6       | Quasi Peak       | Return | 73.0       | -40.4     | Pass       |          |
| 20          | 1.352         | 11.3     | 19.9       | .0         | 31.2       | Quasi Peak       | Return | 73.0       | -41.8     | Pass       |          |

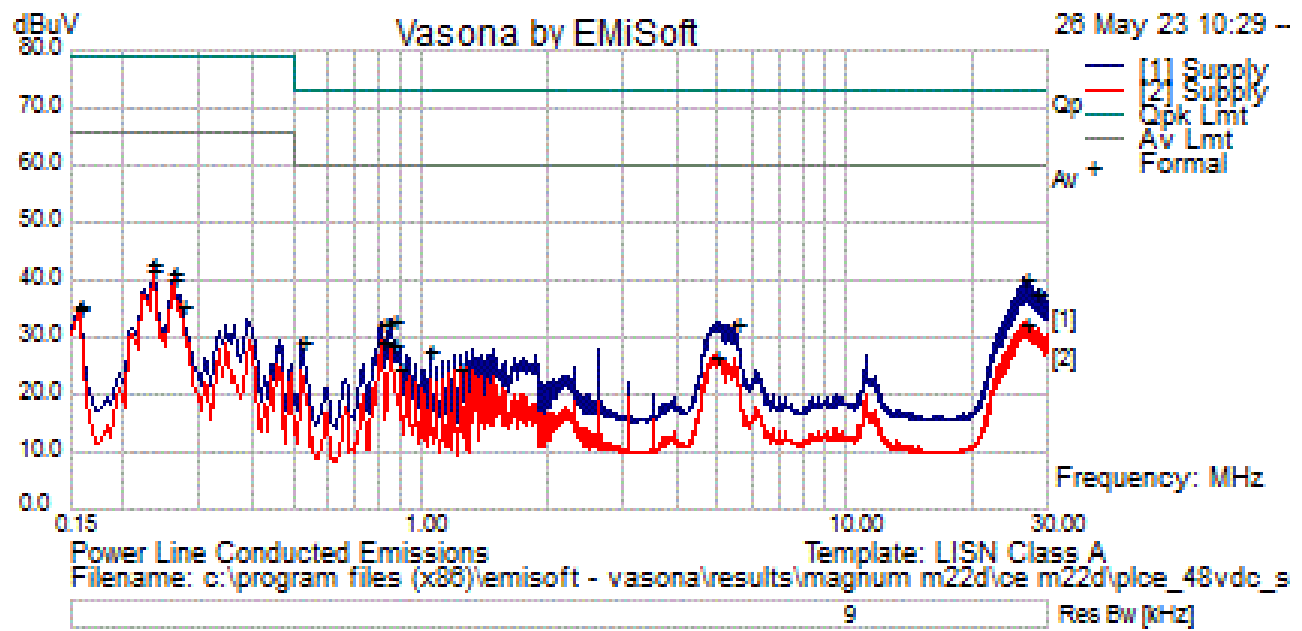

| No | Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line   | Limit dBuV | Margin dB | Pass /Fail | Comments |
|----|---------------|----------|------------|------------|------------|------------------|--------|------------|-----------|------------|----------|
| 1  | .233          | 22.2     | 19.9       | .0         | 42.1       | Average          | Supply | 66.0       | -23.9     | Pass       |          |
| 2  | .260          | 20.6     | 19.9       | .0         | 40.4       | Average          | Supply | 66.0       | -25.6     | Pass       |          |
| 3  | 26.529        | 11.6     | 20.5       | .3         | 32.5       | Average          | Supply | 60.0       | -27.5     | Pass       |          |
| 4  | .272          | 16.0     | 19.8       | .0         | 35.9       | Average          | Supply | 66.0       | -30.1     | Pass       |          |
| 5  | .157          | 14.3     | 20.9       | .1         | 35.2       | Average          | Supply | 66.0       | -30.8     | Pass       |          |
| 6  | .814          | 9.2      | 19.9       | .0         | 29.1       | Average          | Supply | 60.0       | -30.9     | Pass       |          |
| 7  | .852          | 9.1      | 19.9       | .0         | 29.0       | Average          | Supply | 60.0       | -31.0     | Pass       |          |
| 8  | 26.507        | 19.5     | 20.5       | .3         | 40.4       | Quasi Peak       | Supply | 73.0       | -32.6     | Pass       |          |
| 9  | 4.954         | 6.8      | 20.0       | .1         | 26.9       | Average          | Supply | 60.0       | -33.1     | Pass       |          |
| 10 | 28.460        | 16.9     | 20.6       | .4         | 37.9       | Quasi Peak       | Supply | 73.0       | -35.1     | Pass       |          |
| 11 | .890          | 4.7      | 19.9       | .0         | 24.6       | Average          | Supply | 60.0       | -35.4     | Pass       |          |
| 12 | 1.239         | 4.5      | 19.9       | .0         | 24.4       | Average          | Supply | 60.0       | -35.6     | Pass       |          |
| 13 | .233          | 23.1     | 19.9       | .0         | 43.0       | Quasi Peak       | Supply | 79.0       | -36.0     | Pass       |          |
| 14 | .260          | 21.4     | 19.9       | .0         | 41.3       | Quasi Peak       | Supply | 79.0       | -37.7     | Pass       |          |
| 15 | .852          | 13.3     | 19.9       | .0         | 33.2       | Quasi Peak       | Supply | 73.0       | -39.8     | Pass       |          |
| 16 | 5.498         | 12.7     | 20.0       | .1         | 32.8       | Quasi Peak       | Supply | 73.0       | -40.2     | Pass       |          |
| 17 | .814          | 12.7     | 19.9       | .0         | 32.6       | Quasi Peak       | Supply | 73.0       | -40.4     | Pass       |          |
| 18 | .157          | 14.9     | 20.9       | .1         | 35.9       | Quasi Peak       | Supply | 79.0       | -43.1     | Pass       |          |
| 19 | .524          | 9.6      | 19.9       | .0         | 29.5       | Quasi Peak       | Supply | 73.0       | -43.5     | Pass       |          |
| 20 | 1.048         | 7.9      | 19.9       | .0         | 27.8       | Quasi Peak       | Supply | 73.0       | -45.2     | Pass       |          |

**Section 7: Questions & Answers**

|                                                                                                                                       |     |
|---------------------------------------------------------------------------------------------------------------------------------------|-----|
| The category of cable simulated by the AAN, where emissions from wired network ports are measured using an AAN. See Table EN55032 C.2 | N/A |
|---------------------------------------------------------------------------------------------------------------------------------------|-----|

**Appendix C: List of Test Equipment Used to perform the test**

| Equipment #                                              | Manufacturer/ Model                           | Description                                             | Last Cal                    | Next Due                    | Test Item |
|----------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------------------------|-----------------------------|-----------|
| <b>Test Equipment used for conducted tests – Rack 11</b> |                                               |                                                         |                             |                             |           |
| 58721                                                    | Cisco/Automation Test Insertion Loss          | Rack 11                                                 | Verify Before Use           | Verify Before Use           | A.1-A.6   |
| 58776                                                    | Keysight (Agilent/HP)/ N9030B-550 OPT LNP EP0 | PXA Signal Analyzer, 2Hz-50GHz with Options LNP and EP0 | 1 <sup>st</sup> Sep 2023    | 1 <sup>st</sup> Sep 2024    | A.1-A.6   |
| 58803                                                    | NATIONAL INSTRUMENTS / PXIe-1085              | CHASSIS                                                 | Cal Not Required            | Cal Required Not            | A.1-A.6   |
| 58787                                                    | NATIONAL INSTRUMENTS / PXIe-8840              | Up to 2.6 GHz Quad-Core PXI Express Controller          | Cal Not Required            | Cal Not Required            | A.1-A.6   |
| 58788                                                    | NATIONAL INSTRUMENTS / PXI-2796               | 40 GHz Dual 6x1 Multiplexer (SP6T)                      | Verify Before Use           | Verify Before Use           | A.1-A.6   |
| 58789                                                    | NATIONAL INSTRUMENTS / PXI-2796               | 40 GHz Dual 6x1 Multiplexer (SP6T)                      | Verify Before Use           | Verify Before Use           | A.1-A.6   |
| 58786                                                    | NATIONAL INSTRUMENTS / PXI-2799               | Switch 1x1                                              | Verify Before Use           | Verify Before Use           | A.1-A.6   |
| 54235                                                    | PASTERNAK/ PE5019-1                           | Torque Wrench                                           | 30 <sup>th</sup> March 2023 | 30 <sup>th</sup> March 2024 | A.1-A.6   |
| 58256                                                    | COMET/ T7611-4                                | WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER            | 2 <sup>nd</sup> Feb 2023    | 2 <sup>nd</sup> Feb 2024    | A.1-A.6   |
| 56122                                                    | PASTERNAK/PE6072                              | SMA 50 Ohm Termination                                  | 1 <sup>st</sup> Sep 2023    | 1 <sup>st</sup> Sep 2024    | A.1-A.6   |
| 56127                                                    | PASTERNAK/PE6072                              | SMA 50 Ohm Termination                                  | 1 <sup>st</sup> Sep 2023    | 1 <sup>st</sup> Sep 2024    | A.1-A.6   |

**Test Equipment used for AC line Conducted emissions.**

| <b>Cis-Id</b> | <b>Manufacturer</b>           | <b>Model</b>       | <b>Description</b>                     | <b>Calibrated Date</b> | <b>Calibration Due Date</b> |
|---------------|-------------------------------|--------------------|----------------------------------------|------------------------|-----------------------------|
| 004003        | Fischer Custom Communications | FCC-801-M2-32A     | CDN, 2-LINE, 32A                       | 11/30/2022             | 11/30/2023                  |
| 008496        | Fischer Custom Communications | FCC-450B-2.4-N     | Instrumentation Limiter                | 2/14/2023              | 2/14/2024                   |
| 018960        | York                          | CNE V              | Comparison Noise Emitter, 30 - 1000MHz | NA                     | NA                          |
| 045435        | Hefley                        | PAT 50A            | EFT Attenuator                         | 7/22/2022              | 7/22/2023                   |
| 046002        | Fischer Custom Communications | F-090527-1009-1    | Line Impedance Stabilization Network   | 12/20/2022             | 12/20/2023                  |
| 046003        | Fischer Custom Communications | F-090527-1009-2    | LISN Adapter                           | 12/19/2022             | 12/19/2023                  |
| 049534        | TTE                           | H785-150K-50-21378 | 150kHz HI Pass Filter                  | 2/13/2023              | 2/13/2024                   |
| 058276        | ROHDE & SCHWARZ               | ESR3               | EMI Receiver                           | 7/29/2022              | 7/29/2023                   |
| 058758        | Coleman                       | RG-223             | RF Coaxial Cable to 1GHz, 7.6m         | 8/2/2022               | 8/2/2023                    |

## Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

| Abbreviation | Description                                                          | Abbreviation | Description                        |
|--------------|----------------------------------------------------------------------|--------------|------------------------------------|
| EMC          | Electro Magnetic Compatibility                                       | °F           | Degrees Fahrenheit                 |
| EMI          | Electro Magnetic Interference                                        | °C           | Degrees Celsius                    |
| EUT          | Equipment Under Test                                                 | Temp         | Temperature                        |
| ITE          | Information Technology Equipment                                     | S/N          | Serial Number                      |
| TAP          | Test Assessment Schedule                                             | Qty          | Quantity                           |
| ESD          | Electro Static Discharge                                             | emf          | Electromotive force                |
| EFT          | Electric Fast Transient                                              | RMS          | Root mean square                   |
| EDCS         | Engineering Document Control System                                  | Qp           | Quasi Peak                         |
| Config       | Configuration                                                        | Av           | Average                            |
| CIS#         | Cisco Number (unique identification number for Cisco test equipment) | Pk           | Peak                               |
| Cal          | Calibration                                                          | kHz          | Kilohertz (1x10 <sup>3</sup> )     |
| EN           | European Norm                                                        | MHz          | MegaHertz (1x10 <sup>6</sup> )     |
| IEC          | International Electro technical Commission                           | GHz          | Gigahertz (1x10 <sup>9</sup> )     |
| CISPR        | International Special Committee on Radio Interference                | H            | Horizontal                         |
| CDN          | Coupling/Decoupling Network                                          | V            | Vertical                           |
| LISN         | Line Impedance Stabilization Network                                 | dB           | decibel                            |
| PE           | Protective Earth                                                     | V            | Volt                               |
| GND          | Ground                                                               | kV           | Kilovolt (1x10 <sup>3</sup> )      |
| L1           | Line 1                                                               | μV           | Microvolt (1x10 <sup>-6</sup> )    |
| L2           | Line2                                                                | A            | Amp                                |
| L3           | Line 3                                                               | μA           | Micro Amp (1x10 <sup>-6</sup> )    |
| DC           | Direct Current                                                       | mS           | Milli Second (1x10 <sup>-3</sup> ) |
| RAW          | Uncorrected measurement value, as indicated by the measuring device  | μS           | Micro Second (1x10 <sup>-6</sup> ) |
| RF           | Radio Frequency                                                      | μS           | Micro Second (1x10 <sup>-6</sup> ) |
| SLCE         | Signal Line Conducted Emissions                                      | m            | Meter                              |
| Meas dist    | Measurement distance                                                 | Spec dist    | Specification distance             |
| N/A or NA    | Not Applicable                                                       | SL           | Signal Line (or Telecom Line)      |
| P            | Power Line                                                           | L            | Live Line                          |
| N            | Neutral Line                                                         | R            | Return                             |
| S            | Supply                                                               | AC           | Alternating Current                |



## Appendix E: Photographs of Test Setups

EUT Photos have been omitted from this test report. Photos can be found in the supplementary exhibit included in the submission and EDCS# 24671116.

## Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software:

RF Automation Main versions: 316

## Appendix G: Test Procedures

2.4GHz

Measurements were made in accordance with:

KDB 558074 - D01 DTS Meas Guidance v05r02  
KDB Publication No. 662911 - MIMO  
ANSI C63.4 2014 Unintentional Radiators  
ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

|                                |                |
|--------------------------------|----------------|
| FCC 2.4GHz Test Procedures     | EDCS # 1445042 |
| FCC 2.4GHz RSE Test Procedures | EDCS # 1480386 |

5GHz

Measurements were made in accordance with:

- KDB Publication No. 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB Publication No. 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

|                              |                |
|------------------------------|----------------|
| FCC 5GHz Test Procedures     | EDCS # 1445048 |
| FCC 5GHz RSE Test Procedures | EDCS # 1511600 |

6GHz

Measurements were made in accordance with:

- KDB 987694
  - 987594 D01 U-NII 6GHz General Requirements v02r02
  - 987594 D02 U-NII 6 GHz EMC Measurement v02r01
  - 987594 D03 U-NII 6 GHz QA v02
  - 987594 D04 UN6GHZ Pre-Approval Guidance Checklist v02
  - 987594 D05 AFC DUT Test Harness Testing v01r01
- KDB 789033
  - 789033 D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

|                              |                 |
|------------------------------|-----------------|
| FCC 6GHz Test Procedures     | EDCS # 23507622 |
| FCC 6GHz AFC Test Procedures | EDCS # 24173795 |
| FCC 5GHz Test Procedures     | EDCS # 1445048  |
| FCC 5GHz RSE Test Procedures | EDCS # 1511600  |

## **Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)**

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

## **Appendix I: Test Assessment Plan**

Compliance Test Plan (Excel) EDCS# 23771097  
Target Power Tables EDCS# 23074232

## **Appendix J: Worst Case Justification**

N/A

# **End**