

# RF Test Reports



Report No.: FCC\_RF\_SL17121901-MED-023 (97714)  
Supersede Report No.: N/A

|                                                                                                                                      |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Applicant                                                                                                                            | Medtronic, Inc.                                                                       |
| Product Name                                                                                                                         | Restore Sensor                                                                        |
| Model No.                                                                                                                            | 97714                                                                                 |
| Test Standard                                                                                                                        | 47 CFR 15.209                                                                         |
| Test Method                                                                                                                          | ANSI C63.10: 2013                                                                     |
| Date of test                                                                                                                         | 02/27/2018                                                                            |
| Issue Date                                                                                                                           | 03/01/2018                                                                            |
| Test Result                                                                                                                          | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                |
| Equipment complied with the test standard equipment                                                                                  | [ x ]                                                                                 |
| Equipment did not comply with the test standard equipment                                                                            | [ ]                                                                                   |
| This Test Report is Issued Under the Authority of:                                                                                   |                                                                                       |
|                                                   |  |
| Cipher                                                                                                                               | Chen Ge                                                                               |
| Test Engineer                                                                                                                        | Engineer Reviewer                                                                     |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |                                                                                       |

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, CA 95035



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:



## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Accreditation Body     | Scope                             |
|----------------|------------------------|-----------------------------------|
| USA            | FCC, A2LA              | EMC, RF/Wireless, Telecom         |
| Canada         | IC, A2LA, NIST         | EMC, RF/Wireless, Telecom         |
| Taiwan         | BSMI, NCC, NIST        | EMC, RF, Telecom, Safety          |
| Hong Kong      | OFTA, NIST             | RF/Wireless, Telecom              |
| Australia      | NATA, NIST             | EMC, RF, Telecom, Safety          |
| Korea          | KCC/RRA, NIST          | EMI, EMS, RF, Telecom, Safety     |
| Japan          | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom         |
| Mexico         | NOM, COFETEL, Caniety  | EMC, RF/Wireless, Telecom, Safety |
| Europe         | A2LA, NIST             | EMC, RF, Telecom, Safety          |
| Israel         | MOC, NIST              | EMC, RF, Telecom, Safety          |

### Accreditations for Product Certifications

| Country   | Accreditation Body | Scope                 |
|-----------|--------------------|-----------------------|
| USA       | FCC TCB, NIST      | EMC, RF, Telecom      |
| Canada    | IC FCB, NIST       | EMC, RF, Telecom      |
| Singapore | iDA, NIST          | EMC, RF, Telecom      |
| EU        | NB                 | EMC & R&TTE Directive |
| Japan     | MIC (RCB 208)      | RF, Telecom           |
| Hong Kong | OFTA (US002)       | RF, Telecom           |

## **CONTENTS**

|                                                    |                                                                   |           |
|----------------------------------------------------|-------------------------------------------------------------------|-----------|
| <b>1</b>                                           | <b>REPORT REVISION HISTORY .....</b>                              | <b>4</b>  |
| <b>2</b>                                           | <b>EXECUTIVE SUMMARY.....</b>                                     | <b>5</b>  |
| <b>3</b>                                           | <b>CUSTOMER INFORMATION .....</b>                                 | <b>5</b>  |
| <b>4</b>                                           | <b>TEST SITE INFORMATION .....</b>                                | <b>5</b>  |
| <b>5</b>                                           | <b>EQUIPMENT UNDER TEST (EUT) INFORMATION .....</b>               | <b>5</b>  |
| 5.1                                                | EUT Description .....                                             | 5         |
| 5.2                                                | Radio Description .....                                           | 6         |
| <b>6</b>                                           | <b>SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....</b> | <b>7</b>  |
| 6.1                                                | Supporting Equipment .....                                        | 7         |
| 6.2                                                | I/O Ports.....                                                    | 7         |
| 6.3                                                | Test Software Description .....                                   | 7         |
| <b>7</b>                                           | <b>TEST SUMMARY.....</b>                                          | <b>8</b>  |
| <b>8</b>                                           | <b>MEASUREMENT UNCERTAINTY .....</b>                              | <b>9</b>  |
| 8.1                                                | Radiated Emissions (9kHz to 30MHz).....                           | 9         |
| 8.2                                                | Radiated Emissions (30MHz to 1GHz).....                           | 9         |
| 8.3                                                | Radiated Emissions (1GHz to 40GHz).....                           | 10        |
| 8.4                                                | RF conducted measurement .....                                    | 10        |
| <b>9</b>                                           | <b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>        | <b>11</b> |
| 9.1                                                | Antenna Requirement.....                                          | 11        |
| 9.2                                                | Radiated Spurious Emissions below 30MHz .....                     | 12        |
| <b>ANNEX A. TEST INSTRUMENT &amp; METHOD .....</b> |                                                                   | <b>15</b> |
| <b>ANNEX B. SIEMIC ACCREDITATION .....</b>         |                                                                   | <b>16</b> |

## 1 Report Revision History

| Report No.                        | Report Version | Description     | Issue Date |
|-----------------------------------|----------------|-----------------|------------|
| FCC_RF_SL17121901-MED-023 (97714) | None           | Original Report | 03/01/2018 |
|                                   |                |                 |            |
|                                   |                |                 |            |
|                                   |                |                 |            |
|                                   |                |                 |            |
|                                   |                |                 |            |

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Medtronic, Inc.  
Product: Restore Sensor  
Model: 97714

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

|                      |                                                   |
|----------------------|---------------------------------------------------|
| Applicant Name       | Medtronic, Inc.                                   |
| Applicant Address    | 710 Medtronic Parkway N.E., Minneapolis, MN 55432 |
| Manufacturer Name    | Medtronic, Inc.                                   |
| Manufacturer Address | 710 Medtronic Parkway N.E., Minneapolis, MN 55432 |

## 4 Test site information

|                      |                                             |
|----------------------|---------------------------------------------|
| Lab performing tests | SIEMIC Laboratories                         |
| Lab Address          | 775 Montague Expressway, Milpitas, CA 95035 |
| FCC Test Site No.    | 881796                                      |
| IC Test Site No.     | 4842D-2                                     |
| VCCI Test Site No.   | A0133                                       |

## 5 Equipment Under Test (EUT) Information

### 5.1 EUT Description

|                           |                    |
|---------------------------|--------------------|
| Product Name              | Restore Sensor     |
| Model No.                 | 97714              |
| Trade Name                | Medtronic          |
| Serial No.                | NKS730666H         |
| Input Power               | Battery Power 3.0V |
| Date of EUT received      | 12/21/2017         |
| Equipment Class/ Category | ULP-AMI-P, Class 3 |

## 5.2 Radio Description

### Radio Parameters

|                     |                                        |
|---------------------|----------------------------------------|
| Operating Frequency | 175 KHz                                |
| Modulation          | OOK burst                              |
| Channel Spacing     | Single Channel Operation               |
| Antenna Type        | Integral loop antenna/External antenna |
| Antenna Gain        | None                                   |

### Channel List

| Type    | Channel No. | Frequency (KHz) |
|---------|-------------|-----------------|
| ULP-AMI | 1           | 175             |

## 6 Supporting Equipment/Software and cabling Description

### 6.1 Supporting Equipment

| Item | Supporting Equipment Description | Model | Serial Number | Manufacturer | Note |
|------|----------------------------------|-------|---------------|--------------|------|
| 1    | InterStim ICon                   | 3037  | N/A           | Medtronic    | N/A  |

### 6.2 I/O Ports

| Item | Connection Start |          | Connection Stop |          | Length / shielding Info |           | Note |
|------|------------------|----------|-----------------|----------|-------------------------|-----------|------|
|      | From             | I/O Port | To              | I/O Port | Length (m)              | Shielding |      |
| N/A  | N/A              | N/A      | N/A             | N/A      | N/A                     | N/A       | N/A  |

### 6.3 Test Software Description

| Test Item  | Software | Description                                            |
|------------|----------|--------------------------------------------------------|
| RF Testing | N/A      | Provided by manufacturer to set EUT in continuous mode |

## 7 Test Summary

| Test Item                   | Test standard                                                                                                                                                                                                                                                                                                                                                                                |               | Test Method/Procedure |                    | Pass / Fail                                                              |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|--------------------|--------------------------------------------------------------------------|
| Antenna Requirement         | FCC                                                                                                                                                                                                                                                                                                                                                                                          | 47 CFR 15.203 | FCC                   | ANSI C63.10 – 2013 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| Radiated Spurious Emissions | FCC                                                                                                                                                                                                                                                                                                                                                                                          | 47 CFR 15.209 | FCC                   | ANSI C63.10: 2013  | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
| AC Conducted Emissions      | FCC                                                                                                                                                                                                                                                                                                                                                                                          | 47 CFR 15.207 | FCC                   | ANSI C63.10: 2013  | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
| Remark                      | <ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> <li>EUT is a DC powered device.</li> </ol> |               |                       |                    |                                                                          |

## 8 Measurement Uncertainty

### 8.1 Radiated Emissions (9kHz to 30MHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches

| Source of Uncertainty             | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading                  | 0.10       | Rectangular              | 1.732    | 1                       | 0.069284             |
| Cable Insertion Loss              | 0.21       | Normal                   | 2        | 1                       | 0.105                |
| Antenna Factor                    | 0.65       | Normal                   | 2        | 1                       | 0.325                |
| Receiver CW accuracy              | 0.45       | Rectangular              | 1.732    | 1                       | 0.2598152            |
| Mismatch                          | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| Combined Standard Uncertainty     |            |                          |          |                         | 0.935                |
| <b>Expanded Uncertainty (K=2)</b> |            |                          |          |                         | <b>1.87</b>          |

The total derived measurement uncertainty is +/- 1.87 dB.

### 8.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

| Source of Uncertainty             | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading                  | 0.12       | Rectangular              | 1.732    | 1                       | 0.069284             |
| Cable Insertion Loss              | 0.21       | Normal                   | 2        | 1                       | 0.105                |
| Filter Insertion Loss             | 0.25       | Normal                   | 2        | 1                       | 0.125                |
| Antenna Factor                    | 0.65       | Normal                   | 2        | 1                       | 0.325                |
| Receiver CW accuracy              | 0.5        | Rectangular              | 1.732    | 1                       | 0.2886836            |
| Pulse Amplitude Response          | 1.5        | Rectangular              | 1.732    | 1                       | 0.86605081           |
| PRF Response                      | 1.5        | Rectangular              | 1.732    | 1                       | 0.86605081           |
| Mismatch Filter - Receiver        | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| NSA Calibration                   | 4.0        | U-Shape                  | 1.414    | 1                       | 2.8288543            |
| Combined Standard Uncertainty     |            |                          |          |                         | 3.0059131            |
| <b>Expanded Uncertainty (K=2)</b> |            |                          |          |                         | <b>6.0118262</b>     |

The total derived measurement uncertainty is +/- 6.00 dB.

### 8.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

| Source of Uncertainty             | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Receiver Reading                  | 0.12       | Rectangular              | 1.732    | 1                       | 0.0692840            |
| Cable Insertion Loss              | 0.21       | Normal                   | 2        | 1                       | 0.1050000            |
| Filter Insertion Loss             | 0.25       | Normal                   | 2        | 1                       | 0.1250000            |
| Antenna Factor                    | 0.65       | Normal                   | 2        | 1                       | 0.3250000            |
| Receiver CW accuracy              | 0.5        | Rectangular              | 1.732    | 1                       | 0.2886836            |
| Pulse Amplitude Response          | 1.5        | Rectangular              | 1.732    | 1                       | 0.8660508            |
| PRF Response                      | 1.5        | Rectangular              | 1.732    | 1                       | 0.8660508            |
| Mismatch Filter - Receiver        | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| VSWR Calibration                  | 2.0        | U-Shape                  | 1.414    | 1                       | 1.4144272            |
| Combined Standard Uncertainty     |            |                          |          |                         | 4.2363               |
| <b>Expanded Uncertainty (K=2)</b> |            |                          |          |                         | <b>8.4726</b>        |

The total derived measurement uncertainty is +/- 8.47 dB.

### 8.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

| Source of Uncertainty             | Value (dB) | Probability Distribution | Division | Sensitivity Coefficient | Expanded Uncertainty |
|-----------------------------------|------------|--------------------------|----------|-------------------------|----------------------|
| Reference Level                   | 0.12       | Rectangular              | 1.732    | 1                       | 0.069284             |
| Cable Insertion Loss              | 0.21       | Normal                   | 2        | 1                       | 0.105                |
| Attenuator                        | 0.25       | Normal                   | 2        | 1                       | 0.125                |
| Mismatch                          | 0.25       | U-Shape                  | 1.414    | 1                       | 0.1768033            |
| Combined Standard Uncertainty     |            |                          |          |                         | 0.476087             |
| <b>Expanded Uncertainty (K=2)</b> |            |                          |          |                         | <b>0.952174</b>      |

The total derived measurement uncertainty is +/- 0.95 dB.

## 9 Measurements, Examination and Derived Results

### 9.1 Antenna Requirement

| Spec    | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Applicable |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| §15.203 | <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <ul style="list-style-type: none"> <li>a) Antenna must be permanently attached to the device.</li> <li>b) The antenna must use a unique type of connector to attach to the device.</li> <li>c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</li> </ul> | ☒          |
| Remark  | The EUT has an integrated antenna which meets the requirement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            |
| Result  | ☒ PASS      ☐ FAIL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |

## 9.2 Radiated Spurious Emissions below 30MHz

Requirement(s):


|                       | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Applicable                                                                                         |                       |                               |             |             |     |             |              |    |            |    |    |              |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|-------------|-------------|-----|-------------|--------------|----|------------|----|----|--------------|
| FCC 15.209            | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <div>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</div> <table><thead><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th><th>Measurement distance (meters)</th></tr></thead><tbody><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr></tbody></table> | Frequency range (MHz)                                                                              | Field Strength (uV/m) | Measurement distance (meters) | 0.009-0.490 | 2400/F(kHz) | 300 | 0.490-1.705 | 24000/F(kHz) | 30 | 1.705-30.0 | 30 | 30 | <div>☒</div> |
| Frequency range (MHz) | Field Strength (uV/m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Measurement distance (meters)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |
| 0.009-0.490           | 2400/F(kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |
| 0.490-1.705           | 24000/F(kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |
| 1.705-30.0            | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |
| Procedure             | <div><div><div>1.</div><div>2.</div><div>3.</div><div>4.</div></div><div><div>The EUT was switched on and allowed to warm up to its normal operating condition.</div><div>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:<div><div>a.</div><div>b.</div><div>c.</div></div></div><div>A Quasi-peak measurement was then made for that frequency point.</div><div>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</div></div></div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |
| Test Date             | 02/27/2018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Environmental condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <div>Temperature21°C</div> <div>Relative Humidity42%</div> <div>Atmospheric Pressure1015mbar</div> |                       |                               |             |             |     |             |              |    |            |    |    |              |
| Remark                | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |
| Result                | <div>☒ Pass</div> <div>☐ Fail</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                    |                       |                               |             |             |     |             |              |    |            |    |    |              |

Test Data    ☒ Yes                      ☐ N/A

Test Plot    ☒ Yes (See below)      ☐ N/A

Test was done by Shuo Zhang at 10m chamber.


|                     |                                                      |  |         |                                                                           |
|---------------------|------------------------------------------------------|--|---------|---------------------------------------------------------------------------|
| Test specification: | Radiated Spurious Emissions                          |  |         |                                                                           |
| Mains Power:        | 3VDC                                                 |  | Result: | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> Fail |
| Tested by:          | Shuo Zhang                                           |  |         |                                                                           |
| Test Date:          | 02/27/2018                                           |  |         |                                                                           |
| Remarks:            | f= 100kHz – 30MHz plot, and loop antenna at 0 degree |  |         |                                                                           |

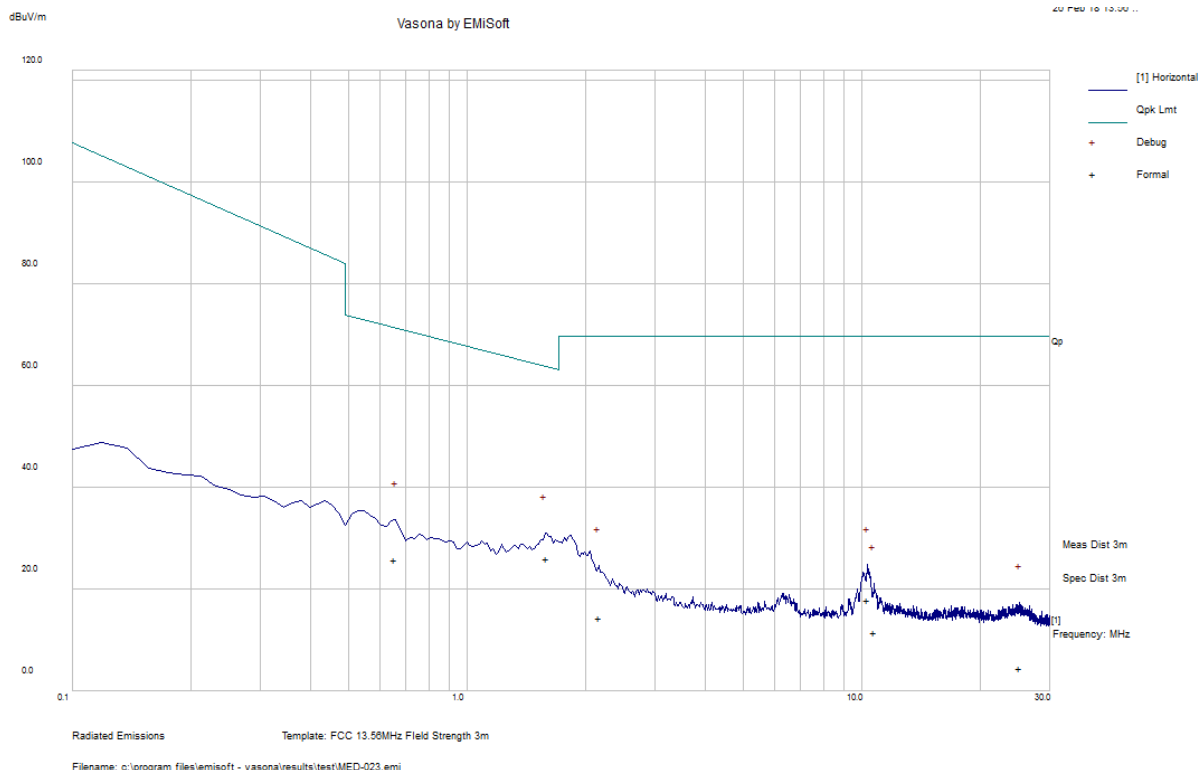

### Quasi Max Measurement

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol (0/90) | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1.59          | 16.24    | 0.48       | 9.24  | 25.96        | Quasi Max        | 0          | 100    | 204     | 63.56        | -37.6     | Pass       |
| 0.66          | 9.24     | 0.4        | 16.2  | 25.85        | Quasi Max        | 0          | 100    | 36      | 71.26        | -45.41    | Pass       |
| 10.35         | 15.78    | 0.66       | 1.55  | 17.99        | Quasi Max        | 0          | 100    | 348     | 69.54        | -51.55    | Pass       |
| 2.17          | 6.85     | 0.51       | 6.93  | 14.29        | Quasi Max        | 0          | 100    | 2       | 69.54        | -55.25    | Pass       |
| 10.75         | 9.35     | 0.66       | 1.57  | 11.58        | Quasi Max        | 0          | 100    | 179     | 69.54        | -57.97    | Pass       |
| 25.12         | 1.94     | 0.91       | 1.73  | 4.57         | Quasi Max        | 0          | 100    | 338     | 69.54        | -64.97    | Pass       |

|                     |                                                                     |  |         |                                                                           |
|---------------------|---------------------------------------------------------------------|--|---------|---------------------------------------------------------------------------|
| Test specification: | Radiated Spurious Emissions                                         |  |         |                                                                           |
| Mains Power:        | 3VDC                                                                |  | Result: | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> Fail |
| Tested by:          | Shuo Zhang                                                          |  |         |                                                                           |
| Test Date:          | 02/27/2018                                                          |  |         |                                                                           |
| Remarks:            | <b><i>f</i>= 100kHz – 30MHz plot, and loop antenna at 90 degree</b> |  |         |                                                                           |

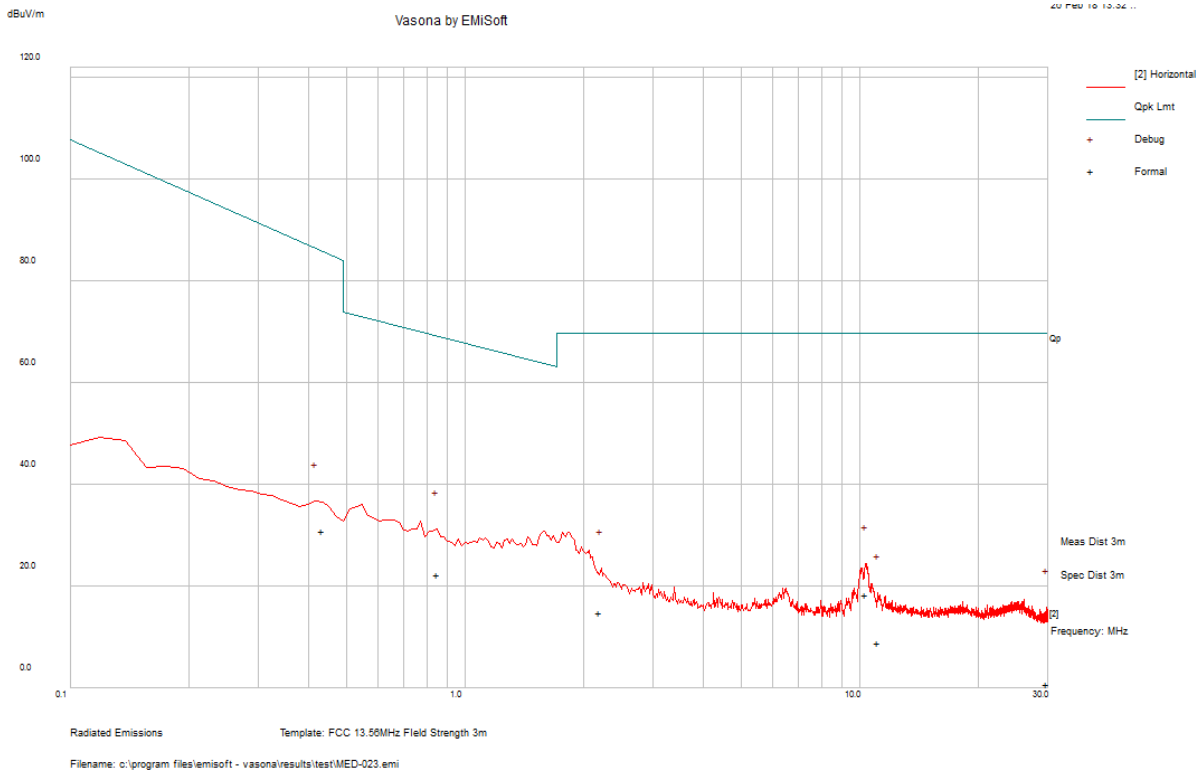

### Quasi Max Measurement

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol (0/90) | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 0.85          | 7.93     | 0.43       | 14.02 | 22.38        | Quasi Max        | 90         | 100    | 321     | 68.99        | -46.61    | Pass       |
| 10.36         | 16.17    | 0.66       | 1.55  | 18.38        | Quasi Max        | 90         | 100    | 17      | 69.54        | -51.16    | Pass       |
| 2.20          | 7.52     | 0.51       | 6.83  | 14.87        | Quasi Max        | 90         | 100    | 275     | 69.54        | -54.68    | Pass       |
| 0.44          | 10.96    | 0.37       | 19.63 | 30.96        | Quasi Max        | 90         | 100    | 24      | 85.58        | -54.62    | Pass       |
| 11.12         | 6.73     | 0.66       | 1.58  | 8.97         | Quasi Max        | 90         | 100    | 357     | 69.54        | -60.57    | Pass       |
| 29.80         | -0.43    | 0.99       | 0.14  | 0.69         | Quasi Max        | 90         | 100    | 40      | 69.54        | -68.85    | Pass       |

## Annex A. TEST INSTRUMENT & METHOD

| Instrument                | Model  | Serial #   | Cal Cycle | Cal Due    | In use                              |
|---------------------------|--------|------------|-----------|------------|-------------------------------------|
| <b>SPURIOUS EMISSIONS</b> |        |            |           |            |                                     |
| Keysight Signal Analyzer  | N9030B | MY57140374 | 1 Year    | 05/24/2018 | <input checked="" type="checkbox"/> |
| Loop Antenna              | 6512   | 49120      | 1 Year    | 08/20/2018 | <input checked="" type="checkbox"/> |
| Pre-Amplifier             | 8449B  | 3008A00715 | 1 Year    | 02/12/2019 | <input checked="" type="checkbox"/> |

## Annex B. SIEMIC Accreditation

| Accreditations                          | Document                                                                            | Scope / Remark                                                                          |
|-----------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| ISO 17025 (A2LA)                        |    | Please see the documents for the detailed scope                                         |
| ISO Guide 65 (A2LA)                     |    | Please see the documents for the detailed scope                                         |
| TCB Designation                         |                                                                                     | A1, A2, A3, A4, B1, B2, B3, B4, C                                                       |
| FCC DoC Accreditation                   |    | FCC Declaration of Conformity Accreditation                                             |
| FCC Site Registration                   |    | 3 meter site                                                                            |
| FCC Site Registration                   |    | 3 meter site                                                                            |
| IC Site Registration                    |    | 3 meter site                                                                            |
| IC Site Registration                    |    | 3 meter site                                                                            |
| EU NB                                   |    | <b>Radio &amp; Telecommunications Terminal Equipment:</b><br>EN45001 – EN ISO/IEC 17025 |
|                                         |  | <b>Electromagnetic Compatibility:</b><br>EN45001 – EN ISO/IEC 17025                     |
| Singapore iDA<br>CB(Certification Body) |  | Phase I, Phase II                                                                       |
| Vietnam MIC<br>CAB Accreditation        |  | Please see the document for the detailed scope                                          |
| Hong Kong OFCA                          |  | <b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom                 |
|                                         |  | <b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom                       |
| Industry Canada CAB                     |  | <b>Radio:</b> Scope A – All Radio Standard Specification in Category I                  |
|                                         |  | <b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII                                      |

|                                                    |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Japan Recognized Certification<br>Body Designation |    | <p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Korea CAB Accreditation                            |    | <p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI<br/>KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS<br/>KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p> <p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p> |
| Taiwan NCC CAB Recognition                         |    | LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Taiwan BSMI CAB Recognition                        |  | CNS 13438                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Japan VCCI                                         |  | <p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Australia CAB Recognition                          |  | <p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p> <p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>                                                                                                             |
| Australia NATA Recognition                         |  | AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |