

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
372000	1860	23.52	2.45	25.97	395.37	2
376500	1882.5	23.59	2.45	26.04	401.79	2
381000	1905	23.47	2.45	25.92	390.84	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
372000	1860	23.59	2.45	26.04	401.79	2
376500	1882.5	23.59	2.45	26.04	401.79	2
381000	1905	23.54	2.45	25.99	397.19	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
372000	1860	22.63	2.45	25.08	322.11	2
376500	1882.5	22.72	2.45	25.17	328.85	2
381000	1905	22.64	2.45	25.09	322.85	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
372000	1860	21.19	2.45	23.64	231.21	2
376500	1882.5	21.22	2.45	23.67	232.81	2
381000	1905	21.21	2.45	23.66	232.27	2

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
372000	1860	19.23	2.45	21.68	147.23	2
376500	1882.5	19.27	2.45	21.72	148.59	2
381000	1905	19.14	2.45	21.59	144.21	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

N41

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	23.7	1.69	25.39	345.94	2
518598	2592.99	23.63	1.69	25.32	340.41	2
535998	2679.99	23.79	1.69	25.48	353.18	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	23.8	1.69	25.49	354.00	2
518598	2592.99	23.64	1.69	25.33	341.19	2
535998	2679.99	23.8	1.69	25.49	354.00	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	22.72	1.69	24.41	276.06	2
518598	2592.99	22.73	1.69	24.42	276.69	2
535998	2679.99	22.88	1.69	24.57	286.42	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	21.59	1.69	23.28	212.81	2
518598	2592.99	21.46	1.69	23.15	206.54	2
535998	2679.99	21.71	1.69	23.4	218.78	2

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	19.3	1.69	20.99	125.6	2
518598	2592.99	19.16	1.69	20.85	121.62	2
535998	2679.99	19.37	1.69	21.06	127.64	2

CHANNEL BANDWIDTH: 30MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	23.65	1.69	25.34	341.98	2
518598	2592.99	23.63	1.69	25.32	340.41	2
534996	2674.98	23.82	1.69	25.51	355.63	2

CHANNEL BANDWIDTH: 30MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	23.76	1.69	25.45	350.75	2
518598	2592.99	23.63	1.69	25.32	340.41	2
534996	2674.98	23.83	1.69	25.52	356.45	2

CHANNEL BANDWIDTH: 30MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	22.77	1.69	24.46	279.25	2
518598	2592.99	22.71	1.69	24.4	275.42	2
534996	2674.98	22.91	1.69	24.6	288.4	2

CHANNEL BANDWIDTH: 30MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	21.58	1.69	23.27	212.32	2
518598	2592.99	21.47	1.69	23.16	207.01	2
534996	2674.98	21.65	1.69	23.34	215.77	2

CHANNEL BANDWIDTH: 30MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	19.3	1.69	20.99	125.6	2
518598	2592.99	19.16	1.69	20.85	121.62	2
534996	2674.98	19.37	1.69	21.06	127.64	2

CHANNEL BANDWIDTH: 40MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	23.67	1.69	25.36	343.56	2
518598	2592.99	23.63	1.69	25.32	340.41	2
534000	2670	23.79	1.69	25.48	353.18	2

CHANNEL BANDWIDTH: 40MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	23.77	1.69	25.46	351.56	2
518598	2592.99	23.63	1.69	25.32	340.41	2
534000	2670	23.84	1.69	25.53	357.27	2

CHANNEL BANDWIDTH: 40MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	22.78	1.69	24.47	279.9	2
518598	2592.99	22.71	1.69	24.4	275.42	2
534000	2670	22.85	1.69	24.54	284.45	2

CHANNEL BANDWIDTH: 40MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	21.61	1.69	23.3	213.8	2
518598	2592.99	21.5	1.69	23.19	208.45	2
534000	2670	21.65	1.69	23.34	215.77	2

CHANNEL BANDWIDTH: 40MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	19.23	1.69	20.92	123.59	2
518598	2592.99	19.17	1.69	20.86	121.9	2
534000	2670	19.4	1.69	21.09	128.53	2

CHANNEL BANDWIDTH: 50MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	23.67	1.69	25.36	343.56	2
518598	2592.99	23.6	1.69	25.29	338.06	2
532998	2664.99	23.86	1.69	25.55	358.92	2

CHANNEL BANDWIDTH: 50MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	23.8	1.69	25.49	354	2
518598	2592.99	23.66	1.69	25.35	342.77	2
532998	2664.99	23.81	1.69	25.5	354.81	2

CHANNEL BANDWIDTH: 50MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	22.74	1.69	24.43	277.33	2
518598	2592.99	22.7	1.69	24.39	274.79	2
532998	2664.99	22.87	1.69	24.56	285.76	2

CHANNEL BANDWIDTH: 50MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	21.6	1.69	23.29	213.3	2
518598	2592.99	21.51	1.69	23.2	208.93	2
532998	2664.99	21.66	1.69	23.35	216.27	2

CHANNEL BANDWIDTH: 50MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	19.28	1.69	20.97	125.03	2
518598	2592.99	19.14	1.69	20.83	121.06	2
532998	2664.99	19.4	1.69	21.09	128.53	2

CHANNEL BANDWIDTH: 60MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	23.65	1.69	25.34	341.98	2
518598	2592.99	23.63	1.69	25.32	340.41	2
531996	2659.98	23.82	1.69	25.51	355.63	2

CHANNEL BANDWIDTH: 60MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	23.76	1.69	25.45	350.75	2
518598	2592.99	23.63	1.69	25.32	340.41	2
531996	2659.98	23.83	1.69	25.52	356.45	2

CHANNEL BANDWIDTH: 60MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	22.77	1.69	24.46	279.25	2
518598	2592.99	22.71	1.69	24.4	275.42	2
531996	2659.98	22.91	1.69	24.6	288.4	2

CHANNEL BANDWIDTH: 60MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	21.58	1.69	23.27	212.32	2
518598	2592.99	21.47	1.69	23.16	207.01	2
531996	2659.98	21.65	1.69	23.34	215.77	2

CHANNEL BANDWIDTH: 60MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	19.3	1.69	20.99	125.6	2
518598	2592.99	19.16	1.69	20.85	121.62	2
531996	2659.98	19.37	1.69	21.06	127.64	2

CHANNEL BANDWIDTH: 80MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	23.67	1.69	25.36	343.56	2
518598	2592.99	23.6	1.69	25.29	338.06	2
529998	2649.99	23.86	1.69	25.55	358.92	2

CHANNEL BANDWIDTH: 80MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	23.76	1.69	25.45	350.75	2
518598	2592.99	23.64	1.69	25.33	341.19	2
529998	2649.99	23.8	1.69	25.49	354	2

CHANNEL BANDWIDTH: 80MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	22.74	1.69	24.43	277.33	2
518598	2592.99	22.7	1.69	24.39	274.79	2
529998	2649.99	22.88	1.69	24.57	286.42	2

CHANNEL BANDWIDTH: 80MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	21.54	1.69	23.23	210.38	2
518598	2592.99	21.51	1.69	23.2	208.93	2
529998	2649.99	21.71	1.69	23.4	218.78	2

CHANNEL BANDWIDTH: 80MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	19.25	1.69	20.94	124.17	2
518598	2592.99	19.15	1.69	20.84	121.34	2
529998	2649.99	19.4	1.69	21.09	128.53	2

CHANNEL BANDWIDTH: 90MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	23.65	1.69	25.34	341.98	2
518598	2592.99	23.62	1.69	25.31	339.63	2
528996	2644.98	23.85	1.69	25.54	358.10	2

CHANNEL BANDWIDTH: 90MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	23.81	1.69	25.5	354.81	2
518598	2592.99	23.66	1.69	25.35	342.77	2
528996	2644.98	23.77	1.69	25.46	351.56	2

CHANNEL BANDWIDTH: 90MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	22.72	1.69	24.41	276.06	2
518598	2592.99	22.73	1.69	24.42	276.69	2
528996	2644.98	22.88	1.69	24.57	286.42	2

CHANNEL BANDWIDTH: 90MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	21.59	1.69	23.28	212.81	2
518598	2592.99	21.46	1.69	23.15	206.54	2
528996	2644.98	21.71	1.69	23.4	218.78	2

CHANNEL BANDWIDTH: 90MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	19.29	1.69	20.98	125.31	2
518598	2592.99	19.14	1.69	20.83	121.06	2
528996	2644.98	19.41	1.69	21.1	128.82	2

CHANNEL BANDWIDTH: 100MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	23.71	1.69	25.4	346.74	2
518598	2592.99	23.65	1.69	25.34	341.98	2
528000	2640	23.87	1.69	25.56	359.75	2

CHANNEL BANDWIDTH: 100MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	23.82	1.69	25.51	355.63	2
518598	2592.99	23.71	1.69	25.4	346.74	2
528000	2640	23.85	1.69	25.54	358.1	2

CHANNEL BANDWIDTH: 100MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	22.8	1.69	24.49	281.19	2
518598	2592.99	22.77	1.69	24.46	279.25	2
528000	2640	22.93	1.69	24.62	289.73	2

CHANNEL BANDWIDTH: 100MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	21.62	1.69	23.31	214.29	2
518598	2592.99	21.52	1.69	23.21	209.41	2
528000	2640	21.73	1.69	23.42	219.79	2

CHANNEL BANDWIDTH: 100MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	19.31	1.69	21	125.89	2
518598	2592.99	19.18	1.69	20.87	122.18	2
528000	2640	19.42	1.69	21.11	129.12	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU
VERITAS**

Test Report No.: W7L-220214W001RF06

N41-HPUE

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	26.36	1.69	28.05	638.26	2
518598	2592.99	26.04	1.69	27.73	592.93	2
535998	2679.99	26.42	1.69	28.11	647.14	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	26.25	1.69	27.94	622.3	2
518598	2592.99	25.84	1.69	27.53	566.24	2
535998	2679.99	26.25	1.69	27.94	622.3	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	25.3	1.69	26.99	500.03	2
518598	2592.99	25.03	1.69	26.72	469.89	2
535998	2679.99	25.46	1.69	27.15	518.8	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	23.88	1.69	25.57	360.58	2
518598	2592.99	23.51	1.69	25.2	331.13	2
535998	2679.99	23.94	1.69	25.63	365.59	2

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
501204	2506.02	21.89	1.69	23.58	228.03	2
518598	2592.99	21.5	1.69	23.19	208.45	2
535998	2679.99	21.99	1.69	23.68	233.35	2

CHANNEL BANDWIDTH: 30MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	26.3	1.69	27.99	629.51	2
518598	2592.99	26.03	1.69	27.72	591.56	2
534996	2674.98	26.41	1.69	28.1	645.65	2

CHANNEL BANDWIDTH: 30MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	26.21	1.69	27.9	616.6	2
518598	2592.99	25.78	1.69	27.47	558.47	2
534996	2674.98	26.27	1.69	27.96	625.17	2

CHANNEL BANDWIDTH: 30MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	25.3	1.69	26.99	500.03	2
518598	2592.99	25.06	1.69	26.75	473.15	2
534996	2674.98	25.49	1.69	27.18	522.4	2

CHANNEL BANDWIDTH: 30MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	23.88	1.69	25.57	360.58	2
518598	2592.99	23.51	1.69	25.2	331.13	2
534996	2674.98	23.94	1.69	25.63	365.59	2

CHANNEL BANDWIDTH: 30MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
502200	2511	21.89	1.69	23.58	228.03	2
518598	2592.99	21.5	1.69	23.19	208.45	2
534996	2674.98	21.99	1.69	23.68	233.35	2

CHANNEL BANDWIDTH: 40MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	26.37	1.69	28.06	639.73	2
518598	2592.99	25.99	1.69	27.68	586.14	2
534000	2670	26.43	1.69	28.12	648.63	2

CHANNEL BANDWIDTH: 40MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	26.19	1.69	27.88	613.76	2
518598	2592.99	25.81	1.69	27.5	562.34	2
534000	2670	26.31	1.69	28	630.96	2

CHANNEL BANDWIDTH: 40MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	25.33	1.69	27.02	503.5	2
518598	2592.99	24.99	1.69	26.68	465.59	2
534000	2670	25.47	1.69	27.16	520	2

CHANNEL BANDWIDTH: 40MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	23.87	1.69	25.56	359.75	2
518598	2592.99	23.48	1.69	25.17	328.85	2
534000	2670	23.97	1.69	25.66	368.13	2

CHANNEL BANDWIDTH: 40MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
503202	2516.01	21.89	1.69	23.58	228.03	2
518598	2592.99	21.5	1.69	23.19	208.45	2
534000	2670	22	1.69	23.69	233.88	2

CHANNEL BANDWIDTH: 50MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	26.31	1.69	28	630.96	2
518598	2592.99	26	1.69	27.69	587.49	2
532998	2664.99	26.44	1.69	28.13	650.13	2

CHANNEL BANDWIDTH: 50MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	26.24	1.69	27.93	620.87	2
518598	2592.99	25.81	1.69	27.5	562.34	2
532998	2664.99	26.29	1.69	27.98	628.06	2

CHANNEL BANDWIDTH: 50MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	25.3	1.69	26.99	500.03	2
518598	2592.99	25.05	1.69	26.74	472.06	2
532998	2664.99	25.45	1.69	27.14	517.61	2

CHANNEL BANDWIDTH: 50MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	23.87	1.69	25.56	359.75	2
518598	2592.99	23.49	1.69	25.18	329.61	2
532998	2664.99	23.99	1.69	25.68	369.83	2

CHANNEL BANDWIDTH: 50MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
504204	2521.02	21.85	1.69	23.54	225.94	2
518598	2592.99	21.51	1.69	23.2	208.93	2
532998	2664.99	21.96	1.69	23.65	231.74	2

CHANNEL BANDWIDTH: 60MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	26.3	1.69	27.99	629.51	2
518598	2592.99	26.03	1.69	27.72	591.56	2
531996	2659.98	26.41	1.69	28.1	645.65	2

CHANNEL BANDWIDTH: 60MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	26.21	1.69	27.9	616.6	2
518598	2592.99	25.78	1.69	27.47	558.47	2
531996	2659.98	26.27	1.69	27.96	625.17	2

CHANNEL BANDWIDTH: 60MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	25.3	1.69	26.99	500.03	2
518598	2592.99	25.06	1.69	26.75	473.15	2
531996	2659.98	25.49	1.69	27.18	522.4	2

CHANNEL BANDWIDTH: 60MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	23.88	1.69	25.57	360.58	2
518598	2592.99	23.51	1.69	25.2	331.13	2
531996	2659.98	23.94	1.69	25.63	365.59	2

CHANNEL BANDWIDTH: 60MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
505200	2526	21.89	1.69	23.58	228.03	2
518598	2592.99	21.5	1.69	23.19	208.45	2
531996	2659.98	21.99	1.69	23.68	233.35	2

CHANNEL BANDWIDTH: 80MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	26.31	1.69	28	630.96	2
518598	2592.99	26	1.69	27.69	587.49	2
529998	2649.99	26.44	1.69	28.13	650.13	2

CHANNEL BANDWIDTH: 80MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	26.18	1.69	27.87	612.35	2
518598	2592.99	25.84	1.69	27.53	566.24	2
529998	2649.99	26.27	1.69	27.96	625.17	2

CHANNEL BANDWIDTH: 80MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	25.3	1.69	26.99	500.03	2
518598	2592.99	25.05	1.69	26.74	472.06	2
529998	2649.99	25.45	1.69	27.14	517.61	2

CHANNEL BANDWIDTH: 80MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	23.85	1.69	25.54	358.1	2
518598	2592.99	23.5	1.69	25.19	330.37	2
529998	2649.99	23.98	1.69	25.67	368.98	2

CHANNEL BANDWIDTH: 80MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
507204	2536.02	21.88	1.69	23.57	227.51	2
518598	2592.99	21.53	1.69	23.22	209.89	2
529998	2649.99	21.94	1.69	23.63	230.67	2

CHANNEL BANDWIDTH: 90MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	26.35	1.69	28.04	636.8	2
518598	2592.99	26.04	1.69	27.73	592.93	2
528996	2644.98	26.4	1.69	28.09	644.17	2

CHANNEL BANDWIDTH: 90MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	26.24	1.69	27.93	620.87	2
518598	2592.99	25.79	1.69	27.48	559.76	2
528996	2644.98	26.28	1.69	27.97	626.61	2

CHANNEL BANDWIDTH: 90MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	25.3	1.69	26.99	500.03	2
518598	2592.99	25.03	1.69	26.72	469.89	2
528996	2644.98	25.46	1.69	27.15	518.8	2

CHANNEL BANDWIDTH: 90MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	23.89	1.69	25.58	361.41	2
518598	2592.99	23.48	1.69	25.17	328.85	2
528996	2644.98	23.98	1.69	25.67	368.98	2

CHANNEL BANDWIDTH: 90MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
508200	2541	21.9	1.69	23.59	228.56	2
518598	2592.99	21.49	1.69	23.18	207.97	2
528996	2644.98	21.99	1.69	23.68	233.35	2

CHANNEL BANDWIDTH: 100MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	26.38	1.69	28.07	641.21	2
518598	2592.99	26.05	1.69	27.74	594.29	2
528000	2640	26.46	1.69	28.15	653.13	2

CHANNEL BANDWIDTH: 100MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	26.26	1.69	27.95	623.73	2
518598	2592.99	25.86	1.69	27.55	568.85	2
528000	2640	26.33	1.69	28.02	633.87	2

CHANNEL BANDWIDTH: 100MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	25.38	1.69	27.07	509.33	2
518598	2592.99	25.07	1.69	26.76	474.24	2
528000	2640	25.51	1.69	27.2	524.81	2

CHANNEL BANDWIDTH: 100MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	23.92	1.69	25.61	363.92	2
518598	2592.99	23.54	1.69	25.23	333.43	2
528000	2640	24	1.69	25.69	370.68	2

CHANNEL BANDWIDTH: 100MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
509202	2546.01	21.93	1.69	23.62	230.14	2
518598	2592.99	21.55	1.69	23.24	210.86	2
528000	2640	22.01	1.69	23.7	234.42	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

N66-LTE5

CHANNEL BANDWIDTH: 5MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
342500	1712.5	23.83	3.09	26.92	492.04	1
349000	1745	23.7	3.09	26.79	477.53	1
355500	1777.5	23.7	3.09	26.79	477.53	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
342500	1712.5	23.81	3.09	26.9	489.78	1
349000	1745	23.63	3.09	26.72	469.89	1
355500	1777.5	23.76	3.09	26.85	484.17	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
342500	1712.5	23.27	3.09	26.36	432.51	1
349000	1745	23.19	3.09	26.28	424.62	1
355500	1777.5	23.24	3.09	26.33	429.54	1

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
342500	1712.5	21.59	3.09	24.68	293.76	1
349000	1745	21.48	3.09	24.57	286.42	1
355500	1777.5	21.51	3.09	24.6	288.4	1

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
342500	1712.5	21.58	3.09	24.67	293.09	1
349000	1745	21.43	3.09	24.52	283.14	1
355500	1777.5	21.5	3.09	24.59	287.74	1

CHANNEL BANDWIDTH: 10MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343000	1715	23.79	3.09	26.88	487.53	1
349000	1745	23.64	3.09	26.73	470.98	1
355000	1775	23.77	3.09	26.86	485.29	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343000	1715	23.79	3.09	26.88	487.53	1
349000	1745	23.66	3.09	26.75	473.15	1
355000	1775	23.73	3.09	26.82	480.84	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343000	1715	23.28	3.09	26.37	433.51	1
349000	1745	23.18	3.09	26.27	423.64	1
355000	1775	23.27	3.09	26.36	432.51	1

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343000	1715	21.55	3.09	24.64	291.07	1
349000	1745	21.45	3.09	24.54	284.45	1
355000	1775	21.52	3.09	24.61	289.07	1

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343000	1715	21.58	3.09	24.67	293.09	1
349000	1745	21.45	3.09	24.54	284.45	1
355000	1775	21.45	3.09	24.54	284.45	1

CHANNEL BANDWIDTH: 15MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343500	1717.5	23.78	3.09	26.87	486.41	1
349000	1745	23.7	3.09	26.79	477.53	1
354500	1772.5	23.73	3.09	26.82	480.84	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343500	1717.5	23.77	3.09	26.86	485.29	1
349000	1745	23.69	3.09	26.78	476.43	1
354500	1772.5	23.72	3.09	26.81	479.73	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343500	1717.5	23.32	3.09	26.41	437.52	1
349000	1745	23.17	3.09	26.26	422.67	1
354500	1772.5	23.27	3.09	26.36	432.51	1

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343500	1717.5	21.59	3.09	24.68	293.76	1
349000	1745	21.48	3.09	24.57	286.42	1
354500	1772.5	21.51	3.09	24.6	288.4	1

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
343500	1717.5	21.58	3.09	24.67	293.09	1
349000	1745	21.43	3.09	24.52	283.14	1
354500	1772.5	21.5	3.09	24.59	287.74	1

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
344000	1720	23.8	3.09	26.89	488.65	1
349000	1745	23.67	3.09	26.76	474.24	1
354000	1770	23.77	3.09	26.86	485.29	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
344000	1720	23.75	3.09	26.84	483.06	1
349000	1745	23.65	3.09	26.74	472.06	1
354000	1770	23.69	3.09	26.78	476.43	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
344000	1720	23.29	3.09	26.38	434.51	1
349000	1745	23.16	3.09	26.25	421.7	1
354000	1770	23.24	3.09	26.33	429.54	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
344000	1720	21.56	3.09	24.65	291.74	1
349000	1745	21.47	3.09	24.56	285.76	1
354000	1770	21.52	3.09	24.61	289.07	1

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
344000	1720	21.54	3.09	24.63	290.4	1
349000	1745	21.39	3.09	24.48	280.54	1
354000	1770	21.47	3.09	24.56	285.76	1

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

CHANNEL BANDWIDTH: 30MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
345000	1725	23.76	3.09	26.85	484.17	1
349000	1745	23.65	3.09	26.74	472.06	1
353000	1765	23.76	3.09	26.85	484.17	1

CHANNEL BANDWIDTH: 30MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
345000	1725	23.81	3.09	26.9	489.78	1
349000	1745	23.63	3.09	26.72	469.89	1
353000	1765	23.76	3.09	26.85	484.17	1

CHANNEL BANDWIDTH: 30MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
345000	1725	23.27	3.09	26.36	432.51	1
349000	1745	23.19	3.09	26.28	424.62	1
353000	1765	23.24	3.09	26.33	429.54	1

CHANNEL BANDWIDTH: 30MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
345000	1725	21.6	3.09	24.69	294.44	1
349000	1745	21.45	3.09	24.54	284.45	1
353000	1765	21.55	3.09	24.64	291.07	1

CHANNEL BANDWIDTH: 30MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
345000	1725	21.57	3.09	24.66	292.42	1
349000	1745	21.39	3.09	24.48	280.54	1
353000	1765	21.52	3.09	24.61	289.07	1

CHANNEL BANDWIDTH: 40MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
346000	1730	23.84	3.09	26.93	493.17	1
349000	1745	23.72	3.09	26.81	479.73	1
352000	1760	23.78	3.09	26.87	486.41	1

CHANNEL BANDWIDTH: 40MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
346000	1730	23.83	3.09	26.92	492.04	1
349000	1745	23.71	3.09	26.8	478.63	1
352000	1760	23.77	3.09	26.86	485.29	1

CHANNEL BANDWIDTH: 40MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
346000	1730	23.35	3.09	26.44	440.55	1
349000	1745	23.23	3.09	26.32	428.55	1
352000	1760	23.29	3.09	26.38	434.51	1

CHANNEL BANDWIDTH: 40MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
346000	1730	21.63	3.09	24.72	296.48	1
349000	1745	21.51	3.09	24.6	288.4	1
352000	1760	21.57	3.09	24.66	292.42	1

CHANNEL BANDWIDTH: 40MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
346000	1730	21.59	3.09	24.68	293.76	1
349000	1745	21.47	3.09	24.56	285.76	1
352000	1760	21.53	3.09	24.62	289.73	1

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

N71

CHANNEL BANDWIDTH: 5MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133100	665.5	23.33	0.14	21.32	135.52	3
136100	680.5	23.32	0.14	21.31	135.21	3
139100	695.5	23.25	0.14	21.24	133.05	3

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133100	665.5	23.31	0.14	21.3	134.9	3
136100	680.5	23.19	0.14	21.18	131.22	3
139100	695.5	23.1	0.14	21.09	128.53	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133100	665.5	22.21	0.14	20.2	104.71	3
136100	680.5	22.26	0.14	20.25	105.93	3
139100	695.5	22.14	0.14	20.13	103.04	3

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133100	665.5	20.77	0.14	18.76	75.16	3
136100	680.5	20.7	0.14	18.69	73.96	3
139100	695.5	20.63	0.14	18.62	72.78	3

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133100	665.5	20.86	0.14	18.85	76.74	3
136100	680.5	20.79	0.14	18.78	75.51	3
139100	695.5	20.64	0.14	18.63	72.95	3

CHANNEL BANDWIDTH: 10MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133600	668	23.32	0.14	21.31	135.21	3
136100	680.5	23.35	0.14	21.34	136.14	3
138600	693	23.21	0.14	21.2	131.83	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133600	668	23.27	0.14	21.26	133.66	3
136100	680.5	23.16	0.14	21.15	130.32	3
138600	693	23.12	0.14	21.11	129.12	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133600	668	22.21	0.14	20.2	104.71	3
136100	680.5	22.27	0.14	20.26	106.17	3
138600	693	22.18	0.14	20.17	103.99	3

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133600	668	20.75	0.14	18.74	74.82	3
136100	680.5	20.66	0.14	18.65	73.28	3
138600	693	20.68	0.14	18.67	73.62	3

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
133600	668	20.86	0.14	18.85	76.74	3
136100	680.5	20.76	0.14	18.75	74.99	3
138600	693	20.67	0.14	18.66	73.45	3

CHANNEL BANDWIDTH: 15MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134100	670.5	23.37	0.14	21.36	136.77	3
136100	680.5	23.36	0.14	21.35	136.46	3
138100	690.5	23.24	0.14	21.23	132.74	3

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134100	670.5	23.32	0.14	21.31	135.21	3
136100	680.5	23.19	0.14	21.18	131.22	3
138100	690.5	23.09	0.14	21.08	128.23	3

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134100	670.5	22.21	0.14	20.2	104.71	3
136100	680.5	22.24	0.14	20.23	105.44	3
138100	690.5	22.15	0.14	20.14	103.28	3

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134100	670.5	20.76	0.14	18.75	74.99	3
136100	680.5	20.65	0.14	18.64	73.11	3
138100	690.5	20.67	0.14	18.66	73.45	3

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134100	670.5	20.86	0.14	18.85	76.74	3
136100	680.5	20.79	0.14	18.78	75.51	3
138100	690.5	20.67	0.14	18.66	73.45	3

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134600	673	23.4	0.14	21.39	137.72	3
136100	680.5	23.37	0.14	21.36	136.77	3
137600	688	23.26	0.14	21.25	133.35	3

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134600	673	23.33	0.14	21.32	135.52	3
136100	680.5	23.24	0.14	21.23	132.74	3
137600	688	23.14	0.14	21.13	129.72	3

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134600	673	22.29	0.14	20.28	106.66	3
136100	680.5	22.28	0.14	20.27	106.41	3
137600	688	22.2	0.14	20.19	104.47	3

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134600	673	20.79	0.14	18.78	75.51	3
136100	680.5	20.71	0.14	18.7	74.13	3
137600	688	20.69	0.14	18.68	73.79	3

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
134600	673	20.87	0.14	18.86	76.91	3
136100	680.5	20.81	0.14	18.8	75.86	3
137600	688	20.69	0.14	18.68	73.79	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU
VERITAS**

Test Report No.: W7L-220214W001RF06

N77C-LTE2

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	23.69	1.5	25.19	330.37	1
656000	3840	23.92	1.5	25.42	348.34	1
664666	3970	23.38	1.5	24.88	307.61	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	23.6	1.5	25.1	323.59	1
656000	3840	23.72	1.5	25.22	332.66	1
664666	3970	23.23	1.5	24.73	297.17	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	23.51	1.5	25.01	316.96	1
656000	3840	23.79	1.5	25.29	338.06	1
664666	3970	23.33	1.5	24.83	304.09	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	23.22	1.5	24.72	296.48	1
656000	3840	23.42	1.5	24.92	310.46	1
664666	3970	22.94	1.5	24.44	277.97	1

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	23.25	1.5	24.75	298.54	1
656000	3840	23.47	1.5	24.97	314.05	1
664666	3970	23.01	1.5	24.51	282.49	1

CHANNEL BANDWIDTH: 30MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	23.64	1.5	25.14	326.59	1
656000	3840	23.92	1.5	25.42	348.34	1
664332	3965	23.41	1.5	24.91	309.74	1

CHANNEL BANDWIDTH: 30MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	23.56	1.5	25.06	320.63	1
656000	3840	23.71	1.5	25.21	331.89	1
664332	3965	23.26	1.5	24.76	299.23	1

CHANNEL BANDWIDTH: 30MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	23.56	1.5	25.06	320.63	1
656000	3840	23.77	1.5	25.27	336.51	1
664332	3965	23.36	1.5	24.86	306.2	1

CHANNEL BANDWIDTH: 30MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	23.22	1.5	24.72	296.48	1
656000	3840	23.42	1.5	24.92	310.46	1
664332	3965	22.94	1.5	24.44	277.97	1

CHANNEL BANDWIDTH: 30MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	23.25	1.5	24.75	298.54	1
656000	3840	23.47	1.5	24.97	314.05	1
664332	3965	23.01	1.5	24.51	282.49	1

CHANNEL BANDWIDTH: 40MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	23.63	1.5	25.13	325.84	1
656000	3840	23.92	1.5	25.42	348.34	1
664000	3960	23.38	1.5	24.88	307.61	1

CHANNEL BANDWIDTH: 40MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	23.57	1.5	25.07	321.37	1
656000	3840	23.71	1.5	25.21	331.89	1
664000	3960	23.27	1.5	24.77	299.92	1

CHANNEL BANDWIDTH: 40MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	23.57	1.5	25.07	321.37	1
656000	3840	23.77	1.5	25.27	336.51	1
664000	3960	23.3	1.5	24.8	302	1

CHANNEL BANDWIDTH: 40MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	23.2	1.5	24.7	295.12	1
656000	3840	23.4	1.5	24.9	309.03	1
664000	3960	22.95	1.5	24.45	278.61	1

CHANNEL BANDWIDTH: 40MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	23.25	1.5	24.75	298.54	1
656000	3840	23.47	1.5	24.97	314.05	1
664000	3960	23.02	1.5	24.52	283.14	1

CHANNEL BANDWIDTH: 50MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	23.66	1.5	25.16	328.1	1
656000	3840	23.89	1.5	25.39	345.94	1
663666	3955	23.45	1.5	24.95	312.61	1

CHANNEL BANDWIDTH: 50MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	23.6	1.5	25.1	323.59	1
656000	3840	23.74	1.5	25.24	334.2	1
663666	3955	23.24	1.5	24.74	297.85	1

CHANNEL BANDWIDTH: 50MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	23.53	1.5	25.03	318.42	1
656000	3840	23.76	1.5	25.26	335.74	1
663666	3955	23.32	1.5	24.82	303.39	1

CHANNEL BANDWIDTH: 50MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	23.21	1.5	24.71	295.8	1
656000	3840	23.37	1.5	24.87	306.9	1
663666	3955	22.99	1.5	24.49	281.19	1

CHANNEL BANDWIDTH: 50MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	23.29	1.5	24.79	301.3	1
656000	3840	23.44	1.5	24.94	311.89	1
663666	3955	22.98	1.5	24.48	280.54	1

CHANNEL BANDWIDTH: 60MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	23.64	1.5	25.14	326.59	1
656000	3840	23.92	1.5	25.42	348.34	1
663332	3950	23.41	1.5	24.91	309.74	1

CHANNEL BANDWIDTH: 60MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	23.56	1.5	25.06	320.63	1
656000	3840	23.71	1.5	25.21	331.89	1
663332	3950	23.26	1.5	24.76	299.23	1

CHANNEL BANDWIDTH: 60MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	23.56	1.5	25.06	320.63	1
656000	3840	23.77	1.5	25.27	336.51	1
663332	3950	23.36	1.5	24.86	306.2	1

CHANNEL BANDWIDTH: 60MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	23.22	1.5	24.72	296.48	1
656000	3840	23.42	1.5	24.92	310.46	1
663332	3950	22.94	1.5	24.44	277.97	1

CHANNEL BANDWIDTH: 60MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	23.25	1.5	24.75	298.54	1
656000	3840	23.47	1.5	24.97	314.05	1
663332	3950	23.01	1.5	24.51	282.49	1

CHANNEL BANDWIDTH: 70MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	23.69	1.5	25.19	330.37	1
656000	3840	23.92	1.5	25.42	348.34	1
663000	3945	23.38	1.5	24.88	307.61	1

CHANNEL BANDWIDTH: 70MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	23.6	1.5	25.1	323.59	1
656000	3840	23.72	1.5	25.22	332.66	1
663000	3945	23.23	1.5	24.73	297.17	1

CHANNEL BANDWIDTH: 70MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	23.53	1.5	25.03	318.42	1
656000	3840	23.78	1.5	25.28	337.29	1
663000	3945	23.37	1.5	24.87	306.9	1

CHANNEL BANDWIDTH: 70MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	23.2	1.5	24.7	295.12	1
656000	3840	23.38	1.5	24.88	307.61	1
663000	3945	22.98	1.5	24.48	280.54	1

CHANNEL BANDWIDTH: 70MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	23.25	1.5	24.75	298.54	1
656000	3840	23.47	1.5	24.97	314.05	1
663000	3945	22.95	1.5	24.45	278.61	1

CHANNEL BANDWIDTH: 80MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	23.66	1.5	25.16	328.1	1
656000	3840	23.89	1.5	25.39	345.94	1
662666	3940	23.45	1.5	24.95	312.61	1

CHANNEL BANDWIDTH: 80MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	23.56	1.5	25.06	320.63	1
656000	3840	23.72	1.5	25.22	332.66	1
662666	3940	23.23	1.5	24.73	297.17	1

CHANNEL BANDWIDTH: 80MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	23.53	1.5	25.03	318.42	1
656000	3840	23.76	1.5	25.26	335.74	1
662666	3940	23.33	1.5	24.83	304.09	1

CHANNEL BANDWIDTH: 80MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	23.2	1.5	24.7	295.12	1
656000	3840	23.41	1.5	24.91	309.74	1
662666	3940	22.95	1.5	24.45	278.61	1

CHANNEL BANDWIDTH: 80MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	23.29	1.5	24.79	301.3	1
656000	3840	23.46	1.5	24.96	313.33	1
662666	3940	23	1.5	24.5	281.84	1

CHANNEL BANDWIDTH: 90MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	23.62	1.5	25.12	325.09	1
656000	3840	23.87	1.5	25.37	344.35	1
662332	3935	23.44	1.5	24.94	311.89	1

CHANNEL BANDWIDTH: 90MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	23.61	1.5	25.11	324.34	1
656000	3840	23.74	1.5	25.24	334.2	1
662332	3935	23.2	1.5	24.7	295.12	1

CHANNEL BANDWIDTH: 90MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	23.51	1.5	25.01	316.96	1
656000	3840	23.79	1.5	25.29	338.06	1
662332	3935	23.33	1.5	24.83	304.09	1

CHANNEL BANDWIDTH: 90MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	23.23	1.5	24.73	297.17	1
656000	3840	23.39	1.5	24.89	308.32	1
662332	3935	22.98	1.5	24.48	280.54	1

CHANNEL BANDWIDTH: 90MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	23.29	1.5	24.79	301.3	1
656000	3840	23.42	1.5	24.92	310.46	1
662332	3935	23.01	1.5	24.51	282.49	1

CHANNEL BANDWIDTH: 100MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	23.7	1.5	25.2	331.13	1
656000	3840	23.94	1.5	25.44	349.95	1
662000	3930	23.46	1.5	24.96	313.33	1

CHANNEL BANDWIDTH: 100MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	23.62	1.5	25.12	325.09	1
656000	3840	23.79	1.5	25.29	338.06	1
662000	3930	23.28	1.5	24.78	300.61	1

CHANNEL BANDWIDTH: 100MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	23.59	1.5	25.09	322.85	1
656000	3840	23.83	1.5	25.33	341.19	1
662000	3930	23.38	1.5	24.88	307.61	1

CHANNEL BANDWIDTH: 100MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	23.26	1.5	24.76	299.23	1
656000	3840	23.45	1.5	24.95	312.61	1
662000	3930	23	1.5	24.5	281.84	1

CHANNEL BANDWIDTH: 100MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	23.31	1.5	24.81	302.69	1
656000	3840	23.49	1.5	24.99	315.5	1
662000	3930	23.03	1.5	24.53	283.79	1

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU
VERITAS**

Test Report No.: W7L-220214W001RF06

N77C-HPUE-LTE2

CHANNEL BANDWIDTH: 20MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	26.85	1.5	28.35	683.91	1
656000	3840	26.61	1.5	28.11	647.14	1
664666	3970	26.68	1.5	28.18	657.66	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	26.82	1.5	28.32	679.2	1
656000	3840	26.52	1.5	28.02	633.87	1
664666	3970	26.65	1.5	28.15	653.13	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	26.65	1.5	28.15	653.13	1
656000	3840	26.27	1.5	27.77	598.41	1
664666	3970	26.49	1.5	27.99	629.51	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	25.53	1.5	27.03	504.66	1
656000	3840	25.18	1.5	26.68	465.59	1
664666	3970	25.24	1.5	26.74	472.06	1

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647334	3710	24.09	1.5	25.59	362.24	1
656000	3840	23.72	1.5	25.22	332.66	1
664666	3970	23.92	1.5	25.42	348.34	1

CHANNEL BANDWIDTH: 30MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	26.82	1.5	28.32	679.20	1
656000	3840	26.6	1.5	28.1	645.65	1
664332	3965	26.72	1.5	28.22	663.74	1

CHANNEL BANDWIDTH: 30MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	26.82	1.5	28.32	679.2	1
656000	3840	26.58	1.5	28.08	642.69	1
664332	3965	26.59	1.5	28.09	644.17	1

CHANNEL BANDWIDTH: 30MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	26.65	1.5	28.15	653.13	1
656000	3840	26.28	1.5	27.78	599.79	1
664332	3965	26.45	1.5	27.95	623.73	1

CHANNEL BANDWIDTH: 30MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	25.53	1.5	27.03	504.66	1
656000	3840	25.18	1.5	26.68	465.59	1
664332	3965	25.24	1.5	26.74	472.06	1

CHANNEL BANDWIDTH: 30MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
647668	3715	24.08	1.5	25.58	361.41	1
656000	3840	23.73	1.5	25.23	333.43	1
664332	3965	23.91	1.5	25.41	347.54	1

CHANNEL BANDWIDTH: 40MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	26.86	1.5	28.36	685.49	1
656000	3840	26.62	1.5	28.12	648.63	1
664000	3960	26.73	1.5	28.23	665.27	1

CHANNEL BANDWIDTH: 40MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	26.8	1.5	28.3	676.08	1
656000	3840	26.56	1.5	28.06	639.73	1
664000	3960	26.61	1.5	28.11	647.14	1

CHANNEL BANDWIDTH: 40MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	26.66	1.5	28.16	654.64	1
656000	3840	26.33	1.5	27.83	606.74	1
664000	3960	26.42	1.5	27.92	619.44	1

CHANNEL BANDWIDTH: 40MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	25.47	1.5	26.97	497.74	1
656000	3840	25.17	1.5	26.67	464.52	1
664000	3960	25.3	1.5	26.8	478.63	1

CHANNEL BANDWIDTH: 40MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648000	3720	24.04	1.5	25.54	358.1	1
656000	3840	23.74	1.5	25.24	334.2	1
664000	3960	23.91	1.5	25.41	347.54	1

CHANNEL BANDWIDTH: 50MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	26.8	1.5	28.3	676.08	1
656000	3840	26.63	1.5	28.13	650.13	1
663666	3955	26.69	1.5	28.19	659.17	1

CHANNEL BANDWIDTH: 50MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	26.81	1.5	28.31	677.64	1
656000	3840	26.58	1.5	28.08	642.69	1
663666	3955	26.61	1.5	28.11	647.14	1

CHANNEL BANDWIDTH: 50MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	26.65	1.5	28.15	653.13	1
656000	3840	26.3	1.5	27.8	602.56	1
663666	3955	26.43	1.5	27.93	620.87	1

CHANNEL BANDWIDTH: 50MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	25.52	1.5	27.02	503.5	1
656000	3840	25.14	1.5	26.64	461.32	1
663666	3955	25.3	1.5	26.8	478.63	1

CHANNEL BANDWIDTH: 50MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648334	3725	24.05	1.5	25.55	358.92	1
656000	3840	23.72	1.5	25.22	332.66	1
663666	3955	23.91	1.5	25.41	347.54	1

CHANNEL BANDWIDTH: 60MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	26.82	1.5	28.32	679.20	1
656000	3840	26.6	1.5	28.1	645.65	1
663332	3950	26.72	1.5	28.22	663.74	1

CHANNEL BANDWIDTH: 60MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	26.82	1.5	28.32	679.2	1
656000	3840	26.58	1.5	28.08	642.69	1
663332	3950	26.59	1.5	28.09	644.17	1

CHANNEL BANDWIDTH: 60MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	26.65	1.5	28.15	653.13	1
656000	3840	26.28	1.5	27.78	599.79	1
663332	3950	26.45	1.5	27.95	623.73	1

CHANNEL BANDWIDTH: 60MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	25.53	1.5	27.03	504.66	1
656000	3840	25.18	1.5	26.68	465.59	1
663332	3950	25.24	1.5	26.74	472.06	1

CHANNEL BANDWIDTH: 60MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
648668	3730	24.08	1.5	25.58	361.41	1
656000	3840	23.73	1.5	25.23	333.43	1
663332	3950	23.91	1.5	25.41	347.54	1

CHANNEL BANDWIDTH: 70MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	26.85	1.5	28.35	683.91	1
656000	3840	26.61	1.5	28.11	647.14	1
663000	3945	26.68	1.5	28.18	657.66	1

CHANNEL BANDWIDTH: 70MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	26.82	1.5	28.32	679.2	1
656000	3840	26.52	1.5	28.02	633.87	1
663000	3945	26.65	1.5	28.15	653.13	1

CHANNEL BANDWIDTH: 70MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	26.66	1.5	28.16	654.64	1
656000	3840	26.33	1.5	27.83	606.74	1
663000	3945	26.45	1.5	27.95	623.73	1

CHANNEL BANDWIDTH: 70MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	25.52	1.5	27.02	503.5	1
656000	3840	25.15	1.5	26.65	462.38	1
663000	3945	25.27	1.5	26.77	475.34	1

CHANNEL BANDWIDTH: 70MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649000	3735	24.04	1.5	25.54	358.1	1
656000	3840	23.74	1.5	25.24	334.2	1
663000	3945	23.91	1.5	25.41	347.54	1

CHANNEL BANDWIDTH: 80MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	26.8	1.5	28.3	676.08	1
656000	3840	26.63	1.5	28.13	650.13	1
662666	3940	26.69	1.5	28.19	659.17	1

CHANNEL BANDWIDTH: 80MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	26.76	1.5	28.26	669.88	1
656000	3840	26.55	1.5	28.05	638.26	1
662666	3940	26.65	1.5	28.15	653.13	1

CHANNEL BANDWIDTH: 80MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	26.6	1.5	28.1	645.65	1
656000	3840	26.3	1.5	27.8	602.56	1
662666	3940	26.48	1.5	27.98	628.06	1

CHANNEL BANDWIDTH: 80MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	25.52	1.5	27.02	503.5	1
656000	3840	25.14	1.5	26.64	461.32	1
662666	3940	25.31	1.5	26.81	479.73	1

CHANNEL BANDWIDTH: 80MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649334	3740	24.06	1.5	25.56	359.75	1
656000	3840	23.77	1.5	25.27	336.51	1
662666	3940	23.88	1.5	25.38	345.14	1

CHANNEL BANDWIDTH: 90MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	26.85	1.5	28.35	683.91	1
656000	3840	26.61	1.5	28.11	647.14	1
662332	3935	26.71	1.5	28.21	662.22	1

CHANNEL BANDWIDTH: 90MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	26.81	1.5	28.31	677.64	1
656000	3840	26.57	1.5	28.07	641.21	1
662332	3935	26.63	1.5	28.13	650.13	1

CHANNEL BANDWIDTH: 90MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	26.65	1.5	28.15	653.13	1
656000	3840	26.27	1.5	27.77	598.41	1
662332	3935	26.49	1.5	27.99	629.51	1

CHANNEL BANDWIDTH: 90MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	25.47	1.5	26.97	497.74	1
656000	3840	25.14	1.5	26.64	461.32	1
662332	3935	25.26	1.5	26.76	474.24	1

CHANNEL BANDWIDTH: 90MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
649668	3745	24.05	1.5	25.55	358.92	1
656000	3840	23.75	1.5	25.25	334.97	1
662332	3935	23.91	1.5	25.41	347.54	1

CHANNEL BANDWIDTH: 100MHz Pi/2 BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	26.87	1.5	28.37	687.07	1
656000	3840	26.65	1.5	28.15	653.13	1
662000	3930	26.74	1.5	28.24	666.81	1

CHANNEL BANDWIDTH: 100MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	26.83	1.5	28.33	680.77	1
656000	3840	26.6	1.5	28.1	645.65	1
662000	3930	26.67	1.5	28.17	656.15	1

CHANNEL BANDWIDTH: 100MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	26.67	1.5	28.17	656.15	1
656000	3840	26.35	1.5	27.85	609.54	1
662000	3930	26.5	1.5	28	630.96	1

CHANNEL BANDWIDTH: 100MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	25.54	1.5	27.04	505.82	1
656000	3840	25.22	1.5	26.72	469.89	1
662000	3930	25.32	1.5	26.82	480.84	1

CHANNEL BANDWIDTH: 100MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
650000	3750	24.11	1.5	25.61	363.92	1
656000	3840	23.79	1.5	25.29	338.06	1
662000	3930	23.93	1.5	25.43	349.14	1

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

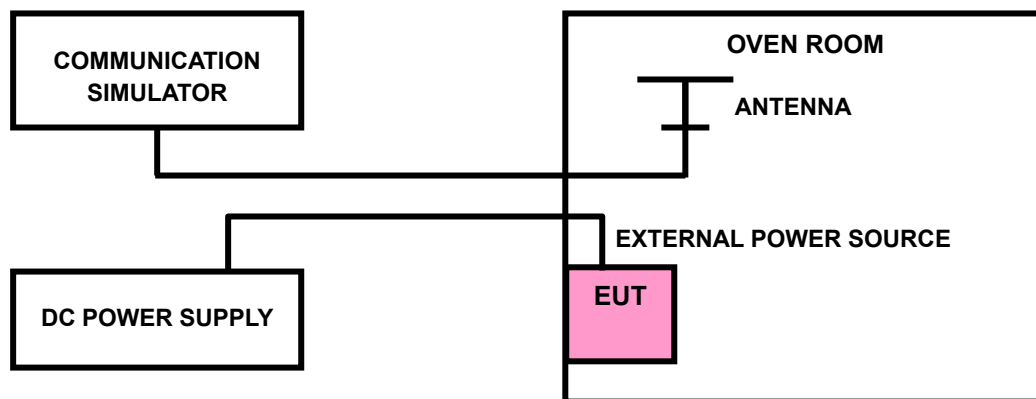



Test Report No.: W7L-220214W001RF06

3.2.4 TEST RESULTS


Please Refer to Appendix F Of this test report.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.3.2 TEST SETUP

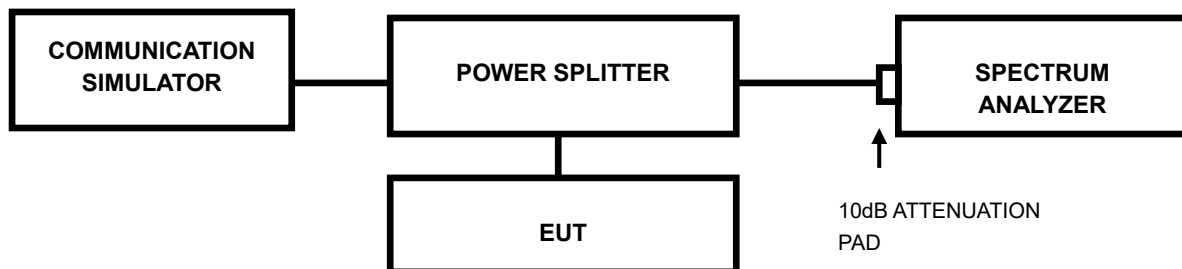

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-220214W001RF06

3.3.4 TEST RESULTS

Please Refer to Appendix F Of this test report.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the FCC limited is $43 + 10 \log (P)$ dB, However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

According to FCC 27.53(l)(2) specified that For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.4.2 TEST SETUP

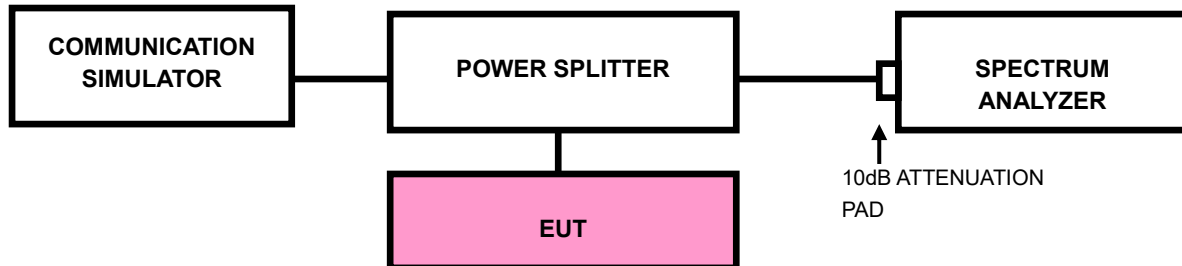

3.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is $\geq 1\% \times \text{EBW kHz}$ and VBW of the spectrum is $3 \times \text{RBW kHz}$. (NR bandwidth 20MHz/30MHz/40MHz/50MHz/60MHz/70MHz/80MHz/90MHz/100 MHz).
- Record the max trace plot into the test report.

3.4.4 TEST RESULTS

Please Refer to Appendix F Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13dBm.


For 5G NR n41:

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

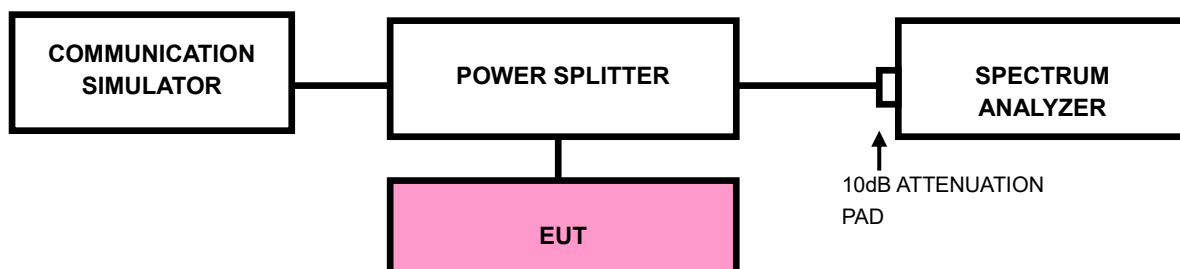



Test Report No.: W7L-220214W001RF06

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix F Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13dBm.

For 5G NR n41:

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.6.2 TEST PROCEDURES

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}.$


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

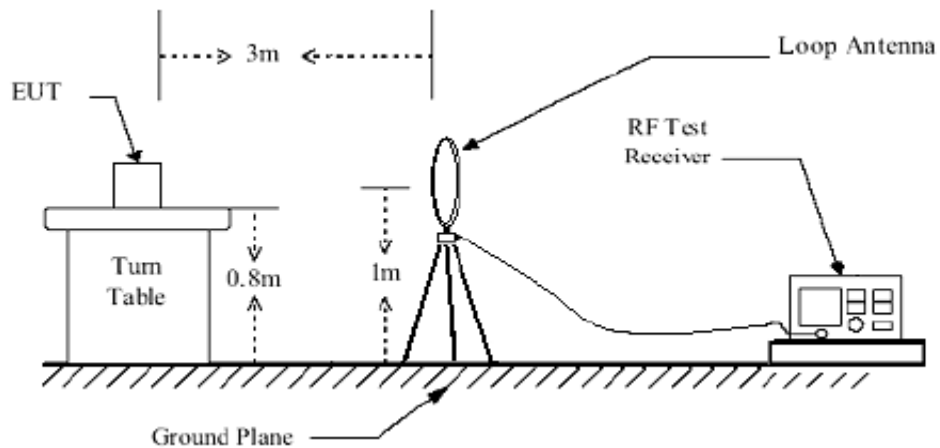

< Frequency Range 30MHz~1GHz >

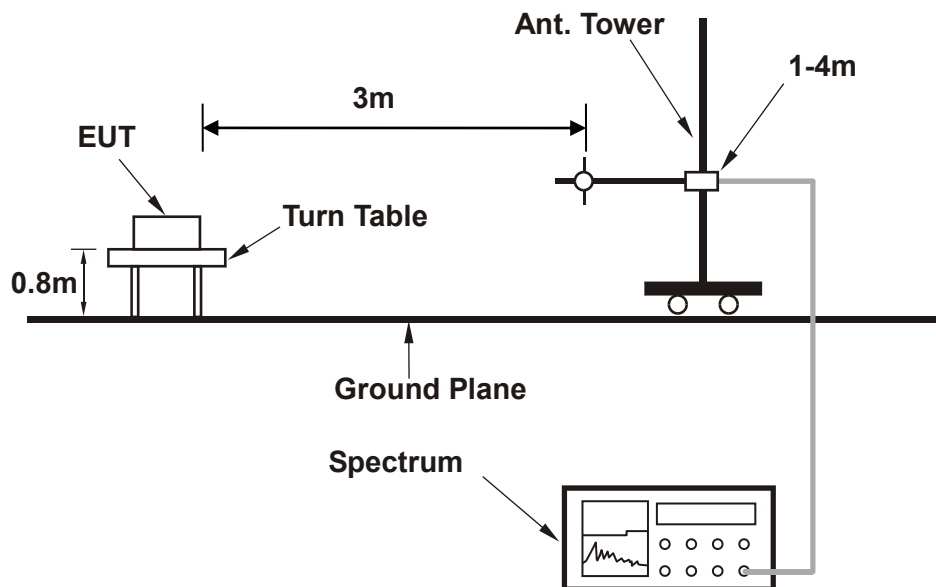

<Frequency Range above 1GHz>

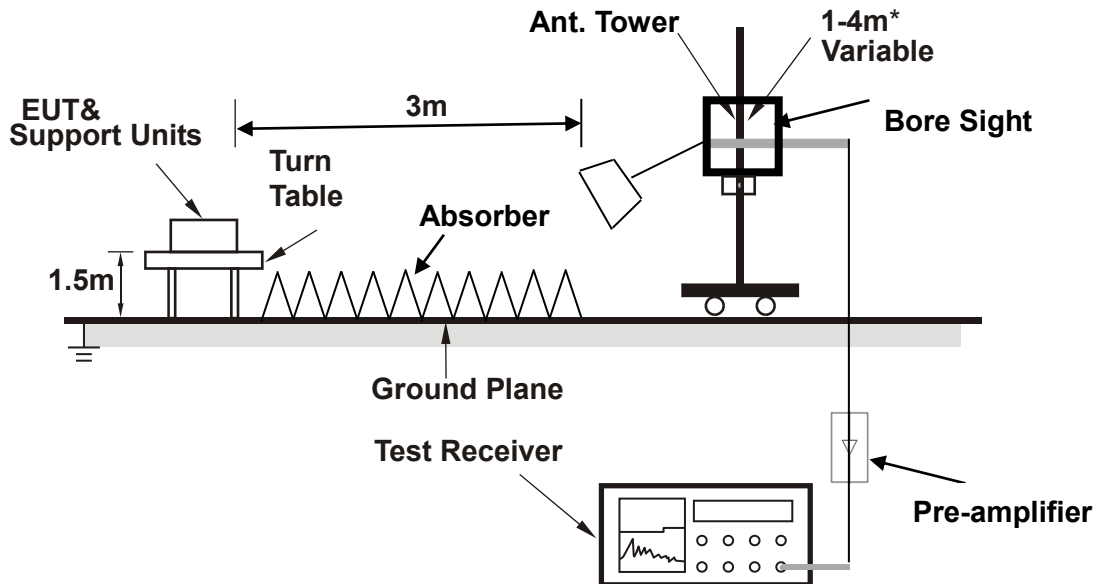

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

5G NSA BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

DC_B5A_n66

CHANNEL BANDWIDTH: 40MHz / QPSK


MODE	TX channel 346000	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	79.470	-42.20	-49.90	-13.00	-29.20	7.70	Peak	Horizontal
2	194.900	-31.17	-42.50	-13.00	-18.17	11.33	Peak	Horizontal
3 PP	266.680	-27.79	-41.46	-13.00	-14.79	13.67	Peak	Horizontal
4	352.040	-41.48	-56.62	-13.00	-28.48	15.14	Peak	Horizontal
5	422.850	-44.07	-60.70	-13.00	-31.07	16.63	Peak	Horizontal
6	624.610	-42.66	-62.83	-13.00	-29.66	20.17	Peak	Horizontal

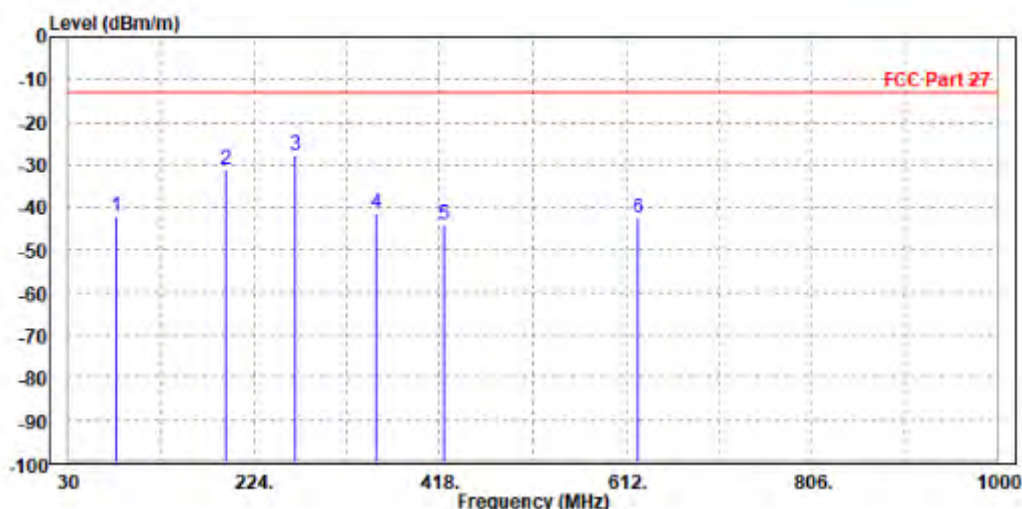

MODE	TX channel 346000	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	42.610	-30.07	-41.90	-13.00	-17.07	11.83	Peak	Vertical
2	102.750	-37.60	-46.62	-13.00	-24.60	9.02	Peak	Vertical
3	156.100	-40.80	-51.54	-13.00	-27.80	10.74	Peak	Vertical
4	220.120	-37.09	-49.03	-13.00	-24.09	11.94	Peak	Vertical
5	266.680	-35.73	-48.80	-13.00	-22.73	13.07	Peak	Vertical
6	453.890	-43.24	-60.24	-13.00	-30.24	17.00	Peak	Vertical

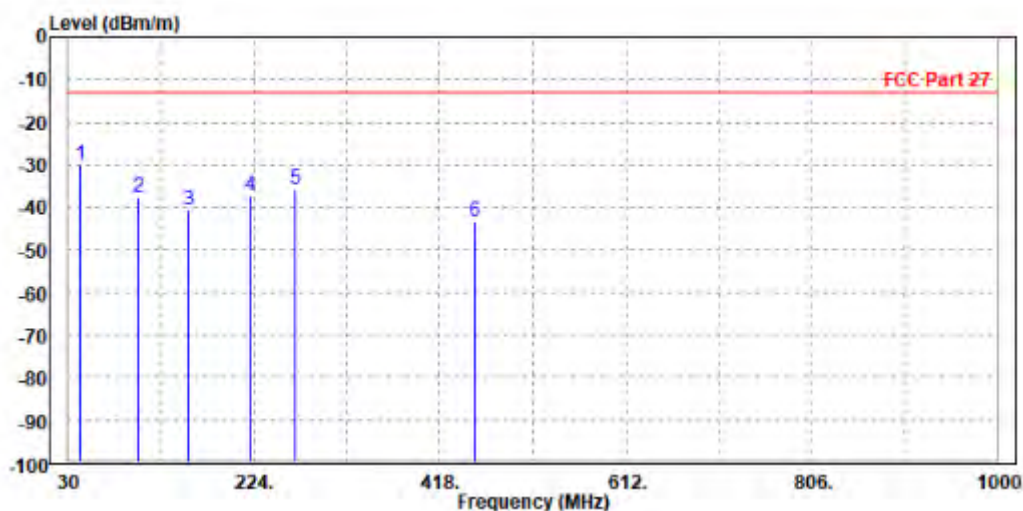



**BUREAU
VERITAS**

Test Report No.: W7L-220214W001RF06

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

DC_B5A_n66

CH 346000


MODE	TX channel 346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-47.01	-55.59	-13.00	-34.01	8.58	Peak	Horizontal
2 PP	5190.000	-32.67	-41.76	-13.00	-19.67	9.09	Peak	Horizontal

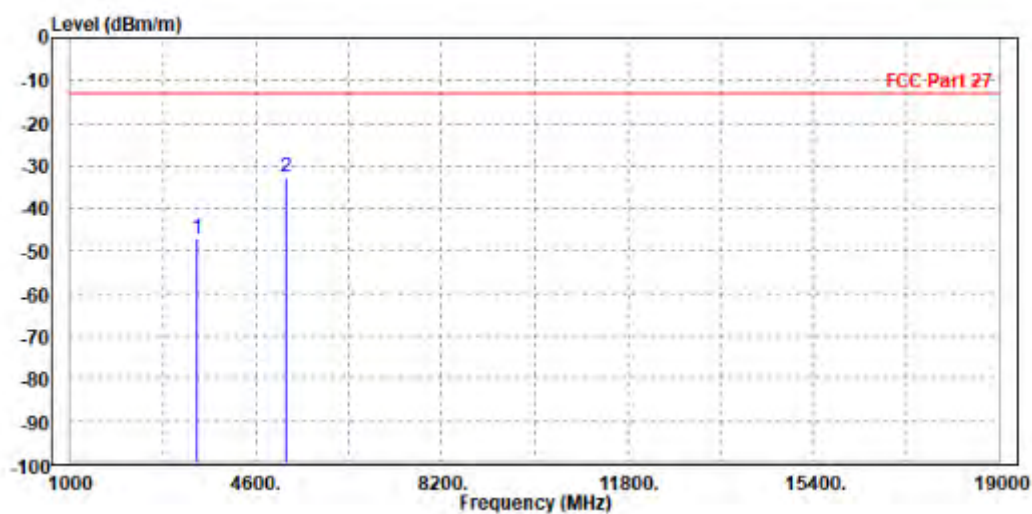

MODE	TX channel 346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-48.09	-57.25	-13.00	-35.09	9.16	Peak	Vertical
2 PP	5190.000	-34.31	-44.13	-13.00	-21.31	9.82	Peak	Vertical

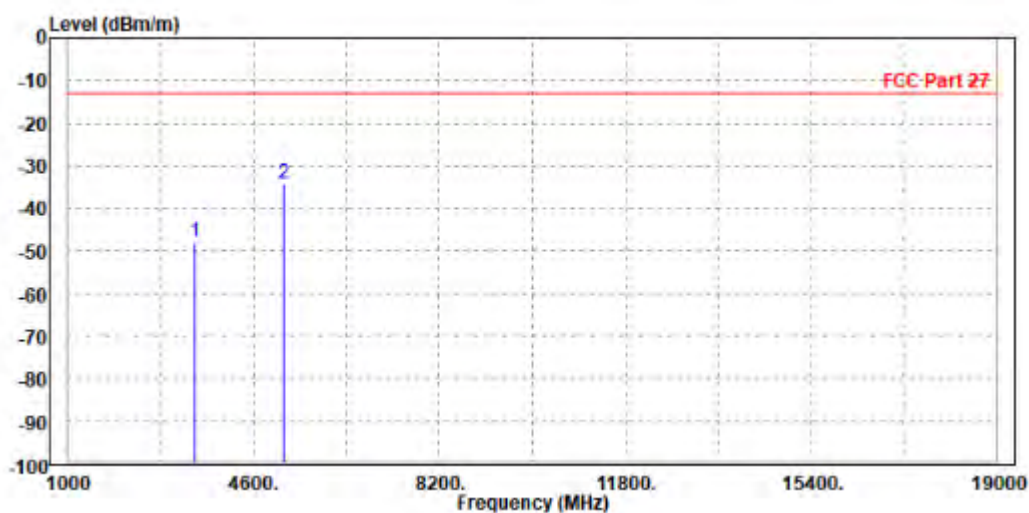

CH 349000


MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3490.000	-48.07	-56.64	-13.00	-35.07	8.57	Peak	Horizontal
2	5230.000	-49.31	-58.52	-13.00	-36.31	9.21	Peak	Horizontal

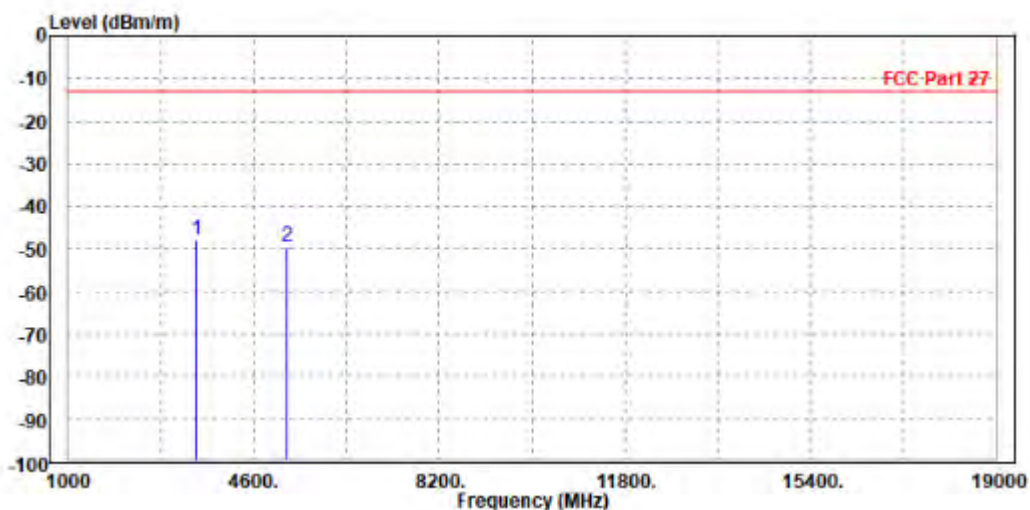

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3484.000	-46.96	-56.14	-13.00	-33.96	9.18	Peak	Vertical
2	5235.000	-49.28	-59.09	-13.00	-36.28	9.81	Peak	Vertical

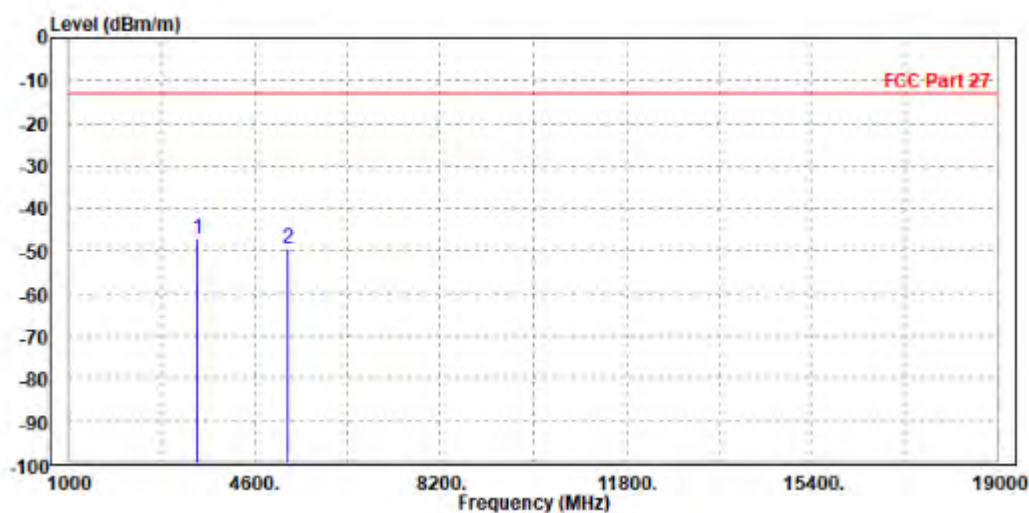

CH 352000


MODE	TX channel 352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3520.000	-42.31	-50.90	-13.00	-29.31	8.59	Peak	Horizontal
2	5280.000	-48.36	-57.72	-13.00	-35.36	9.36	Peak	Horizontal

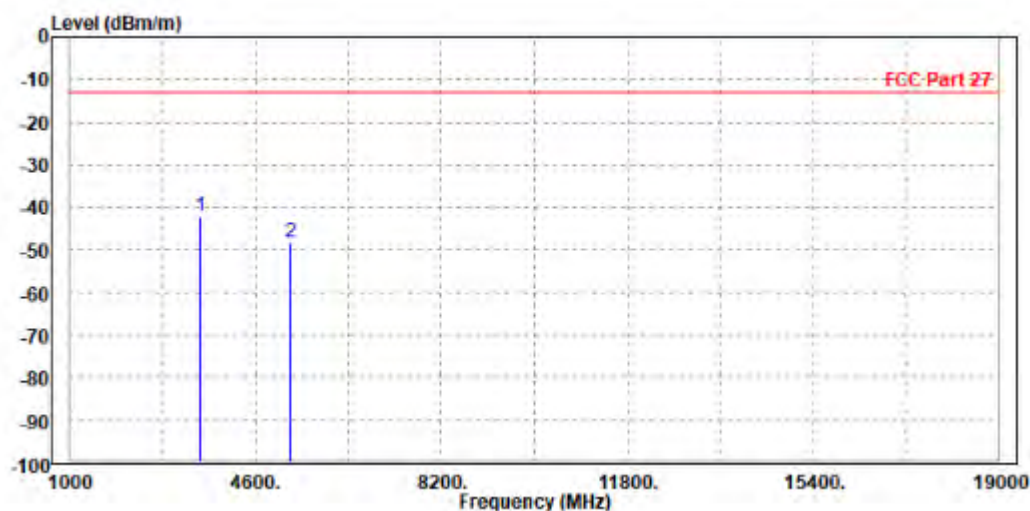

MODE	TX channel 352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3520.000	-38.93	-48.13	-13.00	-25.93	9.20	Peak	Vertical
2	5280.000	-49.04	-58.83	-13.00	-36.04	9.79	Peak	Vertical

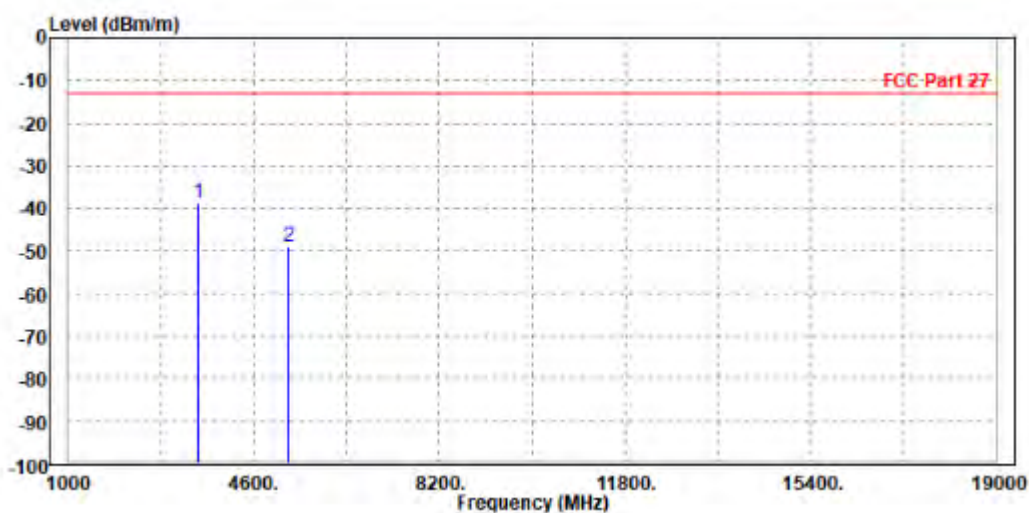



BUREAU
VERITAS


Test Report No.: W7L-220214W001RF06

DC_B12A_n66

CH 346000


MODE	TX channel 346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-48.34	-56.92	-13.00	-35.34	8.58	Peak	Horizontal
2 PP	5190.000	-37.59	-46.68	-13.00	-24.59	9.09	Peak	Horizontal

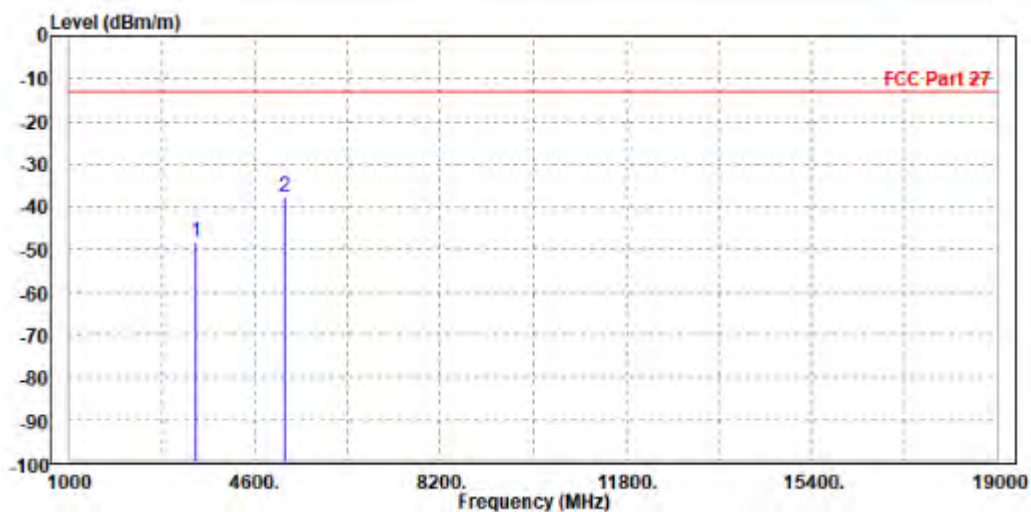

MODE	TX channel 346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-48.20	-57.36	-13.00	-35.20	9.16	Peak	Vertical
2 PP	5190.000	-36.97	-46.79	-13.00	-23.97	9.82	Peak	Vertical

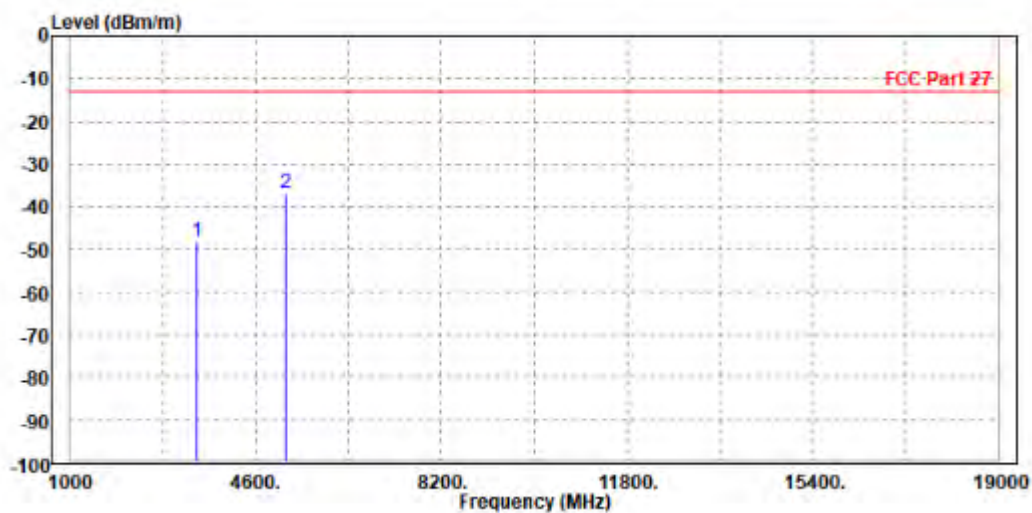

CH 349000


MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3484.000	-48.74	-57.32	-13.00	-35.74	8.58	Peak	Horizontal
2	5235.000	-48.98	-58.21	-13.00	-35.98	9.23	Peak	Horizontal

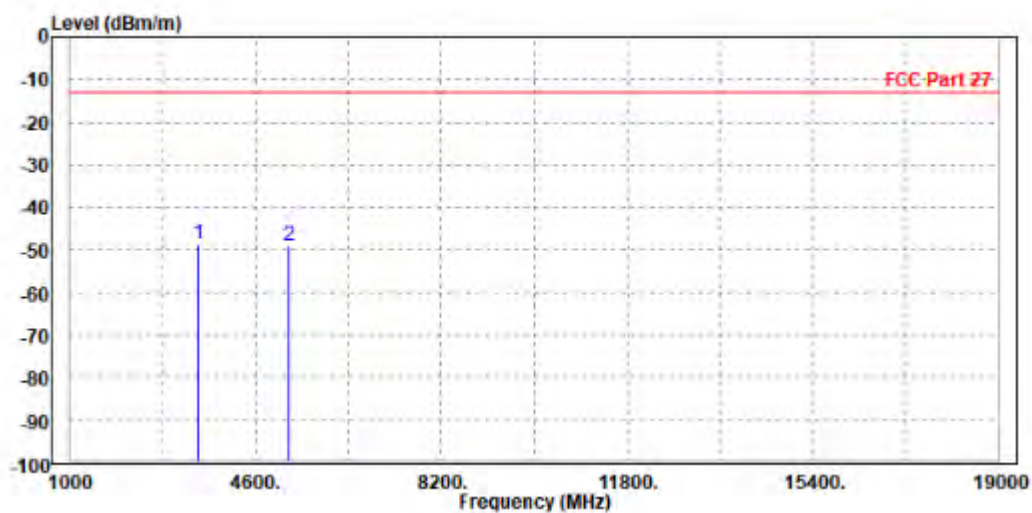

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3484.000	-46.98	-56.16	-13.00	-33.98	9.18	Peak	Vertical
2	5235.000	-48.38	-58.19	-13.00	-35.38	9.81	Peak	Vertical

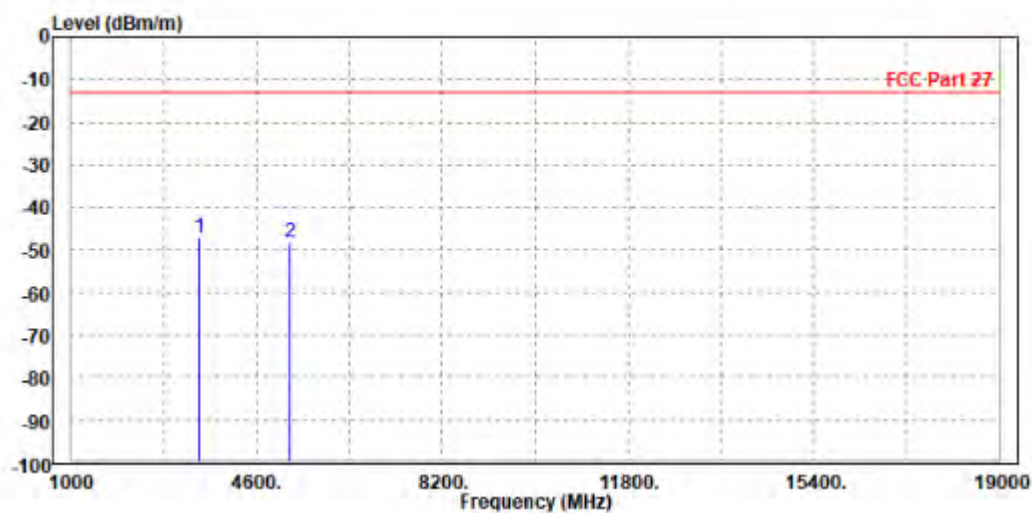

CH 352000


MODE	TX channel 352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3520.000	-42.18	-50.77	-13.00	-29.18	8.59	Peak	Horizontal
2	5280.000	-48.54	-57.90	-13.00	-35.54	9.36	Peak	Horizontal

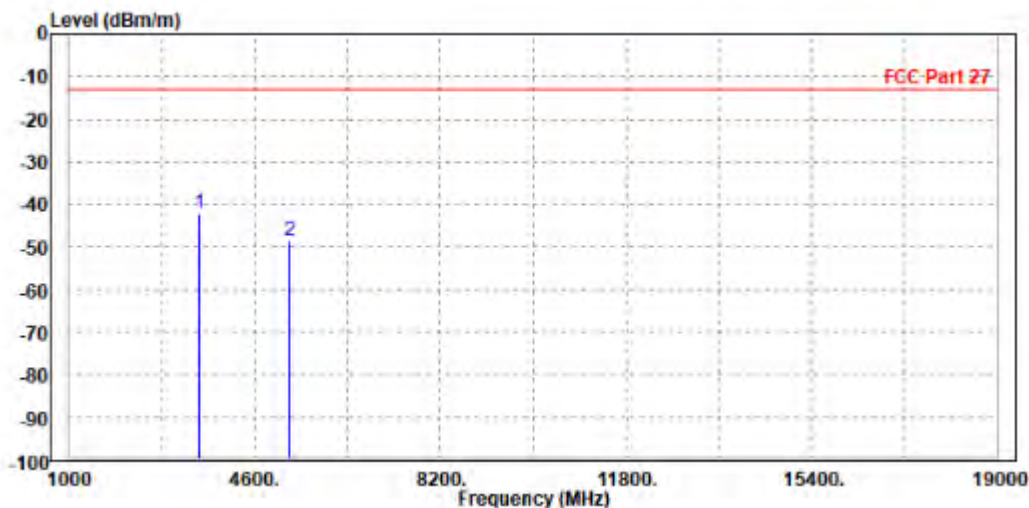

MODE	TX channel 352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3520.000	-41.95	-51.15	-13.00	-28.95	9.20	Peak	Vertical
2	5280.000	-48.25	-58.04	-13.00	-35.25	9.79	Peak	Vertical

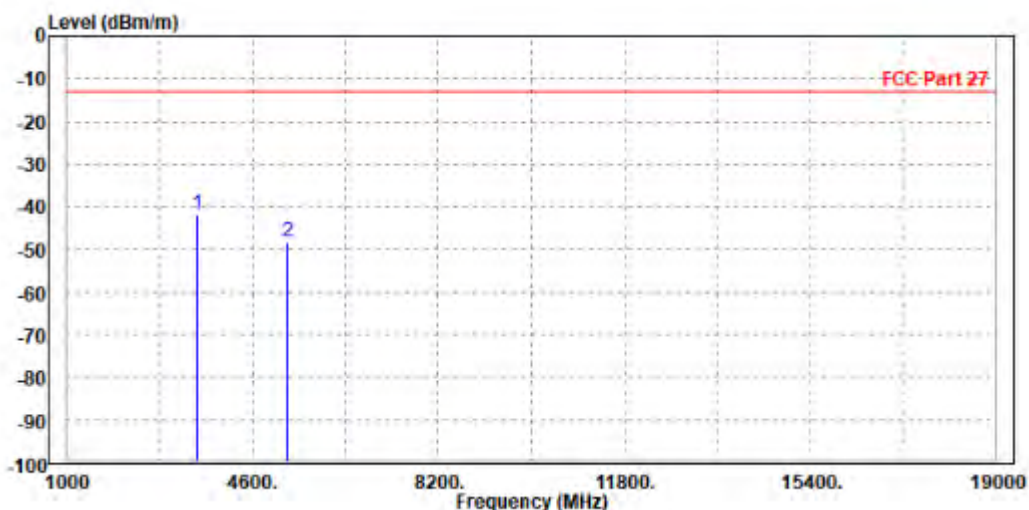



BUREAU
VERITAS


Test Report No.: W7L-220214W001RF06

DC_B14A_n66

CH 346000


MODE	TX channel 346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-48.20	-56.78	-13.00	-35.20	8.58	Peak	Horizontal
2 PP	5190.000	-34.31	-43.40	-13.00	-21.31	9.09	Peak	Horizontal

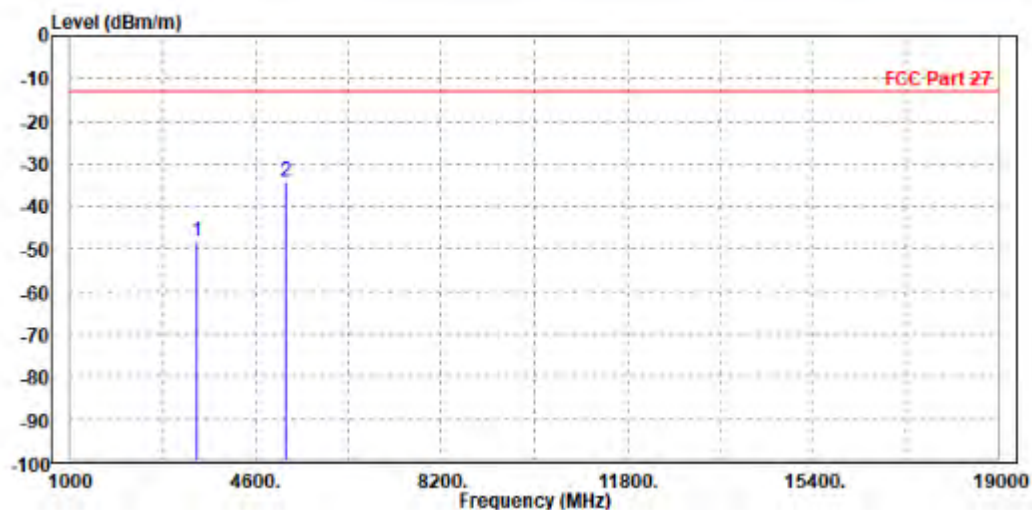

MODE	TX channel 346000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-47.86	-57.02	-13.00	-34.86	9.16	Peak	Vertical
2 PP	5190.000	-36.41	-46.23	-13.00	-23.41	9.82	Peak	Vertical

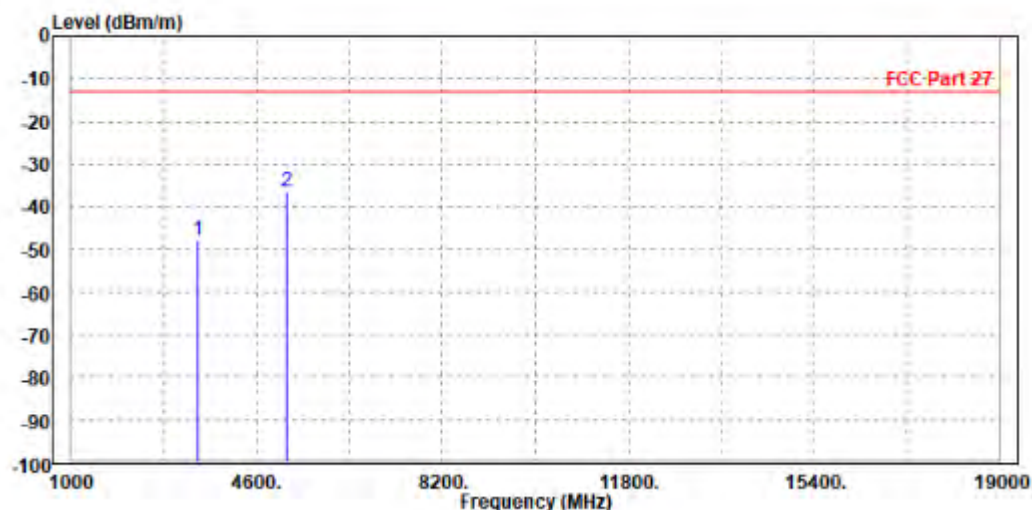

CH 349000


MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3466.000	-48.20	-56.78	-13.00	-35.20	8.58	Peak	Horizontal
2 PP	5190.000	-34.31	-43.40	-13.00	-21.31	9.09	Peak	Horizontal

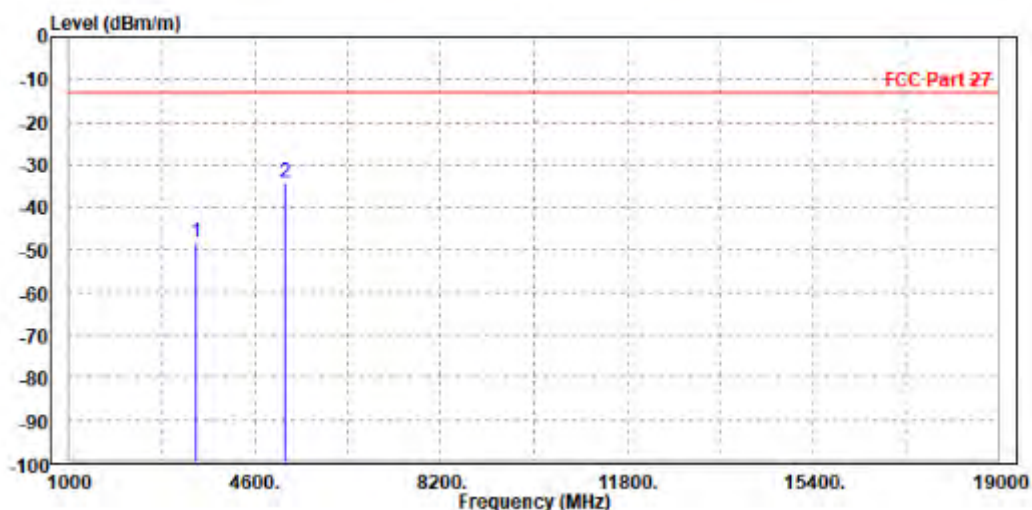

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	PP 3484.000	-47.03	-56.21	-13.00	-34.03	9.18 Peak	Vertical
2	5235.000	-48.84	-58.65	-13.00	-35.84	9.81 Peak	Vertical

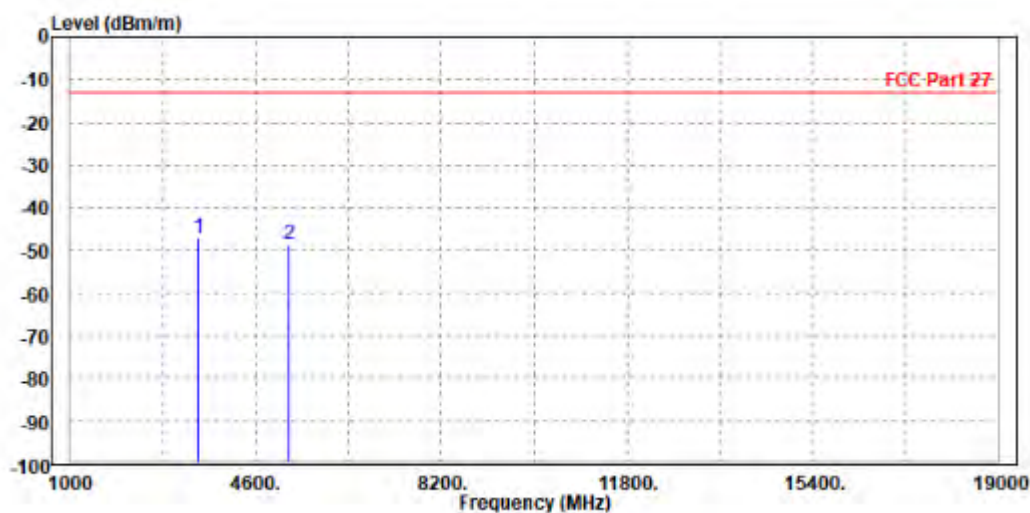

CH 352000


MODE	TX channel 352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3520.000	-41.31	-49.90	-13.00	-28.31	8.59	Peak	Horizontal
2	5280.000	-48.39	-57.75	-13.00	-35.39	9.36	Peak	Horizontal

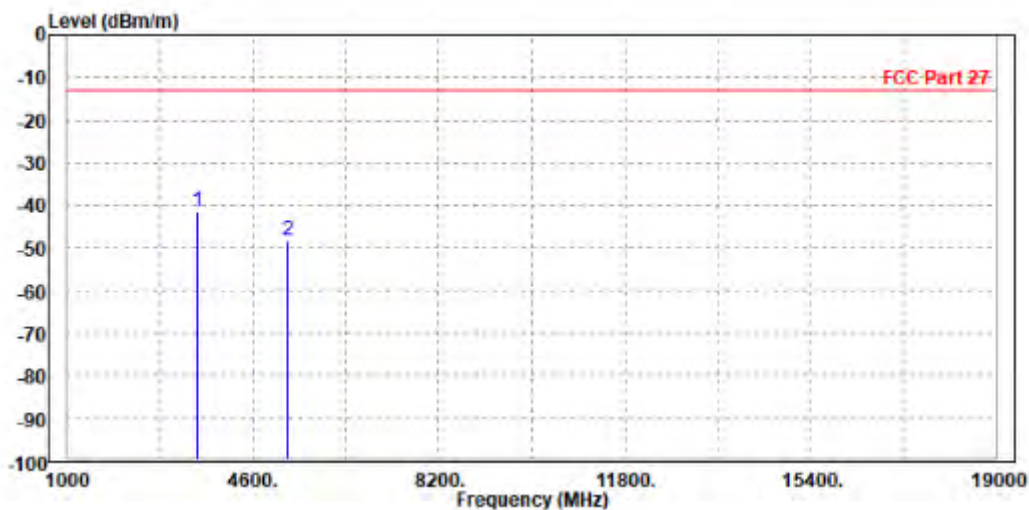

MODE	TX channel 352000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3520.000	-40.15	-49.35	-13.00	-27.15	9.20	Peak	Vertical
2	5280.000	-48.44	-58.23	-13.00	-35.44	9.79	Peak	Vertical

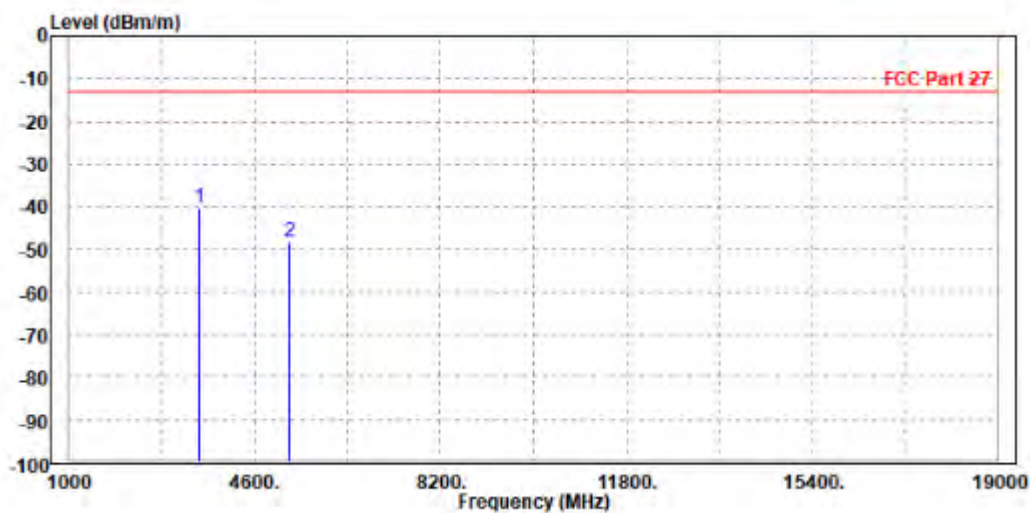



BUREAU
VERITAS


Test Report No.: W7L-220214W001RF06

DC_B2A_n77

CH 650000


MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-49.64	-61.00	-13.00	-36.64	11.36	Peak	Horizontal
2	PP11250.000	-47.26	-62.73	-13.00	-34.26	15.47	Peak	Horizontal

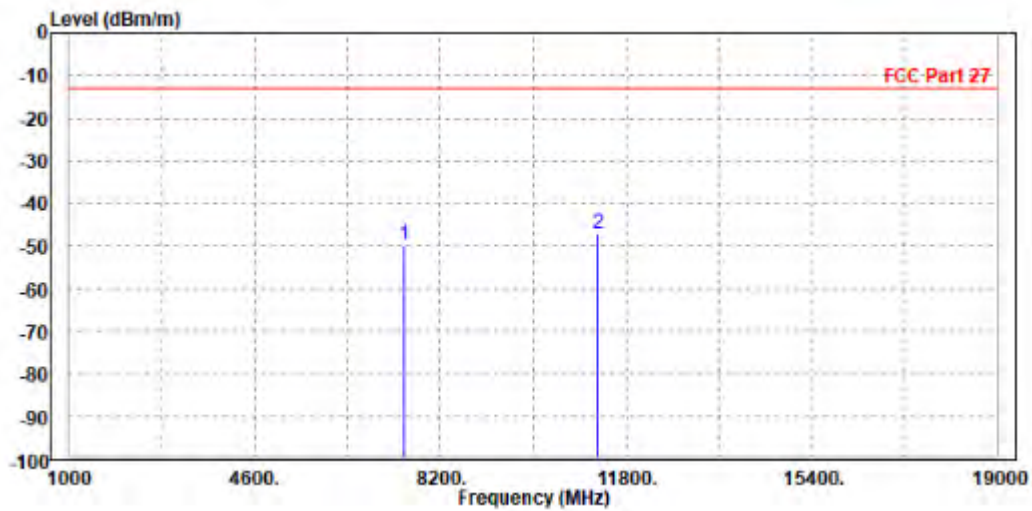

MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7500.000	-49.16	-61.90	-13.00	-36.16	12.74	Peak	Vertical
2	PP11250.000	-45.03	-61.68	-13.00	-32.03	16.65	Peak	Vertical

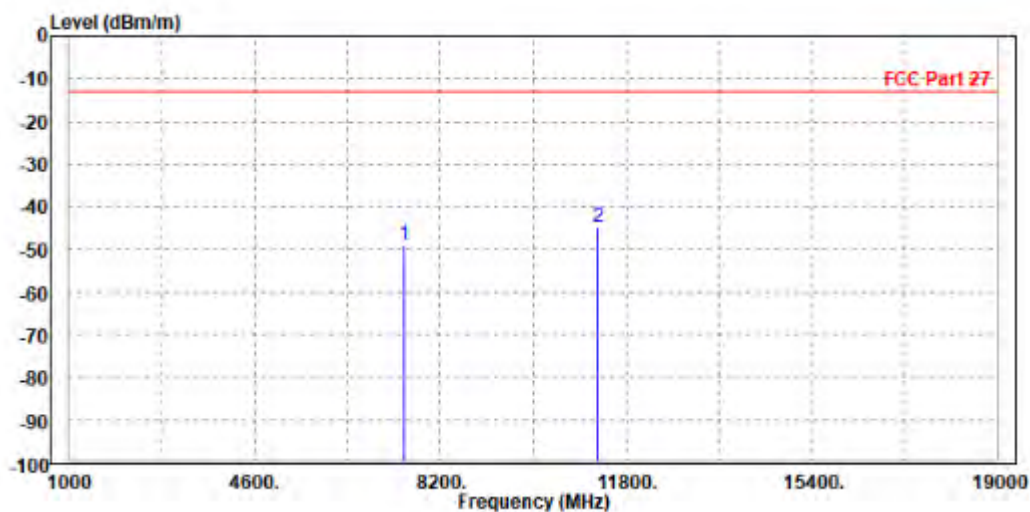

CH 656000


MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-50.17	-61.60	-13.00	-37.17	11.43	Peak	Horizontal
2	PP11520.000	-47.85	-63.45	-13.00	-34.85	15.60	Peak	Horizontal

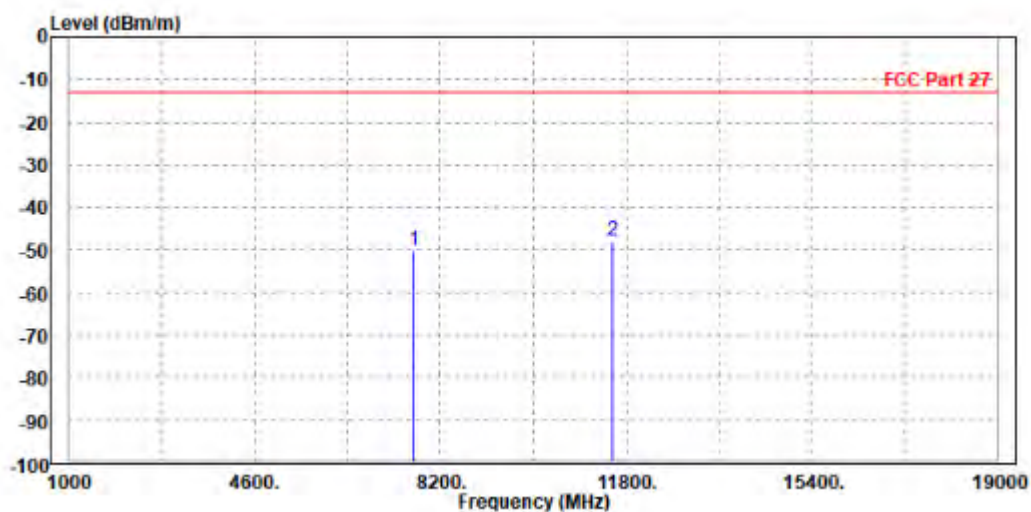

MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-48.78	-61.59	-13.00	-35.78	12.81	Peak	Vertical
2	PP11520.000	-46.13	-62.91	-13.00	-33.13	16.78	Peak	Vertical

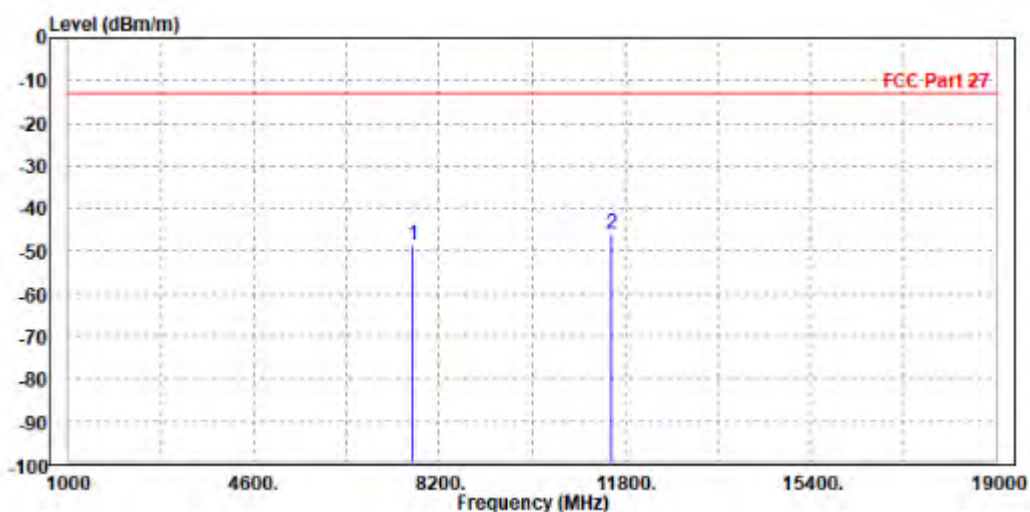

CH 662000


MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-49.51	-61.02	-13.00	-36.51	11.51	Peak	Horizontal
2	PP11790.000	-45.83	-61.97	-13.00	-32.83	16.14	Peak	Horizontal

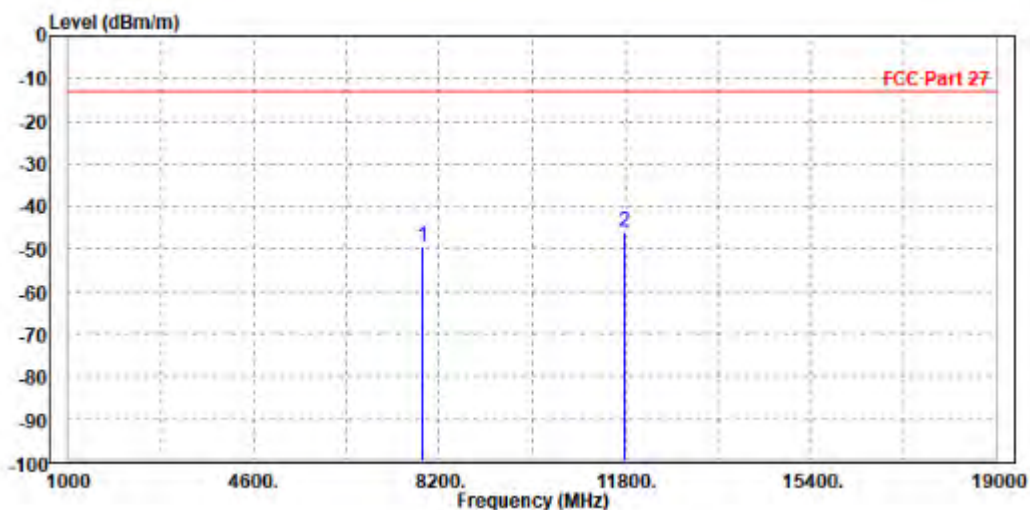

MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-47.32	-60.20	-13.00	-34.32	12.88	Peak	Vertical
2	PP11790.000	-44.42	-62.05	-13.00	-31.42	17.63	Peak	Vertical

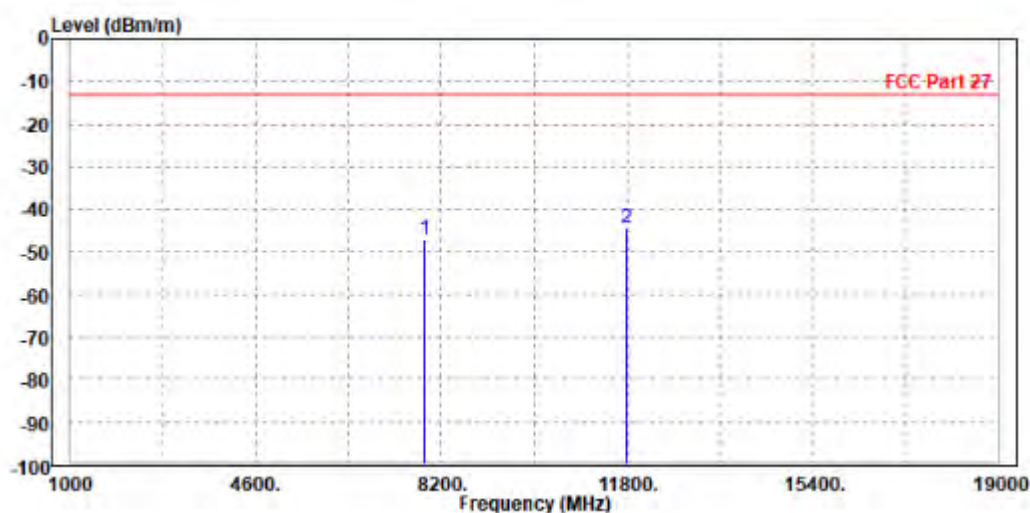




Test Report No.: W7L-220214W001RF06

DC_B5A_n77

CH 650000


MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-48.92	-60.28	-13.00	-35.92	11.36	Peak	Horizontal
2	PP11250.000	-47.44	-62.91	-13.00	-34.44	15.47	Peak	Horizontal

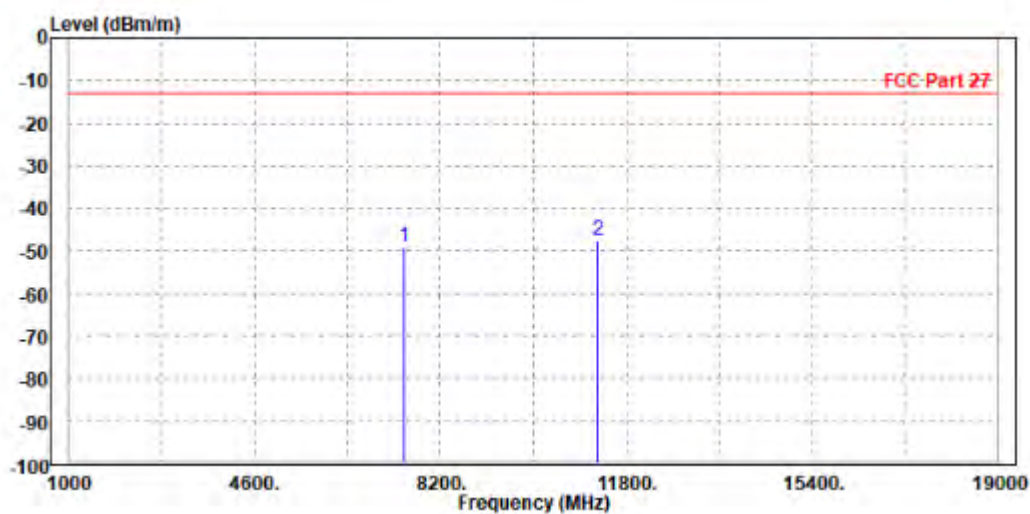

MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-48.54	-61.28	-13.00	-35.54	12.74	Peak	Vertical
2	PP11250.000	-45.31	-61.96	-13.00	-32.31	16.65	Peak	Vertical

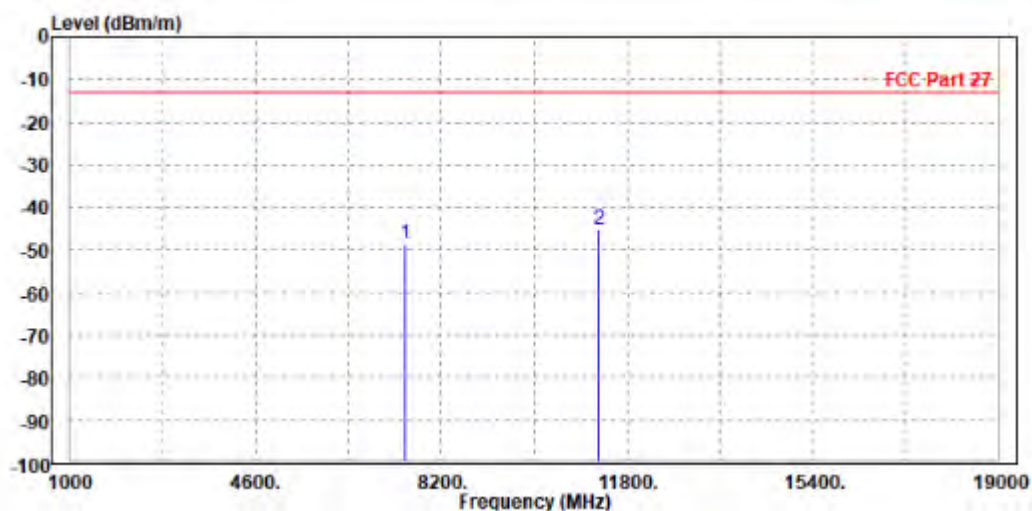

CH 656000


MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-50.11	-61.54	-13.00	-37.11	11.43	Peak	Horizontal
2	PP11520.000	-48.23	-63.83	-13.00	-35.23	15.60	Peak	Horizontal

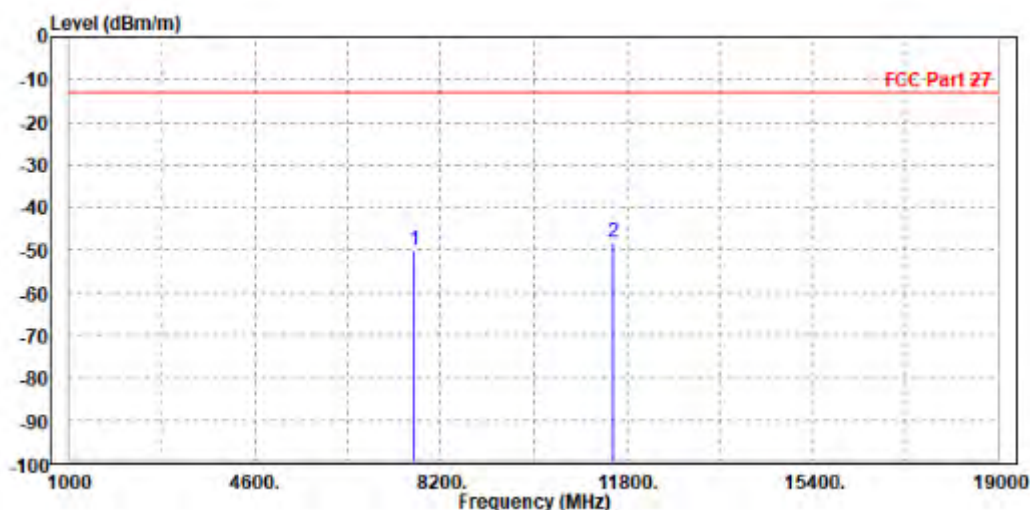

MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-48.08	-60.89	-13.00	-35.08	12.81	Peak	Vertical
2	PP11520.000	-46.26	-63.04	-13.00	-33.26	16.78	Peak	Vertical

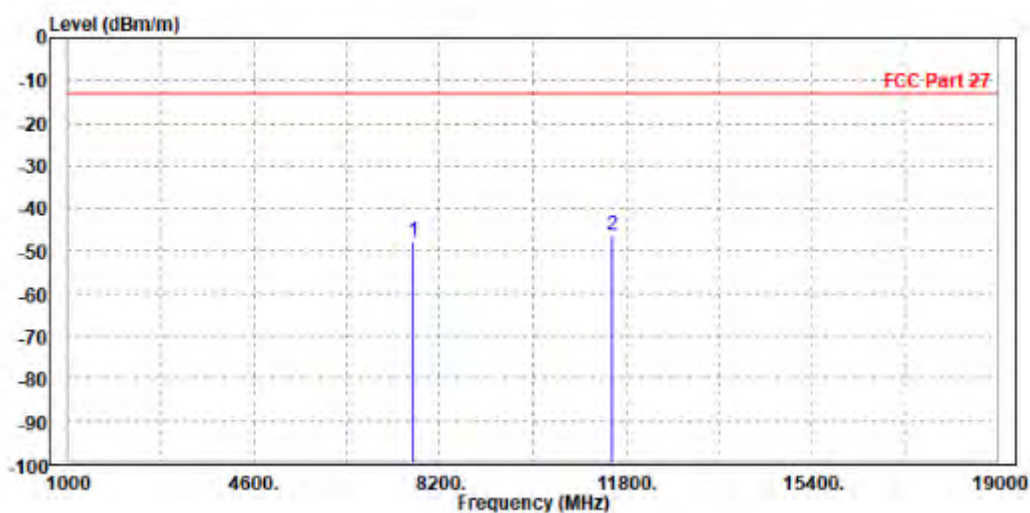

CH 662000


MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-49.19	-60.70	-13.00	-36.19	11.51	Peak	Horizontal
2	PP11790.000	-46.02	-62.16	-13.00	-33.02	16.14	Peak	Horizontal

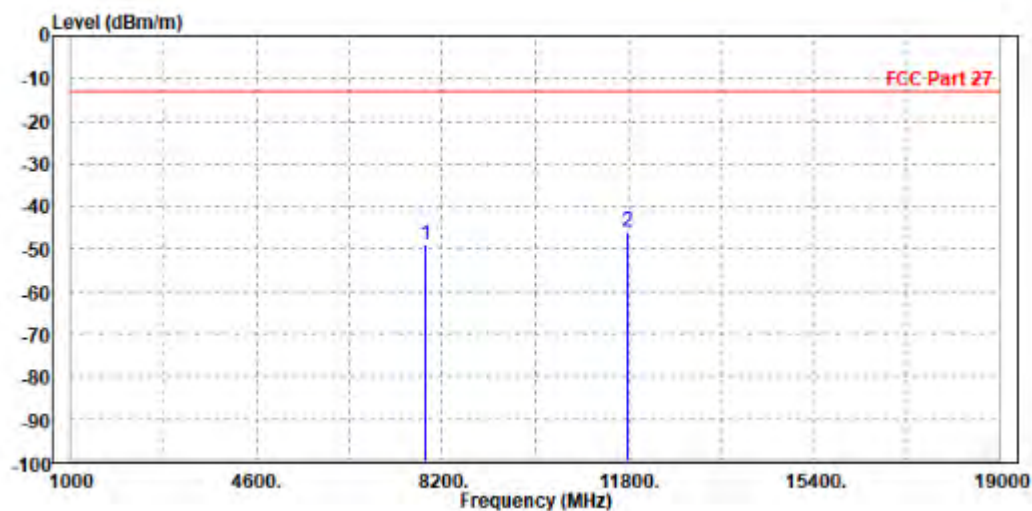

MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-47.40	-60.28	-13.00	-34.40	12.88	Peak	Vertical
2	PP11790.000	-44.30	-61.93	-13.00	-31.30	17.63	Peak	Vertical

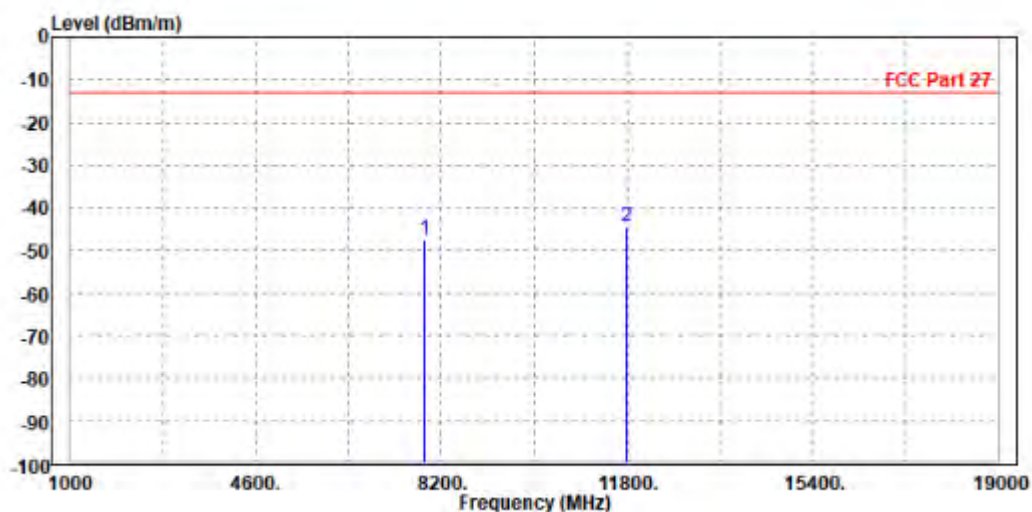



BUREAU
VERITAS


Test Report No.: W7L-220214W001RF06

DC_B12A_n77

CH 650000


MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-49.57	-60.93	-13.00	-36.57	11.36	Peak	Horizontal
2	PP11250.000	-46.49	-61.96	-13.00	-33.49	15.47	Peak	Horizontal

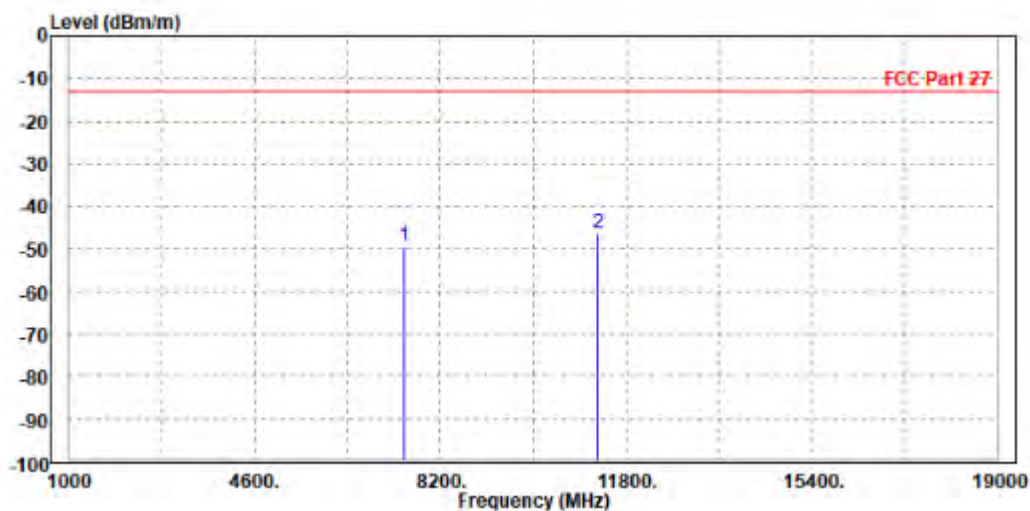

MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-48.99	-61.73	-13.00	-35.99	12.74	Peak	Vertical
2	PP11250.000	-45.99	-62.64	-13.00	-32.99	16.65	Peak	Vertical

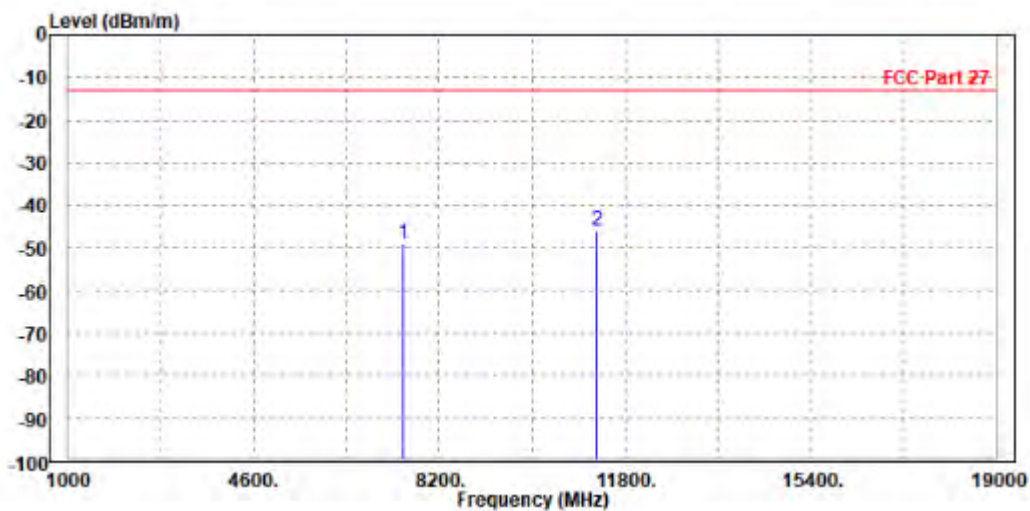

CH 656000


MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-50.07	-61.50	-13.00	-37.07	11.43	Peak	Horizontal
2	PP11520.000	-47.46	-63.06	-13.00	-34.46	15.60	Peak	Horizontal

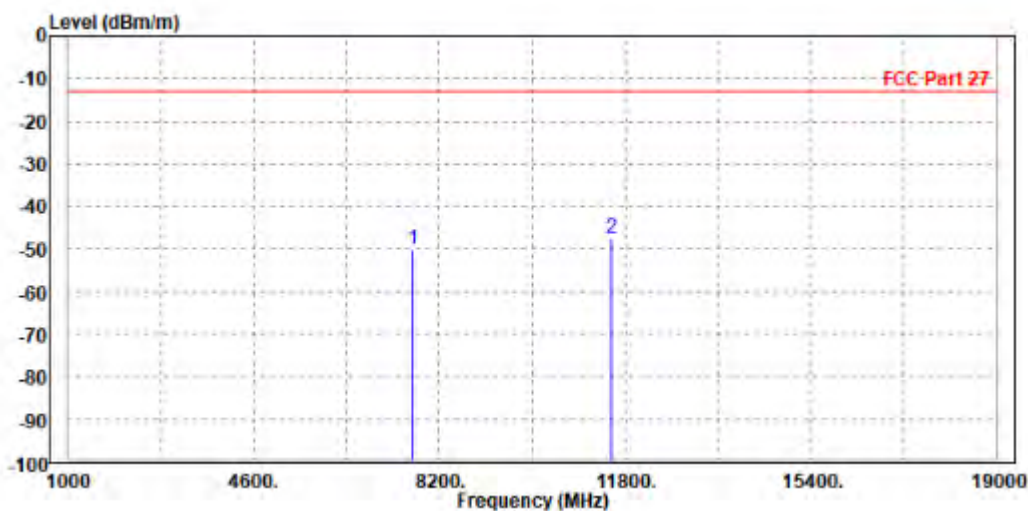

MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-48.60	-61.41	-13.00	-35.60	12.81	Peak	Vertical
2	PP11520.000	-46.03	-62.81	-13.00	-33.03	16.78	Peak	Vertical

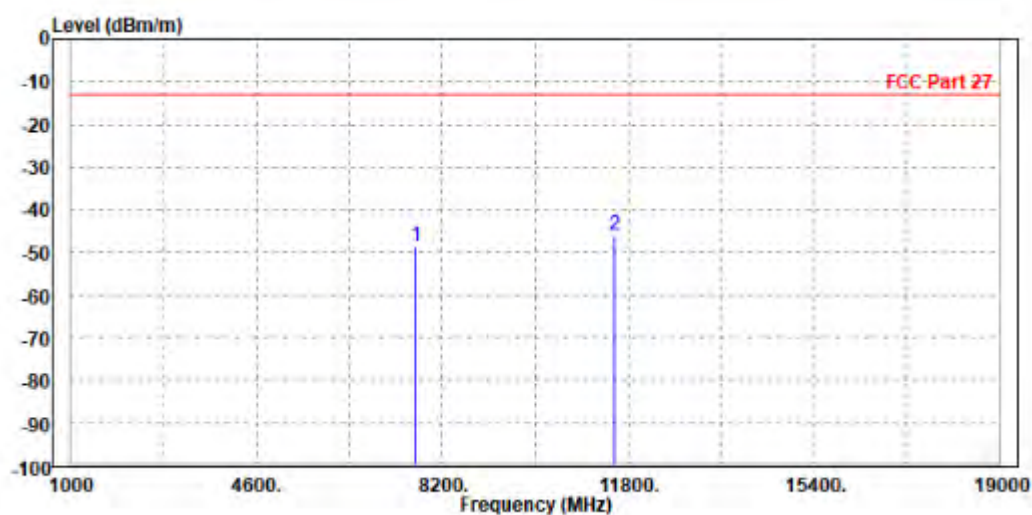

CH 662000


MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-47.65	-59.16	-13.00	-34.65	11.51	Peak	Horizontal
2	PP11790.000	-46.36	-62.50	-13.00	-33.36	16.14	Peak	Horizontal

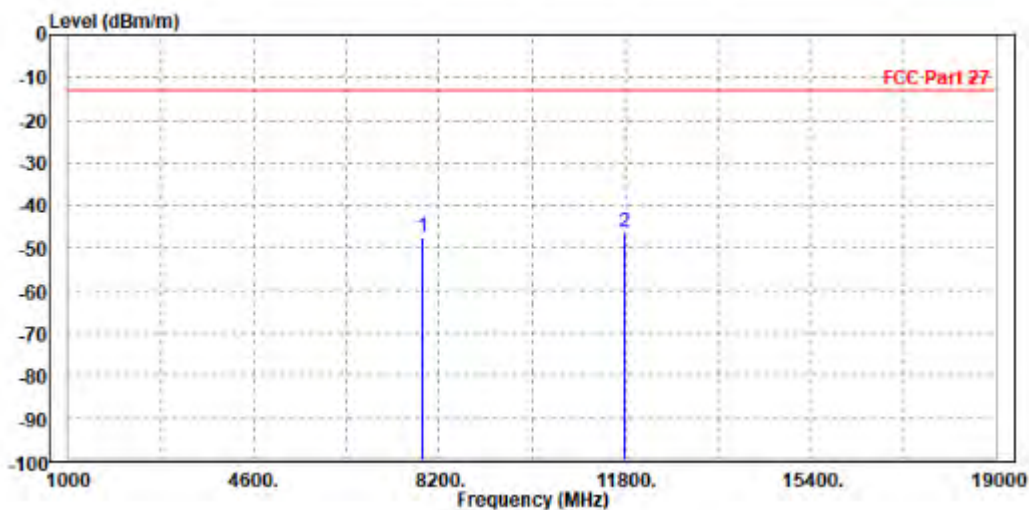

MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-48.29	-61.17	-13.00	-35.29	12.88	Peak	Vertical
2	PP11790.000	-44.34	-61.97	-13.00	-31.34	17.63	Peak	Vertical

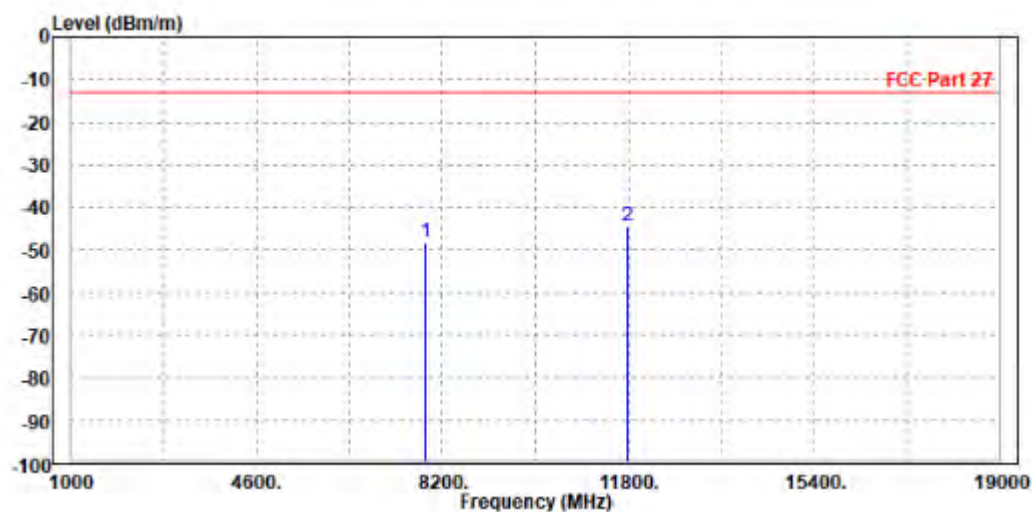



BUREAU
VERITAS


Test Report No.: W7L-220214W001RF06

DC_B14A_n77

CH 650000


MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-50.49	-61.85	-13.00	-37.49	11.36	Peak	Horizontal
2	PP11250.000	-46.78	-62.25	-13.00	-33.78	15.47	Peak	Horizontal

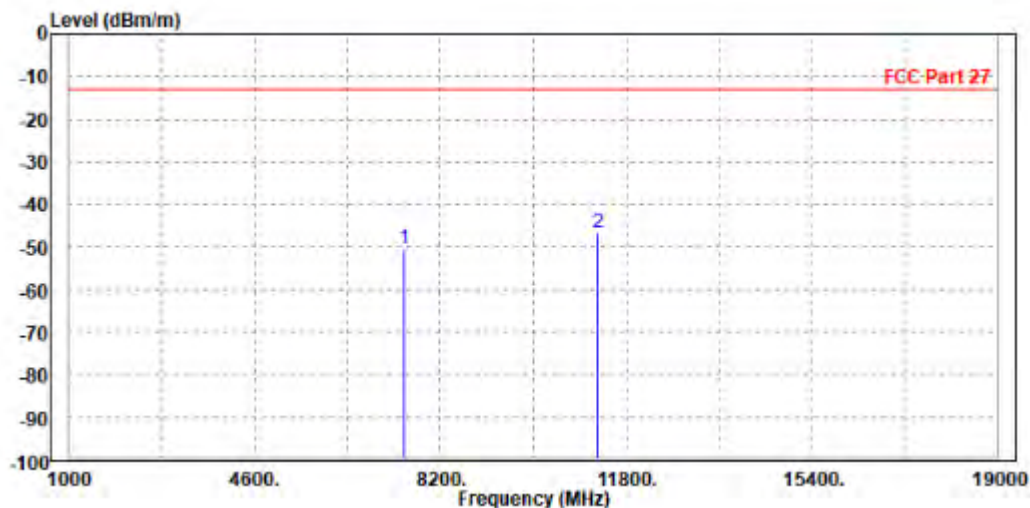

MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-47.51	-60.25	-13.00	-34.51	12.74	Peak	Vertical
2	PP11250.000	-45.16	-61.81	-13.00	-32.16	16.65	Peak	Vertical

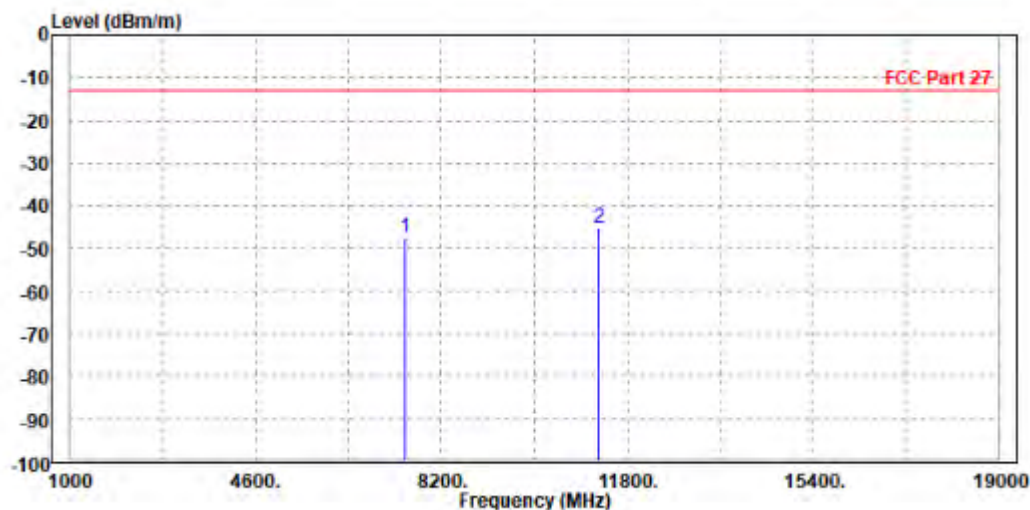

CH 656000


MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-49.42	-60.85	-13.00	-36.42	11.43	Peak	Horizontal
2	PP11520.000	-46.35	-61.95	-13.00	-33.35	15.60	Peak	Horizontal

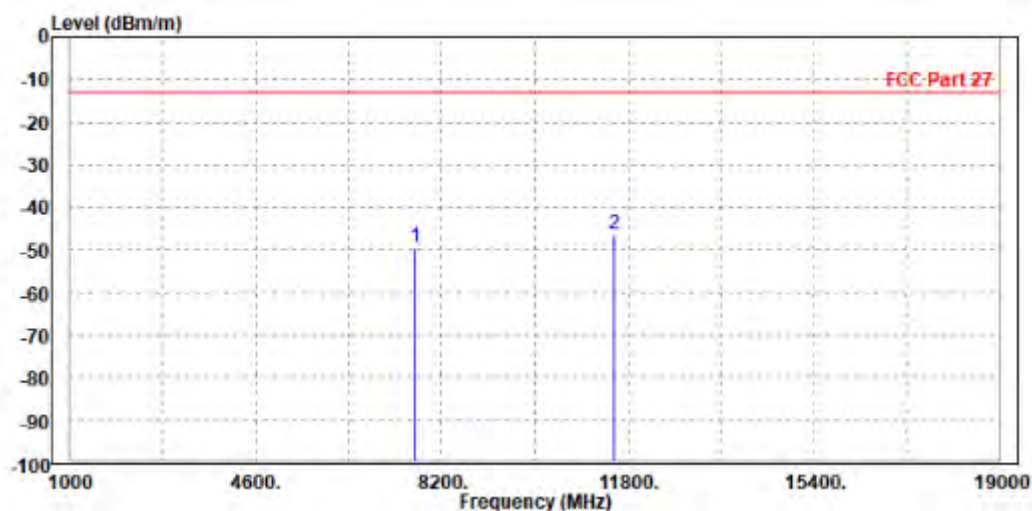

MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-49.02	-61.83	-13.00	-36.02	12.81	Peak	Vertical
2	PP11520.000	-45.29	-62.07	-13.00	-32.29	16.78	Peak	Vertical

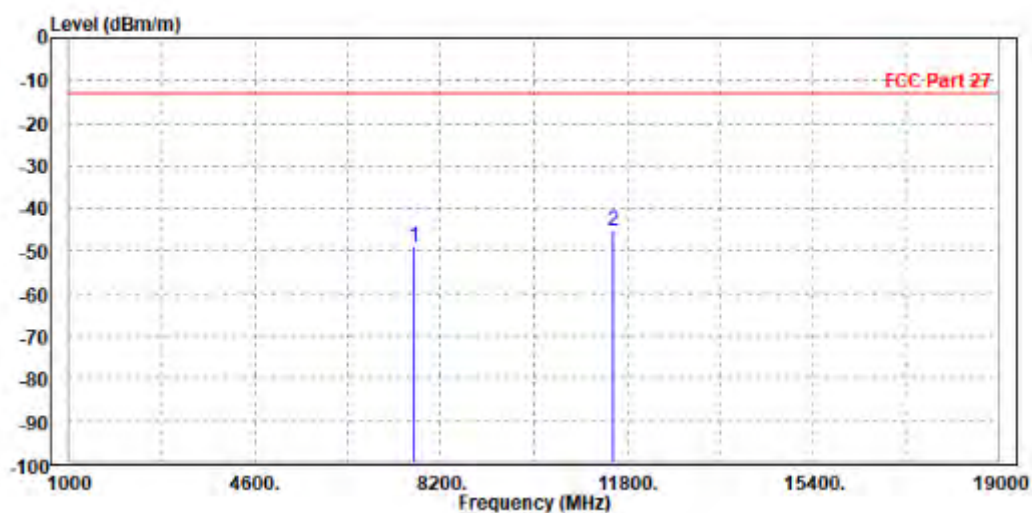

CH 662000


MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-47.45	-58.96	-13.00	-34.45	11.51	Peak	Horizontal
2	PP11790.000	-45.06	-61.20	-13.00	-32.06	16.14	Peak	Horizontal

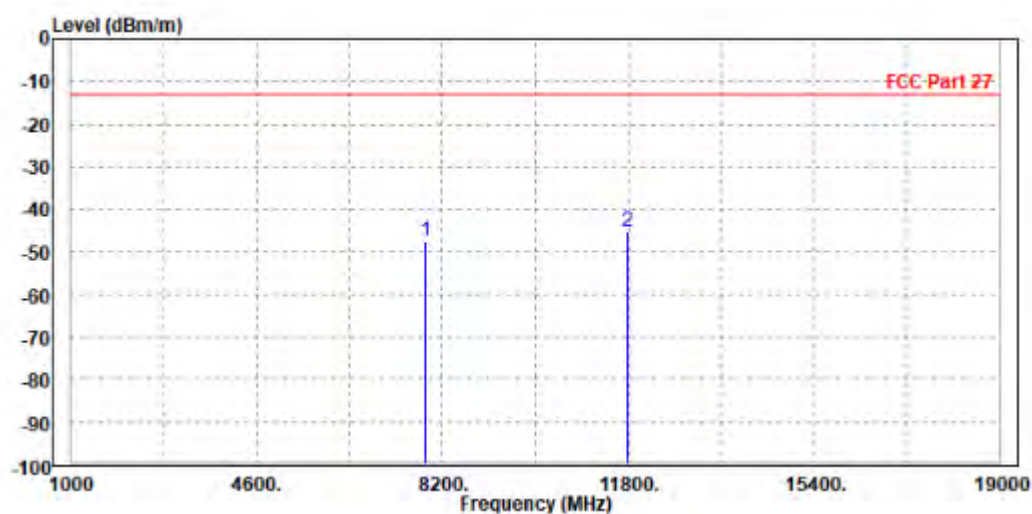

MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-47.46	-60.34	-13.00	-34.46	12.88	Peak	Vertical
2	PP11790.000	-43.53	-61.16	-13.00	-30.53	17.63	Peak	Vertical

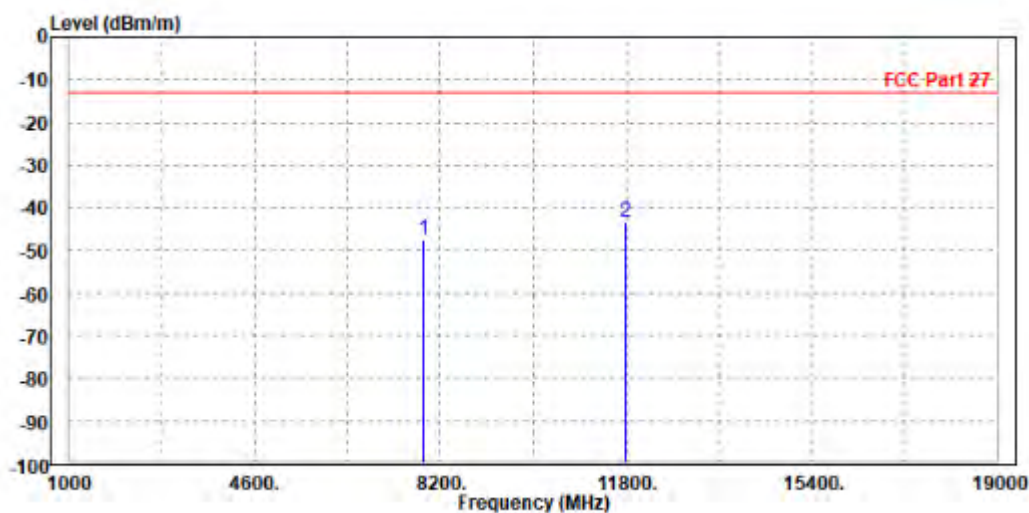




Test Report No.: W7L-220214W001RF06

DC_B66A_n77

CH 650000


MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-49.29	-60.65	-13.00	-36.29	11.36	Peak	Horizontal
2	PP11250.000	-46.80	-62.27	-13.00	-33.80	15.47	Peak	Horizontal

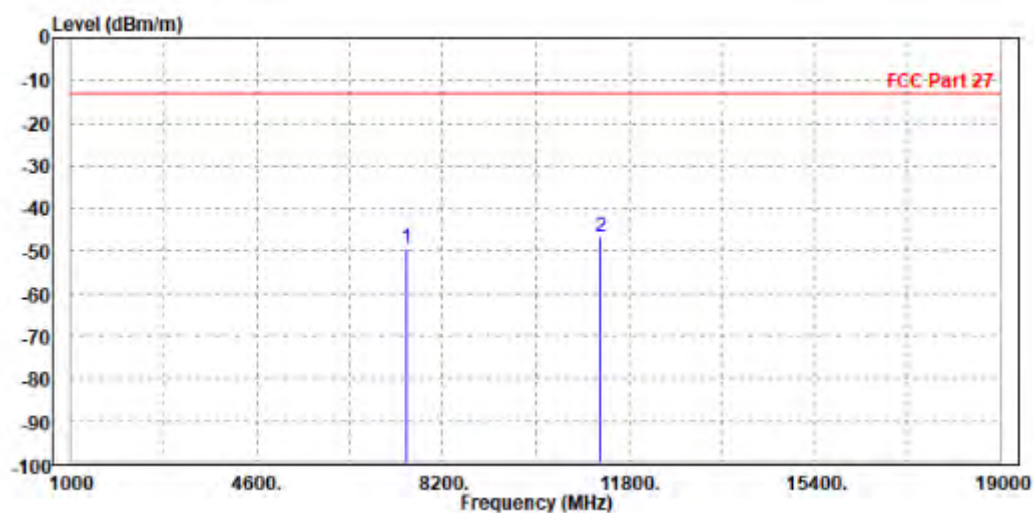

MODE	TX channel 650000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7498.000	-49.03	-61.77	-13.00	-36.03	12.74	Peak	Vertical
2	PP11250.000	-45.21	-61.86	-13.00	-32.21	16.65	Peak	Vertical

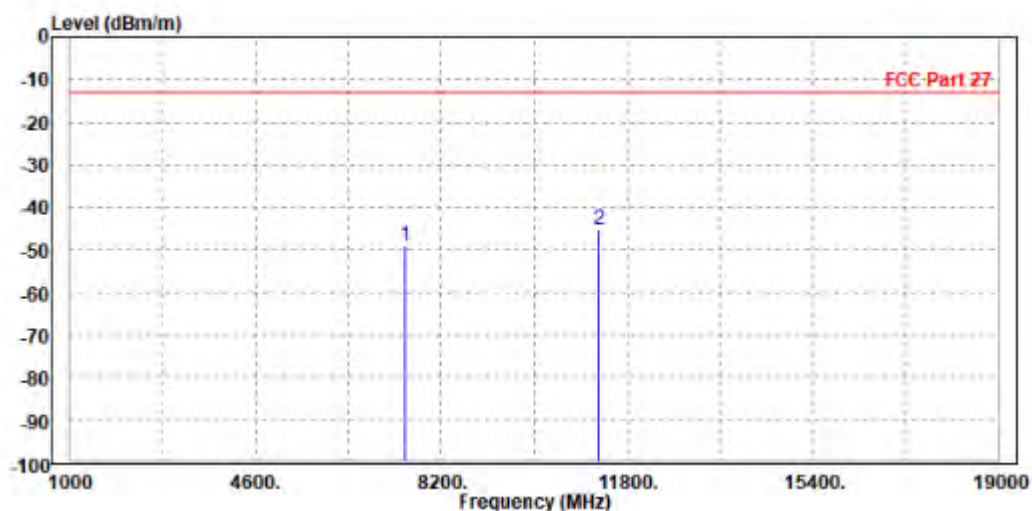

CH 656000


MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-48.91	-60.34	-13.00	-35.91	11.43	Peak	Horizontal
2	PP11520.000	-47.45	-63.05	-13.00	-34.45	15.60	Peak	Horizontal

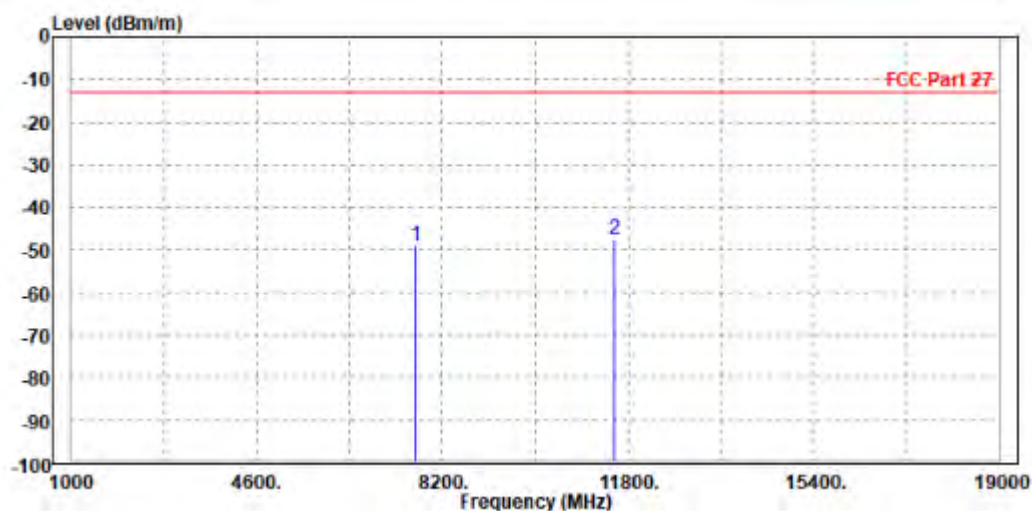

MODE	TX channel 656000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7678.000	-48.81	-61.62	-13.00	-35.81	12.81	Peak	Vertical
2	PP11520.000	-45.92	-62.70	-13.00	-32.92	16.78	Peak	Vertical

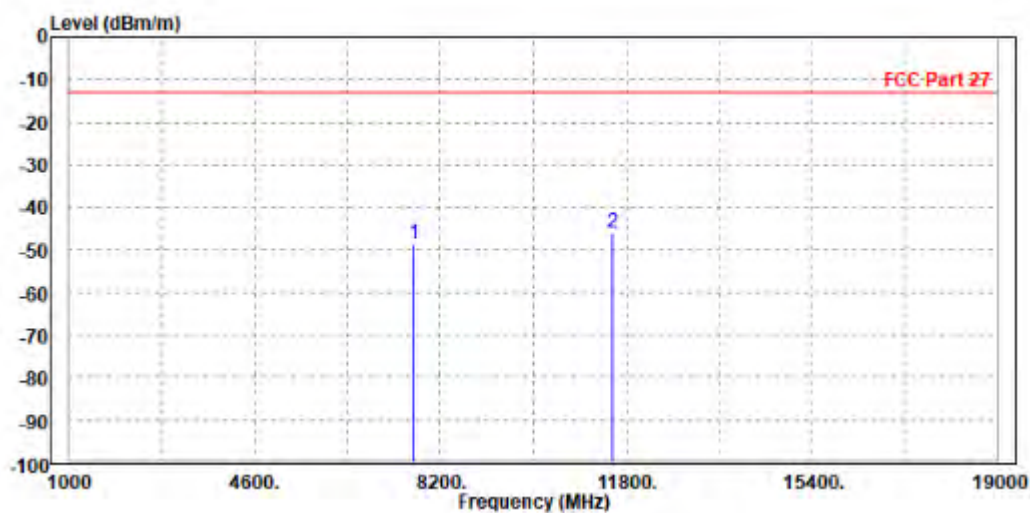

CH 662000


MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-48.98	-60.49	-13.00	-35.98	11.51	Peak	Horizontal
2	PP11790.000	-44.61	-60.75	-13.00	-31.61	16.14	Peak	Horizontal

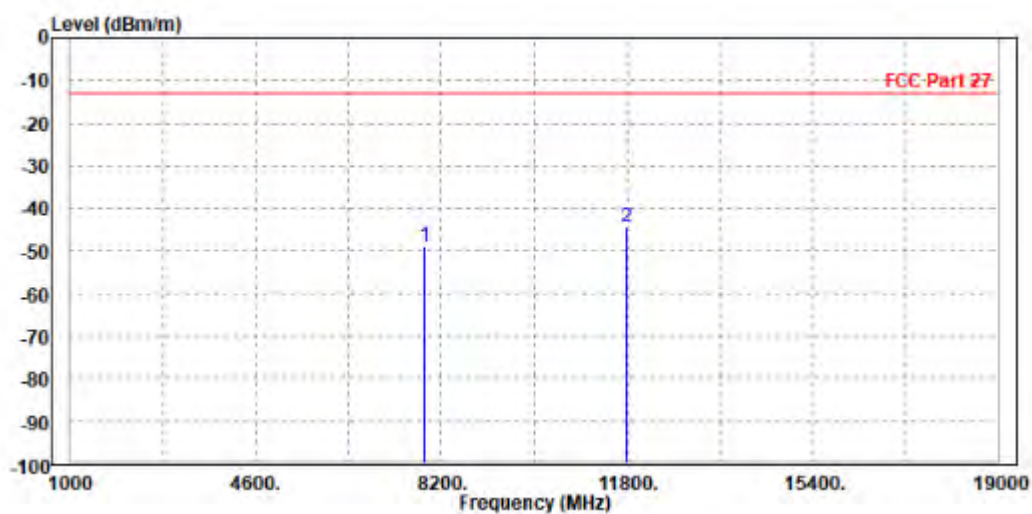

MODE	TX channel 662000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7858.000	-47.27	-60.15	-13.00	-34.27	12.88	Peak	Vertical
2	PP11790.000	-43.79	-61.42	-13.00	-30.79	17.63	Peak	Vertical

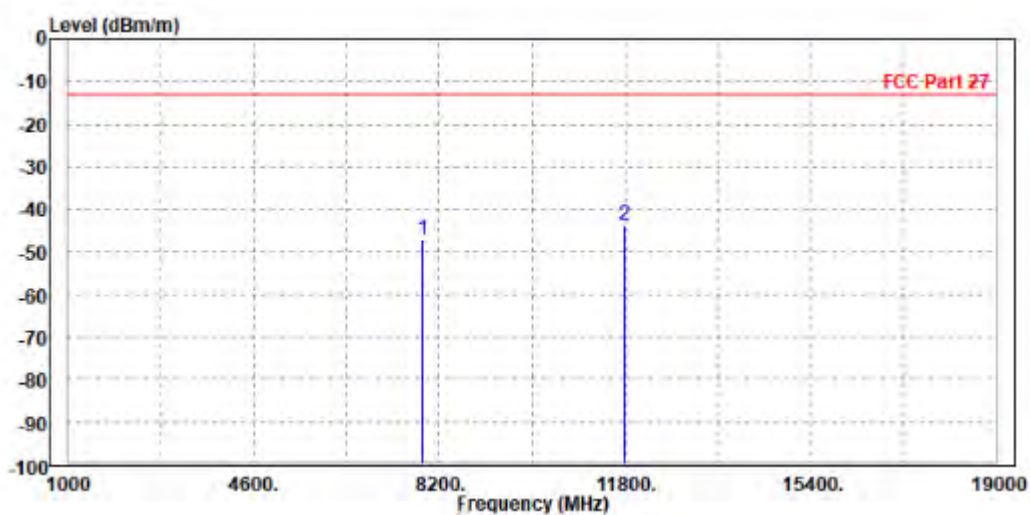

5G SA BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

5G_NR41-HUPE

CHANNEL BANDWIDTH: 50MHz / QPSK


MODE	TX channel CH518598	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	52.310	-69.55	-52.18	-25.00	-44.55	-17.37	Peak	Horizontal
2	79.470	-65.67	-44.12	-25.00	-40.67	-21.55	Peak	Horizontal
3	171.620	-63.75	-47.07	-25.00	-38.75	-16.68	Peak	Horizontal
4	237.580	-61.51	-48.57	-25.00	-36.51	-12.94	Peak	Horizontal
5 PP	266.680	-60.26	-48.47	-25.00	-35.26	-11.79	Peak	Horizontal
6	422.850	-68.00	-58.38	-25.00	-43.00	-9.62	Peak	Horizontal

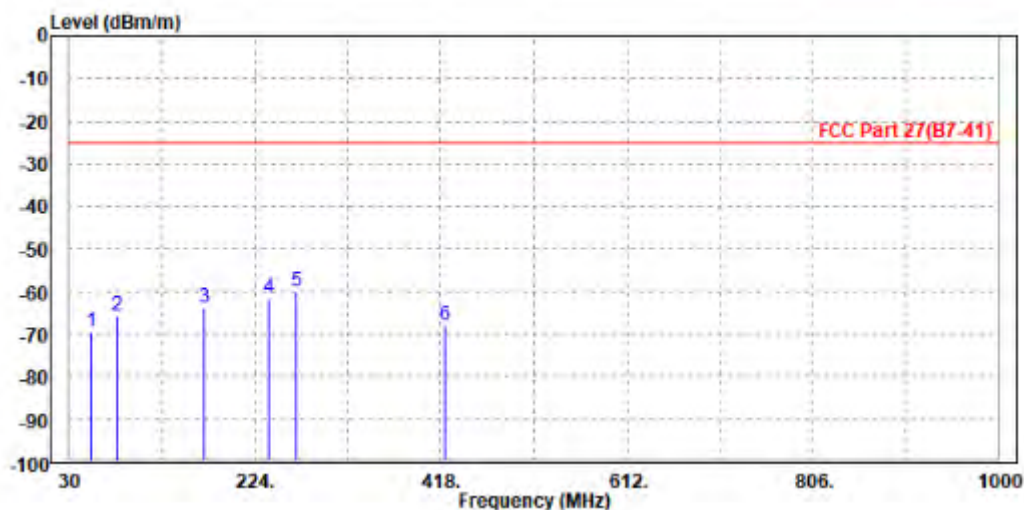

MODE	TX channel CH518598	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	42.610	-67.05	-41.97	-25.00	-42.05	-25.08	Peak	Vertical
2 PP	101.780	-53.65	-46.54	-25.00	-28.65	-7.11	Peak	Vertical
3	141.550	-64.74	-51.00	-25.00	-39.74	-13.74	Peak	Vertical
4	172.590	-67.42	-49.48	-25.00	-42.42	-17.94	Peak	Vertical
5	222.060	-65.52	-49.45	-25.00	-40.52	-16.07	Peak	Vertical
6	267.650	-62.67	-50.05	-25.00	-37.67	-12.62	Peak	Vertical

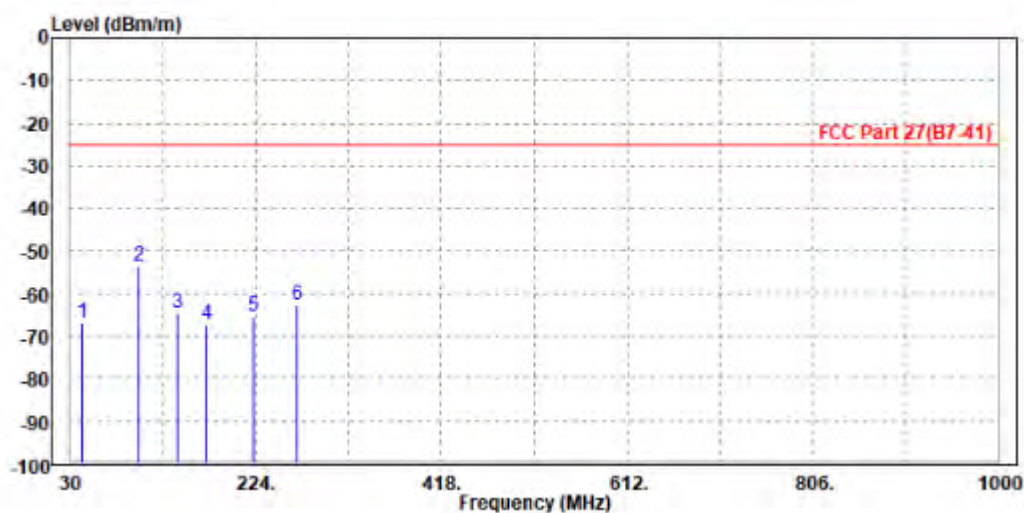

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

5G NR25:

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 376500	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,831.500	-50.69	-13.00	37.69	23.59	H	220.2	2
5	6,842.000	-45.80	-13.00	32.80	30.45	H	212.4	1

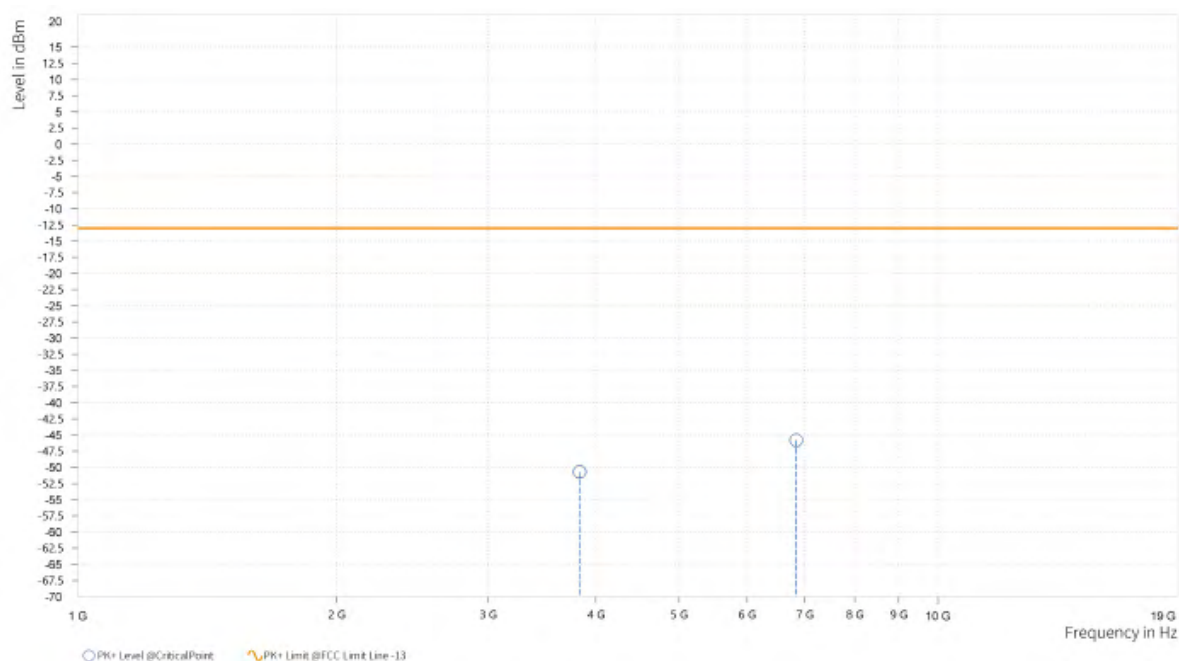

MODE	TX channel 376500	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,874.500	-50.54	-13.00	37.54	23.71	V	0	2
5	6,830.000	-45.41	-13.00	32.41	30.44	V	0	2

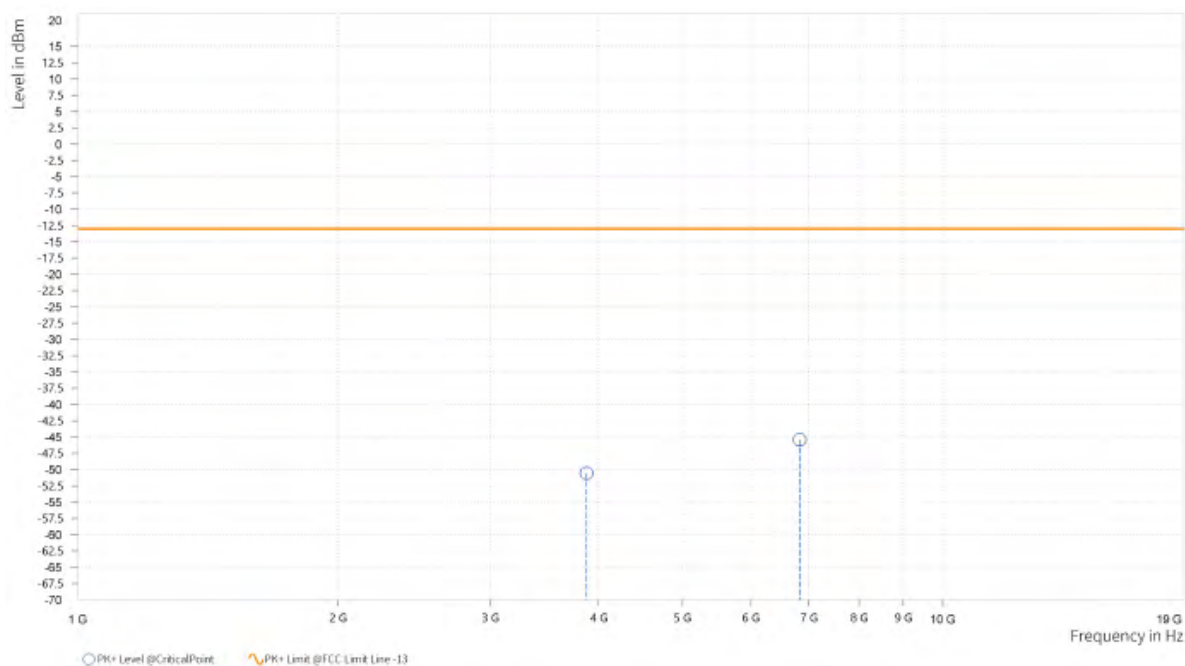




BUREAU
VERITAS

Test Report No.: W7L-220214W001RF06

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 376500	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,833.000	-50.95	-13.00	37.95	23.59	H	0	2
5	6,853.500	-45.04	-13.00	32.04	30.52	H	0	2

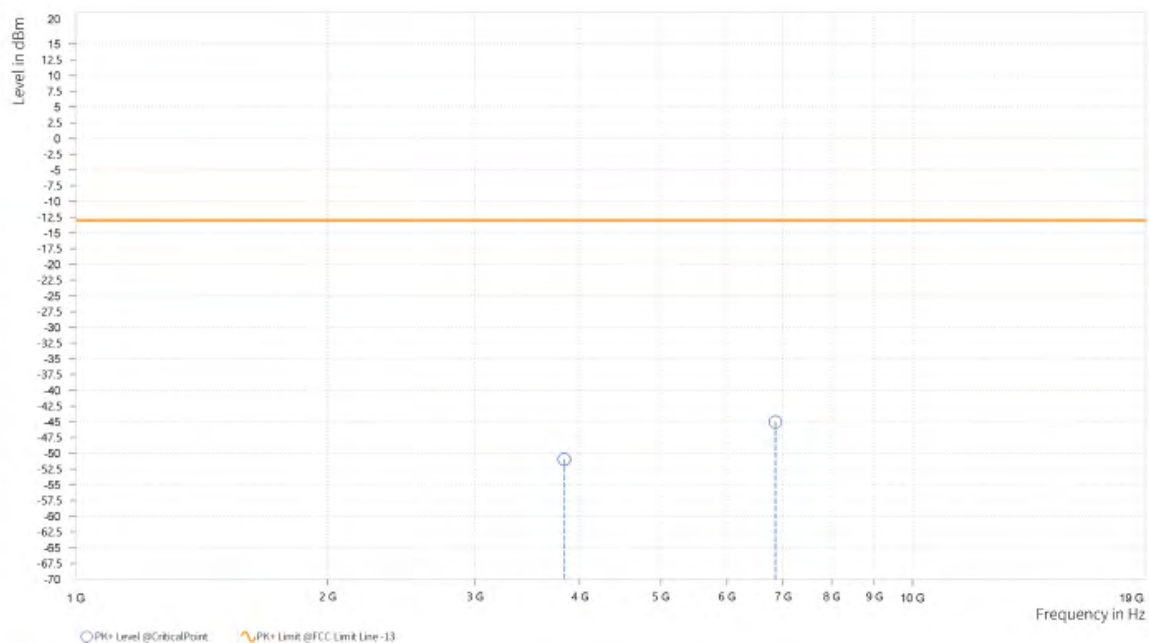

MODE	TX channel 376500	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,869.000	-50.88	-13.00	37.88	23.78	V	0	2
5	6,843.000	-45.71	-13.00	32.71	30.51	V	0	2

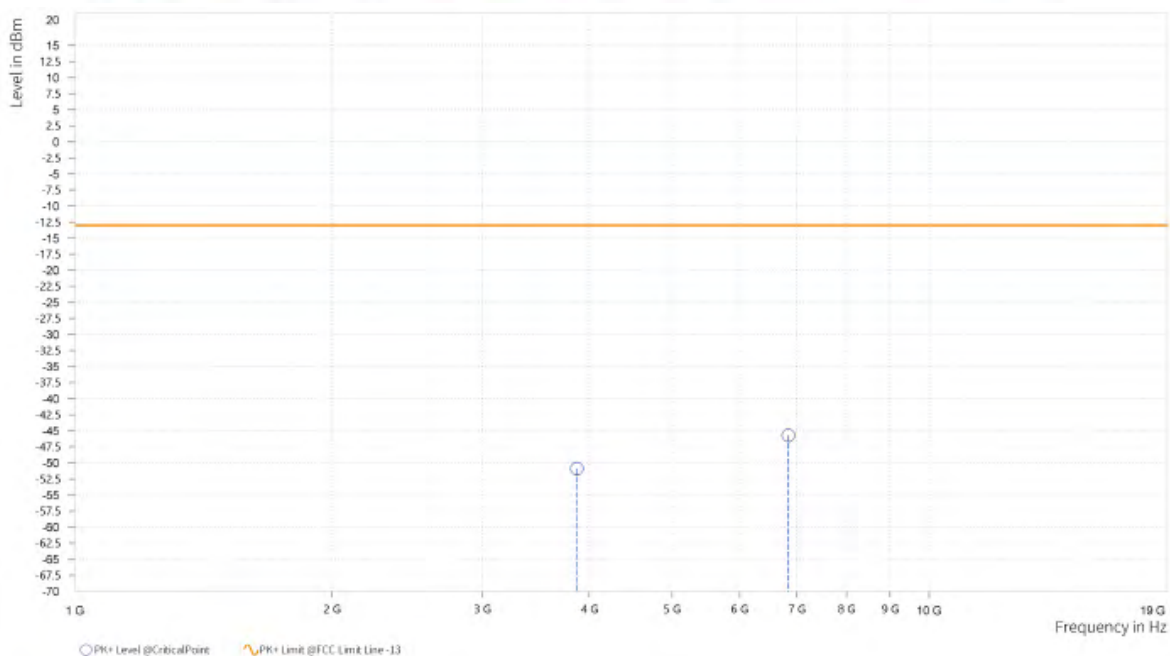




BUREAU
VERITAS

Test Report No.: W7L-220214W001RF06

CHANNEL BANDWIDTH: 15MHz / QPSK
CH371500

MODE	TX channel 371500	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,856.000	-50.12	-13.00	37.12	23.59	H	139	1
5	6,809.000	-45.89	-13.00	32.89	30.34	H	359.9	2

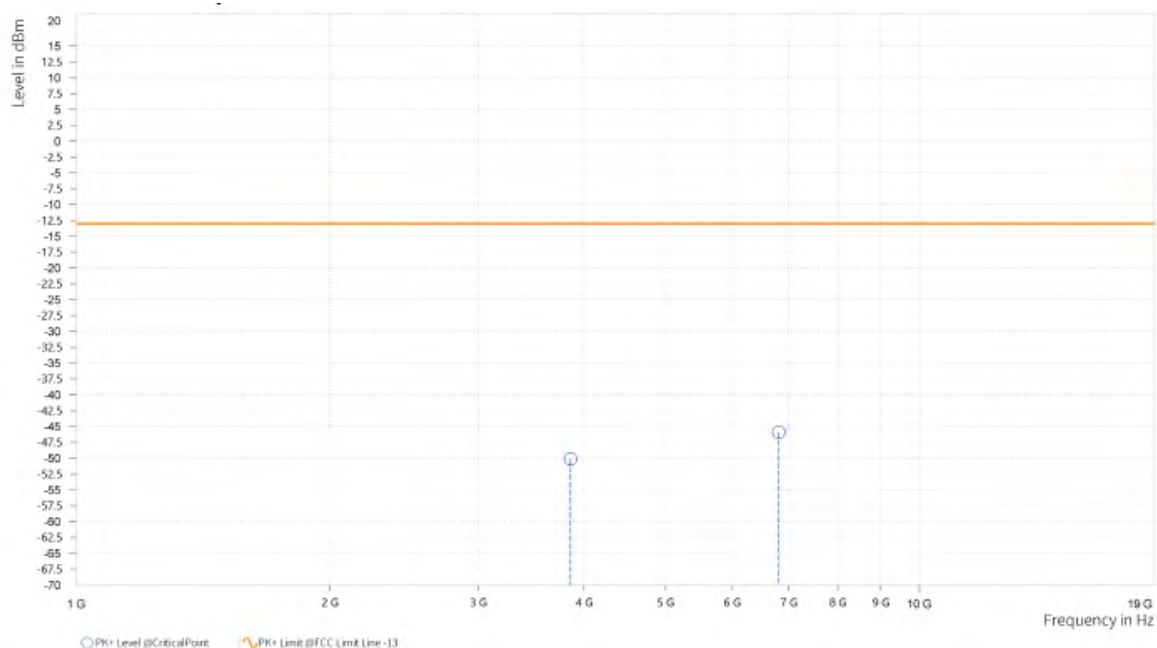

MODE	TX channel 371500	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,807.000	-50.75	-13.00	37.75	23.32	V	359.9	2
5	6,806.500	-45.61	-13.00	32.61	30.45	V	359.9	2

