



Appendix B.3

WCDMA Band II



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 2 of 27

1. Effective (Isotropic) Radiated Power Output Data

1.1 Test Result

ANT1

Band	Channel	Power(dBm)	EIRP(dBm)	Limit(dBm)	Verdict
Band II	9262	23.22	25.15	33	PASS
Band II	9400	23.32	25.25	33	PASS
Band II	9538	23.22	25.15	33	PASS



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 3 of 27

2. Frequency Stability

2.1 Band II

2.1.1 Test Result

Band II							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
RMC	1852.4	20	3.8	1.211	0.0007	-2.5 to 2.5	Pass
			4.0	-3.929	-0.0021	-2.5 to 2.5	Pass
			4.2	-6.112	-0.0033	-2.5 to 2.5	Pass
		-30	4.0	-5.181	-0.0028	-2.5 to 2.5	Pass
		-20	4.0	-5.304	-0.0029	-2.5 to 2.5	Pass
		-10	4.0	-3.967	-0.0021	-2.5 to 2.5	Pass
		0	4.0	-3.111	-0.0017	-2.5 to 2.5	Pass
		10	4.0	-3.975	-0.0021	-2.5 to 2.5	Pass
		30	4.0	-5.727	-0.0031	-2.5 to 2.5	Pass
		40	4.0	-1.784	-0.0010	-2.5 to 2.5	Pass
		50	4.0	-0.469	-0.0003	-2.5 to 2.5	Pass
	1880	20	3.8	-2.253	-0.0012	-2.5 to 2.5	Pass
			4.0	-2.758	-0.0015	-2.5 to 2.5	Pass
			4.2	-1.066	-0.0006	-2.5 to 2.5	Pass
		-30	4.0	-0.689	-0.0004	-2.5 to 2.5	Pass
		-20	4.0	-1.104	-0.0006	-2.5 to 2.5	Pass
		-10	4.0	-0.385	-0.0002	-2.5 to 2.5	Pass
		0	4.0	-1.501	-0.0008	-2.5 to 2.5	Pass
		10	4.0	-0.620	-0.0003	-2.5 to 2.5	Pass
		30	4.0	0.428	0.0002	-2.5 to 2.5	Pass
		40	4.0	-2.518	-0.0013	-2.5 to 2.5	Pass
		50	4.0	0.074	0.0000	-2.5 to 2.5	Pass
	1907.6	20	3.8	0.084	0.0000	-2.5 to 2.5	Pass
			4.0	0.152	0.0001	-2.5 to 2.5	Pass
			4.2	-1.328	-0.0007	-2.5 to 2.5	Pass
		-30	4.0	0.095	0.0000	-2.5 to 2.5	Pass
		-20	4.0	-0.585	-0.0003	-2.5 to 2.5	Pass
		-10	4.0	0.722	0.0004	-2.5 to 2.5	Pass
		0	4.0	-0.473	-0.0002	-2.5 to 2.5	Pass
		10	4.0	-1.736	-0.0009	-2.5 to 2.5	Pass
		30	4.0	0.108	0.0001	-2.5 to 2.5	Pass
		40	4.0	-0.571	-0.0003	-2.5 to 2.5	Pass
		50	4.0	0.676	0.0004	-2.5 to 2.5	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 4 of 27

3. 99% & 26dB Bandwidth

3.1 Band II_OBW

3.1.1 Test Result


Band II						
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)		Verdict
	Network	Subset		Result	Limit	
NTNV	RMC	12.2kbps RMC	1852.4	4.163	/	Pass
			1880	4.172	/	Pass
			1907.6	4.160	/	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

3.1.2 Test Graph

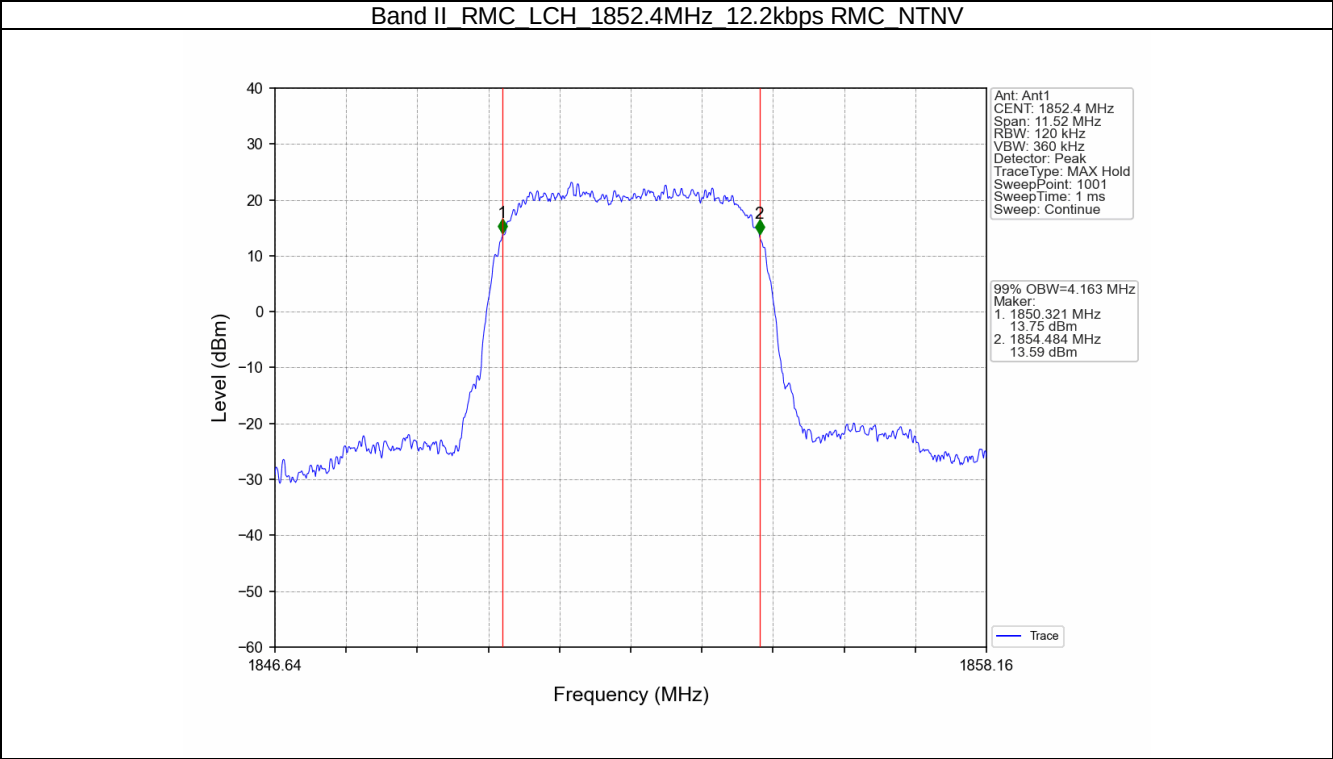




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001


Page: 6 of 27

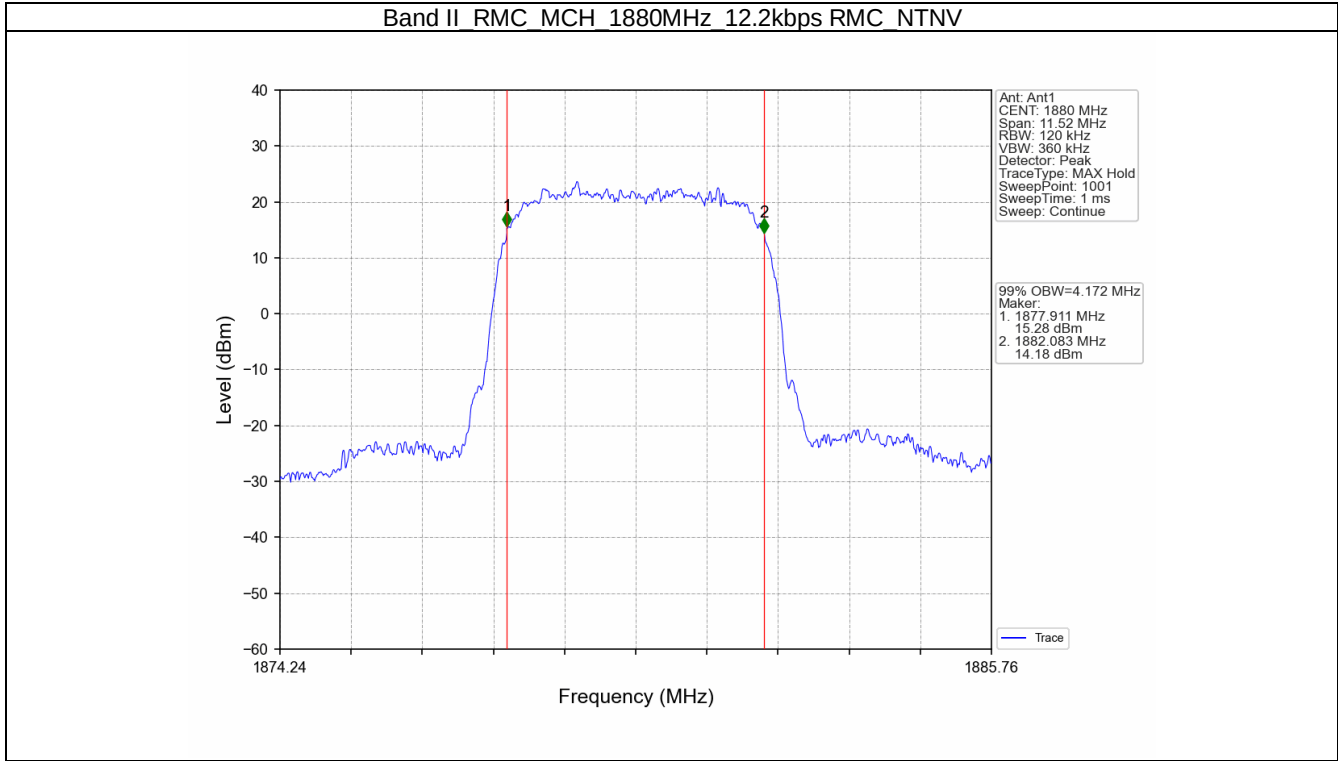



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

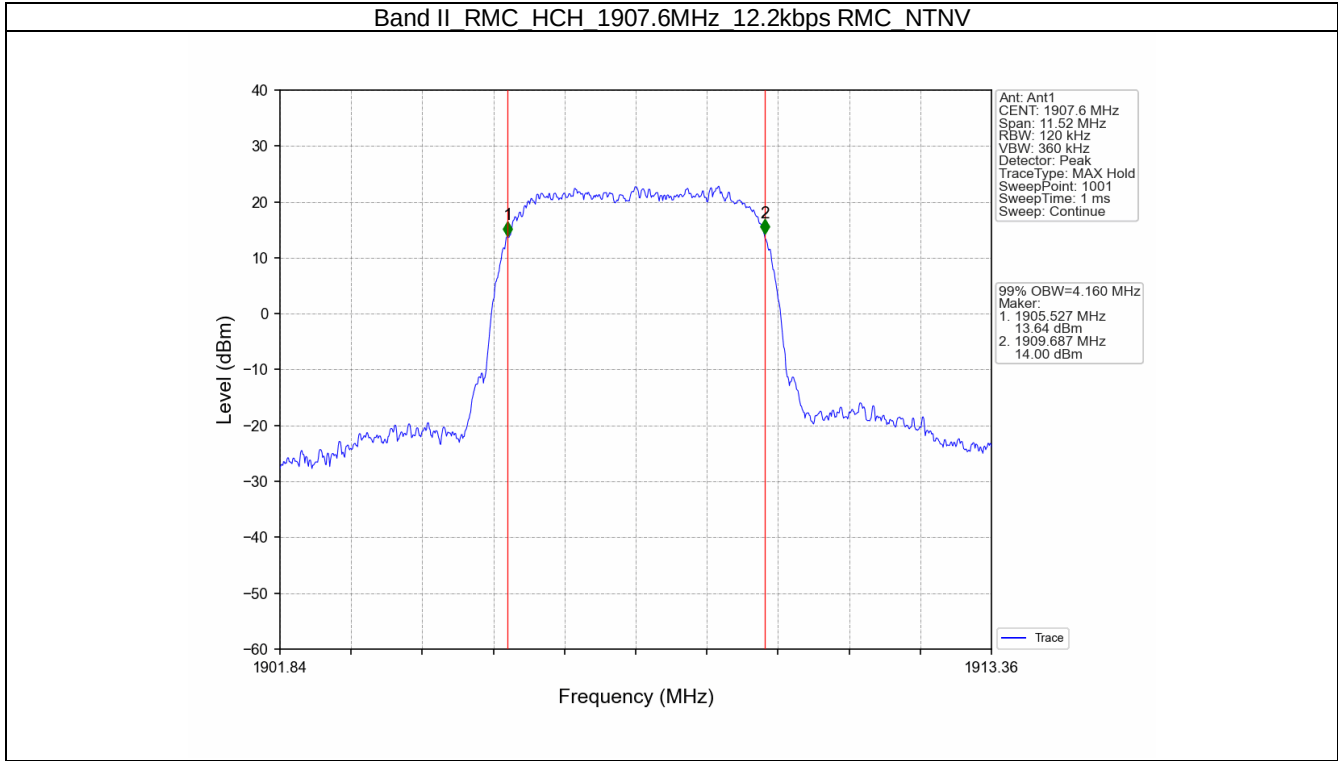



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 8 of 27

3.2 Band II_XDB

3.2.1 Test Result


Band II						
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)		Verdict
	Network	Subset		Result	Limit	
NTNV	RMC	12.2kbps RMC	1852.4	4.734	/	Pass
			1880	4.727	/	Pass
			1907.6	4.737	/	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

3.2.2 Test Graph

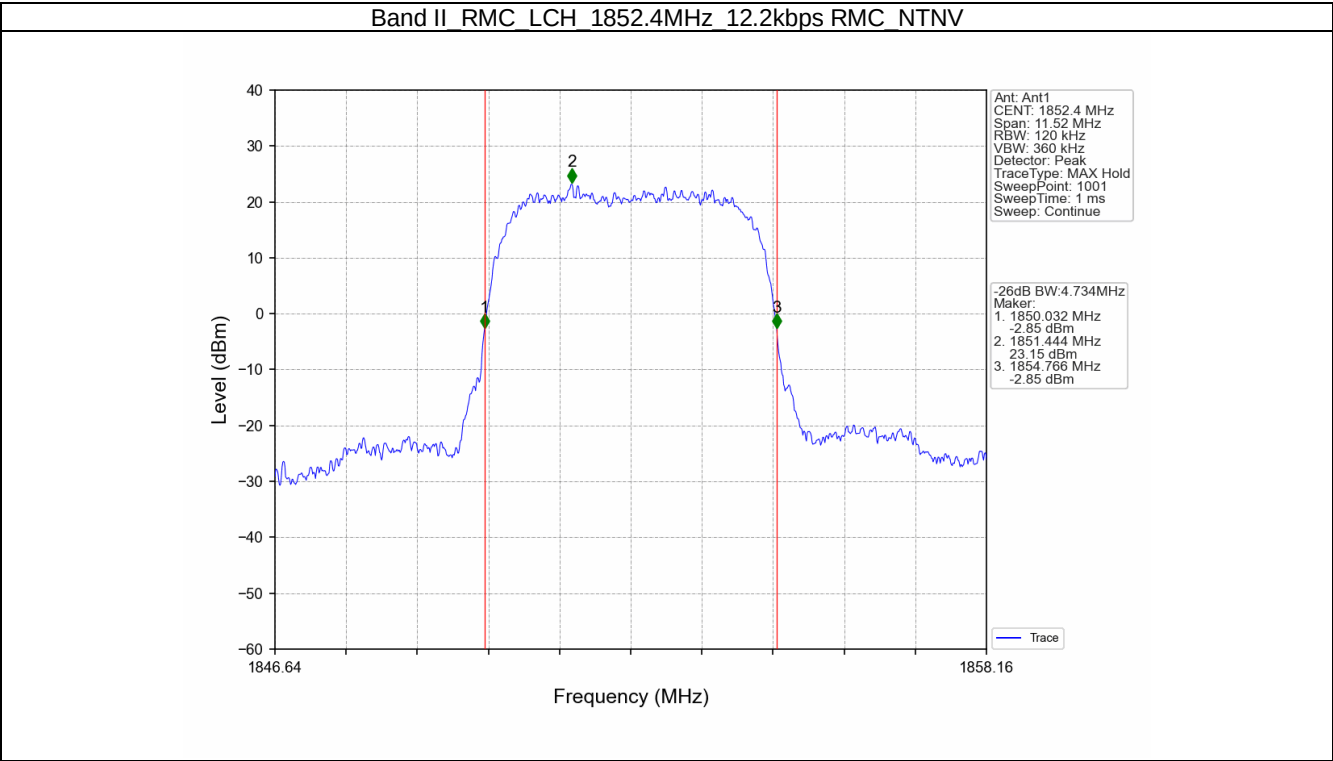




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001


Page: 10 of 27

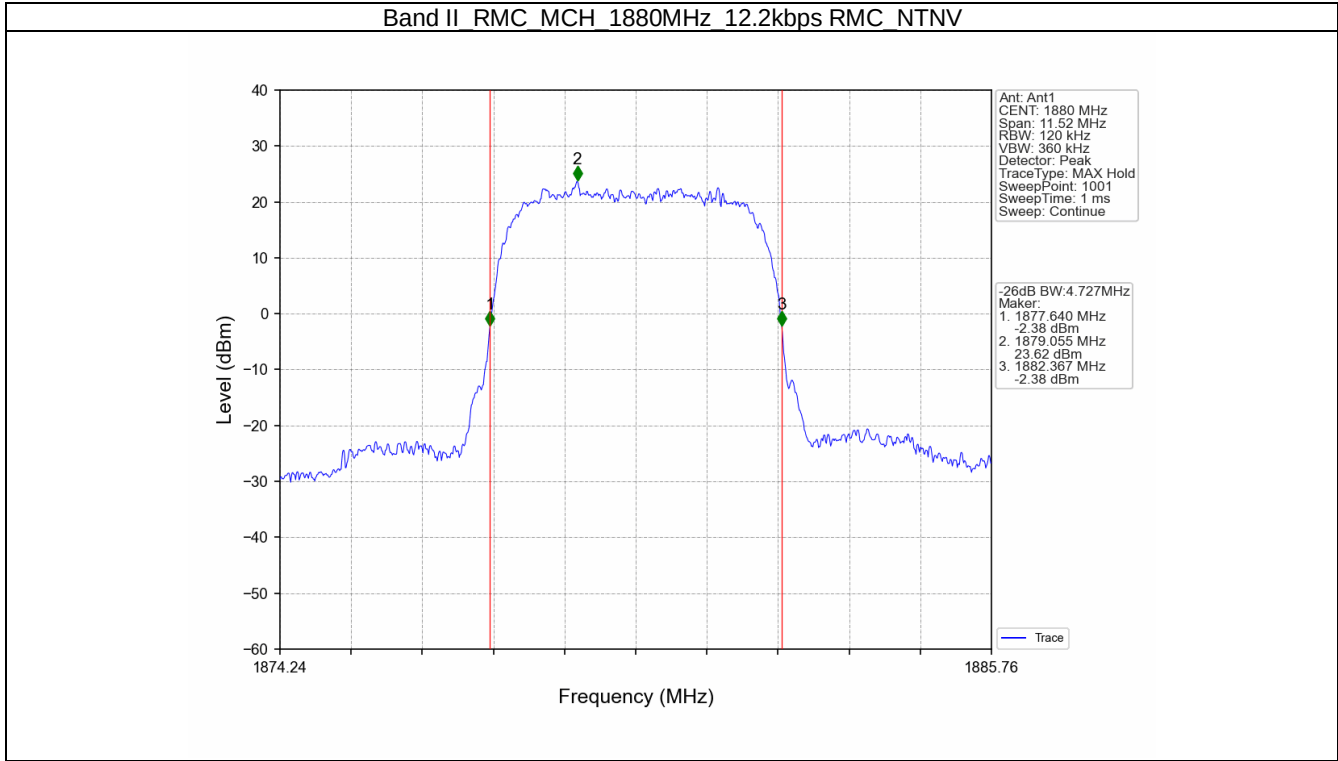



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

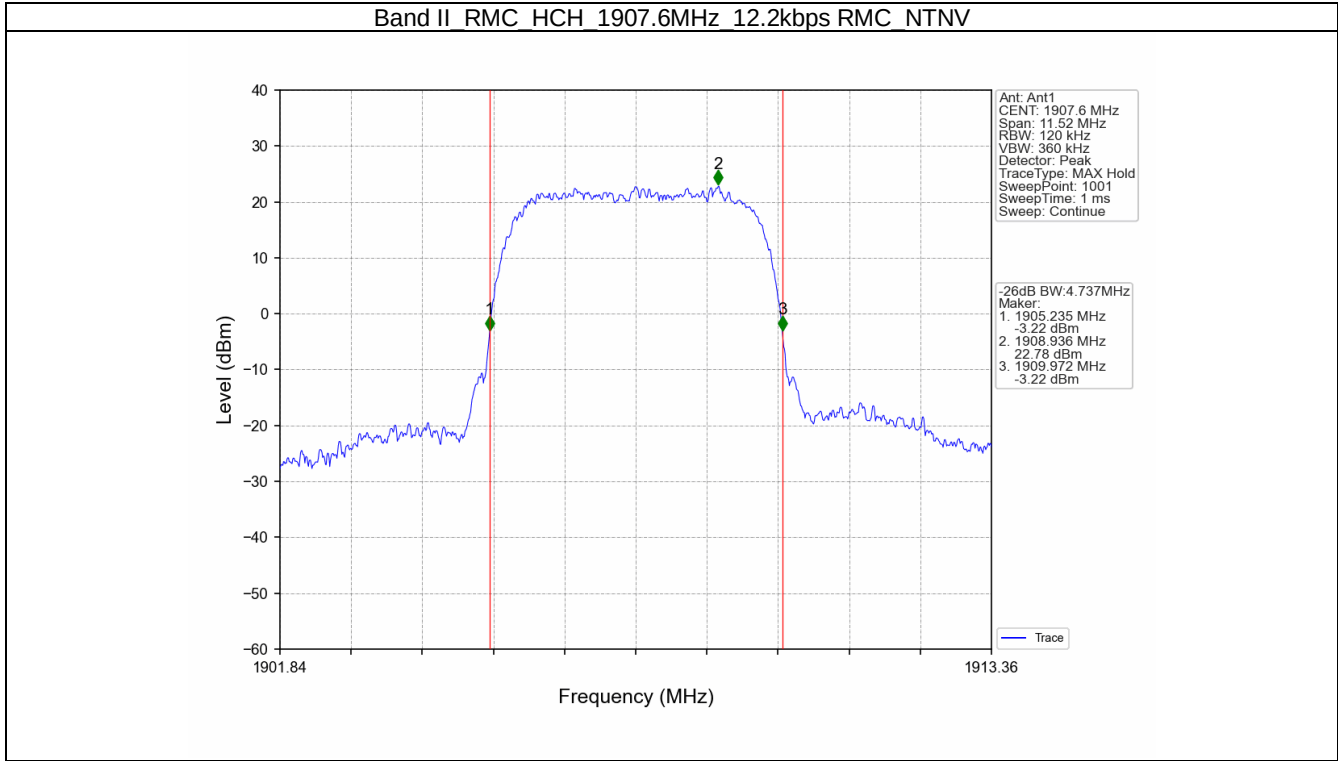



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 12 of 27

4. Peak-Average Ratio

4.1 Band II

4.1.1 Test Result

Band II						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	RMC	12.2kbps RMC	1852.4	3.08	<=13	Pass
			1880	3.09	<=13	Pass
			1907.6	3.07	<=13	Pass




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 13 of 27

4.1.2 Test Graph

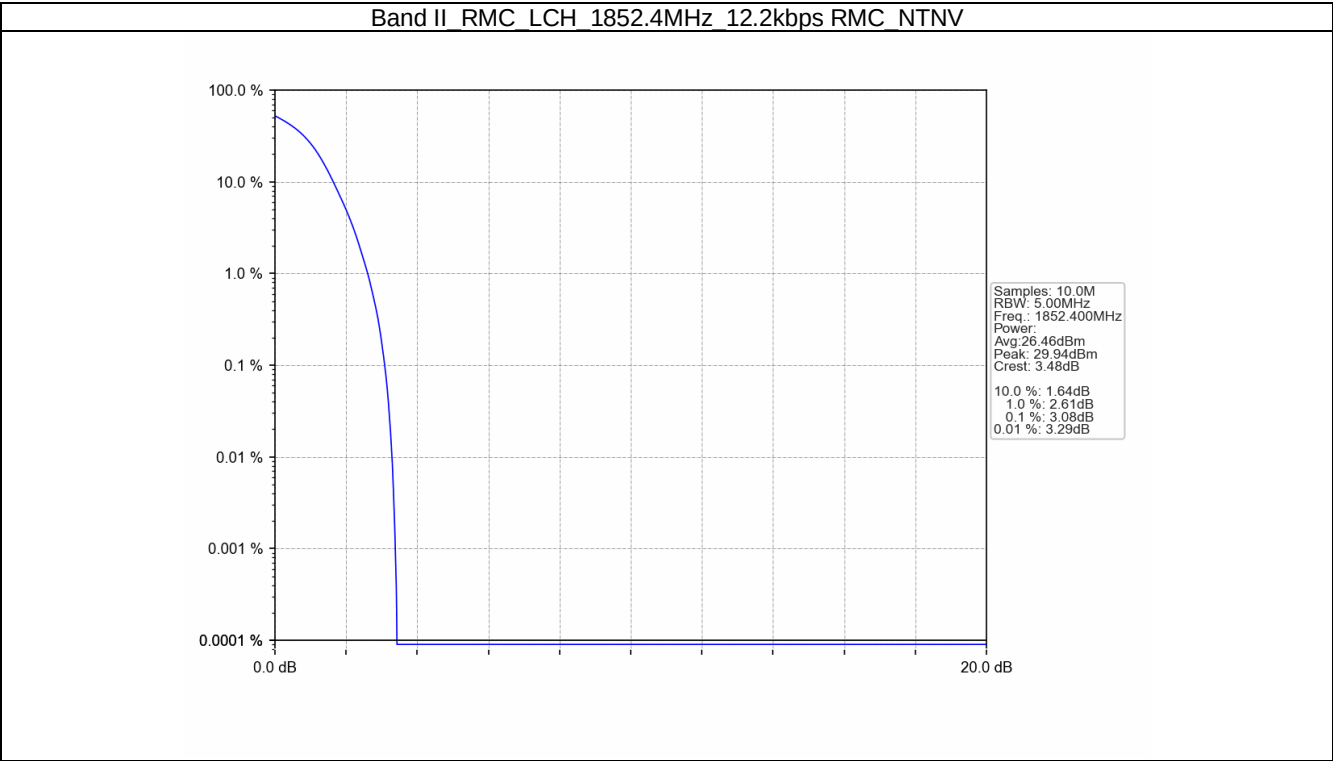




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 14 of 27

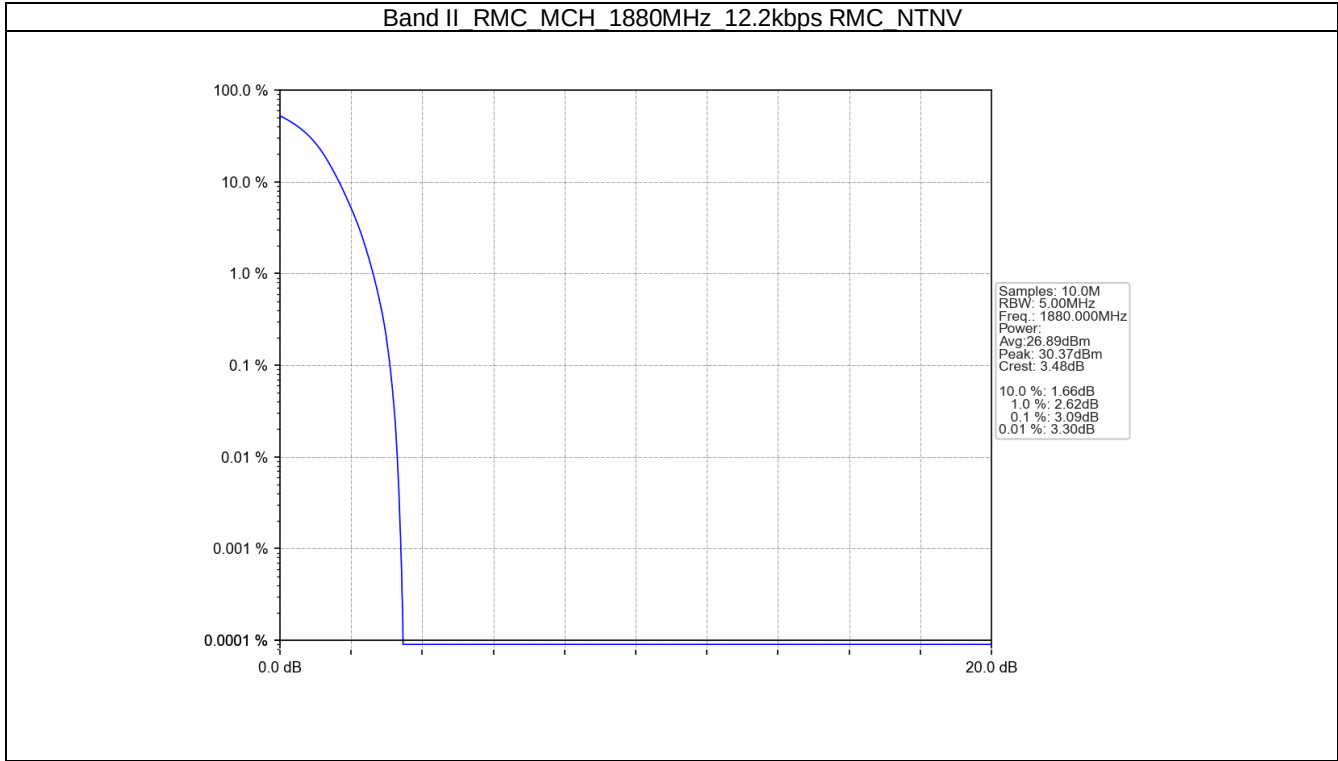




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 15 of 27

Band II RMC HCH 1907.6MHz 12.2kbps RMC NTN

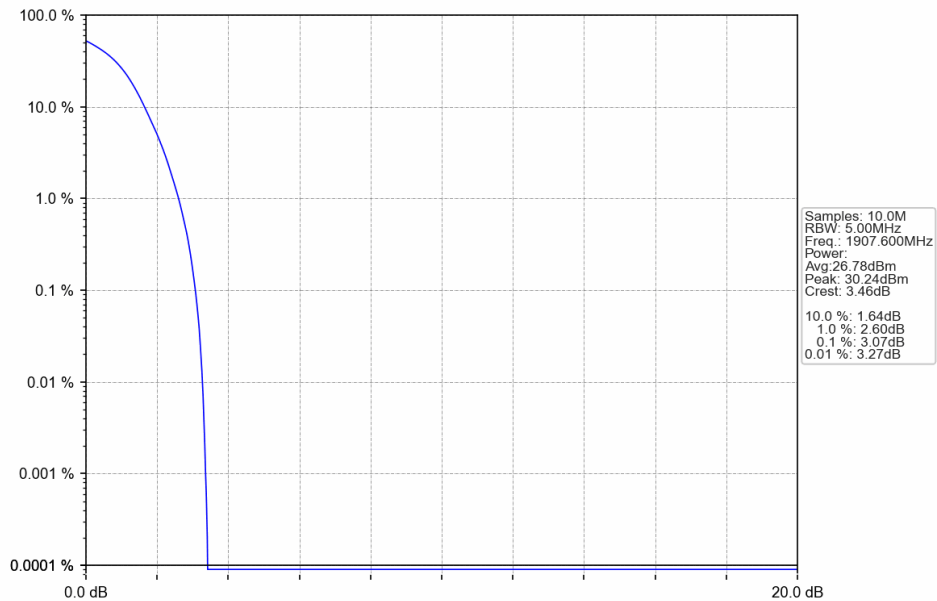



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 16 of 27

5. Spurious Emission & Band Edges

5.1 Band II

5.1.1 Test Result


Band II					
ENV	Mode		Frequency (MHz)	Spurious Emission	
	Network	Subset		Result	Limit
NTNV	RMC	12.2kbps RMC	1852.4	Refer To Test Graph	Pass
			1880	Refer To Test Graph	Pass
			1907.6	Refer To Test Graph	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001


5.1.2 Test Graph

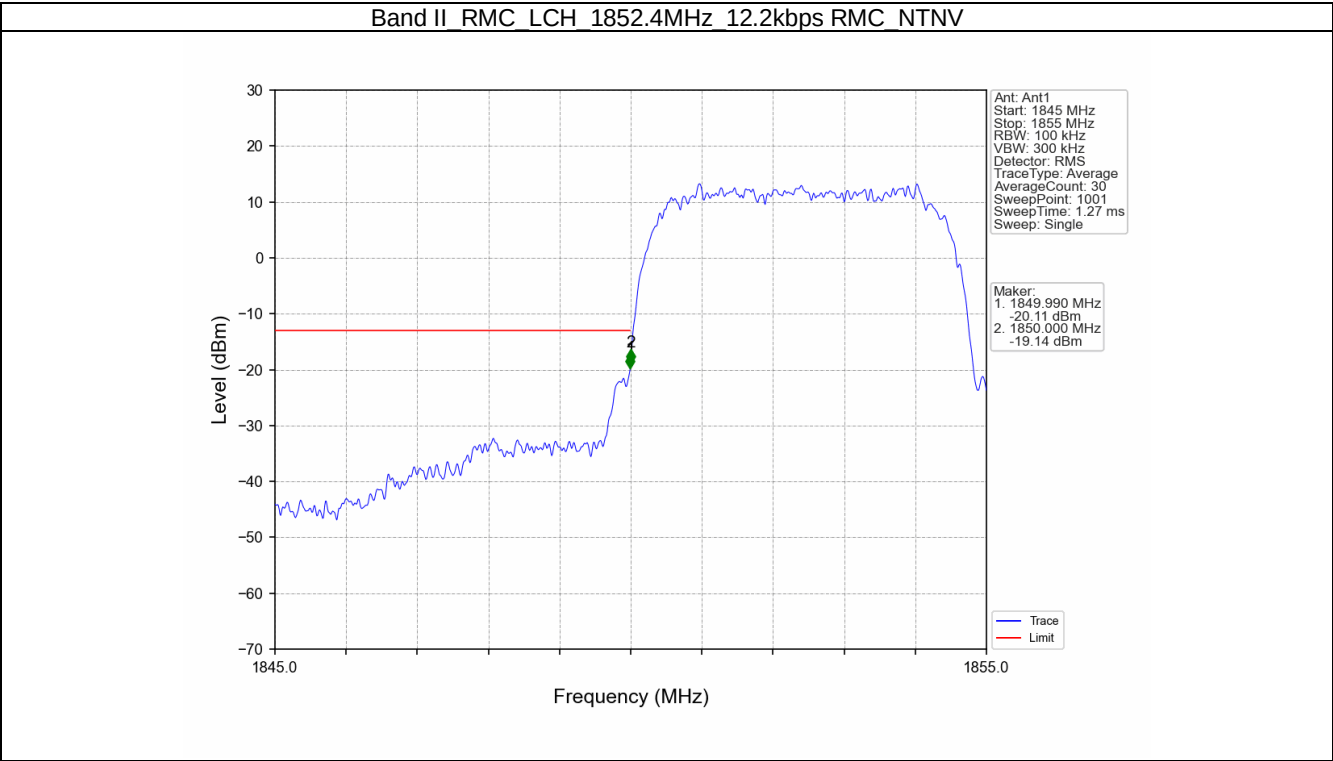



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


SUWI-TRF-RF A001

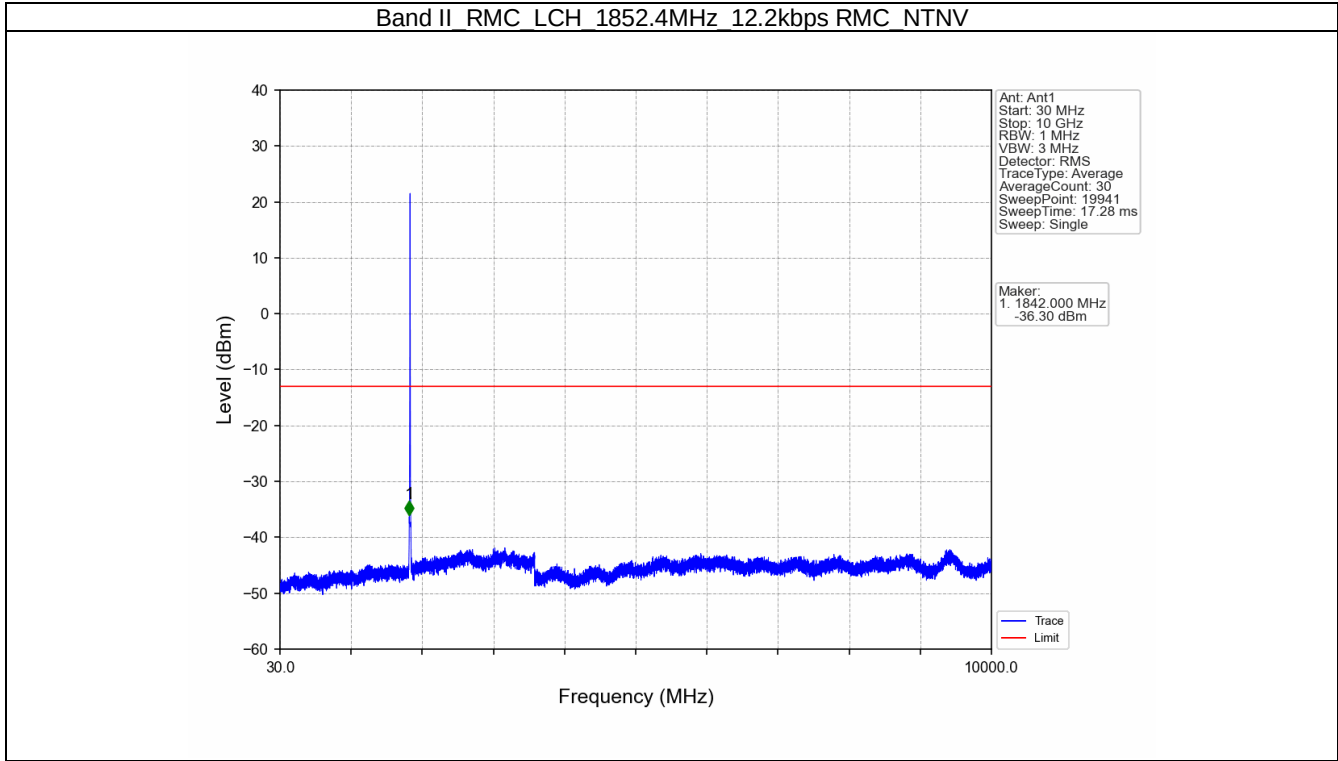



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


SUWI-TRF-RF A001

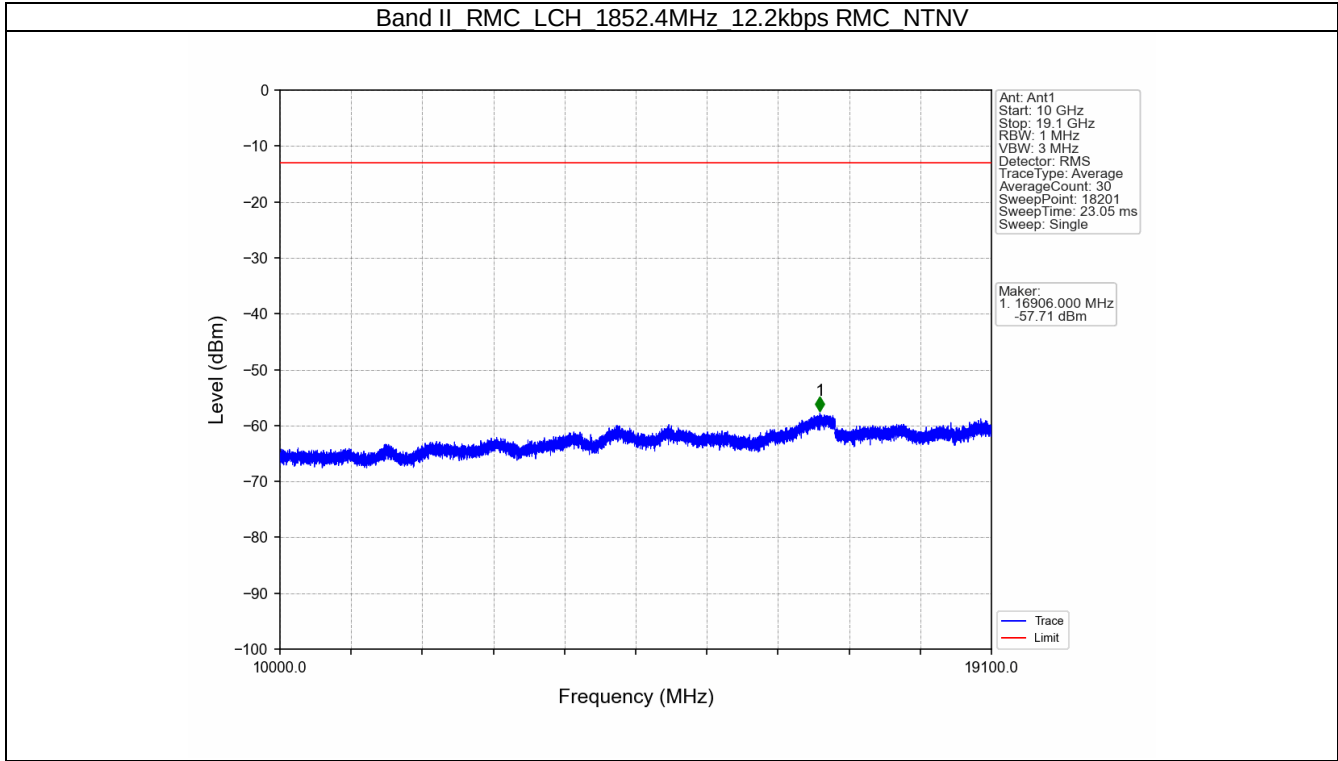



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


SUWI-TRF-RF A001

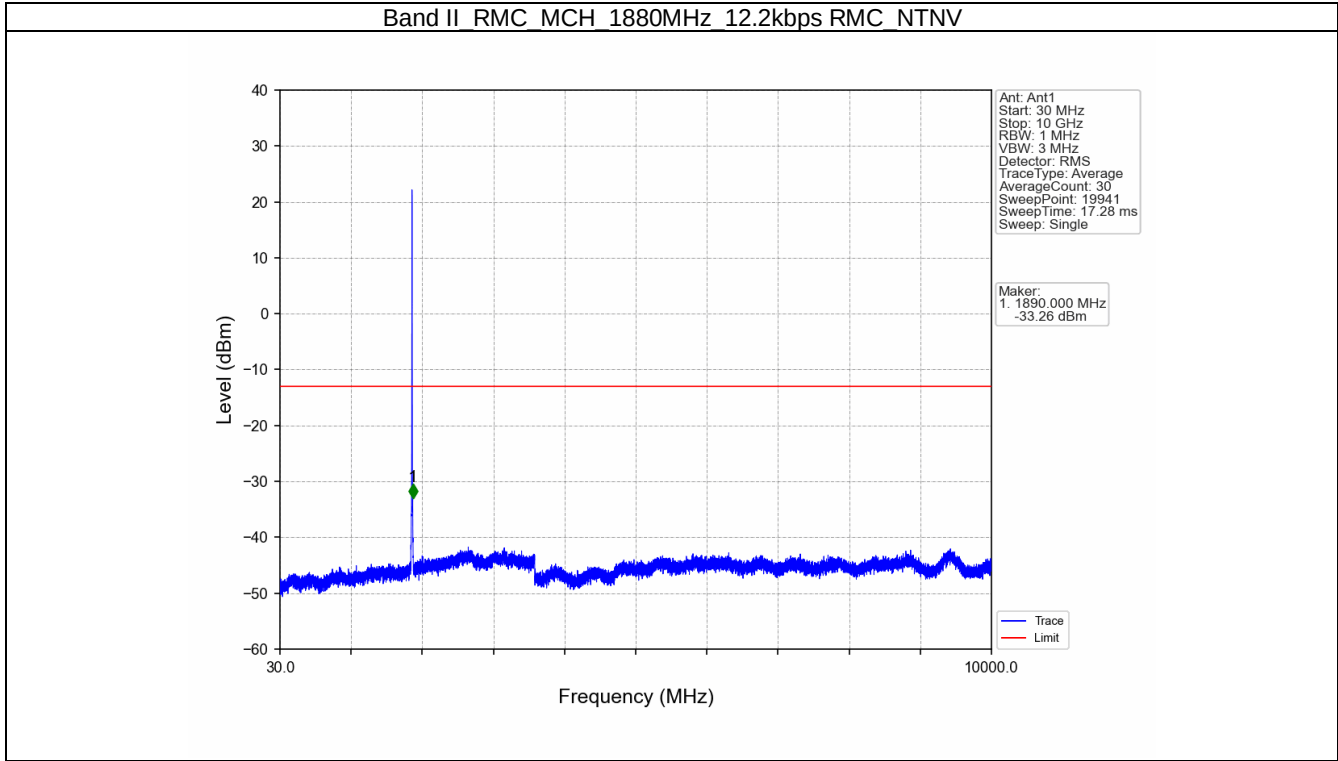



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

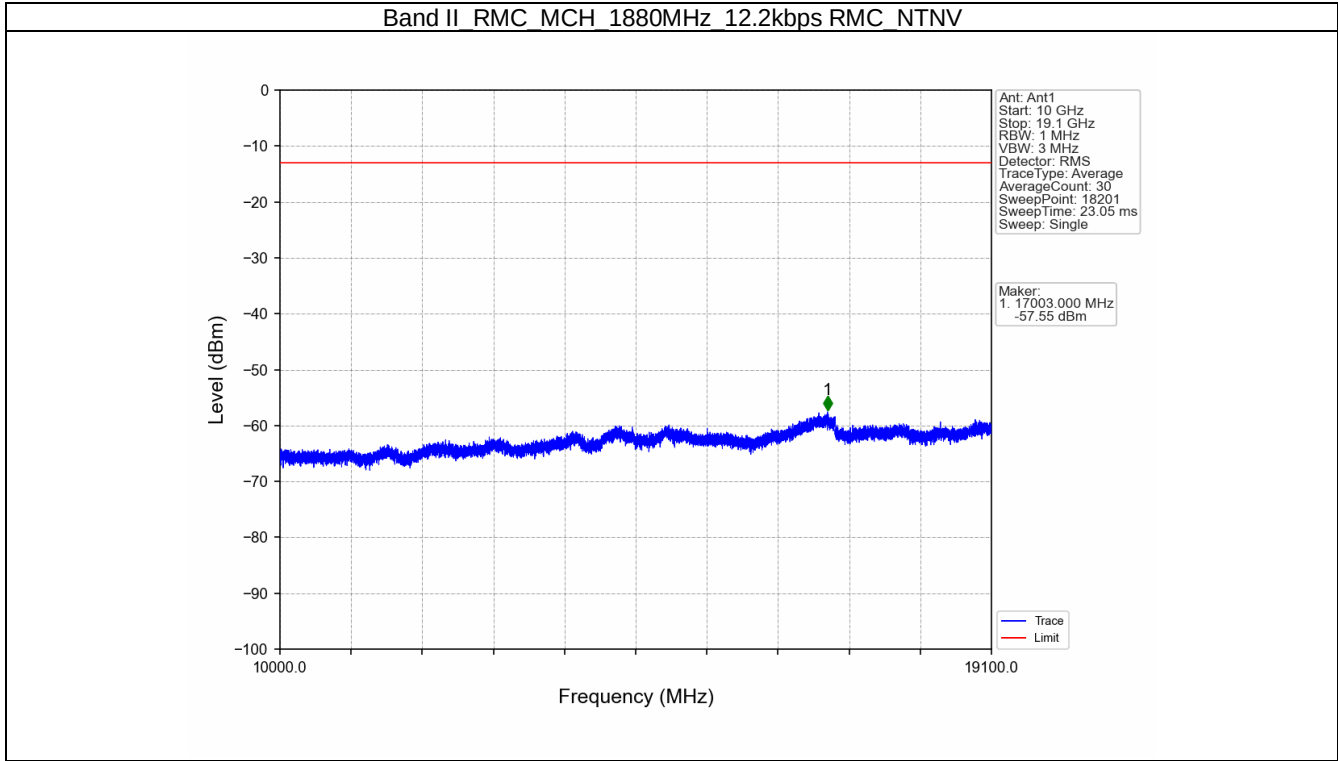




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001


Band II RMC HCH 1907.6MHz 12.2kbps RMC NTN

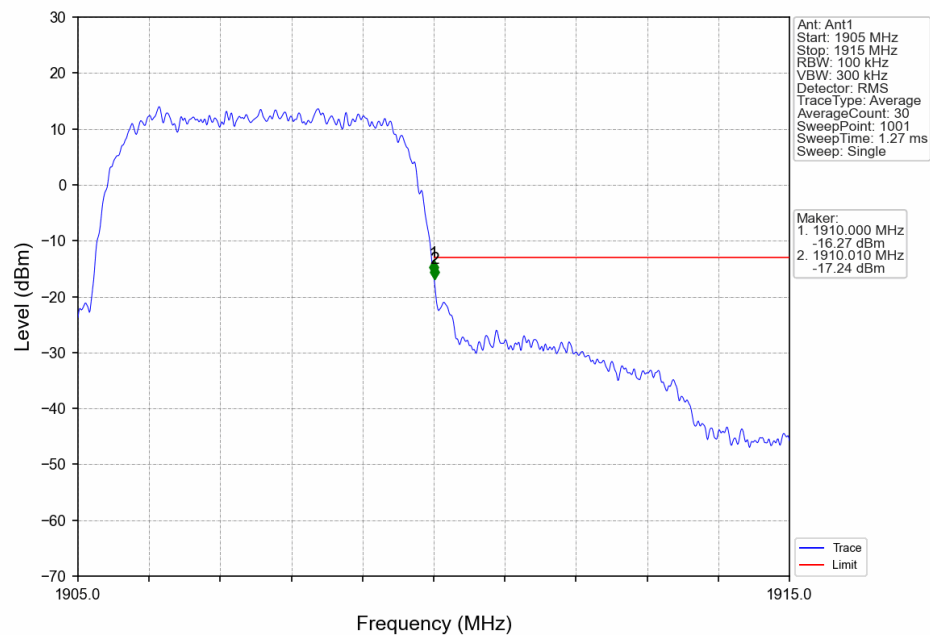



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


SUWI-TRF-RF A001

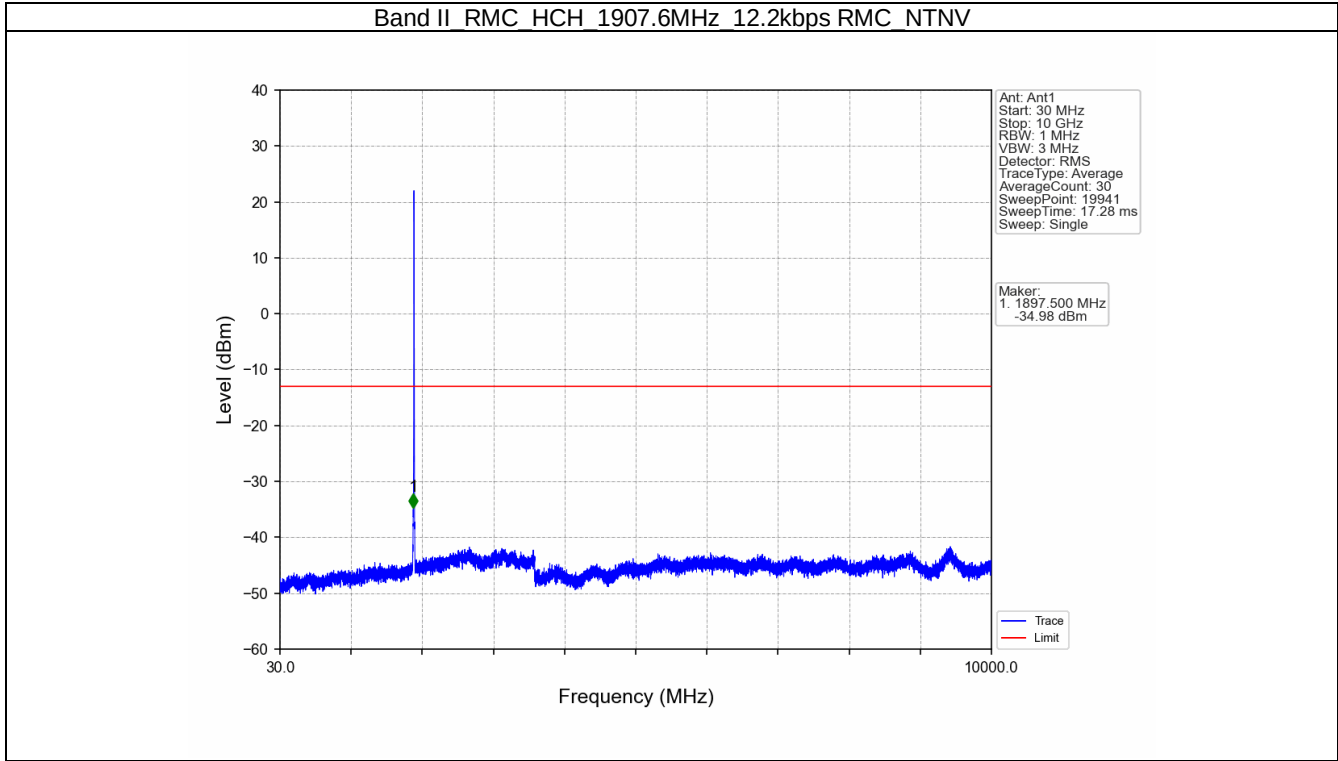



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

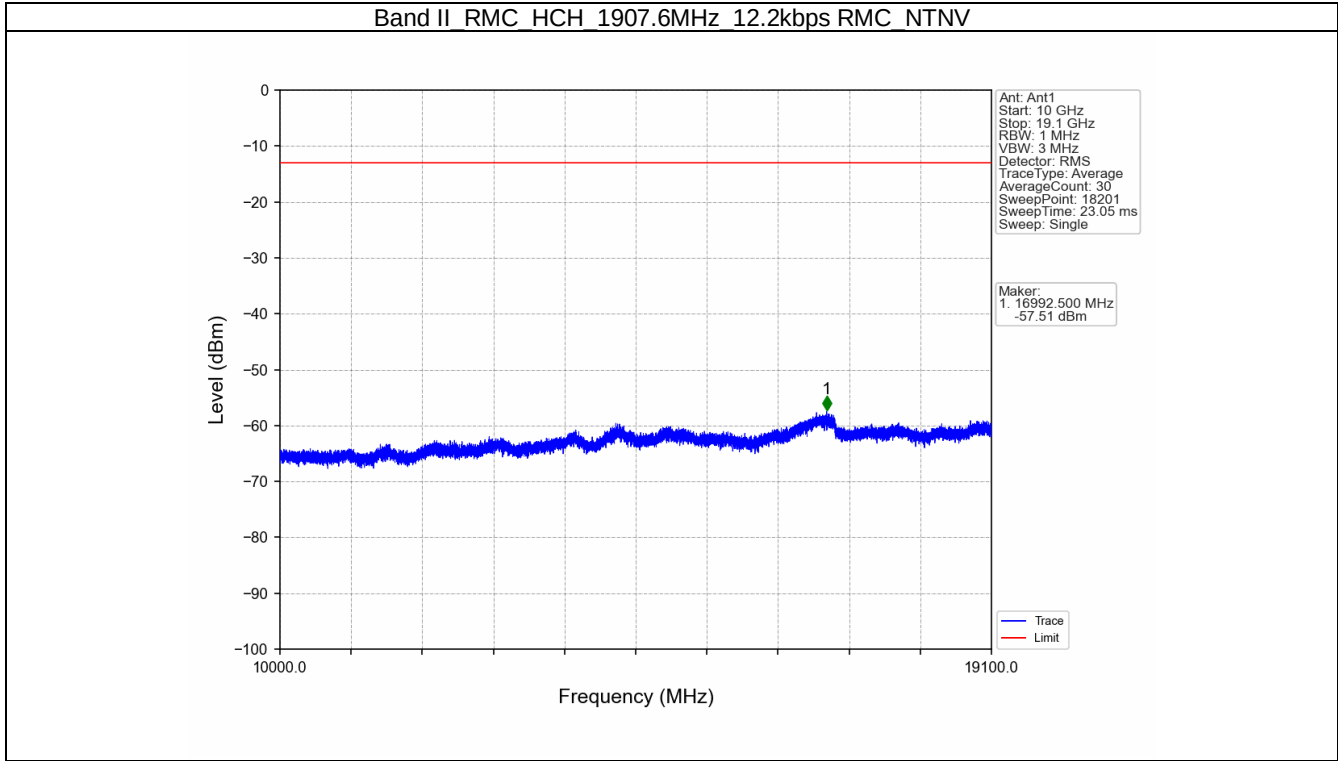



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 25 of 27

6. Field Strength of Spurious Radiation

Test Band = WCDMA Band II_ TM1

Test Channel = Low

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3704.8000	40.06	-45.52	28.81	-71.92	-13.00	58.92	Horizontal
2	5557.2000	39.51	-45.14	32.61	-68.28	-13.00	55.28	Horizontal
3	7409.6000	37.50	-43.38	36.35	-64.80	-13.00	51.80	Horizontal
4	9262.0000	34.22	-40.23	36.80	-64.47	-13.00	51.47	Horizontal
5	11114.4000	30.23	-37.88	38.71	-64.20	-13.00	51.20	Horizontal
6	14439.75	28.26	-34.82	41.08	-60.74	-13.00	47.74	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3704.8000	39.96	-45.52	28.81	-72.02	-13.00	59.02	Vertical
2	5557.2000	39.08	-45.14	32.61	-68.71	-13.00	55.71	Vertical
3	7409.6000	38.39	-43.38	36.35	-63.91	-13.00	50.91	Vertical
4	9262.0000	34.72	-40.23	36.80	-63.97	-13.00	50.97	Vertical
5	11114.4000	29.65	-37.88	38.71	-64.78	-13.00	51.78	Vertical
6	13857.75	29.82	-35.85	40.64	-60.65	-13.00	47.65	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 26 of 27

Test Band = WCDMA Band II_ TM1

Test Channel = Mid

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3760.0000	41.01	-45.75	28.86	-71.14	-13.00	58.14	Horizontal
2	5640.0000	39.41	-44.98	32.63	-68.20	-13.00	55.20	Horizontal
3	7520.0000	37.02	-43.10	36.61	-64.73	-13.00	51.73	Horizontal
4	9400.0000	33.98	-39.83	37.06	-64.05	-13.00	51.05	Horizontal
5	11280.0000	30.19	-37.41	38.73	-63.76	-13.00	50.76	Horizontal
6	13700.25	30.81	-36.16	40.36	-60.25	-13.00	47.25	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3760.0000	39.55	-45.75	28.86	-72.60	-13.00	59.60	Vertical
2	5640.0000	39.16	-44.98	32.63	-68.45	-13.00	55.45	Vertical
3	7520.0000	37.07	-43.10	36.61	-64.68	-13.00	51.68	Vertical
4	9400.0000	34.70	-39.83	37.06	-63.33	-13.00	50.33	Vertical
5	11280.0000	30.65	-37.41	38.73	-63.30	-13.00	50.30	Vertical
6	13727.25	30.30	-36.23	40.41	-60.78	-13.00	47.78	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

SUWI-TRF-RF A001

Page: 27 of 27

Test Band = WCDMA Band II_ TM1

Test Channel = High

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3815.2000	41.07	-45.97	28.92	-71.25	-13.00	58.25	Horizontal
2	5722.8000	38.94	-44.83	32.64	-68.50	-13.00	55.50	Horizontal
3	7630.0000	37.43	-42.99	36.65	-64.17	-13.00	51.17	Horizontal
4	9538.0000	33.05	-40.01	37.32	-64.90	-13.00	51.90	Horizontal
5	11445.6000	29.72	-37.34	38.74	-64.14	-13.00	51.14	Horizontal
6	13841.25	29.89	-36.01	40.61	-60.76	-13.00	47.76	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3815.2000	40.57	-45.97	28.92	-71.75	-13.00	58.75	Vertical
2	5722.8000	38.98	-44.83	32.64	-68.46	-13.00	55.46	Vertical
3	7630.0000	37.62	-42.99	36.65	-63.98	-13.00	50.98	Vertical
4	9538.0000	33.52	-40.01	37.32	-64.43	-13.00	51.43	Vertical
5	11445.6000	30.75	-37.34	38.74	-63.11	-13.00	50.11	Vertical
6	13695.75	30.10	-36.16	40.35	-60.96	-13.00	47.96	Vertical

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

---End of Attachment---