

**TEST REPORT****Report No.: 22041258HKG-009**

Lionel LLC

Application For Certification  
(Class II Permissive Change)

**FCC ID: LIV-RTPGRXV6**

Transceiver – 2.4GHz RC Train

2/F., Garment Centre,  
576 Castle Peak Road, Kowloon,  
Hong Kong SAR, China.

Telephone: (852) 2173 8888  
Facsimile: (852) 2785 5487  
[www.intertek.com](http://www.intertek.com)

**Prepared and Checked by:****Approved by:**

Signed on File

Lau Ka Ho, Tommy  
Assistant Engineer

Wong Kwok Yeung, Kenneth  
Assistant Supervisor  
Date: July 06, 2022

## TEST REPORT

### GENERAL INFORMATION

<b>Grantee:</b>	Lionel LLC
<b>Grantee Address:</b>	6301 Performance Drive, Concord, North Carolina 28027, USA.
<b>Contact Person:</b>	James Rohde
<b>Tel:</b>	586-421-9022
<b>Fax:</b>	704-455-8940
<b>E-mail:</b>	mikeyng@goldlok.com
<b>Manufacturer:</b>	Goldlok Holdings (Guangdong) Co., Ltd.
<b>Brand Name:</b>	LIONEL
<b>Model:</b>	712113
<b>Additional Model:</b>	711960
<b>Type of EUT:</b>	Transceiver
<b>Description of EUT:</b>	Hogwarts Express Ready To Play Train Set
<b>Serial Number:</b>	N/A
<b>FCC ID:</b>	LIV-RTPGRXV6
<b>Date of Sample Submitted:</b>	April 26, 2022
<b>Date of Test:</b>	April 26, 2022 to May 16, 2022
<b>Report No.:</b>	22041258HKG-009
<b>Report Date:</b>	July 06, 2022
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

**TEST REPORT****SUMMARY OF TEST RESULT**

Test Specification	Reference	Results
Radiated Emission	15.249, 15.209	Pass
Radiated Emission on the Bandedge		
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2020 Edition

Note:

1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

**TEST REPORT****TABLE OF CONTENTS**

<b>1.0</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Product Description .....	5
1.2	Purpose of change .....	5
1.3	Test Methodology.....	5
1.4	Test Facility .....	5
<b>2.0</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1	Justification.....	6
2.2	EUT Exercising Software .....	6
2.3	Special Accessories .....	6
2.4	Measurement Uncertainty .....	6
2.5	Support Equipment List and Description.....	6
<b>3.0</b>	<b>EMISSION RESULTS .....</b>	<b>7</b>
3.1	Field Strength Calculation .....	7
3.2	Radiated Emission Configuration Photograph .....	8
3.3	Radiated Emission Data .....	8
<b>4.0</b>	<b>EQUIPMENT PHOTOGRAPHS .....</b>	<b>13</b>
<b>5.0</b>	<b>PRODUCT LABELLING .....</b>	<b>13</b>
<b>6.0</b>	<b>TECHNICAL SPECIFICATIONS .....</b>	<b>13</b>
<b>7.0</b>	<b>INSTRUCTION MANUAL.....</b>	<b>13</b>
<b>8.0</b>	<b>MISCELLANEOUS INFORMATION .....</b>	<b>14</b>
8.1	Radiated Emission on the Bandedge.....	14
8.2	Emissions Test Procedures.....	15
<b>9.0</b>	<b>CONFIDENTIALITY REQUEST .....</b>	<b>17</b>
<b>10.0</b>	<b>EQUIPMENT LIST.....</b>	<b>17</b>

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test (EUT), is a portable 2.4GHz Transceiver (Train Unit) for a RC Train. Two versions of train are tested, including ultrasonic version and without ultrasonic version. The sample supplied operated on 46 channels, normally at 2420 - 2465MHz. The channels are separated with 1MHz spacing.

The EUT is powered by 6 x 1.5V C batteries. After switching on the EUT, the train will be moved forward or backward and turned left and right based on the switches pressed in the controller.

This report covered without ultrasonic version only, the test data of ultrasonic version is covered by 22041528HKG-010.

The Model: 711960 is the same as the Model: 712113 in hardware aspect as declared by client. The models are different in cosmetics, physical design and package only as declared by client.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Purpose of change

The purpose of change is saved with filename: product change.pdf

#### 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

#### 1.4 Test Facility

The 3m Chamber used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC.

## TEST REPORT

### 2.0 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by DC 9.0V (6 x 1.5V C batteries).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, CI 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used.

#### 2.5 Support Equipment List and Description

N/A.

**TEST REPORT****3.0 EMISSION RESULTS**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

**3.1 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RR = RA - AG - AV in  $\text{dB}\mu\text{V}$

LF = CF + AF in dB

Assume a receiver reading of 52.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

**TEST REPORT****3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 951.7425MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

**3.3 Radiated Emission Data**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 13.7dB

## TEST REPORT

### RADIATED EMISSIONS

Model: 712113

Date of Test: May 16, 2022

Worst-Case Operating Mode: Transmitting

**Table 1**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2420.000	73.9	33	29.4	70.3	94.0	-23.7
H	2400.000	40.6	33	29.4	37.0	54.0	-17.0
H	4840.000	35.5	33	34.9	37.4	54.0	-16.6
V	7260.000	29.3	33	37.9	34.2	54.0	-19.8
V	9680.000	24.8	33	40.4	32.2	54.0	-21.8
V	12100.000	26.4	33	40.5	33.9	54.0	-20.1
H	14520.000	31.4	33	38.4	36.8	54.0	-17.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2420.000	94.6	33	29.4	91.0	114.0	-23.0
H	2400.000	59.0	33	29.4	55.4	74.0	-18.6
H	4840.000	55.1	33	34.9	57.0	74.0	-17.0
V	7260.000	45.5	33	37.9	50.4	74.0	-23.6
V	9680.000	37.8	33	40.4	45.2	74.0	-28.8
V	12100.000	40.1	33	40.5	47.6	74.0	-26.4
H	14520.000	45.3	33	38.4	50.7	74.0	-23.3

NOTES: 1. Peak Detector Data unless otherwise stated.

2. Average detector is applied according to ANSI C63.10.

3. All measurements were made at 3 meters.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.

7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: 712113

Date of Test: May 16, 2022

Worst-Case Operating Mode: Transmitting

**Table 2**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

### Middle Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	72.9	33	29.4	69.3	94.0	-24.7
H	4880.000	35.9	33	34.9	37.8	54.0	-16.2
V	7320.000	28.8	33	37.9	33.7	54.0	-20.3
H	9760.000	27.0	33	40.4	34.4	54.0	-19.6
V	12200.000	27.8	33	40.5	35.3	54.0	-18.7
H	14640.000	30.8	33	38.4	36.2	54.0	-17.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	94.6	33	29.4	91.0	114.0	-23.0
H	4880.000	55.8	33	34.9	57.7	74.0	-16.3
V	7320.000	45.0	33	37.9	49.9	74.0	-24.1
H	9760.000	39.9	33	40.4	47.3	74.0	-26.7
V	12200.000	41.6	33	40.5	49.1	74.0	-24.9
H	14640.000	47.2	33	38.4	52.6	74.0	-21.4

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: 712113

Date of Test: May 16, 2022

Worst-Case Operating Mode: Transmitting

**Table 3**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

Highest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2465.000	74.2	33	29.4	70.6	94.0	-23.4
H	2483.500	41.2	33	29.4	37.6	54.0	-16.4
H	4930.000	36.3	33	34.9	38.2	54.0	-15.8
H	7395.000	29.1	33	37.9	34.0	54.0	-20.0
H	9860.000	25.9	33	40.4	33.3	54.0	-20.7
V	12325.000	27.4	33	40.5	34.9	54.0	-19.1
H	14790.000	32.4	33	38.4	37.8	54.0	-16.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2465.000	94.9	33	29.4	91.3	114.0	-22.7
H	2483.500	60.4	33	29.4	56.8	74.0	-17.2
H	4930.000	56.3	33	34.9	58.2	74.0	-15.8
H	7395.000	45.3	33	37.9	50.2	74.0	-23.8
H	9860.000	39.4	33	40.4	46.8	74.0	-27.2
V	12325.000	41.3	33	40.5	48.8	74.0	-25.2
H	14790.000	46.2	33	38.4	51.6	74.0	-22.4

NOTES: 1. Peak Detector Data unless otherwise stated.

2. Average detector is applied according to ANSI C63.10.

3. All measurements were made at 3 meters.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.

7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

**TEST REPORT**

Model: 712113

Date of Test: May 16, 2022

Worst-Case Operating Mode: Transmitting

**Table 4**  
**Pursuant to FCC Part 15 Section 15.209 Requirement**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	31.091	23.2	16	10.0	17.2	40.0	-22.8
V	43.338	19.4	16	10.0	13.4	40.0	-26.6
V	118.755	19.6	16	14.0	17.6	43.5	-25.9
V	481.535	14.0	16	26.0	24.0	46.0	-22.0
H	686.690	16.8	16	29.0	29.8	46.0	-16.3
V	951.743	15.3	16	33.0	32.3	46.0	-13.7

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.

6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### 4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**TEST REPORT****8.0 MISCELLANEOUS INFORMATION**

The miscellaneous information includes details of the test procedure and measured bandwidth.

**8.1 Radiated Emission on the Bandedge**

The emission of bandedge data were shown on the above radiated data table of 1 & 3 respectively.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of Part 15.249(d).

## TEST REPORT

### 8.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


## TEST REPORT

### 8.2.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

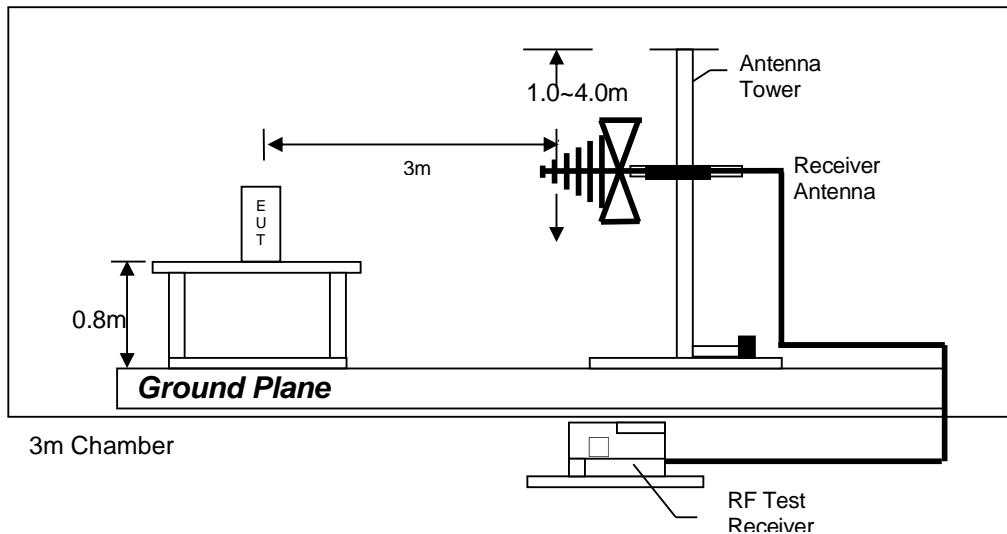

Test setup of radiated emissions up to 1GHz

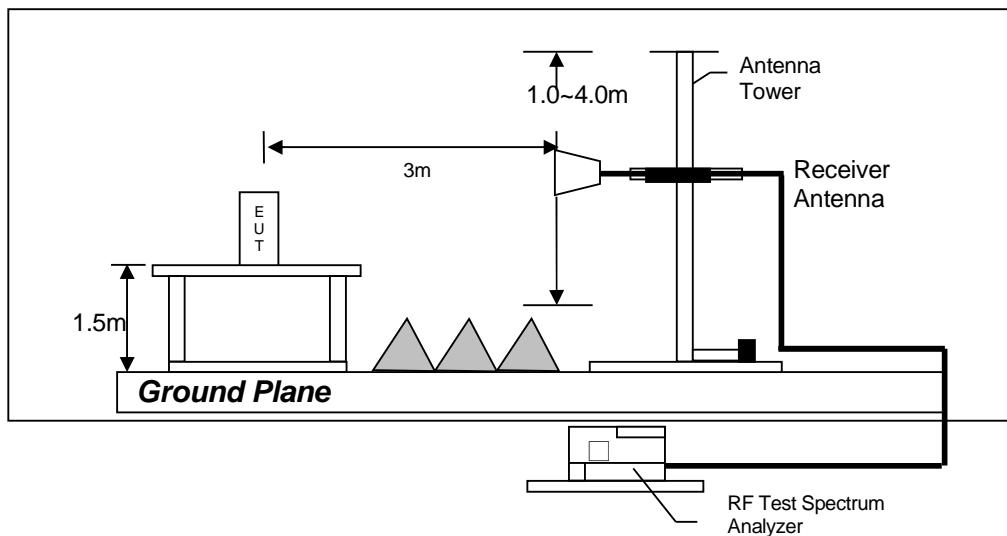

Test setup of radiated emissions above 1GHz

## TEST REPORT

### 9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

### 10.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Biconical Antenna (20MHz to 200MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-3061	EW-3481
Manufacturer	ROHDE SCHWARZ	EMCO	ROHDE SCHWARZ
Model No.	FSV40	3142E	ESR7
Calibration Date	October 29, 2021	February 02, 2021	December 21, 2021
Calibration Due Date	October 29, 2022	August 02, 2022	December 21, 2022

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	June 03, 2021	December 13, 2021
Calibration Due Date	December 30, 2022	November 26, 2022	June 13, 2023

Equipment	RF Preamplifier (9kHz to 6000MHz)	14m Double Shield RF Cable (20MHz to 6GHz)
Registration No.	EW-3006b	EW-2074
Manufacturer	SCHWARZBECK	RADIALL
Model No.	BBV9718	N(m)-RG142-BNC(m) L=14M
Calibration Date	November 25, 2019	November 14, 2019
Calibration Due Date	June 25, 2022	August 14, 2022

Equipment	Pyramidal Horn Antenna
Registration No.	EW-0905
Manufacturer	EMCO
Model No.	3160-09
Calibration Date	July 20, 2021
Calibration Due Date	January 20, 2023

**TEST REPORT**

## 2) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2466
Manufacturer	ROHDE SCHWARZ
Model No.	FSP30
Calibration Date	November 18, 2019
Calibration Due Date	August 18, 2022

## 3) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

**END OF TEST REPORT**