

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RLAN_RM-696_39.docx	Date of Report:	18-Jul-2011
Number of pages:	9	Customer's Contact person:	Peltola Timo.Ta
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O. Box 300 Yrityspellontie 6 FIN-90230 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 58300
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-696 / Headset WH-901 / AC-Charger AC-16E / Battery BV-5JW		
FCC ID:	LJPK	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009), RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer , EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	14-Apr-2011
Testing completed	27-Jun-2011
The customer's contact person	Peltola Timo.Ta
Test Plan referred to	T:\Projects\RM-696\TestPlan\RS_testplan_RM-696.xls
Notes	-
Document name	T:\Projects\RM-696\EMC\FCC15B_RLAN_RM-696_39.docx

1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/IV(1700)/V(850)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-696	004402135480113	1501	-	0.2011.21-5-TA-INT-TEST-BUILD_001	15658
Headset	WH-901	proto ver.040A; Bno. B4.0A	3.2	4.0	-	15665
AC-Charger	AC-16E	4090491166580400050;0675491	0.31	0.3	-	15660
Battery	BV-5JW	-	00-04A	-	-	15711

1.2. Summary of Test Results

RLAN 5GHz:

Section in CFR 47	Section in ICES-003 (RSS-210)	Name of the test	Result
15.407, b	A9.2	AC powerline conducted emissions	NP
15.407, b	A9.2	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.407 (b), RSS-210 A9.2)	4
2.2. Test method and limit	4
2.3. Test results low sub band	6
2.4. Test results high sub band	7
3. Test Equipment	8
3.1. Conducted measurements	8
3.2. Radiated measurements	8

2. Radiated emissions (FCC §15.407 (b), RSS-210 A9.2)

EUT with DUT number	RM-696, DUT 15658
Accessories with DUT numbers	BV-5JW, DUT 15711; WH-901, DUT 15665; AC-16E, DUT 15660
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 101.4
Date of measurements	27-Jun-2011
Measured by	Sami Lehtonen / Kalle Hannila

2.1.1 Test Setup

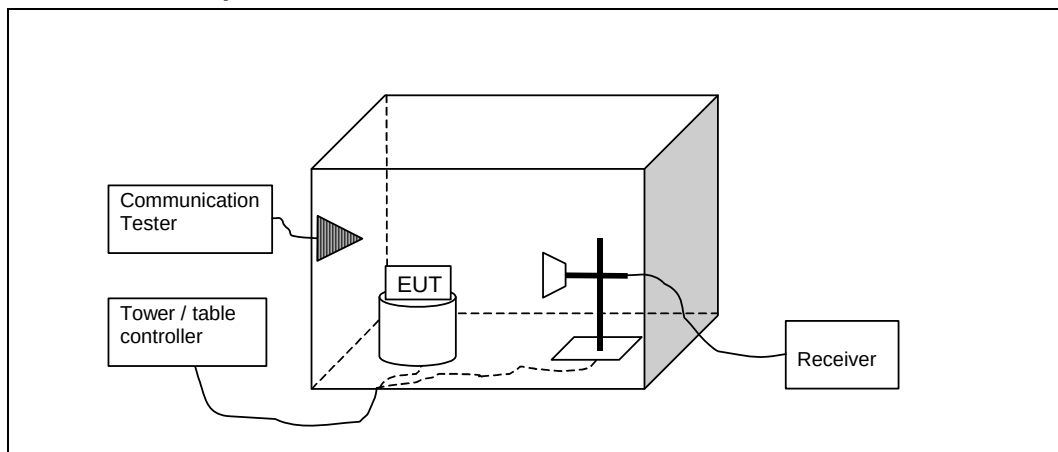

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

2.3. Test results low sub band

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
39.839	25.23	18.266	47.34	-22.11	VERTICAL	PASSED
39.902	25.06	17.902	47.21	-22.15	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7819.14	45.73	193.353	43.85	1.88	VERTICAL	PASSED
7828.355	46.99	223.563	45.02	1.97	HORIZONTAL	PASSED
7831.259	45.94	198.039	43.98	1.96	HORIZONTAL	PASSED
7840.379	46.16	203.212	44.24	1.92	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7819.14	33.15	45.452	31.27	1.88	VERTICAL	PASSED
7828.355	33.12	45.269	31.15	1.97	HORIZONTAL	PASSED
7831.259	33.14	45.384	31.18	1.96	HORIZONTAL	PASSED
7840.379	33.02	44.776	31.1	1.92	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
10479.5	50.98	354.079	42.1	8.88	VERTICAL	PASSED
12750.1	49.99	315.937	43.09	6.9	HORIZONTAL	PASSED
15719	50.35	329.344	41.36	8.99	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
10479.5	38.21	81.405	29.33	8.88	VERTICAL	PASSED
12750.1	36.97	70.567	30.07	6.9	HORIZONTAL	PASSED
15719	37.89	78.442	28.9	8.99	HORIZONTAL	PASSED

2.4. Test results high sub band

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.715	19.6	9.547	36.67	-17.07	VERTICAL	PASSED
39.659	25.26	18.313	47.26	-22	VERTICAL	PASSED
43.509	23.26	14.555	47.5	-24.24	VERTICAL	PASSED
128.321	12.84	4.385	40.88	-28.04	VERTICAL	PASSED
897.391	18.41	8.324	34.4	-15.99	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1727.357	39.9	98.889	47.11	-7.21	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1727.357	27.4	23.434	34.61	-7.21	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7820.037	45.91	197.469	44.01	1.9	HORIZONTAL	PASSED
7823.548	46.49	211.203	44.53	1.96	VERTICAL	PASSED
7837.579	45.81	195.299	43.87	1.94	VERTICAL	PASSED
7858.619	45.98	199.09	44.01	1.97	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7820.037	33.2	45.704	31.3	1.9	HORIZONTAL	PASSED
7823.548	33.24	45.909	31.28	1.96	VERTICAL	PASSED
7837.579	33.17	45.567	31.23	1.94	VERTICAL	PASSED
7858.619	32.98	44.54	31.01	1.97	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
11359.9	52.03	399.577	43.48	8.55	VERTICAL	PASSED
12750	50.06	318.493	43.09	6.97	HORIZONTAL	PASSED
17041.7	52.42	417.927	40.49	11.93	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
11359.9	39.8	97.667	31.25	8.55	VERTICAL	PASSED
12750	37.05	71.17	30.08	6.97	HORIZONTAL	PASSED
17041.7	39.77	97.342	27.84	11.93	VERTICAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1992	Signal Generator	83630B	Agilent	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6016	ESD gun	PESD 1610	HAEFELY	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1988	Antenna	HL562	R&S	22/24/27, 15C, 15B
1989	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24
2051	High Pass Filter	4HC1700-1-KK	R&S	22
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2150	High Pass Filter	F-15041	RLC	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B