

NOKIA

NOKIA MOBILE PHONES

Elektriikkatie 10
FIN-90570 Oulu
FINLAND
Tel. +358 10 5051
Fax. +358 10 505 7222

October 4, 2000

Federal Communications Commission,
Authorization & Evaluation Division,
7435 Oakland Mills Road
Columbia, MD. 21046

Attention: Equipment Authorization Branch

We hereby certify that the transceiver FCC ID: LJPNSW-5NY complies with
ANSI/IEEE C95.1-1992 Standard for Safety Levels with Respect to Human
Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

Compliance was determined by testing appropriate parameters according to
standard.

NOKIA MOBILE PHONES



Mikko Julku
Product Creation Manager, PCC Oulu

October 6th, 2000

P.O. Box 86
Joensuunkatu 7E
FIN-24101 SALO
Finland

FEDERAL COMMUNICATIONS COMMISSION
Equipment Authorization Branch
7435 Oaklands Mills Road
Columbia, MD 21046

SAR TEST REPORT of Nokia 7160

Gentlemen,

Please find attached SAR test report of FCC ID: LJPNSW-5NY

For and on behalf of Nokia Mobile Phones Ltd.

Respectfully,



Sami Savela
Senior RF Design Engineer
Responsible for NMP SAR measurements

Contents	Page
1. Description of the measurement	3
2. Description of calibration by manufacturer	4
3. List of standards	4
4. Device list	5
5. Equipment under test	6
5.1 Verification and results	6
5.2 Specification of Liquid	6
5.3 Specification of position with phone against generic twin phantom	7
5.4 The phone position against generic twin phantom	8
5.5 Results of SAR for 1g	9
5.6 Evaluation of SAR in body worn configurations	10
5.6.1 Introduction	10
5.6.2 Test method	10
5.6.3 Results	12
5.6.4 Summary	12
Appendix 1	
Appendix 2	
Appendix 3	
Appendix 4	
Appendix 5	
Appendix 6	
Appendix 7	
Appendix 8	
Appendix 9	
Appendix 10	

1. Description of the measurement

These measurements were done by E-field scanning system for dosimetric assessments. It is robot-based system which allows automated E-field scanning in tissue simulating solutions. The measurements are based on the induced specific absorption rate (SAR) definition of relevant ANSI / IEEE standards. The dosimetric assessment system of Nokia Mobile Phones is manufactured by Prof. Niels Kuster at ETH (Schmid & Partner Engineering AG) in Switzerland, Europe.

The method used to determine the 1 gram average value of SAR is:

Initially a coarse scan is performed over the whole area on a 20 x 20 mm grid. From this coarse scan, the location at which the maximum value is measured is used as the centre for a second, more detailed scan. This second scan is based on a 3 dimensional grid of 4 x 4 x 7 points on a grid of 10 mm for 900 MHz and 5 x 5 x 7 points on a grid of 8 mm for 1800 MHz band. The average SAR values are computed using the 3D spline interpolation algorithm. The 3D spline is composed on three one-dimensional splines with the "Not a knot" condition in the x, y and z directions (1), (2). The volume is integrated with the trapezoidal algorithm. 1000 points (10x10x10) are interpolated to calculate the average. All neighbouring volumes are evaluated until no neighbouring volume with a higher average is found.

(1) *W. Gander, Computermathematik, Birkhauser, Basel, 1992*

(2) *W. H. Press, S. A. Teukolsky, W. T. Vetterling and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, second edition, Cambridge University Press, 1992*

2. Description of calibration by manufacturer

The calibration of data acquisition electronics and probe was done by the manufacturer. (Appendix 3 and 7)

- the data acquisition unit is calibrated and tested using a FLUKE 702 Process Calibrator
- measurement uncertainty is less than $\pm 20\%$ for various tissues simulating solutions and frequencies:
 - these calibration parameters were measured using a temperature probe developed by manufacturer
 - description of the probe calibration and examples of the evaluation are enclosed in Appendix 7

3. List of standards

ANSI/IEEE Std C95.1-1992

IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

ANSI/IEEE Std C95.3-1992

IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields-RF and Microwave

4. Device list:

Automated E-field scanning system for dosimetric assessments System.
Calibration due June 2001. Technical data (Appendix 1)

Probe ET3DV4, SN: 1105, Recalibrated due June 2001
Technical data (Appendix 2)

DASY-dosimetric assessment system, DAE V2, SN: 213, Calibration
due June 2001 (Appendix 3)

Industrial robot and Control unit, type STÄUBLI CS7 RX 90(CR)
NO:595148-01, Technical data (Appendix 4)

Generic Twin Phantom Version 3 (Appendix 6).

PC COMPAQ 466
laser printer QMS magicolor plus

Devices for preparation of the brain tissue simulating liquids

- General laboratory equipment for preparation of liquids
- Magnetic stirrer with heating plate IKA RET CV, SN:792708
- Scale Mettler Doleto, SN: 2114177678

HP 85070A Dielectric probe system

- network analyzer HP 8753B, SN:2716U00762, Calibration due May 2001
- cables
- probe stand
- dielectric probe kit NO: US33020242
- PC AST PREMMIA 4/66 d
- HP-IB 82335B (interface and software)

Dipole Validation kit for 900 MHz band, Schmid & Partner Engineering AG,
Typ: D900V2, SN: 003, Recalibrated/Verification due June 2002 and

Dipole Validation kit for 1800 MHz band, Schmid & Partner Engineering AG,
Typ: D1800V2, SN: 207, Recalibrated/Verification due June 2002

- signal generator ROHDE & SCHWARZ, 1038.6002.03 , Calibration due June 2002
- power meter, ROHDE & SCHWARZ, 857.8008.02, Calibration due December 2001
- amplifier ZHL-42 (SMA), 022488-RM:4152

5. Equipment under test

Unit: NOKIA 7160
 FCC-ID: LJPNSW-5NY

5.1 Verification and results

Validation of the measurement system was made before measurement using the Validation kit. Appendix: 8 and 9.

This validation measurement makes sure that the repeatability of SAR measurement value with careful positioning is better than 10 %.

On 900 MHz error was < 5 % compared to the parameter of manufacturer SAR results (0.25W): 2.34 mW/g (1g) and 2.45 mW/g (1g).

On 1800 MHz band error was < 8 % compared to the parameter of manufacturer SAR results (0.25W): 9.57 mW/g (1g) and 10.3 mW/g (1g).
 Appendix: 8 and 9

5.2 Specification of Liquid

The liquids were done using the "Recipe 900MHz" and "Recipe 1800MHz", respectively, and preparation bases on brochure. Appendix 5

900 MHz liquid was used with the 900 MHz Validation measurement and 1800 MHz liquid was used with the 1800 MHz validation measurement.

The parameters were measured by liquid testing of HP85070A Dielectric probe system. The amounts of used liquids were 20 litres.

Liquid parameters *e* r (Relative permittivity) and *s* (Conductivity) were measured by HP 85070A Dielectric probe system.

Frequency / MHz	Relative permittivity / e _r	Conductivity / mho/m
824	44.8	0.79
836	44.6	0.80
849	44.5	0.82
900	44.1	0.87
1800	42.4	1.66
1850	42.1	1.71
1880	41.9	1.74
1910	41.7	1.77

5.3 Specification of position with phone against generic twin phantom

The position of the phone relative to the head phantom is shown on page 8. The centre of the phone's earpiece is aligned such that it is co-axial with a mark on the phantom which represents the centre of the ear of the head.

Measurements were done with a Left-Hand (L.H.) side because the antenna is situated in the top right corner of the phone (viewed from the earpiece side). Therefore, the antenna is closer to the head in the measurement position using a L.H. side rather than a R.H. side. It is concluded that the L.H. side is worst case measurement position.



The test signal for measurements was Analog AMPS and Digital TDMA Cellular and Digital TDMA PCS.

The phone positions against the head were 90° (for the IEEE Std C95.1-1991 (ANSI / IEEE) and FCC measurement). The angle between the reference line of the phone and the line connecting both auditory canal openings was 90°. The distance between the handset and the brain simulation liquid was 6 mm (page 8).

The used radio channels on AMPS and TDMA Cellular mode were: 991, 383 and 799. The used radio channels on TDMA PCS mode were: 2, 1000 and 1998. Peak TX power of analog AMPS and digital TDMA test signal ("Power" in the tables of the paragraph 5.5) was measured from external antenna connector of the transceiver using maximum power level. During the tests the battery was fully charged.

Ambient and "brain tissue" liquid temperature was 23 °C ± 1 °C.

5.4 The phone position against generic twin phantom

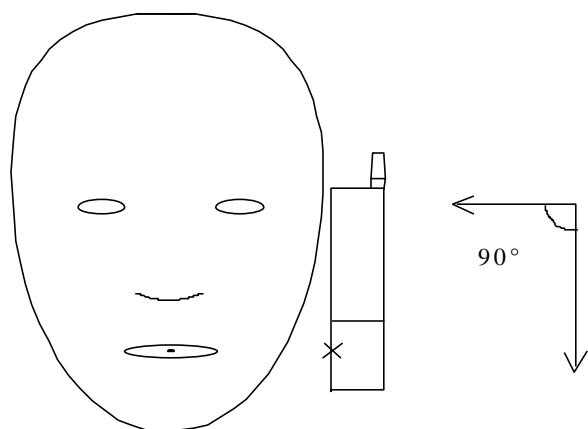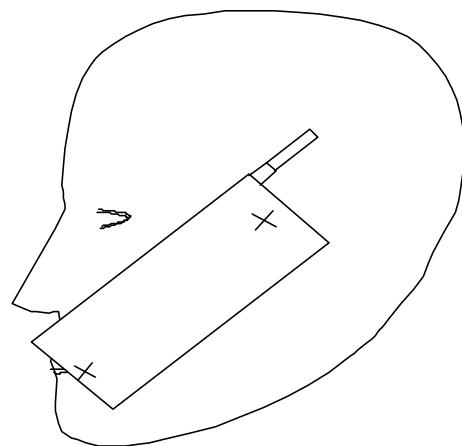

Picture 5.4.

The centre of the ear piece were placed directly at the entrance of the imaginary auditory canal of the phantom. The reference line of the phone lie in the reference plane defined by the following three points: auditory canal openings of both ears and the centre of the mouth.

5.5 Results of SAR for 1g.

Appendix: 10

The plots in Appendix 10 are a graphical representation of the SAR values over the whole area being scanned.

The size of the area being scanned is sufficiently large to ensure that all possible regions of peak SAR are measured. This is indicated by the fact that the position of peak SAR is in the measured area, and the value of SAR reduces asymptotically in the x- and y- directions as the probe is moved towards the border of the measured area.

Analog Mode AMPS, Left Hand Phantom

Meas Nr:	Phone position	Frequency MHz / channel	Power [dBm]	SAR (1g) [mW/g]
1	90°	824 / 991	24.5	1.05
2	90°	836 / 383	24.6	1.23
3	90°	849 / 799	24.6	1.19
FCC ID: LJPNSW-5NY MEASURED: 2000-10-6/NMP		FCC limit		1.60 [mW/g] (ANSI/IEEE)

Digital mode TDMA Cellular, Left Hand Phantom

Meas nr:	Phone position	Frequency MHz / channel	Power [dBm]	SAR (1g) [mW/g]
4	90°	824 / 991	26.9	0.60
5	90°	836 / 383	27.0	0.71
6	90°	849 / 799	26.8	0.69
FCC ID: LJPNSW-5NY MEASURED: 2000-10-6/NMP		FCC limit		1.60 [mW/g] (ANSI/IEEE)

Digital mode TDMA PCS, Left Hand Phantom

Meas Nr:	Phone position	Frequency MHz / channel	Power [dBm]	SAR (1g) [mW/g]
7	90°	1850 / 2	25.2	1.03
8	90°	1880 / 1000	25.3	0.98
9	90°	1910 / 1998	25.3	0.98
FCC ID: LJPNSW-5NY MEASURED: 2000-10-6/NMP		FCC limit		1.60 [mW/g] (ANSI/IEEE)

5.6 Evaluation of SAR in body worn configurations

5.6.1 Introduction

SAR was measured when phone was placed with body worn accessories against the Flat Phantom. Body worn accessories Belt Clip BCH-12U and Leather Carry Case CSL-5 (Picture 1) were tested. The measurement test equipment and setup was the same as used in Head SAR measurements.



Picture 1. Belt Clip BCH-12U and Leather Carry Case CSL-5

5.6.2 Test method

Measurements were done with the Dasy 2 dosimetric assessment system DAE V2, SN: 213 and with the generic Twin Phantom version 3 from Schmid & Partner Engineering Ag. Positioning of the phone in all measurements were done according to the user guide instructions in section *Radio Frequency (RF) Signals*. Separation distance for BCH-12U is presented in picture 2 and for CSL-5 picture 3. The point of maximum SAR was searched and SAR was measured with a 3-dimensional cube measurement averaged over 1 gram mass.



Picture 2. Separation distance with Belt Clip BCH-12U



Picture 3. Separation distance with Leather Carry Sleeve CSL-5

Body-worn SAR was measured on lowest, middle and highest channel with the maximum output power level. Brain equivalent liquid was used in body-worn measurements.

Permittivity and conductivity of muscle tissue simulating liquids at 1880 MHz is shown in table 1 and at 836 MHz in table 2. FCC recommendation is from <http://www.fcc.gov/fcc-bin-dielec.sh>

	Permittivity	Conductivity
FCC recommendation	54.332108	1.436068
Used brain tissue	41.9	1.74

Table 1. Properties of liquids simulating muscle tissue @ 1880 MHz

The used brain tissue has higher conductivity and lower permittivity than the liquid FCC recommends to be used. Thus all SAR values are overestimated.

	Permittivity	Conductivity
FCC recommendation	56.111336	0.946714
Used brain tissue	44.6	0.80

Table 2. Properties of liquids simulating muscle tissue @ 836 MHz

FCC recommended conductivity would lead to higher SAR results than the liquid used. On the other hand, the used permittivity compensates difference caused by the conductivity.

When the measured SAR values are multiplied by factor 1.18, which is the difference between the conductivity values, the maximum body SAR result changes from 1,20 to 1,42. This approach leads to overestimate of SAR.

5.6.3 Results

Graphical presentations of test positions with SAR values are presented in the end of this report.

Body Worn, Belt Clip (BCH-12U) against Flat Phantom

Meas. nr:	Test signal	Frequency MHz / channel	Power dBm	SAR (1g) [mW/g]
10	AMPS	824 / 991	24.5	0.57
11	AMPS	836 / 383	24.6	0.67
12	AMPS	849 / 799	24.6	0.71
13	TDMA Cellular	824 / 991	26.9	0.30
14	TDMA Cellular	836 / 383	27.0	0.34
15	TDMA Cellular	849 / 799	26.8	0.35
16	TDMA PCS	1850 / 2	25.2	0.81
17	TDMA PCS	1880 / 1000	25.3	0.86
18	TDMA PCS	1910 / 1998	25.3	0.80
FCC ID: LJPNSW-5NY MEASURED: 2000-10-6/NMP		FCC limit		1.60 [mW/g] (ANSI/IEEE)

Body Worn, Leather Carry Case (CSL-5) against Flat Phantom

Meas. nr:	Test signal	Frequency MHz / channel	Power dBm	SAR (1g) [mW/g]
19	AMPS	824 / 991	24.5	1.07
20	AMPS	836 / 383	24.6	1.19
21	AMPS	849 / 799	24.6	1.20
22	TDMA Cellular	824 / 991	26.9	0.62
23	TDMA Cellular	836 / 383	27.0	0.80
24	TDMA Cellular	849 / 799	26.8	0.84
25	TDMA PCS	1850 / 2	25.2	0.42
26	TDMA PCS	1880 / 1000	25.3	0.45
27	TDMA PCS	1910 / 1998	25.3	0.46
FCC ID: LJPNSW-5NY MEASURED: 2000-10-6/NMP		FCC limit		1.60 [mW/g] (ANSI/IEEE)

5.6.4 Summary

The SAR values found for the portable cellular phone (FCC ID: LJPNSW-5NY) are below the maximum recommended levels of 1.6 mW/g.