

## SAR Compliance Test Report

|   |   |                                |  |
|---|---|--------------------------------|--|
| <b>Test report no.:</b>                                 | Salo_SAR_0849_02  | <b>Date of report:</b>         | 2008-12-12   |
| <b>Template version:</b>                                | 10  | <b>Number of pages:</b>        | 60   |
| <b>Testing laboratory:</b>                              | TCC Nokia Salo Laboratory<br>P.O.Box 86<br>Joensuunkatu 7H / Kiila 1B<br>FIN-24101 SALO, FINLAND<br>Tel. +358 (0) 7180 08000<br>Fax. +358 (0) 7180 45220  | <b>Client:</b>                 | Nokia Corporation<br>P.O. Box 50<br>Elektroniikkatie 10<br>FIN-90571 OULU, FINLAND<br>Tel. +358 (0) 7180 08000<br>Fax. +358 (0) 7180 47222 |
| <b>Responsible test engineer:</b>                       | Virpi Tuominen  | <b>Product contact person:</b> | Jyrki Juvani   |
| <b>Measurements made by:</b>                            | Janne Hirsimäki, Virpi Tuominen   |                                |  |
| <b>Tested device:</b>                                   | RM-431  |                                |  |
| <b>FCC ID:</b>  | LJPRM-431   | <b>IC:</b>                     | 661E-RM431   |
| <b>Supplement reports:</b>                              | Salo_SAR_0849_03  |                                |  |
| <b>Testing has been carried out in accordance with:</b> | <b>47CFR §2.1093</b><br>Radiofrequency Radiation Exposure Evaluation: Portable Devices<br><b>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)</b><br>Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields<br><b>RSS-102</b><br>Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields<br><b>IEEE 1528 - 2003</b><br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique |                                |  |
| <b>Documentation:</b>                                   | The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.   |                                |  |
| <b>Test results:</b>                                    | <b>The tested device complies with the requirements in respect of all parameters subject to the test.</b> The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.  |                                |  |
| <b>Date and signatures:</b>                             |   |                                |  |
| For the contents:                                       |   |                                |  |

CONTENTS

|  |           |
|--|-----------|
| <b>1. SUMMARY OF SAR TEST REPORT.....</b>                                    | <b>3</b>  |
| 1.1 TEST DETAILS.....  | 3         |
| 1.2 MAXIMUM RESULTS.....   | 3         |
| 1.2.1 <i>Head Configuration</i> .....  | 3         |
| 1.2.2 <i>Body Worn Configuration</i> .....                                   | 4         |
| 1.2.3 <i>Maximum Drift</i> .....   | 4         |
| 1.2.4 <i>Measurement Uncertainty</i> .....                                   | 4         |
| <b>2. DESCRIPTION OF THE DEVICE UNDER TEST.....</b>                          | <b>5</b>  |
| 2.1 DESCRIPTION OF THE ANTENNA.....  | 5         |
| <b>3. TEST CONDITIONS .....</b>  | <b>5</b>  |
| 3.1 TEMPERATURE AND HUMIDITY.....  | 5         |
| 3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....                           | 5         |
| <b>4. DESCRIPTION OF THE TEST EQUIPMENT .....</b>                            | <b>6</b>  |
| 4.1 MEASUREMENT SYSTEM AND COMPONENTS .....                                  | 6         |
| 4.1.1 <i>Isotropic E-field Probe Type ES3DV3</i> .....                       | 7         |
| 4.2 PHANTOMS .....   | 8         |
| 4.3 TISSUE SIMULANTS .....   | 8         |
| 4.3.1 <i>Tissue Simulant Recipes</i> .....                                   | 8         |
| 4.3.2 <i>System Checking</i> .....   | 9         |
| 4.3.3 <i>Tissue Simulants used in the Measurements</i> .....                 | 10        |
| <b>5. DESCRIPTION OF THE TEST PROCEDURE .....</b>                            | <b>11</b> |
| 5.1 DEVICE HOLDER.....   | 11        |
| 5.2 TEST POSITIONS.....  | 12        |
| 5.2.1 <i>Against Phantom Head</i> .....                                      | 12        |
| 5.2.2 <i>Body Worn Configuration</i> .....                                   | 12        |
| 5.3 SCAN PROCEDURES.....   | 12        |
| 5.4 SAR AVERAGING METHODS.....   | 13        |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>                                      | <b>14</b> |
| <b>7. RESULTS .....</b>  | <b>15</b> |
| <b>APPENDIX A: SYSTEM CHECKING SCANS.....</b>                                | <b>19</b> |
| <b>APPENDIX B: MEASUREMENT SCANS.....</b>                                    | <b>19</b> |
| <b>APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S).....</b>      | <b>59</b> |
| <b>APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S) .....</b> | <b>60</b> |

## 1. SUMMARY OF SAR TEST REPORT

### 1.1 Test Details

|  |   |
|--|---|
| Period of test                         | 2008-12-02 to 2008-12-08  |
| SN, HW and SW numbers of tested device | SN: 004401/10/417187/7, HW: 0412, SW: 002.002, DUT: 13290                       |
| Batteries used in testing              | BL-4CT Sony, DUT: 13292, 13293, 13294, 13295<br>BL-4CT Sanyo, DUT: 13298, 13299 |
| Headsets used in testing               | HS-45+AD-54, DUT: 13301, 13300  |
| Other accessories used in testing      | -   |
| State of sample                        | Prototype unit  |
| Notes                                  | -   |

### 1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

#### 1.2.1 Head Configuration

| Mode                      | Ch / f (MHz) | Radiated power | Position     | Measured SAR value (1g avg) | Scaled* SAR value (1g avg) | SAR limit (1g avg) | Result        |
|---------------------------|--------------|----------------|--------------|-----------------------------|----------------------------|--------------------|---------------|
| 3-slot GPRS850            | 251 / 848.8  | 21.3 dBm ERP   | Right, Cheek | 0.605 W/kg                  | <b>0.68 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| GSM1900                   | 661 / 1880.0 | 26.2 dBm EIRP  | Right, Cheek | 0.908 W/kg                  | <b>1.02 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| WLAN2450                  | 7 / 2442.0   | 15.0 dBm EIRP  | Left, Cheek  | 0.180 W/kg                  | <b>0.20 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| 3-slot GPRS850 + WLAN2450 | -            | -              | Right, Cheek | 0.745 W/kg                  | <b>0.83 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| GSM1900 + WLAN2450        | -            | -              | Right, Cheek | 1.048 W/kg                  | <b>1.17 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |

### 1.2.2 Body Worn Configuration

| Mode                      | Ch / f (MHz) | Radiated power | Separation distance | Measured SAR value (1g avg) | Scaled* SAR value (1g avg) | SAR limit (1g avg) | Result        |
|---------------------------|--------------|----------------|---------------------|-----------------------------|----------------------------|--------------------|---------------|
| 3-slot GPRS850            | 251 / 848.8  | 21.3 dBm ERP   | 2.2cm               | 0.430 W/kg                  | <b>0.48 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| GSM1900                   | 661 / 1880.0 | 26.2 dBm EIRP  | 2.2cm               | 0.173 W/kg                  | <b>0.19 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| WLAN2450                  | 7 / 2442.0   | 15.0 dBm EIRP  | 2.2cm               | 0.043 W/kg                  | <b>0.05 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| 3-slot GPRS850 + WLAN2450 | -            | -              | 2.2cm               | 0.473 W/kg                  | <b>0.53 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |
| GSM1900 + WLAN2450        | -            | -              | 2.2cm               | 0.216 W/kg                  | <b>0.24 W/kg</b>           | 1.6 W/kg           | <b>PASSED</b> |

\*SAR values are scaled up by 12% to cover measurement drift.

### 1.2.3 Maximum Drift

| Maximum drift covered by 12% scaling up of the SAR values | Maximum drift during measurements |
|---|-----------------------------------|
| 0.5dB   | 0.40 dB                           |

### 1.2.4 Measurement Uncertainty

|                                |         |
|--------------------------------|---------|
| Expanded Uncertainty (k=2) 95% | ± 25.8% |
|--------------------------------|---------|

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

|                      |                                   |
|----------------------|-----------------------------------|
| Device category      | Portable                          |
| Exposure environment | General population / uncontrolled |

| Modes of Operation | Bands       | Modulation Mode | Duty Cycle | Transmitter Frequency Range (MHz) |
|--------------------|-------------|-----------------|------------|-----------------------------------|
| GSM                | 850<br>1900 | GMSK            | 1/8        | 824 – 849<br>1850 – 1910          |
| GPRS               | 850<br>1900 | GMSK            | 1/8 to 3/8 | 824 – 849<br>1850 – 1910          |
| EGPRS              | 850<br>1900 | GMSK / 8PSK     | 1/8 to 3/8 | 824 – 849<br>1850 – 1910          |
| BT                 | 2450        | GFSK            | 1          | 2402 – 2480                       |
| WLAN               | 2450        | 11Mbps QPSK     | 1          | 2412 – 2462                       |

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, GSM/GPRS/EGPRS1800, WCDMA900 and WCDMA2100 bands which are not part of this filing.

This device has Dual Transfer Mode/Voice over IP capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom.

### 2.1 Description of the Antenna

The device has internal antennas.

## 3. TEST CONDITIONS

### 3.1 Temperature and Humidity

|                           |              |
|---------------------------|--------------|
| Ambient temperature (°C): | 20.0 to 21.9 |
| Ambient humidity (RH %):  | 37 to 42     |

### 3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester except for testing WLAN2450 where control software was used. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing.

#### 4. DESCRIPTION OF THE TEST EQUIPMENT

##### 4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the ‘advanced extrapolation’ algorithm.

The following table lists calibration dates of SPEAG components:

| Test Equipment                 | Serial Number | Calibration interval | Calibration expiry |
|--------------------------------|---------------|----------------------|--------------------|
| DAE 4                          | 728           | 12 months            | 2009-04            |
| DAE 4                          | 793           | 12 months            | 2009-04            |
| E-field Probe ES3DV3           | 3131          | 12 months            | 2009-04            |
| E-field Probe ES3DV3           | 3165          | 12 months            | 2009-04            |
| Dipole Validation Kit, D835V2  | 480           | 24 months            | 2009-05            |
| Dipole Validation Kit, D1900V2 | 5d030         | 24 months            | 2010-01            |
| Dipole Validation Kit, D2450V2 | 729           | 24 months            | 2010-01            |
| DASY4 software                 | Version 4.7   | -                    | -                  |

Additional test equipment used in testing:

| Test Equipment          | Model        | Serial Number | Calibration interval | Calibration expiry |
|-------------------------|--------------|---------------|----------------------|--------------------|
| Signal Generator        | SML03        | 101265        | 12 months            | 2009-07            |
| Amplifier               | ZHL-42 (SMA) | N072095-5     | 12 months            | 2009-07            |
| Power Meter             | NRVS         | 849305/028    | 12 months            | 2009-07            |
| Power Sensor            | NRV-Z32      | 839176/020    | 12 months            | 2009-07            |
| Call Tester             | CMU 200      | 103293        | -                    | -                  |
| Call Tester             | CMU 200      | 101111        | -                    | -                  |
| Vector Network Analyzer | 8753E        | US38432928    | 12 months            | 2009-07            |
| Dielectric Probe Kit    | 85070B       | US33020420    | -                    | -                  |

4.1.1 Isotropic E-field Probe Type ES3DV3

|                      |  |
|----------------------|--|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol) |
| <b>Calibration</b>   | Calibration certificate in Appendix C  |
| <b>Frequency</b>     | 10 MHz to 4 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)   |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in HSL (rotation normal to probe axis)  |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB   |
| <b>Dimensions</b>    | Overall length: 330 mm<br>Tip length: 20 mm<br>Body diameter: 12 mm<br>Tip diameter: 3.9 mm  |
| <b>Application</b>   | Distance from probe tip to dipole centers: 2.0 mm<br>General dosimetry up to 4 GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms                     |

## 4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

## 4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was  $15.0 \pm 0.5$  cm measured from the ear reference point during system checking and device measurements.

### 4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

#### 800MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 51.50                 | 69.25                 |
| Tween 20        | 47.35                 | 30.00                 |
| Salt            | 1.15                  | 0.75                  |

#### 1900MHz band

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 54.50                 | 70.25                 |
| Tween 20        | 45.23                 | 29.41                 |
| Salt            | 0.27                  | 0.34                  |



**2450MHz band**

| Ingredient      | Head<br>(% by weight) | Body<br>(% by weight) |
|-----------------|-----------------------|-----------------------|
| Deionised Water | 56.0                  | 70.20                 |
| Tween 20        | 44.0                  | 29.62                 |
| Salt            | -                     | 0.18                  |

**4.3.2 System Checking**

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

**System checking, head tissue simulant**

| f [MHz] | Description      | SAR [W/kg],<br>1g | Dielectric Parameters |                | Temp [°C] |
|---------|------------------|-------------------|-----------------------|----------------|-----------|
|         |                  |                   | $\epsilon_r$          | $\sigma$ [S/m] |           |
| 835     | Reference result | 2.29              | 41.6                  | 0.90           |           |
|         | ± 10% window     | 2.06 – 2.52       |                       |                |           |
|         | 2008-12-04       | 2.31              | 41.6                  | 0.91           | 21.0      |
|         | 2008-12-05       | 2.31              | 41.4                  | 0.91           | 21.0      |
| 1900    | Reference result | 10.2              | 38.5                  | 1.46           |           |
|         | ± 10% window     | 9.2 – 11.2        |                       |                |           |
|         | 2008-12-02       | 10.4              | 39.6                  | 1.39           | 21.0      |
|         | 2008-12-08       | 10.5              | 40.2                  | 1.40           | 21.0      |
| 2450    | Reference result | 14.3              | 37.8                  | 1.82           |           |
|         | ± 10% window     | 12.9 – 15.7       |                       |                |           |
|         | 2008-12-03       | 14.5              | 38.6                  | 1.86           | 21.0      |

**System checking, body tissue simulant**

| f [MHz] | Description      | SAR [W/kg],<br>1g | Dielectric Parameters |                | Temp [°C] |
|---------|------------------|-------------------|-----------------------|----------------|-----------|
|         |                  |                   | $\epsilon_r$          | $\sigma$ [S/m] |           |
| 2450    | Reference result | 13.8              | 52.5                  | 1.99           |           |
|         | ± 10% window     | 12.4 – 15.2       |                       |                |           |
|         | 2008-12-04       | 13.9              | 50.9                  | 2.01           | 21.0      |

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

**Head tissue simulant measurements**

| f [MHz] | Description       | Dielectric Parameters |                | Temp [°C] |
|---------|-------------------|-----------------------|----------------|-----------|
|         |                   | $\epsilon_r$          | $\sigma$ [S/m] |           |
| 836     | Recommended value | 41.5                  | 0.90           |           |
|         | ± 5% window       | 39.4 – 43.6           | 0.86 – 0.95    |           |
|         | 2008-12-04        | 41.6                  | 0.91           | 21.0      |
|         | 2008-12-05        | 41.4                  | 0.91           | 21.0      |
| 1880    | Recommended value | 40.0                  | 1.40           |           |
|         | ± 5% window       | 38.0 – 42.0           | 1.33 – 1.47    |           |
|         | 2008-12-02        | 39.7                  | 1.38           | 21.0      |
| 2442    | Recommended value | 39.2                  | 1.79           |           |
|         | ± 5% window       | 37.3 – 41.2           | 1.70 – 1.88    |           |
|         | 2008-12-03        | 38.6                  | 1.85           | 21.0      |

**Body tissue simulant measurements**

| f<br>[MHz] | Description       | Dielectric Parameters |                | Temp<br>[°C] |
|------------|-------------------|-----------------------|----------------|--------------|
|            |                   | $\epsilon_r$          | $\sigma$ [S/m] |              |
| 836        | Recommended value | 55.2                  | 0.97           | 21.0         |
|            | ± 5% window       | 52.4 – 58.0           | 0.92 – 1.02    |              |
|            | 2008-12-05        | 53.7                  | 0.99           |              |
| 1880       | Recommended value | 53.3                  | 1.52           | 21.0         |
|            | ± 5% window       | 50.6 – 56.0           | 1.44 – 1.60    |              |
|            | 2008-12-08        | 52.7                  | 1.47           |              |
| 2442       | Recommended value | 52.7                  | 1.94           | 21.0         |
|            | ± 5% window       | 50.1 – 55.3           | 1.85 – 2.04    |              |
|            | 2008-12-04        | 50.9                  | 2.01           |              |

**5. DESCRIPTION OF THE TEST PROCEDURE**

**5.1 Device Holder**

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

## 5.2 Test Positions

### 5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

### 5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

## 5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

---

## 5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

| Uncertainty Component   | Section in IEEE 1528 | Tol. (%) | Prob Dist | Div | $C_i$           | $C_i \cdot U_i$ (%) | $V_i$ |
|---|----------------------|----------|-----------|-----|-----------------|---------------------|-------|
| <b>Measurement System</b>   |                      |          |           |     |                 |                     |       |
| Probe Calibration   | E2.1                 | ±5.9     | N         | 1   | 1               | ±5.9                | ∞     |
| Axial Isotropy  | E2.2                 | ±4.7     | R         | √3  | $(1-c_p)^{1/2}$ | ±1.9                | ∞     |
| Hemispherical Isotropy  | E2.2                 | ±9.6     | R         | √3  | $(c_p)^{1/2}$   | ±3.9                | ∞     |
| Boundary Effect   | E2.3                 | ±1.0     | R         | √3  | 1               | ±0.6                | ∞     |
| Linearity   | E2.4                 | ±4.7     | R         | √3  | 1               | ±2.7                | ∞     |
| System Detection Limits   | E2.5                 | ±1.0     | R         | √3  | 1               | ±0.6                | ∞     |
| Readout Electronics   | E2.6                 | ±1.0     | N         | 1   | 1               | ±1.0                | ∞     |
| Response Time   | E2.7                 | ±0.8     | R         | √3  | 1               | ±0.5                | ∞     |
| Integration Time  | E2.8                 | ±2.6     | R         | √3  | 1               | ±1.5                | ∞     |
| RF Ambient Conditions - Noise   | E6.1                 | ±3.0     | R         | √3  | 1               | ±1.7                | ∞     |
| RF Ambient Conditions - Reflections   | E6.1                 | ±3.0     | R         | √3  | 1               | ±1.7                | ∞     |
| Probe Positioner Mechanical Tolerance   | E6.2                 | ±0.4     | R         | √3  | 1               | ±0.2                | ∞     |
| Probe Positioning with respect to Phantom Shell                                 | E6.3                 | ±2.9     | R         | √3  | 1               | ±1.7                | ∞     |
| Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | E5                   | ±3.9     | R         | √3  | 1               | ±2.3                | ∞     |
| <b>Test sample Related</b>  |                      |          |           |     |                 |                     |       |
| Test Sample Positioning   | E4.2                 | ±6.0     | N         | 1   | 1               | ±6.0                | 11    |
| Device Holder Uncertainty   | E4.1                 | ±5.0     | N         | 1   | 1               | ±5.0                | 7     |
| Output Power Variation - SAR drift measurement                                  | 6.6.3                | ±0.0     | R         | √3  | 1               | ±0.0                | ∞     |
| <b>Phantom and Tissue Parameters</b>  |                      |          |           |     |                 |                     |       |
| Phantom Uncertainty (shape and thickness tolerances)                            | E3.1                 | ±4.0     | R         | √3  | 1               | ±2.3                | ∞     |
| Conductivity Target - tolerance   | E3.2                 | ±5.0     | R         | √3  | 0.64            | ±1.8                | ∞     |
| Conductivity - measurement uncertainty  | E3.3                 | ±5.5     | N         | 1   | 0.64            | ±3.5                | 5     |
| Permittivity Target - tolerance   | E3.2                 | ±5.0     | R         | √3  | 0.6             | ±1.7                | ∞     |
| Permittivity - measurement uncertainty  | E3.3                 | ±2.9     | N         | 1   | 0.6             | ±1.7                | 5     |
| <b>Combined Standard Uncertainty</b>  |                      |          | RSS       |     |                 | ±12.9               | 116   |
| <b>Coverage Factor for 95%</b>  |                      |          | k=2       |     |                 |                     |       |
| <b>Expanded Uncertainty</b>   |                      |          |           |     |                 | ±25.8               |       |

## 7. RESULTS

The measured Head SAR values for the test device are tabulated below:

### 850MHz Head SAR results

| Option used                                    | Test configuration |       | SAR, averaged over 1g (W/kg) |                     |                     |
|--|--------------------|-------|------------------------------|---------------------|---------------------|
|  |                    |       | Ch 128<br>824.2 MHz          | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |
| <b>GSM</b>                                     | <b>Power</b>       |       | <b>24.3 dBm</b>              | <b>24.9 dBm</b>     | <b>25.2 dBm</b>     |
| Battery:<br>BL-4CT Sony                        | Left               | Cheek | -                            | 0.458               | -                   |
|  |                    | Tilt  | -                            | -                   | -                   |
|  | Right              | Cheek | -                            | -                   | -                   |
|  |                    | Tilt  | -                            | -                   | -                   |
| <b>2-slot GPRS</b>                             | <b>Power</b>       |       | <b>22.1 dBm</b>              | <b>22.7 dBm</b>     | <b>22.9 dBm</b>     |
| Battery:<br>BL-4CT Sony                        | Left               | Cheek | -                            | 0.500               | -                   |
|  |                    | Tilt  | -                            | -                   | -                   |
|  | Right              | Cheek | -                            | -                   | -                   |
|  |                    | Tilt  | -                            | -                   | -                   |
| <b>3-slot GPRS</b>                             | <b>Power</b>       |       | <b>20.5 dBm</b>              | <b>21.2 dBm</b>     | <b>21.3 dBm</b>     |
| Battery:<br>BL-4CT Sony                        | Left               | Cheek | -                            | 0.509               | -                   |
|  |                    | Tilt  | -                            | 0.315               | -                   |
|  | Right              | Cheek | 0.524                        | 0.557               | <b>0.605</b>        |
|  |                    | Tilt  | -                            | 0.372               | -                   |
| <b>3-slot 8PSK EGPRS</b>                       | <b>Power</b>       |       | <b>14.3 dBm</b>              | <b>14.1 dBm</b>     | <b>14.3 dBm</b>     |
| Battery:<br>BL-4CT Sony                        | Left               | Cheek | -                            | -                   | -                   |
|  |                    | Tilt  | -                            | -                   | -                   |
|  | Right              | Cheek | -                            | -                   | 0.139               |
|  |                    | Tilt  | -                            | -                   | -                   |
| <b>3-slot GPRS</b><br>Battery:<br>BL-4CT Sanyo | Right Cheek        |       | 0.523                        | 0.563               | 0.604               |

**1900MHz Head SAR results**

| Option used                         | Test configuration |       | SAR, averaged over 1g (W/kg) |                      |                      |
|-------------------------------------|--------------------|-------|------------------------------|----------------------|----------------------|
|                                     |                    |       | Ch 512<br>1850.2 MHz         | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz |
| <b>GSM</b>                          | <b>Power</b>       |       | <b>25.4 dBm</b>              | <b>26.2 dBm</b>      | <b>25.6 dBm</b>      |
| Battery:<br>BL-4CT Sony             | Left               | Cheek | -                            | 0.649                | -                    |
|                                     |                    | Tilt  | -                            | 0.250                | -                    |
|                                     | Right              | Cheek | 0.894                        | <b>0.908</b>         | 0.888                |
|                                     |                    | Tilt  | -                            | 0.182                | -                    |
| <b>2-slot GPRS</b>                  | <b>Power</b>       |       | <b>22.3 dBm</b>              | <b>22.9 dBm</b>      | <b>22.5 dBm</b>      |
| Battery:<br>BL-4CT Sony             | Left               | Cheek | -                            | 0.624                | -                    |
|                                     |                    | Tilt  | -                            | -                    | -                    |
|                                     | Right              | Cheek | -                            | -                    | -                    |
|                                     |                    | Tilt  | -                            | -                    | -                    |
| <b>3-slot GPRS</b>                  | <b>Power</b>       |       | <b>20.5 dBm</b>              | <b>21.5 dBm</b>      | <b>20.9 dBm</b>      |
| Battery:<br>BL-4CT Sony             | Left               | Cheek | -                            | 0.609                | -                    |
|                                     |                    | Tilt  | -                            | -                    | -                    |
|                                     | Right              | Cheek | -                            | -                    | -                    |
|                                     |                    | Tilt  | -                            | -                    | -                    |
| <b>1-slot 8PSK EGPRS</b>            | <b>Power</b>       |       | <b>21.7 dBm</b>              | <b>21.5 dBm</b>      | <b>18.9 dBm</b>      |
| Battery:<br>BL-4CT Sony             | Left               | Cheek | -                            | -                    | -                    |
|                                     |                    | Tilt  | -                            | -                    | -                    |
|                                     | Right              | Cheek | -                            | 0.218                | -                    |
|                                     |                    | Tilt  | -                            | -                    | -                    |
| <b>GSM</b><br>Battery: BL-4CT Sanyo | Right Cheek        |       | 0.838                        | 0.787                | 0.787                |

**2450MHz Head SAR results**

| Option used                         | Test configuration |       | SAR, averaged over 1g (W/kg) |                    |                     |
|-------------------------------------|--------------------|-------|------------------------------|--------------------|---------------------|
|                                     |                    |       | Ch 1<br>2412.0 MHz           | Ch 7<br>2442.0 MHz | Ch 11<br>2462.0 MHz |
| <b>WLAN</b>                         | <b>Power</b>       |       | <b>16.0 dBm</b>              | <b>15.0 dBm</b>    | <b>14.8 dBm</b>     |
| Battery:<br>BL-4CT Sony             | Left               | Cheek | 0.173                        | <b>0.180</b>       | 0.174               |
|                                     |                    | Tilt  | -                            | 0.160              | -                   |
|                                     | Right              | Cheek | -                            | 0.140              | -                   |
|                                     |                    | Tilt  | -                            | 0.142              | -                   |
| <b>WLAN</b><br>Battery:BL-4CT Sanyo | Left Cheek         |       | 0.173                        | 0.164              | 0.153               |



The measured Body SAR values for the test device are tabulated below:

**850MHz Body SAR results**

| Option used              | Device orientation        | Test configuration  | SAR, averaged over 1g (W/kg) |                     |                     |
|--------------------------|---------------------------|---------------------|------------------------------|---------------------|---------------------|
|                          |                           |                     | Ch 128<br>824.2 MHz          | Ch 190<br>836.6 MHz | Ch 251<br>848.8 MHz |
| <b>3-slot GPRS</b>       |                           | <b>Power</b>        | <b>20.5 dBm</b>              | <b>21.2 dBm</b>     | <b>21.3 dBm</b>     |
| Battery:<br>BL-4CT Sony  | Display facing<br>phantom | Without headset     | -                            | 0.264               | -                   |
|                          |                           | Headset HS-45+AD-54 | -                            | 0.142               | -                   |
|                          | Back facing<br>phantom    | Without headset     | 0.285                        | 0.325               | 0.427               |
|                          |                           | Headset HS-45+AD-54 | -                            | 0.175               | -                   |
| Battery:<br>BL-4CT Sanyo | Back facing<br>phantom    | Without headset     | 0.279                        | 0.328               | <b>0.430</b>        |

**1900MHz Body SAR results**

| Option used              | Device orientation        | Test configuration  | SAR, averaged over 1g (W/kg) |                      |                      |
|--------------------------|---------------------------|---------------------|------------------------------|----------------------|----------------------|
|                          |                           |                     | Ch 512<br>1850.2 MHz         | Ch 661<br>1880.0 MHz | Ch 810<br>1909.8 MHz |
| <b>GSM</b>               |                           | <b>Power</b>        | <b>25.4 dBm</b>              | <b>26.2 dBm</b>      | <b>25.6 dBm</b>      |
| Battery:<br>BL-4CT Sony  | Display facing<br>phantom | Without headset     | -                            | 0.109                | -                    |
|                          |                           | Headset HS-45+AD-54 | -                            | 0.099                | -                    |
|                          | Back facing<br>phantom    | Without headset     | <b>0.167</b>                 | 0.160                | 0.161                |
|                          |                           | Headset HS-45+AD-54 | -                            | 0.134                | -                    |
| Battery:<br>BL-4CT Sanyo | Back facing<br>phantom    | Without headset     | 0.165                        | <b>0.173</b>         | 0.165                |

**2450MHz Body SAR results**

| Option used              | Device orientation        | Test configuration  | SAR, averaged over 1g (W/kg) |                    |                     |
|--------------------------|---------------------------|---------------------|------------------------------|--------------------|---------------------|
|                          |                           |                     | Ch 1<br>2412.0 MHz           | Ch 7<br>2442.0 MHz | Ch 11<br>2462.0 MHz |
| <b>WLAN</b>              |                           | <b>Power</b>        | <b>16.0 dBm</b>              | <b>15.0 dBm</b>    | <b>14.8 dBm</b>     |
| Battery:<br>BL-4CT Sony  | Display facing<br>phantom | Without headset     | -                            | -                  | -                   |
|                          |                           | Headset HS-45+AD-54 | -                            | -                  | -                   |
|                          | Back facing<br>phantom    | Without headset     | 0.039                        | <b>0.042</b>       | 0.041               |
|                          |                           | Headset HS-45+AD-54 | -                            | 0.040              | -                   |
| Battery:<br>BL-4CT Sanyo | Back facing<br>phantom    | Without headset     | 0.043                        | <b>0.043</b>       | 0.041               |

**Simultaneous transmissions: Combined SAR results**

| Test configuration        | Max. 1g SAR results |        |         | Combined 1g SAR values |                   |
|---------------------------|---------------------|--------|---------|------------------------|-------------------|
|                           | WLAN                | GSM850 | GSM1900 | WLAN +<br>GSM850       | WLAN +<br>GSM1900 |
| Head: Left, Cheek         | 0.180               | 0.509  | 0.649   | 0.689                  | 0.829             |
| Head: Left, Tilt          | 0.160               | 0.315  | 0.250   | 0.475                  | 0.410             |
| Head: Right, Cheek        | 0.140               | 0.605  | 0.908   | <b>0.745</b>           | <b>1.048</b>      |
| Head: Right, Tilt         | 0.142               | 0.372  | 0.182   | 0.514                  | 0.324             |
| Body: Without Headset     | 0.043               | 0.430  | 0.173   | <b>0.473</b>           | <b>0.216</b>      |
| Body: Headset HS-45+AD-54 | 0.040               | 0.175  | 0.134   | 0.215                  | 0.174             |

Combining the maximum SAR values of WLAN2450 and the cellular bands tends to overestimate the SAR value since their maxima do not necessarily occur in the same location.

Plots of the Measurement scans are given in Appendix B.

**APPENDIX A: SYSTEM CHECKING SCANS**

Date/Time: 2008-12-04 14:30:33


Test Laboratory: TCC Nokia  
Type: D835V2; Serial: D835V2 - SN:480

**Communication System: CW835**  
Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: HSL850; Medium Notes: 20.6C  
Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

- DASY4 Configuration:
- Probe: ES3DV3 - SN3131
  - ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
  - Sensor-Surface: 4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn728; Calibrated: 2008-04-23
  - Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
  - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 2.49 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 53.2 V/m  
Peak SAR (extrapolated) = 3.46 W/kg  
**SAR(1 g) = 2.31 mW/g**  
**SAR(10 g) = 1.51 mW/g**  
**Power Drift = -0.006 dB**  
Maximum value of SAR (measured) = 2.50 mW/g

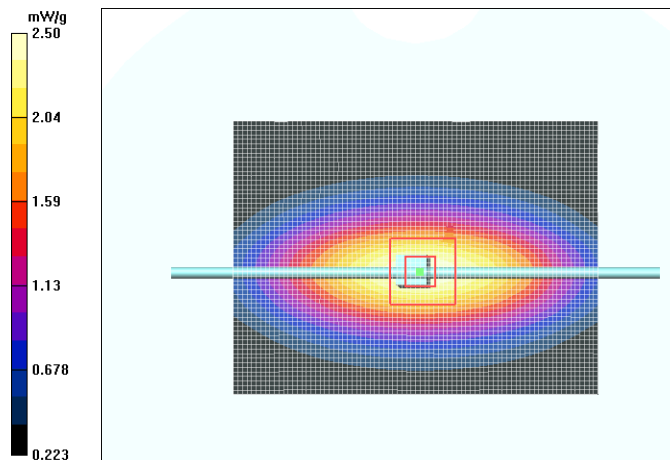

Date/Time: 2008-12-05 10:07:44

Test Laboratory: TCC Nokia  
Type: D835V2; Serial: D835V2 - SN:480

**Communication System: CW835**

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: 20.5C

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.49 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.2 V/m


Peak SAR (extrapolated) = 3.46 W/kg

**SAR(1 g) = 2.31 mW/g**

**SAR(10 g) = 1.51 mW/g**

**Power Drift = 0.004 dB**

Maximum value of SAR (measured) = 2.49 mW/g

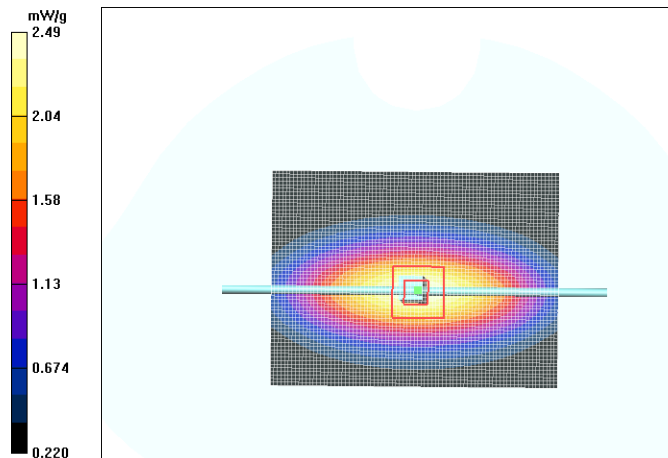

Date/Time: 2008-12-02 10:15:47

Test Laboratory: TCC Nokia  
Type: **D1900V2**; Serial: **D1900V2 - SN:5d030**

**Communication System: CW1900**

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: 20.0C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.4 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.7 V/m


Peak SAR (extrapolated) = 19.6 W/kg

**SAR(1 g) = 10.4 mW/g**

**SAR(10 g) = 5.34 mW/g**

**Power Drift = 0.008 dB**

Maximum value of SAR (measured) = 11.7 mW/g

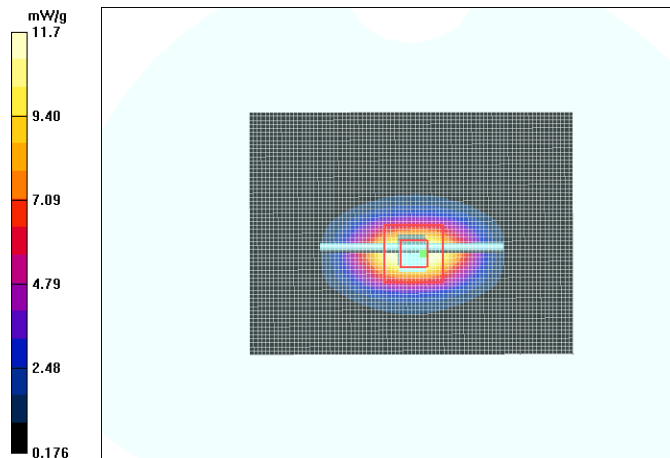

Date/Time: 2008-12-08 09:27:42

Test Laboratory: TCC Nokia  
Type: **D1900V2**; Serial: **D1900V2 - SN:5d030**

**Communication System: CW1900**

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.40$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.5 V/m


Peak SAR (extrapolated) = 19.9 W/kg

**SAR(1 g) = 10.5 mW/g**

**SAR(10 g) = 5.37 mW/g**

**Power Drift = 0.006 dB**

Maximum value of SAR (measured) = 11.8 mW/g

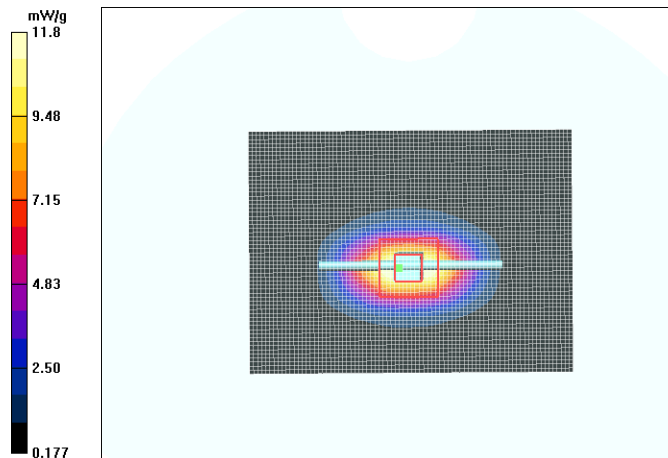

Date/Time: 2008-12-03 09:56:40

Test Laboratory: TCC Nokia  
Type: D2450V2; Serial: D2450V2 - SN:729

**Communication System: CW2450**

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: 20.9C

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.86$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.57, 4.57, 4.57); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 17.5 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.9 V/m


Peak SAR (extrapolated) = 30.7 W/kg

**SAR(1 g) = 14.5 mW/g**

**SAR(10 g) = 6.66 mW/g**

**Power Drift = 0.060 dB**

Maximum value of SAR (measured) = 16.4 mW/g

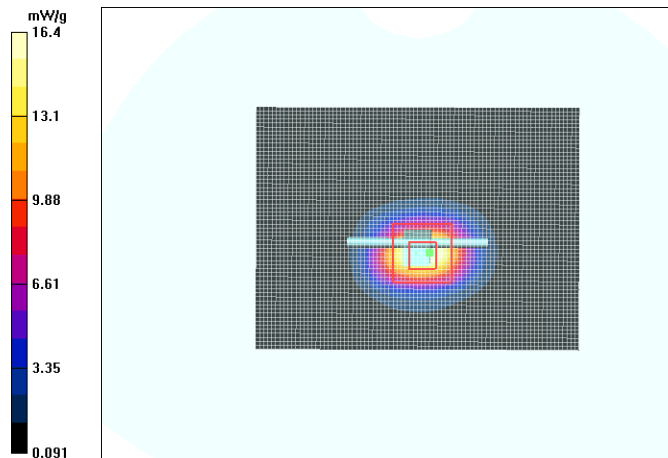

Date/Time: 2008-12-04 08:48:21

Test Laboratory: TCC Nokia  
Type: D2450V2; Serial: D2450V2 - SN:729

**Communication System: CW2450**

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: 21.2 C

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.24, 4.24, 4.24); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 16.4 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.6 V/m


Peak SAR (extrapolated) = 28.1 W/kg

**SAR(1 g) = 13.9 mW/g**

**SAR(10 g) = 6.46 mW/g**

**Power Drift = 0.012 dB**

Maximum value of SAR (measured) = 16.0 mW/g

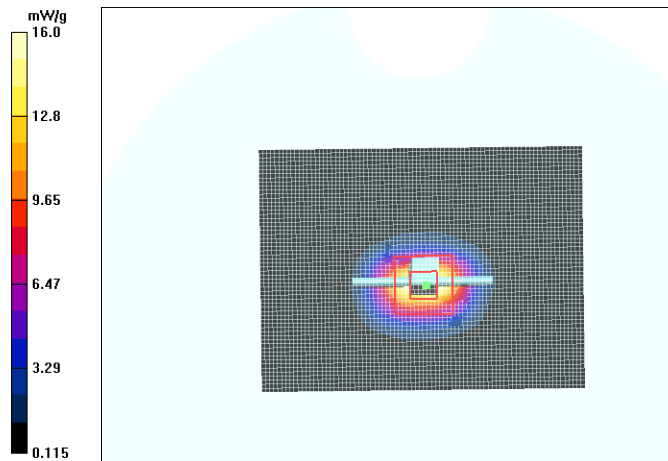



**APPENDIX B: MEASUREMENT SCANS**

Date/Time: 2008-12-04 15:10:42

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM850**

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL850; Medium Notes: 20.5C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.499 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.12 V/m

Peak SAR (extrapolated) = 0.614 W/kg


**SAR(1 g) = 0.458 mW/g**

**SAR(10 g) = 0.323 mW/g**

**Power Drift = -0.402 dB**

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.484 mW/g

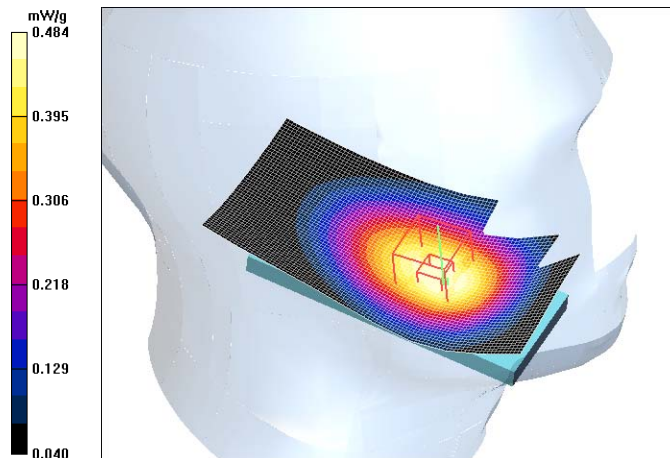

Date/Time: 2008-12-04 15:27:47

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 2-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium: HSL850; Medium Notes: 20.5C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.537 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.39 V/m

Peak SAR (extrapolated) = 0.669 W/kg


**SAR(1 g) = 0.500 mW/g**

**SAR(10 g) = 0.356 mW/g**

**Power Drift = -0.207 dB**

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.528 mW/g

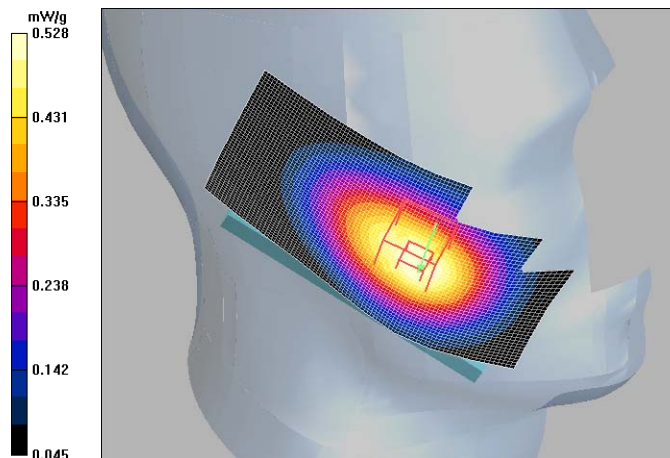

Date/Time: 2008-12-04 15:43:01

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: HSL850; Medium Notes: 20.5C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.537 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.23 V/m

Peak SAR (extrapolated) = 0.682 W/kg


**SAR(1 g) = 0.509 mW/g**

**SAR(10 g) = 0.360 mW/g**

**Power Drift = -0.088 dB**

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.538 mW/g

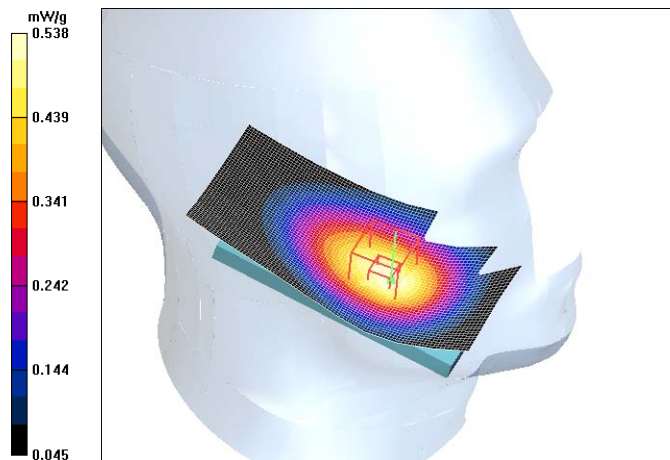

Date/Time: 2008-12-04 15:59:37

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: HSL850; Medium Notes: 20.5C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.331 mW/g

**Tilt position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.9 V/m


Peak SAR (extrapolated) = 0.406 W/kg

**SAR(1 g) = 0.315 mW/g**

**SAR(10 g) = 0.231 mW/g**

**Power Drift = 0.109 dB**

Maximum value of SAR (measured) = 0.331 mW/g

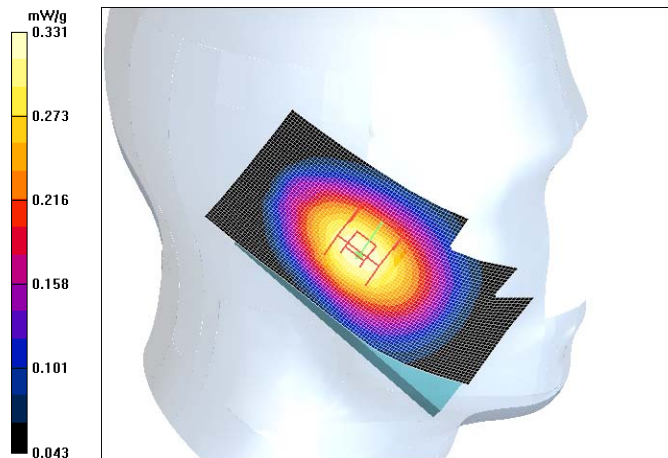

Date/Time: 2008-12-04 17:50:45

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:2.8

Medium: HSL850; Medium Notes: 20.2C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, High, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.650 mW/g

**Cheek position, High, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.74 V/m


Peak SAR (extrapolated) = 0.805 W/kg

**SAR(1 g) = 0.605 mW/g**

**SAR(10 g) = 0.429 mW/g**

**Power Drift = -0.032 dB**

Maximum value of SAR (measured) = 0.652 mW/g

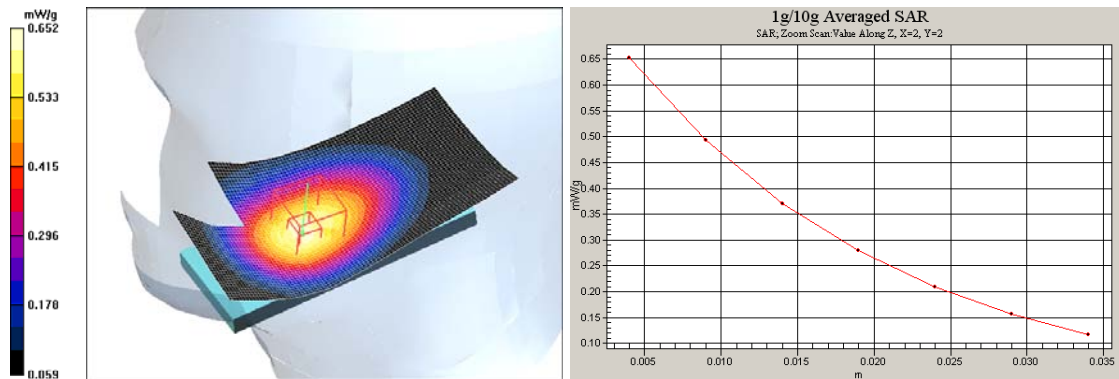

Date/Time: 2008-12-04 16:52:54

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: HSL850; Medium Notes: 20.2C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.385 mW/g

**Tilt position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.3 V/m


Peak SAR (extrapolated) = 0.473 W/kg

**SAR(1 g) = 0.372 mW/g**

**SAR(10 g) = 0.273 mW/g**

**Power Drift = 0.103 dB**

Maximum value of SAR (measured) = 0.392 mW/g

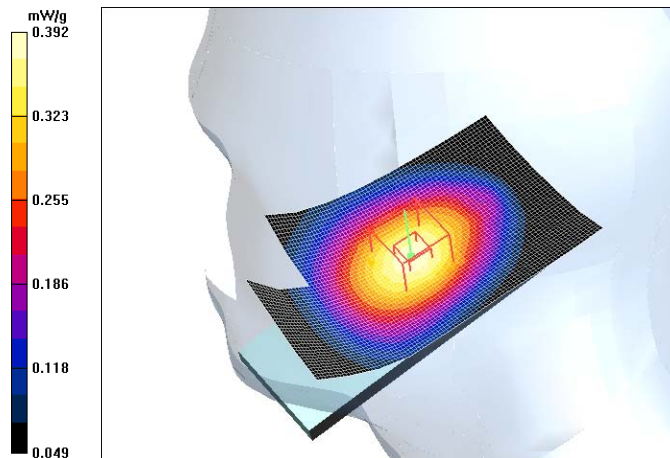

Date/Time: 2008-12-04 18:09:20

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot 8PSK EGPRS850**

Frequency: 849 MHz; Duty Cycle: 1:2.8

Medium: HSL850; Medium Notes: 20.2C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, High, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.151 mW/g

**Cheek position, High, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.58 V/m


Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.139 mW/g**

**SAR(10 g) = 0.099 mW/g**

**Power Drift = 0.191 dB**

Maximum value of SAR (measured) = 0.149 mW/g

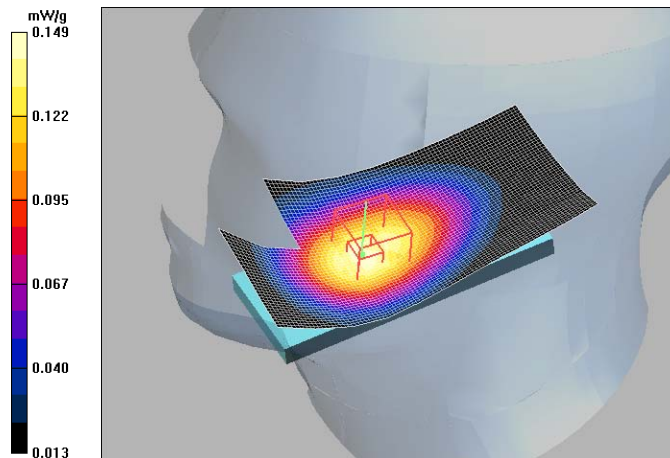

Date/Time: 2008-12-05 12:04:36

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:2.8

Medium: HSL850; Medium Notes: 20.3C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.918$  mho/m;  $\epsilon_r = 41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(6.14, 6.14, 6.14); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, High, BL-4CT Sanyo/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g

**Cheek position, High, BL-4CT Sanyo/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.0 V/m


Peak SAR (extrapolated) = 0.801 W/kg

**SAR(1 g) = 0.604 mW/g**

**SAR(10 g) = 0.431 mW/g**

**Power Drift = 0.022 dB**

Maximum value of SAR (measured) = 0.646 mW/g

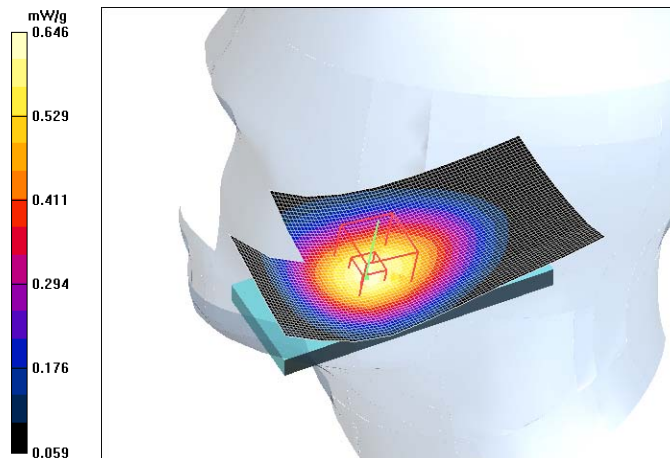



Date/Time: 2008-12-02 11:30:48

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.755 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.40 V/m


Peak SAR (extrapolated) = 0.967 W/kg

**SAR(1 g) = 0.649 mW/g**

**SAR(10 g) = 0.393 mW/g**

**Power Drift = 0.125 dB**

Maximum value of SAR (measured) = 0.706 mW/g

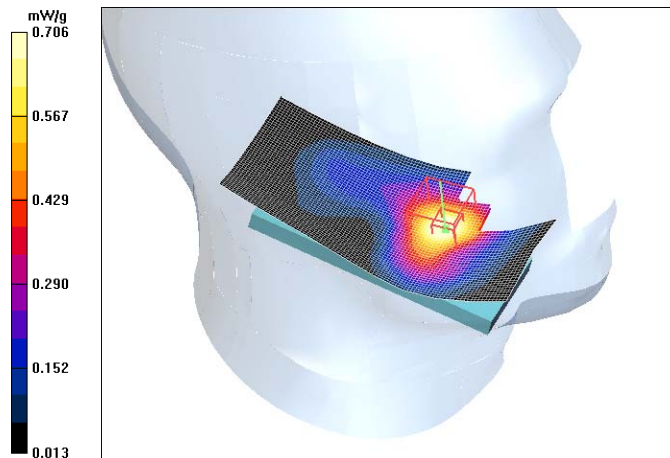

Date/Time: 2008-12-02 14:05:56

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.286 mW/g

**Tilt position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.2 V/m


Peak SAR (extrapolated) = 0.397 W/kg

**SAR(1 g) = 0.250 mW/g**

**SAR(10 g) = 0.149 mW/g**

**Power Drift = -0.163 dB**

Maximum value of SAR (measured) = 0.266 mW/g

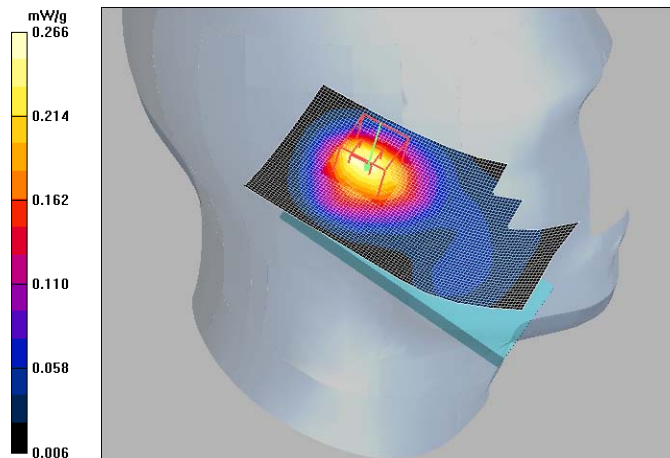

Date/Time: 2008-12-02 14:26:14

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.992 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.06 V/m


Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.908 mW/g**

**SAR(10 g) = 0.511 mW/g**

**Power Drift = 0.077 dB**

Maximum value of SAR (measured) = 1.03 mW/g

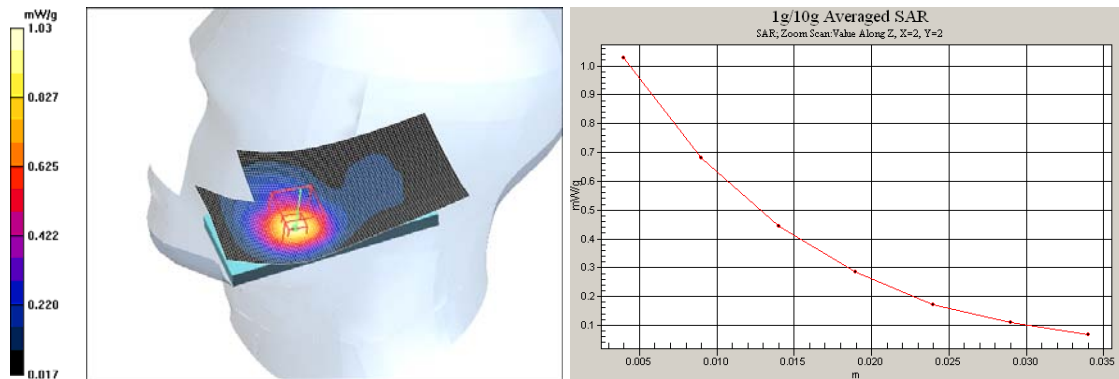

Date/Time: 2008-12-02 15:13:16

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.203 mW/g

**Tilt position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.4 V/m

Peak SAR (extrapolated) = 0.270 W/kg


**SAR(1 g) = 0.182 mW/g**

**SAR(10 g) = 0.118 mW/g**

**Power Drift = 0.021 dB**

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.195 mW/g

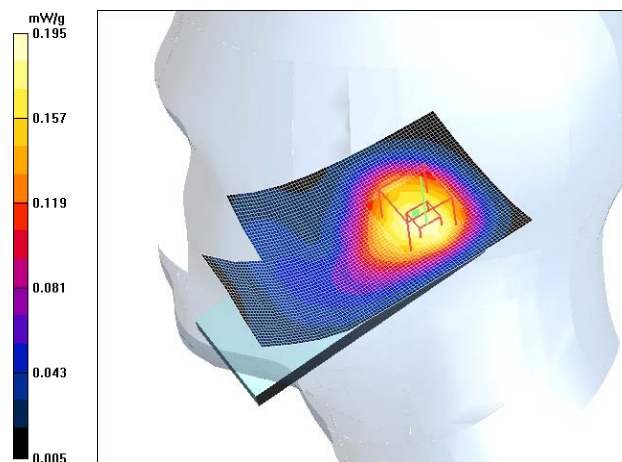

Date/Time: 2008-12-02 11:49:16

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 2-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.695 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.40 V/m


Peak SAR (extrapolated) = 0.895 W/kg

**SAR(1 g) = 0.624 mW/g**

**SAR(10 g) = 0.378 mW/g**

**Power Drift = -0.014 dB**

Maximum value of SAR (measured) = 0.681 mW/g

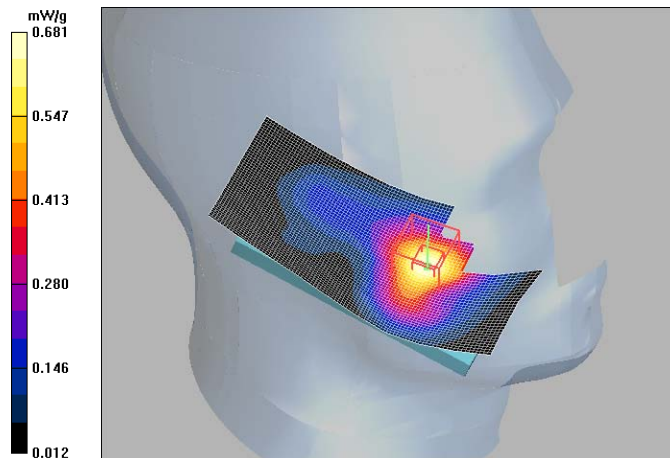

Date/Time: 2008-12-02 12:04:55

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:2.8

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.659 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.24 V/m


Peak SAR (extrapolated) = 0.875 W/kg

**SAR(1 g) = 0.609 mW/g**

**SAR(10 g) = 0.371 mW/g**

**Power Drift = 0.042 dB**

Maximum value of SAR (measured) = 0.675 mW/g

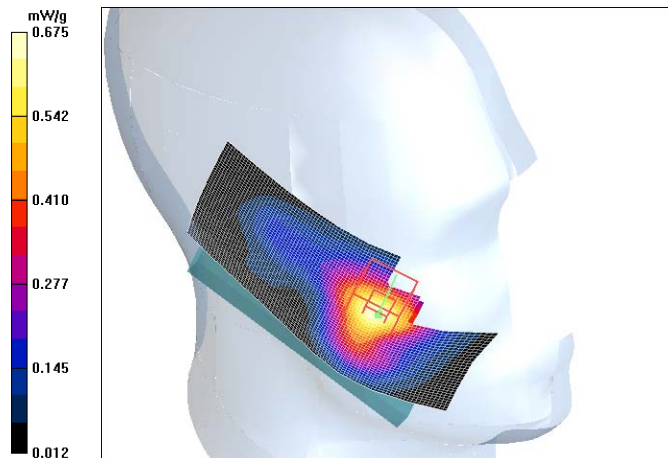

Date/Time: 2008-12-02 15:37:28

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 1-slot 8PSK EGPRS1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.240 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.66 V/m


Peak SAR (extrapolated) = 0.339 W/kg

**SAR(1 g) = 0.218 mW/g**

**SAR(10 g) = 0.124 mW/g**

**Power Drift = -0.193 dB**

Maximum value of SAR (measured) = 0.243 mW/g

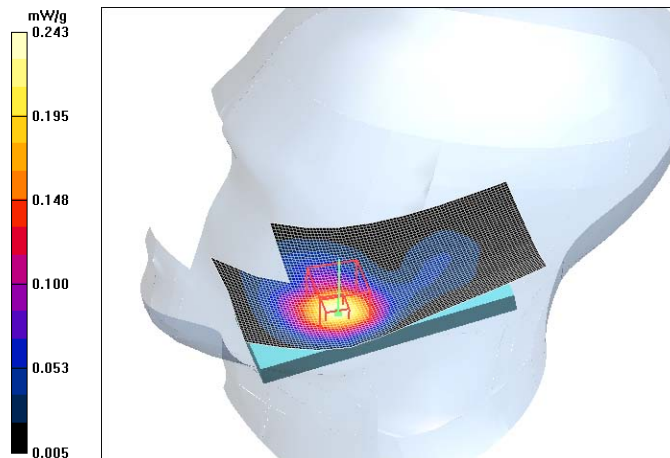

Date/Time: 2008-12-02 16:11:58

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium Notes: 19.8 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.14, 5.14, 5.14); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Low, BL-4CT Sanyo/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.889 mW/g

**Cheek position, Low, BL-4CT Sanyo/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.37 V/m


Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.838 mW/g**

**SAR(10 g) = 0.485 mW/g**

**Power Drift = 0.075 dB**

Maximum value of SAR (measured) = 0.915 mW/g

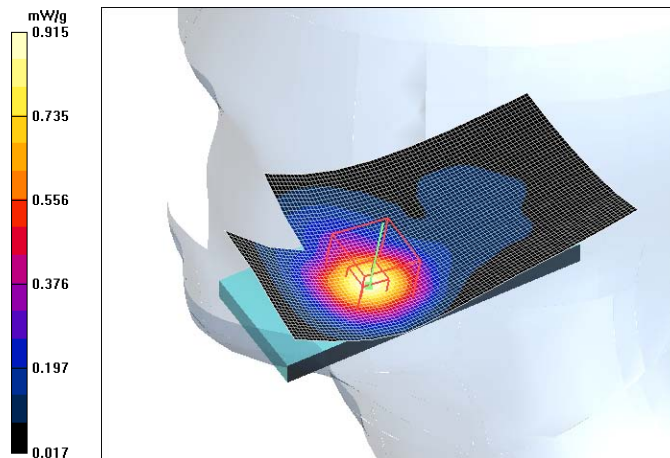



Date/Time: 2008-12-03 11:47:41

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: 20.7C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.57, 4.57, 4.57); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.27 V/m


Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.180 mW/g**

**SAR(10 g) = 0.090 mW/g**

**Power Drift = -0.150 dB**

Maximum value of SAR (measured) = 0.199 mW/g

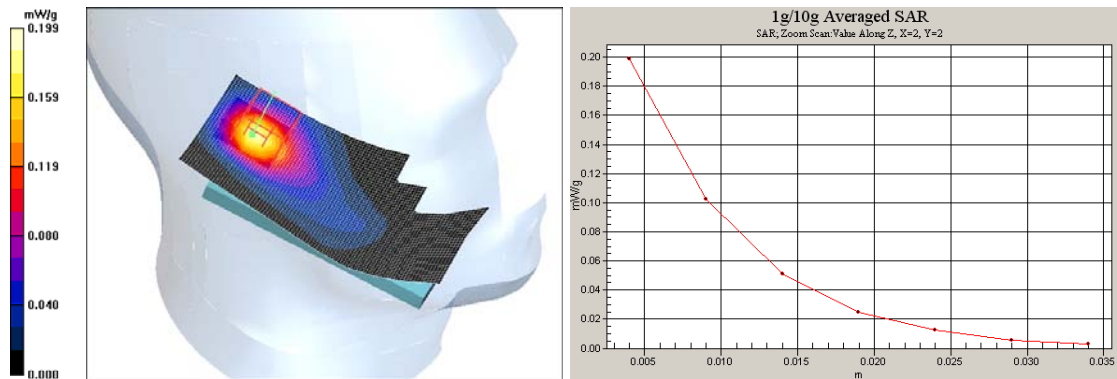

Date/Time: 2008-12-03 12:01:14

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: 20.7C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.57, 4.57, 4.57); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.172 mW/g

**Tilt position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.41 V/m


Peak SAR (extrapolated) = 0.321 W/kg

**SAR(1 g) = 0.160 mW/g**

**SAR(10 g) = 0.080 mW/g**

**Power Drift = 0.061 dB**

Maximum value of SAR (measured) = 0.179 mW/g

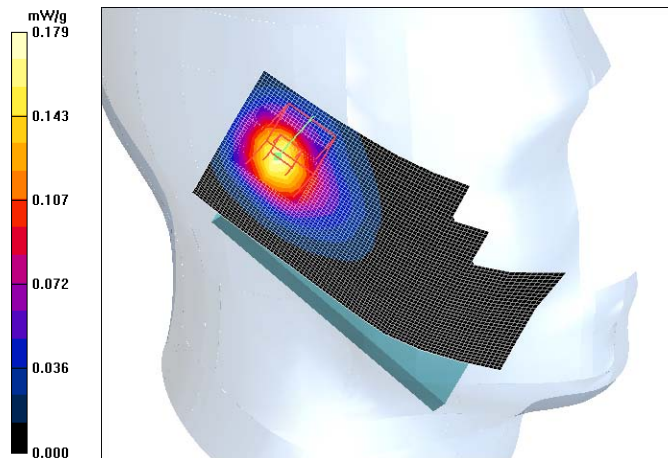

Date/Time: 2008-12-03 12:25:11

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: 20.8C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.57, 4.57, 4.57); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.163 mW/g

**Cheek position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.18 V/m


Peak SAR (extrapolated) = 0.268 W/kg

**SAR(1 g) = 0.140 mW/g**

**SAR(10 g) = 0.074 mW/g**

**Power Drift = -0.346 dB**

Maximum value of SAR (measured) = 0.154 mW/g

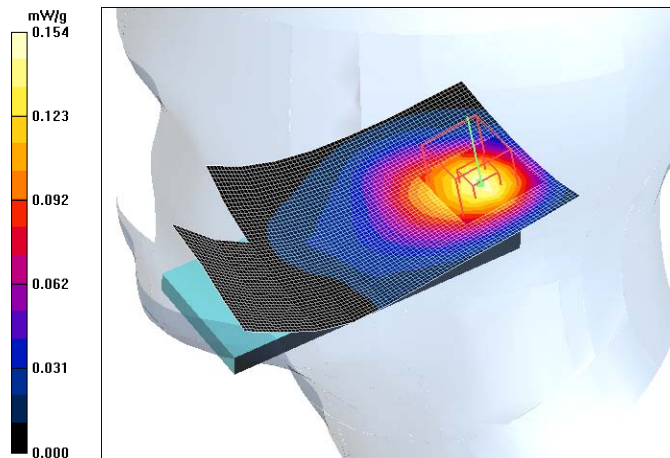

Date/Time: 2008-12-03 12:40:01

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: 20.8C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.57, 4.57, 4.57); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Tilt position, Middle, BL-4CT Sony/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.164 mW/g

**Tilt position, Middle, BL-4CT Sony/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.22 V/m


Peak SAR (extrapolated) = 0.276 W/kg

**SAR(1 g) = 0.142 mW/g**

**SAR(10 g) = 0.072 mW/g**

**Power Drift = 0.000 dB**

Maximum value of SAR (measured) = 0.158 mW/g

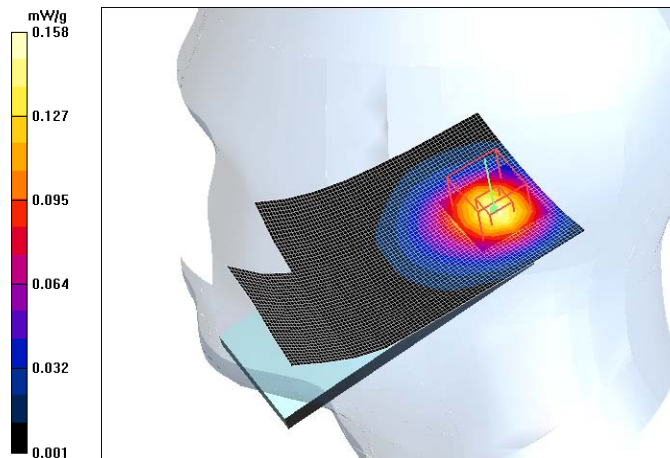

Date/Time: 2008-12-03 14:10:16

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: 20.7C

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.82$  mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.57, 4.57, 4.57); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Cheek position, Low, BL-4CT Sanyo/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.192 mW/g

**Cheek position, Low, BL-4CT Sanyo/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.15 V/m


Peak SAR (extrapolated) = 0.356 W/kg

**SAR(1 g) = 0.173 mW/g**

**SAR(10 g) = 0.087 mW/g**

**Power Drift = -0.079 dB**

Maximum value of SAR (measured) = 0.188 mW/g

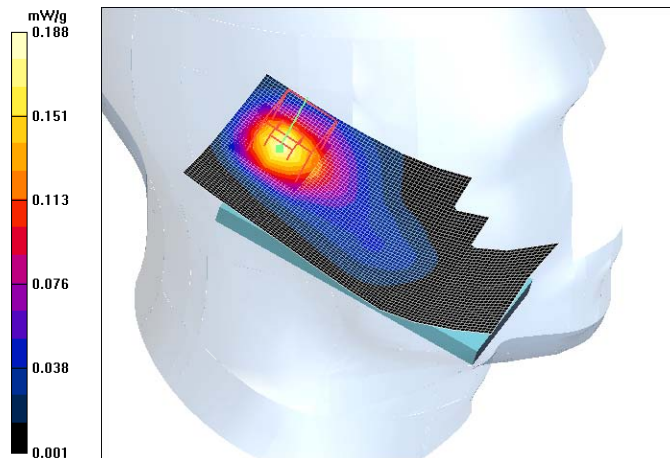

Date/Time: 2008-12-05 12:50:51

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: BSL850; Medium Notes: 20.0C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(5.68, 5.68, 5.68); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, No accessory, Display facing phantom/Area Scan (41x81x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.297 mW/g

**Body Measurement, Middle, BL-4CT Sony, No accessory, Display facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.92 V/m


Peak SAR (extrapolated) = 0.340 W/kg

**SAR(1 g) = 0.264 mW/g**

**SAR(10 g) = 0.196 mW/g**

**Power Drift = -0.364 dB**

Maximum value of SAR (measured) = 0.278 mW/g

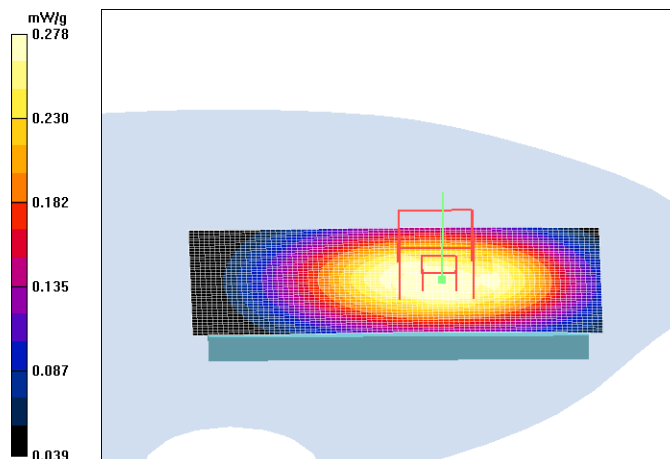

Date/Time: 2008-12-05 13:04:52

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: BSL850; Medium Notes: 20.0C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(5.68, 5.68, 5.68); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Display facing phantom/Area Scan (41x81x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.150 mW/g

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Display facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.31 V/m


Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.142 mW/g**

**SAR(10 g) = 0.103 mW/g**

**Power Drift = -0.068 dB**

Maximum value of SAR (measured) = 0.150 mW/g

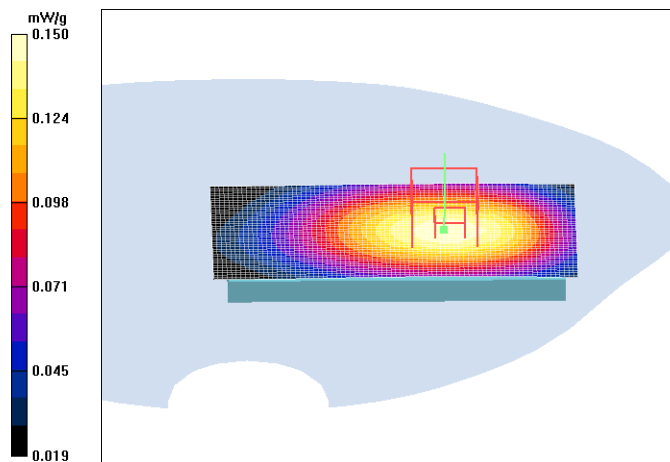

Date/Time: 2008-12-05 14:44:09

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:2.8

Medium: BSL850; Medium Notes: 20.0C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(5.68, 5.68, 5.68); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, High, BL-4CT Sony, No accessory, Back facing phantom/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm**

Maximum value of SAR (interpolated) = 0.457 mW/g

**Body Measurement, High, BL-4CT Sony, No accessory, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.46 V/m


Peak SAR (extrapolated) = 0.551 W/kg

**SAR(1 g) = 0.427 mW/g**

**SAR(10 g) = 0.312 mW/g**

**Power Drift = -0.340 dB**

Maximum value of SAR (measured) = 0.450 mW/g

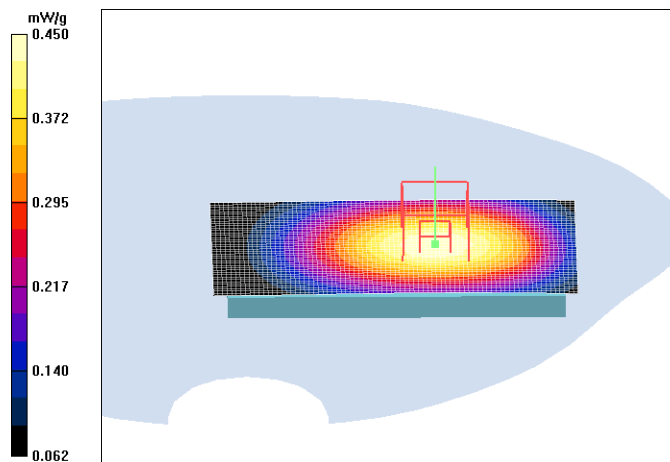



Date/Time: 2008-12-05 13:59:23

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: BSL850; Medium Notes: 20.0C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(5.68, 5.68, 5.68); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Back facing phantom/Area Scan (41x81x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.33 V/m


Peak SAR (extrapolated) = 0.228 W/kg

**SAR(1 g) = 0.175 mW/g**

**SAR(10 g) = 0.127 mW/g**

**Power Drift = 0.048 dB**

Maximum value of SAR (measured) = 0.185 mW/g

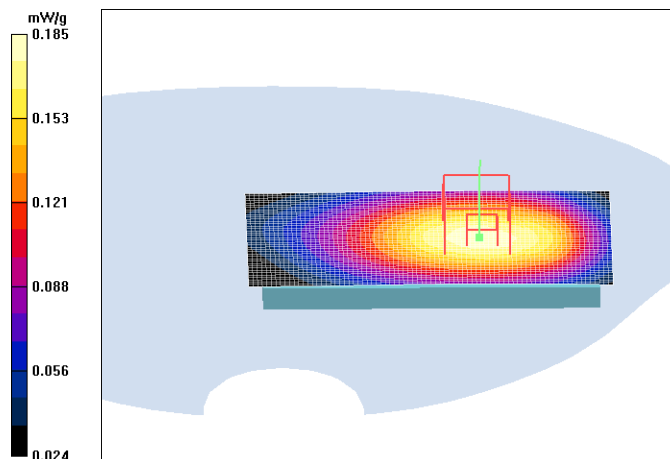

Date/Time: 2008-12-05 14:59:59

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: 3-slot GPRS850**

Frequency: 848.8 MHz; Duty Cycle: 1:2.8

Medium: BSL850; Medium Notes: 20.0C

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3131
- ConvF(5.68, 5.68, 5.68); Calibrated: 2008-04-22
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn728; Calibrated: 2008-04-23
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, High, BL-4CT Sanyo, No accessory, Back facing phantom/Area Scan (41x81x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.460 mW/g

**Body Measurement, High, BL-4CT Sanyo, No accessory, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.72 V/m


Peak SAR (extrapolated) = 0.561 W/kg

**SAR(1 g) = 0.430 mW/g**

**SAR(10 g) = 0.313 mW/g**

**Power Drift = -0.298 dB**

Maximum value of SAR (measured) = 0.453 mW/g

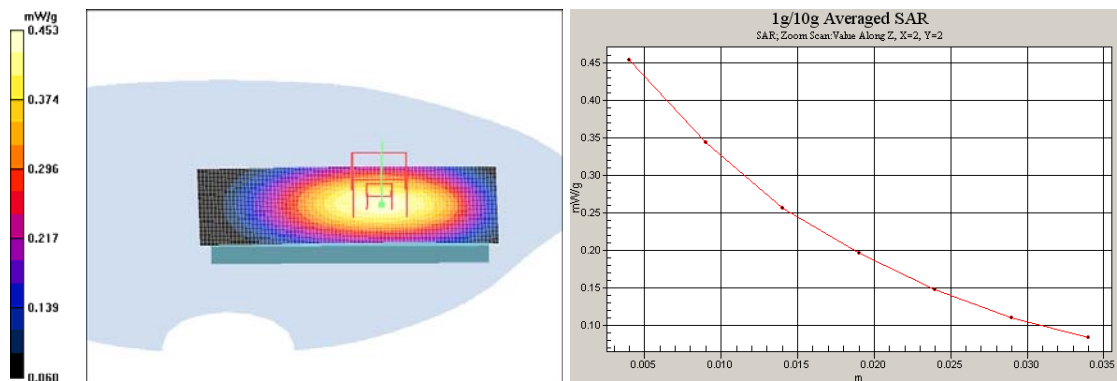

Date/Time: 2008-12-08 17:24:49

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: BSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.23, 5.23, 5.23); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, No accessory, Display facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.119 mW/g

**Body Measurement, Middle, BL-4CT Sony, No accessory, Display facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.70 V/m


Peak SAR (extrapolated) = 0.170 W/kg

**SAR(1 g) = 0.109 mW/g**

**SAR(10 g) = 0.068 mW/g**

**Power Drift = -0.191 dB**

Maximum value of SAR (measured) = 0.116 mW/g

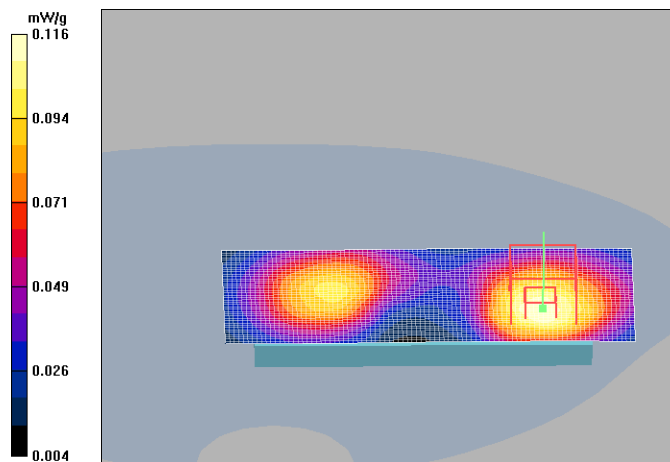

Date/Time: 2008-12-08 17:35:43

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: BSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.23, 5.23, 5.23); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54,Display facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.112 mW/g

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54,Display facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.39 V/m


Peak SAR (extrapolated) = 0.161 W/kg

**SAR(1 g) = 0.099 mW/g**

**SAR(10 g) = 0.061 mW/g**

**Power Drift = -0.151 dB**

Maximum value of SAR (measured) = 0.106 mW/g

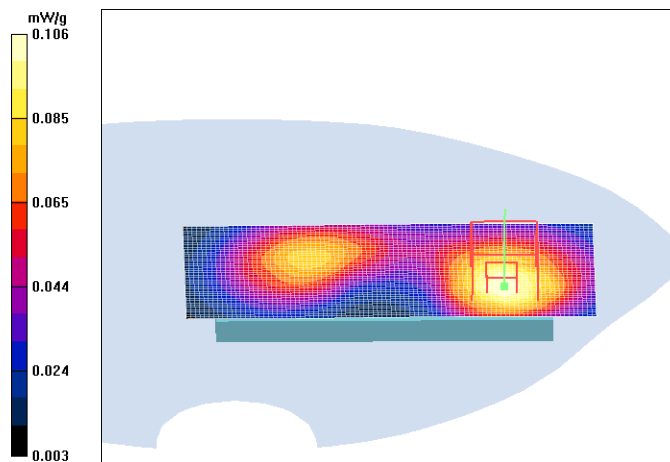

Date/Time: 2008-12-08 17:50:21

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: BSL1900; Medium Notes: 19.8 C

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.23, 5.23, 5.23); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Low, BL-4CT Sony, No accessory,Back facing phantom/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm**

Maximum value of SAR (interpolated) = 0.181 mW/g

**Body Measurement, Low, BL-4CT Sony, No accessory,Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.43 V/m


Peak SAR (extrapolated) = 0.272 W/kg

**SAR(1 g) = 0.167 mW/g**

**SAR(10 g) = 0.102 mW/g**

**Power Drift = 0.164 dB**

Maximum value of SAR (measured) = 0.185 mW/g

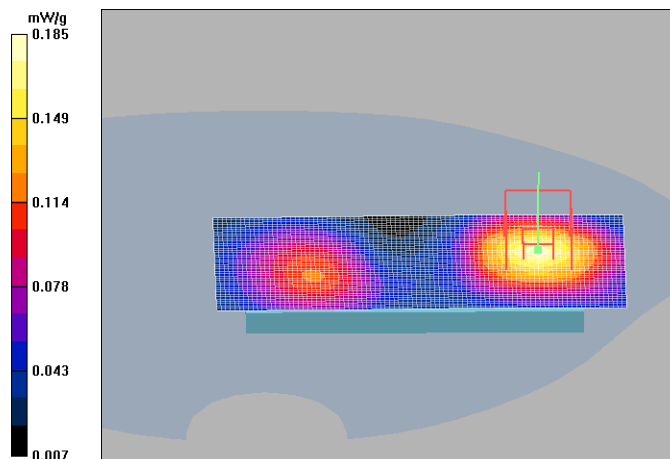

Date/Time: 2008-12-08 17:01:06

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: BSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.23, 5.23, 5.23); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Back facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.152 mW/g

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.95 V/m


Peak SAR (extrapolated) = 0.213 W/kg

**SAR(1 g) = 0.134 mW/g**

**SAR(10 g) = 0.084 mW/g**

**Power Drift = -0.237 dB**

Maximum value of SAR (measured) = 0.143 mW/g

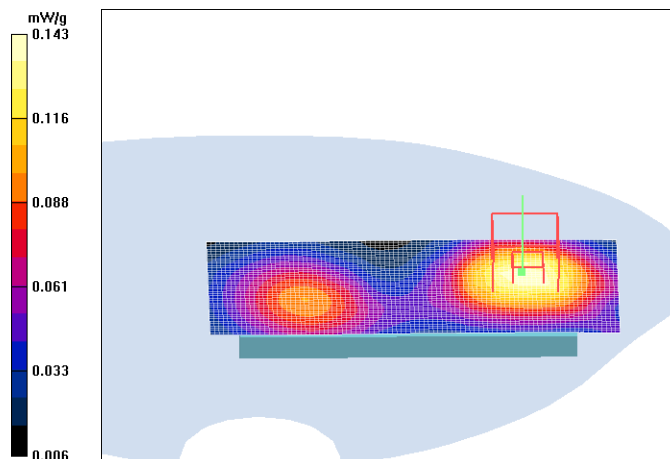

Date/Time: 2008-12-08 18:14:05

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: GSM1900**

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: BSL1900; Medium Notes: 19.8 C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.23, 5.23, 5.23); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sanyo, No accessory, Back facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

**Body Measurement, Middle, BL-4CT Sanyo, No accessory, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.10 V/m


Peak SAR (extrapolated) = 0.280 W/kg

**SAR(1 g) = 0.173 mW/g**

**SAR(10 g) = 0.106 mW/g**

**Power Drift = -0.126 dB**

Maximum value of SAR (measured) = 0.188 mW/g

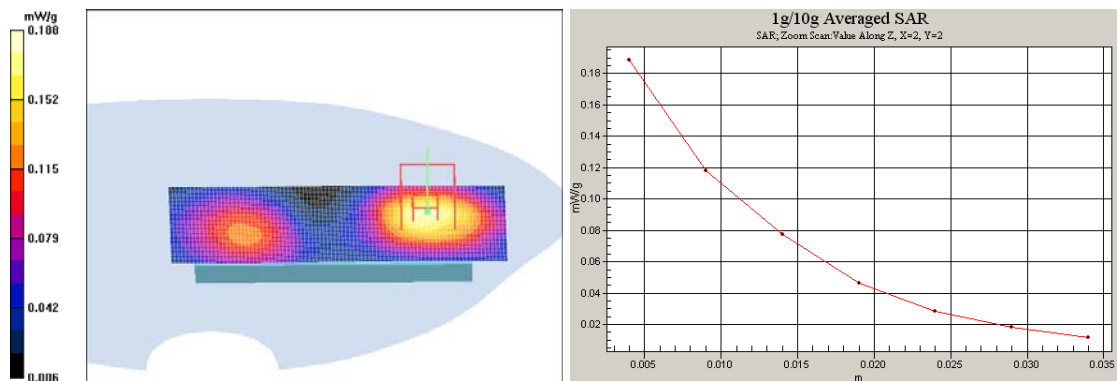

Date/Time: 2008-12-04 09:35:14

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: 21.0 C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.24, 4.24, 4.24); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, No accessory, Back facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.044 mW/g

**Body Measurement, Middle, BL-4CT Sony, No accessory, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.61 V/m


Peak SAR (extrapolated) = 0.072 W/kg

**SAR(1 g) = 0.042 mW/g**

**SAR(10 g) = 0.024 mW/g**

**Power Drift = 0.028 dB**

Maximum value of SAR (measured) = 0.045 mW/g

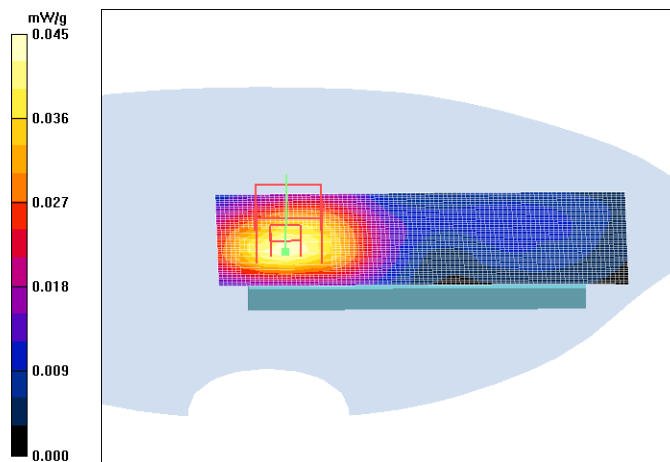



Date/Time: 2008-12-04 09:52:55

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: 21.0 C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.24, 4.24, 4.24); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Back facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.045 mW/g

**Body Measurement, Middle, BL-4CT Sony, HS-45+AD-54, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.06 V/m


Peak SAR (extrapolated) = 0.068 W/kg

**SAR(1 g) = 0.040 mW/g**

**SAR(10 g) = 0.023 mW/g**

**Power Drift = 0.115 dB**

Maximum value of SAR (measured) = 0.043 mW/g

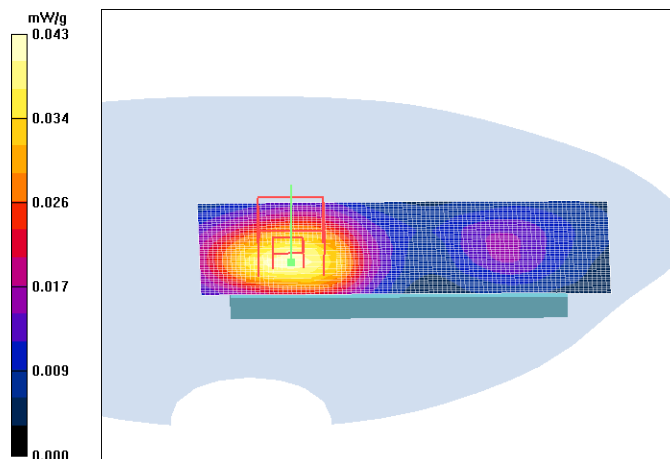

Date/Time: 2008-12-04 11:25:01

Test Laboratory: TCC Nokia  
Type: RM-431; Serial: 004401/10/417187/7

**Communication System: WLAN2450**

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: 21.0 C

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.24, 4.24, 4.24); Calibrated: 2008-04-23
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2008-04-30
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Body Measurement, Middle, BL-4CT Sanyo, No accessory, Back facing phantom/Area Scan (41x91x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.048 mW/g

**Body Measurement, Middle, BL-4CT Sanyo, No accessory, Back facing phantom/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.75 V/m

Peak SAR (extrapolated) = 0.074 W/kg

**SAR(1 g) = 0.043 mW/g**

**SAR(10 g) = 0.026 mW/g**

**Power Drift = 0.020 dB**

Maximum value of SAR (measured) = 0.046 mW/g

