

SAR Compliance Test Report

Test report no.:	FCC_RM-779_03	Date of report:	2011-09-13
Template version:	18.0	Number of pages:	122
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
Responsible test engineer:	Virpi Tuominen	Product contact person:	Jyrki Juvani
Measurements made by:	Janne Hirsimäki, Virpi Tuominen, Alina Tähtkääpää		
Tested device:	RM-779		
FCC ID:	LJPRM-779	IC:	-
Supplement reports:	SAR_Photo_RM-779_04		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:			
For the contents:			

CONTENTS

1. SUMMARY OF SAR TEST REPORT	4
1.1 TEST DETAILS	4
1.2 MAXIMUM RESULTS	4
1.2.1 Head Configuration	4
1.2.2 Body Worn Configuration	5
1.2.3 Maximum Drift	5
1.2.4 Measurement Uncertainty	5
2. DESCRIPTION OF THE DEVICE UNDER TEST	6
2.1 DESCRIPTION OF THE ANTENNA	7
3. TEST CONDITIONS	7
3.1 TEMPERATURE AND HUMIDITY	7
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	7
3.3 TEST CASES AND TEST MINIMISATION	8
4. DESCRIPTION OF THE TEST EQUIPMENT	9
4.1 MEASUREMENT SYSTEM AND COMPONENTS	9
4.1.1 Isotropic E-field Probe Type ES3DV3	11
4.1.2 Isotropic E-field Probe Type EX3DV4	11
4.2 PHANTOMS	12
4.3 TISSUE SIMULANTS	12
4.3.1 Tissue Simulant Recipes	12
4.3.2 System Checking	13
4.3.3 Tissue Simulants used in the Measurements	16
5. DESCRIPTION OF THE TEST PROCEDURE	17
5.1 DEVICE HOLDER	17
5.2 TEST POSITIONS	18
5.2.1 Against Phantom Head	18
5.2.2 Body Worn Configuration	18
5.3 SCAN PROCEDURES	19
5.4 SAR AVERAGING METHODS	19
6. MEASUREMENT UNCERTAINTY	20
7. RESULTS	21
APPENDIX A: SYSTEM CHECKING SCANS	30
APPENDIX B: MEASUREMENT SCANS	42
APPENDIX C: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA	118
APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	121

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S).....	122
--	-----

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2011-08-16 to 2011-09-02
SN, HW and SW numbers of tested device	SN: 004402/13/568469/8, HW: 0503, SW: 111.010.0705, DUT: 15921 SN: 004402/13/568481/3, HW: 0503, SW: 111.010.0705, DUT: 15791
Batteries used in testing	BP-3L Sony, DUT: 15777, 15778 BP-3L LG, DUT: 15779, 15780, 15781, 15782
Headsets used in testing	WH-207, DUT: 15626
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f (MHz)	Conducted power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
4-slot GPRS850	251 / 848.8	28.0 dBm	Left, Cheek	1.19 W/kg	1.33 W/kg	1.6 W/kg	PASSED
WCDMA850	4175 / 835.0	23.5 dBm	Left, Cheek	1.05 W/kg	1.18 W/kg	1.6 W/kg	PASSED
WCDMA1700/2100	1412 / 1732.4	23.5 dBm	Right, Cheek	0.832 W/kg	0.93 W/kg	1.6 W/kg	PASSED
2-slot GPRS1900	810 / 1909.8	29.5 dBm	Left, Cheek	0.893 W/kg	1.00 W/kg	1.6 W/kg	PASSED
WCDMA1900	9538 / 1907.6	23.0 dBm	Left, Cheek	0.884 W/kg	0.99 W/kg	1.6 W/kg	PASSED
WLAN2450	7 / 2442.0	17.5 dBm	Left, Cheek	0.291 W/kg	0.33 W/kg	1.6 W/kg	PASSED
4-slot GPRS850 + WLAN2450	-	-	Left, Cheek	1.19 W/kg	1.33 W/kg	1.6 W/kg	PASSED
WCDMA850 + WLAN2450	-	-	Left, Cheek	1.10 W/kg	1.23 W/kg	1.6 W/kg	PASSED
WCDMA1700/2100 + WLAN2450	-	-	Right, Cheek	0.832 W/kg	0.93 W/kg	1.6 W/kg	PASSED
2-slot GPRS1900 + WLAN2450	-	-	Left, Cheek	0.893 W/kg	1.00 W/kg	1.6 W/kg	PASSED
WCDMA1900 + WLAN2450	-	-	Left, Cheek	0.884 W/kg	0.99 W/kg	1.6 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f (MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
4-slot GPRS850	251 / 848.8	28.0 dBm	2.2cm	0.722 W/kg	0.81 W/kg	1.6 W/kg	PASSED
WCDMA850	4233 / 846.6	23.5 dBm	2.2cm	0.579 W/kg	0.65 W/kg	1.6 W/kg	PASSED
WCDMA1700/2100	1513 / 1752.6	23.5 dBm	2.2cm	0.808 W/kg	0.90 W/kg	1.6 W/kg	PASSED
2-slot GPRS1900	512 / 1850.2	29.5 dBm	2.2cm	0.667 W/kg	0.75 W/kg	1.6 W/kg	PASSED
WCDMA1900	9262 / 1852.4	23.0 dBm	2.2cm	0.618 W/kg	0.69 W/kg	1.6 W/kg	PASSED
WLAN2450	7 / 2442.0	17.5 dBm	2.2cm	0.074 W/kg	0.08 W/kg	1.6 W/kg	PASSED
4-slot GPRS850 + WLAN2450	-	-	2.2cm	0.743 W/kg	0.83 W/kg	1.6 W/kg	PASSED
WCDMA850 + WLAN2450	-	-	2.2cm	0.594 W/kg	0.67 W/kg	1.6 W/kg	PASSED
WCDMA1700/2100 + WLAN2450	-	-	2.2cm	0.822 W/kg	0.92 W/kg	1.6 W/kg	PASSED
2-slot GPRS1900 + WLAN2450	-	-	2.2cm	0.673 W/kg	0.75 W/kg	1.6 W/kg	PASSED
WCDMA1900 + WLAN2450	-	-	2.2cm	0.618 W/kg	0.69 W/kg	1.6 W/kg	PASSED

* SAR values are scaled up by 12% to cover measurement drift. As a consequence of this upwards correction of the SAR values, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.43dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%
--------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850 1900	GMSK	1/8	824 – 849 1850 – 1910
GPRS	850 1900	GMSK	1/8 to 4/8	824 – 849 1850 – 1910
EGPRS	850 1900	GMSK / 8PSK	1/8 to 4/8	824 – 849 1850 – 1910
WCDMA	850 (Band V) 1700/2100 (Band IV) 1900 (Band II)		1	826 – 847 1712 – 1753 1852 – 1908
HSUPA	850 (Band V) 1700/2100 (Band IV) 1900 (Band II)		1	826 – 847 1712 – 1753 1852 – 1908
BT	2450	GFSK	1	2402 – 2480
WLAN b-mode	2450	Up to 11Mbps QPSK	1	2412 – 2462
WLAN g-mode	2450	Up to 54Mbps 64QAM	1	2412 – 2462
WLAN n-mode 20MHz	2450	Up to 72.2Mbps 64QAM	1	2412 – 2462

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, GSM/GPRS/EGPRS1800, WCDMA900 and WCDMA2100 bands which are not part of this filing.

This device has Push to Talk/Dual Transfer Mode capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom. Dual Transfer Mode is a feature that utilises the multi-slot GPRS capability in this device; it allows simultaneous transmission of voice and data during the same call, using the same transmitter and antenna.

This is a WCDMA HSUPA device, but SAR tests for HSUPA mode have not been performed as no HSUPA Sub-test mode has an average power > 0.25dB above the basic WCDMA 12.2kbps RMC mode. Appendix C of this report gives a summary of the measured WCDMA and HSUPA average powers; a detailed report of these WCDMA and HSUPA conducted power tests is submitted separately.

This is a BT Class 1 device; as its power tuning target is 6.5dBm (4.5mW), SAR testing was deemed unnecessary.

2.1 Description of the Antenna

The device has internal antennas for both cellular and WLAN use. The cellular antenna is located at the bottom underneath the back cover. The WLAN antenna is located at the top underneath the back cover.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 – 22.7
Ambient humidity (RH %):	40 - 60

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester except for testing WLAN2450 where control software was used. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The transmission mode of the device in all WCDMA tests was configured to 12.2kbps RMC with all TPC bits set as “1”.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing. The results are given in the EMC report supporting this application.

The transmission mode of the device in all WLAN b-mode tests was DSSS QPSK 11Mbps. This mode has the highest (or equal highest) time-averaged output power of all the WLAN b and g modulation modes in Nokia devices. In WLAN n-mode, BPSK 6.5Mbps with 20MHz bandwidth was used.

3.3 Test Cases and Test Minimisation

The tested device examined in this report may not incorporate all of the features described in the text that follows, but its SAR evaluation will have been subjected to the same considerations and test logic described below.

Whilst it's possible to identify the maximum SAR test cases from inspection of the conducted power levels given in the Results tables (Section 7), different modes in the same band and multi-slot transmit GSM/GPRS modes can create some difficulties. Therefore the sequence of the SAR tests made in evaluating this device has used test logic that is based on measured SAR values. Comparison of measured SAR values in this way, can also allow some test minimization (i.e. test elimination) to be made.

For example, when SAR testing multi-slot GSM/GPRS/EGPRS modes, it is an inefficient use of test resources to fully SAR test every test configuration in each of the different modes as these modes have a fixed power relationship between them that is the same, irrespective of the test configuration. In the case of multi-slot GSM/GPRS modes, a single comparative SAR test - using the same test channel and test configuration - is made in each of the n-slot modes; the mode with the highest measured SAR value is then subjected to full SAR testing in all test configurations. These comparative SAR tests (same frequency, same test configuration) are regarded as extremely accurate as they are relative tests in which the tested device changes neither its frequency nor its position between tests. For different modes that operate in the same band and use the same antenna e.g. GSM/GPRS850 and WCDMA850, full SAR testing is carried out in the GSM/GPRS850 mode but WCDMA850 testing is limited to 3 channel testing in the maximum SAR test configuration for GSM/GPRS850.

Multi-slot SAR testing against the Head is always performed whenever such a device offers Push to Talk over cellular with the internal earpiece active, Dual Transfer Mode (i.e. the ability to transmit voice and data simultaneously using the same transmitter) or has WLAN (which enables a Voice over IP call to take place whilst the device can simultaneously transmit data on a cellular band). Whenever a device has an intended multi-slot use against the head, it is also Head SAR tested in EGPRS mode. It should be noted that EGPRS transmit modes can have either GMSK or 8PSK modulation but, when tested, only 8PSK EGPRS will appear explicitly in the results tables, as GMSK EGPRS mode has identical time-averaged power to the reported GPRS mode.

Devices that have flips or slides are fully SAR tested in all device configurations consistent with their intended usage. For example, flip phones that can receive a call in closed mode are SAR tested against the head in both open and closed configurations. Similarly, slide phones are fully SAR tested in all slide configurations in which calls are intended to be made or received.

In the results tables in Section 7, the maximum SAR value for the 'basic' tests (i.e. left cheek, left tilt, right cheek and right tilt in Head SAR testing; with and without headset with the back &/or

display side facing the flat phantom in Body SAR testing) is bolded for each band. In some cases, after full testing of the basic SAR test configurations has been completed, additional checking SAR tests are made. These checking tests are always based on the bolded result from the 'basic' testing. When the SAR value of a checking test exceeds the maximum value from the basic tests, it is also bolded and used as the basis for any further checking tests that might be needed.

Checking tests are largely voluntary and can cover optional batteries, different camera slide positions, optional covers, etc. In the case of optional batteries, if the construction of the optional battery is significantly different to the battery used in the full testing e.g. if the outer can is floating electrically rather than grounded, then the maximum SAR test configuration in each band is tested with the optional battery in 3 channels. For camera slides, if the slide material is metal, then checking tests in 3 channels are again run for the maximum SAR test configuration in each band. For plastic camera slides, SAR checking is only carried out in the channel that provided the maximum SAR value for the original. Optional front and back covers are tested if their shape differs significantly from the original or if their metallic content varies by more than 15% from the original; in the former case, the testing depends on the extent of the physical differences, whereas in the latter case, 3 channel SAR testing is performed in every band in the max SAR test configuration.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 4	538	12 months	2011-09
DAE 4	555	12 months	2012-02
DAE 4	793	12 months	2011-09
E-field Probe ES3DV3	3194	12 months	2011-09
E-field Probe ES3DV3	3165	12 months	2012-02
E-field Probe EX3DV4	3573	12 months	2012-02
Dipole Validation Kit, D835V2	480	24 months	2011-10
Dipole Validation Kit, D1800V2	256	24 months	2011-10
Dipole Validation Kit, D1900V2	5d013	24 months	2012-03
Dipole Validation Kit, D2450V2	749	24 months	2011-10
DASY4 software	Version 4.7	-	-
DASY5 software	Version 52.6.1.408	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SML03	101265	12 months	2012-08
Amplifier	ZHL-42 (SMA)	N072095-5	12 months	2012-08
Power Meter	NRVS	838624/032	12 months	2012-08
Power Sensor	NRV-Z32	100069	12 months	2012-08
Call Tester	CMU 200	101111	-	-
Call Tester	CMU 200	103293	-	-
Vector Network Analyzer	8753E	US38432928	12 months	2012-08
Dielectric Probe Kit	85070B	US33020420	-	-
Signal Generator	E4436B	US39260114	12 months	2012-08
Amplifier	5S1G4	25583	12 months	2012-08
Power Meter	NRVS	849305/028	12 months	2012-08
Power Sensor	NRV-Z32	100067	12 months	2012-08

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm
Application	Distance from probe tip to dipole centers: 2.0 mm General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.1.2 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g, Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 10 mm Body diameter: 12 mm Tip diameter: 2.5 mm
Application	Distance from probe tip to dipole centers: 1.0 mm General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was at least 15.0 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	51.50	69.25
Tween 20	47.35	30.00
Salt	1.15	0.75

1800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.0	70.20
Tween 20	45.6	29.37
Salt	0.4	0.43

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.50	70.25
Tween 20	45.23	29.41
Salt	0.27	0.34

2450MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	56.0	70.20
Tween 20	44.0	29.62
Salt	-	0.18

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.36	40.5	0.88	
	$\pm 10\%$ window	2.12 – 2.60			
	2011-08-19	2.50	40.3	0.91	21.0
	2011-08-25	2.41	40.5	0.91	21.0
	2011-09-02	2.45	40.2	0.91	21.0
1800	Reference result	9.90	40.0	1.40	
	$\pm 10\%$ window	8.91 – 10.89			
	2011-08-23	10.8	39.2	1.45	21.0
	2011-08-24	10.4	38.5	1.42	21.0
1900	Reference result	10.2	41.2	1.45	
	$\pm 10\%$ window	9.2 – 11.2			
	2011-08-16	11.0	39.6	1.44	21.0
	2011-08-17	11.1	39.8	1.44	21.0
2450	Reference result	13.2	39.1	1.78	
	$\pm 10\%$ window	11.9 – 14.5			
	2011-08-22	14.0	38.2	1.84	21.0

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
835	Reference result	2.52	53.2	1.01	
	$\pm 10\%$ window	2.27 – 2.77			
	2011-08-26	2.59	53.5	1.01	21.0
	2011-08-29	2.57	53.2	1.00	21.0
1900	Reference result	10.4	55.0	1.58	
	$\pm 10\%$ window	9.4 – 11.4			
	2011-08-31	10.7	52.4	1.54	21.0
2450	Reference result	12.5	52.7	1.98	
	$\pm 10\%$ window	11.2 – 13.8			
	2011-08-29	13.4	50.5	2.04	21.0

Plots of the system checking scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
835	Recommended value	41.5	0.90	
	± 5% window	39.4 – 43.6	0.86 – 0.95	
	2011-08-25	40.5	0.91	21.0
836	Recommended value	41.5	0.90	
	± 5% window	39.4 – 43.6	0.86 – 0.95	
	2011-08-19	40.3	0.91	21.0
	2011-08-25	40.5	0.91	21.0
	2011-09-02	40.3	0.90	21.0
1732	Recommended value	40.1	1.36	
	± 5% window	38.1 – 42.1	1.29 – 1.43	
	2011-08-23	39.5	1.37	21.0
	2011-08-24	38.8	1.35	21.0
1880	Recommended value	40.0	1.40	
	± 5% window	38.0 – 42.0	1.33 – 1.47	
	2011-08-16	39.7	1.41	21.0
	2011-08-17	39.9	1.42	21.0
2442	Recommended value	39.2	1.79	
	± 5% window	37.3 – 41.2	1.70 – 1.88	
	2011-08-22	38.3	1.83	21.0

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
835	Recommended value	55.2	0.97	21.0
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	2011-08-26	53.5	1.01	
836	Recommended value	55.2	0.97	21.0
	$\pm 5\%$ window	52.4 – 58.0	0.92 – 1.02	
	2011-08-29	53.2	1.00	
1732	Recommended value	53.5	1.48	21.0
	$\pm 5\%$ window	50.8 – 56.2	1.40 – 1.55	
	2011-08-23	52.1	1.48	
1880	Recommended value	53.3	1.52	21.0
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	2011-08-31	52.5	1.52	
2442	Recommended value	52.7	1.94	21.0
	$\pm 5\%$ window	50.1 – 55.3	1.85 – 2.04	
	2011-08-29	50.5	2.03	

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

Nokia body-worn accessories are commonly available for the separation distance used in this testing.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	C_i	$C_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			±12.9	116
Coverage Factor for 95%			k=2				
Expanded Uncertainty						±25.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

850MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM	Conducted Power		-	32.5 dBm	-
BP-3L Sony	Left	Cheek	-	0.824	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot GPRS	Conducted Power		-	31.0 dBm	-
BP-3L Sony	Left	Cheek	-	1.09	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	Conducted Power		-	29.0 dBm	-
BP-3L Sony	Left	Cheek	-	1.04	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
4-slot GPRS	Conducted Power		28.0 dBm	28.0 dBm	28.0 dBm
BP-3L Sony	Left	Cheek	1.06	1.11	1.18
		Tilt	-	0.744	-
	Right	Cheek	0.985	1.01	1.08
		Tilt	-	0.696	-
4-slot 8PSK EGPRS	Conducted Power		-	-	27.0 dBm
BP-3L Sony	Left	Cheek	-	-	0.869
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-

(850MHz Table continues)

(850MHz Table continues)

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 4132 826.4 MHz	Ch 4175 835.0 MHz	Ch 4233 846.6 MHz
WCDMA	Conducted Power		23.5 dBm	23.5 dBm	23.5 dBm
BP-3L Sony	Left	Cheek	0.795	1.05	0.982
		Tilt	-	0.664	-
	Right	Cheek	0.745	1.00	0.905
		Tilt	-	0.671	-
4-slot GPRS BP-3L LG	Left Cheek		1.08	1.12	1.19

1700/2100MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 1312 1712.4 MHz	Ch 1412 1732.4 MHz	Ch 1513 1752.6 MHz
WCDMA	Conducted Power		23.5 dBm	23.5 dBm	23.5 dBm
BP-3L Sony	Left	Cheek	-	0.767	-
		Tilt	-	0.164	-
	Right	Cheek	0.729	0.785	0.736
		Tilt	-	0.148	-
WCDMA BP-3L LG	Right Cheek		0.803	0.832	0.826

1900MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	Conducted Power		-	30.5 dBm	-
BP-3L Sony	Left	Cheek	-	0.567	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot GPRS	Conducted Power		29.5 dBm	29.5 dBm	29.5 dBm
BP-3L Sony	Left	Cheek	0.800	0.849	0.893
		Tilt	-	0.252	-
	Right	Cheek	0.798	0.871	0.812
		Tilt	-	0.266	-
3-slot GPRS	Conducted Power		-	27.5 dBm	-
BP-3L Sony	Left	Cheek	-	0.746	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
4-slot GPRS	Conducted Power		-	26.5 dBm	-
BP-3L Sony	Left	Cheek	-	0.768	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot 8PSK EGPRS	Conducted Power		-	-	26.0 dBm
BP-3L Sony	Left	Cheek	-	-	0.315
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz
WCDMA	Conducted Power		23.0 dBm	23.0 dBm	23.0 dBm
BP-3L Sony	Left	Cheek	0.836	0.727	0.884
		Tilt	-	0.230	-
	Right	Cheek	-	0.723	-
		Tilt	-	0.247	-
2-slot GPRS BP-3L LG	Left Cheek		0.771	0.727	0.889

2450MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 1 2412.0 MHz	Ch 7 2442.0 MHz	Ch 11 2462.0 MHz
WLAN b-mode	Conducted Power		15.0 dBm	17.5 dBm	15.0 dBm
BP-3L Sony	Left	Cheek	0.157	0.279	0.161
		Tilt	-	0.209	-
	Right	Cheek	-	0.242	-
		Tilt	-	0.187	-
WLAN n-mode 20MHz	Conducted Power		13.5 dBm	16.5 dBm	13.5 dBm
BP-3L Sony	Left	Cheek	0.124	0.218	0.128
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
WLAN b-mode BP-3L LG	Left Cheek		0.155	0.291	0.167

The measured Body SAR values for the test device are tabulated below:

850MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
4-slot GPRS		Conducted Power	28.0 dBm	28.0 dBm	28.0 dBm
BP-3L Sony	Display facing phantom	Without headset	-	0.592	-
		Headset WH-207	-	0.346	-
	Back facing phantom	Without headset	0.645	0.674	0.696
		Headset WH-207	-	0.445	-
Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 4132 826.4 MHz	Ch 4175 835.0 MHz	Ch 4233 846.6 MHz
WCDMA		Conducted Power	23.5 dBm	23.5 dBm	23.5 dBm
BP-3L Sony	Display facing phantom	Without headset	0.435	0.575	0.579
		Headset WH-207	-	0.395	-
	Back facing phantom	Without headset	-	0.572	-
		Headset WH-207	-	0.379	-
4-slot GPRS BP-3L LG	Back facing phantom	Without headset	0.663	0.696	0.722

1700/2100MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 1312 1712.4 MHz	Ch 1412 1732.4 MHz	Ch 1513 1752.6 MHz
WCDMA		Conducted Power	23.5 dBm	23.5 dBm	23.5 dBm
BP-3L Sony	Display facing phantom	Without headset	-	0.300	-
		Headset WH-207	-	0.282	-
	Back facing phantom	Without headset	0.748	0.776	0.808
		Headset WH-207	-	0.758	-
WCDMA BP-3L LG	Back facing phantom	Without headset	0.750	0.804	0.806

1900MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
2-slot GPRS		Conducted Power	29.5 dBm	29.5 dBm	29.5 dBm
BP-3L Sony	Display facing phantom	Without headset	-	0.273	-
		Headset WH-207	-	0.266	-
	Back facing phantom	Without headset	-	0.612	-
		Headset WH-207	0.667	0.620	0.591
Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz
WCDMA		Conducted Power	23.0 dBm	23.0 dBm	23.0 dBm
BP-3L Sony	Display facing phantom	Without headset	-	0.285	-
		Headset WH-207	-	0.268	-
	Back facing phantom	Without headset	-	0.595	-
		Headset WH-207	0.618	0.601	0.557
2-slot GPRS BP-3L LG	Back facing phantom	Headset WH-207	0.649	0.603	0.579

2450MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 1 2412.0 MHz	Ch 7 2442.0 MHz	Ch 11 2462.0 MHz
WLAN b-mode		Conducted Power	15.0 dBm	17.5 dBm	15.0 dBm
BP-3L Sony	Display facing phantom	Without headset	-	0.034	-
		Headset WH-207	-	0.029	-
	Back facing Phantom	Without headset	-	0.062	-
		Headset WH-207	0.037	0.071	0.041
WLAN b-mode BP-3L LG	Back facing phantom	Headset WH-207	0.039	0.074	0.046
WLAN n-mode 20MHz		Conducted Power	13.5 dBm	16.5 dBm	13.5 dBm
BP-3L LG	Display facing phantom	Without headset	-	-	-
		Headset WH-207	-	-	-
	Back facing phantom	Without headset	-	-	-
		Headset WH-207	0.029	0.055	0.034

**Simultaneous transmissions: Combined SAR results –
Individual band Max results**

Test configuration	Max. 1g SAR results					
	WLAN	4-slot GPRS850	WCDMA 850	WCDMA 1700/2100	2-slot GPRS1900	WCDMA 1900
Head: Left, Cheek	0.291	1.19	1.05	0.767	0.893	0.884
Head: Left, Tilt	0.209	0.744	0.664	0.164	0.252	0.230
Head: Right, Cheek	0.242	1.08	1.00	0.832	0.871	0.723
Head: Right, Tilt	0.187	0.696	0.671	0.148	0.266	0.247
Body: Display facing phantom, Without Headset	0.034	0.592	0.579	0.300	0.273	0.285
Body: Display facing phantom, Headset WH-207	0.029	0.346	0.395	0.282	0.266	0.268
Body: Back facing phantom, Without Headset	0.062	0.722	0.572	0.808	0.612	0.595
Body: Back facing phantom, Headset WH-207	0.074	0.445	0.379	0.758	0.667	0.618

**Simultaneous transmissions: Combined SAR results –
Max + Max combined results**

Test configuration	Max. 1g SAR results				
	4-slot GPRS850 + WLAN	WCDMA 850 + WLAN	WCDMA 1700/2100 + WLAN	2-slot GPRS1900 + WLAN	WCDMA 1900 + WLAN
Head: Left, Cheek	1.481	1.341	1.058	1.184	1.175
Head: Left, Tilt	0.953	0.873	0.373	0.461	0.439
Head: Right, Cheek	1.322	1.242	1.074	1.113	0.965
Head: Right, Tilt	0.883	0.858	0.335	0.453	0.434
Body: Display facing phantom, Without Headset	0.626	0.613	0.334	0.307	0.319
Body: Display facing phantom, Headset WH-207	0.375	0.424	0.311	0.295	0.297
Body: Back facing phantom, Without Headset	0.784	0.634	0.870	0.674	0.657
Body: Back facing phantom, Headset WH-207	0.519	0.453	0.832	0.741	0.692

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

**Simultaneous transmissions: Combined SAR results –
SPEAG Combined Multiband algorithm results**

Test configuration	Max. 1g SAR results				
	4-slot GPRS850 + WLAN	WCDMA 850 + WLAN	WCDMA 1700/2100 + WLAN	2-slot GPRS1900 + WLAN	WCDMA 1900 + WLAN
Head: Left, Cheek	1.18	1.10	-	0.851	0.844
Head: Left, Tilt	-	-	-	-	-
Head: Right, Cheek	-	-	0.792	-	-
Head: Right, Tilt	-	-	-	-	-
Body: Display facing phantom, Without Headset	-	-	-	-	-
Body: Display facing phantom, Headset WH-207	-	-	-	-	-
Body: Back facing phantom, Without Headset	0.743	0.594	0.822	-	-
Body: Back facing phantom, Headset WH-207	-	-	-	0.673	0.616

Some of the Combined SAR values in the above table are less than the maximum SAR values for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In these cases, the maximum SAR values given for the combined Modes in the Summary table in Section 1.2 are those for the individual cellular band.

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product. The Combined SAR data given in the tables above has been voluntarily calculated.

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

Date/Time: 2011-08-19 06:56:18, Date/Time: 2011-08-19 07:02:09

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: $t = 22.0\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.912\text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: $dx=15\text{ mm}$, $dy=15\text{ mm}$

Maximum value of SAR (interpolated) = 2.67 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 54.7 V/m


Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 2.5 mW/g

SAR(10 g) = 1.62 mW/g

Power Drift = 0.024 dB

Maximum value of SAR (measured) = 2.7 mW/g

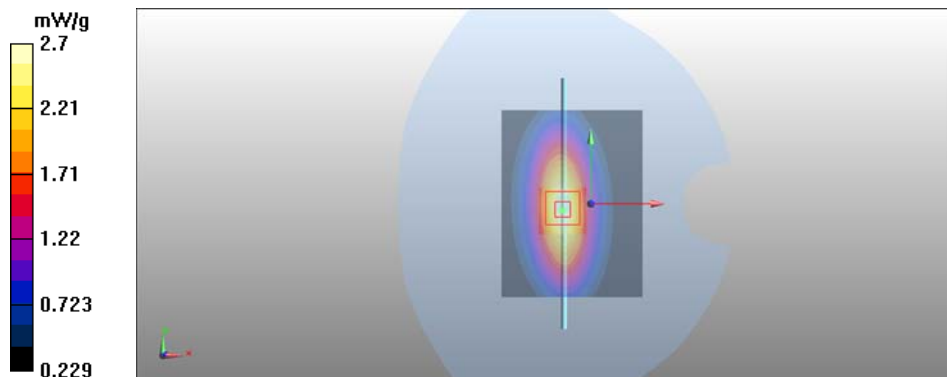

Date/Time: 2011-08-25 12:09:15, Date/Time: 2011-08-25 12:15:00

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 835 MHz; σ = 0.911 mho/m; ϵ_r = 40.5; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.6 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.3 V/m


Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.41 mW/g

SAR(10 g) = 1.56 mW/g

Power Drift = -0.017 dB

Maximum value of SAR (measured) = 2.6 mW/g

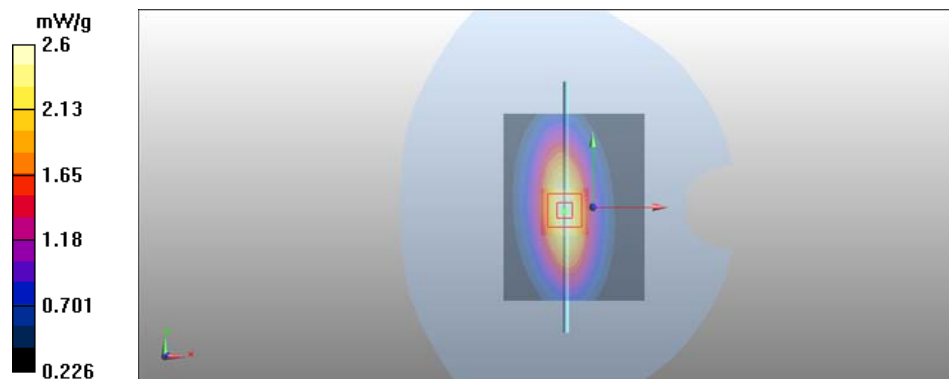

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-09-02 12:52:16, Date/Time: 2011-09-02 12:57:57

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: t= 21.2 C

Medium parameters used: f = 835 MHz; σ = 0.905 mho/m; ϵ_r = 40.2; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.62 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.5 V/m


Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 2.45 mW/g

SAR(10 g) = 1.58 mW/g

Power Drift = -0.036 dB

Maximum value of SAR (measured) = 2.65 mW/g

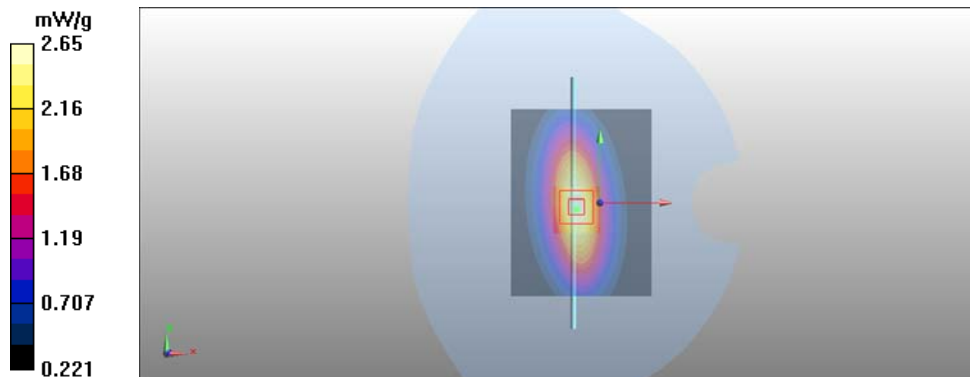

Date/Time: 2011-08-23 10:34:38, Date/Time: 2011-08-23 10:40:53

Test Laboratory: TCC Nokia

Type: D1800V2; Serial: D1800V2 - SN:256

Communication System: CW1800

Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: $t = 21.1$ C

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.2 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.5 V/m


Peak SAR (extrapolated) = 20.4 W/kg

SAR(1 g) = 10.8 mW/g

SAR(10 g) = 5.55 mW/g

Power Drift = 0.026 dB

Maximum value of SAR (measured) = 12.2 mW/g

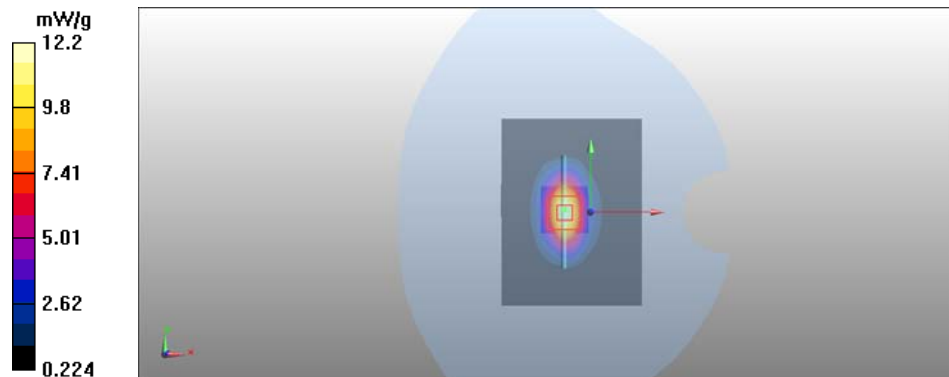

Date/Time: 2011-08-24 09:19:24, Date/Time: 2011-08-24 09:25:45

Test Laboratory: TCC Nokia

Type: D1800V2; Serial: D1800V2 - SN:256

Communication System: CW1800

Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t= 20.7 C

Medium parameters used: f = 1800 MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.1 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.1 V/m


Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 10.4 mW/g

SAR(10 g) = 5.36 mW/g

Power Drift = 0.135 dB

Maximum value of SAR (measured) = 11.6 mW/g

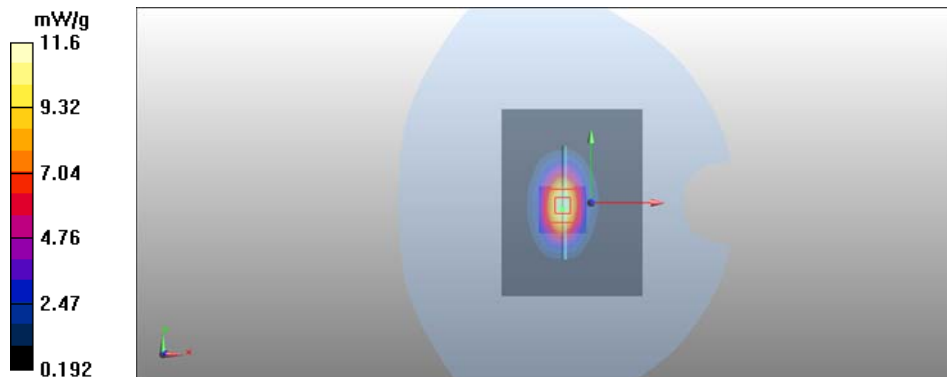

Date/Time: 2011-08-16 12:07:58, Date/Time: 2011-08-16 12:14:07

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: t= 22.5 C

Medium parameters used: f = 1900 MHz; σ = 1.44 mho/m; ϵ_r = 39.6; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.9 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.4 V/m


Peak SAR (extrapolated) = 20.8 W/kg

SAR(1 g) = 11 mW/g

SAR(10 g) = 5.67 mW/g

Power Drift = 0.134 dB

Maximum value of SAR (measured) = 12.4 mW/g

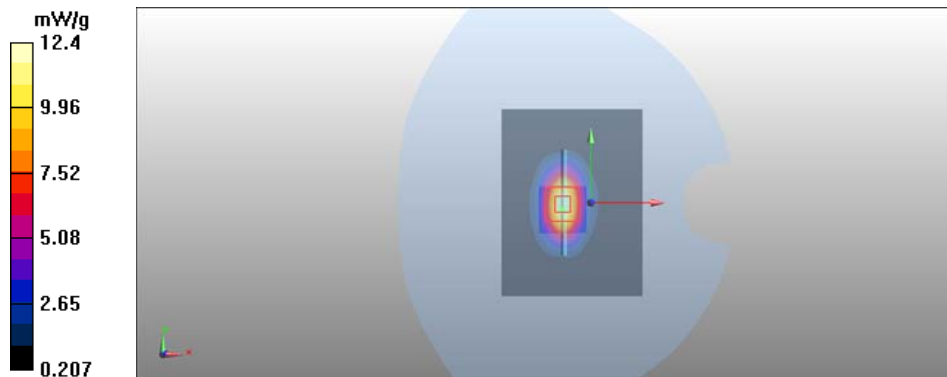

Date/Time: 2011-08-17 13:50:07, Date/Time: 2011-08-17 13:56:34

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: $t = 21.6$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.6 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.3 V/m


Peak SAR (extrapolated) = 21.2 W/kg

SAR(1 g) = 11.1 mW/g

SAR(10 g) = 5.73 mW/g

Power Drift = 0.093 dB

Maximum value of SAR (measured) = 12.6 mW/g

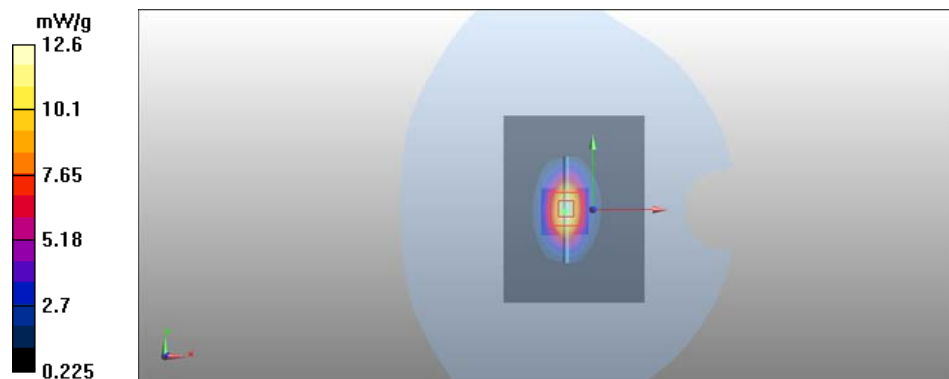

Date/Time: 2011-08-22 09:54:49, Date/Time: 2011-08-22 10:00:46

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW2450

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 17 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.5 V/m


Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 14 mW/g

SAR(10 g) = 6.49 mW/g

Power Drift = 0.025 dB

Maximum value of SAR (measured) = 15.8 mW/g

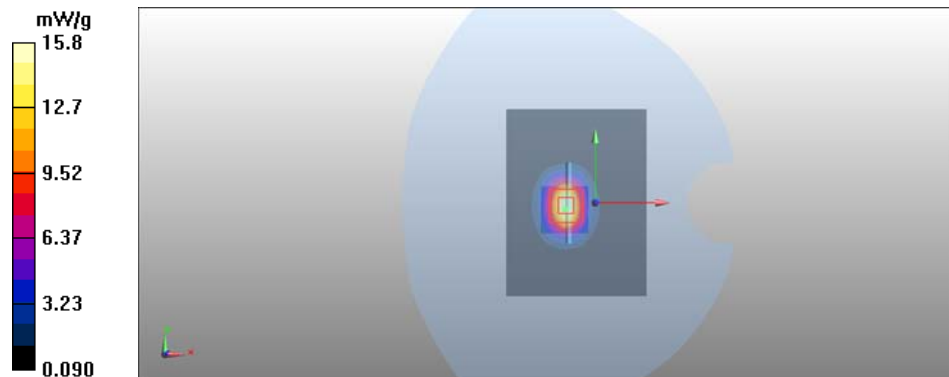

Date/Time: 2011-08-26 11:10:58, Date/Time: 2011-08-26 11:16:41

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 21.1 C

Medium parameters used: f = 835 MHz; σ = 1.01 mho/m; ϵ_r = 53.5; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.74 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.2 V/m


Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 2.59 mW/g

SAR(10 g) = 1.68 mW/g

Power Drift = 0.118 dB

Maximum value of SAR (measured) = 2.8 mW/g

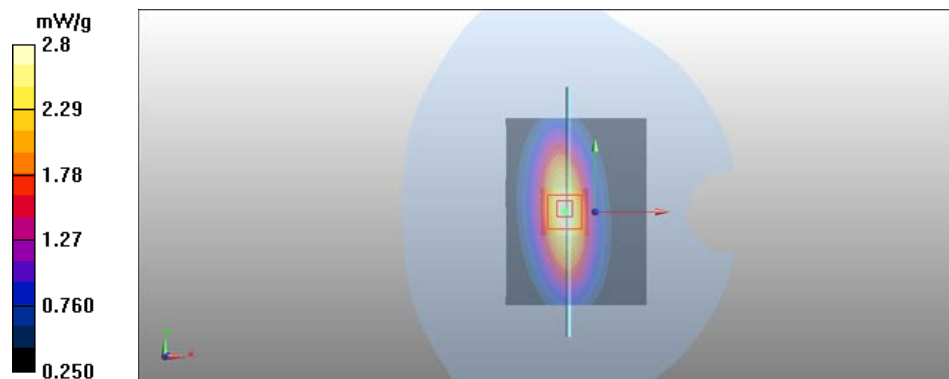

Date/Time: 2011-08-29 06:52:20, Date/Time: 2011-08-29 06:58:05

Test Laboratory: TCC Nokia

Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 835 MHz; σ = 1 mho/m; ϵ_r = 53.2; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.74 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.1 V/m


Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 2.57 mW/g

SAR(10 g) = 1.68 mW/g

Power Drift = 0.073 dB

Maximum value of SAR (measured) = 2.78 mW/g

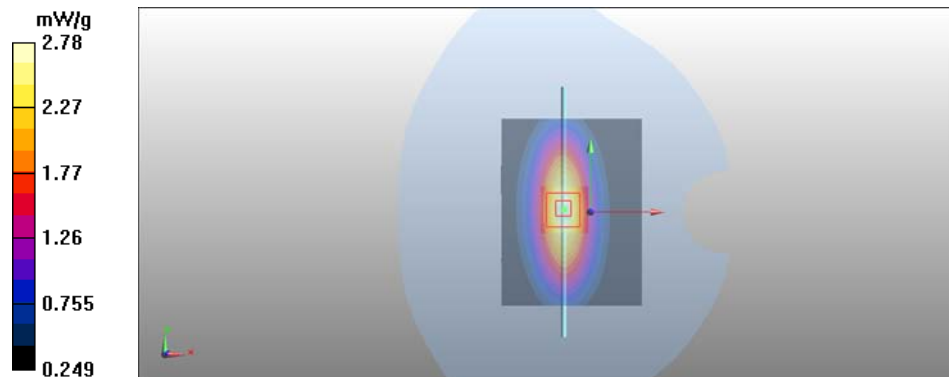

Date/Time: 2011-08-31 08:18:07, Date/Time: 2011-08-31 08:24:09

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.6 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.2 V/m


Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 10.7 mW/g

SAR(10 g) = 5.63 mW/g

Power Drift = 0.049 dB

Maximum value of SAR (measured) = 12.2 mW/g

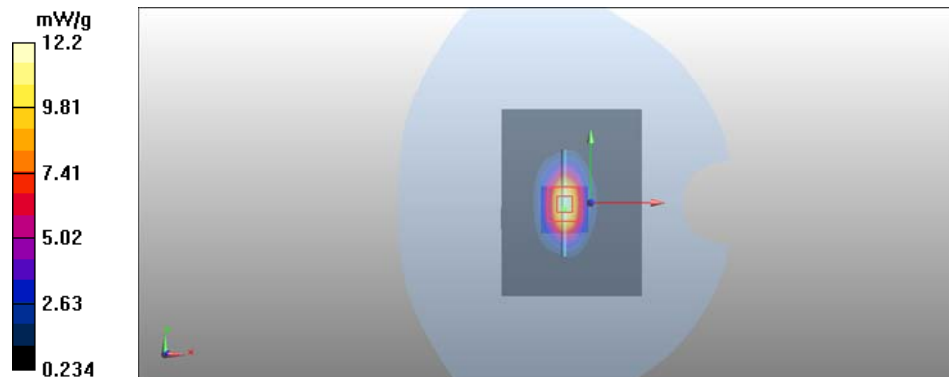

Date/Time: 2011-08-29 12:54:01, Date/Time: 2011-08-29 12:59:53

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW2450

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: $t = 20.9\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 2.04\text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 15.4 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 80.9 V/m


Peak SAR (extrapolated) = 27.3 W/kg

SAR(1 g) = 13.4 mW/g

SAR(10 g) = 6.2 mW/g

Power Drift = -0.043 dB

Maximum value of SAR (measured) = 15.5 mW/g

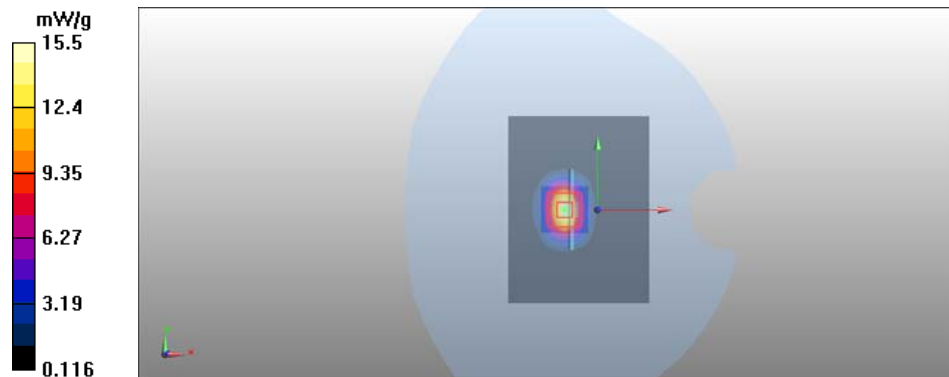

APPENDIX B: MEASUREMENT SCANS

Date/Time: 2011-08-19 07:59:50, Date/Time: 2011-08-19 08:05:32

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 837 MHz; σ = 0.912 mho/m; ϵ_r = 40.3; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

GSM - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.865 mW/g

GSM - Left/Cheek - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.2 V/m


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.824 mW/g

SAR(10 g) = 0.603 mW/g

Power Drift = -0.324 dB

Maximum value of SAR (measured) = 0.874 mW/g

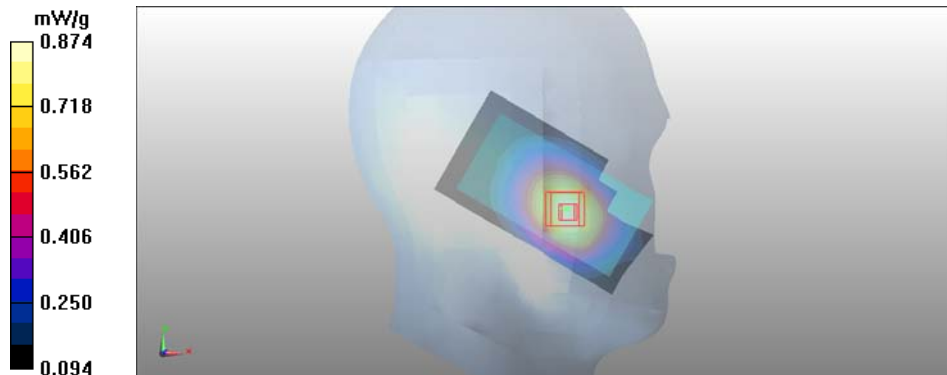

Date/Time: 2011-08-19 09:15:58, Date/Time: 2011-08-19 09:21:40

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 2-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:4.19952

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 837 MHz; σ = 0.912 mho/m; ϵ_r = 40.3; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.17 mW/g

2-slot GPRS - Left/Cheek - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.2 V/m


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 1.09 mW/g

SAR(10 g) = 0.802 mW/g

Power Drift = 0.105 dB

Maximum value of SAR (measured) = 1.16 mW/g

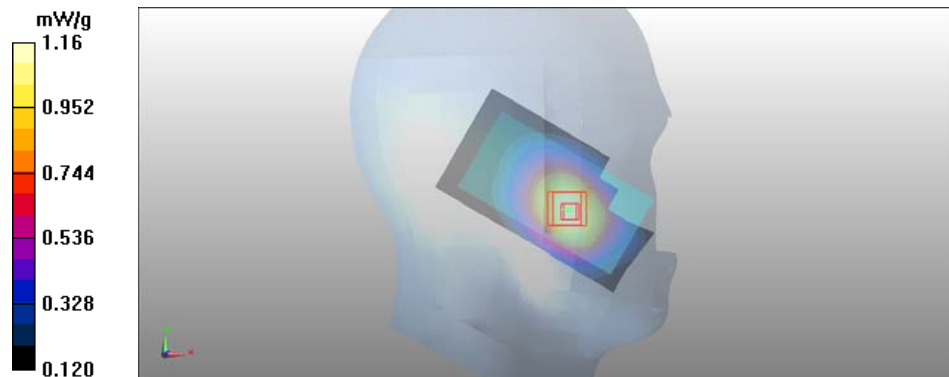

Date/Time: 2011-08-19 10:05:51, Date/Time: 2011-08-19 10:11:35

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 3-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.80027

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 837 MHz; σ = 0.912 mho/m; ϵ_r = 40.3; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.1 mW/g

3-slot GPRS - Left/Cheek - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.7 V/m


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 1.04 mW/g

SAR(10 g) = 0.768 mW/g

Power Drift = -0.284 dB

Maximum value of SAR (measured) = 1.11 mW/g

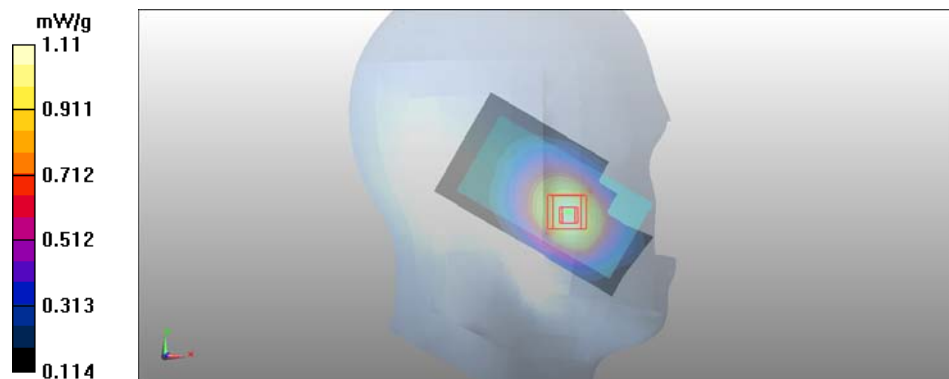

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 11:51:28, Date/Time: 2011-08-19 11:54:41

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 849 MHz; σ = 0.92 mho/m; ϵ_r = 40.2; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Left/Cheek - High - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

4-slot GPRS - Left/Cheek - High - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.1 V/m


Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 1.18 mW/g

SAR(10 g) = 0.863 mW/g

Power Drift = -0.049 dB

Maximum value of SAR (measured) = 1.25 mW/g

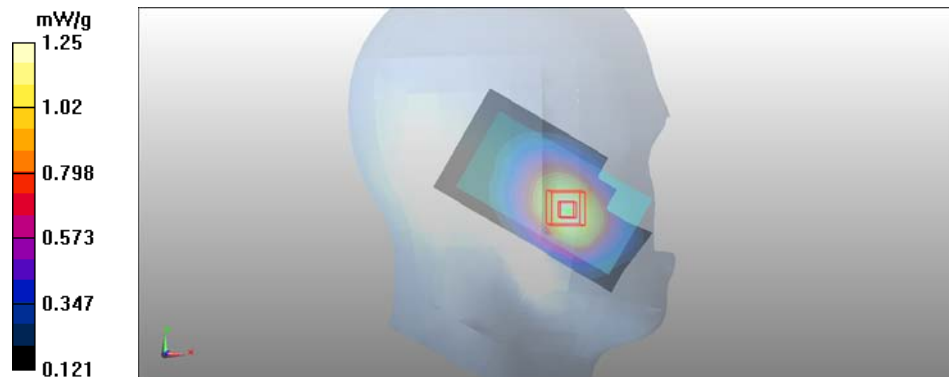

Date/Time: 2011-08-19 12:12:23, Date/Time: 2011-08-19 12:15:34

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.09991

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 837 MHz; σ = 0.912 mho/m; ϵ_r = 40.3; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Left/Tilt - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.798 mW/g

4-slot GPRS - Left/Tilt - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.9 V/m


Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.744 mW/g

SAR(10 g) = 0.553 mW/g

Power Drift = -0.104 dB

Maximum value of SAR (measured) = 0.788 mW/g

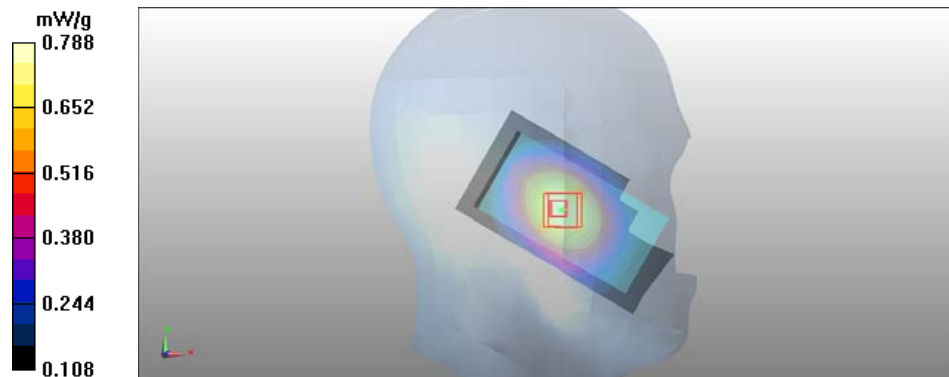

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 13:55:43, Date/Time: 2011-08-19 13:59:13

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 849 MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Right/Cheek – High - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g

4-slot GPRS - Right/Cheek – High - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.7 V/m


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 1.08 mW/g

SAR(10 g) = 0.795 mW/g

Power Drift = 0.017 dB

Maximum value of SAR (measured) = 1.14 mW/g

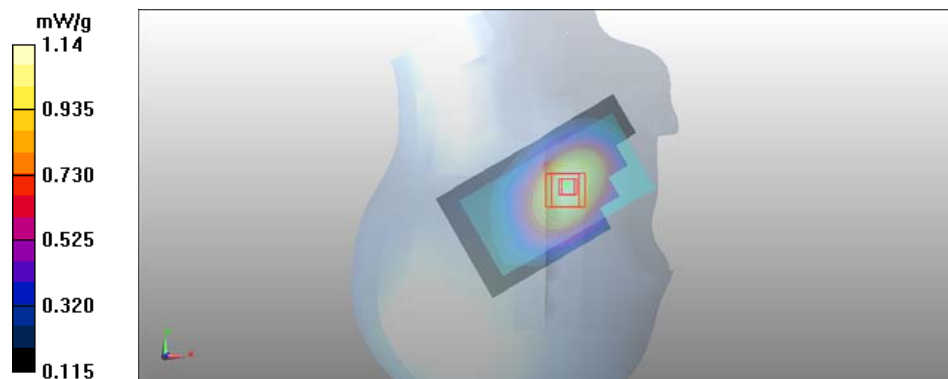

Date/Time: 2011-08-19 13:23:56, Date/Time: 2011-08-19 13:27:27, Date/Time: 2011-08-19 13:33:26

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.09991

Medium: HSL850; Medium Notes: t= 22.0 C

Medium parameters used: f = 837 MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Right/Tilt - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.710 mW/g

4-slot GPRS - Right/Tilt - Middle - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.5 V/m

Peak SAR (extrapolated) = 0.900 W/kg

SAR(1 g) = 0.696 mW/g

SAR(10 g) = 0.511 mW/g

Power Drift = -0.021 dB

Maximum value of SAR (measured) = 0.738 mW/g

4-slot GPRS - Right/Tilt - Middle - BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.5 V/m

Peak SAR (extrapolated) = 0.775 W/kg


SAR(1 g) = 0.527 mW/g

SAR(10 g) = 0.338 mW/g

Power Drift = -0.021 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.653 mW/g

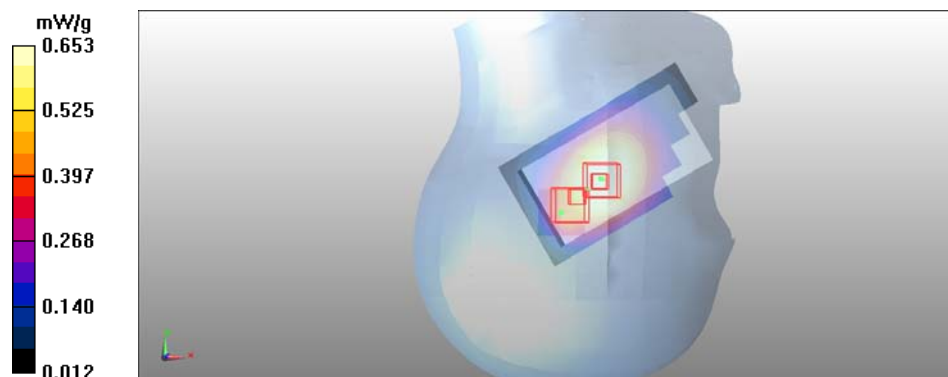

Date/Time: 2011-08-25 13:38:54, Date/Time: 2011-08-25 13:42:04

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot 8PSK EGPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: HSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 849 MHz; σ = 0.92 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot 8PSK EGPRS - Left/Cheek – High – BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.946 mW/g

4-slot 8PSK EGPRS - Left/Cheek – High – BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.869 mW/g

SAR(10 g) = 0.642 mW/g

Power Drift = -0.426 dB

Maximum value of SAR (measured) = 0.920 mW/g

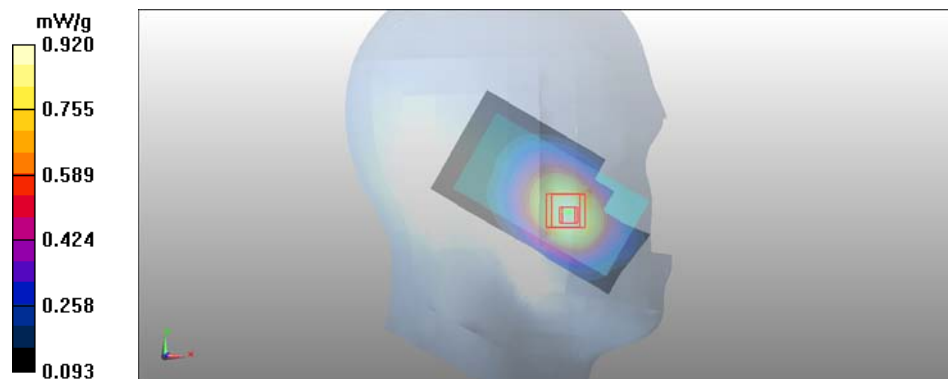

Date/Time: 2011-08-26 06:49:57, Date/Time: 2011-08-26 07:09:38

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 835 MHz; σ = 0.911 mho/m; ϵ_r = 40.5; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g

WCDMA - Left/Cheek - Middle - BP-3L Sony/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 1.05 mW/g

SAR(10 g) = 0.780 mW/g

Power Drift = -0.00286 dB

Maximum value of SAR (measured) = 1.11 mW/g

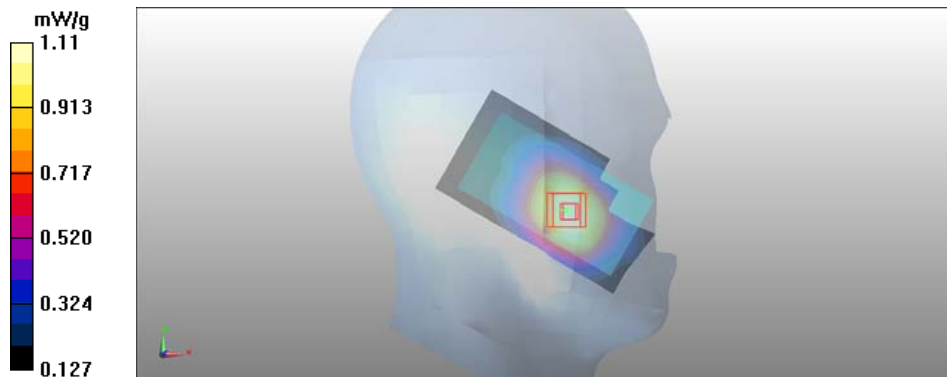

Date/Time: 2011-08-26 07:48:05, Date/Time: 2011-08-26 07:51:14

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 835 MHz; σ = 0.911 mho/m; ϵ_r = 40.5; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Tilt - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.706 mW/g

WCDMA - Left/Tilt - Middle - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m


Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.664 mW/g

SAR(10 g) = 0.489 mW/g

Power Drift = -0.015 dB

Maximum value of SAR (measured) = 0.703 mW/g

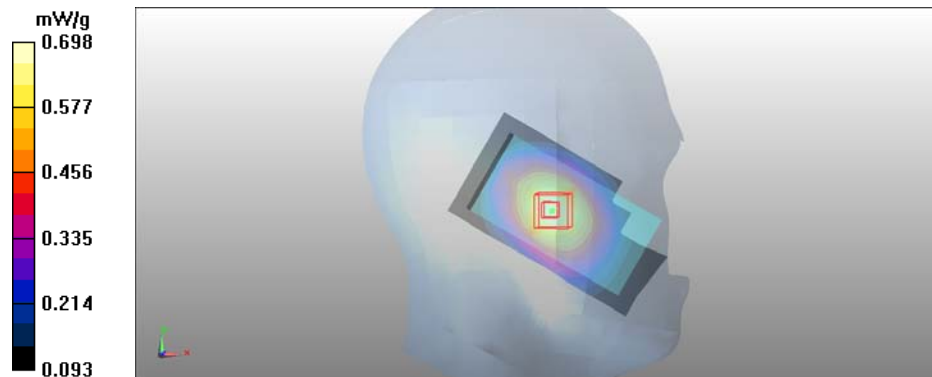

Date/Time: 2011-08-26 08:19:48, Date/Time: 2011-08-26 08:28:32

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: $t = 21.0\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.911\text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Cheek - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.1 mW/g

WCDMA - Right/Cheek - Middle - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.6 V/m


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 1 mW/g

SAR(10 g) = 0.734 mW/g

Power Drift = 0.000289 dB

Maximum value of SAR (measured) = 1.05 mW/g

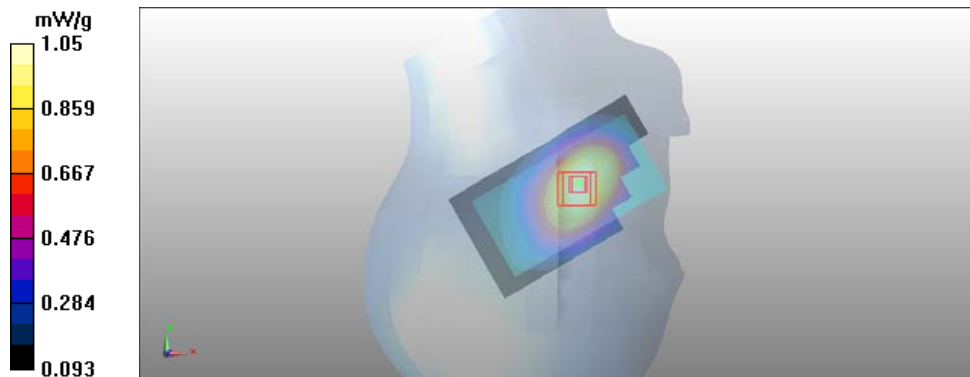

Date/Time: 2011-08-26 09:03:35, Date/Time: 2011-08-26 09:07:01, Date/Time: 2011-08-26 09:18:00

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 835 MHz; $\sigma = 0.911$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Tilt - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.696 mW/g

WCDMA - Right/Tilt - Middle - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.671 mW/g

SAR(10 g) = 0.491 mW/g

Power Drift = 0.00937 dB

Maximum value of SAR (measured) = 0.702 mW/g

WCDMA - Right/Tilt - Middle - BP-3L Sony /Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m

Peak SAR (extrapolated) = 0.795 W/kg


SAR(1 g) = 0.494 mW/g

SAR(10 g) = 0.346 mW/g

Power Drift = 0.00937 dB

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.653 mW/g

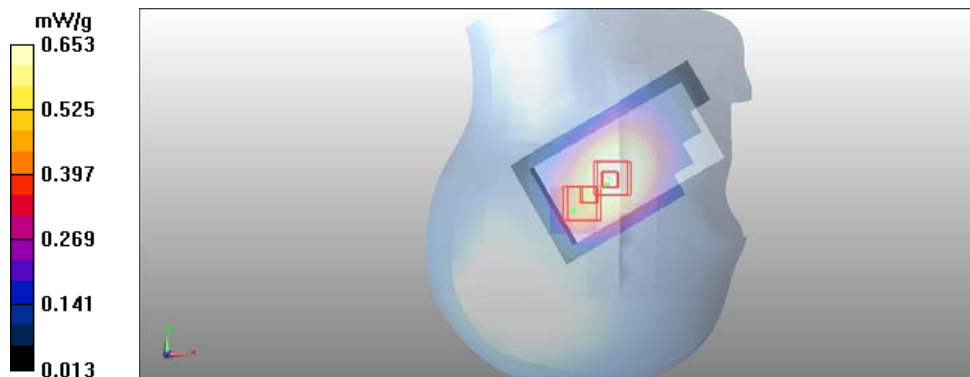

Date/Time: 2011-08-25 13:23:49, Date/Time: 2011-08-25 13:26:57

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: HSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 849 MHz; σ = 0.92 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Left/Cheek - High - BP-3L LG/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g

4-slot GPRS - Left/Cheek - High - BP-3L LG/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.4 V/m


Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 1.19 mW/g

SAR(10 g) = 0.875 mW/g

Power Drift = -0.169 dB

Maximum value of SAR (measured) = 1.26 mW/g

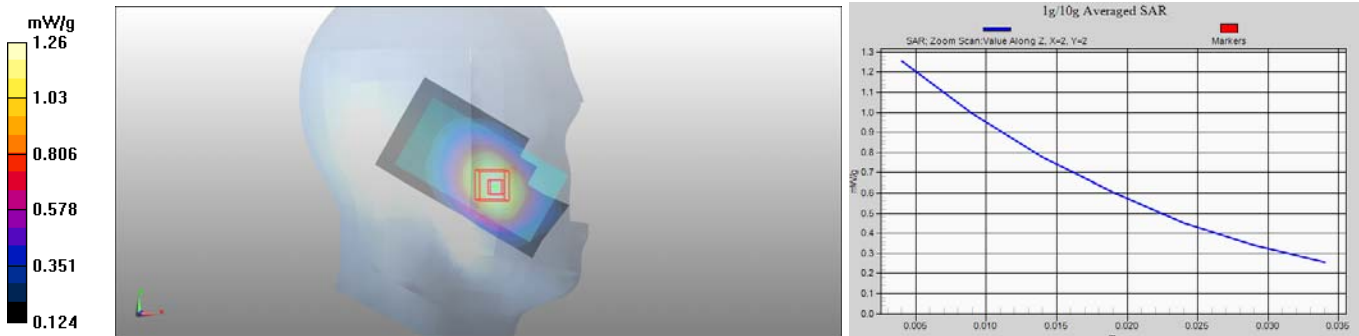

Date/Time: 2011-08-23 16:53:49, Date/Time: 2011-08-23 16:59:52

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t= 21.1 C

Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Cheek - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.828 mW/g

WCDMA - Left/Cheek - Middle - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.45 V/m


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.767 mW/g

SAR(10 g) = 0.416 mW/g

Power Drift = 0.229 dB

Maximum value of SAR (measured) = 0.841 mW/g

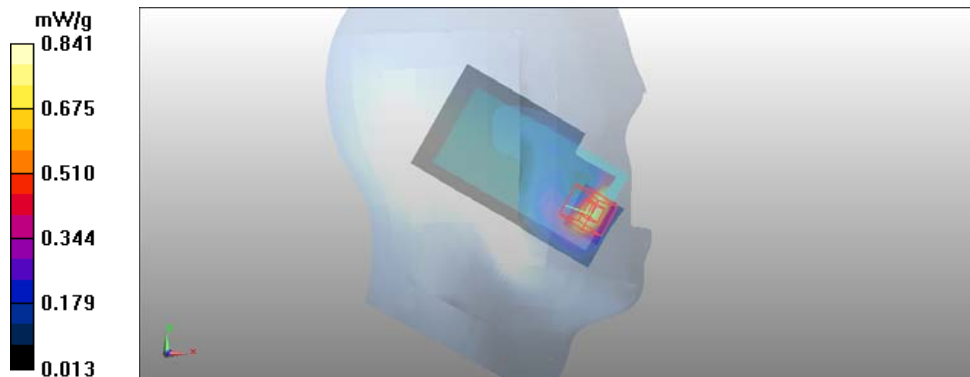

Date/Time: 2011-08-23 17:10:02, Date/Time: 2011-08-23 17:13:46

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t= 21.1 C

Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Tilt - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

WCDMA - Left/Tilt - Middle - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.76 V/m


Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.164 mW/g

SAR(10 g) = 0.102 mW/g

Power Drift = 0.081 dB

Maximum value of SAR (measured) = 0.174 mW/g

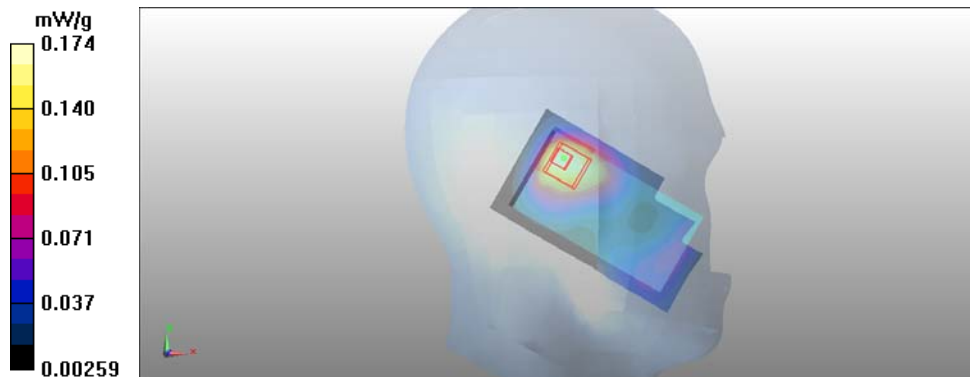

Date/Time: 2011-08-23 17:31:04, Date/Time: 2011-08-23 17:37:10

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t= 21.1 C

Medium parameters used (interpolated): f = 1732.4 MHz; σ = 1.37 mho/m; ϵ_r = 39.5; ρ = 1000 kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Cheek - Middle -BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.826 mW/g

WCDMA - Right/Cheek - Middle -BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.9 V/m


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.785 mW/g

SAR(10 g) = 0.439 mW/g

Power Drift = -0.00821 dB

Maximum value of SAR (measured) = 0.821 mW/g

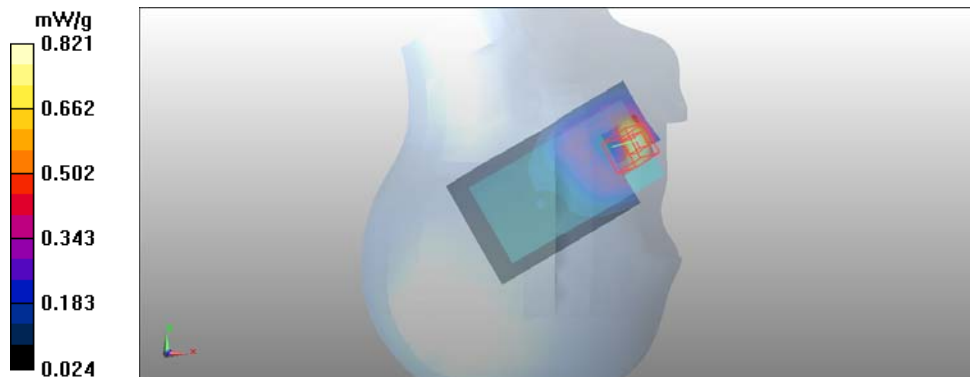

Date/Time: 2011-08-23 17:45:50, Date/Time: 2011-08-23 17:49:41

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t= 21.1 C

Medium parameters used (interpolated): f = 1732.4 MHz; σ = 1.37 mho/m; ϵ_r = 39.5; ρ = 1000 kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Tilt - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.157 mW/g

WCDMA - Right/Tilt - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.3 V/m


Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.148 mW/g

SAR(10 g) = 0.089 mW/g

Power Drift = 0.048 dB

Maximum value of SAR (measured) = 0.159 mW/g

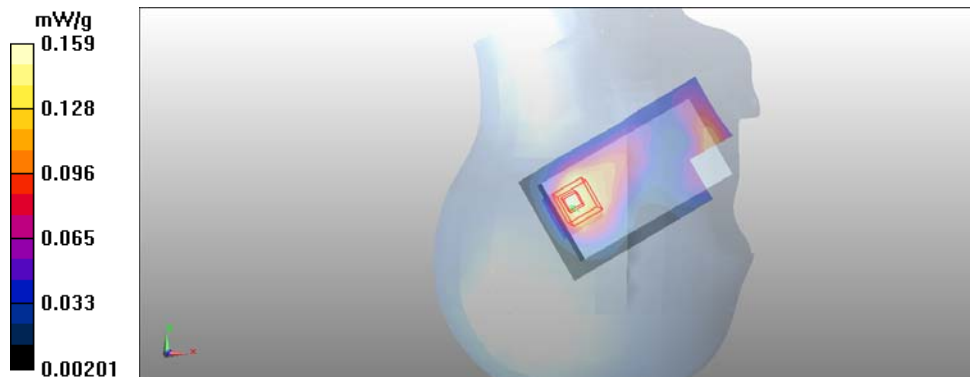

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-24 09:51:40, Date/Time: 2011-08-24 09:57:47

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1800; Medium Notes: t= 20.7 C

Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.19, 5.19, 5.19); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 4; Type: Twin SAM 040 CA; Serial: TP-1018
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Cheek - Middle - BP-3L LG/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.914 mW/g

WCDMA - Right/Cheek - Middle - BP-3L LG/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.26 V/m


Peak SAR (extrapolated) = 1.4 W/kg

SAR(1 g) = 0.832 mW/g

SAR(10 g) = 0.471 mW/g

Power Drift = -0.092 dB

Maximum value of SAR (measured) = 0.884 mW/g

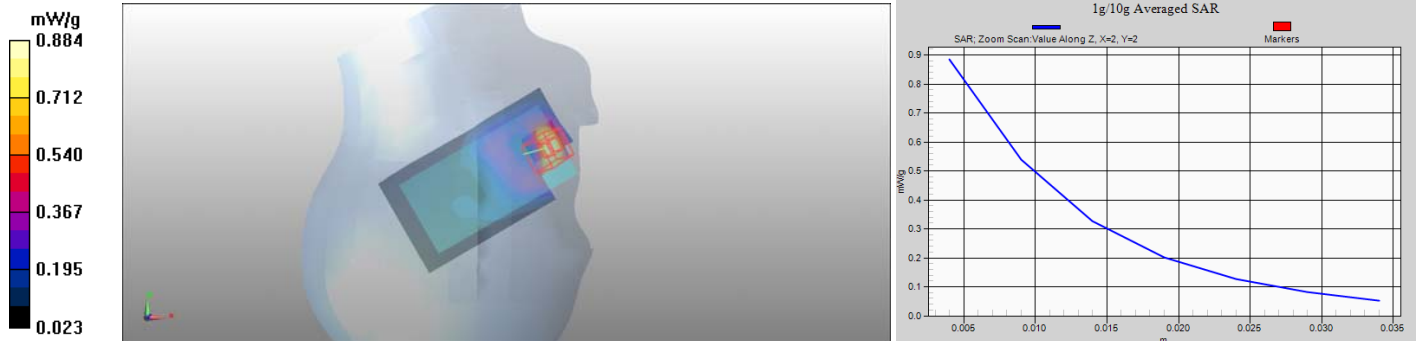

Date/Time: 2011-08-16 13:47:27, Date/Time: 2011-08-16 13:53:33, Date/Time: 2011-08-16 14:00:35

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL900; Medium Notes: 22.1C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

GSM - Left/Cheek - Middle/ - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.622 mW/g

GSM - Left/Cheek - Middle/ - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.97 V/m

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.567 mW/g

SAR(10 g) = 0.315 mW/g

Power Drift = 0.063 dB

Maximum value of SAR (measured) = 0.619 mW/g

GSM - Left/Cheek - Middle/ - BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.97 V/m


Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.501 mW/g

SAR(10 g) = 0.283 mW/g

Power Drift = 0.063 dB

Maximum value of SAR (measured) = 0.551 mW/g

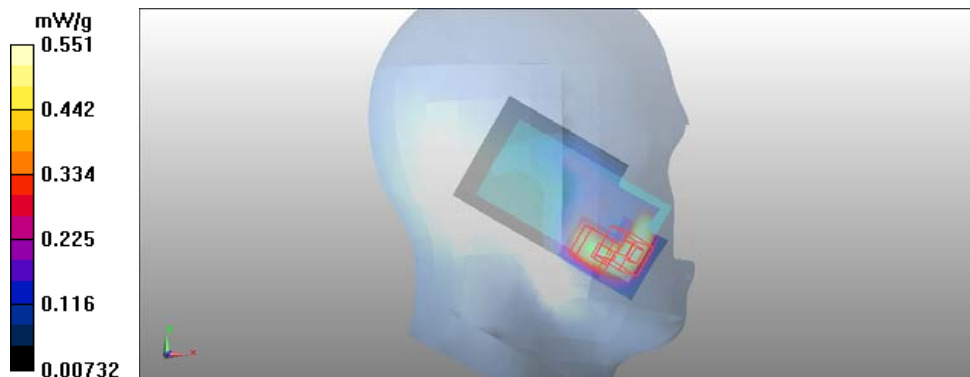

Date/Time: 2011-08-16 16:14:26, Date/Time: 2011-08-16 16:18:14, Date/Time: 2011-08-16 16:25:28

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: HSL900; Medium Notes: 22.1C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Left/Cheek - High - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.993 mW/g

2-slot GPRS - Left/Cheek - High - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.39 V/m

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.893 mW/g

SAR(10 g) = 0.507 mW/g

Power Drift = -0.088 dB

Maximum value of SAR (measured) = 0.988 mW/g

2-slot GPRS - Left/Cheek - High - BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.39 V/m


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.804 mW/g

SAR(10 g) = 0.432 mW/g

Power Drift = -0.088 dB

Maximum value of SAR (measured) = 0.954 mW/g

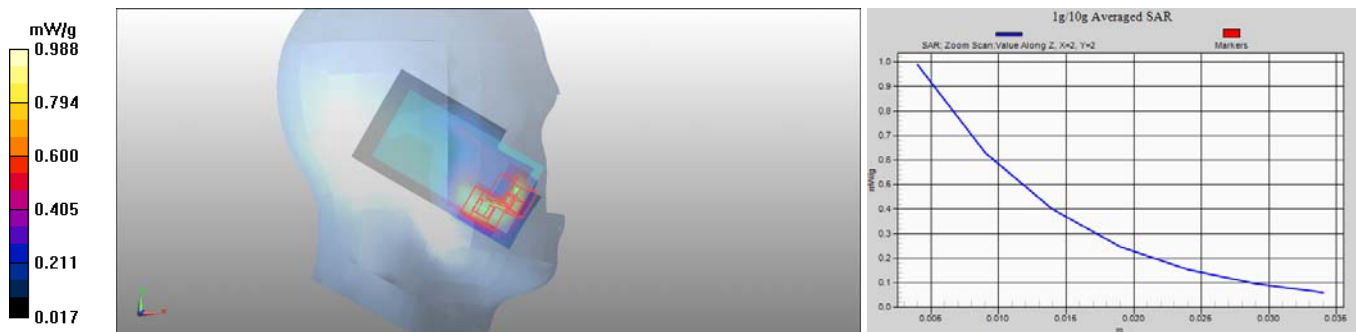

Date/Time: 2011-08-16 16:37:38, Date/Time: 2011-08-16 16:41:25

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL900; Medium Notes: 22.1C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Left/Tilt – Middle – BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.307 mW/g

2-slot GPRS - Left/Tilt – Middle – BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.2 V/m


Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.252 mW/g

SAR(10 g) = 0.144 mW/g

Power Drift = -0.00481 dB

Maximum value of SAR (measured) = 0.280 mW/g

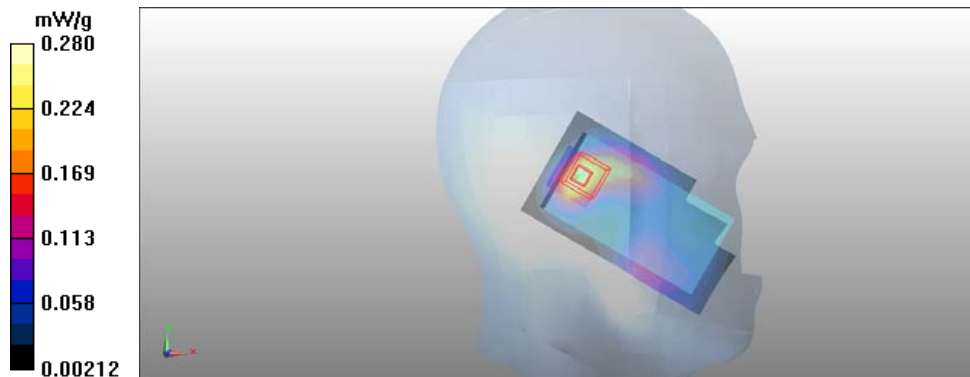

Date/Time: 2011-08-16 17:03:28, Date/Time: 2011-08-16 17:09:49, Date/Time: 2011-08-16 17:16:45

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900; Medium Notes: 22.0C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Right/Cheek - Middle – BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.934 mW/g

2-slot GPRS - Right/Cheek - Middle – BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.2 V/m

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.871 mW/g

SAR(10 g) = 0.490 mW/g

Power Drift = 0.041 dB

Maximum value of SAR (measured) = 0.951 mW/g

2-slot GPRS - Right/Cheek - Middle – BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.2 V/m


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.617 mW/g

SAR(10 g) = 0.362 mW/g

Power Drift = 0.041 dB

Maximum value of SAR (measured) = 0.697 mW/g

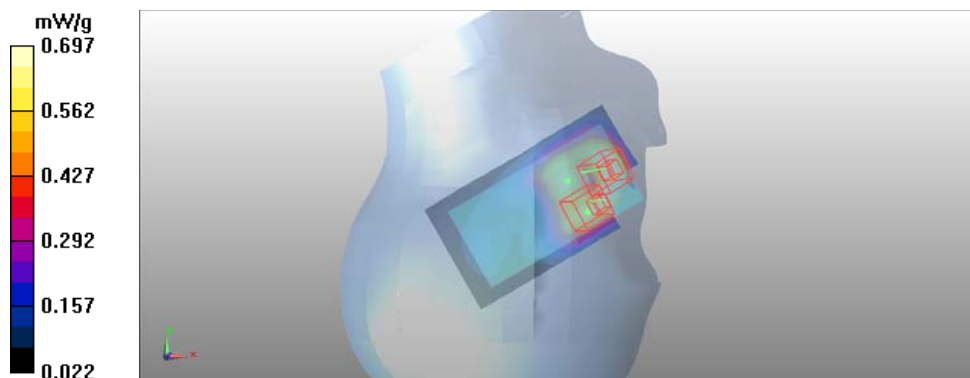

Date/Time: 2011-08-16 17:27:21, Date/Time: 2011-08-16 17:31:20

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900; Medium Notes: 22.0C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Right/Tilt - Middle – BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.321 mW/g

2-slot GPRS - Right/Tilt - Middle – BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.7 V/m


Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.266 mW/g

SAR(10 g) = 0.147 mW/g

Power Drift = -0.051 dB

Maximum value of SAR (measured) = 0.302 mW/g

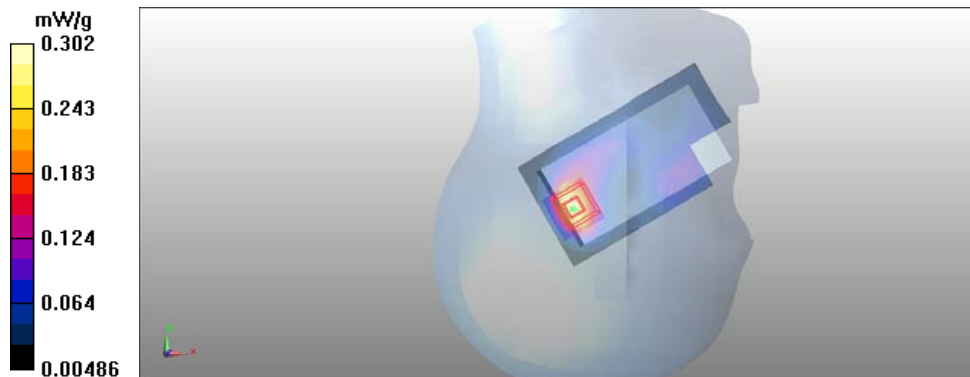

Date/Time: 2011-08-16 14:38:47, Date/Time: 2011-08-16 14:44:55, Date/Time: 2011-08-16 14:52:12

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 3-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:2.8

Medium: HSL900; Medium Notes: 22.1C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Left/Cheek - Middle - BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.818 mW/g

3-slot GPRS - Left/Cheek - Middle - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.95 V/m

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.746 mW/g

SAR(10 g) = 0.416 mW/g

Power Drift = 0.111 dB

Maximum value of SAR (measured) = 0.815 mW/g

3-slot GPRS - Left/Cheek - Middle - BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.95 V/m


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.661 mW/g

SAR(10 g) = 0.374 mW/g

Power Drift = 0.111 dB

Maximum value of SAR (measured) = 0.730 mW/g

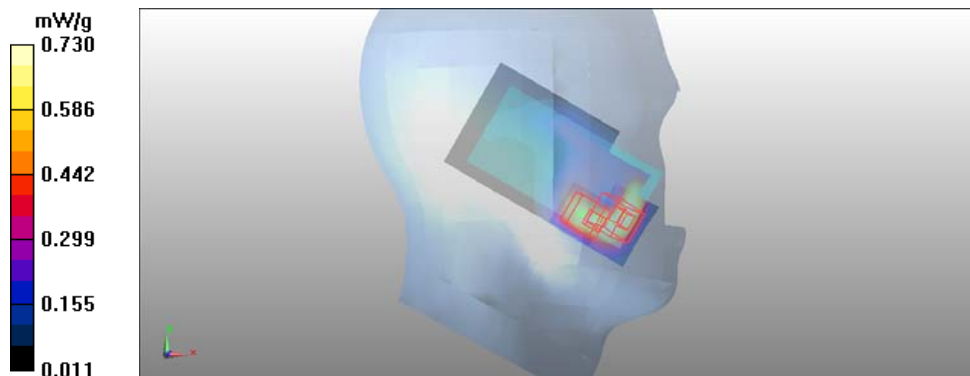

Date/Time: 2011-08-16 15:09:19, Date/Time: 2011-08-16 15:15:26, Date/Time: 2011-08-16 15:22:27

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 4-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:2.1

Medium: HSL900; Medium Notes: 22.1C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.842 mW/g

4-slot GPRS - Left/Cheek - Middle - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9 V/m

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.768 mW/g

SAR(10 g) = 0.432 mW/g

Power Drift = -0.104 dB

Maximum value of SAR (measured) = 0.848 mW/g

4-slot GPRS - Left/Cheek - Middle - BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9 V/m


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.744 mW/g

SAR(10 g) = 0.422 mW/g

Power Drift = -0.104 dB

Maximum value of SAR (measured) = 0.823 mW/g

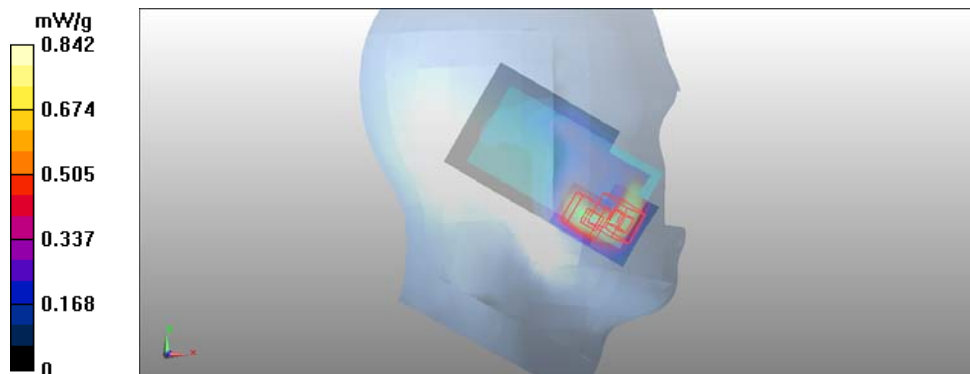

Date/Time: 2011-08-16 18:47:29, Date/Time: 2011-08-16 18:54:42

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot 8PSK EGPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: HSL1900; Medium Notes: 22.1C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot 8PSK EGPRS - Left/Cheek - High - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.346 mW/g

2-slot 8PSK EGPRS - Left/Cheek - High - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.15 V/m


Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.315 mW/g

SAR(10 g) = 0.181 mW/g

Power Drift = 0.00807 dB

Maximum value of SAR (measured) = 0.347 mW/g

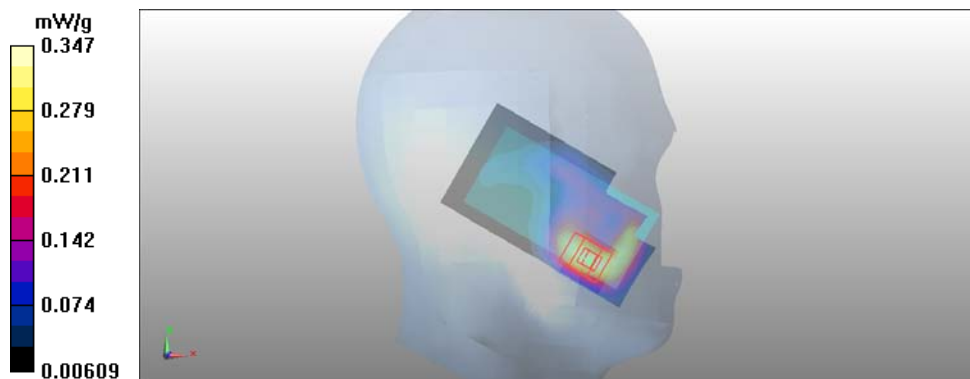

Date/Time: 2011-08-17 21:27:05, Date/Time: 2011-08-17 21:50:58, Date/Time: 2011-08-17 21:38:04

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: 21.6C

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Cheek - High - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.987 mW/g

WCDMA - Left/Cheek - High - BP-3L Sony/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.93 V/m

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.884 mW/g

SAR(10 g) = 0.504 mW/g

Power Drift = 0.032 dB

Maximum value of SAR (measured) = 0.962 mW/g

WCDMA - Left/Cheek - High - BP-3L Sony/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.93 V/m


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.865 mW/g

SAR(10 g) = 0.484 mW/g

Power Drift = 0.032 dB

Maximum value of SAR (measured) = 0.949 mW/g

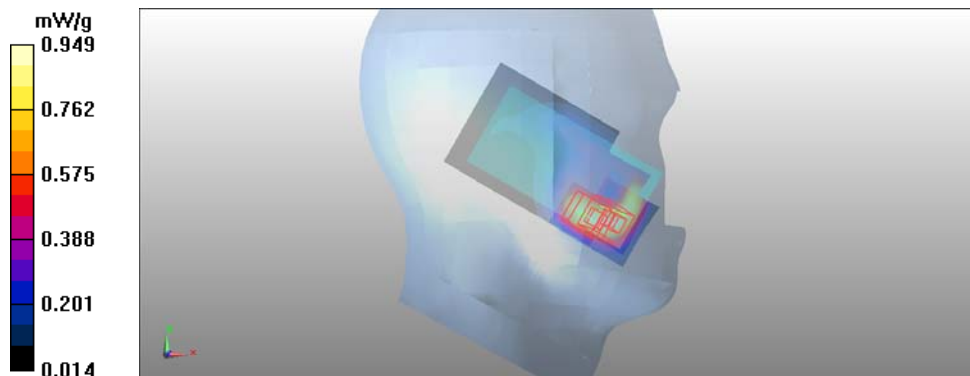

Date/Time: 2011-08-16 20:33:33, Date/Time: 2011-08-16 20:37:16

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: 21.8C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Tilt – Middle – BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.279 mW/g

WCDMA - Left/Tilt – Middle – BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm,

dy=7.5mm, dz=5mm

Reference Value = 13.5 V/m


Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.230 mW/g

SAR(10 g) = 0.132 mW/g

Power Drift = -0.066 dB

Maximum value of SAR (measured) = 0.255 mW/g

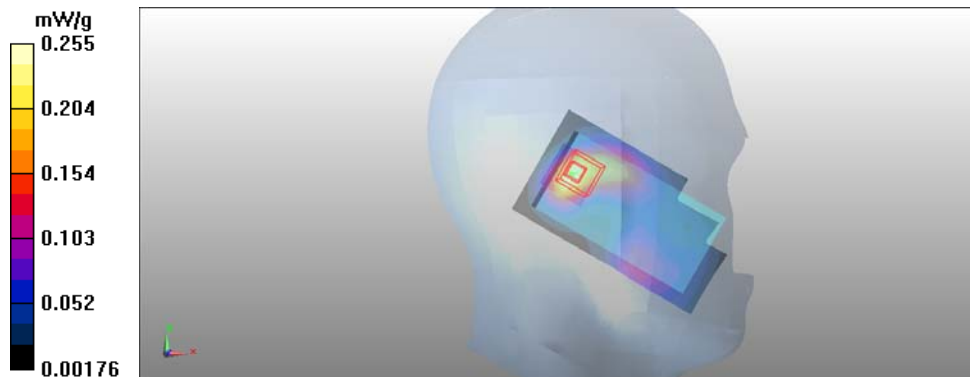

Date/Time: 2011-08-16 20:50:51, Date/Time: 2011-08-16 21:00:39, Date/Time: 2011-08-16 21:08:59

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: 22.0C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Cheek - Middle – BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.783 mW/g

WCDMA - Right/Cheek - Middle – BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.6 V/m

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.723 mW/g

SAR(10 g) = 0.408 mW/g

Power Drift = -0.148 dB

Maximum value of SAR (measured) = 0.753 mW/g

WCDMA - Right/Cheek - Middle – BP-3L Sony /Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.6 V/m


Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.583 mW/g

SAR(10 g) = 0.347 mW/g

Power Drift = -0.148 dB

Maximum value of SAR (measured) = 0.622 mW/g

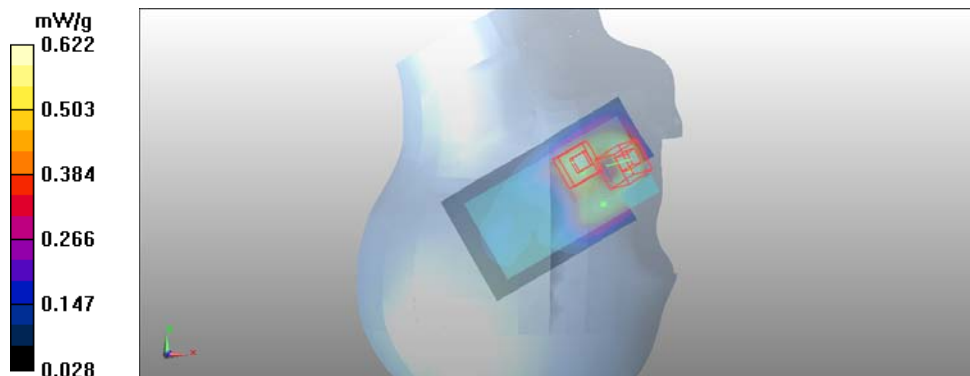

Date/Time: 2011-08-16 21:20:13, Date/Time: 2011-08-16 21:24:08

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium Notes: 22.0C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Tilt - Middle – BP-3L Sony /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.300 mW/g

WCDMA - Right/Tilt - Middle – BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.2 V/m


Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.247 mW/g

SAR(10 g) = 0.135 mW/g

Power Drift = 0.030 dB

Maximum value of SAR (measured) = 0.277 mW/g

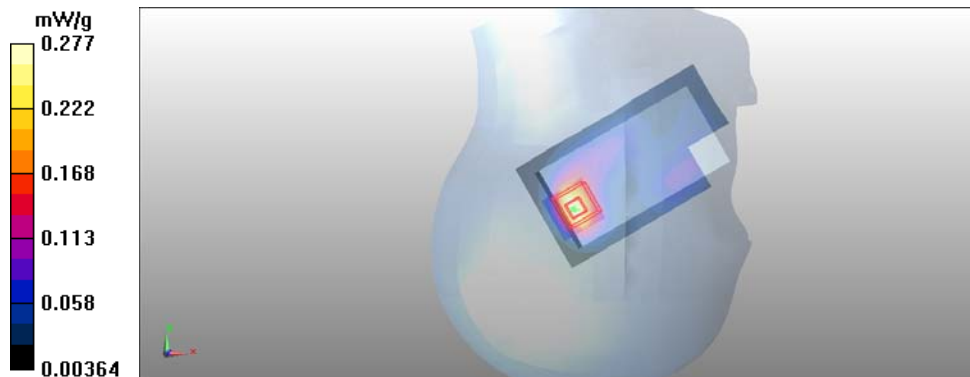

Date/Time: 2011-08-17 19:24:29, Date/Time: 2011-08-17 19:28:19, Date/Time: 2011-08-17 19:35:18

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: HSL1900; Medium Notes: 21.6C

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Left/Cheek - High - BP-3L LG/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.960 mW/g

2-slot GPRS - Left/Cheek - High - BP-3L LG/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.75 V/m

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.879 mW/g

SAR(10 g) = 0.490 mW/g

Power Drift = -0.019 dB

Maximum value of SAR (measured) = 0.955 mW/g

2-slot GPRS - Left/Cheek - High - BP-3L LG/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.75 V/m


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.889 mW/g

SAR(10 g) = 0.490 mW/g

Power Drift = -0.019 dB

Maximum value of SAR (measured) = 0.945 mW/g

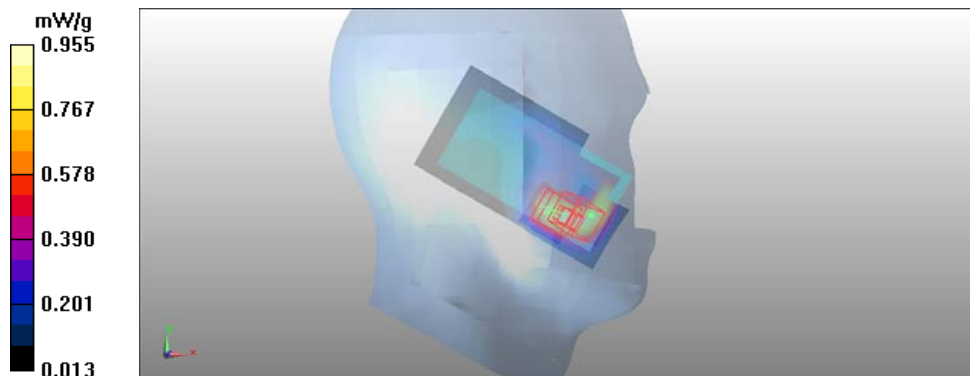

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-22 10:53:54, Date/Time: 2011-08-22 10:59:15

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.302 mW/g

WLAN - Left/Cheek - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 11.1 V/m


Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.279 mW/g

SAR(10 g) = 0.139 mW/g

Power Drift = -0.0094 dB

Maximum value of SAR (measured) = 0.302 mW/g

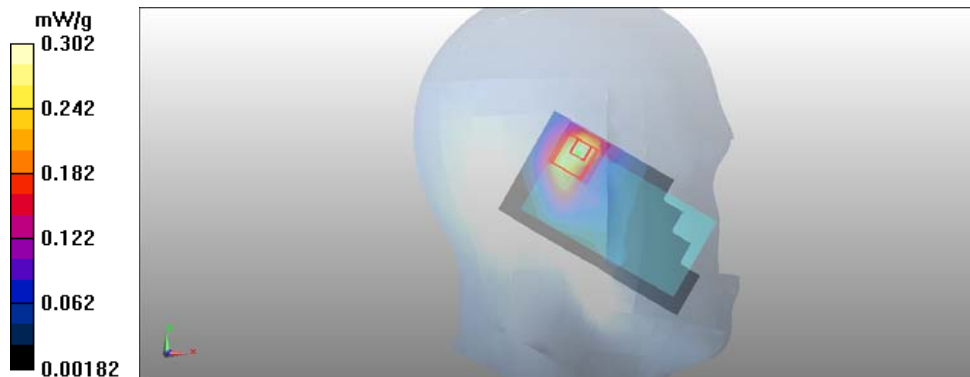

Date/Time: 2011-08-22 11:09:35, Date/Time: 2011-08-22 11:12:34

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Left/Tilt - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.218 mW/g

WLAN - Left/Tilt - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 11 V/m


Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.209 mW/g

SAR(10 g) = 0.108 mW/g

Power Drift = 0.048 dB

Maximum value of SAR (measured) = 0.232 mW/g

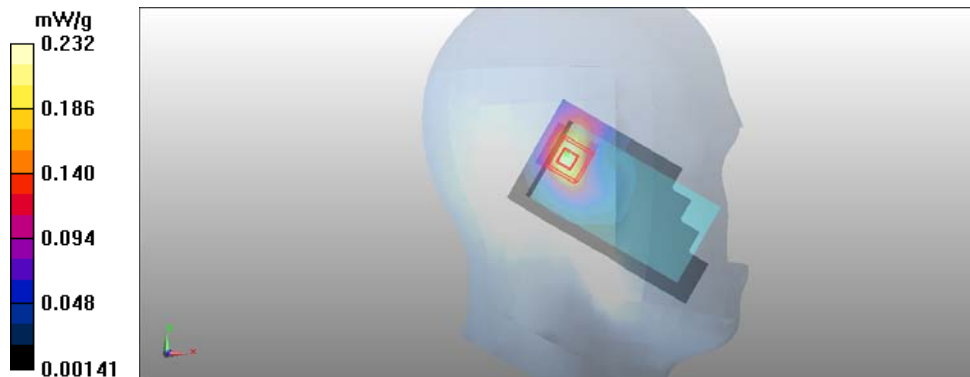

Date/Time: 2011-08-22 11:35:17, Date/Time: 2011-08-22 11:40:58

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t= 21.0 C

Medium parameters used: f = 2442 MHz; σ = 1.83 mho/m; ϵ_r = 38.3; ρ = 1000 kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Right/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.229 mW/g

WLAN - Right/Cheek - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.2 V/m


Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.242 mW/g

SAR(10 g) = 0.120 mW/g

Power Drift = 0.079 dB

Maximum value of SAR (measured) = 0.269 mW/g

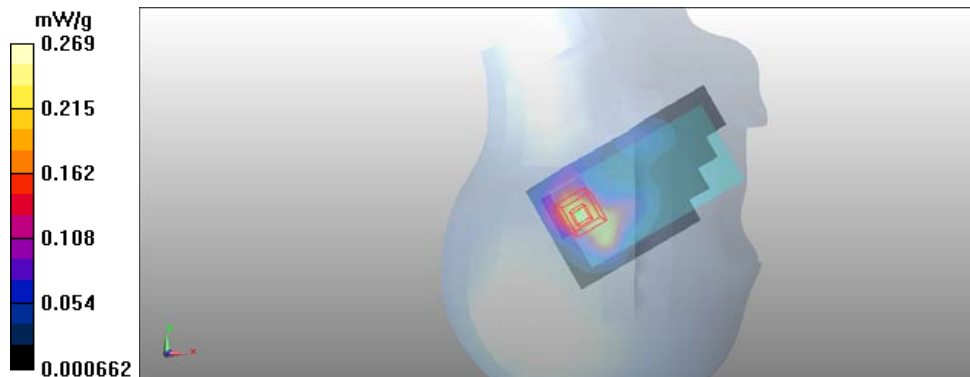

Date/Time: 2011-08-22 11:50:05, Date/Time: 2011-08-22 11:57:17

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Right/Tilt - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g

WLAN - Right/Tilt - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.7 V/m


Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.187 mW/g

SAR(10 g) = 0.097 mW/g

Power Drift = -0.092 dB

Maximum value of SAR (measured) = 0.209 mW/g

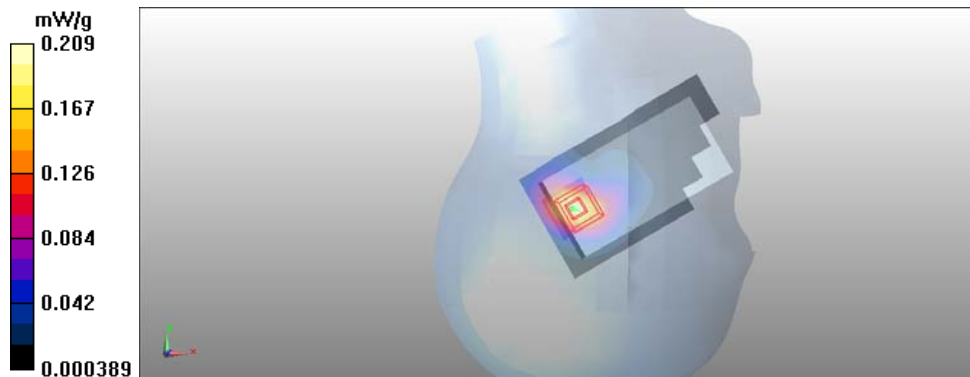

Date/Time: 2011-08-22 13:17:49, Date/Time: 2011-08-22 13:23:10

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 n-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t= 21.0 C

Medium parameters used: f = 2442 MHz; σ = 1.83 mho/m; ϵ_r = 38.3; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Left/Cheek - Middle - BP-3L Sony/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.239 mW/g

WLAN - Left/Cheek - Middle - BP-3L Sony/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.23 V/m


Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.218 mW/g

SAR(10 g) = 0.106 mW/g

Power Drift = 0.140 dB

Maximum value of SAR (measured) = 0.239 mW/g

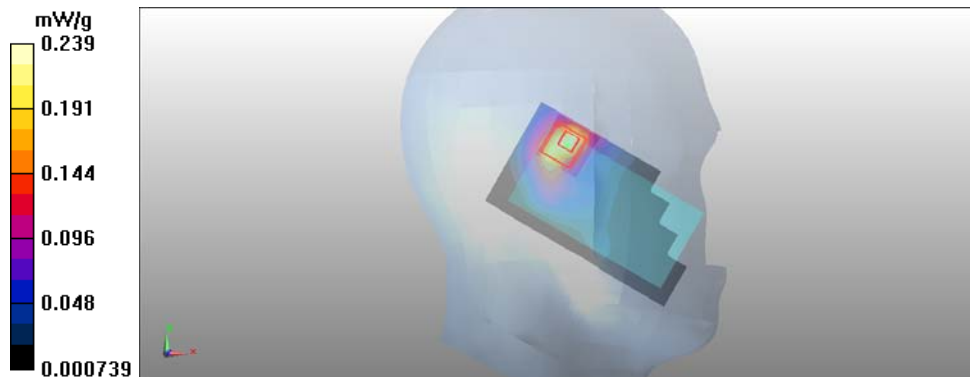

Date/Time: 2011-08-22 14:38:49, Date/Time: 2011-08-22 14:44:11

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium Notes: t= 21.0 C

Medium parameters used: f = 2442 MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Left/Cheek - Middle - BP-3L LG/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 mW/g

WLAN - Left/Cheek - Middle - BP-3L LG/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m


Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.291 mW/g

SAR(10 g) = 0.141 mW/g

Power Drift = 0.116 dB

Maximum value of SAR (measured) = 0.315 mW/g

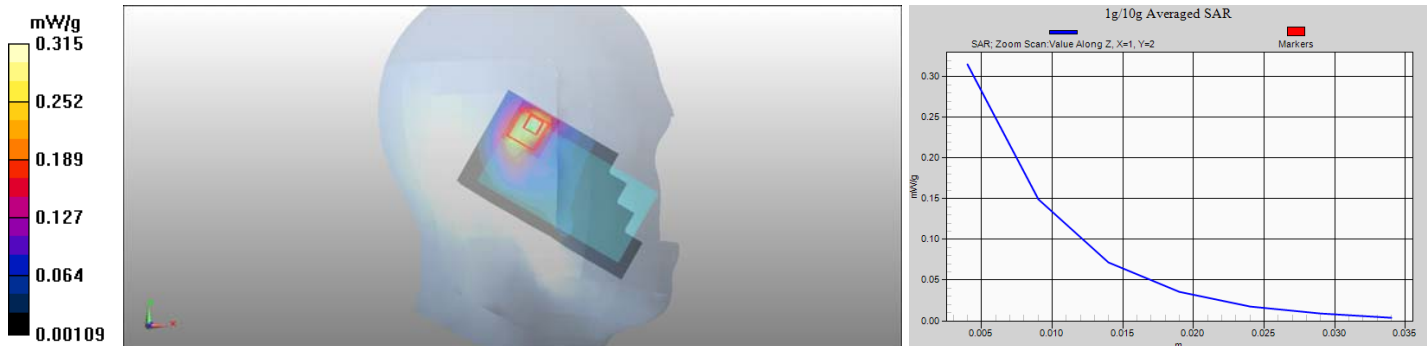

Date/Time: 2011-08-29 07:45:29, Date/Time: 2011-08-29 07:52:26

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.09991

Medium: BSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 837 MHz; σ = 1 mho/m; ϵ_r = 53.2; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.631 mW/g

4-slot GPRS/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m


Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.592 mW/g

SAR(10 g) = 0.435 mW/g

Power Drift = -0.087 dB

Maximum value of SAR (measured) = 0.627 mW/g

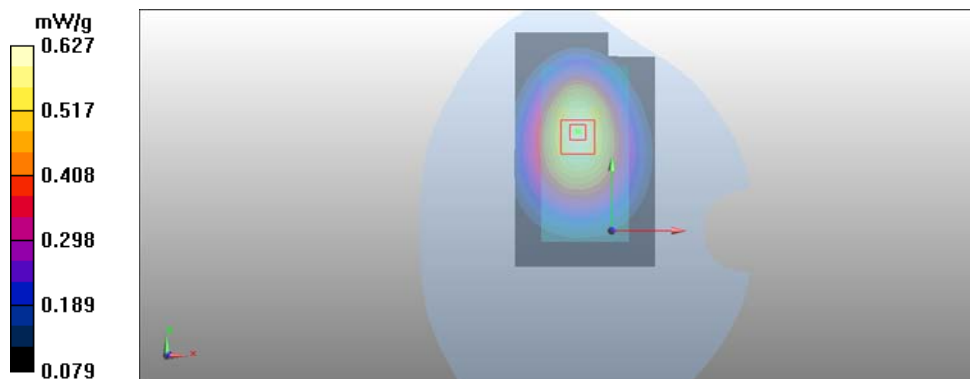

Date/Time: 2011-08-29 08:05:59, Date/Time: 2011-08-29 08:09:38

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.09991

Medium: BSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 837 MHz; σ = 1 mho/m; ϵ_r = 53.2; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.367 mW/g

4-slot GPRS/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.32 V/m


Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.346 mW/g

SAR(10 g) = 0.250 mW/g

Power Drift = 0.032 dB

Maximum value of SAR (measured) = 0.366 mW/g

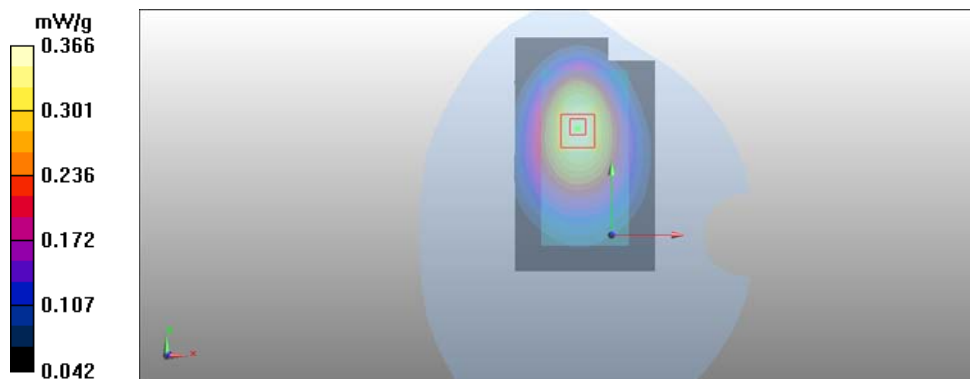

Date/Time: 2011-08-29 09:27:10, Date/Time: 2011-08-29 09:30:48

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: BSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 849 MHz; σ = 1.01 mho/m; ϵ_r = 53.1; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS/Body - High - No Accessory - Back Facing Phantom - BP-3L Sony /Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.734 mW/g

4-slot GPRS/Body - High - No Accessory - Back Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m


Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.696 mW/g

SAR(10 g) = 0.508 mW/g

Power Drift = -0.015 dB

Maximum value of SAR (measured) = 0.735 mW/g

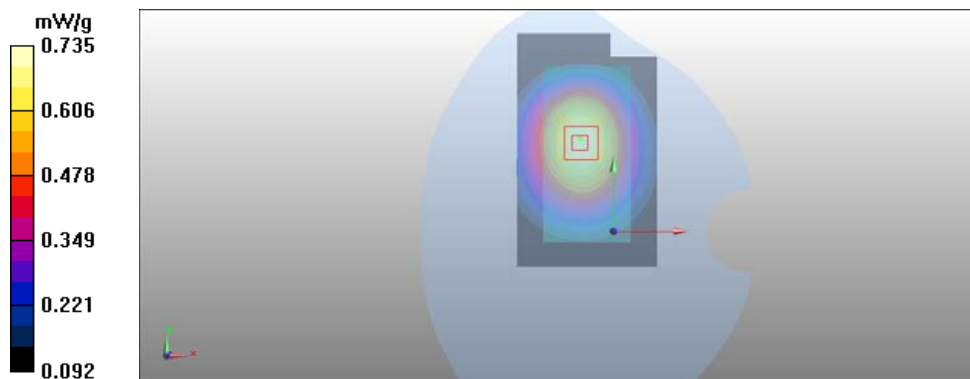

Date/Time: 2011-08-29 08:21:57, Date/Time: 2011-08-29 08:25:35

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.09991

Medium: BSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 837 MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS/Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony /Area Scan (61x101x1): Measurement
grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.472 mW/g

4-slot GPRS/Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m


Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.445 mW/g

SAR(10 g) = 0.320 mW/g

Power Drift = 0.021 dB

Maximum value of SAR (measured) = 0.472 mW/g

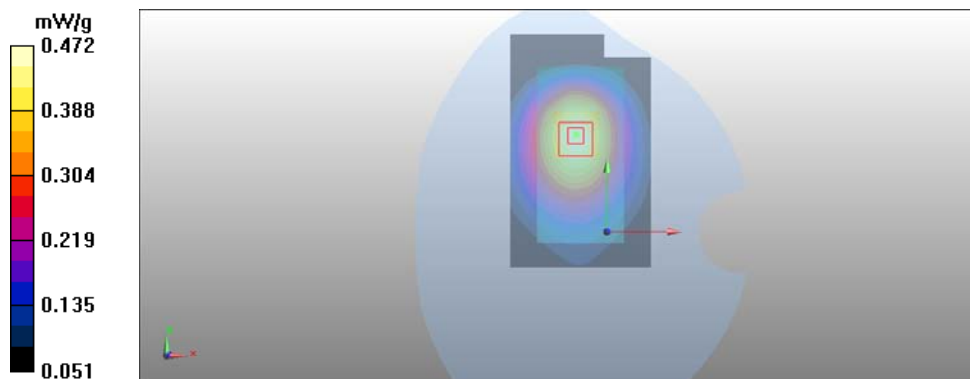

Date/Time: 2011-08-26 13:11:28, Date/Time: 2011-08-26 13:15:07

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 21.1 C

Medium parameters used: f = 847 MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA/Body - High - No Accessory - Display Facing Phantom - BP-3L Sony /Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.609 mW/g

WCDMA/Body - High - No Accessory - Display Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m


Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.579 mW/g

SAR(10 g) = 0.426 mW/g

Power Drift = 0.040 dB

Maximum value of SAR (measured) = 0.609 mW/g

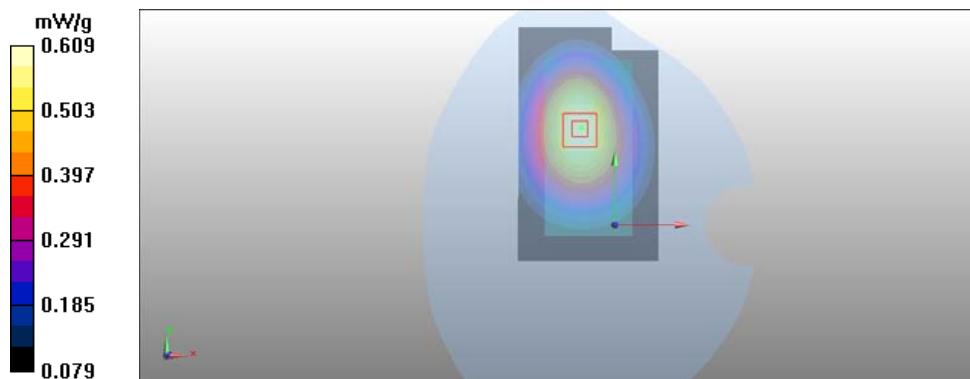

Date/Time: 2011-08-26 12:02:00, Date/Time: 2011-08-26 12:05:39

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: t= 21.1 C

Medium parameters used: f = 835 MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA/ Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Area Scan (61x101x1): Measurement
grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 mW/g

WCDMA/ Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.92 V/m


Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.395 mW/g

SAR(10 g) = 0.288 mW/g

Power Drift = -0.070 dB

Maximum value of SAR (measured) = 0.416 mW/g

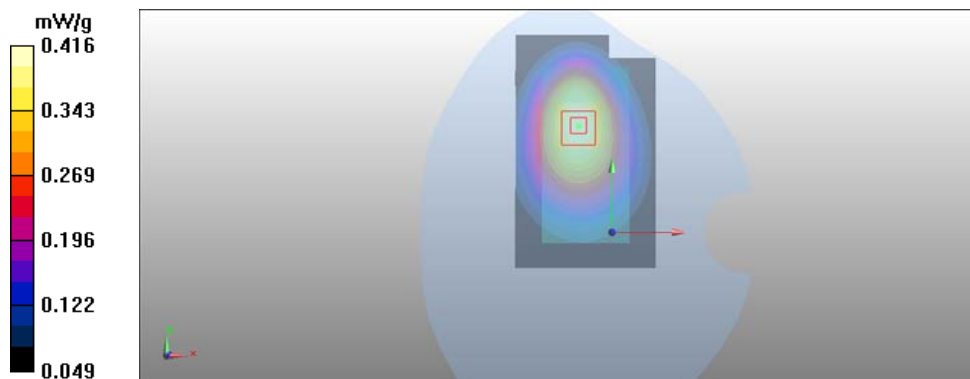

Date/Time: 2011-08-26 12:37:33, Date/Time: 2011-08-26 12:41:10

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: $t = 21.1$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - No Accessory - Back Facing Phantom - BP-3L Sony /Area Scan (61x101x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.613 mW/g

WCDMA/Body - Middle - No Accessory - Back Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.6 V/m


Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.572 mW/g

SAR(10 g) = 0.416 mW/g

Power Drift = -0.154 dB

Maximum value of SAR (measured) = 0.602 mW/g

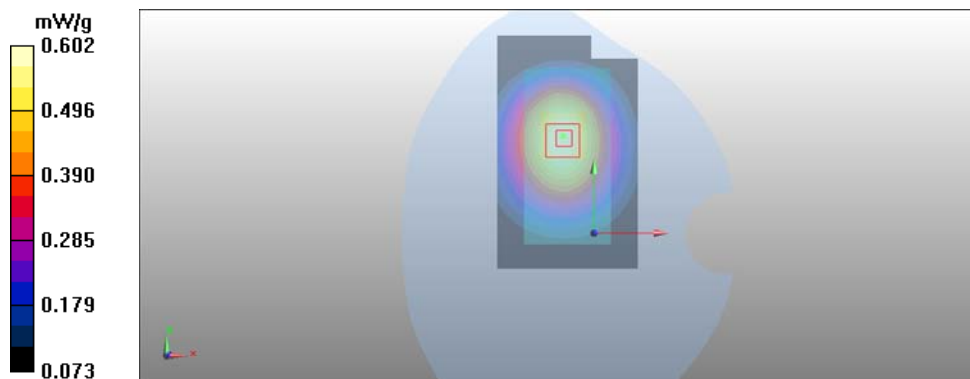

Date/Time: 2011-08-26 12:19:08, Date/Time: 2011-08-26 12:22:46

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA850

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: BSL850; Medium Notes: $t = 21.1$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASYS2, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony /Area Scan (61x101x1): Measurement
grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.401 mW/g

WCDMA/Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m


Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.379 mW/g

SAR(10 g) = 0.274 mW/g

Power Drift = 0.0068 dB

Maximum value of SAR (measured) = 0.401 mW/g

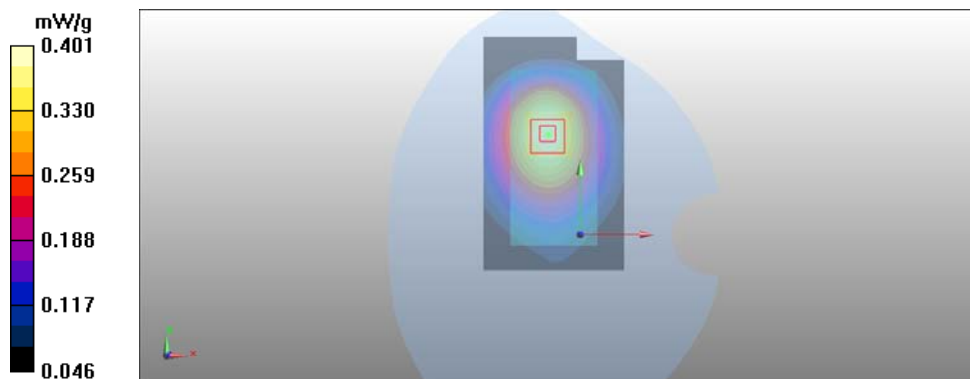

Date/Time: 2011-08-29 10:29:18, Date/Time: 2011-08-29 10:32:56

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: 4-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.09991

Medium: BSL850; Medium Notes: t= 21.0 C

Medium parameters used: f = 849 MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS/Body - High - No Accessory - Back Facing Phantom - BP-3L LG /Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.770 mW/g

4-slot GPRS/Body - High - No Accessory - Back Facing Phantom - BP-3L LG /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m




Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.722 mW/g

SAR(10 g) = 0.526 mW/g

Power Drift = -0.015 dB

Maximum value of SAR (measured) = 0.763 mW/g

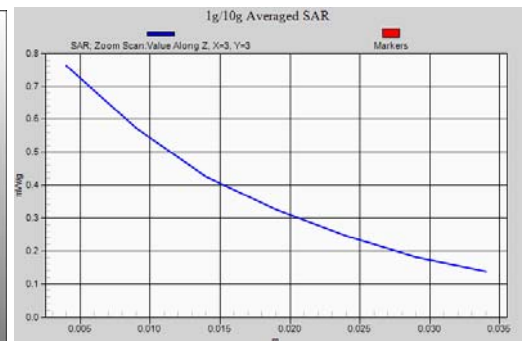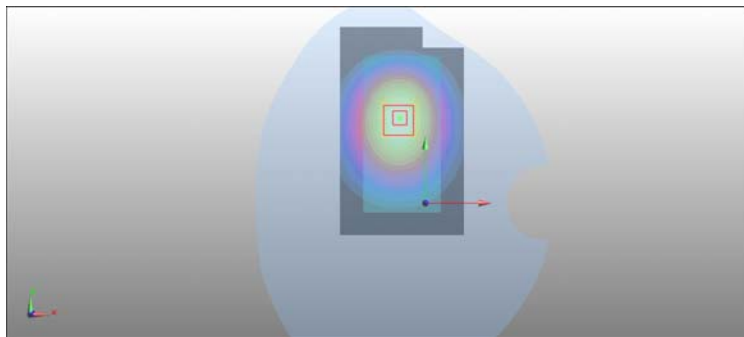

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 15:04:01, Date/Time: 2011-08-23 15:08:12

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes: t= 21.1 C

Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.91, 4.91, 4.91); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/ Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.324 mW/g

WCDMA/ Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.08 V/m


Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.300 mW/g

SAR(10 g) = 0.181 mW/g

Power Drift = 0.036 dB

Maximum value of SAR (measured) = 0.326 mW/g

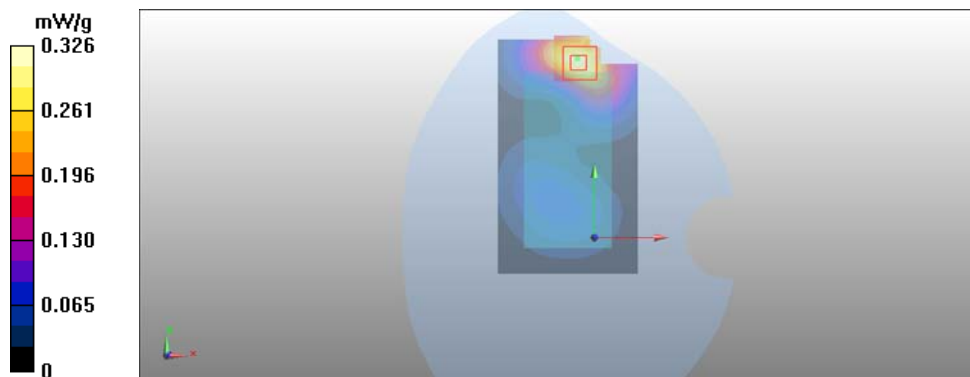

Date/Time: 2011-08-23 14:52:40, Date/Time: 2011-08-23 14:56:45

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes: t= 21.1 C

Medium parameters used (interpolated): f = 1732.4 MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.91, 4.91, 4.91); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/ Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 mW/g

WCDMA/ Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.87 V/m


Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.282 mW/g

SAR(10 g) = 0.170 mW/g

Power Drift = 0.069 dB

Maximum value of SAR (measured) = 0.308 mW/g

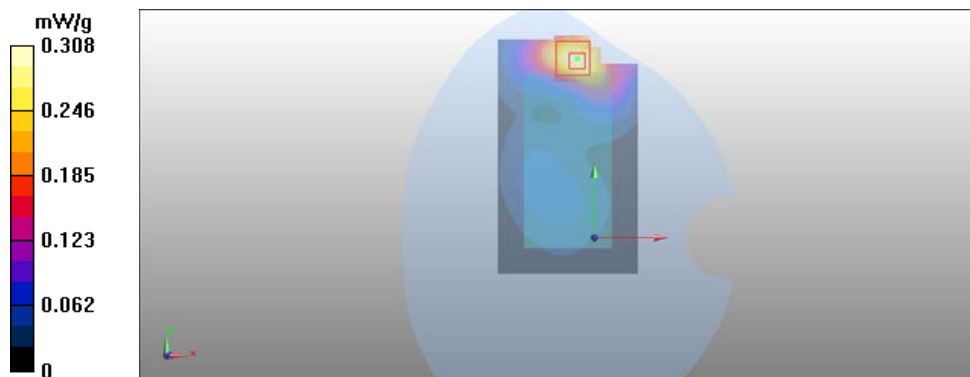

Date/Time: 2011-08-23 15:38:40, Date/Time: 2011-08-23 15:42:46

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes: $t = 21.1$ C

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165

- ConvF(4.91, 4.91, 4.91); Calibrated: 2011-02-17

- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn555; Calibrated: 2011-02-22

- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179

- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body -High - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement

grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.902 mW/g

WCDMA/Body -High - No accessory - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.94 V/m


Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.808 mW/g

SAR(10 g) = 0.492 mW/g

Power Drift = -0.149 dB

Maximum value of SAR (measured) = 0.886 mW/g

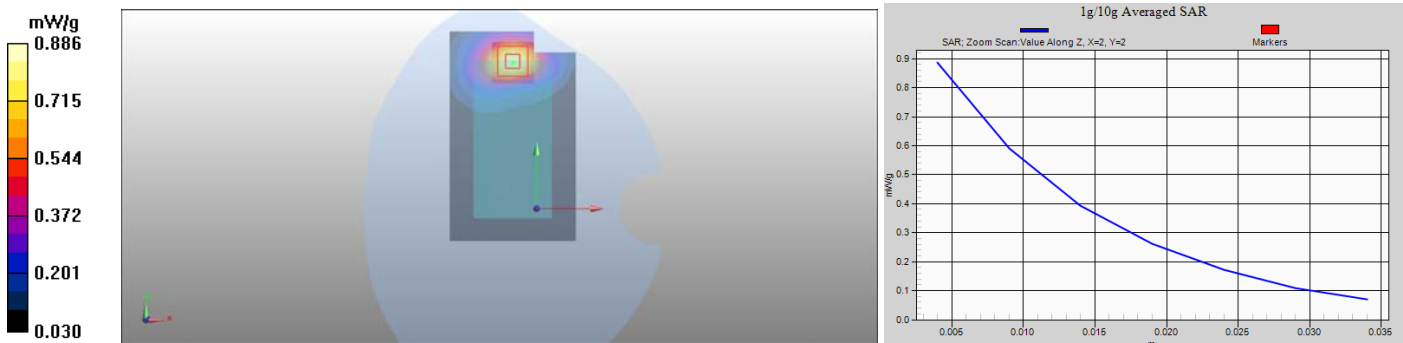

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 14:38:07, Date/Time: 2011-08-23 14:42:11

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes: $t = 21.1$ C

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.91, 4.91, 4.91); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/ Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement
grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.859 mW/g

WCDMA/ Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 4.5 V/m


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.758 mW/g

SAR(10 g) = 0.465 mW/g

Power Drift = -0.092 dB

Maximum value of SAR (measured) = 0.831 mW/g

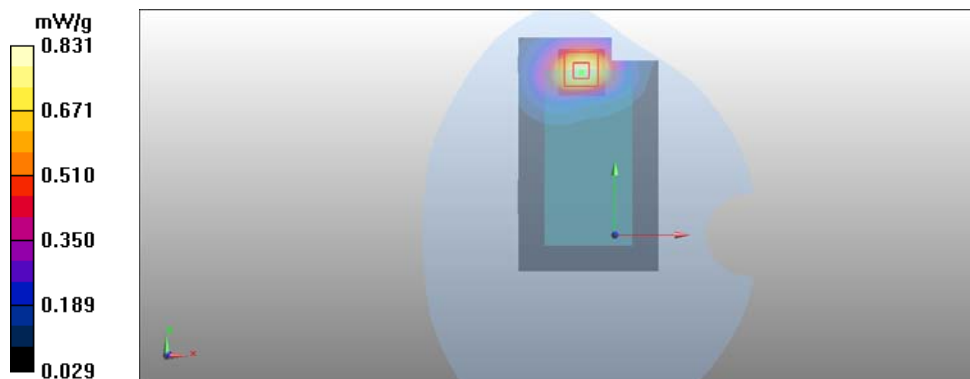

Date/Time: 2011-08-23 16:10:32, Date/Time: 2011-08-23 16:14:39

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8

Communication System: WCDMA1700/2100

Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: BSL1800; Medium Notes: $t = 21.1$ C

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165

- ConvF(4.91, 4.91, 4.91); Calibrated: 2011-02-17

- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn555; Calibrated: 2011-02-22

- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179

- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - High - No accessory - Back Facing Phantom - BP-3L LG/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.891 mW/g

WCDMA/Body - High - No accessory - Back Facing Phantom - BP-3L LG /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.06 V/m


Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.806 mW/g

SAR(10 g) = 0.493 mW/g

Power Drift = -0.011 dB

Maximum value of SAR (measured) = 0.884 mW/g

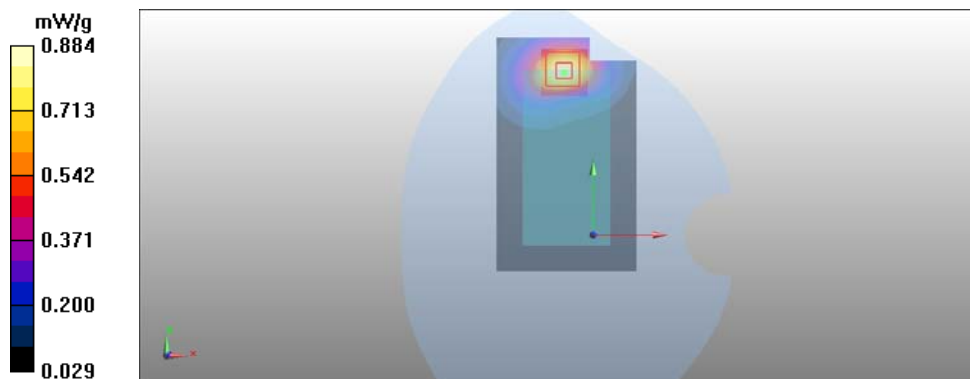

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-31 11:28:12, Date/Time: 2011-08-31 11:35:29

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: BSL1900; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.288 mW/g

2-slot GPRS/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.8 V/m


Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.273 mW/g

SAR(10 g) = 0.176 mW/g

Power Drift = -0.056 dB

Maximum value of SAR (measured) = 0.288 mW/g

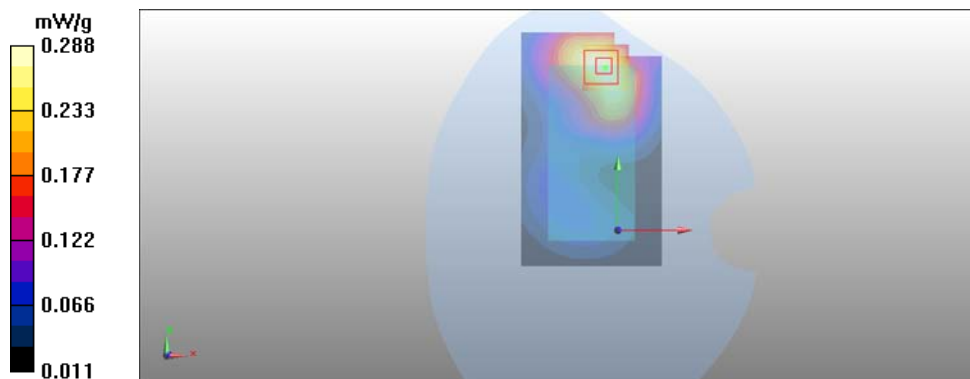

Date/Time: 2011-08-31 11:42:24, Date/Time: 2011-08-31 11:46:35

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: BSL1900; Medium Notes: t= 21.0 C

Medium parameters used: f = 1880 MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.278 mW/g

2-slot GPRS/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.22 V/m


Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.266 mW/g

SAR(10 g) = 0.169 mW/g

Power Drift = 0.080 dB

Maximum value of SAR (measured) = 0.281 mW/g

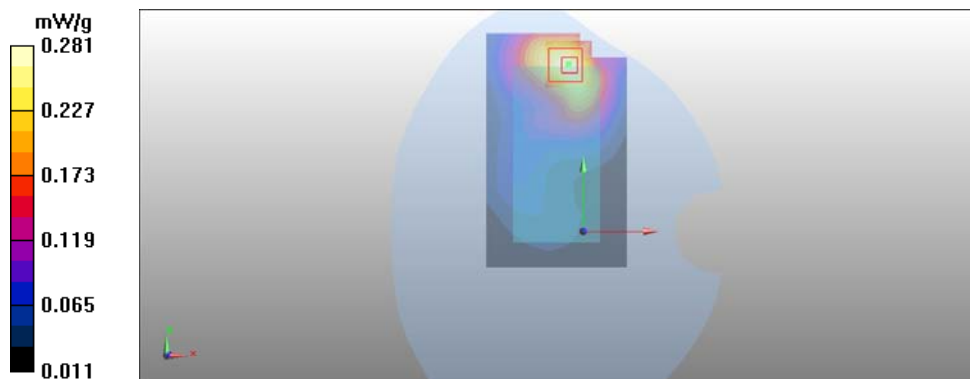

Date/Time: 2011-08-31 12:05:11, Date/Time: 2011-08-31 12:09:21

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: BSL1900; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.671 mW/g

2-slot GPRS/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.77 V/m


Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.612 mW/g

SAR(10 g) = 0.380 mW/g

Power Drift = 0.050 dB

Maximum value of SAR (measured) = 0.671 mW/g

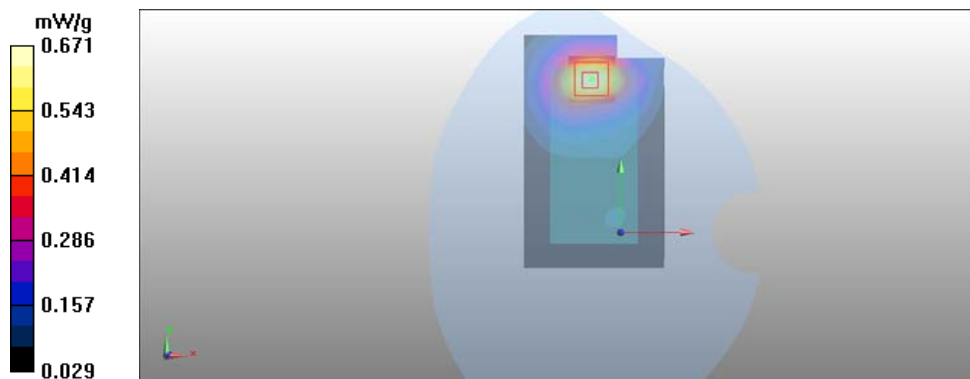

Date/Time: 2011-08-31 12:18:28, Date/Time: 2011-08-31 12:22:38

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: BSL1900; Medium Notes: t= 21.0 C

Medium parameters used (interpolated): f = 1850.2 MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS /Body - Low - WH-207 - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.730 mW/g

2-slot GPRS /Body - Low - WH-207 - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.86 V/m


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.667 mW/g

SAR(10 g) = 0.414 mW/g

Power Drift = -0.052 dB

Maximum value of SAR (measured) = 0.732 mW/g

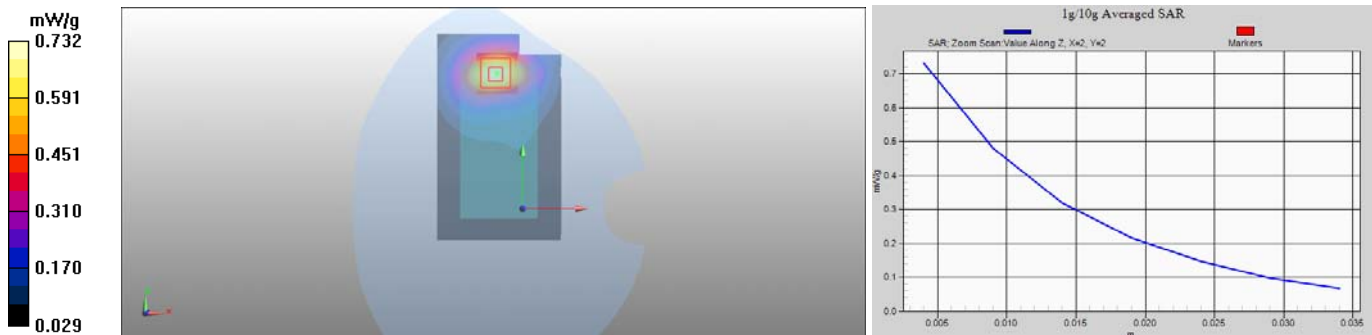

Date/Time: 2011-08-31 08:47:21, Date/Time: 2011-08-31 08:54:35

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.301 mW/g

WCDMA/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.86 V/m


Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.285 mW/g

SAR(10 g) = 0.181 mW/g

Power Drift = -0.262 dB

Maximum value of SAR (measured) = 0.301 mW/g

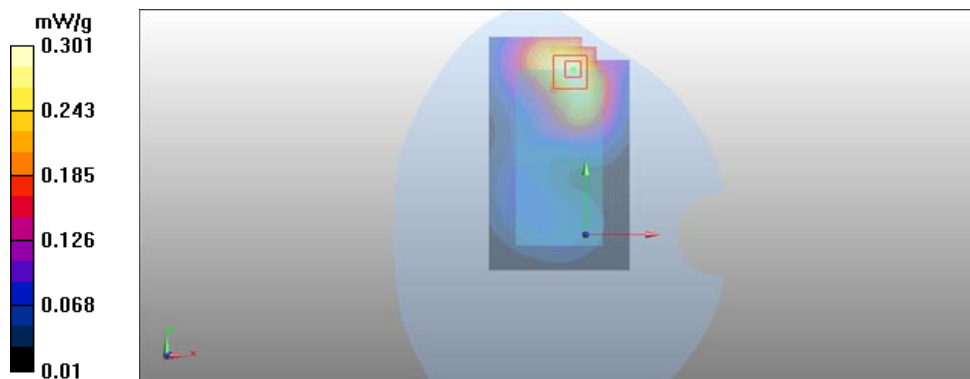

Date/Time: 2011-08-31 09:02:10, Date/Time: 2011-08-31 09:06:47

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: $t = 21.0\text{ C}$

Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement
grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.278 mW/g

WCDMA/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.41 V/m


Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.268 mW/g

SAR(10 g) = 0.170 mW/g

Power Drift = 0.144 dB

Maximum value of SAR (measured) = 0.284 mW/g

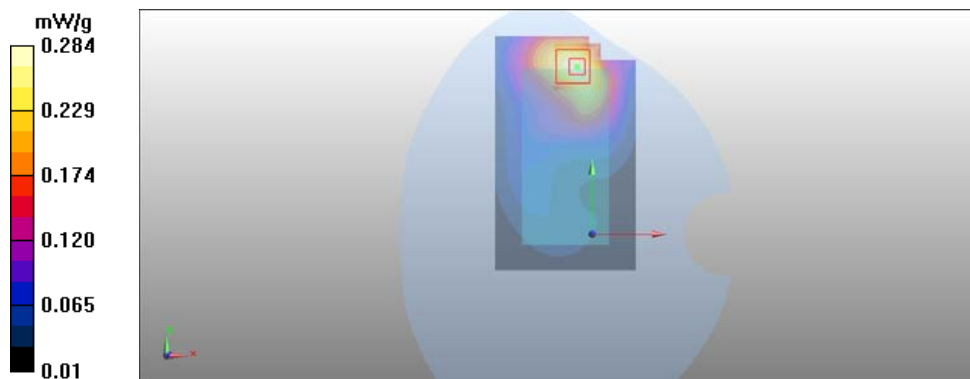

Date/Time: 2011-08-31 09:27:55, Date/Time: 2011-08-31 09:32:03

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: $t = 21.0$ C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.642 mW/g

WCDMA/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.51 V/m


Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.595 mW/g

SAR(10 g) = 0.371 mW/g

Power Drift = -0.066 dB

Maximum value of SAR (measured) = 0.650 mW/g

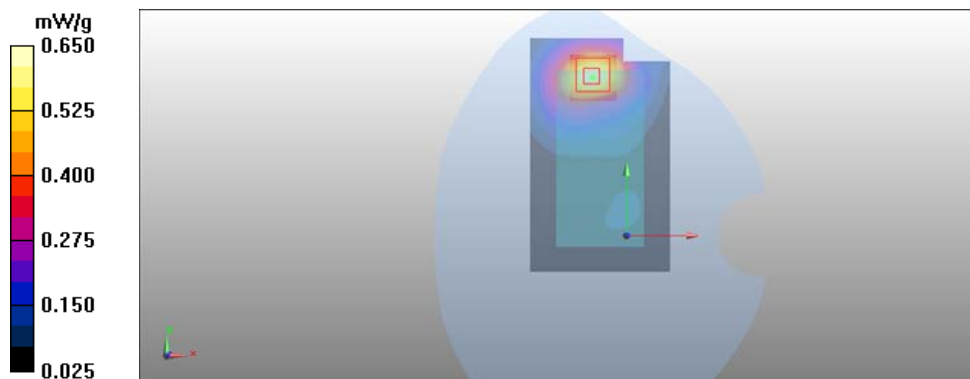

Date/Time: 2011-08-31 09:42:09, Date/Time: 2011-08-31 09:46:23

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: BSL1900; Medium Notes: $t = 21.0\text{ C}$

Medium parameters used (interpolated): $f = 1852.4\text{ MHz}$; $\sigma = 1.49\text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Low - WH-207 - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.668 mW/g

WCDMA/Body - Low - WH-207 - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.73 V/m


Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.618 mW/g

SAR(10 g) = 0.386 mW/g

Power Drift = 0.081 dB

Maximum value of SAR (measured) = 0.676 mW/g

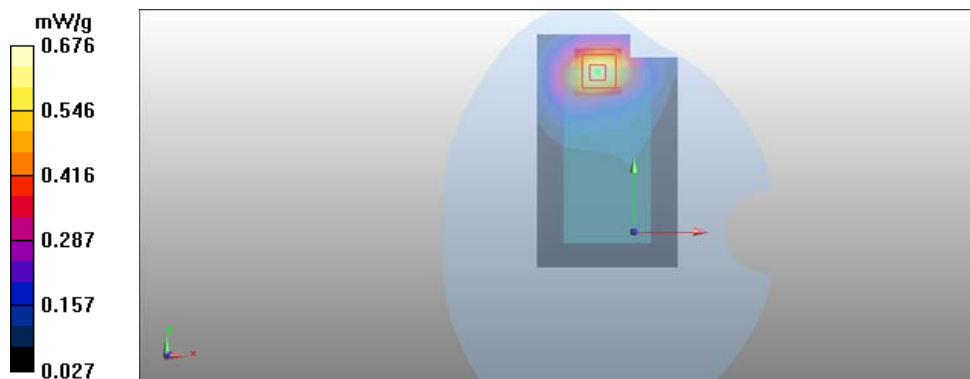

Date/Time: 2011-08-31 12:56:53, Date/Time: 2011-08-31 13:01:03

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900

Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: BSL1900; Medium Notes: $t = 21.0$ C

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS/Body - Low - WH-207 - Back Facing Phantom - BP-3L LG/Area Scan (61x101x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.713 mW/g

2-slot GPRS/Body - Low - WH-207 - Back Facing Phantom - BP-3L LG /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.81 V/m


Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.649 mW/g

SAR(10 g) = 0.407 mW/g

Power Drift = -0.226 dB

Maximum value of SAR (measured) = 0.708 mW/g

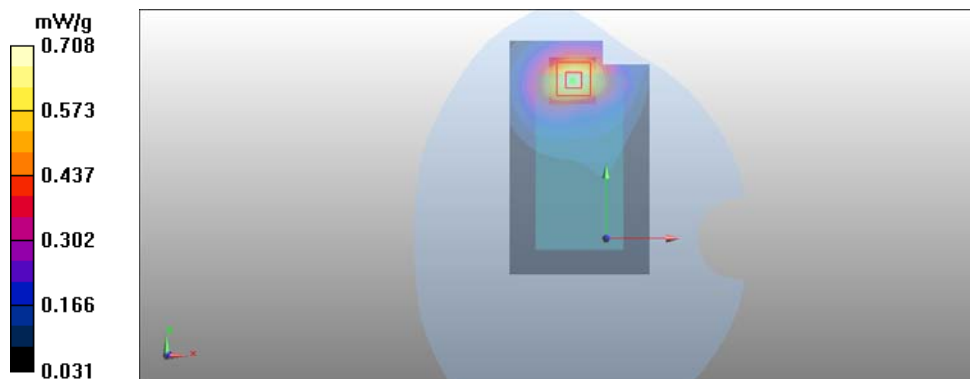

Date/Time: 2011-08-29 13:27:08, Date/Time: 2011-08-29 13:34:11

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: $t = 20.9\text{ C}$

Medium parameters used: $f = 2442\text{ MHz}$; $\sigma = 2.03\text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.038 mW/g

WLAN/Body - Middle - No accessory - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.77 V/m


Peak SAR (extrapolated) = 0.059 W/kg

SAR(1 g) = 0.034 mW/g

SAR(10 g) = 0.020 mW/g

Power Drift = -0.136 dB

Maximum value of SAR (measured) = 0.037 mW/g

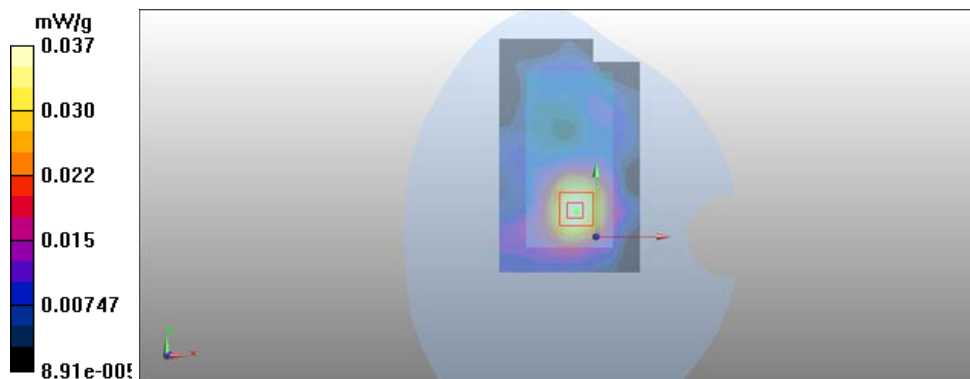

Date/Time: 2011-08-29 13:42:21, Date/Time: 2011-08-29 13:46:00

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: $t = 20.9\text{ C}$

Medium parameters used: $f = 2442\text{ MHz}$; $\sigma = 2.03\text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.033 mW/g

WLAN/Body - Middle - WH-207 - Display Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.1 V/m


Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.029 mW/g

SAR(10 g) = 0.016 mW/g

Power Drift = -0.247 dB

Maximum value of SAR (measured) = 0.031 mW/g

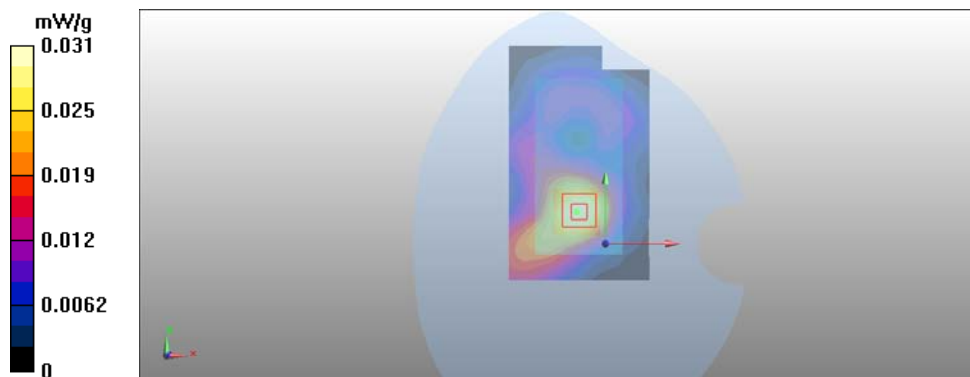

Date/Time: 2011-08-29 14:10:59, Date/Time: 2011-08-29 14:14:38

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: $t = 20.9\text{ }^{\circ}\text{C}$

Medium parameters used: $f = 2442\text{ MHz}$; $\sigma = 2.03\text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid: $dx=15\text{ mm}$, $dy=15\text{ mm}$

Maximum value of SAR (interpolated) = 0.067 mW/g

WLAN/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{ mm}$, $dy=7.5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 5.41 V/m


Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.062 mW/g

SAR(10 g) = 0.036 mW/g

Power Drift = 0.023 dB

Maximum value of SAR (measured) = 0.066 mW/g

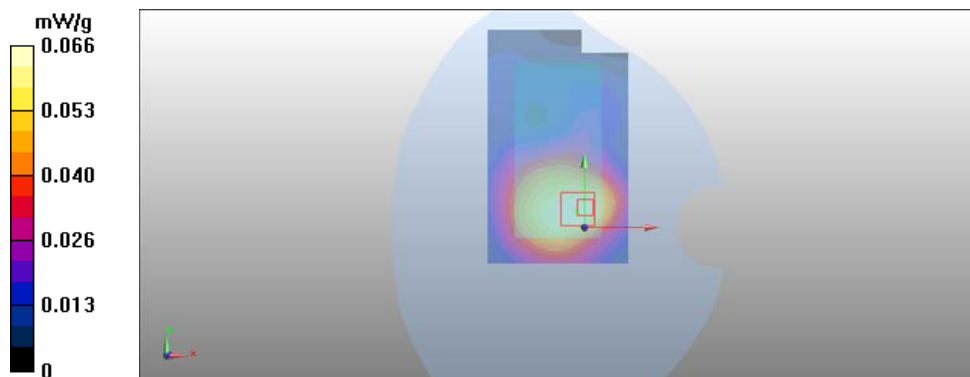

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-29 13:59:23, Date/Time: 2011-08-29 14:03:08

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: $t = 20.9\text{ C}$

Medium parameters used: $f = 2442\text{ MHz}$; $\sigma = 2.03\text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony/Area Scan (61x101x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.078 mW/g

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L Sony /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.34 V/m


Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.071 mW/g

SAR(10 g) = 0.041 mW/g

Power Drift = -0.027 dB

Maximum value of SAR (measured) = 0.076 mW/g

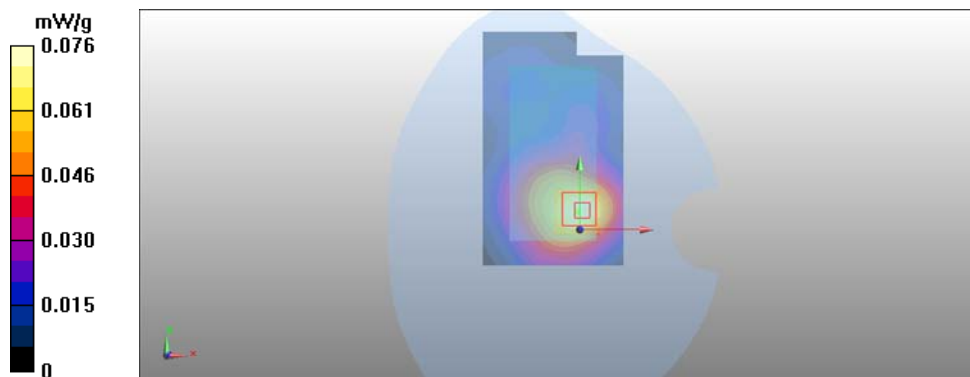

Date/Time: 2011-08-30 09:19:20, Date/Time: 2011-08-30 09:26:29

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 b-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: t= 20.9 C

Medium parameters used: f = 2442 MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L LG/Area Scan (61x101x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.081 mW/g

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L LG /Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.41 V/m


Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.074 mW/g

SAR(10 g) = 0.043 mW/g

Power Drift = -0.090 dB

Maximum value of SAR (measured) = 0.080 mW/g

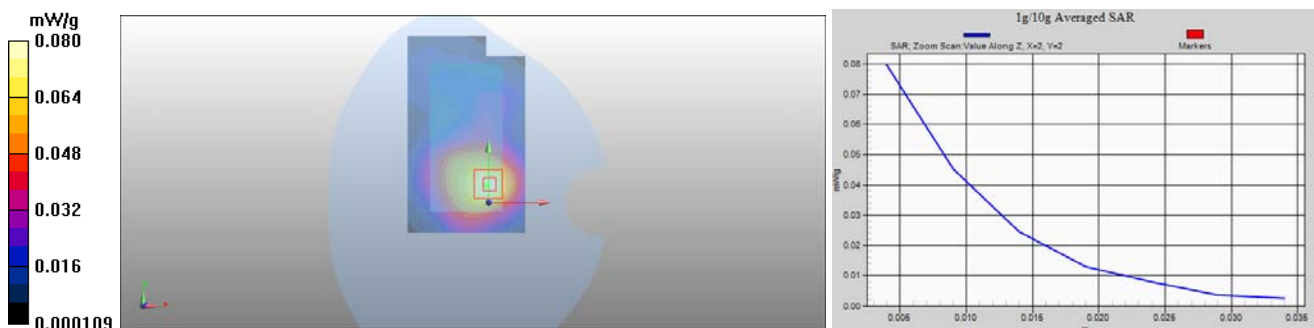

SAR Report

FCC_RM-779_03

Applicant: Nokia Corporation

Type: RM-779

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-30 10:27:09, Date/Time: 2011-08-30 10:34:11

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WLAN2450 n-mode

Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL2450; Medium Notes: $t = 20.9$ C

Medium parameters used: $f = 2442$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L LG/Area Scan (61x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.061 mW/g

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L LG /Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 4.27 V/m


Peak SAR (extrapolated) = 0.095 W/kg

SAR(1 g) = 0.055 mW/g

SAR(10 g) = 0.032 mW/g

Power Drift = 0.108 dB

Maximum value of SAR (measured) = 0.059 mW/g

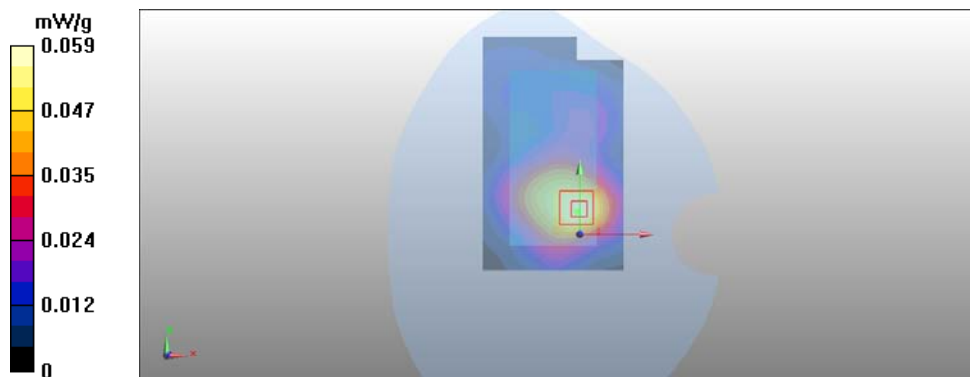

Date/Time: 2011-08-25 13:23:49, Date/Time: 2011-08-22 14:38:49

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8, Serial: 004402/13/568481/3

Communication System: 4-slot GPRS850, Communication System: WLAN2450 b-mode

Frequency: 848.8 MHz, Frequency: 2442 MHz; Duty Cycle: 1:2.09991, Duty Cycle: 1:1

Medium: HSL850, Medium: HSL2450; Medium Notes: t= 21.0 C

Medium parameters used: f = 849 MHz; σ = 0.92 mho/m; ϵ_r = 40.4; ρ = 1000 kg/m³, Medium parameters used:
f = 2442 MHz; σ = 1.83 mho/m; ϵ_r = 38.3; ρ = 1000 kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194, Probe: EX3DV4 - SN3573
- ConvF(6.09, 6.09, 6.09), ConvF(6.69, 6.69, 6.69); Calibrated: 2010-09-09, Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538, Electronics: DAE4 Sn793; Calibrated: 2010-09-09, Calibrated: 2010-09-08
- Phantom: SAM 3, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1126
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


4-slot GPRS - Left/Cheek - High - BP-3L LG/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN - Left/Cheek - Middle - BP-3L LG/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 1.18 mW/g

SAR(10 g) = 0.830 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

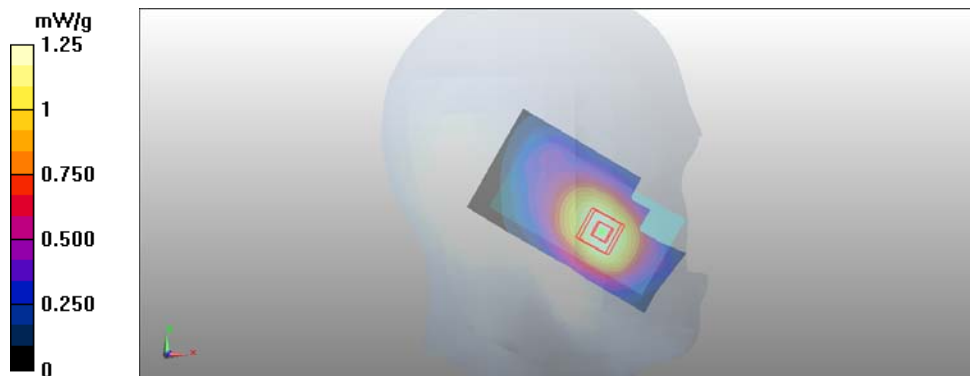

Date/Time: 2011-08-26 06:49:57, Date/Time: 2011-08-22 14:38:49

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8, Serial: 004402/13/568481/3

Communication System: WCDMA850, Communication System: WLAN2450 b-mode

Frequency: 835 MHz, Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL850, Medium: HSL2450; Medium Notes: t= 21.0 C

Medium parameters used: f = 835 MHz; $\sigma = 0.911$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³, Medium parameters used:
f = 2442 MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3194, Probe: EX3DV4 - SN3573
- ConvF(6.09, 6.09, 6.09), ConvF(6.69, 6.69, 6.69); Calibrated: 2010-09-09, Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538, Electronics: DAE4 Sn793; Calibrated: 2010-09-09, Calibrated: 2010-09-08
- Phantom: SAM 3, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1126
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


WCDMA - Left/Cheek - Middle - BP-3L Sony/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN - Left/Cheek - Middle - BP-3L LG/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 1.1 mW/g

SAR(10 g) = 0.778 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

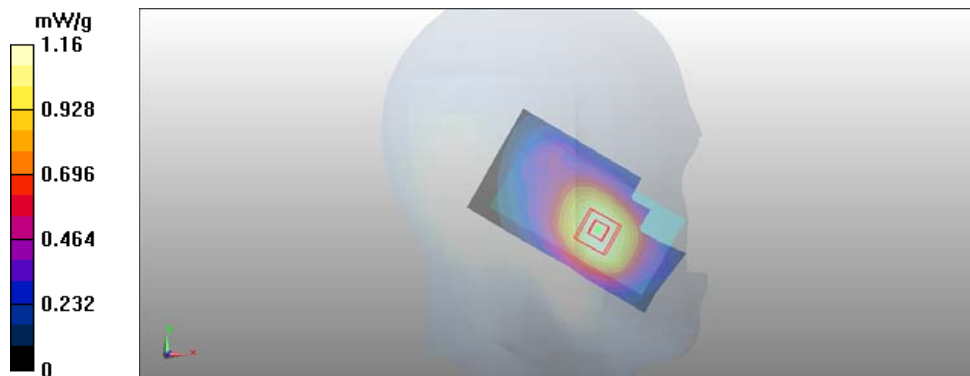

Date/Time: 2011-08-24 09:51:40, Date/Time: 2011-08-22 11:35:17

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8, Serial: 004402/13/568481/3

Communication System: WCDMA1700/2100, Communication System: WLAN2450 b-mode

Frequency: 1732.4 MHz, Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL1800, Medium: HSL2450; Medium Notes: $t = 20.7$ C, Medium Notes: $t = 21.0$ C

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 2442$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(5.19, 5.19, 5.19), ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 4, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1018, Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


WCDMA - Right/Cheek - Middle - BP-3L LG/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN - Right/Cheek - Middle - BP-3L Sony/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.792 mW/g

SAR(10 g) = 0.401 mW/g

Maximum value of SAR (measured) = 0.914 mW/g

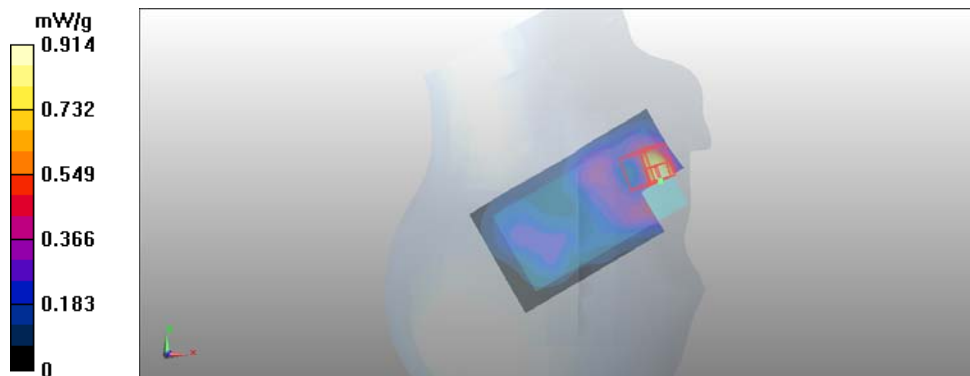

Date/Time: 2011-08-16 16:14:26, Date/Time: 2011-08-22 14:38:49

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900, Communication System: WLAN2450 b-mode

Frequency: 1909.8 MHz, Frequency: 2442 MHz; Duty Cycle: 1:4.2, Duty Cycle: 1:1

Medium: HSL900, Medium: HSL2450; Medium Notes: 22.1C, Medium Notes: t= 21.0 C

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used:
 $f = 2442 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(5.03, 5.03, 5.03), ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1449, Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


2-slot GPRS - Left/Cheek – High – BP-3L Sony/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN - Left/Cheek - Middle - BP-3L LG/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.851 mW/g

SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 1 mW/g

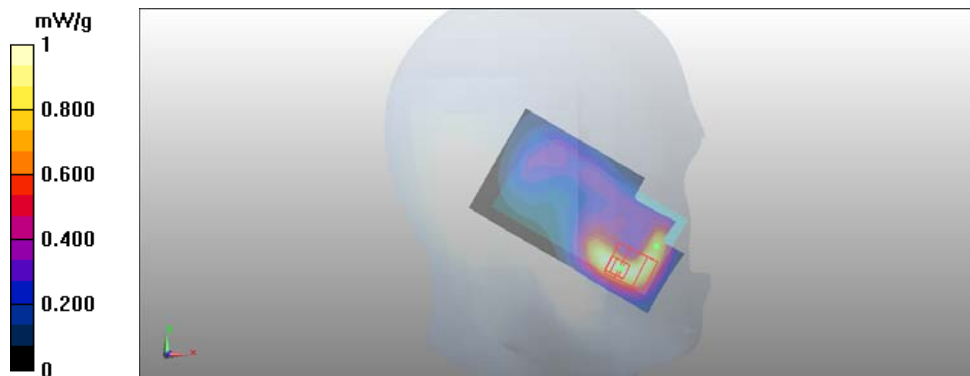

Date/Time: 2011-08-17 21:27:05, Date/Time: 2011-08-22 14:38:49

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900, Communication System: WLAN2450 b-mode

Frequency: 1907.6 MHz, Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: HSL1900, Medium: HSL2450; Medium Notes: 21.6C, Medium Notes: t= 21.0 C

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used:
 $f = 2442 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(5.03, 5.03, 5.03), ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1449, Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


WCDMA - Left/Cheek - High - BP-3L Sony/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN - Left/Cheek - Middle - BP-3L LG/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.844 mW/g

SAR(10 g) = 0.464 mW/g

Maximum value of SAR (measured) = 0.991 mW/g

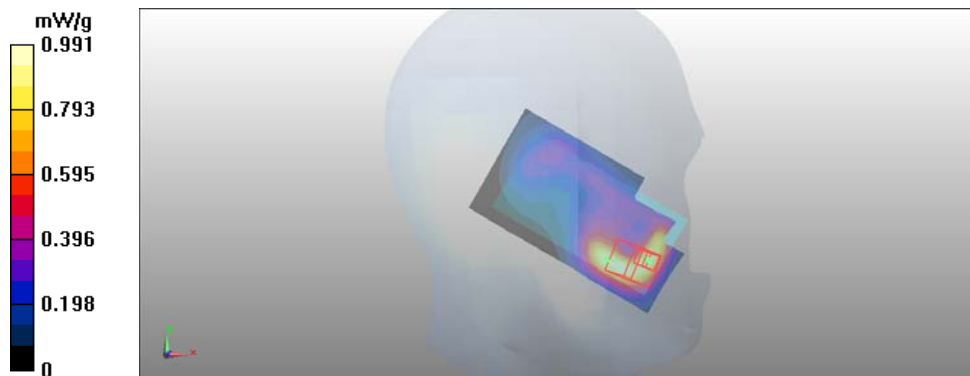

Date/Time: 2011-08-29 10:29:18, Date/Time: 2011-08-29 14:10:59

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8, Serial: 004402/13/568481/3

Communication System: 4-slot GPRS850, Communication System: WLAN2450 b-mode

Frequency: 848.8 MHz, Frequency: 2442 MHz; Duty Cycle: 1:2.09991, Duty Cycle: 1:1

Medium: BSL850, Medium: BSL2450; Medium Notes: $t = 21.0$ C, Medium Notes: $t = 20.9$ C

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³, Medium parameters used:
 $f = 2442$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194, Probe: EX3DV4 - SN3573
- ConvF(5.95, 5.95, 5.95), ConvF(6.8, 6.8, 6.8); Calibrated: 2010-09-09, Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn538, Electronics: DAE4 Sn793; Calibrated: 2010-09-09, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1570
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


4-slot GPRS/Body - High - No Accessory - Back Facing Phantom - BP-3L LG /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

WLAN/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.743 mW/g

SAR(10 g) = 0.525 mW/g

Maximum value of SAR (measured) = 0.785 mW/g

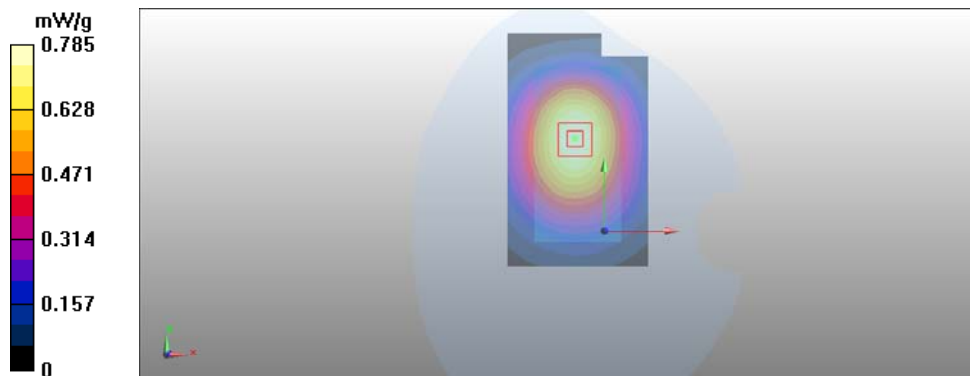

Date/Time: 2011-08-26 12:37:33, Date/Time: 2011-08-29 14:10:59

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8, Serial: 004402/13/568481/3

Communication System: WCDMA850, Communication System: WLAN2450 b-mode

Frequency: 835 MHz, Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL850, Medium: BSL2450; Medium Notes: $t = 21.1$ C, Medium Notes: $t = 20.9$ C

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³, Medium parameters used:
 $f = 2442$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3194, Probe: EX3DV4 - SN3573
- ConvF(5.95, 5.95, 5.95), ConvF(6.8, 6.8, 6.8); Calibrated: 2010-09-09, Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn538, Electronics: DAE4 Sn793; Calibrated: 2010-09-09, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1570
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


WCDMA/Body - Middle - No Accessory - Back Facing Phantom - BP-3L Sony /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

WLAN/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.594 mW/g

SAR(10 g) = 0.420 mW/g

Maximum value of SAR (measured) = 0.628 mW/g

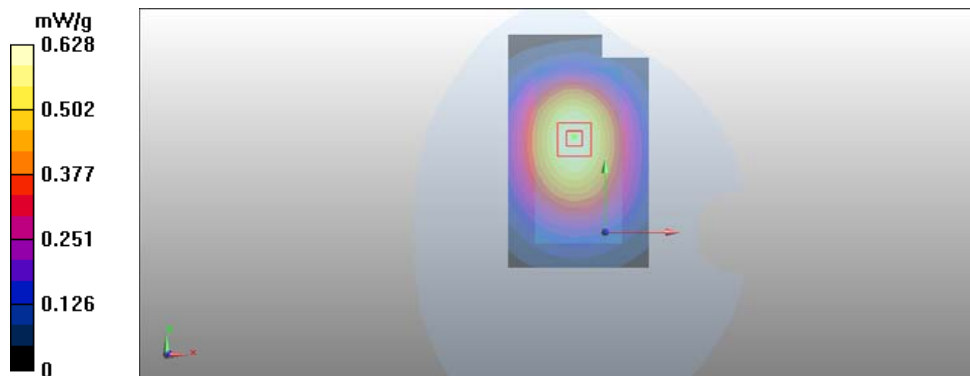

Date/Time: 2011-08-23 15:38:40, Date/Time: 2011-08-29 14:10:59

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568469/8, Serial: 004402/13/568481/3

Communication System: WCDMA1700/2100, Communication System: WLAN2450 b-mode

Frequency: 1752.6 MHz, Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL1800, Medium: BSL2450; Medium Notes: t= 21.1 C, Medium Notes: t= 20.9 C

Medium parameters used: f = 1753 MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³, Medium parameters used:
f = 2442 MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(4.91, 4.91, 4.91), ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 3, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


WCDMA/Body -High - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

WLAN/Body - Middle - No accessory - Back Facing Phantom - BP-3L Sony/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.822 mW/g

SAR(10 g) = 0.479 mW/g

Maximum value of SAR (measured) = 0.915 mW/g

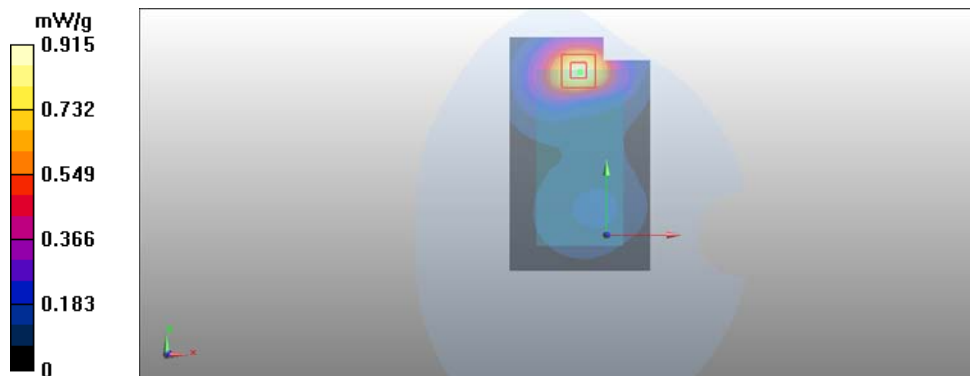

Date/Time: 2011-08-31 12:18:28, Date/Time: 2011-08-30 09:19:20

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: 2-slot GPRS1900, Communication System: WLAN2450 b-mode

Frequency: 1850.2 MHz, Frequency: 2442 MHz; Duty Cycle: 1:4.2, Duty Cycle: 1:1

Medium: BSL1900, Medium: BSL2450; Medium Notes: t= 21.0 C, Medium Notes: t= 20.9 C

Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.49 mho/m; ϵ_r = 52.6; ρ = 1000 kg/m³, Medium parameters used: f = 2442 MHz; σ = 2.03 mho/m; ϵ_r = 50.5; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(4.61, 4.61, 4.61), ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 2, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP - 1177, Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61


2-slot GPRS/Body - Low - WH-207 - Back Facing Phantom - BP-3L Sony/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L LG/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.673 mW/g

SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.746 mW/g

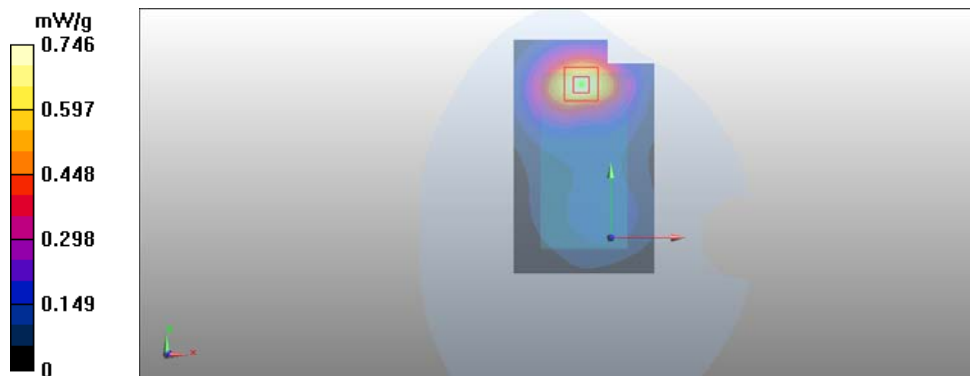

Date/Time: 2011-08-31 09:42:09, Date/Time: 2011-08-30 09:19:20

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568481/3

Communication System: WCDMA1900, Communication System: WLAN2450 b-mode

Frequency: 1852.4 MHz, Frequency: 2442 MHz; Duty Cycle: 1:1

Medium: BSL1900, Medium: BSL2450; Medium Notes: t= 21.0 C, Medium Notes: t= 20.9 C

Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.49 mho/m; ϵ_r = 52.5; ρ = 1000 kg/m³, Medium parameters used: f = 2442 MHz; σ = 2.03 mho/m; ϵ_r = 50.5; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY Configuration:


- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(4.61, 4.61, 4.61), ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 2, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP - 1177, Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Low - WH-207 - Back Facing Phantom - BP-3L Sony/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

WLAN/Body - Middle - WH-207 - Back Facing Phantom - BP-3L LG/Area Scan (7x11x1): Measurement grid:
dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.616 mW/g
SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.683 mW/g

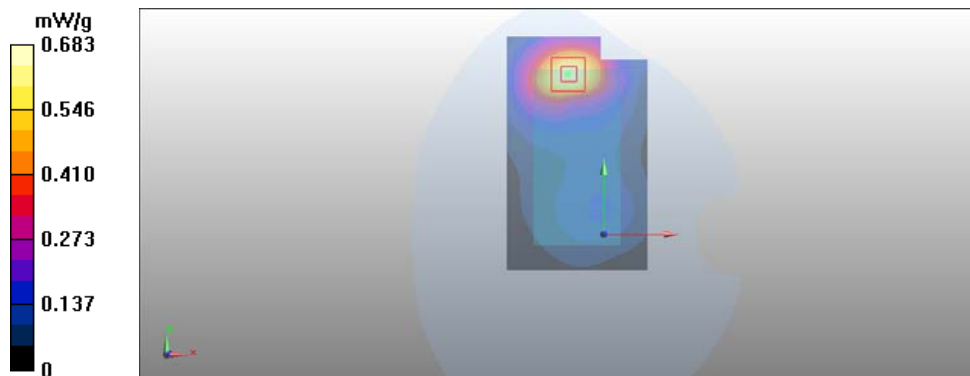

APPENDIX C: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568422/7, HW: 0503, SW: 111.010.0705

C.1. WCDMA850 Test results

Average power

Ch	P [dBm]
4133	23.18
4175	23.04
4232	23.28

C.2. HSUPA850 Test results

Average power

Ch	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
4133	20.73	20.13	20.92	19.85	21.98
4175	19.73	19.27	20.77	20.22	21.67
4232	20.01	20.18	21.30	20.00	22.08

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs two separate HSUPA power control routines: MPR and E-TFC MPR. In each Subtest mode, the routine with the higher power reduction dominates. In addition, to ensure linearity of the PA out, a further 1dB power reduction for all Subtest modes is implemented. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
2.5dB	3.0dB	2.0dB	3.0dB	1.0dB

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568422/7, HW: 0503, SW: 111.010.0705

C.3. WCDMA1700/2100 Test results

Average power

Ch	P [dBm]
1313	22.84
1450	22.78
1512	22.64

C.4. HSUPA1700/2100 Test results

Average power

Ch	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
1313	20.32	19.88	20.73	19.92	21.63
1450	20.07	19.65	20.77	19.97	21.57
1512	20.14	19.74	20.60	19.24	21.49

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs two separate HSUPA power control routines: MPR and E-TFC MPR. In each Subtest mode, the routine with the higher power reduction dominates. In addition, to ensure linearity of the PA out, a further 1dB power reduction for all Subtest modes is implemented. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
2.5dB	3.0dB	2.0dB	3.0dB	1.0dB

Test Laboratory: TCC Nokia

Type: RM-779; Serial: 004402/13/568422/7, HW: 0503, SW: 111.010.0705

C.5. WCDMA1900 Test results

Average power

Ch	P [dBm]
9263	22.21
9400	22.28
9537	22.07

C.6. HSUPA1900 Test results

Average power

Ch / f (MHz)	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
9263	19.85	19.19	20.85	20.05	21.63
9400	19.64	18.99	20.39	19.86	21.54
9537	19.50	19.37	20.46	19.69	21.39

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs two separate HSUPA power control routines: MPR and E-TFC MPR. In each Subtest mode, the routine with the higher power reduction dominates. In addition, to ensure linearity of the PA out, a further 0.5dB power reduction for all Subtest modes is implemented. As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
2.0dB	2.5dB	1.5dB	2.5dB	0.5dB

APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **ES3-3194_Sep10**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3194**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25.v2
 Calibration procedure for dosimetric E-field probes**

Calibration date: **September 9, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: September 9, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3194

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	6.09	6.09	6.09	0.99	1.05 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	5.14	5.14	5.14	0.45	1.74 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.93	4.93	4.93	0.44	1.85 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.30	4.30	4.30	0.41	1.99 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3194

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	5.95	5.95	5.95	0.84	1.15 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.81	4.81	4.81	0.35	2.12 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.58	4.58	4.58	0.35	2.32 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.24	4.24	4.24	0.77	1.20 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC Certificate No: ES3-3165_Feb11

CALIBRATION CERTIFICATE

Object ES3DV3 - SN:3165

Calibration procedure(s) QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes

Calibration date: February 17, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3165

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unci. (k=2)
835	41.5	0.90	6.09	6.09	6.09	0.43	1.44	± 12.0 %
1750	40.1	1.37	5.19	5.19	5.19	0.35	1.84	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.64	1.34	± 12.0 %
2450	39.2	1.80	4.44	4.44	4.44	0.79	1.13	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3- SN:3165

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	6.04	6.04	6.04	0.50	1.43	± 12.0 %
1750	53.4	1.49	4.91	4.91	4.91	0.36	2.50	± 12.0 %
1900	53.3	1.52	4.61	4.61	4.61	0.34	2.38	± 12.0 %
2450	52.7	1.95	4.18	4.18	4.18	0.79	0.83	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: EX3-3573_Feb11

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3573

Calibration procedure(s) QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes

Calibration date: February 17, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3573

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	8.39	8.39	8.39	0.71	0.69	± 12.0 %
1750	40.1	1.37	7.66	7.66	7.66	0.79	0.65	± 12.0 %
1900	40.0	1.40	7.37	7.37	7.37	0.79	0.66	± 12.0 %
2450	39.2	1.80	6.69	6.69	6.69	0.74	0.63	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4- SN:3573

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	8.42	8.42	8.42	0.70	0.77	± 12.0 %
1750	53.4	1.49	7.56	7.56	7.56	0.79	0.69	± 12.0 %
1900	53.3	1.52	7.16	7.16	7.16	0.79	0.68	± 12.0 %
2450	52.7	1.95	6.80	6.80	6.80	0.79	0.62	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D835V2-480_Oct09**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 480**

Calibration procedure(s) **QA CAL-05.v7**
Calibration procedure for dipole validation kits

Calibration date: **October 19, 2009**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	

Approved by:	Katja Pokovic	Technical Manager
--------------	---------------	-------------------

Issued: October 19, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date/Time: 19.10.2009 10:11:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.6 V/m; Power Drift = 0.00856 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.76 mW/g

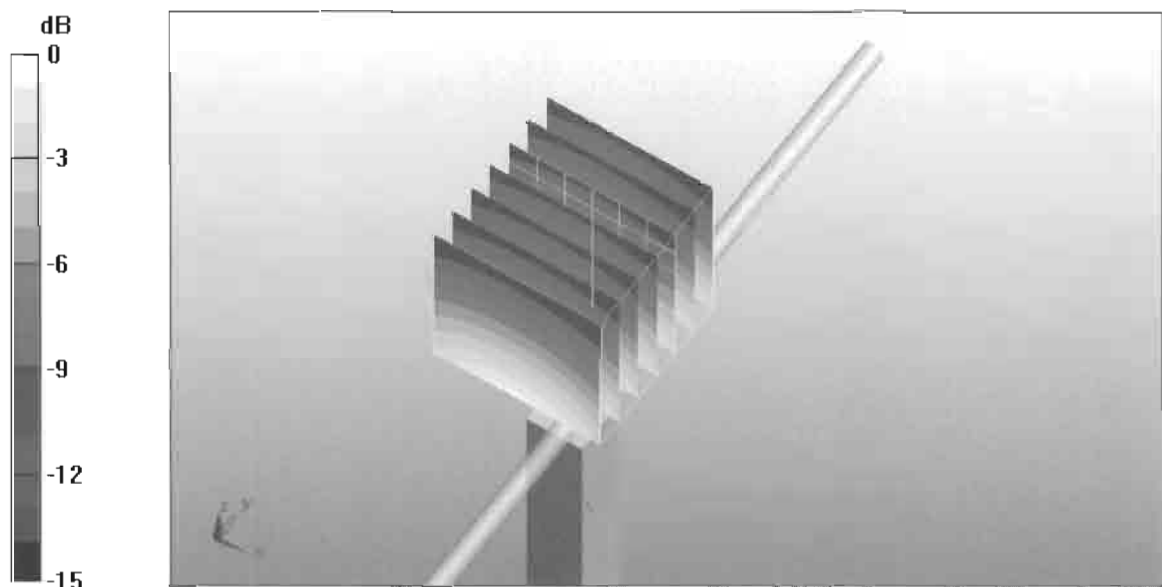

0 dB = 2.76mW/g

DASY5 Validation Report for Body

Date/Time: 19.10.2009 13:40:30

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.94 mW/g

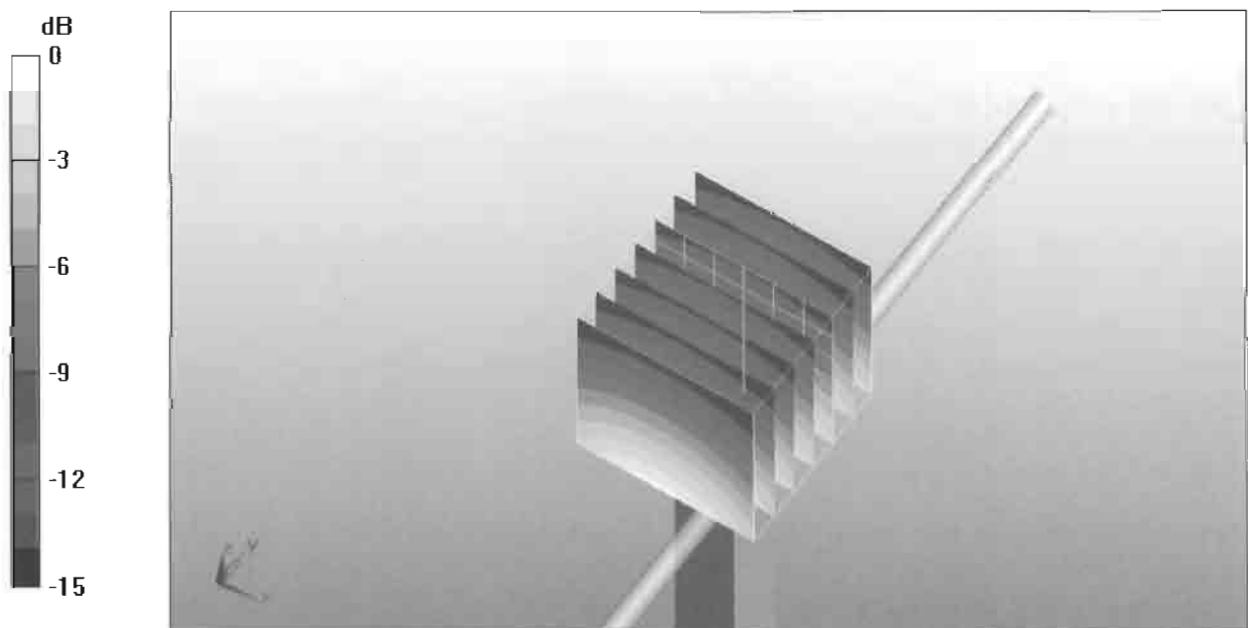

0 dB = 2.94mW/g



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D1800V2-256_Oct09**

CALIBRATION CERTIFICATE

Object **D1800V2 - SN: 256**

Calibration procedure(s) **QA CAL-05.v7**
Calibration procedure for dipole validation kits

Calibration date: **October 20, 2009**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	

Approved by:	Katja Pokovic	Technical Manager
--------------	---------------	-------------------

Issued: October 21, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date/Time: 20.10.2009 10:26:59

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:256

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.25, 5.25, 5.25); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.2 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.9 mW/g; SAR(10 g) = 5.21 mW/g

Maximum value of SAR (measured) = 12.4 mW/g

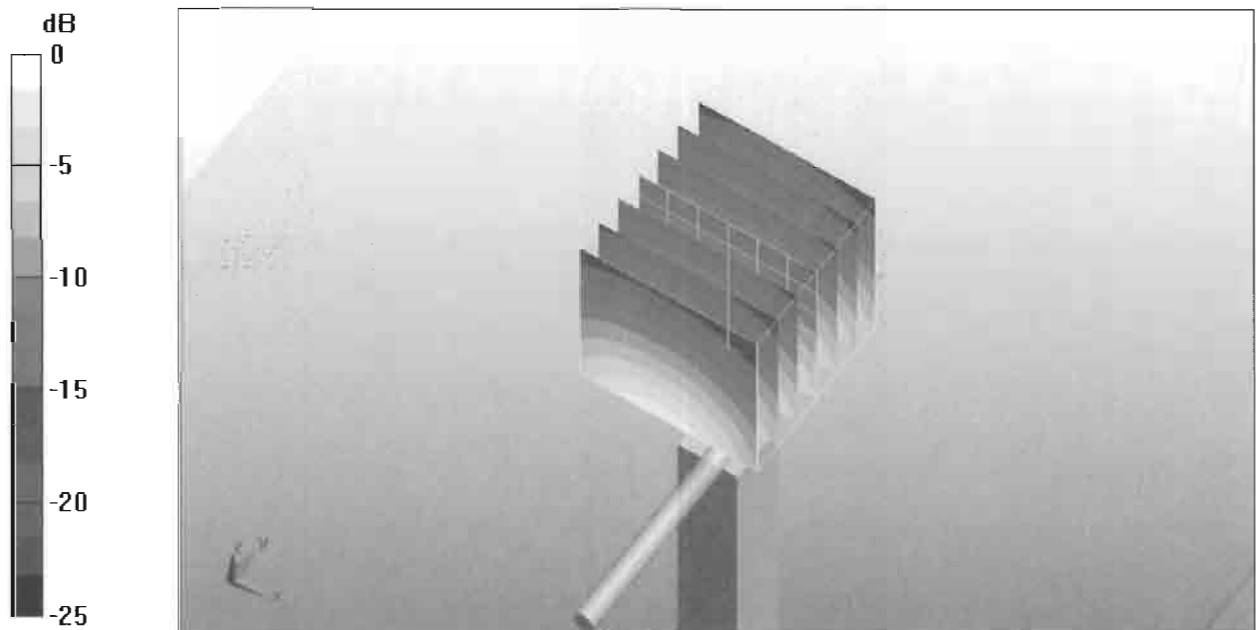

0 dB = 12.4mW/g

DASY5 Validation Report for Body

Date/Time: 20.10.2009 14:52:33

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:256

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.8, 4.8, 4.8); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.2 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.61 mW/g; SAR(10 g) = 5.07 mW/g

Maximum value of SAR (measured) = 12.2 mW/g

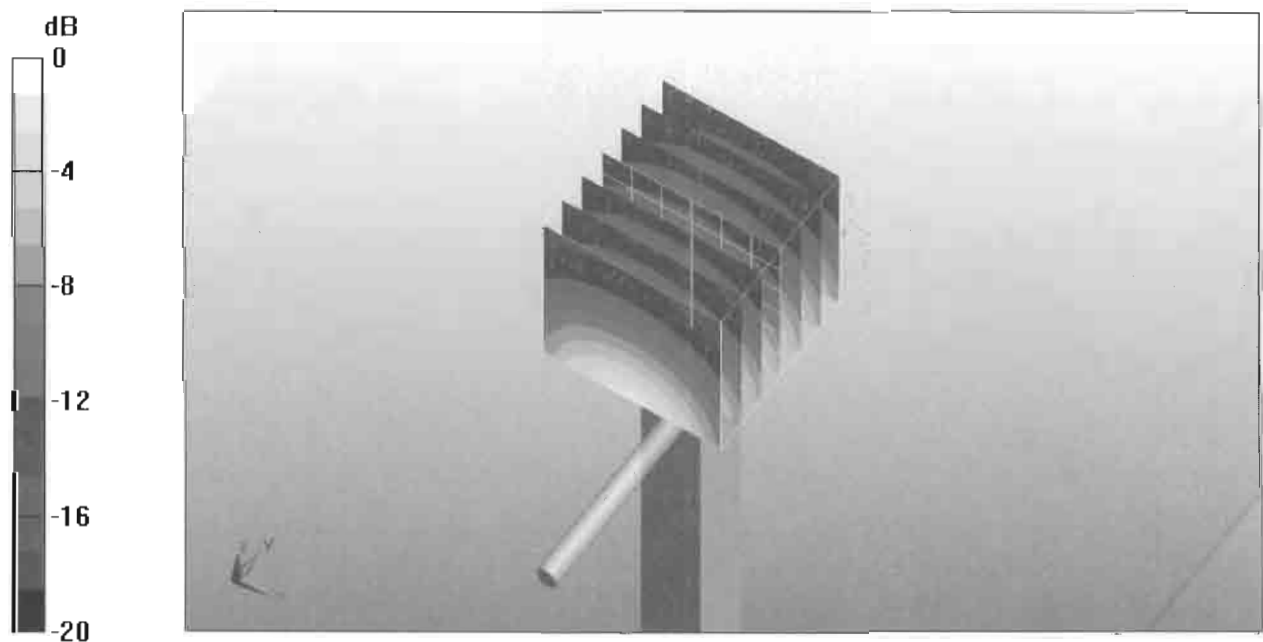

0 dB = 12.2mW/g



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Nokia Salo TCC**

Certificate No: **D1900V2-5d013_Mar10**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d013**

Calibration procedure(s) **QA CAL-05.v7
 Calibration procedure for dipole validation kits**

Calibration date: **March 23, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Dinco Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 23, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date/Time: 23.03.2010 10:16:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.32 mW/g

Maximum value of SAR (measured) = 12.6 mW/g

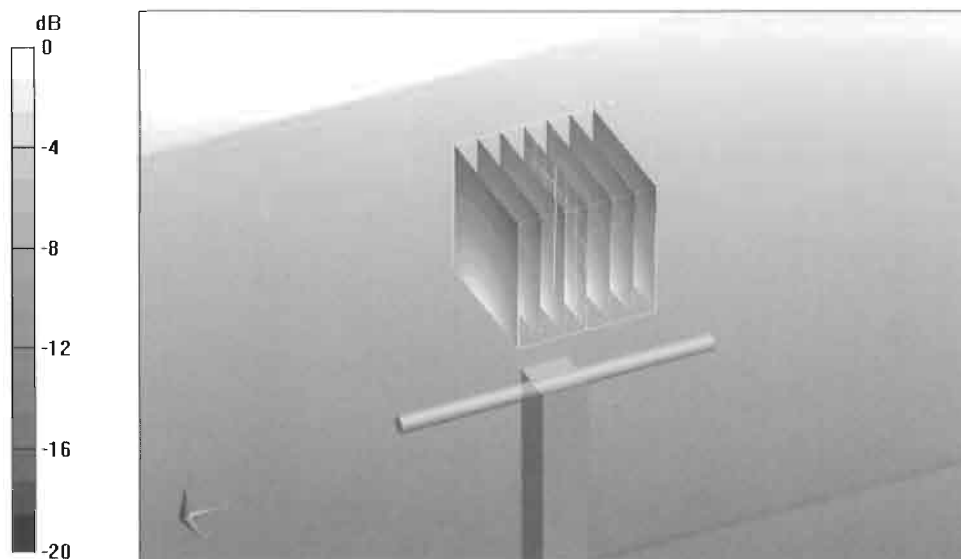

0 dB = 12.6mW/g

DASY5 Validation Report for Body

Date/Time: 23.03.2010 13:12:18

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.9 V/m; Power Drift = 0.00956 dB

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.58 mW/g

Maximum value of SAR (measured) = 12.7 mW/g

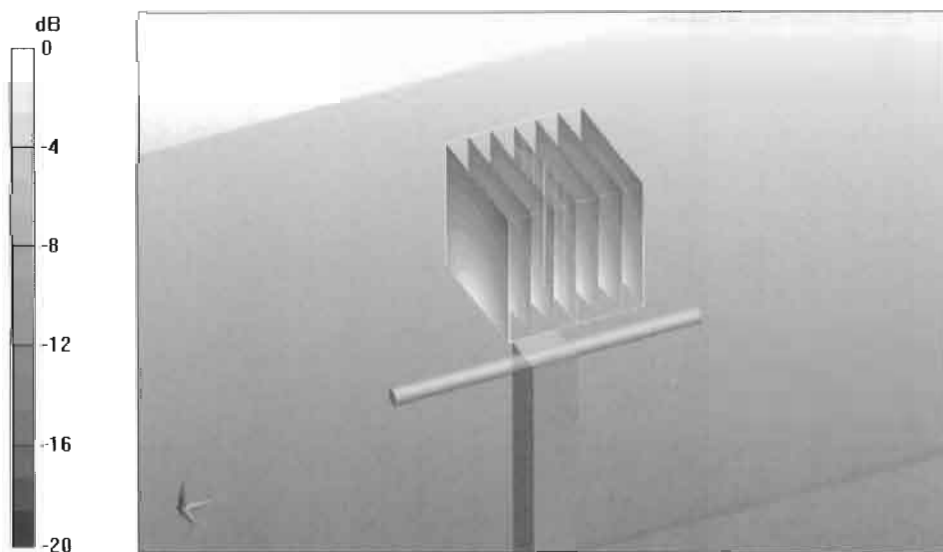

0 dB = 12.7mW/g



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC Certificate No: D2450V2-749_Oct09

CALIBRATION CERTIFICATE

Object D2450V2 - SN: 749

Calibration procedure(s) QA CAL-05.v7
Calibration procedure for dipole validation kits

Calibration date: October 21, 2009

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.78 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.7 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 26.8 W/kg

SAR(1 g) = 13.2 mW/g; SAR(10 g) = 6.18 mW/g

Maximum value of SAR (measured) = 16.9 mW/g

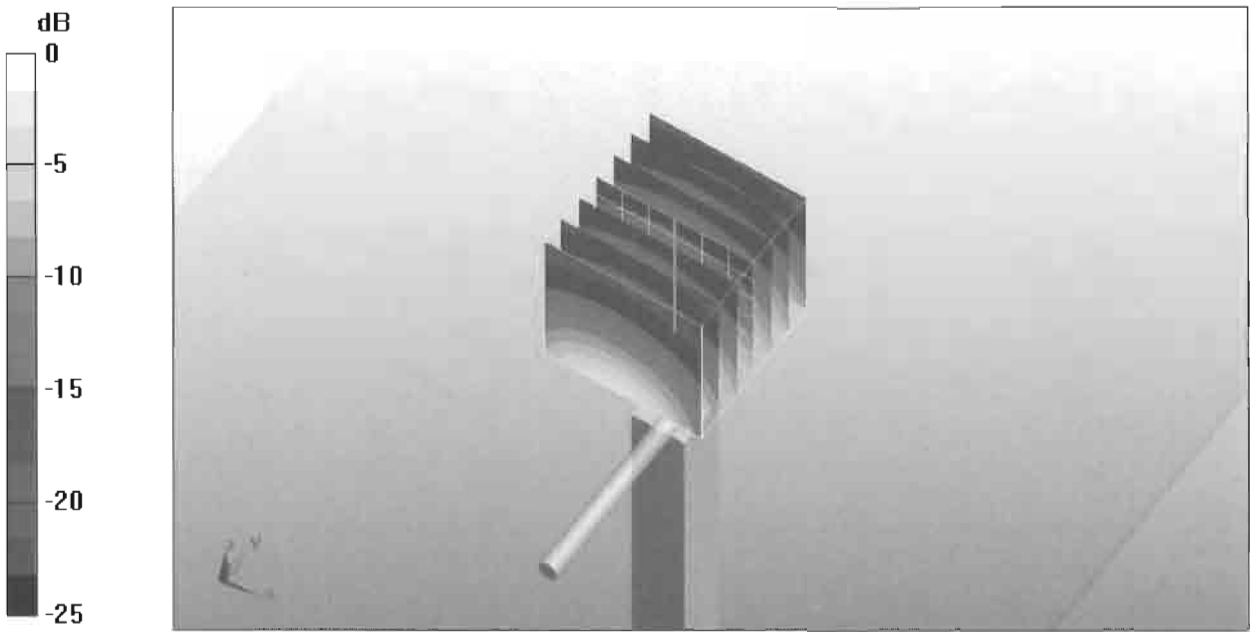

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.98 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.9 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 12.5 mW/g; SAR(10 g) = 5.81 mW/g

Maximum value of SAR (measured) = 16.4 mW/g

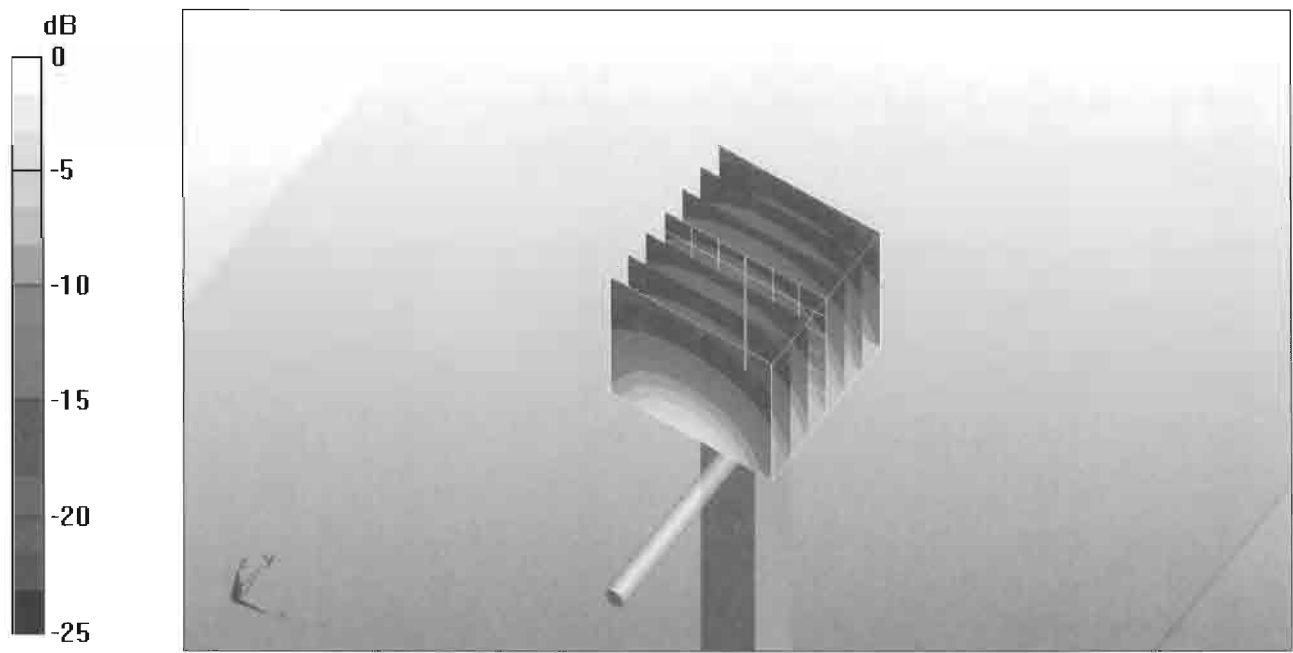

0 dB = 16.4mW/g