

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-779_13.docx	Date of Report:	09-Sep-2011
Number of pages:	19	Customer's Contact person:	Timo Peltola
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-779 / Battery BP-3L / AC charger AC-10E / Headset WH-207 / Dummy battery SD-102R		
FCC ID:	LJPRM-779	IC:	661E-RM779
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22, 24 and 27, TIA-603-C-2004 and IC standards RSS-GEN (Issue 3, Dec 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009) and RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	27-Jul-2011
Testing completed	04-Aug-2011
The customer's contact person	Timo Peltola
Test Plan referred to	T:\Projects\RM-779\TestPlan\RS_TestPlan_RM-779.xls
Notes	-
Document name	FCC22&24&27_RM-779_13.docx

1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/IV(1700)/V(850)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-779	004402135684722	0503	-	111.010.0705	42634
Phone	RM-779	004402135684706	0503	-	111.010.0705	42635
Battery	BP-3L	3932131235140111404;0670635	-	-	-	42636
AC charger	AC-10E	3997910432062201323;0675408	-	-	-	42637
Headset	WH-207	06949371106A1R12943	-	-	-	42638
Dummy battery	SD-102R	GS2820230	0.1	-	-	42640

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

WCDMA 850 (Band V):

Section in CFR 47	Section in <i>RSS-GEN</i> or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in <i>RSS-GEN</i> or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§27.53(g)	6.5	Band edge compliance	NP
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§27.53(g), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

WCDMA 1900 (Band II):

Section in CFR 47	Section in <i>RSS-GEN</i> or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 22/24/27 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
2.5. WCDMA 850 Test results	8
2.6. WCDMA 1700 Test results	8
2.7. WCDMA 1900 Test results	9
3. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, §27.53(g), §2.1053, RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)	10
3.2. Test method and limit	10
3.3. GSM850 TX Test results	11
3.4. GSM1900 TX Test results	12
3.5. WCDMA 850 (Band V) TX Test results	12
3.6. WCDMA 1700 (Band IV) TX Test results	12
3.7. WCDMA 1900 (Band II) TX Test results	13
4. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)	14
4.1. Test setup	14
4.2. Test method and limit	14
4.3. GSM 850 Test results	15
4.4. GSM 1900 Test results	15
4.5. WCDMA 1700 Test results	15
5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)	16
5.1. Test setup	16
5.2. Test method and limit	16
5.3. GSM 850 Test results	17
5.4. GSM 1900 Test results	17
5.5. WCDMA 1700 Test results	17
6. Test Equipment	18
6.1. Conducted measurements	18
6.2. Radiated measurements	18

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-779 DUT 42635
Accessories with DUT numbers	BP-3L DUT 42636
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 51 / 99.9
Date of measurements	03-Aug-2011
Measured by	Jari Jantunen

2.1. Test setup

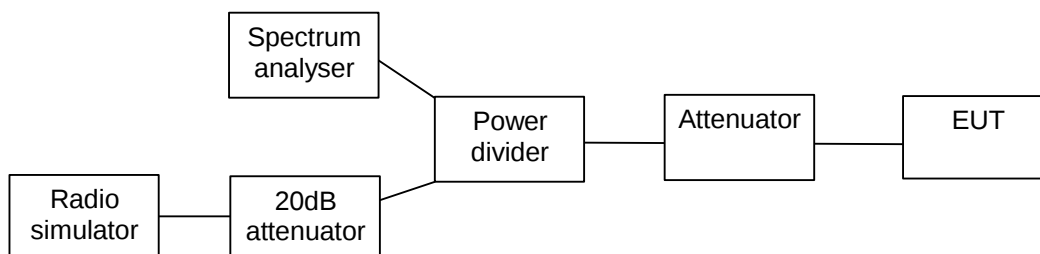


2.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and 27 and IC standard RSS-GEN.


2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	245.192
EGPRS	245.192

GSM mode, channel 190 / 836.6 MHz

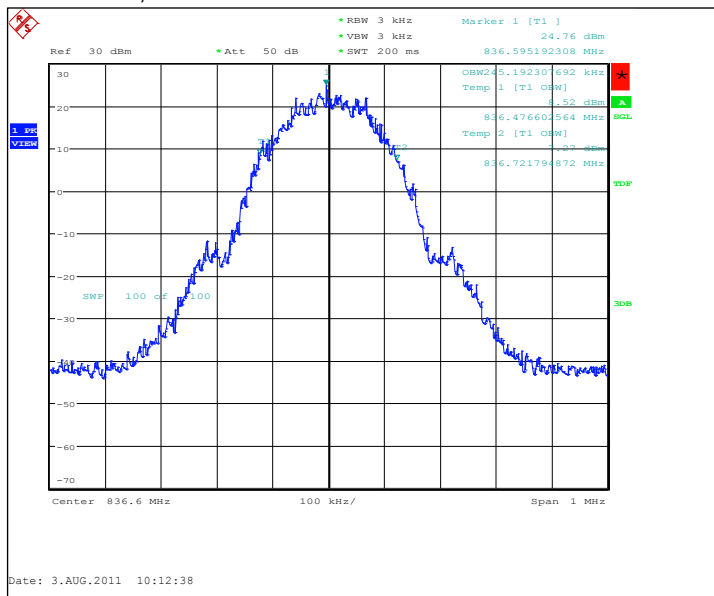


EGPRS mode, channel 190 / 836.6 MHz

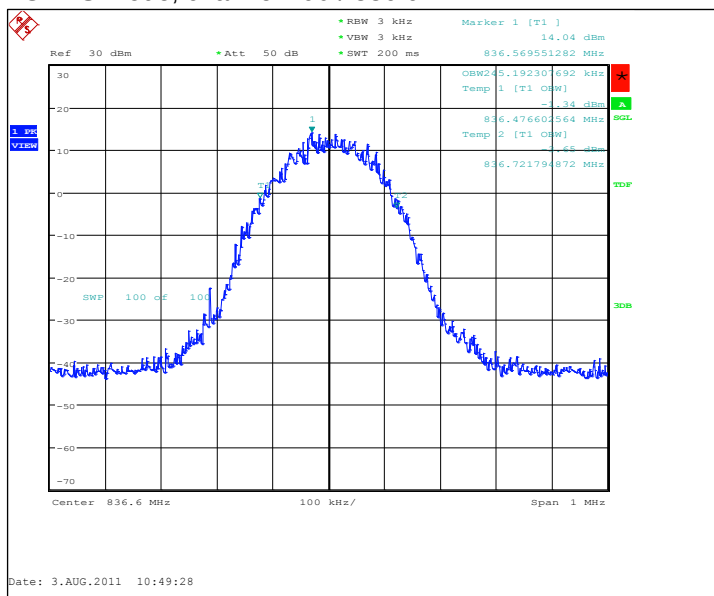


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	241.987
EGPRS	235.577

GSM mode, channel 661 / 1880.0 MHz

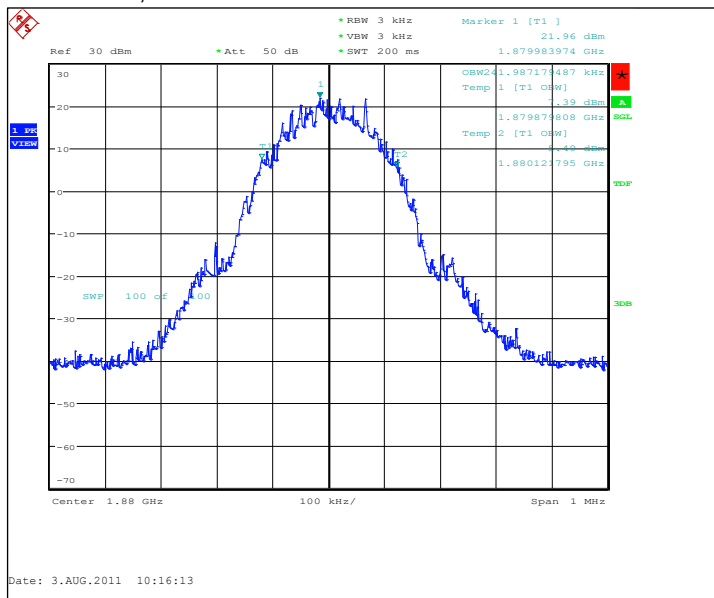


EGPRS mode, channel 661 / 1880.0 MHz

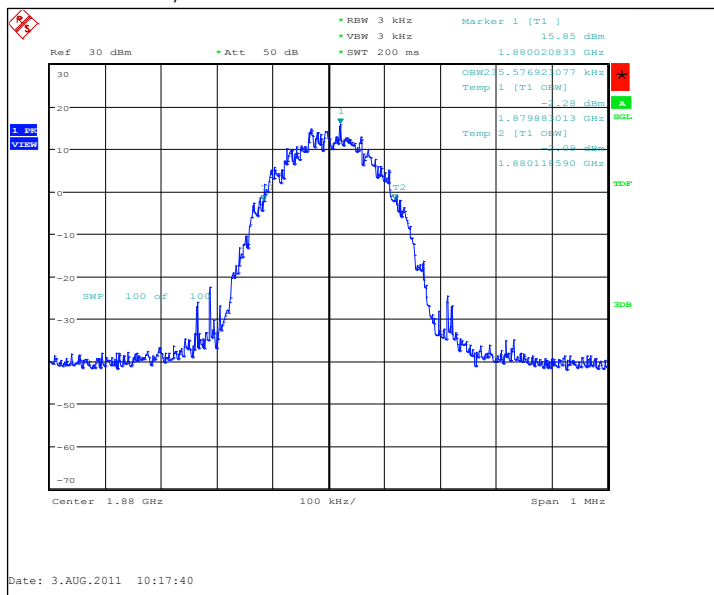

2.5. WCDMA 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4134.615


Channel 4175 / 835.0 MHz

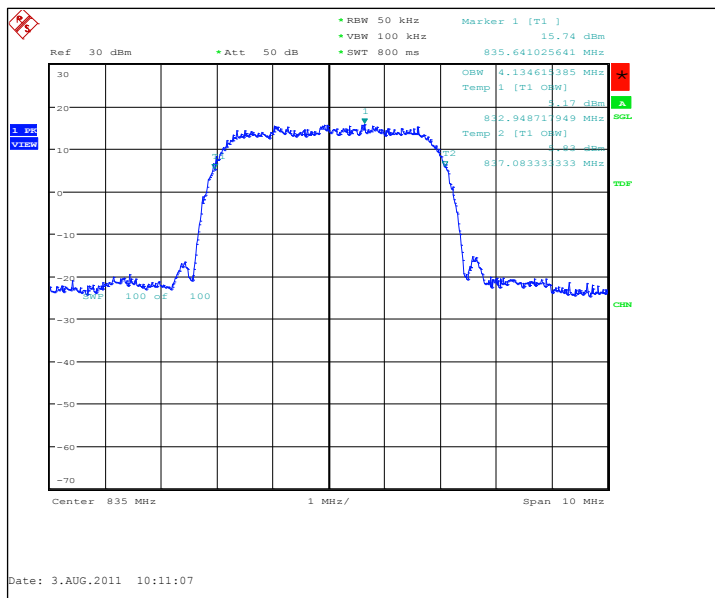

2.6. WCDMA 1700 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4118.590


Channel 1412 / 1732.4 MHz

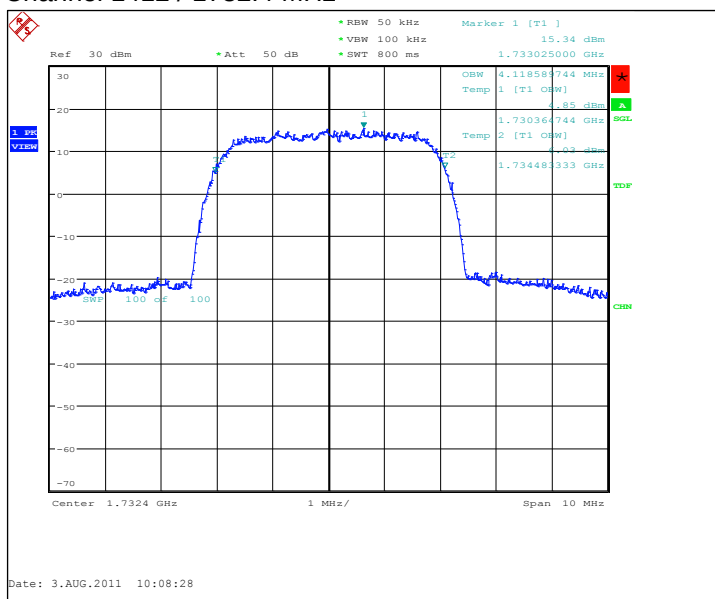

2.7. WCDMA 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4118.590

Channel 9400 / 1880.0 MHz

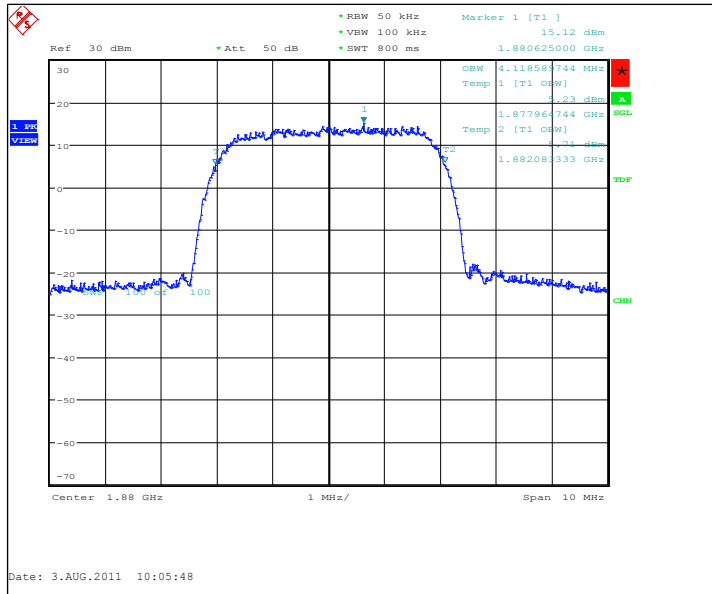


3. Spurious radiated emissions

(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, §27.53(g), §2.1053, RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)

EUT with DUT number	RM-779, DUT 42634
Accessories with DUT numbers	BP-3L, DUT 42636 ; AC-10E, DUT 42637 ; WH-207, DUT 42638
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 54 / 99.6
Date of measurements	27-Jul-2011
Measured by	Jari Jantunen

3.1.1 Test Setup

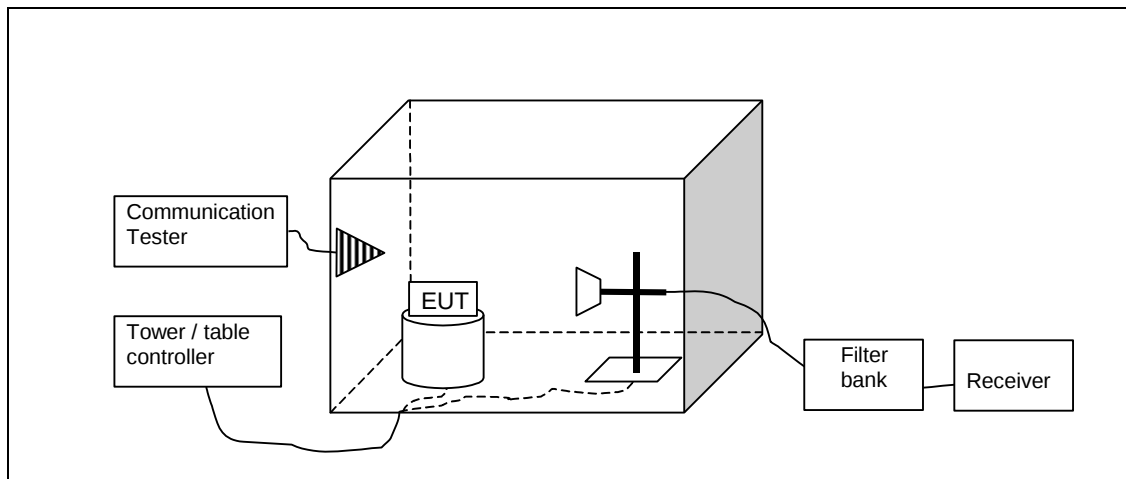

3.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software. The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. $P_{SUBST\ TX}$ is signal generator level, $P_{SUBST\ RX}$ is receiver level, $L_{SUBST\ CABLES}$ is cable losses including both TX and RX cables and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700 / WCDMA 1900	30 - 18000	-13

3.3. GSM850 TX Test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
1673.168	-46.55	0.02213	-42.05	-4.5	VERTICAL	PASSED
2509.96	-43.15	0.04842	-45.07	1.92	HORIZONTAL	PASSED
3320.481	-58.64	0.00137	-61.72	3.08	HORIZONTAL	PASSED

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
1673.146	-45.63	0.02735	-41.13	-4.5	VERTICAL	PASSED
2509.9	-46.45	0.02265	-48.37	1.92	HORIZONTAL	PASSED
3361.824	-58.76	0.00133	-61.97	3.21	VERTICAL	PASSED

3.4. GSM1900 TX Test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3780.641	-55.07	0.00311	-63.42	8.35	HORIZONTAL	PASSED
5640	-44.44	0.03597	-54	9.56	HORIZONTAL	PASSED
7550.301	-50.04	0.00991	-63.88	13.84	HORIZONTAL	PASSED

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3759.9	-55.11	0.00308	-63.25	8.14	HORIZONTAL	PASSED
5639.579	-50.9	0.00813	-60.47	9.57	HORIZONTAL	PASSED
7544.028	-49.65	0.01084	-63.4	13.75	HORIZONTAL	PASSED

3.5. WCDMA 850 (Band V) TX Test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

Channel 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
823.676	-42.87	0.05164	-30.71	-12.16	VERTICAL	PASSED
2540.2	-54.06	0.00393	-56.98	2.92	HORIZONTAL	PASSED

3.6. WCDMA 1700 (Band IV) TX Test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

Channel 1412 / 1732.4 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1714.939	-43.25	0.04732	-40.35	-2.9	HORIZONTAL	PASSED

3.7. WCDMA 1900 (Band II) TX Test results

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.


Channel 9400 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3764.689	-54.76	0.00334	-62.93	8.17	HORIZONTAL	PASSED
7567.174	-50.25	0.00944	-64.02	13.77	HORIZONTAL	PASSED

4. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-779 DUT 42635
Accessories with DUT numbers	BP-3L, DUT 42636 ; AC-10E, DUT 42637 ; WH-207, DUT 42638
Operation Voltage [V] / [Hz]	230 / 50
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 56 / 100.0
Date of measurements	04-Aug-2011
Measured by	Jari Jantunen

4.1. Test setup

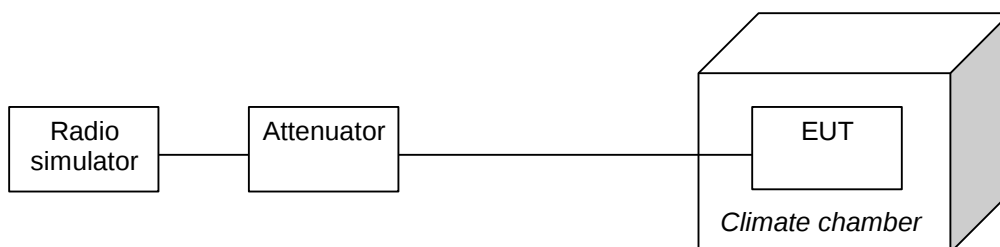

4.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and 27 and IC standards RSS-132, RSS-133 and RSS-139 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize. The EUT is placed in the chamber.

The EUT is set in idle mode for 15 minutes.

The EUT is set to transmit.

The transmit frequency error was measured immediately.

The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-22	- 0.0263
40	-20	- 0.0239
30	-23	- 0.0275
20	-24	- 0.0287
10	-19	- 0.0227
0	-18	- 0.0215
-10	-20	- 0.0239
-20	-24	- 0.0287

*Phone switched off at -22 °C

4.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-25	- 0.0133
40	-27	- 0.0144
30	-28	- 0.0149
20	-35	- 0.0186
10	-30	- 0.0160
0	-25	- 0.0133
-10	-31	- 0.0165
-20	-35	- 0.0186
-22	-35	- 0.0186
-24	-39	- 0.0207
-26	-40	- 0.0213

*Phone switched off at -28 °C

4.5. WCDMA 1700 Test results

Channel 1412 / 1732.4 MHz


Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	18	0.0104
40	10	0.0058
30	7	0.0040
20	12	0.0069
10	18	0.0104
0	14	0.0081
-10	-7	- 0.0040
-20	10	0.0058

*Phone switched off at -22 °C

5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3, RSS-139 6.3)

EUT with DUT number	RM-779 DUT 42635
Accessories with DUT numbers	SD-102R DUT 42640
Operation Voltage [V] / [Hz]	3.7 VDC and 3.5 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 51 / 99.9
Date of measurements	03-Aug-2011
Measured by	Jari Jantunen

5.1. Test setup



5.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and 27 and IC standards RSS-132, RSS-133 and RSS-139 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-19	- 0.0227
Nominal / 3.70	-24	- 0.0287

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	-35	- 0.0186
Nominal / 3.70	-29	- 0.0154

5.5. WCDMA 1700 Test results

Channel 1412 / 1732.4 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.50	7	0.0040
Nominal / 3.70	12	0.0069

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM0631 2	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM30642	Mast/turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM38990	Remote switching module	RSM1	EMC Automation	22/24/27, 15C, 15B
TM38341	System interface	SI-300	EMC Automation	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Controller	2090	Emco	22/24/27, 15C, 15B
TM39158	Antenna	3116	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AFS4-00100300-20-23P6	Miteq	15C
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Torqueleader	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870/	Wainwright	27
TM38215	Band reject filter	WRCD 1920/1980-1918/1982-40/20	Wainwright UMTS	27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30/	Wainwright ISM	15C
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	27
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
-	Antenna	SBA 9113	Schwarzbeck	22/24/27
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C