



T213 (EN ISO/IEC 17025)

SAR Compliance Test Report

Test report no.:	OULU_SAR0436_04	Date of report:	2004-10-28
Template version:	2	Number of pages:	38
Testing laboratory:	TCC Oulu Yrtipellontie 6 P.O. Box 300 FIN-90401 OULU Tel. +358-7180-08000 Fax. +358-7180-47222	Client:	Nokia Finland Elektroniikkatie 10 P.O. Box 50 FIN-90570 Oulu Tel. +358-7180-08000 Fax. +358-7180-47222
Responsible test engineer:	Kai Niskala	Product contact person:	Niko Balabanis
Measurements made by:	Kai Niskala		
Tested device:	RM-8		
FCC ID:	LJPRM-8	IC:	661E-RM8
Supplement reports:			
Testing has been carried out in accordance with:	<p>47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices</p> <p>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields</p> <p>IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p>		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Oulu		
Test results:	<p>The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.</p>		

Date and signatures: 2004-10-28

For the contents:

Kai Niskala


Test Engineer



CONTENTS

1. SUMMARY OF SAR TEST REPORT	4
1.1 TEST DETAILS	4
1.2 MAXIMUM RESULTS	4
1.2.1 <i>Head Configuration</i>	4
1.2.2 <i>Body Worn Configuration</i>	4
1.2.3 <i>Maximum Drift</i>	5
1.2.4 <i>Measurement Uncertainty</i>	5
2. DESCRIPTION OF THE DEVICE UNDER TEST	5
2.1 PICTURE OF THE DEVICE	6
2.2 DESCRIPTION OF THE ANTENNA	6
3. TEST CONDITIONS	6
3.1 TEMPERATURE AND HUMIDITY	6
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	6
4. DESCRIPTION OF THE TEST EQUIPMENT	7
4.1 MEASUREMENT SYSTEM AND COMPONENTS	7
4.1.1 <i>Isotropic E-field Probe ET3DV6</i>	8
4.2 PHANTOMS	9
4.3 SIMULATING LIQUIDS	9
4.3.1 <i>Liquid Recipes</i>	9
4.3.2 <i>Verification of the System</i>	9
4.3.3 <i>Tissue Simulants used in the Measurements</i>	10
5. DESCRIPTION OF THE TEST PROCEDURE	11
5.1 DEVICE HOLDER	11
5.2 TEST POSITIONS	11
5.2.1 <i>Against Phantom Head</i>	11
5.2.2 <i>Body Worn Configuration</i>	12
5.3 SCAN PROCEDURES	12
5.4 SAR AVERAGING METHODS	13
6. MEASUREMENT UNCERTAINTY	14
7. RESULTS	15
APPENDIX A: VALIDATION SCANS	16
APPENDIX B: MEASUREMENT SCANS	21
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	31



T213 (EN ISO/IEC 17025)



1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2004-8-27 to 2004-8-30
SN, HW and SW numbers of tested device	SN: 004400/35/176534/0; DUT#: 30206; HW: 10.15; SW: 3.07
Batteries used in testing	BL-4C; DUT#'s: 30202, 30203, 30204
Headsets used in testing	HS-3; DUT#: 30205
Other accessories used in testing	
State of sample	Prototype Unit
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f(MHz)	EIRP	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GRPS 1900	512/1850.2 MHz	22.51 dBm	Right Cheek	1.6 W/kg	1.05 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f(MHz)	EIRP	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GRPS 1900	512/1850.2 MHz	22.51 dBm	1.5 cm	1.6 W/kg	0.61 W/kg	PASSED



T213 (EN ISO/IEC 17025)

1.2.3 Maximum Drift

Maximum drift during measurements	-0.16 dB
-----------------------------------	----------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	± 29.1 %
--------------------------------	----------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	portable			
Exposure environment	general population/uncontrolled			
Modes and Bands of Operation	GSM1900	GPRS 1900	E-GPRS1900	BT
Modulation Mode	GMSK	GMSK	8PSK	GFSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	1850.2-1909.8	1850.2-1909.8	1850.2-1909.8	2402.0 – 2480.0

Outside of USA and Canada, the transmitter is capable of operating also in GSM900 and GSM1800, which are not part of this filing.

This device has Push-to-Talk/Voice-over-IP capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was evaluated against the head profile of the phantom.



T213 (EN ISO/IEC 17025)

2.1 Picture of the Device



2.2 Description of the Antenna

The device has an internal patch antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Period of measurement:	2004-8-27 to 2004-8-30
Ambient temperature (°C):	21 to 24
Ambient humidity (RH %):	35 to 50

3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.



T213 (EN ISO/IEC 17025)

In all operating bands the measurements were performed on lowest, middle and highest channels.

The power output was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.2, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE V1	555	12 months	02/05
E-field Probe ET3DV6	1765	12 months	02/05
Dipole Validation Kit, D1900V2	5d030	12 months	04/05

Additional test equipment used in testing:



T213 (EN ISO/IEC 17025)

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	HP 8657B	3630U08114	12 months	06/05
Amplifier	Amplifier Research 5S1G4	306024	-	-
Power Meter	R&S NRT	101143	12 months	04/05
Power Sensor	R&S NRT-Z43	100239	12 months	04/05
Thermometer	Fluke 51 II	84350048	12 months	06/05
Network Analyzer	HP 8753D	3410A08934	12 months	06/05
Dielectric Probe Kit	Agilent 85070D	US01440162	-	-

4.1.1 Isotropic E-field Probe ET3DV6

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm
Application	Distance from probe tip to dipole centers: 2.7 mm General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



4.2 Phantoms

The phantom used for all tests i.e. for both validation testing and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

Validation tests were performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Simulating Liquids

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using liquids whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the liquid was 15.0 ± 0.5 cm measured from the ear reference point during validation and device measurements.

4.3.1 Liquid Recipes

The following recipes were used for Head and Body liquids:

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 Verification of the System

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids were measured every day using the dielectric probe kit and the network analyser. A SAR measurement was made following the determination of the dielectric parameters of the



T213 (EN ISO/IEC 17025)

liquids, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The validation results (dielectric parameters and SAR values) are given in the table below.

System verification, head tissue simulant

f[MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1900	Reference result	10.5	38.8	1.44	N/A
	$\pm 10\%$ window	9.5 - 11.6			
	2004-08-27	10.1	38.1	1.46	

System verification, body tissue simulant

f[MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1900	Reference result	10.7	51.2	1.59	N/A
	$\pm 10\%$ window	9.6 - 11.8			
	2004-08-30	10.7	52.3	1.57	

Plots of the Verification scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f[MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	40.0	1.40	N/A
	$\pm 5\%$ window	38.0 - 42.0	1.33 - 1.47	
	2004-08-27	38.3	1.44	

Body tissue simulant measurements

f[MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	53.3	1.52	N/A
	$\pm 5\%$ window	50.6 - 56.0	1.44 - 1.60	
	2004-08-30	52.4	1.55	



5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in "cheek" and "tilt" positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".



Photo of the device in "cheek" position



Photo of the device in "tilt" position



T213 (EN ISO/IEC 17025)

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its display facing the phantom since this orientation gave higher results.



Photo of the device positioned for Body SAR measurement. The spacer was removed for the tests.

5.3 Scan Procedures

First coarse scans were used for determination of the field distribution. Next a cube scan, 5x5x7 points covering a volume of 75x75x49 mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.



T213 (EN ISO/IEC 17025)

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.



T213 (EN ISO/IEC 17025)

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i \cdot u_i$ (%)	u_i
Measurement System							
Probe Calibration	E2.1	± 4.8	N	1	1	± 5.8	∞
Axial Isotropy	E2.2	± 4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	E2.2	± 9.6	R	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary Effect	E2.3	± 8.3	R	$\sqrt{3}$	1	± 4.8	∞
Linearity	E2.4	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	E2.5	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	E2.6	± 1.0	N	1	1	± 1.0	∞
Response Time	E2.7	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	E2.8	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Conditions - Noise	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Conditions - Reflections	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	± 3.9	R	$\sqrt{3}$	1	± 2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	± 6.0	N	1	1	± 6.0	11
Device Holder Uncertainty	E4.1.1	± 5.0	N	1	1	± 5.0	7
Output Power Variation - SAR drift measurement	6.6.3	± 10.0	R	$\sqrt{3}$	1	± 5.8	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid Conductivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid Conductivity - measurement uncertainty	E3.3	± 5.5	N	1	0.64	± 3.5	5
Liquid Permittivity Target tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid Permittivity - measurement uncertainty	E3.3	± 2.9	N	1	0.6	± 1.7	5
Combined Standard Uncertainty				RSS		± 14.9	206
Coverage Factor for 95%				k=2			
Expanded Standard Uncertainty						± 29.8	



7. RESULTS

The measured Head SAR values for the test device are tabulated below:

GPRS 1900 Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		22.51 dBm	23.57 dBm	22.11 dBm
Left	Cheek		0.62	
	Tilt		0.36	
Right	Cheek	1.05	0.89	0.73
	Tilt		0.35	

GSM 1900 Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		25.90 dBm	25.90 dBm	24.70 dBm
Right	Cheek	0.82		

E-GPRS 1900 Head SAR results

Position		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		22.68 dBm	22.59 dBm	21.24 dBm
Right	Cheek	0.41		

GPRS 1900 Body SAR results

Body-worn location setup		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880 MHz	Ch 810 1909.8 MHz
Power level		22.51 dBm	23.57 dBm	22.11 dBm
Without headset		0.60	0.52	0.37
Headset		0.61	0.51	0.37

Plots of the Measurement scans are given in Appendix B.



T213 (EN ISO/IEC 17025)

APPENDIX A: VALIDATION SCANS



T213 (EN ISO/IEC 17025)

Test Laboratory: TCC Oulu

Date/Time: 08/27/04 08:39:02

DUT: Dipole 1900 MHz; Serial: SN:5d030

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.24, 5.24, 5.24); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

d=10mm, Pin=250mW, t=22.0 C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 94.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 11.7 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)**d=10mm, Pin=250mW, t=22.0 C/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.2 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 11.4 mW/g

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.25 mW/g[Info: Interpolated medium parameters used for SAR evaluation!](#)



T213 (EN ISO/IEC 17025)

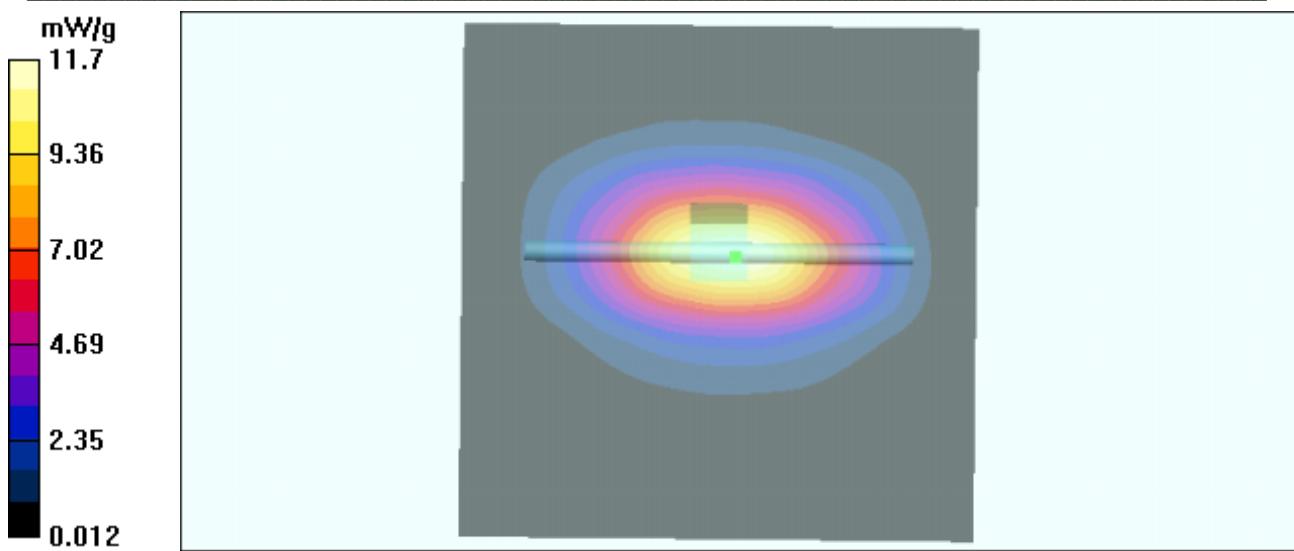



T213 (EN ISO/IEC 17025)

Test Laboratory: TCC Oulu

Date/Time: 08/30/04 08:46:06

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d030

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: BSL1900 Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(4.59, 4.59, 4.59); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

d=10mm, Pin=250mW, t=21.6 C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 93.4 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 12.5 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)**d=10mm, Pin=250mW, t=21.6 C/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.4 V/m; Power Drift = -0.0 dB


Maximum value of SAR (measured) = 12.3 mW/g

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.65 mW/g[Info: Interpolated medium parameters used for SAR evaluation!](#)



T213 (EN ISO/IEC 17025)

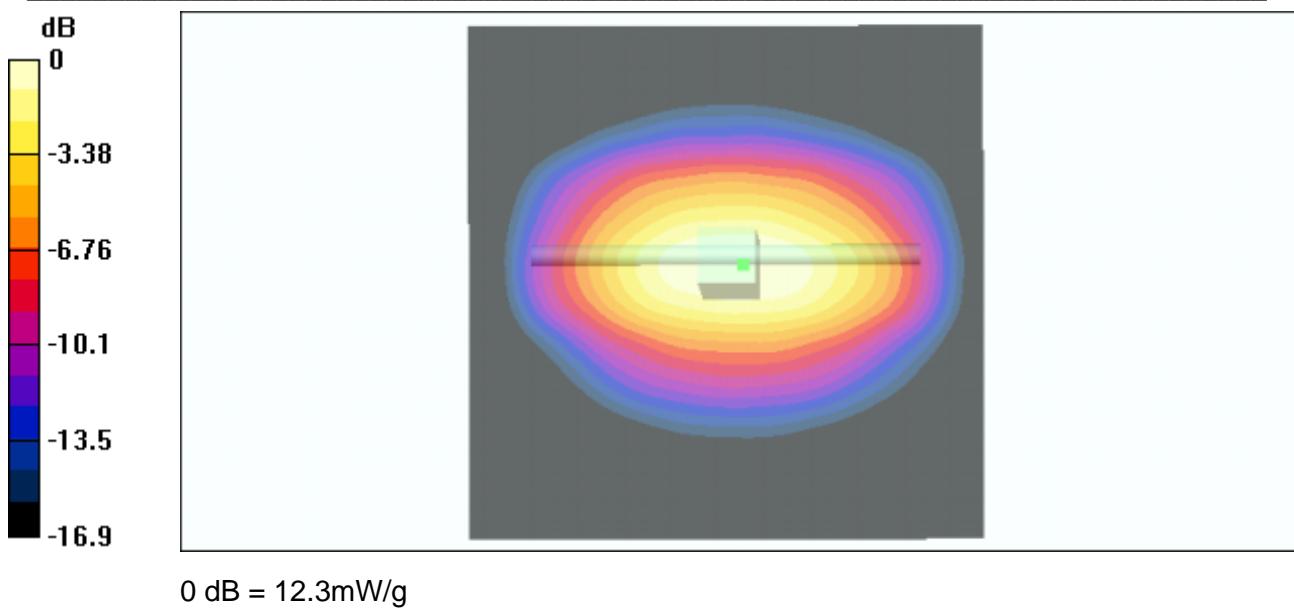



T213 (EN ISO/IEC 17025)

APPENDIX B: MEASUREMENT SCANS



T213 (EN ISO/IEC 17025)

Test Laboratory: TCC Oulu

Date/Time: 08/27/04 09:46:34

DUT: RM-8; Serial: 004400/35/176534/0

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Cheek position - Middle, t=21.9 C, worst case extrapolation/Area Scan**(51x101x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.679 mW/g


Cheek position - Middle, t=21.9 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.650 mW/g

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.364 mW/g

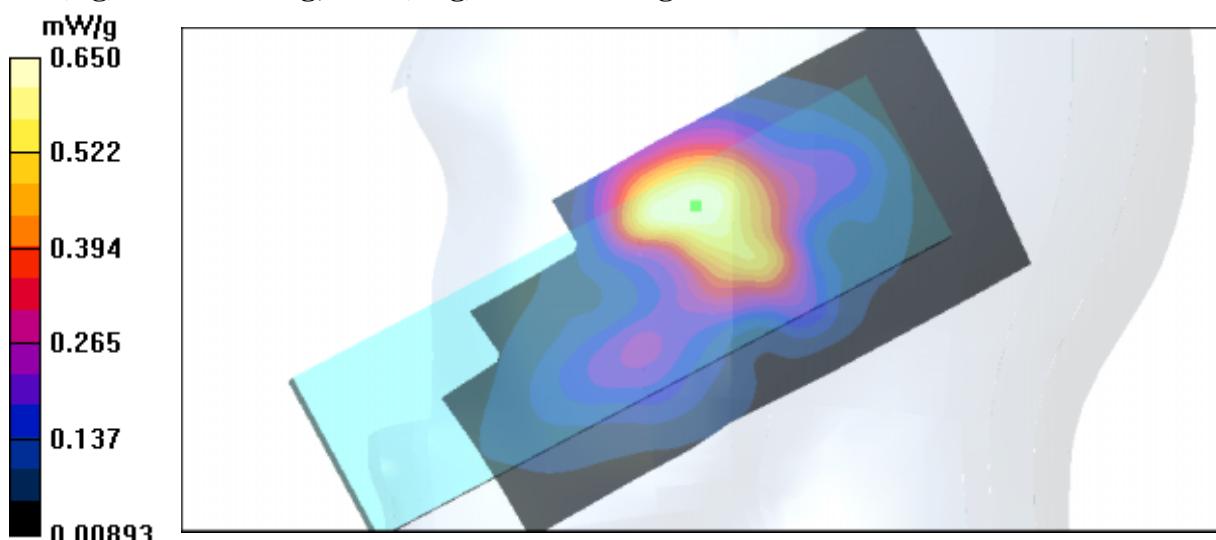

SAR Report

OULU_SAR0436_04

Applicant: Nokia Corporation

Type: RM-8

Copyright © 2004 TCC Oulu



T213 (EN ISO/IEC 17025)

Date/Time: 08/27/04 09:46:34

Test Laboratory: TCC Oulu

DUT: RM-8; Serial: 004400/35/176534/0

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Tilt position - Middle, t=21.8 C, worst case extrapolation/Area Scan (51x91x1):

Measurement grid: dx=15mm, dy=15mm

Reference Value = 16.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.439 mW/g

Tilt position - Middle, t=21.8 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.377 mW/g


Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.212 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.



T213 (EN ISO/IEC 17025)

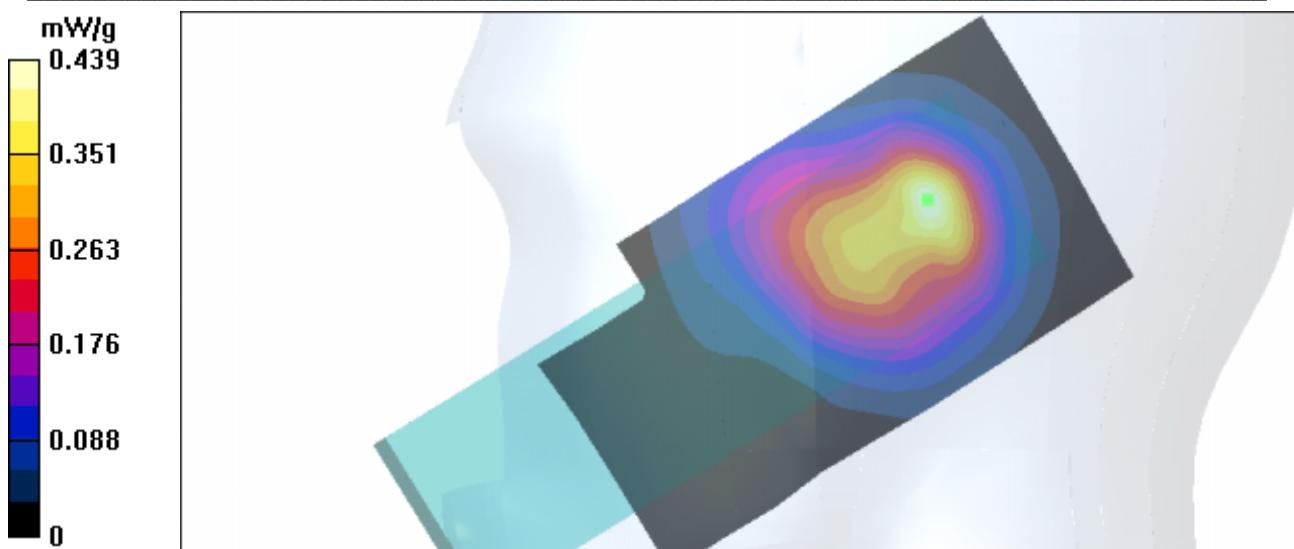



T213 (EN ISO/IEC 17025)

Date/Time: 08/27/04 11:40:07

Test Laboratory: TCC Oulu

DUT: RM-8; Serial: 004400/35/176534/0

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Cheek position - Low, t=21.9 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.07 mW/g

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.589 mW/g[Info: Interpolated medium parameters used for SAR evaluation!](#)**Cheek position - Low, t=21.9 C, worst case extrapolation/Area Scan (51x91x1):**

Measurement grid: dx=15mm, dy=15mm


Reference Value = 9.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.27 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)




T213 (EN ISO/IEC 17025)

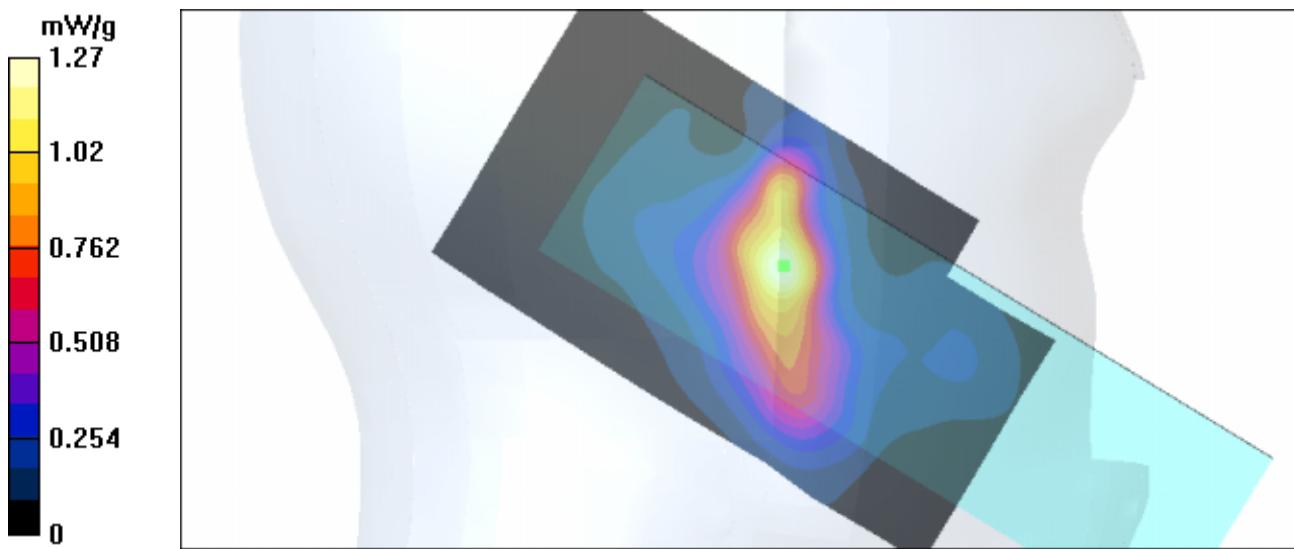

1g/10g Averaged SAR

Compliance Testing: P1528 Protocol (Right-Hand Side)/Zoom Scan (5x5x7)/Value Along Z, X=2, Y=2 SAR

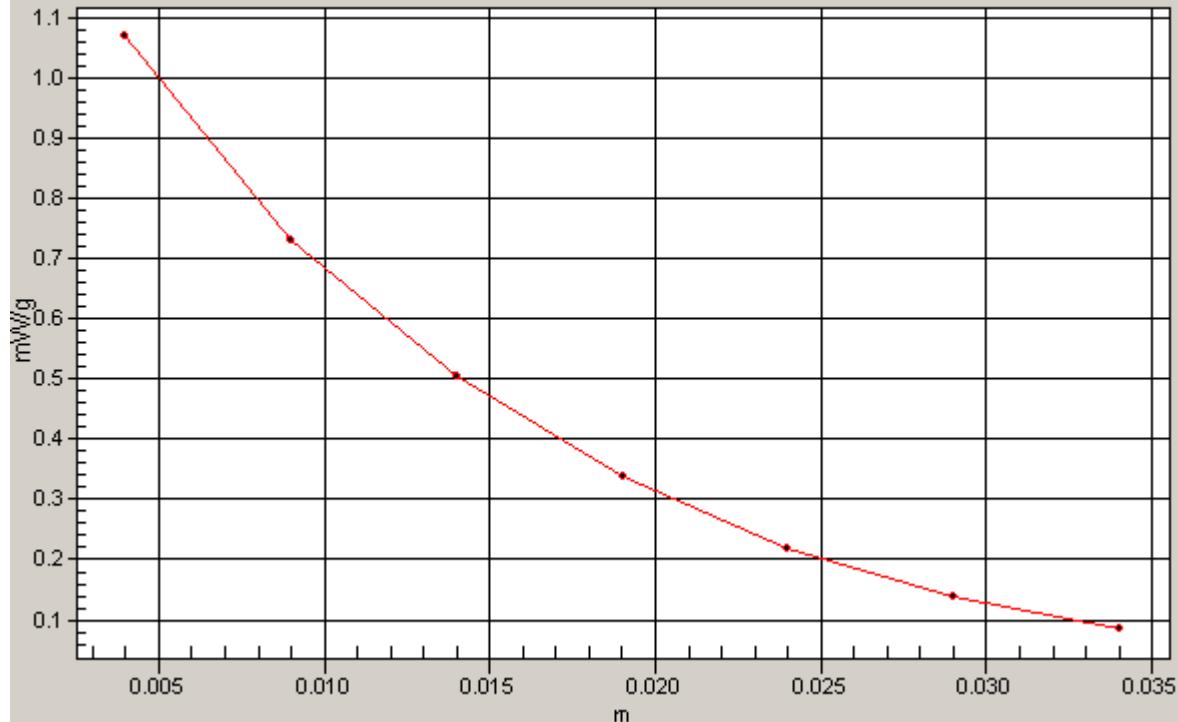



T213 (EN ISO/IEC 17025)

Test Laboratory: TCC Oulu

Date/Time: 08/27/04 11:40:07

DUT: RM-8; Serial: 004400/35/176534/0

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Tilt position - Middle, t=21.8 C, worst case extrapolation/Area Scan (51x101x1):

Measurement grid: dx=15mm, dy=15mm

Reference Value = 14 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.373 mW/g

Tilt position - Middle, t=21.8 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.357 mW/g

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.209 mW/g**Tilt position - Middle, t=21.8 C, worst case extrapolation/Zoom Scan (5x5x7)****(5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.312 mW/g


Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.181 mW/g

Warning: Maximum averaged SAR over 1 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement. Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.



T213 (EN ISO/IEC 17025)

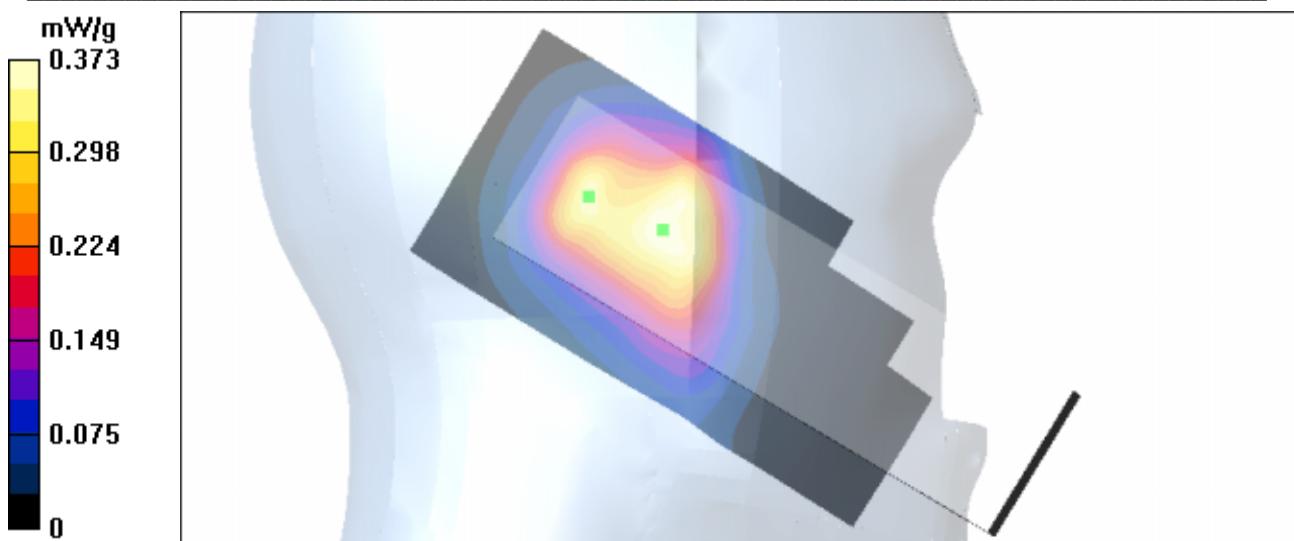



Date/Time: 08/30/04 11:58:57

Test Laboratory: TCC Oulu

DUT: RM-8; Serial: 004400/35/176534/0; with Headset HS-3

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: BSL1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(4.65, 4.65, 4.65); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body worn - Low, t=21.6 C, worst case extrapolation/Area Scan (51x91x1):

Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.668 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)**Body worn - Low, t=21.6 C, worst case extrapolation/Zoom Scan (5x5x7)****(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.650 mW/g

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.290 mW/g[Info: Interpolated medium parameters used for SAR evaluation!](#)**Body worn - Low, t=21.6 C, worst case extrapolation/Zoom Scan (5x5x7)****(5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 0.495 mW/g

Peak SAR (extrapolated) = 0.941 W/kg

SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.259 mW/g[Info: Interpolated medium parameters used for SAR evaluation!](#)



T213 (EN ISO/IEC 17025)

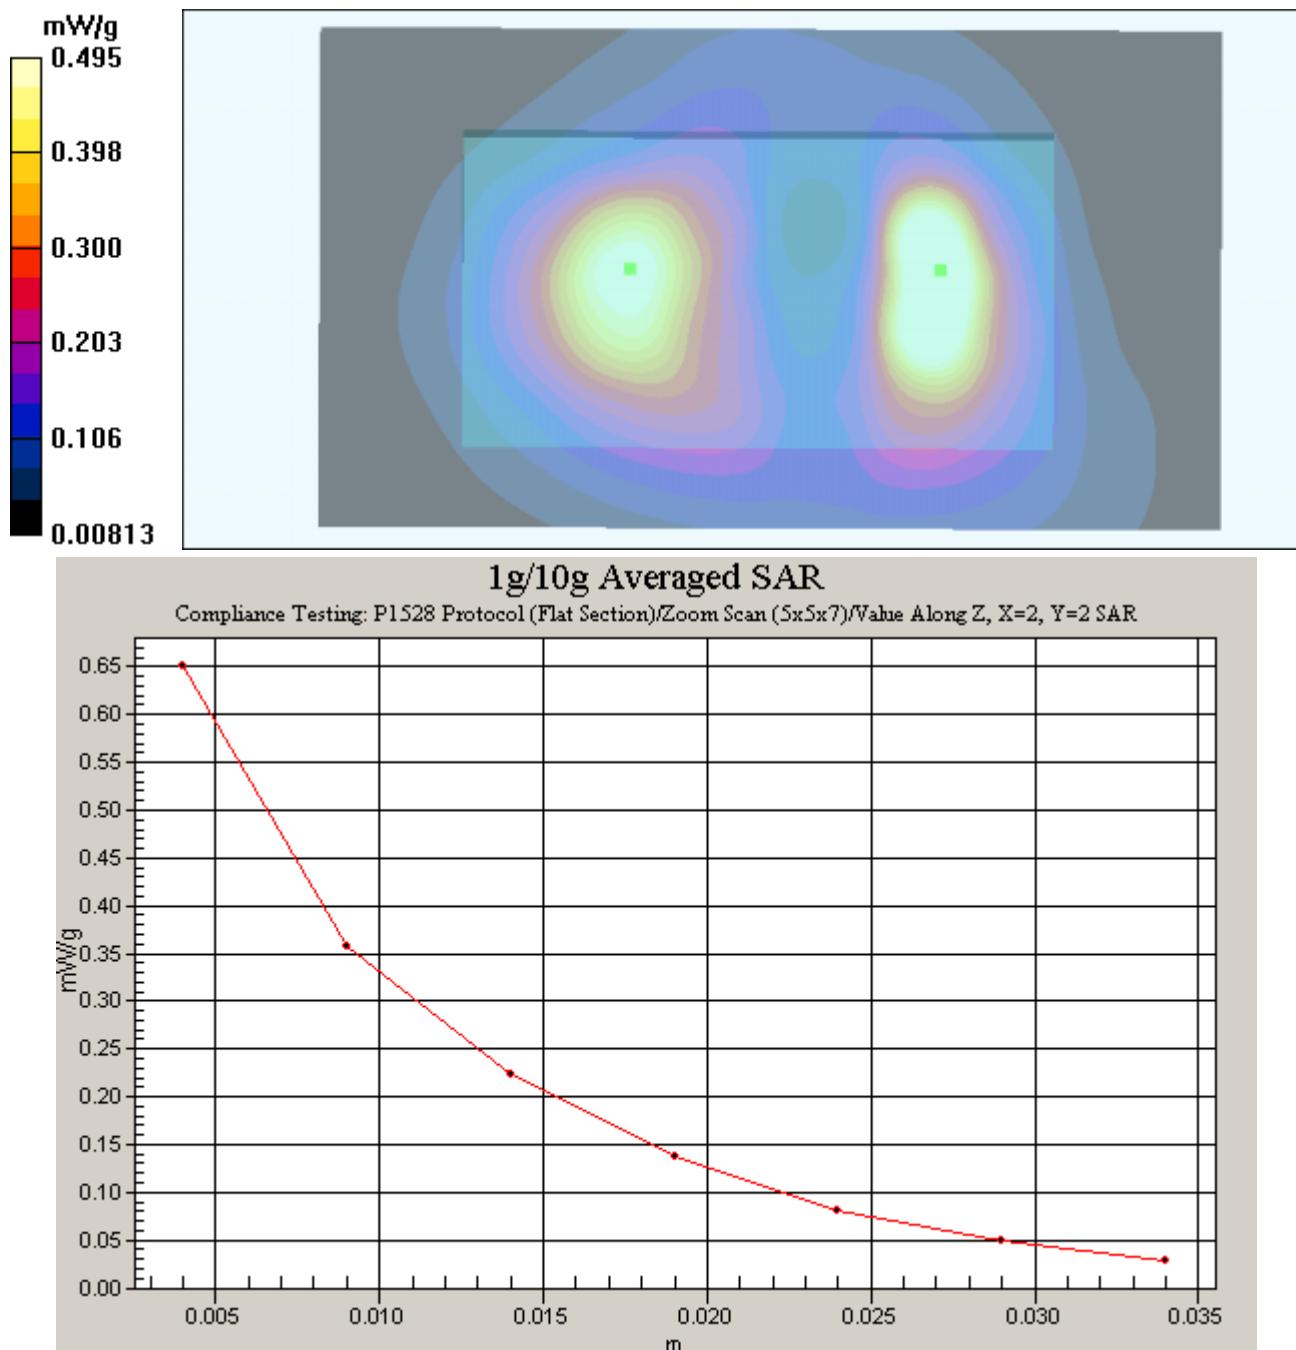



T213 (EN ISO/IEC 17025)

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Oulu

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1765**

Calibration procedure(s) **QA CAL-01.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **February 16, 2004**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.


All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS, No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

Calibrated by: **Name** **Function** **Signature**
Katja Pokovic - Laboratory Director

Approved by: **Name** **Function**
Niels Kuster Quality Manager




Date issued: February 16, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

DASY - Parameters of Probe: ET3DV6 SN:1765

Sensitivity in Free Space

NormX	1.64 μ V/(V/m) ²
NormY	1.85 μ V/(V/m) ²
NormZ	1.92 μ V/(V/m) ²

Diode Compression^A

DCP X	94	mV
DCP Y	94	mV
DCP Z	94	mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	10.6	5.8
SAR _{be} [%] With Correction Algorithm	0.3	0.6

Head 1800 MHz Typical SAR gradient: 10 % per mm

Sensor to Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	13.4	8.8
SAR _{be} [%] With Correction Algorithm	0.2	0.1


Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	in tolerance	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A numerical linearization parameter: uncertainty not required

Conversion Factor Assessment

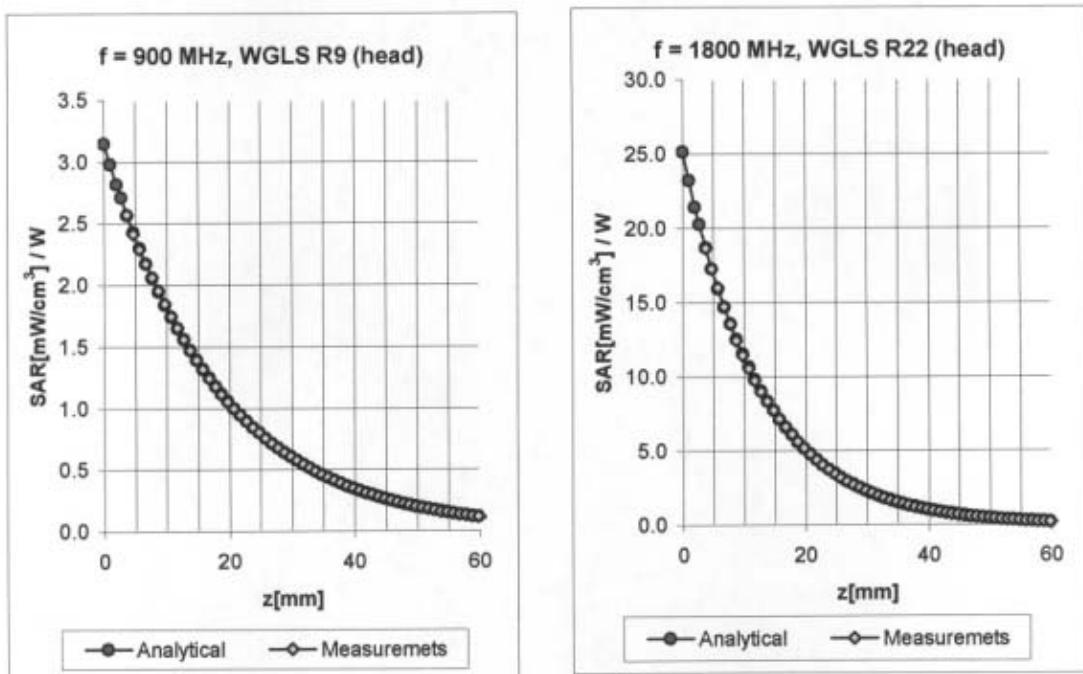

f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	793-877	Head	$41.5 \pm 5\%$	$0.90 \pm 5\%$	0.68	1.81	6.55	$\pm 9.5\% \text{ (k=2)}$
900	855-945	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	0.44	2.37	6.45	$\pm 9.6\% \text{ (k=2)}$
1800	1710-1890	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.55	2.42	5.27	$\pm 10.9\% \text{ (k=2)}$
1880	1786-1974	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.56	2.58	5.24	$\pm 11.0\% \text{ (k=2)}$
2450	2400-2500	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	1.07	1.81	4.80	$\pm 9.7\% \text{ (k=2)}$

f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	793-877	Body	$55.2 \pm 5\%$	$0.97 \pm 5\%$	0.43	2.38	6.23	$\pm 9.5\% \text{ (k=2)}$
900	855-945	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	0.47	2.29	6.02	$\pm 9.6\% \text{ (k=2)}$
1800	1710-1890	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.63	2.56	4.65	$\pm 10.9\% \text{ (k=2)}$
1880	1786-1974	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.64	2.64	4.59	$\pm 11.0\% \text{ (k=2)}$
2450	2400-2500	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	1.65	1.35	4.18	$\pm 9.7\% \text{ (k=2)}$

^B The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.



T213 (EN ISO/IEC 17025)

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client Nokia Oyj, Oulu

CALIBRATION CERTIFICATE

Object(s) D1900V2 - SN:5d030

Calibration procedure(s) QA CAL-05.v2
Calibration procedure for dipole validation kits

Calibration date: April 8, 2003

Condition of the calibrated item In Tolerance (according to the specific calibration document)

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03

Calibrated by: Name Katja Pokovic Function Laboratory Director Signature 

Approved by: Name Niels Kuster Function Quality Manager Signature 

Date issued: April 11, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 04/01/03 15:53:35

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d030_SN1507_HSL1900_010403.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d030
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz; ($\sigma = 1.44 \text{ mho/m}$, $\epsilon_r = 38.78$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.5 V/m

Peak SAR = 18.4 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.42 mW/g

Power Drift = 0.03 dB



Date/Time: 04/08/03 14:15:07

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d030_SN1507_M1900_080403.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d030
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz; ($\sigma = 1.59 \text{ mho/m}$, $\epsilon_r = 51.2$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m

Peak SAR = 18.7 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.52 mW/g

Power Drift = 0.03 dB

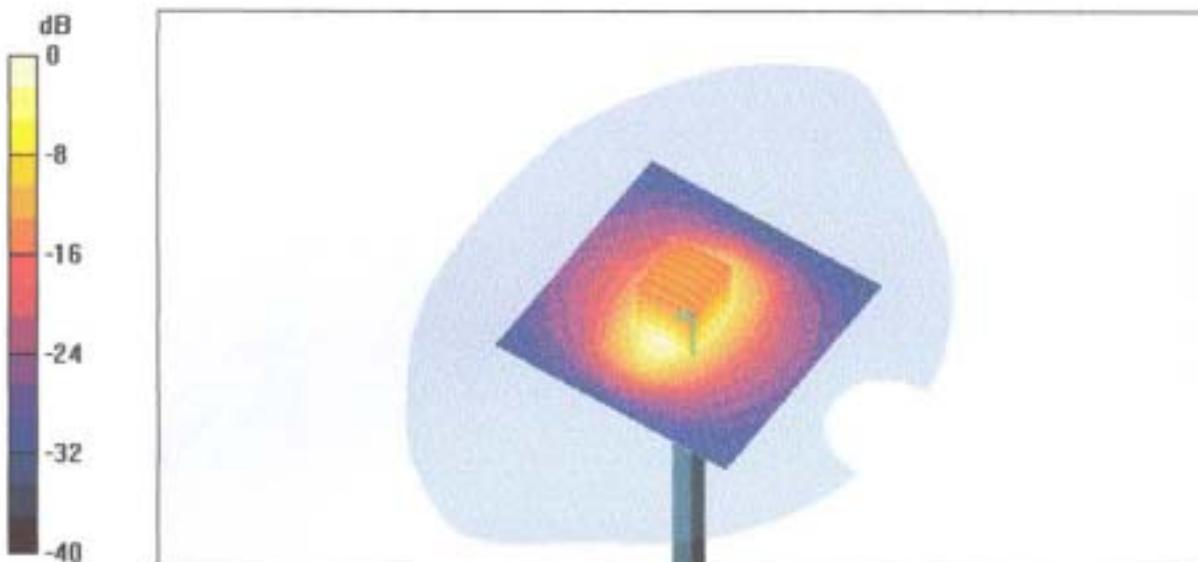



T213 (EN ISO/IEC 17025)

Amendment to SAR Compliance Test Report

Test report no.:	OULU_SAR0436_04_Amendment	Date of report:	2004-11-01
Template version:		Number of pages:	2
Testing laboratory:	<p>TCC Oulu Yrtipellontie 6 P.O. Box 300 FIN-90401 OULU Tel. +358-7180-08000 Fax. +358-7180-47222</p>	Client:	<p>Nokia Finland Elektroniikkatie 10 P.O. Box 50 FIN-90570 Oulu Tel. +358-7180-08000 Fax. +358-7180-47222</p>
Responsible test engineer:	Kai Niskala	Product contact person:	Niko Balabanis
Measurements made by:	Kai Niskala		
Tested device:	RM-8		
FCC ID:	LJPRM-8	IC:	661E-RM8
Supplement reports:			
Testing has been carried out in accordance with:	<p>47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields</p> <p>IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p>		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Oulu		
Test results:	<p>The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.</p>		

Date and signatures: 2004-11-01

For the contents:

Kai Niskala

Test Engineer



2. Description of the Device Under Test

In test report "Oulu_SAR0436_04" there was error in the "Description of the Device Under Test" -table: there is no Bluetooth (BT) functionality in the Device Under Test. BT column should be removed.

Original table:

Device category	portable			
Exposure environment	general population/uncontrolled			
Modes and Bands of Operation	GSM1900	GPRS 1900	E-GPRS1900	BT
Modulation Mode	GMSK	GMSK	8PSK	GFSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	1850.2-1909.8	1850.2-1909.8	1850.2-1909.8	2400.0 – 2483.5

Corrected table:

Device category	portable		
Exposure environment	general population/uncontrolled		
Modes and Bands of Operation	GSM1900	GPRS 1900	E-GPRS1900
Modulation Mode	GMSK	GMSK	8PSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8
Transmitter Frequency Range (MHz)	1850.2-1909.8	1850.2-1909.8	1850.2-1909.8