TCC
Nokia

FINAS
Finnish Accreditation Service
T117 (EN ISO/IEC 17025)

SAR Compliance Test Report

Test report no.:	FCC_RM-801_02	**Date of report:**	2011-09-23
Template version:	18.0	**Number of pages:**	87
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	**Client:**	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
Responsible test engineer:	Janne Hirsimäki	**Product contact person:**	Kari Koskela
Measurements made by:	Heikki Haloila, Janne Hirsimäki, Virpi Tuominen, Alina Tähkäpää		
Tested device:	RM-801		
FCC ID:	LJPRM-801	**IC:**	-
Supplement reports:	SAR_Photo_RM-801_03		
Testing has been carried out in accordance with:	**47CFR §2.1093** Radiofrequency Radiation Exposure Evaluation: Portable Devices **FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)** Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields **RSS-102** Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields **IEEE 1528 - 2003** IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	**The tested device complies with the requirements in respect of all parameters subject to the test.** The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:

For the contents:

Digitally signed by Janne Hirsimäki
DN: cn=Janne Hirsimäki, o=Nokia, ou, email=janne.hirsimaki@nokia.com, c=FI
Date: 2011.09.26 09:49:49 +03'00'

Copyright © 2011 TCC Nokia

CONTENTS

1. SUMMARY OF SAR TEST REPORT 4
1.1 TEST DETAILS 4
1.2 MAXIMUM RESULTS 4
1.2.1 Head Configuration *4*
1.2.2 Body Worn Configuration *5*
1.2.3 Maximum Drift *5*
1.2.4 Measurement Uncertainty *5*
2. DESCRIPTION OF THE DEVICE UNDER TEST 6
2.1 DESCRIPTION OF THE ANTENNA 7
3. TEST CONDITIONS 7
3.1 TEMPERATURE AND HUMIDITY 7
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER 7
3.3 TEST CASES AND TEST MINIMISATION 7
4. DESCRIPTION OF THE TEST EQUIPMENT 9
4.1 MEASUREMENT SYSTEM AND COMPONENTS 9
4.1.1 Isotropic E-field Probe Type ES3DV3 ..... *10*
4.1.2 Isotropic E-field Probe Type EX3DV4 ..... *11*
4.2 PHANTOMS 11
4.3 TISSUE SIMULANTS 11
4.3.1 Tissue Simulant Recipes *12*
4.3.2 System Checking *12*
4.3.3 Tissue Simulants used in the Measurements *14*
5. DESCRIPTION OF THE TEST PROCEDURE 15
5.1 DEVICE HOLDER 15
5.2 TEST POSITIONS 16
5.2.1 Against Phantom Head *16*
5.2.2 Body Worn Configuration *16*
5.3 SCAN PROCEDURES 16
5.4 SAR AVERAGING METHODS 17
6. MEASUREMENT UNCERTAINTY 18
7. RESULTS 19
APPENDIX A: SYSTEM CHECKING SCANS 26
APPENDIX B: MEASUREMENT SCANS 37
APPENDIX C: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA 85
APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S) 86

Copyright © 2011 TCC Nokia

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S) 87

Copyright © 2011 TCC Nokia

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2011-08-08 to 2011-08-24
SN, HW and SW numbers of tested device	SN: 004402/13/553891/0, HW: 1100, SW: 1600.1800.7720.11300, DUT: 15785 SN: 004402/13/553871/2, HW: 1100 , SW: 1600.1800.7720.11300, DUT: 15784
Batteries used in testing	-
Headsets used in testing	WH-902, DUT: 15924, 15925
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / *f* (MHz)	Conducted power	Position	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
3-slot GPRS850	128 / 824.2	28.5 dBm	Left, Cheek	1.13 W/kg	**1.27 W/kg**	1.6 W/kg	PASSED
3-slot GPRS1900	512 / 1850.2	25.5 dBm	Left, Cheek	0.937 W/kg	**1.05 W/kg**	1.6 W/kg	PASSED
WCDMA1900	9262 / 1852.4	23.5 dBm	Left, Cheek	1.03 W/kg	**1.15 W/kg**	1.6 W/kg	PASSED
WLAN2450	11 / 2462.0	13.0 dBm	Right, Cheek	0.488 W/kg	**0.55 W/kg**	1.6 W/kg	PASSED
3-slot GPRS850 + WLAN2450	-	-	Right, Cheek	1.13 W/kg	**1.27 W/kg**	1.6 W/kg	PASSED
3-slot GPRS1900 + WLAN2450	-	-	Left, Cheek	0.976 W/kg	**1.09 W/kg**	1.6 W/kg	PASSED
WCDMA1900 + WLAN2450	-	-	Right, Cheek	1.03 W/kg	**1.15 W/kg**	1.6 W/kg	PASSED

Copyright © 2011 TCC Nokia

1.2.2 Body Worn Configuration

Mode	Ch / *f* (MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Scaled* SAR value (1g avg)	SAR limit (1g avg)	Result
3-slot GPRS850	251 / 828.8	28.5 dBm	1.5cm	0.950 W/kg	**1.06 W/kg**	1.6 W/kg	PASSED
3-slot GPRS1900	512 / 1850.2	25.5 dBm	1.5cm	0.570 W/kg	**0.64 W/kg**	1.6 W/kg	PASSED
WCDMA1900	9262 / 1852.4	23.5 dBm	1.5cm	0.746 W/kg	**0.84 W/kg**	1.6 W/kg	PASSED
WLAN2450	11 / 2462.0	15.0 dBm	1.5cm	0.057 W/kg	**0.06 W/kg**	1.6 W/kg	PASSED
3-slot GPRS850 + WLAN2450	-	-	1.5cm	0.968 W/kg	**1.08 W/kg**	1.6 W/kg	PASSED
3-slot GPRS1900 + WLAN2450	-	-	1.5cm	0.570 W/kg	**0.64 W/kg**	1.6 W/kg	PASSED
WCDMA1900 + WLAN2450	-	-	1.5cm	0.771 W/kg	**0.86 W/kg**	1.6 W/kg	PASSED

* SAR values are scaled up by 12% to cover measurement drift. As a consequence of this upwards correction of the SAR values, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

1.2.3 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.47dB

1.2.4 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 25.8%

Copyright © 2011 TCC Nokia

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Bands	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)
GSM	850 1900	GMSK	1/8	824 – 849 1850 – 1910
GPRS	850 1900	GMSK	1/8 to 4/8	824 – 849 1850 – 1910
EGPRS	850 1900	GMSK / 8PSK	1/8 to 4/8	824 – 849 1850 – 1910
WCDMA	1900 (Band II)		1	1852 – 1908
HSUPA	1900 (Band II)		1	1852 – 1908
BT	2450	GFSK	1	2402 – 2480
WLAN b-mode	2450	Up to 11Mbps QPSK	1	2412 – 2462
WLAN g-mode	2450	Up to 54Mbps 64QAM	1	2412 – 2462
WLAN n-mode 20MHz	2450	Up to 72.2Mbps 64QAM	1	2412 – 2462

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, GSM/GPRS/EGPRS1800, WCDMA900 and WCDMA2100 bands which are not part of this filing.

This device has Voice-over-IP/Dual Transfer Mode capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom. Dual Transfer Mode is a feature that utilises the multi-slot GPRS capability in this device; it allows simultaneous transmission of voice and data during the same call, using the same transmitter and antenna.

This is a WCDMA HSUPA device, but SAR tests for HSUPA mode have not been performed as no HSUPA Sub-test mode has an average power > 0.25dB above the basic WCDMA 12.2kbps RMC mode. Appendix C of this report gives a summary of the measured WCDMA and HSUPA average powers; a detailed report of these WCDMA and HSUPA conducted power tests is submitted separately.

Copyright © 2011 TCC Nokia

2.1 Description of the Antenna

The device has internal antennas for both cellular and WLAN use. The cellular antenna is located at the bottom underneath the back cover. The WLAN antenna is located at the top underneath the back cover.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 – 22.7
Ambient humidity (RH %):	44 - 60

3.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester except for testing WLAN2450 where control software was used. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The transmission mode of the device in all WCDMA tests was configured to 12.2kbps RMC with all TPC bits set as “1”.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing. The results are given in the EMC report supporting this application.

The transmission mode of the device in all WLAN b-mode tests was DSSS QPSK 11Mbps. This mode has the highest (or equal highest) time-averaged output power of all the WLAN b and g modulation modes in Nokia devices. In WLAN n-mode, BPSK 6.5Mbps with 20MHz bandwidth was used.

3.3 Test Cases and Test Minimisation

The tested device examined in this report may not incorporate all of the features described in the text that follows, but its SAR evaluation will have been subjected to the same considerations and test logic described below.

Copyright © 2011 TCC Nokia

Whilst it's possible to identify the maximum SAR test cases from inspection of the conducted power levels given in the Results tables (Section 7), different modes in the same band and multi-slot transmit GSM/GPRS modes can create some difficulties. Therefore the sequence of the SAR tests made in evaluating this device has used test logic that is based on measured SAR values. Comparison of measured SAR values in this way, can also allow some test minimization (i.e. test elimination) to be made.

For example, when SAR testing multi-slot GSM/GPRS/EGPRS modes, it is an inefficient use of test resources to fully SAR test every test configuration in each of the different modes as these modes have a fixed power relationship between them that is the same, irrespective of the test configuration. In the case of multi-slot GSM/GPRS modes, a single comparative SAR test - using the same test channel and test configuration – is made in each of the n-slot modes; the mode with the highest measured SAR value is then subjected to full SAR testing in all test configurations. These comparative SAR tests (same frequency, same test configuration) are regarded as extremely accurate as they are relative tests in which the tested device changes neither its frequency nor its position between tests. For different modes that operate in the same band and use the same antenna e.g. GSM/GPRS850 and WCDMA850, full SAR testing is carried out in the GSM/GPRS850 mode but WCDMA850 testing is limited to 3 channel testing in the maximum SAR test configuration for GSM/GPRS850.

Multi-slot SAR testing against the Head is always performed whenever such a device offers Push to Talk over cellular with the internal earpiece active, Dual Transfer Mode (i.e. the ability to transmit voice and data simultaneously using the same transmitter) or has WLAN (which enables a Voice over IP call to take place whilst the device can simultaneously transmit data on a cellular band). Whenever a device has an intended multi-slot use against the head, it is also Head SAR tested in EGPRS mode. It should be noted that EGPRS transmit modes can have either GMSK or 8PSK modulation but, when tested, only 8PSK EGPRS will appear explicitly in the results tables, as GMSK EGPRS mode has identical time-averaged power to the reported GPRS mode.

Devices that have flips or slides are fully SAR tested in all device configurations consistent with their intended usage. For example, flip phones that can receive a call in closed mode are SAR tested against the head in both open and closed configurations. Similarly, slide phones are fully SAR tested in all slide configurations in which calls are intended to be made or received.

In the results tables in Section 7, the maximum SAR value for the ‘basic’ tests (i.e. left cheek, left tilt, right cheek and right tilt in Head SAR testing; with and without headset with the back &/or display side facing the flat phantom in Body SAR testing) is bolded for each band. In some cases, after full testing of the basic SAR test configurations has been completed, additional checking SAR tests are made. These checking tests are always based on the bolded result from the ‘basic’ testing. When the SAR value of a checking test exceeds the maximum value from the basic tests, it is also bolded and used as the basis for any further checking tests that might be needed.

Copyright © 2011 TCC Nokia

Checking tests are largely voluntary and can cover optional batteries, different camera slide positions, optional covers, etc. In the case of optional batteries, if the construction of the optional battery is significantly different to the battery used in the full testing e.g. if the outer can is floating electrically rather than grounded, then the maximum SAR test configuration in each band is tested with the optional battery in 3 channels. For camera slides, if the slide material is metal, then checking tests in 3 channels are again run for the maximum SAR test configuration in each band. For plastic camera slides, SAR checking is only carried out in the channel that provided the maximum SAR value for the original. Optional front and back covers are tested if their shape differs significantly from the original or if their metallic content varies by more than 15% from the original; in the former case, the testing depends on the extent of the physical differences, whereas in the latter case, 3 channel SAR testing is performed in every band in the max SAR test configuration.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE 4	538	12 months	2011-09
DAE 4	555	12 months	2012-02
DAE 4	793	12 months	2011-09
E-field Probe ES3DV3	3194	12 months	2011-09
E-field Probe ES3DV3	3165	12 months	2012-02
E-field Probe EX3DV4	3573	12 months	2012-02
Dipole Validation Kit, D835V2	480	24 months	2011-10
Dipole Validation Kit, D1900V2	5d013	24 months	2012-03
Dipole Validation Kit, D2450V2	749	24 months	2011-10
DASY4 software	Version 4.7	-	-
DASY5 software	Version 52.6.1.408	-	-

Copyright © 2011 TCC Nokia

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SML03	101265	12 months	2011-08
Amplifier	ZHL-42 (SMA)	N072095-5	12 months	2011-08
Power Meter	NRVS	838624/032	12 months	2011-08
Power Sensor	NRV-Z32	839176/020	12 months	2011-08
Call Tester	CMU 200	101111	-	-
Call Tester	CMU 200	103293	-	-
Vector Network Analyzer	8753E	US38432928	12 months	2011-08
Dielectric Probe Kit	85070B	US33020420	-	-
Signal Generator	E4436B	US39260114	12 months	2011-08
Amplifier	5S1G4	25583	12 months	2011-08
Power Meter	NRVS	849305/028	12 months	2011-08
Power Sensor	NRV-Z32	100067	12 months	2011-12

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

Copyright © 2011 TCC Nokia

4.1.2 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g, Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 10 mm Body diameter: 12 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within ± 5% of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

Copyright © 2011 TCC Nokia

The depth of the tissue simulant was at least 15.0 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	51.50	69.25
Tween 20	47.35	30.00
Salt	1.15	0.75

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.50	70.25
Tween 20	45.23	29.41
Salt	0.27	0.34

2450MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	56.0	70.20
Tween 20	44.0	29.62
Salt	-	0.18

4.3.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

Copyright © 2011 TCC Nokia

System checking, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			εr	σ [S/m]	
835	Reference result	2.36	40.5	0.88	
	± 10% window	2.12 – 2.60			
	2011-08-12	2.46	40.4	0.91	21.0
	2011-08-23	2.45	39.9	0.89	21.0
1900	Reference result	10.2	41.2	1.45	
	± 10% window	9.2 – 11.2			
	2011-08-08	10.9	39.4	1.43	21.0
	2011-08-09	10.8	39.2	1.39	21.0
	2011-08-10	10.9	39.3	1.40	21.0
	2011-08-19	11.1	39.2	1.45	21.0
	2011-08-22	11.1	39.4	1.40	21.0
2450	Reference result	13.2	39.1	1.78	
	± 10% window	11.9 – 14.5			
	2011-08-11	13.6	37.5	1.81	21.0
	2011-08-18	13.7	37.2	1.82	21.0

System checking, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			εr	σ [S/m]	
835	Reference result	2.52	53.2	1.01	
	± 10% window	2.27 – 2.77			
	2011-08-24	2.51	53.5	1.01	21.0
2450	Reference result	12.5	52.7	1.98	
	± 10% window	11.2 – 13.8			
	2011-08-17	12.7	50.6	1.97	21.0

Plots of the system checking scans are given in Appendix A.

Copyright © 2011 TCC Nokia

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ε_r	σ [S/m]	
836	Recommended value	41.5	0.90	
	± 5% window	39.4 – 43.6	0.86 – 0.95	
	2011-08-12	40.3	0.91	21.0
	2011-08-23	39.9	0.89	21.0
1880	Recommended value	40.0	1.40	
	± 5% window	38.0 – 42.0	1.33 – 1.47	
	2011-08-08	39.5	1.41	21.0
	2011-08-09	39.3	1.37	21.0
	2011-08-19	39.3	1.43	21.0
	2011-08-22	39.5	1.38	21.0
2442	Recommended value	39.2	1.79	
	± 5% window	37.3 – 41.2	1.70 – 1.88	
	2011-08-11	37.6	1.80	21.0
	2011-08-18	37.3	1.81	21.0

Copyright © 2011 TCC Nokia

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ε_r	σ [S/m]	
836	Recommended value	55.2	0.97	
	± 5% window	52.4 – 58.0	0.92 – 1.02	
	2011-08-23	53.4	0.98	21.0
	2011-08-24	53.5	1.01	21.0
1880	Recommended value	53.3	1.52	
	± 5% window	50.6 – 56.0	1.44 – 1.60	
	2011-08-09	53.0	1.49	21.0
	2011-08-10	52.6	1.49	21.0
	2011-08-19	52.5	1.54	21.0
2442	Recommended value	52.7	1.94	
	± 5% window	50.1 – 55.3	1.85 – 2.04	
	2011-08-17	50.6	1.96	21.0
	2011-08-18	50.5	1.97	21.0

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.

Device holder supplied by SPEAG

Copyright © 2011 TCC Nokia

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.

Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

Nokia body-worn accessories are commonly available for the separation distance used in this testing.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

Copyright © 2011 TCC Nokia

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

Copyright © 2011 TCC Nokia

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i . u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	±5.9	N	1	1	±5.9	∞
Axial Isotropy	E2.2	±4.7	R	√3	$(1-c_p)^{1/2}$	±1.9	∞
Hemispherical Isotropy	E2.2	±9.6	R	√3	$(c_p)^{1/2}$	±3.9	∞
Boundary Effect	E2.3	±1.0	R	√3	1	±0.6	∞
Linearity	E2.4	±4.7	R	√3	1	±2.7	∞
System Detection Limits	E2.5	±1.0	R	√3	1	±0.6	∞
Readout Electronics	E2.6	±1.0	N	1	1	±1.0	∞
Response Time	E2.7	±0.8	R	√3	1	±0.5	∞
Integration Time	E2.8	±2.6	R	√3	1	±1.5	∞
RF Ambient Conditions - Noise	E6.1	±3.0	R	√3	1	±1.7	∞
RF Ambient Conditions - Reflections	E6.1	±3.0	R	√3	1	±1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	±0.4	R	√3	1	±0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	±2.9	R	√3	1	±1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	±3.9	R	√3	1	±2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	±6.0	N	1	1	±6.0	11
Device Holder Uncertainty	E4.1	±5.0	N	1	1	±5.0	7
Output Power Variation - SAR drift measurement	6.6.3	±0.0	R	√3	1	±0.0	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	±4.0	R	√3	1	±2.3	∞
Conductivity Target - tolerance	E3.2	±5.0	R	√3	0.64	±1.8	∞
Conductivity - measurement uncertainty	E3.3	±5.5	N	1	0.64	±3.5	5
Permittivity Target - tolerance	E3.2	±5.0	R	√3	0.6	±1.7	∞
Permittivity - measurement uncertainty	E3.3	±2.9	N	1	0.6	±1.7	5
Combined Standard Uncertainty			RSS			**±12.9**	116
Coverage Factor for 95%			**k=2**				
Expanded Uncertainty						**±25.8**	

Copyright © 2011 TCC Nokia

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

850MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
GSM	**Conducted Power**		**-**	**32.5 dBm**	**-**
	Left	Cheek	-	0.723	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot GPRS	**Conducted Power**		**-**	**30.0 dBm**	**-**
	Left	Cheek	-	0.922	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	**Conducted Power**		**28.5 dBm**	**28.5 dBm**	**28.5 dBm**
	Left	Cheek	**1.13**	1.02	0.974
		Tilt	-	0.608	-
	Right	Cheek	0.969	0.920	0.819
		Tilt	-	0.478	-
4-slot GPRS	**Conducted Power**		**-**	**27.0 dBm**	**-**
	Left	Cheek	-	0.875	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot 8PSK EGPRS	**Conducted Power**		**24.0 dBm**	**-**	**-**
	Left	Cheek	0.313	-	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-

Copyright © 2011 TCC Nokia

1900MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
GSM	Conducted Power		-	30.0 dBm	-
	Left	Cheek	-	0.335	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
2-slot GPRS	Conducted Power		-	27.0 dBm	-
	Left	Cheek	-	0.582	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot GPRS	Conducted Power		25.5 dBm	25.5 dBm	25.5 dBm
	Left	Cheek	**0.937**	0.729	0.594
		Tilt	-	0.243	-
	Right	Cheek	-	0.580	-
		Tilt	-	0.314	-
4-slot GPRS	Conducted Power		-	24.0 dBm	-
	Left	Cheek	-	0.675	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
3-slot 8PSK EGPRS	Conducted Power		23.0 dBm	-	-
	Left	Cheek	0.409	-	-
		Tilt	-	-	-
	Right	Cheek	-	-	-
		Tilt	-	-	-
Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 9262 1852.4 MHz	Ch 9400 1880.0 MHz	Ch 9538 1907.6 MHz
WCDMA	Conducted Power		23.5 dBm	23.5 dBm	23.5 dBm
	Left	Cheek	**1.03**	0.970	0.878
		Tilt	-	0.257	-
	Right	Cheek	0.821	0.806	0.687
		Tilt	-	0.320	-

Copyright © 2011 TCC Nokia

2450MHz Head SAR results

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 1 2412.0 MHz	Ch 7 2442.0 MHz	Ch 11 2462.0 MHz
WLAN b-mode	**Conducted Power**		**15.0 dBm**	**15.0 dBm**	**15.0 dBm**
	Left	Cheek	-	0.212	-
		Tilt	-	0.076	-
	Right	Cheek	0.370	0.409	**0.439**
		Tilt	-	0.076	-
WLAN n-mode 20MHz	**Conducted Power**		**13.0 dBm**	**13.0 dBm**	**13.0 dBm**
	Left	Cheek	-	-	-
		Tilt	-	-	-
	Right	Cheek	0.240	0.319	0.365
		Tilt	-	-	-

2450MHz Head SAR results – corrected for power drift

Mode	Test configuration		SAR, averaged over 1g (W/kg)		
			Ch 1 2412.0 MHz	Ch 7 2442.0 MHz	Ch 11 2462.0 MHz
WLAN b-mode	**Conducted Power**		**15.0 dBm**	**15.0 dBm**	**15.0 dBm**
	Left	Cheek	-	0.220	-
		Tilt	-	0.080	-
	Right	Cheek	0.372	0.438	**0.461**
		Tilt	-	0.083	-
WLAN n-mode 20MHz	**Conducted Power**		**13.0 dBm**	**13.0 dBm**	**13.0 dBm**
	Left	Cheek	-	-	-
		Tilt	-	-	-
	Right	Cheek	0.302	0.360	**0.488**
		Tilt	-	-	-

Copyright © 2011 TCC Nokia

The measured Body SAR values for the test device are tabulated below:

850MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 128 824.2 MHz	Ch 190 836.6 MHz	Ch 251 848.8 MHz
3-slot GPRS		Conducted Power	28.5 dBm	28.5 dBm	28.5 dBm
	Display facing phantom	Without headset	-	0.677	-
		Headset WH-902	-	0.582	-
	Back facing phantom	Without headset	0.912	0.927	**0.950**
		Headset WH-902	-	0.756	-

1900MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
3-slot GPRS		Conducted Power	25.5 dBm	25.5 dBm	25.5 dBm
	Display facing phantom	Without headset	-	0.523	-
		Headset WH-902	-	0.408	-
	Back facing phantom	Without headset	**0.570**	0.561	0.434
		Headset WH-902	-	0.492	-
Mode	**Device orientation**	**Test configuration**	**SAR, averaged over 1g (W/kg)**		
			Ch 9262 1852.4 MHz	**Ch 9400 1880.0 MHz**	**Ch 9538 1907.6 MHz**
WCDMA		Conducted Power	23.5 dBm	23.5 dBm	23.5 dBm
	Display facing phantom	Without headset	-	0.658	-
		Headset WH-902	-	0.547	-
	Back facing phantom	Without headset	**0.746**	0.741	0.406
		Headset WH-902	-	0.735	-

Copyright © 2011 TCC Nokia

2450MHz Body SAR results

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 1 2412.0 MHz	Ch 7 2442.0 MHz	Ch 11 2462.0 MHz
WLAN b-mode		**Conducted Power**	**15.0 dBm**	**15.0 dBm**	**15.0 dBm**
	Display facing phantom	Without headset	-	0.027	-
		Headset WH-902	-	0.030	-
	Back facing Phantom	Without headset	0.047	0.051	**0.056**
		Headset WH-902	-	0.045	-
WLAN n-mode 20MHz		**Conducted Power**	**13.0 dBm**	**13.0 dBm**	**13.0 dBm**
	Display facing phantom	Without headset	-	-	-
		Headset WH-902	-	-	-
	Back facing phantom	Without headset	0.031	0.037	0.045
		Headset WH-902	-	-	-

2450MHz Body SAR results – corrected for power drift

Mode	Device orientation	Test configuration	SAR, averaged over 1g (W/kg)		
			Ch 1 2412.0 MHz	Ch 7 2442.0 MHz	Ch 11 2462.0 MHz
WLAN b-mode		**Conducted Power**	**15.0 dBm**	**15.0 dBm**	**15.0 dBm**
	Display facing phantom	Without headset	-	0.033	-
		Headset WH-902	-	0.040	-
	Back facing Phantom	Without headset	0.051	0.056	**0.057**
		Headset WH-902	-	0.045	-
WLAN n-mode 20MHz		**Conducted Power**	**13.0 dBm**	**13.0 dBm**	**13.0 dBm**
	Display facing phantom	Without headset	-	-	-
		Headset WH-902	-	-	-
	Back facing phantom	Without headset	0.034	0.038	0.047
		Headset WH-902	-	-	-

Copyright © 2011 TCC Nokia

Simultaneous transmissions: Combined SAR results – Individual band Max results

Test configuration	Max. 1g SAR results			
	WLAN	3-slot GPRS850	3-slot GPRS1900	WCDMA 1900
Head: Left, Cheek	0.220	1.13	0.937	1.03
Head: Left, Tilt	0.080	0.608	0.243	0.257
Head: Right, Cheek	0.488	0.969	0.580	0.821
Head: Right, Tilt	0.083	0.478	0.314	0.320
Body: Display facing phantom, Without Headset	0.033	0.677	0.523	0.658
Body: Display facing phantom, Headset WH-902	0.040	0.582	0.408	0.547
Body: Back facing phantom, Without Headset	0.057	0.950	0.570	0.746
Body: Back facing phantom, Headset WH-902	0.045	0.756	0.492	0.735

Simultaneous transmissions: Combined SAR results – Max + Max combined results

Test configuration	Max. 1g SAR results		
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN	WCDMA1900 + WLAN
Head: Left, Cheek	1.350	**1.157**	1.250
Head: Left, Tilt	0.688	0.323	0.337
Head: Right, Cheek	**1.457**	1.068	**1.309**
Head: Right, Tilt	0.561	0.397	0.403
Body: Display facing phantom, Without Headset	0.710	0.556	0.691
Body: Display facing phantom, Headset WH-902	0.622	0.448	0.587
Body: Back facing phantom, Without Headset	**1.007**	**0.627**	**0.803**
Body: Back facing phantom, Headset WH-902	0.801	0.537	0.780

Copyright © 2011 TCC Nokia

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values.

Simultaneous transmissions: Combined SAR results – SPEAG Combined Multiband algorithm results

Test configuration	Max. 1g SAR results		
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN	WCDMA1900 + WLAN
Head: Left, Cheek	-	**0.976**	-
Head: Left, Tilt	-	-	-
Head: Right, Cheek	**0.990**	-	**1.01**
Head: Right, Tilt	-	-	-
Body: Display facing phantom, Without Headset	-	-	-
Body: Display facing phantom, Headset WH-902	-	-	-
Body: Back facing phantom, Without Headset	**0.968**	**0.565**	**0.771**
Body: Back facing phantom, Headset WH-902	-	-	-

Some of the Combined SAR values in the above table are less than the maximum SAR values for the contributing cellular band. This is due to a) minimal overlap of the SAR distributions of the cellular band with WLAN2450 and b) uncertainties associated with the different methods of calculation. In these cases, the maximum SAR values given for the combined Modes in the Summary table in Section 1.2 are those for the individual cellular band.

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product. The Combined SAR data given in the tables above has been voluntarily calculated.

Plots of the Measurement scans are given in Appendix B.

Copyright © 2011 TCC Nokia

APPENDIX A: SYSTEM CHECKING SCANS

Date/Time: 2011-08-12 07:29:53, Date/Time: 2011-08-12 07:35:38

Test Laboratory: TCC Nokia
Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL850; Medium Notes: t= 21.8 C
Medium parameters used: f = 835 MHz; σ = 0.909 mho/m; ε_r = 40.4; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.61 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 53.5 V/m
Peak SAR (extrapolated) = 3.76 W/kg
SAR(1 g) = 2.46 mW/g
SAR(10 g) = 1.58 mW/g
Power Drift = 0.074 dB
Maximum value of SAR (measured) = 2.64 mW/g

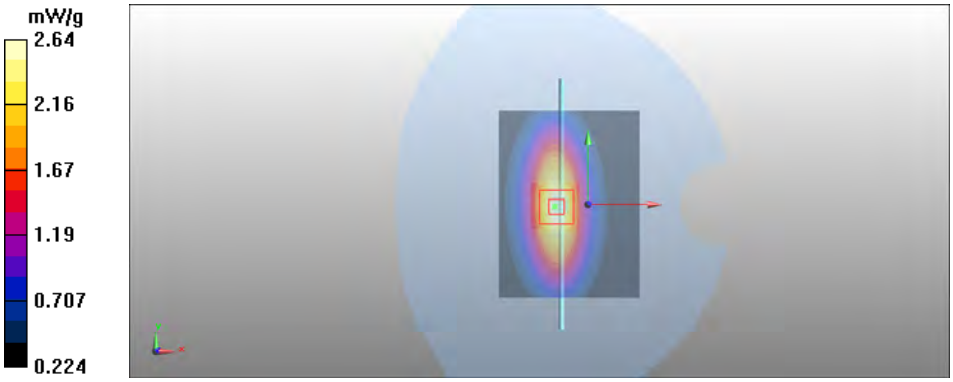

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 12:14:44, Date/Time: 2011-08-23 12:20:30

Test Laboratory: TCC Nokia
Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW850
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL900; Medium Notes: t= 21.0 C
Medium parameters used: f = 835 MHz; σ = 0.89 mho/m; ε_r = 39.9; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.63 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.1 V/m
Peak SAR (extrapolated) = 3.73 W/kg
SAR(1 g) = 2.45 mW/g
SAR(10 g) = 1.59 mW/g
Power Drift = 0.00496 dB
Maximum value of SAR (measured) = 2.65 mW/g

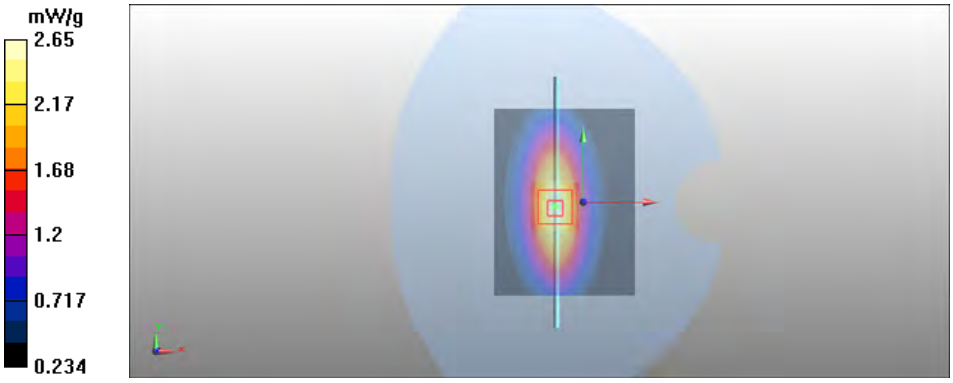

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-08 08:35:51, Date/Time: 2011-08-08 09:01:22

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1900 MHz; σ = 1.43 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12.4 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.5 V/m
Peak SAR (extrapolated) = 20.6 W/kg
SAR(1 g) = 10.9 mW/g
SAR(10 g) = 5.65 mW/g
Power Drift = 0.025 dB
Maximum value of SAR (measured) = 12.3 mW/g

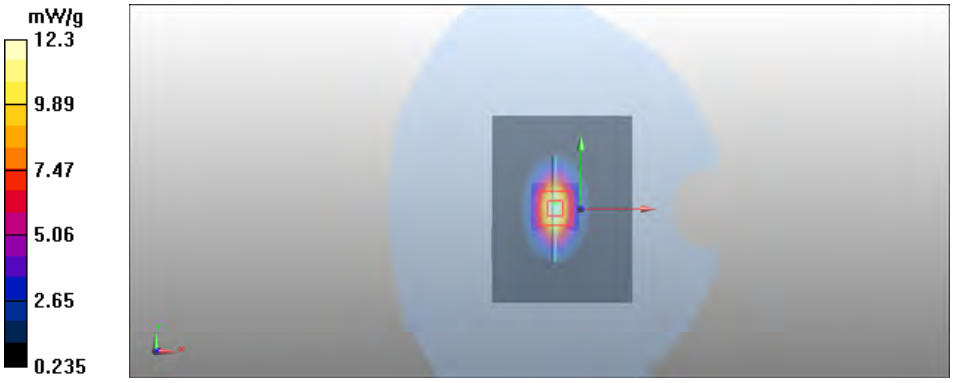

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-09 09:20:18, Date/Time: 2011-08-09 09:26:14

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1900 MHz; σ = 1.39 mho/m; ε_r = 39.2; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12.7 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 92.3 V/m
Peak SAR (extrapolated) = 20.5 W/kg
SAR(1 g) = 10.8 mW/g
SAR(10 g) = 5.6 mW/g
Power Drift = 0.184 dB
Maximum value of SAR (measured) = 12.1 mW/g

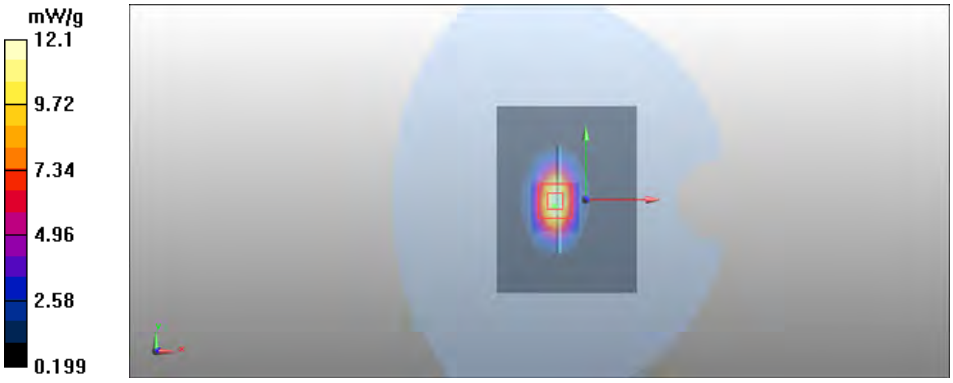

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-10 09:28:51, Date/Time: 2011-08-10 09:34:43

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1900 MHz; σ = 1.4 mho/m; ε_r = 39.3; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12.8 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.7 V/m
Peak SAR (extrapolated) = 20.7 W/kg
SAR(1 g) = 10.9 mW/g
SAR(10 g) = 5.59 mW/g
Power Drift = 0.058 dB
Maximum value of SAR (measured) = 12.2 mW/g

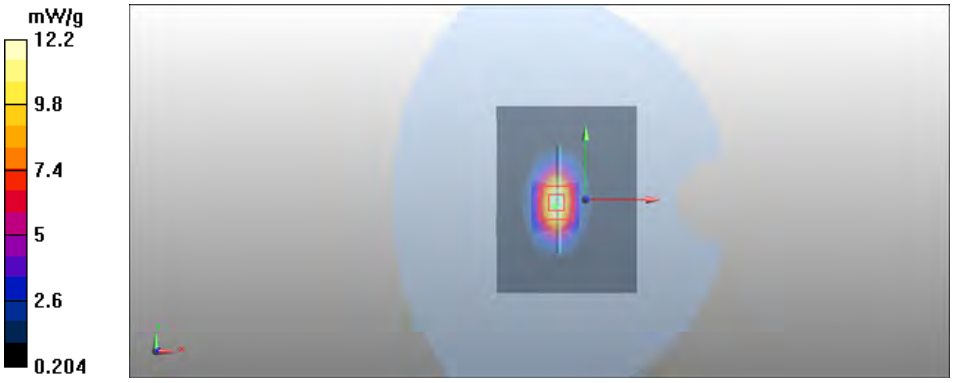

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 08:27:49, Date/Time: 2011-08-19 08:51:25

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 21.8 C
Medium parameters used: f = 1900 MHz; σ = 1.45 mho/m; ε_r = 39.2; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.2 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.8 V/m
Peak SAR (extrapolated) = 20.9 W/kg
SAR(1 g) = 11.1 mW/g
SAR(10 g) = 5.72 mW/g
Power Drift = -0.0077 dB
Maximum value of SAR (measured) = 12.3 mW/g

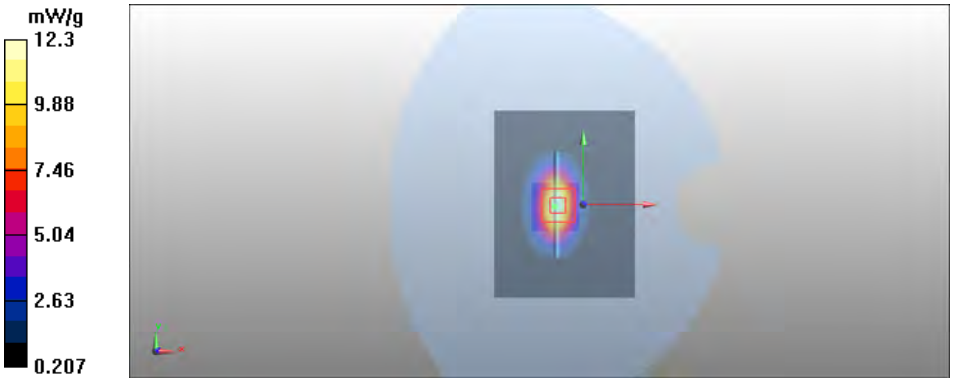

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-22 09:24:07, Date/Time: 2011-08-22 09:27:34

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW1900
Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.1 C
Medium parameters used: f = 1900 MHz; σ = 1.4 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12.9 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 91.2 V/m
Peak SAR (extrapolated) = 21.2 W/kg
SAR(1 g) = 11.1 mW/g
SAR(10 g) = 5.7 mW/g
Power Drift = 0.072 dB
Maximum value of SAR (measured) = 12.4 mW/g

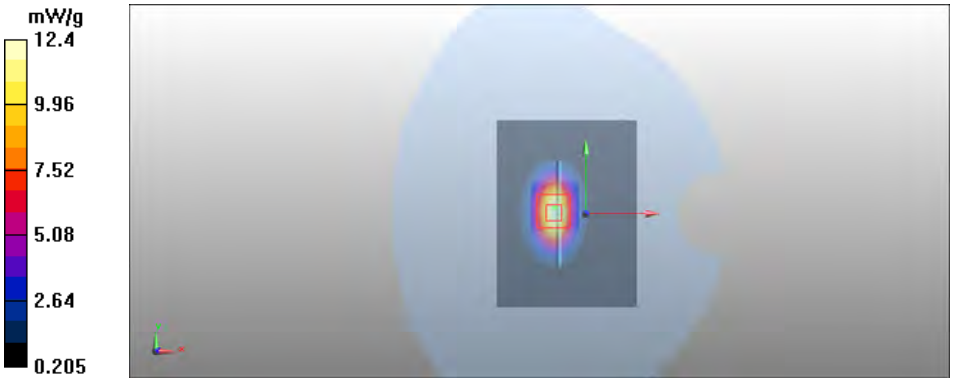

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-11 13:04:03, Date/Time: 2011-08-11 13:09:56

Test Laboratory: TCC Nokia
Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW2450
Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.1 C
Medium parameters used: f = 2450 MHz; σ = 1.81 mho/m; ε_r = 37.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 16.8 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 90.4 V/m
Peak SAR (extrapolated) = 28.5 W/kg
SAR(1 g) = 13.6 mW/g
SAR(10 g) = 6.3 mW/g
Power Drift = 0.012 dB
Maximum value of SAR (measured) = 15.3 mW/g

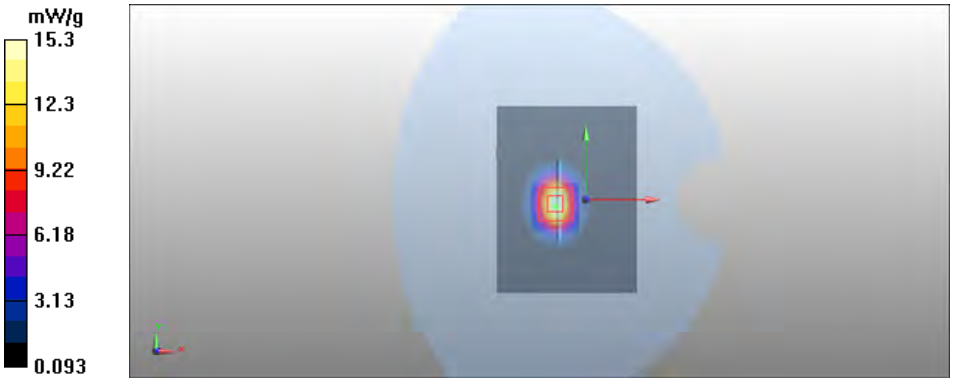

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-18 08:49:26, Date/Time: 2011-08-18 08:55:23

Test Laboratory: TCC Nokia
Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW2450
Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.3 C
Medium parameters used: f = 2450 MHz; σ = 1.82 mho/m; ε_r = 37.2; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 16.8 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 90.8 V/m
Peak SAR (extrapolated) = 28.9 W/kg
SAR(1 g) = 13.7 mW/g
SAR(10 g) = 6.35 mW/g
Power Drift = 0.020 dB
Maximum value of SAR (measured) = 15.5 mW/g

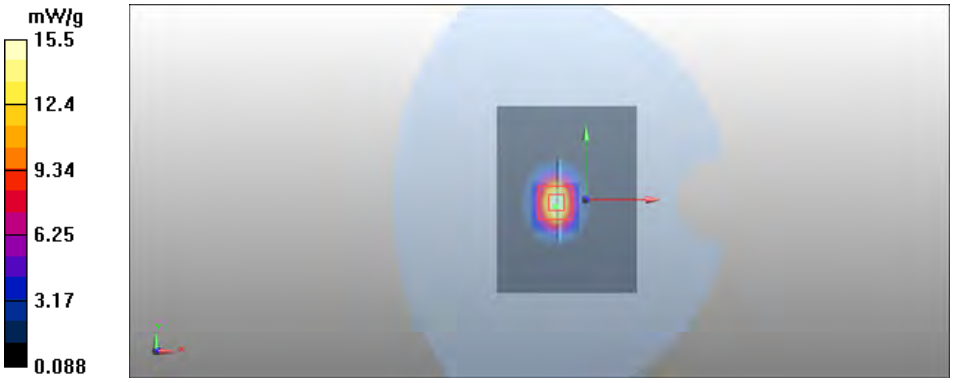

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-24 07:21:31, Date/Time: 2011-08-24 07:27:12

Test Laboratory: TCC Nokia
Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW835
Frequency: 835 MHz; Duty Cycle: 1:1
Medium: BSL850; Medium Notes: t= 21.2 C
Medium parameters used: f = 835 MHz; σ = 1.01 mho/m; ε_r = 53.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.66 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 52 V/m
Peak SAR (extrapolated) = 3.79 W/kg
SAR(1 g) = 2.51 mW/g
SAR(10 g) = 1.63 mW/g
Power Drift = 0.040 dB
Maximum value of SAR (measured) = 2.72 mW/g

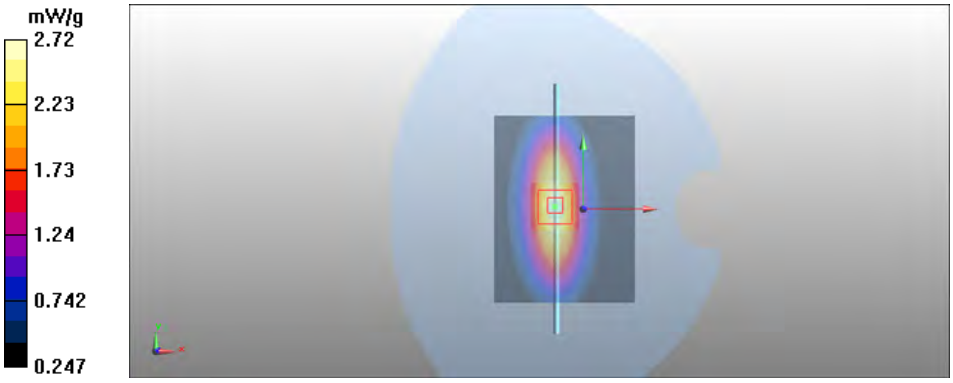

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-17 09:39:22, Date/Time: 2011-08-17 09:45:41

Test Laboratory: TCC Nokia
Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW2450
Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: BSL2450; Medium Notes: t= 21.3 C
Medium parameters used: f = 2450 MHz; σ = 1.97 mho/m; ε_r = 50.6; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/d=15mm, Pin=250mW/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 14.9 mW/g

Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 85.1 V/m
Peak SAR (extrapolated) = 25.9 W/kg
SAR(1 g) = 12.7 mW/g
SAR(10 g) = 5.87 mW/g
Power Drift = -0.030 dB
Maximum value of SAR (measured) = 14.5 mW/g

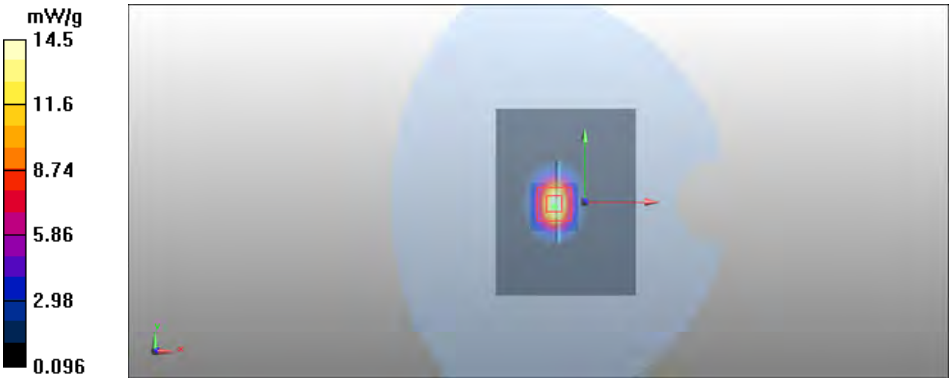

Copyright © 2011 TCC Nokia

APPENDIX B: MEASUREMENT SCANS

Date/Time: 2011-08-23 13:57:47, Date/Time: 2011-08-23 14:04:20

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: GSM850
Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: HSL900; Medium Notes: t= 21.0 C
Medium parameters used: f = 837 MHz; σ = 0.89 mho/m; ε_r = 39.9; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

GSM - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.773 mW/g

GSM - Left/Cheek - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.69 V/m
Peak SAR (extrapolated) = 0.909 W/kg
SAR(1 g) = 0.723 mW/g
SAR(10 g) = 0.538 mW/g
Power Drift = -0.091 dB
Maximum value of SAR (measured) = 0.766 mW/g

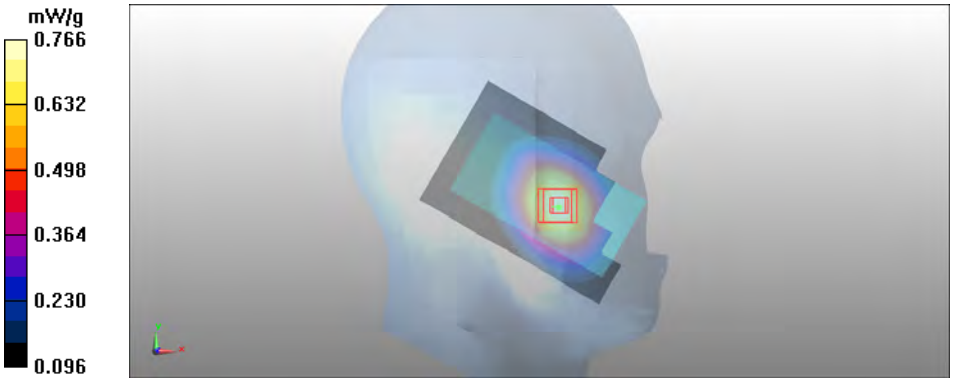

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 08:20:01, Date/Time: 2011-08-12 08:32:46

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 2-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:4.19952
Medium: HSL850; Medium Notes: t= 21.8 C
Medium parameters used: f = 837 MHz; σ = 0.91 mho/m; ε_r = 40.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.974 mW/g

2-slot GPRS - Left/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.8 V/m
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.922 mW/g
SAR(10 g) = 0.685 mW/g
Power Drift = -0.163 dB
Maximum value of SAR (measured) = 0.978 mW/g

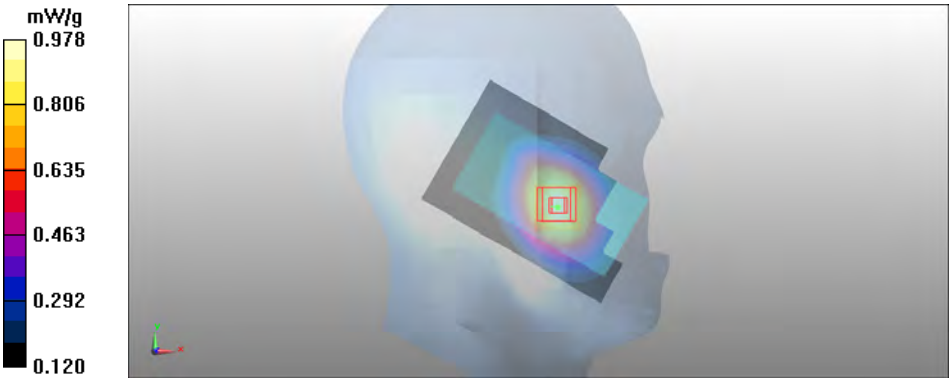

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 10:41:23, Date/Time: 2011-08-12 10:45:01

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 824.2 MHz; Duty Cycle: 1:2.80027
Medium: HSL850; Medium Notes: t= 21.8 C
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.901 mho/m; ε_r = 40.4; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Left/Cheek - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.19 mW/g

3-slot GPRS - Left/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.86 V/m
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 1.13 mW/g
SAR(10 g) = 0.840 mW/g
Power Drift = 0.027 dB
Maximum value of SAR (measured) = 1.19 mW/g

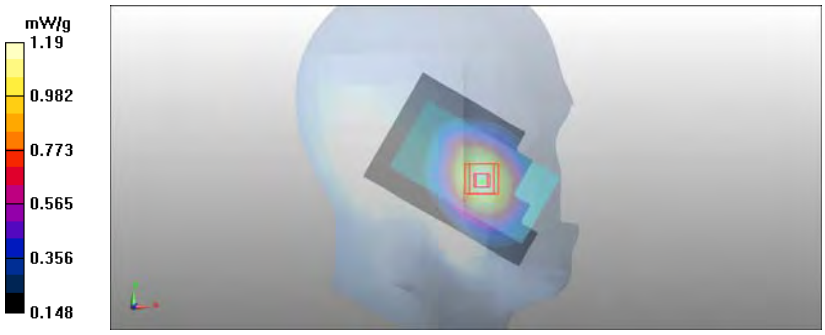

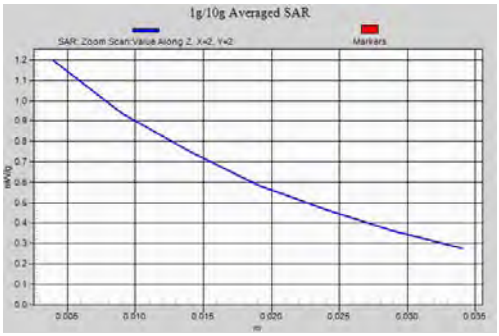

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 10:30:45, Date/Time: 2011-08-12 10:34:24

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:2.80027
Medium: HSL850; Medium Notes: t= 21.8 C
Medium parameters used: f = 837 MHz; σ = 0.91 mho/m; ε_r = 40.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Left/Tilt - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.659 mW/g

3-slot GPRS - Left/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 14.6 V/m
Peak SAR (extrapolated) = 0.754 W/kg
SAR(1 g) = 0.608 mW/g
SAR(10 g) = 0.462 mW/g
Power Drift = -0.250 dB
Maximum value of SAR (measured) = 0.637 mW/g

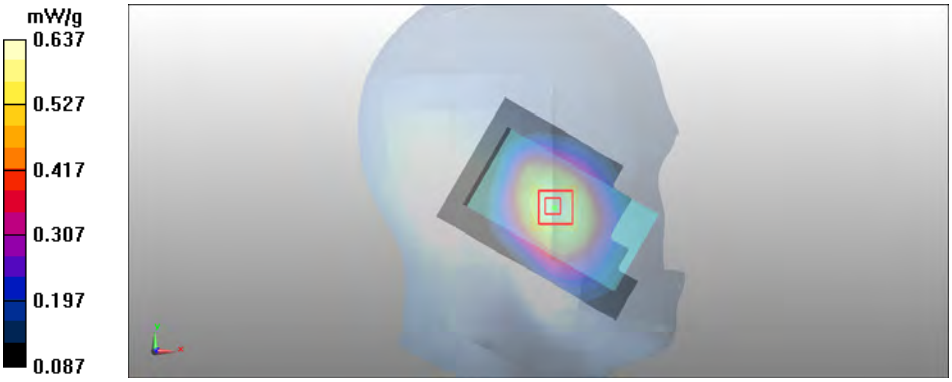

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 14:26:17, Date/Time: 2011-08-23 14:32:10

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 824.2 MHz; Duty Cycle: 1:2.80027
Medium: HSL900; Medium Notes: t= 21.0 C
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.883 mho/m; ε_r = 40; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Right/Cheek - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.955 mW/g

3-slot GPRS - Right/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.93 V/m
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.969 mW/g
SAR(10 g) = 0.726 mW/g
Power Drift = 0.209 dB
Maximum value of SAR (measured) = 1.02 mW/g

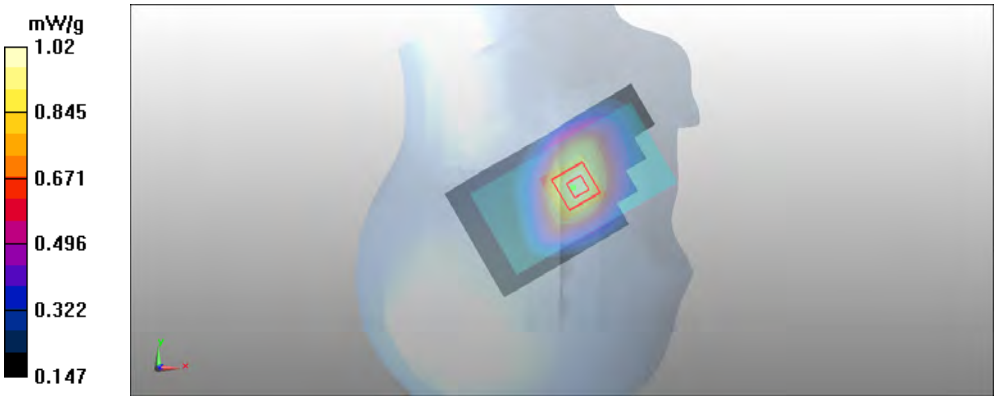

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 11:18:50, Date/Time: 2011-08-12 11:22:17

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:2.80027
Medium: HSL850; Medium Notes: t= 21.8 C
Medium parameters used: f = 837 MHz; σ = 0.91 mho/m; ε_r = 40.3; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Right/Tilt - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.500 mW/g

3-slot GPRS - Right/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.7 V/m
Peak SAR (extrapolated) = 0.594 W/kg
SAR(1 g) = 0.478 mW/g
SAR(10 g) = 0.359 mW/g
Power Drift = -0.042 dB
Maximum value of SAR (measured) = 0.501 mW/g

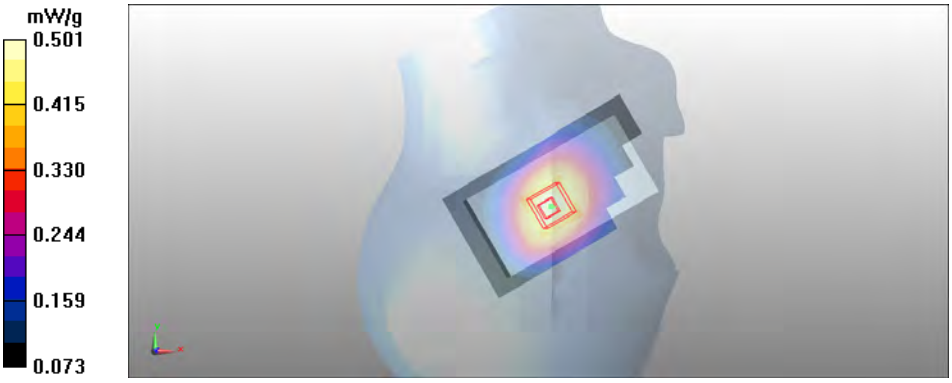

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 09:00:38, Date/Time: 2011-08-12 09:07:02

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 4-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:2.09991
Medium: HSL850; Medium Notes: t= 21.8 C
Medium parameters used: f = 837 MHz; σ = 0.91 mho/m; ε_r = 40.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.926 mW/g

4-slot GPRS - Left/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.81 V/m
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.875 mW/g
SAR(10 g) = 0.647 mW/g
Power Drift = -0.102 dB
Maximum value of SAR (measured) = 0.926 mW/g

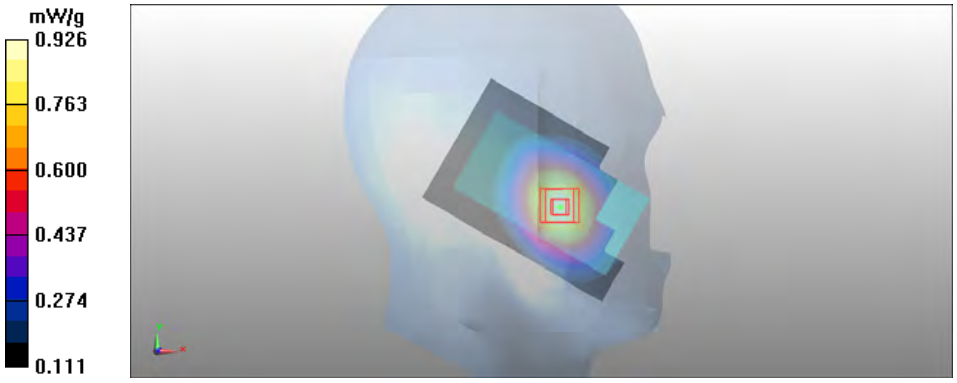

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 15:18:27, Date/Time: 2011-08-23 15:24:54

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot 8PSK EGPRS850
Frequency: 824.2 MHz; Duty Cycle: 1:2.80027
Medium: HSL900; Medium Notes: t= 21.0 C
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.883 mho/m; ε_r = 40; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(6.09, 6.09, 6.09); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 3; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot 8PSK EGPRS - Left/Cheek - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.328 mW/g

3-slot 8PSK EGPRS - Left/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 4.93 V/m
Peak SAR (extrapolated) = 0.421 W/kg
SAR(1 g) = 0.313 mW/g
SAR(10 g) = 0.229 mW/g
Power Drift = 0.262 dB
Maximum value of SAR (measured) = 0.332 mW/g

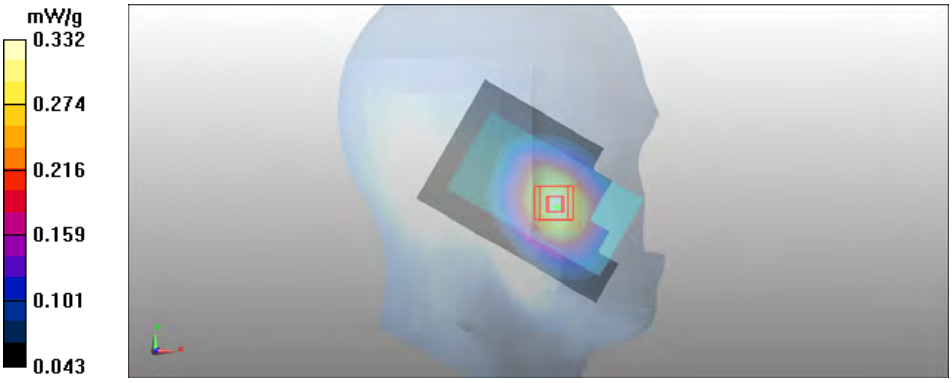

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-09 14:25:39, Date/Time: 2011-08-09 14:32:35

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: GSM1900
Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1880 MHz; σ = 1.37 mho/m; ε_r = 39.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

GSM - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.361 mW/g

GSM - Left/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.71 V/m
Peak SAR (extrapolated) = 0.514 W/kg
SAR(1 g) = 0.335 mW/g
SAR(10 g) = 0.210 mW/g
Power Drift = -0.167 dB
Maximum value of SAR (measured) = 0.354 mW/g

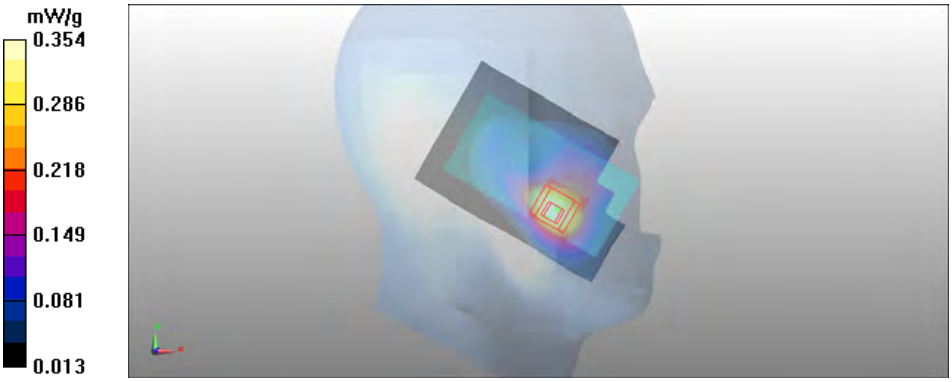

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 11:20:59, Date/Time: 2011-08-19 11:25:26

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 2-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium: HSL1900; Medium Notes: t= 21.8 C
Medium parameters used: f = 1880 MHz; σ = 1.43 mho/m; ε_r = 39.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

2-slot GPRS - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.618 mW/g

2-slot GPRS - Left/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.96 V/m
Peak SAR (extrapolated) = 0.913 W/kg
SAR(1 g) = 0.582 mW/g
SAR(10 g) = 0.360 mW/g
Power Drift = -0.154 dB
Maximum value of SAR (measured) = 0.622 mW/g

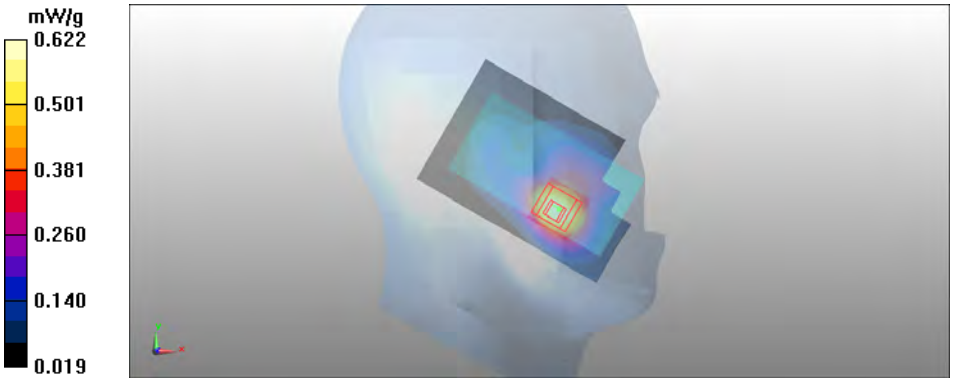

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 11:35:21, Date/Time: 2011-08-19 11:39:48

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1850.2 MHz; Duty Cycle: 1:2.8
Medium: HSL1900; Medium Notes: t= 21.8 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.41 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Left/Cheek - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.994 mW/g

3-slot GPRS - Left/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.2 V/m
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.937 mW/g
SAR(10 g) = 0.586 mW/g
Power Drift = -0.202 dB
Maximum value of SAR (measured) = 0.980 mW/g

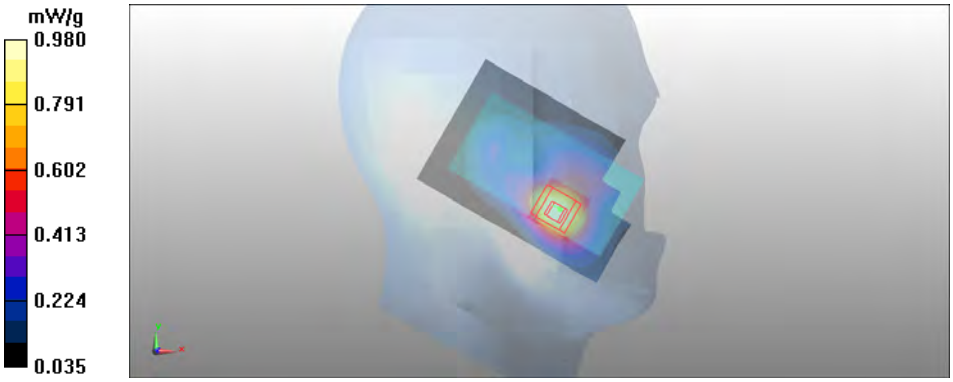

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 16:50:27, Date/Time: 2011-08-19 16:58:54

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.8
Medium: HSL1900; Medium Notes: t= 21.8 C
Medium parameters used: f = 1880 MHz; σ = 1.43 mho/m; ε_r = 39.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Left/Tilt - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.276 mW/g

3-slot GPRS - Left/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.2 V/m
Peak SAR (extrapolated) = 0.389 W/kg
SAR(1 g) = 0.243 mW/g
SAR(10 g) = 0.148 mW/g
Power Drift = -0.471 dB
Maximum value of SAR (measured) = 0.261 mW/g

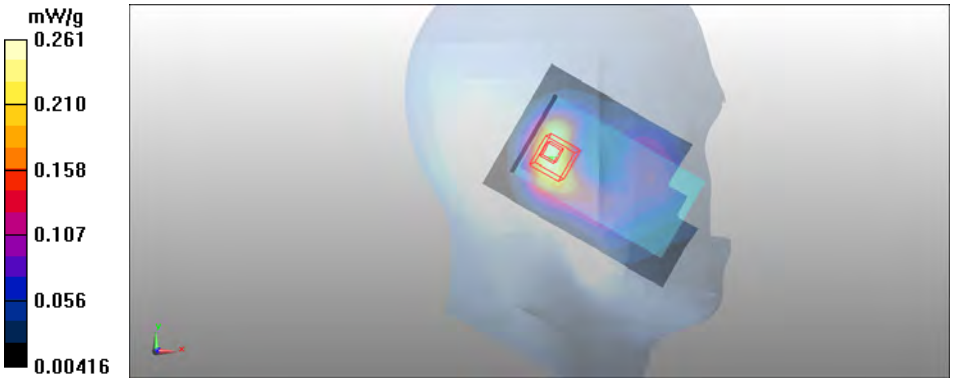

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-22 10:24:53, Date/Time: 2011-08-22 10:31:02, Date/Time: 2011-08-22 10:37:58
Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.8
Medium: HSL1900; Medium Notes: t= 22.3 C
Medium parameters used: f = 1880 MHz; σ = 1.38 mho/m; ε_r = 39.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS - Right/Cheek - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.653 mW/g

3-slot GPRS - Right/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.72 V/m
Peak SAR (extrapolated) = 0.891 W/kg
SAR(1 g) = 0.580 mW/g
SAR(10 g) = 0.371 mW/g
Power Drift = 0.020 dB
Maximum value of SAR (measured) = 0.628 mW/g

3-slot GPRS - Right/Cheek - Middle/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.72 V/m
Peak SAR (extrapolated) = 0.796 W/kg
SAR(1 g) = 0.505 mW/g
SAR(10 g) = 0.327 mW/g
Power Drift = 0.020 dB
Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.
Maximum value of SAR (measured) = 0.543 mW/g

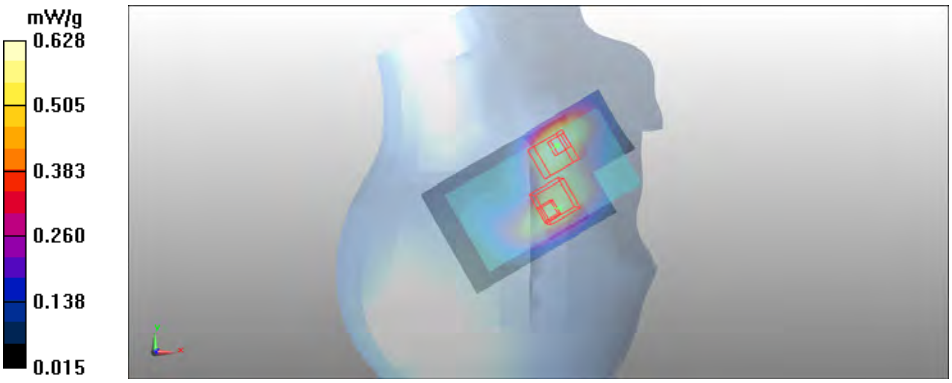

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-22 10:47:42, Date/Time: 2011-08-22 10:51:34

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.8
Medium: HSL1900; Medium Notes: t= 22.3 C
Medium parameters used: f = 1880 MHz; σ = 1.38 mho/m; ε_r = 39.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS1900 - Right/Tilt - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.381 mW/g

3-slot GPRS1900 - Right/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.5 V/m
Peak SAR (extrapolated) = 0.488 W/kg
SAR(1 g) = 0.314 mW/g
SAR(10 g) = 0.191 mW/g
Power Drift = -0.171 dB
Maximum value of SAR (measured) = 0.341 mW/g

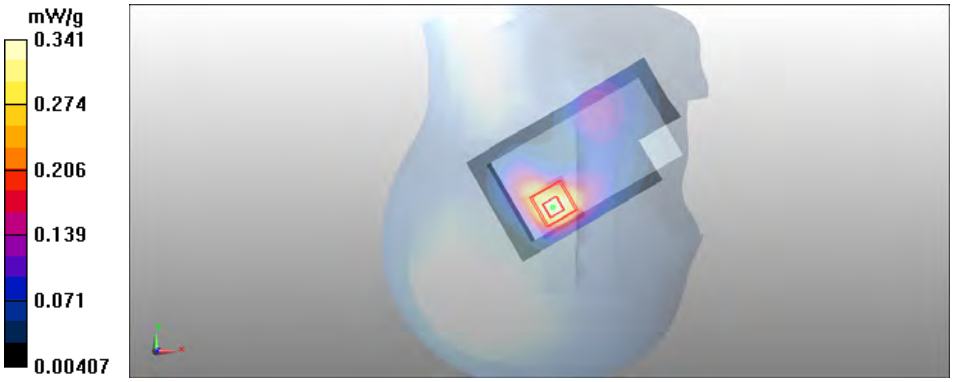

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 11:04:59, Date/Time: 2011-08-19 11:09:27

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 4-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.1
Medium: HSL1900; Medium Notes: t= 21.8 C
Medium parameters used: f = 1880 MHz; σ = 1.43 mho/m; ε_r = 39.3; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

4-slot GPRS - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.718 mW/g

4-slot GPRS - Left/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.73 V/m
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.675 mW/g
SAR(10 g) = 0.421 mW/g
Power Drift = -0.060 dB
Maximum value of SAR (measured) = 0.711 mW/g

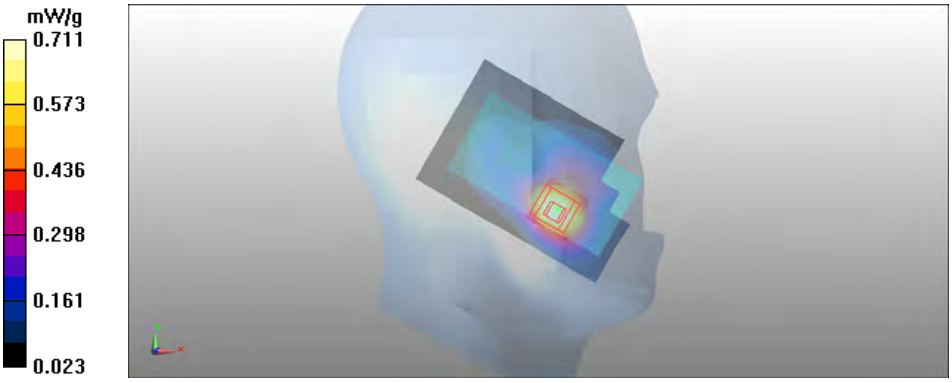

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-22 13:18:04, Date/Time: 2011-08-22 13:25:17

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot 8PSK EGPRS1900
Frequency: 1850.2 MHz; Duty Cycle: 1:2.8
Medium: HSL1900; Medium Notes: t= 22.1 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.36 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot 8PSK EGPRS - Left/Cheek - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.448 mW/g

3-slot 8PSK EGPRS - Left/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 7.36 V/m
Peak SAR (extrapolated) = 0.614 W/kg
SAR(1 g) = 0.409 mW/g
SAR(10 g) = 0.255 mW/g
Power Drift = -0.050 dB
Maximum value of SAR (measured) = 0.445 mW/g

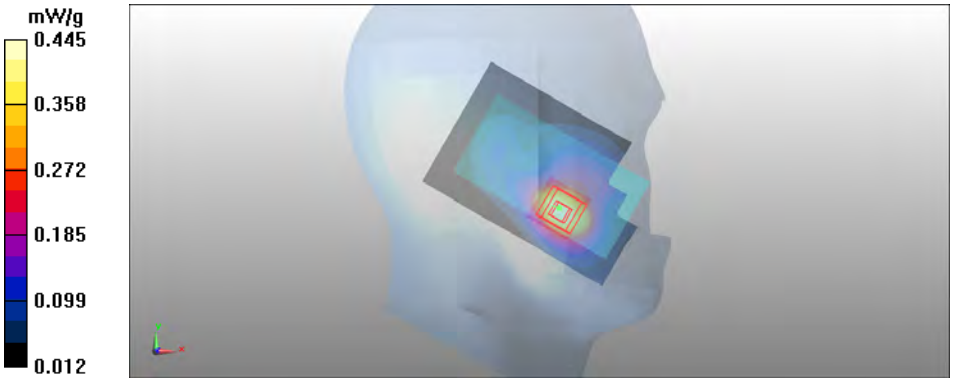

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-08 11:54:33, Date/Time: 2011-08-08 11:58:59

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Cheek - Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.12 mW/g

WCDMA - Left/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.68 V/m
Peak SAR (extrapolated) = 1.6 W/kg
SAR(1 g) = 1.03 mW/g
SAR(10 g) = 0.630 mW/g
Power Drift = -0.076 dB
Maximum value of SAR (measured) = 1.07 mW/g

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-08 12:20:13, Date/Time: 2011-08-08 12:24:40

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA - Left/Tilt - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.308 mW/g

WCDMA - Left/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12 V/m
Peak SAR (extrapolated) = 0.420 W/kg
SAR(1 g) = 0.257 mW/g
SAR(10 g) = 0.159 mW/g
Power Drift = 0.097 dB
Maximum value of SAR (measured) = 0.272 mW/g

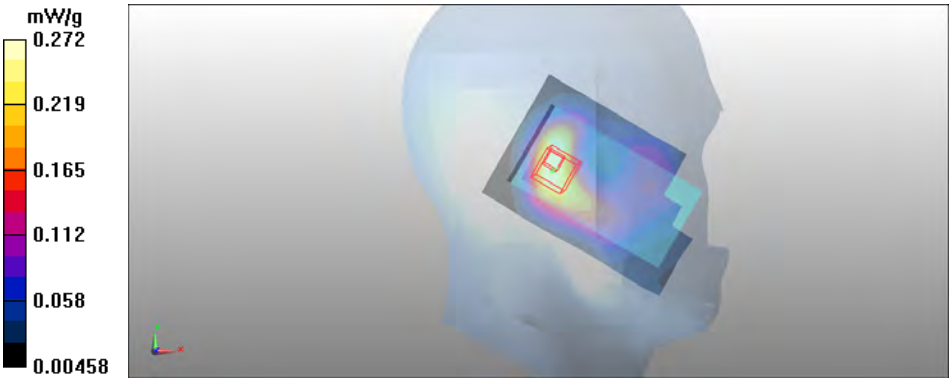

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-08 13:56:14, Date/Time: 2011-08-08 14:00:10, Date/Time: 2011-08-08 14:07:00
Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Cheek - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.940 mW/g

WCDMA - Right/Cheek - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.76 V/m
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.821 mW/g
SAR(10 g) = 0.520 mW/g
Power Drift = 0.139 dB
Maximum value of SAR (measured) = 0.890 mW/g

WCDMA - Right/Cheek - Low/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.76 V/m
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.777 mW/g
SAR(10 g) = 0.494 mW/g
Power Drift = 0.139 dB
Maximum value of SAR (measured) = 0.839 mW/g

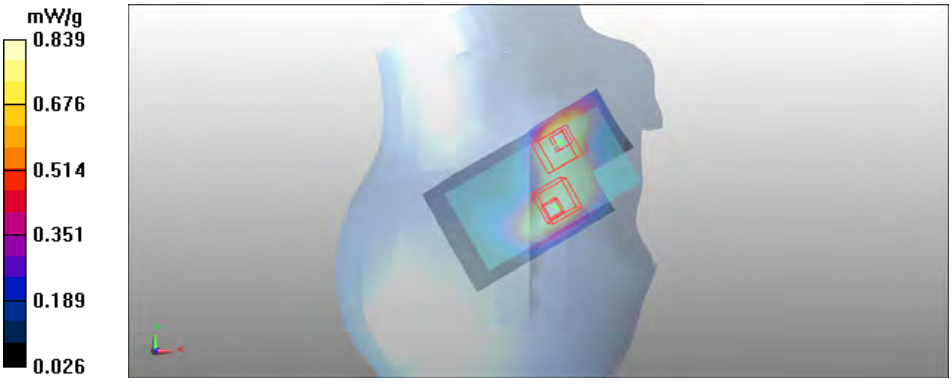

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-08 14:33:11, Date/Time: 2011-08-08 14:37:07

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(5.03, 5.03, 5.03); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1449
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

WCDMA - Right/Tilt - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.381 mW/g

WCDMA - Right/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.6 V/m
Peak SAR (extrapolated) = 0.508 W/kg
SAR(1 g) = 0.320 mW/g
SAR(10 g) = 0.192 mW/g
Power Drift = -0.015 dB
Maximum value of SAR (measured) = 0.347 mW/g

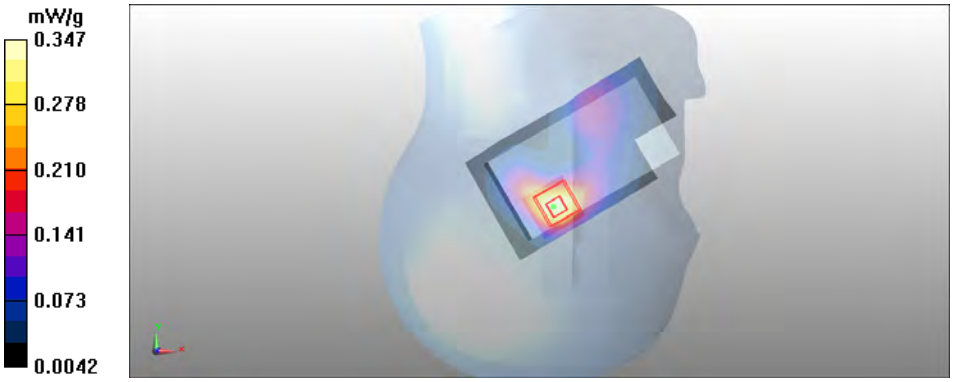

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-11 14:01:45, Date/Time: 2011-08-11 14:08:10

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.1 C
Medium parameters used: f = 2442 MHz; σ = 1.8 mho/m; ε_r = 37.6; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Left/Cheek - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.244 mW/g

WLAN - Left/Cheek - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.02 V/m
Peak SAR (extrapolated) = 0.467 W/kg
SAR(1 g) = 0.212 mW/g
SAR(10 g) = 0.114 mW/g
Power Drift = 0.164 dB
Maximum value of SAR (measured) = 0.233 mW/g

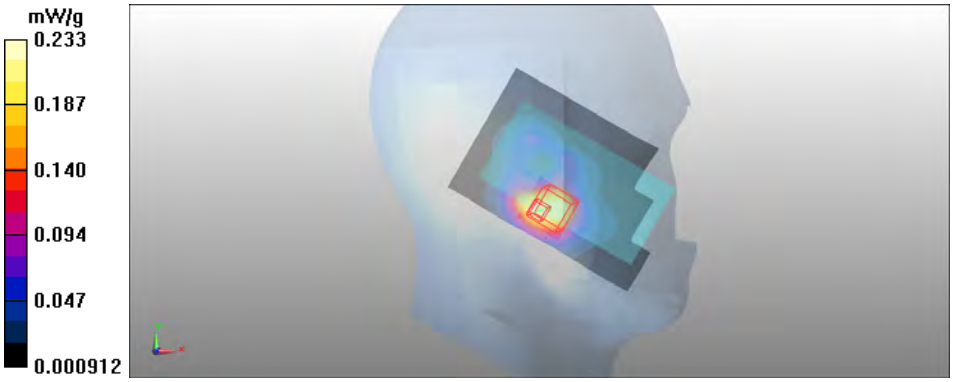

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-11 14:25:22, Date/Time: 2011-08-11 14:28:59

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.1 C
Medium parameters used: f = 2442 MHz; σ = 1.8 mho/m; ε_r = 37.6; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Left/Tilt - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.091 mW/g

WLAN - Left/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.75 V/m
Peak SAR (extrapolated) = 0.142 W/kg
SAR(1 g) = 0.076 mW/g
SAR(10 g) = 0.038 mW/g
Power Drift = 0.247 dB
Maximum value of SAR (measured) = 0.083 mW/g

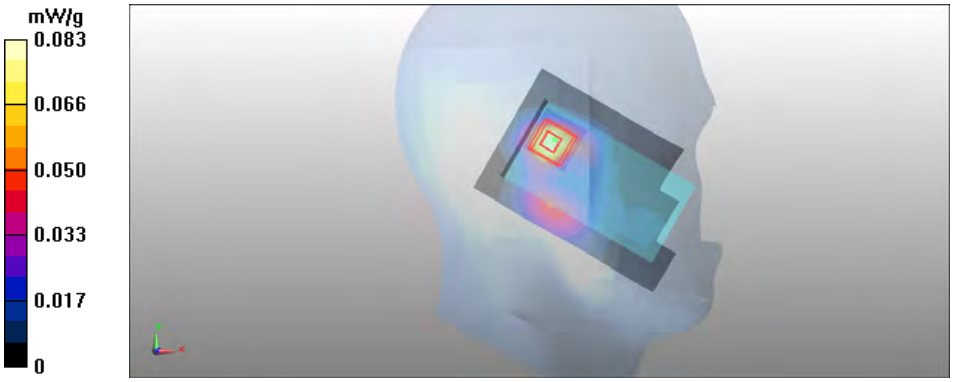

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 12:32:24, Date/Time: 2011-08-12 12:37:04

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.1 C
Medium parameters used: f = 2462 MHz; σ = 1.82 mho/m; ε_r = 37.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Right/Cheek - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.474 mW/g

WLAN - Right/Cheek - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 3.88 V/m
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.439 mW/g
SAR(10 g) = 0.193 mW/g
Power Drift = 0.210 dB
Maximum value of SAR (measured) = 0.498 mW/g



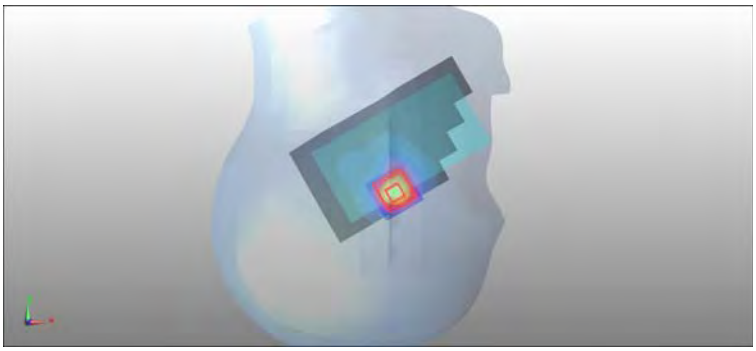

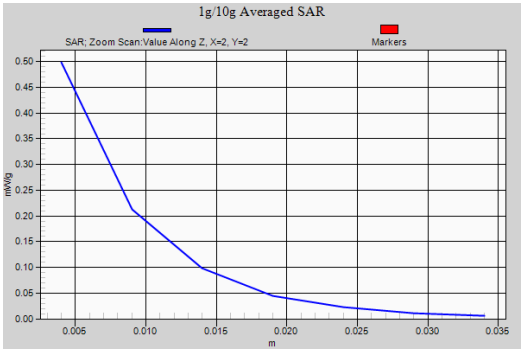

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-12 10:13:02, Date/Time: 2011-08-12 10:16:04

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.1 C
Medium parameters used: f = 2442 MHz; σ = 1.8 mho/m; ε_r = 37.6; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Right/Tilt - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.078 mW/g

WLAN - Right/Tilt - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 4.77 V/m
Peak SAR (extrapolated) = 0.159 W/kg
SAR(1 g) = 0.076 mW/g
SAR(10 g) = 0.037 mW/g
Power Drift = 0.364 dB
Maximum value of SAR (measured) = 0.084 mW/g

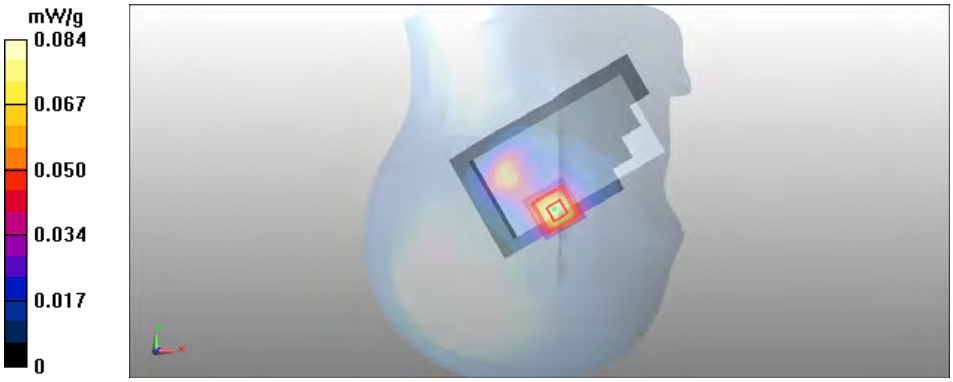

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-18 10:49:39, Date/Time: 2011-08-18 10:52:54

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 n-mode
Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL2450; Medium Notes: t= 22.3 C
Medium parameters used: f = 2462 MHz; σ = 1.83 mho/m; ε_r = 37.2; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM1; Type: SAM; Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN - Right/Cheek - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.396 mW/g

WLAN - Right/Cheek - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 2.96 V/m
Peak SAR (extrapolated) = 0.900 W/kg
SAR(1 g) = 0.365 mW/g
SAR(10 g) = 0.161 mW/g
Power Drift = 1.26 dB
Maximum value of SAR (measured) = 0.408 mW/g

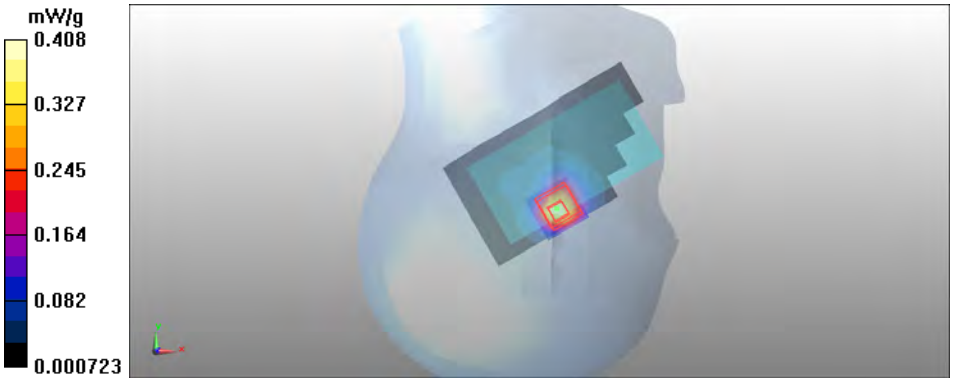

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 16:24:23, Date/Time: 2011-08-23 16:29:54

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:2.80027
Medium: BSL850; Medium Notes: t= 21.3 C
Medium parameters used: f = 837 MHz; σ = 0.982 mho/m; ε_r = 53.4; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Middle - No Accessory-Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.715 mW/g

3-slot GPRS/Body - Middle - No Accessory-Display Facing Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9 V/m
Peak SAR (extrapolated) = 0.869 W/kg
SAR(1 g) = 0.677 mW/g
SAR(10 g) = 0.509 mW/g
Power Drift = -0.158 dB
Maximum value of SAR (measured) = 0.709 mW/g

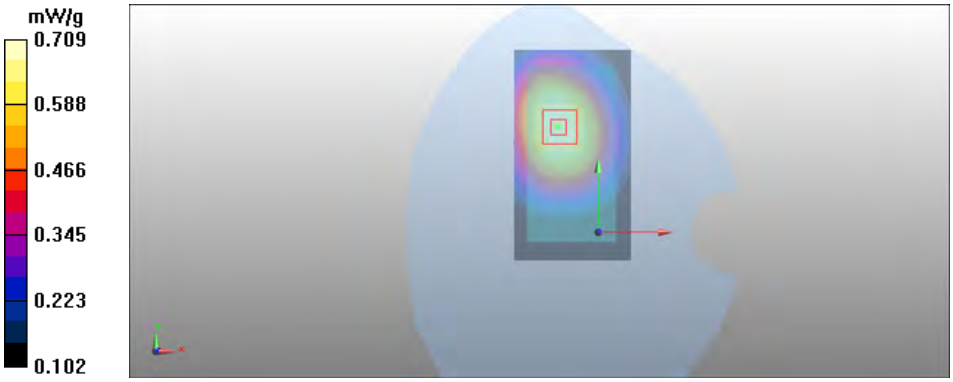

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-24 07:56:17, Date/Time: 2011-08-24 08:01:50, Date/Time: 2011-08-24 08:12:47
Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:2.80027
Medium: BSL850; Medium Notes: t= 21.2 C
Medium parameters used: f = 837 MHz; σ = 1.01 mho/m; ε_r = 53.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Middle - WH-902 - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.624 mW/g

3-slot GPRS/Body - Middle - WH-902 - Display Facing Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.9 V/m
Peak SAR (extrapolated) = 0.753 W/kg
SAR(1 g) = 0.582 mW/g
SAR(10 g) = 0.434 mW/g
Power Drift = -0.293 dB
Maximum value of SAR (measured) = 0.615 mW/g

3-slot GPRS/Body - Middle - WH-902 - Display Facing Phantom/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.9 V/m
Peak SAR (extrapolated) = 0.731 W/kg
SAR(1 g) = 0.561 mW/g
SAR(10 g) = 0.418 mW/g
Power Drift = -0.293 dB
Maximum value of SAR (measured) = 0.591 mW/g

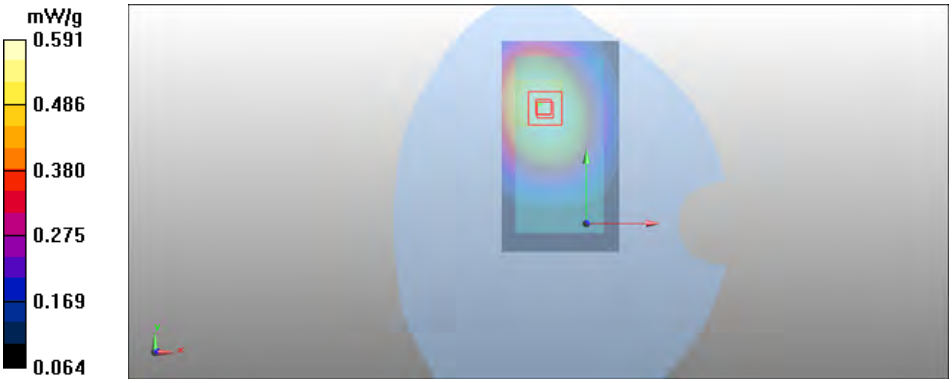

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-24 09:23:21, Date/Time: 2011-08-24 09:26:17

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 848.8 MHz; Duty Cycle: 1:2.80027
Medium: BSL850; Medium Notes: t= 21.2 C
Medium parameters used: f = 849 MHz; σ = 1.02 mho/m; ε_r = 53.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - High - No Accessory - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.01 mW/g

3-slot GPRS/Body - High - No Accessory - Back Facing Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.4 V/m
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.950 mW/g
SAR(10 g) = 0.695 mW/g
Power Drift = -0.019 dB
Maximum value of SAR (measured) = 1 mW/g

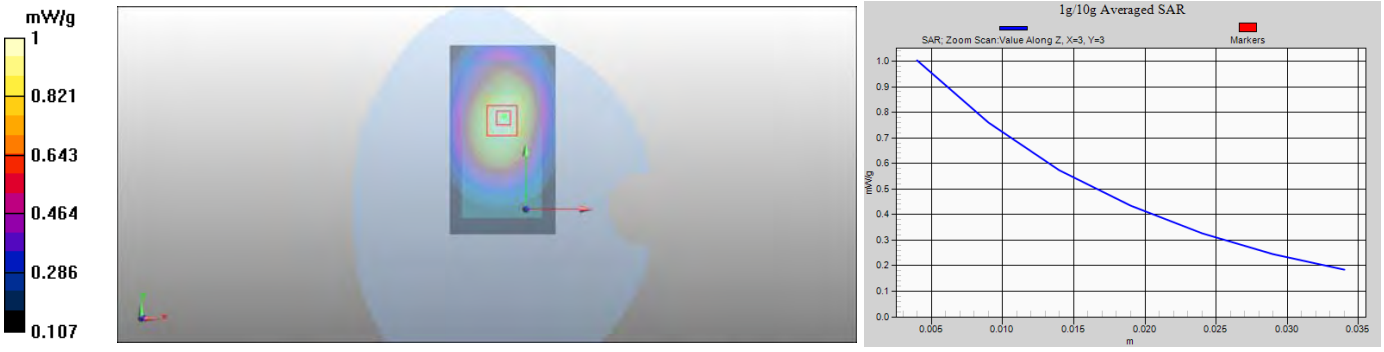

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-24 08:27:49, Date/Time: 2011-08-24 08:30:45

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS850
Frequency: 836.6 MHz; Duty Cycle: 1:2.80027
Medium: BSL850; Medium Notes: t= 21.2 C
Medium parameters used: f = 837 MHz; σ = 1.01 mho/m; ε_r = 53.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194
- ConvF(5.95, 5.95, 5.95); Calibrated: 2010-09-09
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn538; Calibrated: 2010-09-09
- Phantom: SAM 1; Type: Twin SAM 040 CA; Serial: TP-1179
- Measurement SW: DASY52, V52.6 Build 2; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Middle - WH-902 - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.791 mW/g

3-slot GPRS/Body - Middle - WH-902 - Back Facing Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.3 V/m
Peak SAR (extrapolated) = 1.04 W/kg
SAR(1 g) = 0.756 mW/g
SAR(10 g) = 0.543 mW/g
Power Drift = -0.123 dB
Maximum value of SAR (measured) = 0.866 mW/g

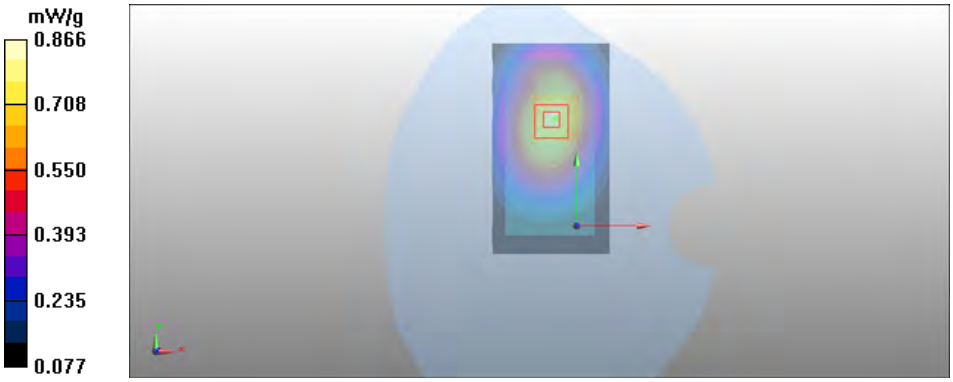

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 15:05:41, Date/Time: 2011-08-19 15:21:15

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.8
Medium: BSL1900; Medium Notes: t= 21.7 C
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 52.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Middle - No accessory - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.543 mW/g

3-slot GPRS/Body - Middle - No accessory - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.57 V/m
Peak SAR (extrapolated) = 0.788 W/kg
SAR(1 g) = 0.523 mW/g
SAR(10 g) = 0.331 mW/g
Power Drift = 0.120 dB
Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.
Maximum value of SAR (measured) = 0.561 mW/g

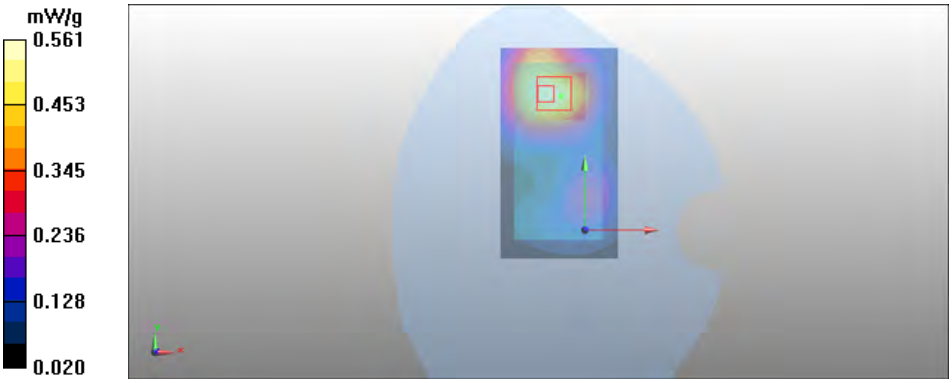

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 15:30:01, Date/Time: 2011-08-19 15:33:21

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.8
Medium: BSL1900; Medium Notes: t= 21.7 C
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 52.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Middle - WH-902 - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.456 mW/g

3-slot GPRS/Body - Middle - WH-902 - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 4.97 V/m
Peak SAR (extrapolated) = 0.624 W/kg
SAR(1 g) = 0.408 mW/g
SAR(10 g) = 0.263 mW/g
Power Drift = -0.073 dB
Maximum value of SAR (measured) = 0.437 mW/g

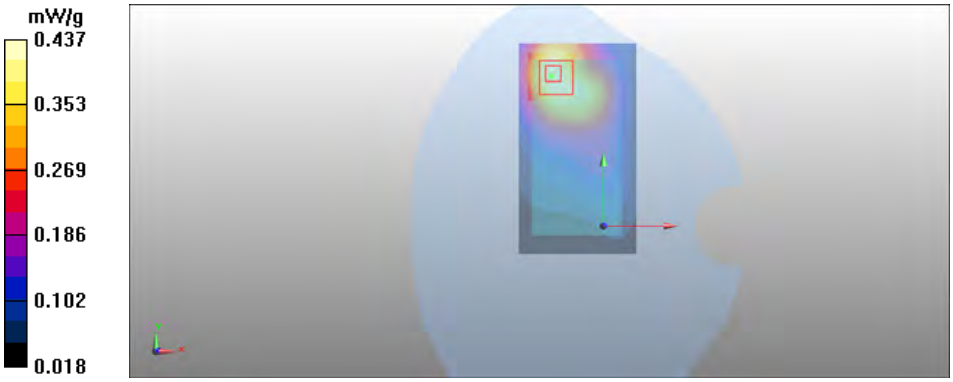

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 16:21:02, Date/Time: 2011-08-19 16:24:22

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1850.2 MHz; Duty Cycle: 1:2.8
Medium: BSL1900; Medium Notes: t= 21.7 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.52 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Low - No accessory - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.623 mW/g

3-slot GPRS/Body - Low - No accessory - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.58 V/m
Peak SAR (extrapolated) = 0.924 W/kg
SAR(1 g) = 0.570 mW/g
SAR(10 g) = 0.349 mW/g
Power Drift = -0.145 dB
Maximum value of SAR (measured) = 0.618 mW/g

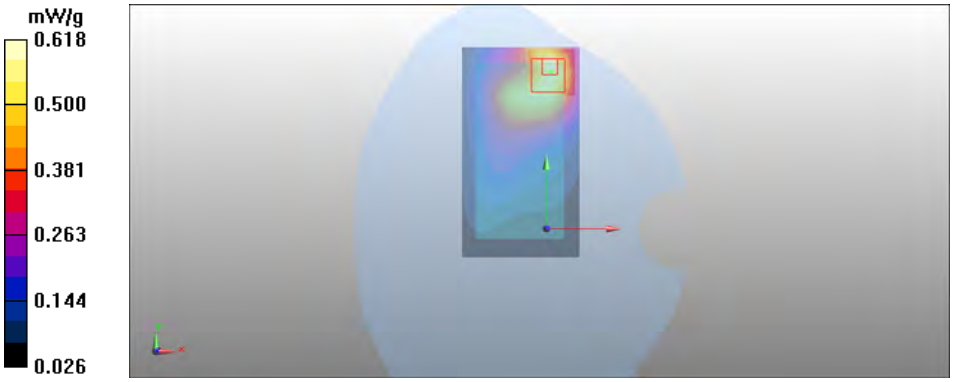

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 16:09:36, Date/Time: 2011-08-19 16:12:55

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: 3-slot GPRS1900
Frequency: 1880 MHz; Duty Cycle: 1:2.8
Medium: BSL1900; Medium Notes: t= 21.7 C
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 52.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Middle - WH-902 - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.529 mW/g

3-slot GPRS/Body - Middle - WH-902 - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 4.53 V/m
Peak SAR (extrapolated) = 0.792 W/kg
SAR(1 g) = 0.492 mW/g
SAR(10 g) = 0.301 mW/g
Power Drift = 0.173 dB
Maximum value of SAR (measured) = 0.526 mW/g

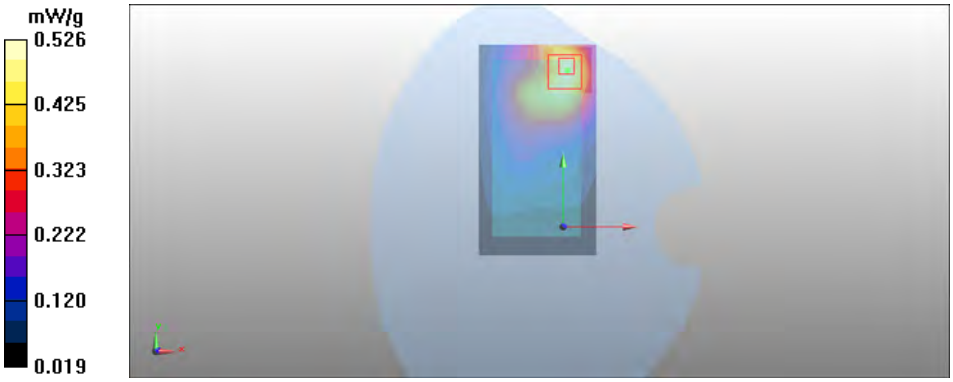

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-09 16:28:48, Date/Time: 2011-08-09 16:34:14

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: BSL1900; Medium Notes: t= 22.2 C
Medium parameters used: f = 1880 MHz; σ = 1.49 mho/m; ε_r = 53; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - No Accessory - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.699 mW/g

WCDMA/Body - Middle - No Accessory - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.8 V/m
Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.658 mW/g
SAR(10 g) = 0.420 mW/g
Power Drift = -0.289 dB
Maximum value of SAR (measured) = 0.708 mW/g

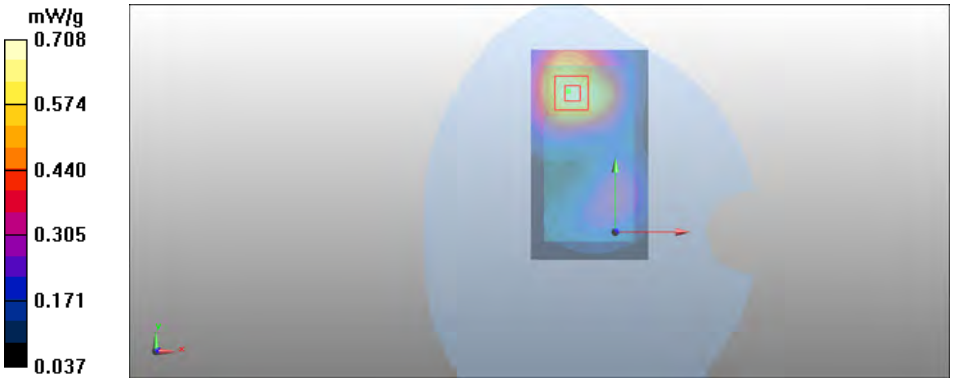

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-10 09:56:15, Date/Time: 2011-08-10 10:01:52

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: BSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1880 MHz; σ = 1.49 mho/m; ε_r = 52.6; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - WH-902 - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.615 mW/g

WCDMA/Body - Middle - WH-902 - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 6.29 V/m
Peak SAR (extrapolated) = 0.842 W/kg
SAR(1 g) = 0.547 mW/g
SAR(10 g) = 0.352 mW/g
Power Drift = -0.150 dB
Maximum value of SAR (measured) = 0.583 mW/g

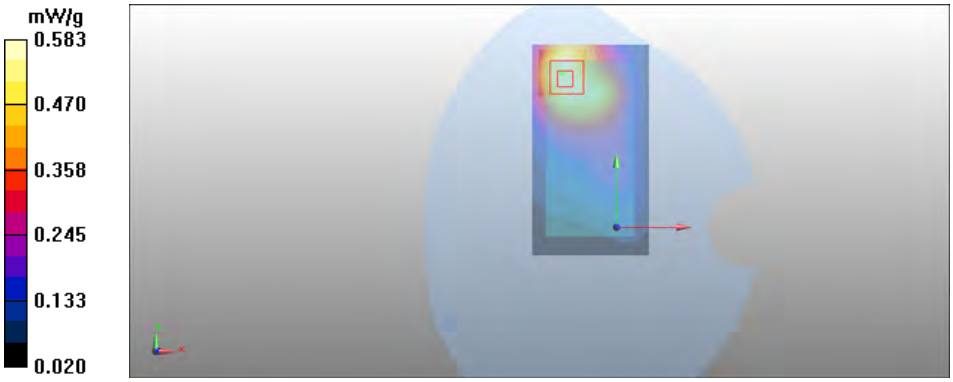

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-09 16:53:42, Date/Time: 2011-08-09 16:56:58

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: BSL1900; Medium Notes: t= 22.2 C
Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.46 mho/m; ε_r = 53; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Low - No Accessory - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.822 mW/g

WCDMA/Body - Low - No Accessory - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.8 V/m
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.746 mW/g
SAR(10 g) = 0.473 mW/g
Power Drift = 0.00145 dB
Maximum value of SAR (measured) = 0.800 mW/g

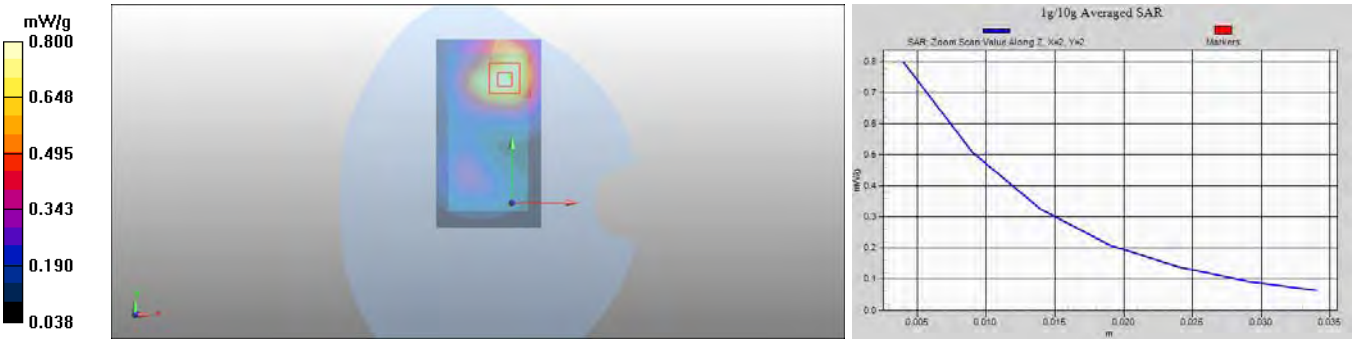

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-10 10:10:31, Date/Time: 2011-08-10 10:13:52

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2

Communication System: WCDMA1900
Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: BSL1900; Medium Notes: t= 22.0 C
Medium parameters used: f = 1880 MHz; σ = 1.49 mho/m; ε_r = 52.6; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165
- ConvF(4.61, 4.61, 4.61); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555; Calibrated: 2011-02-22
- Phantom: SAM 2; Type: Twin SAM 040 CA; Serial: TP - 1177
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/Body - Middle - WH-902 - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.809 mW/g

WCDMA/Body - Middle - WH-902 - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 6.99 V/m
Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 0.735 mW/g
SAR(10 g) = 0.454 mW/g
Power Drift = -0.116 dB
Maximum value of SAR (measured) = 0.789 mW/g

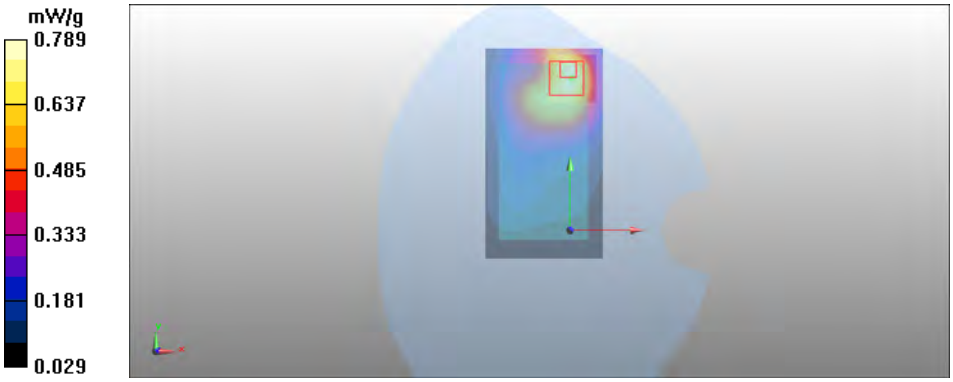

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-17 16:07:30, Date/Time: 2011-08-17 16:13:05

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: BSL2450; Medium Notes: t= 21.3 C
Medium parameters used: f = 2442 MHz; σ = 1.96 mho/m; ε_r = 50.6; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - No accessory - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.033 mW/g

WLAN/Body - Body - Middle - No accessory - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 2.57 V/m
Peak SAR (extrapolated) = 0.053 W/kg
SAR(1 g) = 0.027 mW/g
SAR(10 g) = 0.014 mW/g
Power Drift = 0.922 dB
Maximum value of SAR (measured) = 0.030 mW/g

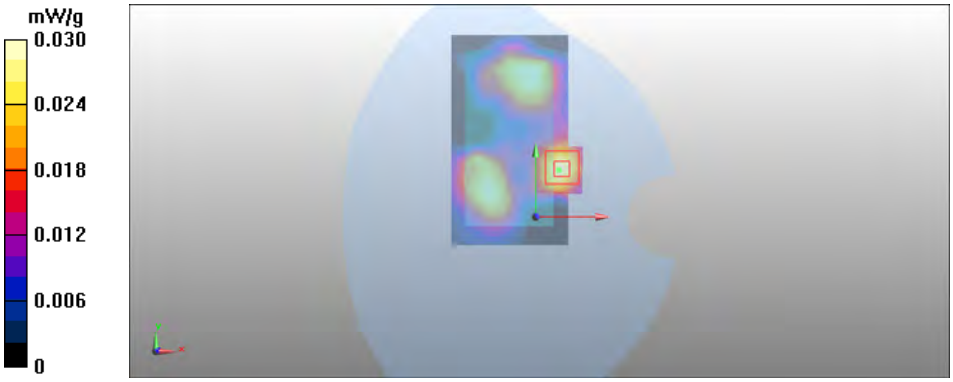

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-17 16:37:36, Date/Time: 2011-08-17 16:40:32

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: BSL2450; Medium Notes: t= 21.3 C
Medium parameters used: f = 2442 MHz; σ = 1.96 mho/m; ε_r = 50.6; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - WH-902 - Display Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.034 mW/g

WLAN/Body - Middle - WH-902 - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 2.17 V/m
Peak SAR (extrapolated) = 0.054 W/kg
SAR(1 g) = 0.030 mW/g
SAR(10 g) = 0.017 mW/g
Power Drift = 1.2 dB
Maximum value of SAR (measured) = 0.034 mW/g

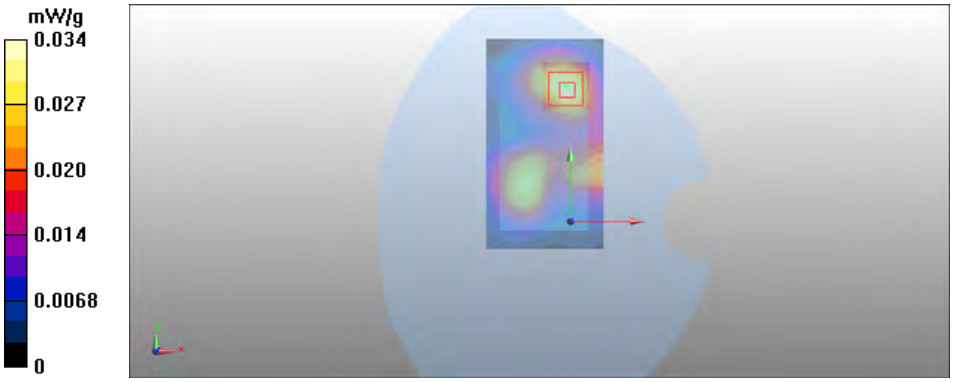

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-18 13:49:53, Date/Time: 2011-08-18 13:52:50

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: BSL2450; Medium Notes: t= 21.3 C
Medium parameters used: f = 2462 MHz; σ = 2 mho/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - High - No accessory - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.060 mW/g

WLAN/Body - High - No accessory - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 3.37 V/m
Peak SAR (extrapolated) = 0.116 W/kg
SAR(1 g) = 0.056 mW/g
SAR(10 g) = 0.028 mW/g
Power Drift = 0.089 dB
Maximum value of SAR (measured) = 0.059 mW/g

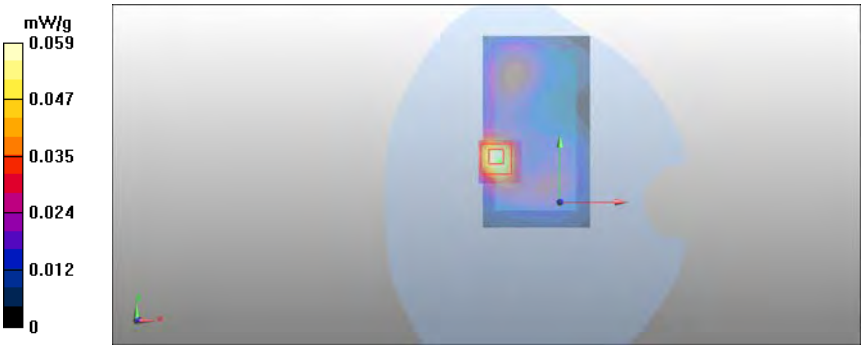

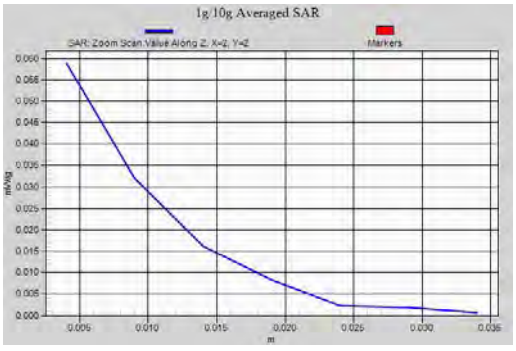

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-18 13:17:30, Date/Time: 2011-08-18 13:20:26

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 b-mode
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium: BSL2450; Medium Notes: t= 21.3 C
Medium parameters used: f = 2442 MHz; σ = 1.97 mho/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WLAN/Body - Middle - WH-902 - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.046 mW/g

WLAN/Body - Middle - WH-902 - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 2.92 V/m
Peak SAR (extrapolated) = 0.092 W/kg
SAR(1 g) = 0.045 mW/g
SAR(10 g) = 0.022 mW/g
Power Drift = 0.022 dB
Maximum value of SAR (measured) = 0.048 mW/g

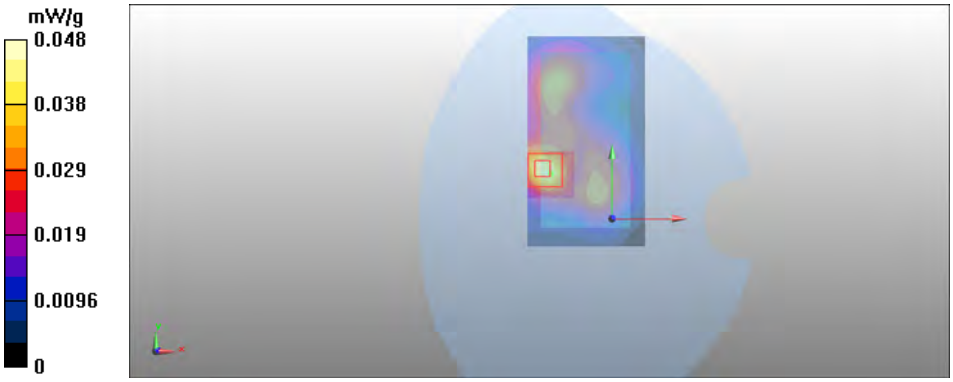

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-18 15:35:01, Date/Time: 2011-08-18 15:37:57

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553891/0

Communication System: WLAN2450 n-mode
Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: BSL2450; Medium Notes: t= 21.3 C
Medium parameters used: f = 2462 MHz; σ = 2 mho/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: EX3DV4 - SN3573
- ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn793; Calibrated: 2010-09-08
- Phantom: SAM2; Type: SAM; Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

Configuration/WLAN - Body - High - No accessory - Back Facing Phantom/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.044 mW/g

Configuration/WLAN - Body - High - No accessory - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 2.78 V/m
Peak SAR (extrapolated) = 0.087 W/kg
SAR(1 g) = 0.045 mW/g
SAR(10 g) = 0.022 mW/g
Power Drift = 0.164 dB
Maximum value of SAR (measured) = 0.050 mW/g

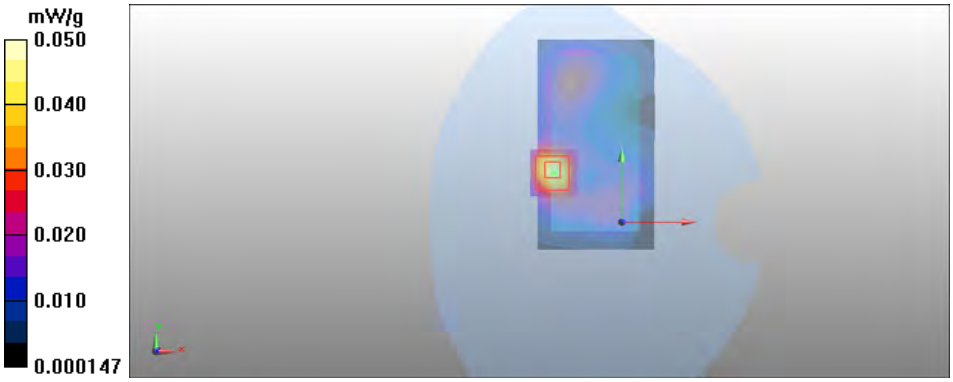

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-23 14:26:17, Date/Time: 2011-08-18 10:49:39

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2, Serial: 004402/13/553891/0

Communication System: 3-slot GPRS850, Communication System: WLAN2450 n-mode
Frequency: 824.2 MHz, Frequency: 2462 MHz; Duty Cycle: 1:2.80027, Duty Cycle: 1:1
Medium: HSL900, Medium: HSL2450; Medium Notes: t= 21.0 C, Medium Notes: t= 22.3 C
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.883 mho/m; ε_r = 40; ρ = 1000 kg/m^3 , Medium parameters used: f = 2462 MHz; σ = 1.83 mho/m; ε_r = 37.2; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 - SN3194, Probe: EX3DV4 - SN3573
- ConvF(6.09, 6.09, 6.09), ConvF(6.69, 6.69, 6.69); Calibrated: 2010-09-09, Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn538, Electronics: DAE4 Sn793; Calibrated: 2010-09-09, Calibrated: 2010-09-08
- Phantom: SAM 3, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1126
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.4.5

3-slot GPRS - Right/Cheek - Low/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN - Right/Cheek - High/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.990 mW/g; SAR(10 g) = 0.678 mW/g

Maximum value of SAR (interpolated) = 1.058 mW/g

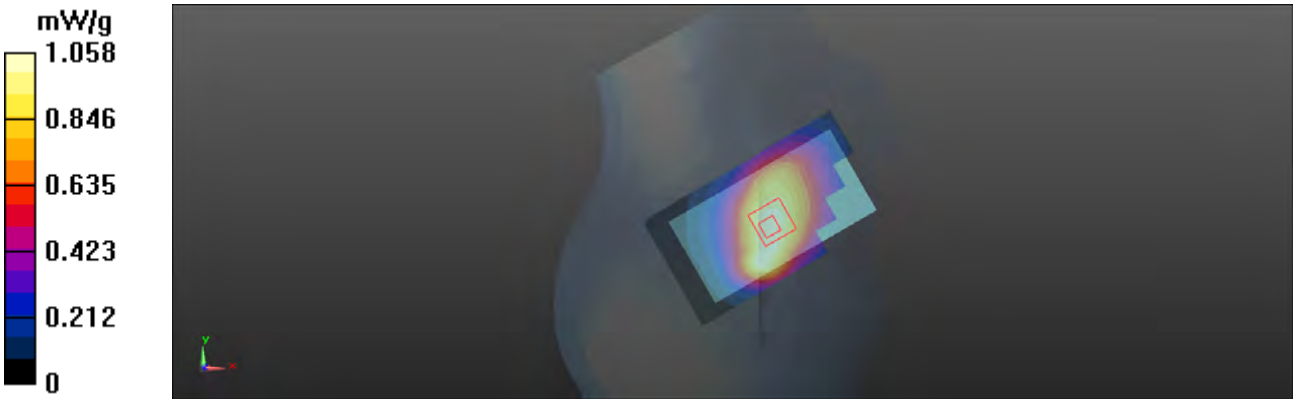

WLAN scaled up by 1.26dB to account for drift.

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 11:35:21, Date/Time: 2011-08-11 14:01:45

Test Laboratory: TCC Nokia

Type: RM-801; Serial: 004402/13/553871/2, Serial: 004402/13/553891/0

Communication System: 3-slot GPRS1900, Communication System: WLAN2450 b-mode
Frequency: 1850.2 MHz, Frequency: 2442 MHz; Duty Cycle: 1:2.8, Duty Cycle: 1:1
Medium: HSL1900, Medium: HSL2450; Medium Notes: t= 21.8 C, Medium Notes: t= 22.1 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.41 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3 , Medium parameters used: f = 2442 MHz; σ = 1.8 mho/m; ε_r = 37.6; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:
- Probe: ES3DV3 – SN3165, Probe: EX3DV4 – SN3573
- ConvF(5.03, 5.03, 5.03), ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1449, Serial: TP-1126
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS – Left/Cheek – Low/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN – Left/Cheek – Middle/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.976 mW/g
SAR(10 g) = 0.571 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

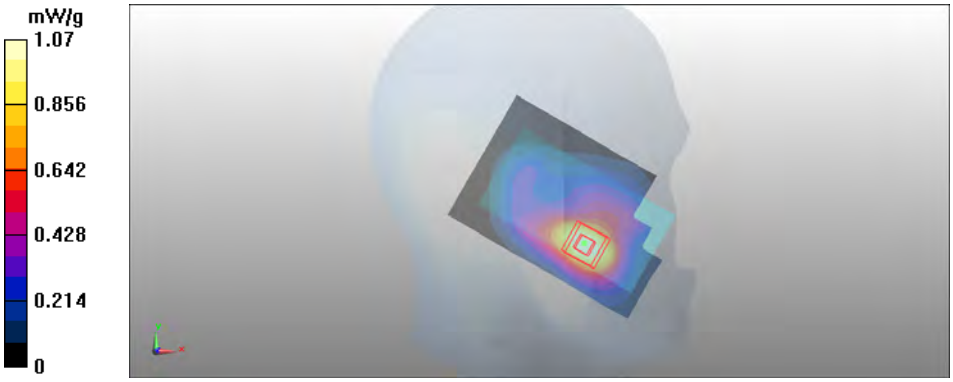

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-08 13:56:14, Date/Time: 2011-08-18 10:49:39

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2, Serial: 004402/13/553891/0

Communication System: WCDMA1900, Communication System: WLAN2450 n-mode
Frequency: 1852.4 MHz, Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL1900, Medium: HSL2450; Medium Notes: t= 22.0 C, Medium Notes: t= 22.3 C
Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3 , Medium parameters used: f = 2462 MHz; σ = 1.83 mho/m; ε_r = 37.2; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:
- Probe: ES3DV3 – SN3165, Probe: EX3DV4 – SN3573
- ConvF(5.03, 5.03, 5.03), ConvF(6.69, 6.69, 6.69); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM1; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1449, Serial: TP-1126
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.4.5

Configuration/WCDMA – Right/Cheek – Low/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Configuration/WLAN – Right/Cheek – High/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.558 mW/g

Maximum value of SAR (interpolated) = 1.119 mW/g

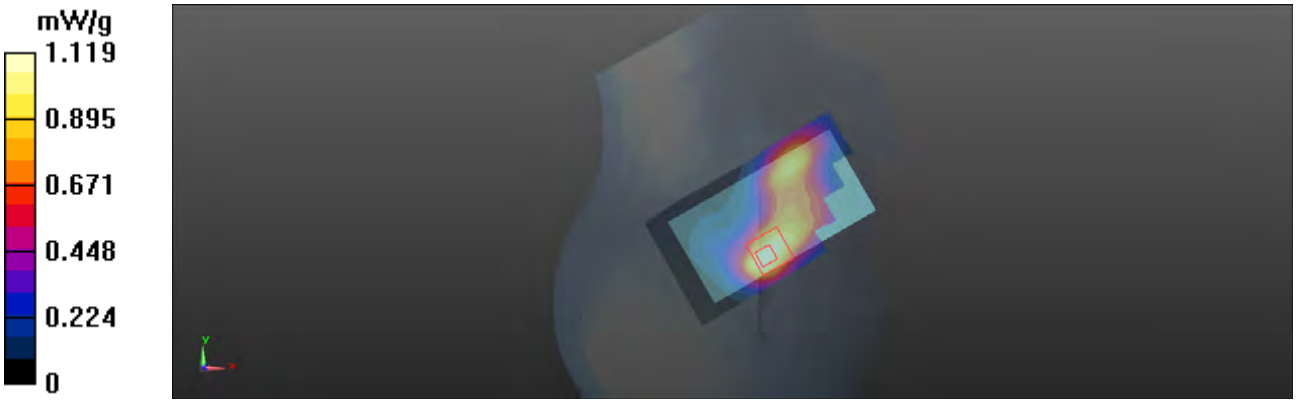

WLAN scaled up by 1.26dB to account for drift.

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-24 09:23:21, Date/Time: 2011-08-18 13:49:53

Test Laboratory: TCC Nokia

Type: RM-801; Serial: 004402/13/553871/2, Serial: 004402/13/553891/0

Communication System: 3-slot GPRS850, Communication System: WLAN2450 b-mode
Frequency: 848.8 MHz, Frequency: 2462 MHz; Duty Cycle: 1:2.80027, Duty Cycle: 1:1
Medium: BSL850, Medium: BSL2450; Medium Notes: t= 21.2 C, Medium Notes: t= 21.3 C
Medium parameters used: f = 849 MHz; σ = 1.02 mho/m; ε_r = 53.5; ρ = 1000 kg/m^3 , Medium parameters used: f = 2462 MHz; σ = 2 mho/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3194, Probe: EX3DV4 - SN3573
- ConvF(5.95, 5.95, 5.95), ConvF(6.8, 6.8, 6.8); Calibrated: 2010-09-09, Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn538, Electronics: DAE4 Sn793; Calibrated: 2010-09-09, Calibrated: 2010-09-08
- Phantom: SAM 1, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP-1179, Serial: TP-1570
- Measurement SW: DASY52, V52.6 Build 2, Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - High - No Accessory - Back Facing Phantom/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN/Body - High - No accessory - Back Facing Phantom/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.968 mW/g
SAR(10 g) = 0.682 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

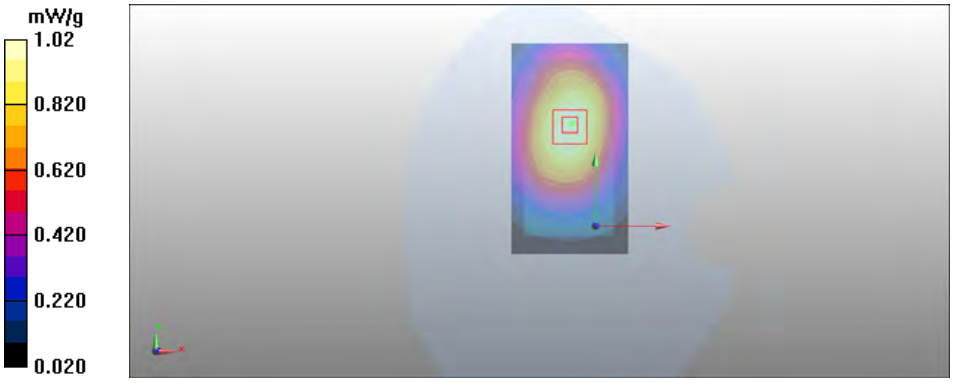

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-19 16:21:02, Date/Time: 2011-08-18 13:49:53

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2, Serial: 004402/13/553891/0

Communication System: 3-slot GPRS1900, Communication System: WLAN2450 b-mode
Frequency: 1850.2 MHz, Frequency: 2462 MHz; Duty Cycle: 1:2.8, Duty Cycle: 1:1
Medium: BSL1900, Medium: BSL2450; Medium Notes: t= 21.7 C, Medium Notes: t= 21.3 C
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.52 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3 , Medium parameters used: f = 2462 MHz; σ = 2 mho/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(4.61, 4.61, 4.61), ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 2, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP - 1177, Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

3-slot GPRS/Body - Low - No accessory - Back Facing Phantom/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN/Body - High - No accessory - Back Facing Phantom/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.565 mW/g
SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

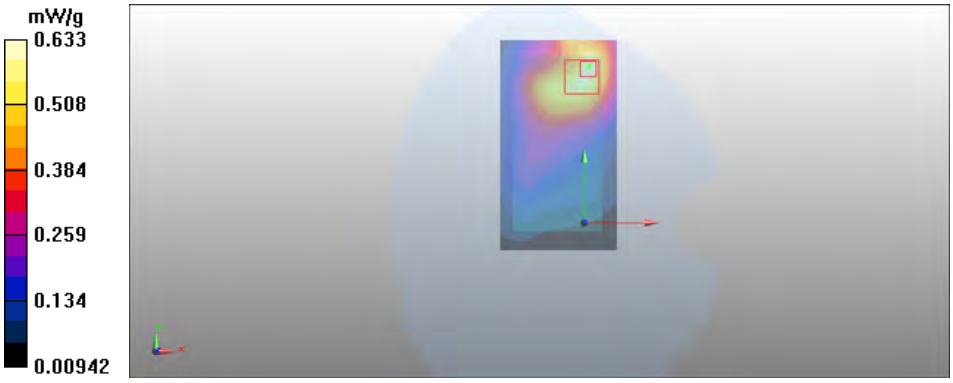

Copyright © 2011 TCC Nokia

Date/Time: 2011-08-09 16:53:42, Date/Time: 2011-08-18 13:49:53

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/553871/2, Serial: 004402/13/553891/0

Communication System: WCDMA1900, Communication System: WLAN2450 b-mode
Frequency: 1852.4 MHz, Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: BSL1900, Medium: BSL2450; Medium Notes: t= 22.2 C, Medium Notes: t= 21.3 C
Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.46 mho/m; ε_r = 53; ρ = 1000 kg/m^3 , Medium parameters used: f = 2462 MHz; σ = 2 mho/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:
- Probe: ES3DV3 - SN3165, Probe: EX3DV4 - SN3573
- ConvF(4.61, 4.61, 4.61), ConvF(6.8, 6.8, 6.8); Calibrated: 2011-02-17
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE4 Sn555, Electronics: DAE4 Sn793; Calibrated: 2011-02-22, Calibrated: 2010-09-08
- Phantom: SAM 2, Phantom: SAM2; Type: Twin SAM 040 CA, Type: SAM; Serial: TP - 1177, Serial: TP-1570
- Measurement SW: DASY4, V4.7 Build 55; SEMCAD X Version 14.0 Build 61

WCDMA/ Body - Low - No Accessory - Back Facing Phantom/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

WLAN/ Body - High - No accessory - Back Facing Phantom/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Motorola Fast SAR of Combined Scans: SAR(1 g) = 0.771 mW/g
SAR(10 g) = 0.468 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

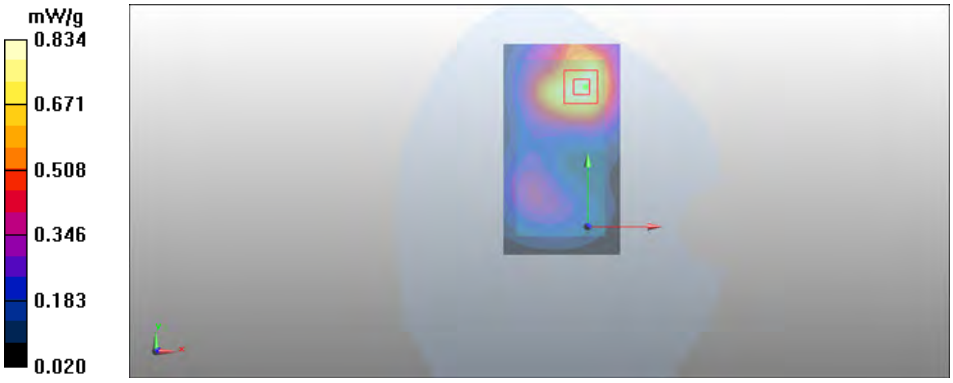

Copyright © 2011 TCC Nokia

APPENDIX C: CONDUCTED AVERAGE POWER MEASUREMENTS FOR WCDMA AND HSUPA

Test Laboratory: TCC Nokia
Type: RM-801; Serial: 004402/13/552686/5, HW: 1100H, SW: Rev 1600.2100.7720.11330 Rev 112.1402.2.2

C.1. WCDMA1900 Test results

Average power

Ch / *f* (MHz)	P [dBm]
9263 / 1852.6	22.58
9400 / 1880.0	22.64
9537 / 1907.4	22.65

C.2. HSUPA1900 Test results

Average power

Ch / *f* (MHz)	P [dBm]				
	Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
9263 / 1852.6	19.88	21.05	20.61	20.94	20.65
9400 / 1880.0	20.29	21.18	20.79	21.09	20.70
9537 / 1907.4	20.64	21.16	21.27	21.34	20.86

Note: In HSUPA operation, the output power is reduced relative to the tuning target power for WCDMA. This device runs two separate HSUPA power control routines: MPR and E-TFC MPR. In each Subtest mode, the routine with the higher power reduction dominates. Also additional power reduction of 1.0dB, 0.5dB and 2.0dB for Subtest Mode 1, 3 and 5, respectively, is used.
As a result, the MPR for each of the Subtest modes is as follows:

Maximum Power Reduction (MPR)				
Subtest mode 1	Subtest mode 2	Subtest mode 3	Subtest mode 4	Subtest mode 5
2.5dB	2.0dB	1.5dB	2.0dB	2.0dB

Copyright © 2011 TCC Nokia

APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

Copyright © 2011 TCC Nokia

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: ES3-3194_Sep10

CALIBRATION CERTIFICATE

Object: ES3DV3 - SN:3194

Calibration procedure(s): QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25.v2
Calibration procedure for dosimetric E-field probes

Calibration date: September 9, 2010

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 9, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3194

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu V/(V/m)^2$)[A]	1.39	1.28	1.37	± 10.1%
DCP (mV)[B]	95.7	93.2	88.0	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc[E] (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	± 1.5%
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of NormX,Y,Z do not affect the E^2-field uncertainty inside TSL (see Pages 5 and 6).

[B] Numerical linearization parameter: uncertainty not required.

[E] Uncertainty is determined using the maximum deviation from linear response applying recatangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3194

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz][C]	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	6.09	6.09	6.09	0.99	1.05 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	5.14	5.14	5.14	0.45	1.74 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.93	4.93	4.93	0.44	1.85 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.30	4.30	4.30	0.41	1.99 ± 11.0%

[C] The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3194

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz][C]	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	5.95	5.95	5.95	0.84	1.15 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.81	4.81	4.81	0.35	2.12 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.58	4.58	4.58	0.35	2.32 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.24	4.24	4.24	0.77	1.20 ± 11.0%

[C] The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: ES3-3165_Feb11

CALIBRATION CERTIFICATE

Object: ES3DV3 - SN:3165

Calibration procedure(s): QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes

Calibration date: February 17, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3165

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	6.09	6.09	6.09	0.43	1.44	± 12.0 %
1750	40.1	1.37	5.19	5.19	5.19	0.35	1.84	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.64	1.34	± 12.0 %
2450	39.2	1.80	4.44	4.44	4.44	0.79	1.13	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3- SN:3165

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	6.04	6.04	6.04	0.50	1.43	± 12.0 %
1750	53.4	1.49	4.91	4.91	4.91	0.36	2.50	± 12.0 %
1900	53.3	1.52	4.61	4.61	4.61	0.34	2.38	± 12.0 %
2450	52.7	1.95	4.18	4.18	4.18	0.79	0.83	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: EX3-3573_Feb11

CALIBRATION CERTIFICATE

Object	EX3DV4 - SN:3573
Calibration procedure(s)	QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3 Calibration procedure for dosimetric E-field probes
Calibration date:	February 17, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3573

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	8.39	8.39	8.39	0.71	0.69	± 12.0 %
1750	40.1	1.37	7.66	7.66	7.66	0.79	0.65	± 12.0 %
1900	40.0	1.40	7.37	7.37	7.37	0.79	0.66	± 12.0 %
2450	39.2	1.80	6.69	6.69	6.69	0.74	0.63	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4- SN:3573

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	8.42	8.42	8.42	0.70	0.77	± 12.0 %
1750	53.4	1.49	7.56	7.56	7.56	0.79	0.69	± 12.0 %
1900	53.3	1.52	7.16	7.16	7.16	0.79	0.68	± 12.0 %
2450	52.7	1.95	6.80	6.80	6.80	0.79	0.62	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

Copyright © 2011 TCC Nokia

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: D835V2-480_Oct09

CALIBRATION CERTIFICATE

Object: D835V2 - SN: 480

Calibration procedure(s): QA CAL-05.v7
Calibration procedure for dipole validation kits

Calibration date: October 19, 2009

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 19, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date/Time: 19.10.2009 10:11:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL900
Medium parameters used: f = 835 MHz; σ = 0.88 mho/m; ε_r = 40.5; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 57.6 V/m; Power Drift = 0.00856 dB
Peak SAR (extrapolated) = 3.53 W/kg
SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.55 mW/g
Maximum value of SAR (measured) = 2.76 mW/g

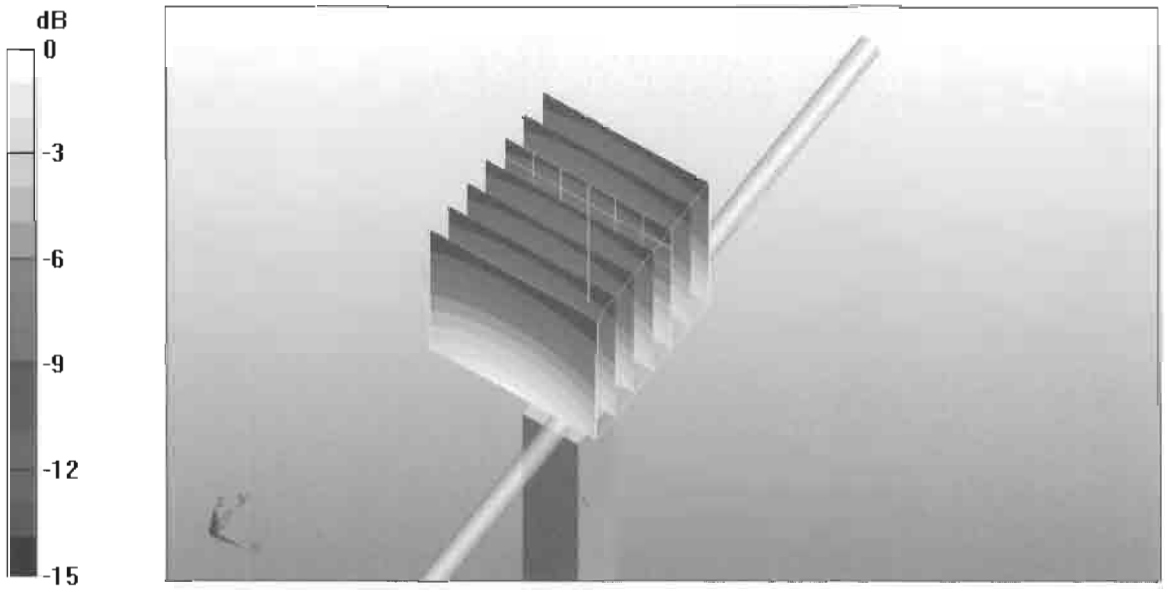

0 dB = 2.76mW/g

DASY5 Validation Report for Body

Date/Time: 19.10.2009 13:40:30

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:480

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL900
Medium parameters used: f = 835 MHz; σ = 1.01 mho/m; ε_r = 53.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.5 V/m; Power Drift = 0.014 dB
Peak SAR (extrapolated) = 3.74 W/kg
SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g
Maximum value of SAR (measured) = 2.94 mW/g

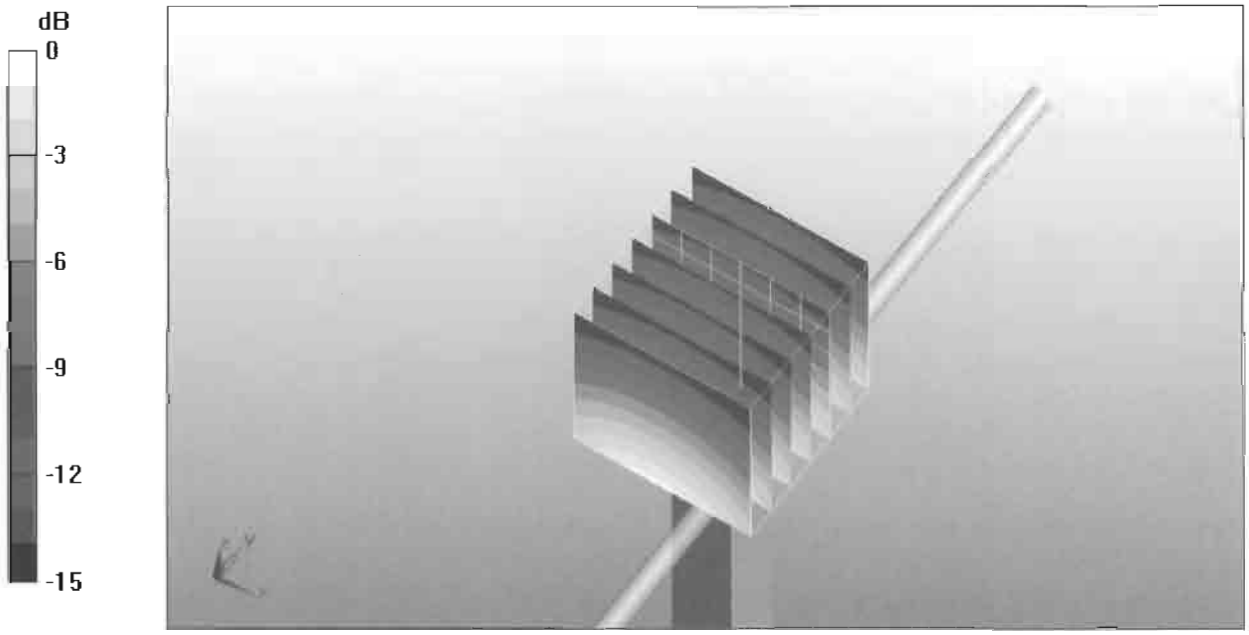

0 dB = 2.94mW/g

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: D1900V2-5d013_Mar10

CALIBRATION CERTIFICATE

Object	D1900V2 - SN: 5d013
Calibration procedure(s)	QA CAL-05.v7 Calibration procedure for dipole validation kits
Calibration date:	March 23, 2010

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 23, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date/Time: 23.03.2010 10:16:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL U11 BB
Medium parameters used: f = 1900 MHz; σ = 1.45 mho/m; ε_r = 41.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 96.4 V/m; Power Drift = 0.028 dB
Peak SAR (extrapolated) = 18.5 W/kg
SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.32 mW/g
Maximum value of SAR (measured) = 12.6 mW/g

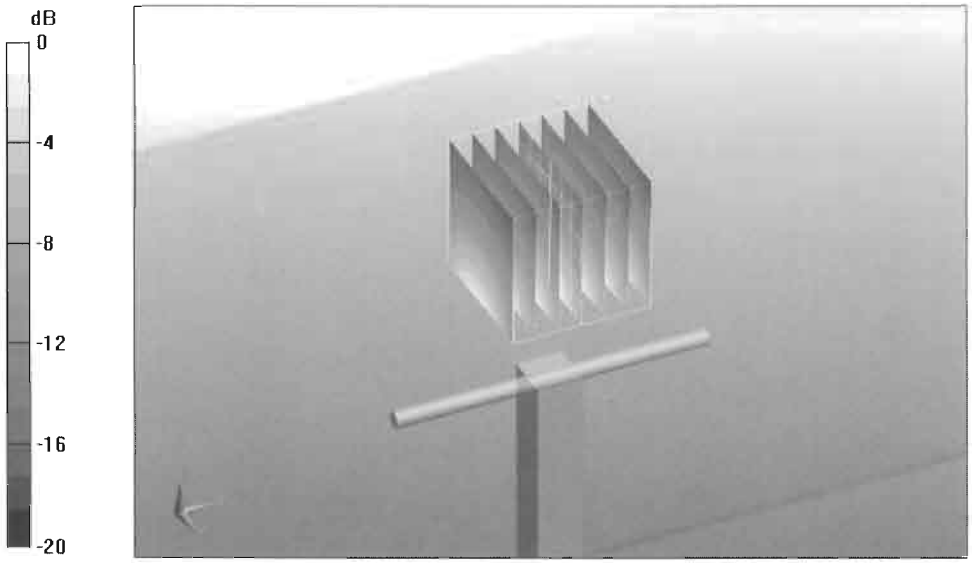

0 dB = 12.6mW/g

DASY5 Validation Report for Body

Date/Time: 23.03.2010 13:12:18

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d013

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL U11 BB
Medium parameters used: f = 1900 MHz; σ = 1.58 mho/m; ε_r = 55; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.9 V/m; Power Drift = 0.00956 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.58 mW/g
Maximum value of SAR (measured) = 12.7 mW/g

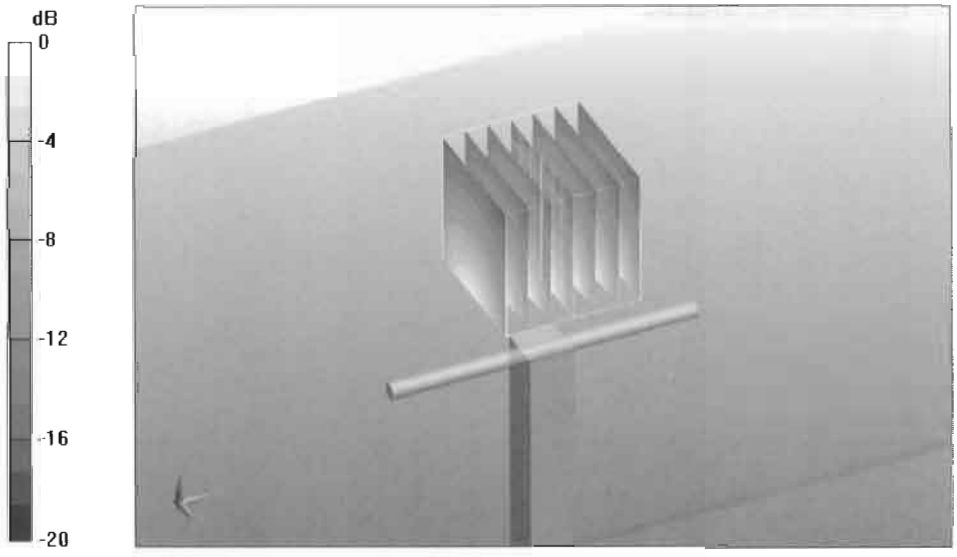

0 dB = 12.7mW/g

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Nokia Salo TCC

Certificate No: D2450V2-749_Oct09

CALIBRATION CERTIFICATE

Object: D2450V2 - SN: 749

Calibration procedure(s): QA CAL-05.v7
Calibration procedure for dipole validation kits

Calibration date: October 21, 2009

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date/Time: 21.10.2009 11:01:04

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL U11 BB
Medium parameters used: f = 2450 MHz; σ = 1.78 mho/m; ε_r = 39.1; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 100.7 V/m; Power Drift = 0.078 dB
Peak SAR (extrapolated) = 26.8 W/kg
SAR(1 g) = 13.2 mW/g; SAR(10 g) = 6.18 mW/g
Maximum value of SAR (measured) = 16.9 mW/g

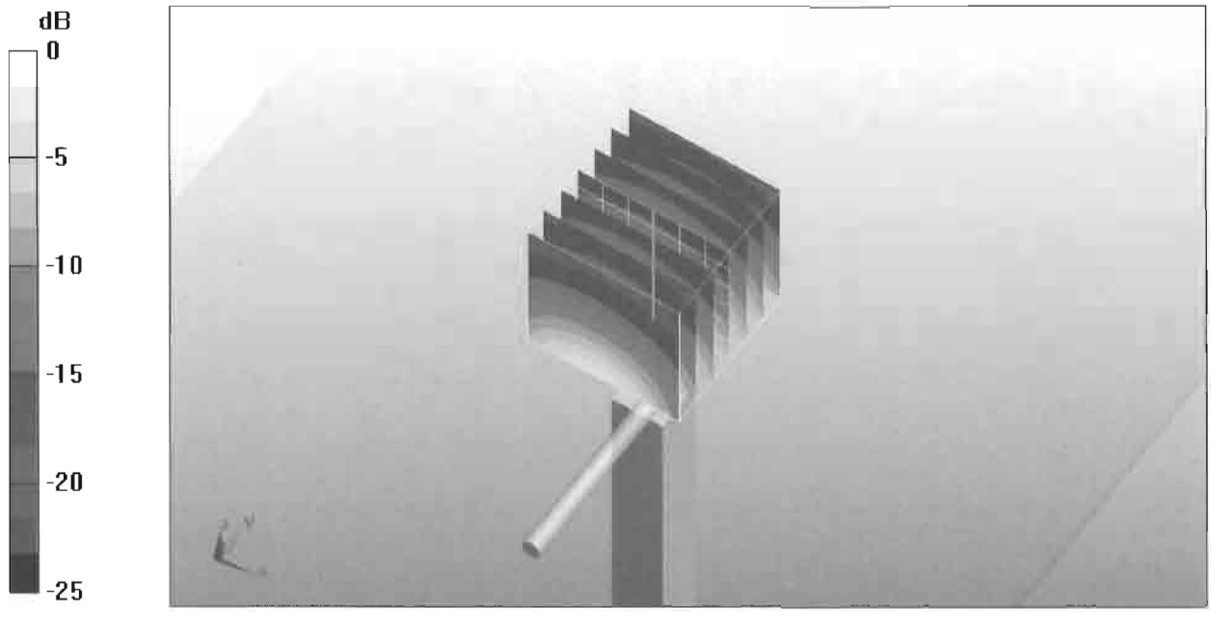

0 dB = 16.9mW/g

DASY5 Validation Report for Body

Date/Time: 21.10.2009 12:07:58

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:749

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: MSL U10 BB
Medium parameters used: f = 2450 MHz; σ = 1.98 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.9 V/m; Power Drift = 0.046 dB
Peak SAR (extrapolated) = 25.8 W/kg
SAR(1 g) = 12.5 mW/g; SAR(10 g) = 5.81 mW/g
Maximum value of SAR (measured) = 16.4 mW/g

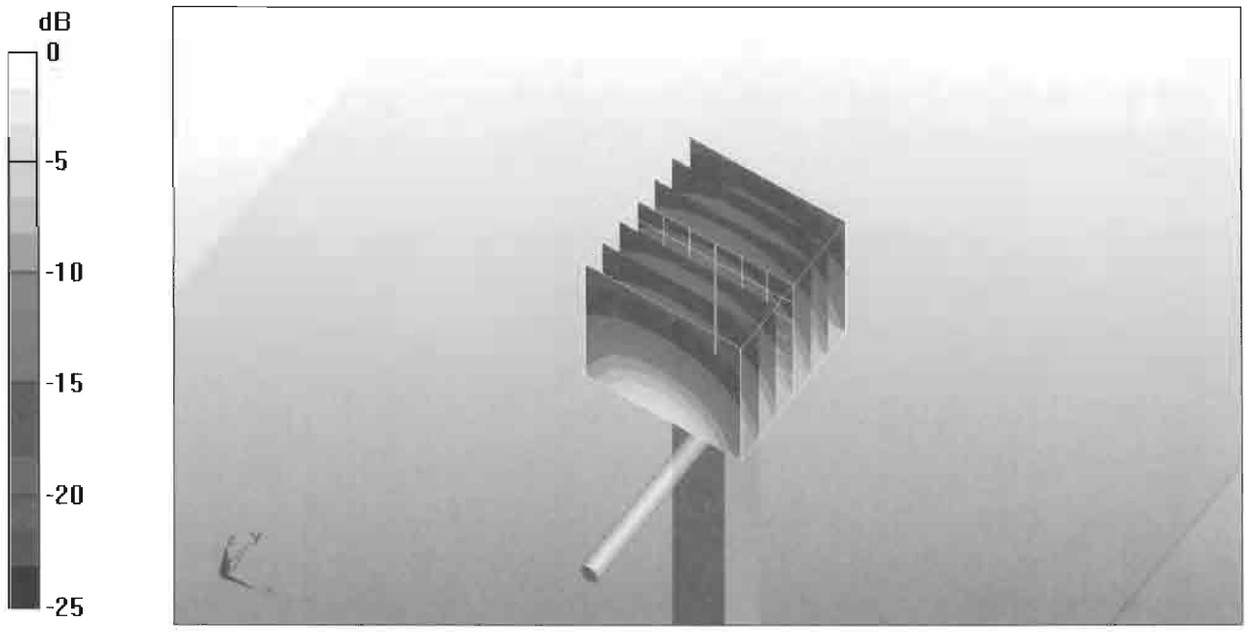

0 dB = 16.4mW/g