

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RX-51_05.doc	Date of Report:	15-Jul-2009
Number of pages:	10	Customer's Contact person:	Tuomo Pursiheimo
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RX-51 / Battery BL-5J, Data cable CA-101, Laptop T41 and Camera Ixus70		
FCC ID:	LJPRX-51	IC:	661E-RX-51
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 1, February 2008) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Kalle Hannila , Engineer, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	08-Jun-2009
Testing completed	14-Jul-2009
The customer's contact person	Tuomo Pursiheimo
Test Plan referred to	T:\Projects\RX-51\TestPlan_RS\RS_testplan_RX-51.xls
Notes	-
Document name	FCC15B_RX-51_05.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. GSM bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RX-51	004401107150423	2001	-	1.2009.22-15	13970
Battery	BL-5J	4620409101S20119808;0670573	-	-	-	13931
Data Cable	CA-101	0730634730501310522	-	-	-	13402
Laptop	T41	-	-	-	-	13983
Camera	Ixus 70	-	-	-	-	13919

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. Bluetooth Test results	5
2.4. WLAN Test results	7
3. Test Equipment.....	9
3.1. Conducted measurements	9
3.2. Radiated measurements	9

2. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RX-51, DUT 13970
Accessories with DUT numbers	BL-5J, DUT 13931; CA-101, DUT 13402; T41, DUT 13983; IXUS70, DUT 13919;
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 101.7
Date of measurements	09-Jul-2009 – 13-Jul-2009
Measured by	Kalle Hannila

2.1. Test setup

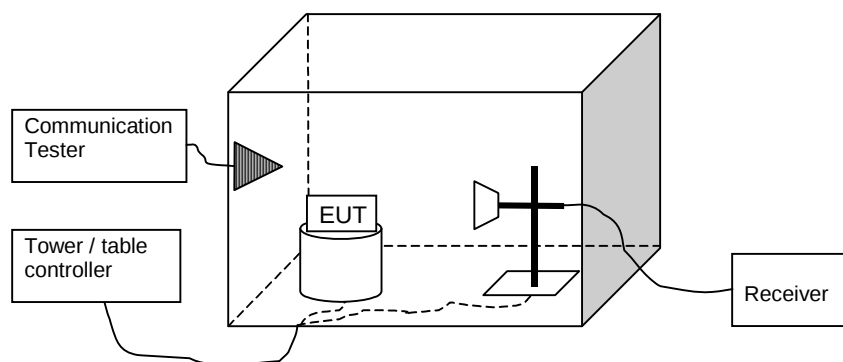

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

2.3. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	44.30	164.06	43.30	1.00	HORIZONTAL	PASSED
7206.000000	46.60	213.80	43.70	2.90	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	31.60	38.02	30.60	1.00	HORIZONTAL	PASSED
7206.000000	34.00	50.12	31.10	2.90	HORIZONTAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
400.501202	35.30	58.21	61.30	-26.00	HORIZONTAL	PASSED
830.861323	30.00	31.62	48.30	-18.30	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4841.675351	44.40	165.96	42.90	1.50	VERTICAL	PASSED
12209.418838	52.10	402.72	40.70	11.40	VERTICAL	PASSED
13308.113226	54.50	530.88	41.80	12.70	VERTICAL	PASSED
15377.259519	56.30	653.13	38.00	18.30	VERTICAL	PASSED
15650.296593	55.70	609.54	38.20	17.50	VERTICAL	PASSED
16041.590180	58.30	822.24	37.80	20.50	VERTICAL	PASSED
17940.887776	57.10	716.14	37.30	19.80	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4840.675351	31.80	38.90	30.30	1.50	VERTICAL	PASSED
12211.918838	39.50	94.41	28.10	11.40	VERTICAL	PASSED
13309.613226	40.60	107.15	27.90	12.70	VERTICAL	PASSED
15376.759519	43.50	149.62	25.20	18.30	VERTICAL	PASSED
15647.796593	42.50	133.35	25.00	17.50	VERTICAL	PASSED
16046.590180	44.50	167.88	23.80	20.70	VERTICAL	PASSED
17945.887776	44.50	167.88	24.70	19.80	HORIZONTAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	43.00	141.25	42.80	0.20	HORIZONTAL	PASSED
7440.000000	48.10	254.10	43.70	4.40	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	30.50	33.50	30.30	0.20	VERTICAL	PASSED
7440.000000	35.00	56.23	30.60	4.40	VERTICAL	PASSED

2.4. WLAN Test results

TX mode, channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	44.90	175.79	43.60	1.3	VERTICAL	PASSED
7236.000000	48.40	263.03	45.40	3.0	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	32.00	39.81	30.70	1.3	VERTICAL	PASSED
7236.000000	35.50	59.57	32.50	3.0	VERTICAL	PASSED

TX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
166.331263	22.20	12.88	52.80	-30.6	VERTICAL	PASSED
400.501202	34.20	51.29	60.20	-26.0	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.269539	46.00	199.53	44.70	1.3	HORIZONTAL	PASSED
7319.133267	47.50	237.14	44.30	3.2	HORIZONTAL	PASSED
7325.649299	51.00	354.81	47.70	3.3	HORIZONTAL	PASSED
7355.707415	47.70	242.66	43.90	3.8	HORIZONTAL	PASSED
7356.705411	47.80	245.47	43.90	3.9	HORIZONTAL	PASSED
12207.418838	52.30	412.10	40.90	11.4	HORIZONTAL	PASSED
15869.237475	55.40	588.84	37.80	17.6	VERTICAL	PASSED
16051.598196	57.70	767.36	37.10	20.6	HORIZONTAL	PASSED
17930.853707	57.10	716.14	37.30	19.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	32.60	42.66	31.30	1.3	HORIZONTAL	PASSED
7319.633267	38.00	79.43	34.80	3.2	HORIZONTAL	PASSED
7325.149299	39.00	89.13	35.70	3.3	HORIZONTAL	PASSED
7354.207415	34.40	52.48	30.60	3.8	HORIZONTAL	PASSED
7356.205411	34.50	53.09	30.70	3.8	HORIZONTAL	PASSED
12211.418838	39.40	93.33	28.00	11.4	HORIZONTAL	PASSED
15866.737475	42.70	136.46	25.10	17.6	VERTICAL	PASSED
16050.098196	44.70	171.79	24.00	20.7	HORIZONTAL	PASSED
17930.353707	44.10	160.32	24.30	19.8	VERTICAL	PASSED

TX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	49.70	305.49	49.00	0.7	HORIZONTAL	PASSED
7386.000000	57.70	767.36	53.50	4.2	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	35.00	56.23	34.30	0.7	HORIZONTAL	PASSED
7386.000000	47.40	234.42	43.20	4.2	VERTICAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24/27, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1749	Log. per. Antenna	HL025	R&S	22/24/27, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24/27, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24/27, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24/27, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24/27, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24/27, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24/27, 15C, 15B
2019	Multimeter	34401A	HP	22/24/27, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24/27, 15C, 15B
2043	Band Reject Filter	WRCA824/849-0.2-6SS	Wainwright	22, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24, 15C, 15B
2048	Band Reject Filter	WRCC1700/1800-0.2-10SS	Wainwright	27, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24/27, 15C
2057	Log. per. Antenna	HL025	R&S	22/24/27, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24/27, 15C, 15B
2110	Multimeter	34401A	HP	22/24/27, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24/27, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24/27, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24/27, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24/27, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2138	Ultra Broadband Antenna	HL562	R&S	22/24/27, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24/27, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24/27, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24/27, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24/27, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24/27, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24/27, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24/27, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24/27, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24/27, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24/27, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24/27, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24/27
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24/27
2365	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22/24/27
2388	Bluetooth Tester	CBT	R&S	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B