

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RX-51_39.doc	Date of Report:	22-Apr-2010
Number of pages:	9	Customer's Contact person:	Niina Upola
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RX-51 / Battery BL-5J / AC-Charger AC-10E / AC-Charger WH-205		
FCC ID:	LJPRX-51X	IC:	661E-RX51
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27, TIA-603-C-2004 and IC standards, RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Ruben Hansen, System Manager, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	31-Mar-2010
Testing completed	21-Apr-2010
The customer's contact person	Niina Upola
Test Plan referred to	T:\Projects\RX-51\TestPlan_RS\RS_testplan_RX-51_CR_HW2205.xls
Notes	-
Document name	T:\Projects\RX-51\EMC\FCC22&24&27_RX-51_39.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900) and WCDMA Band (I/IV(1700)/VIII) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and WLAN and Bluetooth and FM transmitter. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RX-51	004401107724268	2205	-	3.2010.02-8	24329
Battery	BL-5J	4620409457L20205376;0670573	-	-	-	24320
AC-Charger	AC-10E	3997918446120502064;0675408	-	-	-	24322
Headset	WH-205	06944219431D1R53950	-	-	-	24323

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	Passed
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	Passed
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	Passed
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(g)	6.5	Band edge compliance	NP
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS1. Summary for FCC Part 22/24/27 Compliance Test Report 2


1.1.	EUT and Accessory Information	2
1.2.	Summary of Test Results	2
2.	Radiated RF output power	
	(FCC §22.913(a), §24.232(b), §27.50(d)(2), RSS-132 4.4, RSS-133 6.4, RSS-139 6.4) ...	5
2.1.	Test Setup	5
2.2.	Test method and limit	5
2.3.	GSM850 TX Test results	7
2.4.	GSM1900 TX Test results	7
2.5.	WCDMA4 TX Test results	7
3.	Test Equipment.....	8
3.1.	Conducted measurements	8
3.2.	Radiated measurements	8

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), §27.50(d)(2), RSS-132 4.4, RSS-133 6.4, RSS-139 6.4)

EUT with DUT number	RX-51, DUT 24329
Accessories with DUT numbers	BL-5J, DUT 24320 ; AC-10E, DUT 24322 ; WH-205, DUT 24323
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 42 / 100
Date of measurements	21-Apr-2010
Measured by	Ruben Hansen

2.1. Test Setup

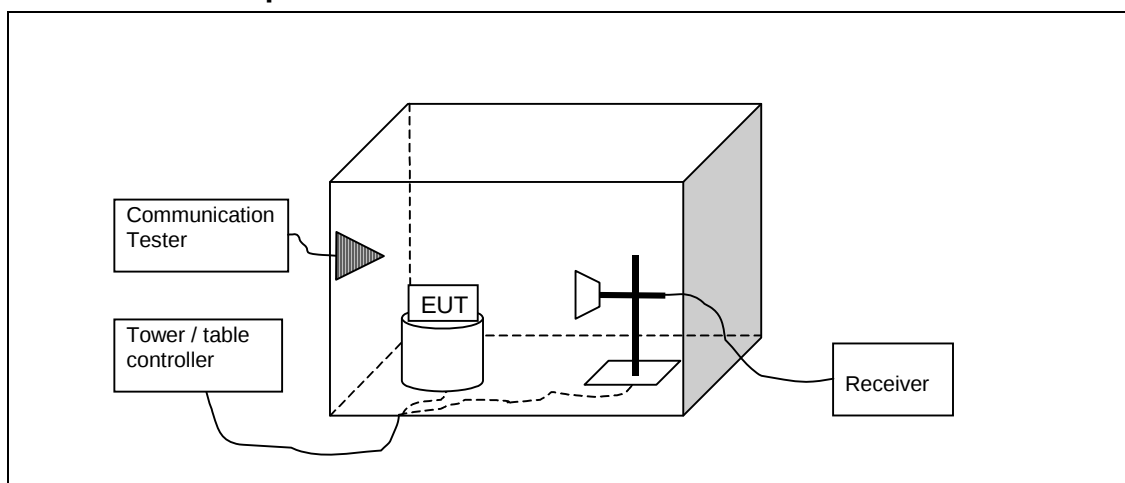

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. $P_{SUBST\ TX}$ is signal generator level, $P_{SUBST\ RX}$ is receiver level, $L_{SUBST\ CABLES}$ is cable losses including both TX and RX cables and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit([dBm])
824 - 849	7	38.5
1710 - 1755	1	30
1850 - 1910	2	33

2.3. GSM850 TX Test results

GSM mode

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	24.55	0.285	-8.92	33.47	HORIZONTAL	Passed
190 / 836.6	26.76	0.474	-6.55	33.31	HORIZONTAL	Passed
251 / 848.8	28.81	0.76	-4.16	32.97	HORIZONTAL	Passed

EGPRS mode, 1 TX Slot

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
128 / 824.2	17.27	0.053	-16.2	33.47	HORIZONTAL	Passed
190 / 836.6	19.75	0.094	-13.56	33.31	HORIZONTAL	Passed
251 / 848.8	21.78	0.151	-11.19	32.97	HORIZONTAL	Passed

2.4. GSM1900 TX Test results

GSM mode

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
512 / 1850.2	31.01	1.262	-13.95	44.96	VERTICAL	Passed
661 / 1880	31.29	1.346	-14.15	45.44	VERTICAL	Passed
810 / 1909.8	30.69	1.172	-14.82	45.51	VERTICAL	Passed

EGPRS mode, 1 TX Slot

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
512 / 1850.2	27.86	0.611	-17.1	44.96	VERTICAL	Passed
661 / 1880	27.49	0.561	-17.95	45.44	VERTICAL	Passed
810 / 1909.8	26.6	0.457	-18.91	45.51	VERTICAL	Passed

2.5. WCDMA4 TX Test results

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
1392 / 1712.4	24.09	0.256	-18.81	42.90	HORIZONTAL	Passed
1420 / 1740	24.39	0.275	-18.81	43.20	VERTICAL	Passed
1432 / 1752.6	24.36	0.273	-19.44	43.8	HORIZONTAL	Passed

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schw	15C, 15B
13666	Receiver	ESPC	Rohde&Schw	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schw	15C, 15B
16995	Directional Coupler 20dB	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schw	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schw	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schw	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schw	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Communication Tester	CMU200	Rohde&Schw	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schw	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX	10-785-522	Pickering	22/24/27, 15C, 15B
18861	Receiver	EMI Test Receiver	Rohde&Schw	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schw	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-	Wainwright	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-	Wainwright	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-	Wainwright	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-	Wainwright	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZB	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schw	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schw	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B

14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B