

Test Report No. 8412316054

For Alvarion Ltd.

Equipment Under Test:

Broadband Wireless Access

***BreezeACCESS VL 5.8 System and
Point to Point BreezeNET B system***

***From The Standards Institution
Of Israel
Industry Division
Telematics Laboratory
EMC Section***



Certificate No.1487-01

Test Report No.: 8412316054

Page 1 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Order placed by:	Alvarion Ltd.
Address:	21A Habarzel str, Tel-Aviv, 69710, Israel
Sample for test selected by:	The orderer
The date of test:	26/08 - 14/09/2004

Description of Equipment

Under Test (EUT): BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Manufactured by: Alvarion Ltd.

Reference Documents:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices"; Subpart C: "Intentional radiators" (2002)

Test Results: The EUT was found meeting with the relevant requirements of CFR 47 FCC Part 15 Sections: 15.205,15.207,15.209,15.247

This Test Report contains 60 pages and may be used only in full.	This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.
--	---

Test Report No.: 8412316054

Page 2 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Table of Contents

1. Scope	3
2. System content	4
2.1. BreezeACCESS VL system and BreezeNETB system	4
2.2. Applicant information	5
2.3. Test performance	5
3. Scope	6
4. General	6
4.1. Permissive change description	6
5. Test configuration:	11
6. Test specification, Methods and Procedures	13
7. Measurements, examinations and derived results	13
7.1. Location of the Test Site:	13
7.2. Normal test condition:	13
7.3. Conducted emission test (per Section 15.207):	14
7.4. Radiated emission test, general requirements (per section 15.209):	19
7.5. Radiated emission test on Radio Unit – spurious (per Section 15.209):	21
7.6. Radiated emission test on Radio Unit - restricted bands (per Section 15.205):	25
8. Conducted emission tests on Radio Unit:	33
8.1. Minimum bandwidth	33
8.2. Maximum peak output power	33
9. Compliance with specification:	52
10. Appendix 1: Test equipment used	53
11. Appendix 2: Antenna Factor and Cable Loss	53
12. Appendix 3: Test configuration illustration	56

Test Report No.: 8412316054

Page 3 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

1. Scope

Test item: BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system .

Manufacturer: Alvarion LTD

Types (Models): Base Station

IDU:	BS-SH-VL (Generic) shelf
BS-AU-VL	Plugged-in card
BS-PS-AC-VL	AC Power supply
ODU: AU-D-BS-5.8-ODU	Radio unit

Subscribe unit:

SU-A-5.8-6/54-B/1D-VL Complete system

IDU: Universal indoor unit, Model: PS1065/1073

Base station Stand-alone unit and Subscriber unit are identical hardware units and system construction. The two configurations are distinguished by software application only.

BreezeNET B system hardware configuration and system construction is identical to the following BreezeAccess VL units:

BU-B14/28D-5.8 system configuration is identical to subscriber unit SU-A-5.8-6/54-B/1D-VL.

The two systems are distinguished by software application only.

RB-B14/28D-5.8 system configuration is identical to subscriber unit SU-A-5.8-6/54-B/1D-VL.

The two systems are distinguished by software application only.

Test Report No.: 8412316054

Page 4 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

2. System content

2.1. BreezeACCESS VL system and BreezeNETB system

Base station	
AU-D-BS-5.8-90/120-VL	Complete system
BS-SH-VL (Generic)	Shelf
BS-PS-AC-VL	Power supply AC
BS-PS-DC-VL	Power supply DC
BS-AU-VL	Indoor card
AU-D-BS-5.8 -ODU-90/120	Outdoor unit with detached antenna
Base station Stand alone	
AU-D-SA-5.8-60/90/120-VL	Complete system with detached antenna
Subscriber unit	
SU-A-5.8-6/54-B/1D-VL	Complete system with integrated antenna
BreezeNETB p-to-p system	
RB-B14/28D-5.8 ¹	Remote bridge D: antenna detached
BU-B14/28D-5.8 ¹	Base unit D: antenna detached

Comments:

¹ D can be blank or D

Test Report No.: 8412316054

Page 5 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

2.2. Applicant information

Company: Alvarion LTD
P.O.B.: 13139
Postal code: 61131
City: Tel Aviv
Country: Israel
Telephone number: +972 3 6456262
Telefax number: +972 3 6456222

2.3. Test performance

Location: SII EMC Section
Alvarion LTD
Purpose of test: Apparatus compliance verification in according with
CFR 47 FCC Requirement
Test specification: CFR 47 FCC Part 15 Sections: 15.205,15.207,15.209,15.247

Test performed by: Mr. Michael Feldman, test technician

Test report approved by: Mr. Yuri Rozenberg, Head of EMC Branch

3. Scope

This test report contains results measured on BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system (permissive change) according to the relevant requirements of CFR 47 FCC Part 15 Subpart C.

4. General

4.1. Permissive change description

The BreezeAccess VL radio is based on the ATHEROS chip set that includes the MAC and the radio section. The permissive change is a modification of the front end transmit section to a low cost radio solution with better performance. The major changes are

1. The power amplifier section was updated.
2. The LNA was replace to a low cost design
3. The Atheros chip set was updated to a new low cost and improved design.
4. Adding ability to operate in a 10MHz bandwidth.

The general radio parameters specification was not changed as output power, operating frequency band etc.

BreezeACCESS VL is a high capacity, IP services oriented Broadband Wireless Access system.

The BreezeAccess VL is digital modulated TDD system operating in 5725MHz to 5850MHz band.

The system contains a base station unit and a subscriber unit.

The base station and subscriber radio are identical radio hardware.

The basic system configuration is a two-box configuration that contains

1. Indoor unit that contains a power supply and an Ethernet 10Base-T bypass.
2. Outdoor unit containing the entire radio and digital section.
3. A single CAT5 cable connecting the indoor and outdoor unit carrying the DC power and the data.

Test Report No.: 8412316054

Page 7 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

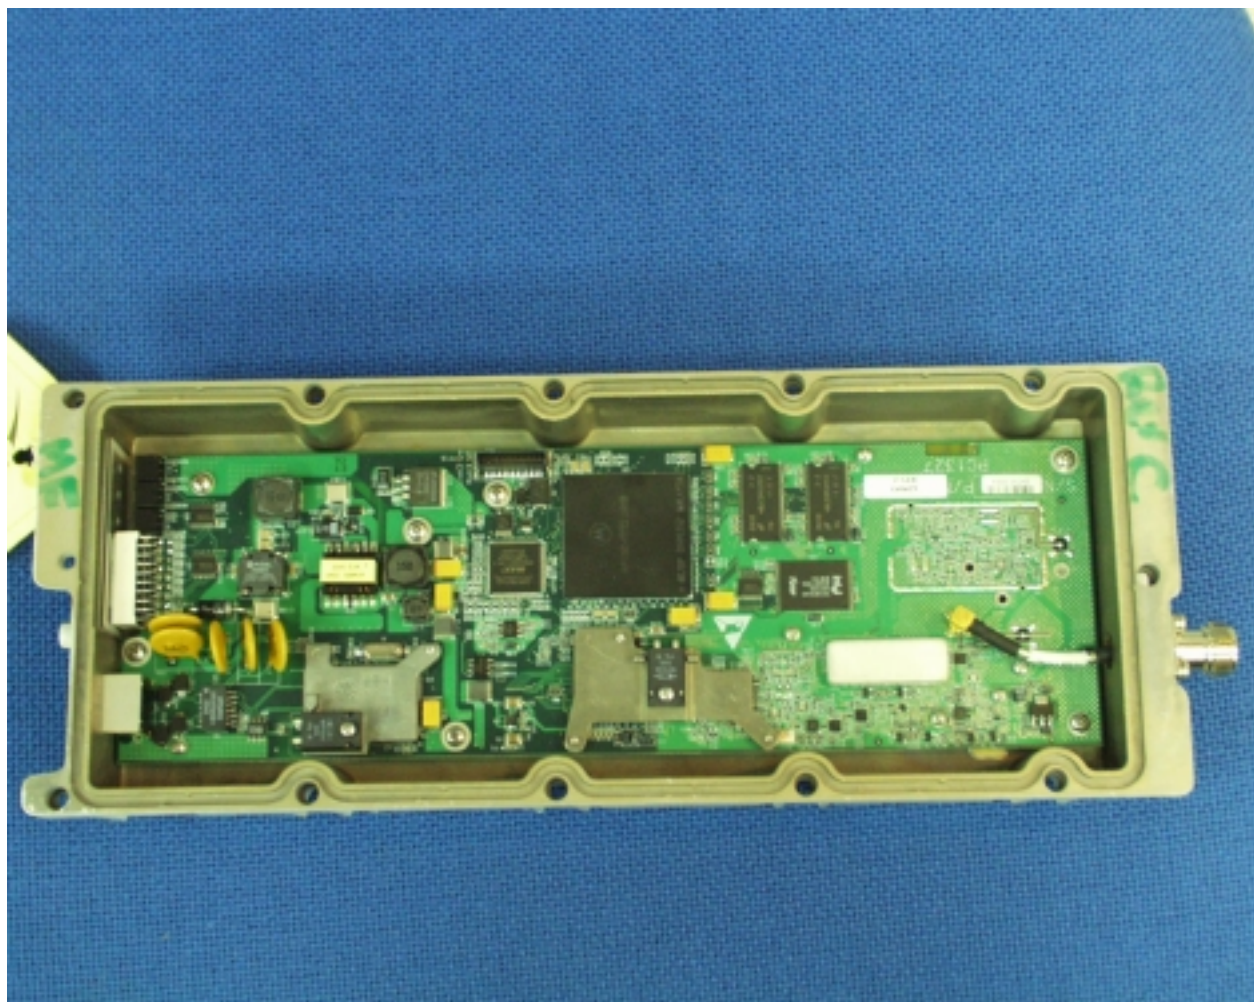


Photo # 1. Radio Unit. PWB component side

Test Report No.: 8412316054

Page 8 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

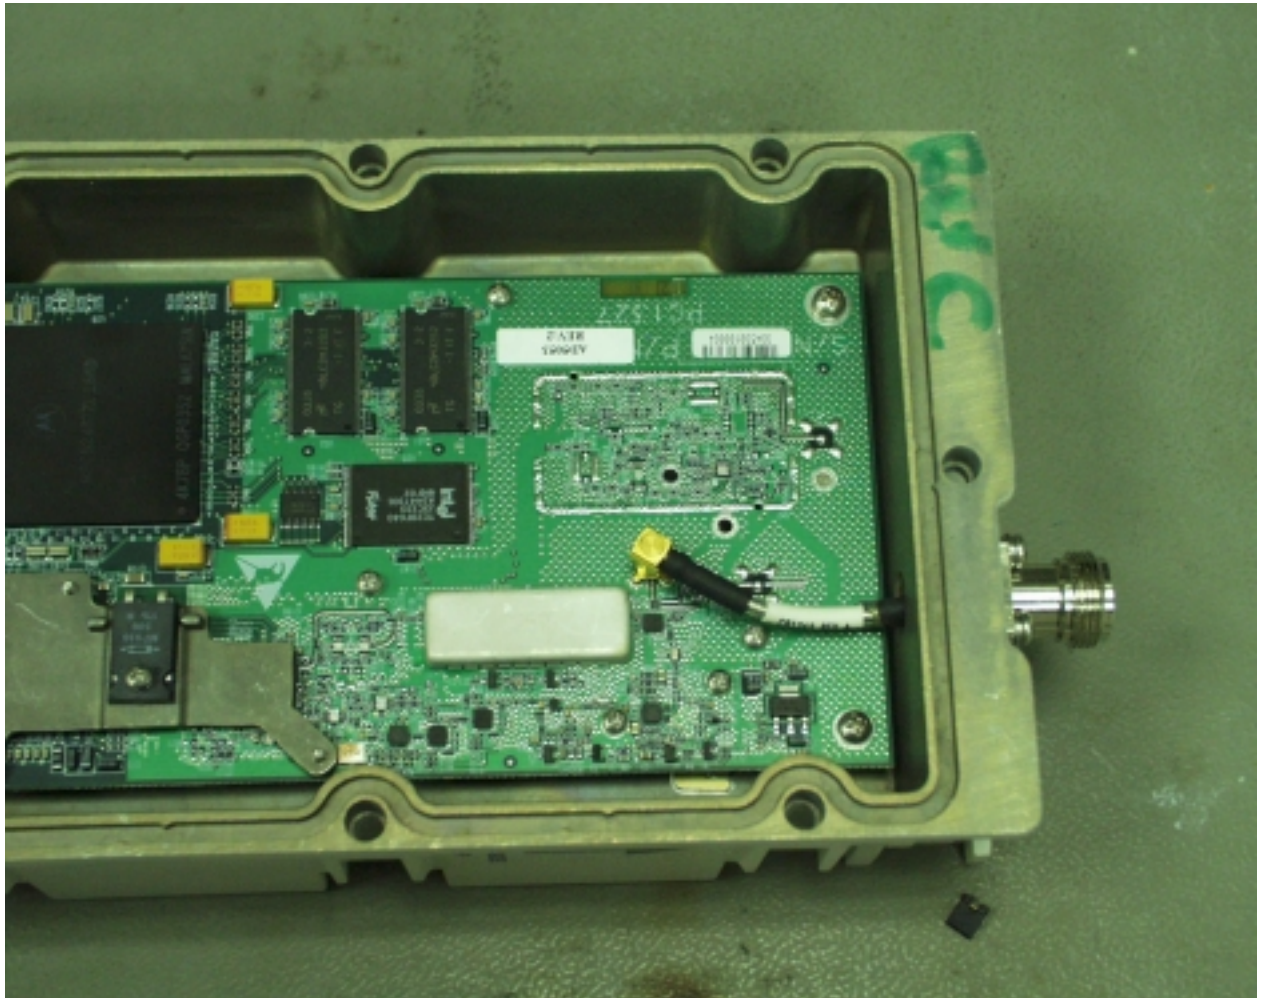


Photo # 2. Radio unit, component side

Test Report No.: 8412316054

Page 9 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

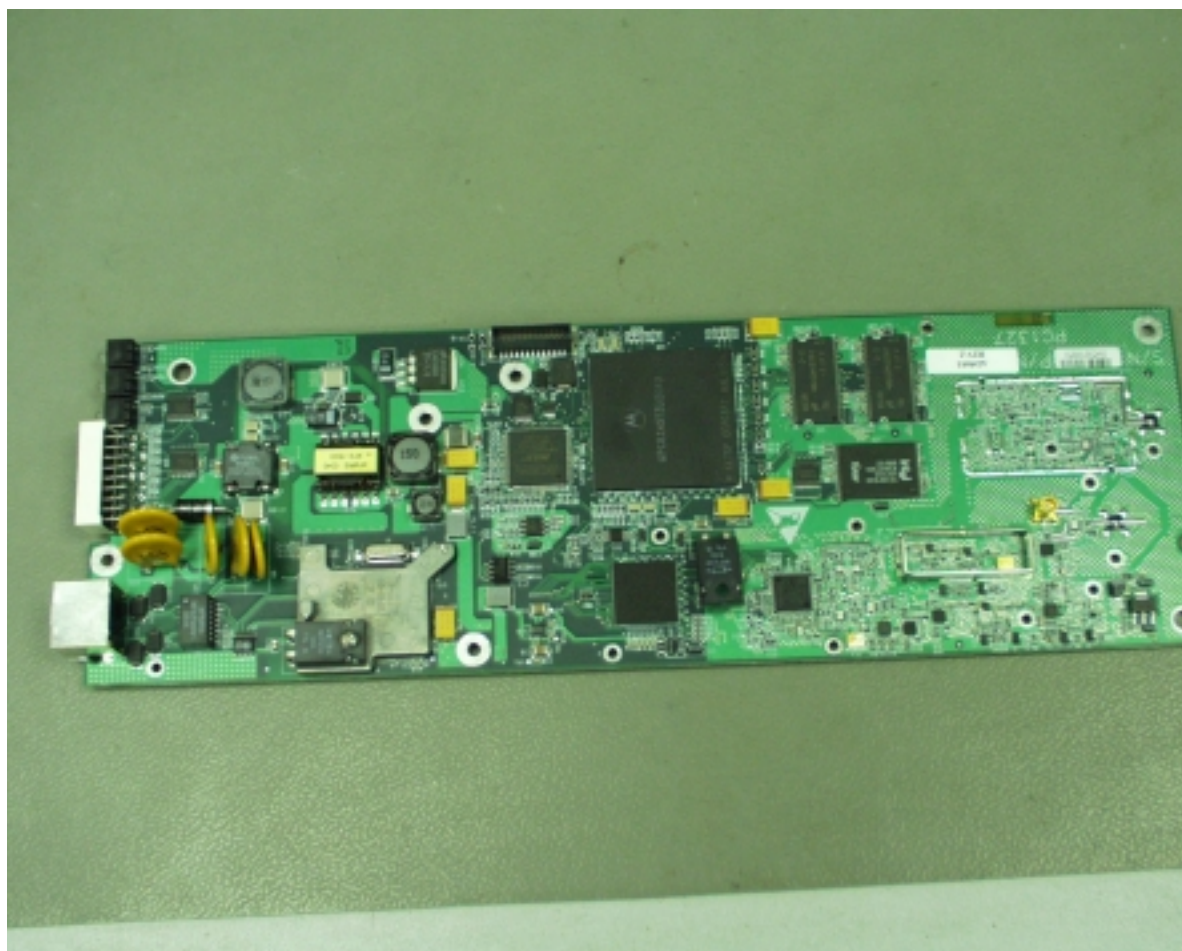


Photo # 3. Radio Unit. PCB component side

Test Report No.: 8412316054

Page 10 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

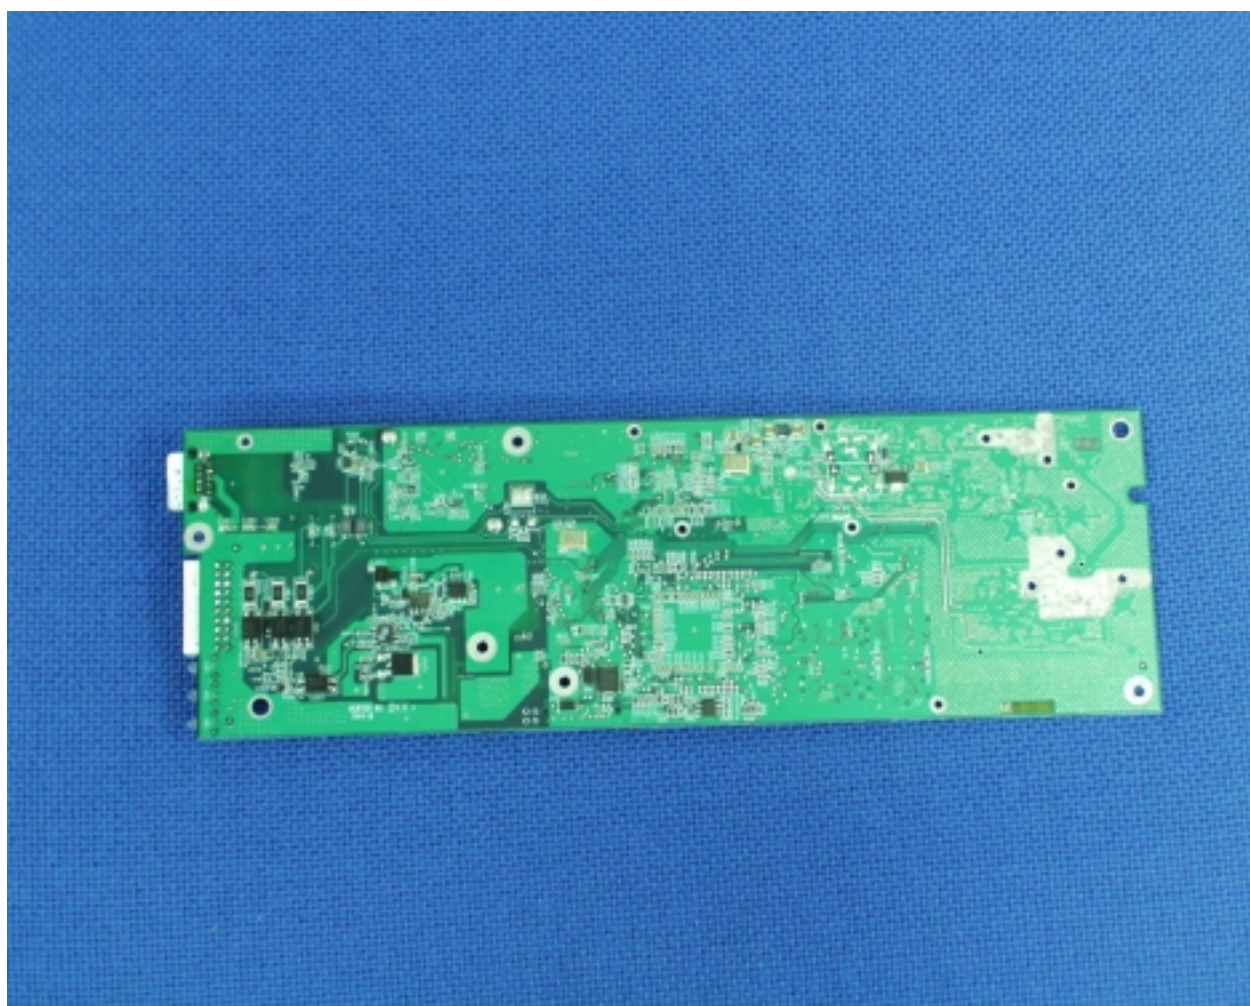


Photo # 4. Radio Unit. PCB print side

Test Report No.: 8412316054

Page 11 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

5. Test configuration:

- For Radiated emission measurements per sec. 15.209 requirements the Subscriber Unit and the Base Station Unit were configured for tests as shown in Figures 1, 2.
- For Radiated emission measurements per sec. 15.205 requirements the Radio unit was tested with three various antennas, as shown in table:

	Name	Freq. Range GHz	Gain dBi	P/N or Model	Type
1	MTI (AU)	5.15-5.875	16	AN 1152	Sector antenna MT-484033/NV
2	UNI-28-4 (SU)	5.15-5.875	28	AN 1230	Planar Array MT 4860001 Unidirectional antenna
3	SP2-5.8 (SU)	5.15-5.875	28	AN 1133	Parabolic antenna

Test Report No.: 8412316054

Page 12 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

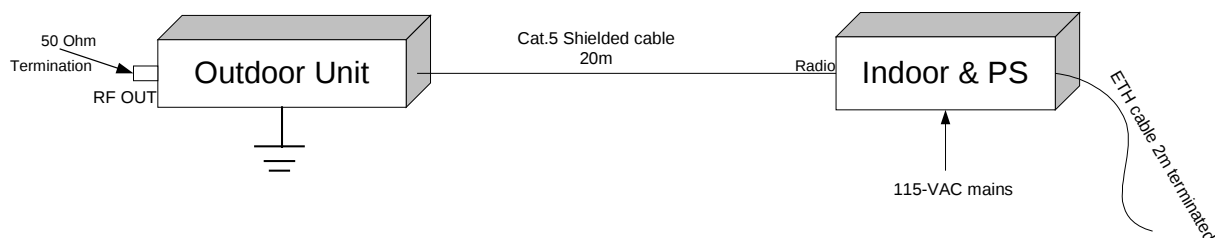


Figure 1. Subscriber Unit test setup

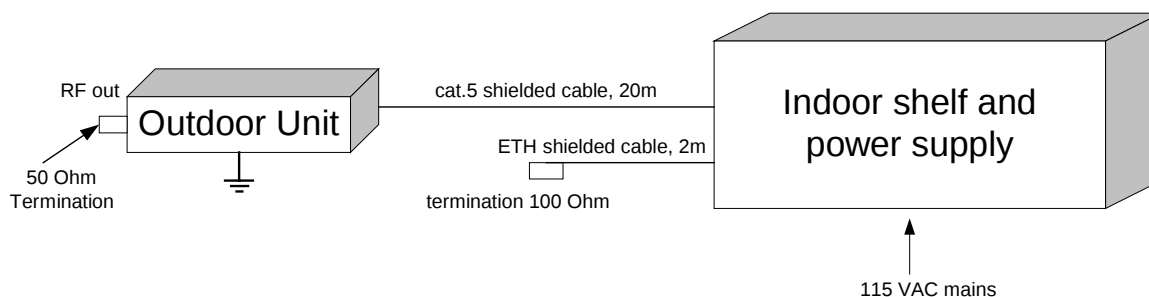


Figure 2. Base Station test setup

6. Test specification, Methods and Procedures

Test Specification:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices"; Subpart E: "Intentional radiators" (2002)

Methods and Procedures:

- ❖ ANSI C63/4/1992: "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz".

7. Measurements, examinations and derived results

7.1. Location of the Test Site:

The tests were conducted in the EMC laboratory of the Standards Institution of Israel in Tel-Aviv and at open test site located at Kibbutz Native Halamed Hai in Emek HaEla, Israel.

7.2. Normal test condition:

Temperature: 22 °C
Humidity: 50 %

Test Report No.: 8412316054

Page 14 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

7.3. Conducted emission test (per Section 15.207):

7.3.1. Requirements:

EUTs conducted emission within the band 150 kHz to 30 MHz shall not exceed value required in section 15.207 (a).

7.3.2. Tested units:

The measurements were performed on:

- Subscriber Unit - on Universal Indoor unit AC power adaptor PS 1065/1073.
- Base Station Unit - on AC input.

7.3.3. Test procedure:

Each EUT was placed on a non-metallic table in a shielded chamber at a height of 80 cm from the floor and 40 cm from the nearest wall.

The EUT was operated to transmitting through the customer software.

First, initial scans were performed. Final measurements were performed at the frequencies where emission exceeded the tolerance limit.

Test equipment (EMI receiver) setup was as follow:

Initial scan:

Detector type	Peak
Mode	Max hold
Bandwidth	9 kHz
Step size	Continuous sweep
Sweep time	>100 msec

Measurements

Detector type	Quasi-peak, Avg (CISPR)
Bandwidth	9 kHz
Measurement time	200 seconds/MHz
Observation	>15 seconds

7.3.4. Test results:

Subscriber Unit. Test results are shown in Plots #1, 2.

Base Station Unit. Test results are shown in Plots #3, 4.

**Test Report No.: 8412316054****Page 15 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system**

09:51:54 SEP 07, 2004 FCC Line PH

ALVARION EUT-BreezeAccess VL 5.3

Signal Freq (MHz)	PK Amp	QP Amp	AV Amp	QP _Δ L2
1 0.165183	49.7	49.0	41.6	-6.2
2 0.220912	41.8	41.3	33.9	-11.5
3 0.274070	38.8	37.6	29.8	-13.5
4 0.493901	37.6	36.8	36.3	-9.4
5 7.356944	33.2	31.5	23.0	-18.5

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 160 kHz

47.65 dB μ VLOG REF 75.0 dB μ V

10

dB/

ATN

10 dB

VA SB

SC FC

ACORR


START 150 kHz

#IF BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz

SWP 2.49 sec

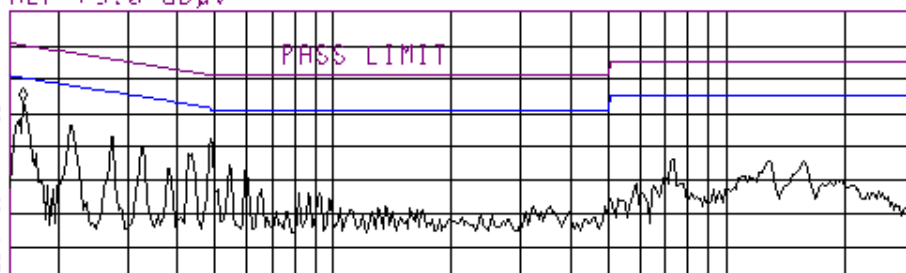
**Plot # 1. Subscriber Unit****Conducted emissions measurement result on 110 VAC power line: phase**

**Test Report No.: 8412316054****Page 16 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system**

09:59:14 SEP 07, 2004 FCC Line N
ALVARION EUT-BreezeAccess VL 5.3

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP Δ L2
1	0.164024	49.3	48.8	42.9	-6.5
2	0.219401	44.0	43.2	38.1	-9.7
3	0.273755	41.9	40.7	36.3	-10.3
4	0.439660	37.2	36.3	35.9	-10.8
5	0.493376	37.0	36.0	35.6	-10.1

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 490 kHz
36.17 dB μ V

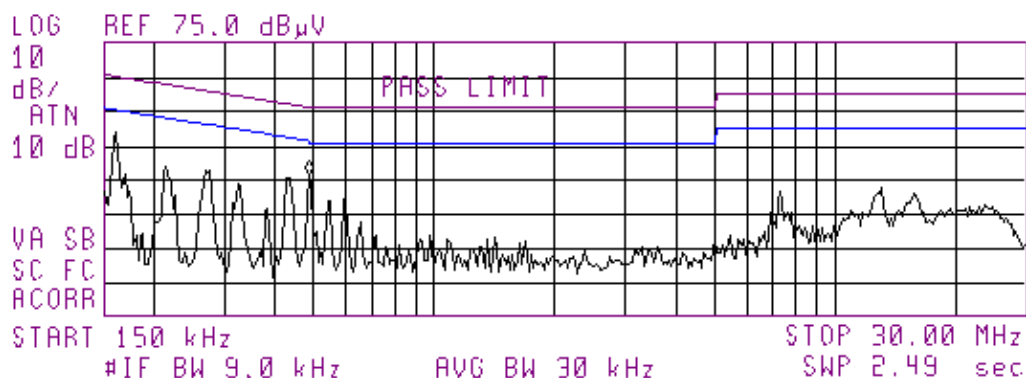
**Plot # 2. Subscriber Unit****Conducted emissions measurement result on 110 VAC power line: neutral**

Test Report No.: 8412316054

Page 17 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

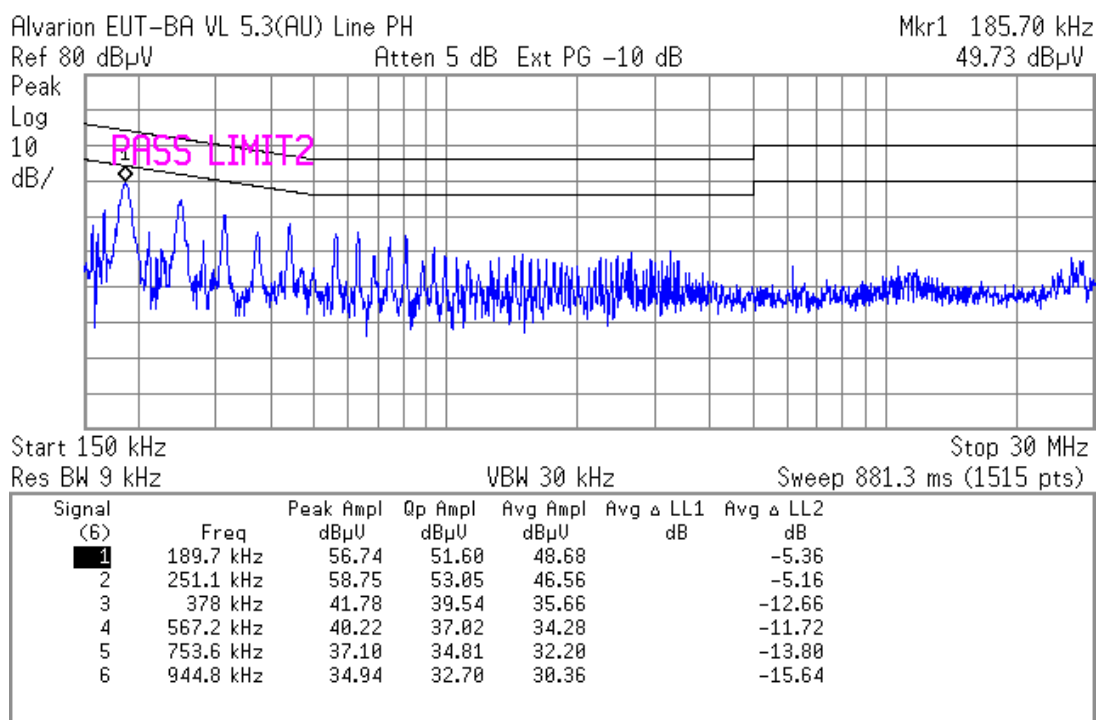

Plot # 3. Base Station Unit


Conducted emissions measurement result on 110 VAC power line: phase

Test Report No.: 8412316054

Page 18 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

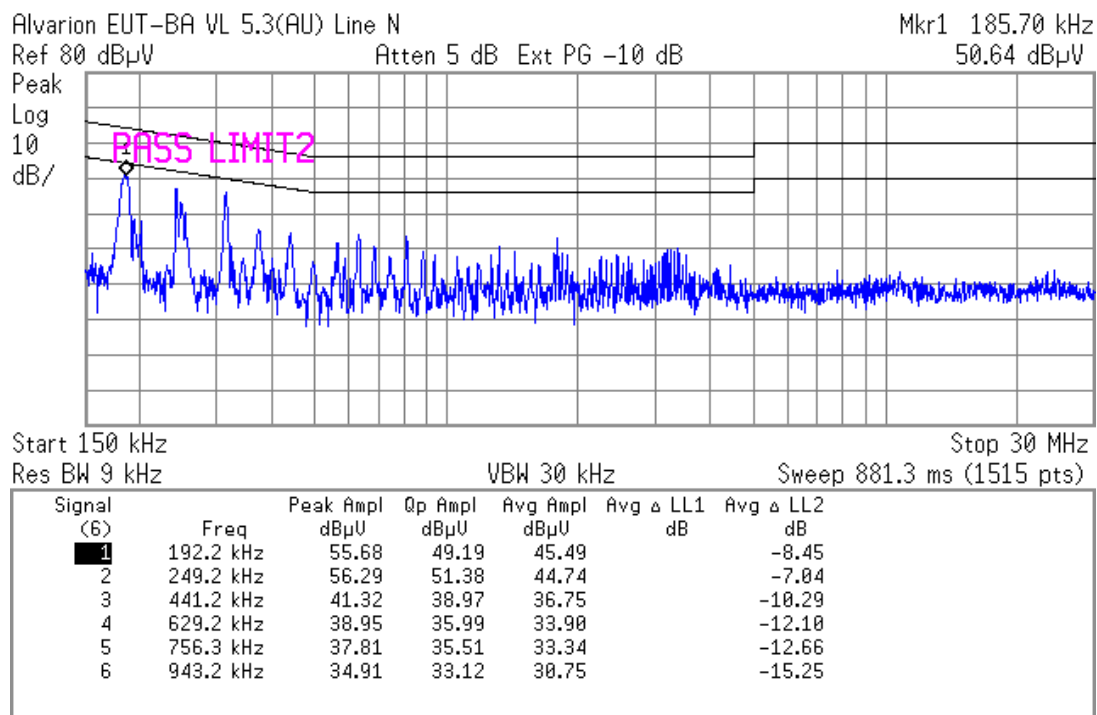

Plot # 4. Base Station Unit

Conducted emissions measurement result on 110 VAC power line: neutral

7.4. Radiated emission test, general requirements (per section 15.209):

7.4.1. Requirements:

EUT's radiated emission shall not exceed value required in section 15.209.

7.4.2. Test description:

The measurements were performed at the Open Area Test Site.

The test configuration is shown in Fig.1, 2.

The EUT was arranged on a non-metallic table 0.8 m placed on the turn-table.

The measurements were performed at a 10 m measurement distance.

The Biconilog 30 MHz-2 GHz antenna was used.

The frequency range was investigated from 30 MHz to 2GHz.

The measurements were performed at each frequency at which the signal was 10 dB below the limit or less.

The level were maximized by initially rotating turntable through 360°, varying the antenna height between 1 m and 4 m, rerouting EUT cables and changing antenna polarization from vertical to horizontal. The measuring equipment settings were:

Initial scan:

Detector type	Peak
Mode	Max hold
Bandwidth	120 kHz
Step size	Continuous sweep
Sweep time	>1 seconds/MHz

Measurements:

Detector type	Quasi-peak (CISPR 16)
Bandwidth	120 kHz
Measurement time	20 seconds/MHz
Observation	>15 seconds

7.4.3. Radiated emission test results:

Test results are presented in Table 1.

Test Report No.: 8412316054

Page 20 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Table 1. Radiated emission test results
EUT: BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system
BreezeACCESS VL 5.8 System

Frequency (MHz)	Turn- table Angle (°)	Antenna Polariz.	Antenna Height (m)	Emission Level Note 1 (dB μ V/m)	Limit @ 3 m (dB μ V/m)	Margin Note 2 (dB)	Results
250	56	H	2.15	27.0	46	19	Complies
300	322	H	3.27	22.2	46	23.8	Complies
375	226	H	2.76	27.4	46	18.6	Complies
400	281	H	3.30	30.5	46	15.5	Complies
450	271	H	2.78	23.2	46	22.8	Complies
500.0	191	H	1.75	30.9	46	15.1	Complies

Note 1: Emission level = E Reading (dB μ V) + Cable loss (dB) + Antenna Factor (dB/m) + 10 dB
 Where 10 dB is an extrapolation distance factor.
 For Cable Loss and Antenna Factor refer to Appendix 2.

Note 2: Margin (dB) = Limit (dB μ V/m) – Emission level (dB μ V/m)

Test Report No.: 8412316054

Page 21 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

7.5. Radiated emission test on Radio Unit – spurious (per Section 15.209):

7.5.1. Requirements:

The levels of any unwanted emission shall not exceed value required in section 15.209.

7.5.2. EUT configuration:

The radio unit was tested with four various antennas (see sec.2.2)

- Sector antenna, AN 1152 for Base Station (AU)
- Unidirectional antenna AN 1230 for Subscriber unit (SU)
- Parabolic antenna AN 1133 for Subscriber unit (SU).

7.5.3. Test procedure:

The measurements were performed in the anechoic chamber.

The EUT was arranged on a non-metallic table 0.8 m placed on the turntable.

Measuring antennas used: Up to 18 GHz - Double Ridge **EMCO** model 3115
above 18 GHz - Alpha TRG model A361

Antenna height = 1 m.

Polarization: Vertical/Horizontal

Measurement distance = 1m.

The frequency range was investigated up to 40 GHz.

The measurements were performed in vertical and horizontal polarization, the maximum reading recorded.

Measuring detector function and bandwidths:

Detector type	Peak
Resolution bandwidth	1MHz
Video bandwidth	1 MHz

Detector type	Average
Resolution bandwidth	1MHz
Video bandwidth	3 kHz*

7.5.4. Radiated emission test results and calculation ratio:

The test results are shown in Tables ## 2-4.

The emission level was calculated as:

E Reading (dBμV) + measuring cable loss (dB) + measuring antenna factor (dB/m) + Distance correction factor

For measuring cable loss and measuring antenna factor refer to Appendix 2.

Distance correction factor = -9.5 dB (an extrapolation reading from 1 m measuring distance to 3m specified distance)

Test Report No.: 8412316054

Page 22 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Table 2. Spurious emissions test results

Antenna used: P/N: AN 1152

Frequency (GHz)	Emission Level (dBμV/m)		Limit @ 3m (dBμV/m)		Margin (dB)		Results
	Average	Peak	Average	Peak	Average	Peak	
LOW 5.735 GHz							
11.47	41.1	59.7	54	74	12.8	14.3	Complies
17.21	44.3	62.6			9.7	11.4	Complies
22.94	Noise floor	Noise floor			-	-	Complies
28.68	Noise floor	Noise floor			-	-	Complies
34.41	Noise floor	Noise floor			-	-	Complies
MIDDLE 5.785 GHz							
11.57	41.5	60.5	54	74	12.5	13.5	Complies
17.36	43.5	62.7			10.5	11.3	Complies
23.14	Noise floor	Noise floor			-	-	Complies
28.93	Noise floor	Noise floor			-	-	Complies
34.71	Noise floor	Noise floor			-	-	Complies
HIGH 5.840 GHz							
11.68	40.9	57.4	54	74	13.2	16.7	Complies
17.52	42.5	58.2			11.5	15.8	Complies
23.36	Noise floor	Noise floor			-	-	Complies
29.20	Noise floor	Noise floor			-	-	Complies
35.04	Noise floor	Noise floor			-	-	Complies

Test Report No.: 8412316054

Page 23 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Table 3. Spurious emissions test results

Antenna used: P/N: AN 1230

Frequency (GHz)	Emission Level (dBμV/m)		Limit @ 3m (dBμV/m)		Margin (dB)		Results
	Average	Peak	Average	Peak	Average	Peak	
LOW 5.735 GHz							
11.47	41.5	60.0	54	74	12.5	14.0	Complies
17.21	45.2	62.9			8.8	11.1	Complies
22.94	Noise floor	Noise floor			-	-	Complies
28.68	Noise floor	Noise floor			-	-	Complies
34.41	Noise floor	Noise floor			-	-	Complies
MIDDLE 5.785 GHz							
11.57	41.5	60.5	54	74	12.5	13.5	Complies
17.36	43.5	62.3			10.5	11.7	Complies
23.14	Noise floor	Noise floor			-	-	Complies
28.93	Noise floor	Noise floor			-	-	Complies
34.71	Noise floor	Noise floor			-	-	Complies
HIGH 5.840 GHz							
11.68	41.5	60.4	54	74	12.5	13.6	Complies
17.52	43.3	61.7			10.7	12.3	Complies
23.36	Noise floor	Noise floor			-	-	Complies
29.20	Noise floor	Noise floor			-	-	Complies
35.04	Noise floor	Noise floor			-	-	Complies

Test Report No.: 8412316054

Page 24 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

Table 4. Spurious emissions test results

Antenna used: P/N: AN 1133

Frequency (GHz)	Emission Level (dBμV/m)		Limit @ 3m (dBμV/m)		Margin (dB)		Results
	Average	Peak	Average	Peak	Average	Peak	
LOW 5.735 GHz							
11.47	41.2	59.7	54	74	12.8	14.3	Complies
17.21	45.2	62.6			8.8	11.4	Complies
22.94	Noise floor	Noise floor			-	-	Complies
28.68	Noise floor	Noise floor			-	-	Complies
34.41	Noise floor	Noise floor			-	-	Complies
MIDDLE 5.785 GHz							
11.57	41.6	60.5	54	74	12.4	13.5	Complies
17.36	43.5	62.6			10.5	11.4	Complies
23.14	Noise floor	Noise floor			-	-	Complies
28.93	Noise floor	Noise floor			-	-	Complies
34.71	Noise floor	Noise floor			-	-	Complies
HIGH 5.840 GHz							
11.68	41.7	61.4	54	74	12.3	12.6	Complies
17.52	43.4	63.0			10.6	11.0	Complies
23.36	Noise floor	Noise floor			-	-	Complies
29.20	Noise floor	Noise floor			-	-	Complies
35.04	Noise floor	Noise floor			-	-	Complies

Test Report No.: 8412316054

Page 25 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

7.6. Radiated emission test on Radio Unit - restricted bands (per Section 15.205):

7.6.1. Requirements:

Radiated emission in restricted bands should meet the requirements sec. 15.205.
The following frequency bands should be measured:

Frequency	Frequency, GHz	Restricted band, GHz
<u>LOW 5.735 GHz</u>	11.47	10.6-12.7
	22.94	22.01-23.12
<u>MIDDLE 5.785 GHz</u>	11.57	10.6-12.7
<u>HIGH 5.840 GHz</u>	11.68	10.6-12.7

7.6.2. EUT configuration:

The measurements were performed with four various antennas.

7.6.3. Test procedure:

The measurements were performed in the anechoic chamber.
The EUT was arranged on a non-metallic table 0.8 m placed on the turntable.
Measuring antennas used: Up to 18 GHz - Double Ridge **EMCO** model 3115
above 18 GHz - Alpha TRG model A361

Antenna height = 1 m.

Measurement distance = 1m.

Measuring detector function and bandwidths:

Detector type	Peak
RBW	1MHz
VBW	1 MHz

All measurements were taken with peak detector and the readings were compared with AVG limit line.

Test Report No.: 8412316054

Page 26 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

7.6.4. Test results and calculation ratio:

The test results are shown in Plots #5 to #20 , see table below:

Frequency	Frequency, GHz	Restricted band, GHz	Antenna name		
			AN 1152	AN 1230	AN 1133
<u>LOW 5.735 GHz</u>	11.47	10.6-12.7	#6	#5	#7
	22.94	22.01-23.12	#14	#15	#16
<u>MIDDLE 5.785 GHz</u>	11.57	10.6-12.7	#8	#9	#10
<u>HIGH 5.840 GHz</u>	11.68	10.6-12.7	#11	#12	#13

Notes: The AVG limit line 64 dB μ V/m (at 1m distance) is not shown in the plots.


All measurements in restricted bands on frequency ranges above 21.5 GHz not exceed the SA noise floor level.

Test Report No.: 8412316054


Page 27 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

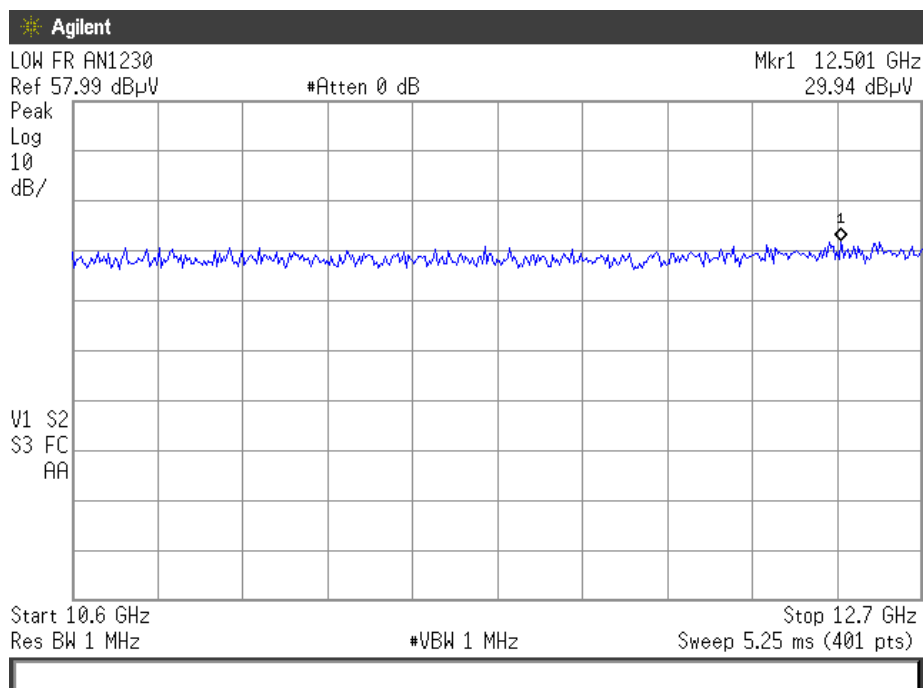

Plot # 5. Antenna: P/N AN1230, low frequency

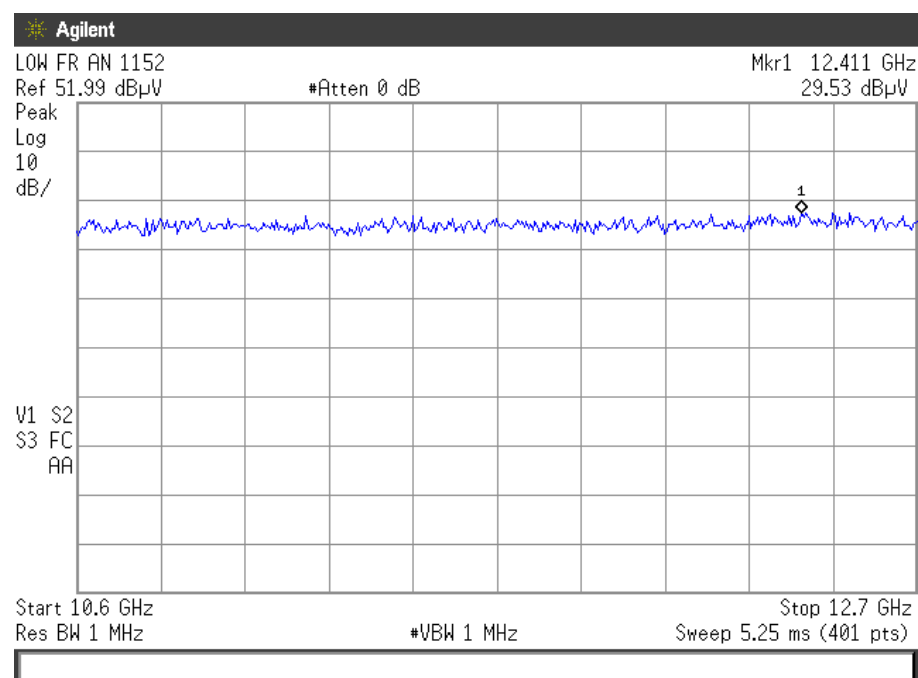


Plot # 6. Antenna: P/N AN1152, low frequency

Test Report No.: 8412316054


Page 28 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

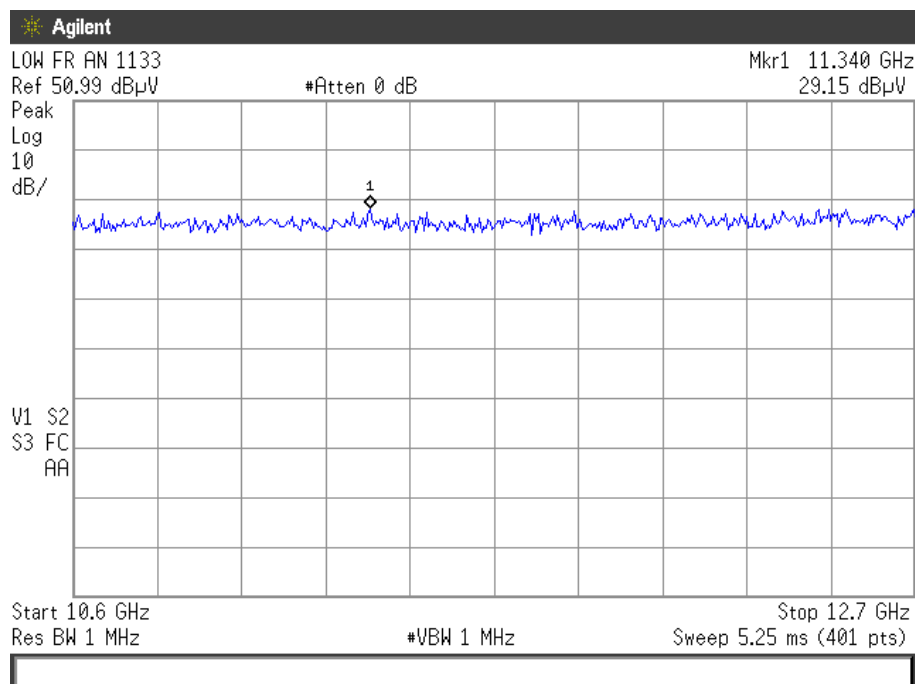

Plot # 7. Antenna: P/N AN1133, low frequency

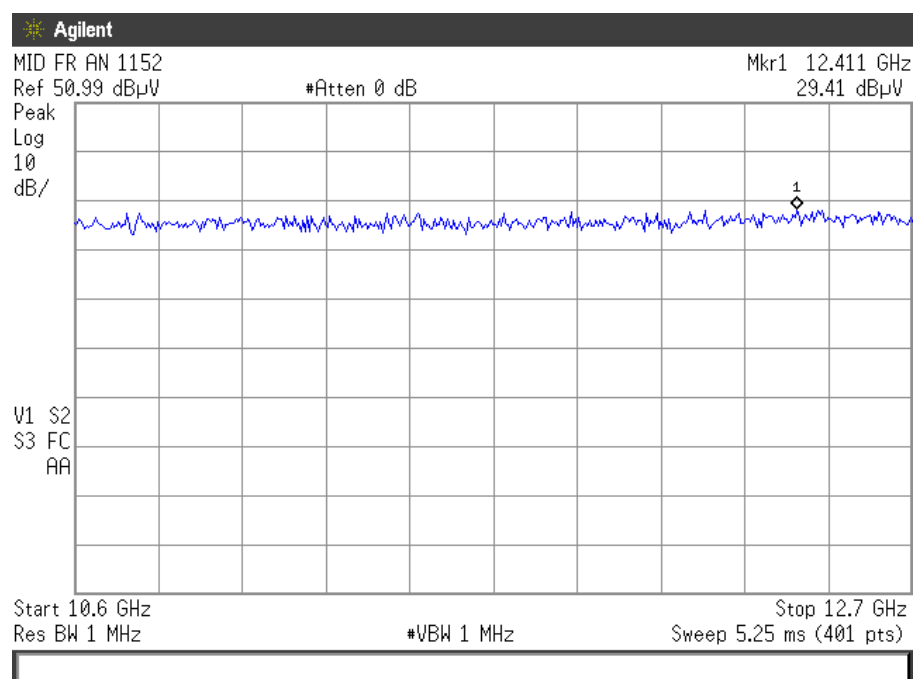


Plot # 8. Antenna: P/N AN1152, middle frequency

Test Report No.: 8412316054


Page 29 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

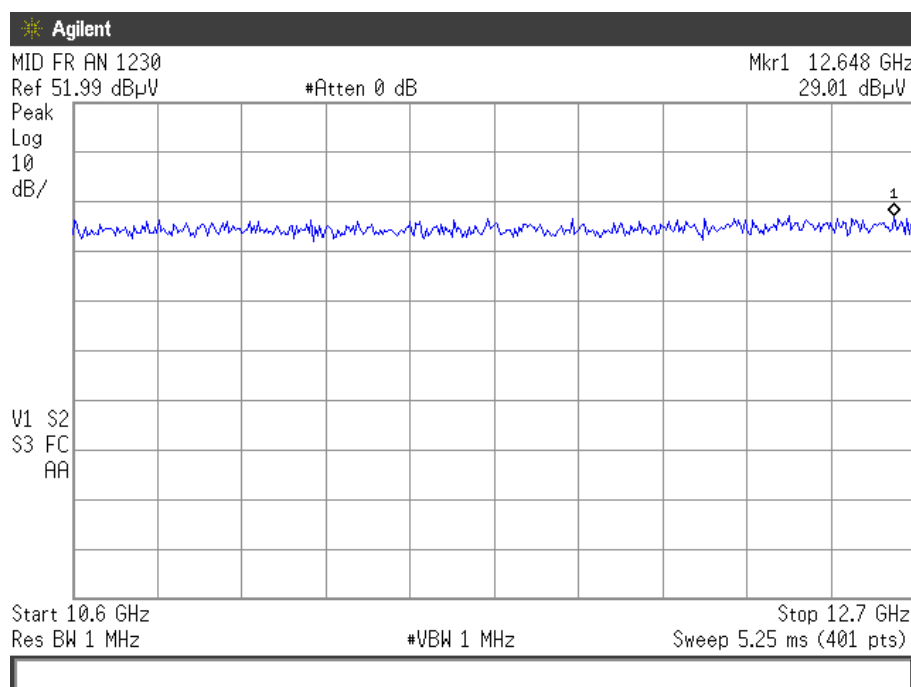

Plot # 9. Antenna: P/N AN1230, middle frequency

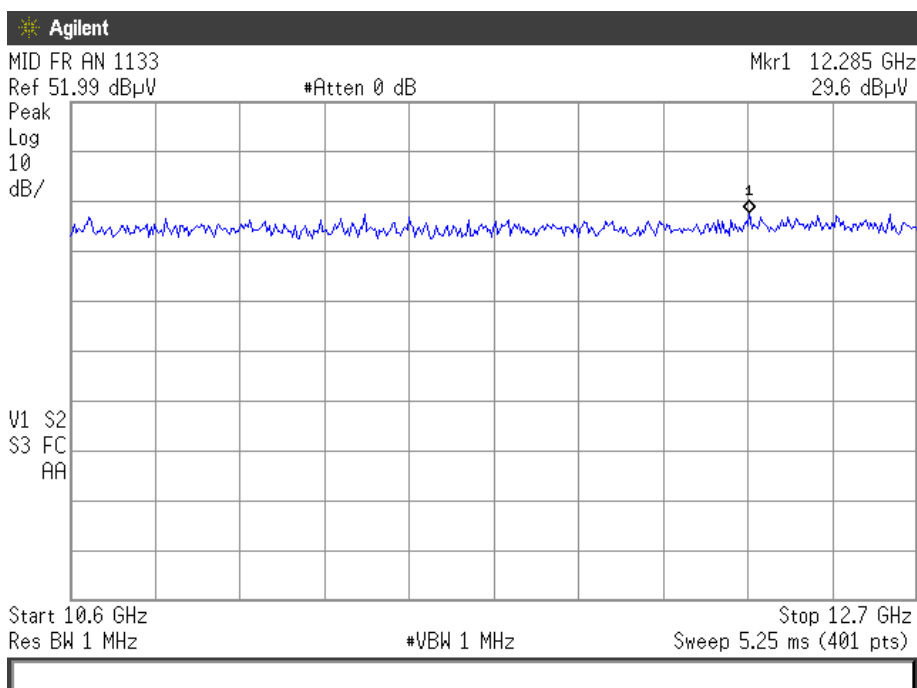


Plot # 10. Antenna: P/N AN1133, middle frequency

Test Report No.: 8412316054


Page 30 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

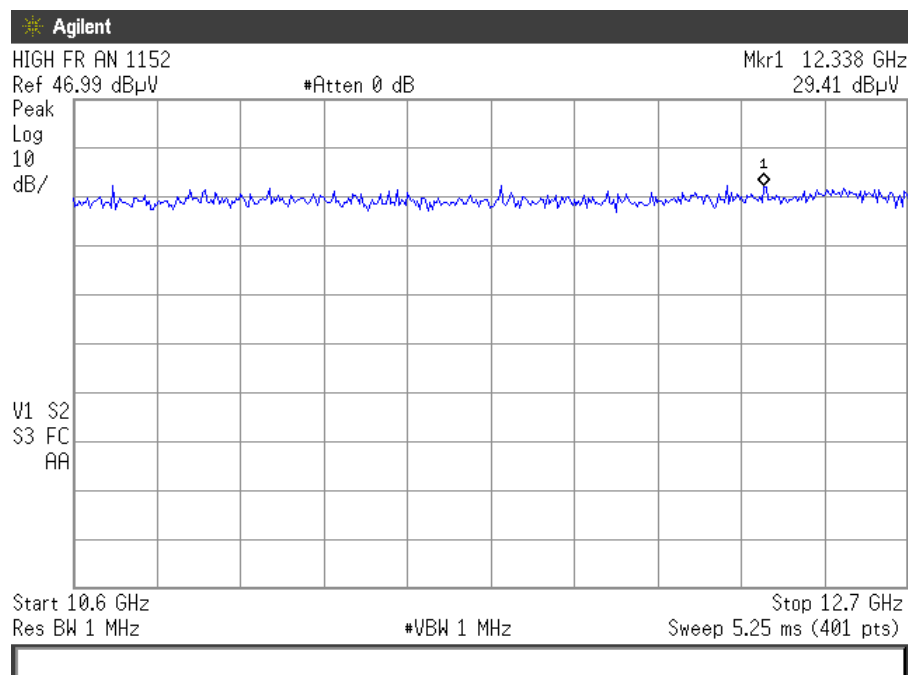

Plot # 11. Antenna: P/N AN1152, high frequency

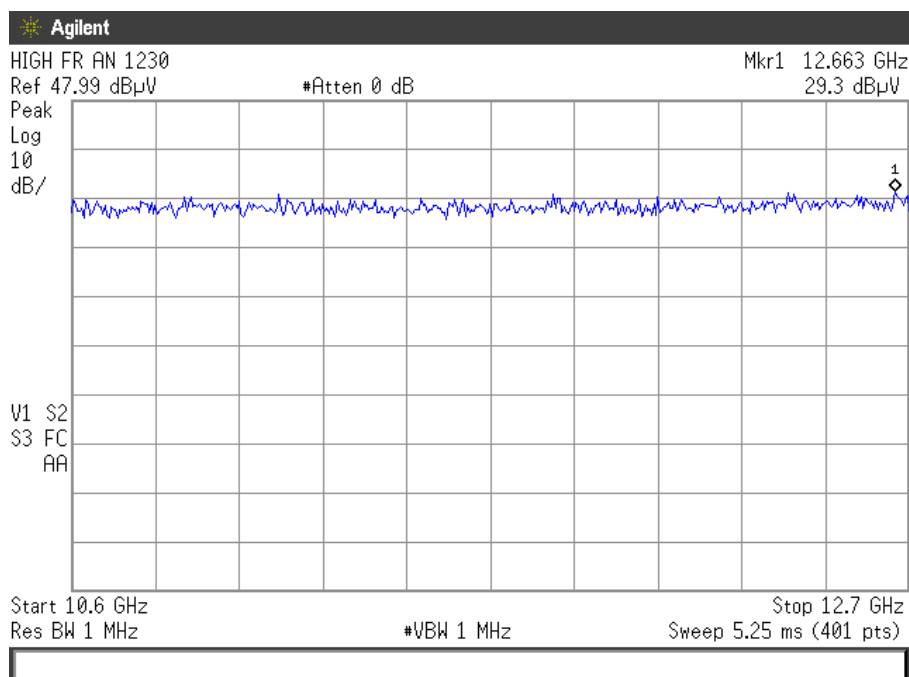


Plot # 12. Antenna: P/N AN1230, high frequency

Test Report No.: 8412316054


Page 31 of 60 Pages

Title: Test on Broadband Wireless Access



BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

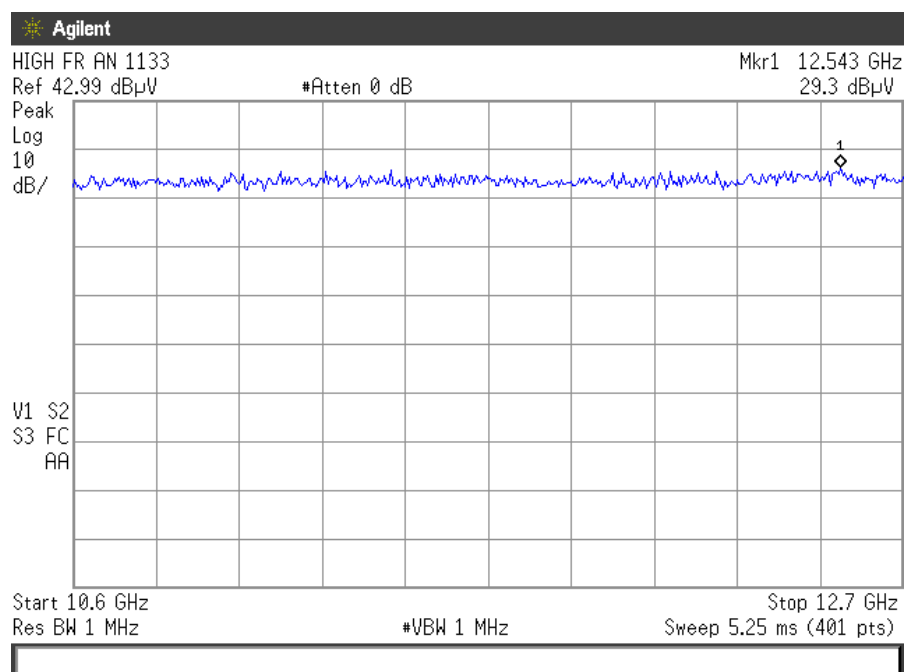

Plot # 13. Antenna: P/N AN1133, high frequency

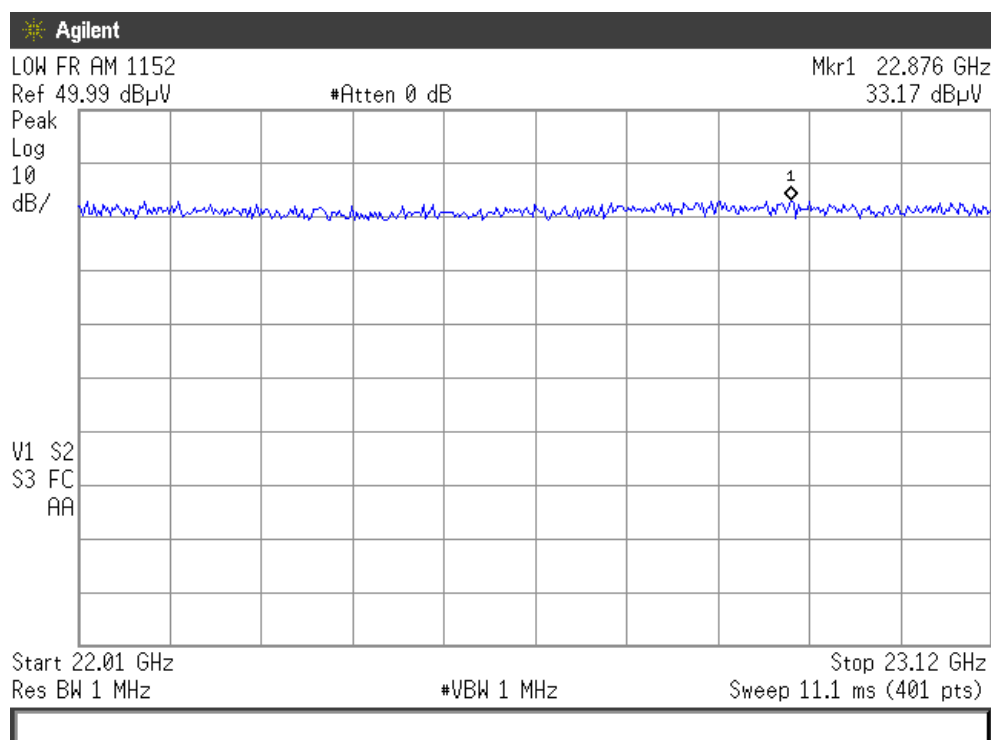

Plot # 14. Antenna: P/N AN1152, low frequency

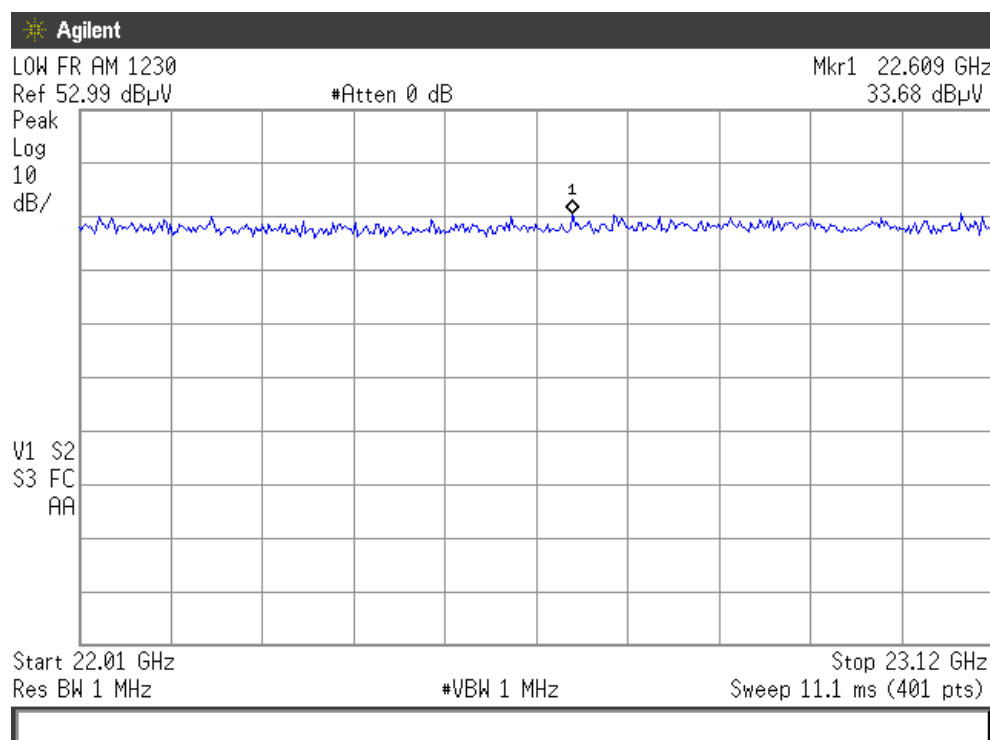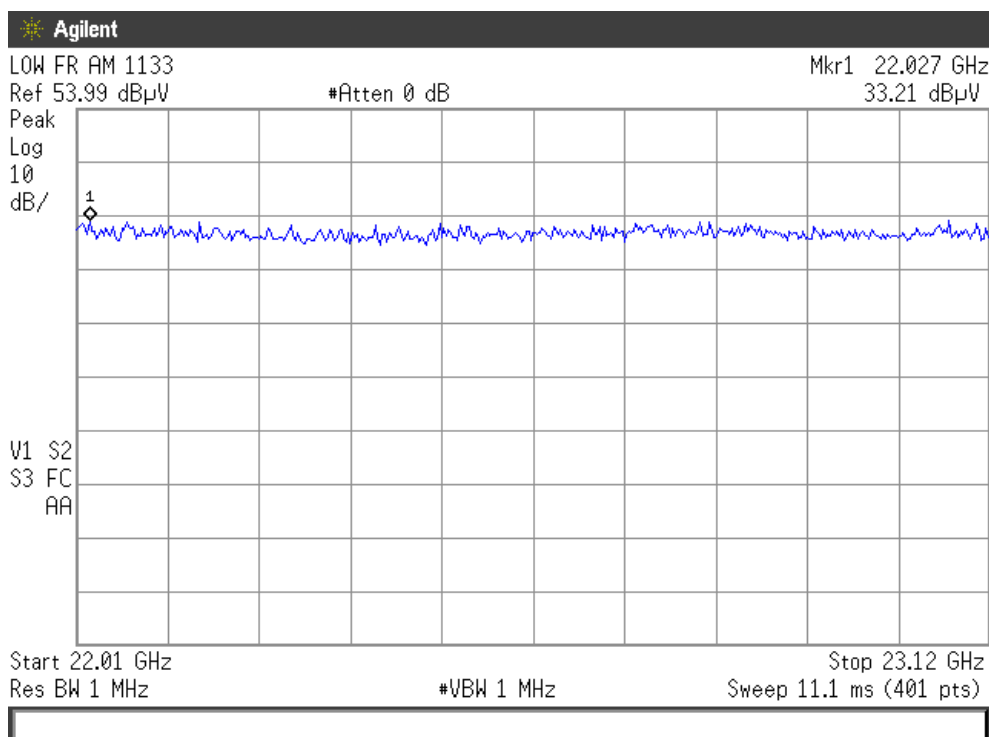**Test Report No.: 8412316054****Page 32 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 15. Antenna: P/N AN1230, low frequency****Plot # 16. Antenna: P/N AN1133, low frequency**

8. Conducted emission tests on Radio Unit:

The radio can operate in 3 signal bandwidth: 10MHz, 20MHz and 40MHz. .

8.1. Minimum bandwidth

Requirements:

The minimum 6dB bandwidth shall be at least 500KHz as required in sec. 15.247 (b) (2) Subpart C.

Test results:

The measured minimum bandwidth is shown in plot #17 to #25

The measurements results are summarized in Table 5. The minimum measured bandwidth for all configuration is 8.65MHz that is within the at least 500KHz required bandwidth.

8.2. Maximum peak output power

Requirements:

The maximum peak output power shall not exceed 1 Watt as required in sec. 15.247 (b) (1).

Test results:

The measurements were taken at three carrier frequencies, in the band 30 MHz – 26 GHz and in the band 26 GHz – 40 GHz.

Calculations:

1. Maximum setting of RBW=VBW is 1MHz
2. Measure the 6dB bandwidth @ RBW=VBW=1MHz.
3. Measure peak power using max hold function.
4. Calculate total peak power as $\text{peak_power}(3)+10*\log(\text{BW}(2))$

The table bellow summarizes the test results for low, middle and upper channel for the 10MHz,20MHz and 40MHz bands.

Bandwidth	Measured results low channel		Total Peak power [dBm]	Measured results middle channel		Total Peak power [dBm]	Measured results high channel		Total Peak power [dBm]
	6dB points [MHz]	Peak power [dBm]		6dB points [MHz]	Peak power [dBm]		6dB points [MHz]	Peak power [dBm]	
10MHz	8.73	19.9	29.3	8.95	17.8	27.3	8.65	18.4	27.8
20MHz	17	16.1	28.4	16.75	16	28.24	16.75	14.9	27.1
40MHz	33.5	13.8	29	33.3	13.8	29	33.2	13.8	29

Table 5: Peak output power and 6dB bandwidth results

Test Report No.: 8412316054

Page 34 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

The measured results are shown in Plots #17 to #25.

The maximum peak output power in range 30 MHz – 40 GHz does not exceed 30 dBm (1 Watt).

8.2.1. Spurious

Requirements:

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the RF power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, as required in sec. 15.247 (c).

Test results:

The measured results are shown in Plots #26 to # 40



8.2.2. Peak power spectral density



Requirements:



The peak power spectral density shall not be greater than 8dBm in any 3kHz band as required in section 15.247 (d).

Test results:

The measured results are shown in Plots #41- # 49

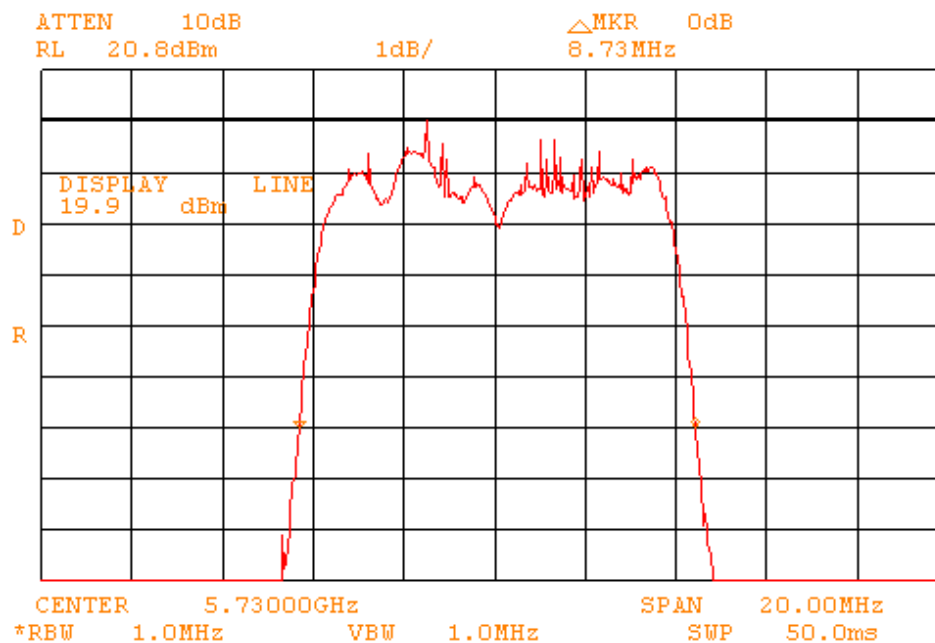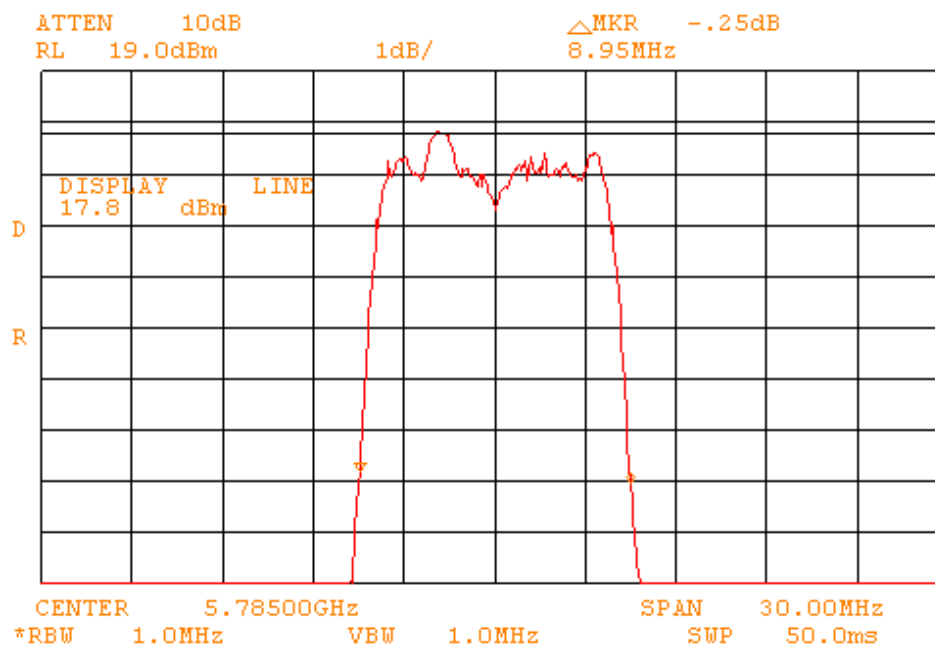**Test Report No.: 8412316054****Page 35 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 17. Minimum 6dB bandwidth 10MHz low channel****Plot # 18. Minimum 6dB bandwidth 10MHz middle channel**

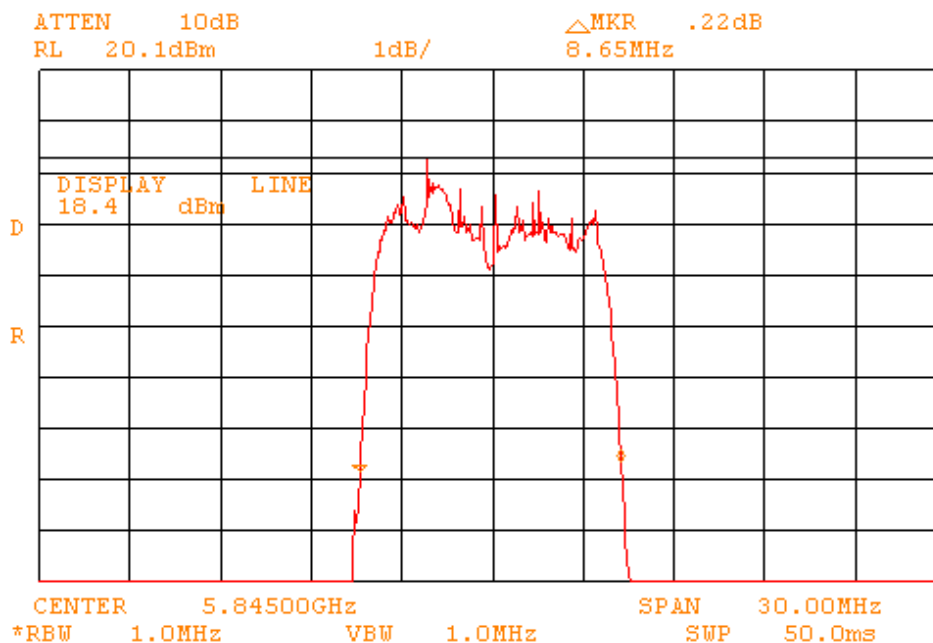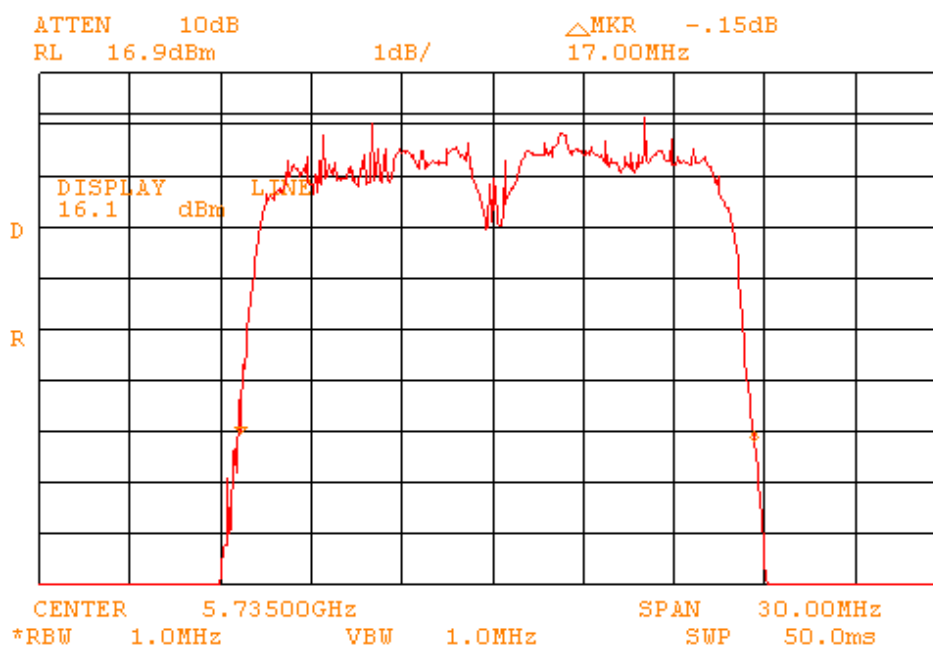**Test Report No.: 8412316054****Page 36 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 19. Minimum 6dB bandwidth 10MHz upper channel****Plot # 20. Minimum 6dB bandwidth 20MHz low channel**

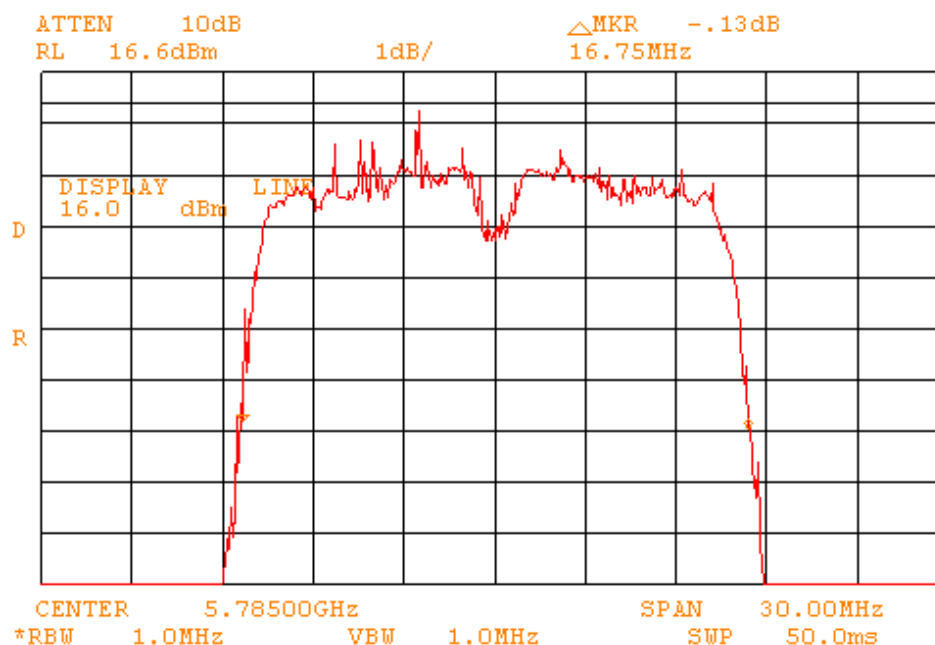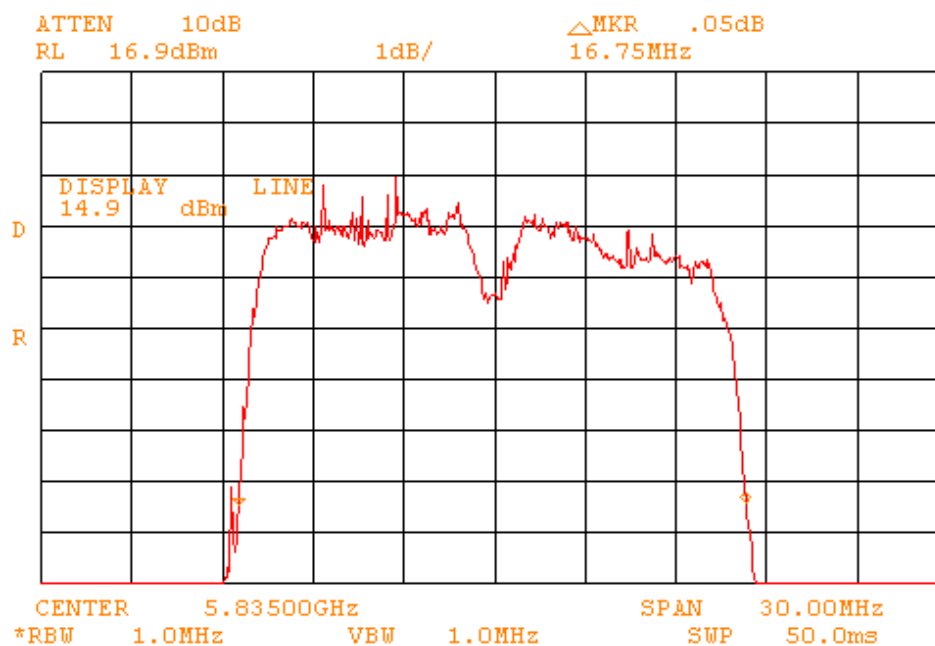
**Test Report No.: 8412316054****Page 37 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 21. Minimum 6dB bandwidth 20MHz middle channel****Plot # 22. Minimum 6dB bandwidth 20MHz upper channel**

Test Report No.: 8412316054


Page 38 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

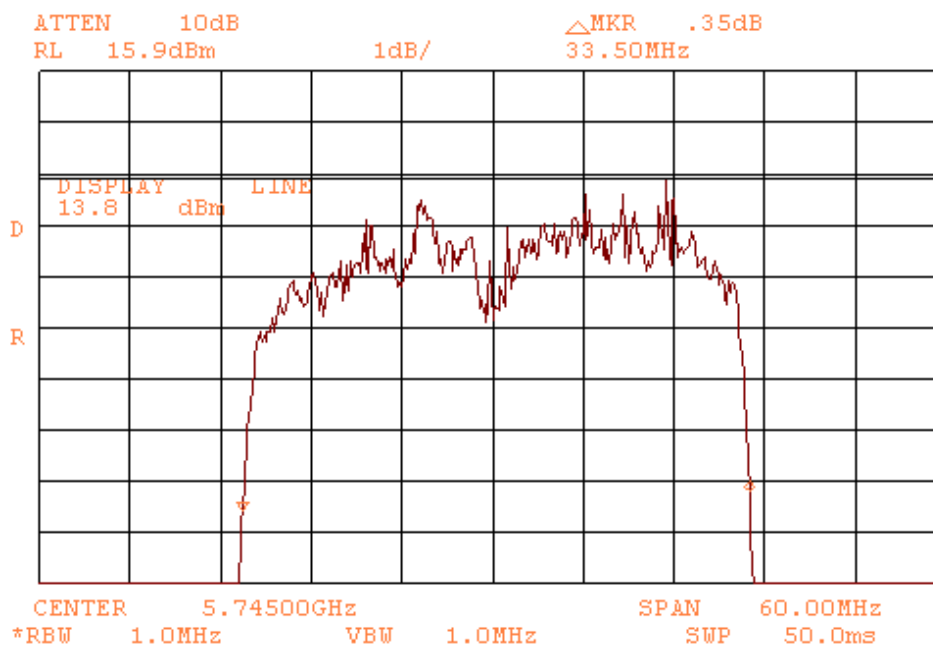

Plot # 23. Minimum 6dB bandwidth 40MHz low channel

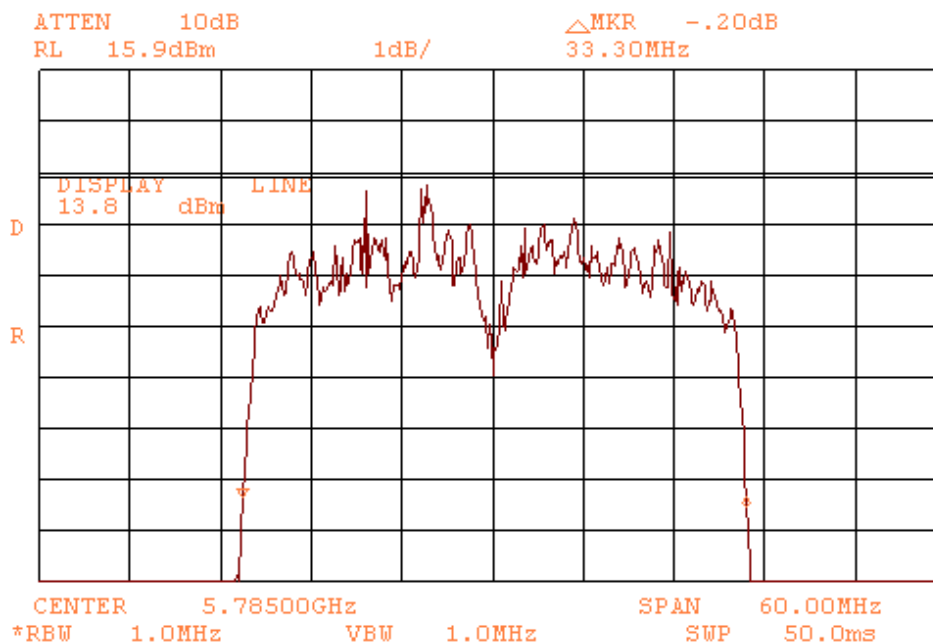


Plot # 24. Minimum 6dB bandwidth 40MHz middle channel

Test Report No.: 8412316054


Page 39 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

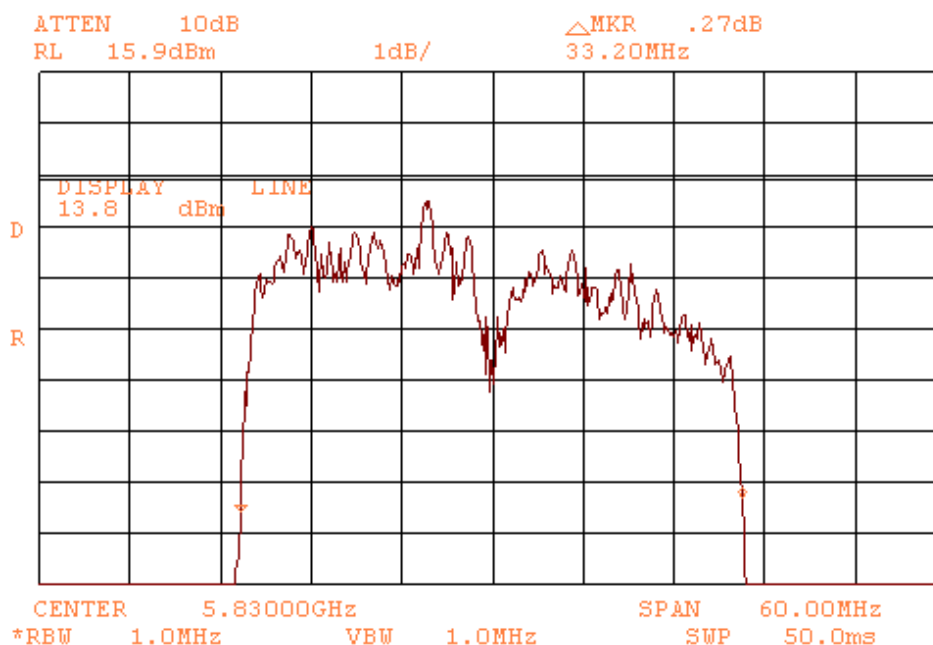

Plot # 25. Minimum 6dB bandwidth 40MHz upper channel

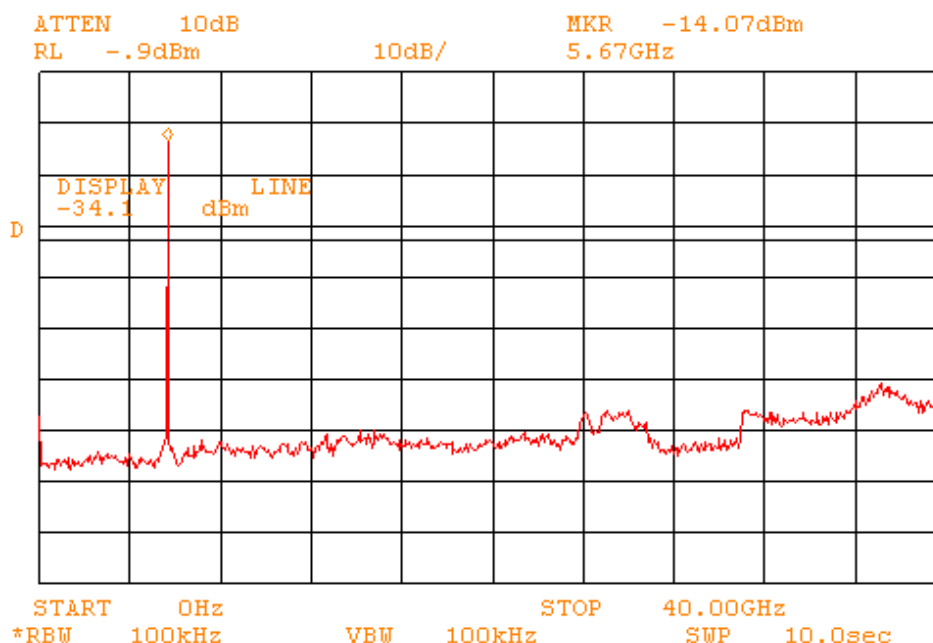


Plot # 26. Out of band spurious 10MHz bandwidth lower band

Test Report No.: 8412316054


Page 40 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

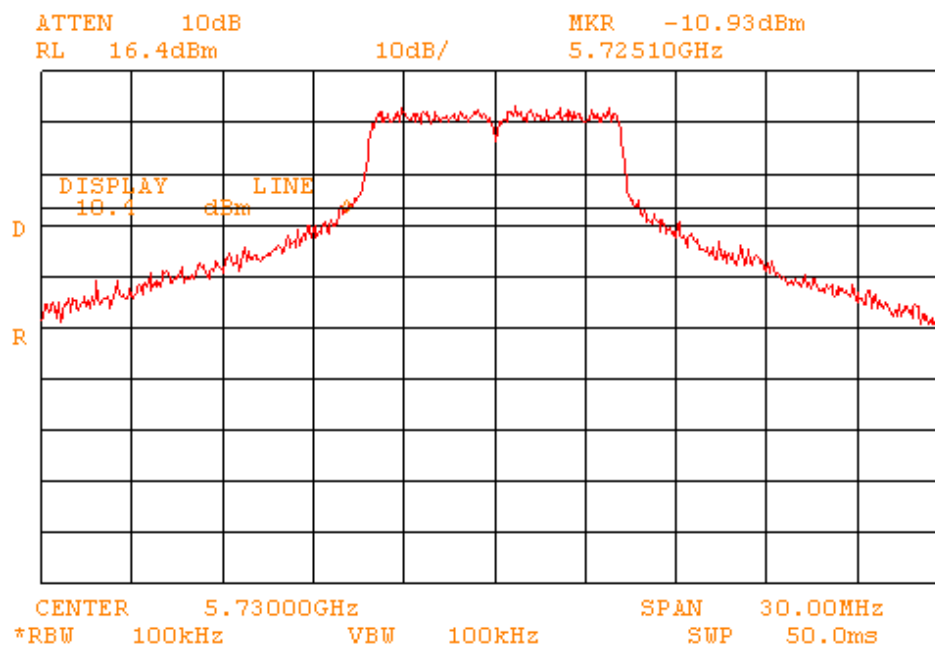

Plot # 27. Out of band spurious 10MHz bandwidth lower band edge

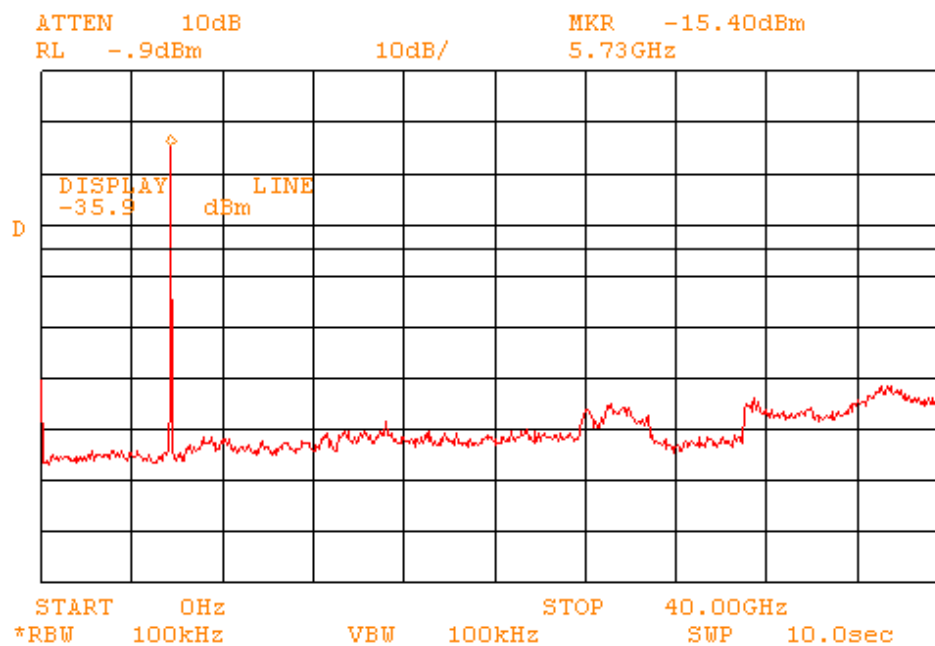


Plot # 28. Out of band spurious 10MHz bandwidth middle band

Test Report No.: 8412316054


Page 41 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

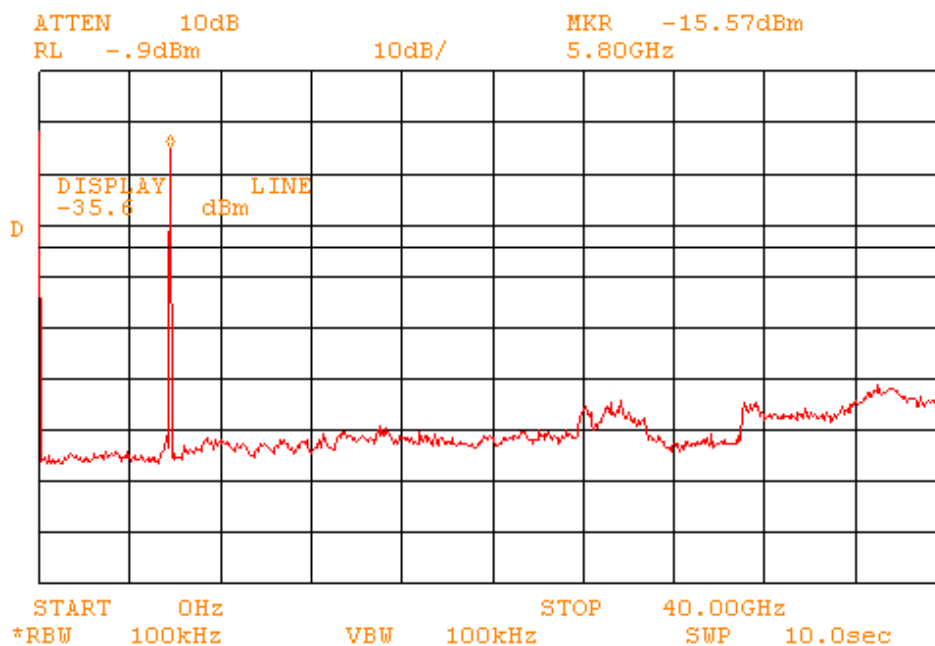

Plot # 29. Out of band spurious 10MHz bandwidth upper band

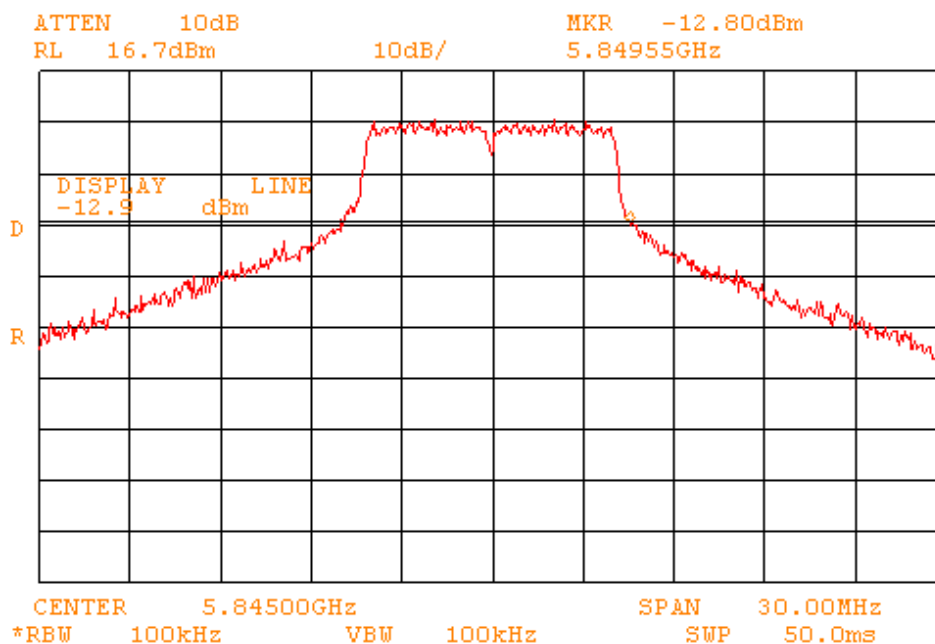


Plot # 30. Out of band spurious 10MHz bandwidth upper band edge

Test Report No.: 8412316054


Page 42 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

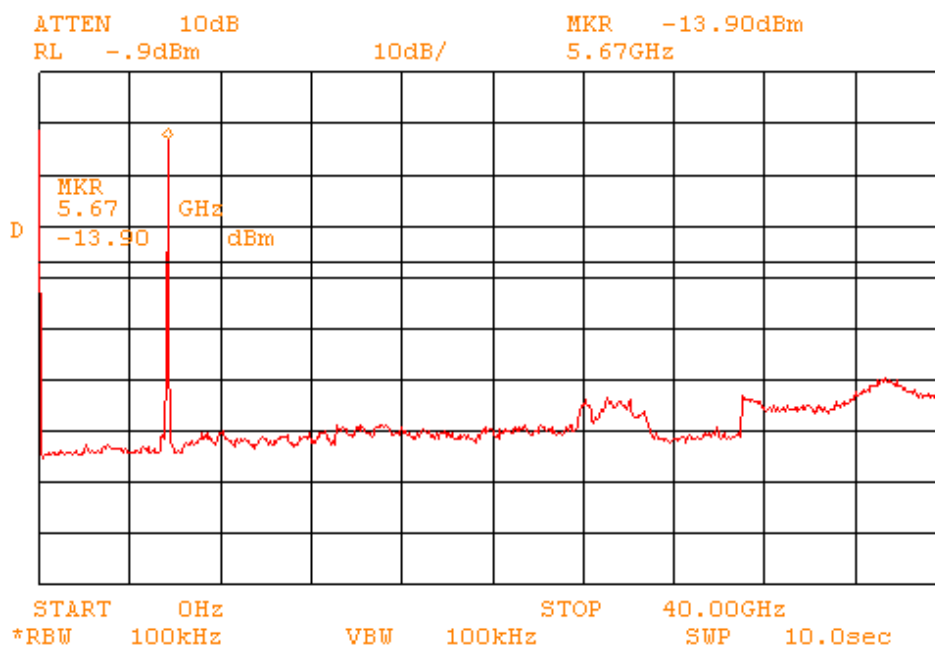

Plot # 31. Out of band spurious 20MHz bandwidth lower band

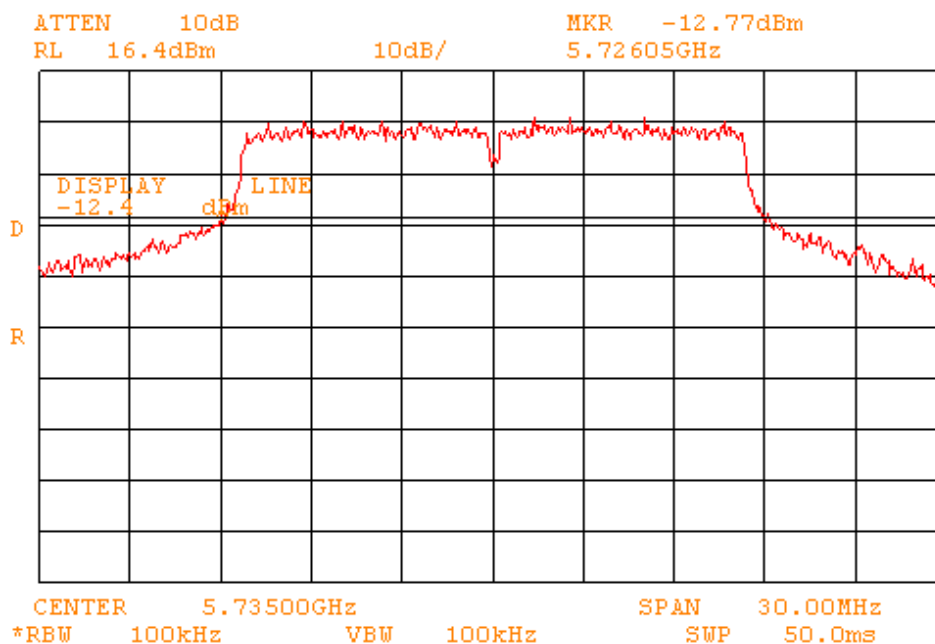


Plot # 32. Out of band spurious 20MHz bandwidth lower band edge

Test Report No.: 8412316054


Page 43 of 60 Pages

Title: Test on Broadband Wireless Access



BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system


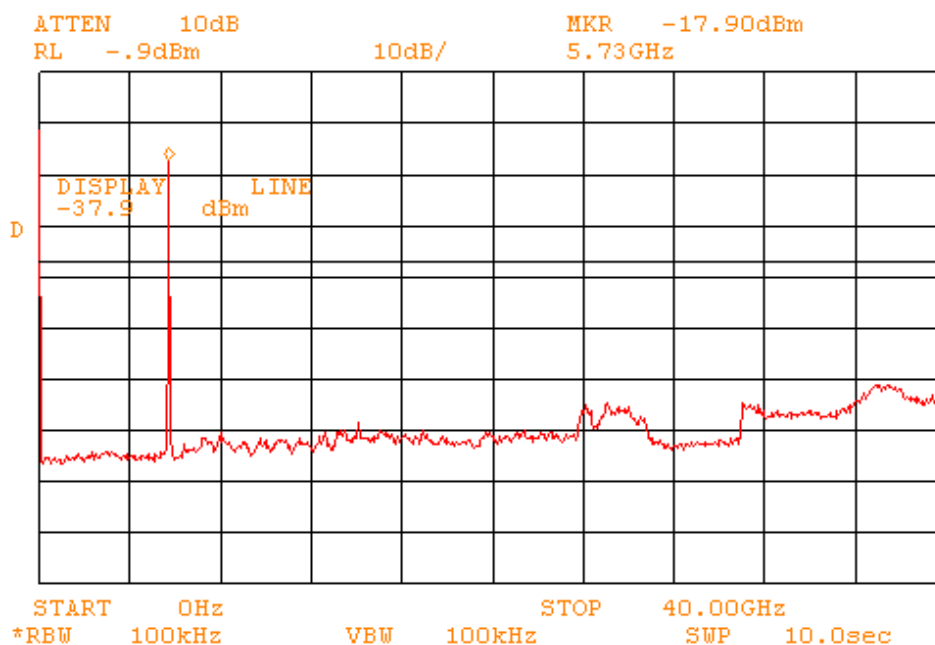


Plot # 33. Out of band spurious 20MHz bandwidth middle band

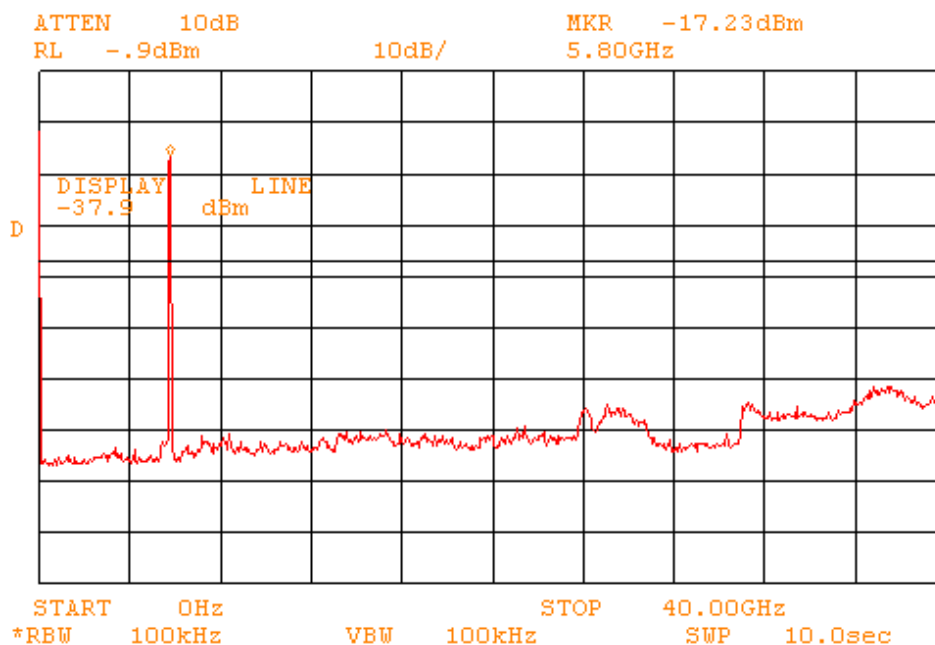

Plot # 34. Out of band spurious 20MHz bandwidth upper band

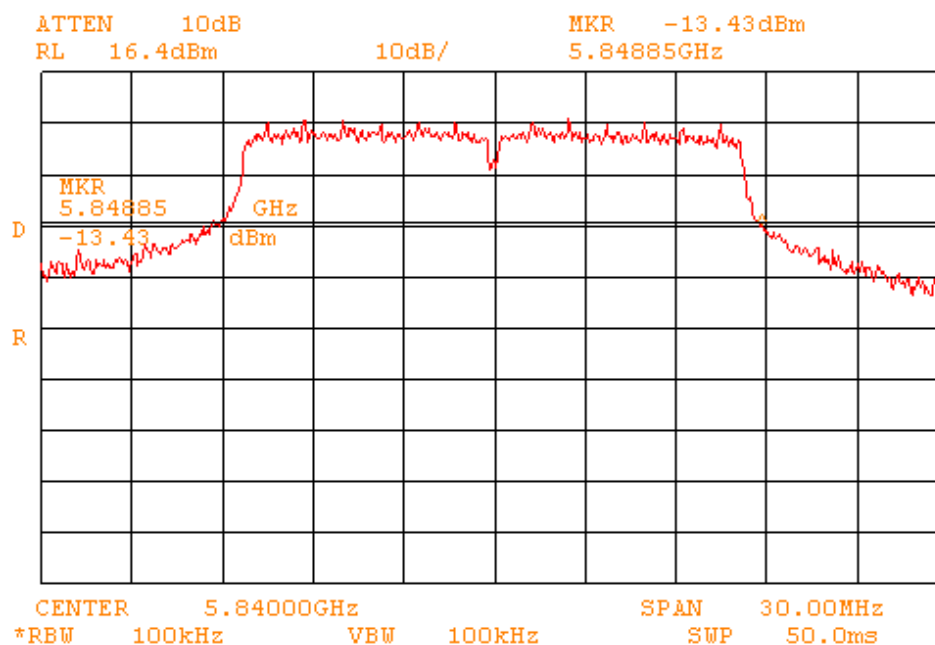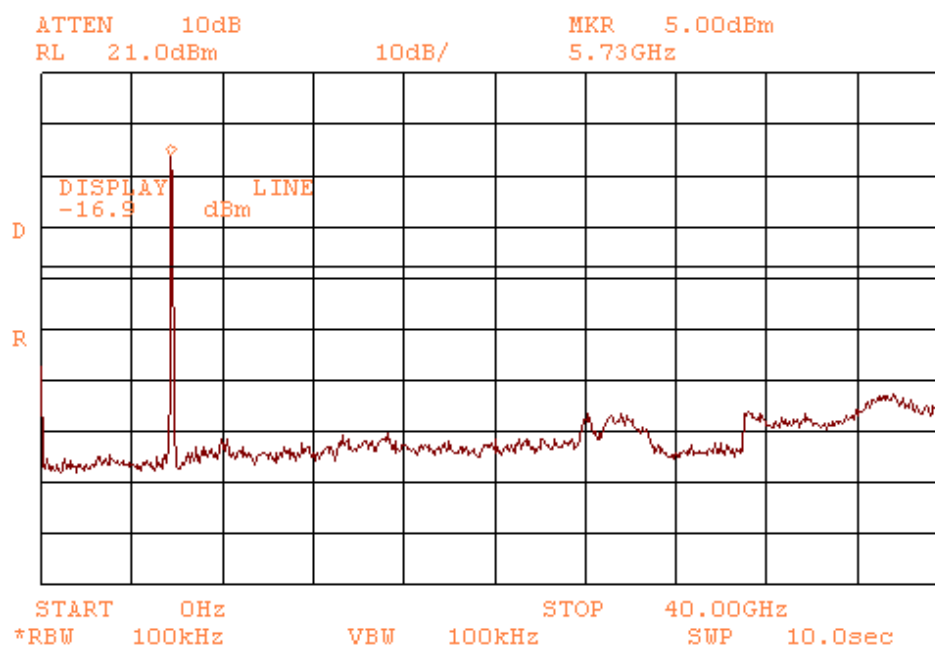**Test Report No.: 8412316054****Page 44 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 35. Out of band spurious 20MHz bandwidth upper band edge****Plot # 36. Out of band spurious 40MHz bandwidth lower band**

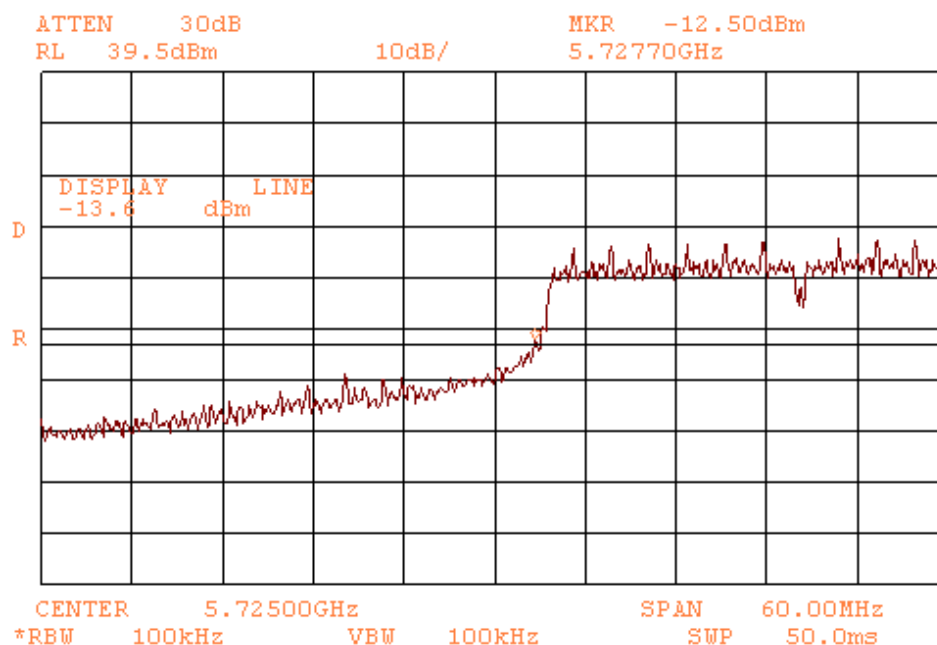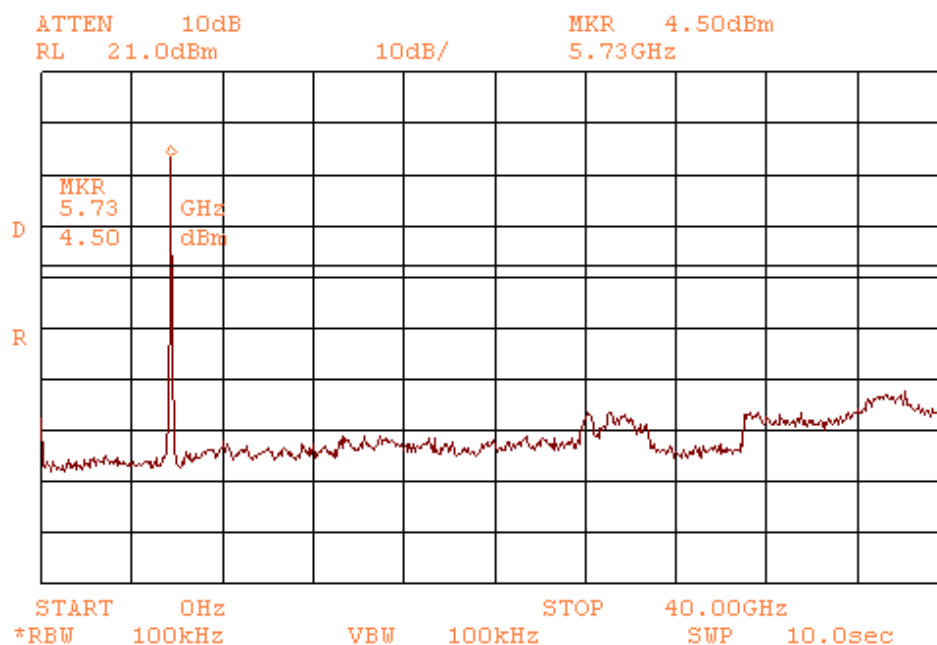
**Test Report No.: 8412316054****Page 45 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 37. Out of band spurious 40MHz bandwidth lower band edge****Plot # 38. Out of band spurious 40MHz bandwidth middle band**

Test Report No.: 8412316054


Page 46 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

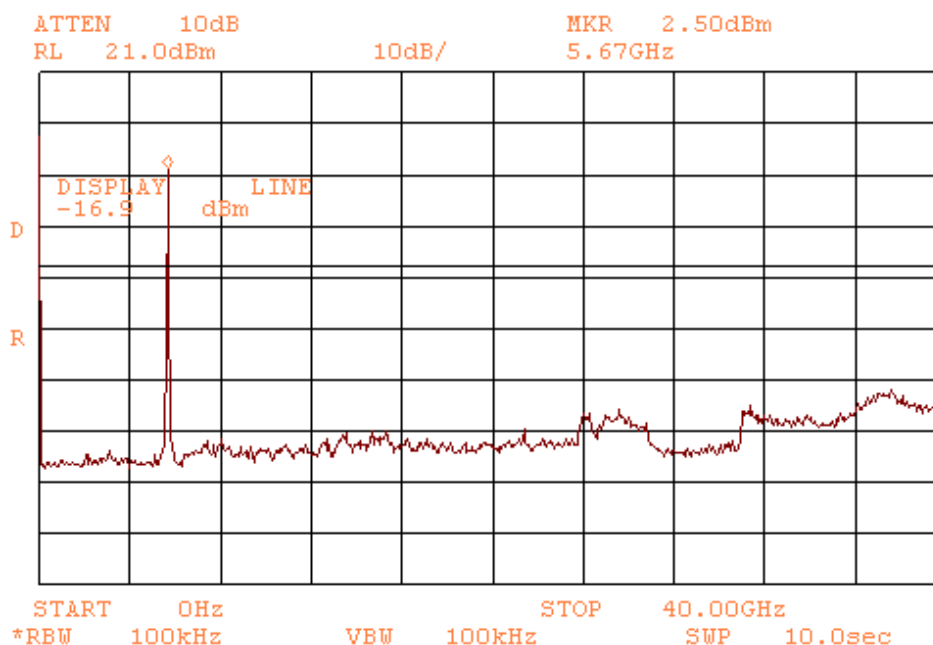

Plot # 39. Out of band spurious 40MHz bandwidth upper band

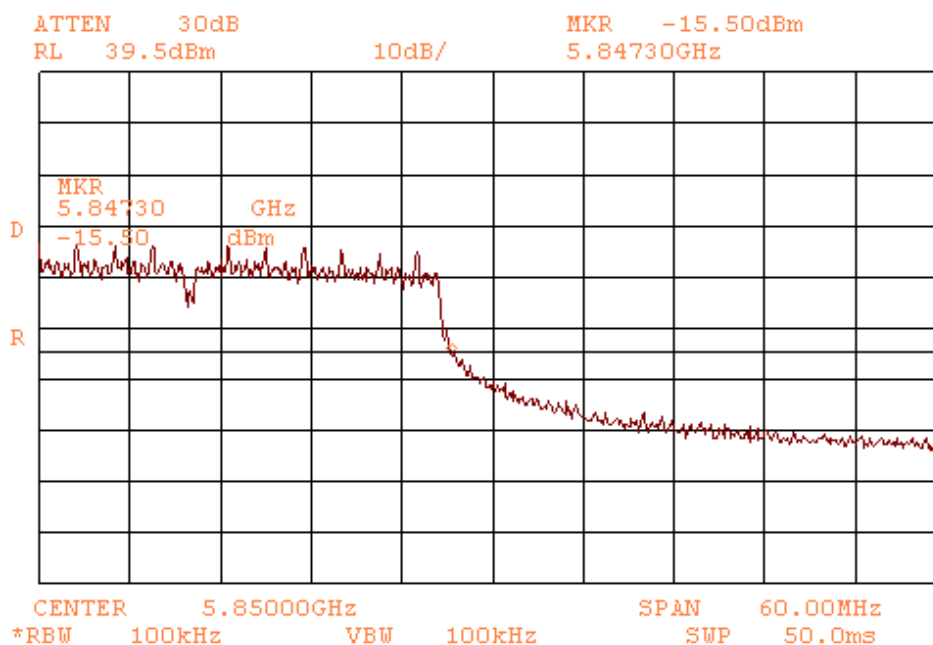


Plot # 40. Out of band spurious 40MHz bandwidth upper band edge

Test Report No.: 8412316054


Page 47 of 60 Pages

Title: Test on Broadband Wireless Access



BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

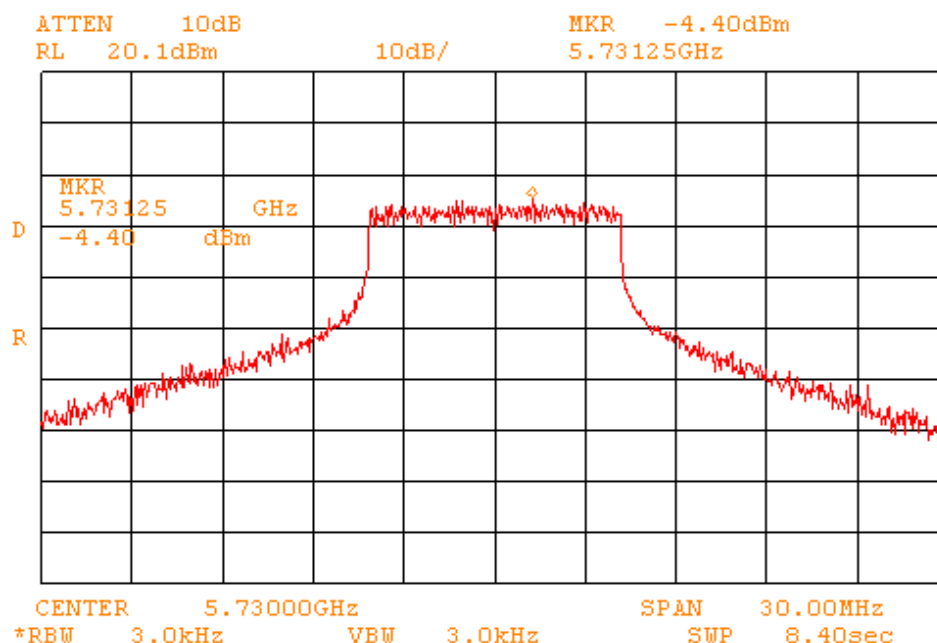

Plot # 41. Peak power spectral density 10MHz bandwidth lower band

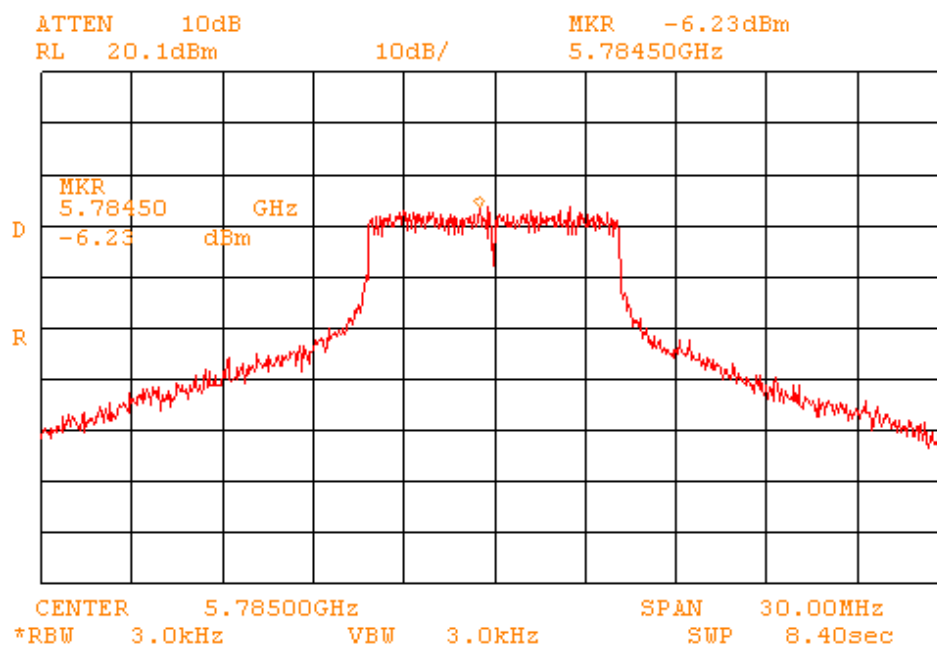

Plot # 42. Peak power spectral density 10MHz bandwidth middle band

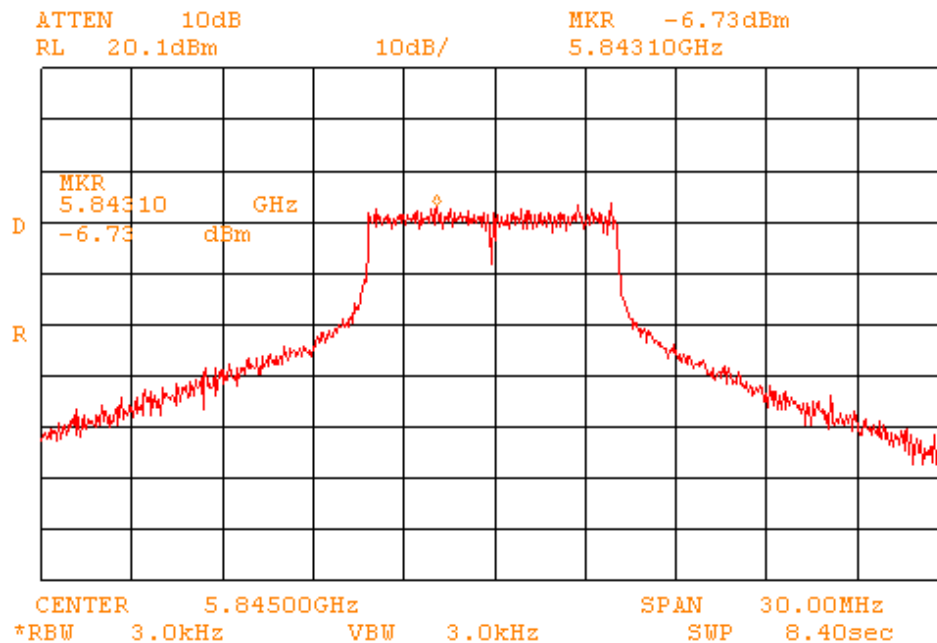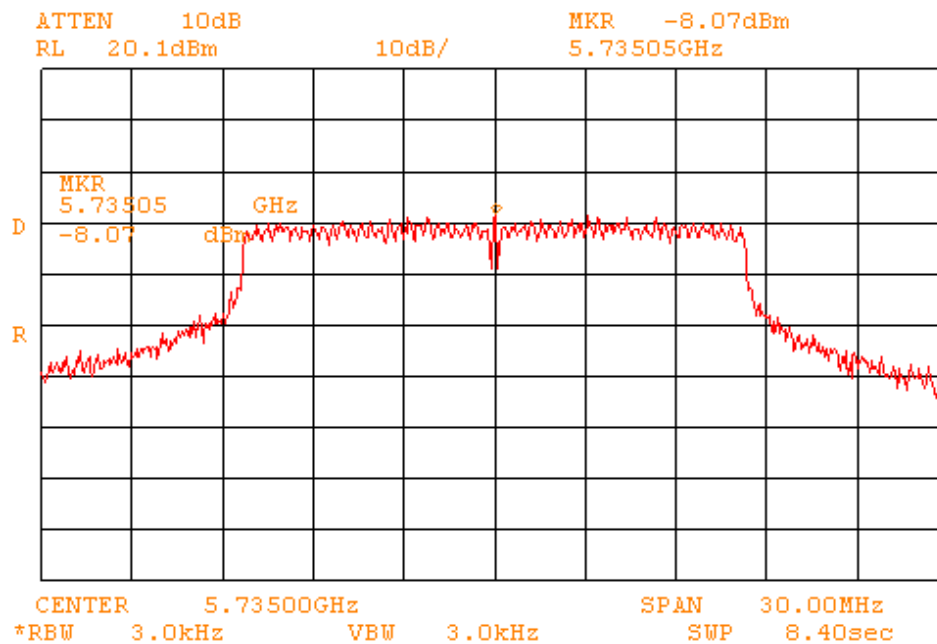
**Test Report No.: 8412316054****Page 48 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 43. Peak power spectral density 10MHz bandwidth upper band****Plot # 44. Peak power spectral density 20MHz bandwidth lower band**

Test Report No.: 8412316054


Page 49 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

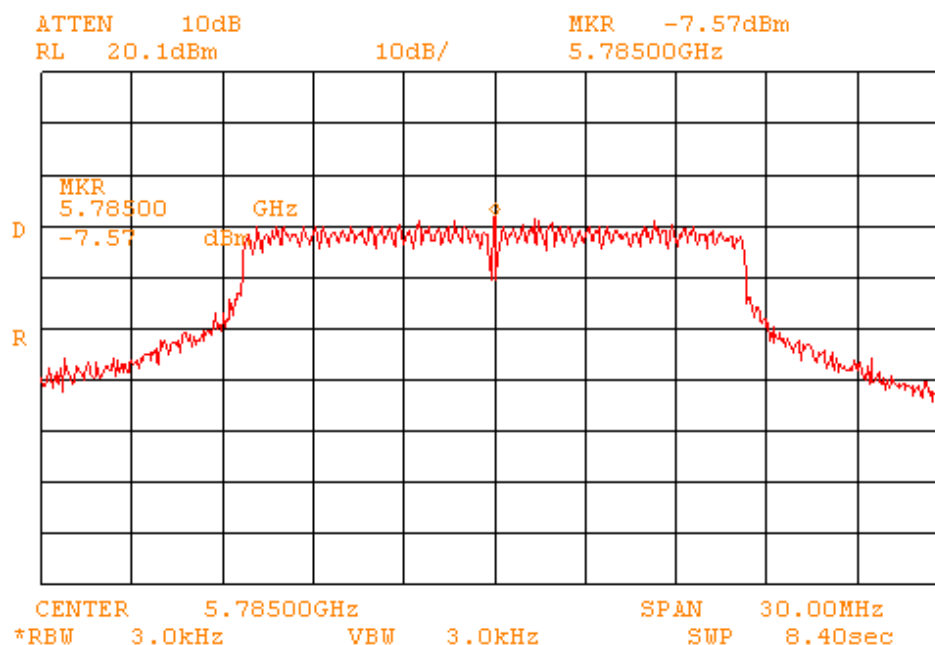

Plot # 45. Peak power spectral density 20MHz bandwidth middle band

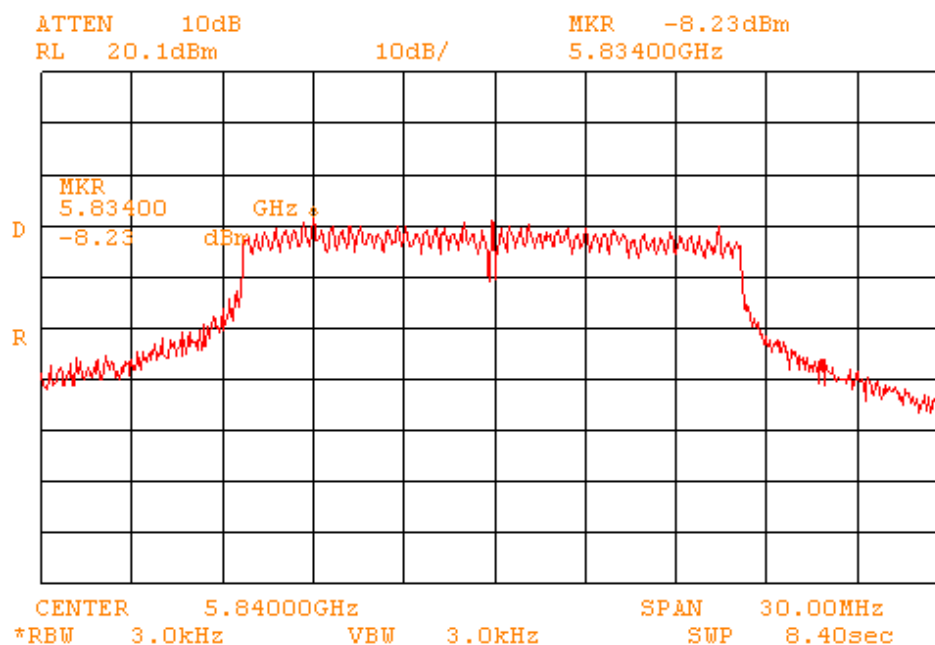


Plot # 46. Peak power spectral density 20MHz bandwidth upper band

Test Report No.: 8412316054


Page 50 of 60 Pages

Title: Test on Broadband Wireless Access


BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

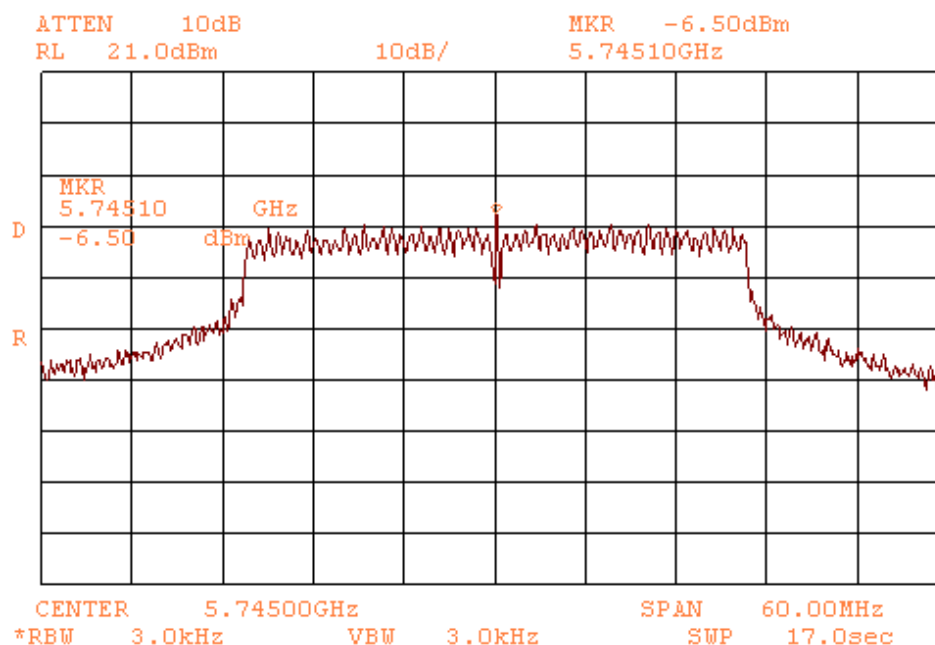

Plot # 47. Peak power spectral density 40MHz bandwidth lower band

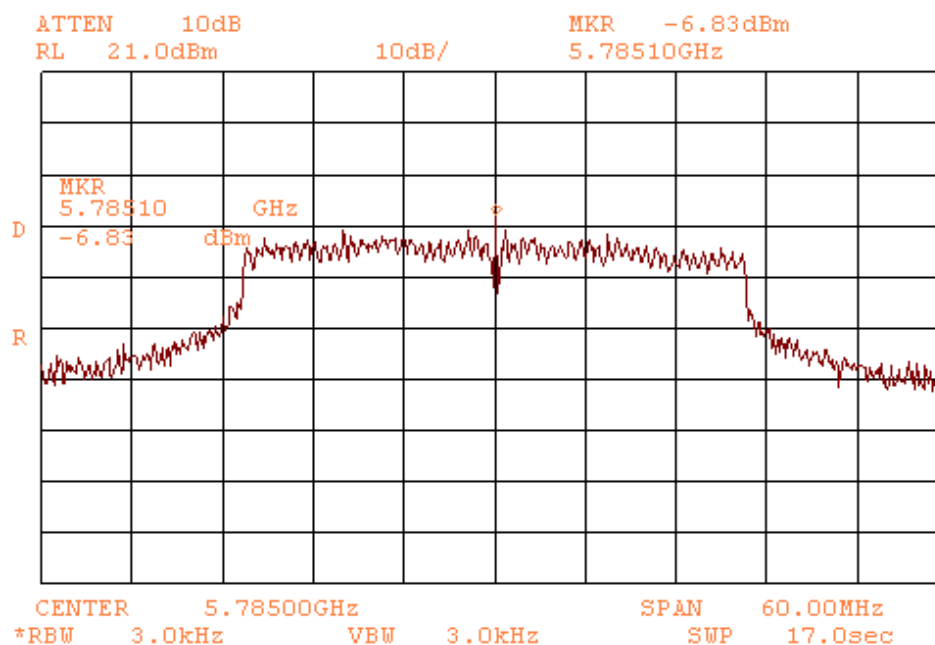

Plot # 48. Peak power spectral density 40MHz bandwidth middle band

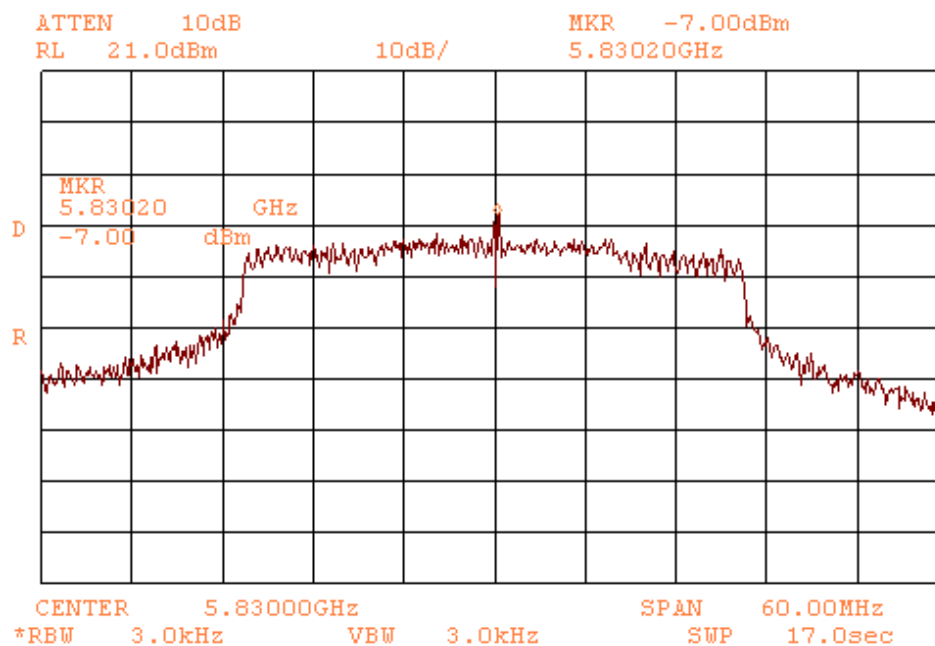**Test Report No.: 8412316054****Page 51 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Plot # 49. Peak power spectral density 40MHz bandwidth upper band**

Test Report No.: 8412316054

Page 52 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

9. Compliance with specification:

Test	FCC Part 15	Test result
Radiated emissions in restricted bands	Sec.15.205	Complies
Conducted emission	Sec.15.207	Complies
Radiated emission – general requirements	Sec.15.109,209	Complies
Minimum bandwidth	Sec. 15.247 (a) (2)	Complies
Maximum peak output power	Sec.15.247 (b) (3)	Complies
Conducted spurious	Sec.15.247 (c)	Complies
Peak power density	Sec.15.247 (d)	Complies



Telematics Laboratory

5 October 2004



Approved by: Yuri Rozenberg

Position: Head of EMC Branch

Tested by: Michael Feldman

Position: Testing Technician

Test Report No.: 8412316054

Page 53 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

10. Appendix 1: Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

Instrument	Manufacturer	Model	Serial No.	Last calibration date	Next calibration date
Spectrum analyzer 10 KHz-26.5 GHz	HP	E7405a	SII 4944	04/04	04/05
Spectrum analyzer 9 KHz-50 GHz	HP	8565E	3517A00347	07/04	07/05
Antenna Double Ridge 1-18 GHz	EMCO	3115	SII4873	03/04	03/05
Antenna Standard Gain Horn 18-40 GHz	WILTRON	Alpha TRG A361	861A/590	01/04	01/05
LISN 9 kHz – 30 MHz	FCC	LISN- 50/250-32-4-16	SII 5023	05/04	05/05
Transient limiter 0.009-200 MHz	HP	11947A	31074A3105	05/04	05/05
Attenuator 20 dB	HP	8491B	3929M50394	05/04	05/05

11. Appendix 2: Antenna Factor and Cable Loss

Antenna Factor
Standard Gain Horn 26 – 40 GHz Alpha TRG Model A361

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	26000	35.22
2	27000	35.40
3	28000	35.52
4	29000	35.64
5	30000	35.76
6	31000	35.90
7	32000	36.07
8	33000	36.16
9	34000	36.31
10	35000	36.46
11	36000	36.60
12	37000	36.74
13	38000	36.93
14	39000	37.21
15	40000	37.28

**Test Report No.: 8412316054****Page 54 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Gain and Antenna Factors for Double Ridged Guide Antenna****Manufactured by EMC Test Systems****Model Number: 3115****Serial Number: 5802****1.0 Meter Calibration****Polarization: Horizontal**

Frequency (MHz)	Antenna Factor (dB/m)	Gain Numeric	Gain dBi
1000	24.3	3.86	5.9
1500	25.6	6.48	8.1
2000	27.9	6.83	8.3
2500	28.9	8.43	9.3
3000	30.7	7.97	9.0
3500	32.0	8.06	9.1
4000	33.0	8.38	9.2
4500	32.9	10.91	10.4
5000	34.1	10.16	10.1
5500	34.8	10.51	10.2
6000	35.2	11.38	10.6
6500	35.4	12.79	11.1
7000	36.4	11.83	10.7
7500	37.3	10.90	10.4
8000	37.5	12.05	10.8
8500	37.9	12.36	10.9
9000	38.2	12.86	11.1
9500	38.3	14.04	11.5
10000	38.7	14.25	11.5
10500	38.5	16.26	12.1
11000	38.8	16.87	12.3
11500	39.5	15.41	11.9
12000	39.3	17.96	12.5
12500	39.1	20.03	13.0
13000	40.2	16.83	12.3
13500	41.2	14.53	11.6
14000	41.9	13.20	11.2
14500	41.3	16.27	12.1
15000	39.6	26.07	14.2
15500	38.1	39.49	16.0
16000	38.4	39.12	15.9
16500	39.8	29.81	14.7
17000	41.6	20.97	13.2
17500	44.8	10.55	10.2
18000	46.5	7.57	8.8

**Test Report No.: 8412316054****Page 55 of 60 Pages****Title: Test on Broadband Wireless Access****BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system****Gain and Antenna Factors for Double Ridged Guide Antenna****Manufactured by EMC Test Systems****Model Number: 3115 Serial Number: 5802****1.0 Meter Calibration****Polarization: Vertical**

Frequency (MHz)	Antenna Factor (dB/m)	Gain Numeric	Gain dBi
1000	24.1	4.11	6.1
1500	25.6	6.48	8.1
2000	27.9	6.83	8.3
2500	28.9	8.47	9.3
3000	30.6	8.18	9.1
3500	31.9	8.24	9.2
4000	33.0	8.45	9.3
4500	32.8	11.14	10.5
5000	34.0	10.34	10.1
5500	34.8	10.40	10.2
6000	35.1	11.67	10.7
6500	35.4	12.86	11.1
7000	36.3	11.92	10.8
7500	37.3	10.95	10.4
8000	37.4	12.15	10.8
8500	37.8	12.58	11.0
9000	38.2	13.01	11.1
9500	38.2	14.21	11.5
10000	38.5	14.79	11.7
10500	38.6	16.05	12.1
11000	38.8	16.93	12.3
11500	39.3	16.19	12.1
12000	39.1	18.46	12.7
12500	39.1	20.28	13.1
13000	40.1	17.19	12.4
13500	41.1	14.85	11.7
14000	41.8	13.55	11.3
14500	41.3	16.25	12.1
15000	39.6	25.78	14.1
15500	38.0	39.54	16.0
16000	38.3	39.73	16.0
16500	39.6	31.52	15.0
17000	41.3	22.72	13.6
17500	44.5	11.49	10.6
18000	46.5	7.69	8.9

Test Report No.: 8412316054

Page 56 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

12. Appendix 3: Test configuration illustration



Photo # 5.
Base Station + Subscriber Unit
Radiated emission test on open site

Test Report No.: 8412316054

Page 57 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system




Photo # 6.
Base Station + Subscriber Unit
Radiated emission test on open site

Test Report No.: 8412316054


Page 58 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

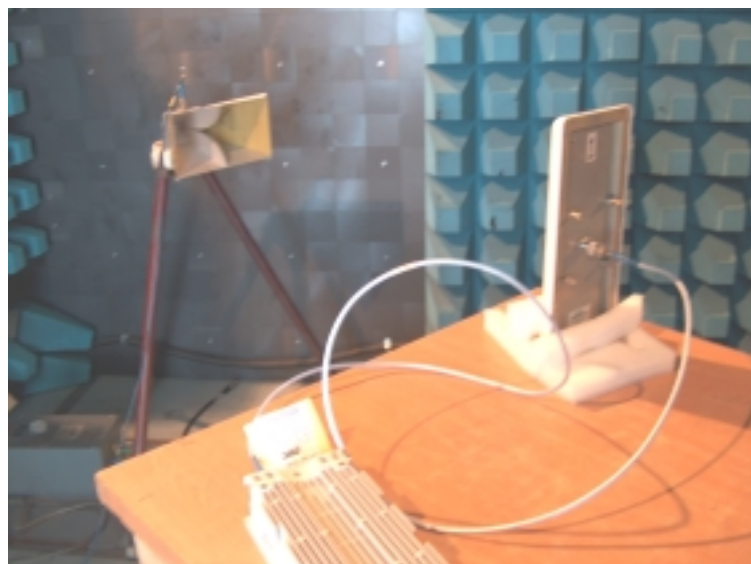

**Photo # 7. P/N AN1152
Spurious emission test**

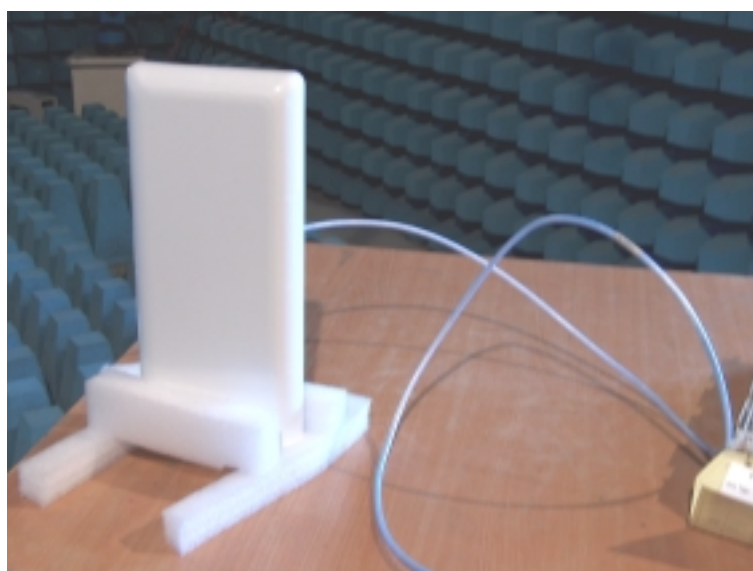

**Photo # 8.
Radio unit with MTI sector antenna P/N AN1152.
Spurious emission test**

Test Report No.: 8412316054

Page 59 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system

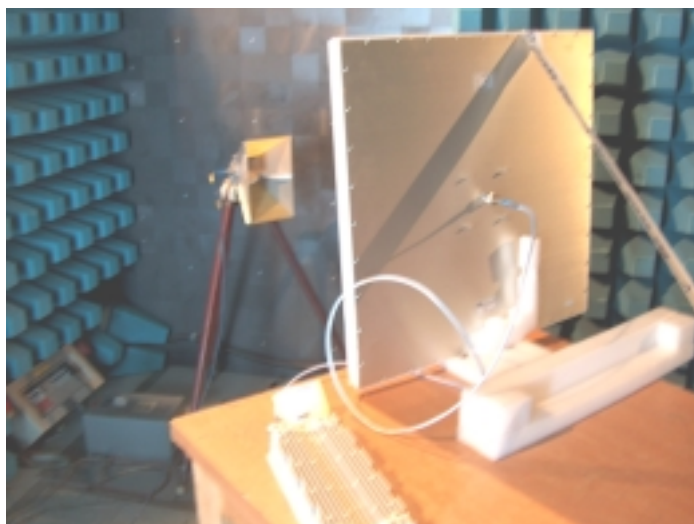


Photo # 9.

**Radio unit with Unidirectional antenna UNI-28-4 P/N AN1230
Spurious emission test**



Photo # 10.

**Radio unit with Unidirectional antenna UNI-28-4 P/N AN1230
Spurious emission test**

Test Report No.: 8412316054

Page 60 of 60 Pages

Title: Test on Broadband Wireless Access

BreezeACCESS VL 5.8 System and Point to Point BreezeNET B system



Photo # 11.

**Radio unit with integrated antenna P/N AN1133
Spurious emission test**

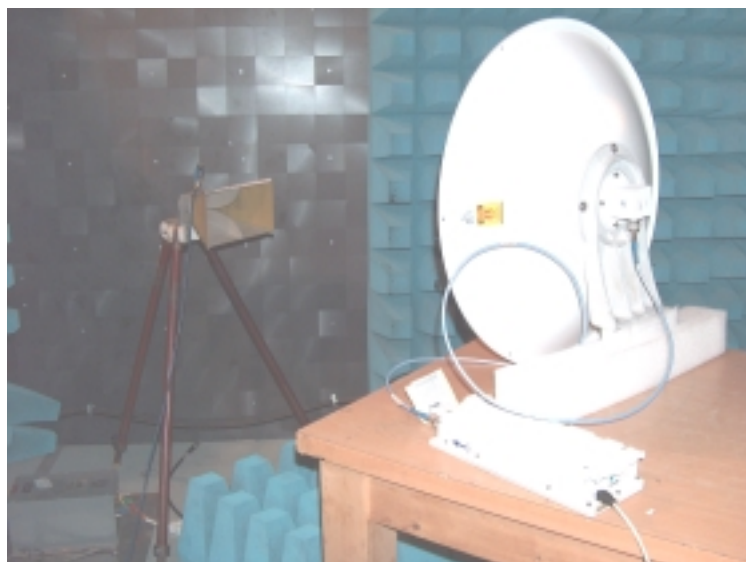


Photo # 12.

**Radio unit with integrated antenna P/N AN1133
Spurious emission test**