



SK TECH CO., LTD.

Page 1 of 14

## Certificate of Compliance

<b>Test Report No.:</b>	SKTOS-02077		
<b>NVLAP CODE :</b>	200220-0		
<b>Applicant:</b>	HITRON SYSTEMS INC.		
<b>Applicant Address:</b>	109-19, Majeon-ri, Samjuk-Myeon, Ansung-City, Kyungki-Do, Korea		
<b>Product:</b>	LCD MONITOR		
<b>FCC ID:</b>	LLIHTM170C	<b>Model No.:</b>	HTM170C
<b>Buyer M/N :</b>	See page 3		
<b>Receipt No.:</b>	SKE20020705-433	<b>Date of receipt:</b>	July 05, 2002
<b>Date of Issue:</b>	July 29, 2002		
<b>Testing location:</b>	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
<b>Test Standards:</b>	ANSI C63.4 / 2000		
<b>Rule Parts:</b>	FCC part 15 Subpart B		
<b>Equipment Class :</b>	Class B Digital Device Peripheral		
<b>Test Result:</b>	The above mentioned product has been tested and passed.		

Prepared by: Y.H.Kang

Tested by: Y.B.Kim/Engineer

Approved by: K.S.Kim/Manager  
& Chief Engineer

Signature	Date	Signature	Date	Signature	Date
<b>Other Aspects :</b>					
<b>Abbreviations :</b>	· OK, Pass = passed · Fail = failed · N/A = not applicable				

- This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.

NVLAP Lab. Code: 200220-0



## » » **Contents** « «

Contents	2
List of Tables	2
List of Figures	2
List of Photographs	2
Buyer Model No.	3
1. General	4
2. Test Site	4
2.1 Location	4
2.2 List of Test and Measurement Instruments	5
2.3 Test Date	5
2.4 Test Environment	5
3. Description of the tested samples	6
3.1 Rating and Physical Characteristics	6
3.2 Submitted Documents	6
4. Measurement Conditions	7
4.1 Modes of Operation	7
4.2 List of Peripherals	7
4.3 Type of Used cables	8
4.4 Test Setup	8
4.5 Uncertainty	8
5. EMISSION Test	9
5.1 Conducted Emissions	9
5.2 Radiated Emissions	13

## » **List of Tables**

Table 1	List of test and measurement Equipment	5
Table 2	Test Data, Conducted Emissions	12
Table 3	Test Data, Radiated Emissions	14

## » **List of Figures**

Figure 1	Spectral Diagram, LINE-PE	10
Figure 2	Spectral Diagram, Neutral-PE	11



**SK TECH CO., LTD.**

*Page 3 of 14*

**BUYER MODEL No.**

**NE-LCD17**

**VMC-17LCD-P**



## **1. General**

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by SK Tech Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## **2. Test Site**

SK TECH Co., Ltd.

### **2.1 Location**

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

The test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200220-0 and DATech for DAR-Registration No.:TTI-P-G155/97-10



## 2.2 List of Test and Measurement Instruments

**Table 1 : List of Test and Measurement Equipment**

- **Conducted Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESHS10	862970/019	02.2003
Artificial Mains Network	ESH3-Z5	834549/001	10.2002
EMI Receiver	ESHS10	835871/002	10.2002
Artificial Mains Network	ESH3-Z5	836679/018	10.2002
Conducted Cable	N/A	N/A	N/A

- **Radiated Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESVS 10	825120/013	02.2003
EMI Receiver	ESVS 10	834468/008	11.2002
Spectrum Analyzer	R3361A	11730187	07.2003
Amplifier	8447F	3113A05153	06.2003
Log Periodic Antenna	UHALP9107	1819	02.2003
Biconical Antenna	BBA9106	91031626	02.2003
Antenna Mast	5907	N/A	N/A
Antenna & Turntable controller	5906	N/A	N/A
Amp & Receiver connection cables	N/A	N/A	N/A
50Ω Switcher	MP59B	6100214538	N/A

## 2.3 Test Date

Date of Application : July 05, 2002  
 Date of Test : July 24, 2002

## 2.4 Test Environment

See each test item's description.



### 3. Description of the tested samples

The EUT is LCD Monitor.

#### 3.1 Rating and Physical Characteristics

##### General

Power Requirement	DC 12V 3.25A
Power Consumption	41 Watts
AC Adaptor Connector	IEC-320 Male, 100-240Vac
User Controls	Bright, Contrast, Tilt, Color, Sharpness, etc
OSD Language	English / France / German / Italian / Spanish / Polish
Dimensions	398mm(W) x 333mm(H) x 56mm(D)
Weight	3.7Kg
Operating temperature	0 to 40 degree
Storage temperature	0 to 50 degree
Audio input connector	RCA x 2 (Stereo)
Audio amplifier	0.5W x 2

##### LCD

LCD Panel	17.0 inches TFT LCD Panel
Pixel format	1280(H) x 1024(V), RGB vertical stripe
Pixel pitch	0.264mm x 0.264mm
Color depths	8 Bit / 16.7M Colors
Contrast ratio	350 : 1 (typical)
Viewing angles(L/R/U/D)	80/80/80/80 (typical)
Light source / Lifetime	4CCFL / 20,000Hrs(Minimum)
Response time (tr/td)	20/15ms

##### Video

Video mode	NTSC/PAL (Auto selection)
Scanning method	Digital progressive scan (Still/Progressive)
Video input signal	Composite : 1.0Vp-p, 75 ohm S-video : 0.7Vp-p (Luminance), 75ohm 0.3Vp-p (Chrominance), 75 ohm
Video connector	Composite : BNC x 2 S-video : 4 pin Mini-din x 2
Termination	75 ohm, Auto termination
Resolution	More than 500 lines

##### PC

Input signal	Analog RGB(0.714Vp-p, 75 ohm), H&V Sync(TTL)
Input connector	15 pin D-sub
Input resolution	VGA 640 x 480 60 to 75Hz SVGA 800 x 600 56 to 75Hz XGA 1024 x 768 60 to 75Hz SXGA 1280 x 1024 60Hz
Plug & Play	DDC 2B

#### 3.2 Submitted Documents

N/A



## 4. Measurement Conditions

Operating of EUT voltage is 12V DC supplied by the adaptor which is structural element for EUT.

( Adaptor Input Voltage : AC 120V, 60Hz)

### 4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

EUT is connected with PC by video interface cable.

Tested in mode of displaying "H" on the screen(EUT-LCD Monitor).

Tested in mode of displaying picture on the screen(CCTV Monitor).

### 4.2 List of Peripherals

Description	Manufacturer	Model Name	Serial No.	FCC ID
Personal Computer	LG-IBM	W8S	202KI10616	N/A
Color Video Monitor	Hitron Systems	CVM1054X	M0090004	N/A
Keyboard	LG-IBM	LKB-0107	10209670	N/A
Mouse	Logitech	M-S69	HCA20208290	JNZ211443
CCD Color Camera	Hitron Systems	HZC4P01N	M0060005	N/A
Adapter (for Camera)	Sigma Telecom	YK-15025U	N/A	N/A
Adapter (for EUT)	D-Tech	DTA-SXGA03	N/A	N/A



## 4.3 Type of Used Cables

Description	Length	Type of shield	Manufacturer	Remark
AC/DC Adapter cable	1.2m	Non-shield	None	For EUT
BNC cable	1.6m	Shield	None	For EUT
A/V cable (x2)	1.2m	Shield	None	For EUT
S-Video cable (x2)	1.2m	Non-shield	None	For EUT
AC/DC Adapter cable	1.2m	Non-shield	None	For Camera
PC power cable	1.2m	Non-shield	None	
Color Video Monitor power cable	1.8m	Non-shield	None	
Keyboard interface cable	1.5m	Non-shield	None	
Mouse interface	1.5m	Non-shield	None	
VGA cable	1.8m	Shield	None	For EUT
Camera interface cable	1.6m	Non-Shield	None	

## 4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

## 4.5 Uncertainty

### 1) Radiated disturbance

$$U_c \text{ (Combined standard Uncertainty)} = \pm 1.9 \text{ dB}$$

$$\text{Expanded uncertainty } U = K U_c$$

$$K = 2$$

$$\therefore U = \pm 3.8 \text{ dB}$$

### 2) Conducted disturbance

$$U_c = \pm 0.88 \text{ dB}$$

$$U = K U_c = 2 \times U_c = \pm 1.8 \text{ dB}$$



## 5. EMISSION Test

### 5.1 Conducted Emissions

**Result:****Pass**

The line-conducted facility is located inside a 2.0M x 3.6M x 7.2M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05.

A 1m x 1.5m wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room. ROHDE & SCHWARZ Model ESH3-Z5 (10kHz-30MHz) 50ohm/50 uH Line-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the ROHDE & SCHWARZ LISN and the support equipment is powered from the ROHDE & SCHWARZ LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters (100dB 14kHz-10GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the ROHDE & SCHWARZ LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 450kHz to 30MHz with 100msec. sweep time.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESHS 10) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

**SK TECH CO., LTD.**

Page 10 of 14


**Figure 1 : Spectral Diagram, LINE - PE**

24 Jul 2002 18:06

**CONDUCTED DISTURBANCE**

EUT: HTM170C  
Manuf:  
Op Cond:  
Operator:  
Test Spec:  
Comment: LINE-PE

Scan Settings	(1 Range) Frequencies			Receiver Settings				
Start 150kHz	Stop 30MHz	Step 10kHz		IF BW 10kHz	Detector PK	M-Time 100msec	Atten Auto	Preamp OFF
Final Measurement:	Detector: X QP							OpRge 60dB
	Meas Time: 1sec							
	Peaks: 8							
	Acc Margin: 35 dB							

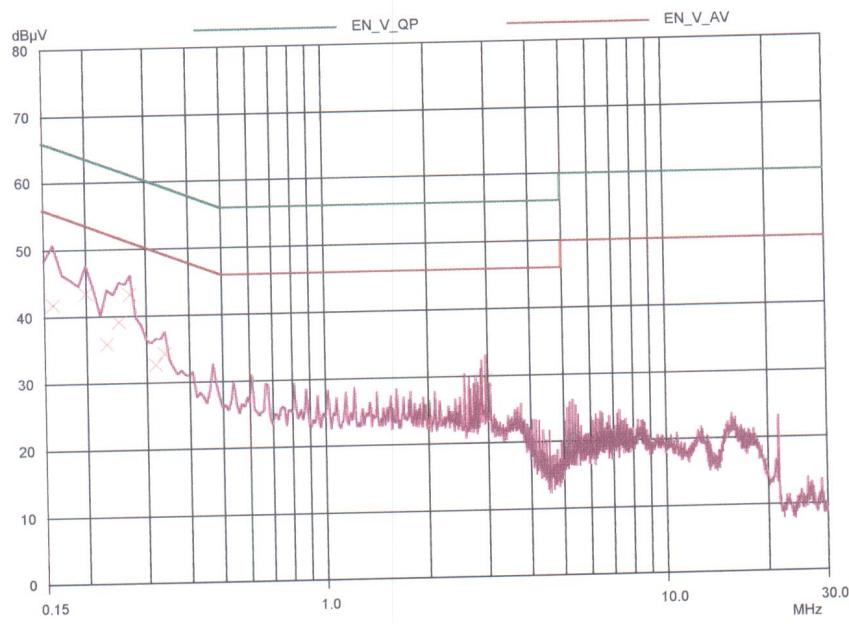



SK TECH CO., LTD.

Page 11 of 14


Figure 2 : Spectral Diagram, NEUTRAL – PE

## CONDUCTED DISTURBANCE

EUT: HTM170C  
Manuf:  
Op Cond:  
Operator:  
Test Spec:  
Comment: NEUTRAL-PE

24 Jul 2002 17:58

Scan Settings	(1 Range) Frequencies			Receiver Settings					
Start	Stop	Step		IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	10kHz		10kHz	PK	100msec	Auto	OFF	60dB
Final Measurement:				Detector:	X QP				
				Meas Time:	1sec				
				Peaks:	8				
				Acc Margin:	35 dB				

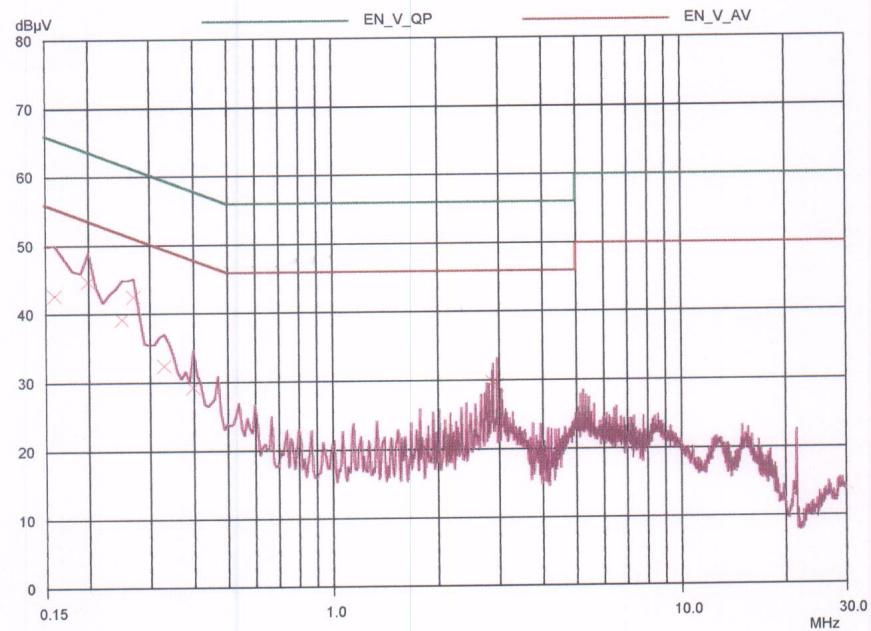

**Table 2: Test Data, Conducted Emissions**

Frequency (MHz)	(1)Reading (dB $\mu$ V)	Line	(2)C/F (dB)	(3)C/L (dB)	(4)Actual (dB $\mu$ V)	(5)Limit (dB $\mu$ V)	(6)Margin (dB)
0.160	42.68	B	0.3	0.1	43.08	65.5	22.42
0.200	44.77	B	0.3	0.1	45.17	63.6	18.43
0.270	43.24	A	0.1	0.1	43.44	61.1	17.66
0.320	32.74	A	0.1	0.1	32.94	59.7	26.76
0.400	29.27	B	0.1	0.1	29.47	57.9	28.43
2.970	29.48	A	0.1	0.3	29.88	56.0	26.12

**NOTES:**

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. Line A = LINE-PE, Line B = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss

**♠ Margin Calculation**

$$\begin{aligned}
 (6)\text{Margin} &= (5)\text{Limit} - (4)\text{Actual} \\
 (4)\text{Actual} &= (1)\text{Reading} + (2)\text{C/F} + (3)\text{C/L}
 \end{aligned}$$



## 5.2 Radiated Emissions

**Result :****Pass**

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with FRP.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter(ESVS 10) and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test.

Each EME reported was calibrated using self-calibrating mode.


**Table 3 : Test Data, Radiated Emissions**

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB $\mu$ V)	(2) AFCL (dB/m)	(3) Actual (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
135.51	H	2.6	159	4.5	16.5	21.0	43.5	22.5
250.18	H	3.2	205	16.1	20.8	36.9	46.0	9.1
268.21	V	1.5	168	13.7	21.4	35.1	46.0	10.9
418.76	H	3.8	265	15.0	21.9	36.9	46.0	9.1

Table. Radiated Measurements at 3-meters

**NOTES:**

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization

**♠ Margin Calculation**

$$\begin{aligned}
 (5) \text{Margin} &= (4) \text{Limit} - (3) \text{Actual} \\
 [(3) \text{Actual}] &= (1) \text{Reading} + (2) \text{AFCL}
 \end{aligned}$$