

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11ax-HE160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	8911.80	35.40	12.55	47.95	68.20	-20.25	Peak	Horizontal
	11575.70	30.75	16.36	47.11	74.00	-26.89	Peak	Horizontal
*	14280.40	31.17	19.10	50.27	68.20	-17.93	Peak	Horizontal
	17932.00	15.86	28.47	44.33	54.00	-9.67	Average	Horizontal
	17932.00	30.26	28.47	58.73	74.00	-15.27	Peak	Horizontal
	11103.10	31.58	15.93	47.51	74.00	-26.49	Peak	Vertical
*	14132.50	30.75	19.17	49.92	68.20	-18.28	Peak	Vertical
*	14798.90	31.39	19.17	50.56	68.20	-17.64	Peak	Vertical
	17928.60	16.25	28.34	44.59	54.00	-9.41	Average	Vertical
	17928.60	29.99	28.34	58.33	74.00	-15.67	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8287.90	37.55	10.40	47.95	74.00	-26.05	Peak	Horizontal
*	14122.30	30.92	18.99	49.91	68.20	-18.29	Peak	Horizontal
*	14870.30	29.01	18.64	47.65	68.20	-20.55	Peak	Horizontal
	17857.20	16.25	28.61	44.86	54.00	-9.14	Average	Horizontal
	17857.20	29.37	28.61	57.98	74.00	-16.02	Peak	Horizontal
	11118.40	31.37	16.14	47.51	74.00	-26.49	Peak	Vertical
*	13828.20	30.70	18.66	49.36	68.20	-18.84	Peak	Vertical
*	14934.90	30.61	18.39	49.00	68.20	-19.20	Peak	Vertical
	17845.30	16.35	28.52	44.87	54.00	-9.13	Average	Vertical
	17845.30	29.43	28.52	57.95	74.00	-16.05	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8352.50	38.17	10.46	48.63	74.00	-25.37	Peak	Horizontal
*	14037.30	30.12	18.91	49.03	68.20	-19.17	Peak	Horizontal
*	14622.10	30.46	19.06	49.52	68.20	-18.68	Peak	Horizontal
	17923.50	16.59	28.18	44.77	54.00	-9.23	Average	Horizontal
	17923.50	29.81	28.18	57.99	74.00	-16.01	Peak	Horizontal
	11436.30	31.50	16.33	47.83	74.00	-26.17	Peak	Vertical
*	13877.50	29.93	18.75	48.68	68.20	-19.52	Peak	Vertical
*	14637.40	32.08	19.03	51.11	68.20	-17.09	Peak	Vertical
	17867.40	16.59	28.26	44.85	54.00	-9.15	Average	Vertical
	17867.40	29.34	28.26	57.60	74.00	-16.40	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8384.80	39.07	10.66	49.73	74.00	-24.27	Peak	Horizontal
*	14188.60	30.70	19.05	49.75	68.20	-18.45	Peak	Horizontal
*	14809.10	30.63	19.15	49.78	68.20	-18.42	Peak	Horizontal
	17847.00	16.32	28.53	44.85	54.00	-9.15	Average	Horizontal
	17847.00	29.88	28.53	58.41	74.00	-15.59	Peak	Horizontal
	11504.30	31.39	16.41	47.80	74.00	-26.20	Peak	Vertical
*	14054.30	31.24	19.08	50.32	68.20	-17.88	Peak	Vertical
*	14889.00	31.30	18.83	50.13	68.20	-18.07	Peak	Vertical
	17933.70	16.59	28.49	45.08	54.00	-8.92	Average	Vertical
	17933.70	29.79	28.49	58.28	74.00	-15.72	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8415.40	38.33	10.92	49.25	74.00	-24.75	Peak	Horizontal
*	14132.50	29.99	19.17	49.16	68.20	-19.04	Peak	Horizontal
*	14885.60	30.62	18.82	49.44	68.20	-18.76	Peak	Horizontal
	17843.60	16.54	28.42	44.96	54.00	-9.04	Average	Horizontal
	17843.60	30.37	28.42	58.79	74.00	-15.21	Peak	Horizontal
	11432.90	31.29	16.34	47.63	74.00	-26.37	Peak	Vertical
*	14129.10	31.15	19.10	50.25	68.20	-17.95	Peak	Vertical
*	14601.70	31.14	19.04	50.18	68.20	-18.02	Peak	Vertical
	17937.10	15.48	28.52	44.00	54.00	-10.00	Average	Vertical
	17937.10	30.63	28.52	59.15	74.00	-14.85	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8480.00	38.17	11.00	49.17	74.00	-24.83	Peak	Horizontal
*	14018.60	30.81	18.80	49.61	68.20	-18.59	Peak	Horizontal
*	14895.80	30.91	18.84	49.75	68.20	-18.45	Peak	Horizontal
	17933.70	16.14	28.49	44.63	54.00	-9.37	Average	Horizontal
	17933.70	29.29	28.49	57.78	74.00	-16.22	Peak	Horizontal
	11409.10	31.28	16.42	47.70	74.00	-26.30	Peak	Vertical
*	13649.70	31.14	18.20	49.34	68.20	-18.86	Peak	Vertical
*	14855.00	31.03	18.57	49.60	68.20	-18.60	Peak	Vertical
	17945.60	16.35	28.60	44.95	54.00	-9.05	Average	Vertical
	17945.60	30.02	28.60	58.62	74.00	-15.38	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	8512.30	38.05	11.31	49.36	68.20	-18.84	Peak	Horizontal
	11432.90	31.37	16.34	47.71	74.00	-26.29	Peak	Horizontal
*	14144.40	31.34	19.35	50.69	68.20	-17.51	Peak	Horizontal
	17886.10	16.69	27.46	44.15	54.00	-9.85	Average	Horizontal
	17886.10	30.96	27.46	58.42	74.00	-15.58	Peak	Horizontal
	11492.40	31.10	16.40	47.50	74.00	-26.50	Peak	Vertical
*	13993.10	31.18	19.03	50.21	68.20	-17.99	Peak	Vertical
*	14880.50	30.66	18.76	49.42	68.20	-18.78	Peak	Vertical
	17867.40	16.20	28.26	44.46	54.00	-9.54	Average	Vertical
	17867.40	29.36	28.26	57.62	74.00	-16.38	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	31.80	16.03	47.83	74.00	-26.17	Peak	Horizontal
*	14188.60	31.12	19.05	50.17	68.20	-18.03	Peak	Horizontal
*	14700.30	30.93	19.28	50.21	68.20	-17.99	Peak	Horizontal
	17945.60	15.98	28.60	44.58	54.00	-9.42	Average	Horizontal
	17945.60	29.25	28.60	57.85	74.00	-16.15	Peak	Horizontal
	11125.20	32.23	16.16	48.39	74.00	-25.61	Peak	Vertical
*	14006.70	31.10	18.85	49.95	68.20	-18.25	Peak	Vertical
*	14775.10	31.06	18.99	50.05	68.20	-18.15	Peak	Vertical
	17748.40	16.39	27.54	43.93	54.00	-10.07	Average	Vertical
	17748.40	30.34	27.54	57.88	74.00	-16.12	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11480.50	32.25	16.36	48.61	74.00	-25.39	Peak	Horizontal
*	13739.80	30.98	18.35	49.33	68.20	-18.87	Peak	Horizontal
*	14894.10	31.74	18.84	50.58	68.20	-17.62	Peak	Horizontal
	17937.10	15.64	28.52	44.16	54.00	-9.84	Average	Horizontal
	17937.10	30.44	28.52	58.96	74.00	-15.04	Peak	Horizontal
	11055.50	31.66	15.76	47.42	74.00	-26.58	Peak	Vertical
*	13724.50	30.77	18.41	49.18	68.20	-19.02	Peak	Vertical
*	14798.90	31.20	19.17	50.37	68.20	-17.83	Peak	Vertical
	17928.60	15.69	28.34	44.03	54.00	-9.97	Average	Vertical
	17928.60	29.94	28.34	58.28	74.00	-15.72	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	32.80	16.03	48.83	74.00	-25.17	Peak	Horizontal
*	13908.10	30.36	18.79	49.15	68.20	-19.05	Peak	Horizontal
*	14885.60	30.89	18.82	49.71	68.20	-18.49	Peak	Horizontal
	17960.90	16.36	28.42	44.78	54.00	-9.22	Average	Horizontal
	17960.90	30.54	28.42	58.96	74.00	-15.04	Peak	Horizontal
	11072.50	32.22	15.62	47.84	74.00	-26.16	Peak	Vertical
*	14032.20	31.38	18.86	50.24	68.20	-17.96	Peak	Vertical
*	14742.80	31.29	18.95	50.24	68.20	-17.96	Peak	Vertical
	17925.20	16.32	28.23	44.55	54.00	-9.45	Average	Vertical
	17925.20	29.73	28.23	57.96	74.00	-16.04	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11659.00	31.03	16.37	47.40	74.00	-26.60	Peak	Horizontal
*	13935.30	30.24	18.66	48.90	68.20	-19.30	Peak	Horizontal
*	14807.40	30.77	19.15	49.92	68.20	-18.28	Peak	Horizontal
	17933.70	16.36	28.49	44.85	54.00	-9.15	Average	Horizontal
	17933.70	30.69	28.49	59.18	74.00	-14.82	Peak	Horizontal
	11392.10	30.92	16.32	47.24	74.00	-26.76	Peak	Vertical
*	13806.10	30.67	18.76	49.43	68.20	-18.77	Peak	Vertical
*	14931.50	30.58	18.45	49.03	68.20	-19.17	Peak	Vertical
	17954.10	16.36	28.54	44.90	54.00	-9.10	Average	Vertical
	17954.10	29.39	28.54	57.93	74.00	-16.07	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	32.09	16.03	48.12	74.00	-25.88	Peak	Horizontal
*	13982.90	30.19	19.07	49.26	68.20	-18.94	Peak	Horizontal
*	14809.10	28.32	19.15	47.47	68.20	-20.73	Peak	Horizontal
	17954.10	15.96	28.54	44.50	54.00	-9.50	Average	Horizontal
	17954.10	29.39	28.54	57.93	74.00	-16.07	Peak	Horizontal
	11570.60	30.91	16.34	47.25	74.00	-26.75	Peak	Vertical
*	13795.90	30.32	18.64	48.96	68.20	-19.24	Peak	Vertical
*	15045.40	31.02	18.10	49.12	68.20	-19.08	Peak	Vertical
	17923.50	16.35	28.18	44.53	54.00	-9.47	Average	Vertical
	17923.50	30.02	28.18	58.20	74.00	-15.80	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11436.30	31.40	16.33	47.73	74.00	-26.27	Peak	Horizontal
*	13797.60	30.31	18.67	48.98	68.20	-19.22	Peak	Horizontal
*	15086.20	30.63	18.20	48.83	68.20	-19.37	Peak	Horizontal
	17841.90	16.34	28.32	44.66	54.00	-9.34	Average	Horizontal
	17841.90	29.56	28.32	57.88	74.00	-16.12	Peak	Horizontal
	11676.00	30.91	16.37	47.28	74.00	-26.72	Peak	Vertical
*	13797.60	31.71	18.67	50.38	68.20	-17.82	Peak	Vertical
*	14739.40	31.14	18.99	50.13	68.20	-18.07	Peak	Vertical
	17925.20	16.12	28.23	44.35	54.00	-9.65	Average	Vertical
	17925.20	29.80	28.23	58.03	74.00	-15.97	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	31.28	16.03	47.31	74.00	-26.69	Peak	Horizontal
*	13816.30	30.53	18.75	49.28	68.20	-18.92	Peak	Horizontal
*	14900.90	30.49	18.86	49.35	68.20	-18.85	Peak	Horizontal
	17962.60	16.94	28.38	45.32	54.00	-8.68	Average	Horizontal
	17962.60	29.75	28.38	58.13	74.00	-15.87	Peak	Horizontal
	11526.40	30.87	16.34	47.21	74.00	-26.79	Peak	Vertical
*	14057.70	30.65	19.10	49.75	68.20	-18.45	Peak	Vertical
*	15150.80	31.91	18.21	50.12	68.20	-18.08	Peak	Vertical
	17971.10	15.98	28.17	44.15	54.00	-9.85	Average	Vertical
	17971.10	29.17	28.17	57.34	74.00	-16.66	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8303.20	37.38	10.50	47.88	74.00	-26.12	Peak	Horizontal
*	13729.60	30.89	18.40	49.29	68.20	-18.91	Peak	Horizontal
*	14797.20	30.60	19.16	49.76	68.20	-18.44	Peak	Horizontal
	17858.90	15.96	28.58	44.54	54.00	-9.46	Average	Horizontal
	17858.90	29.48	28.58	58.06	74.00	-15.94	Peak	Horizontal
	11592.70	30.88	16.39	47.27	74.00	-26.73	Peak	Vertical
*	14137.60	31.96	19.28	51.24	68.20	-16.96	Peak	Vertical
*	14785.30	30.68	19.10	49.78	68.20	-18.42	Peak	Vertical
	17928.60	16.54	28.34	44.88	54.00	-9.12	Average	Vertical
	17928.60	30.66	28.34	59.00	74.00	-15.00	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8367.80	38.17	10.52	48.69	74.00	-25.31	Peak	Horizontal
*	14023.70	30.90	18.81	49.71	68.20	-18.49	Peak	Horizontal
*	14810.80	30.87	19.14	50.01	68.20	-18.19	Peak	Horizontal
	17862.30	15.96	28.52	44.48	54.00	-9.52	Average	Horizontal
	17862.30	29.18	28.52	57.70	74.00	-16.30	Peak	Horizontal
	11500.90	31.20	16.42	47.62	74.00	-26.38	Peak	Vertical
*	14067.90	30.52	19.11	49.63	68.20	-18.57	Peak	Vertical
*	14792.10	30.98	19.14	50.12	68.20	-18.08	Peak	Vertical
	17949.00	15.94	28.64	44.58	54.00	-9.42	Average	Vertical
	17949.00	29.14	28.64	57.78	74.00	-16.22	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8432.40	37.86	10.86	48.72	74.00	-25.28	Peak	Horizontal
*	14186.90	30.52	19.08	49.60	68.20	-18.60	Peak	Horizontal
*	14739.40	30.43	18.99	49.42	68.20	-18.78	Peak	Horizontal
	17959.20	15.93	28.45	44.38	54.00	-9.62	Average	Horizontal
	17959.20	30.29	28.45	58.74	74.00	-15.26	Peak	Horizontal
	11152.40	31.52	15.94	47.46	74.00	-26.54	Peak	Vertical
*	14052.60	30.77	19.06	49.83	68.20	-18.37	Peak	Vertical
*	14702.00	29.98	19.28	49.26	68.20	-18.94	Peak	Vertical
	17852.10	16.39	28.58	44.97	54.00	-9.03	Average	Vertical
	17852.10	29.67	28.58	58.25	74.00	-15.75	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8495.30	38.53	11.17	49.70	74.00	-24.30	Peak	Horizontal
*	13826.50	30.09	18.67	48.76	68.20	-19.44	Peak	Horizontal
*	14831.20	30.25	18.87	49.12	68.20	-19.08	Peak	Horizontal
	17841.90	16.25	28.32	44.57	54.00	-9.43	Average	Horizontal
	17841.90	29.29	28.32	57.61	74.00	-16.39	Peak	Horizontal
	11772.90	30.84	16.11	46.95	74.00	-27.05	Peak	Vertical
*	13974.40	30.41	19.09	49.50	68.20	-18.70	Peak	Vertical
*	14787.00	30.64	19.11	49.75	68.20	-18.45	Peak	Vertical
	17935.40	16.36	28.50	44.86	54.00	-9.14	Average	Vertical
	17935.40	30.35	28.50	58.85	74.00	-15.15	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11480.50	31.38	16.36	47.74	74.00	-26.26	Peak	Horizontal
*	14042.40	30.37	18.97	49.34	68.20	-18.86	Peak	Horizontal
*	14705.40	30.17	19.29	49.46	68.20	-18.74	Peak	Horizontal
	17959.20	16.21	28.45	44.66	54.00	-9.34	Average	Horizontal
	17959.20	30.14	28.45	58.59	74.00	-15.41	Peak	Horizontal
	11436.30	31.43	16.33	47.76	74.00	-26.24	Peak	Vertical
*	13835.00	30.80	18.59	49.39	68.20	-18.81	Peak	Vertical
*	14900.90	30.31	18.86	49.17	68.20	-19.03	Peak	Vertical
	17962.60	16.21	28.38	44.59	54.00	-9.41	Average	Vertical
	17962.60	29.27	28.38	57.65	74.00	-16.35	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	32.13	16.03	48.16	74.00	-25.84	Peak	Horizontal
*	13690.50	31.66	18.29	49.95	68.20	-18.25	Peak	Horizontal
*	14754.70	30.87	18.88	49.75	68.20	-18.45	Peak	Horizontal
	17938.80	15.93	28.53	44.46	54.00	-9.54	Average	Horizontal
	17938.80	29.01	28.53	57.54	74.00	-16.46	Peak	Horizontal
	11511.10	30.90	16.39	47.29	74.00	-26.71	Peak	Vertical
*	13802.70	30.55	18.75	49.30	68.20	-18.90	Peak	Vertical
*	15128.70	31.31	17.84	49.15	68.20	-19.05	Peak	Vertical
	17957.50	16.36	28.48	44.84	54.00	-9.16	Average	Vertical
	17957.50	29.75	28.48	58.23	74.00	-15.77	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11118.40	32.06	16.14	48.20	74.00	-25.80	Peak	Horizontal
*	13785.70	30.52	18.49	49.01	68.20	-19.19	Peak	Horizontal
*	14763.20	30.79	18.90	49.69	68.20	-18.51	Peak	Horizontal
	17957.50	16.32	28.48	44.80	54.00	-9.20	Average	Horizontal
	17957.50	30.54	28.48	59.02	74.00	-14.98	Peak	Horizontal
	11604.60	30.99	16.37	47.36	74.00	-26.64	Peak	Vertical
*	13717.70	31.36	18.46	49.82	68.20	-18.38	Peak	Vertical
*	14800.60	30.45	19.18	49.63	68.20	-18.57	Peak	Vertical
	17947.30	15.96	28.63	44.59	54.00	-9.41	Average	Vertical
	17947.30	29.71	28.63	58.34	74.00	-15.66	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11016.40	31.69	15.89	47.58	74.00	-26.42	Peak	Horizontal
*	13636.10	31.34	18.34	49.68	68.20	-18.52	Peak	Horizontal
*	14838.00	31.45	18.76	50.21	68.20	-17.99	Peak	Horizontal
	17945.60	15.93	28.60	44.53	54.00	-9.47	Average	Horizontal
	17945.60	29.71	28.60	58.31	74.00	-15.69	Peak	Horizontal
	11495.80	30.89	16.41	47.30	74.00	-26.70	Peak	Vertical
*	14033.90	30.29	18.88	49.17	68.20	-19.03	Peak	Vertical
*	14720.70	30.03	19.23	49.26	68.20	-18.94	Peak	Vertical
	17933.70	16.39	28.49	44.88	54.00	-9.12	Average	Vertical
	17933.70	30.48	28.49	58.97	74.00	-15.03	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11769.50	31.23	16.10	47.33	74.00	-26.67	Peak	Horizontal
*	13731.30	31.24	18.39	49.63	68.20	-18.57	Peak	Horizontal
*	14739.40	30.48	18.99	49.47	68.20	-18.73	Peak	Horizontal
	17857.20	16.32	28.61	44.93	54.00	-9.07	Average	Horizontal
	17857.20	29.35	28.61	57.96	74.00	-16.04	Peak	Horizontal
	11614.80	31.74	16.32	48.06	74.00	-25.94	Peak	Vertical
*	14095.10	30.24	18.93	49.17	68.20	-19.03	Peak	Vertical
*	14693.50	30.31	19.21	49.52	68.20	-18.68	Peak	Vertical
	17853.80	16.24	28.60	44.84	54.00	-9.16	Average	Vertical
	17853.80	28.77	28.60	57.37	74.00	-16.63	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11438.00	30.75	16.32	47.07	74.00	-26.93	Peak	Horizontal
*	13948.90	30.27	18.75	49.02	68.20	-19.18	Peak	Horizontal
*	14717.30	31.42	19.28	50.70	68.20	-17.50	Peak	Horizontal
	17855.50	16.35	28.62	44.97	54.00	-9.03	Average	Horizontal
	17855.50	29.09	28.62	57.71	74.00	-16.29	Peak	Horizontal
	11006.20	31.89	15.73	47.62	74.00	-26.38	Peak	Vertical
*	14064.50	30.24	19.12	49.36	68.20	-18.84	Peak	Vertical
*	14860.10	31.12	18.60	49.72	68.20	-18.48	Peak	Vertical
	17959.20	16.43	28.45	44.88	54.00	-9.12	Average	Vertical
	17959.20	29.75	28.45	58.20	74.00	-15.80	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11555.30	31.38	16.30	47.68	74.00	-26.32	Peak	Horizontal
*	14171.60	30.26	19.28	49.54	68.20	-18.66	Peak	Horizontal
*	14812.50	30.78	19.13	49.91	68.20	-18.29	Peak	Horizontal
	17877.60	16.32	27.73	44.05	54.00	-9.95	Average	Horizontal
	17877.60	30.10	27.73	57.83	74.00	-16.17	Peak	Horizontal
	11618.20	31.05	16.30	47.35	74.00	-26.65	Peak	Vertical
*	13976.10	30.14	19.10	49.24	68.20	-18.96	Peak	Vertical
*	14970.60	31.36	18.35	49.71	68.20	-18.49	Peak	Vertical
	17969.40	16.32	28.21	44.53	54.00	-9.47	Average	Vertical
	17969.40	30.75	28.21	58.96	74.00	-15.04	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	32.27	16.03	48.30	74.00	-25.70	Peak	Horizontal
*	13603.80	30.52	18.11	48.63	68.20	-19.57	Peak	Horizontal
*	14625.50	30.39	19.08	49.47	68.20	-18.73	Peak	Horizontal
	17864.00	16.35	28.44	44.79	54.00	-9.21	Average	Horizontal
	17864.00	29.86	28.44	58.30	74.00	-15.70	Peak	Horizontal
	11458.40	30.28	16.25	46.53	74.00	-27.47	Peak	Vertical
*	13994.80	30.45	19.01	49.46	68.20	-18.74	Peak	Vertical
*	14630.60	30.59	19.08	49.67	68.20	-18.53	Peak	Vertical
	17843.60	15.69	28.42	44.11	54.00	-9.89	Average	Vertical
	17843.60	29.94	28.42	58.36	74.00	-15.64	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	8848.90	35.95	12.43	48.38	68.20	-19.82	Peak	Horizontal
	11387.00	30.74	16.27	47.01	74.00	-26.99	Peak	Horizontal
*	13916.60	30.57	18.72	49.29	68.20	-18.91	Peak	Horizontal
	17858.90	16.32	28.58	44.90	54.00	-9.10	Average	Horizontal
	17858.90	29.83	28.58	58.41	74.00	-15.59	Peak	Horizontal
*	7939.40	36.00	10.71	46.71	68.20	-21.49	Peak	Vertical
	11667.50	31.02	16.38	47.40	74.00	-26.60	Peak	Vertical
*	13884.30	30.40	18.80	49.20	68.20	-19.00	Peak	Vertical
	17960.90	16.22	28.42	44.64	54.00	-9.36	Average	Vertical
	17960.90	29.08	28.42	57.50	74.00	-16.50	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11009.60	31.86	15.79	47.65	74.00	-26.35	Peak	Horizontal
*	14006.70	30.10	18.85	48.95	68.20	-19.25	Peak	Horizontal
*	14848.20	32.06	18.62	50.68	68.20	-17.52	Peak	Horizontal
	17933.70	16.35	28.49	44.84	54.00	-9.16	Average	Horizontal
	17933.70	30.48	28.49	58.97	74.00	-15.03	Peak	Horizontal
	11458.40	31.09	16.25	47.34	74.00	-26.66	Peak	Vertical
*	14006.70	29.85	18.85	48.70	68.20	-19.50	Peak	Vertical
*	14778.50	30.90	19.03	49.93	68.20	-18.27	Peak	Vertical
	17967.70	16.33	28.26	44.59	54.00	-9.41	Average	Vertical
	17967.70	29.80	28.26	58.06	74.00	-15.94	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11038.50	31.91	15.94	47.85	74.00	-26.15	Peak	Horizontal
*	14067.90	30.32	19.11	49.43	68.20	-18.77	Peak	Horizontal
*	15208.60	30.87	17.90	48.77	68.20	-19.43	Peak	Horizontal
	17949.00	16.31	28.64	44.95	54.00	-9.05	Average	Horizontal
	17949.00	29.06	28.64	57.70	74.00	-16.30	Peak	Horizontal
	11463.50	31.02	16.26	47.28	74.00	-26.72	Peak	Vertical
*	13812.90	30.28	18.76	49.04	68.20	-19.16	Peak	Vertical
*	15140.60	31.88	18.07	49.95	68.20	-18.25	Peak	Vertical
	17753.50	16.11	27.60	43.71	54.00	-10.29	Average	Vertical
	17753.50	30.29	27.60	57.89	74.00	-16.11	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11439.70	31.40	16.31	47.71	74.00	-26.29	Peak	Horizontal
*	14006.70	30.72	18.85	49.57	68.20	-18.63	Peak	Horizontal
*	14807.40	29.86	19.15	49.01	68.20	-19.19	Peak	Horizontal
	17935.40	15.99	28.50	44.49	54.00	-9.51	Average	Horizontal
	17935.40	28.96	28.50	57.46	74.00	-16.54	Peak	Horizontal
	11414.20	30.74	16.42	47.16	74.00	-26.84	Peak	Vertical
*	14139.30	30.47	19.30	49.77	68.20	-18.43	Peak	Vertical
*	14802.30	30.54	19.17	49.71	68.20	-18.49	Peak	Vertical
	17932.00	16.11	28.47	44.58	54.00	-9.42	Average	Vertical
	17932.00	29.84	28.47	58.31	74.00	-15.69	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11084.40	32.11	15.64	47.75	74.00	-26.25	Peak	Horizontal
*	14103.60	30.74	18.91	49.65	68.20	-18.55	Peak	Horizontal
*	14771.70	30.90	18.95	49.85	68.20	-18.35	Peak	Horizontal
	17925.20	16.32	28.23	44.55	54.00	-9.45	Average	Horizontal
	17925.20	29.66	28.23	57.89	74.00	-16.11	Peak	Horizontal
	11468.60	30.56	16.28	46.84	74.00	-27.16	Peak	Vertical
*	13967.60	30.28	18.99	49.27	68.20	-18.93	Peak	Vertical
*	14724.10	29.95	19.18	49.13	68.20	-19.07	Peak	Vertical
	17858.90	16.21	28.58	44.79	54.00	-9.21	Average	Vertical
	17858.90	28.88	28.58	57.46	74.00	-16.54	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-06-28	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11910.60	31.69	16.03	47.72	74.00	-26.28	Peak	Horizontal
*	13952.30	31.62	18.79	50.41	68.20	-17.79	Peak	Horizontal
*	14902.60	31.09	18.86	49.95	68.20	-18.25	Peak	Horizontal
	17938.80	16.32	28.53	44.85	54.00	-9.15	Average	Horizontal
	17938.80	29.98	28.53	58.51	74.00	-15.49	Peak	Horizontal
	11475.40	31.63	16.33	47.96	74.00	-26.04	Peak	Vertical
*	13641.20	31.44	18.28	49.72	68.20	-18.48	Peak	Vertical
*	14759.80	30.23	18.89	49.12	68.20	-19.08	Peak	Vertical
	17862.30	16.25	28.52	44.77	54.00	-9.23	Average	Vertical
	17862.30	29.46	28.52	57.98	74.00	-16.02	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WZ-AC2	Test Date	2025-07-08
Temperature	24.6°C	Humidity	40.0%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Ajin Fan
Factor	VULB 9162_00047	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5745MHz		

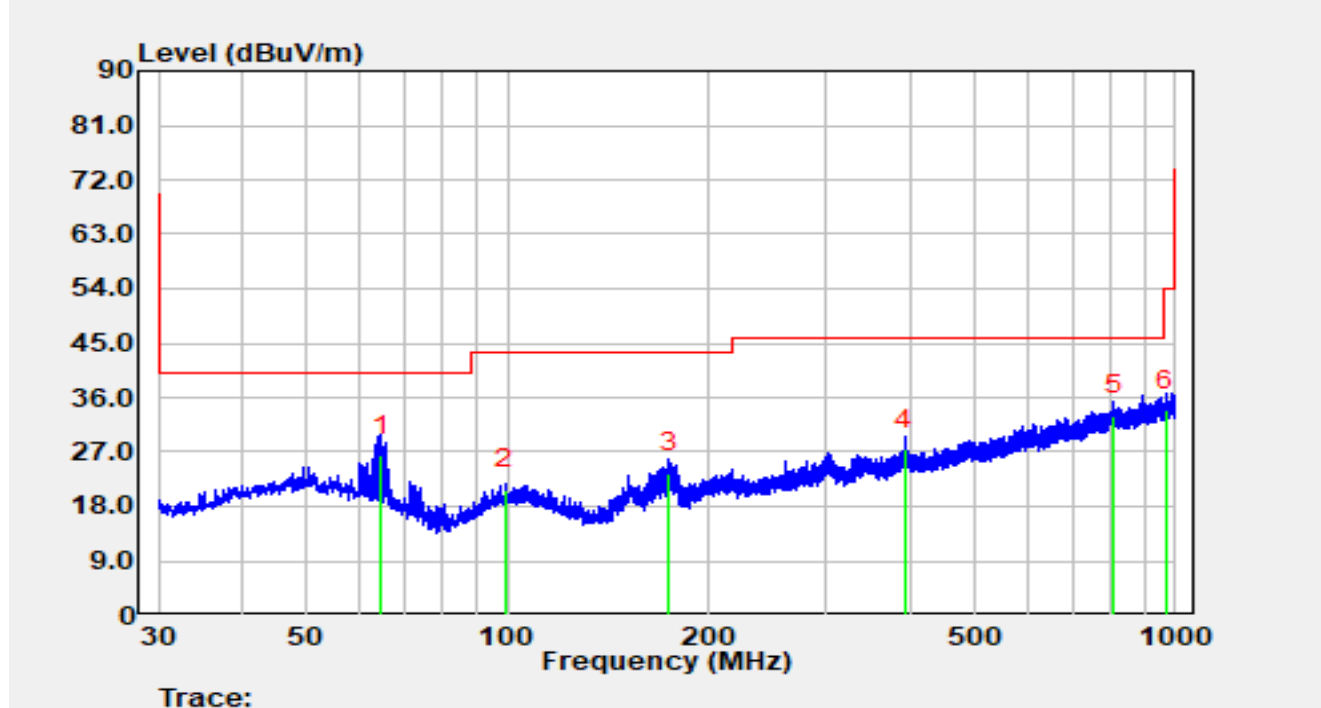


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		64.53	8.12	18.32	26.44	-13.56	40.00	QP
2		99.06	2.10	18.63	20.73	-22.77	43.50	QP
3		174.24	7.12	16.39	23.51	-19.99	43.50	QP
4		393.07	4.12	23.38	27.50	-18.50	46.00	QP
5	*	808.13	2.12	30.83	32.95	-13.05	46.00	QP
6		968.09	2.14	31.75	33.89	-20.11	54.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC2	Test Date	2025-07-08
Temperature	24.6°C	Humidity	40.0%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Ajin Fan
Factor	VULB 9162_00047	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5745MHz		

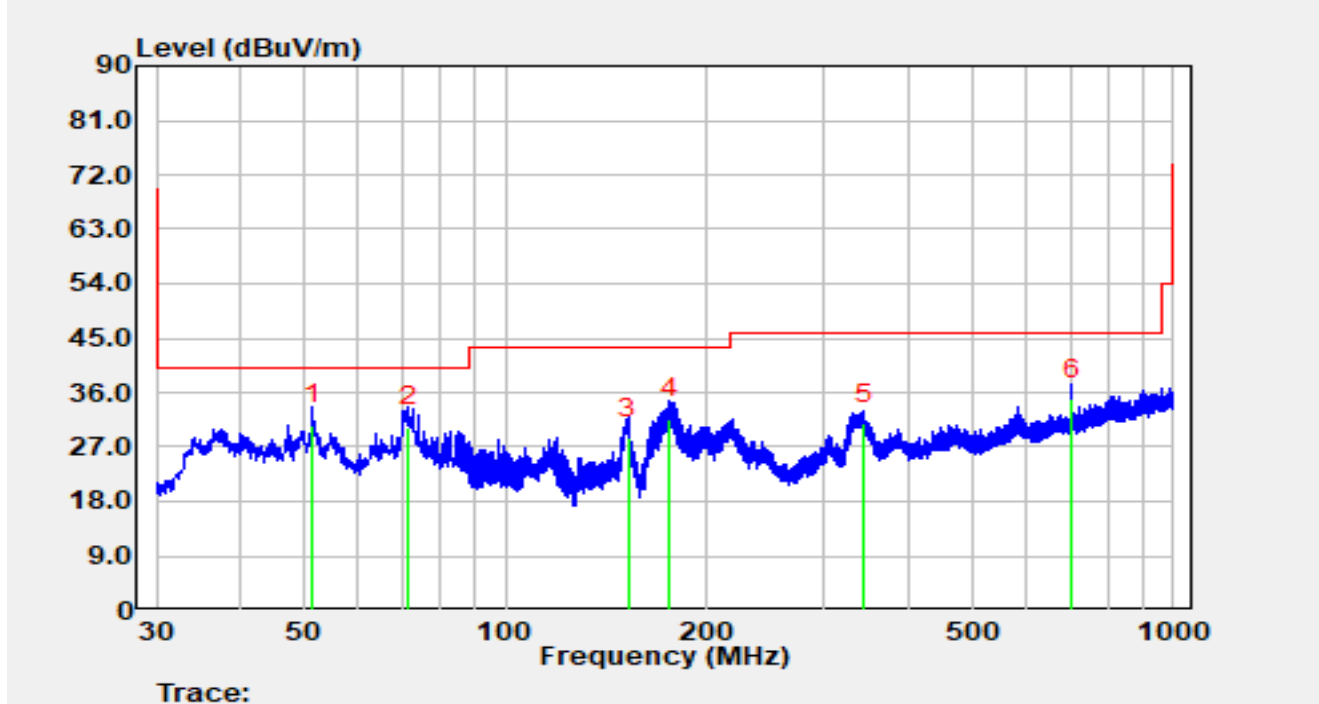


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	51.44	10.25	20.48	30.73	-9.27	40.00	QP
2		71.42	14.25	16.02	30.27	-9.73	40.00	QP
3		152.51	13.25	15.26	28.51	-14.99	43.50	QP
4		175.69	15.25	16.48	31.73	-11.77	43.50	QP
5		343.70	8.25	22.60	30.85	-15.15	46.00	QP
6		704.05	6.21	28.62	34.83	-11.17	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180MHz		

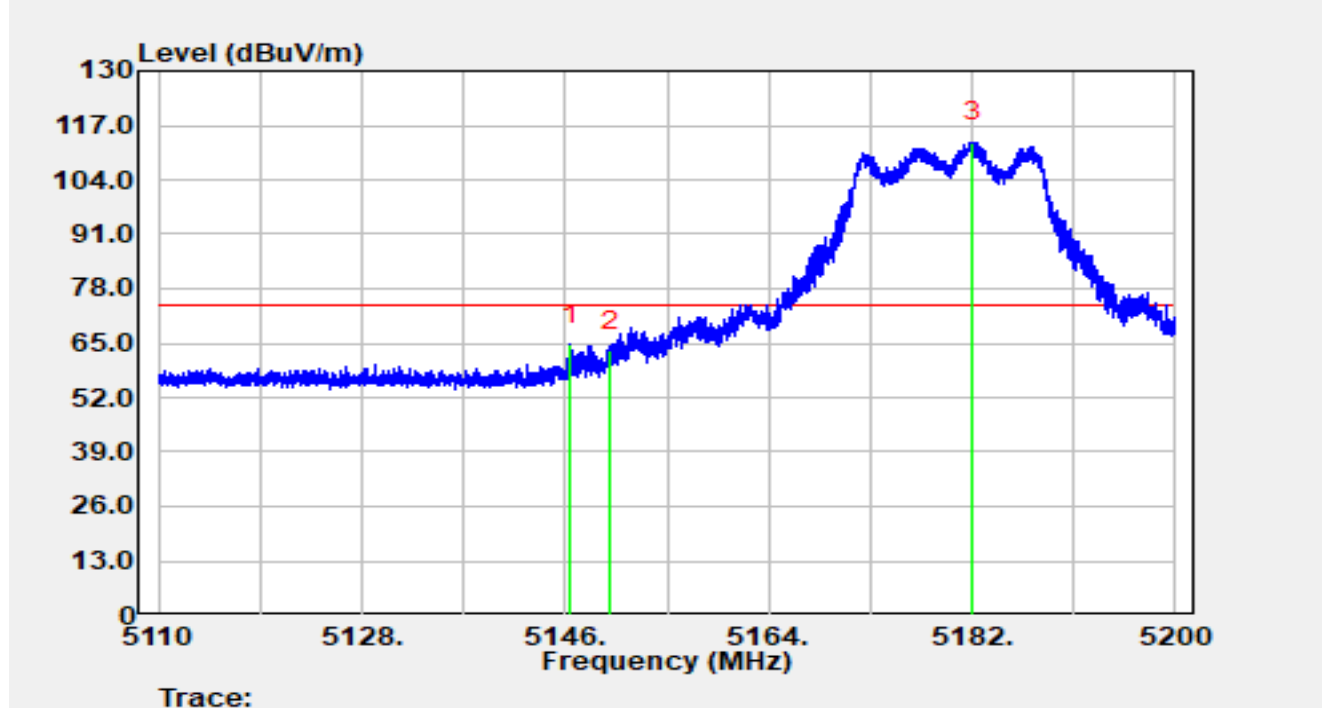


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.44	44.59	20.14	64.73	-9.27	74.00	Peak
2		5150.00	43.04	20.14	63.17	-10.83	74.00	Peak
3		5182.11	93.05	19.98	113.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180MHz		

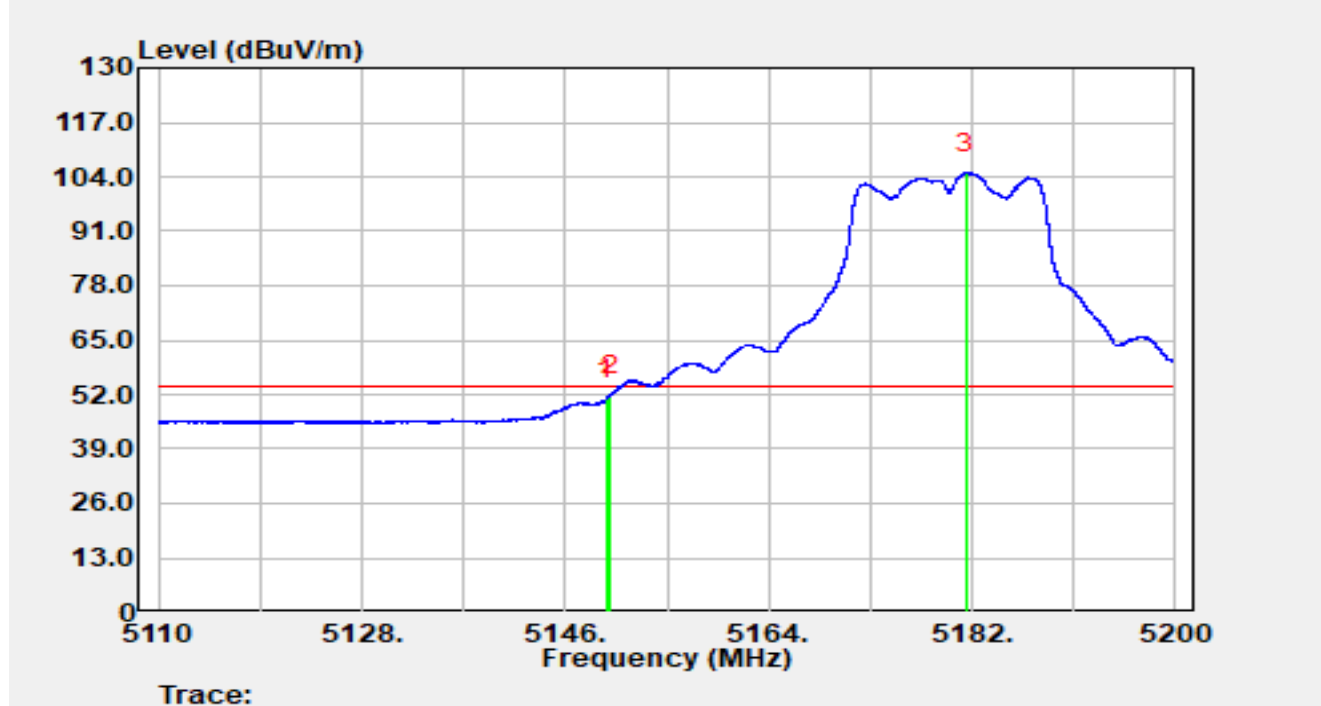


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.68	30.75	20.14	50.88	-3.12	54.00	Average
2	*	5150.00	31.57	20.14	51.70	-2.30	54.00	Average
3		5181.43	84.80	19.98	104.79	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180MHz		

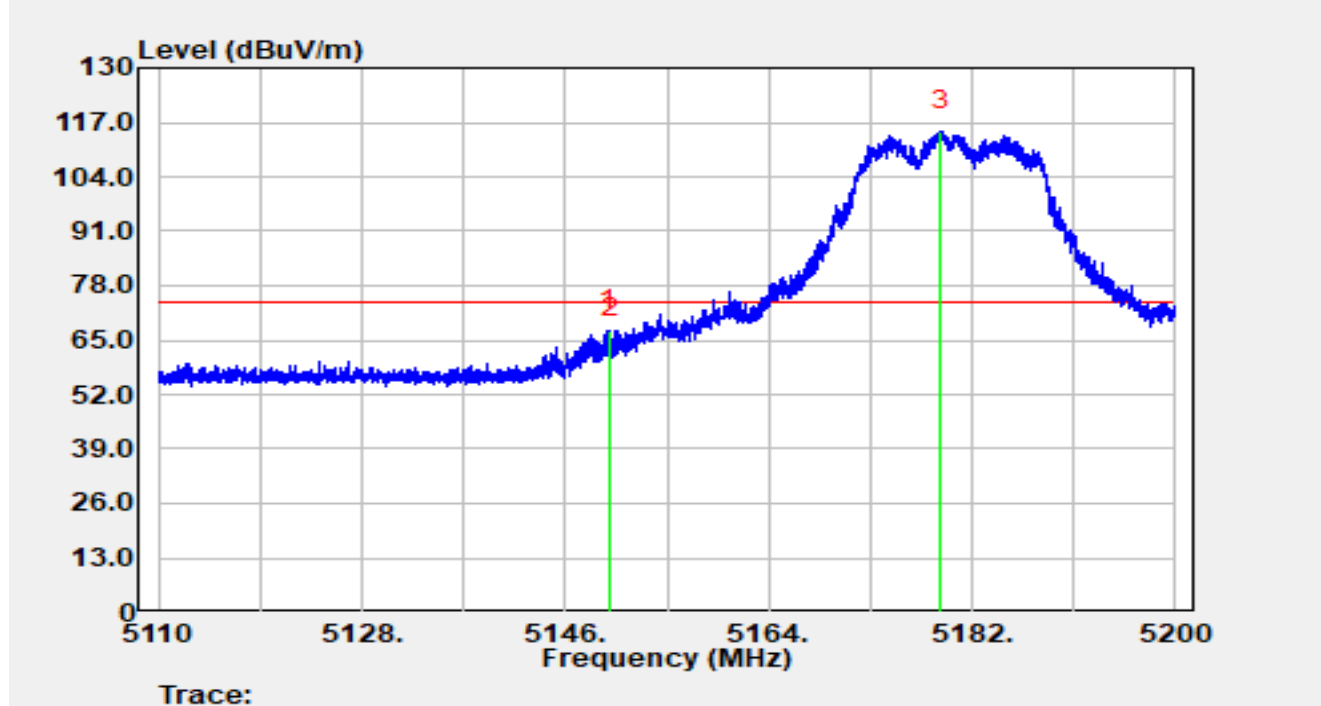


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.82	47.19	20.14	67.32	-6.68	74.00	Peak
2		5150.00	45.24	20.14	65.37	-8.63	74.00	Peak
3		5179.24	94.97	19.99	114.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180MHz		

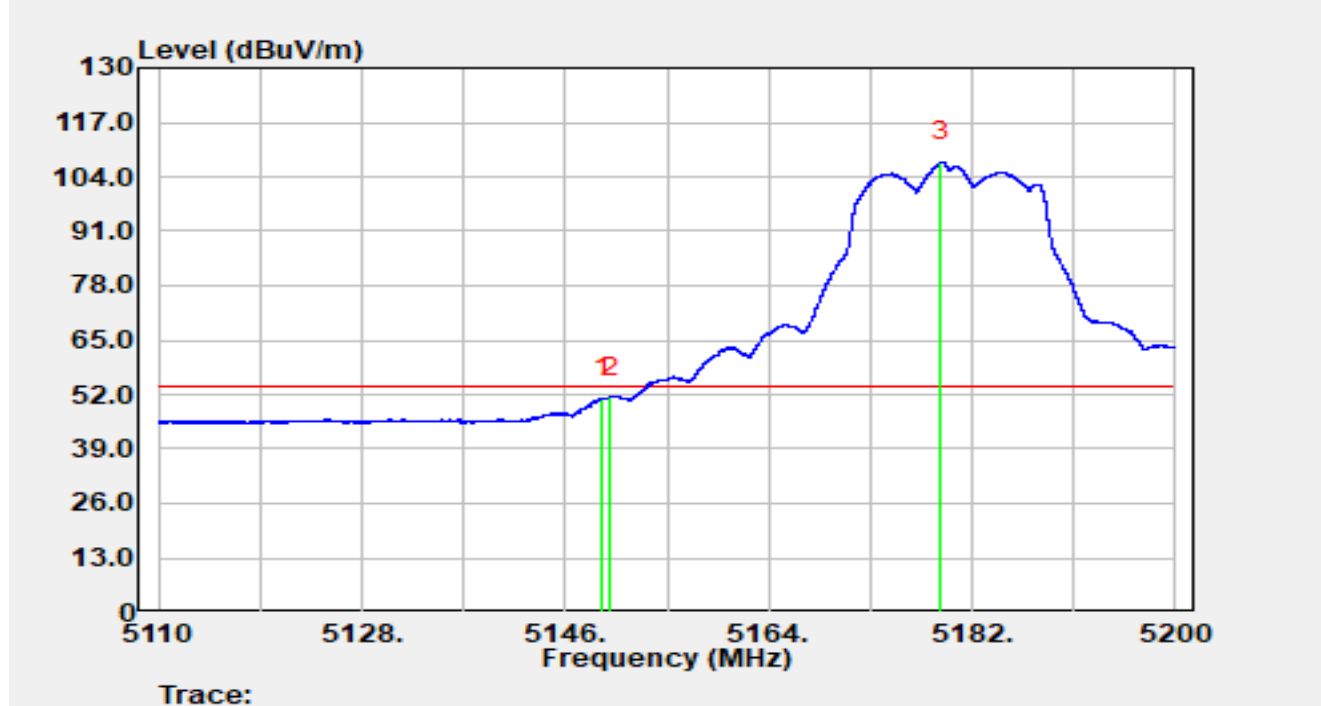


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.25	30.90	20.14	51.04	-2.96	54.00	Average
2	*	5150.00	31.19	20.14	51.33	-2.67	54.00	Average
3		5179.28	87.45	19.99	107.43	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320MHz		

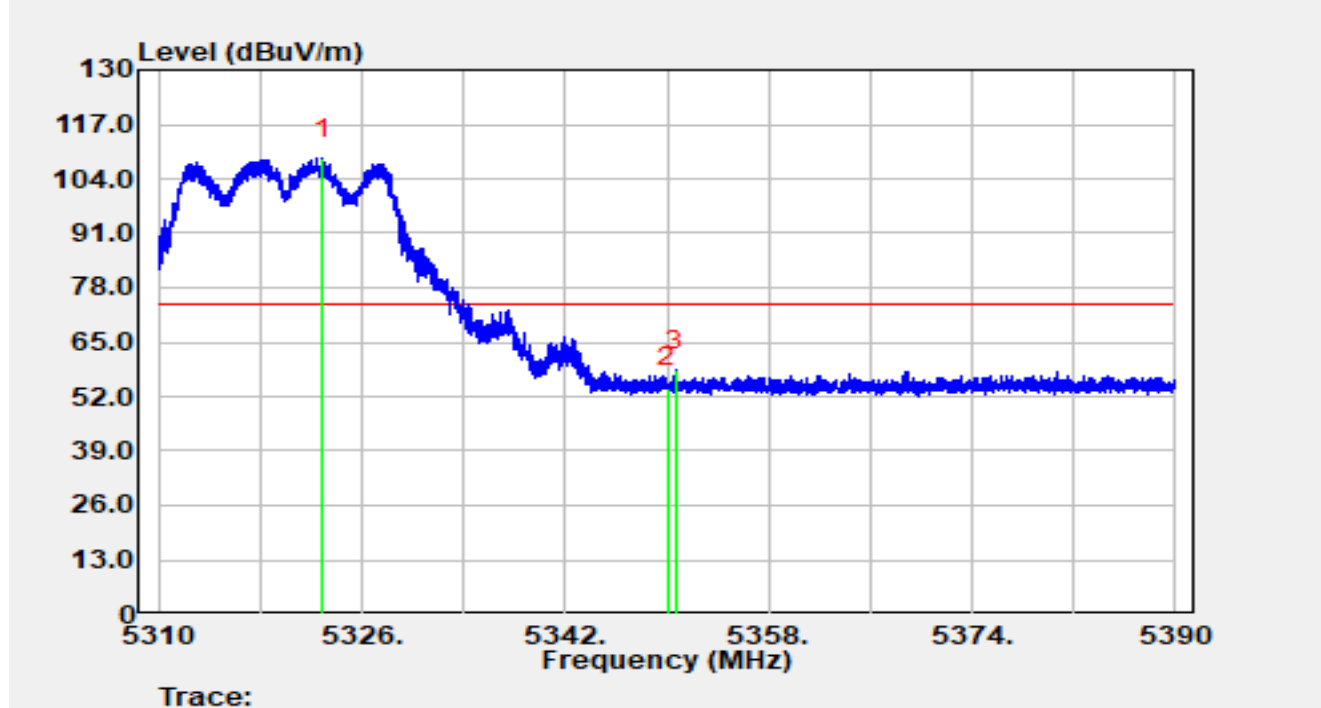


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.94	88.68	20.10	108.77	N/A	N/A	Peak
2		5350.00	34.09	20.09	54.17	-19.83	74.00	Peak
3	*	5350.66	38.08	20.08	58.16	-15.84	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320MHz		

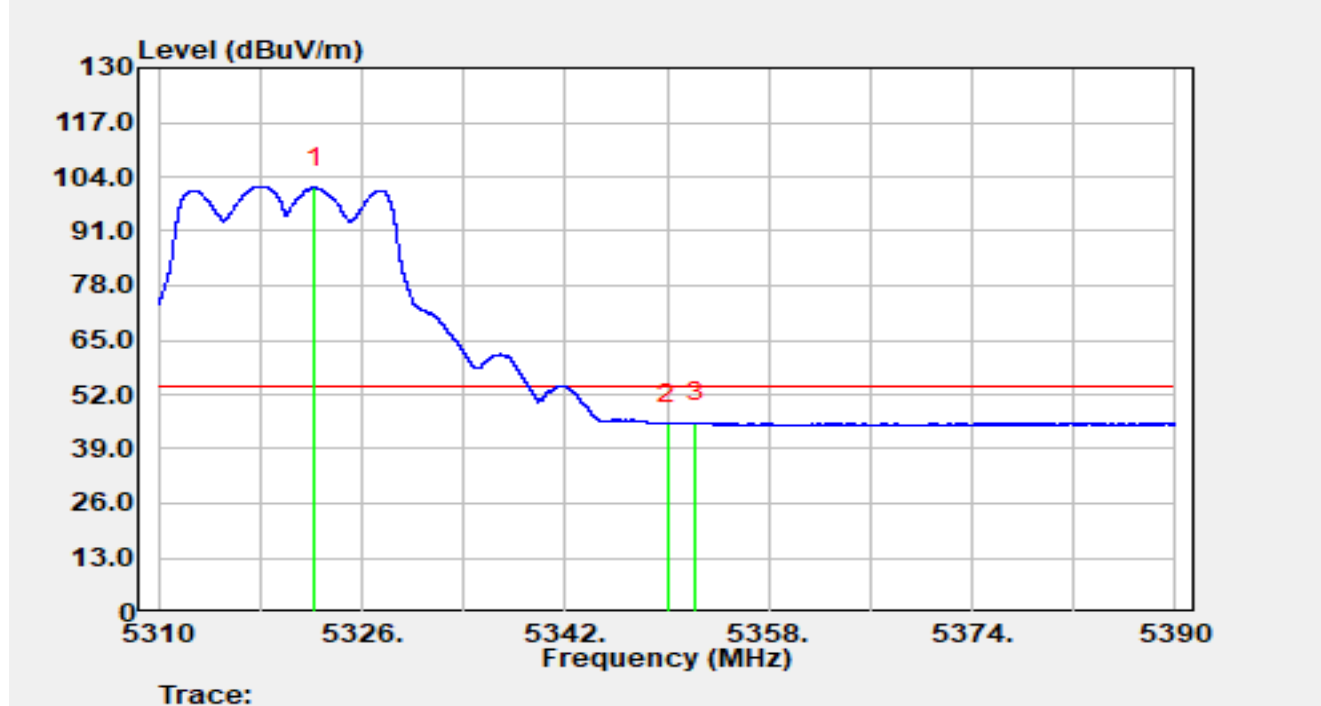


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.34	81.29	20.09	101.38	N/A	N/A	Average
2		5350.00	24.89	20.09	44.98	-9.02	54.00	Average
3	*	5352.29	25.29	20.07	45.36	-8.64	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320MHz		

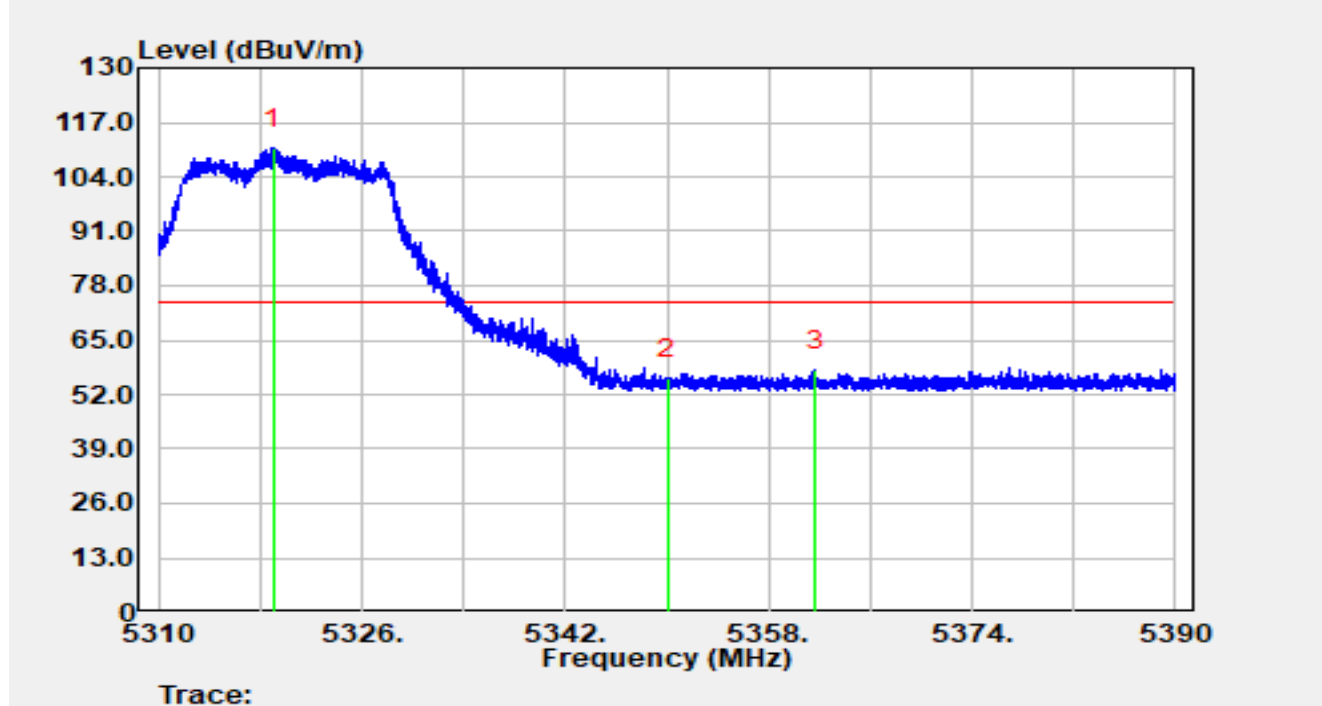


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.02	90.66	20.07	110.73	N/A	N/A	Peak
2		5350.00	35.63	20.09	55.72	-18.28	74.00	Peak
3	*	5361.64	37.79	20.06	57.85	-16.15	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320MHz		

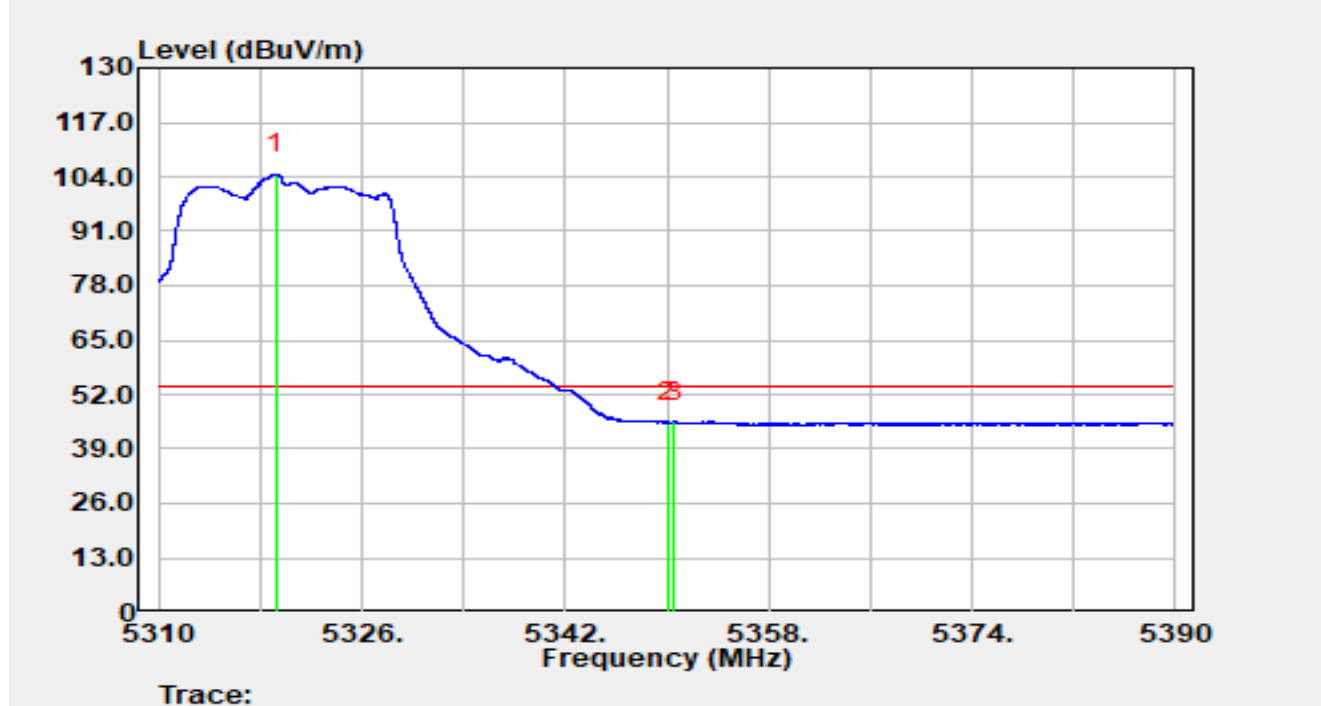


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.23	84.48	20.07	104.54	N/A	N/A	Average
2		5350.00	25.23	20.09	45.32	-8.68	54.00	Average
3	*	5350.58	25.33	20.08	45.41	-8.59	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500MHz		

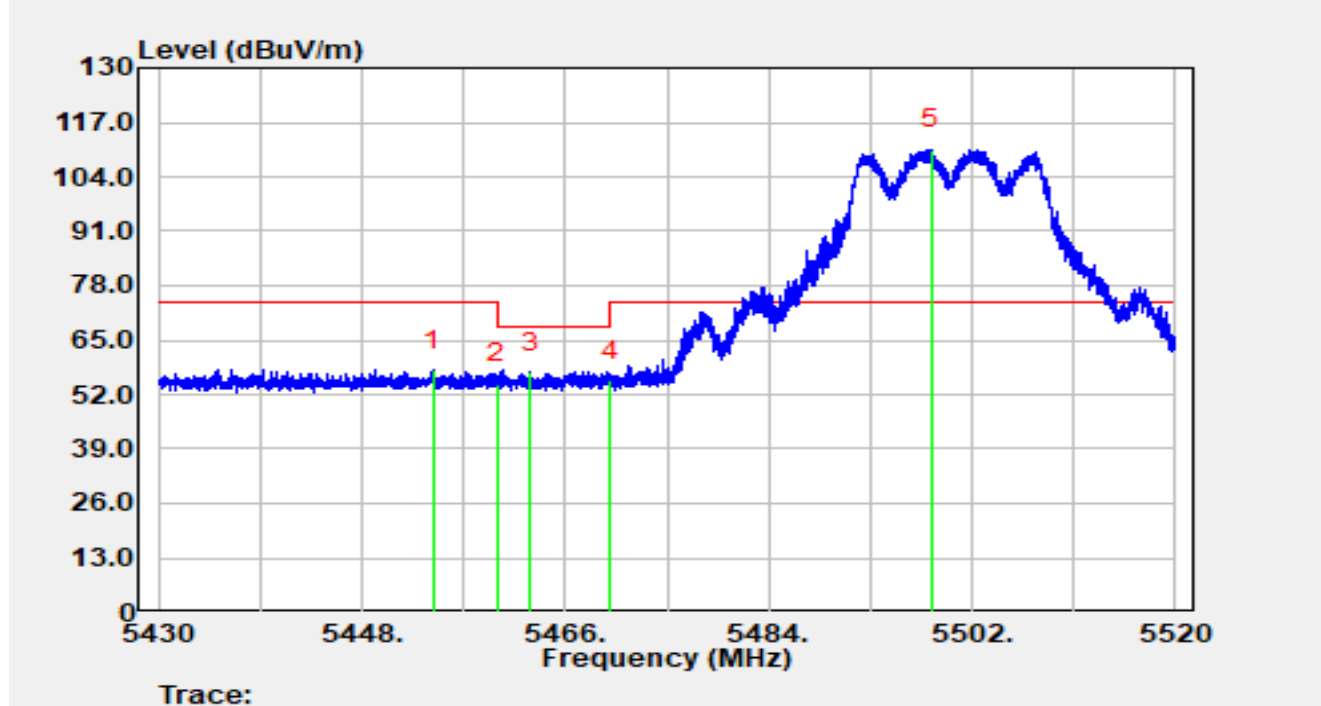


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.27	37.28	20.43	57.71	-16.29	74.00	Peak
2		5460.00	34.09	20.40	54.49	-13.71	68.20	Peak
3	*	5462.91	36.79	20.37	57.16	-11.04	68.20	Peak
4		5470.00	35.03	20.31	55.34	-12.86	68.20	Peak
5		5498.42	90.12	20.45	110.58	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500MHz		

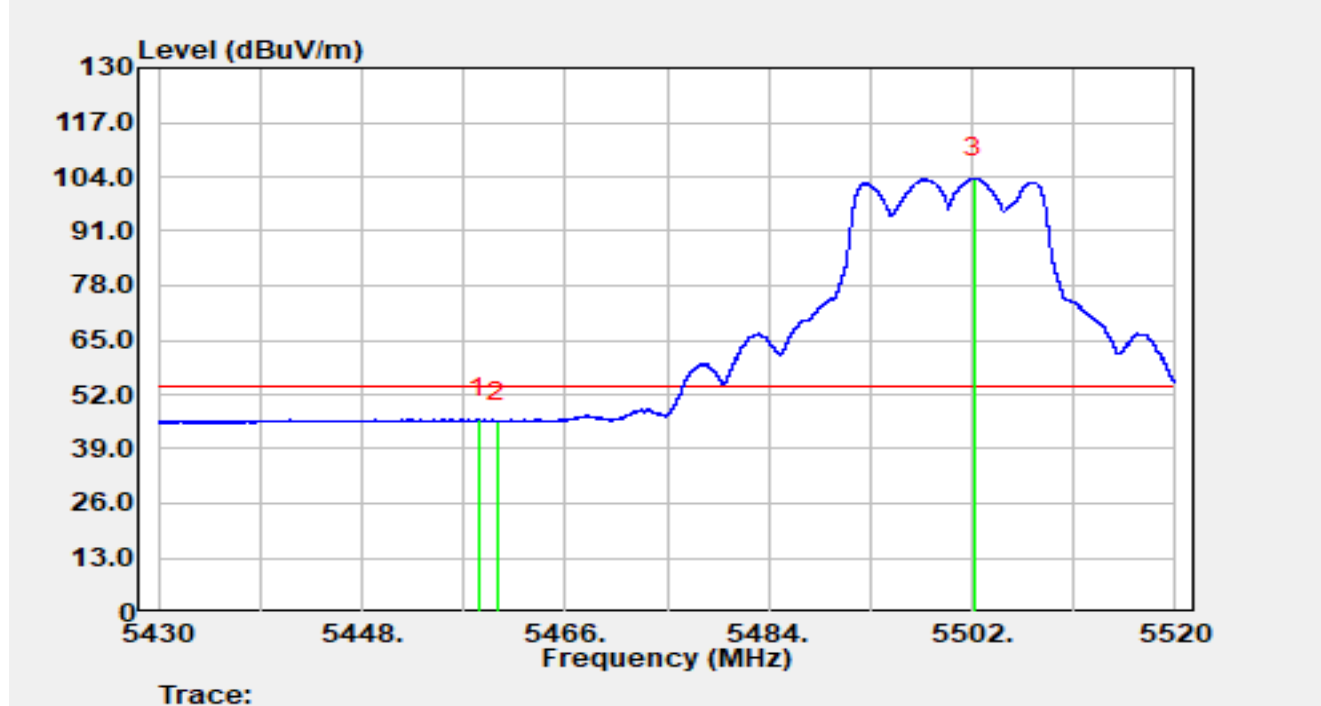


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.28	25.74	20.41	46.15	-7.85	54.00	Average
2		5460.00	25.19	20.40	45.58	-8.42	54.00	Average
3		5502.21	83.26	20.48	103.74	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500MHz		

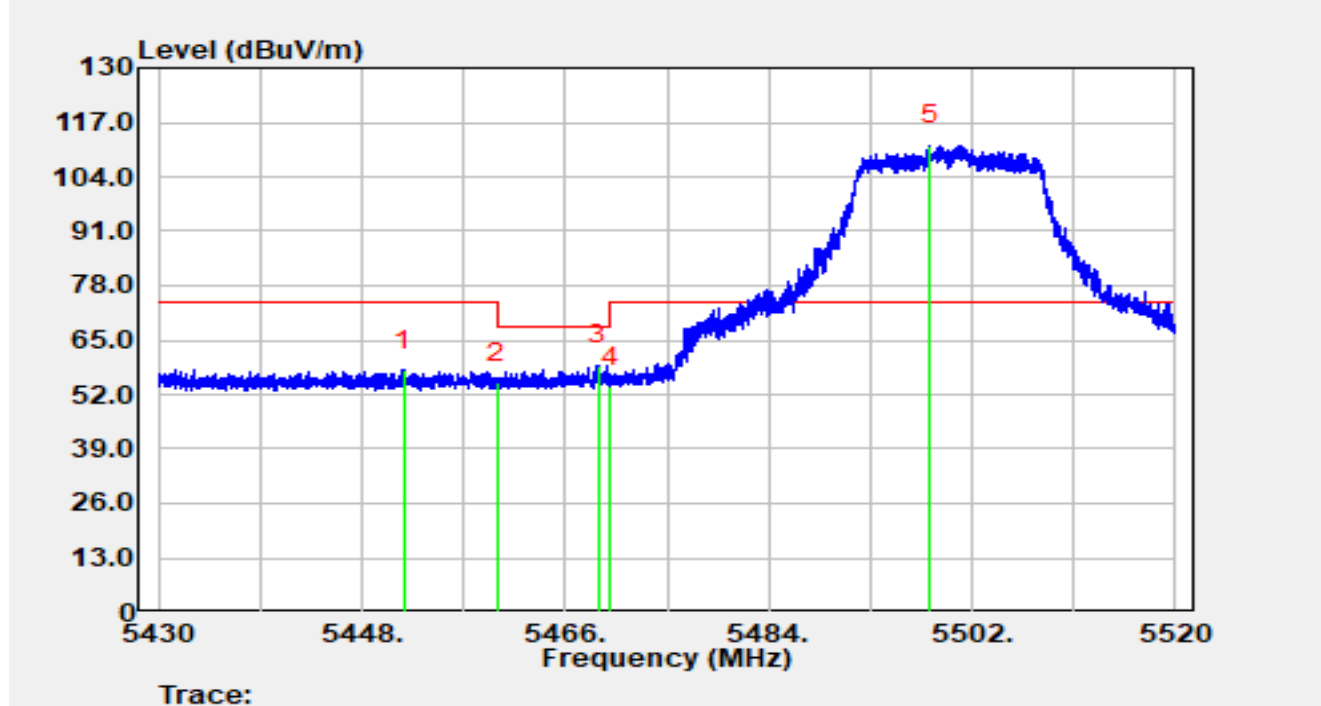


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.66	37.36	20.42	57.78	-16.22	74.00	Peak
2		5460.00	34.36	20.40	54.75	-13.45	68.20	Peak
3	*	5468.87	38.69	20.32	59.01	-9.19	68.20	Peak
4		5470.00	33.65	20.31	53.95	-14.25	68.20	Peak
5		5498.28	91.00	20.45	111.45	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500MHz		

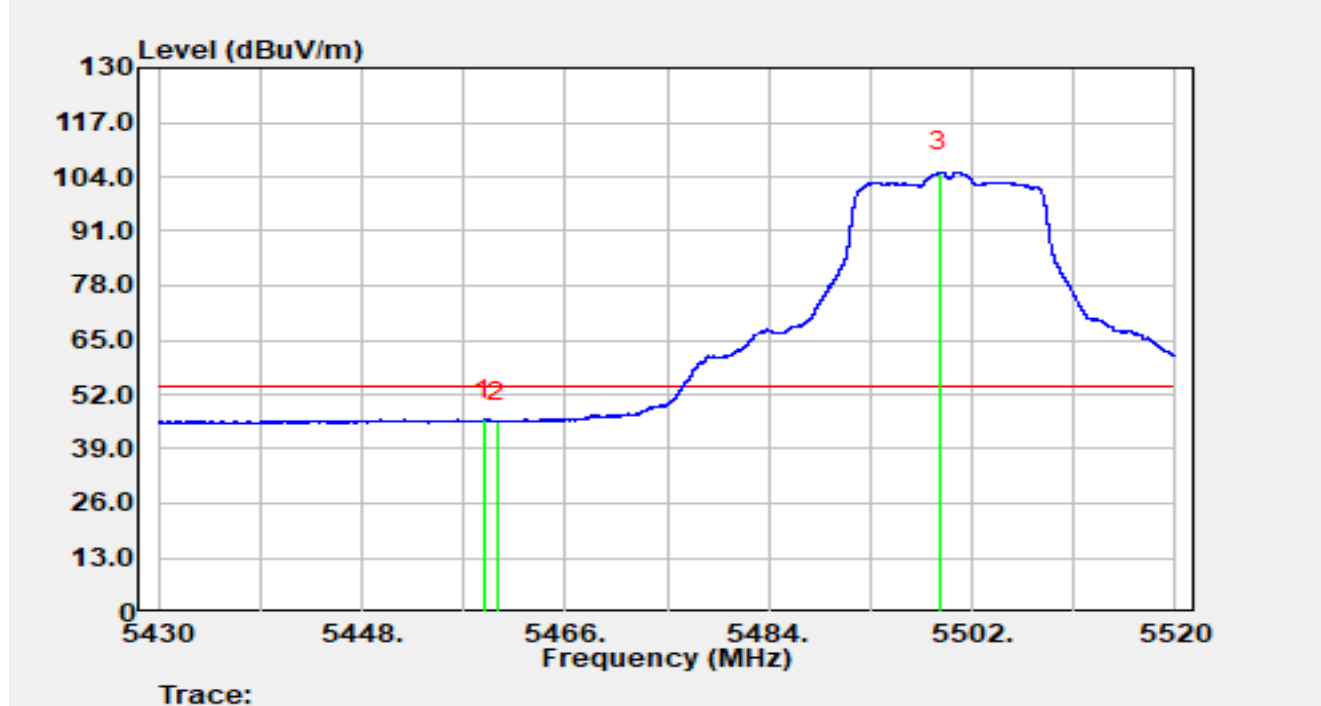


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.83	25.57	20.41	45.98	-8.02	54.00	Average
2		5460.00	25.13	20.40	45.53	-8.47	54.00	Average
3		5499.14	84.64	20.46	105.10	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5700MHz		

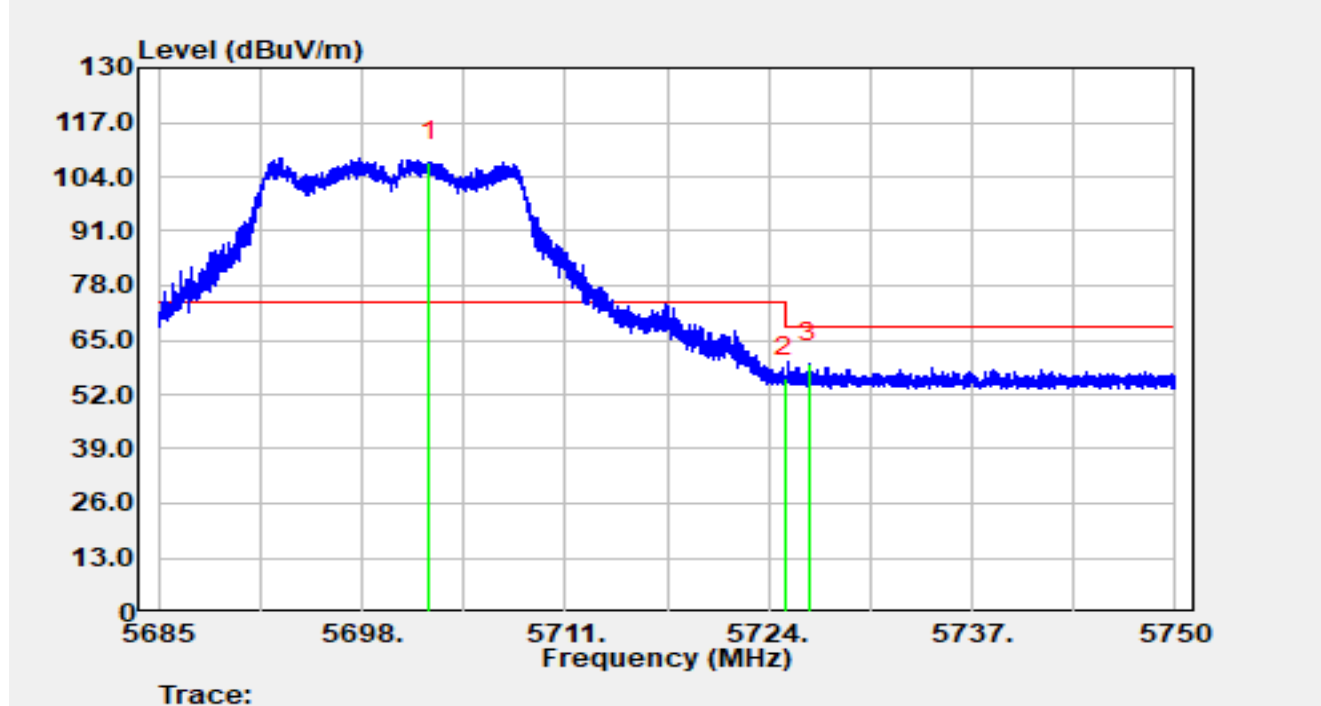


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.27	87.04	20.61	107.66	N/A	N/A	Peak
2		5725.00	35.43	20.69	56.12	-12.08	68.20	Peak
3	*	5726.59	38.80	20.68	59.48	-8.72	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-19
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5700MHz		

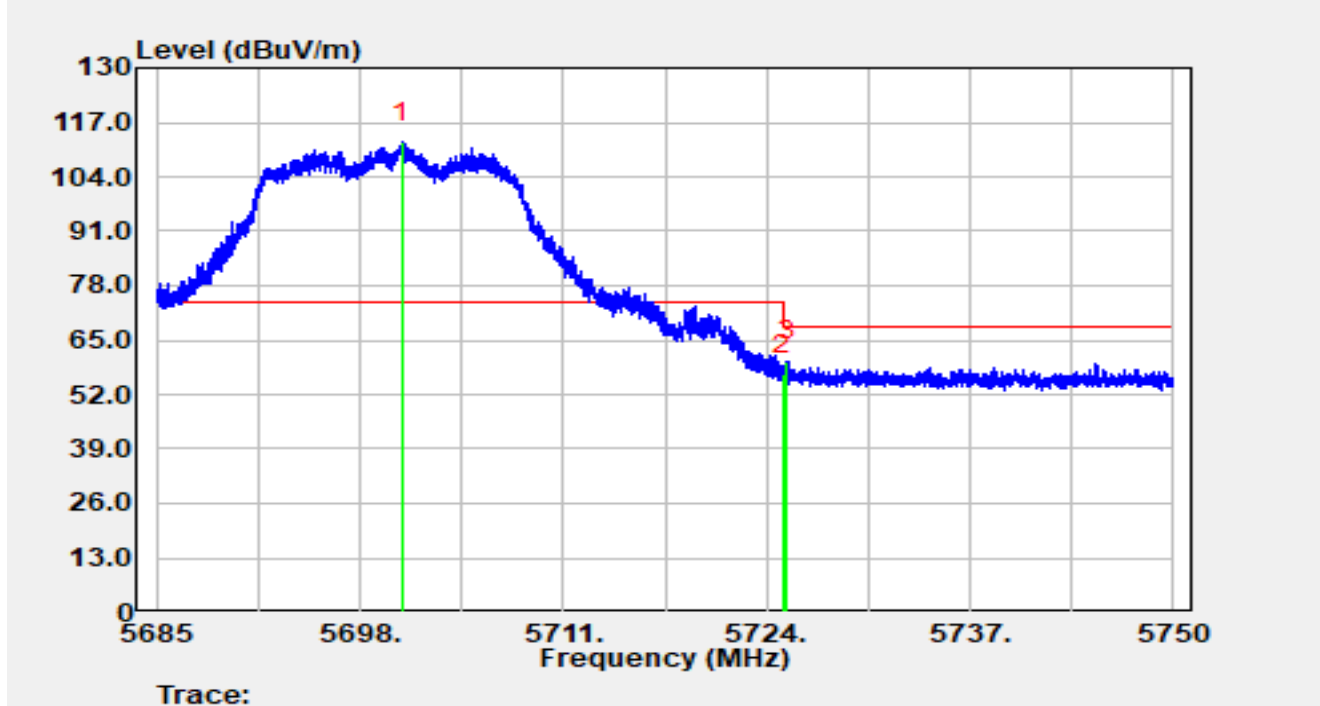


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5700.69	91.67	20.59	112.26	N/A	N/A	Peak
2		5725.00	36.15	20.69	56.84	-11.36	68.20	Peak
3	*	5725.29	39.34	20.69	60.03	-8.17	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5745MHz		

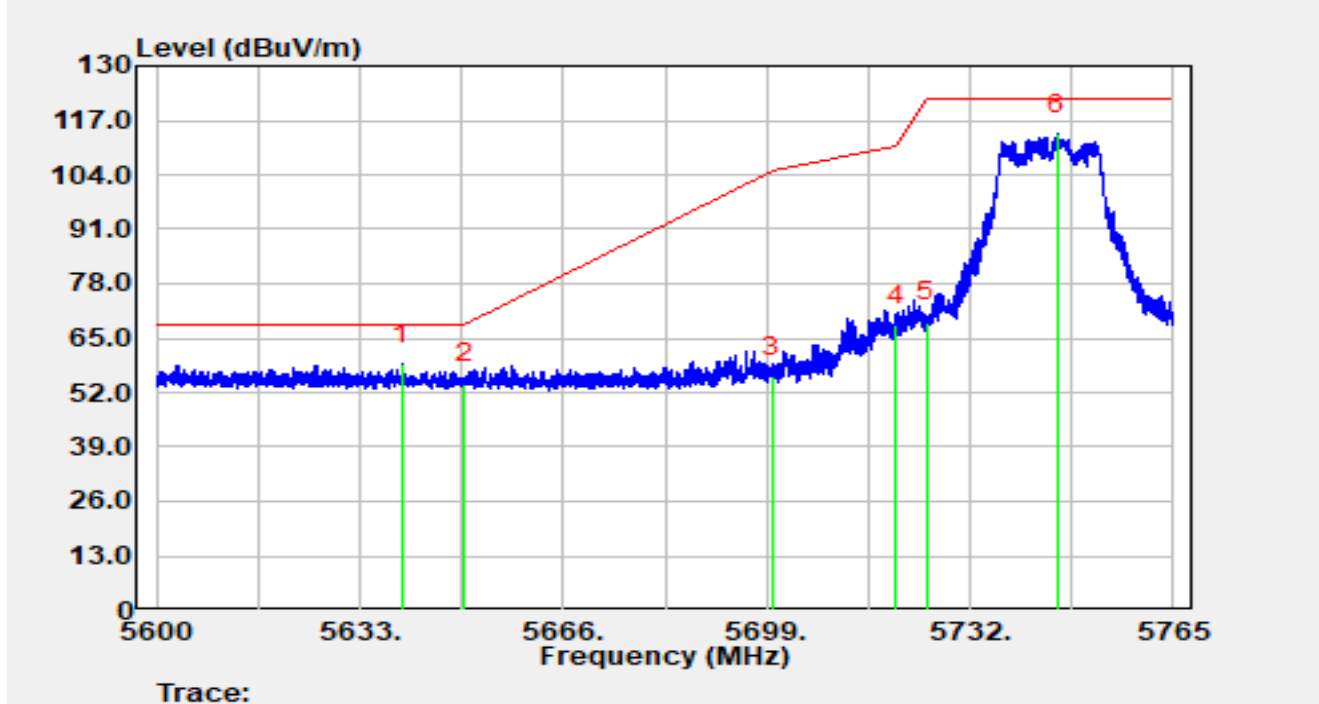


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5639.86	38.36	20.41	58.76	-9.44	68.20	Peak
2		5650.00	33.65	20.37	54.02	-14.18	68.20	Peak
3		5700.00	35.29	20.58	55.87	-49.33	105.20	Peak
4		5720.00	47.42	20.70	68.11	-42.69	110.80	Peak
5		5725.00	48.09	20.69	68.77	-53.43	122.20	Peak
6		5746.06	93.18	20.58	113.76	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5745MHz		

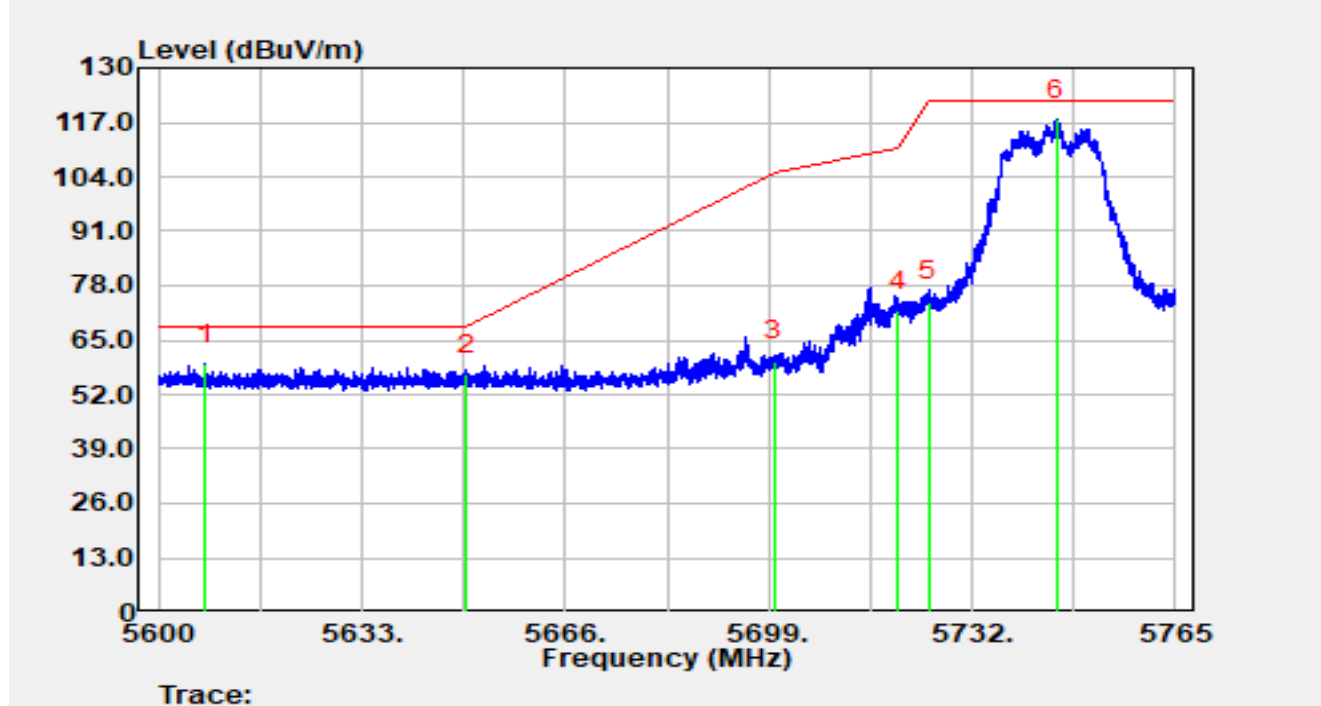


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5607.61	38.89	20.46	59.34	-8.86	68.20	Peak
2		5650.00	36.44	20.37	56.81	-11.39	68.20	Peak
3		5700.00	39.38	20.58	59.96	-45.24	105.20	Peak
4		5720.00	51.18	20.70	71.88	-38.92	110.80	Peak
5		5725.00	53.50	20.69	74.19	-48.01	122.20	Peak
6		5745.73	96.92	20.58	117.50	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5825MHz		

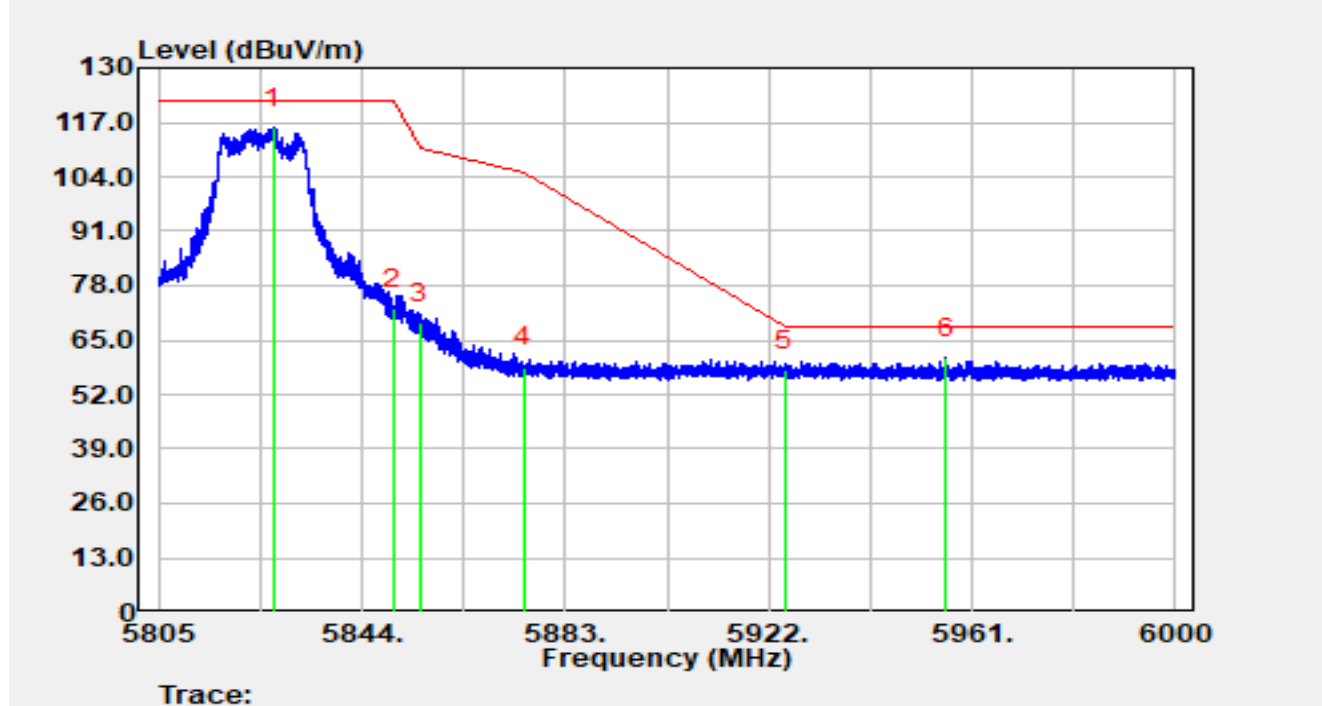


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.11	94.66	21.01	115.66	N/A	N/A	Peak
2		5850.00	51.75	20.79	72.54	-49.66	122.20	Peak
3		5855.00	48.37	20.76	69.13	-41.67	110.80	Peak
4		5875.00	37.61	20.78	58.38	-46.82	105.20	Peak
5		5925.00	36.60	21.12	57.72	-10.48	68.20	Peak
6	*	5955.91	39.84	20.82	60.66	-7.54	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5825MHz		

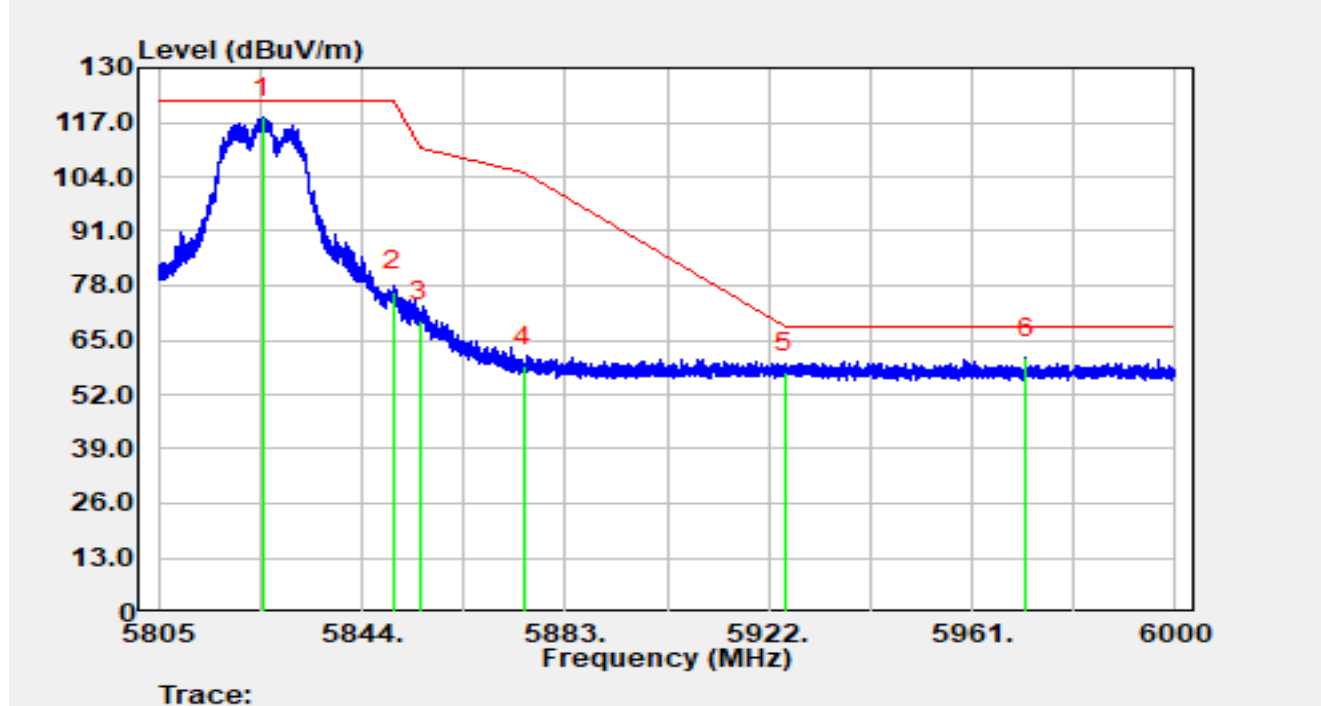


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5824.95	97.18	21.00	118.18	N/A	N/A	Peak
2		5850.00	55.77	20.79	76.56	-45.64	122.20	Peak
3		5855.00	48.82	20.76	69.57	-41.23	110.80	Peak
4		5875.00	37.86	20.78	58.64	-46.56	105.20	Peak
5		5925.00	36.06	21.12	57.18	-11.02	68.20	Peak
6	*	5971.30	39.72	20.87	60.59	-7.61	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

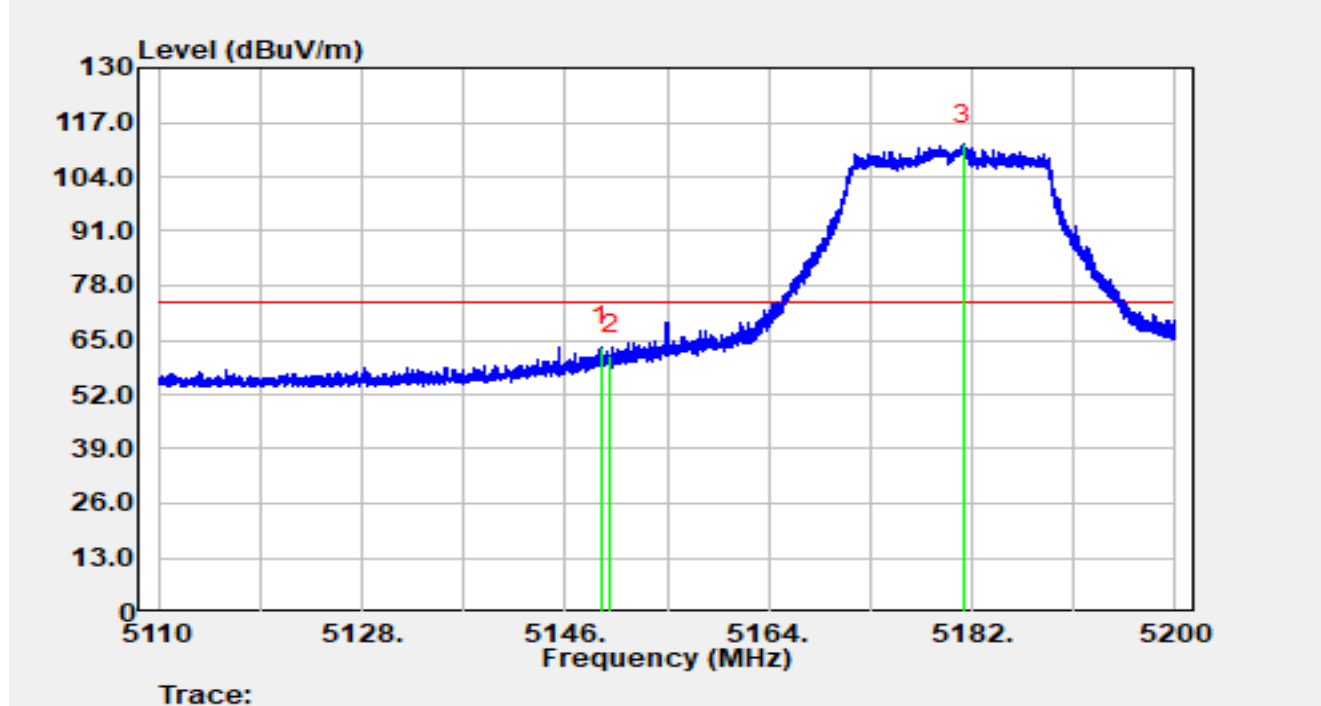


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.21	43.18	20.14	63.32	-10.68	74.00	Peak
2		5150.00	41.39	20.14	61.52	-12.48	74.00	Peak
3		5181.17	91.69	19.98	111.68	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

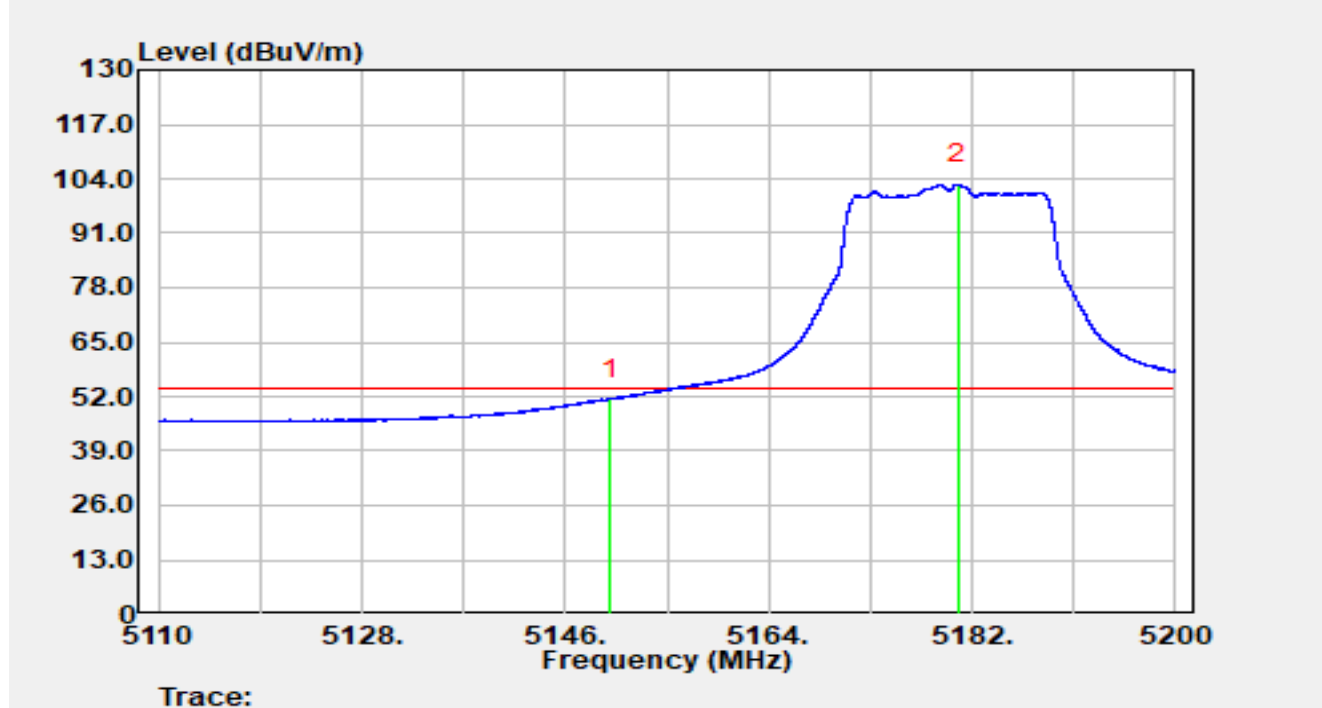


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	31.34	20.14	51.48	-2.52	54.00	Average
2		5180.71	82.68	19.98	102.66	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

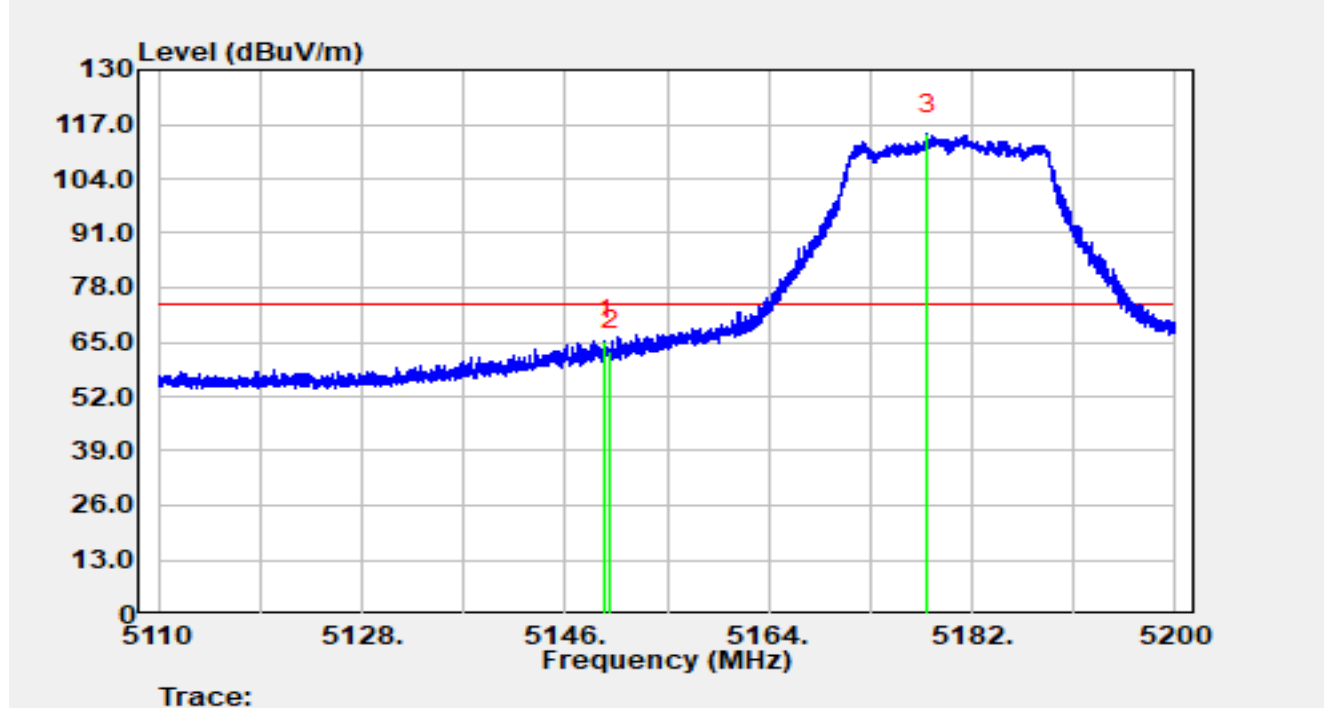


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.51	45.20	20.14	65.33	-8.67	74.00	Peak
2		5150.00	42.74	20.14	62.88	-11.12	74.00	Peak
3		5178.09	94.69	19.99	114.68	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

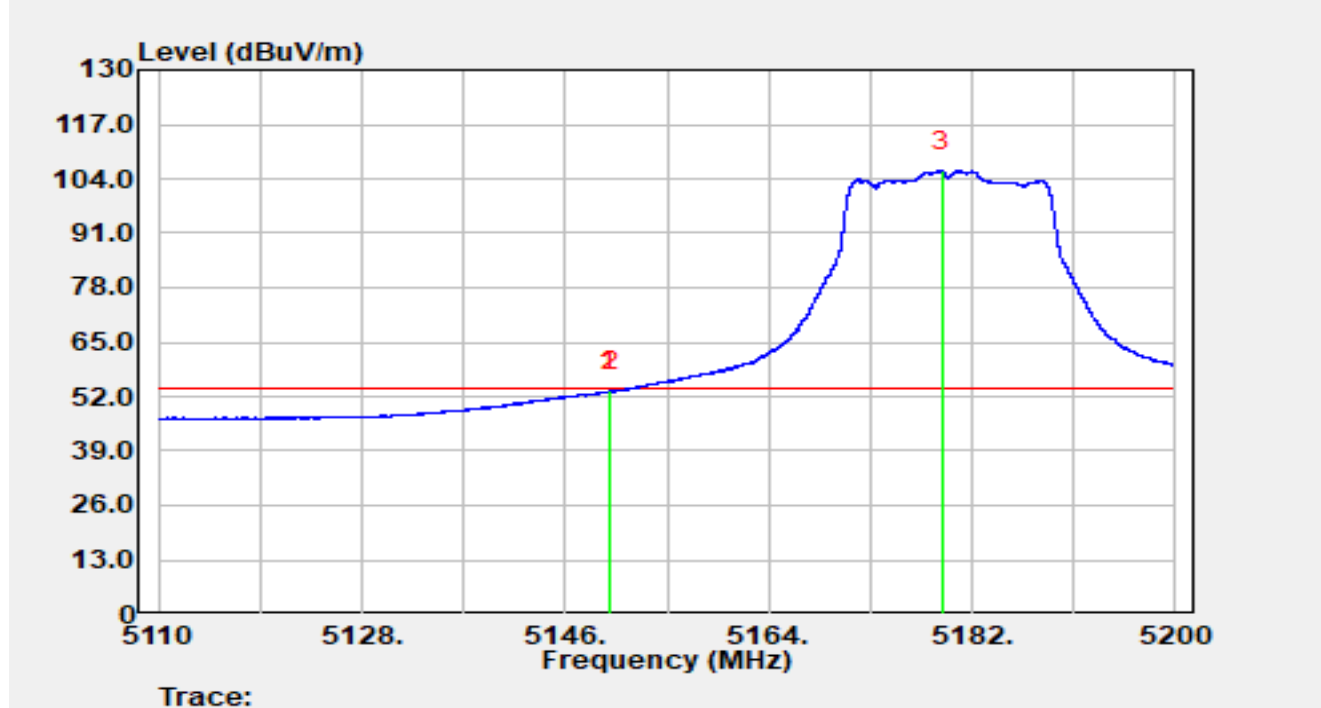


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.83	33.18	20.14	53.32	-0.68	54.00	Average
2		5150.00	32.94	20.14	53.07	-0.93	54.00	Average
3		5179.34	85.90	19.99	105.88	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

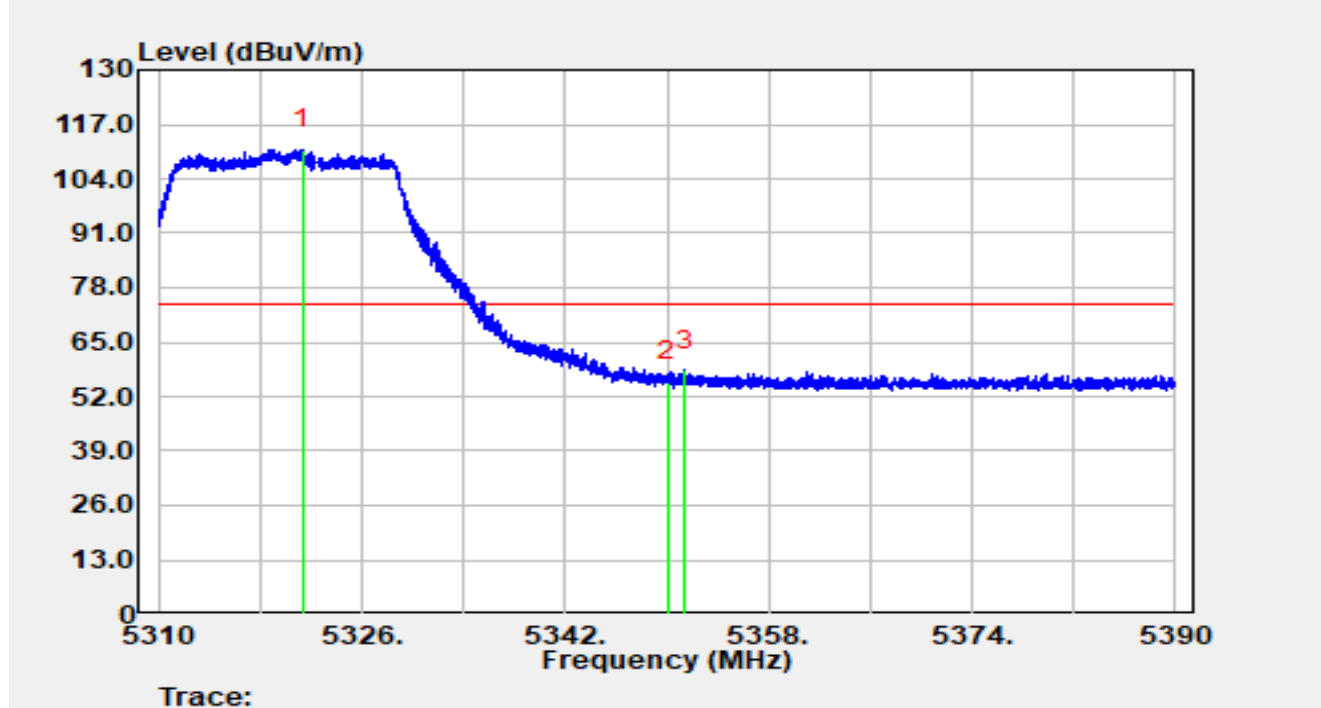


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.32	91.01	20.08	111.09	N/A	N/A	Peak
2		5350.00	35.43	20.09	55.51	-18.49	74.00	Peak
3	*	5351.41	38.06	20.07	58.13	-15.87	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

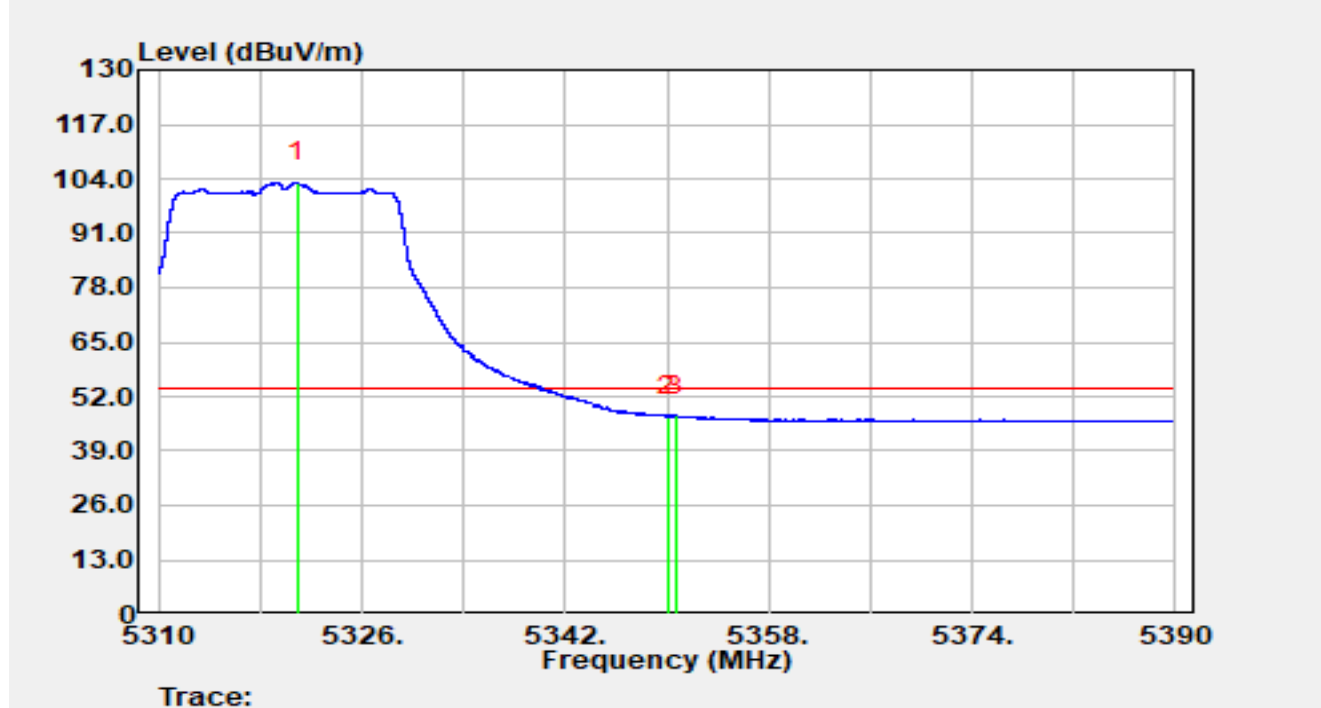


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.90	83.04	20.08	103.12	N/A	N/A	Average
2		5350.00	27.21	20.09	47.30	-6.70	54.00	Average
3	*	5350.70	27.41	20.08	47.49	-6.51	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

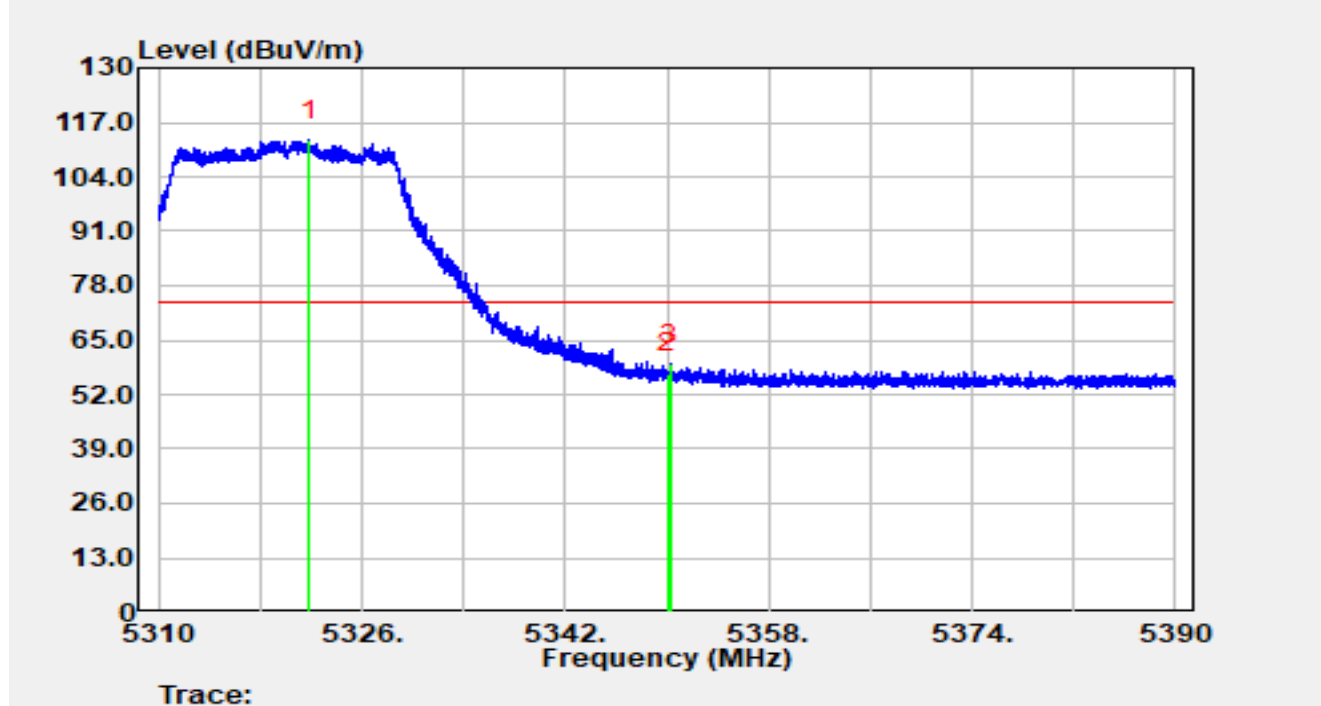


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.87	92.56	20.09	112.65	N/A	N/A	Peak
2		5350.00	36.95	20.09	57.04	-16.96	74.00	Peak
3	*	5350.28	39.08	20.08	59.17	-14.83	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

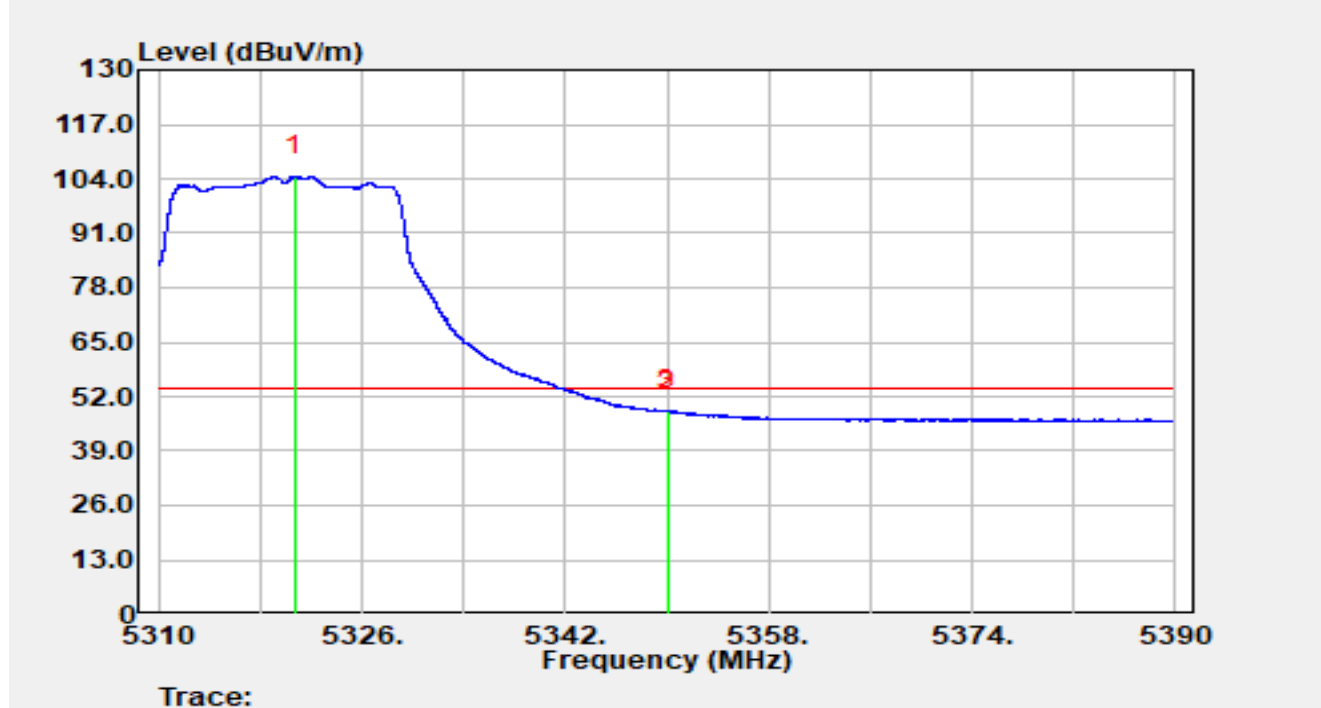


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.69	84.52	20.08	104.60	N/A	N/A	Average
2		5350.00	28.24	20.09	48.33	-5.67	54.00	Average
3	*	5350.10	28.51	20.09	48.60	-5.40	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

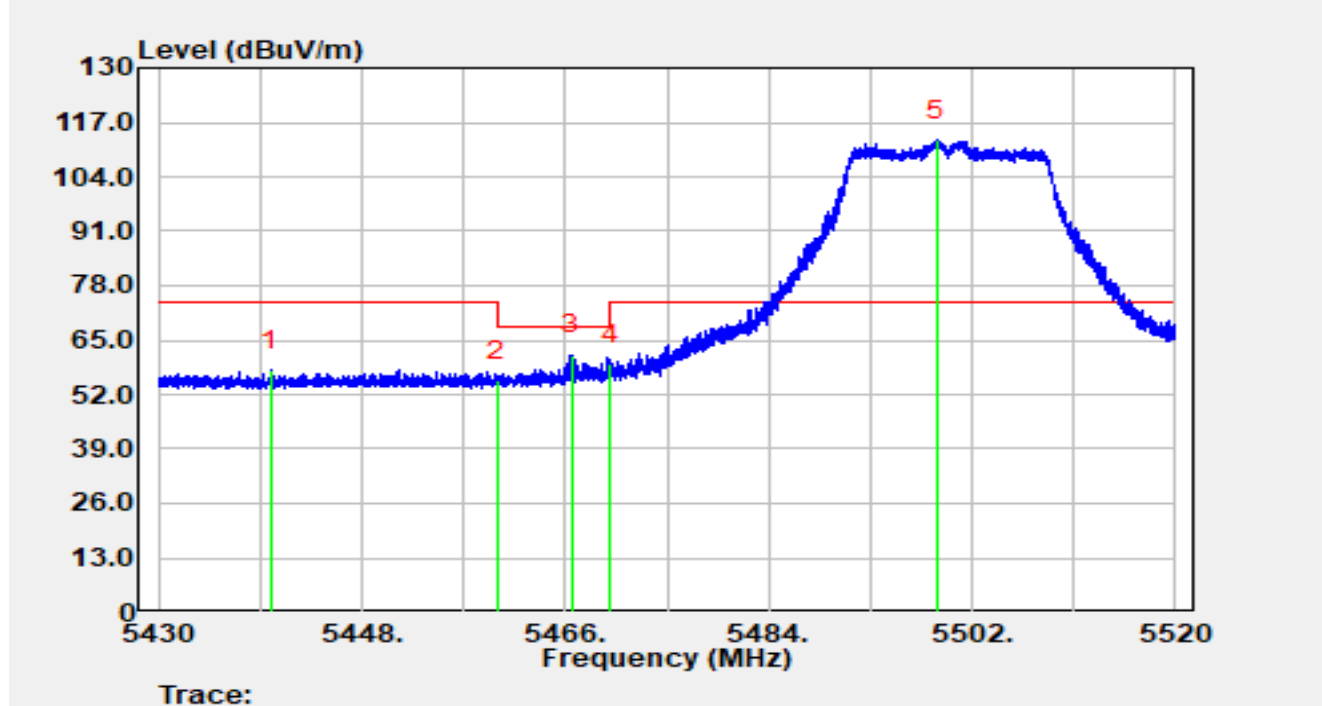


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5439.90	37.34	20.36	57.70	-16.30	74.00	Peak
2		5460.00	34.79	20.40	55.19	-18.81	74.00	Peak
3	*	5466.51	41.11	20.34	61.45	-6.75	68.20	Peak
4		5470.00	38.98	20.31	59.29	-8.91	68.20	Peak
5		5498.92	92.36	20.46	112.82	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

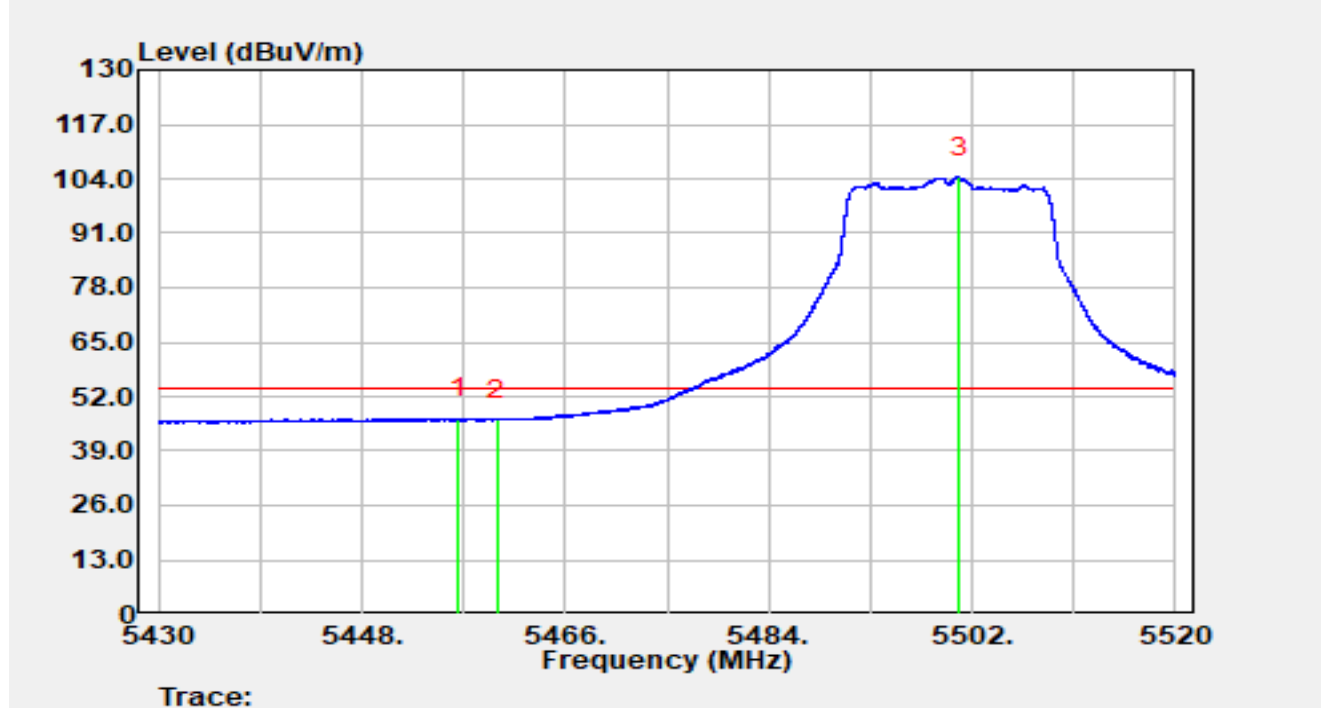


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.51	26.28	20.42	46.70	-7.30	54.00	Average
2		5460.00	26.08	20.40	46.47	-7.53	54.00	Average
3		5500.86	83.83	20.47	104.30	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

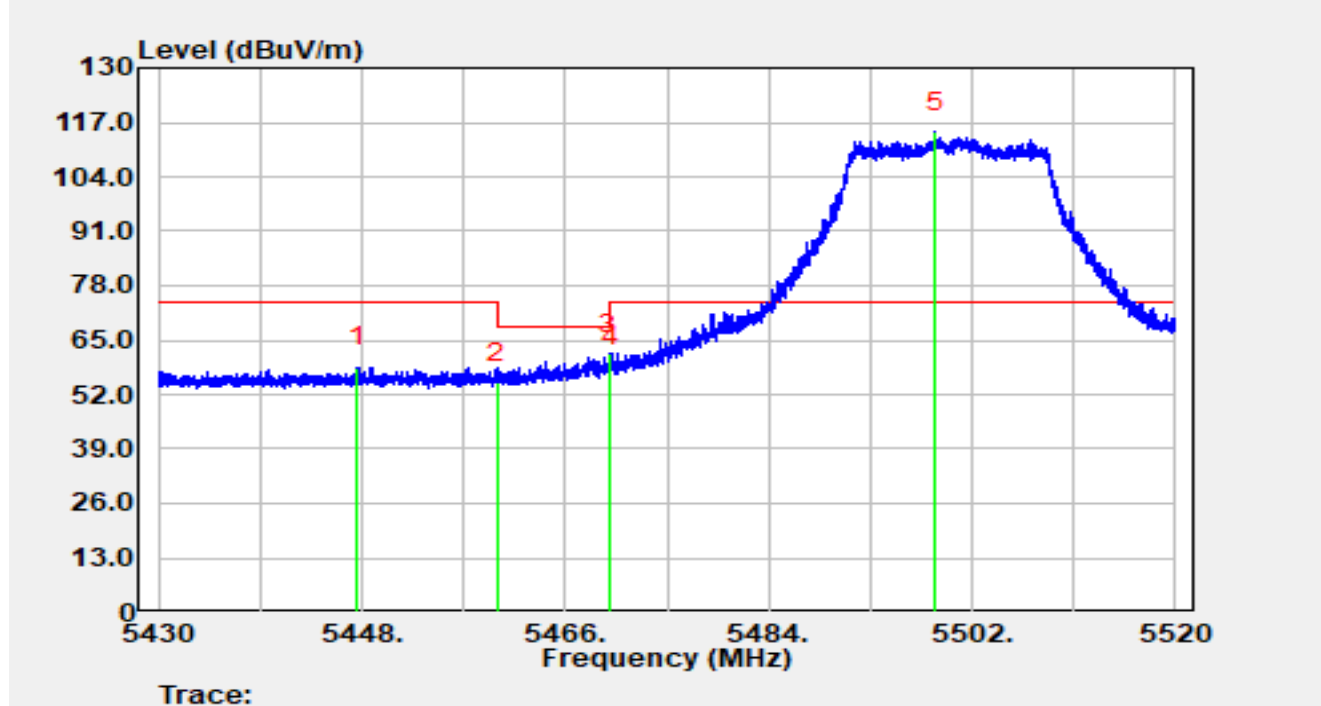


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.65	38.00	20.40	58.41	-15.59	74.00	Peak
2		5460.00	34.45	20.40	54.85	-19.15	74.00	Peak
3	*	5469.86	41.46	20.31	61.77	-6.43	68.20	Peak
4		5470.00	38.20	20.31	58.50	-9.70	68.20	Peak
5		5498.78	94.26	20.45	114.71	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

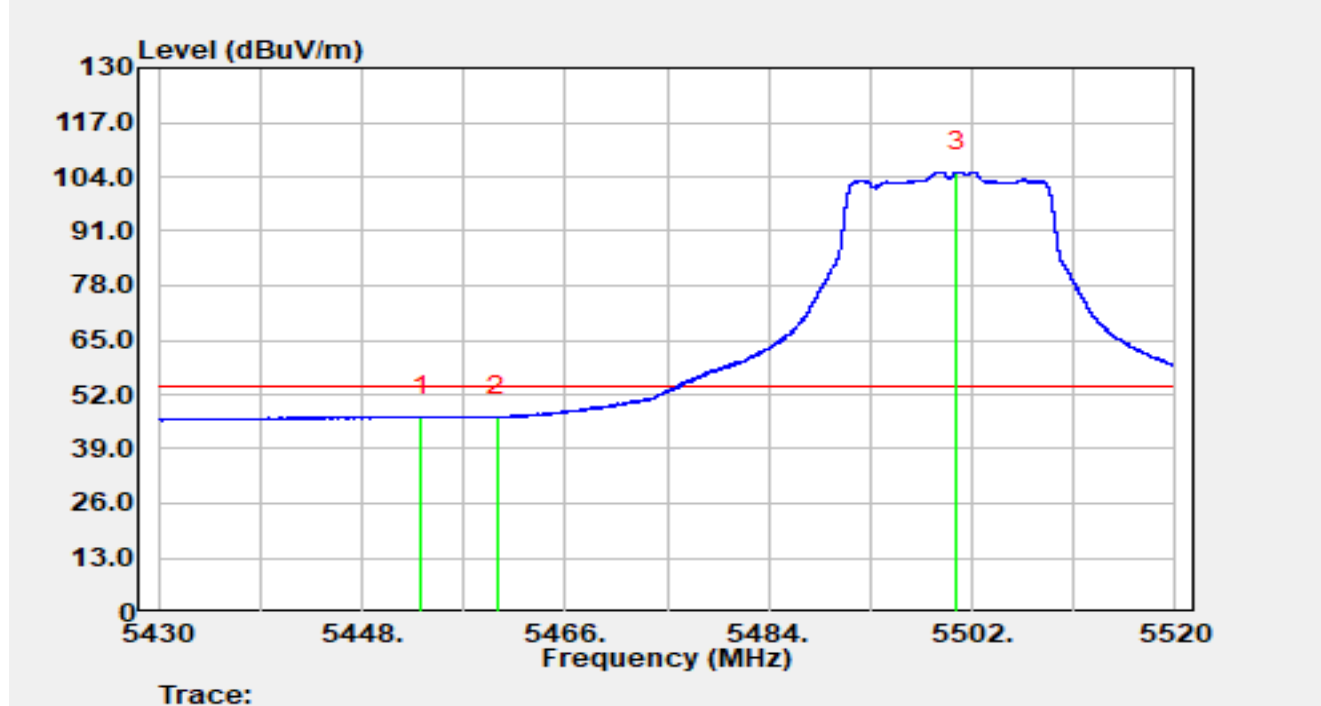


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5453.24	26.40	20.43	46.82	-7.18	54.00	Average
2		5460.00	26.27	20.40	46.66	-7.34	54.00	Average
3		5500.63	84.71	20.47	105.18	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

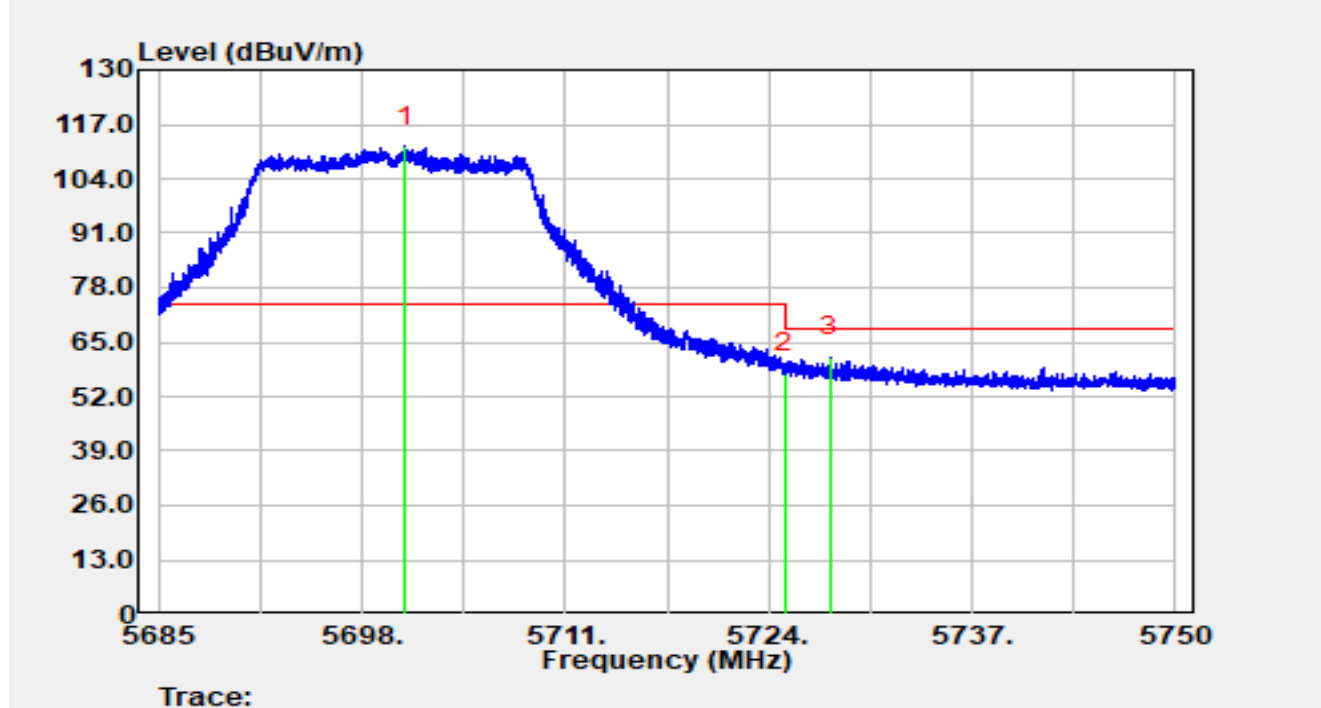


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5700.76	91.02	20.59	111.61	N/A	N/A	Peak
2		5725.00	36.84	20.69	57.53	-10.67	68.20	Peak
3	*	5727.91	40.74	20.67	61.42	-6.78	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

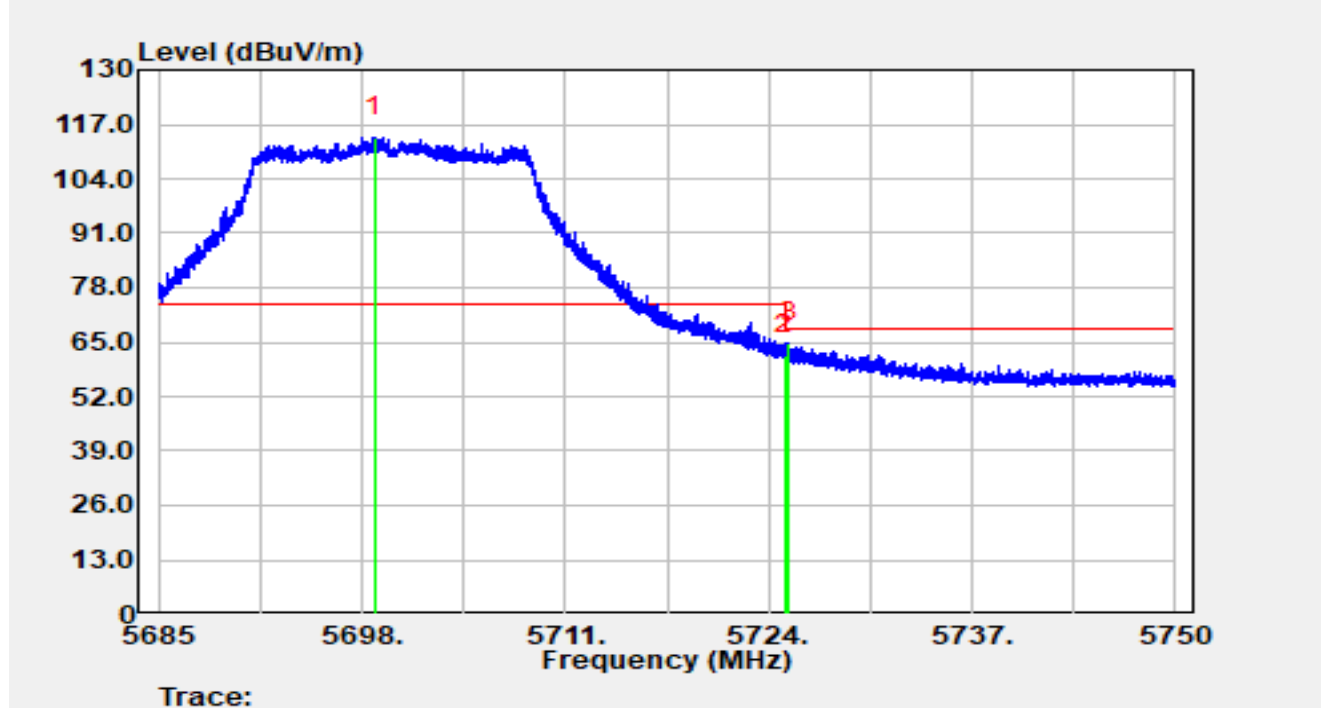


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5698.77	93.29	20.56	113.84	N/A	N/A	Peak
2		5725.00	41.20	20.69	61.89	-6.31	68.20	Peak
3	*	5725.27	44.27	20.69	64.96	-3.24	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

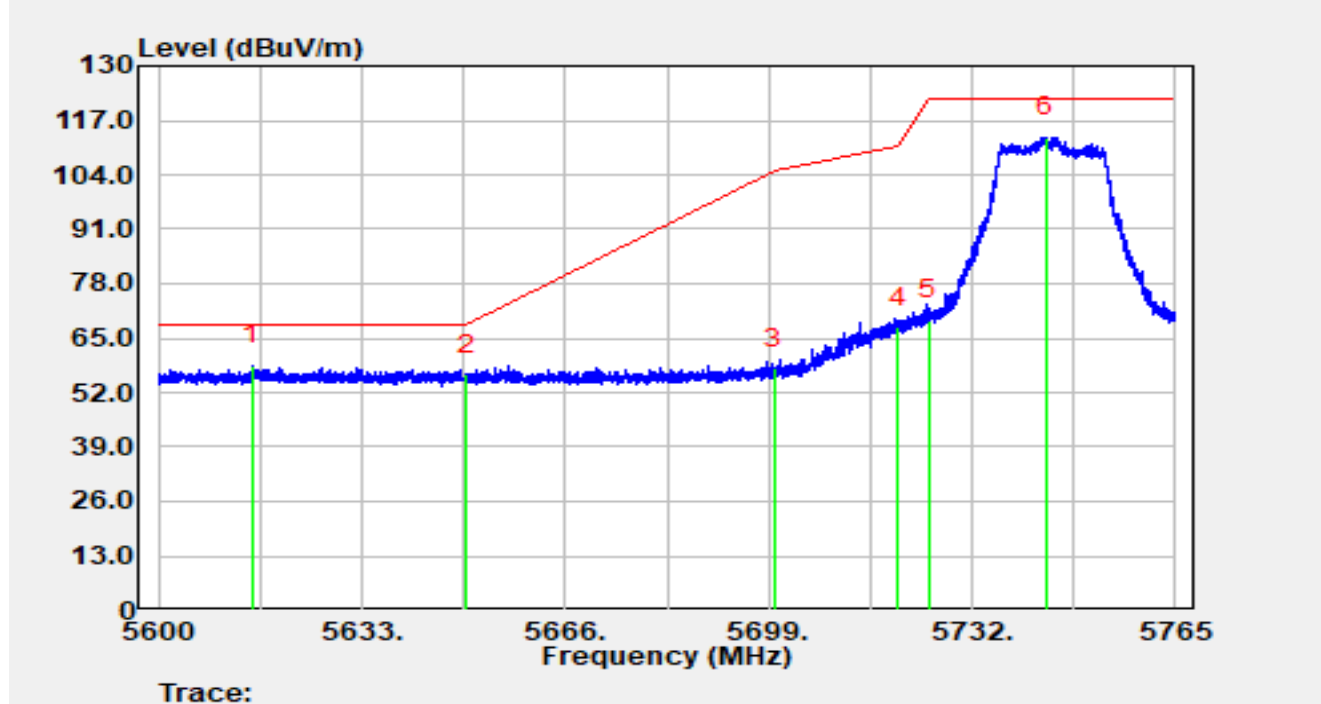


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.26	38.06	20.47	58.53	-9.67	68.20	Peak
2		5650.00	35.98	20.37	56.35	-11.85	68.20	Peak
3		5700.00	37.15	20.58	57.72	-47.48	105.20	Peak
4		5720.00	46.79	20.70	67.49	-43.31	110.80	Peak
5		5725.00	48.67	20.69	69.36	-52.84	122.20	Peak
6		5743.90	92.48	20.58	113.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

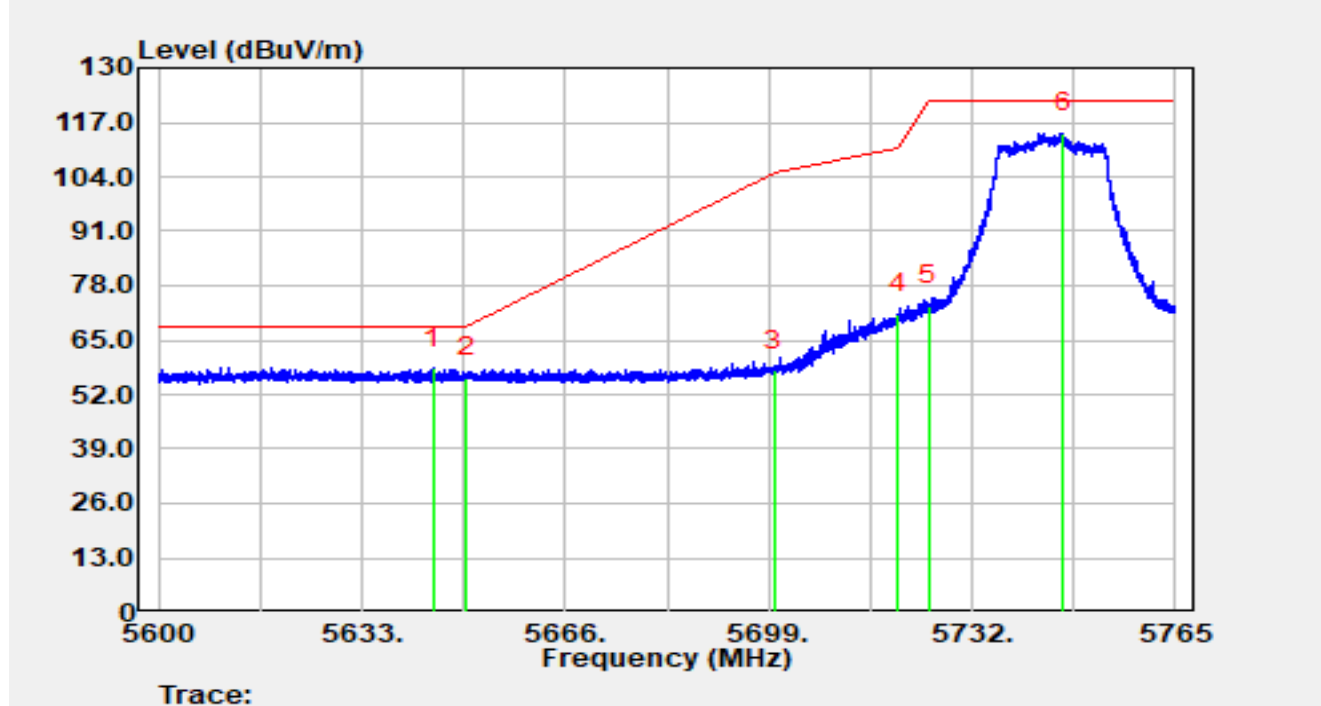


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.47	37.98	20.39	58.37	-9.83	68.20	Peak
2		5650.00	35.69	20.37	56.06	-12.14	68.20	Peak
3		5700.00	37.23	20.58	57.81	-47.39	105.20	Peak
4		5720.00	50.48	20.70	71.18	-39.62	110.80	Peak
5		5725.00	52.57	20.69	73.26	-48.94	122.20	Peak
6		5746.75	93.94	20.58	114.52	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

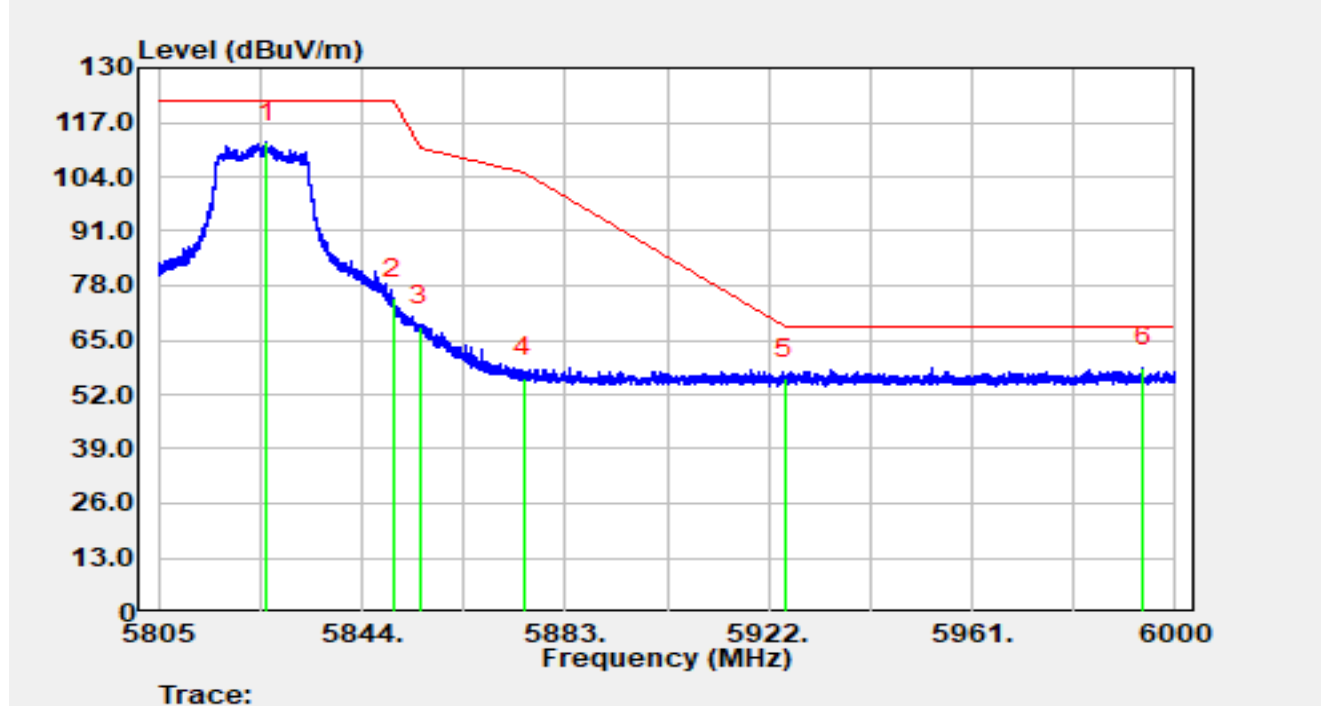


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5825.73	91.28	21.00	112.29	N/A	N/A	Peak
2		5850.00	54.11	20.79	74.90	-47.30	122.20	Peak
3		5855.00	47.67	20.76	68.43	-42.37	110.80	Peak
4		5875.00	35.15	20.78	55.93	-49.27	105.20	Peak
5		5925.00	34.67	21.12	55.79	-12.41	68.20	Peak
6	*	5993.78	37.61	20.98	58.58	-9.62	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-06-24
Temperature	25.6°C	Humidity	46.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

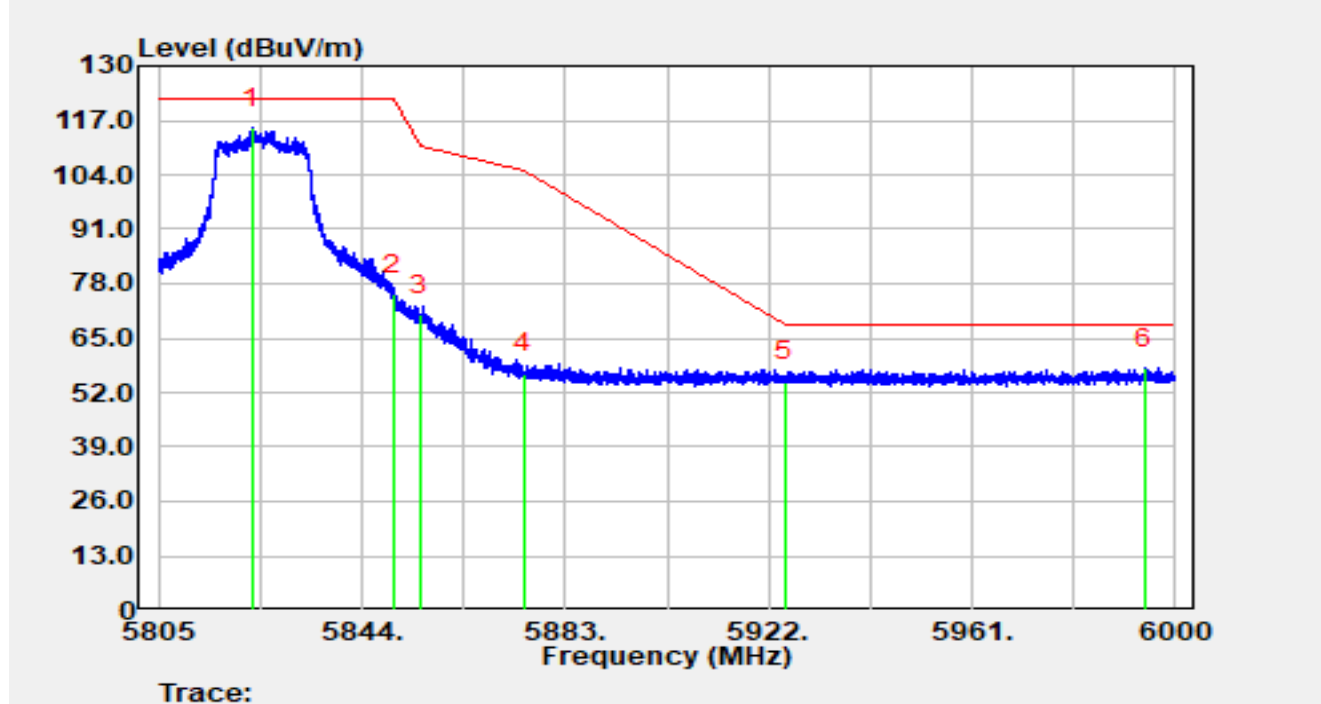


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.86	94.18	20.99	115.17	N/A	N/A	Peak
2		5850.00	54.72	20.79	75.51	-46.69	122.20	Peak
3		5855.00	49.70	20.76	70.46	-40.34	110.80	Peak
4		5875.00	35.70	20.78	56.47	-48.73	105.20	Peak
5		5925.00	33.44	21.12	54.56	-13.64	68.20	Peak
6	*	5994.13	36.80	20.98	57.77	-10.43	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

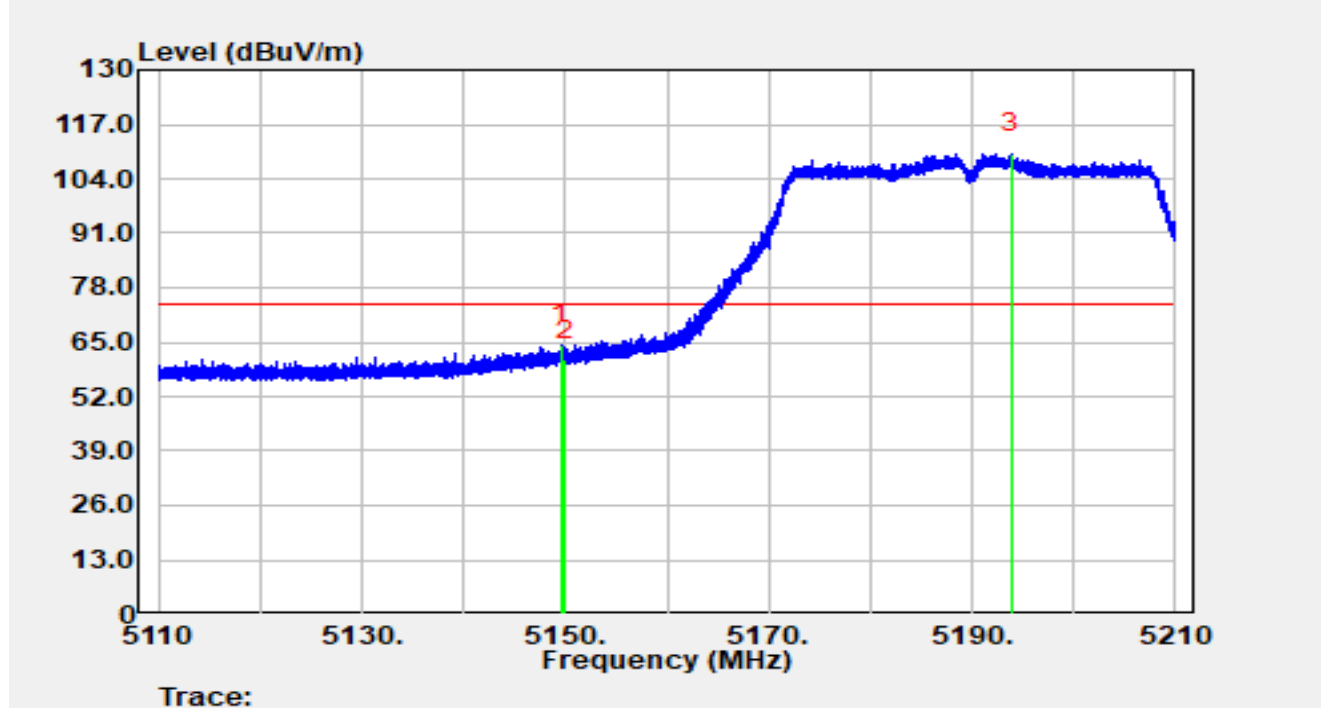


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.60	44.18	20.14	64.32	-9.68	74.00	Peak
2		5150.00	40.68	20.14	60.82	-13.18	74.00	Peak
3		5193.82	89.97	20.01	109.98	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

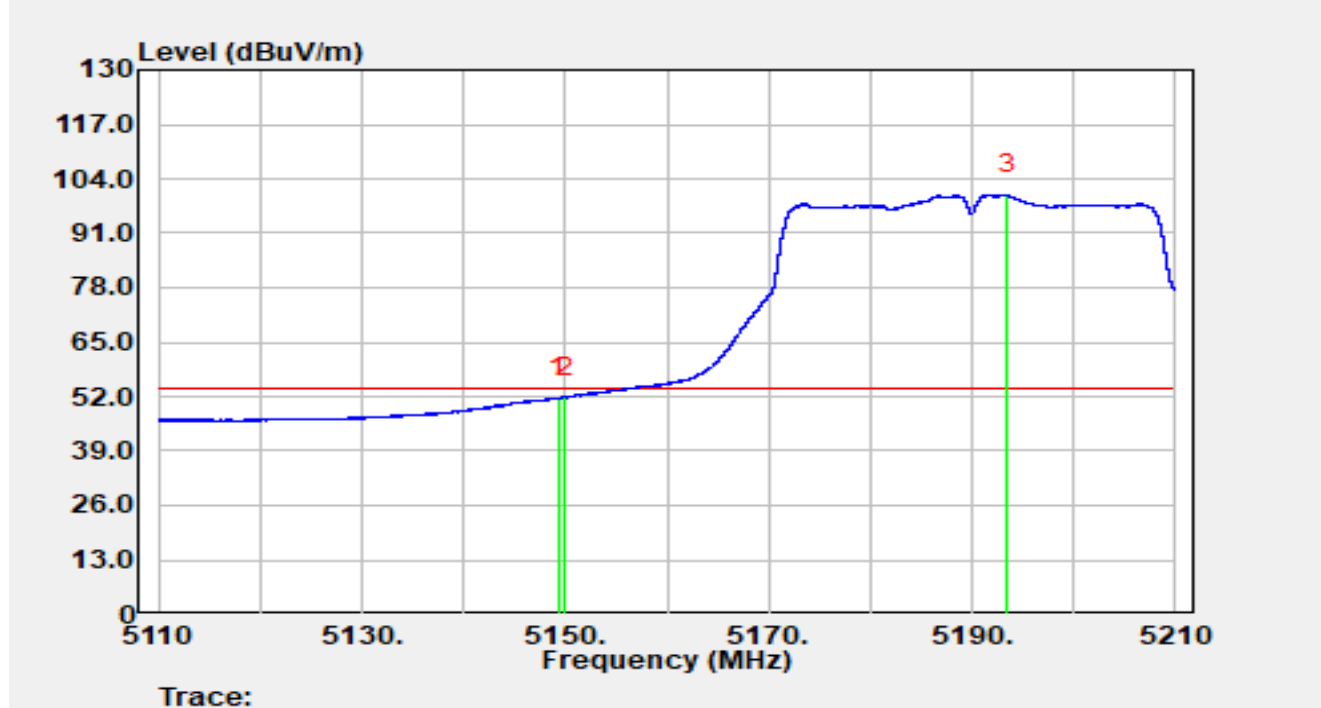


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.37	31.54	20.14	51.67	-2.33	54.00	Average
2	*	5150.00	31.68	20.14	51.81	-2.19	54.00	Average
3		5193.41	80.28	20.01	100.29	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

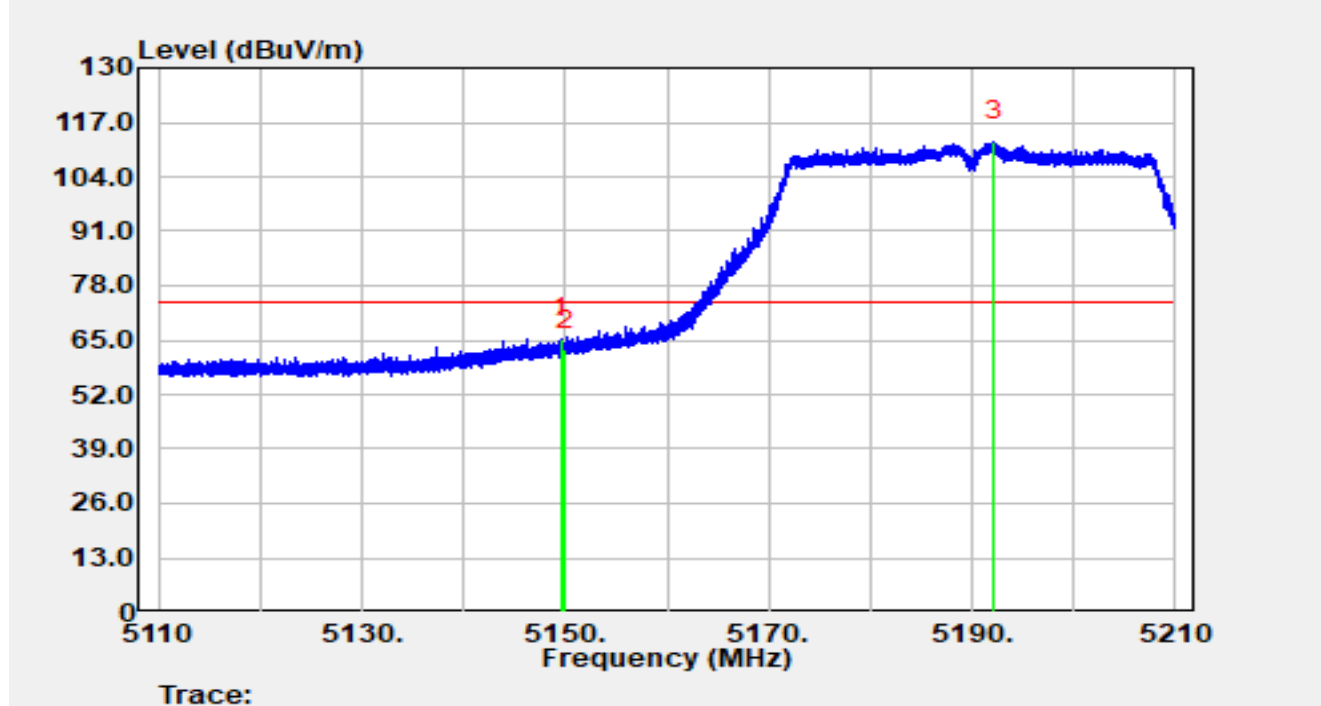


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.60	45.16	20.14	65.29	-8.71	74.00	Peak
2		5150.00	42.63	20.14	62.76	-11.24	74.00	Peak
3		5192.13	92.40	20.00	112.40	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

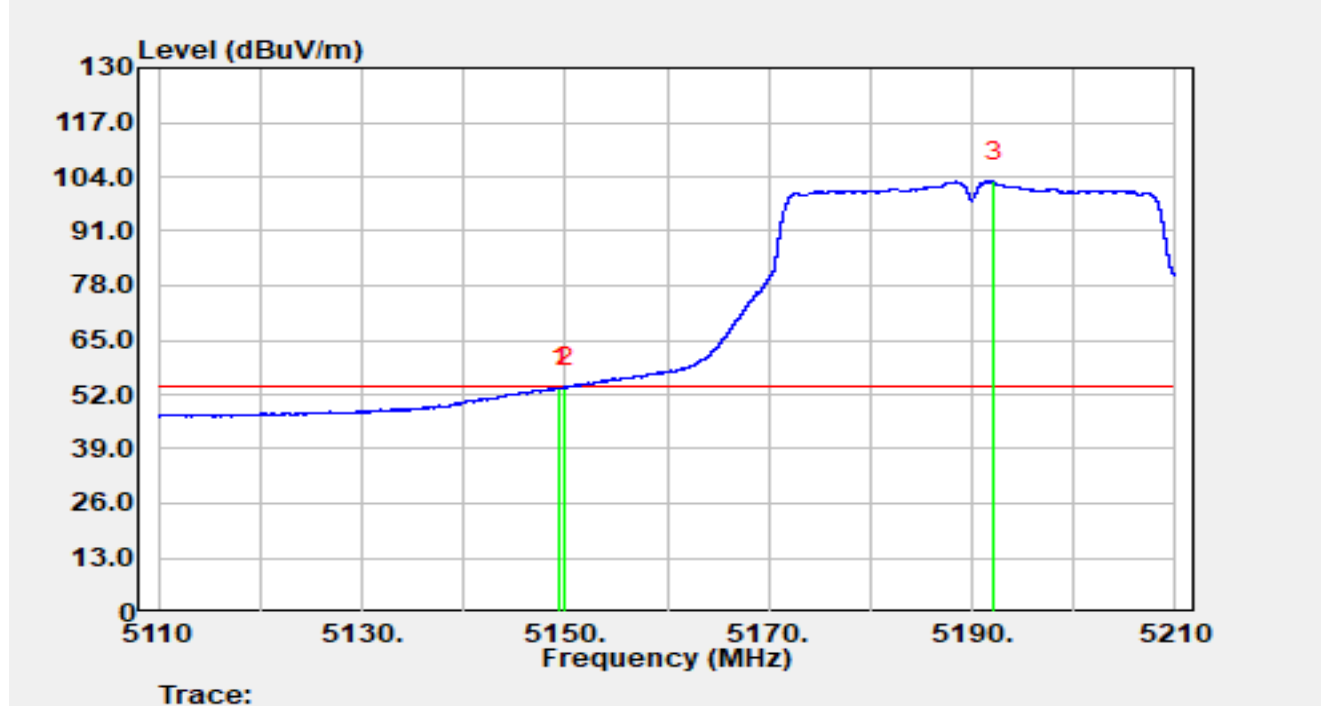


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.42	33.48	20.14	53.61	-0.39	54.00	Peak
2		5150.00	33.42	20.14	53.55	-0.45	54.00	Peak
3		5192.16	82.82	20.00	102.82	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

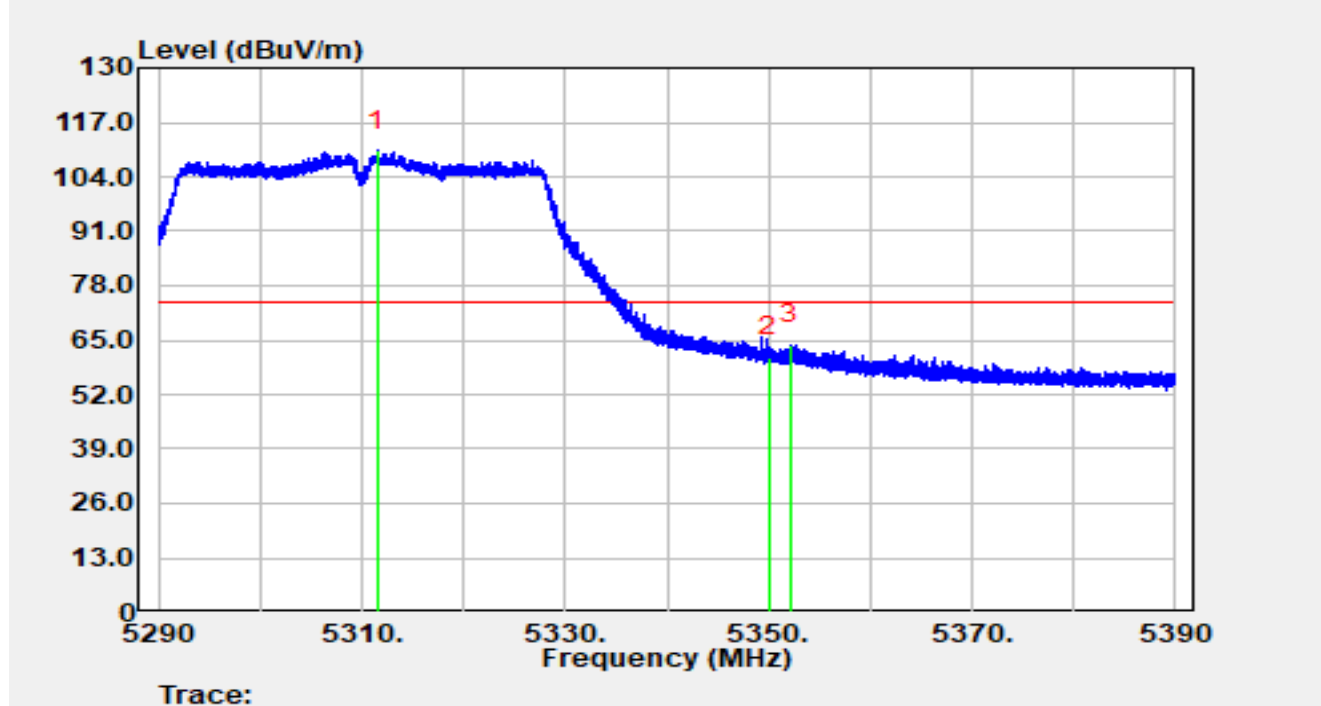


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.51	90.32	20.03	110.35	N/A	N/A	Peak
2		5350.00	40.87	20.09	60.95	-13.05	74.00	Peak
3	*	5352.16	43.75	20.07	63.82	-10.18	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

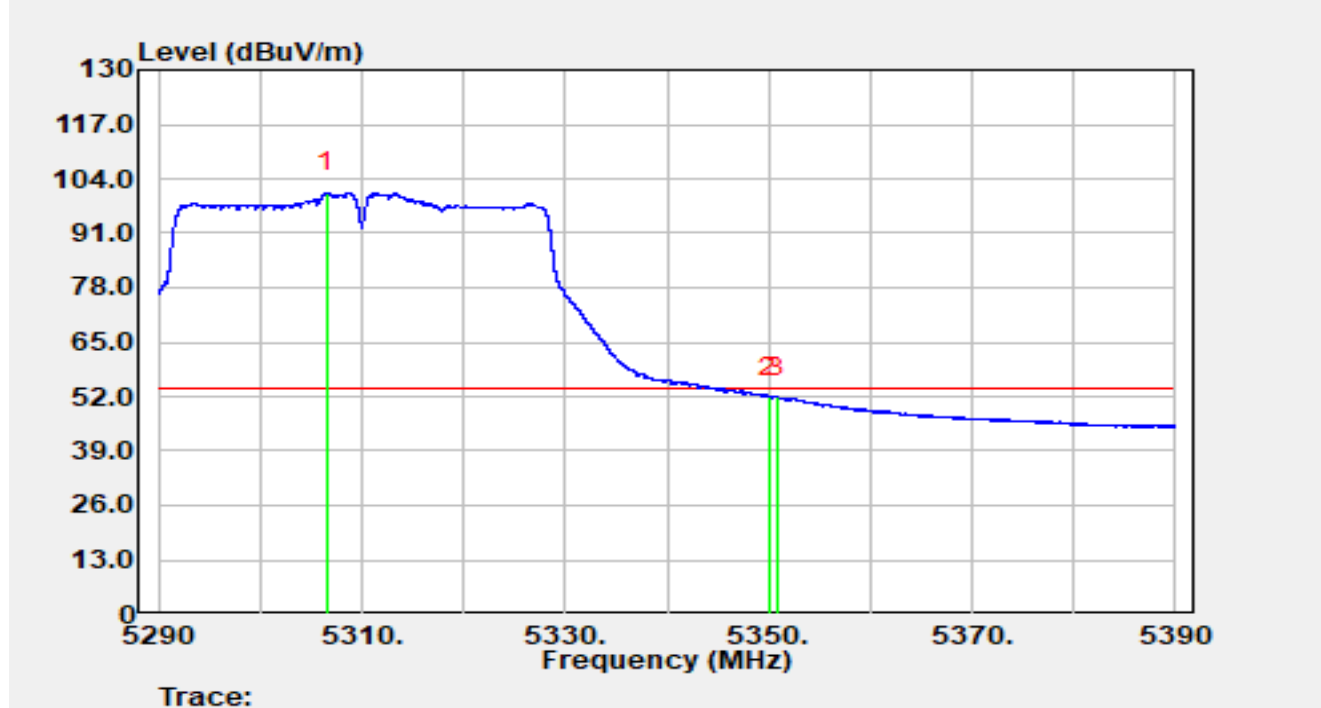


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.48	80.74	20.00	100.74	N/A	N/A	Average
2		5350.00	31.90	20.09	51.98	-2.02	54.00	Average
3	*	5350.82	31.91	20.08	51.99	-2.01	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

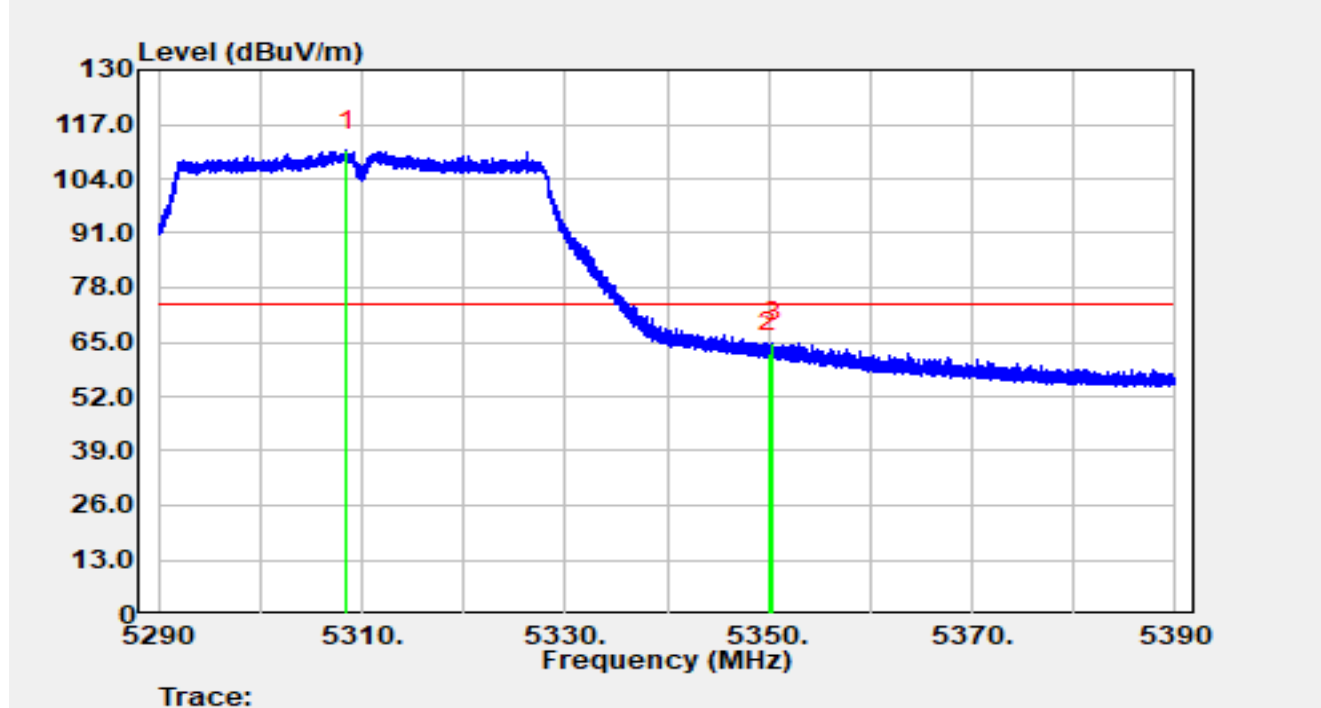


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.56	90.61	20.01	110.62	N/A	N/A	Peak
2		5350.00	42.30	20.09	62.38	-11.62	74.00	Peak
3	*	5350.35	44.87	20.08	64.95	-9.05	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

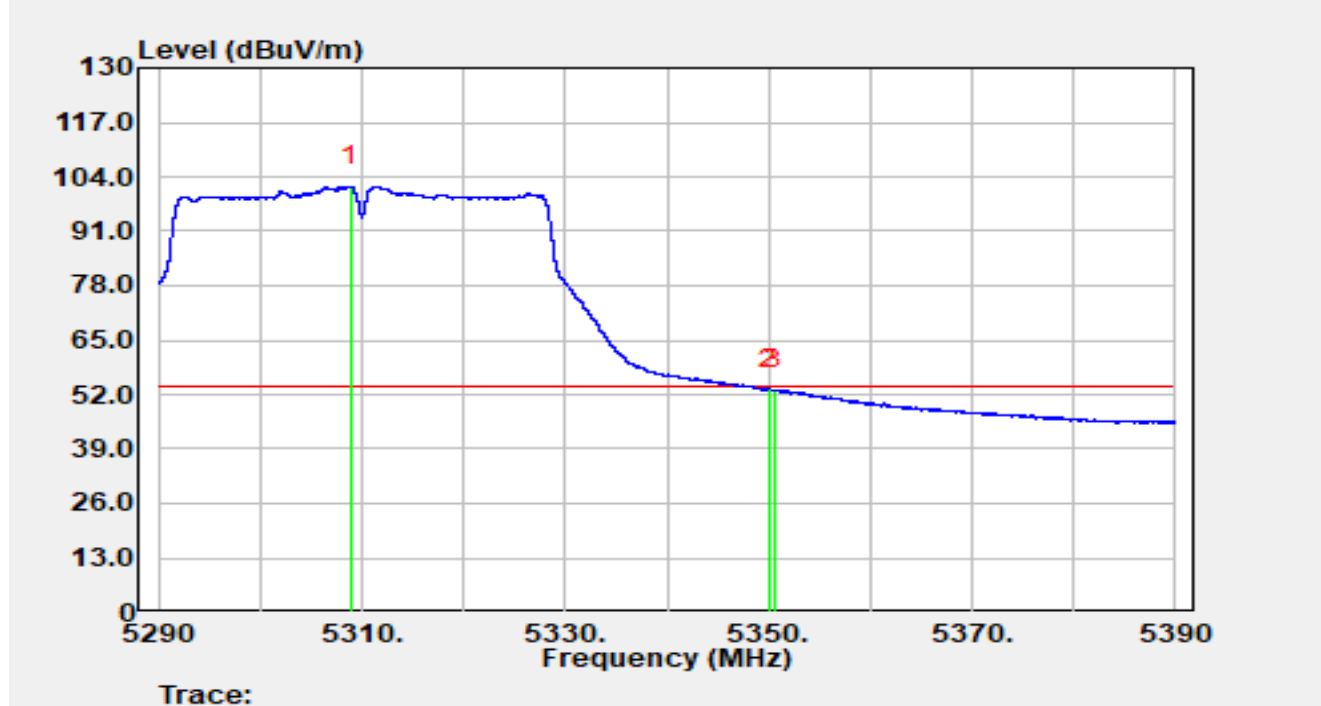


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.91	81.70	20.01	101.72	N/A	N/A	Average
2	*	5350.00	33.15	20.09	53.24	-0.76	54.00	Average
3		5350.51	32.98	20.08	53.06	-0.94	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

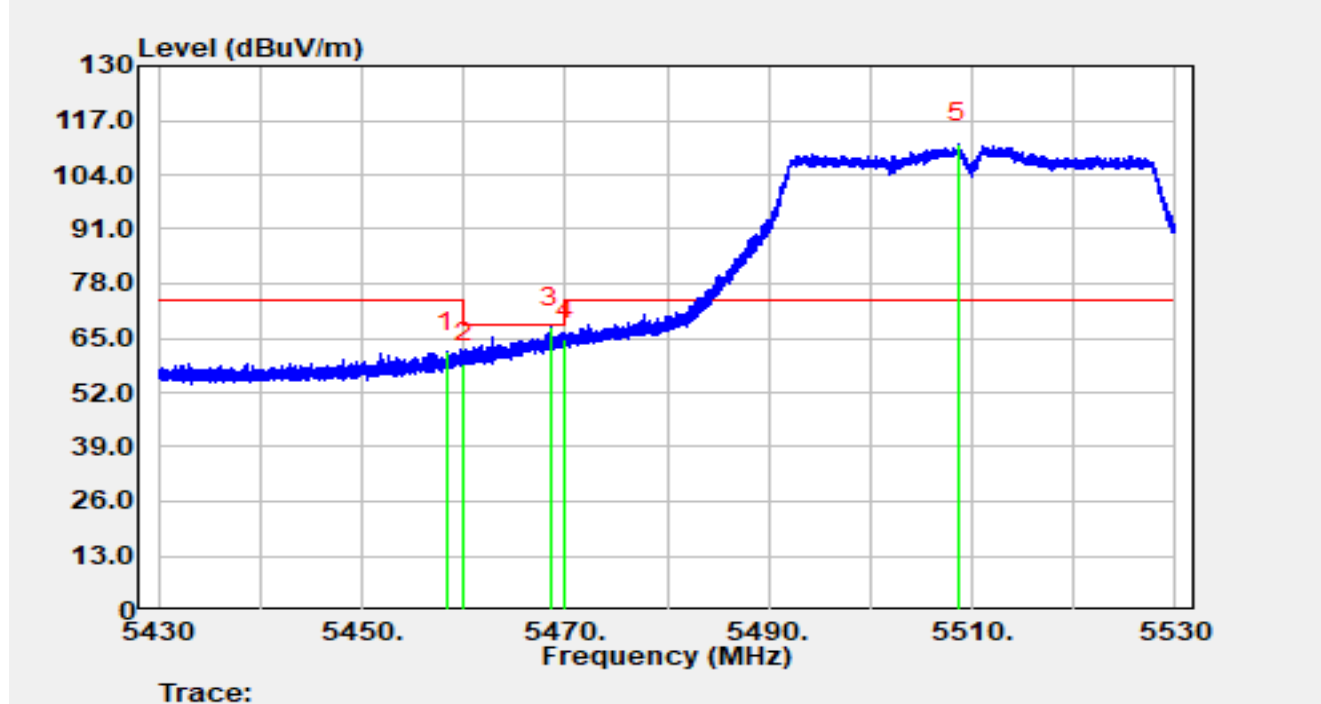


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.29	41.30	20.41	61.71	-12.29	74.00	Peak
2		5460.00	38.48	20.40	58.87	-9.33	68.20	Peak
3	*	5468.50	47.21	20.32	67.53	-0.67	68.20	Peak
4		5470.00	44.23	20.31	64.54	-3.66	68.20	Peak
5		5508.68	91.03	20.50	111.54	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

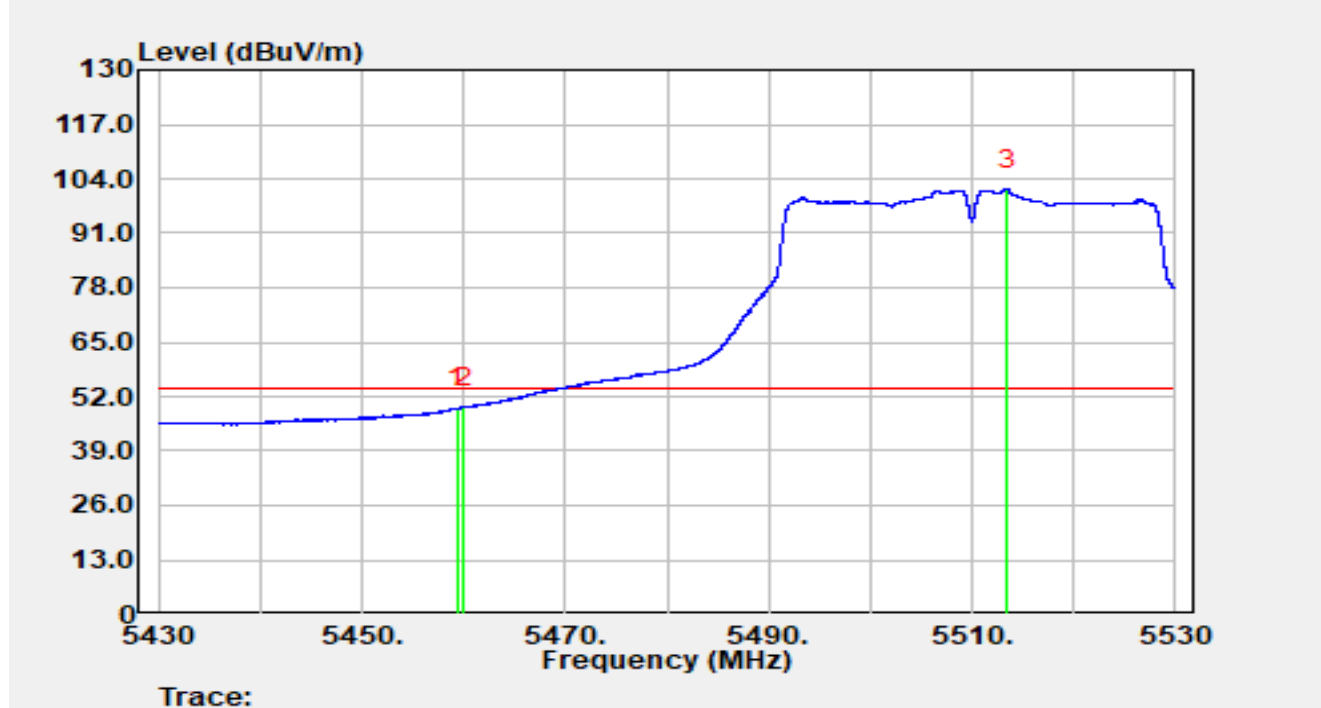


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.36	28.83	20.40	49.23	-4.77	54.00	Average
2	*	5460.00	28.91	20.40	49.31	-4.69	54.00	Average
3		5513.43	81.03	20.51	101.54	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

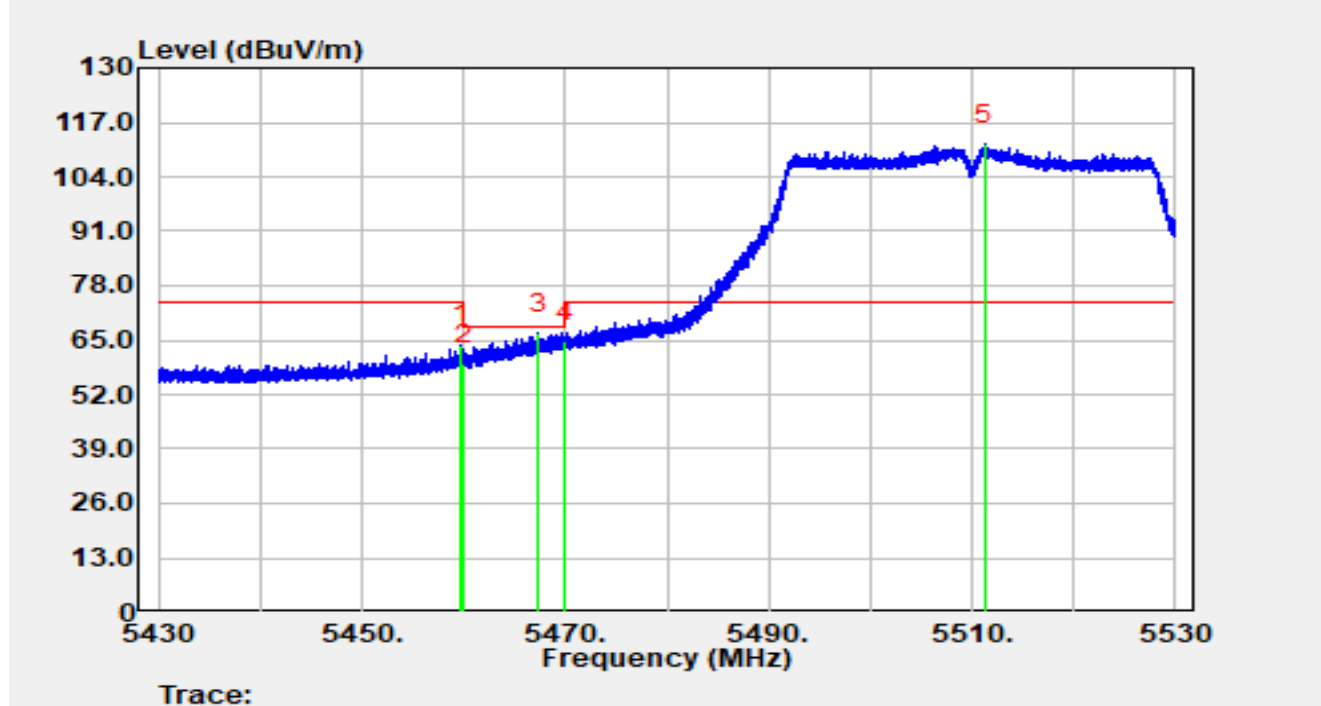


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.79	43.53	20.40	63.93	-10.07	74.00	Peak
2		5460.00	38.94	20.40	59.33	-8.87	68.20	Peak
3	*	5467.39	46.15	20.33	66.48	-1.72	68.20	Peak
4		5470.00	44.31	20.31	64.61	-3.59	68.20	Peak
5		5511.27	91.26	20.51	111.76	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

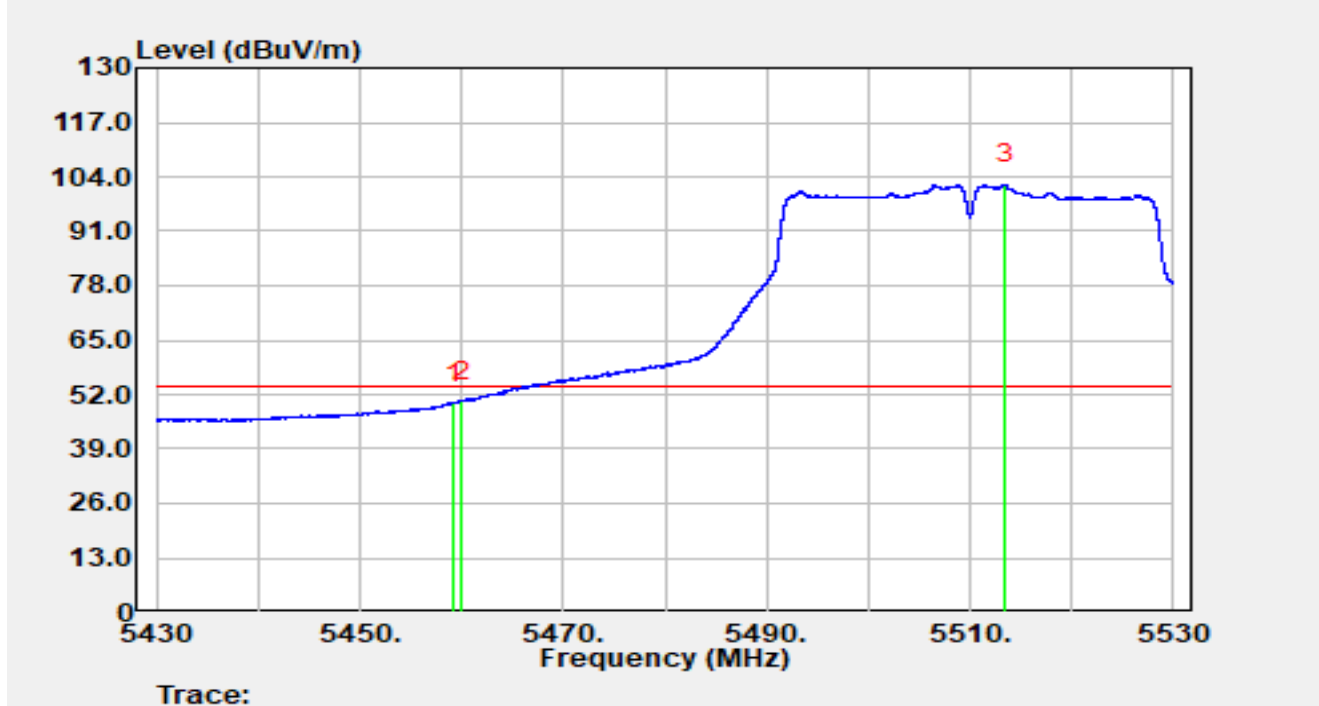


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.27	29.62	20.40	50.03	-3.97	54.00	Average
2	*	5460.00	29.90	20.40	50.29	-3.71	54.00	Average
3		5513.41	81.61	20.51	102.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

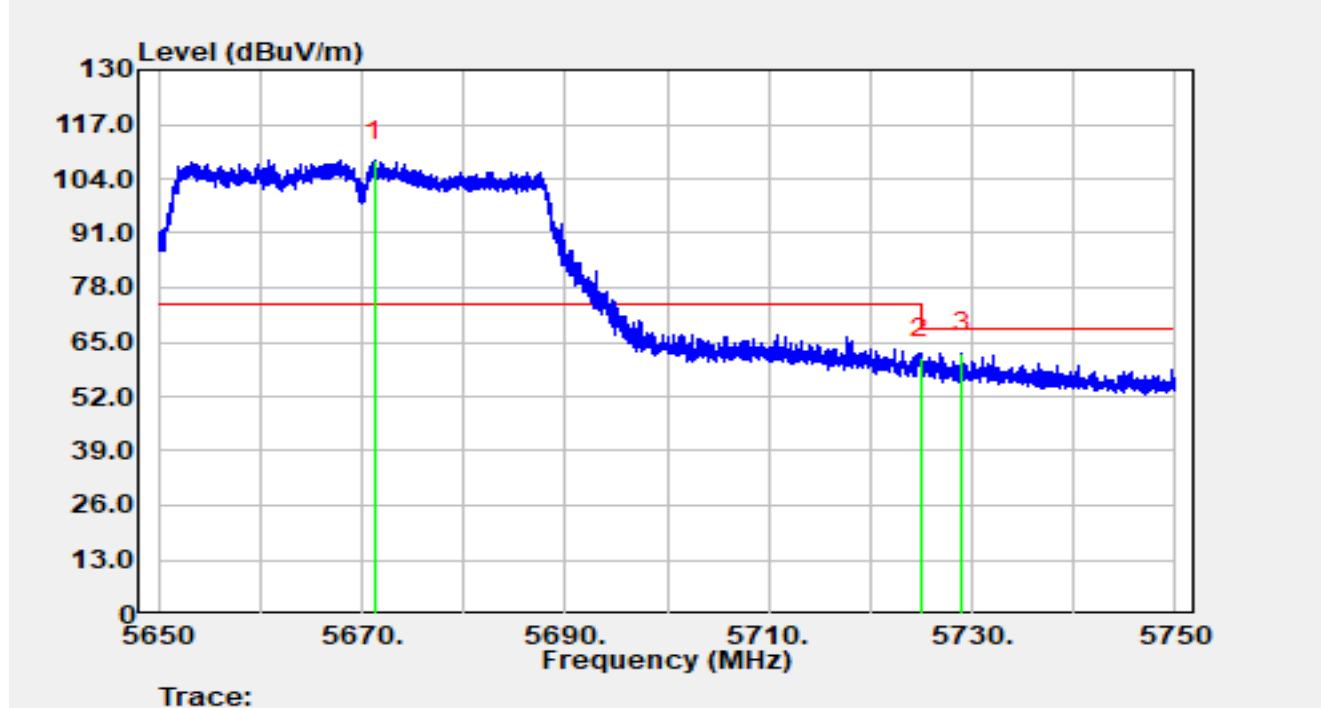


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5671.30	87.95	20.32	108.28	N/A	N/A	Peak
2		5725.00	40.54	20.69	61.23	-6.97	68.20	Peak
3	*	5728.96	41.84	20.67	62.50	-5.70	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

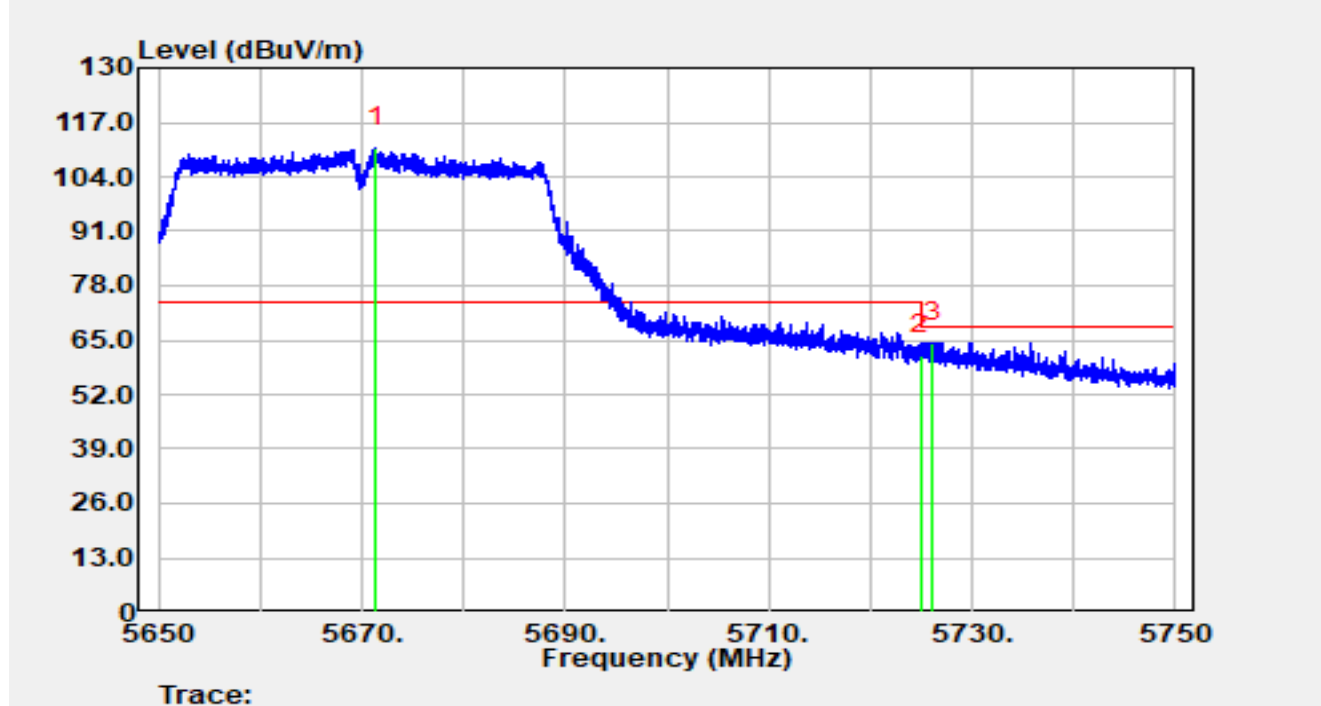


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5671.37	90.70	20.32	111.02	N/A	N/A	Peak
2		5725.00	40.81	20.69	61.49	-6.71	68.20	Peak
3	*	5726.15	43.77	20.68	64.45	-3.75	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

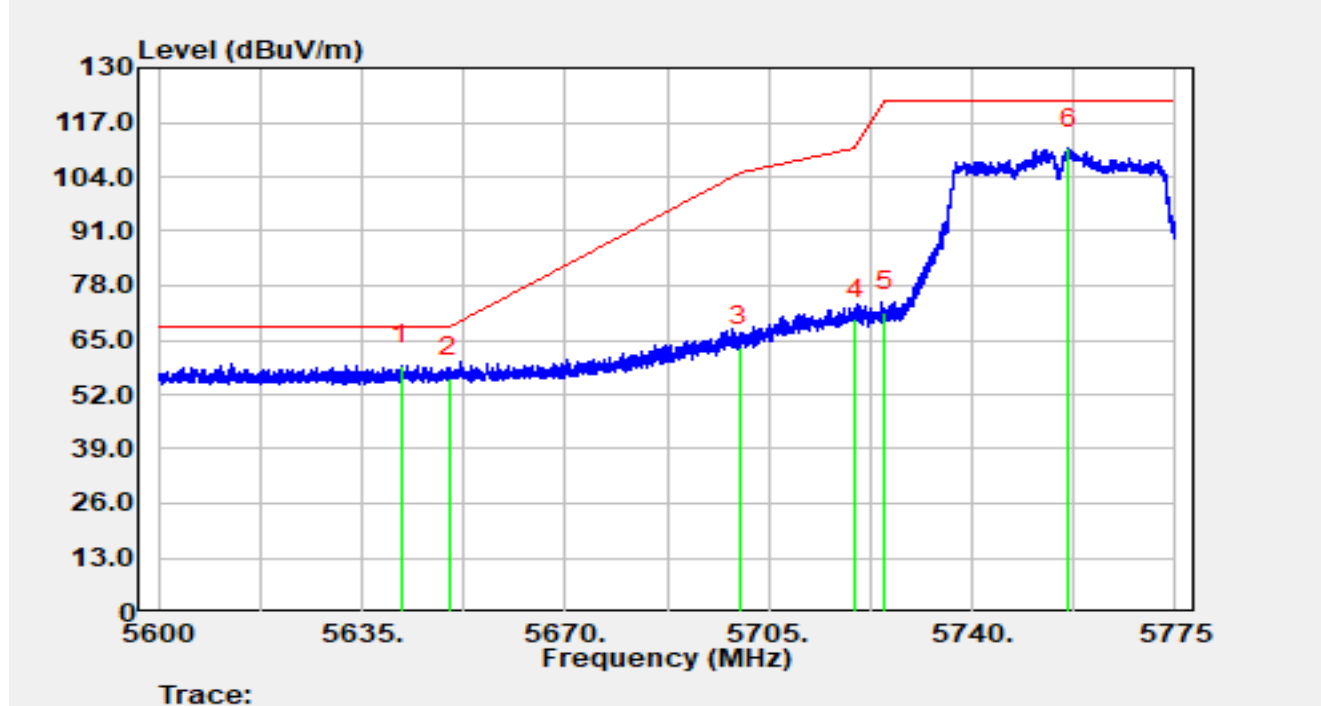


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.83	38.70	20.40	59.10	-9.10	68.20	Peak
2		5650.00	35.59	20.37	55.96	-12.24	68.20	Peak
3		5700.00	42.75	20.58	63.33	-41.87	105.20	Peak
4		5720.00	49.26	20.70	69.96	-40.84	110.80	Peak
5		5725.00	50.98	20.69	71.66	-50.54	122.20	Peak
6		5756.68	90.21	20.58	110.79	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

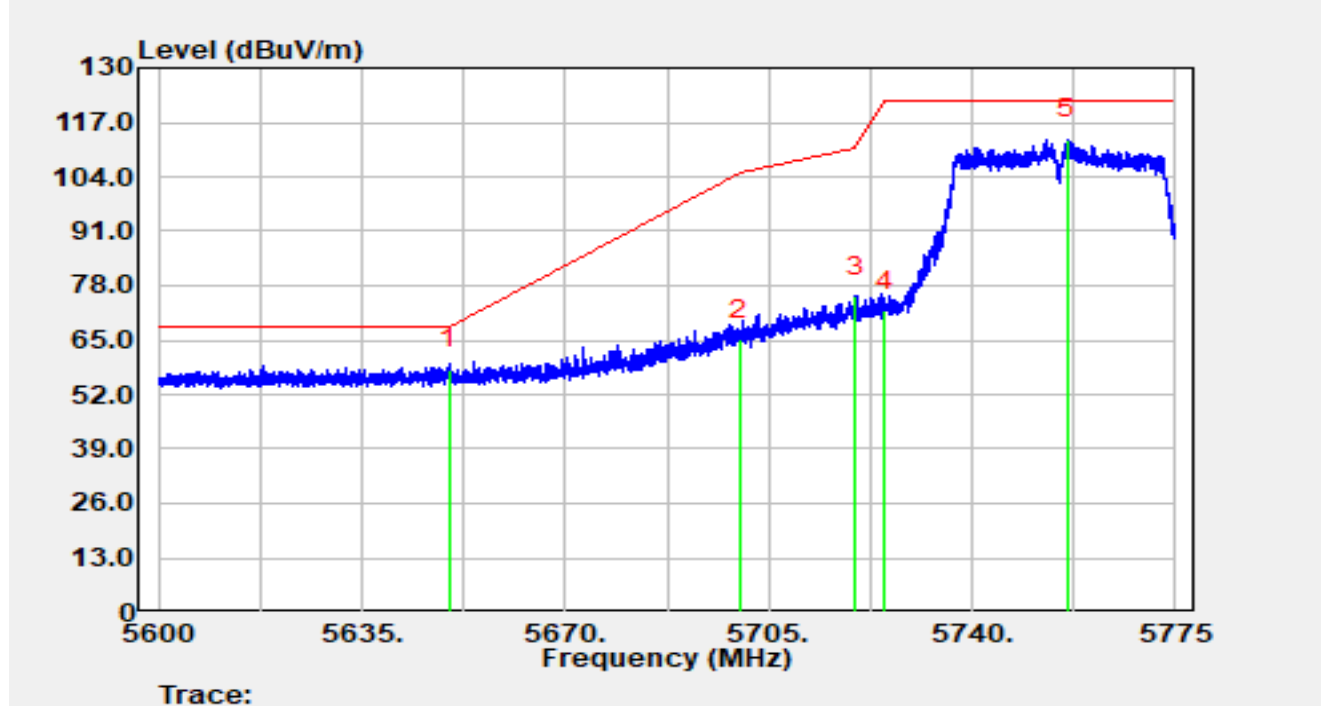


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5650.00	37.53	20.37	57.90	-10.30	68.20	Peak
2		5700.00	44.55	20.58	65.13	-40.07	105.20	Peak
3		5720.00	54.64	20.70	75.33	-35.47	110.80	Peak
4		5725.00	51.34	20.69	72.03	-50.17	122.20	Peak
5		5756.36	92.48	20.58	113.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

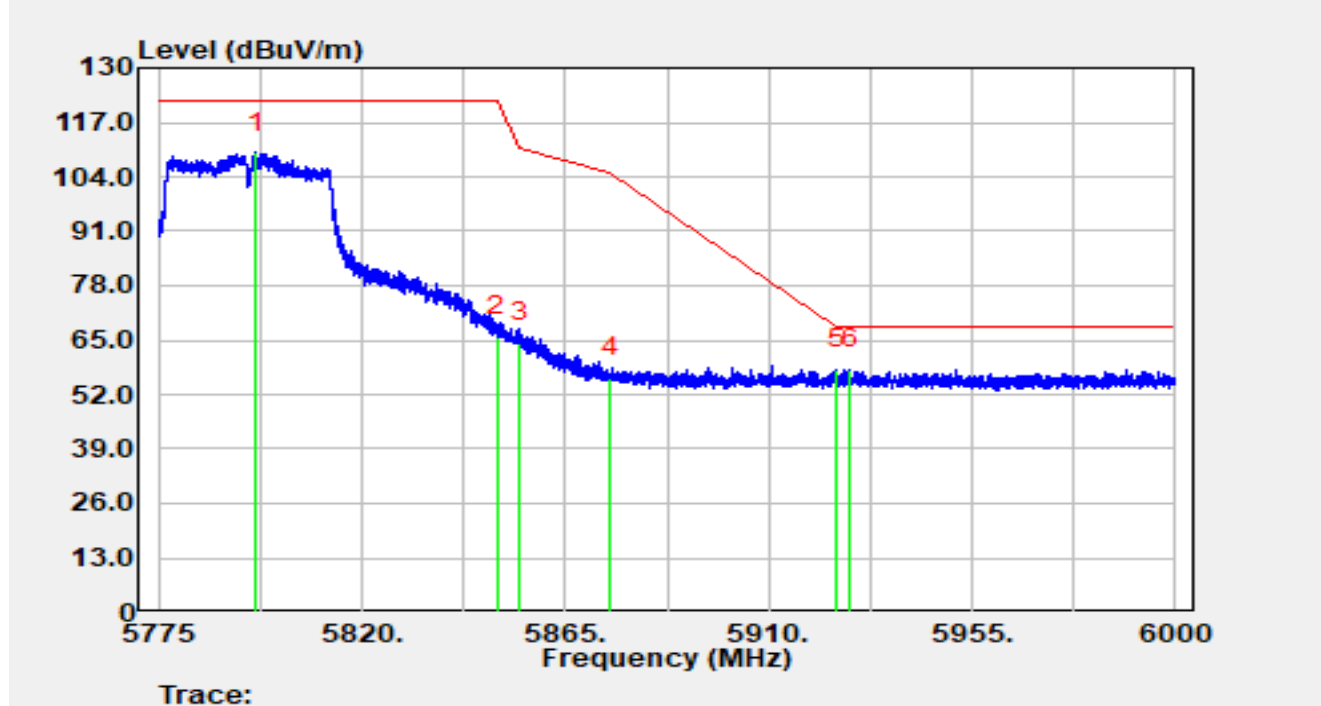


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5796.65	89.14	20.73	109.87	N/A	N/A	Peak
2		5850.00	45.06	20.79	65.85	-56.35	122.20	Peak
3		5855.00	43.73	20.76	64.49	-46.31	110.80	Peak
4		5875.00	35.20	20.78	55.98	-49.22	105.20	Peak
5		5925.00	36.83	21.12	57.95	-10.25	68.20	Peak
6	*	5928.02	36.93	21.10	58.03	-10.17	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-30
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

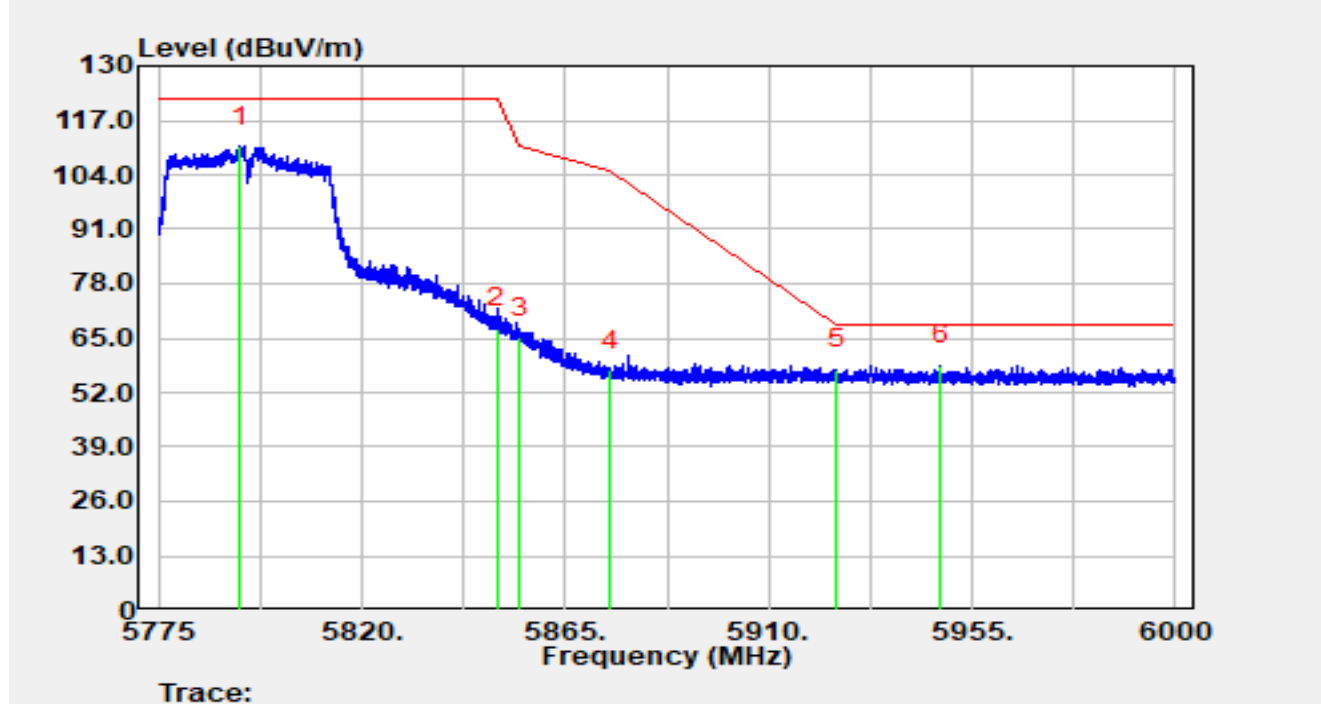


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.05	90.00	20.69	110.68	N/A	N/A	Peak
2		5850.00	46.55	20.79	67.35	-54.85	122.20	Peak
3		5855.00	44.30	20.76	65.06	-45.74	110.80	Peak
4		5875.00	36.48	20.78	57.26	-47.94	105.20	Peak
5		5925.00	36.35	21.12	57.47	-10.73	68.20	Peak
6	*	5947.98	37.56	20.86	58.42	-9.78	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

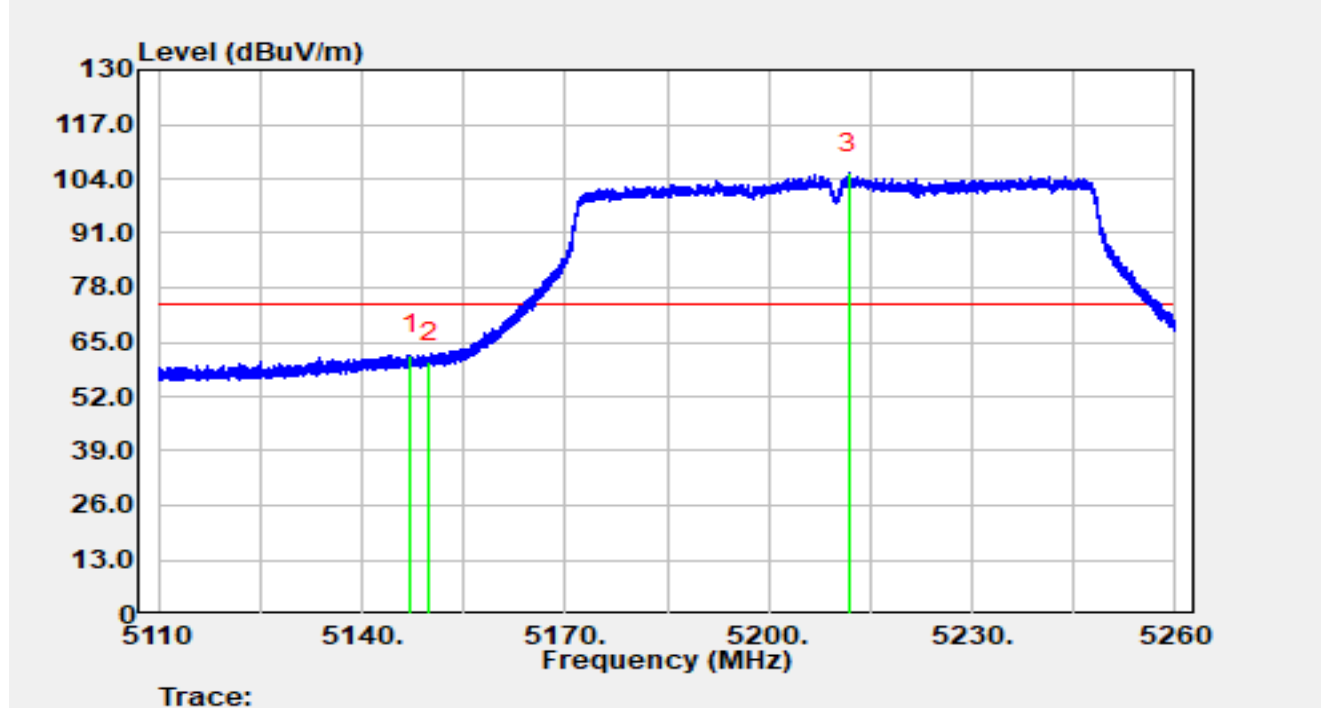


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.23	41.76	20.14	61.90	-12.10	74.00	Peak
2		5150.00	40.02	20.14	60.15	-13.85	74.00	Peak
3		5211.82	85.30	20.14	105.44	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

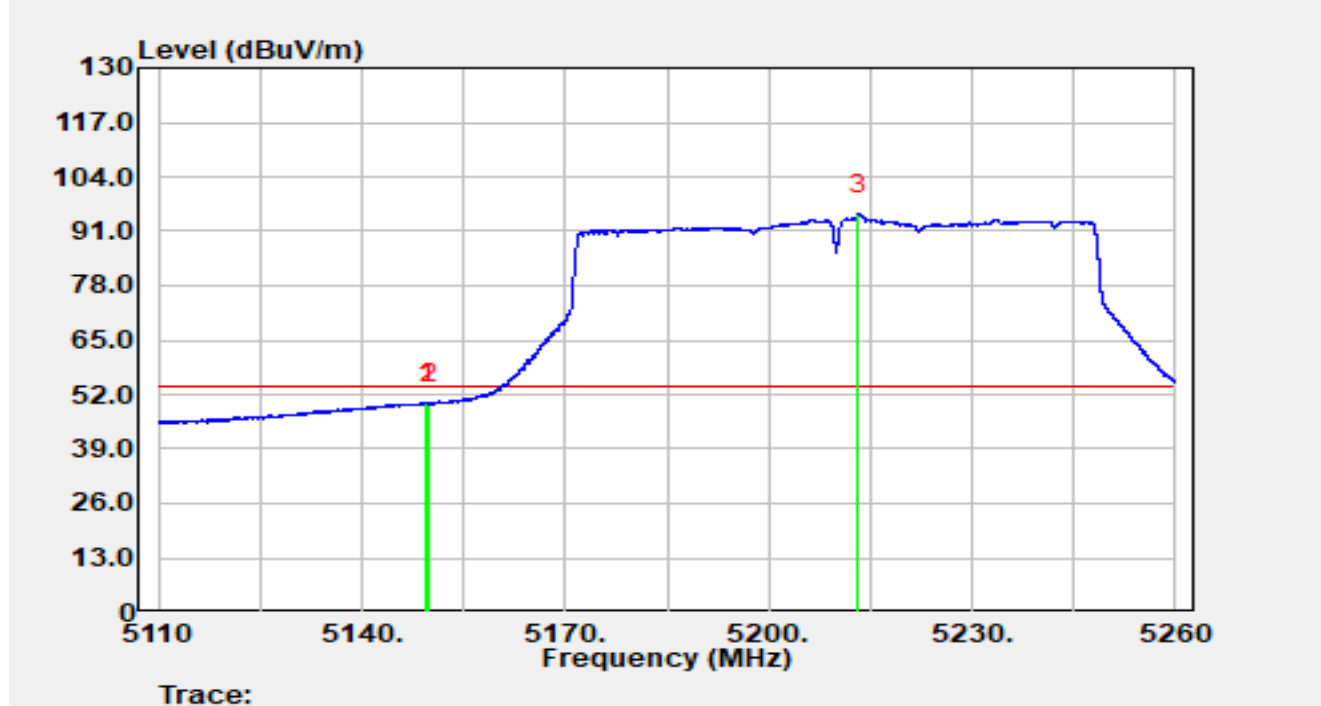


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.51	29.86	20.14	49.99	-4.01	54.00	Peak
2		5150.00	29.64	20.14	49.78	-4.22	54.00	Peak
3		5213.25	74.95	20.15	95.09	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

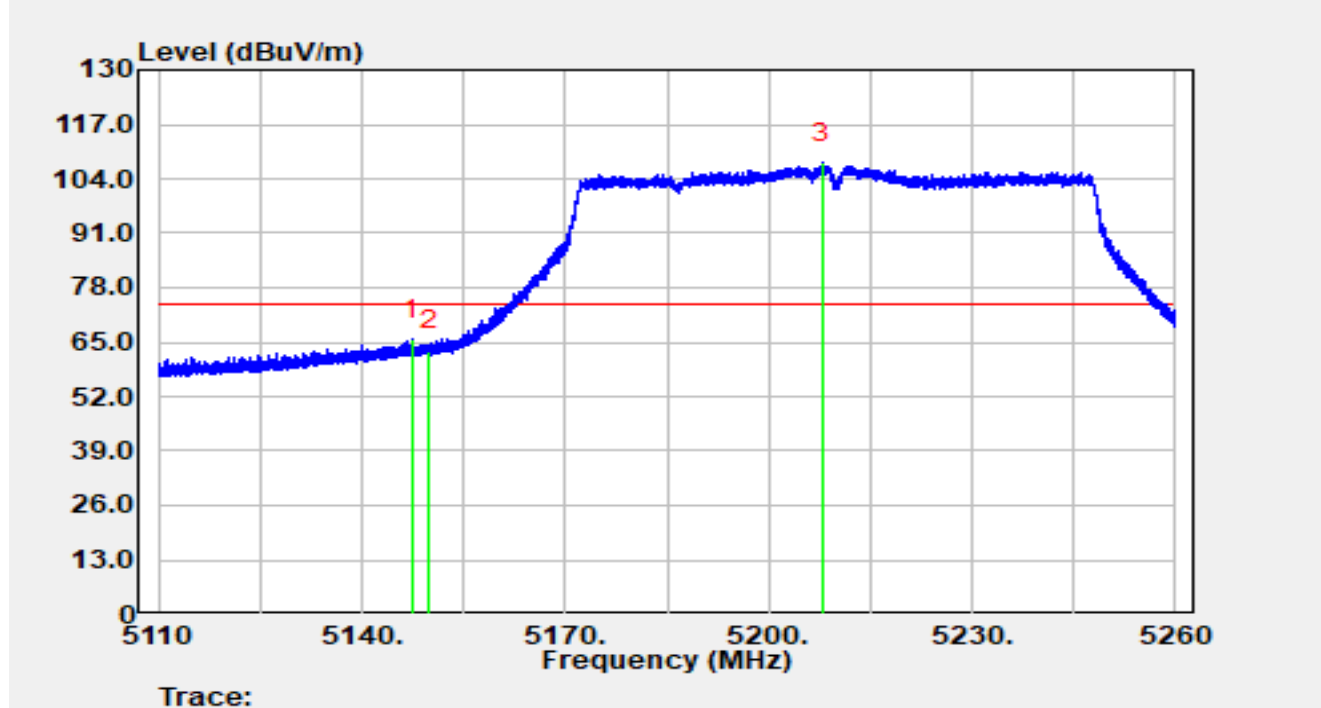


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.34	45.49	20.14	65.63	-8.37	74.00	Peak
2		5150.00	42.81	20.14	62.94	-11.06	74.00	Peak
3		5207.97	87.74	20.11	107.85	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

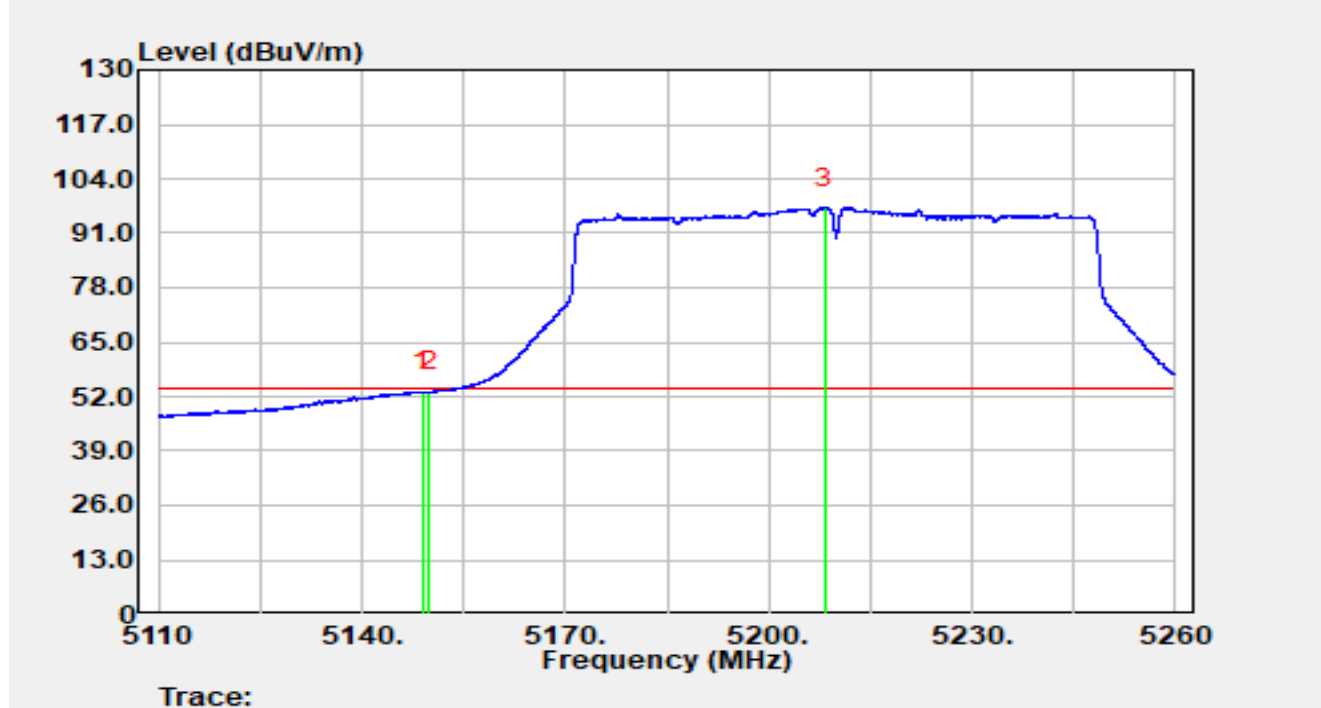


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.91	32.92	20.14	53.05	-0.95	54.00	Average
2		5150.00	32.88	20.14	53.02	-0.98	54.00	Average
3		5208.21	76.98	20.12	97.09	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

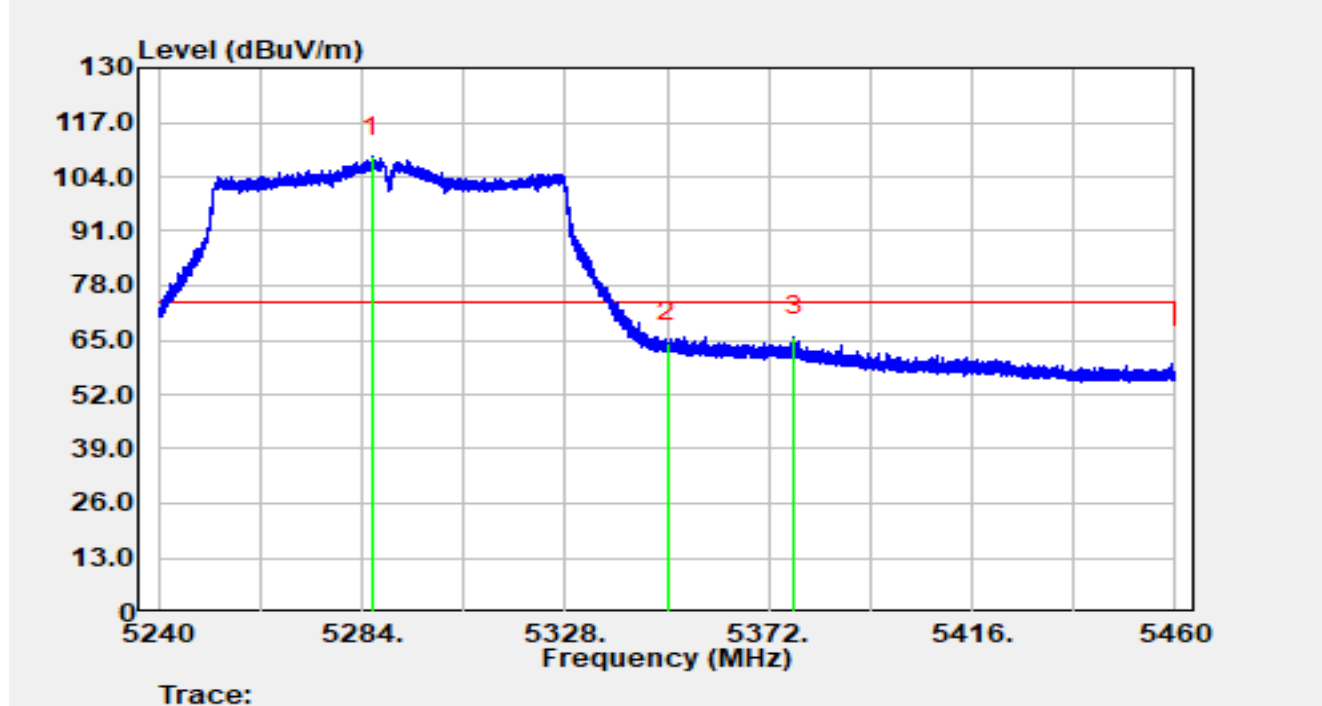


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5286.20	88.95	19.94	108.89	N/A	N/A	Peak
2		5350.00	44.27	20.09	64.36	-9.64	74.00	Peak
3	*	5377.57	45.77	20.11	65.87	-8.13	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

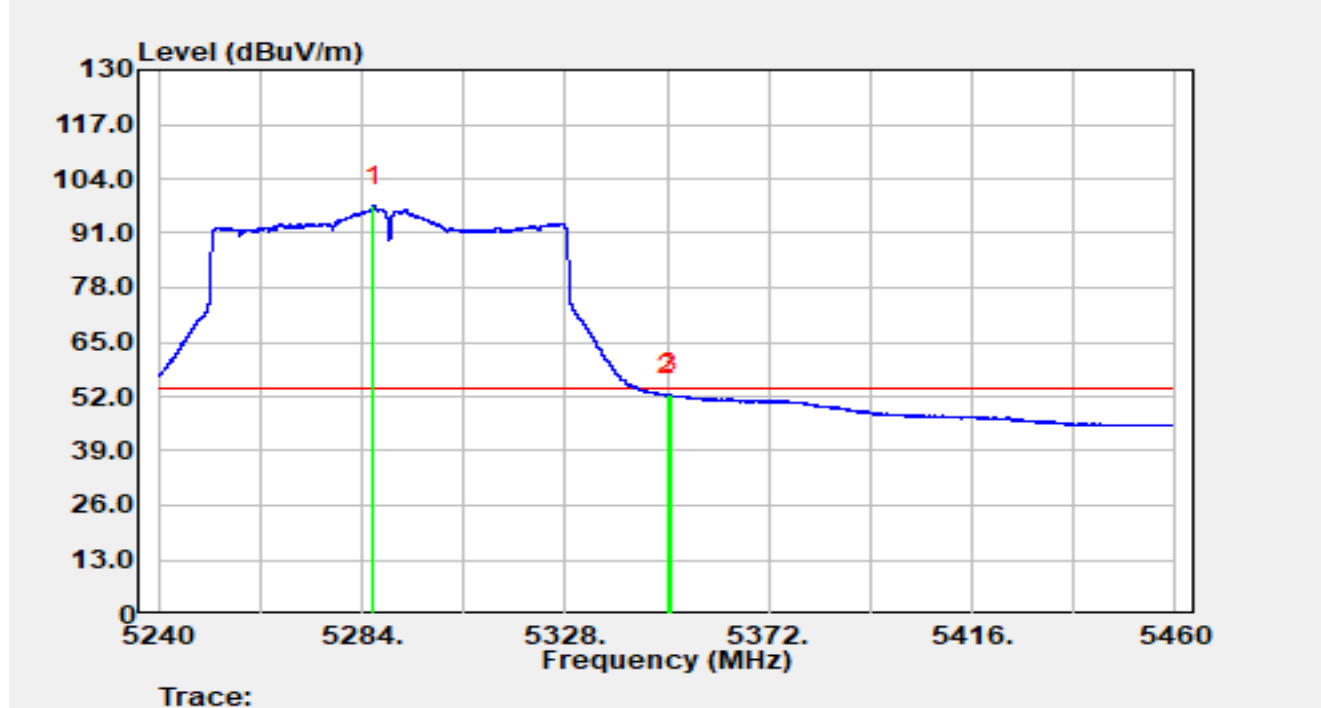


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5286.51	77.67	19.94	97.62	N/A	N/A	Average
2		5350.00	32.36	20.09	52.44	-1.56	54.00	Average
3	*	5350.62	32.42	20.08	52.50	-1.50	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

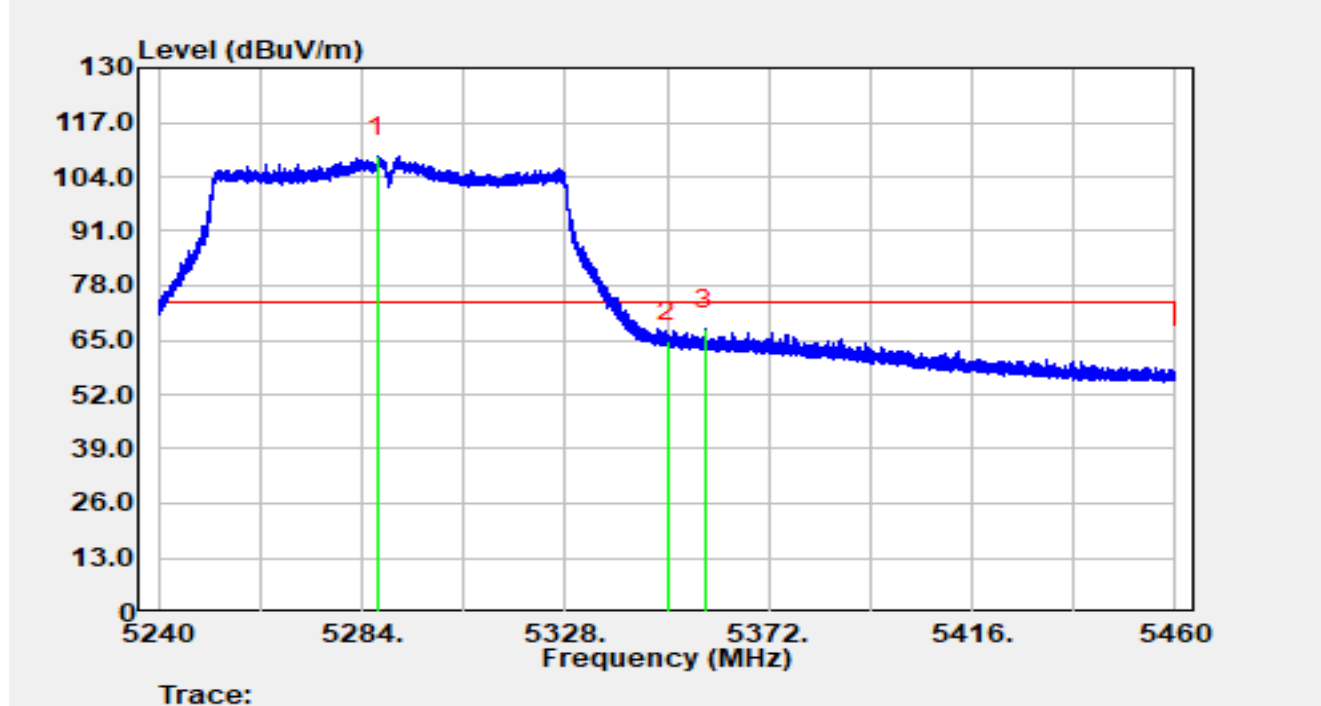


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5287.37	88.89	19.94	108.83	N/A	N/A	Peak
2		5350.00	44.52	20.09	64.60	-9.40	74.00	Peak
3	*	5358.23	47.50	20.06	67.56	-6.44	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

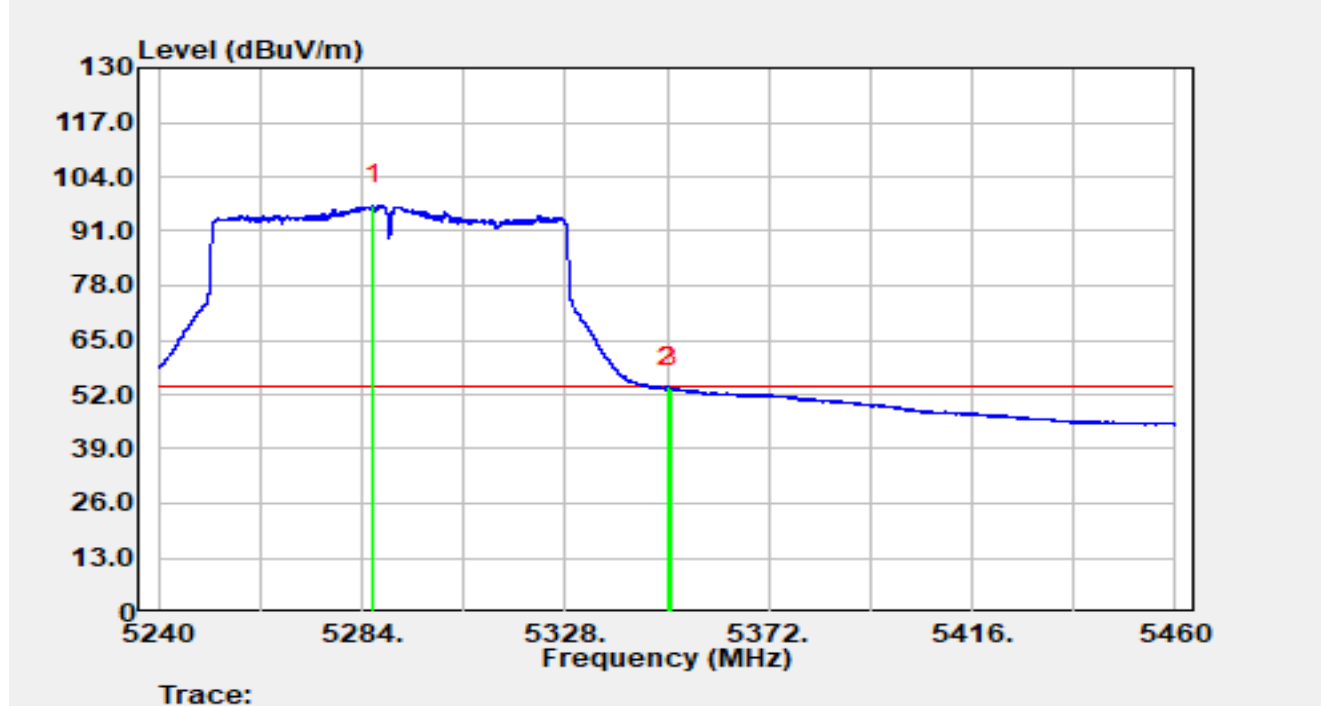


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5286.53	77.38	19.94	97.32	N/A	N/A	Average
2	*	5350.00	33.71	20.09	53.79	-0.21	54.00	Average
3		5350.79	33.58	20.08	53.66	-0.34	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

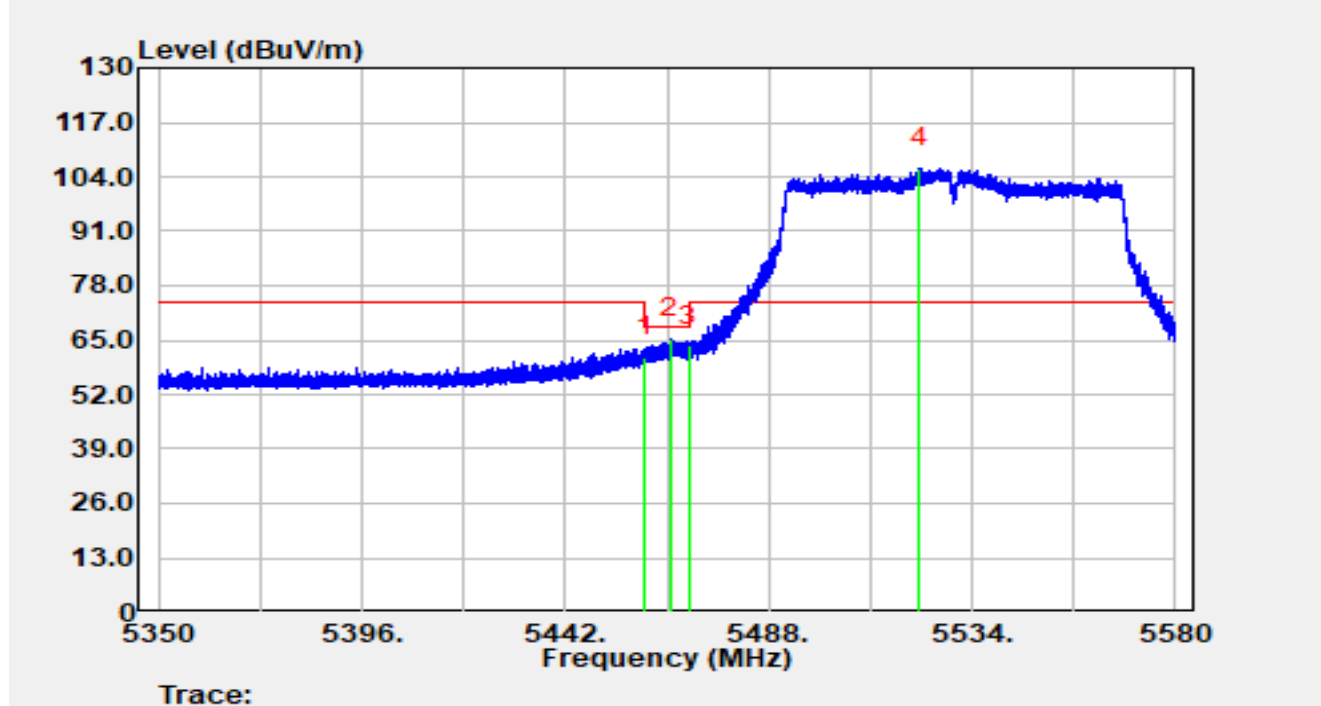


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.00	40.63	20.40	61.02	-7.18	68.20	Peak
2	*	5465.76	45.06	20.34	65.40	-2.80	68.20	Peak
3		5470.00	43.41	20.31	63.71	-4.49	68.20	Peak
4		5522.20	85.53	20.54	106.08	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

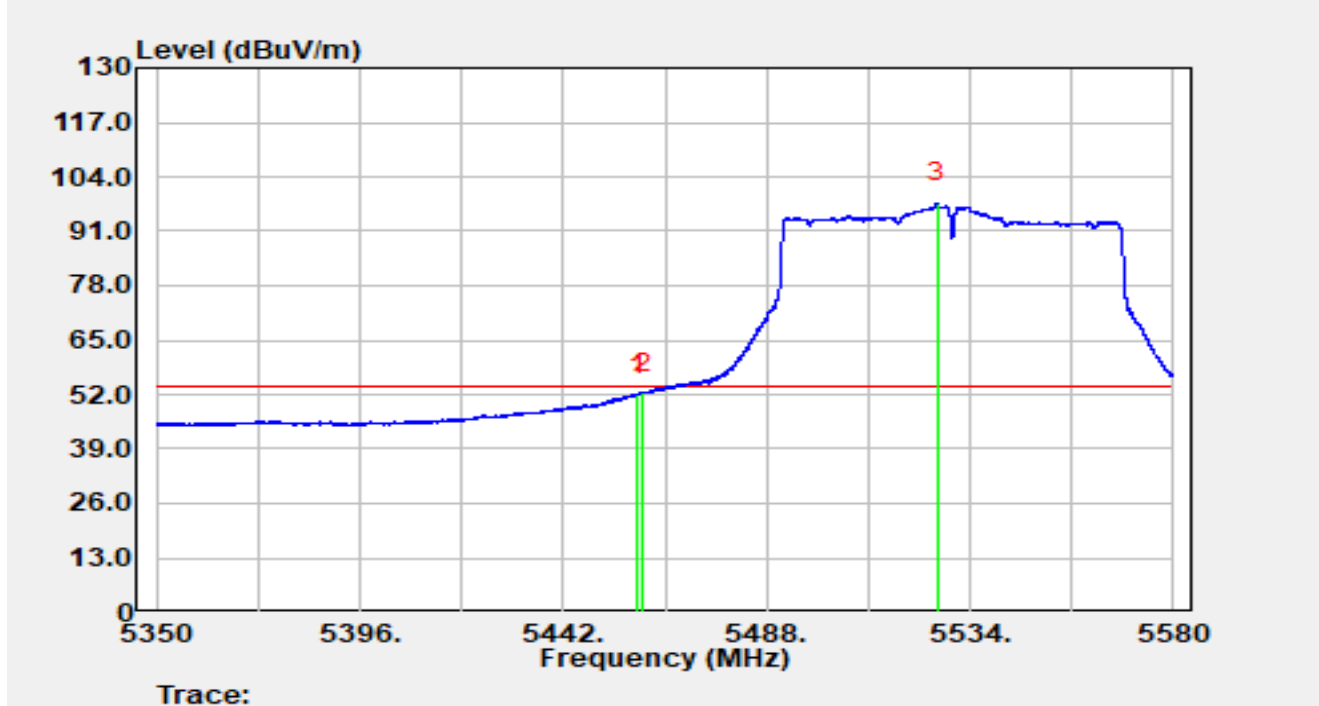


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.70	31.54	20.41	51.95	-2.05	54.00	Average
2	*	5460.00	32.07	20.40	52.47	-1.53	54.00	Average
3		5526.55	77.20	20.52	97.72	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

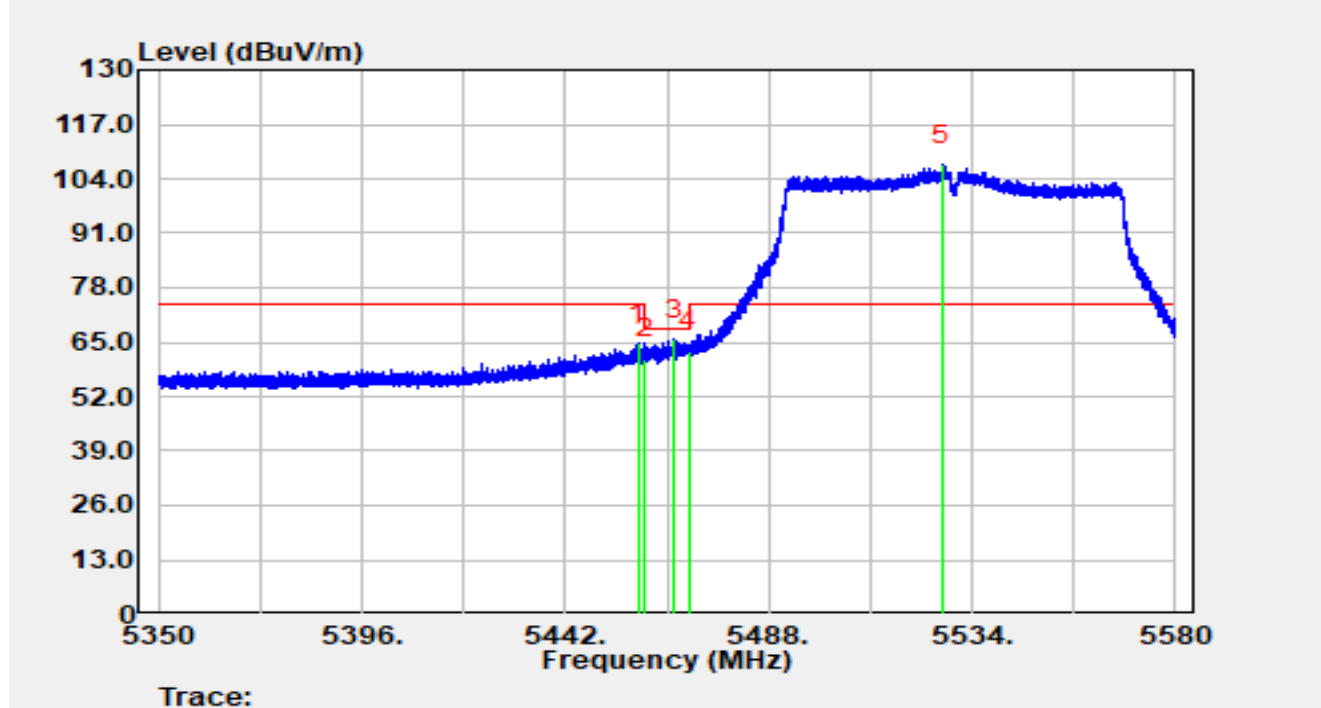


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.38	44.16	20.41	64.57	-9.43	74.00	Peak
2		5460.00	40.67	20.40	61.07	-7.13	68.20	Peak
3	*	5466.68	45.26	20.34	65.60	-2.60	68.20	Peak
4		5470.00	42.64	20.31	62.94	-5.26	68.20	Peak
5		5527.19	86.75	20.52	107.26	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.7°C	Humidity	44.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

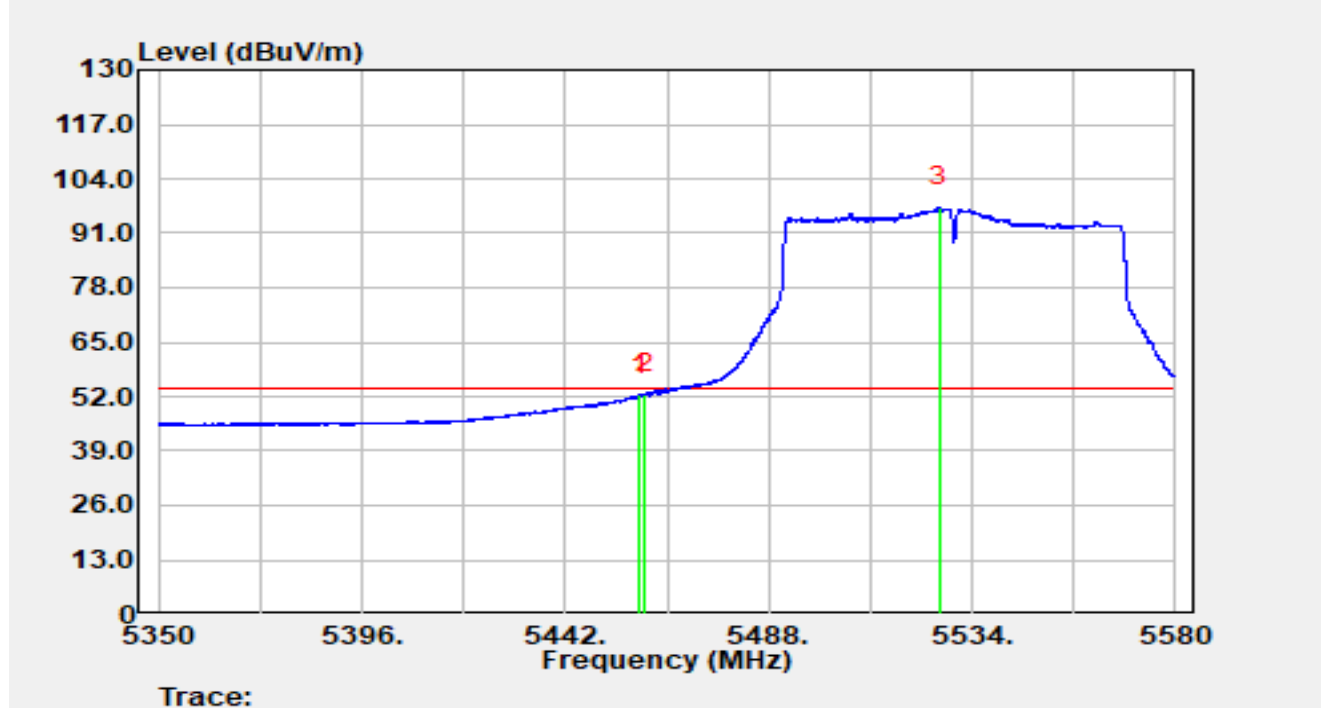


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.79	31.89	20.41	52.29	-1.71	54.00	Average
2	*	5460.00	32.20	20.40	52.59	-1.41	54.00	Average
3		5526.59	76.83	20.52	97.35	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.1°C	Humidity	48.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

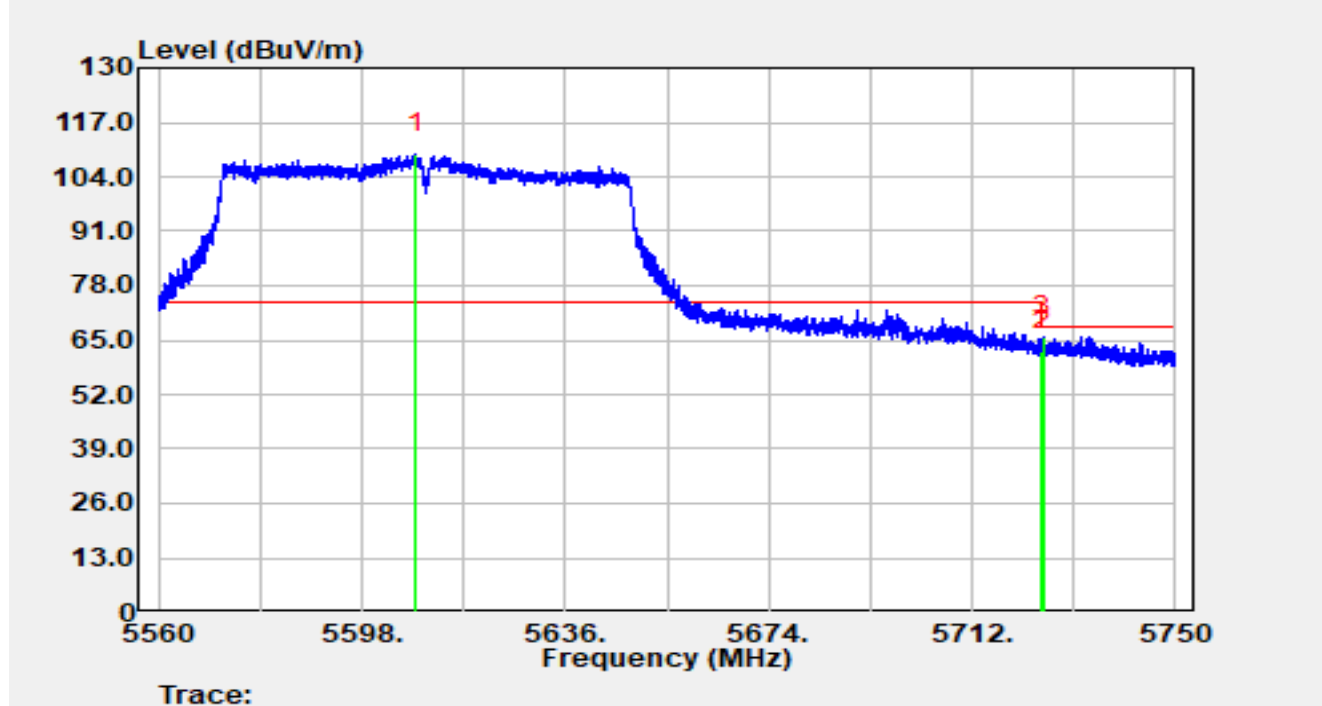


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5608.03	89.02	20.46	109.48	N/A	N/A	Peak
2		5725.00	41.68	20.69	62.36	-5.84	68.20	Peak
3	*	5725.40	45.19	20.69	65.87	-2.33	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-31
Temperature	24.1°C	Humidity	48.8%
Limit	FCC_5G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Wi-Fi 7 Tri-band Indoor Wall Plate AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

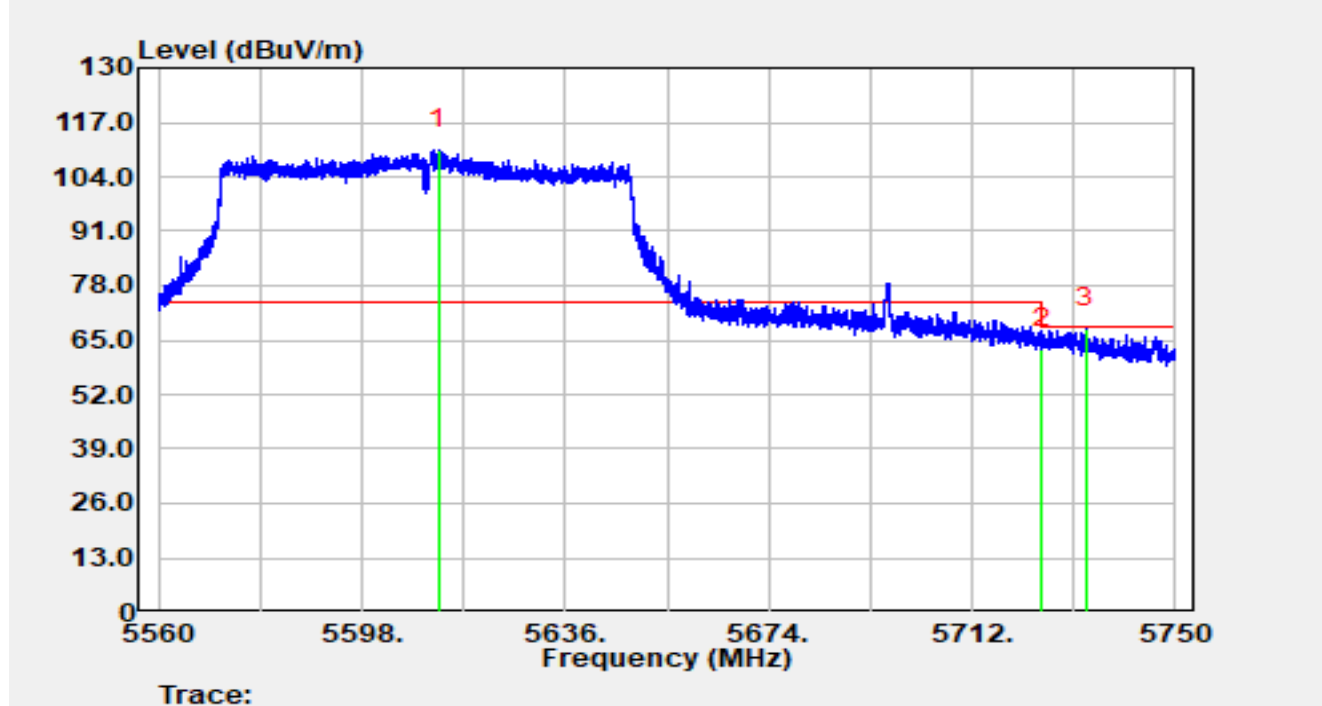

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5612.38	90.15	20.47	110.62	N/A	N/A	Peak
2		5725.00	42.31	20.69	63.00	-5.20	68.20	Peak
3	*	5733.30	47.11	20.64	67.76	-0.44	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).