

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11325.80	41.63	5.41	47.04	74.00	-26.96	Peak	Horizontal
*	13721.10	45.09	4.58	49.67	88.20	-38.53	Peak	Horizontal
*	14693.50	45.08	5.68	50.76	88.20	-37.44	Peak	Horizontal
	15535.00	45.61	5.87	51.48	74.00	-22.52	Peak	Horizontal
*	10251.40	40.86	5.91	46.77	88.20	-41.43	Peak	Vertical
	11466.90	42.78	5.37	48.15	74.00	-25.85	Peak	Vertical
	12471.60	43.93	4.76	48.69	74.00	-25.31	Peak	Vertical
*	14050.90	44.52	5.44	49.96	88.20	-38.24	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11293.50	41.46	5.40	46.86	74.00	-27.14	Peak	Horizontal
	12027.90	43.59	5.08	48.67	74.00	-25.33	Peak	Horizontal
*	14168.20	44.31	5.52	49.83	88.20	-38.37	Peak	Horizontal
*	14999.50	45.13	5.80	50.93	88.20	-37.27	Peak	Horizontal
	11320.70	41.93	5.39	47.32	74.00	-26.68	Peak	Vertical
	12237.00	43.11	4.75	47.86	74.00	-26.14	Peak	Vertical
*	14071.30	45.21	5.41	50.62	88.20	-37.58	Peak	Vertical
*	14858.40	45.43	5.54	50.97	88.20	-37.23	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10130.70	40.38	5.87	46.25	88.20	-41.95	Peak	Horizontal
	11313.90	41.17	5.38	46.55	74.00	-27.45	Peak	Horizontal
	11975.20	43.16	5.16	48.32	74.00	-25.68	Peak	Horizontal
*	14294.00	46.60	5.52	52.12	88.20	-36.08	Peak	Horizontal
	11417.60	41.51	5.43	46.94	74.00	-27.06	Peak	Vertical
	12493.70	43.88	4.97	48.85	74.00	-25.15	Peak	Vertical
*	14168.20	45.10	5.52	50.62	88.20	-37.58	Peak	Vertical
*	15094.70	45.79	5.79	51.58	88.20	-36.62	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT20	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11157.50	41.89	5.09	46.98	74.00	-27.02	Peak	Horizontal
	12048.30	42.56	5.20	47.76	74.00	-26.24	Peak	Horizontal
*	13971.00	44.09	5.29	49.38	88.20	-38.82	Peak	Horizontal
*	14734.30	44.71	5.68	50.39	88.20	-37.81	Peak	Horizontal
	11276.50	42.71	5.33	48.04	74.00	-25.96	Peak	Vertical
	12150.30	42.90	5.00	47.90	74.00	-26.10	Peak	Vertical
*	13700.70	45.44	4.68	50.12	88.20	-38.08	Peak	Vertical
*	14900.90	46.67	5.76	52.43	88.20	-35.77	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11390.40	41.31	5.47	46.78	74.00	-27.22	Peak	Horizontal
	11742.30	42.84	4.78	47.62	74.00	-26.38	Peak	Horizontal
*	14028.80	44.37	5.44	49.81	88.20	-38.39	Peak	Horizontal
*	14909.40	45.85	5.74	51.59	88.20	-36.61	Peak	Horizontal
	11295.20	41.75	5.41	47.16	74.00	-26.84	Peak	Vertical
	11732.10	42.70	4.76	47.46	74.00	-26.54	Peak	Vertical
*	12922.10	44.73	5.17	49.90	88.20	-38.30	Peak	Vertical
*	14047.50	44.82	5.44	50.26	88.20	-37.94	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11235.70	41.41	5.30	46.71	74.00	-27.29	Peak	Horizontal
	11771.20	44.11	4.72	48.83	74.00	-25.17	Peak	Horizontal
*	13930.20	44.24	5.28	49.52	88.20	-38.68	Peak	Horizontal
*	15110.00	45.29	5.77	51.06	88.20	-37.14	Peak	Horizontal
*	9743.10	40.91	6.10	47.01	88.20	-41.19	Peak	Vertical
	12162.20	42.66	5.07	47.73	74.00	-26.27	Peak	Vertical
*	14066.20	44.62	5.42	50.04	88.20	-38.16	Peak	Vertical
	15994.00	35.35	6.23	41.58	54.00	-12.42	Average	Vertical
	15994.00	45.90	6.23	52.13	74.00	-21.87	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11278.20	41.92	5.32	47.24	74.00	-26.76	Peak	Horizontal
	12522.60	43.43	5.05	48.48	74.00	-25.52	Peak	Horizontal
*	13836.70	45.32	4.93	50.25	88.20	-37.95	Peak	Horizontal
*	15091.30	45.37	5.80	51.17	88.20	-37.03	Peak	Horizontal
	11480.50	41.66	5.40	47.06	74.00	-26.94	Peak	Vertical
	11874.90	42.63	4.97	47.60	74.00	-26.40	Peak	Vertical
*	14091.70	44.75	5.54	50.29	88.20	-37.91	Peak	Vertical
*	15113.40	44.95	5.79	50.74	88.20	-37.46	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11409.10	41.34	5.51	46.85	74.00	-27.15	Peak	Horizontal
	11914.00	44.19	4.90	49.09	74.00	-24.91	Peak	Horizontal
*	13996.50	44.98	5.33	50.31	88.20	-37.89	Peak	Horizontal
*	14875.40	45.95	5.65	51.60	88.20	-36.60	Peak	Horizontal
	11353.00	41.22	5.51	46.73	74.00	-27.27	Peak	Vertical
	12231.90	42.81	4.77	47.58	74.00	-26.42	Peak	Vertical
*	14062.80	45.05	5.43	50.48	88.20	-37.72	Peak	Vertical
*	14950.20	45.26	5.74	51.00	88.20	-37.20	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11157.50	41.68	5.09	46.77	74.00	-27.23	Peak	Horizontal
	12255.70	42.88	4.81	47.69	74.00	-26.31	Peak	Horizontal
*	14118.90	45.22	5.36	50.58	88.20	-37.62	Peak	Horizontal
*	14975.70	45.56	5.72	51.28	88.20	-36.92	Peak	Horizontal
*	10241.20	40.78	5.87	46.65	88.20	-41.55	Peak	Vertical
	11392.10	42.07	5.48	47.55	74.00	-26.45	Peak	Vertical
	12097.60	42.52	5.14	47.66	74.00	-26.34	Peak	Vertical
*	13911.50	44.18	5.14	49.32	88.20	-38.88	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10015.10	40.04	5.89	45.93	88.20	-42.27	Peak	Horizontal
	11009.60	42.17	5.09	47.26	74.00	-26.74	Peak	Horizontal
	12033.00	42.99	5.11	48.10	74.00	-25.90	Peak	Horizontal
*	14135.90	44.95	5.55	50.50	88.20	-37.70	Peak	Horizontal
*	10207.20	39.34	5.93	45.27	88.20	-42.93	Peak	Vertical
	11271.40	41.81	5.37	47.18	74.00	-26.82	Peak	Vertical
	12289.70	43.44	4.96	48.40	74.00	-25.60	Peak	Vertical
*	14028.80	44.01	5.44	49.45	88.20	-38.75	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11516.20	42.46	5.21	47.67	74.00	-26.33	Peak	Horizontal
	12507.30	43.81	4.95	48.76	74.00	-25.24	Peak	Horizontal
*	14057.70	44.62	5.43	50.05	88.20	-38.15	Peak	Horizontal
*	14996.10	46.19	5.81	52.00	88.20	-36.20	Peak	Horizontal
	11259.50	42.03	5.37	47.40	74.00	-26.60	Peak	Vertical
	12104.40	44.23	5.10	49.33	74.00	-24.67	Peak	Vertical
*	13782.30	44.85	4.81	49.66	88.20	-38.54	Peak	Vertical
*	15212.00	45.26	5.96	51.22	88.20	-36.98	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11259.50	41.72	5.37	47.09	74.00	-26.91	Peak	Horizontal
	12356.00	43.47	4.75	48.22	74.00	-25.78	Peak	Horizontal
*	14134.20	44.61	5.53	50.14	88.20	-38.06	Peak	Horizontal
*	14946.80	45.14	5.75	50.89	88.20	-37.31	Peak	Horizontal
	11475.40	41.51	5.43	46.94	74.00	-27.06	Peak	Vertical
	11914.00	43.35	4.90	48.25	74.00	-25.75	Peak	Vertical
*	14052.60	45.33	5.43	50.76	88.20	-37.44	Peak	Vertical
*	14897.50	45.25	5.73	50.98	88.20	-37.22	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10147.70	40.12	5.80	45.92	88.20	-42.28	Peak	Horizontal
	11577.40	42.20	5.18	47.38	74.00	-26.62	Peak	Horizontal
	12298.20	43.27	4.81	48.08	74.00	-25.92	Peak	Horizontal
*	13960.80	44.72	5.14	49.86	88.20	-38.34	Peak	Horizontal
*	10254.80	40.51	5.90	46.41	88.20	-41.79	Peak	Vertical
	11441.40	41.95	5.30	47.25	74.00	-26.75	Peak	Vertical
	12257.40	43.61	4.81	48.42	74.00	-25.58	Peak	Vertical
*	14045.80	44.28	5.44	49.72	88.20	-38.48	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11623.30	42.84	4.99	47.83	74.00	-26.17	Peak	Horizontal
	12378.10	43.25	4.71	47.96	74.00	-26.04	Peak	Horizontal
*	12923.80	43.82	5.17	48.99	88.20	-39.21	Peak	Horizontal
*	14056.00	44.41	5.43	49.84	88.20	-38.36	Peak	Horizontal
*	10205.50	40.12	5.91	46.03	88.20	-42.17	Peak	Vertical
	11332.60	41.42	5.44	46.86	74.00	-27.14	Peak	Vertical
	12257.40	43.62	4.81	48.43	74.00	-25.57	Peak	Vertical
*	13886.00	45.30	5.08	50.38	88.20	-37.82	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9930.10	39.57	5.99	45.56	88.20	-42.64	Peak	Horizontal
	11334.30	41.34	5.44	46.78	74.00	-27.22	Peak	Horizontal
	12043.20	42.30	5.17	47.47	74.00	-26.53	Peak	Horizontal
*	14079.80	44.25	5.44	49.69	88.20	-38.51	Peak	Horizontal
*	9816.20	40.84	6.20	47.04	88.20	-41.16	Peak	Vertical
	11599.50	42.42	5.01	47.43	74.00	-26.57	Peak	Vertical
	12095.90	42.41	5.15	47.56	74.00	-26.44	Peak	Vertical
*	13789.10	45.39	4.78	50.17	88.20	-38.03	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11400.60	42.08	5.53	47.61	74.00	-26.39	Peak	Horizontal
	12235.30	42.80	4.76	47.56	74.00	-26.44	Peak	Horizontal
*	13996.50	43.89	5.33	49.22	88.20	-38.98	Peak	Horizontal
*	14824.40	45.08	5.68	50.76	88.20	-37.44	Peak	Horizontal
	11519.60	42.02	5.18	47.20	74.00	-26.80	Peak	Vertical
	12016.00	42.64	4.99	47.63	74.00	-26.37	Peak	Vertical
*	14027.10	44.70	5.45	50.15	88.20	-38.05	Peak	Vertical
*	14953.60	44.76	5.73	50.49	88.20	-37.71	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11249.30	41.90	5.35	47.25	74.00	-26.75	Peak	Horizontal
	12163.90	42.94	5.08	48.02	74.00	-25.98	Peak	Horizontal
*	12860.90	44.10	5.45	49.55	88.20	-38.65	Peak	Horizontal
*	14198.80	44.61	5.46	50.07	88.20	-38.13	Peak	Horizontal
*	10288.80	40.55	5.80	46.35	88.20	-41.85	Peak	Vertical
	11087.80	42.39	5.04	47.43	74.00	-26.57	Peak	Vertical
	12175.80	44.33	5.08	49.41	74.00	-24.59	Peak	Vertical
*	14010.10	44.32	5.38	49.70	88.20	-38.50	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10137.50	40.57	5.84	46.41	88.20	-41.79	Peak	Horizontal
	11259.50	42.05	5.37	47.42	74.00	-26.58	Peak	Horizontal
	12095.90	42.42	5.15	47.57	74.00	-26.43	Peak	Horizontal
*	14200.50	45.85	5.47	51.32	88.20	-36.88	Peak	Horizontal
	10924.60	41.46	5.15	46.61	74.00	-27.39	Peak	Vertical
	12177.50	43.63	5.08	48.71	74.00	-25.29	Peak	Vertical
*	14103.60	45.02	5.40	50.42	88.20	-37.78	Peak	Vertical
*	14946.80	45.85	5.75	51.60	88.20	-36.60	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11920.80	43.31	4.92	48.23	74.00	-25.77	Peak	Horizontal
	13348.80	45.05	5.09	50.14	74.00	-23.86	Peak	Horizontal
*	14642.50	46.18	5.78	51.96	88.20	-36.24	Peak	Horizontal
*	16825.30	46.63	3.82	50.45	88.20	-37.75	Peak	Horizontal
*	10181.70	40.31	5.86	46.17	88.20	-42.03	Peak	Vertical
	11472.00	42.06	5.42	47.48	74.00	-26.52	Peak	Vertical
	12009.20	43.22	5.03	48.25	74.00	-25.75	Peak	Vertical
*	14008.40	44.71	5.35	50.06	88.20	-38.14	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10479.20	41.70	5.60	47.30	88.20	-40.90	Peak	Horizontal
	11222.10	41.69	5.26	46.95	74.00	-27.05	Peak	Horizontal
	12238.70	43.19	4.76	47.95	74.00	-26.05	Peak	Horizontal
*	14175.00	44.25	5.49	49.74	88.20	-38.46	Peak	Horizontal
	11405.70	42.54	5.54	48.08	74.00	-25.92	Peak	Vertical
	12250.60	43.29	4.79	48.08	74.00	-25.92	Peak	Vertical
*	14124.00	44.15	5.41	49.56	88.20	-38.64	Peak	Vertical
*	14511.60	42.29	5.76	48.05	88.20	-40.15	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11030.00	41.00	5.04	46.04	74.00	-27.96	Peak	Horizontal
	12274.40	43.29	4.85	48.14	74.00	-25.86	Peak	Horizontal
*	13999.90	44.22	5.32	49.54	88.20	-38.66	Peak	Horizontal
*	14805.70	44.88	5.64	50.52	88.20	-37.68	Peak	Horizontal
	11470.30	41.84	5.40	47.24	74.00	-26.76	Peak	Vertical
	12347.50	43.42	4.72	48.14	74.00	-25.86	Peak	Vertical
*	13923.40	44.65	5.32	49.97	88.20	-38.23	Peak	Vertical
*	14957.00	44.97	5.72	50.69	88.20	-37.51	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9819.60	40.08	6.17	46.25	88.20	-41.95	Peak	Horizontal
	11007.90	41.28	5.09	46.37	74.00	-27.63	Peak	Horizontal
	12063.60	42.47	5.10	47.57	74.00	-26.43	Peak	Horizontal
*	14086.60	43.88	5.50	49.38	88.20	-38.82	Peak	Horizontal
*	10263.30	40.29	5.82	46.11	88.20	-42.09	Peak	Vertical
	11261.20	41.11	5.38	46.49	74.00	-27.51	Peak	Vertical
	12012.60	42.47	5.01	47.48	74.00	-26.52	Peak	Vertical
*	14039.00	44.02	5.44	49.46	88.20	-38.74	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11453.30	42.02	5.28	47.30	74.00	-26.70	Peak	Horizontal
	12388.30	43.56	4.70	48.26	74.00	-25.74	Peak	Horizontal
*	14081.50	44.39	5.44	49.83	88.20	-38.37	Peak	Horizontal
*	14802.30	44.85	5.62	50.47	88.20	-37.73	Peak	Horizontal
	11305.40	41.97	5.41	47.38	74.00	-26.62	Peak	Vertical
	12296.50	43.64	4.84	48.48	74.00	-25.52	Peak	Vertical
*	14137.60	44.49	5.57	50.06	88.20	-38.14	Peak	Vertical
*	14608.50	45.03	5.72	50.75	88.20	-37.45	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11499.20	41.79	5.29	47.08	74.00	-26.92	Peak	Horizontal
	11958.20	42.55	5.18	47.73	74.00	-26.27	Peak	Horizontal
*	14105.30	44.40	5.36	49.76	88.20	-38.44	Peak	Horizontal
*	15110.00	45.22	5.77	50.99	88.20	-37.21	Peak	Horizontal
	11330.90	41.41	5.43	46.84	74.00	-27.16	Peak	Vertical
	12133.30	41.96	4.96	46.92	74.00	-27.08	Peak	Vertical
*	14183.50	44.57	5.47	50.04	88.20	-38.16	Peak	Vertical
*	14676.50	45.05	5.63	50.68	88.20	-37.52	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11024.90	40.53	5.06	45.59	74.00	-28.41	Peak	Horizontal
	12172.40	40.81	5.10	45.91	74.00	-28.09	Peak	Horizontal
*	14020.30	42.03	5.46	47.49	88.20	-40.71	Peak	Horizontal
*	14873.70	45.29	5.65	50.94	88.20	-37.26	Peak	Horizontal
	11390.40	41.21	5.47	46.68	74.00	-27.32	Peak	Vertical
	12157.10	43.00	5.03	48.03	74.00	-25.97	Peak	Vertical
*	14163.10	44.47	5.55	50.02	88.20	-38.18	Peak	Vertical
*	14863.50	45.06	5.58	50.64	88.20	-37.56	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11385.30	41.11	5.45	46.56	74.00	-27.44	Peak	Horizontal
	12356.00	43.14	4.75	47.89	74.00	-26.11	Peak	Horizontal
*	13835.00	45.02	4.93	49.95	88.20	-38.25	Peak	Horizontal
*	14941.70	45.68	5.73	51.41	88.20	-36.79	Peak	Horizontal
*	9938.60	40.45	6.00	46.45	88.20	-41.75	Peak	Vertical
	11269.70	41.16	5.38	46.54	74.00	-27.46	Peak	Vertical
	12048.30	43.06	5.20	48.26	74.00	-25.74	Peak	Vertical
*	14139.30	44.19	5.58	49.77	88.20	-38.43	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11070.80	41.30	5.11	46.41	74.00	-27.59	Peak	Horizontal
	12617.80	44.06	5.37	49.43	74.00	-24.57	Peak	Horizontal
*	14032.20	44.47	5.44	49.91	88.20	-38.29	Peak	Horizontal
*	14962.10	44.83	5.71	50.54	88.20	-37.66	Peak	Horizontal
	11477.10	42.06	5.43	47.49	74.00	-26.51	Peak	Vertical
	12272.70	43.12	4.84	47.96	74.00	-26.04	Peak	Vertical
*	14088.30	44.36	5.53	49.89	88.20	-38.31	Peak	Vertical
*	14950.20	44.42	5.74	50.16	88.20	-38.04	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10253.10	40.10	5.90	46.00	88.20	-42.20	Peak	Horizontal
	11336.00	41.87	5.45	47.32	74.00	-26.68	Peak	Horizontal
	12055.10	42.19	5.17	47.36	74.00	-26.64	Peak	Horizontal
*	14137.60	44.97	5.57	50.54	88.20	-37.66	Peak	Horizontal
	11351.30	41.68	5.51	47.19	74.00	-26.81	Peak	Vertical
	11958.20	42.34	5.18	47.52	74.00	-26.48	Peak	Vertical
*	14105.30	44.76	5.36	50.12	88.20	-38.08	Peak	Vertical
*	15110.00	41.22	5.77	46.99	88.20	-41.21	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11312.20	42.14	5.38	47.52	74.00	-26.48	Peak	Horizontal
	12005.80	42.20	5.05	47.25	74.00	-26.75	Peak	Horizontal
*	13790.80	45.90	4.77	50.67	88.20	-37.53	Peak	Horizontal
*	14951.90	44.68	5.73	50.41	88.20	-37.79	Peak	Horizontal
	11378.50	41.92	5.47	47.39	74.00	-26.61	Peak	Vertical
	12282.90	42.52	4.94	47.46	74.00	-26.54	Peak	Vertical
*	14027.10	44.90	5.45	50.35	88.20	-37.85	Peak	Vertical
*	15220.50	46.03	5.89	51.92	88.20	-36.28	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11529.80	42.31	5.13	47.44	74.00	-26.56	Peak	Horizontal
	12051.70	44.38	5.20	49.58	74.00	-24.42	Peak	Horizontal
*	14062.80	44.71	5.43	50.14	88.20	-38.06	Peak	Horizontal
*	14974.00	45.07	5.72	50.79	88.20	-37.41	Peak	Horizontal
	11422.70	41.93	5.39	47.32	74.00	-26.68	Peak	Vertical
	12014.30	43.93	5.00	48.93	74.00	-25.07	Peak	Vertical
*	14146.10	44.77	5.60	50.37	88.20	-37.83	Peak	Vertical
*	14807.40	45.19	5.65	50.84	88.20	-37.36	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11948.00	41.83	5.14	46.97	74.00	-27.03	Peak	Horizontal
*	14098.50	44.09	5.48	49.57	88.20	-38.63	Peak	Horizontal
*	15052.20	45.66	5.71	51.37	88.20	-36.83	Peak	Horizontal
	17960.90	38.29	5.02	43.31	54.00	-10.69	Average	Horizontal
	17960.90	47.96	5.02	52.98	74.00	-21.02	Peak	Horizontal
	10933.10	40.91	5.11	46.02	74.00	-27.98	Peak	Vertical
	11823.90	43.20	4.92	48.12	74.00	-25.88	Peak	Vertical
*	13976.10	44.49	5.32	49.81	88.20	-38.39	Peak	Vertical
*	14958.70	44.55	5.72	50.27	88.20	-37.93	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11448.20	42.39	5.29	47.68	74.00	-26.32	Peak	Horizontal
	12407.00	43.56	4.67	48.23	74.00	-25.77	Peak	Horizontal
*	13920.00	43.75	5.33	49.08	88.20	-39.12	Peak	Horizontal
*	14997.80	44.65	5.81	50.46	88.20	-37.74	Peak	Horizontal
	11230.60	41.44	5.28	46.72	74.00	-27.28	Peak	Vertical
	12050.00	42.46	5.21	47.67	74.00	-26.33	Peak	Vertical
*	14011.80	44.69	5.39	50.08	88.20	-38.12	Peak	Vertical
*	14661.20	46.54	5.72	52.26	88.20	-35.94	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11448.20	41.71	5.29	47.00	74.00	-27.00	Peak	Horizontal
	12136.70	44.32	4.96	49.28	74.00	-24.72	Peak	Horizontal
*	14020.30	43.54	5.46	49.00	88.20	-39.20	Peak	Horizontal
*	15028.40	46.11	5.66	51.77	88.20	-36.43	Peak	Horizontal
	11453.30	42.37	5.28	47.65	74.00	-26.35	Peak	Vertical
	12488.60	43.98	4.92	48.90	74.00	-25.10	Peak	Vertical
*	14180.10	43.90	5.48	49.38	88.20	-38.82	Peak	Vertical
*	14938.30	45.18	5.69	50.87	88.20	-37.33	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11446.50	42.00	5.29	47.29	74.00	-26.71	Peak	Horizontal
	12184.30	43.17	5.03	48.20	74.00	-25.80	Peak	Horizontal
*	14023.70	44.31	5.46	49.77	88.20	-38.43	Peak	Horizontal
*	15067.50	44.87	5.79	50.66	88.20	-37.54	Peak	Horizontal
*	10166.40	41.14	5.95	47.09	88.20	-41.11	Peak	Vertical
	11575.70	42.13	5.19	47.32	74.00	-26.68	Peak	Vertical
	12265.90	43.84	4.82	48.66	74.00	-25.34	Peak	Vertical
*	14273.60	45.15	5.60	50.75	88.20	-37.45	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9809.40	39.74	6.26	46.00	88.20	-42.20	Peak	Horizontal
	11035.10	42.19	5.05	47.24	74.00	-26.76	Peak	Horizontal
	11820.50	42.73	4.88	47.61	74.00	-26.39	Peak	Horizontal
*	13914.90	45.12	5.21	50.33	88.20	-37.87	Peak	Horizontal
	11404.00	41.20	5.55	46.75	74.00	-27.25	Peak	Vertical
	12437.60	43.48	4.75	48.23	74.00	-25.77	Peak	Vertical
*	14263.40	46.45	5.57	52.02	88.20	-36.18	Peak	Vertical
*	14632.30	44.93	5.73	50.66	88.20	-37.54	Peak	Vertical
Note 1: " * " is not in restricted band. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11404.00	41.30	5.55	46.85	74.00	-27.15	Peak	Horizontal
	12430.80	43.86	4.73	48.59	74.00	-25.41	Peak	Horizontal
*	13835.00	45.62	4.93	50.55	88.20	-37.65	Peak	Horizontal
*	14883.90	45.72	5.66	51.38	88.20	-36.82	Peak	Horizontal
	11414.20	41.63	5.46	47.09	74.00	-26.91	Peak	Vertical
	12036.40	43.62	5.13	48.75	74.00	-25.25	Peak	Vertical
*	13991.40	46.88	5.35	52.23	88.20	-35.97	Peak	Vertical
*	14924.70	46.38	5.52	51.90	88.20	-36.30	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT320-1	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11597.80	42.17	5.03	47.20	74.00	-26.80	Peak	Horizontal
	12233.60	44.10	4.76	48.86	74.00	-25.14	Peak	Horizontal
*	14084.90	44.61	5.48	50.09	88.20	-38.11	Peak	Horizontal
*	14737.70	45.26	5.67	50.93	88.20	-37.27	Peak	Horizontal
	11108.20	42.15	5.04	47.19	74.00	-26.81	Peak	Vertical
	12180.90	44.72	5.05	49.77	74.00	-24.23	Peak	Vertical
*	13894.50	45.12	5.01	50.13	88.20	-38.07	Peak	Vertical
*	14934.90	45.04	5.64	50.68	88.20	-37.52	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT320-1	Test Channel	95
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11631.80	42.47	4.95	47.42	74.00	-26.58	Peak	Horizontal
	12245.50	42.91	4.77	47.68	74.00	-26.32	Peak	Horizontal
*	14049.20	45.27	5.44	50.71	88.20	-37.49	Peak	Horizontal
*	14647.60	45.42	5.81	51.23	88.20	-36.97	Peak	Horizontal
*	10215.70	40.46	6.01	46.47	88.20	-41.73	Peak	Vertical
	11407.40	41.65	5.52	47.17	74.00	-26.83	Peak	Vertical
	11931.00	42.76	4.95	47.71	74.00	-26.29	Peak	Vertical
*	14253.20	44.71	5.57	50.28	88.20	-37.92	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT320-1	Test Channel	159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11381.90	41.08	5.46	46.54	74.00	-27.46	Peak	Horizontal
	12000.70	43.10	5.07	48.17	74.00	-25.83	Peak	Horizontal
*	14008.40	44.77	5.35	50.12	88.20	-38.08	Peak	Horizontal
*	14926.40	45.07	5.53	50.60	88.20	-37.60	Peak	Horizontal
	11468.60	42.03	5.38	47.41	74.00	-26.59	Peak	Vertical
	12352.60	43.75	4.74	48.49	74.00	-25.51	Peak	Vertical
*	13889.40	45.33	5.05	50.38	88.20	-37.82	Peak	Vertical
*	15087.90	44.93	5.83	50.76	88.20	-37.44	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT320-2	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11591.00	41.85	5.10	46.95	74.00	-27.05	Peak	Horizontal
*	13969.30	45.10	5.27	50.37	88.20	-37.83	Peak	Horizontal
*	15076.00	44.94	5.91	50.85	88.20	-37.35	Peak	Horizontal
	16050.10	44.23	6.03	50.26	74.00	-23.74	Peak	Horizontal
	11132.00	41.59	5.20	46.79	74.00	-27.21	Peak	Vertical
	12357.70	42.88	4.75	47.63	74.00	-26.37	Peak	Vertical
*	14176.70	44.69	5.49	50.18	88.20	-38.02	Peak	Vertical
*	14902.60	44.78	5.77	50.55	88.20	-37.65	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT320-2	Test Channel	127
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11453.30	41.99	5.28	47.27	74.00	-26.73	Peak	Horizontal
	12486.90	43.15	4.89	48.04	74.00	-25.96	Peak	Horizontal
*	13977.80	45.87	5.33	51.20	88.20	-37.00	Peak	Horizontal
*	15082.80	44.84	5.86	50.70	88.20	-37.50	Peak	Horizontal
*	10344.90	40.06	5.80	45.86	88.20	-42.34	Peak	Vertical
	11376.80	41.09	5.47	46.56	74.00	-27.44	Peak	Vertical
	11958.20	42.62	5.18	47.80	74.00	-26.20	Peak	Vertical
*	14084.90	44.81	5.48	50.29	88.20	-37.91	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Wi-Fi 7 DeskPod AP	Test Engineer	Bob Zhang
Test Site	WJ-AC2	Test Date	2025-03-17
Test Mode	802.11be-EHT320-2	Test Channel	191
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11023.20	41.39	5.07	46.46	74.00	-27.54	Peak	Horizontal
	12503.90	43.50	4.96	48.46	74.00	-25.54	Peak	Horizontal
*	13722.80	44.60	4.57	49.17	88.20	-39.03	Peak	Horizontal
*	14858.40	45.07	5.54	50.61	88.20	-37.59	Peak	Horizontal
	11398.90	41.17	5.52	46.69	74.00	-27.31	Peak	Vertical
	11970.10	41.80	5.18	46.98	74.00	-27.02	Peak	Vertical
*	14054.30	44.80	5.43	50.23	88.20	-37.97	Peak	Vertical
*	14945.10	46.32	5.75	52.07	88.20	-36.13	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-03-18
Temperature	20.1 °C	Humidity	36.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

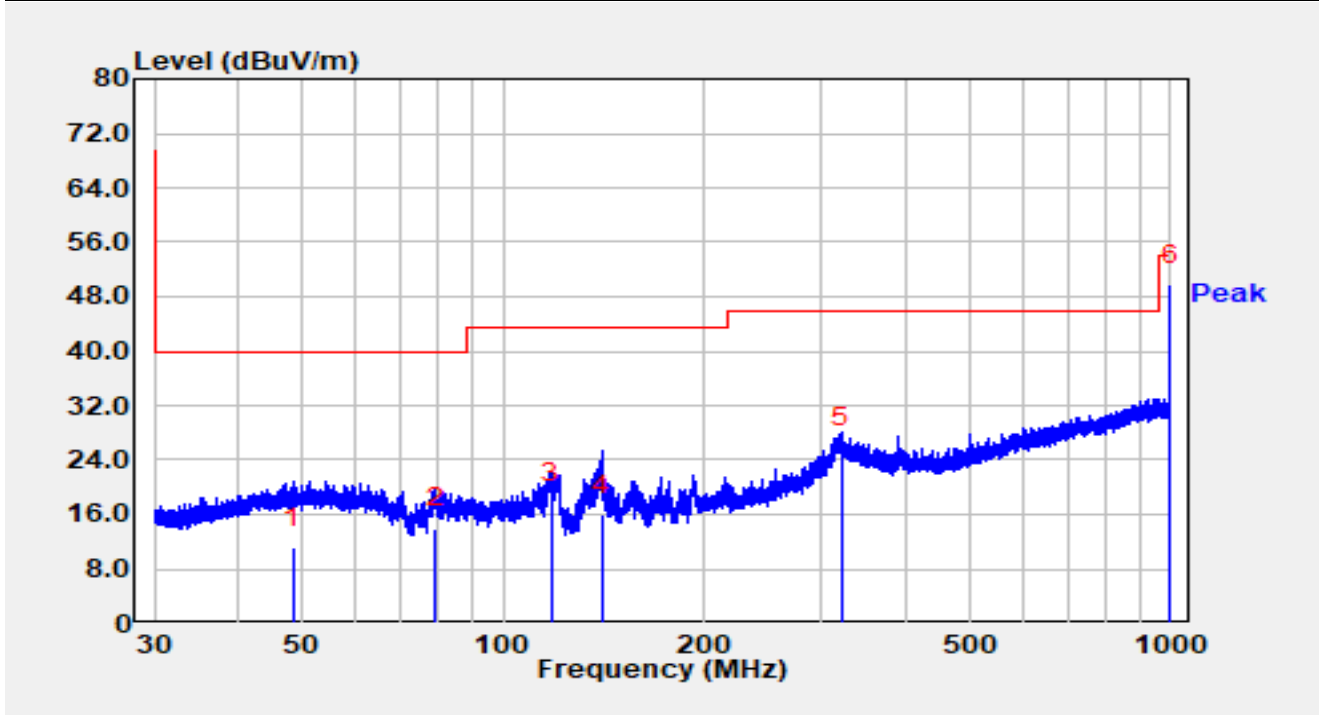


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		48.349	-8.60	19.69	11.09	-28.91	40.00	QP
2		79.326	0.40	13.63	14.03	-25.97	40.00	QP
3		118.228	1.30	16.29	17.59	-25.91	43.50	QP
4		140.786	1.80	14.07	15.87	-27.63	43.50	QP
5		321.963	4.60	21.19	25.79	-20.21	46.00	QP
6	*	1000.000	18.10	31.61	49.71	-4.29	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC1	Test Date	2025-03-18
Temperature	20.1 °C	Humidity	36.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

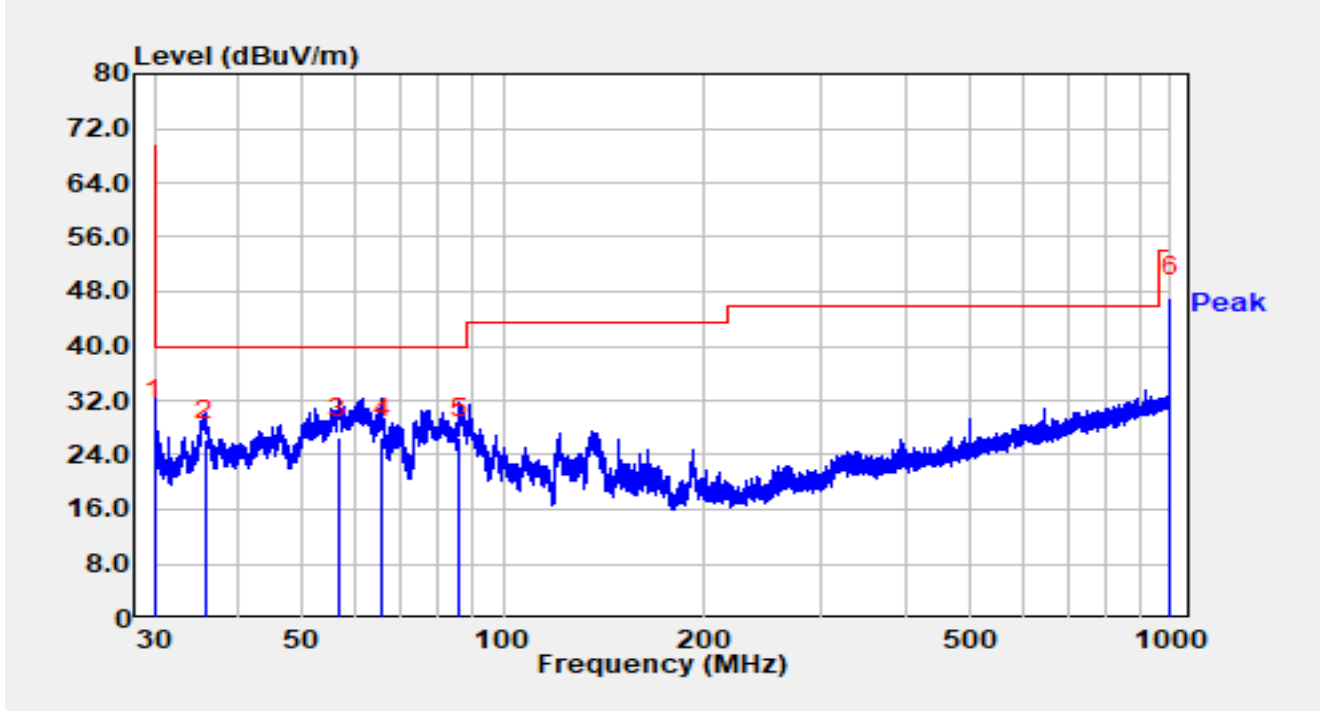


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		30.011	12.40	16.77	29.17	-10.83	40.00	QP
2		35.686	8.80	17.32	26.12	-13.88	40.00	QP
3		56.732	7.80	18.73	26.53	-13.47	40.00	QP
4		65.734	9.40	17.14	26.54	-13.46	40.00	QP
5		86.019	11.60	14.95	26.55	-13.45	40.00	QP
6	*	1000.000	15.60	31.61	47.21	-6.79	54.00	QP

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.9 Radiated Restricted Band Edge Test Result

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 5955MHz		

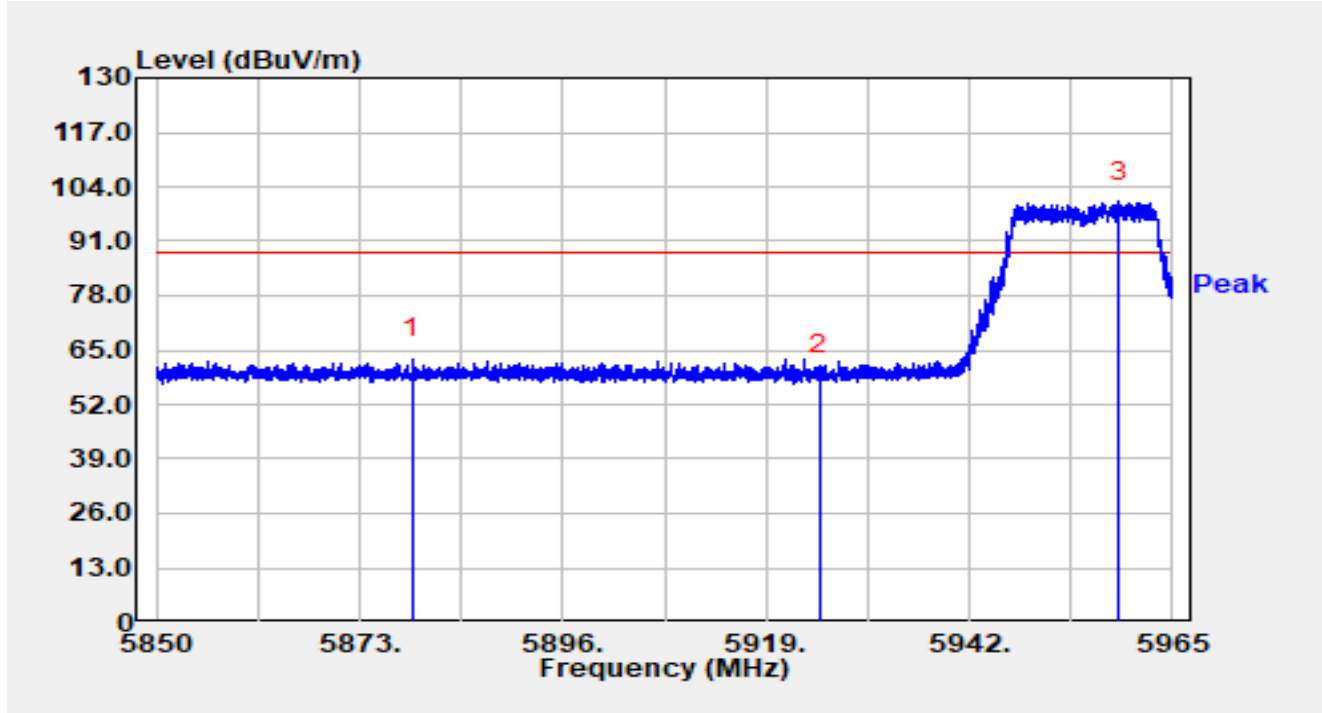


No	Mark	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector
1	*	5878.968	45.47	17.40	62.87	-25.33	88.20	Peak
2		5925.000	41.95	17.36	59.32	-28.88	88.20	Peak
3		5958.905	83.01	17.46	100.47	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBuV/m) = Reading (dBuV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 5955MHz		

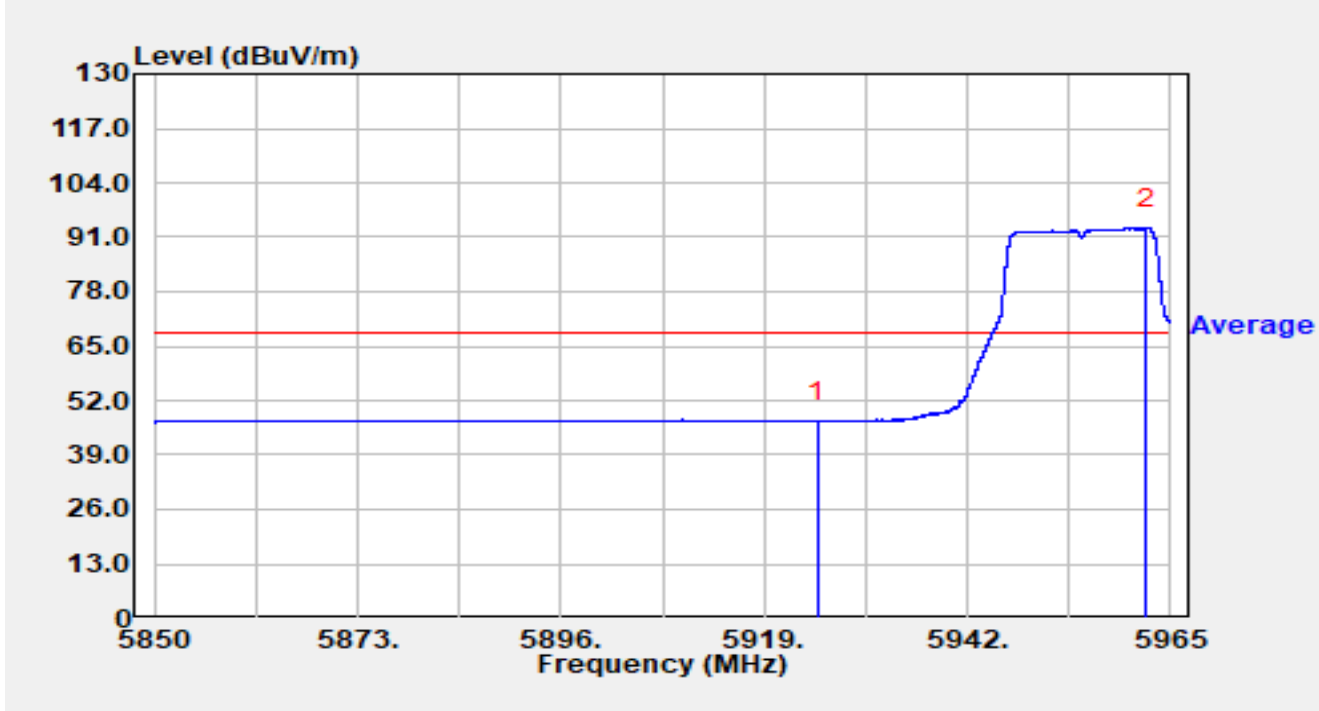


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	29.71	17.36	47.08	-21.12	68.20	Average
2		5962.297	75.73	17.47	93.20	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 5955MHz		

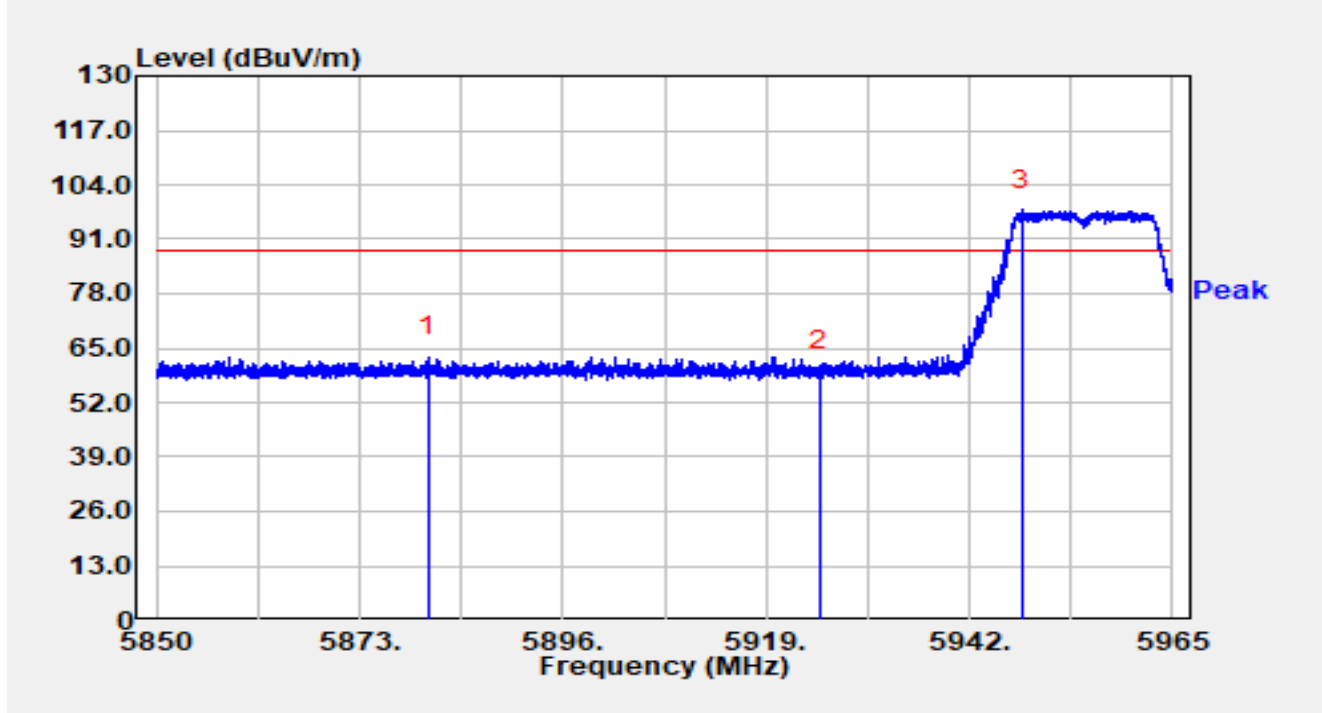


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5880.705	45.56	17.40	62.96	-25.24	88.20	Peak
2		5925.000	42.11	17.36	59.48	-28.72	88.20	Peak
3		5947.980	80.52	17.45	97.97	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 5955MHz		

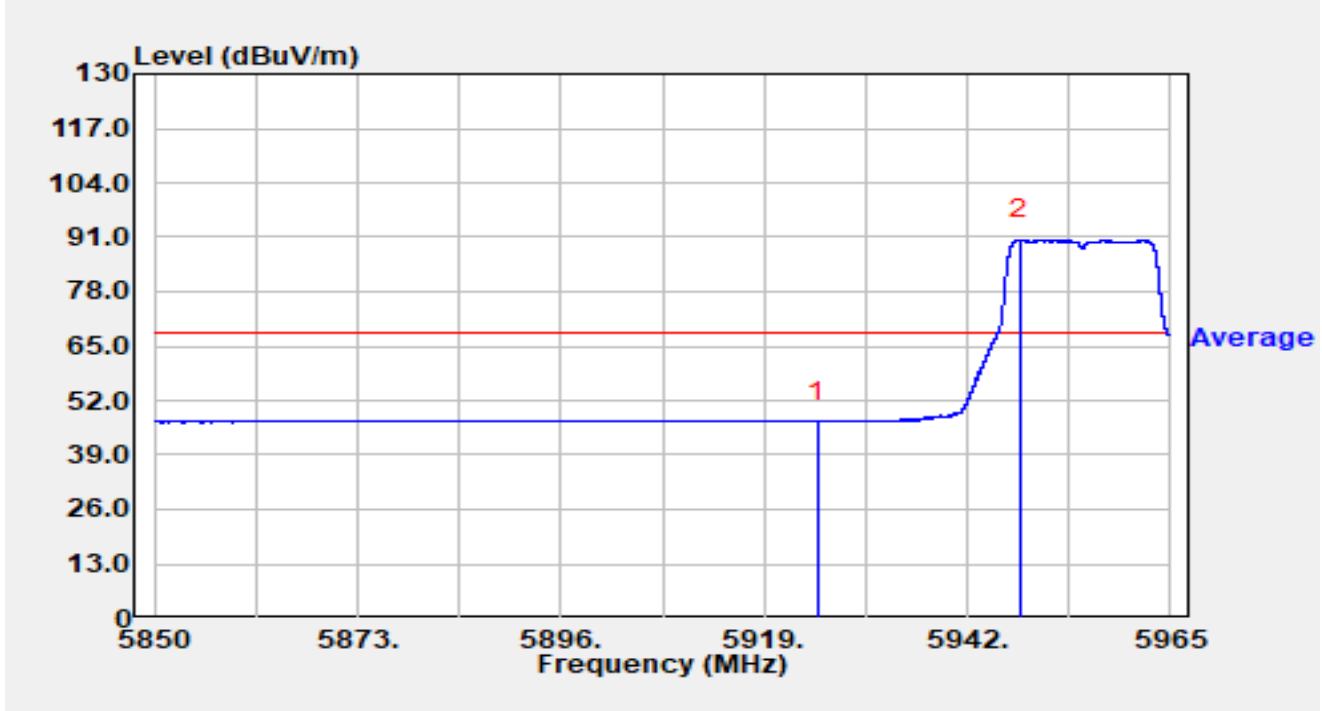


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	29.63	17.36	46.99	-21.21	68.20	Average
2		5947.911	72.88	17.45	90.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 7095MHz		

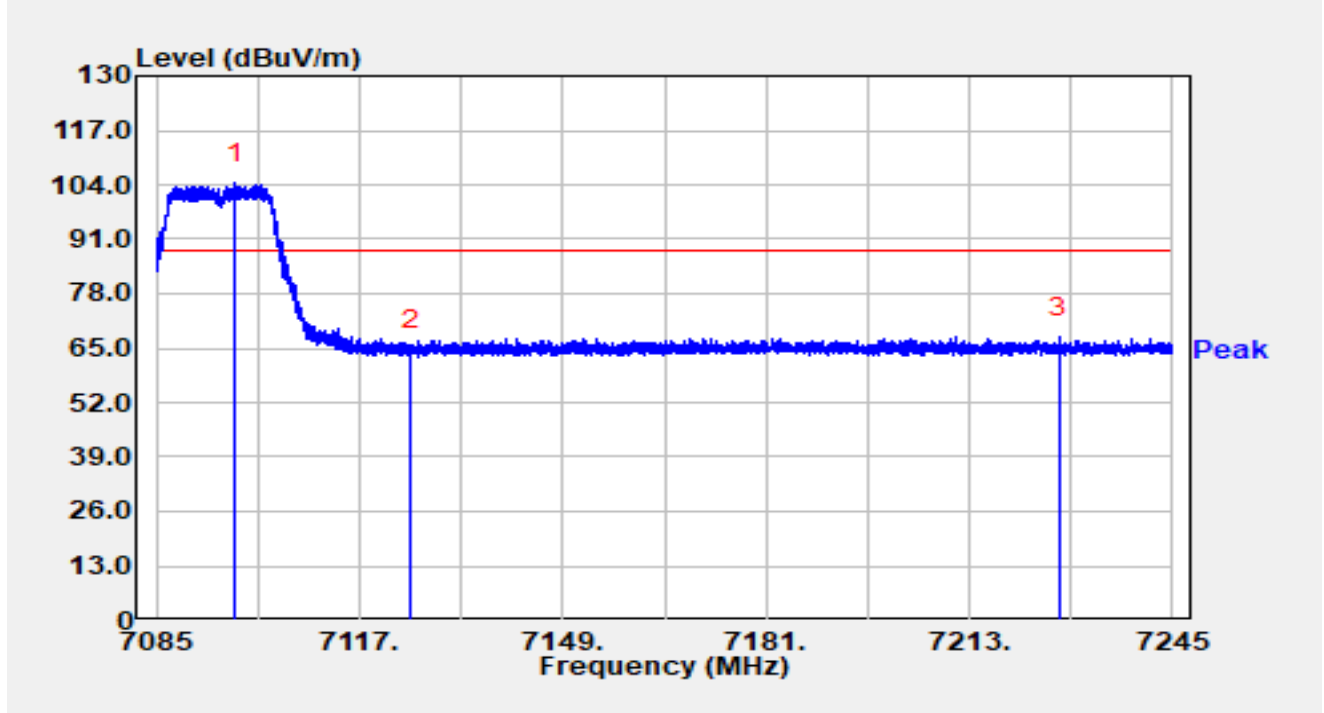


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.368	83.76	20.50	104.26	N/A	N/A	Peak
2		7125.000	44.17	20.42	64.59	-23.61	88.20	Peak
3	*	7227.096	47.06	20.59	67.65	-20.55	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 7095MHz		

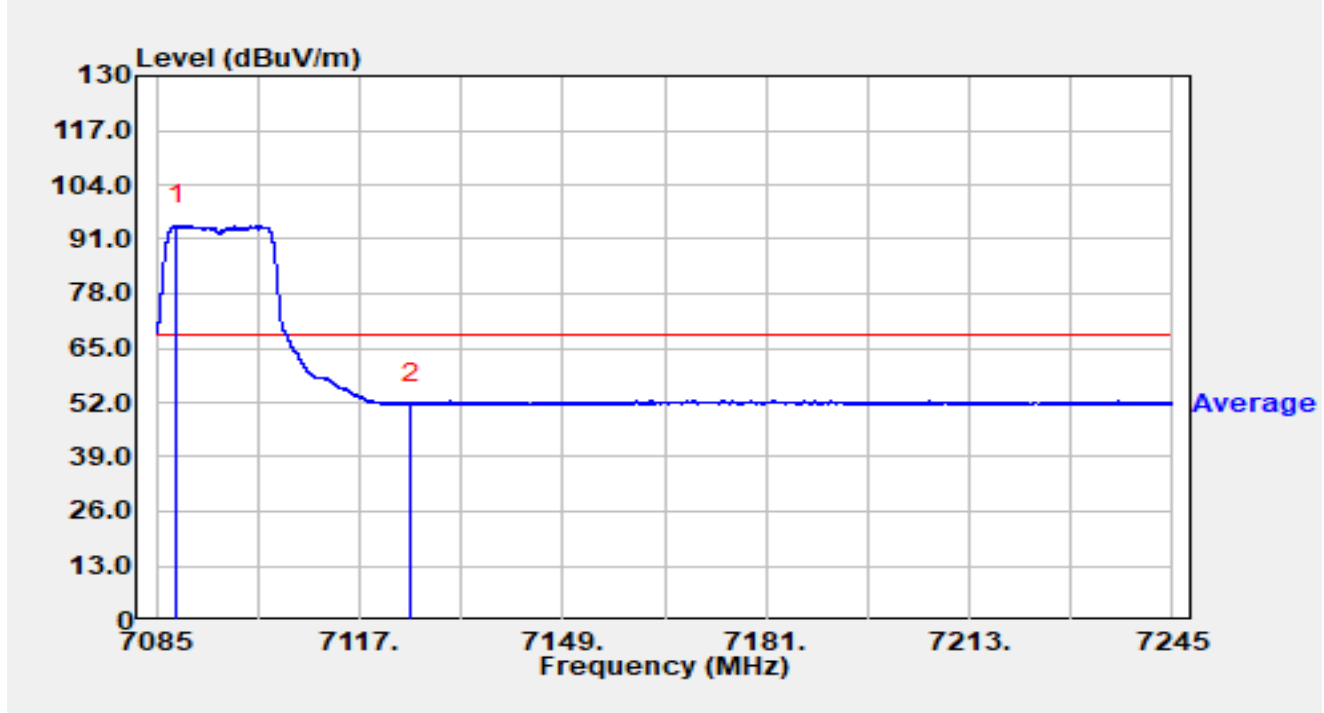


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7088.136	73.87	20.49	94.35	N/A	N/A	Average
2	*	7125.000	31.36	20.42	51.78	-16.42	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 7095MHz		

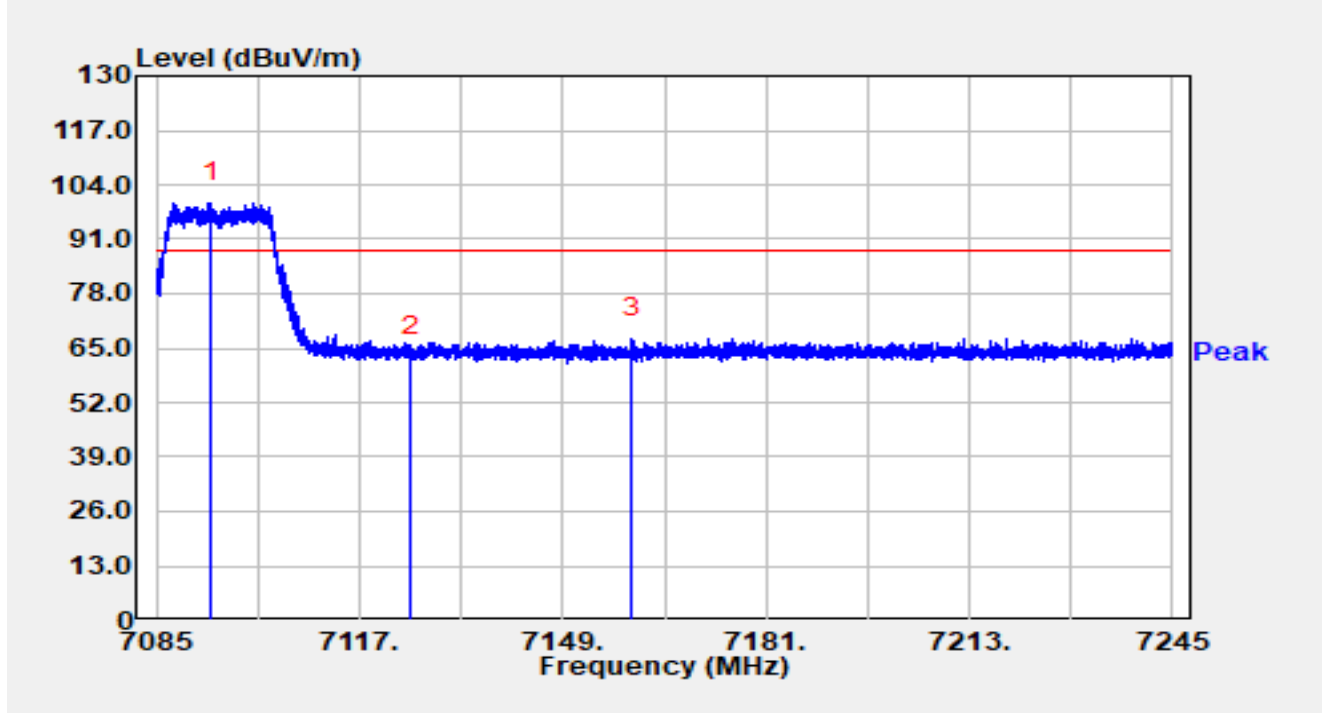


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7093.704	79.18	20.50	99.68	N/A	N/A	Peak
2		7125.000	42.45	20.42	62.87	-25.33	88.20	Peak
3	*	7159.768	46.86	20.51	67.37	-20.83	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a (SISO) at 7095MHz		

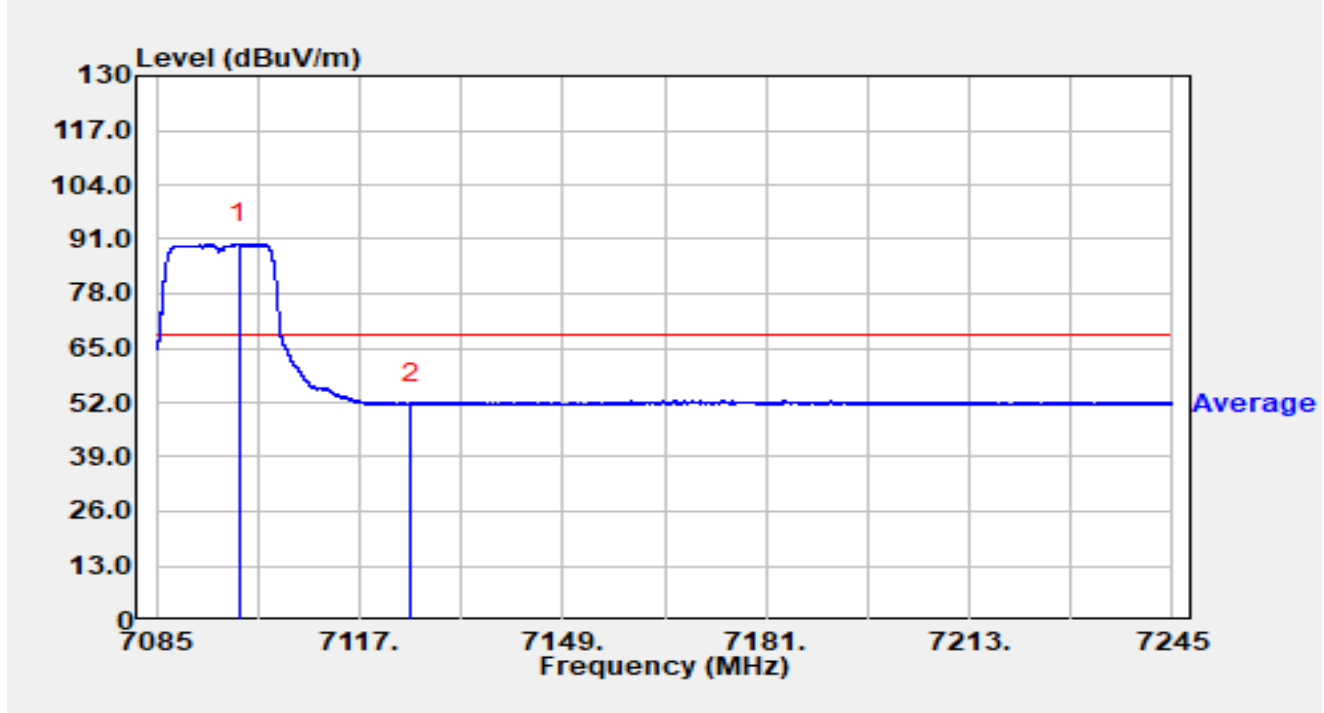


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.944	69.39	20.50	89.88	N/A	N/A	Average
2	*	7125.000	31.39	20.42	51.82	-16.38	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

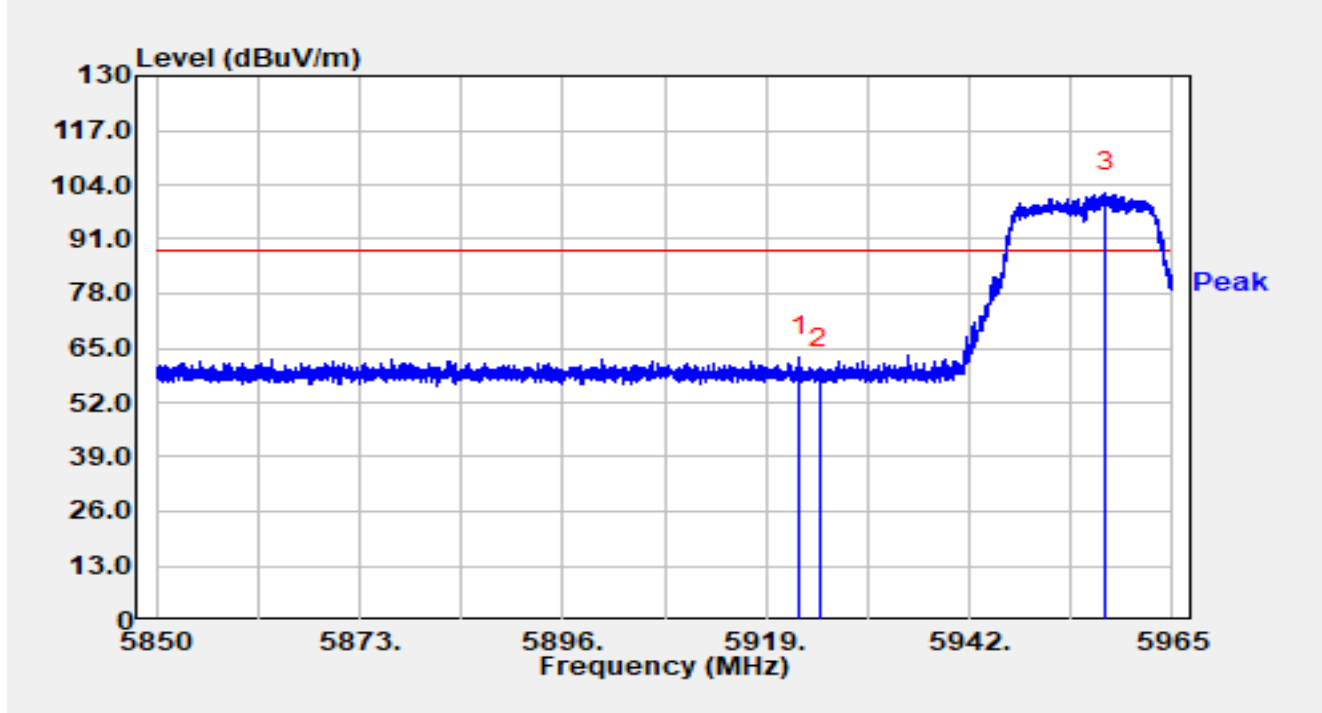


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.772	45.60	17.36	62.96	-25.24	88.20	Peak
2		5925.003	42.86	17.36	60.22	-27.98	88.20	Peak
3		5957.444	84.71	17.46	102.17	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

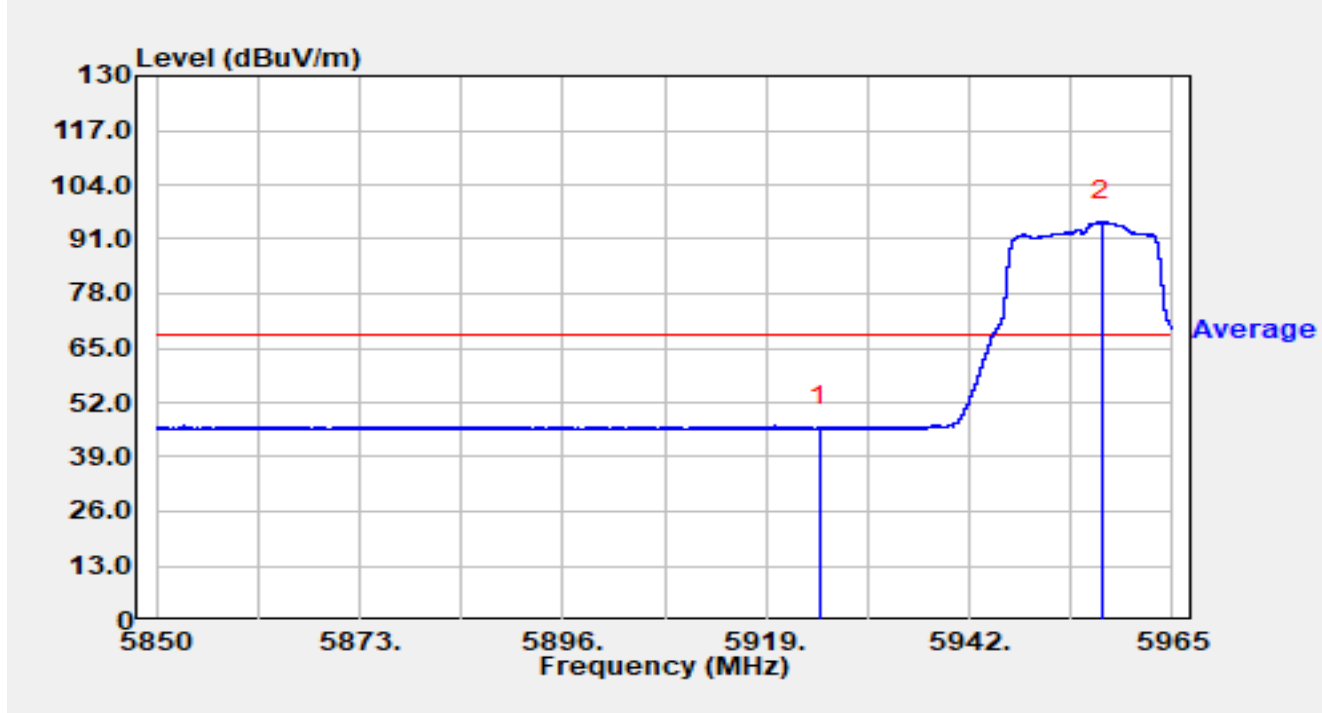


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	28.84	17.36	46.20	-22.00	68.20	Average
2		5956.927	77.75	17.46	95.21	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

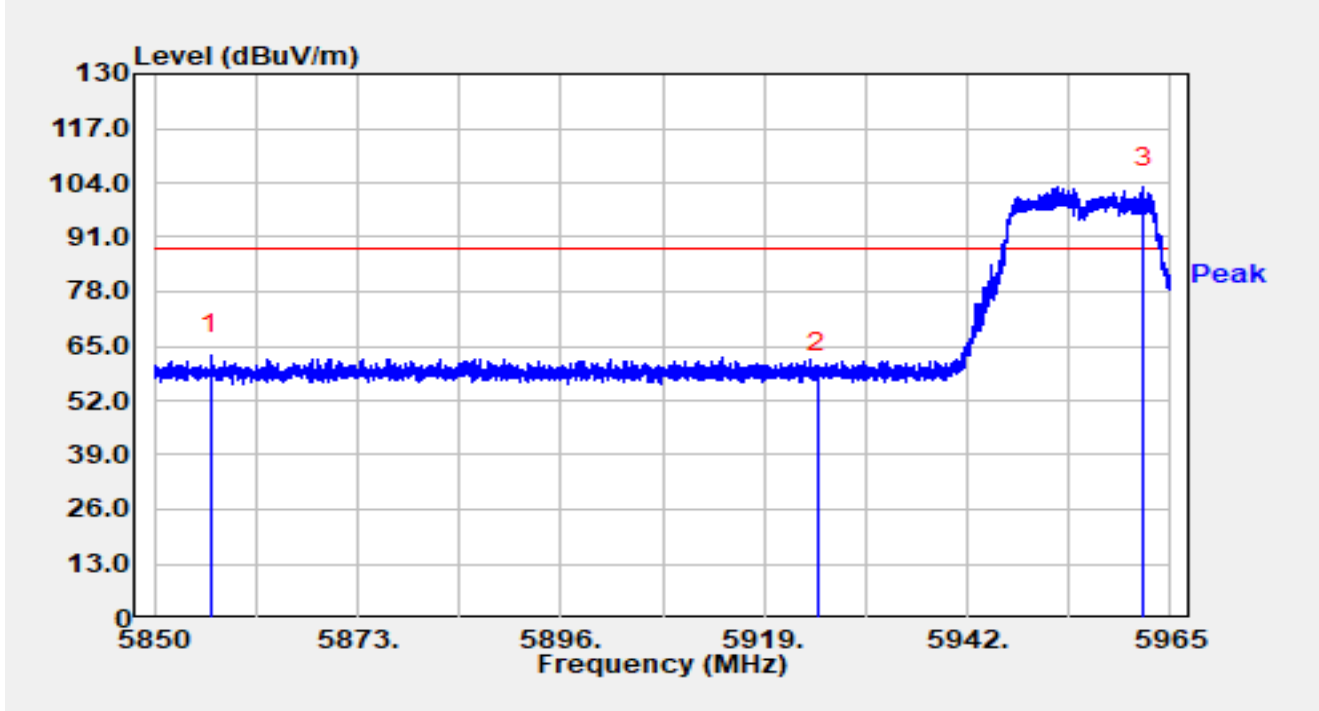


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5856.359	45.57	17.33	62.90	-25.30	88.20	Peak
2		5925.000	41.35	17.36	58.72	-29.48	88.20	Peak
3		5961.907	85.33	17.47	102.79	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

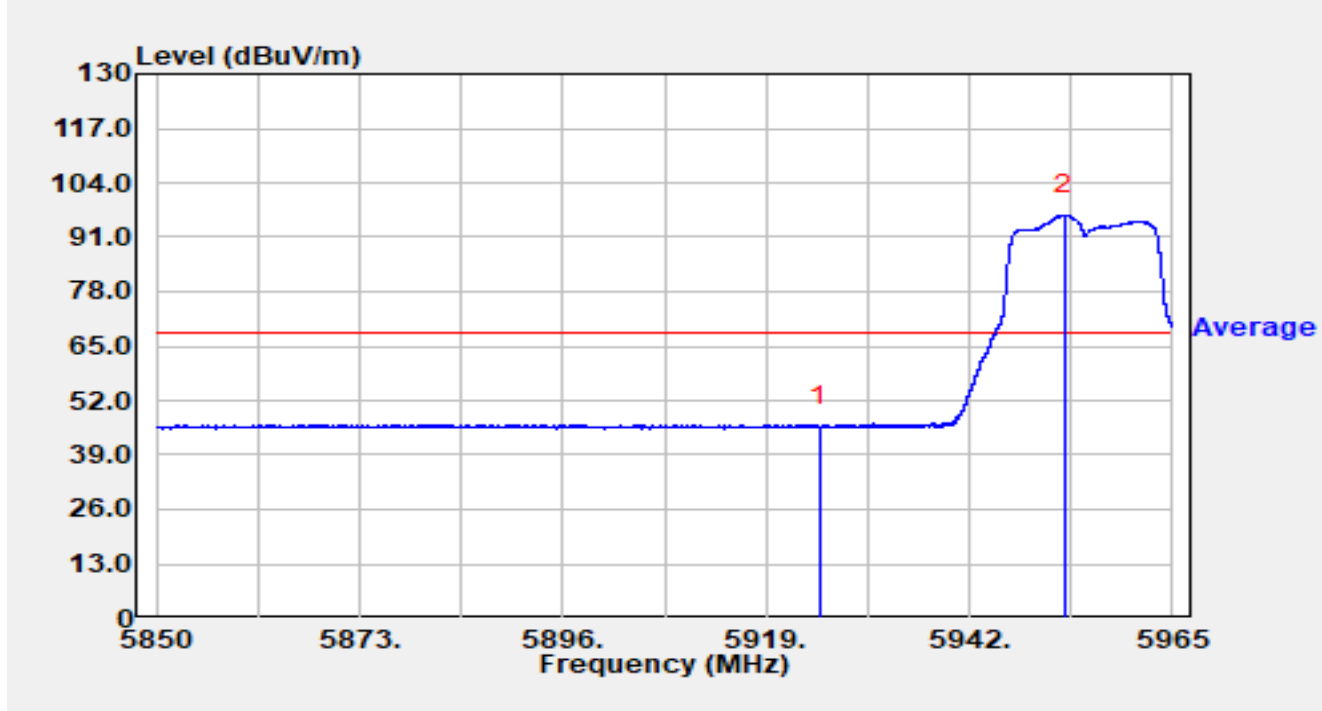


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5925.000	28.30	17.36	45.66	-22.54	68.20	Average
2		5952.810	78.78	17.45	96.24	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

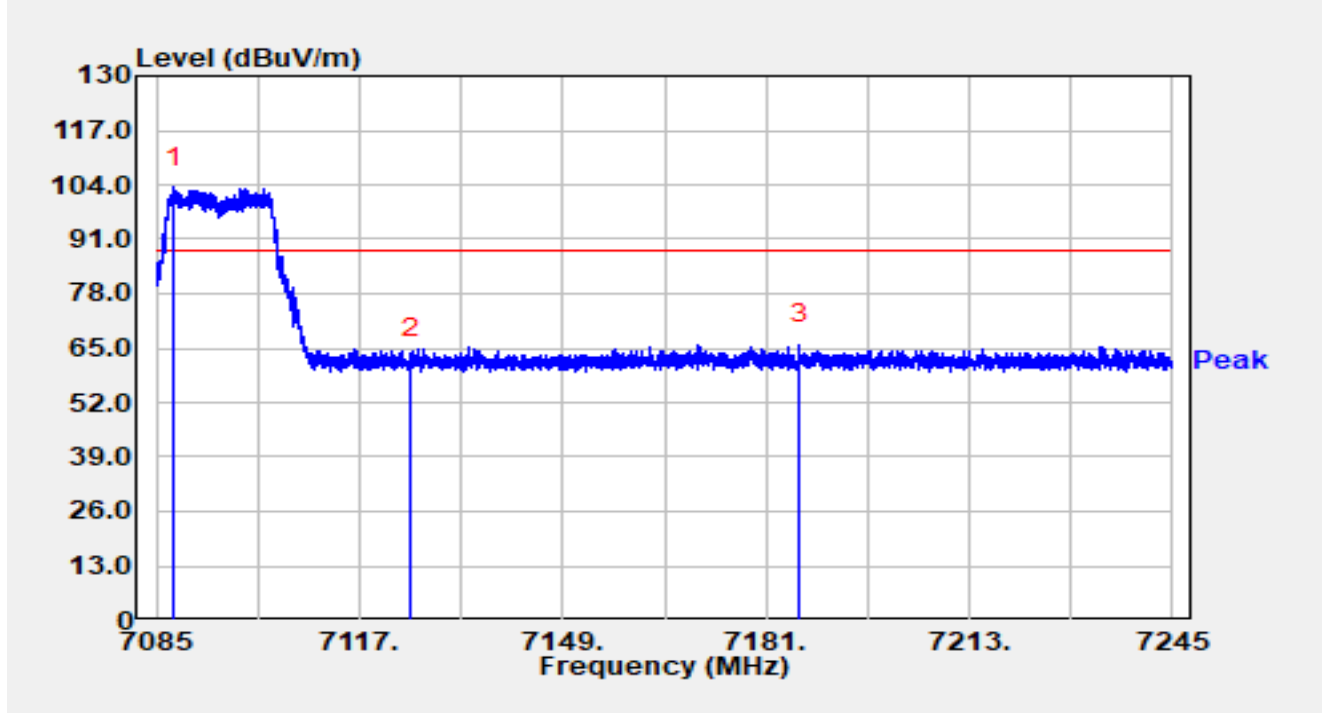


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.672	82.83	20.49	103.31	N/A	N/A	Peak
2		7125.000	42.02	20.42	62.44	-25.76	88.20	Peak
3	*	7186.296	45.20	20.69	65.89	-22.31	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

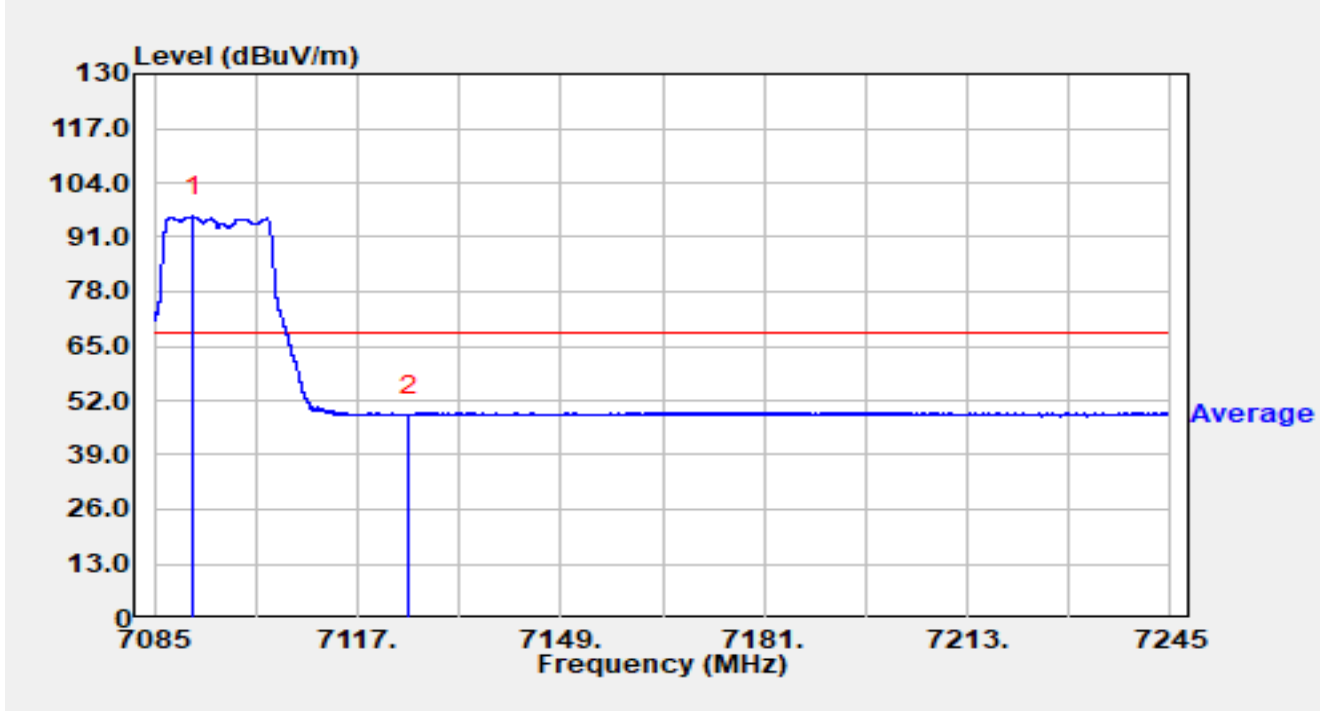


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.128	75.43	20.50	95.92	N/A	N/A	Average
2	*	7125.000	28.09	20.42	48.52	-19.68	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

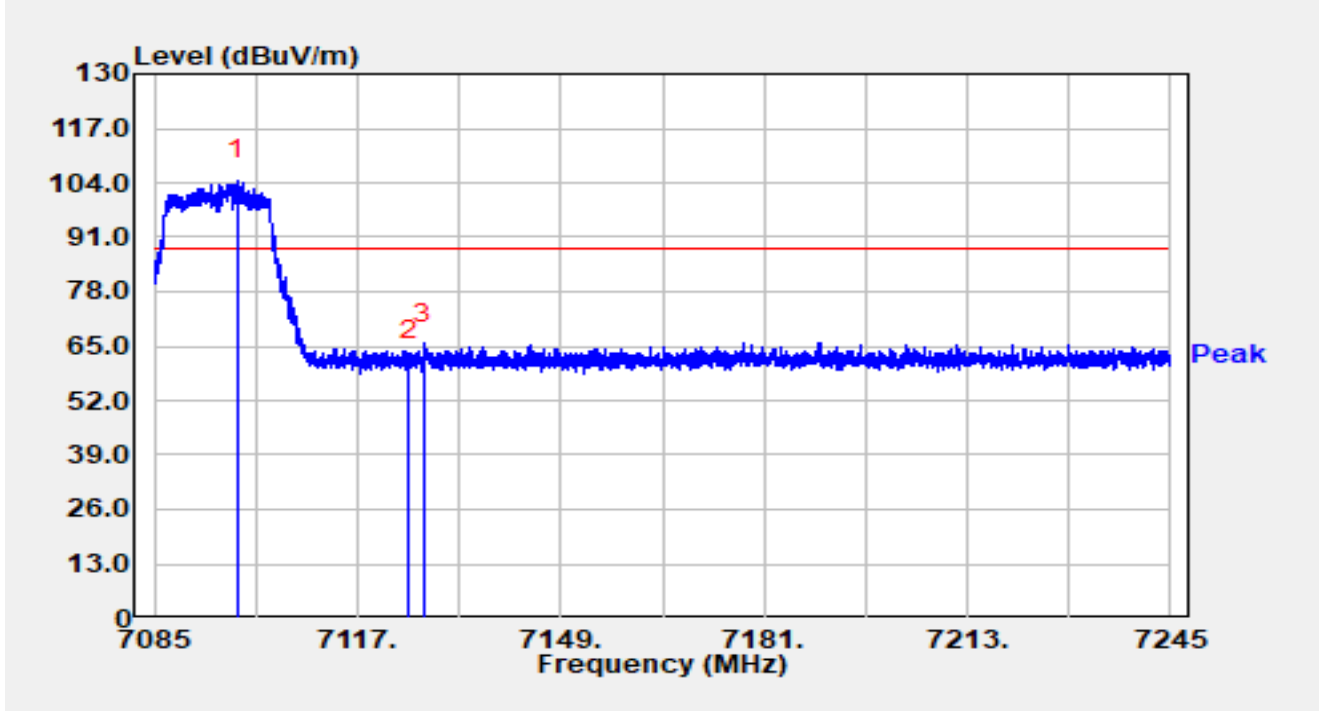


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.992	84.09	20.50	104.59	N/A	N/A	Peak
2		7125.000	40.91	20.42	61.34	-26.86	88.20	Peak
3	*	7127.384	45.14	20.44	65.58	-22.62	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

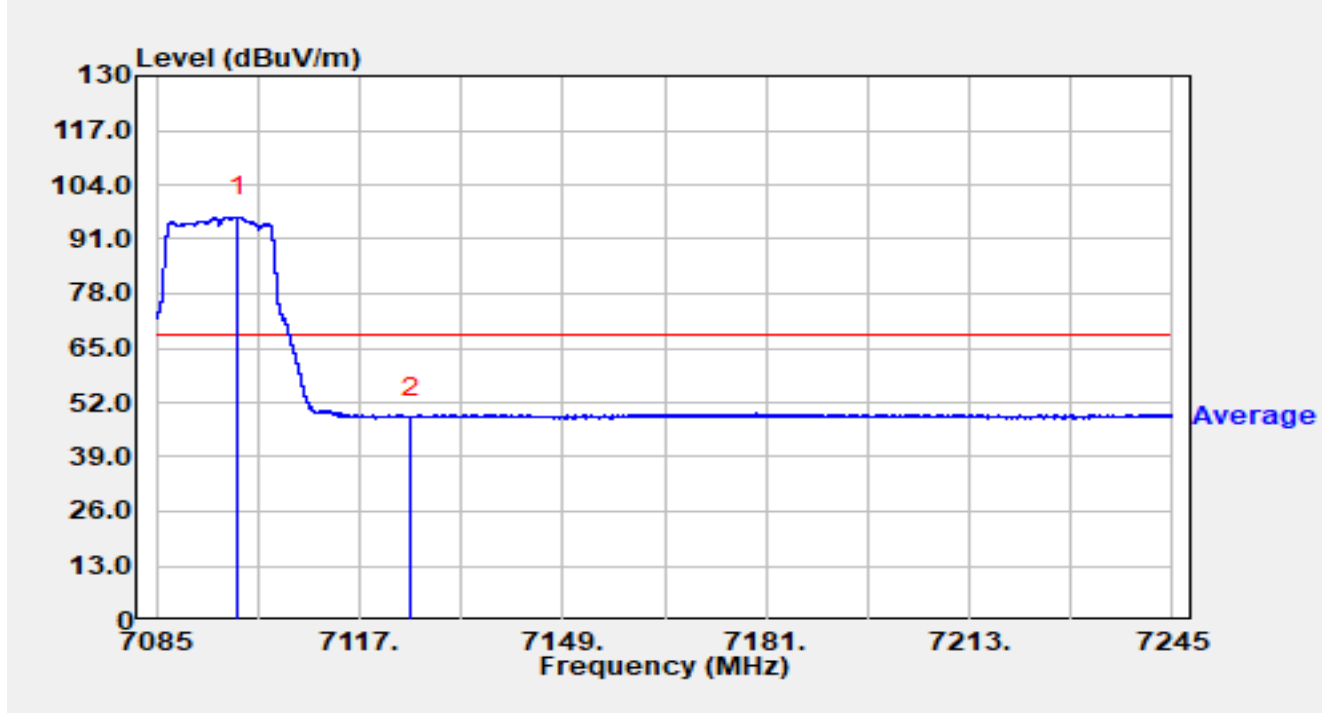


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.896	75.84	20.50	96.33	N/A	N/A	Average
2	*	7125.000	28.13	20.42	48.55	-19.65	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

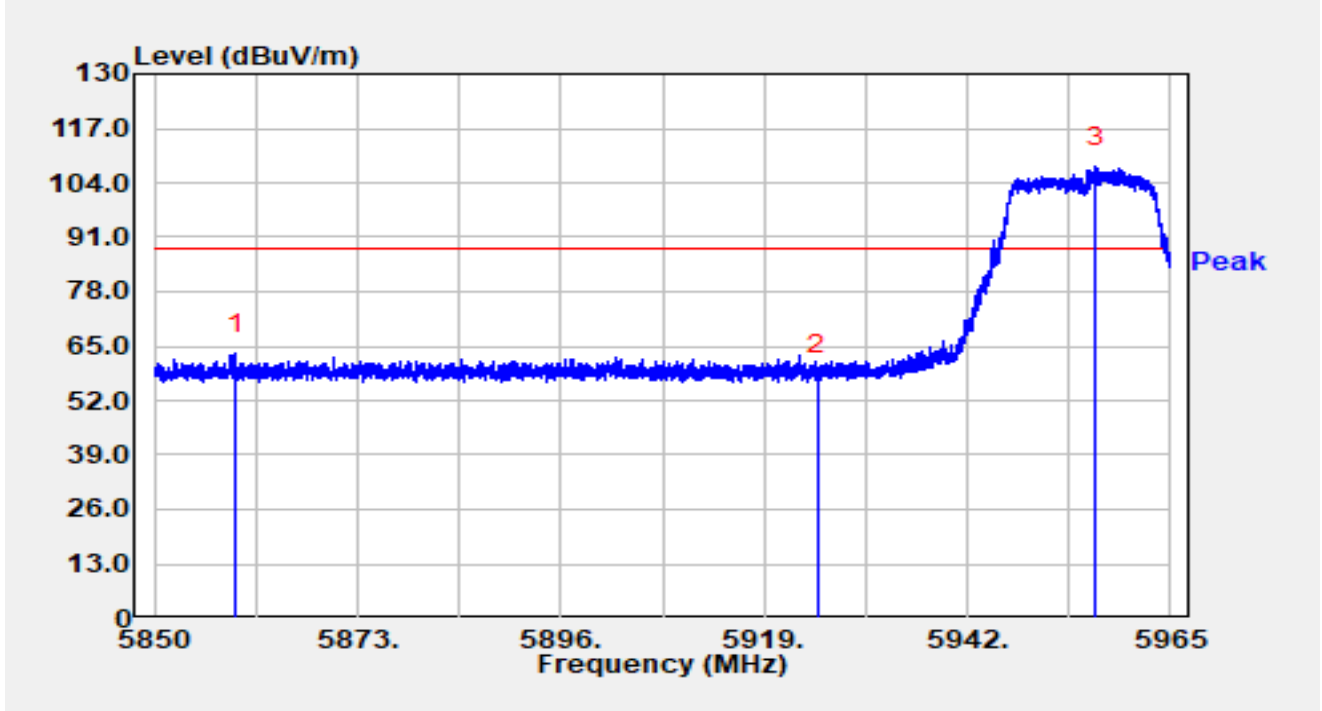


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5859.234	45.83	17.33	63.15	-25.05	88.20	Peak
2		5925.000	41.01	17.36	58.37	-29.83	88.20	Peak
3		5956.501	90.31	17.46	107.76	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

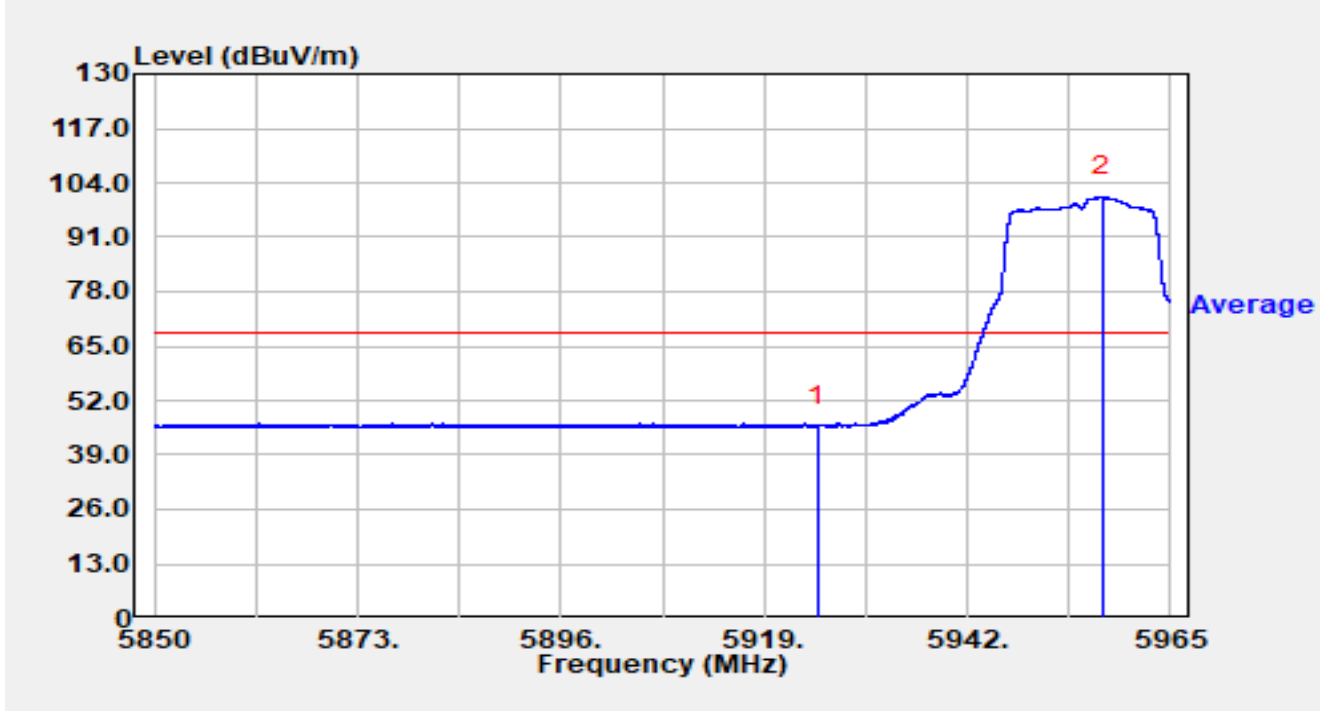


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	28.55	17.36	45.91	-22.29	68.20	Average
2		5957.307	83.17	17.46	100.63	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

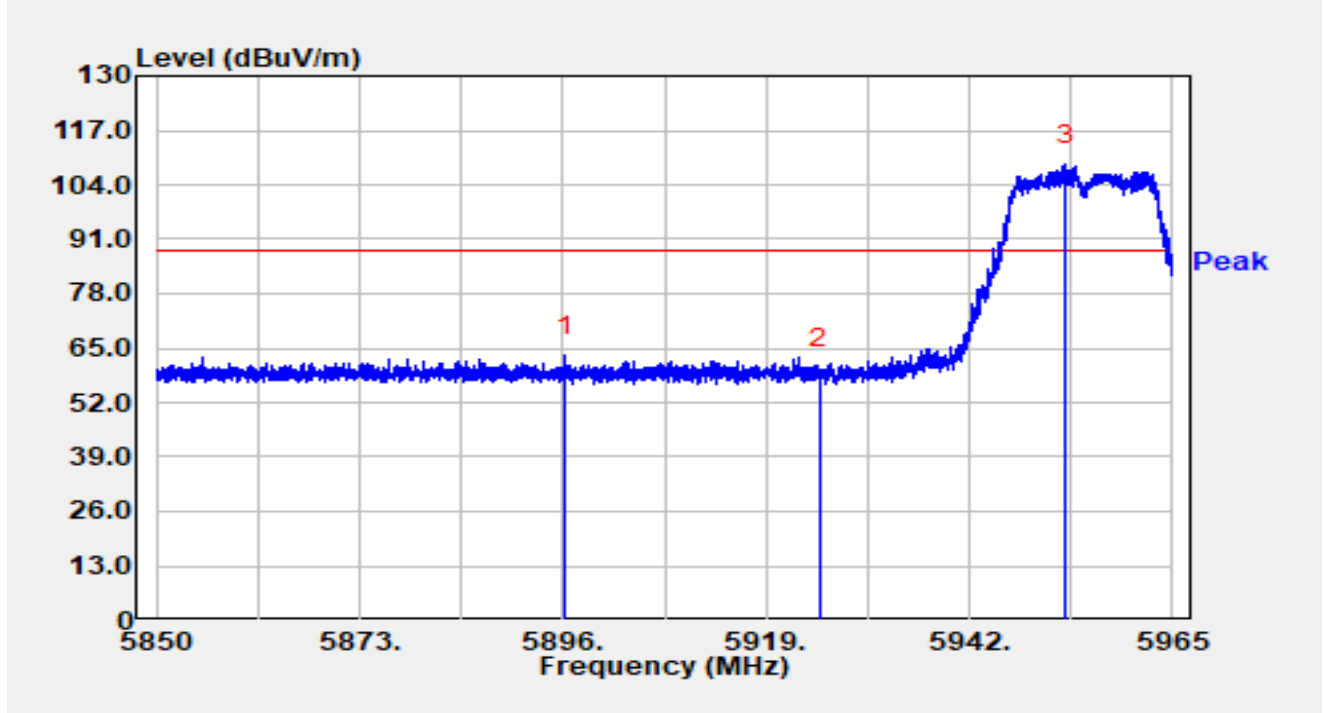


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5896.299	45.78	17.37	63.16	-25.04	88.20	Peak
2		5925.003	42.52	17.36	59.89	-28.31	88.20	Peak
3		5952.937	91.44	17.45	108.90	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

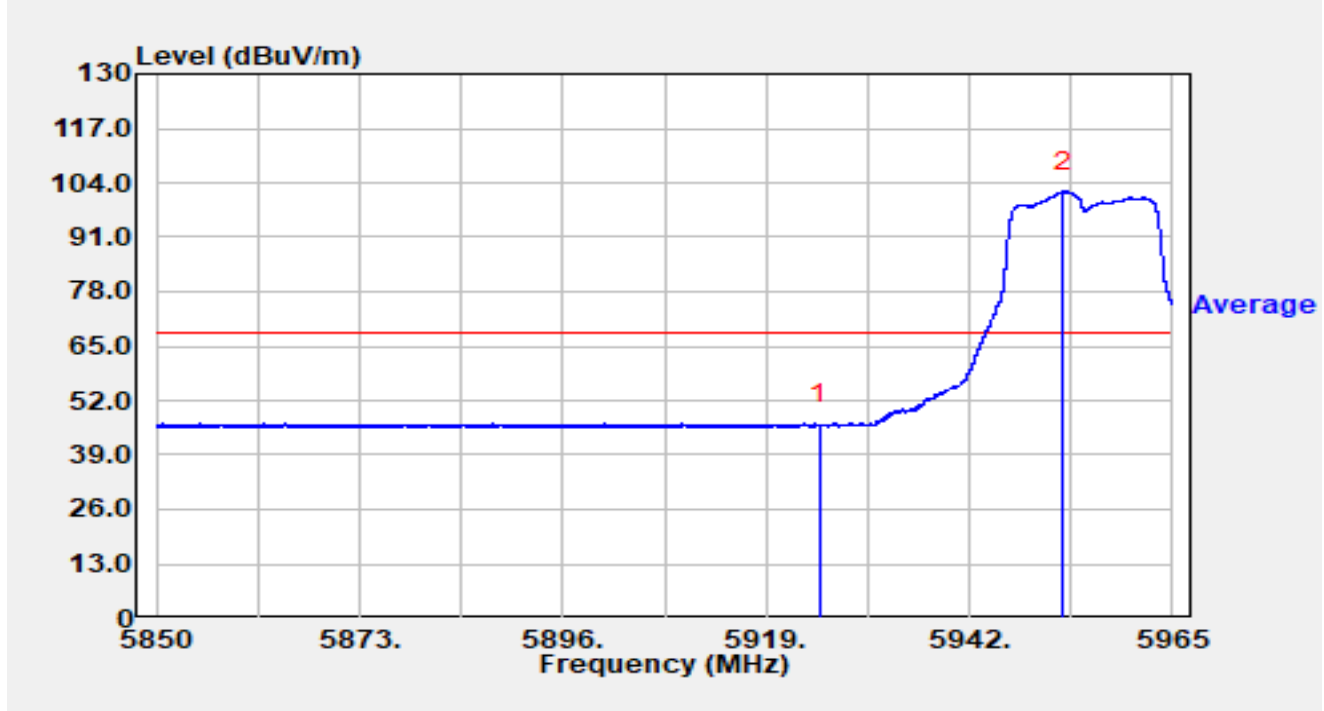


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	28.81	17.36	46.18	-22.02	68.20	Average
2		5952.661	84.50	17.45	101.95	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

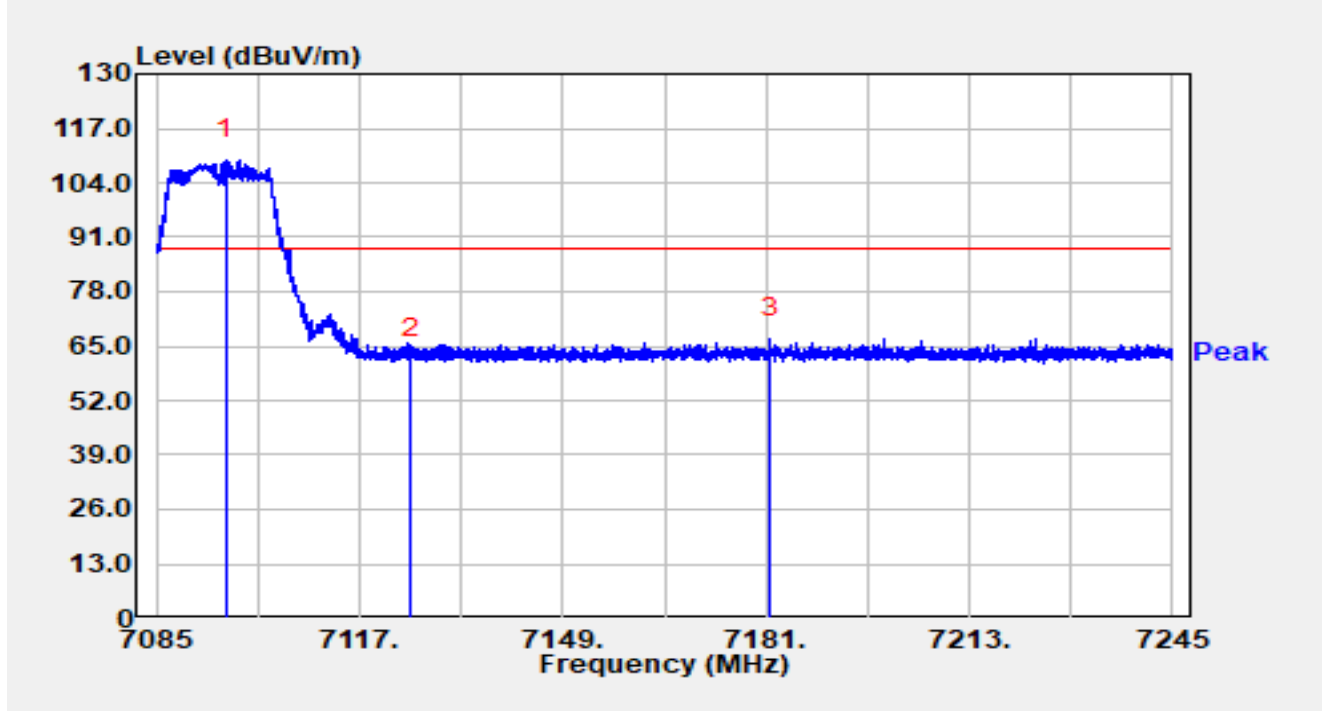


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7095.960	89.02	20.50	109.51	N/A	N/A	Peak
2		7125.000	41.81	20.42	62.23	-25.97	88.20	Peak
3	*	7181.672	46.26	20.70	66.96	-21.24	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

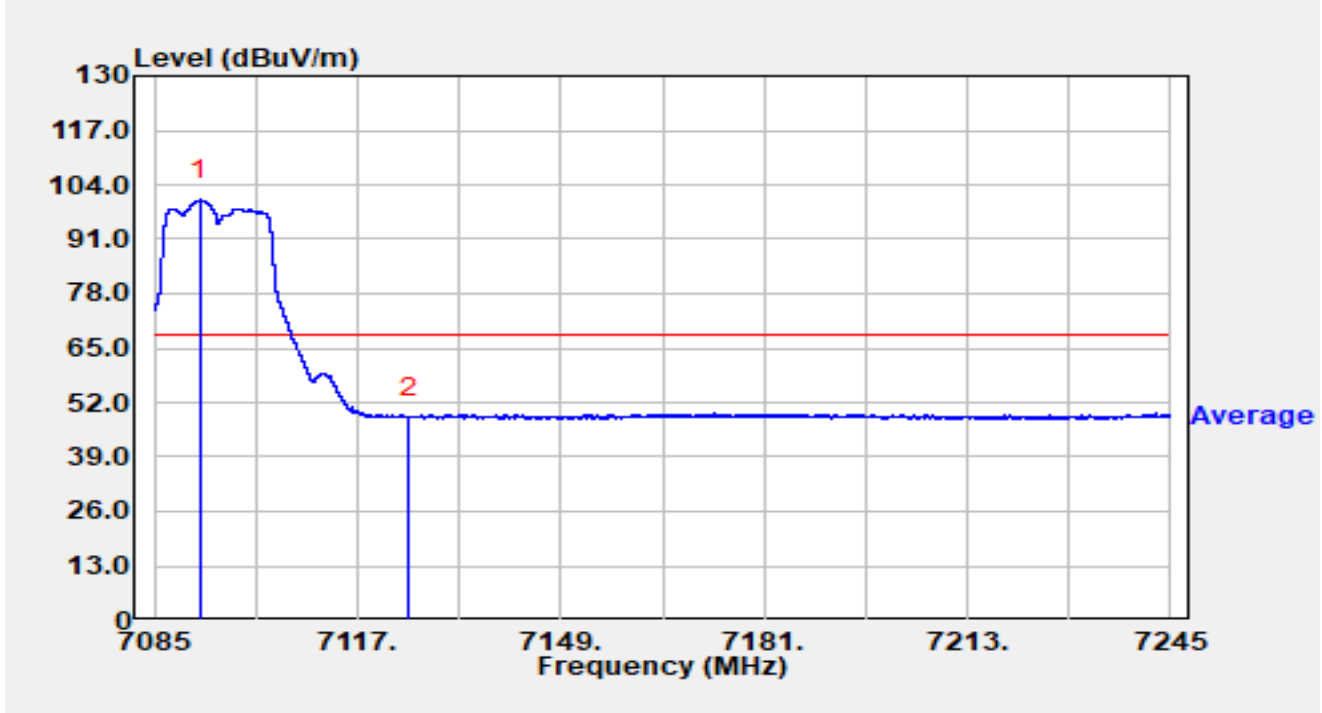


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		7092.168	79.84	20.50	100.33	N/A	N/A	Average
2	*	7125.000	27.97	20.42	48.39	-19.81	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

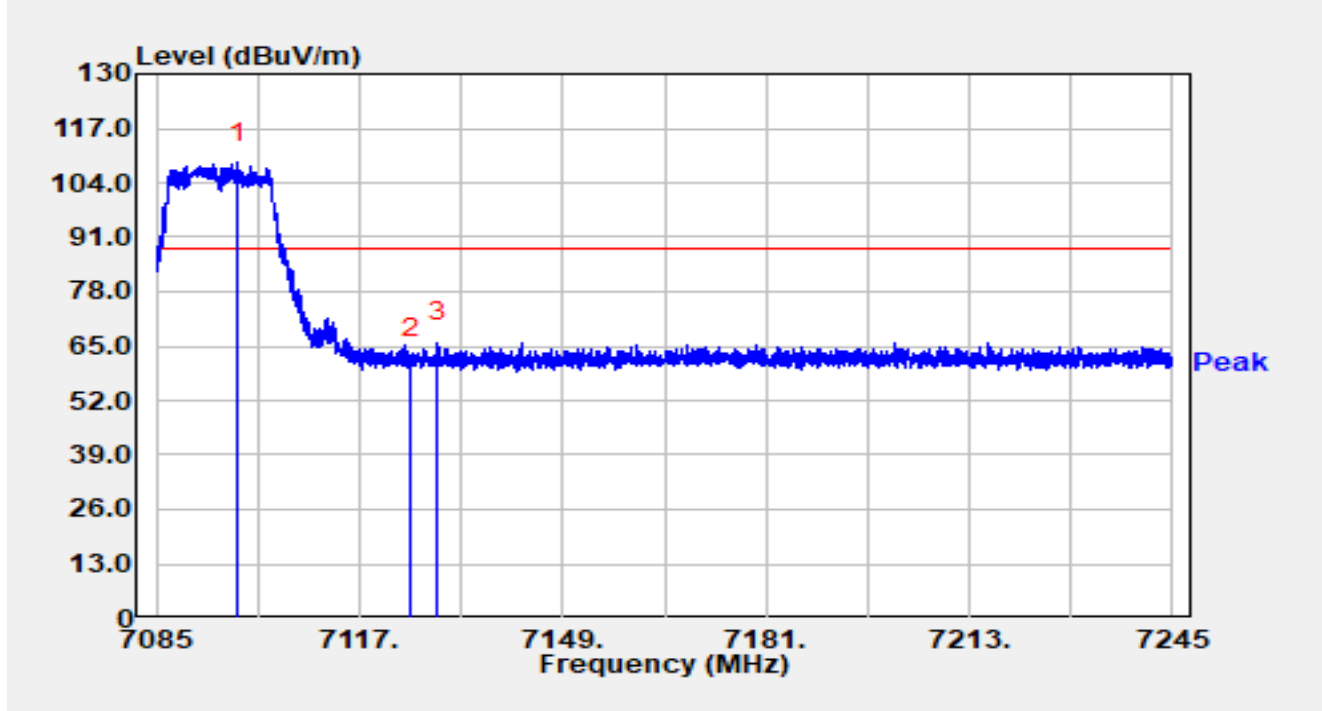


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.816	88.40	20.50	108.89	N/A	N/A	Peak
2		7125.000	41.42	20.42	61.85	-26.35	88.20	Peak
3	*	7129.336	45.40	20.44	65.84	-22.36	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

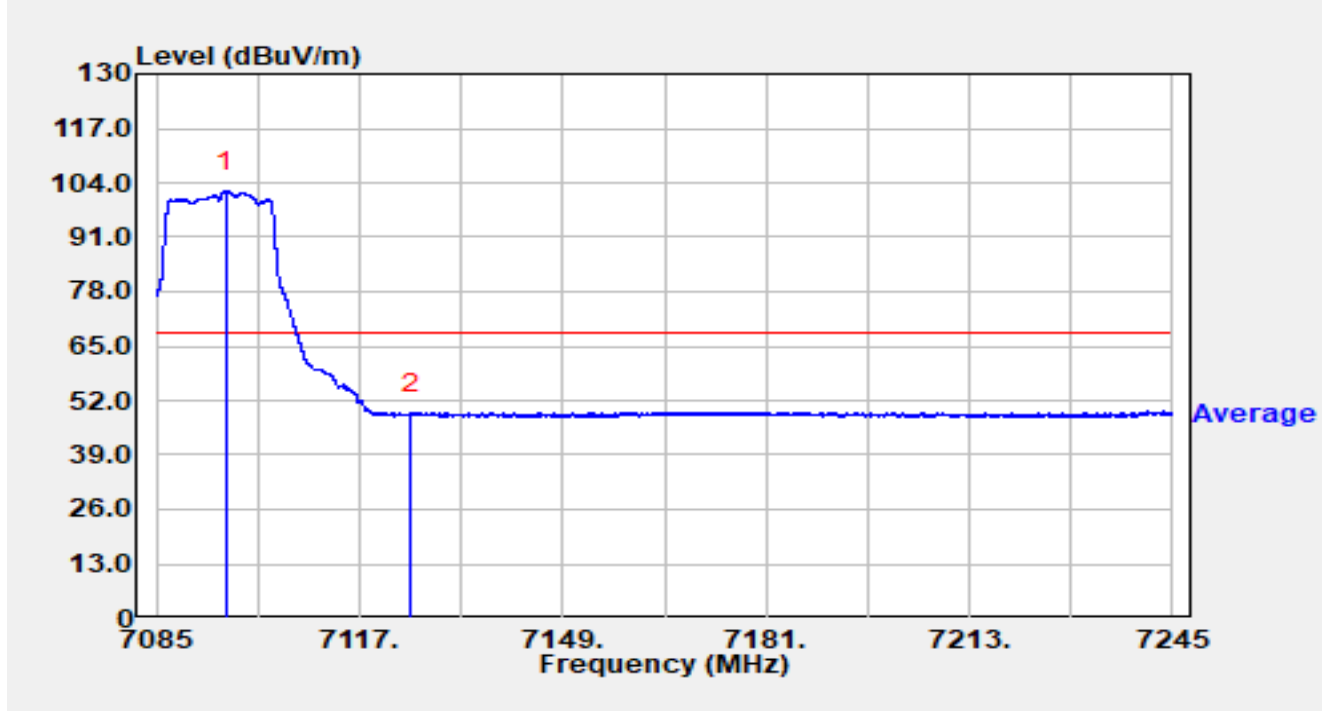


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7095.896	81.47	20.50	101.97	N/A	N/A	Average
2	*	7125.000	28.23	20.42	48.65	-19.55	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

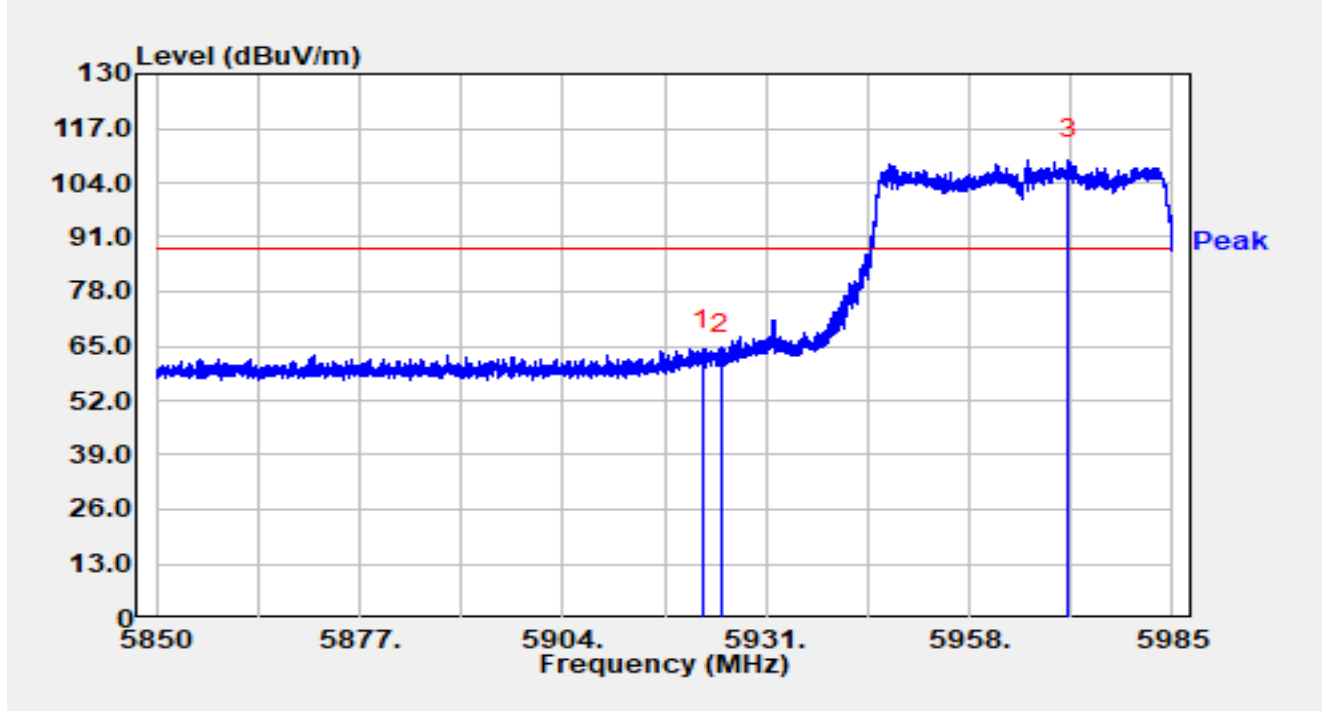


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.495	46.77	17.36	64.13	-24.07	88.20	Peak
2		5925.006	45.76	17.36	63.12	-25.08	88.20	Peak
3		5971.230	91.88	17.53	109.40	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

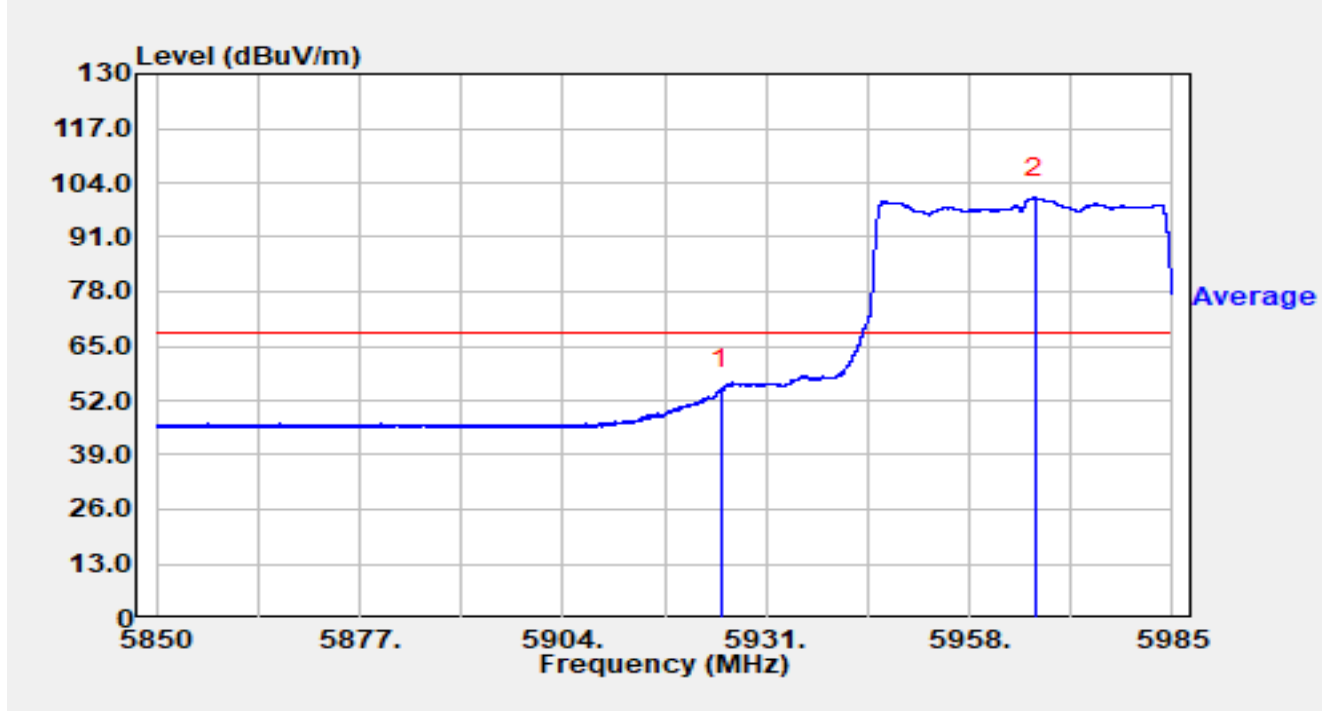


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	37.12	17.36	54.48	-13.72	68.20	Average
2		5966.708	82.90	17.49	100.39	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

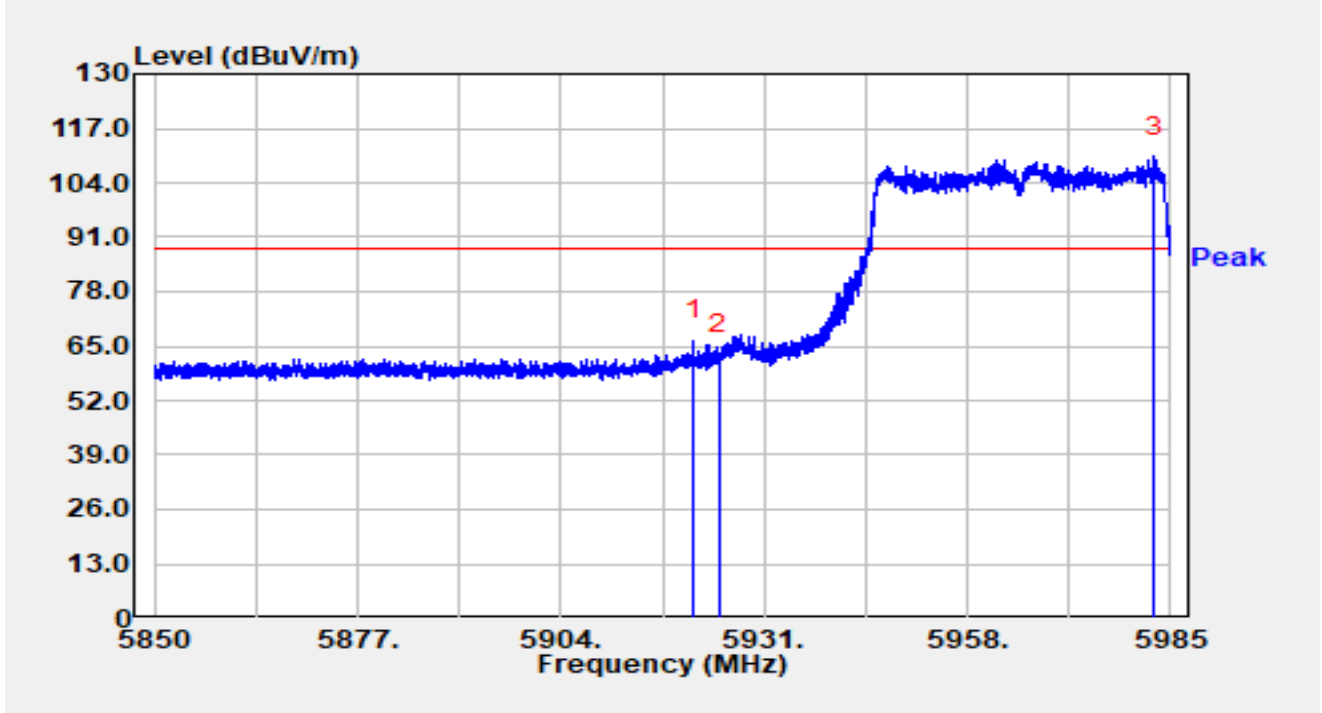


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.631	49.11	17.36	66.47	-21.73	88.20	Peak
2		5925.000	45.56	17.36	62.93	-25.27	88.20	Peak
3		5982.827	92.77	17.56	110.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

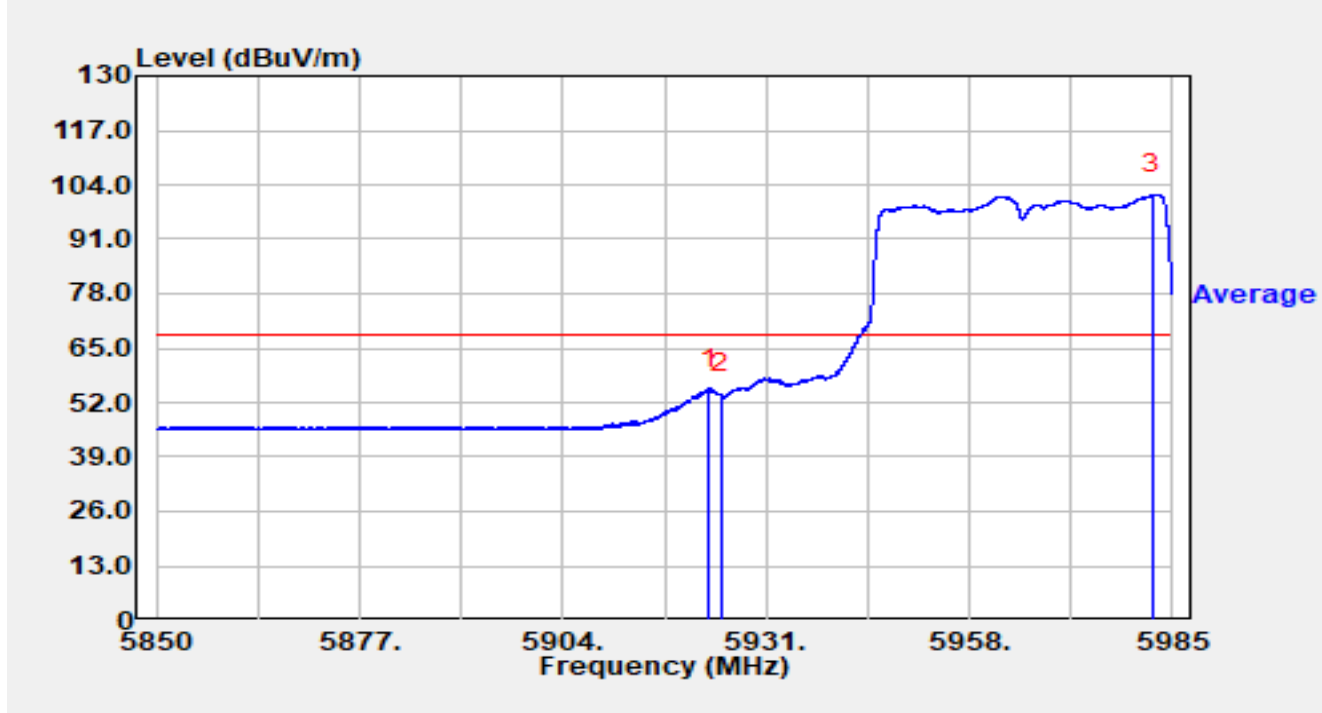


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.454	38.03	17.36	55.39	-12.81	68.20	Average
2		5925.000	36.63	17.36	53.99	-14.21	68.20	Average
3		5982.287	84.09	17.57	101.66	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

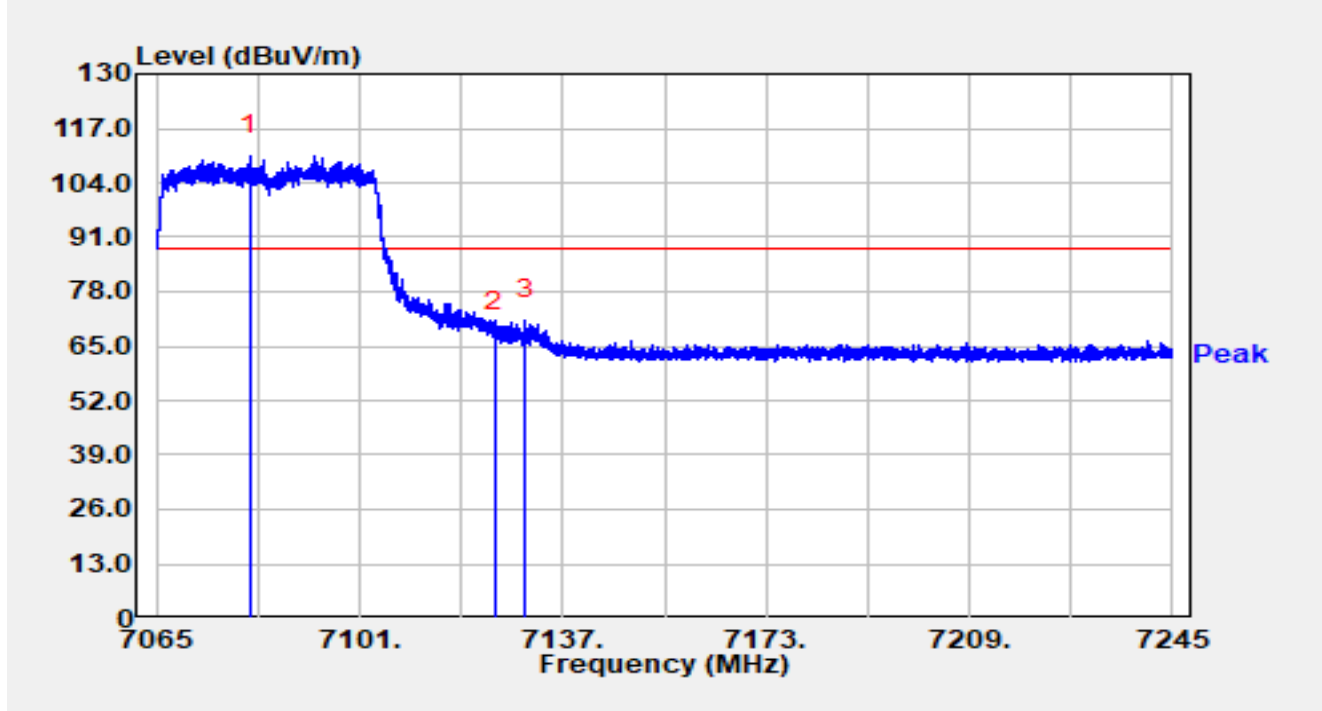


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7081.650	90.05	20.45	110.50	N/A	N/A	Peak
2		7124.994	48.13	20.42	68.56	-19.64	88.20	Peak
3	*	7130.412	50.75	20.44	71.19	-17.01	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

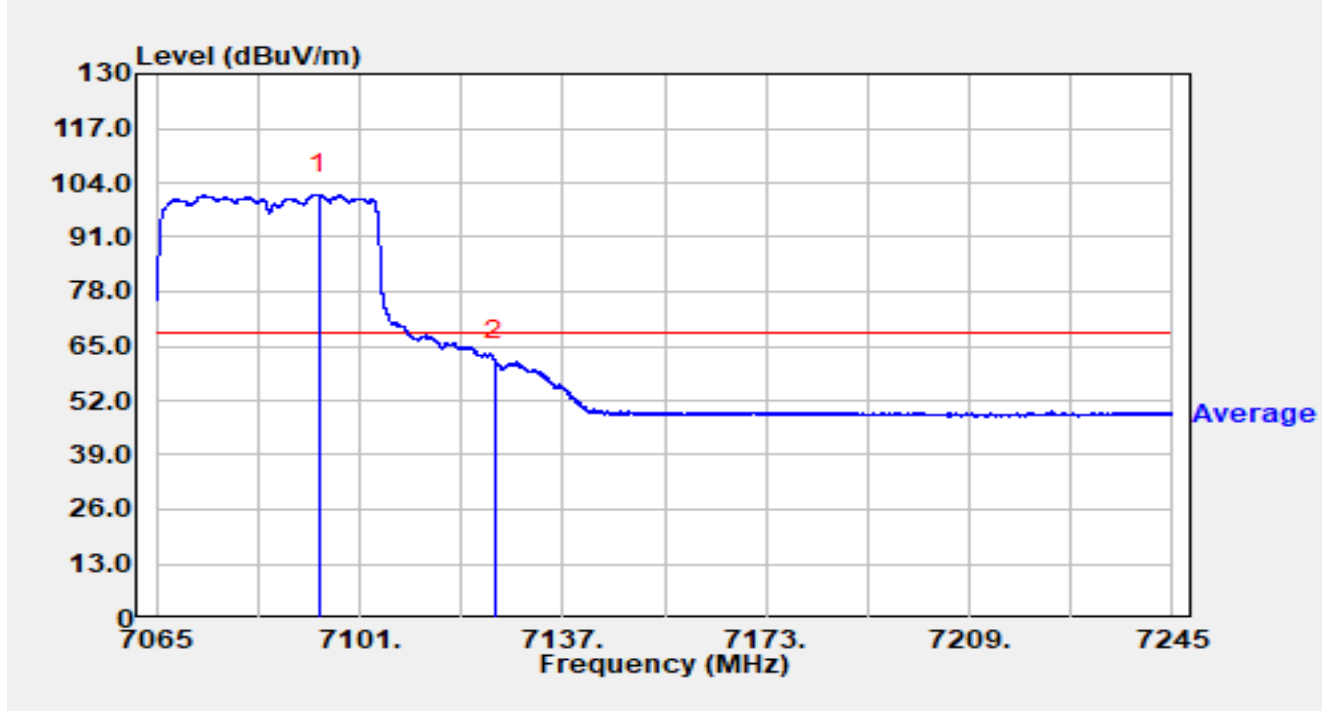


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7093.746	80.68	20.50	101.18	N/A	N/A	Average
2	*	7125.000	41.00	20.42	61.42	-6.78	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

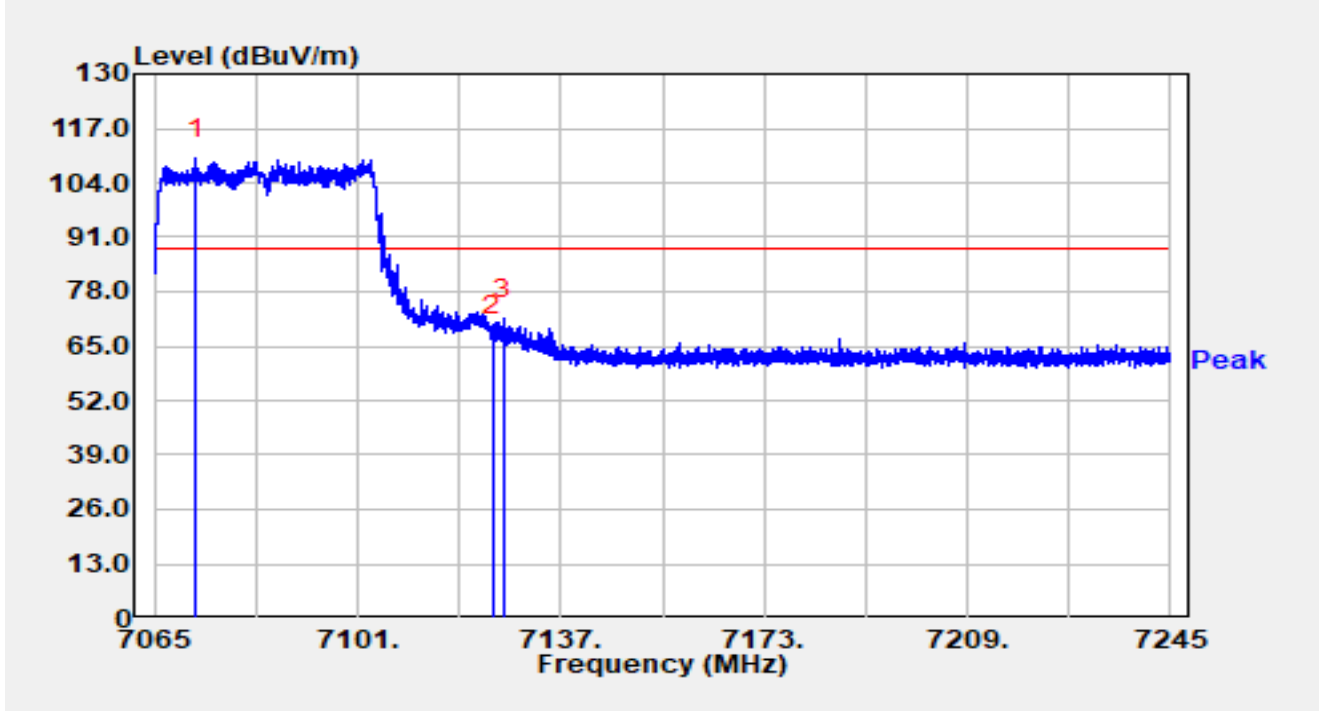


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7072.380	89.44	20.36	109.80	N/A	N/A	Peak
2		7125.000	47.20	20.42	67.63	-20.57	88.20	Peak
3	*	7126.902	51.01	20.44	71.45	-16.75	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9°C	Humidity	34.3%
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

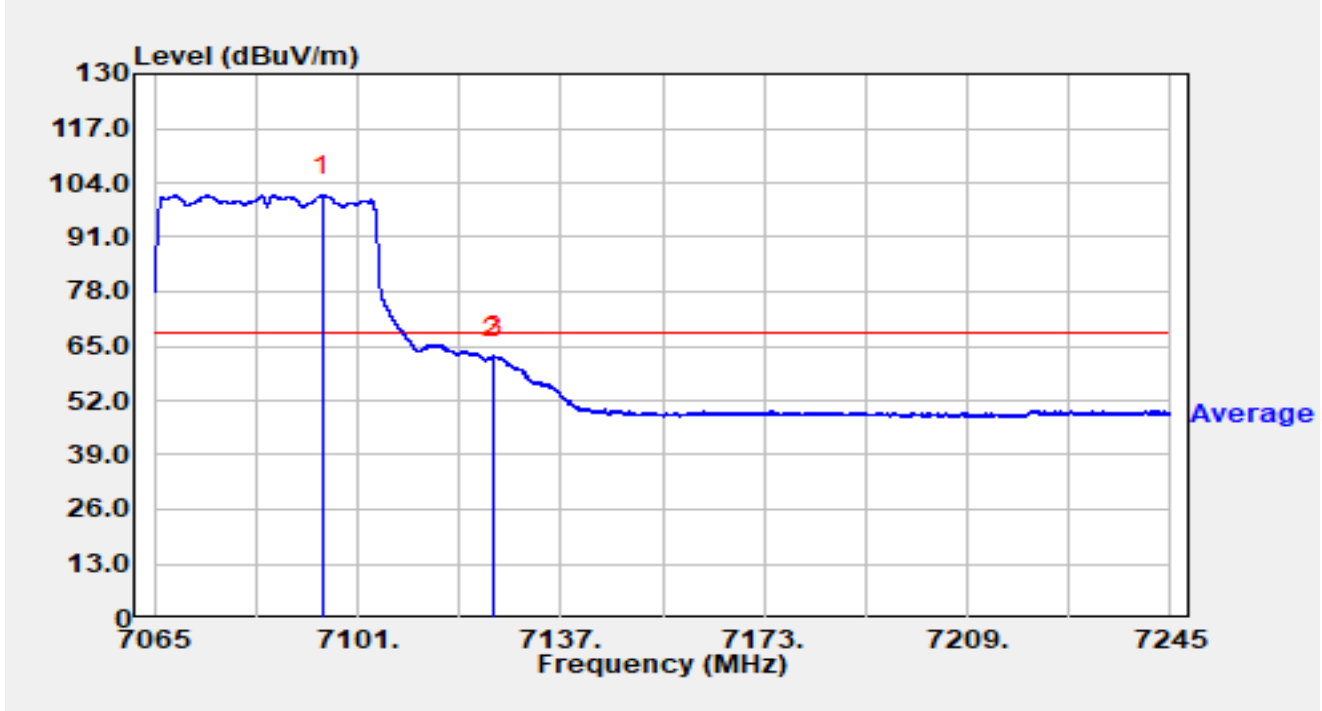


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7094.790	80.49	20.50	100.99	N/A	N/A	Average
2		7125.000	41.63	20.42	62.06	-6.14	68.20	Average
3	*	7125.174	42.16	20.43	62.58	-5.62	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

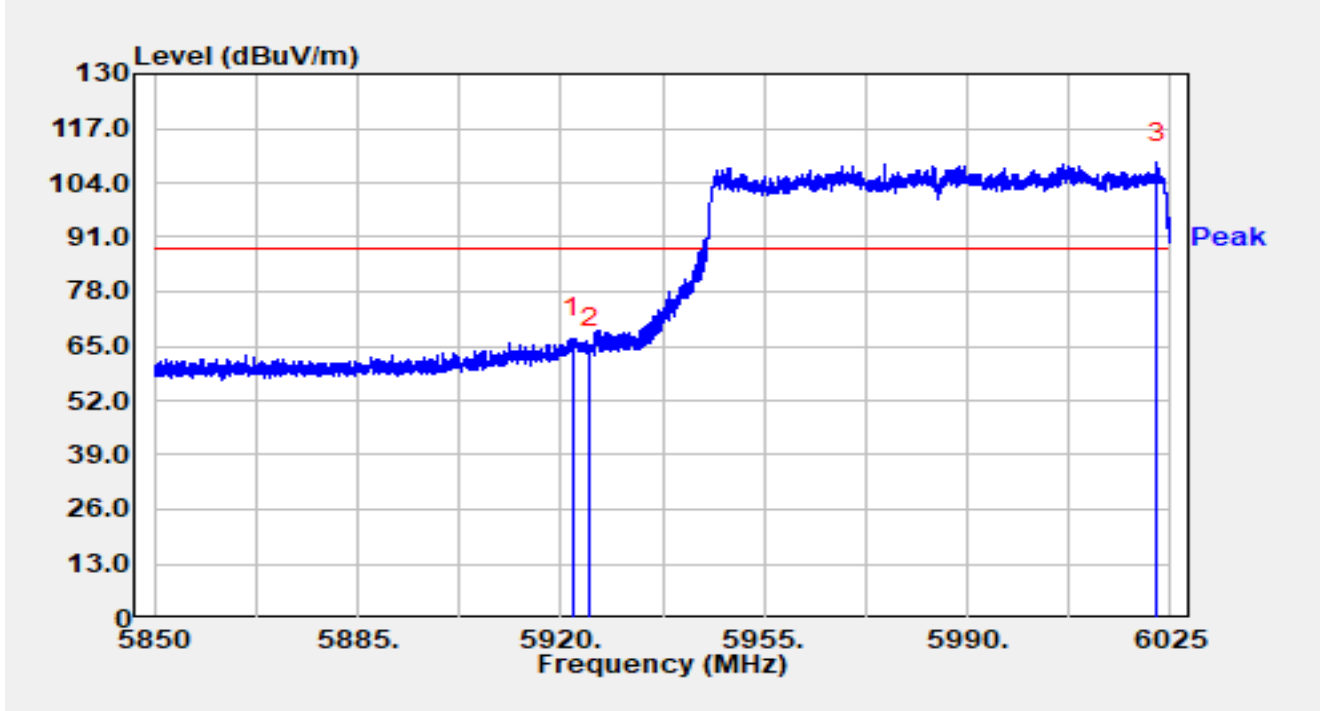


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5921.995	49.38	17.36	66.73	-21.47	88.20	Peak
2		5925.000	47.00	17.36	64.36	-23.84	88.20	Peak
3		6022.620	91.13	17.70	108.83	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz P=16		

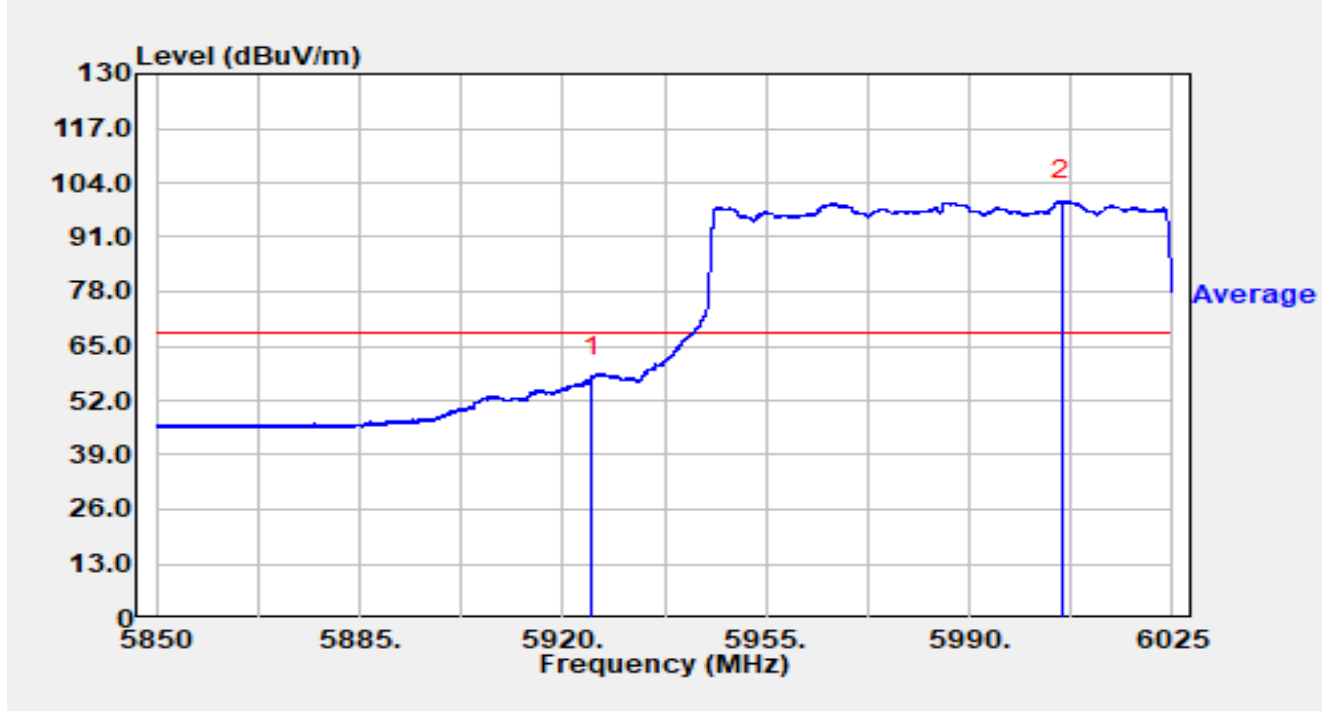


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.005	40.24	17.36	57.61	-10.59	68.20	Average
2		6005.890	82.14	17.46	99.60	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

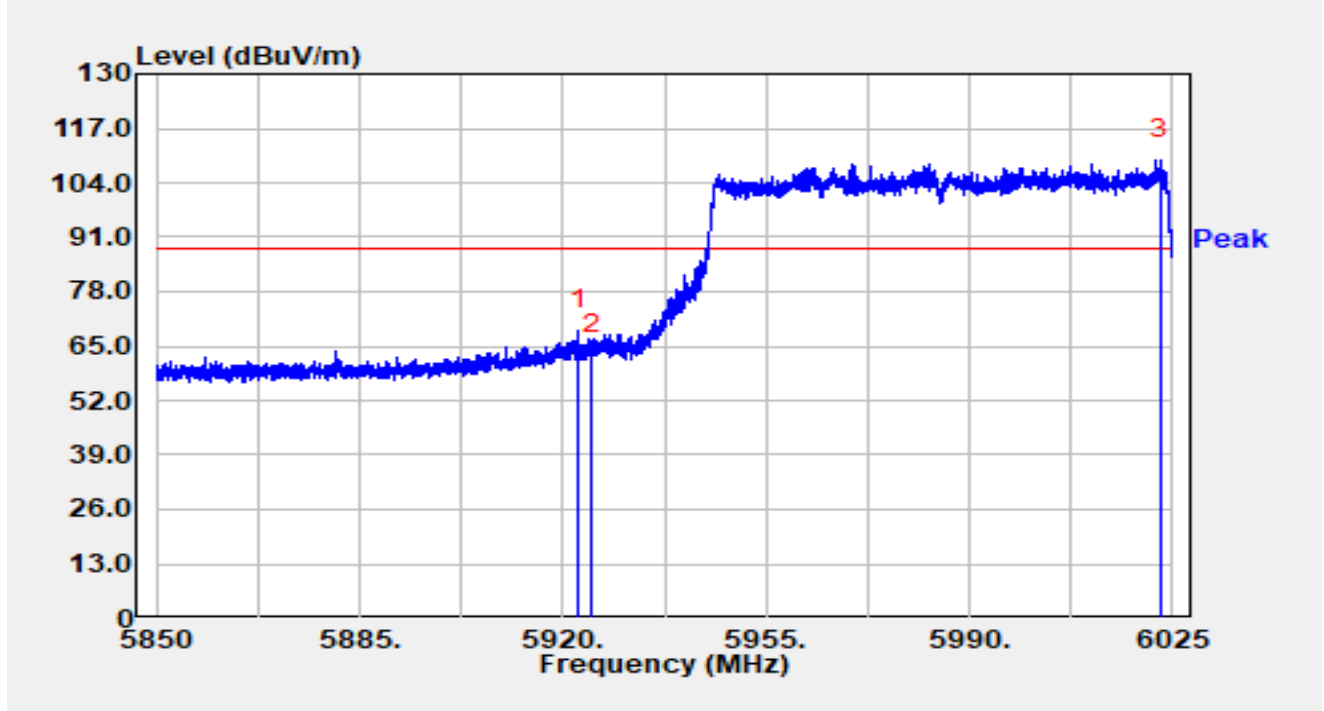


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.607	51.51	17.36	68.87	-19.33	88.20	Peak
2		5925.005	45.56	17.36	62.92	-25.28	88.20	Peak
3		6022.882	91.83	17.70	109.53	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

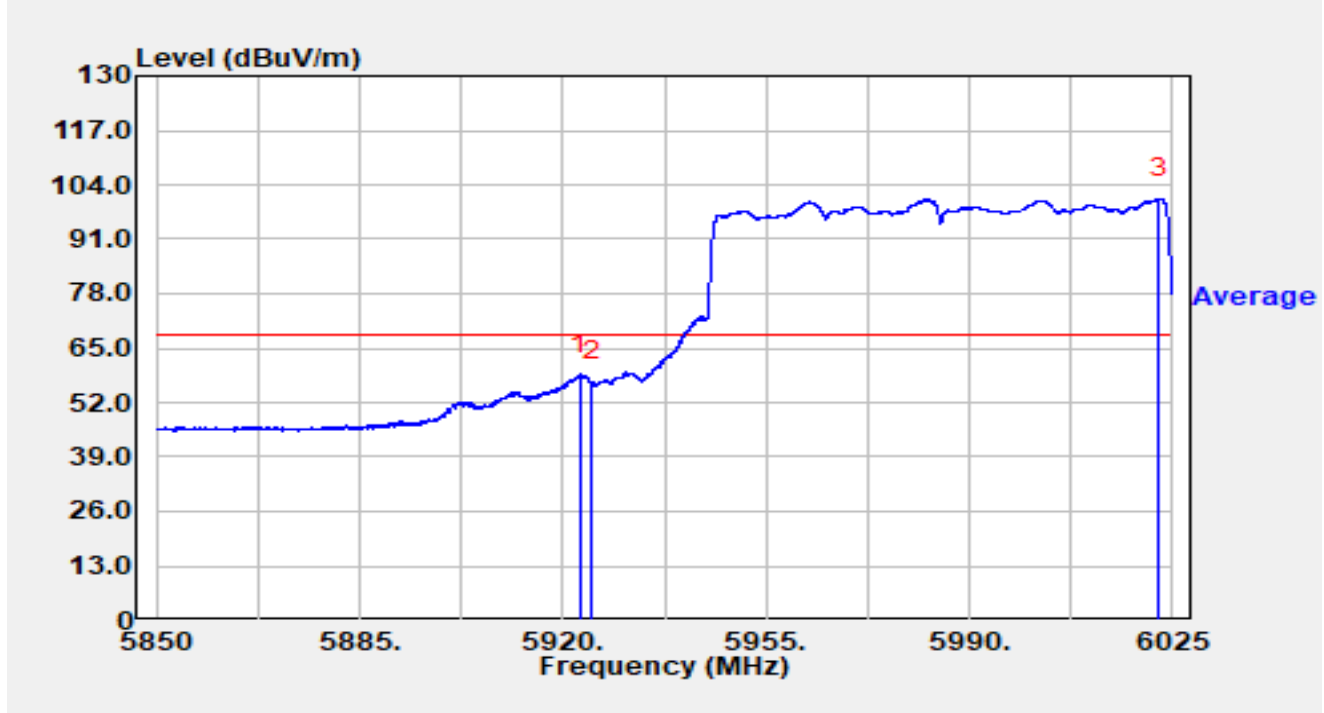


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5922.922	41.27	17.36	58.63	-9.57	68.20	Average
2		5925.005	39.59	17.36	56.95	-11.25	68.20	Average
3		6022.585	82.93	17.70	100.63	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

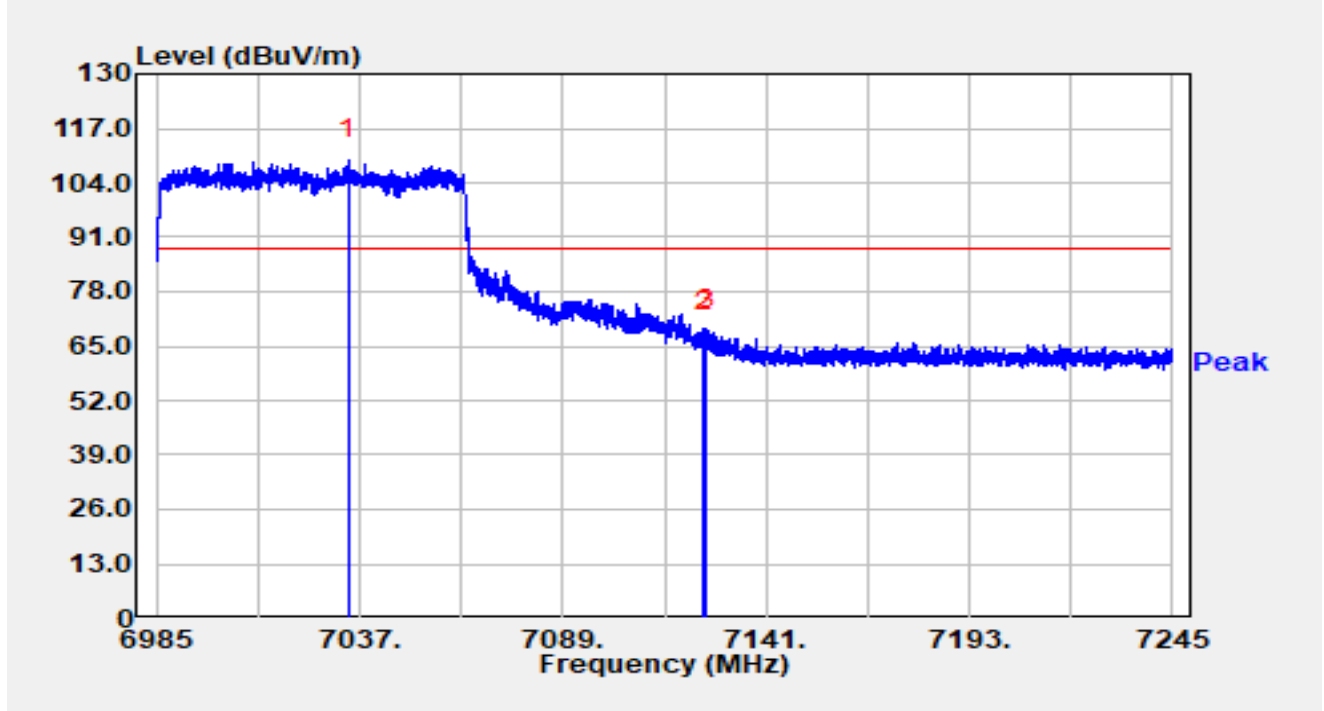


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7034.088	89.21	20.22	109.43	N/A	N/A	Peak
2		7125.000	48.22	20.42	68.65	-19.55	88.20	Peak
3	*	7125.608	48.69	20.43	69.12	-19.08	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

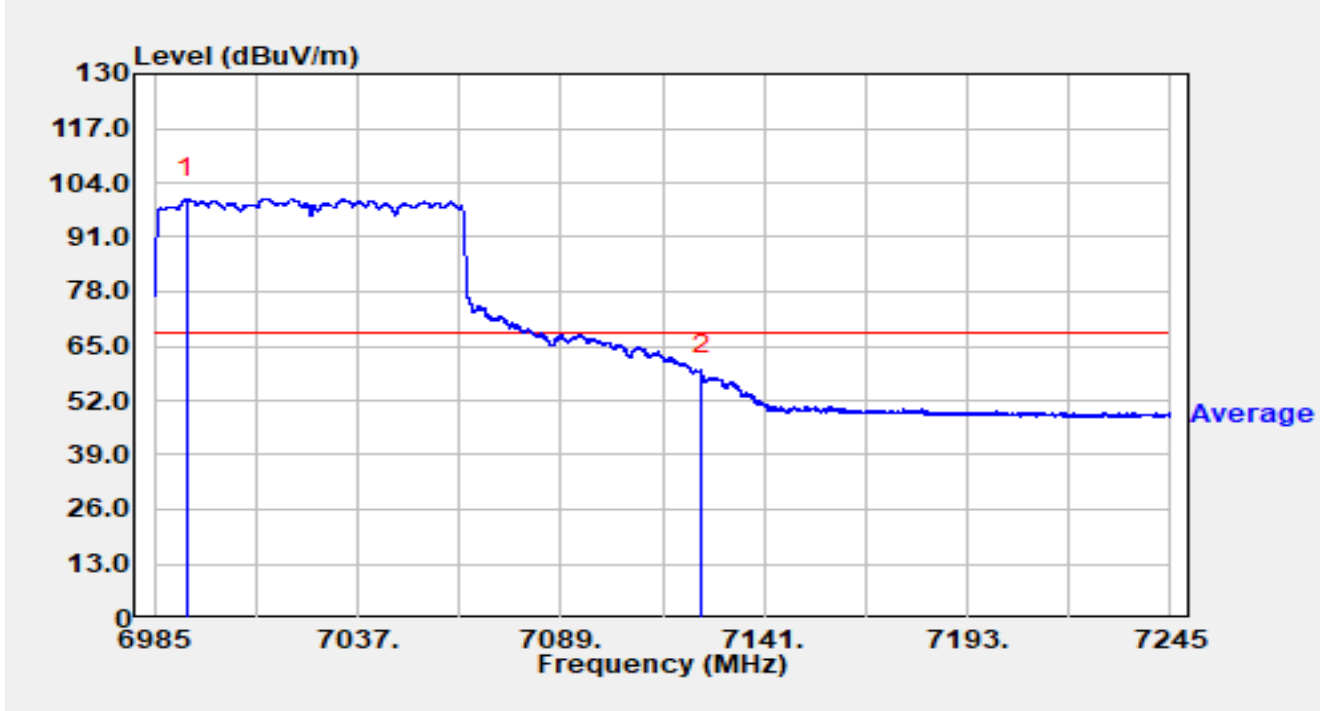


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6993.398	79.86	20.28	100.14	N/A	N/A	Average
2	*	7125.000	37.80	20.42	58.22	-9.98	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

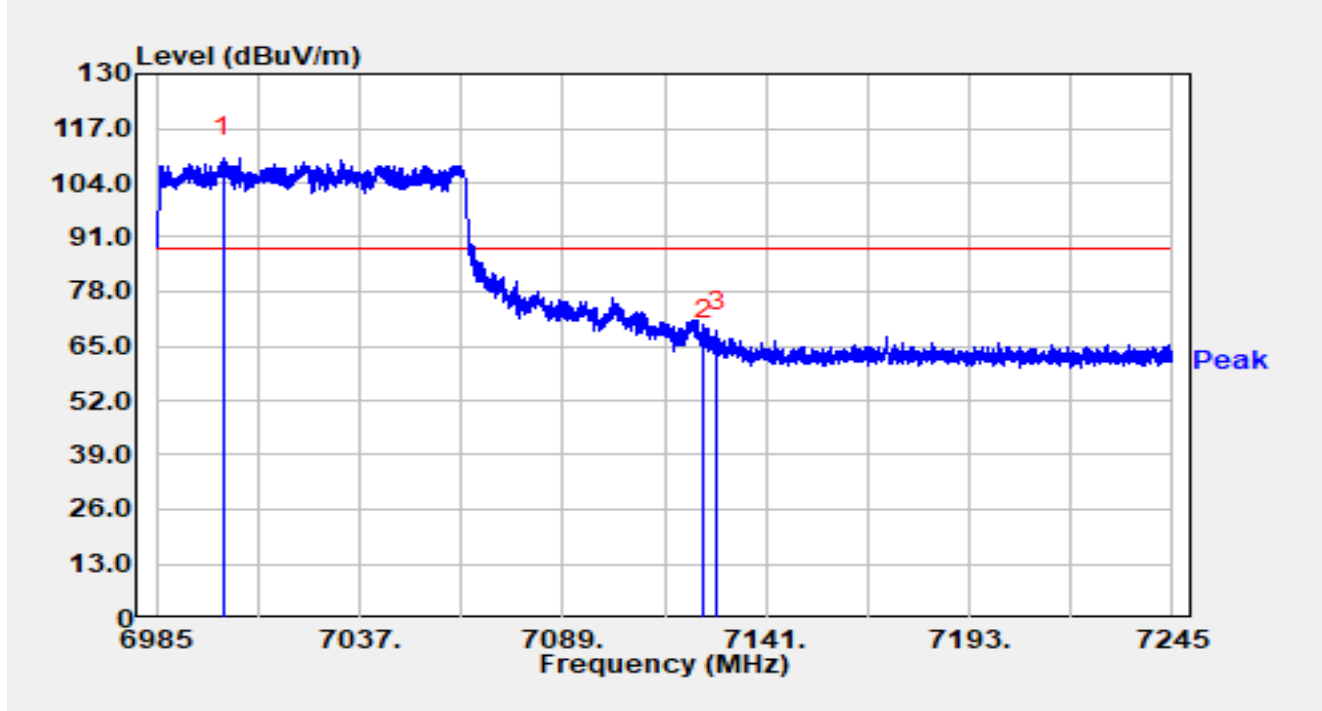


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7002.004	89.64	20.27	109.91	N/A	N/A	Peak
2		7125.000	46.00	20.42	66.42	-21.78	88.20	Peak
3	*	7128.364	48.11	20.44	68.56	-19.64	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

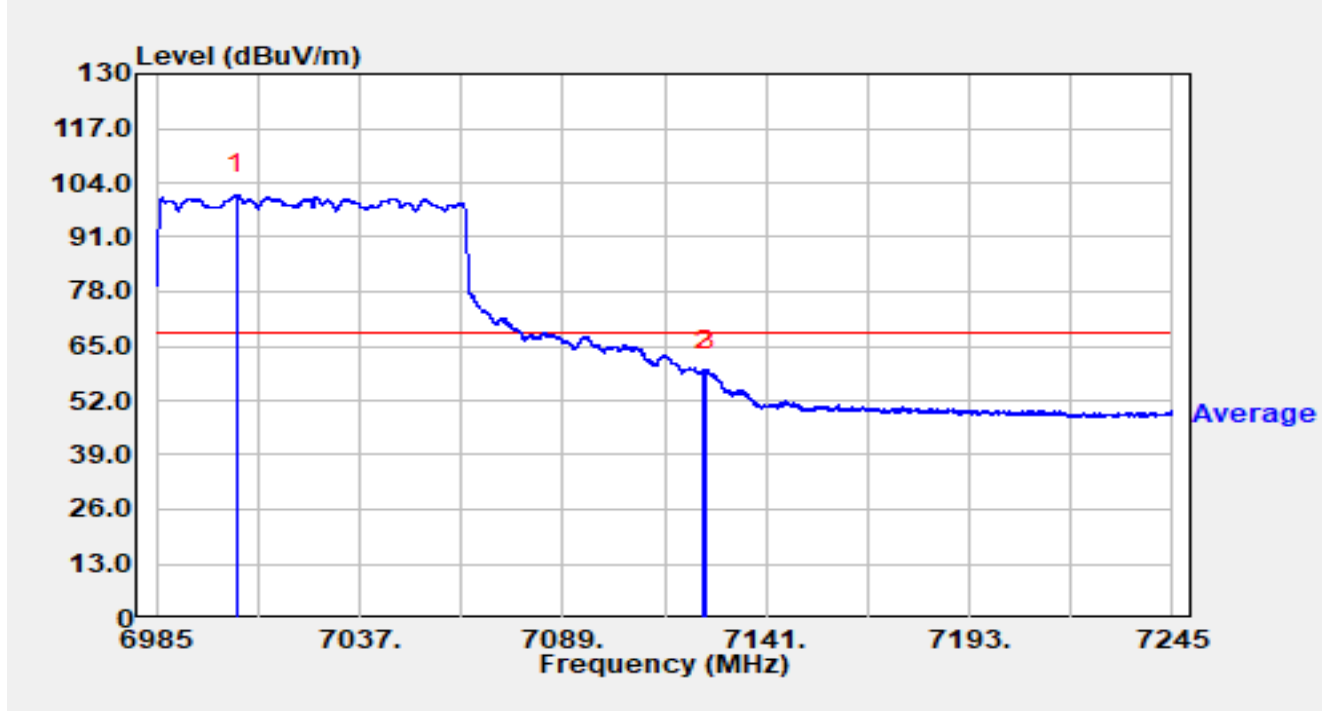


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7005.540	80.78	20.30	101.08	N/A	N/A	Average
2		7125.010	38.73	20.42	59.15	-9.05	68.20	Average
3	*	7125.686	38.89	20.43	59.32	-8.88	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

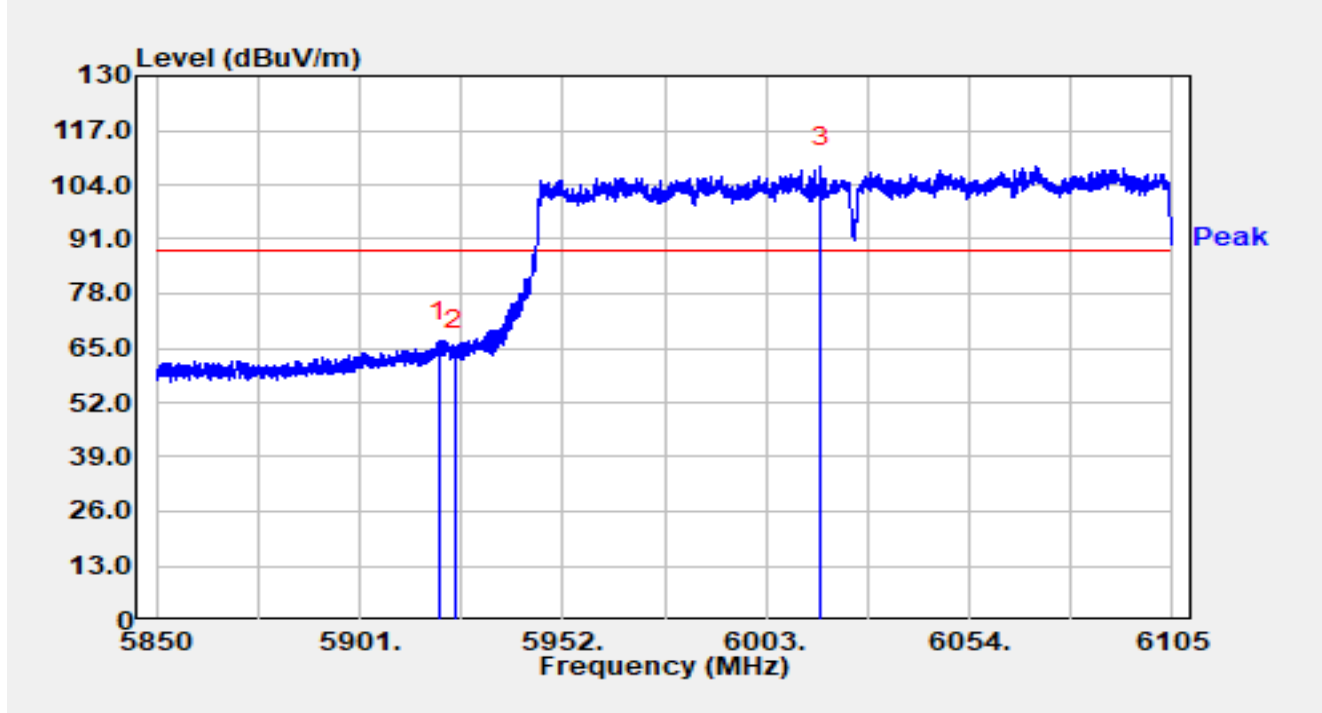


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.763	49.29	17.36	66.64	-21.56	88.20	Peak
2		5924.996	47.16	17.36	64.53	-23.67	88.20	Peak
3		6016.770	90.63	17.63	108.26	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

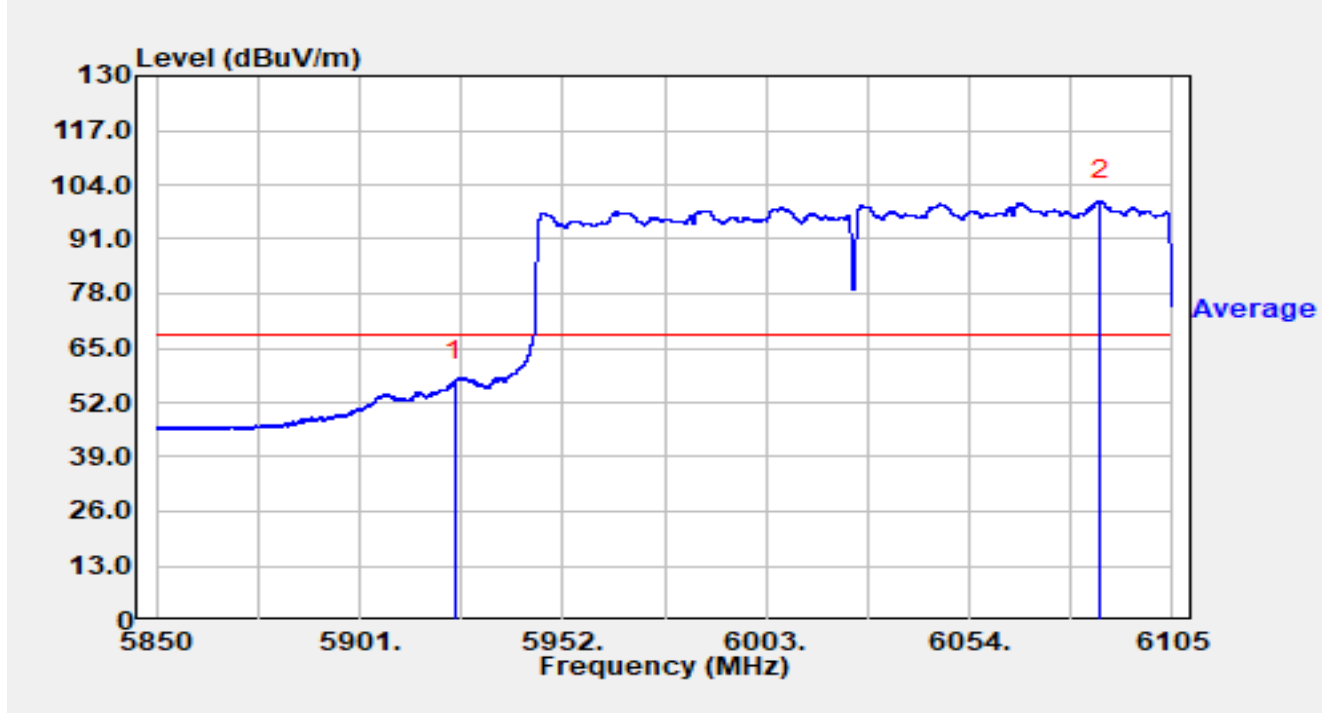


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.996	39.75	17.36	57.11	-11.09	68.20	Average
2		6086.870	82.04	18.07	100.12	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

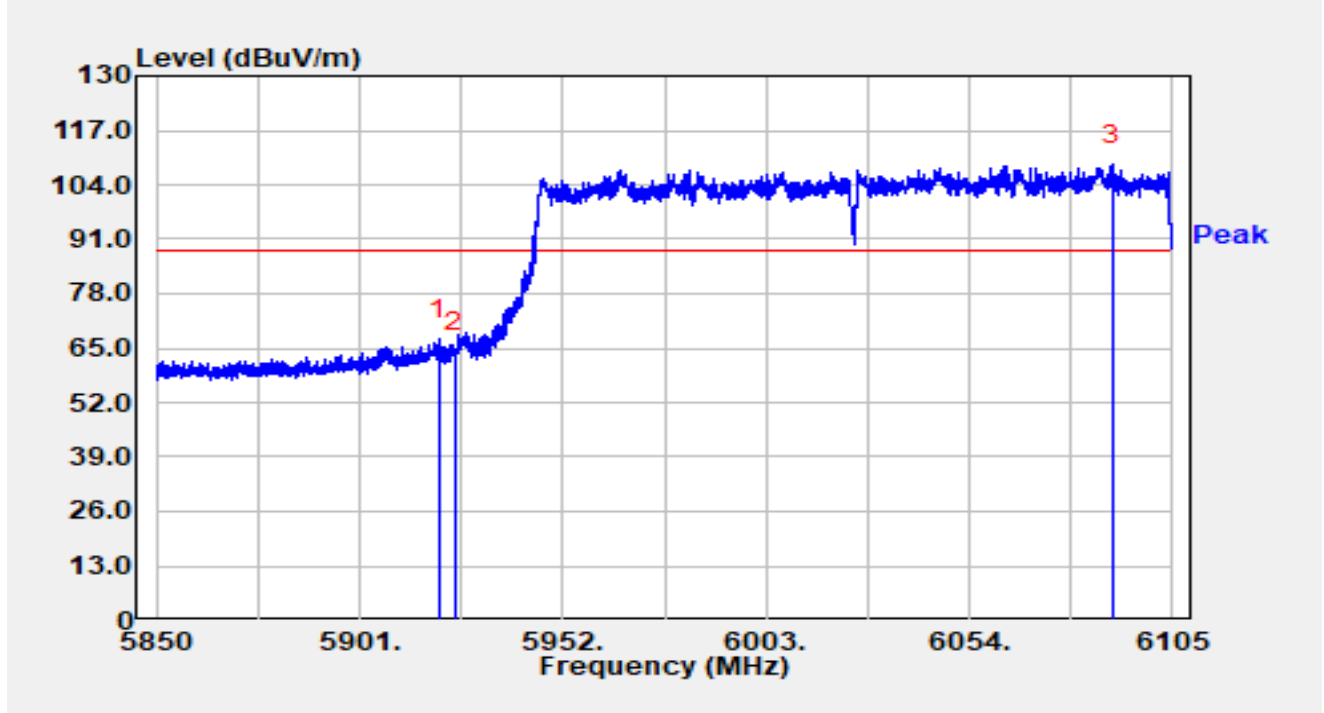


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.992	49.80	17.36	67.16	-21.04	88.20	Peak
2		5924.996	46.42	17.36	63.78	-24.42	88.20	Peak
3		6089.751	90.62	18.05	108.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

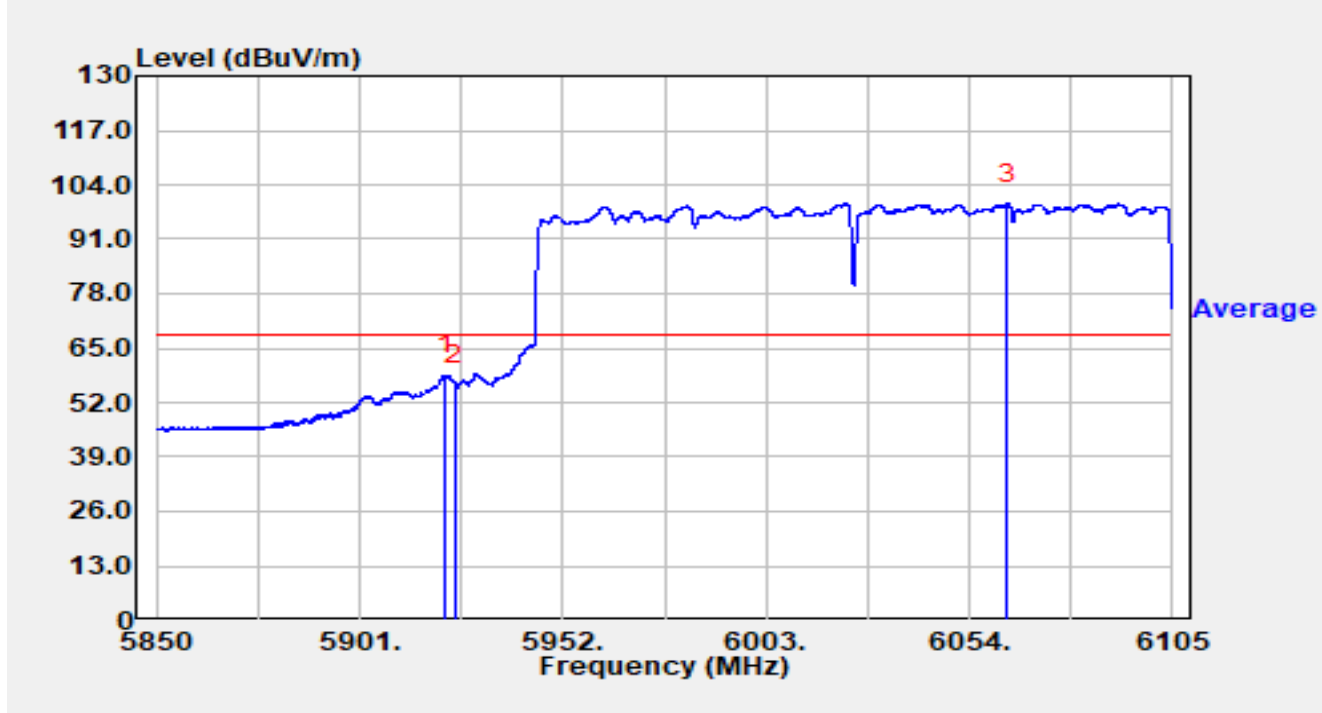


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5922.701	41.04	17.36	58.40	-9.80	68.20	Average
2		5924.996	38.94	17.36	56.30	-11.90	68.20	Average
3		6063.588	81.33	18.11	99.44	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz P=20.5		

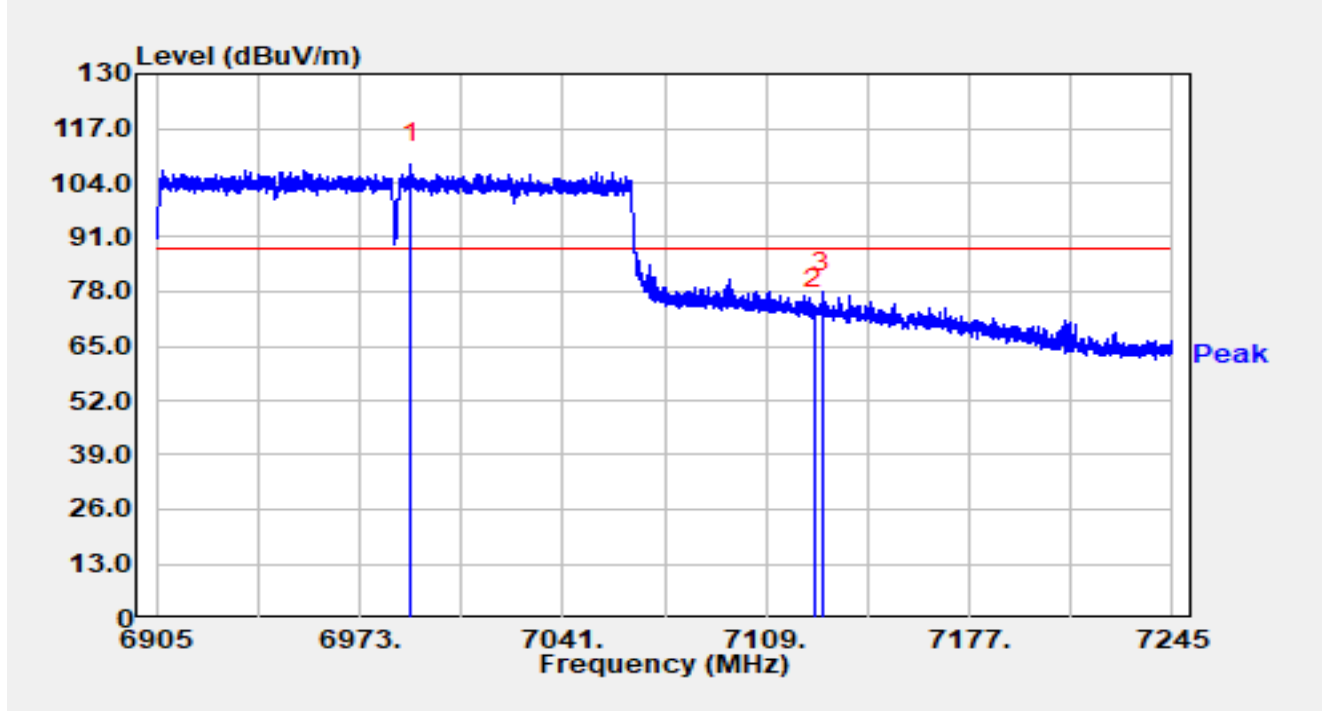


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6990.170	88.23	20.29	108.52	N/A	N/A	Peak
2		7125.014	53.43	20.42	73.86	-14.34	88.20	Peak
3	*	7127.938	57.47	20.44	77.91	-10.29	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

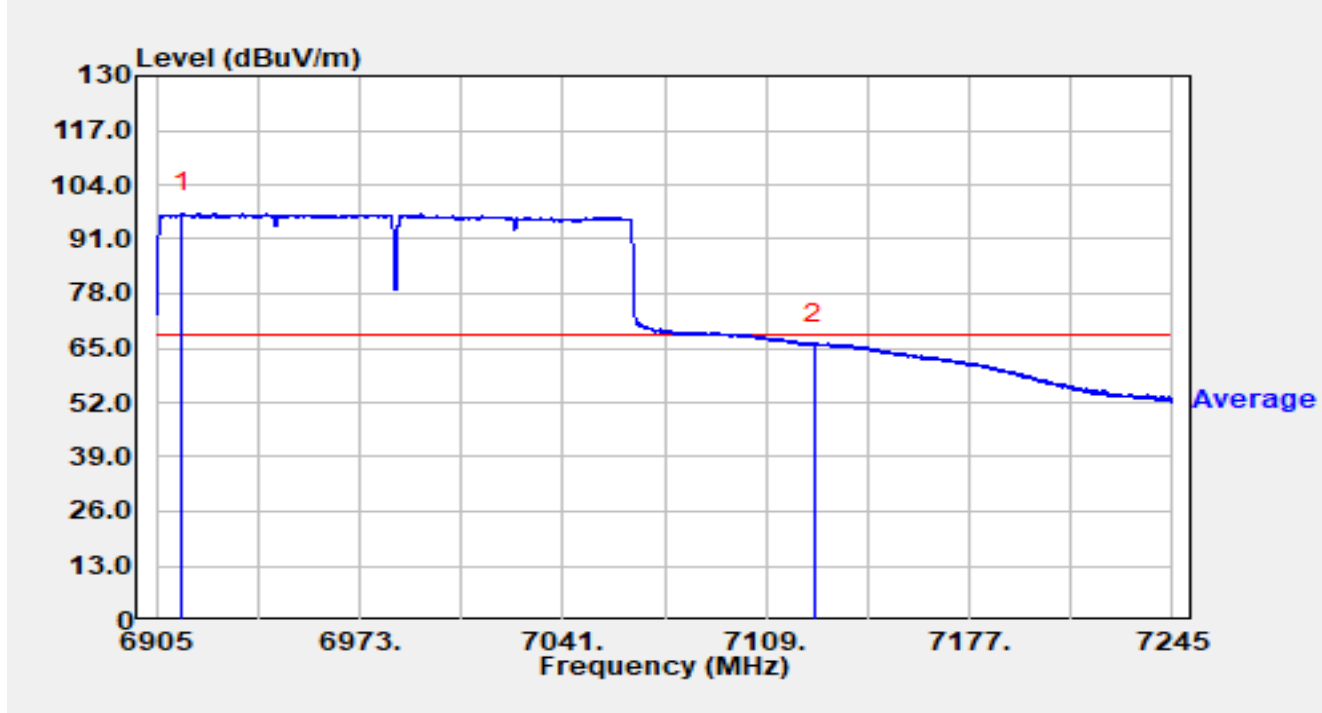


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6913.738	76.91	20.34	97.25	N/A	N/A	Average
2	*	7125.014	45.64	20.42	66.06	-2.14	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

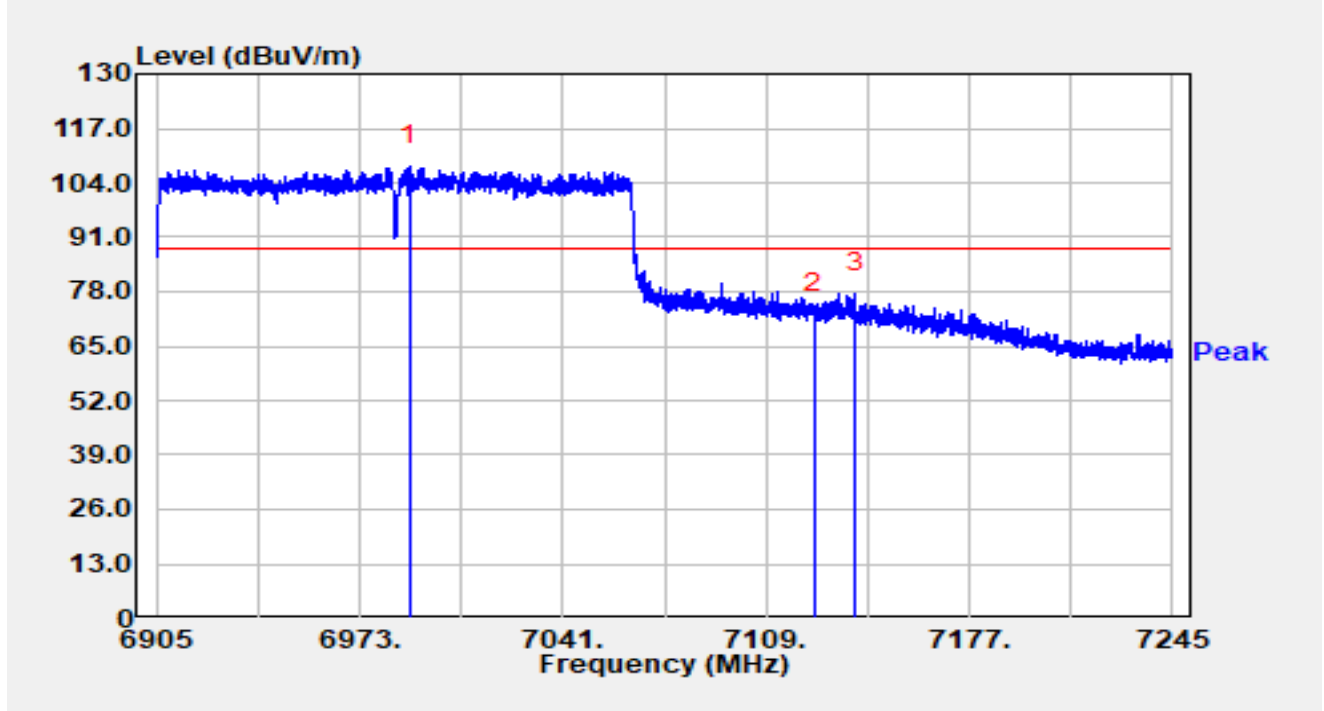


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6989.558	87.82	20.29	108.11	N/A	N/A	Peak
2		7125.014	52.42	20.42	72.84	-15.36	88.20	Peak
3	*	7139.022	57.10	20.41	77.52	-10.68	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

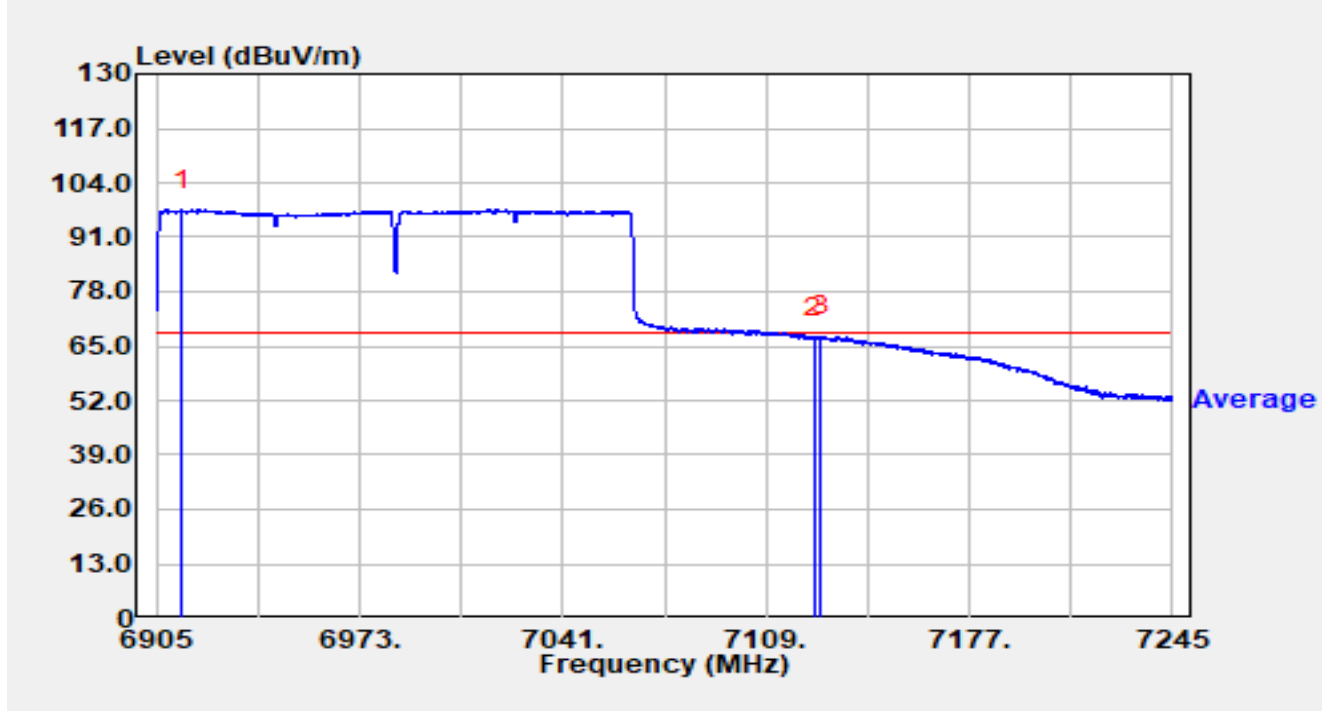


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6913.534	77.18	20.34	97.52	N/A	N/A	Average
2		7125.014	46.53	20.42	66.95	-1.25	68.20	Average
3	*	7127.496	46.86	20.44	67.30	-0.90	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

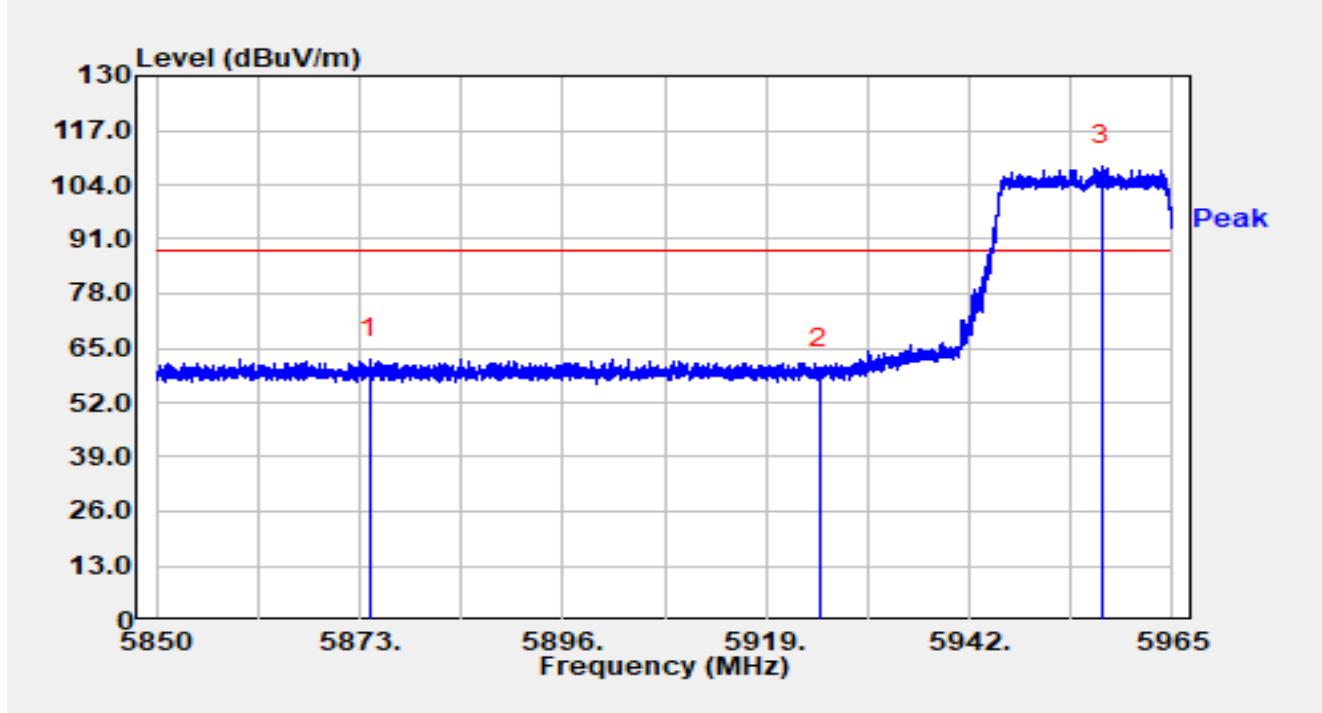


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5874.150	45.12	17.37	62.50	-25.70	88.20	Peak
2		5925.003	42.59	17.36	59.95	-28.25	88.20	Peak
3		5956.973	91.11	17.46	108.56	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

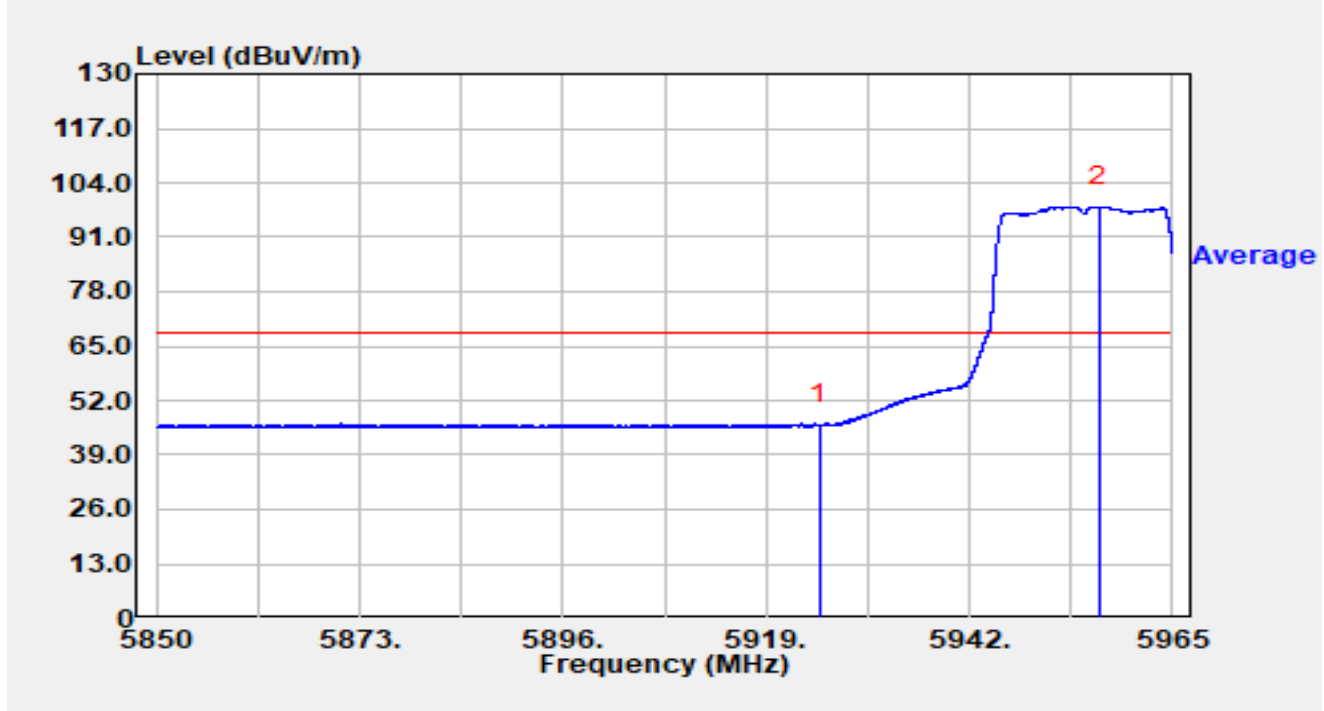


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	28.77	17.36	46.13	-22.07	68.20	Average
2		5956.617	80.89	17.46	98.35	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

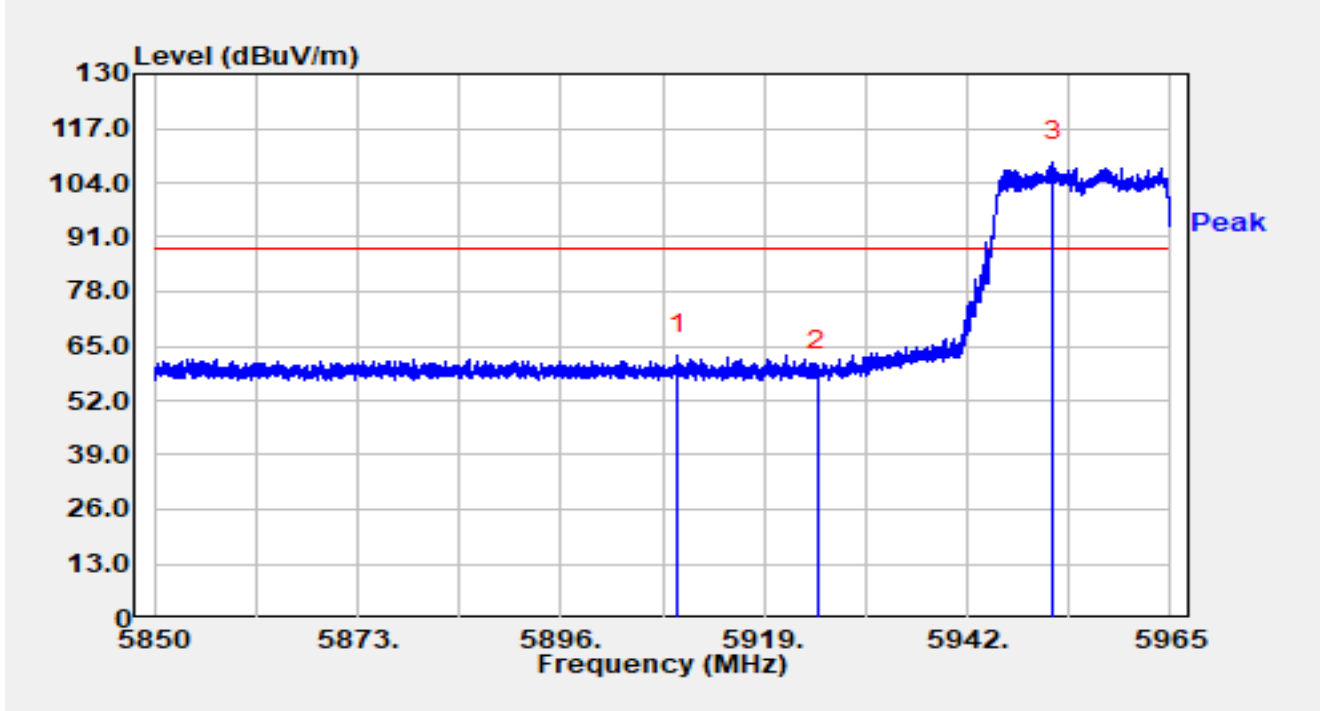


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.179	45.65	17.35	63.01	-25.19	88.20	Peak
2		5925.003	41.75	17.36	59.12	-29.08	88.20	Peak
3		5951.671	91.55	17.45	109.00	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

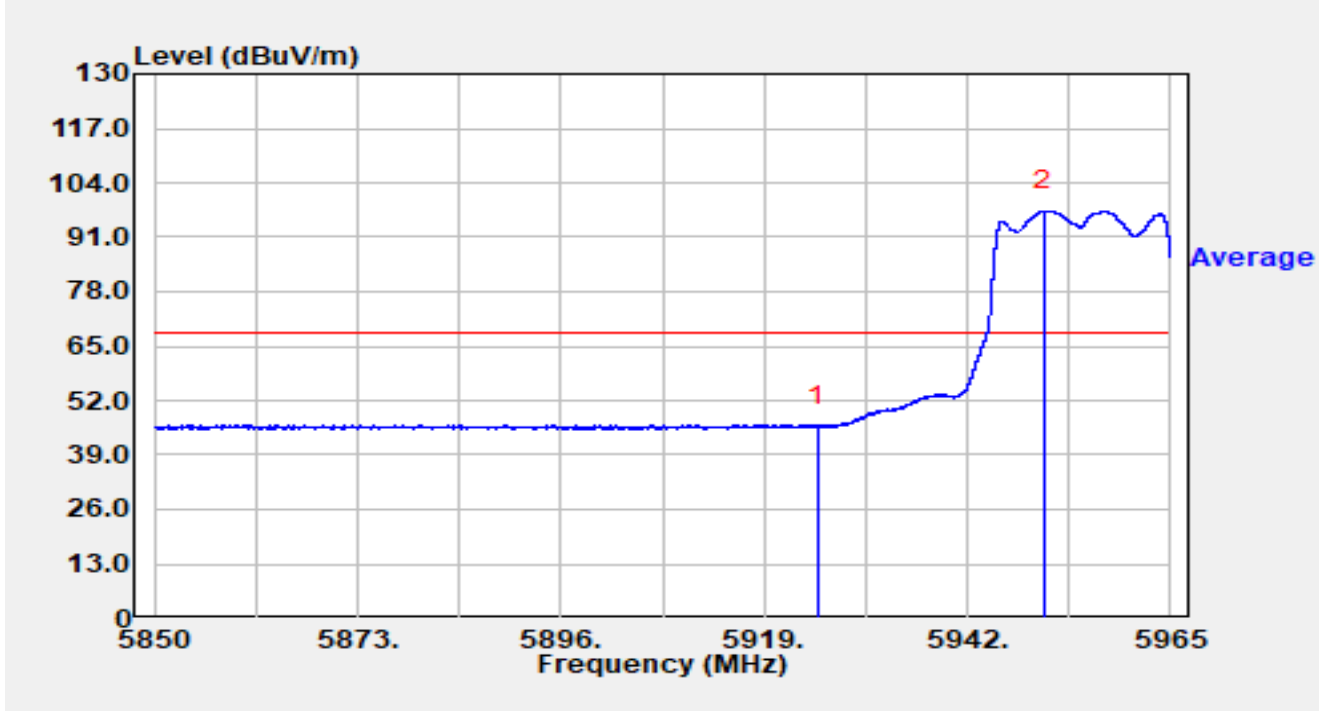


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	28.32	17.36	45.68	-22.52	68.20	Average
2		5950.625	79.91	17.45	97.36	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

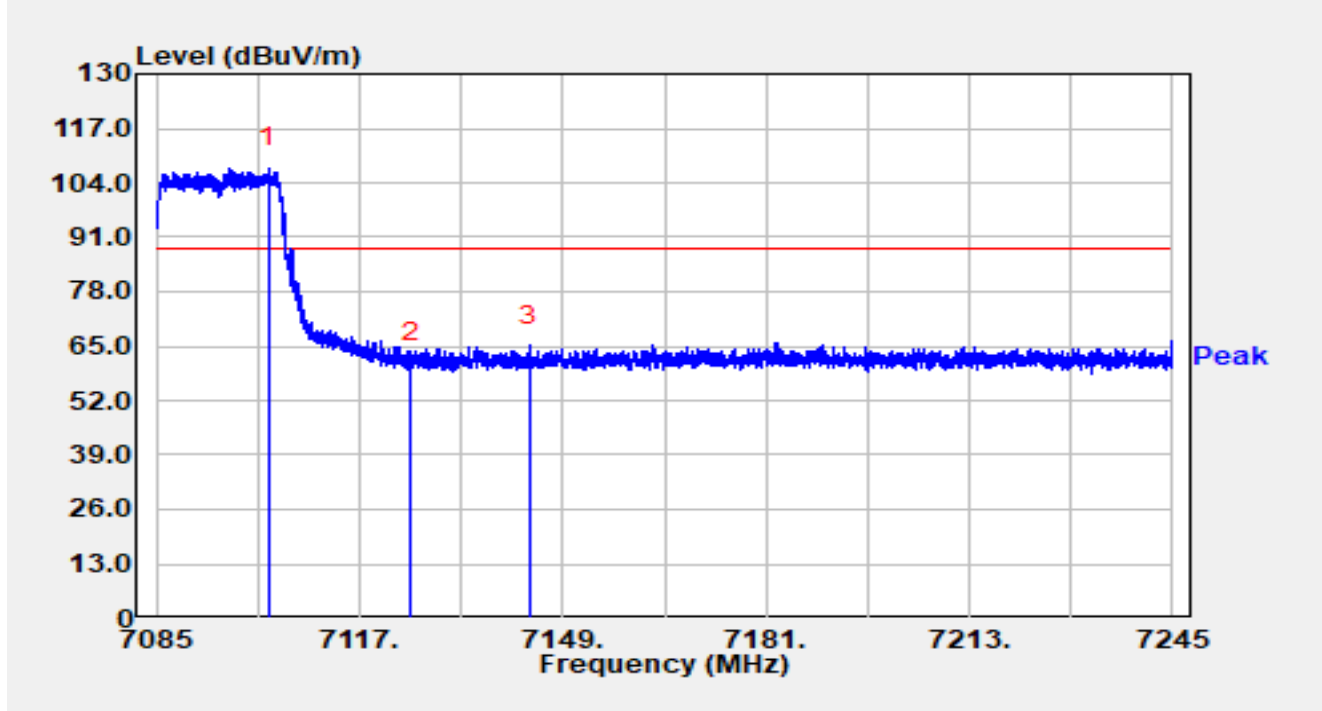


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7102.680	86.94	20.49	107.44	N/A	N/A	Peak
2		7125.000	40.66	20.42	61.09	-27.11	88.20	Peak
3	*	7143.736	44.86	20.39	65.24	-22.96	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

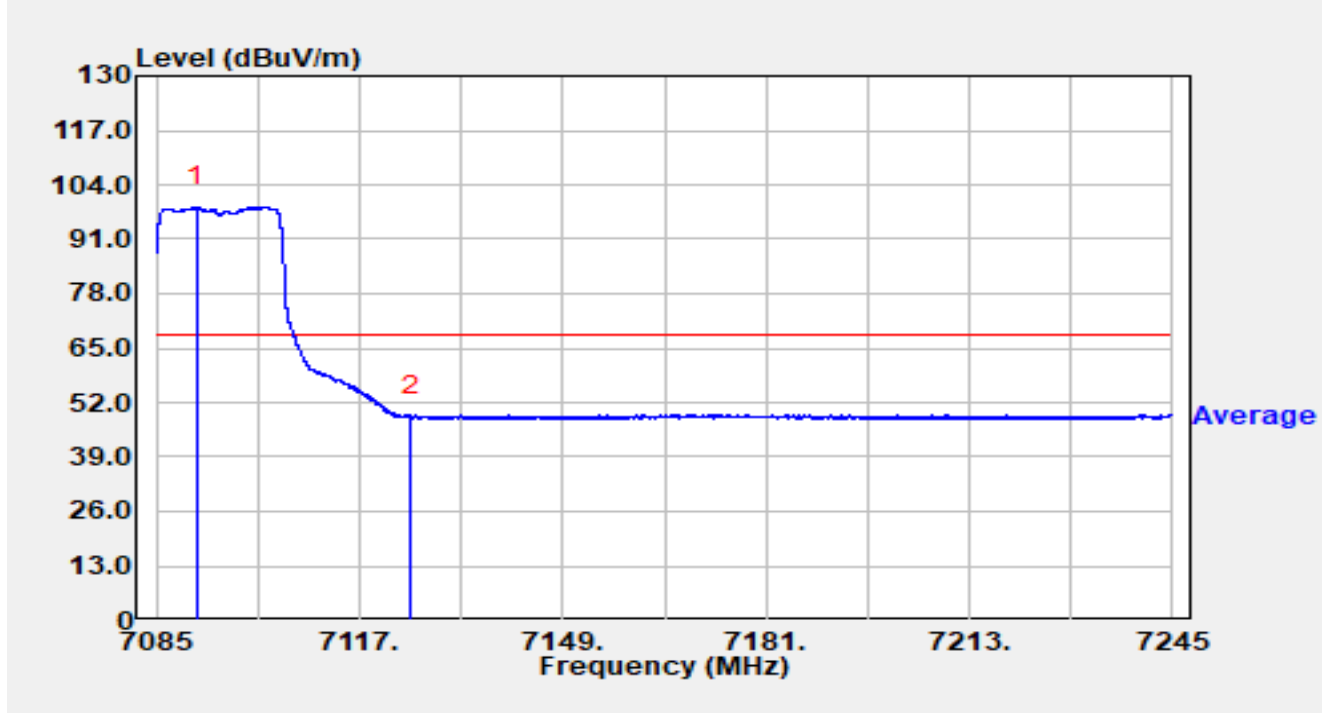


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.256	78.22	20.50	98.71	N/A	N/A	Average
2	*	7125.000	28.25	20.42	48.68	-19.52	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

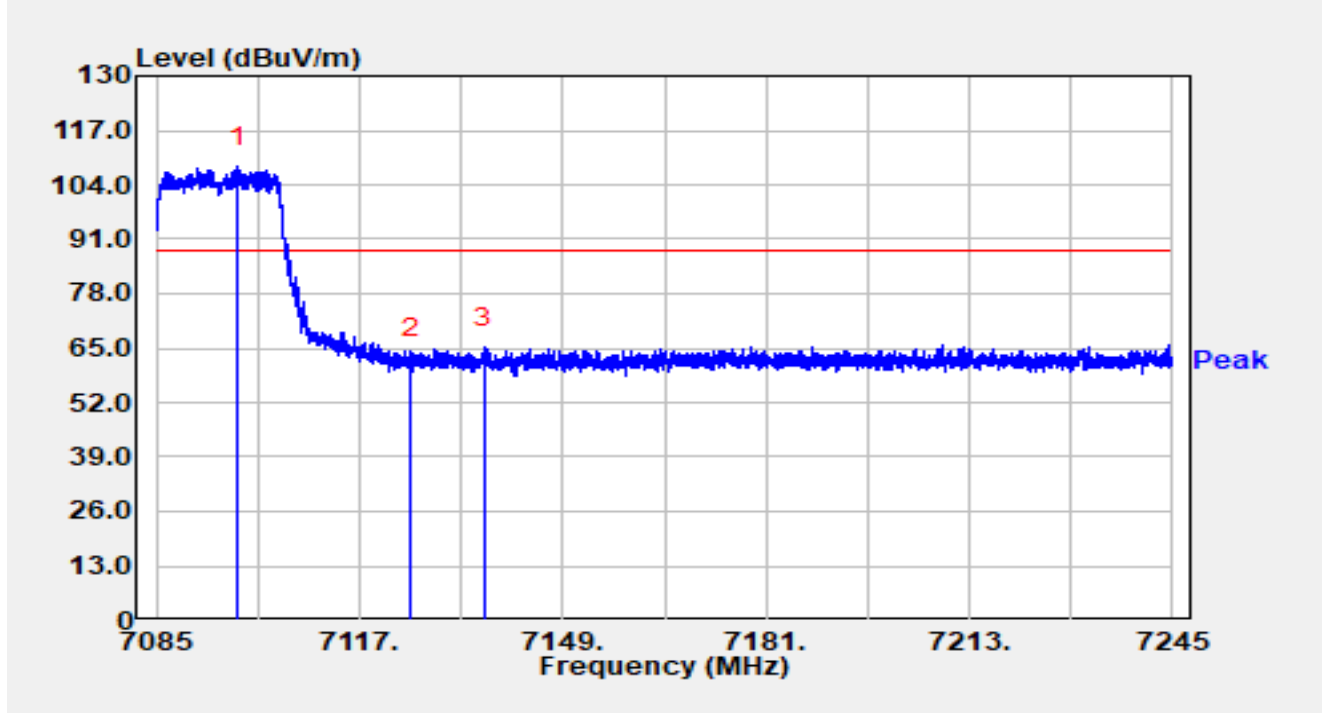


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.912	87.78	20.50	108.27	N/A	N/A	Peak
2		7125.000	42.20	20.42	62.62	-25.58	88.20	Peak
3	*	7136.600	44.69	20.43	65.12	-23.08	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

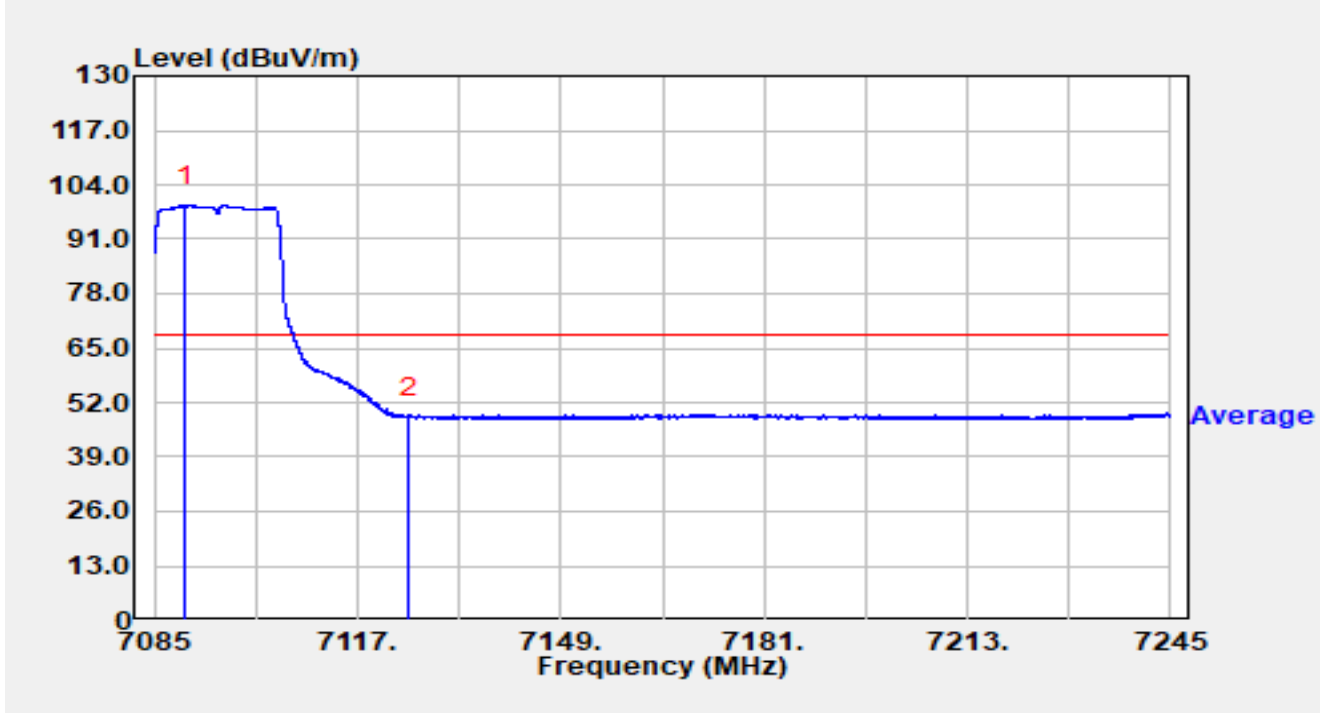


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.880	78.57	20.49	99.06	N/A	N/A	Average
2	*	7125.000	28.05	20.42	48.48	-19.72	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

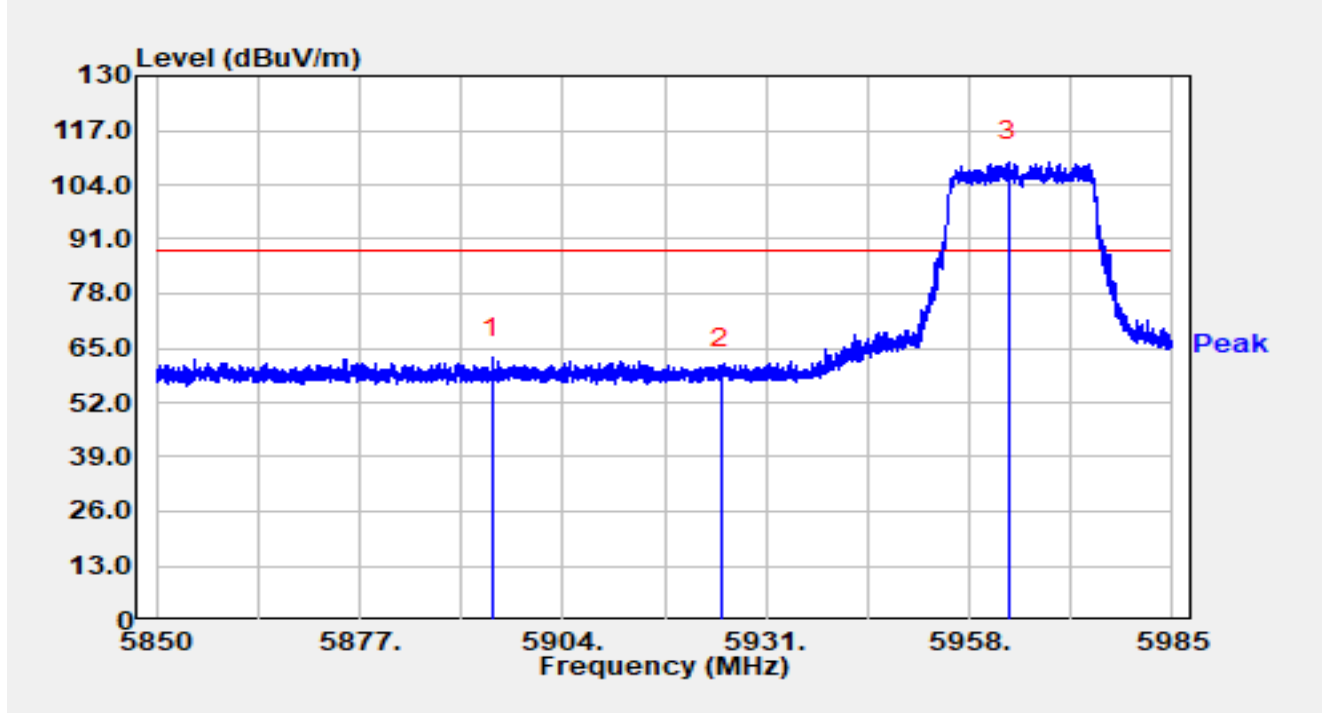


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5894.590	45.25	17.38	62.63	-25.57	88.20	Peak
2		5925.006	42.54	17.36	59.91	-28.29	88.20	Peak
3		5963.225	91.93	17.47	109.40	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

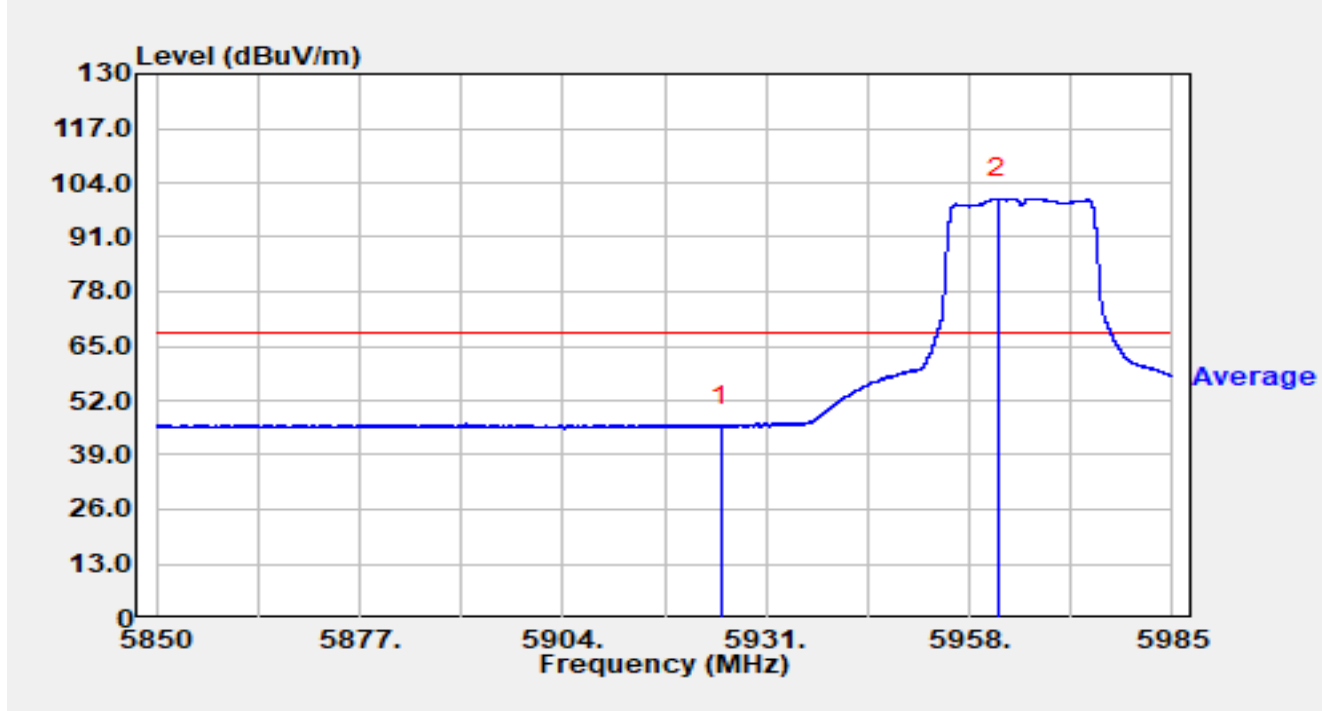


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.006	28.34	17.36	45.71	-22.49	68.20	Average
2		5961.875	82.85	17.47	100.32	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

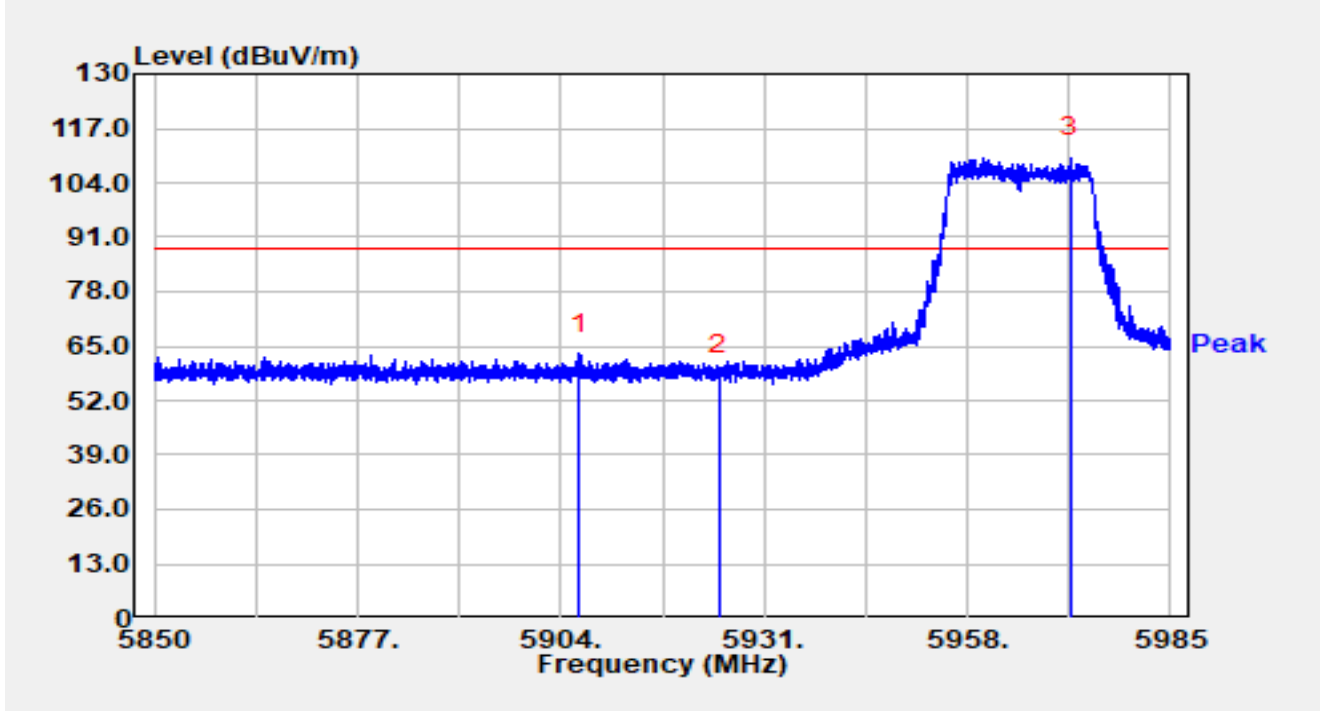


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.524	45.74	17.36	63.09	-25.11	88.20	Peak
2		5925.006	40.57	17.36	57.94	-30.26	88.20	Peak
3		5971.662	92.51	17.53	110.04	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

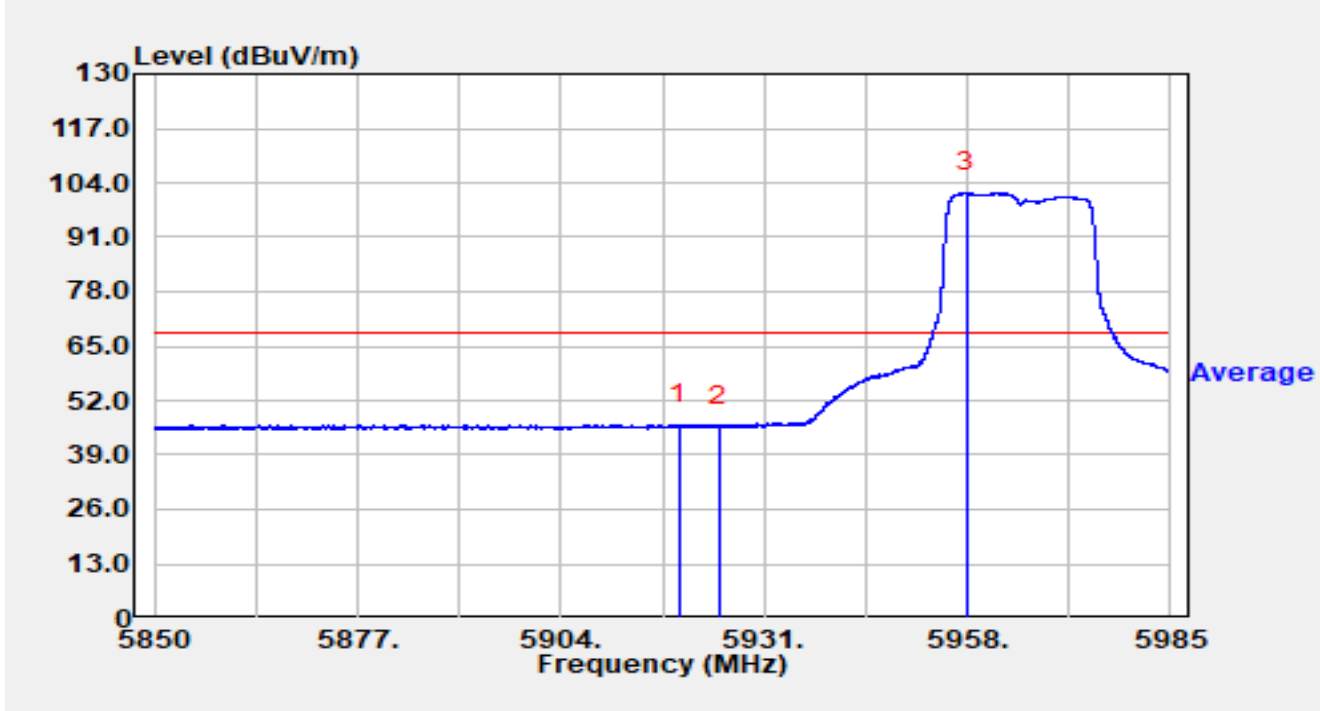


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.741	28.98	17.35	46.33	-21.87	68.20	Average
2		5925.006	28.45	17.36	45.82	-22.38	68.20	Average
3		5957.919	84.20	17.46	101.66	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

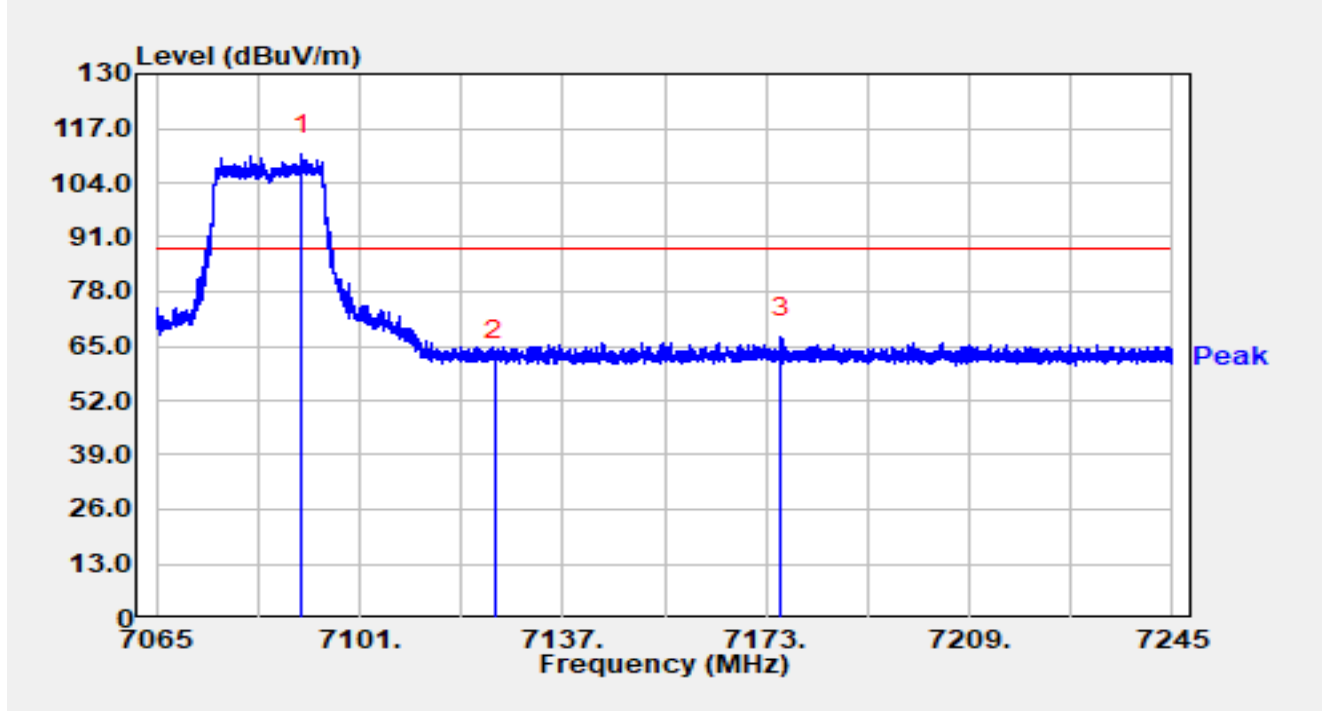


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7090.722	90.20	20.49	110.70	N/A	N/A	Peak
2		7124.994	41.37	20.42	61.79	-26.41	88.20	Peak
3	*	7175.718	46.36	20.73	67.09	-21.11	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

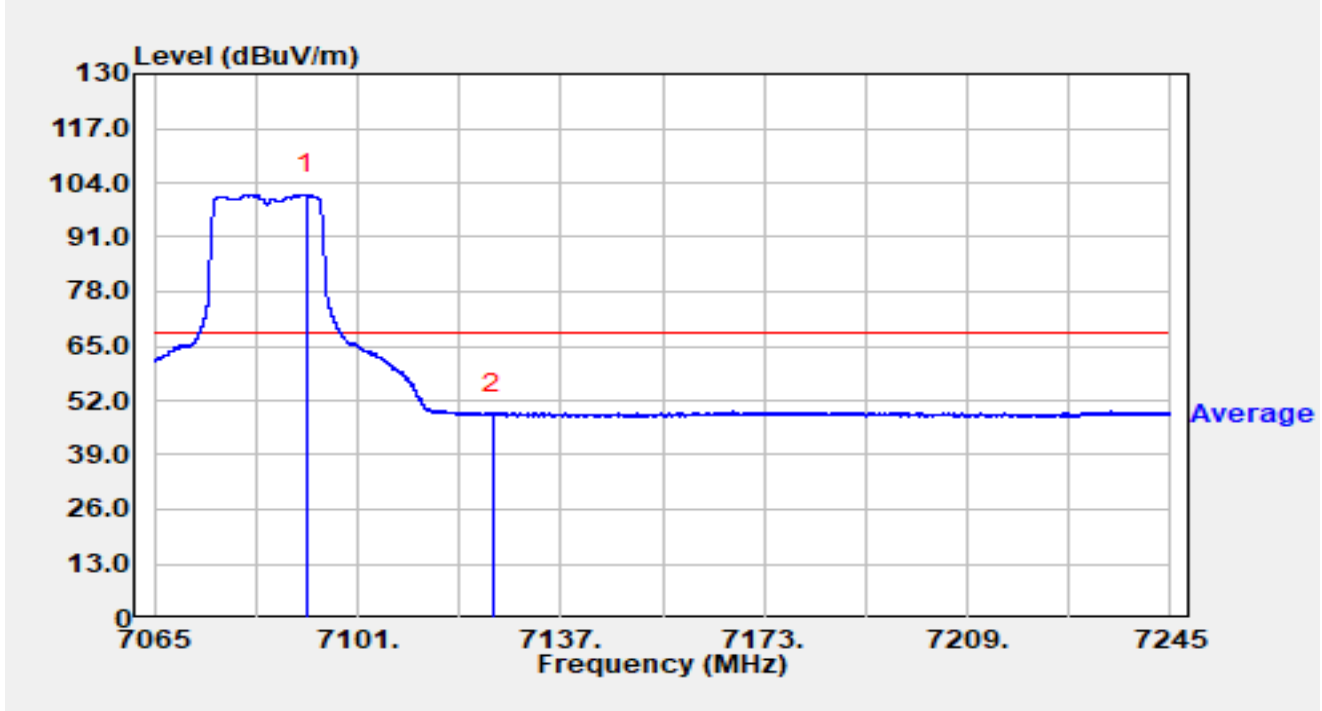


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7092.018	80.69	20.50	101.19	N/A	N/A	Average
2	*	7125.000	28.37	20.42	48.79	-19.41	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

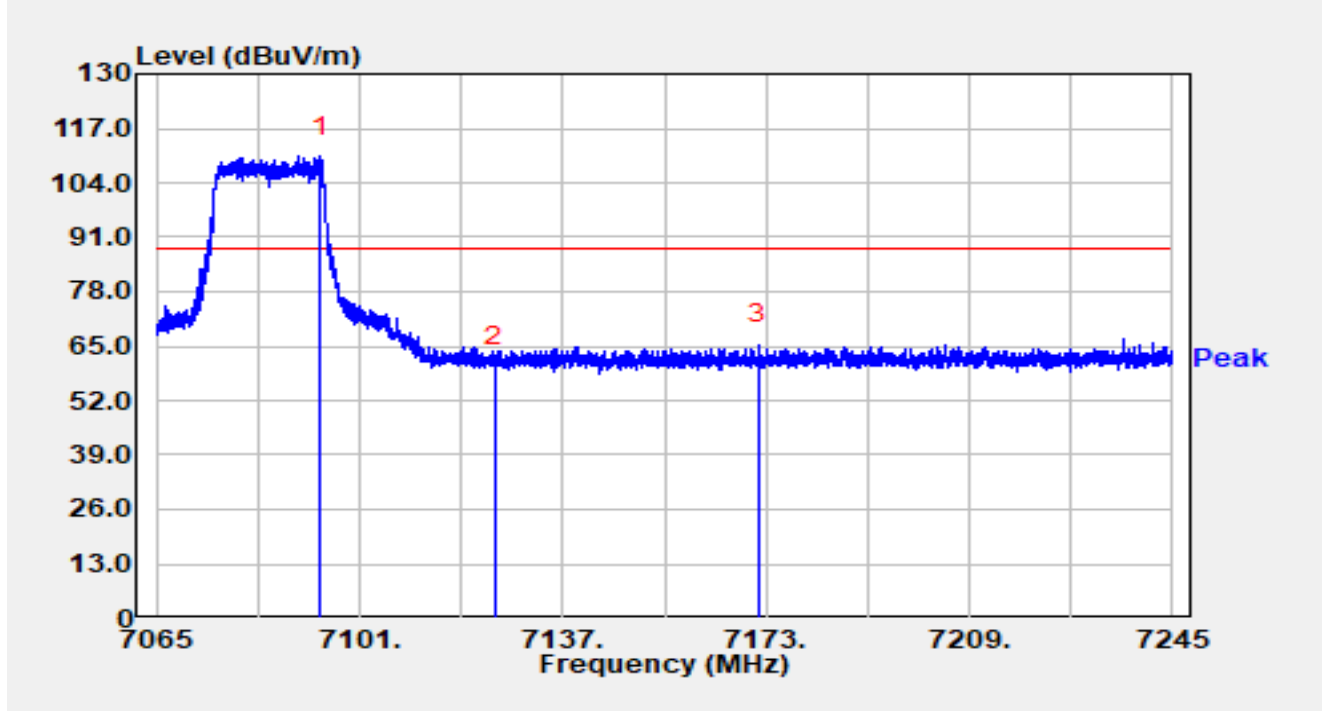


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7094.124	89.78	20.50	110.28	N/A	N/A	Peak
2		7125.000	39.88	20.42	60.31	-27.89	88.20	Peak
3	*	7171.614	44.59	20.75	65.34	-22.86	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

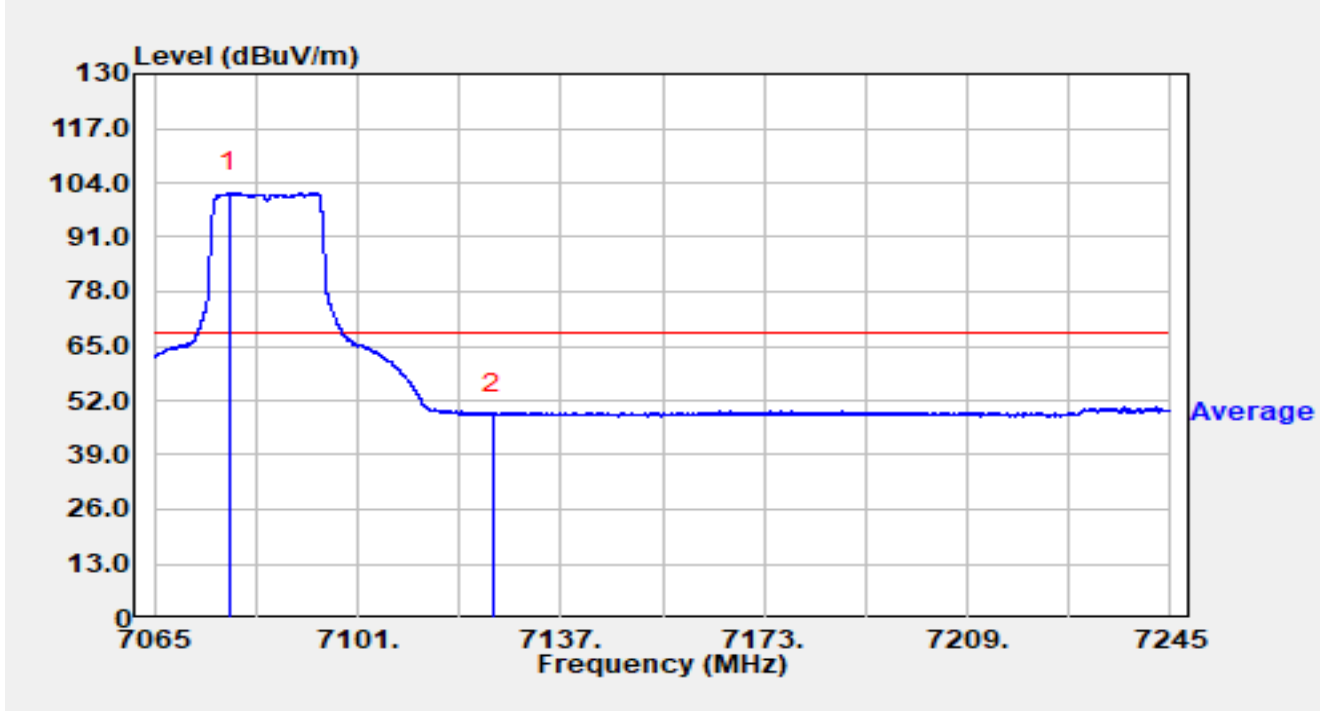


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7078.176	81.14	20.41	101.56	N/A	N/A	Average
2	*	7125.000	28.23	20.42	48.65	-19.55	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

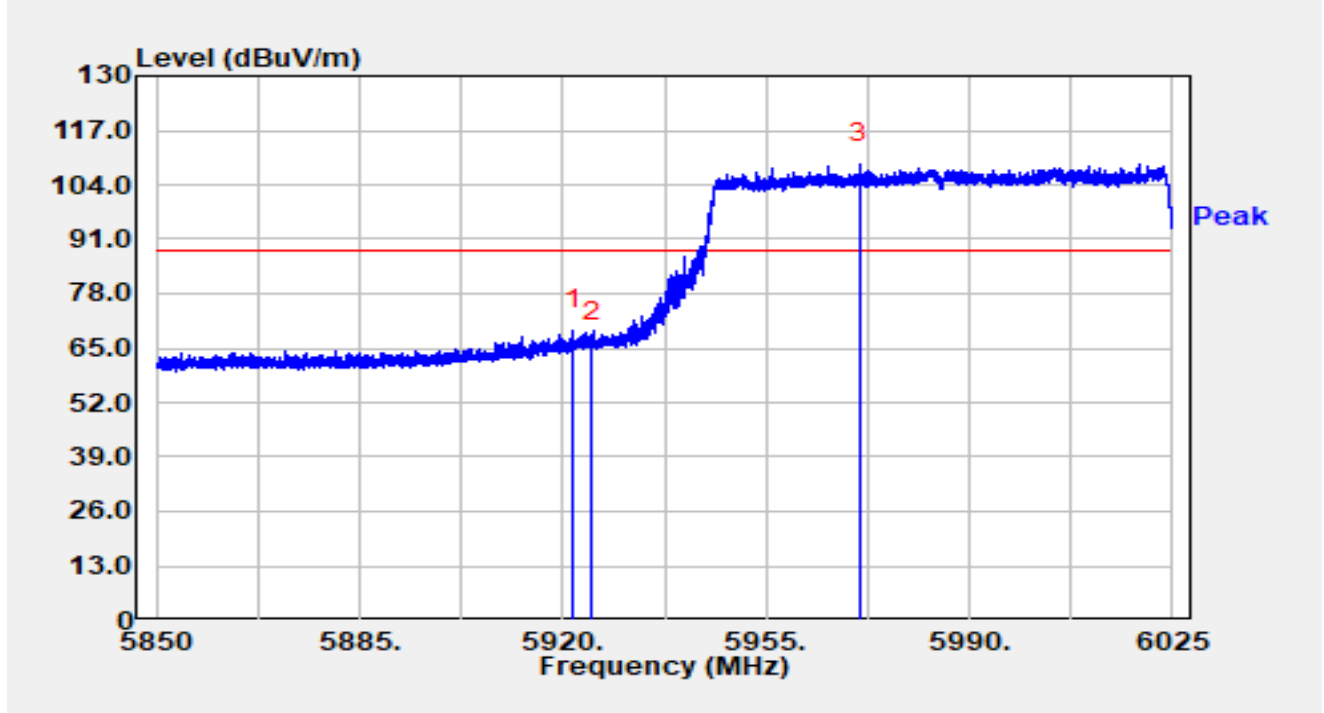


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.820	52.02	17.36	69.38	-18.82	88.20	Peak
2		5925.005	49.16	17.36	66.53	-21.67	88.20	Peak
3		5971.013	91.38	17.53	108.91	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

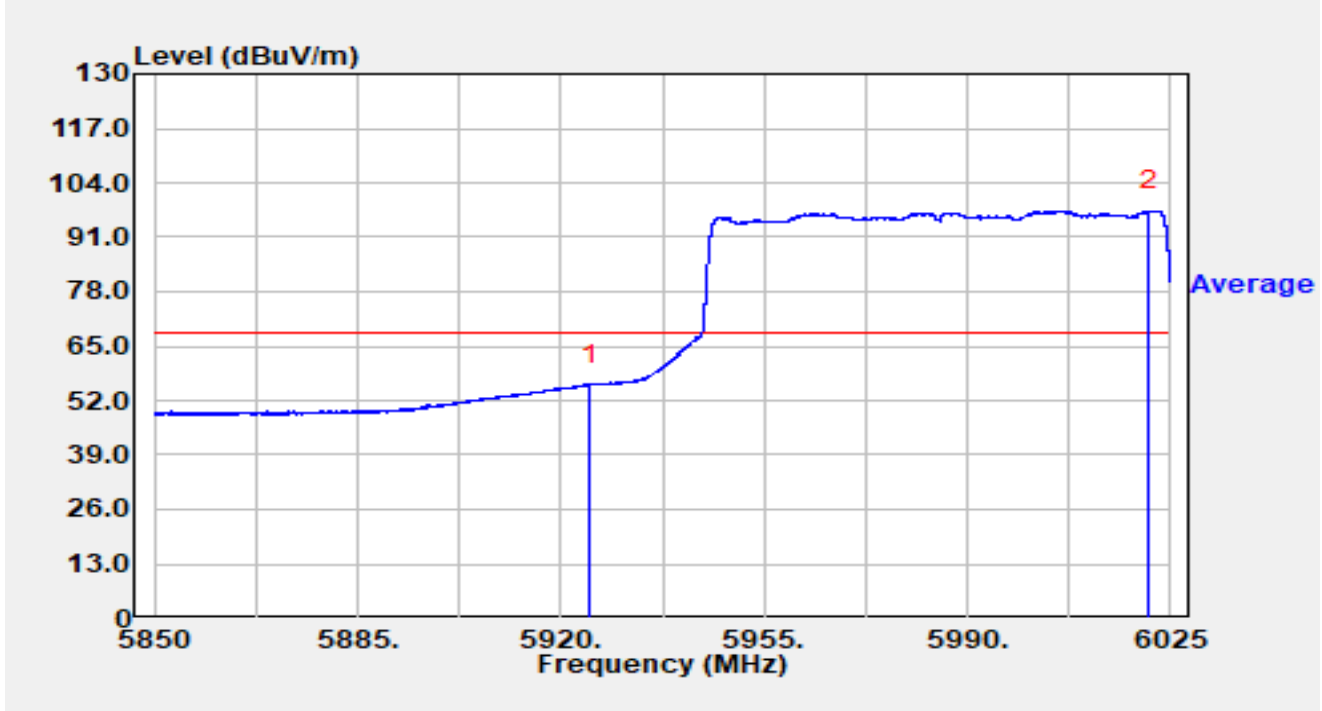


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.005	38.42	17.36	55.78	-12.42	68.20	Average
2		6021.360	79.63	17.69	97.32	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

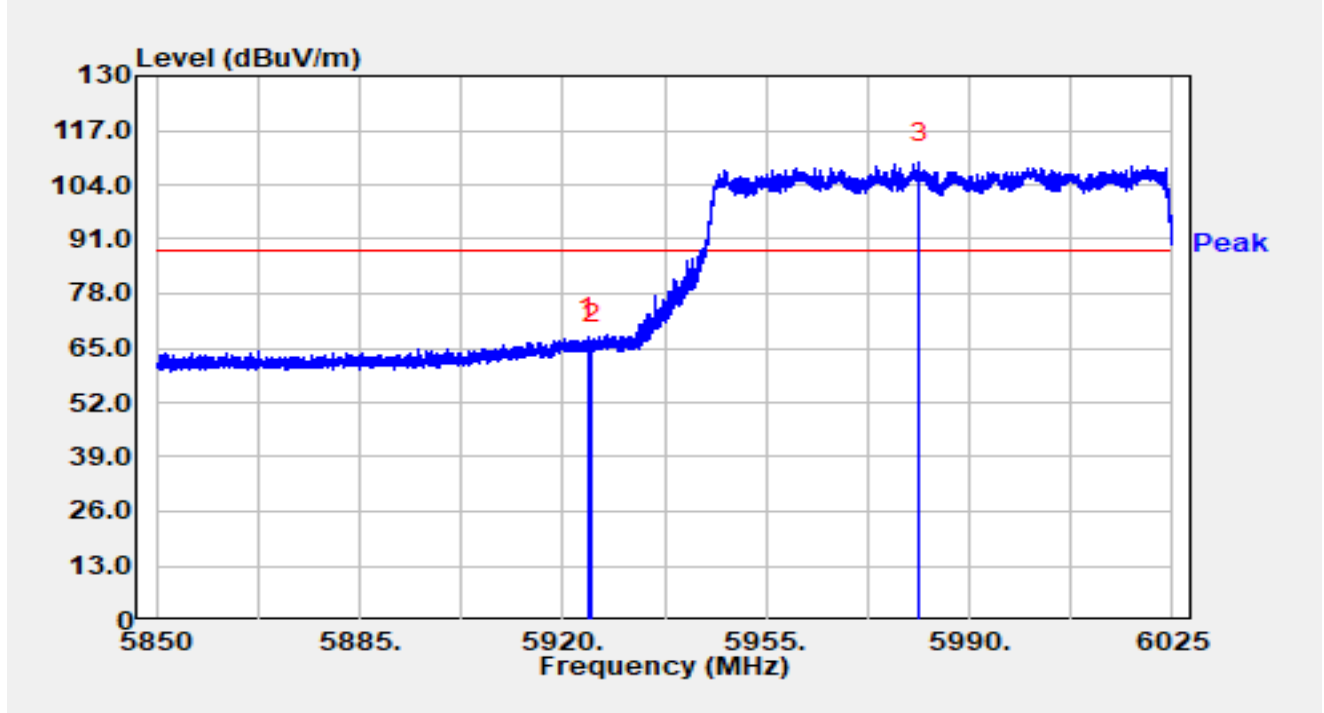


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.393	50.10	17.36	67.46	-20.74	88.20	Peak
2		5925.005	48.53	17.36	65.89	-22.31	88.20	Peak
3		5981.425	91.66	17.59	109.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

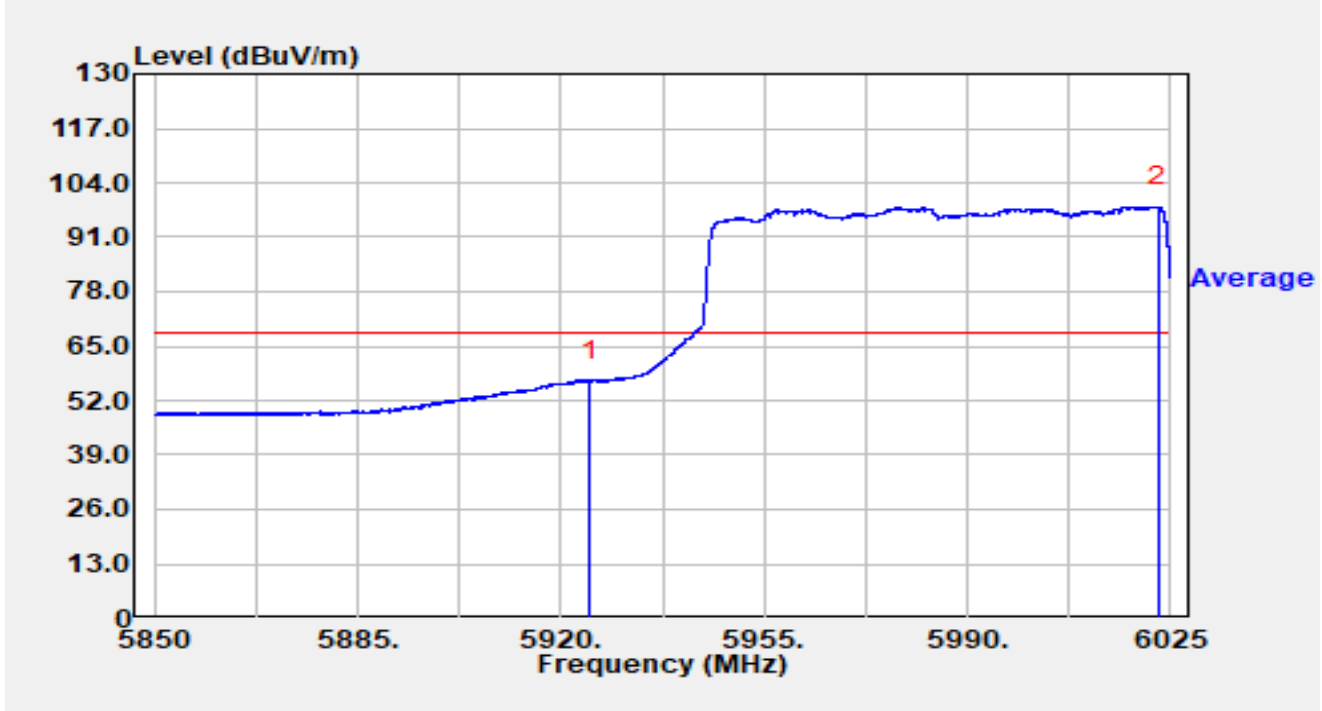


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.005	39.26	17.36	56.62	-11.58	68.20	Average
2		6022.900	80.45	17.70	98.15	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

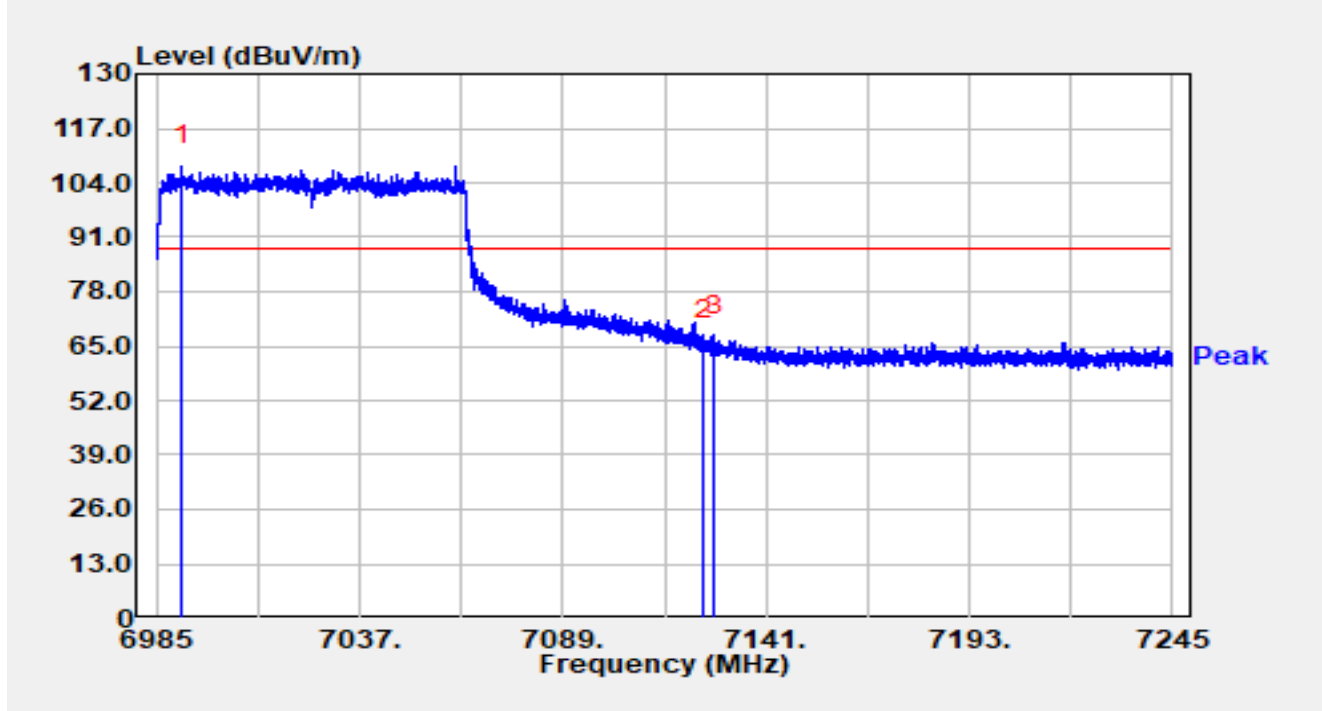


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6991.448	87.68	20.29	107.97	N/A	N/A	Peak
2		7125.010	46.21	20.42	66.63	-21.57	88.20	Peak
3	*	7127.766	47.04	20.44	67.48	-20.72	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

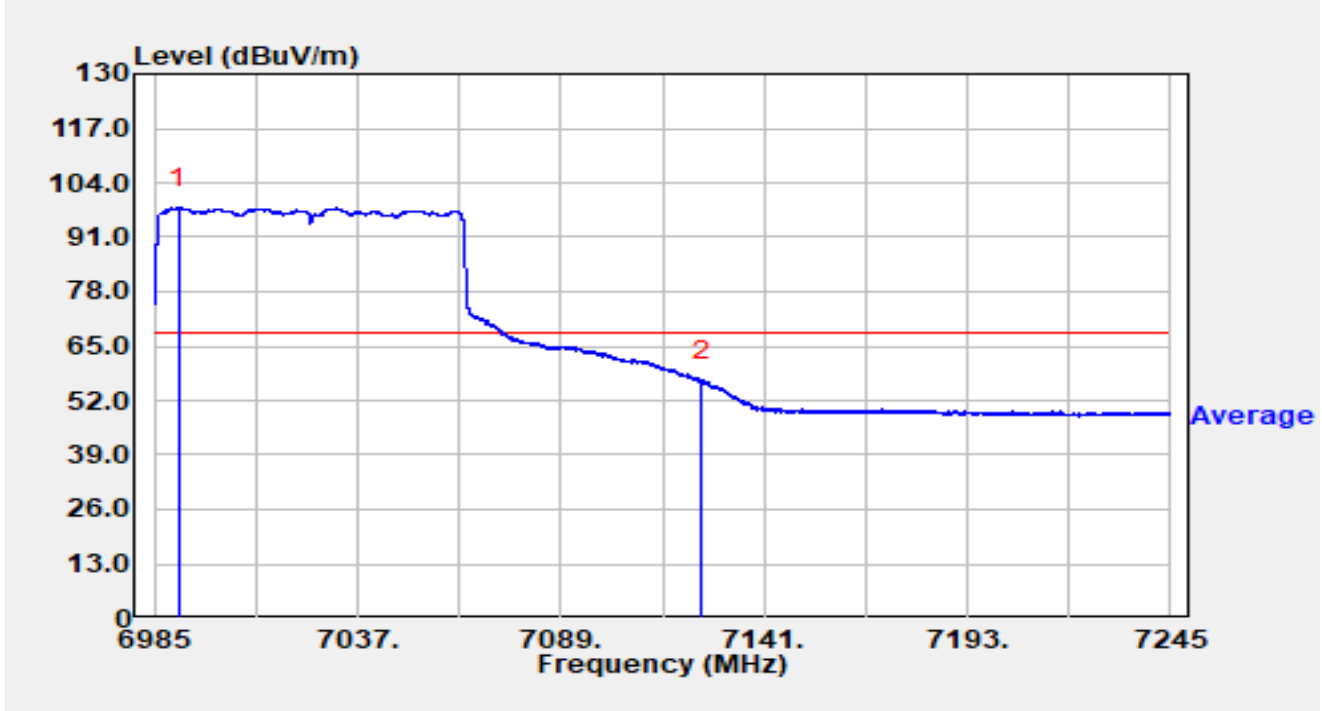


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6991.162	77.76	20.29	98.05	N/A	N/A	Average
2	*	7125.010	36.17	20.42	56.59	-11.61	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

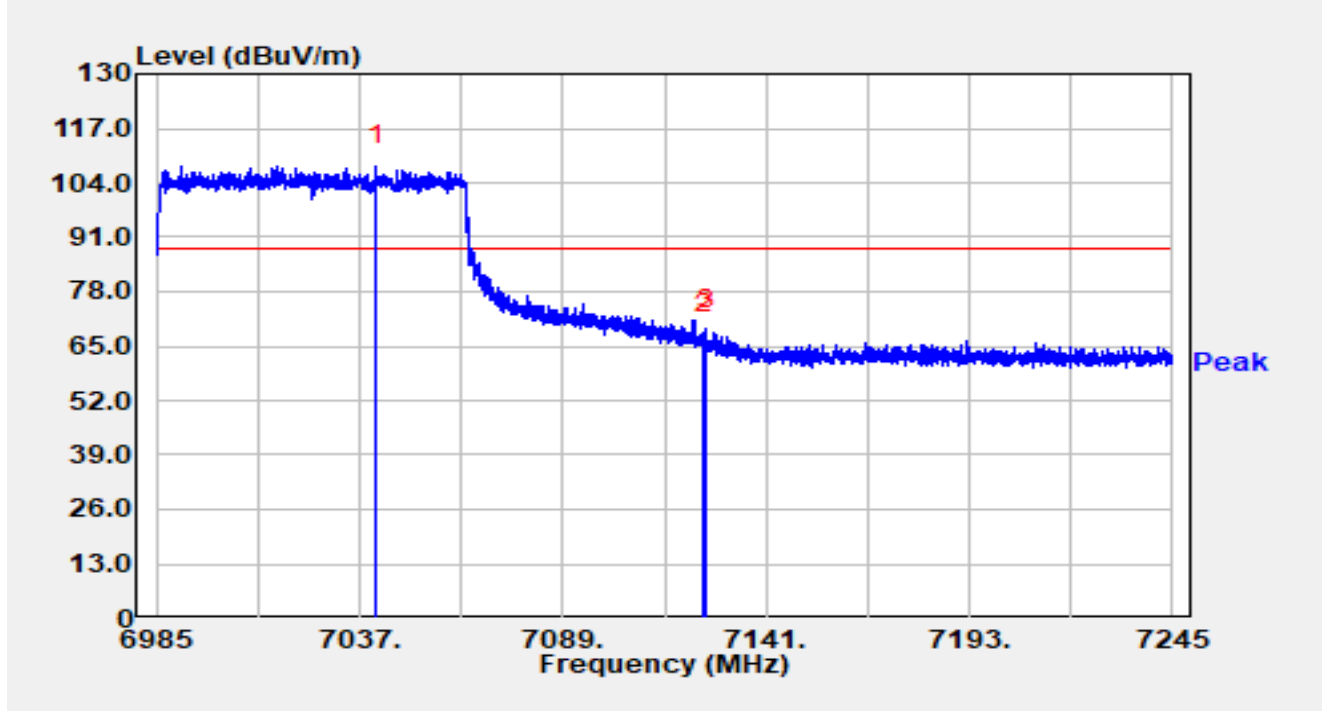


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7041.108	87.75	20.20	107.95	N/A	N/A	Peak
2		7125.010	47.43	20.42	67.85	-20.35	88.20	Peak
3	*	7125.790	48.67	20.43	69.10	-19.10	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

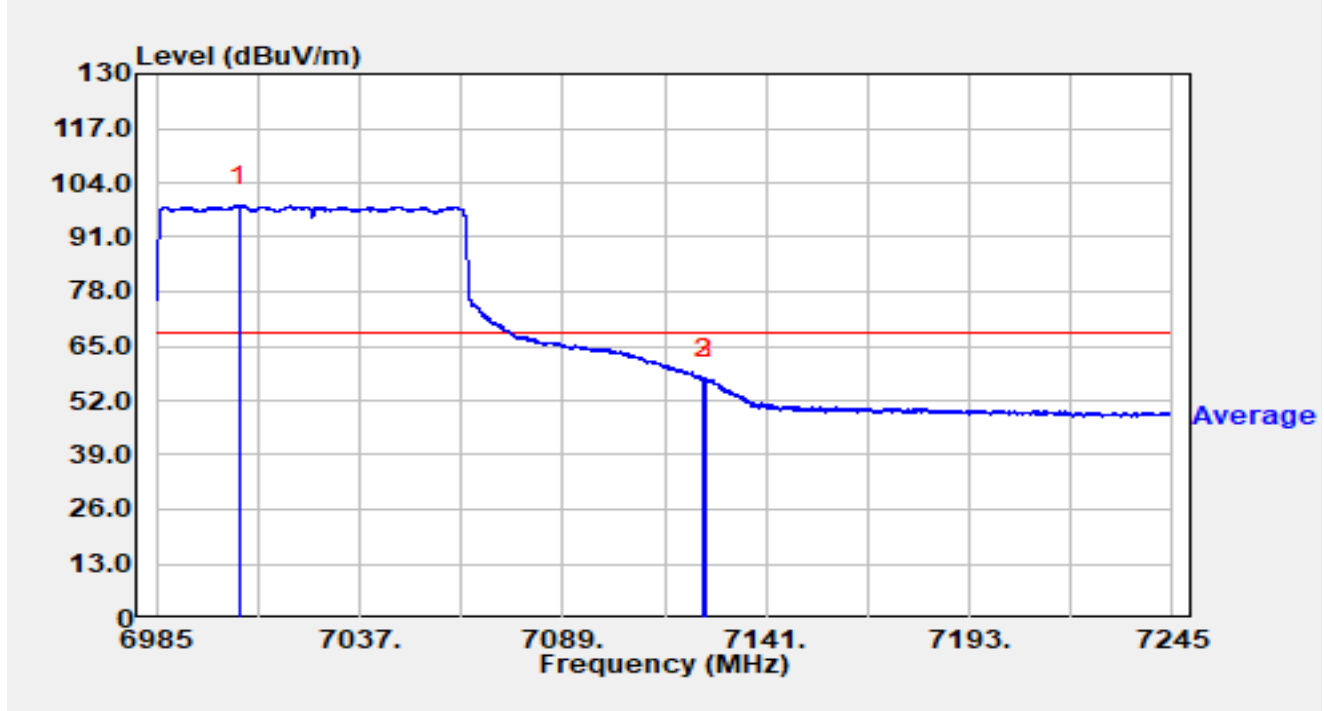


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7006.164	78.27	20.30	98.57	N/A	N/A	Average
2		7125.010	36.66	20.42	57.08	-11.12	68.20	Average
3	*	7125.478	36.83	20.43	57.26	-10.94	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

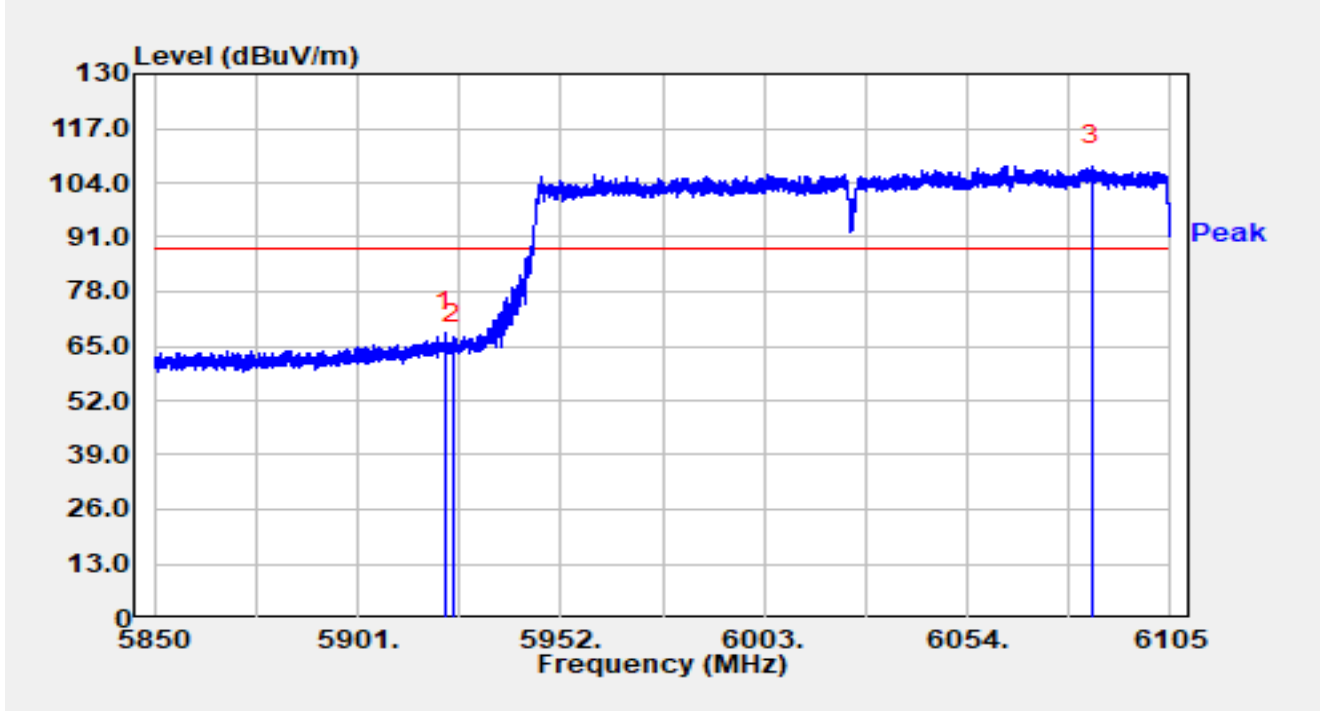


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.930	50.91	17.36	68.27	-19.93	88.20	Peak
2		5924.996	48.11	17.36	65.47	-22.73	88.20	Peak
3		6085.212	89.97	18.09	108.06	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

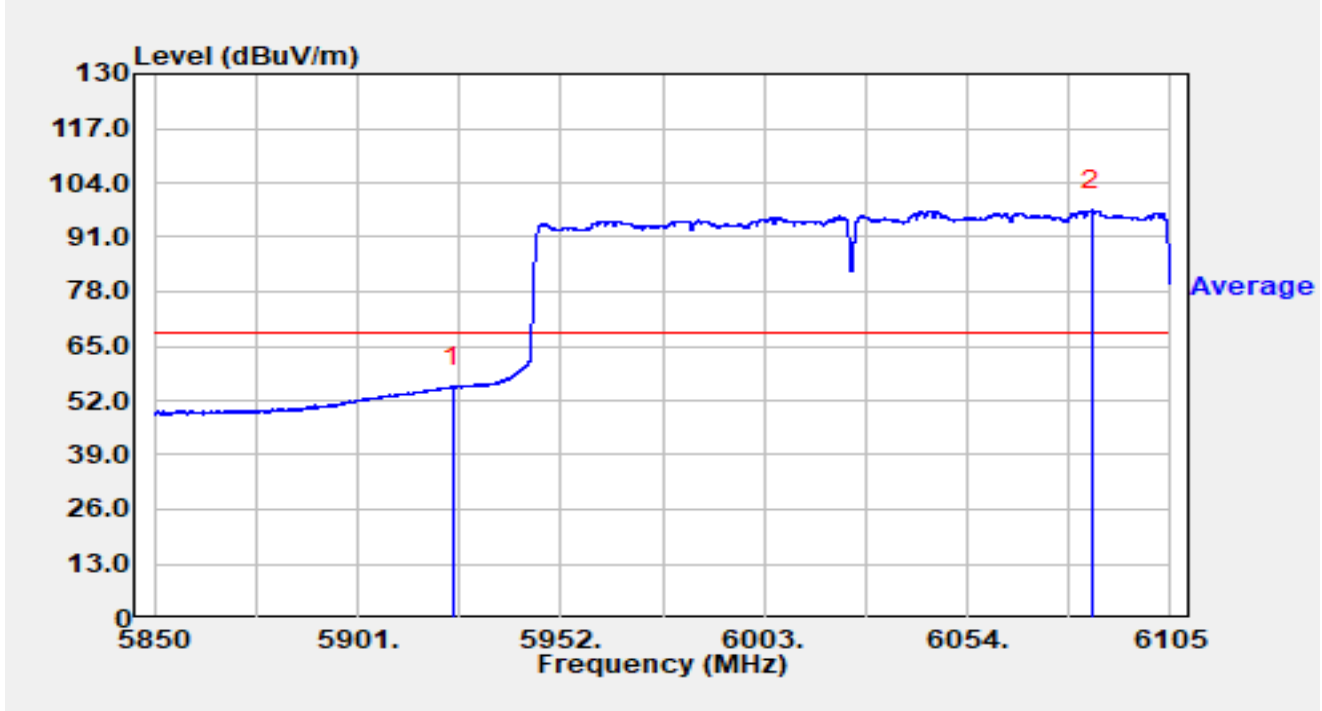


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.996	37.78	17.36	55.14	-13.06	68.20	Average
2		6085.110	79.31	18.09	97.40	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

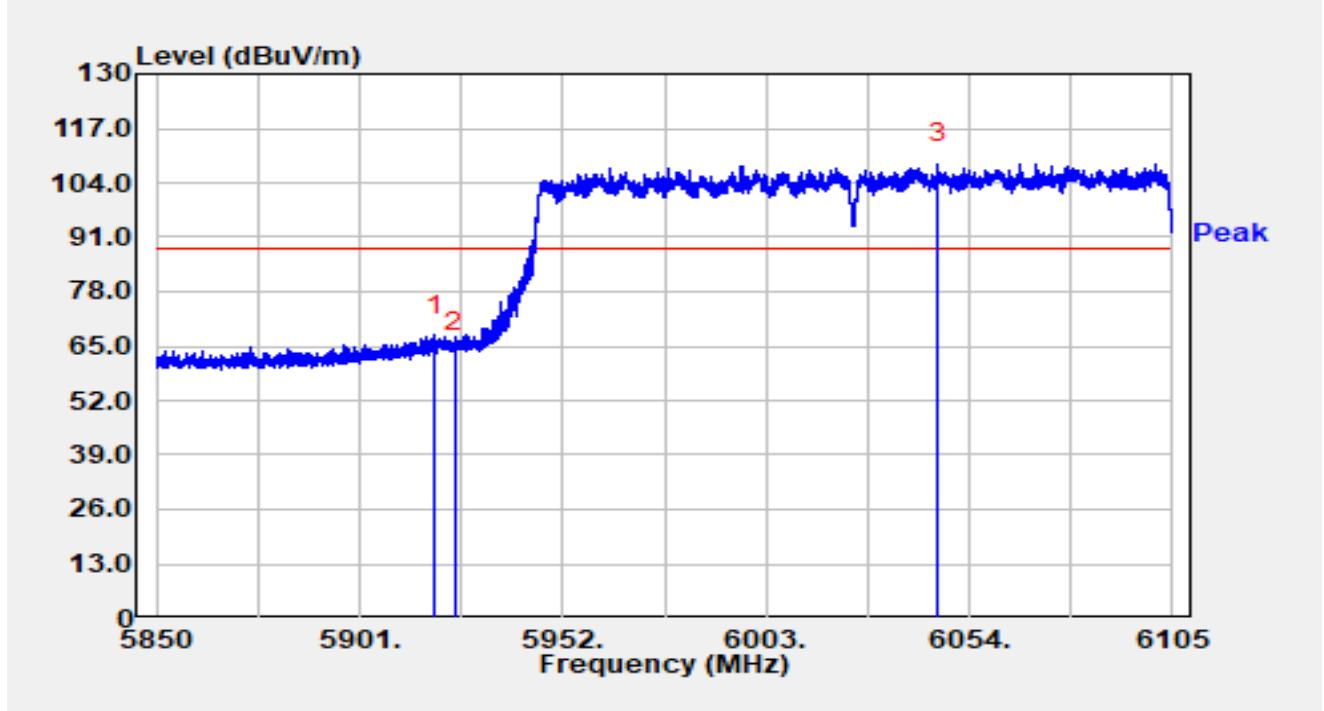


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.845	50.20	17.35	67.56	-20.64	88.20	Peak
2		5924.996	46.29	17.36	63.65	-24.55	88.20	Peak
3		6046.197	90.68	17.92	108.60	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

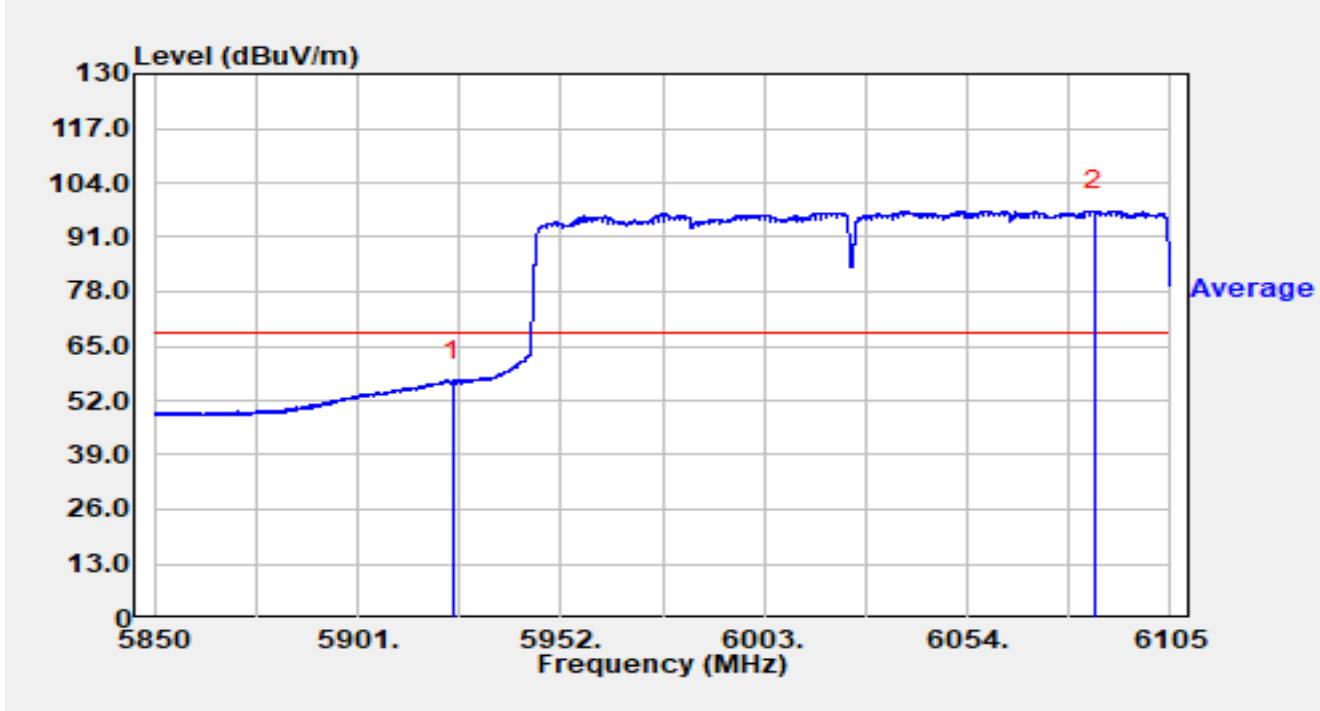


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.996	39.30	17.36	56.66	-11.54	68.20	Average
2		6085.748	79.19	18.09	97.27	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

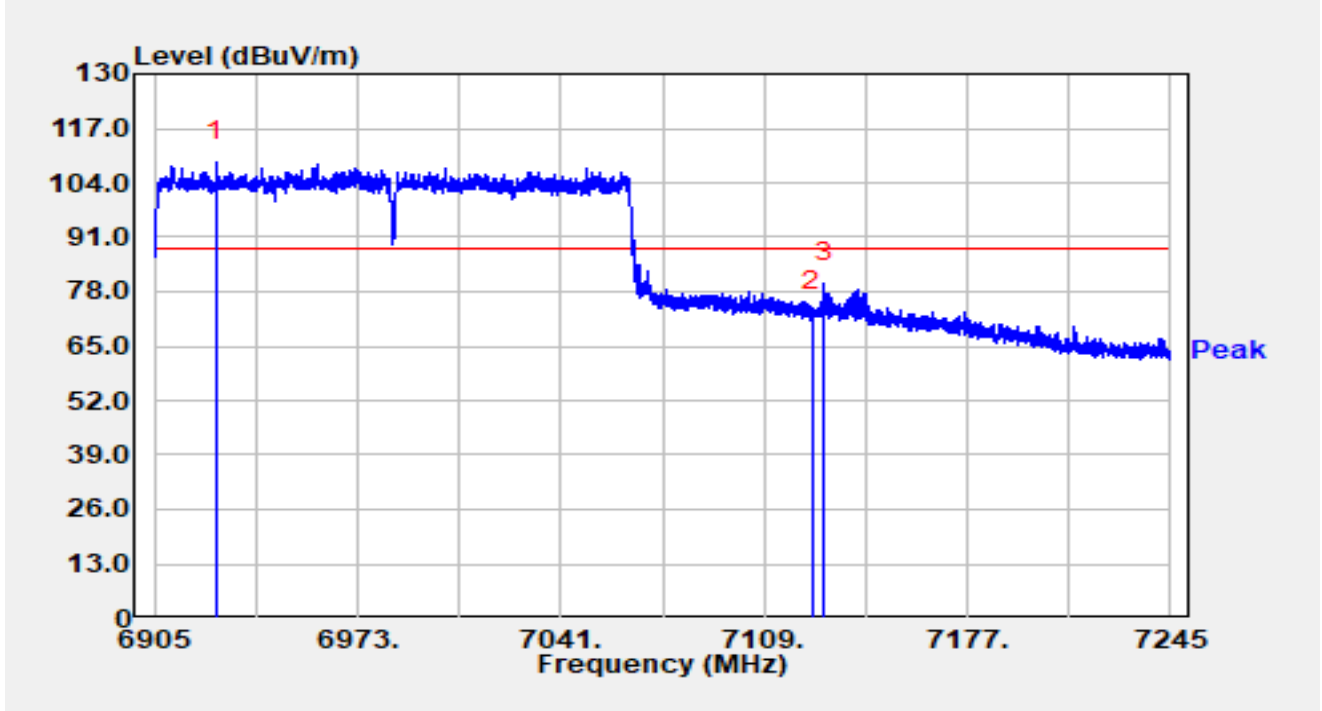


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6925.536	88.60	20.38	108.99	N/A	N/A	Peak
2		7125.014	52.87	20.42	73.29	-14.91	88.20	Peak
3	*	7129.060	59.65	20.44	80.09	-8.11	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

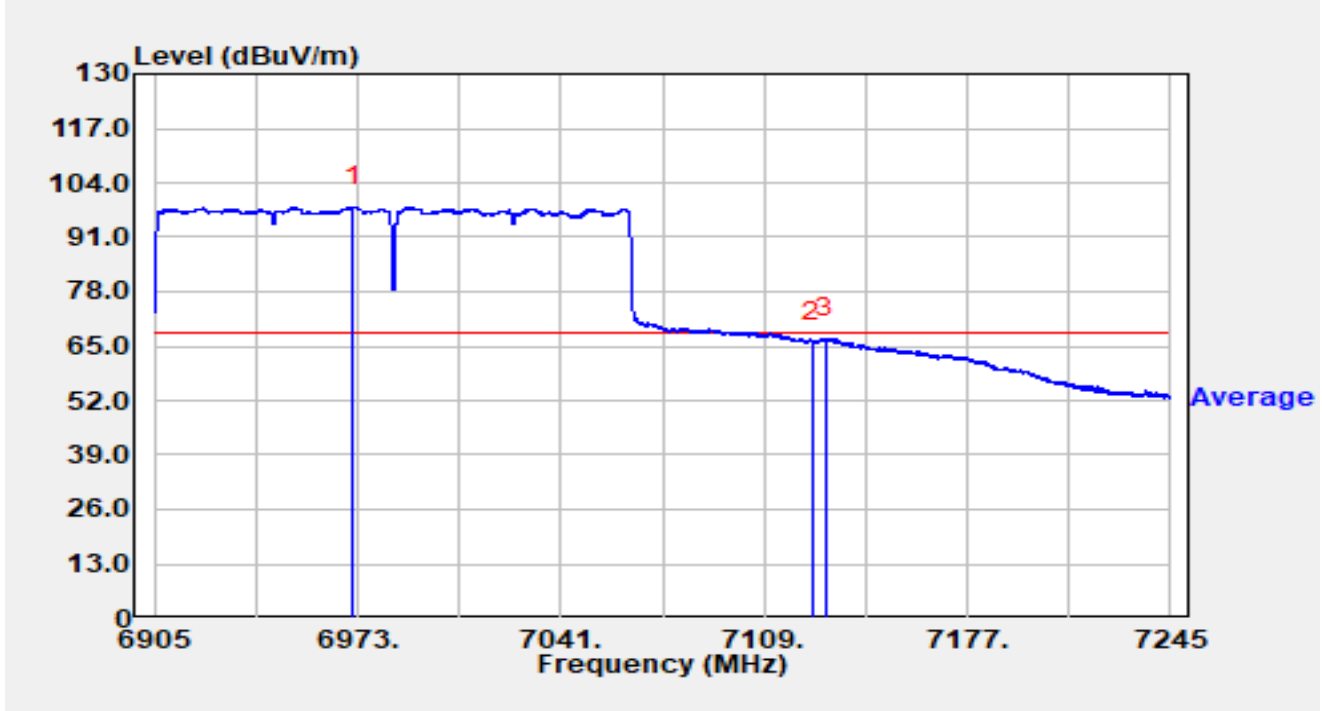


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6971.470	78.04	20.19	98.23	N/A	N/A	Average
2		7125.000	45.67	20.42	66.09	-2.11	68.20	Average
3	*	7129.706	46.36	20.44	66.80	-1.40	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

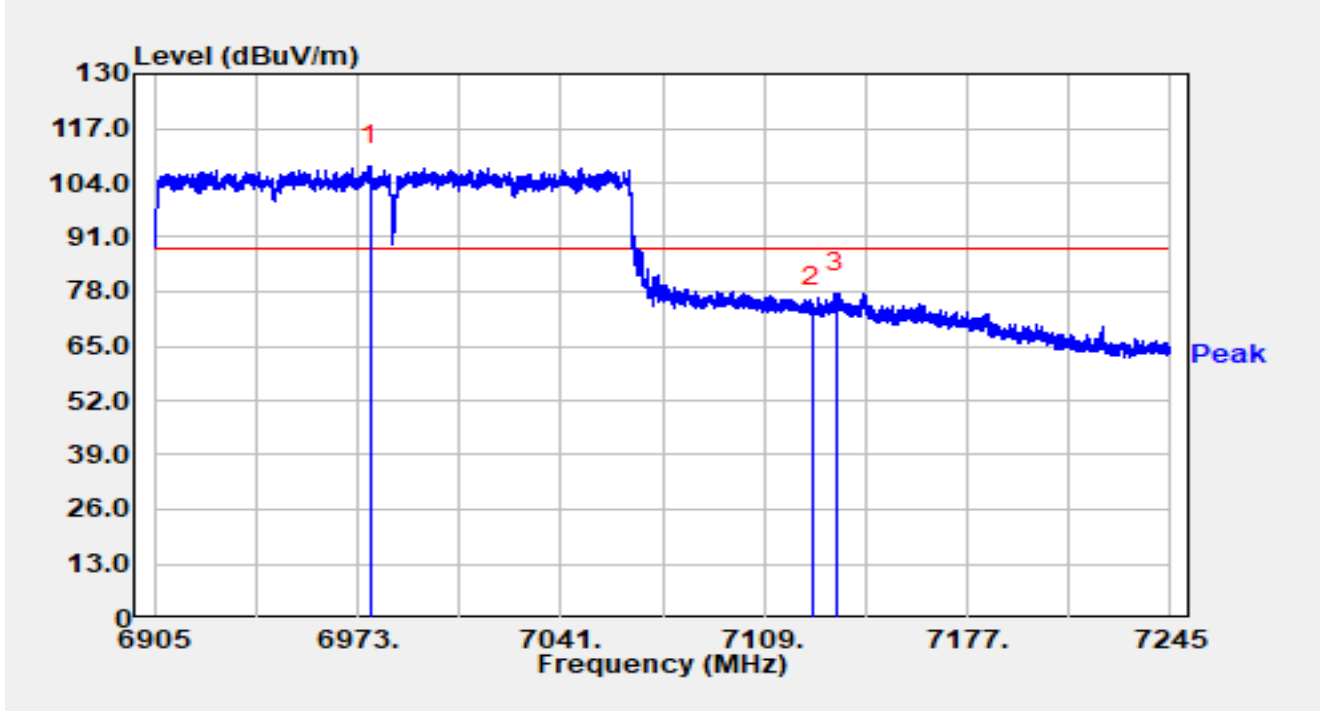


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6977.046	87.84	20.24	108.09	N/A	N/A	Peak
2		7125.014	53.78	20.42	74.21	-13.99	88.20	Peak
3	*	7132.902	57.29	20.43	77.73	-10.47	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

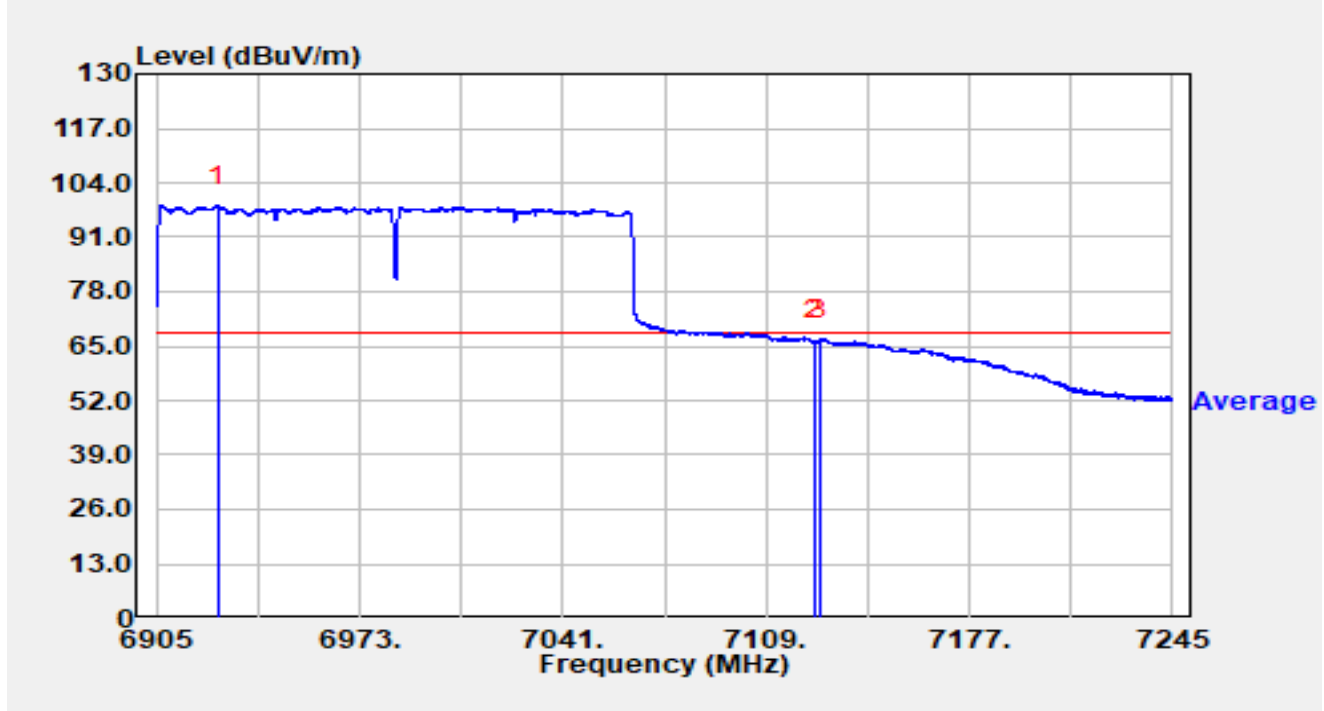


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6925.536	78.10	20.38	98.48	N/A	N/A	Average
2		7125.014	45.84	20.42	66.27	-1.93	68.20	Average
3	*	7126.986	46.15	20.44	66.58	-1.62	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6105MHz		

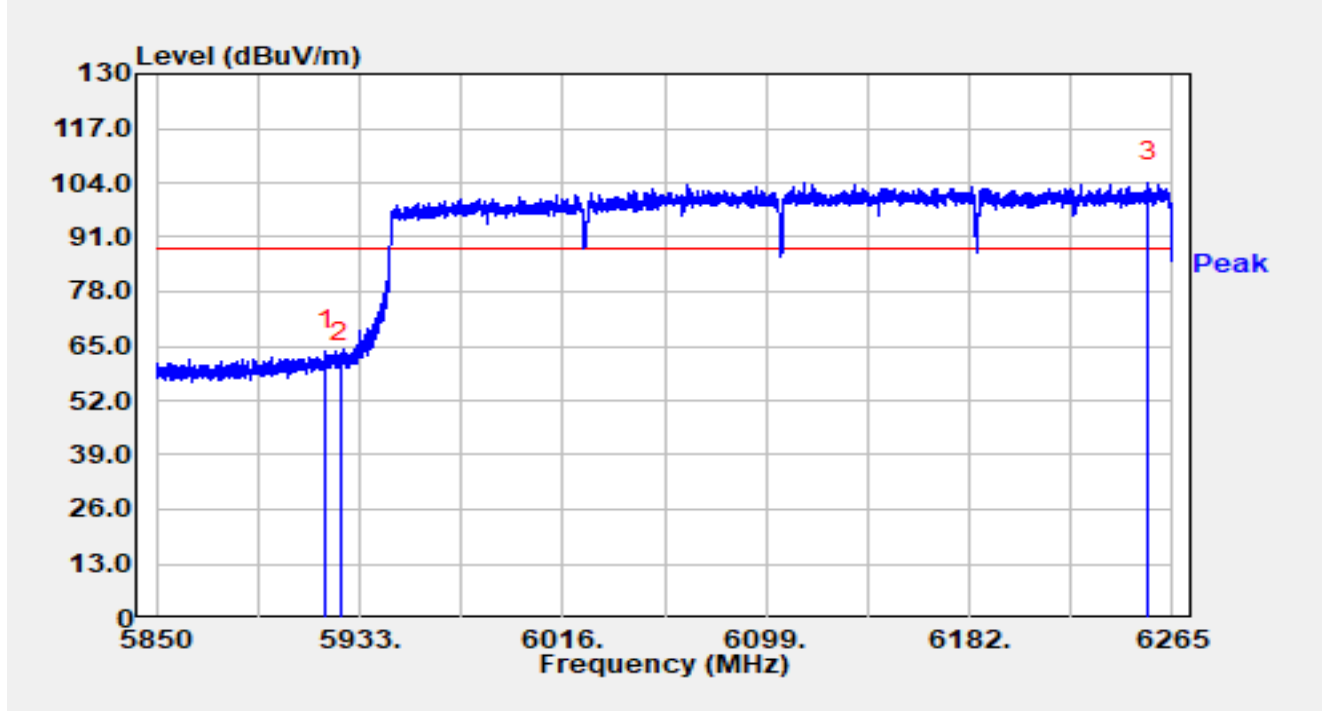


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.388	46.50	17.35	63.86	-24.34	88.20	Peak
2		5924.991	43.55	17.36	60.92	-27.28	88.20	Peak
3		6255.165	85.24	18.81	104.05	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6105MHz		

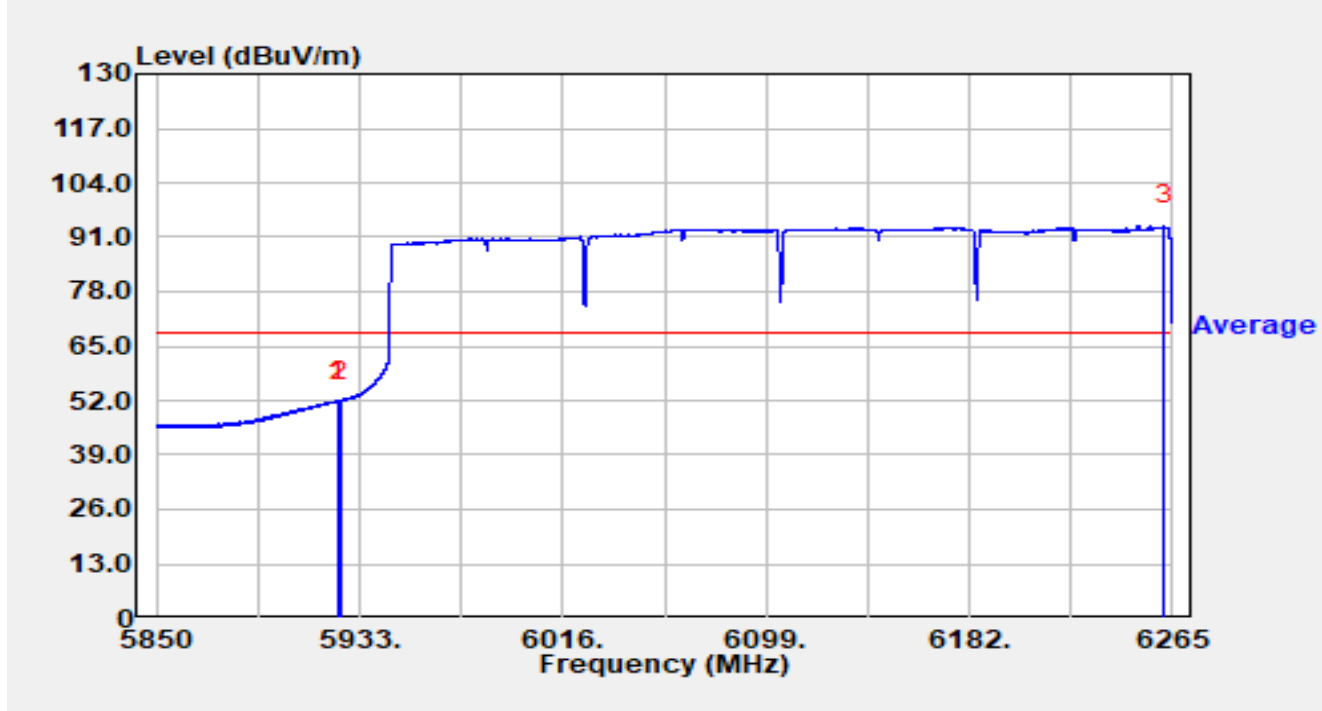


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.119	34.60	17.36	51.96	-16.24	68.20	Average
2		5924.991	34.45	17.36	51.81	-16.39	68.20	Average
3		6261.597	74.95	18.84	93.79	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6105MHz		

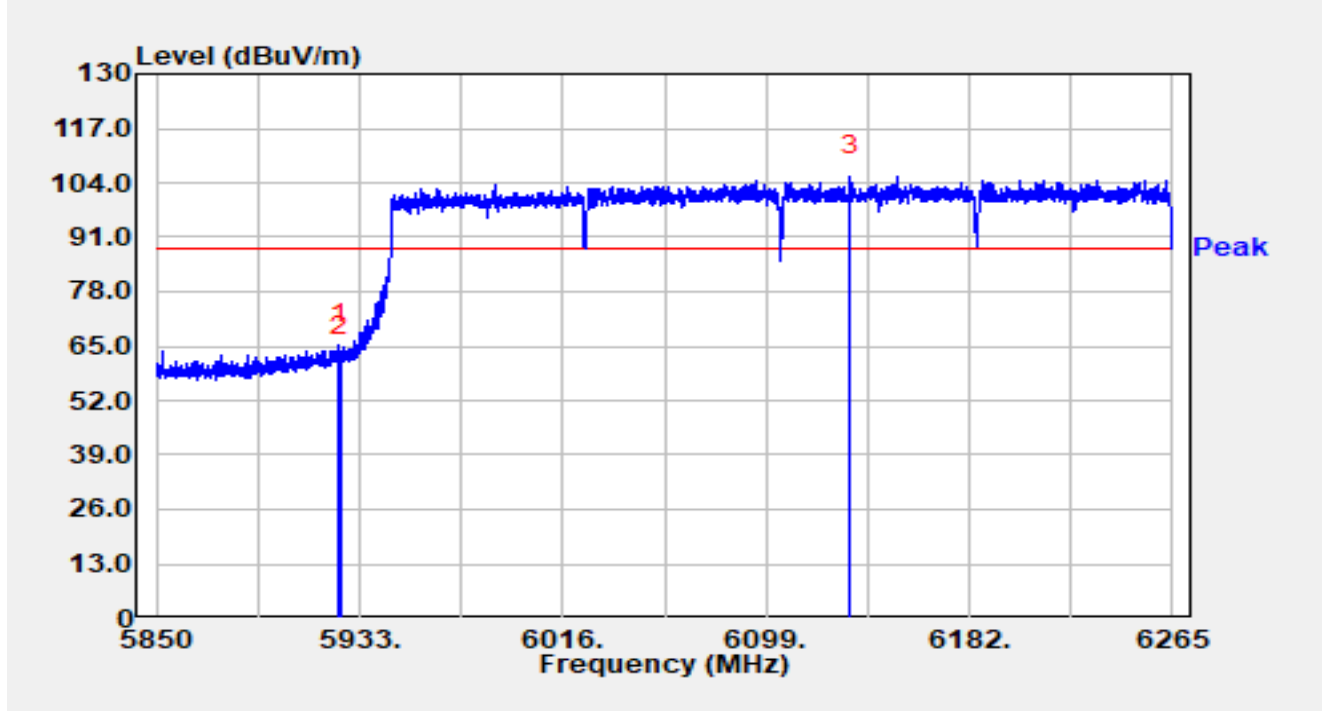


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.368	48.12	17.36	65.48	-22.72	88.20	Peak
2		5924.991	45.16	17.36	62.52	-25.68	88.20	Peak
3		6133.362	87.11	18.41	105.51	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6105MHz		

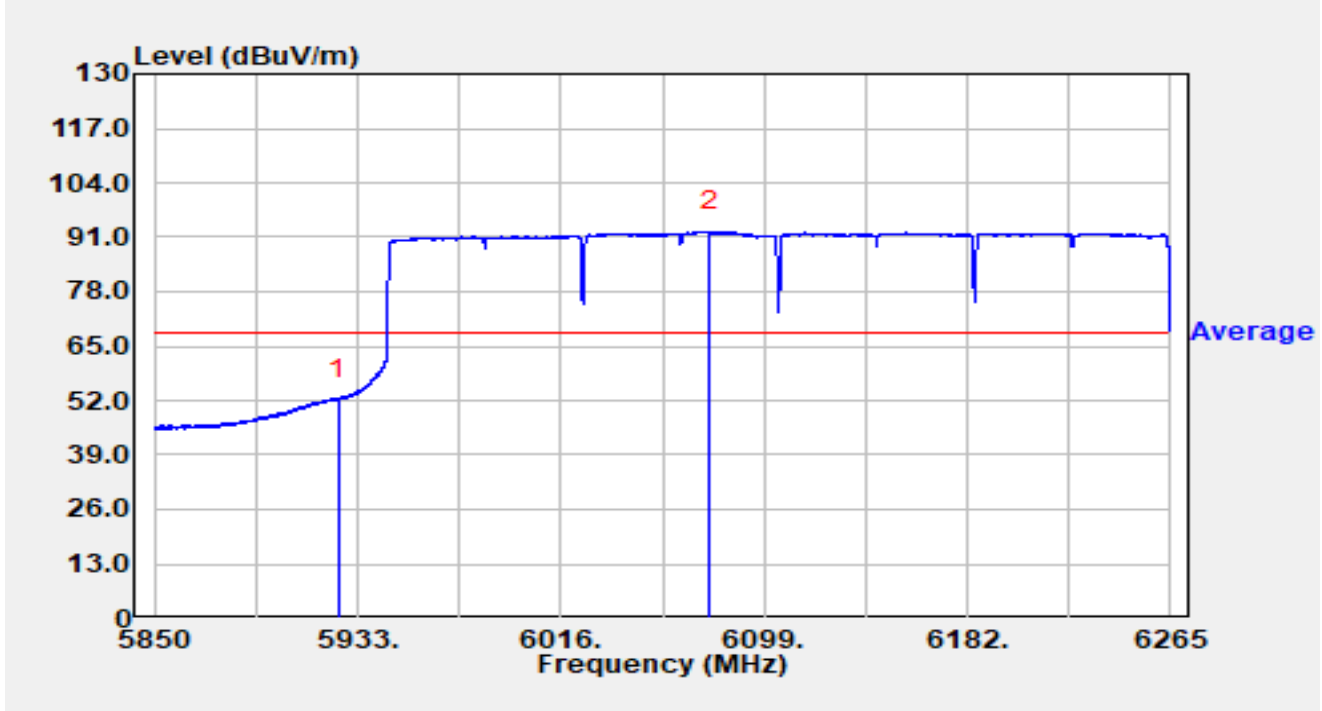


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.991	35.00	17.36	52.37	-15.83	68.20	Average
2		6076.880	74.35	18.12	92.47	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

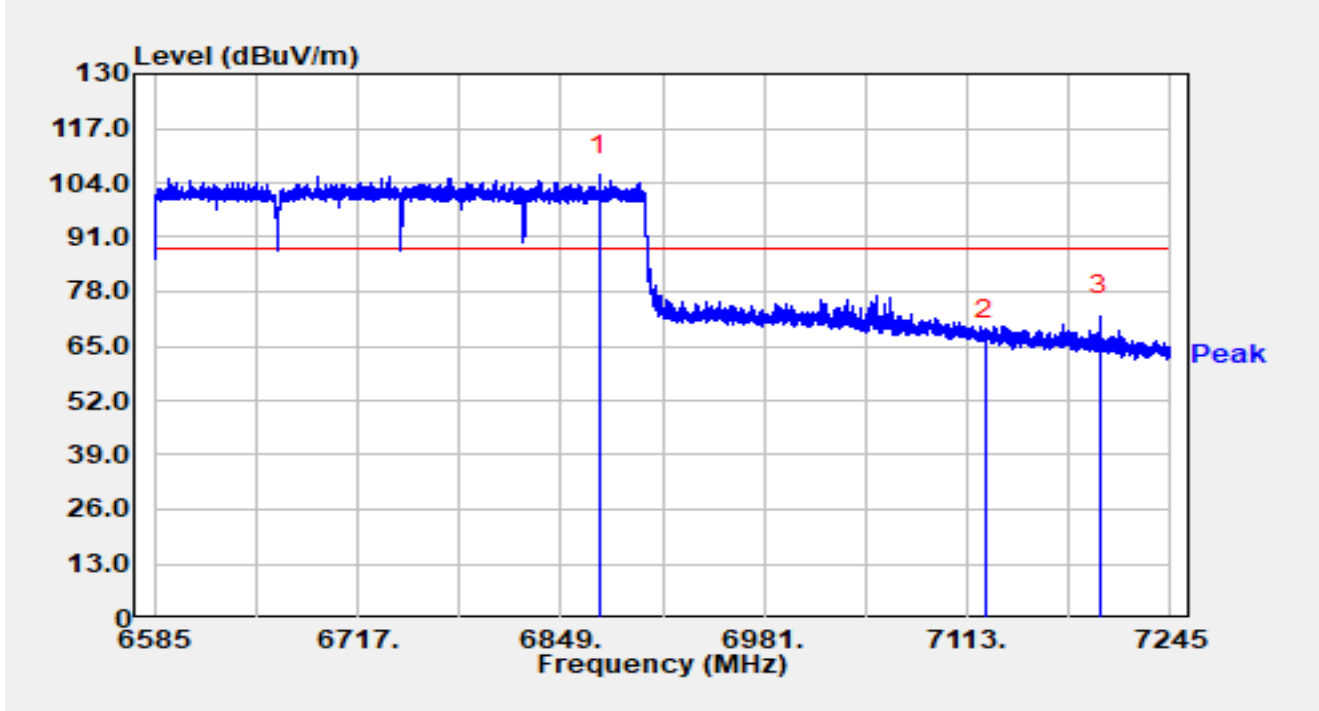


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6873.882	85.44	20.41	105.85	N/A	N/A	Peak
2		7125.012	46.28	20.42	66.70	-21.50	88.20	Peak
3	*	7199.394	51.52	20.64	72.17	-16.03	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

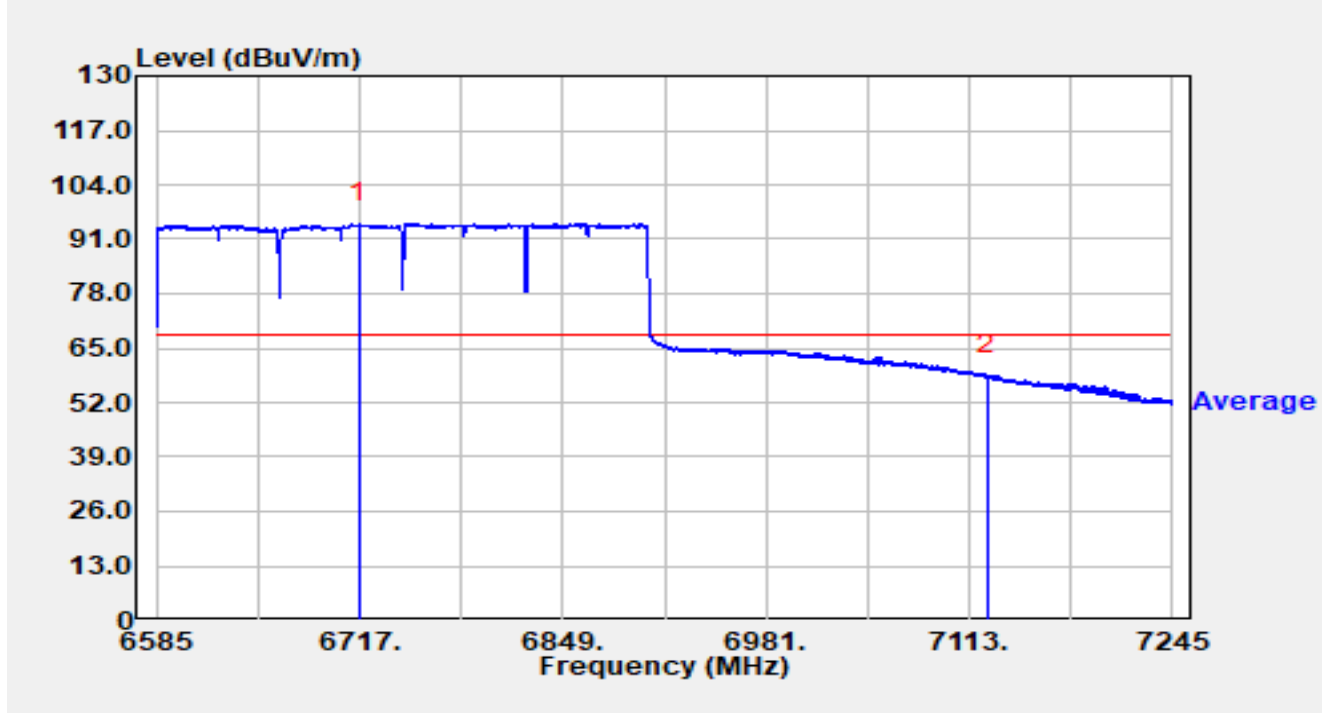


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6716.604	74.33	20.38	94.72	N/A	N/A	Average
2	*	7125.012	38.07	20.42	58.50	-9.70	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

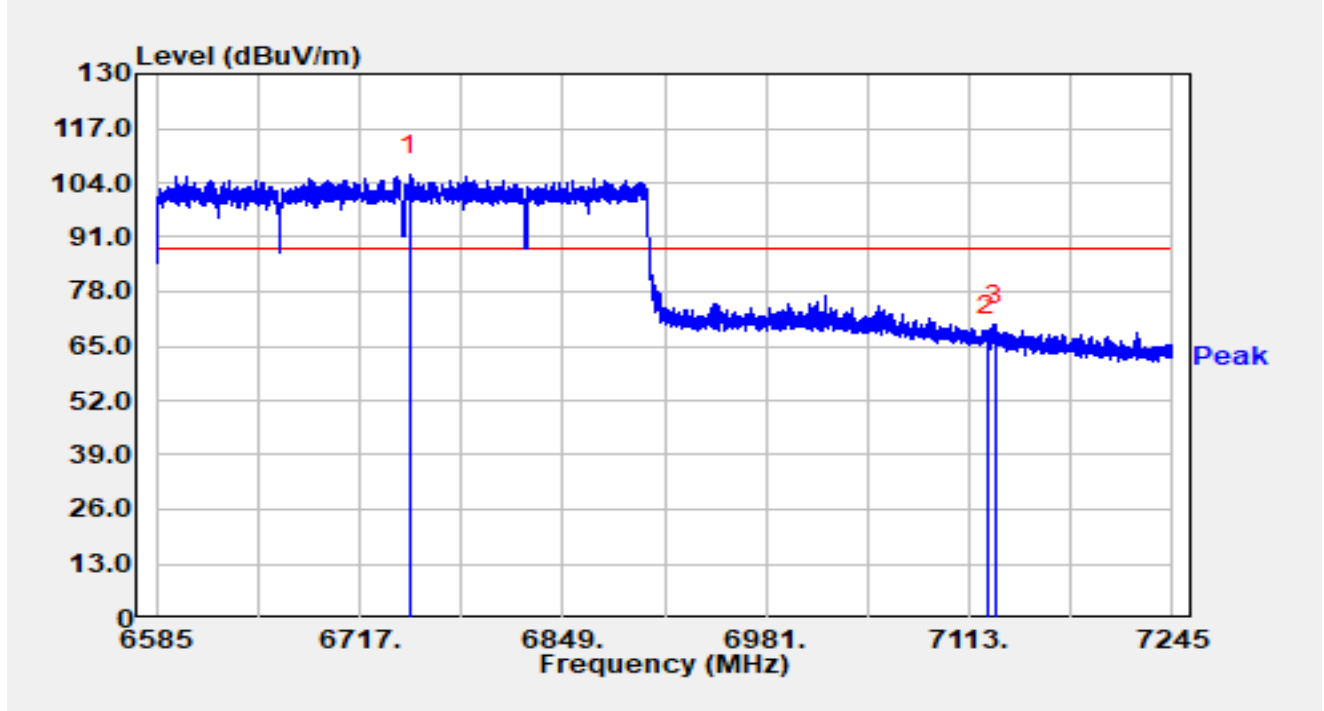


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6749.208	85.42	20.39	105.81	N/A	N/A	Peak
2		7125.012	46.82	20.42	67.24	-20.96	88.20	Peak
3	*	7129.434	49.52	20.44	69.96	-18.24	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

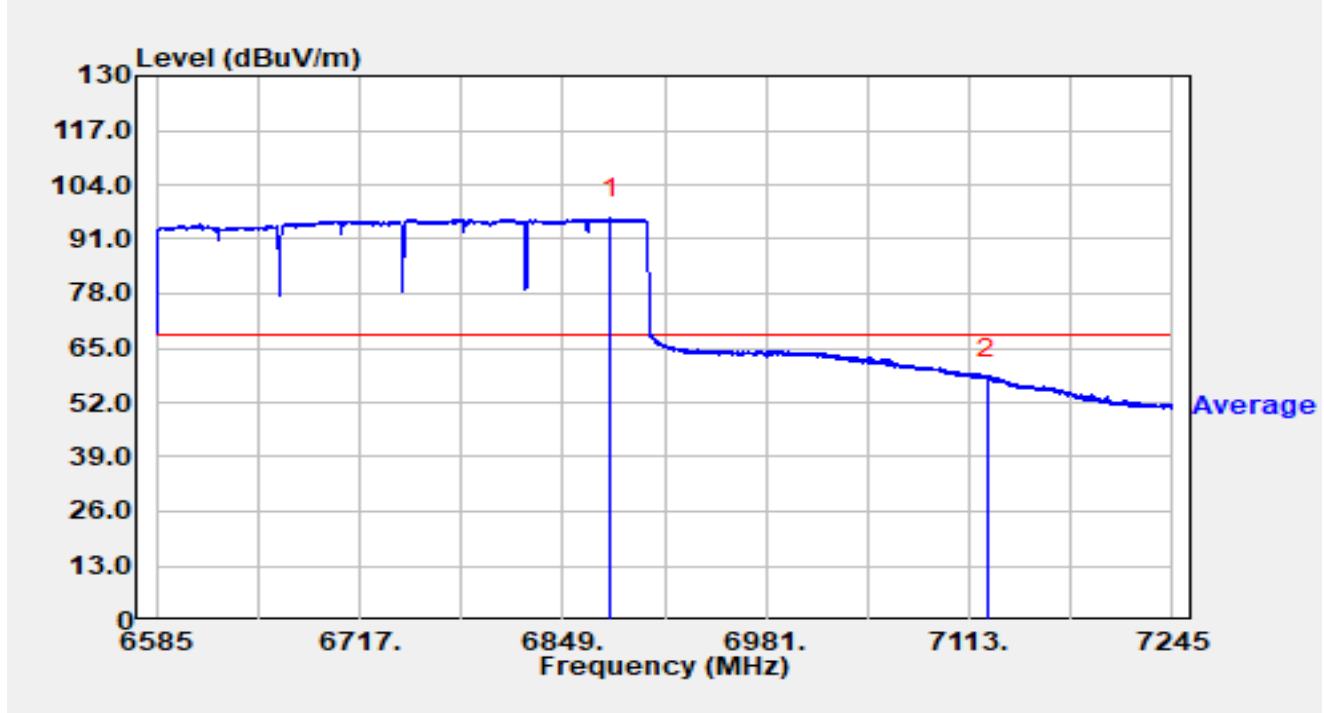


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6879.756	75.52	20.39	95.91	N/A	N/A	Average
2	*	7125.012	37.34	20.42	57.77	-10.43	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

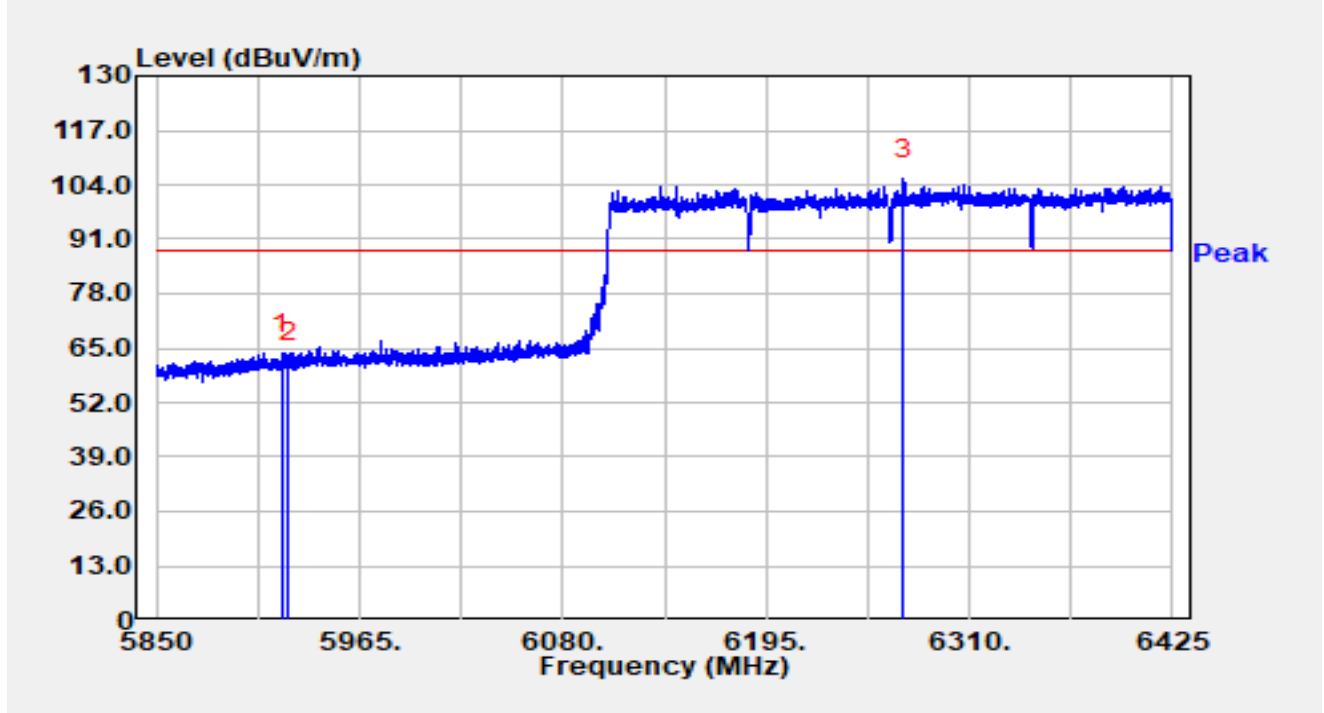


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.955	46.29	17.36	63.65	-24.55	88.20	Peak
2		5924.980	43.98	17.36	61.34	-26.86	88.20	Peak
3		6272.970	86.52	18.92	105.44	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

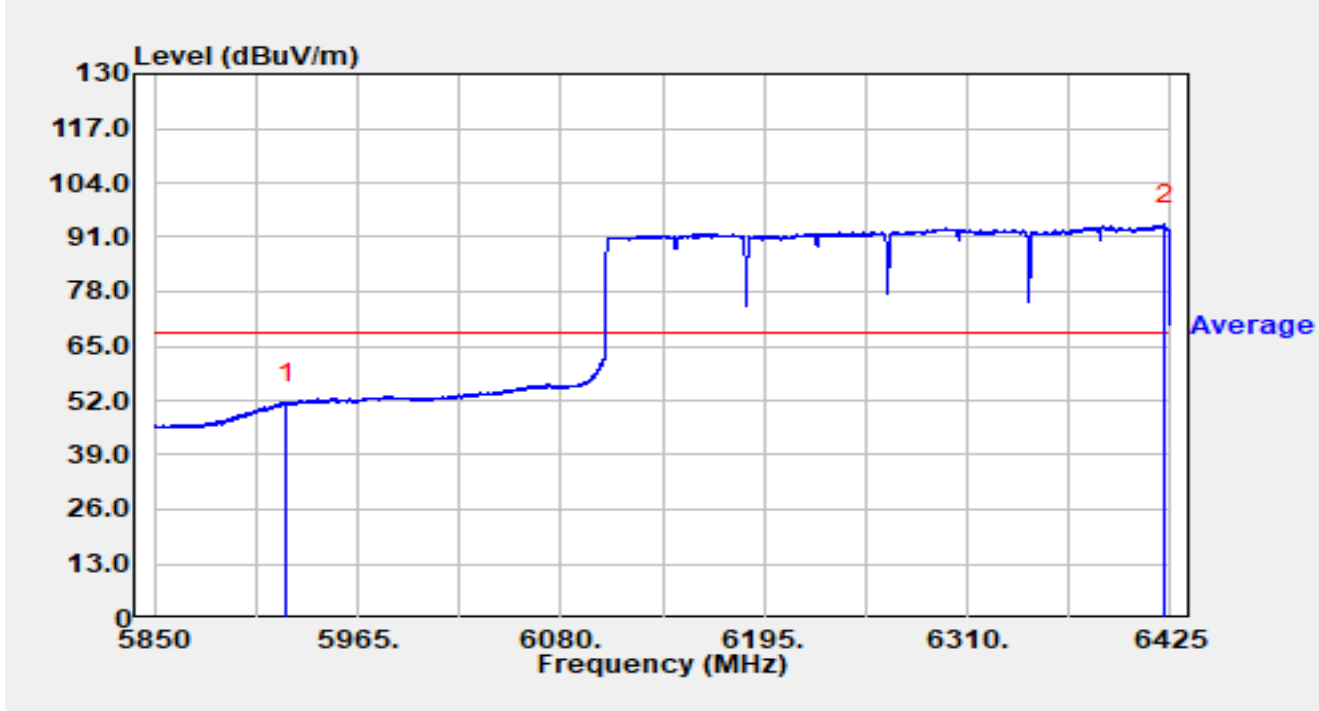


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.980	33.67	17.36	51.03	-17.17	68.20	Average
2		6421.550	74.56	19.47	94.03	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

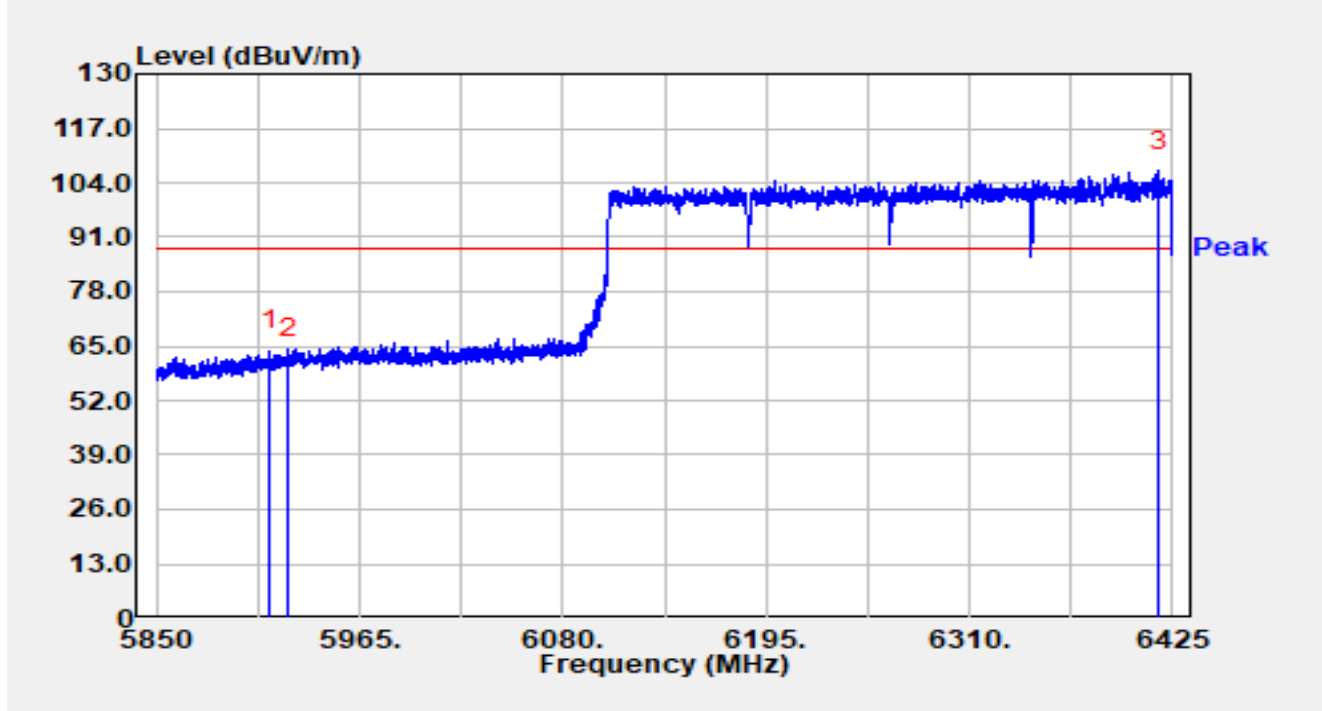


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.940	46.62	17.34	63.96	-24.24	88.20	Peak
2		5924.980	44.86	17.36	62.22	-25.98	88.20	Peak
3		6417.065	87.28	19.45	106.72	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

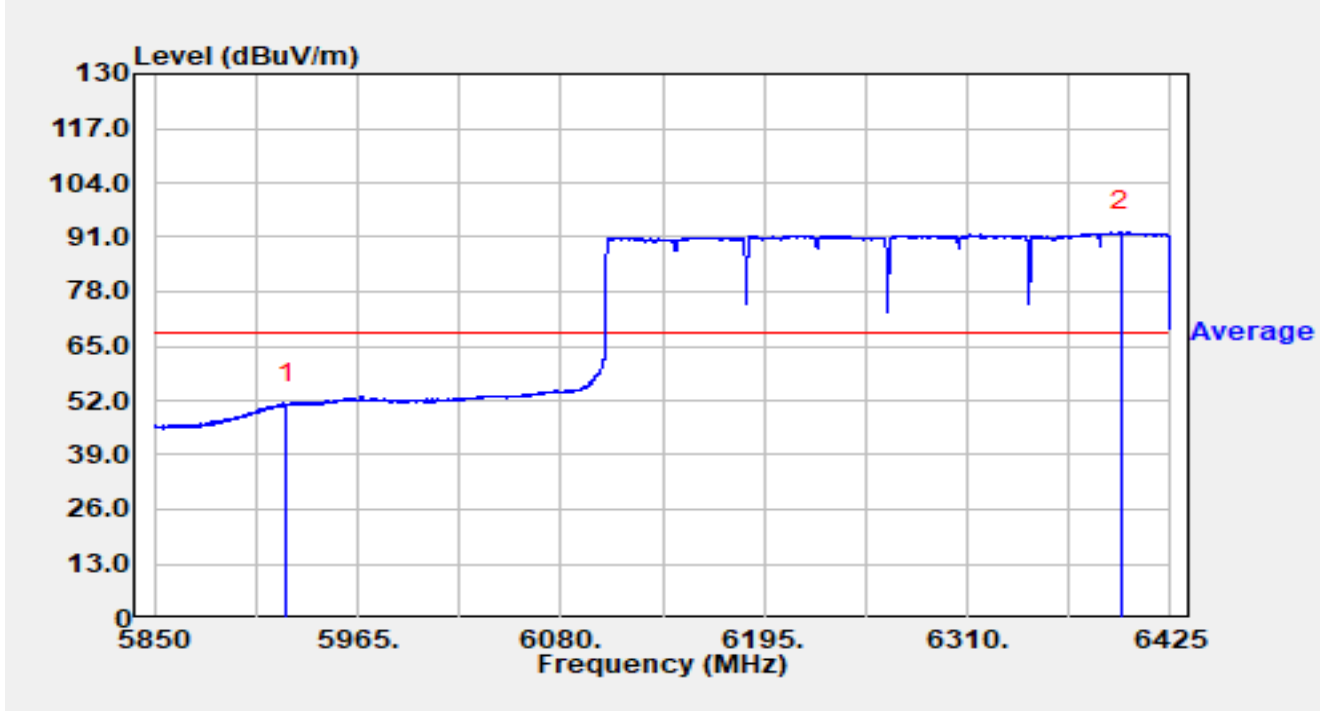


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.980	33.66	17.36	51.02	-17.18	68.20	Average
2		6396.882	72.81	19.44	92.25	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

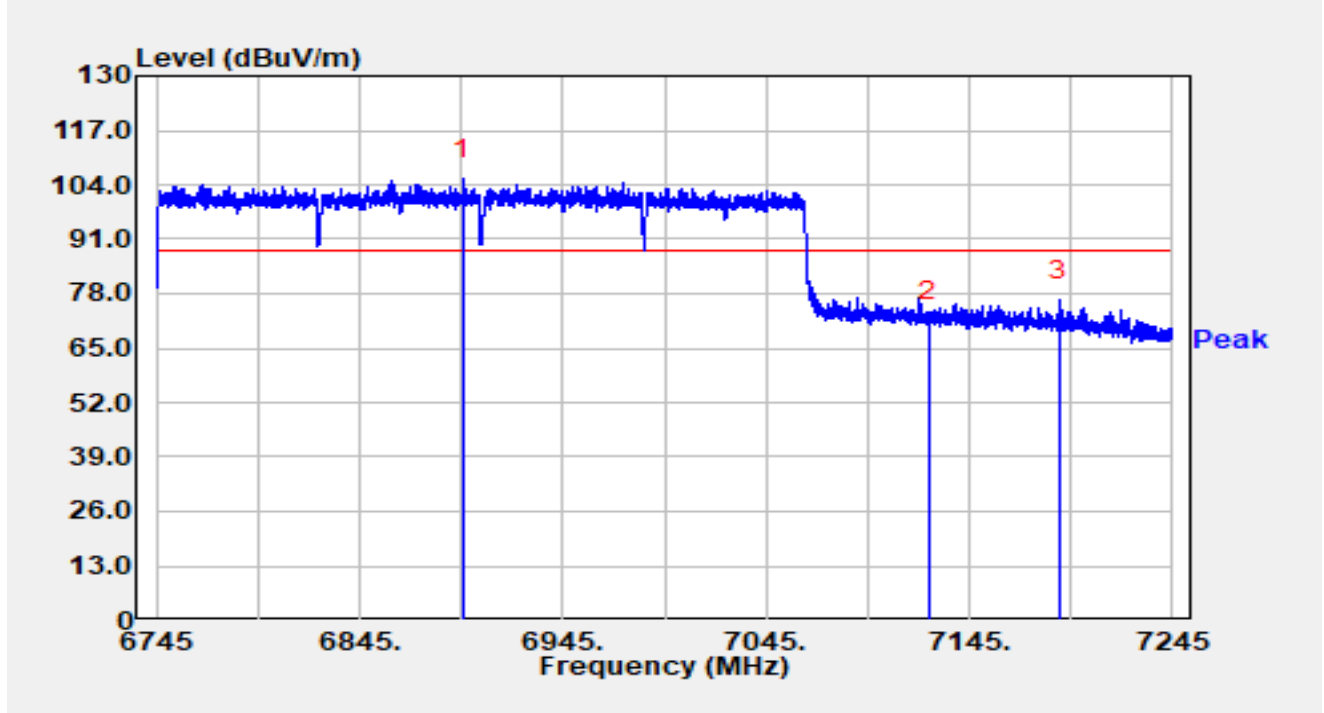


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6896.100	85.01	20.30	105.31	N/A	N/A	Peak
2		7125.000	51.13	20.42	71.56	-16.64	88.20	Peak
3	*	7189.350	55.82	20.68	76.50	-11.70	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

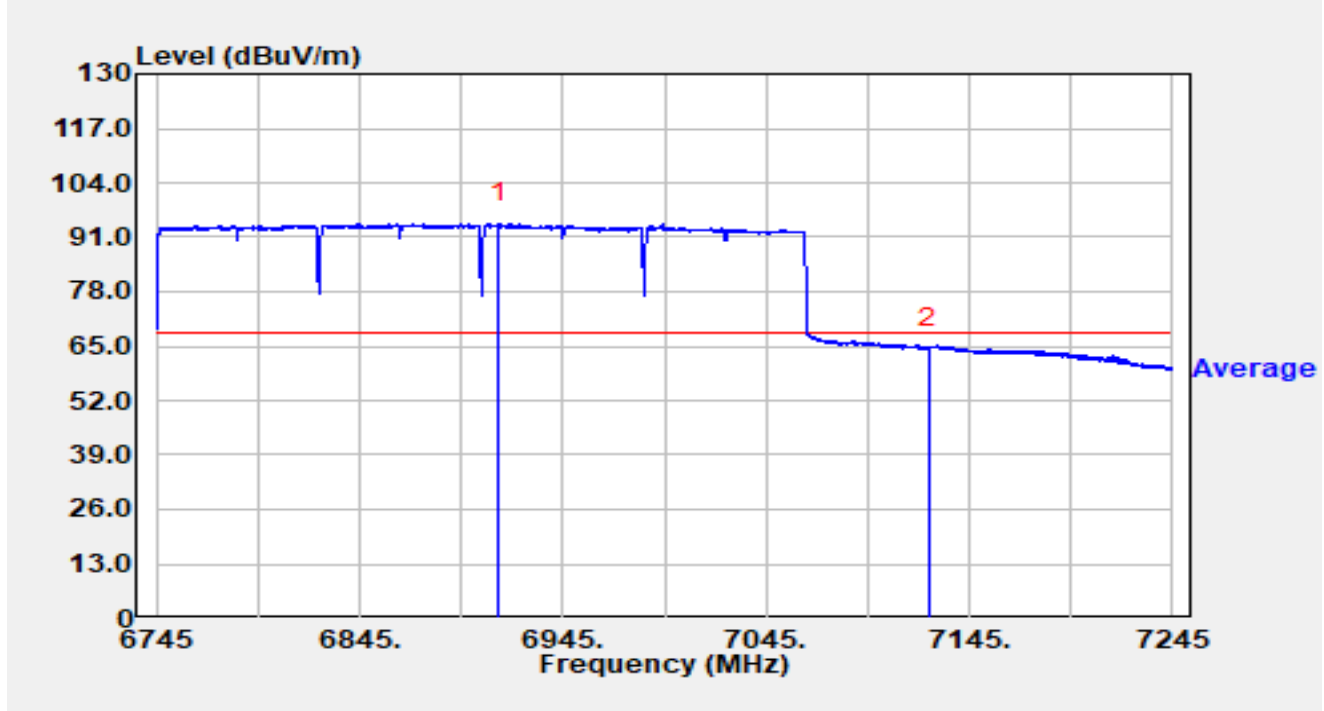


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6913.750	74.03	20.34	94.37	N/A	N/A	Average
2	*	7125.000	44.23	20.42	64.66	-3.54	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

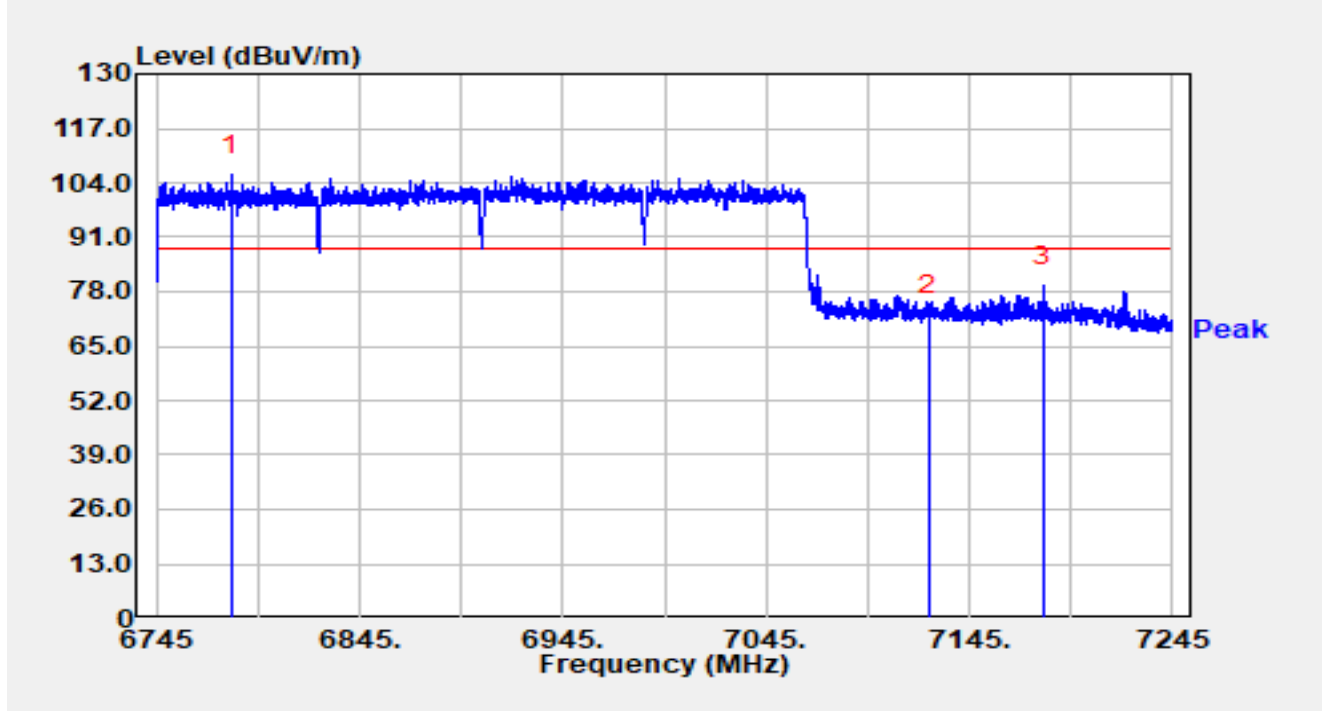


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6781.850	85.42	20.45	105.87	N/A	N/A	Peak
2		7125.000	51.73	20.42	72.15	-16.05	88.20	Peak
3	*	7181.450	58.58	20.70	79.28	-8.92	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_6G RE (3m)-AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

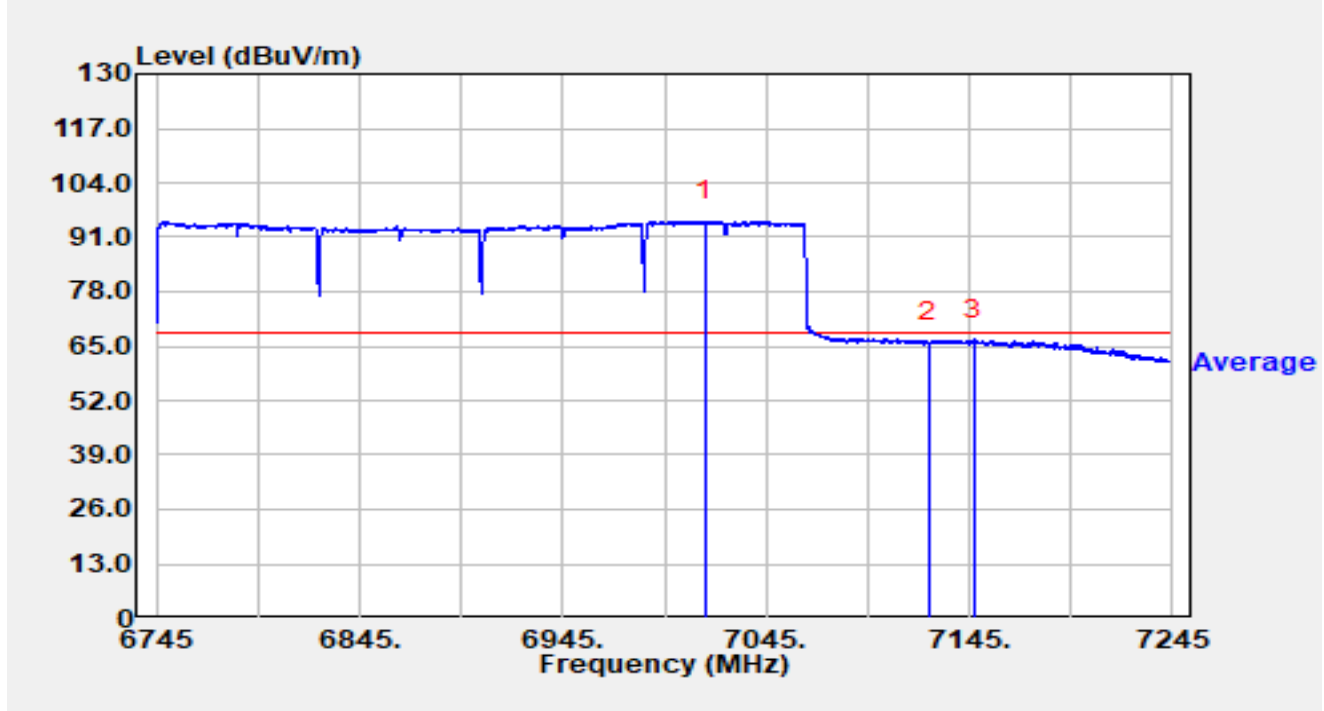


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7015.200	74.42	20.38	94.80	N/A	N/A	Average
2		7125.000	45.42	20.42	65.85	-2.35	68.20	Average
3	*	7147.300	46.16	20.37	66.54	-1.66	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	WJ-SR5	Test Date	2025-03-19
Temperature	19.2 °C	Humidity	33.6 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_L1_Filter Off_E	Polarity	Line1
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

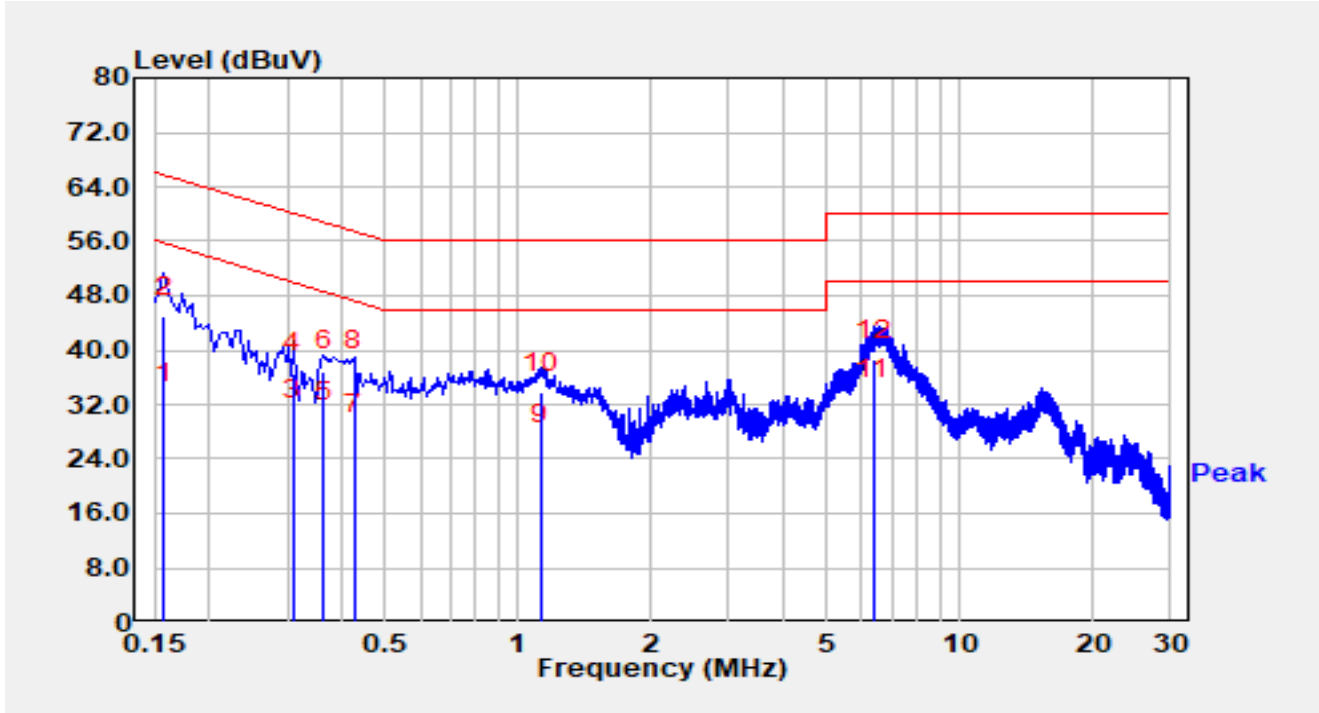


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	22.19	9.89	32.08	-23.49	55.57	Average
2		0.158	35.06	9.89	44.95	-20.62	65.57	QP
3		0.310	19.88	9.90	29.78	-20.19	49.97	Average
4		0.310	26.63	9.90	36.53	-23.44	59.97	QP
5		0.362	19.47	9.92	29.39	-19.30	48.68	Average
6		0.362	27.04	9.92	36.96	-21.73	58.68	QP
7		0.426	17.78	9.94	27.72	-19.62	47.33	Average
8		0.426	26.97	9.94	36.91	-20.43	57.33	QP
9		1.122	15.85	10.18	26.03	-19.97	46.00	Average
10		1.122	23.61	10.18	33.79	-22.21	56.00	QP
11	*	6.386	22.42	10.48	32.90	-17.10	50.00	Average
12		6.386	28.15	10.48	38.63	-21.37	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WJ-SR5	Test Date	2025-03-19
Temperature	19.2 °C	Humidity	33.6 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_N_Filter Off_E	Polarity	Neutral
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

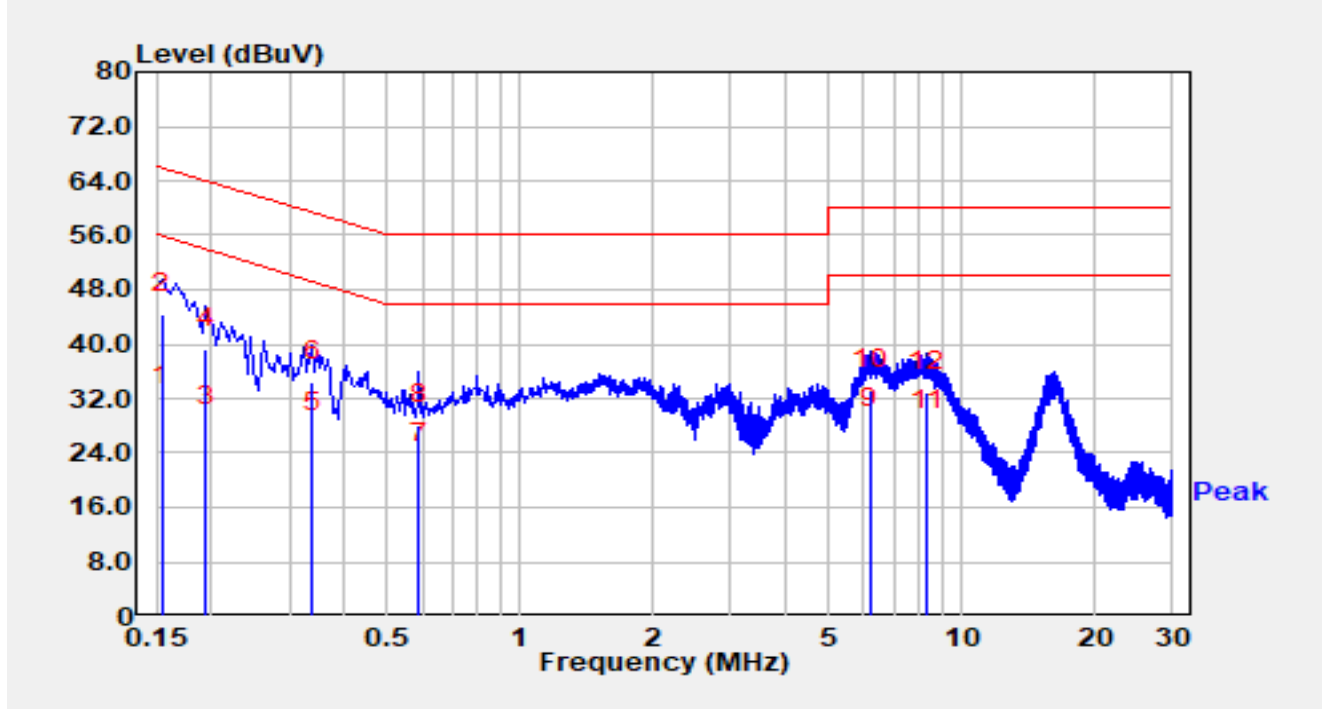

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	21.15	9.90	31.05	-24.73	55.78	Average
2	*	0.154	34.56	9.90	44.46	-21.32	65.78	QP
3		0.194	18.01	9.89	27.90	-25.97	53.86	Average
4		0.194	29.47	9.89	39.36	-24.51	63.86	QP
5		0.338	17.12	9.92	27.04	-22.21	49.25	Average
6		0.338	24.53	9.92	34.45	-24.80	59.25	QP
7		0.590	12.47	10.02	22.49	-23.51	46.00	Average
8		0.590	18.06	10.02	28.08	-27.92	56.00	QP
9		6.186	16.99	10.54	27.53	-22.47	50.00	Average
10		6.186	22.72	10.54	33.26	-26.74	60.00	QP
11		8.325	16.48	10.73	27.21	-22.79	50.00	Average
12		8.325	22.30	10.73	33.03	-26.97	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1037020-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1037020-UE” file.

_____ The End _____