

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11a – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11652.20	47.00	4.87	51.87	54.00	-2.13	Average	Horizontal
	11652.20	56.47	4.87	61.34	74.00	-12.66	Peak	Horizontal
*	13974.40	43.30	5.32	48.62	68.20	-19.58	Peak	Horizontal
	15720.30	42.10	6.14	48.24	74.00	-25.76	Peak	Horizontal
*	17476.40	60.44	3.61	64.05	68.20	-4.15	Peak	Horizontal
	11657.30	48.01	4.86	52.87	54.00	-1.13	Average	Vertical
	11657.30	57.26	4.86	62.12	74.00	-11.88	Peak	Vertical
*	13843.50	43.68	4.91	48.59	68.20	-19.61	Peak	Vertical
	16019.50	42.13	6.21	48.34	74.00	-25.66	Peak	Vertical
*	17469.60	59.30	3.52	62.82	68.20	-5.38	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10356.80	49.65	5.72	55.37	68.20	-12.83	Peak	Horizontal
	11407.40	41.40	5.52	46.92	74.00	-27.08	Peak	Horizontal
*	13947.20	42.22	5.12	47.34	68.20	-20.86	Peak	Horizontal
	15535.00	38.95	5.87	44.82	54.00	-9.18	Average	Horizontal
	15535.00	49.82	5.87	55.69	74.00	-18.31	Peak	Horizontal
*	10360.20	50.47	5.68	56.15	68.20	-12.05	Peak	Vertical
	11635.20	40.32	4.93	45.25	74.00	-28.75	Peak	Vertical
*	13884.30	41.72	5.07	46.79	68.20	-21.41	Peak	Vertical
	15531.60	43.66	5.86	49.52	54.00	-4.48	Average	Vertical
	15531.60	52.13	5.86	57.99	74.00	-16.01	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10433.30	48.00	5.72	53.72	68.20	-14.48	Peak	Horizontal
	11203.40	42.08	5.28	47.36	74.00	-26.64	Peak	Horizontal
*	14054.30	45.45	5.43	50.88	68.20	-17.32	Peak	Horizontal
	15657.40	41.34	6.11	47.45	54.00	-6.55	Average	Horizontal
	15657.40	50.55	6.11	56.66	74.00	-17.34	Peak	Horizontal
*	10440.10	49.94	5.68	55.62	68.20	-12.58	Peak	Vertical
	11269.70	41.33	5.38	46.71	74.00	-27.29	Peak	Vertical
*	14028.80	44.74	5.44	50.18	68.20	-18.02	Peak	Vertical
	15671.00	42.62	6.14	48.76	54.00	-5.24	Average	Vertical
	15671.00	51.53	6.14	57.67	74.00	-16.33	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10482.60	48.78	5.58	54.36	68.20	-13.84	Peak	Horizontal
	11885.10	42.99	4.94	47.93	74.00	-26.07	Peak	Horizontal
*	13877.50	44.99	5.00	49.99	68.20	-18.21	Peak	Horizontal
	15713.50	40.00	6.17	46.17	54.00	-7.83	Average	Horizontal
	15713.50	48.78	6.17	54.95	74.00	-19.05	Peak	Horizontal
*	10479.20	48.04	5.60	53.64	68.20	-14.56	Peak	Vertical
	11716.80	41.88	4.79	46.67	74.00	-27.33	Peak	Vertical
*	14027.10	44.01	5.45	49.46	68.20	-18.74	Peak	Vertical
	15716.90	41.02	6.17	47.19	54.00	-6.81	Average	Vertical
	15716.90	49.91	6.17	56.08	74.00	-17.92	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10205.50	40.24	5.91	46.15	68.20	-22.05	Peak	Horizontal
	11266.30	41.86	5.39	47.25	74.00	-26.75	Peak	Horizontal
	12466.50	42.86	4.81	47.67	74.00	-26.33	Peak	Horizontal
*	14076.40	44.53	5.42	49.95	68.20	-18.25	Peak	Horizontal
*	10035.50	39.74	6.03	45.77	68.20	-22.43	Peak	Vertical
	11584.20	42.30	5.13	47.43	74.00	-26.57	Peak	Vertical
*	14108.70	44.78	5.33	50.11	68.20	-18.09	Peak	Vertical
	15859.70	44.08	6.26	50.34	74.00	-23.66	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9867.20	39.58	6.20	45.78	68.20	-22.42	Peak	Horizontal
	11444.80	41.35	5.29	46.64	74.00	-27.36	Peak	Horizontal
	12104.40	42.38	5.10	47.48	74.00	-26.52	Peak	Horizontal
*	14176.70	44.31	5.49	49.80	68.20	-18.40	Peak	Horizontal
*	9940.30	39.98	6.00	45.98	68.20	-22.22	Peak	Vertical
	11262.90	41.56	5.38	46.94	74.00	-27.06	Peak	Vertical
	12027.90	42.45	5.08	47.53	74.00	-26.47	Peak	Vertical
*	13977.80	44.80	5.33	50.13	68.20	-18.07	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9651.30	40.95	6.24	47.19	68.20	-21.01	Peak	Horizontal
	11482.20	42.14	5.39	47.53	74.00	-26.47	Peak	Horizontal
	12014.30	42.68	5.00	47.68	74.00	-26.32	Peak	Horizontal
*	13838.40	45.00	4.92	49.92	68.20	-18.28	Peak	Horizontal
*	10137.50	40.58	5.84	46.42	68.20	-21.78	Peak	Vertical
	11361.50	41.21	5.50	46.71	74.00	-27.29	Peak	Vertical
	12250.60	43.36	4.79	48.15	74.00	-25.85	Peak	Vertical
*	13773.80	44.95	4.86	49.81	68.20	-18.39	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10242.90	40.84	5.89	46.73	68.20	-21.47	Peak	Horizontal
	11364.90	41.31	5.49	46.80	74.00	-27.20	Peak	Horizontal
	12359.40	43.03	4.75	47.78	74.00	-26.22	Peak	Horizontal
*	14159.70	44.14	5.56	49.70	68.20	-18.50	Peak	Horizontal
*	10282.00	41.29	5.90	47.19	68.20	-21.01	Peak	Vertical
	11392.10	40.86	5.48	46.34	74.00	-27.66	Peak	Vertical
	12158.80	42.57	5.04	47.61	74.00	-26.39	Peak	Vertical
*	14217.50	44.21	5.48	49.69	68.20	-18.51	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10057.60	40.34	5.89	46.23	68.20	-21.97	Peak	Horizontal
	11133.70	41.39	5.19	46.58	74.00	-27.42	Peak	Horizontal
	12024.50	42.24	5.05	47.29	74.00	-26.71	Peak	Horizontal
*	13755.10	44.35	4.78	49.13	68.20	-19.07	Peak	Horizontal
*	10071.20	39.94	5.90	45.84	68.20	-22.36	Peak	Vertical
	11145.60	41.76	5.09	46.85	74.00	-27.15	Peak	Vertical
	12080.60	41.65	5.15	46.80	74.00	-27.20	Peak	Vertical
*	13693.90	43.97	4.66	48.63	68.20	-19.57	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10122.20	40.96	5.86	46.82	68.20	-21.38	Peak	Horizontal
	11398.90	42.66	5.52	48.18	74.00	-25.82	Peak	Horizontal
	11997.30	42.56	5.09	47.65	74.00	-26.35	Peak	Horizontal
*	13950.60	44.81	5.08	49.89	68.20	-18.31	Peak	Horizontal
*	9974.30	39.91	5.94	45.85	68.20	-22.35	Peak	Vertical
	11398.90	42.36	5.52	47.88	74.00	-26.12	Peak	Vertical
	12371.30	42.46	4.72	47.18	74.00	-26.82	Peak	Vertical
*	13967.60	43.36	5.24	48.60	68.20	-19.60	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10054.20	39.49	5.92	45.41	68.20	-22.79	Peak	Horizontal
	11482.20	42.14	5.39	47.53	74.00	-26.47	Peak	Horizontal
	12172.40	41.75	5.10	46.85	74.00	-27.15	Peak	Horizontal
*	13903.00	44.10	4.94	49.04	68.20	-19.16	Peak	Horizontal
*	10006.60	39.85	5.86	45.71	68.20	-22.49	Peak	Vertical
	11438.00	43.13	5.31	48.44	74.00	-25.56	Peak	Vertical
	12172.40	42.02	5.10	47.12	74.00	-26.88	Peak	Vertical
*	14015.20	43.99	5.42	49.41	68.20	-18.79	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11492.40	39.55	5.31	44.86	54.00	-9.14	Average	Horizontal
	11492.40	48.43	5.31	53.74	74.00	-20.26	Peak	Horizontal
*	14878.80	45.05	5.66	50.71	68.20	-17.49	Peak	Horizontal
	15659.10	43.51	6.12	49.63	74.00	-24.37	Peak	Horizontal
*	17233.30	53.32	3.22	56.54	68.20	-11.66	Peak	Horizontal
*	9984.50	39.00	5.96	44.96	68.20	-23.24	Peak	Vertical
	11487.30	39.67	5.36	45.03	54.00	-8.97	Average	Vertical
	11487.30	48.92	5.36	54.28	74.00	-19.72	Peak	Vertical
*	13969.30	45.90	5.27	51.17	68.20	-17.03	Peak	Vertical
*	17226.50	50.65	3.21	53.86	68.20	-14.34	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11567.20	39.47	5.13	44.60	54.00	-9.40	Average	Horizontal
	11567.20	49.50	5.13	54.63	74.00	-19.37	Peak	Horizontal
*	14967.20	44.94	5.71	50.65	68.20	-17.55	Peak	Horizontal
	15970.20	41.02	6.17	47.19	74.00	-26.81	Peak	Horizontal
*	17359.10	54.89	3.27	58.16	68.20	-10.04	Peak	Horizontal
	11568.90	43.22	5.15	48.37	54.00	-5.63	Average	Vertical
	11568.90	51.17	5.15	56.32	74.00	-17.68	Peak	Vertical
*	14181.80	44.00	5.48	49.48	68.20	-18.72	Peak	Vertical
	15881.80	43.58	6.26	49.84	74.00	-24.16	Peak	Vertical
*	17360.80	51.60	3.28	54.88	68.20	-13.32	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11648.80	43.01	4.88	47.89	54.00	-6.11	Average	Horizontal
	11648.80	52.32	4.88	57.20	74.00	-16.80	Peak	Horizontal
*	13959.10	42.36	5.11	47.47	68.20	-20.73	Peak	Horizontal
	15710.10	42.20	6.17	48.37	74.00	-25.63	Peak	Horizontal
*	17466.20	58.32	3.47	61.79	68.20	-6.41	Peak	Horizontal
	11660.70	46.04	4.85	50.89	54.00	-3.11	Average	Vertical
	11660.70	55.20	4.85	60.05	74.00	-13.95	Peak	Vertical
*	14108.70	44.75	5.33	50.08	68.20	-18.12	Peak	Vertical
	15820.60	43.89	6.41	50.30	74.00	-23.70	Peak	Vertical
*	17484.90	57.11	3.62	60.73	68.20	-7.47	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10373.80	45.07	5.60	50.67	68.20	-17.53	Peak	Horizontal
	11793.30	43.11	4.79	47.90	74.00	-26.10	Peak	Horizontal
*	14084.90	44.51	5.48	49.99	68.20	-18.21	Peak	Horizontal
	15813.80	41.34	6.26	47.60	74.00	-26.40	Peak	Horizontal
*	10384.00	45.46	5.60	51.06	68.20	-17.14	Peak	Vertical
	11818.80	42.90	4.87	47.77	74.00	-26.23	Peak	Vertical
*	13755.10	44.38	4.78	49.16	68.20	-19.04	Peak	Vertical
	15647.20	44.01	6.05	50.06	74.00	-23.94	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10458.80	48.03	5.60	53.63	68.20	-14.57	Peak	Horizontal
	12016.00	42.99	4.99	47.98	74.00	-26.02	Peak	Horizontal
*	13923.40	44.97	5.32	50.29	68.20	-17.91	Peak	Horizontal
	15677.80	37.66	6.06	43.72	54.00	-10.28	Average	Horizontal
	15677.80	46.67	6.06	52.73	74.00	-21.27	Peak	Horizontal
*	10458.80	48.03	5.60	53.63	68.20	-14.57	Peak	Vertical
	12182.60	43.81	5.04	48.85	74.00	-25.15	Peak	Vertical
*	14005.00	41.90	5.31	47.21	68.20	-20.99	Peak	Vertical
	15691.40	39.37	6.00	45.37	54.00	-8.63	Average	Vertical
	15691.40	47.07	6.00	53.07	74.00	-20.93	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11354.70	42.83	5.51	48.34	74.00	-25.66	Peak	Horizontal
	12080.60	42.15	5.15	47.30	74.00	-26.70	Peak	Horizontal
*	13959.10	42.04	5.11	47.15	68.20	-21.05	Peak	Horizontal
*	14906.00	42.72	5.79	48.51	68.20	-19.69	Peak	Horizontal
*	10241.20	40.41	5.87	46.28	68.20	-21.92	Peak	Vertical
	11470.30	42.02	5.40	47.42	74.00	-26.58	Peak	Vertical
	12124.80	43.54	4.96	48.50	74.00	-25.50	Peak	Vertical
*	14195.40	45.45	5.46	50.91	68.20	-17.29	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11594.40	42.19	5.07	47.26	74.00	-26.74	Peak	Horizontal
	12213.20	43.20	4.88	48.08	74.00	-25.92	Peak	Horizontal
*	14074.70	45.21	5.41	50.62	68.20	-17.58	Peak	Horizontal
*	14955.30	42.59	5.73	48.32	68.20	-19.88	Peak	Horizontal
*	10205.50	40.83	5.91	46.74	68.20	-21.46	Peak	Vertical
	11636.90	42.40	4.92	47.32	74.00	-26.68	Peak	Vertical
	11978.60	42.83	5.15	47.98	74.00	-26.02	Peak	Vertical
*	14955.30	43.03	5.73	48.76	68.20	-19.44	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12 ~ 2025-03-21	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10152.80	38.80	5.85	44.65	68.20	-23.55	Peak	Horizontal
	11737.20	42.78	4.77	47.55	74.00	-26.45	Peak	Horizontal
*	14093.40	43.09	5.52	48.61	68.20	-19.59	Peak	Horizontal
	15665.90	43.77	6.15	49.92	74.00	-24.08	Peak	Horizontal
*	10299.00	40.96	5.65	46.61	68.20	-21.59	Peak	Vertical
	11693.00	43.31	4.83	48.14	74.00	-25.86	Peak	Vertical
	12585.50	43.48	5.23	48.71	74.00	-25.29	Peak	Vertical
*	14277.00	44.85	5.61	50.46	68.20	-17.74	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12 ~ 2025-03-21	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12289.70	44.40	4.96	49.36	74.00	-24.64	Peak	Horizontal
*	13486.50	45.93	4.89	50.82	68.20	-17.38	Peak	Horizontal
*	14620.40	45.18	5.73	50.91	68.20	-17.29	Peak	Horizontal
	15664.20	43.00	6.15	49.15	74.00	-24.85	Peak	Horizontal
*	9882.50	39.78	6.07	45.85	68.20	-22.35	Peak	Vertical
	11337.70	41.40	5.46	46.86	74.00	-27.14	Peak	Vertical
	12180.90	42.89	5.05	47.94	74.00	-26.06	Peak	Vertical
*	13785.70	44.67	4.79	49.46	68.20	-18.74	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11351.30	44.51	5.51	50.02	74.00	-23.98	Peak	Horizontal
	11874.90	42.30	4.97	47.27	74.00	-26.73	Peak	Horizontal
*	13748.30	43.77	4.71	48.48	68.20	-19.72	Peak	Horizontal
*	17022.50	48.69	3.45	52.14	68.20	-16.06	Peak	Horizontal
*	9715.90	40.43	6.12	46.55	68.20	-21.65	Peak	Vertical
	11337.70	38.59	5.46	44.05	54.00	-9.95	Average	Vertical
	11337.70	46.19	5.46	51.65	74.00	-22.35	Peak	Vertical
	15817.20	44.12	6.33	50.45	74.00	-23.55	Peak	Vertical
*	17017.40	48.78	3.45	52.23	68.20	-15.97	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9807.70	40.04	6.27	46.31	68.20	-21.89	Peak	Horizontal
	11419.30	42.26	5.41	47.67	74.00	-26.33	Peak	Horizontal
*	14096.80	44.71	5.49	50.20	68.20	-18.00	Peak	Horizontal
	15895.40	42.08	6.32	48.40	74.00	-25.60	Peak	Horizontal
*	9789.00	40.22	6.15	46.37	68.20	-21.83	Peak	Vertical
	11421.00	42.41	5.40	47.81	74.00	-26.19	Peak	Vertical
*	14093.40	43.31	5.52	48.83	68.20	-19.37	Peak	Vertical
	15722.00	41.97	6.12	48.09	74.00	-25.91	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10086.50	40.21	5.90	46.11	68.20	-22.09	Peak	Horizontal
	11509.40	37.74	5.27	43.01	54.00	-10.99	Average	Horizontal
	11509.40	46.63	5.27	51.90	74.00	-22.10	Peak	Horizontal
	15837.60	42.75	6.46	49.21	74.00	-24.79	Peak	Horizontal
*	17253.70	51.05	3.20	54.25	68.20	-13.95	Peak	Horizontal
	11506.00	38.54	5.29	43.83	54.00	-10.17	Average	Vertical
	11506.00	46.31	5.29	51.60	74.00	-22.40	Peak	Vertical
*	14724.10	43.16	5.66	48.82	68.20	-19.38	Peak	Vertical
	15667.60	44.51	6.14	50.65	74.00	-23.35	Peak	Vertical
*	17262.20	50.44	3.13	53.57	68.20	-14.63	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11582.50	37.83	5.14	42.97	54.00	-11.03	Average	Horizontal
	11582.50	47.61	5.14	52.75	74.00	-21.25	Peak	Horizontal
*	14093.40	42.45	5.52	47.97	68.20	-20.23	Peak	Horizontal
	15552.00	44.17	5.92	50.09	74.00	-23.91	Peak	Horizontal
*	17382.90	53.49	3.42	56.91	68.20	-11.29	Peak	Horizontal
*	9897.80	37.09	6.07	43.16	68.20	-25.04	Peak	Vertical
	11596.10	41.25	5.05	46.30	54.00	-7.70	Average	Vertical
	11596.10	52.35	5.05	57.40	74.00	-16.60	Peak	Vertical
	15664.20	42.12	6.15	48.27	74.00	-25.73	Peak	Vertical
*	17393.10	51.70	3.47	55.17	68.20	-13.03	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10156.20	40.28	5.88	46.16	68.20	-22.04	Peak	Horizontal
	11137.10	41.84	5.16	47.00	74.00	-27.00	Peak	Horizontal
	12332.20	42.93	4.69	47.62	74.00	-26.38	Peak	Horizontal
*	13967.60	44.66	5.24	49.90	68.20	-18.30	Peak	Horizontal
*	10149.40	41.18	5.82	47.00	68.20	-21.20	Peak	Vertical
*	10395.90	42.00	5.67	47.67	68.20	-20.53	Peak	Vertical
	12090.80	42.84	5.17	48.01	74.00	-25.99	Peak	Vertical
	15722.00	42.94	6.12	49.06	74.00	-24.94	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11468.60	42.35	5.38	47.73	74.00	-26.27	Peak	Horizontal
*	13999.90	44.89	5.32	50.21	68.20	-17.99	Peak	Horizontal
*	14948.50	44.95	5.74	50.69	68.20	-17.51	Peak	Horizontal
	15895.40	41.09	6.32	47.41	74.00	-26.59	Peak	Horizontal
*	10402.70	42.21	5.69	47.90	68.20	-20.30	Peak	Vertical
	11473.70	42.84	5.42	48.26	74.00	-25.74	Peak	Vertical
	12192.80	42.54	4.97	47.51	74.00	-26.49	Peak	Vertical
*	14064.50	44.64	5.42	50.06	68.20	-18.14	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10142.60	40.32	5.81	46.13	68.20	-22.07	Peak	Horizontal
	11380.20	41.51	5.46	46.97	74.00	-27.03	Peak	Horizontal
*	13853.70	44.39	4.90	49.29	68.20	-18.91	Peak	Horizontal
	15834.20	44.48	6.47	50.95	74.00	-23.05	Peak	Horizontal
*	10132.40	40.77	5.86	46.63	68.20	-21.57	Peak	Vertical
	11665.80	43.37	4.84	48.21	74.00	-25.79	Peak	Vertical
*	14278.70	44.36	5.61	49.97	68.20	-18.23	Peak	Vertical
	15722.00	41.40	6.12	47.52	74.00	-26.48	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12084.00	42.54	5.17	47.71	74.00	-26.29	Peak	Horizontal
*	13739.80	42.04	4.64	46.68	68.20	-21.52	Peak	Horizontal
	15837.60	42.56	6.46	49.02	74.00	-24.98	Peak	Horizontal
*	16820.20	48.91	3.87	52.78	68.20	-15.42	Peak	Horizontal
*	9761.80	40.02	6.07	46.09	68.20	-22.11	Peak	Vertical
	11363.20	41.88	5.49	47.37	74.00	-26.63	Peak	Vertical
*	14093.40	42.16	5.52	47.68	68.20	-20.52	Peak	Vertical
	15895.40	42.73	6.32	49.05	74.00	-24.95	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10232.70	40.59	5.85	46.44	68.20	-21.76	Peak	Horizontal
	11489.00	41.83	5.34	47.17	74.00	-26.83	Peak	Horizontal
	12128.20	42.94	4.96	47.90	74.00	-26.10	Peak	Horizontal
*	13986.30	44.86	5.36	50.22	68.20	-17.98	Peak	Horizontal
*	9863.80	39.70	6.23	45.93	68.20	-22.27	Peak	Vertical
	11480.50	41.52	5.40	46.92	74.00	-27.08	Peak	Vertical
*	14190.30	44.54	5.46	50.00	68.20	-18.20	Peak	Vertical
	15596.20	44.44	5.95	50.39	74.00	-23.61	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10265.00	39.66	5.81	45.47	68.20	-22.73	Peak	Horizontal
	11565.50	38.55	5.11	43.66	54.00	-10.34	Average	Horizontal
	11565.50	47.19	5.11	52.30	74.00	-21.70	Peak	Horizontal
	15494.20	40.94	5.84	46.78	74.00	-27.22	Peak	Horizontal
*	17316.60	51.15	3.53	54.68	68.20	-13.52	Peak	Horizontal
	11565.50	40.61	5.11	45.72	54.00	-8.28	Average	Vertical
	11565.50	47.19	5.11	52.30	74.00	-21.70	Peak	Vertical
*	13981.20	45.15	5.34	50.49	68.20	-17.71	Peak	Vertical
	15779.80	42.00	6.36	48.36	74.00	-25.64	Peak	Vertical
*	17316.60	51.15	3.53	54.68	68.20	-13.52	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10185.10	40.96	5.85	46.81	68.20	-21.39	Peak	Horizontal
	11715.10	42.36	4.80	47.16	74.00	-26.84	Peak	Horizontal
*	13964.20	44.61	5.19	49.80	68.20	-18.40	Peak	Horizontal
	15608.10	41.77	6.02	47.79	74.00	-26.21	Peak	Horizontal
*	10271.80	40.76	5.84	46.60	68.20	-21.60	Peak	Vertical
	11577.40	42.25	5.18	47.43	74.00	-26.57	Peak	Vertical
	12303.30	43.23	4.72	47.95	74.00	-26.05	Peak	Vertical
*	14185.20	44.48	5.47	49.95	68.20	-18.25	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ac-VHT160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12036.40	43.27	5.13	48.40	74.00	-25.60	Peak	Horizontal
*	14885.60	44.23	5.67	49.90	68.20	-18.30	Peak	Horizontal
	15722.00	42.04	6.12	48.16	74.00	-25.84	Peak	Horizontal
*	16762.40	47.02	4.16	51.18	68.20	-17.02	Peak	Horizontal
*	10242.90	41.02	5.89	46.91	68.20	-21.29	Peak	Vertical
	11363.20	42.58	5.49	48.07	74.00	-25.93	Peak	Vertical
	12282.90	43.70	4.94	48.64	74.00	-25.36	Peak	Vertical
*	14049.20	44.90	5.44	50.34	68.20	-17.86	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10355.10	48.41	5.74	54.15	68.20	-14.05	Peak	Horizontal
	11854.50	43.30	4.91	48.21	74.00	-25.79	Peak	Horizontal
*	14146.10	44.68	5.60	50.28	68.20	-17.92	Peak	Horizontal
	15543.50	38.69	5.89	44.58	54.00	-9.42	Average	Horizontal
	15543.50	47.70	5.89	53.59	74.00	-20.41	Peak	Horizontal
*	10363.60	50.25	5.63	55.88	68.20	-12.32	Peak	Vertical
	12633.10	43.86	5.46	49.32	74.00	-24.68	Peak	Vertical
*	14093.40	42.63	5.52	48.15	68.20	-20.05	Peak	Vertical
	15541.80	40.06	5.89	45.95	54.00	-8.05	Average	Vertical
	15541.80	47.91	5.89	53.80	74.00	-20.20	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10443.50	47.88	5.65	53.53	68.20	-14.67	Peak	Horizontal
	12041.50	42.50	5.16	47.66	74.00	-26.34	Peak	Horizontal
	15655.70	39.21	6.10	45.31	54.00	-8.69	Average	Horizontal
	15655.70	48.73	6.10	54.83	74.00	-19.17	Peak	Horizontal
*	16704.60	46.03	4.27	50.30	68.20	-17.90	Peak	Horizontal
*	10435.00	48.58	5.73	54.31	68.20	-13.89	Peak	Vertical
	11419.30	41.43	5.41	46.84	74.00	-27.16	Peak	Vertical
*	14720.70	46.07	5.65	51.72	68.20	-16.48	Peak	Vertical
	15662.50	41.93	6.14	48.07	54.00	-5.93	Average	Vertical
	15662.50	50.99	6.14	57.13	74.00	-16.87	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10457.10	46.85	5.59	52.44	68.20	-15.76	Peak	Horizontal
	11434.60	42.21	5.33	47.54	74.00	-26.46	Peak	Horizontal
*	13632.70	44.48	4.60	49.08	68.20	-19.12	Peak	Horizontal
	15688.00	40.25	5.96	46.21	54.00	-7.79	Average	Horizontal
	15688.00	48.10	5.96	54.06	74.00	-19.94	Peak	Horizontal
*	10469.00	47.09	5.64	52.73	68.20	-15.47	Peak	Vertical
	12070.40	42.47	5.08	47.55	74.00	-26.45	Peak	Vertical
*	14231.10	44.11	5.51	49.62	68.20	-18.58	Peak	Vertical
	15698.20	42.67	6.07	48.74	54.00	-5.26	Average	Vertical
	15698.20	51.82	6.07	57.89	74.00	-16.11	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11390.40	41.58	5.47	47.05	74.00	-26.95	Peak	Horizontal
	11825.60	42.17	4.94	47.11	74.00	-26.89	Peak	Horizontal
*	13829.90	44.55	4.87	49.42	68.20	-18.78	Peak	Horizontal
*	14963.80	44.49	5.71	50.20	68.20	-18.00	Peak	Horizontal
*	9904.60	39.70	6.08	45.78	68.20	-22.42	Peak	Vertical
	11235.70	41.44	5.30	46.74	74.00	-27.26	Peak	Vertical
*	14015.20	44.61	5.42	50.03	68.20	-18.17	Peak	Vertical
	15771.30	44.26	6.40	50.66	74.00	-23.34	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11431.20	41.56	5.35	46.91	74.00	-27.09	Peak	Horizontal
*	14064.50	44.39	5.42	49.81	68.20	-18.39	Peak	Horizontal
*	14907.70	44.70	5.76	50.46	68.20	-17.74	Peak	Horizontal
	15920.90	38.45	6.26	44.71	54.00	-9.29	Average	Horizontal
	15920.90	46.16	6.26	52.42	74.00	-21.58	Peak	Horizontal
	11045.30	41.50	5.05	46.55	74.00	-27.45	Peak	Vertical
*	14152.90	44.11	5.59	49.70	68.20	-18.50	Peak	Vertical
	15931.10	38.44	6.22	44.66	54.00	-9.34	Average	Vertical
	15931.10	45.61	6.22	51.83	74.00	-22.17	Peak	Vertical
*	16799.80	46.07	3.97	50.04	68.20	-18.16	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11019.80	42.53	5.08	47.61	74.00	-26.39	Peak	Horizontal
*	13104.00	41.18	4.78	45.96	68.20	-22.24	Peak	Horizontal
*	14010.10	43.77	5.38	49.15	68.20	-19.05	Peak	Horizontal
	15722.00	42.75	6.12	48.87	74.00	-25.13	Peak	Horizontal
*	10304.10	40.58	5.66	46.24	68.20	-21.96	Peak	Vertical
	11390.40	40.90	5.47	46.37	74.00	-27.63	Peak	Vertical
	12192.80	43.39	4.97	48.36	74.00	-25.64	Peak	Vertical
	15779.80	41.54	6.36	47.90	74.00	-26.10	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9948.80	39.69	6.08	45.77	68.20	-22.43	Peak	Horizontal
	11101.40	41.40	5.09	46.49	74.00	-27.51	Peak	Horizontal
	11829.00	42.94	4.97	47.91	74.00	-26.09	Peak	Horizontal
*	13937.00	44.46	5.25	49.71	68.20	-18.49	Peak	Horizontal
	11347.90	41.40	5.50	46.90	74.00	-27.10	Peak	Vertical
*	14178.40	44.14	5.48	49.62	68.20	-18.58	Peak	Vertical
*	14940.00	42.79	5.72	48.51	68.20	-19.69	Peak	Vertical
	15664.20	42.83	6.15	48.98	74.00	-25.02	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10095.00	39.71	5.92	45.63	68.20	-22.57	Peak	Horizontal
	11133.70	41.28	5.19	46.47	74.00	-27.53	Peak	Horizontal
	12407.00	43.89	4.67	48.56	74.00	-25.44	Peak	Horizontal
*	13840.10	41.59	4.92	46.51	68.20	-21.69	Peak	Horizontal
*	9797.50	39.87	6.22	46.09	68.20	-22.11	Peak	Vertical
	11524.70	41.96	5.14	47.10	74.00	-26.90	Peak	Vertical
	12189.40	43.21	4.99	48.20	74.00	-25.80	Peak	Vertical
*	14088.30	44.16	5.53	49.69	68.20	-18.51	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10248.00	40.46	5.92	46.38	68.20	-21.82	Peak	Horizontal
	11398.90	41.79	5.52	47.31	74.00	-26.69	Peak	Horizontal
	11851.10	42.61	4.91	47.52	74.00	-26.48	Peak	Horizontal
*	14192.00	44.70	5.45	50.15	68.20	-18.05	Peak	Horizontal
	11385.30	42.01	5.45	47.46	74.00	-26.54	Peak	Vertical
*	14093.40	43.59	5.52	49.11	68.20	-19.09	Peak	Vertical
*	14953.60	44.43	5.73	50.16	68.20	-18.04	Peak	Vertical
	15881.80	44.19	6.26	50.45	74.00	-23.55	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9969.20	40.14	5.98	46.12	68.20	-22.08	Peak	Horizontal
	11492.40	41.57	5.31	46.88	74.00	-27.12	Peak	Horizontal
	11883.40	42.62	4.95	47.57	74.00	-26.43	Peak	Horizontal
*	13836.70	45.45	4.93	50.38	68.20	-17.82	Peak	Horizontal
*	9857.00	39.61	6.24	45.85	68.20	-22.35	Peak	Vertical
	11402.30	42.23	5.54	47.77	74.00	-26.23	Peak	Vertical
	12005.80	42.14	5.05	47.19	74.00	-26.81	Peak	Vertical
*	13918.30	45.61	5.29	50.90	68.20	-17.30	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10044.00	37.61	6.03	43.64	68.20	-24.56	Peak	Horizontal
	11492.40	38.42	5.31	43.73	54.00	-10.27	Average	Horizontal
	11492.40	46.49	5.31	51.80	74.00	-22.20	Peak	Horizontal
*	14197.10	43.63	5.46	49.09	68.20	-19.11	Peak	Horizontal
	15664.20	42.97	6.15	49.12	74.00	-24.88	Peak	Horizontal
	11490.70	40.21	5.33	45.54	54.00	-8.46	Average	Vertical
	11490.70	49.91	5.33	55.24	74.00	-18.76	Peak	Vertical
*	14192.00	45.26	5.45	50.71	68.20	-17.49	Peak	Vertical
	15552.00	42.07	5.92	47.99	74.00	-26.01	Peak	Vertical
*	17229.90	50.92	3.21	54.13	68.20	-14.07	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11567.20	40.61	5.13	45.74	54.00	-8.26	Average	Horizontal
	11567.20	49.00	5.13	54.13	74.00	-19.87	Peak	Horizontal
*	14778.50	41.99	5.64	47.63	68.20	-20.57	Peak	Horizontal
	15779.80	42.89	6.36	49.25	74.00	-24.75	Peak	Horizontal
*	17350.60	54.05	3.25	57.30	68.20	-10.90	Peak	Horizontal
	11572.30	42.07	5.19	47.26	54.00	-6.74	Average	Vertical
	11572.30	51.57	5.19	56.76	74.00	-17.24	Peak	Vertical
*	14316.10	45.33	5.70	51.03	68.20	-17.17	Peak	Vertical
	15779.80	42.99	6.36	49.35	74.00	-24.65	Peak	Vertical
*	17360.80	52.13	3.28	55.41	68.20	-12.79	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11650.50	42.45	4.87	47.32	54.00	-6.68	Average	Horizontal
	11650.50	51.68	4.87	56.55	74.00	-17.45	Peak	Horizontal
*	14016.90	44.23	5.43	49.66	68.20	-18.54	Peak	Horizontal
	16068.80	42.87	6.11	48.98	74.00	-25.02	Peak	Horizontal
*	17462.80	58.82	3.41	62.23	68.20	-5.97	Peak	Horizontal
	11657.30	46.06	4.86	50.92	54.00	-3.08	Average	Vertical
	11657.30	54.43	4.86	59.29	74.00	-14.71	Peak	Vertical
*	13789.10	43.23	4.78	48.01	68.20	-20.19	Peak	Vertical
	15608.10	43.81	6.02	49.83	74.00	-24.17	Peak	Vertical
*	17481.50	57.05	3.62	60.67	68.20	-7.53	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10113.70	41.65	5.83	47.48	68.20	-20.72	Peak	Horizontal
	11361.50	43.11	5.50	48.61	74.00	-25.39	Peak	Horizontal
*	13765.30	45.22	4.89	50.11	68.20	-18.09	Peak	Horizontal
	15750.90	44.27	6.20	50.47	74.00	-23.53	Peak	Horizontal
*	10380.60	44.70	5.60	50.30	68.20	-17.90	Peak	Vertical
	12055.10	43.98	5.17	49.15	74.00	-24.85	Peak	Vertical
*	14940.00	43.96	5.72	49.68	68.20	-18.52	Peak	Vertical
	15654.00	46.02	6.09	52.11	74.00	-21.89	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10457.10	44.53	5.59	50.12	68.20	-18.08	Peak	Horizontal
	12051.70	42.25	5.20	47.45	74.00	-26.55	Peak	Horizontal
*	14300.80	44.77	5.57	50.34	68.20	-17.86	Peak	Horizontal
	15688.00	39.90	5.96	45.86	54.00	-8.14	Average	Horizontal
	15688.00	47.06	5.96	53.02	74.00	-20.98	Peak	Horizontal
*	10458.80	46.22	5.60	51.82	68.20	-16.38	Peak	Vertical
	12138.40	40.94	4.97	45.91	74.00	-28.09	Peak	Vertical
*	13688.80	42.62	4.64	47.26	68.20	-20.94	Peak	Vertical
	15671.00	38.60	6.14	44.74	54.00	-9.26	Average	Vertical
	15671.00	47.59	6.14	53.73	74.00	-20.27	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10140.90	40.71	5.82	46.53	68.20	-21.67	Peak	Horizontal
	10948.40	41.00	5.08	46.08	74.00	-27.92	Peak	Horizontal
	11939.50	43.14	5.04	48.18	74.00	-25.82	Peak	Horizontal
*	13831.60	44.85	4.89	49.74	68.20	-18.46	Peak	Horizontal
*	9732.90	39.99	6.15	46.14	68.20	-22.06	Peak	Vertical
	11201.70	42.04	5.27	47.31	74.00	-26.69	Peak	Vertical
	11793.30	43.08	4.79	47.87	74.00	-26.13	Peak	Vertical
*	14139.30	44.55	5.58	50.13	68.20	-18.07	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9974.30	40.87	5.94	46.81	68.20	-21.39	Peak	Horizontal
	11298.60	42.14	5.43	47.57	74.00	-26.43	Peak	Horizontal
	12221.70	43.23	4.81	48.04	74.00	-25.96	Peak	Horizontal
*	14220.90	44.42	5.48	49.90	68.20	-18.30	Peak	Horizontal
*	9838.30	39.54	6.11	45.65	68.20	-22.55	Peak	Vertical
	11523.00	42.52	5.15	47.67	74.00	-26.33	Peak	Vertical
	12519.20	43.01	5.02	48.03	74.00	-25.97	Peak	Vertical
*	14042.40	44.25	5.44	49.69	68.20	-18.51	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9755.00	40.14	6.01	46.15	68.20	-22.05	Peak	Horizontal
*	10477.50	41.76	5.61	47.37	68.20	-20.83	Peak	Horizontal
	11468.60	41.97	5.38	47.35	74.00	-26.65	Peak	Horizontal
	11944.60	42.28	5.10	47.38	74.00	-26.62	Peak	Horizontal
*	9911.40	40.29	6.06	46.35	68.20	-21.85	Peak	Vertical
	11351.30	41.60	5.51	47.11	74.00	-26.89	Peak	Vertical
	12172.40	42.74	5.10	47.84	74.00	-26.16	Peak	Vertical
	15732.20	44.26	6.14	50.40	74.00	-23.60	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10353.40	40.66	5.76	46.42	68.20	-21.78	Peak	Horizontal
	11351.30	41.60	5.51	47.11	74.00	-26.89	Peak	Horizontal
	12175.80	43.10	5.08	48.18	74.00	-25.82	Peak	Horizontal
*	14130.80	44.27	5.49	49.76	68.20	-18.44	Peak	Horizontal
*	9819.60	40.68	6.17	46.85	68.20	-21.35	Peak	Vertical
	11220.40	41.63	5.26	46.89	74.00	-27.11	Peak	Vertical
	12162.20	42.69	5.07	47.76	74.00	-26.24	Peak	Vertical
*	14209.00	44.29	5.48	49.77	68.20	-18.43	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10202.10	39.95	5.87	45.82	68.20	-22.38	Peak	Horizontal
	11332.60	42.52	5.44	47.96	74.00	-26.04	Peak	Horizontal
	11708.30	44.12	4.83	48.95	74.00	-25.05	Peak	Horizontal
*	14020.30	44.23	5.46	49.69	68.20	-18.51	Peak	Horizontal
	11562.10	43.79	5.06	48.85	74.00	-25.15	Peak	Vertical
*	14047.50	44.27	5.44	49.71	68.20	-18.49	Peak	Vertical
*	14800.60	44.16	5.61	49.77	68.20	-18.43	Peak	Vertical
	15953.20	42.72	6.39	49.11	74.00	-24.89	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11412.50	42.87	5.48	48.35	74.00	-25.65	Peak	Horizontal
*	13697.30	44.92	4.67	49.59	68.20	-18.61	Peak	Horizontal
*	14962.10	45.01	5.71	50.72	68.20	-17.48	Peak	Horizontal
	15856.30	45.06	6.29	51.35	74.00	-22.65	Peak	Horizontal
*	9925.00	40.47	6.00	46.47	68.20	-21.73	Peak	Vertical
	11432.90	43.46	5.34	48.80	74.00	-25.20	Peak	Vertical
	12073.80	41.94	5.11	47.05	74.00	-26.95	Peak	Vertical
*	13982.90	44.05	5.35	49.40	68.20	-18.80	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11495.80	38.56	5.29	43.85	54.00	-10.15	Average	Horizontal
	11495.80	46.18	5.29	51.47	74.00	-22.53	Peak	Horizontal
*	14074.70	45.14	5.41	50.55	68.20	-17.65	Peak	Horizontal
	15664.20	42.37	6.15	48.52	74.00	-25.48	Peak	Horizontal
*	17255.40	53.82	3.19	57.01	68.20	-11.19	Peak	Horizontal
*	10244.60	41.43	5.90	47.33	68.20	-20.87	Peak	Vertical
	11509.40	38.14	5.27	43.41	54.00	-10.59	Average	Vertical
	11509.40	46.26	5.27	51.53	74.00	-22.47	Peak	Vertical
*	15307.20	46.20	5.70	51.90	68.20	-16.30	Peak	Vertical
	15580.90	43.87	5.92	49.79	74.00	-24.21	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11587.60	39.88	5.12	45.00	54.00	-9.00	Average	Horizontal
	11587.60	48.55	5.12	53.67	74.00	-20.33	Peak	Horizontal
*	14042.40	42.95	5.44	48.39	68.20	-19.81	Peak	Horizontal
	15837.60	41.92	6.46	48.38	74.00	-25.62	Peak	Horizontal
*	17386.30	54.44	3.44	57.88	68.20	-10.32	Peak	Horizontal
	11596.10	40.93	5.05	45.98	54.00	-8.02	Average	Vertical
	11596.10	50.62	5.05	55.67	74.00	-18.33	Peak	Vertical
*	14081.50	43.95	5.44	49.39	68.20	-18.81	Peak	Vertical
	15664.20	42.27	6.15	48.42	74.00	-25.58	Peak	Vertical
*	17399.90	51.38	3.50	54.88	68.20	-13.32	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10287.10	41.47	5.83	47.30	68.20	-20.90	Peak	Horizontal
	11186.40	40.69	5.23	45.92	74.00	-28.08	Peak	Horizontal
	11915.70	42.05	4.90	46.95	74.00	-27.05	Peak	Horizontal
*	13940.40	45.09	5.20	50.29	68.20	-17.91	Peak	Horizontal
*	10382.30	41.96	5.60	47.56	68.20	-20.64	Peak	Vertical
	11458.40	42.30	5.29	47.59	74.00	-26.41	Peak	Vertical
	11954.80	42.42	5.17	47.59	74.00	-26.41	Peak	Vertical
*	14290.60	44.32	5.54	49.86	68.20	-18.34	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9809.40	40.43	6.26	46.69	68.20	-21.51	Peak	Horizontal
	11657.30	43.09	4.86	47.95	74.00	-26.05	Peak	Horizontal
	12099.30	43.56	5.14	48.70	74.00	-25.30	Peak	Horizontal
*	13909.80	44.39	5.10	49.49	68.20	-18.71	Peak	Horizontal
*	9836.60	40.01	6.11	46.12	68.20	-22.08	Peak	Vertical
	11166.00	41.45	5.14	46.59	74.00	-27.41	Peak	Vertical
	12068.70	42.79	5.07	47.86	74.00	-26.14	Peak	Vertical
*	14299.10	44.76	5.55	50.31	68.20	-17.89	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10242.90	41.04	5.89	46.93	68.20	-21.27	Peak	Horizontal
	11584.20	41.73	5.13	46.86	74.00	-27.14	Peak	Horizontal
	12281.20	42.90	4.92	47.82	74.00	-26.18	Peak	Horizontal
*	13743.20	45.41	4.67	50.08	68.20	-18.12	Peak	Horizontal
*	9943.70	39.89	6.02	45.91	68.20	-22.29	Peak	Vertical
	11349.60	42.45	5.51	47.96	74.00	-26.04	Peak	Vertical
	12027.90	42.75	5.08	47.83	74.00	-26.17	Peak	Vertical
*	14299.10	44.46	5.55	50.01	68.20	-18.19	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-12	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10249.70	40.63	5.92	46.55	68.20	-21.65	Peak	Horizontal
	11256.10	41.43	5.36	46.79	74.00	-27.21	Peak	Horizontal
	12175.80	43.15	5.08	48.23	74.00	-25.77	Peak	Horizontal
*	14056.00	45.71	5.43	51.14	68.20	-17.06	Peak	Horizontal
*	10224.20	40.73	5.94	46.67	68.20	-21.53	Peak	Vertical
	11240.80	42.80	5.33	48.13	74.00	-25.87	Peak	Vertical
	11849.40	42.27	4.91	47.18	74.00	-26.82	Peak	Vertical
*	13940.40	43.82	5.20	49.02	68.20	-19.18	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-12	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9717.60	39.72	6.11	45.83	68.20	-22.37	Peak	Horizontal
	11409.10	42.30	5.51	47.81	74.00	-26.19	Peak	Horizontal
	12075.50	42.06	5.12	47.18	74.00	-26.82	Peak	Horizontal
*	14210.70	44.55	5.48	50.03	68.20	-18.17	Peak	Horizontal
*	10225.90	40.89	5.92	46.81	68.20	-21.39	Peak	Vertical
	11206.80	41.18	5.27	46.45	74.00	-27.55	Peak	Vertical
	12087.40	42.69	5.17	47.86	74.00	-26.14	Peak	Vertical
*	13928.50	44.35	5.29	49.64	68.20	-18.56	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-12	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10288.80	40.54	5.80	46.34	68.20	-21.86	Peak	Horizontal
	11550.20	33.90	5.02	38.92	54.00	-15.08	Average	Horizontal
	11550.20	46.96	5.02	51.98	74.00	-22.02	Peak	Horizontal
	12131.60	42.34	4.96	47.30	74.00	-26.70	Peak	Horizontal
*	17328.50	50.67	3.43	54.10	68.20	-14.10	Peak	Horizontal
*	9824.70	40.04	6.14	46.18	68.20	-22.02	Peak	Vertical
	11254.40	41.37	5.36	46.73	74.00	-27.27	Peak	Vertical
	11575.70	36.88	5.19	42.07	54.00	-11.93	Average	Vertical
	11575.70	49.38	5.19	54.57	74.00	-19.43	Peak	Vertical
*	17382.90	49.02	3.42	52.44	68.20	-15.76	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-12	Test Mode	802.11ax-HE160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10117.10	38.20	5.84	44.04	68.20	-24.16	Peak	Horizontal
	11492.40	39.04	5.31	44.35	74.00	-29.65	Peak	Horizontal
	12226.80	41.27	4.79	46.06	74.00	-27.94	Peak	Horizontal
*	13739.80	43.06	4.64	47.70	68.20	-20.50	Peak	Horizontal
*	10125.60	40.40	5.87	46.27	68.20	-21.93	Peak	Vertical
	11584.20	42.97	5.13	48.10	74.00	-25.90	Peak	Vertical
	12305.00	42.85	4.70	47.55	74.00	-26.45	Peak	Vertical
*	13812.90	44.58	4.68	49.26	68.20	-18.94	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-12	Test Mode	802.11ax-HE160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10098.40	40.41	5.90	46.31	68.20	-21.89	Peak	Horizontal
	11558.70	43.26	5.01	48.27	74.00	-25.73	Peak	Horizontal
	12072.10	42.98	5.09	48.07	74.00	-25.93	Peak	Horizontal
*	14248.10	44.58	5.58	50.16	68.20	-18.04	Peak	Horizontal
*	10234.40	40.39	5.85	46.24	68.20	-21.96	Peak	Vertical
	11217.00	41.28	5.26	46.54	74.00	-27.46	Peak	Vertical
	12004.10	42.69	5.06	47.75	74.00	-26.25	Peak	Vertical
*	14161.40	44.42	5.56	49.98	68.20	-18.22	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-12	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10368.70	47.69	5.60	53.29	68.20	-14.91	Peak	Horizontal
	11305.40	41.88	5.41	47.29	74.00	-26.71	Peak	Horizontal
*	14198.80	44.21	5.46	49.67	68.20	-18.53	Peak	Horizontal
	15550.30	36.21	5.92	42.13	54.00	-11.87	Average	Horizontal
	15550.30	46.51	5.92	52.43	74.00	-21.57	Peak	Horizontal
*	10360.20	49.51	5.68	55.19	68.20	-13.01	Peak	Vertical
	12104.40	42.30	5.10	47.40	74.00	-26.60	Peak	Vertical
*	14593.20	44.86	5.69	50.55	68.20	-17.65	Peak	Vertical
	15536.70	38.65	5.87	44.52	54.00	-9.48	Average	Vertical
	15536.70	48.76	5.87	54.63	74.00	-19.37	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10438.40	47.08	5.70	52.78	68.20	-15.42	Peak	Horizontal
	11395.50	41.66	5.50	47.16	74.00	-26.84	Peak	Horizontal
*	14203.90	44.95	5.47	50.42	68.20	-17.78	Peak	Horizontal
	15664.20	39.20	6.15	45.35	54.00	-8.65	Average	Horizontal
	15664.20	48.24	6.15	54.39	74.00	-19.61	Peak	Horizontal
*	10440.10	48.61	5.68	54.29	68.20	-13.91	Peak	Vertical
	11966.70	42.39	5.19	47.58	74.00	-26.42	Peak	Vertical
*	14103.60	44.11	5.40	49.51	68.20	-18.69	Peak	Vertical
	15664.20	42.42	6.15	48.57	54.00	-5.43	Average	Vertical
	15664.20	51.41	6.15	57.56	74.00	-16.44	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11667.50	42.71	4.84	47.55	74.00	-26.45	Peak	Horizontal
*	13739.80	42.39	4.64	47.03	68.20	-21.17	Peak	Horizontal
*	14831.20	43.49	5.58	49.07	68.20	-19.13	Peak	Horizontal
	15711.80	41.20	6.17	47.37	54.00	-6.63	Average	Horizontal
	15711.80	46.21	6.17	52.38	74.00	-21.62	Peak	Horizontal
*	9782.20	39.94	6.14	46.08	68.20	-22.12	Peak	Vertical
	11766.10	42.46	4.64	47.10	74.00	-26.90	Peak	Vertical
*	14054.30	44.13	5.43	49.56	68.20	-18.64	Peak	Vertical
	15419.40	38.05	5.73	43.78	54.00	-10.22	Average	Vertical
	15419.40	46.86	5.73	52.59	74.00	-21.41	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.00	40.45	6.15	46.60	68.20	-21.60	Peak	Horizontal
	11543.40	42.10	5.07	47.17	74.00	-26.83	Peak	Horizontal
*	14256.60	45.08	5.57	50.65	68.20	-17.55	Peak	Horizontal
	15616.60	44.78	5.98	50.76	74.00	-23.24	Peak	Horizontal
*	9807.70	40.82	6.27	47.09	68.20	-21.11	Peak	Vertical
	11835.80	42.32	4.95	47.27	74.00	-26.73	Peak	Vertical
*	14168.20	44.40	5.52	49.92	68.20	-18.28	Peak	Vertical
	15960.00	43.42	6.32	49.74	74.00	-24.26	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9931.80	40.85	5.99	46.84	68.20	-21.36	Peak	Horizontal
	11217.00	42.12	5.26	47.38	74.00	-26.62	Peak	Horizontal
	12186.00	42.50	5.02	47.52	74.00	-26.48	Peak	Horizontal
	15599.60	44.99	5.98	50.97	74.00	-23.03	Peak	Horizontal
*	10173.20	40.41	5.91	46.32	68.20	-21.88	Peak	Vertical
	11103.10	41.78	5.07	46.85	74.00	-27.15	Peak	Vertical
	12073.80	42.98	5.11	48.09	74.00	-25.91	Peak	Vertical
*	13931.90	43.13	5.28	48.41	68.20	-19.79	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10081.40	40.21	5.88	46.09	68.20	-22.11	Peak	Horizontal
	11325.80	41.15	5.41	46.56	74.00	-27.44	Peak	Horizontal
	11910.60	42.28	4.90	47.18	74.00	-26.82	Peak	Horizontal
*	13940.40	44.80	5.20	50.00	68.20	-18.20	Peak	Horizontal
*	9896.10	40.43	6.07	46.50	68.20	-21.70	Peak	Vertical
	11058.90	42.01	5.15	47.16	74.00	-26.84	Peak	Vertical
	12058.50	43.28	5.14	48.42	74.00	-25.58	Peak	Vertical
*	14146.10	43.92	5.60	49.52	68.20	-18.68	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10174.90	40.37	5.90	46.27	68.20	-21.93	Peak	Horizontal
	10917.80	41.35	5.21	46.56	74.00	-27.44	Peak	Horizontal
	11914.00	43.33	4.90	48.23	74.00	-25.77	Peak	Horizontal
*	14049.20	44.81	5.44	50.25	68.20	-17.95	Peak	Horizontal
*	9794.10	41.02	6.19	47.21	68.20	-20.99	Peak	Vertical
	11242.50	40.67	5.34	46.01	74.00	-27.99	Peak	Vertical
	12097.60	42.42	5.14	47.56	74.00	-26.44	Peak	Vertical
*	14195.40	44.37	5.46	49.83	68.20	-18.37	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10327.90	41.03	5.64	46.67	68.20	-21.53	Peak	Horizontal
	11681.10	42.00	4.83	46.83	74.00	-27.17	Peak	Horizontal
	12298.20	43.06	4.81	47.87	74.00	-26.13	Peak	Horizontal
*	14152.90	45.18	5.59	50.77	68.20	-17.43	Peak	Horizontal
*	10147.70	40.50	5.80	46.30	68.20	-21.90	Peak	Vertical
	11273.10	41.58	5.35	46.93	74.00	-27.07	Peak	Vertical
	12364.50	43.41	4.74	48.15	74.00	-25.85	Peak	Vertical
*	14331.40	44.85	5.66	50.51	68.20	-17.69	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10049.10	40.72	5.97	46.69	68.20	-21.51	Peak	Horizontal
	11392.10	41.58	5.48	47.06	74.00	-26.94	Peak	Horizontal
	12218.30	42.44	4.83	47.27	74.00	-26.73	Peak	Horizontal
*	14176.70	44.83	5.49	50.32	68.20	-17.88	Peak	Horizontal
*	9780.50	41.54	6.14	47.68	68.20	-20.52	Peak	Vertical
	10758.00	41.05	5.29	46.34	74.00	-27.66	Peak	Vertical
	11791.60	41.98	4.79	46.77	74.00	-27.23	Peak	Vertical
*	13935.30	44.66	5.26	49.92	68.20	-18.28	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10202.10	40.57	5.87	46.44	68.20	-21.76	Peak	Horizontal
	11030.00	41.96	5.04	47.00	74.00	-27.00	Peak	Horizontal
	12077.20	42.73	5.13	47.86	74.00	-26.14	Peak	Horizontal
*	14083.20	44.12	5.46	49.58	68.20	-18.62	Peak	Horizontal
*	9697.20	39.60	6.10	45.70	68.20	-22.50	Peak	Vertical
	11373.40	41.45	5.48	46.93	74.00	-27.07	Peak	Vertical
	12315.20	43.31	4.70	48.01	74.00	-25.99	Peak	Vertical
*	14127.40	43.74	5.45	49.19	68.20	-19.01	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11492.40	37.55	5.31	42.86	54.00	-11.14	Average	Horizontal
	11492.40	46.93	5.31	52.24	74.00	-21.76	Peak	Horizontal
*	14037.30	42.61	5.44	48.05	68.20	-20.15	Peak	Horizontal
	15880.10	44.16	6.26	50.42	74.00	-23.58	Peak	Horizontal
*	17236.70	53.87	3.22	57.09	68.20	-11.11	Peak	Horizontal
	11489.00	40.10	5.34	45.44	54.00	-8.56	Average	Vertical
	11489.00	48.26	5.34	53.60	74.00	-20.40	Peak	Vertical
*	14253.20	44.79	5.57	50.36	68.20	-17.84	Peak	Vertical
	15893.70	44.25	6.29	50.54	74.00	-23.46	Peak	Vertical
*	17240.10	50.95	3.22	54.17	68.20	-14.03	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11568.90	41.23	5.15	46.38	54.00	-7.62	Average	Horizontal
	11568.90	49.08	5.15	54.23	74.00	-19.77	Peak	Horizontal
*	14015.20	43.81	5.42	49.23	68.20	-18.97	Peak	Horizontal
	15791.70	43.83	6.29	50.12	74.00	-23.88	Peak	Horizontal
*	17367.60	54.24	3.33	57.57	68.20	-10.63	Peak	Horizontal
	11574.00	43.51	5.20	48.71	54.00	-5.29	Average	Vertical
	11574.00	52.66	5.20	57.86	74.00	-16.14	Peak	Vertical
*	14088.30	44.14	5.53	49.67	68.20	-18.53	Peak	Vertical
	15786.60	44.15	6.33	50.48	74.00	-23.52	Peak	Vertical
*	17345.50	53.73	3.27	57.00	68.20	-11.20	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11652.20	42.32	4.87	47.19	54.00	-6.81	Average	Horizontal
	11652.20	51.90	4.87	56.77	74.00	-17.23	Peak	Horizontal
*	14163.10	43.92	5.55	49.47	68.20	-18.73	Peak	Horizontal
	16016.10	44.87	6.28	51.15	74.00	-22.85	Peak	Horizontal
*	17476.40	59.49	3.61	63.10	68.20	-5.10	Peak	Horizontal
	11645.40	45.67	4.88	50.55	54.00	-3.45	Average	Vertical
	11645.40	54.53	4.88	59.41	74.00	-14.59	Peak	Vertical
*	14285.50	44.61	5.58	50.19	68.20	-18.01	Peak	Vertical
	15764.50	44.46	6.33	50.79	74.00	-23.21	Peak	Vertical
*	17467.90	58.19	3.50	61.69	68.20	-6.51	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10373.80	45.65	5.60	51.25	68.20	-16.95	Peak	Horizontal
	11201.70	42.29	5.27	47.56	74.00	-26.44	Peak	Horizontal
	12153.70	43.57	5.01	48.58	74.00	-25.42	Peak	Horizontal
*	13913.20	44.27	5.18	49.45	68.20	-18.75	Peak	Horizontal
*	10380.60	48.23	5.60	53.83	68.20	-14.37	Peak	Vertical
	11455.00	41.89	5.27	47.16	74.00	-26.84	Peak	Vertical
*	14042.40	44.25	5.44	49.69	68.20	-18.51	Peak	Vertical
	15745.80	42.65	6.18	48.83	74.00	-25.17	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10458.80	47.31	5.60	52.91	68.20	-15.29	Peak	Horizontal
	12383.20	43.44	4.70	48.14	74.00	-25.86	Peak	Horizontal
*	13935.30	44.71	5.26	49.97	68.20	-18.23	Peak	Horizontal
	15696.50	40.66	6.05	46.71	54.00	-7.29	Average	Horizontal
	15696.50	49.86	6.05	55.91	74.00	-18.09	Peak	Horizontal
*	10452.00	49.01	5.57	54.58	68.20	-13.62	Peak	Vertical
	11939.50	42.24	5.04	47.28	74.00	-26.72	Peak	Vertical
*	14185.20	44.22	5.47	49.69	68.20	-18.51	Peak	Vertical
	15696.50	42.63	6.05	48.68	54.00	-5.32	Average	Vertical
	15696.50	51.20	6.05	57.25	74.00	-16.75	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11480.50	41.71	5.40	47.11	74.00	-26.89	Peak	Horizontal
*	14210.70	45.08	5.48	50.56	68.20	-17.64	Peak	Horizontal
*	14934.90	44.67	5.64	50.31	68.20	-17.89	Peak	Horizontal
	15912.40	43.78	6.32	50.10	74.00	-23.90	Peak	Horizontal
	11293.50	41.19	5.40	46.59	74.00	-27.41	Peak	Vertical
*	14062.80	44.19	5.43	49.62	68.20	-18.58	Peak	Vertical
*	14851.60	45.65	5.51	51.16	68.20	-17.04	Peak	Vertical
	15739.00	44.34	6.15	50.49	74.00	-23.51	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10623.70	44.07	5.29	49.36	74.00	-24.64	Peak	Horizontal
*	13469.50	45.98	4.90	50.88	68.20	-17.32	Peak	Horizontal
*	14940.00	45.23	5.72	50.95	68.20	-17.25	Peak	Horizontal
	15924.30	40.63	6.24	46.87	54.00	-7.13	Average	Horizontal
	15924.30	48.24	6.24	54.48	74.00	-19.52	Peak	Horizontal
	12089.10	42.98	5.17	48.15	74.00	-25.85	Peak	Vertical
*	14246.40	44.39	5.58	49.97	68.20	-18.23	Peak	Vertical
*	14815.90	45.18	5.70	50.88	68.20	-17.32	Peak	Vertical
	15927.70	36.06	6.23	42.29	54.00	-11.71	Average	Vertical
	15927.70	46.66	6.23	52.89	74.00	-21.11	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10115.40	40.76	5.84	46.60	68.20	-21.60	Peak	Horizontal
	11494.10	41.84	5.30	47.14	74.00	-26.86	Peak	Horizontal
	12264.20	43.74	4.82	48.56	74.00	-25.44	Peak	Horizontal
*	14100.20	44.85	5.46	50.31	68.20	-17.89	Peak	Horizontal
*	10225.90	39.71	5.92	45.63	68.20	-22.57	Peak	Vertical
	11424.40	40.91	5.38	46.29	74.00	-27.71	Peak	Vertical
*	14224.30	44.58	5.48	50.06	68.20	-18.14	Peak	Vertical
	16004.20	44.09	6.37	50.46	74.00	-23.54	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9731.20	39.90	6.14	46.04	68.20	-22.16	Peak	Horizontal
	11490.70	41.90	5.33	47.23	74.00	-26.77	Peak	Horizontal
	12153.70	42.80	5.01	47.81	74.00	-26.19	Peak	Horizontal
*	14117.20	45.13	5.35	50.48	68.20	-17.72	Peak	Horizontal
	11064.00	41.41	5.19	46.60	74.00	-27.40	Peak	Vertical
	11672.60	41.98	4.83	46.81	74.00	-27.19	Peak	Vertical
*	13687.10	43.44	4.64	48.08	68.20	-20.12	Peak	Vertical
*	14887.30	44.78	5.67	50.45	68.20	-17.75	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9952.20	39.86	6.11	45.97	68.20	-22.23	Peak	Horizontal
	11336.00	44.53	5.45	49.98	74.00	-24.02	Peak	Horizontal
	15970.20	44.18	6.17	50.35	74.00	-23.65	Peak	Horizontal
*	17003.80	53.09	3.41	56.50	68.20	-11.70	Peak	Horizontal
	11342.80	38.59	5.48	44.07	54.00	-9.93	Average	Vertical
	11342.80	47.57	5.48	53.05	74.00	-20.95	Peak	Vertical
*	13921.70	43.22	5.33	48.55	68.20	-19.65	Peak	Vertical
	15562.20	42.21	5.96	48.17	74.00	-25.83	Peak	Vertical
*	17015.70	52.94	3.44	56.38	68.20	-11.82	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11419.30	42.37	5.41	47.78	74.00	-26.22	Peak	Horizontal
*	13819.70	44.10	4.72	48.82	68.20	-19.38	Peak	Horizontal
*	14814.20	45.06	5.69	50.75	68.20	-17.45	Peak	Horizontal
	15980.40	42.68	6.16	48.84	74.00	-25.16	Peak	Horizontal
	11419.30	43.34	5.41	48.75	74.00	-25.25	Peak	Vertical
*	14185.20	44.30	5.47	49.77	68.20	-18.43	Peak	Vertical
	16009.30	43.27	6.38	49.65	74.00	-24.35	Peak	Vertical
*	17158.50	47.31	3.26	50.57	68.20	-17.63	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11507.70	37.99	5.28	43.27	54.00	-10.73	Average	Horizontal
	11507.70	46.16	5.28	51.44	74.00	-22.56	Peak	Horizontal
*	14885.60	44.55	5.67	50.22	68.20	-17.98	Peak	Horizontal
	15960.00	43.87	6.32	50.19	74.00	-23.81	Peak	Horizontal
*	17263.90	54.30	3.12	57.42	68.20	-10.78	Peak	Horizontal
*	10147.70	39.18	5.80	44.98	68.20	-23.22	Peak	Vertical
	11507.70	40.61	5.28	45.89	54.00	-8.11	Average	Vertical
	11507.70	47.07	5.28	52.35	74.00	-21.65	Peak	Vertical
	15708.40	43.44	6.17	49.61	74.00	-24.39	Peak	Vertical
*	17263.90	52.07	3.12	55.19	68.20	-13.01	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.50	41.06	5.92	46.98	68.20	-21.22	Peak	Horizontal
	11587.60	42.06	5.12	47.18	54.00	-6.82	Average	Horizontal
	11587.60	50.03	5.12	55.15	74.00	-18.85	Peak	Horizontal
	15650.60	44.14	6.07	50.21	74.00	-23.79	Peak	Horizontal
*	17394.80	53.55	3.48	57.03	68.20	-11.17	Peak	Horizontal
	11591.00	46.20	5.10	51.30	54.00	-2.70	Average	Vertical
	11591.00	51.01	5.10	56.11	74.00	-17.89	Peak	Vertical
*	13736.40	44.27	4.60	48.87	68.20	-19.33	Peak	Vertical
	15582.60	44.46	5.92	50.38	74.00	-23.62	Peak	Vertical
*	17391.40	51.45	3.47	54.92	68.20	-13.28	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10412.90	42.22	5.63	47.85	68.20	-20.35	Peak	Horizontal
	11679.40	42.30	4.84	47.14	74.00	-26.86	Peak	Horizontal
*	14258.30	44.66	5.56	50.22	68.20	-17.98	Peak	Horizontal
	15645.50	44.53	6.04	50.57	74.00	-23.43	Peak	Horizontal
*	10438.40	42.18	5.70	47.88	68.20	-20.32	Peak	Vertical
	12152.00	42.05	5.00	47.05	74.00	-26.95	Peak	Vertical
*	14033.90	44.34	5.44	49.78	68.20	-18.42	Peak	Vertical
	15608.10	44.68	6.02	50.70	74.00	-23.30	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	12157.10	41.89	5.03	46.92	74.00	-27.08	Peak	Horizontal
*	13858.80	44.28	4.90	49.18	68.20	-19.02	Peak	Horizontal
*	14985.90	43.85	5.78	49.63	68.20	-18.57	Peak	Horizontal
	15553.70	44.18	5.94	50.12	74.00	-23.88	Peak	Horizontal
	11325.80	41.09	5.41	46.50	74.00	-27.50	Peak	Vertical
*	13964.20	44.29	5.19	49.48	68.20	-18.72	Peak	Vertical
*	14980.80	44.30	5.74	50.04	68.20	-18.16	Peak	Vertical
	15944.70	44.09	6.32	50.41	74.00	-23.59	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9836.60	40.01	6.11	46.12	68.20	-22.08	Peak	Horizontal
	11135.40	41.51	5.17	46.68	74.00	-27.32	Peak	Horizontal
*	13947.20	44.14	5.12	49.26	68.20	-18.94	Peak	Horizontal
	15893.70	43.98	6.29	50.27	74.00	-23.73	Peak	Horizontal
	11142.20	41.70	5.12	46.82	74.00	-27.18	Peak	Vertical
*	14124.00	43.96	5.41	49.37	68.20	-18.83	Peak	Vertical
*	14846.50	44.94	5.50	50.44	68.20	-17.76	Peak	Vertical
	15730.50	44.57	6.13	50.70	74.00	-23.30	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10178.30	39.86	5.88	45.74	68.20	-22.46	Peak	Horizontal
	11781.40	41.57	4.82	46.39	74.00	-27.61	Peak	Horizontal
*	13977.80	43.96	5.33	49.29	68.20	-18.91	Peak	Horizontal
	15475.50	44.07	5.79	49.86	74.00	-24.14	Peak	Horizontal
	11268.00	42.05	5.39	47.44	74.00	-26.56	Peak	Vertical
*	14015.20	44.55	5.42	49.97	68.20	-18.23	Peak	Vertical
	15586.00	44.33	5.92	50.25	74.00	-23.75	Peak	Vertical
*	16811.70	46.37	3.95	50.32	68.20	-17.88	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11200.00	41.66	5.27	46.93	74.00	-27.07	Peak	Horizontal
	12148.60	42.03	4.99	47.02	74.00	-26.98	Peak	Horizontal
*	14892.40	44.26	5.70	49.96	68.20	-18.24	Peak	Horizontal
*	16821.90	48.35	3.85	52.20	68.20	-16.00	Peak	Horizontal
	11240.80	43.25	5.33	48.58	74.00	-25.42	Peak	Vertical
*	13862.20	43.95	4.91	48.86	68.20	-19.34	Peak	Vertical
*	14962.10	44.04	5.71	49.75	68.20	-18.45	Peak	Vertical
	15569.00	36.89	5.96	42.85	54.00	-11.15	Average	Vertical
	15569.00	45.28	5.96	51.24	74.00	-22.76	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11550.20	44.75	5.02	49.77	74.00	-24.23	Peak	Horizontal
*	14040.70	44.30	5.44	49.74	68.20	-18.46	Peak	Horizontal
	15795.10	44.43	6.25	50.68	74.00	-23.32	Peak	Horizontal
*	17299.60	49.15	3.34	52.49	68.20	-15.71	Peak	Horizontal
	11562.10	45.95	5.06	51.01	74.00	-22.99	Peak	Vertical
*	14015.20	43.89	5.42	49.31	68.20	-18.89	Peak	Vertical
	15640.40	41.21	6.02	47.23	74.00	-26.77	Peak	Vertical
*	17088.80	46.95	3.32	50.27	68.20	-17.93	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10202.10	40.59	5.87	46.46	68.20	-21.74	Peak	Horizontal
	11506.00	41.81	5.29	47.10	74.00	-26.90	Peak	Horizontal
	11936.10	42.82	5.00	47.82	74.00	-26.18	Peak	Horizontal
*	14146.10	44.20	5.60	49.80	68.20	-18.40	Peak	Horizontal
	11431.20	42.01	5.35	47.36	74.00	-26.64	Peak	Vertical
*	13857.10	44.35	4.90	49.25	68.20	-18.95	Peak	Vertical
*	14829.50	44.63	5.60	50.23	68.20	-17.97	Peak	Vertical
	15995.70	43.60	6.26	49.86	74.00	-24.14	Peak	Vertical

Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Carl Jiang
Test Date	2025-03-13	Test Mode	802.11be-EHT160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11038.50	41.66	5.05	46.71	74.00	-27.29	Peak	Horizontal
	12252.30	43.03	4.80	47.83	74.00	-26.17	Peak	Horizontal
*	14785.30	47.18	5.60	52.78	68.20	-15.42	Peak	Horizontal
*	16726.70	47.76	4.16	51.92	68.20	-16.28	Peak	Horizontal
	11495.80	42.11	5.29	47.40	74.00	-26.60	Peak	Vertical
	12033.00	43.35	5.11	48.46	74.00	-25.54	Peak	Vertical
*	14193.70	45.24	5.46	50.70	68.20	-17.50	Peak	Vertical
*	14957.00	45.68	5.72	51.40	68.20	-16.80	Peak	Vertical


Note 1: " * " is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-03-18
Temperature	20.1 °C	Humidity	36.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

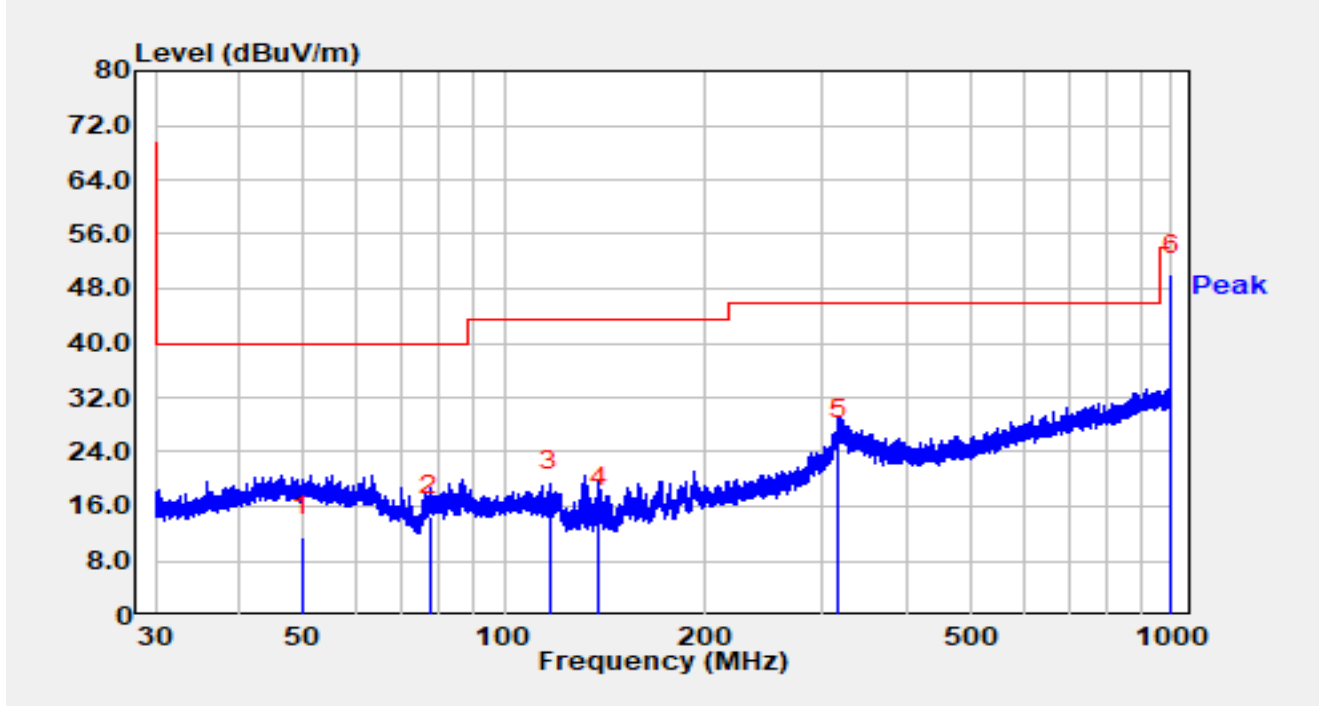


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		49.672	-8.10	19.68	11.58	-28.42	40.00	QP
2		77.375	0.90	13.60	14.50	-25.50	40.00	QP
3		117.196	1.90	16.47	18.37	-25.13	43.50	QP
4		138.825	1.70	14.11	15.81	-27.69	43.50	QP
5		317.145	4.80	21.03	25.83	-20.17	46.00	QP
6	*	1000.000	18.40	31.61	50.01	-3.99	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC1	Test Date	2025-03-18
Temperature	20.1 °C	Humidity	36.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

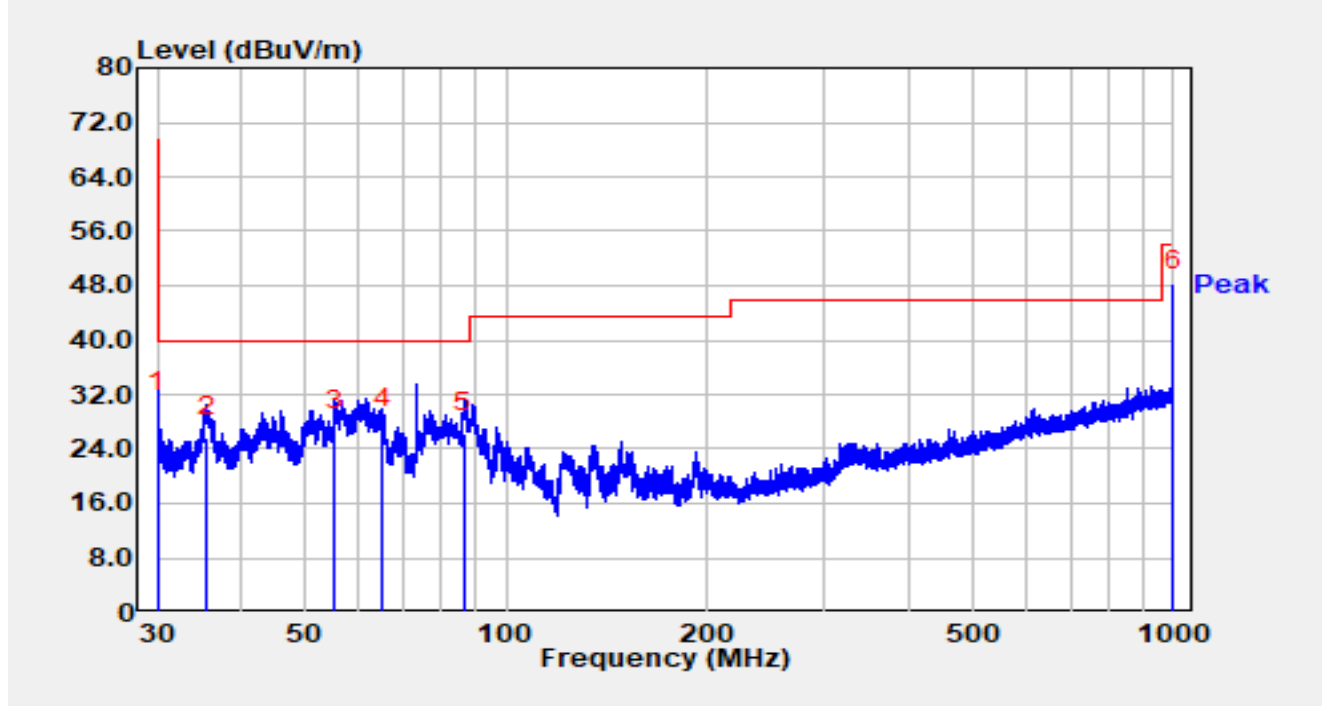


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		30.011	12.80	16.77	29.57	-10.43	40.00	QP
2		35.562	8.40	17.27	25.67	-14.33	40.00	QP
3		55.434	7.50	19.09	26.59	-13.41	40.00	QP
4		65.343	9.70	17.25	26.95	-13.05	40.00	QP
5		86.291	11.30	15.02	26.32	-13.68	40.00	QP
6	*	1000.000	15.60	31.61	47.21	-6.79	54.00	QP

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

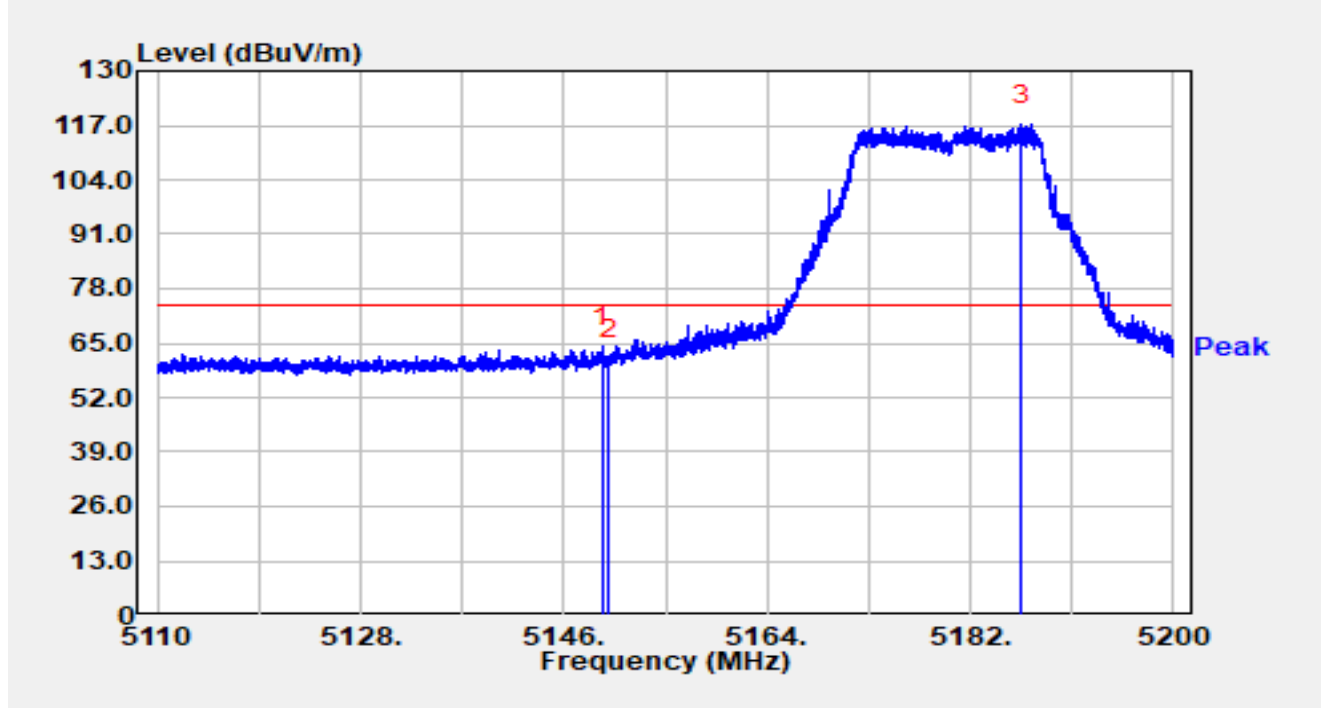


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.402	48.14	16.00	64.13	-9.87	74.00	Peak
2		5150.000	45.06	16.00	61.05	-12.95	74.00	Peak
3		5186.491	101.15	15.94	117.09	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

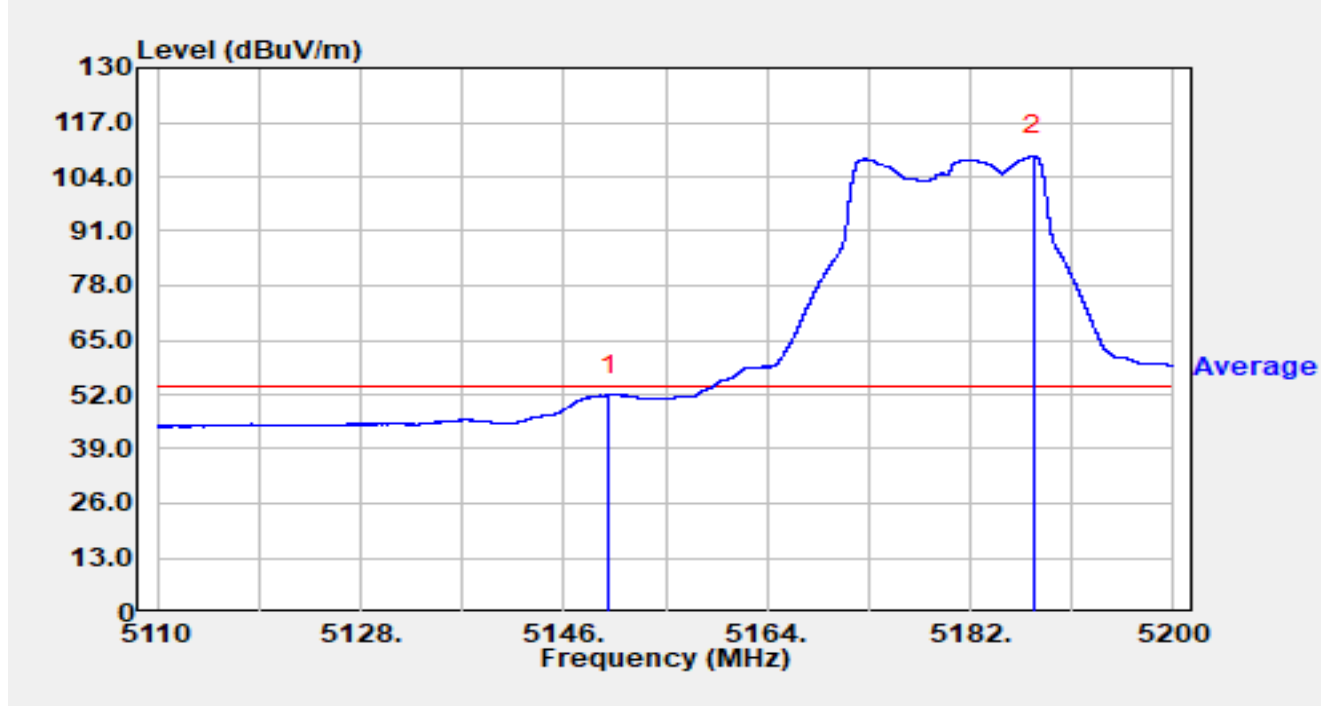


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	35.91	16.00	51.90	-2.10	54.00	Average
2		5187.589	93.04	15.94	108.98	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

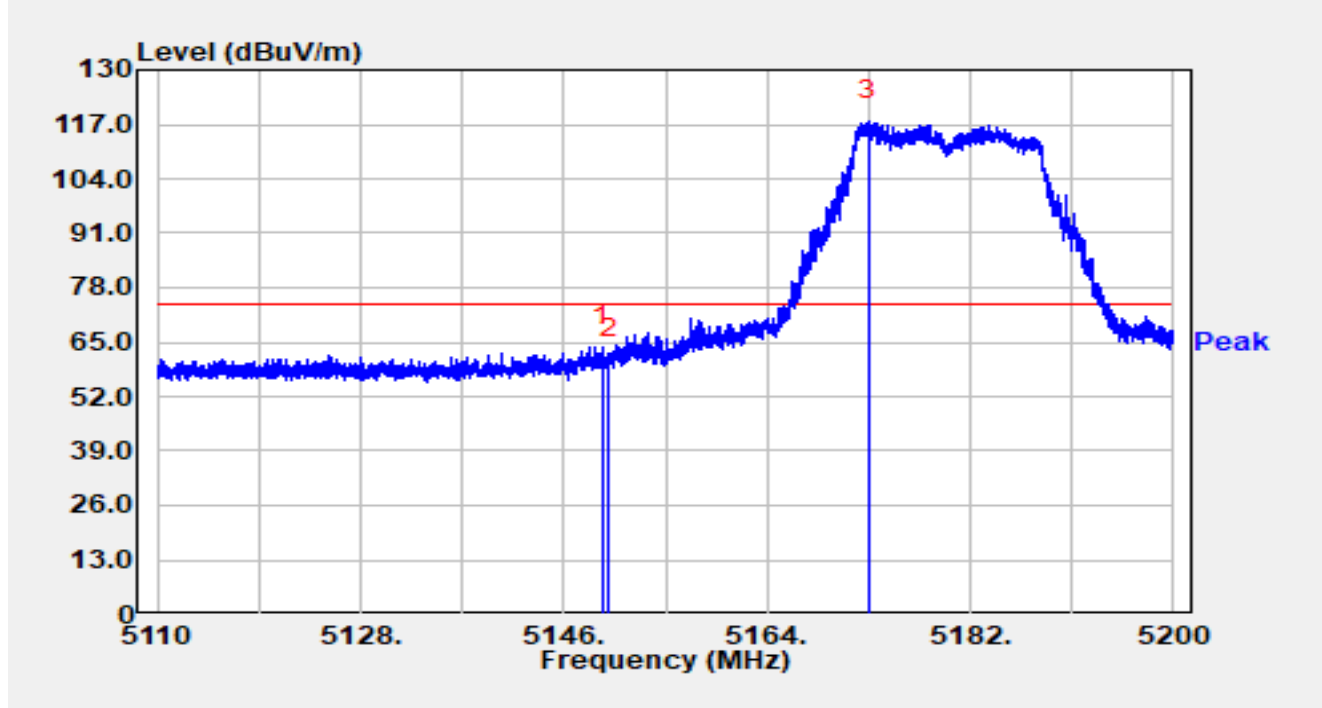


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.456	47.92	16.00	63.91	-10.09	74.00	Peak
2		5150.000	45.24	16.00	61.23	-12.77	74.00	Peak
3		5172.991	101.99	15.97	117.95	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

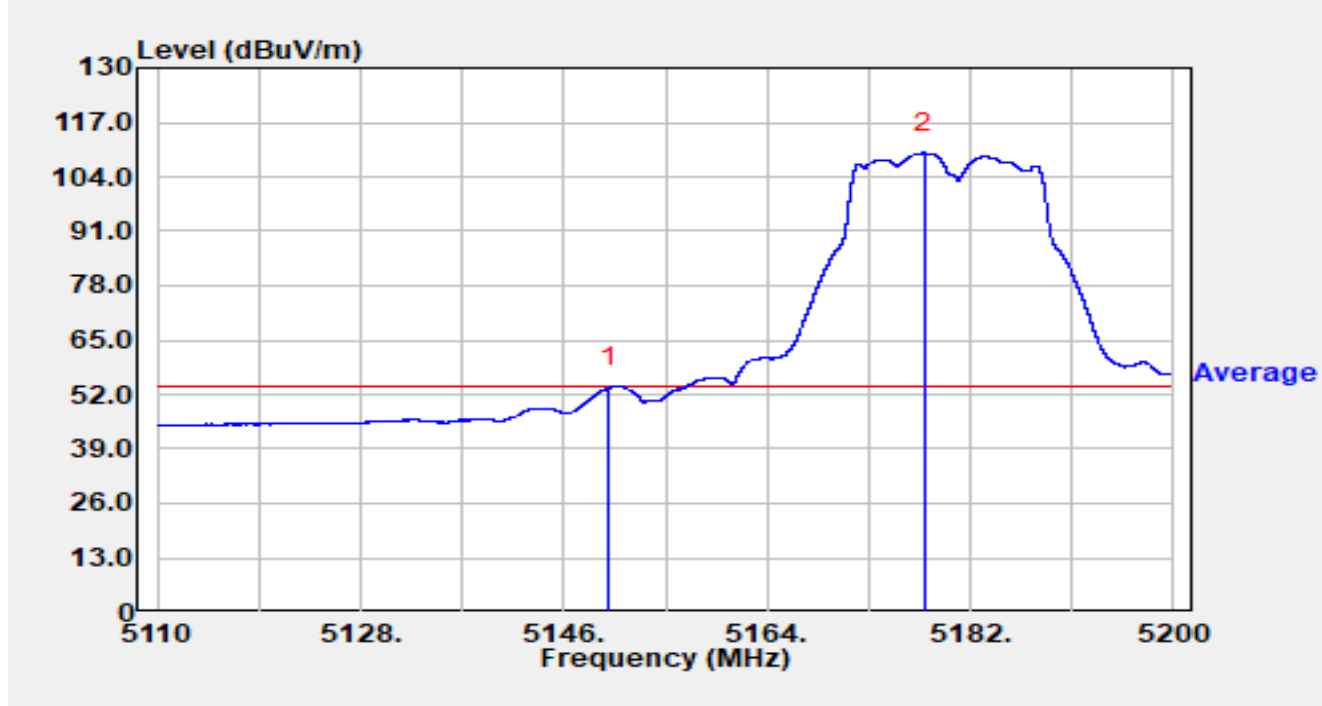


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.49	16.00	53.48	-0.52	54.00	Average
2		5177.932	93.74	15.94	109.68	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

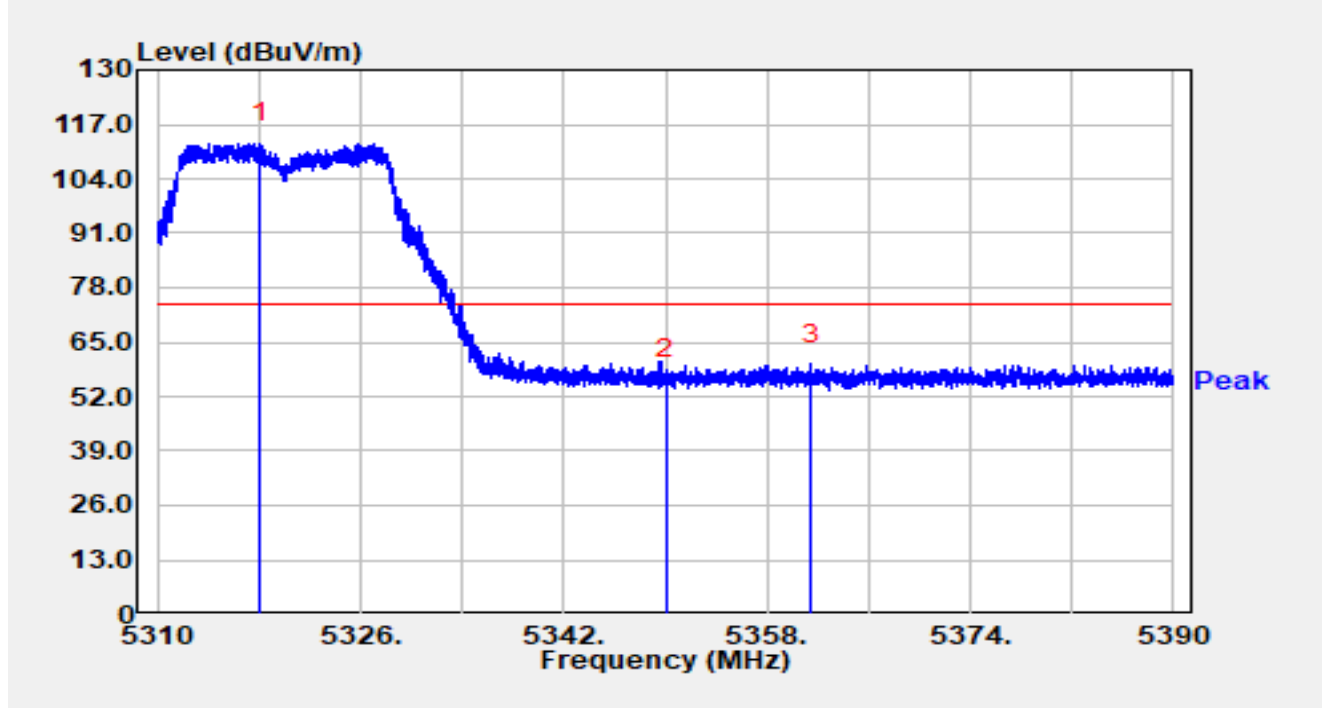


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.080	96.79	15.79	112.58	N/A	N/A	Peak
2		5350.000	40.62	15.68	56.30	-17.70	74.00	Peak
3	*	5361.456	44.10	15.64	59.75	-14.25	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

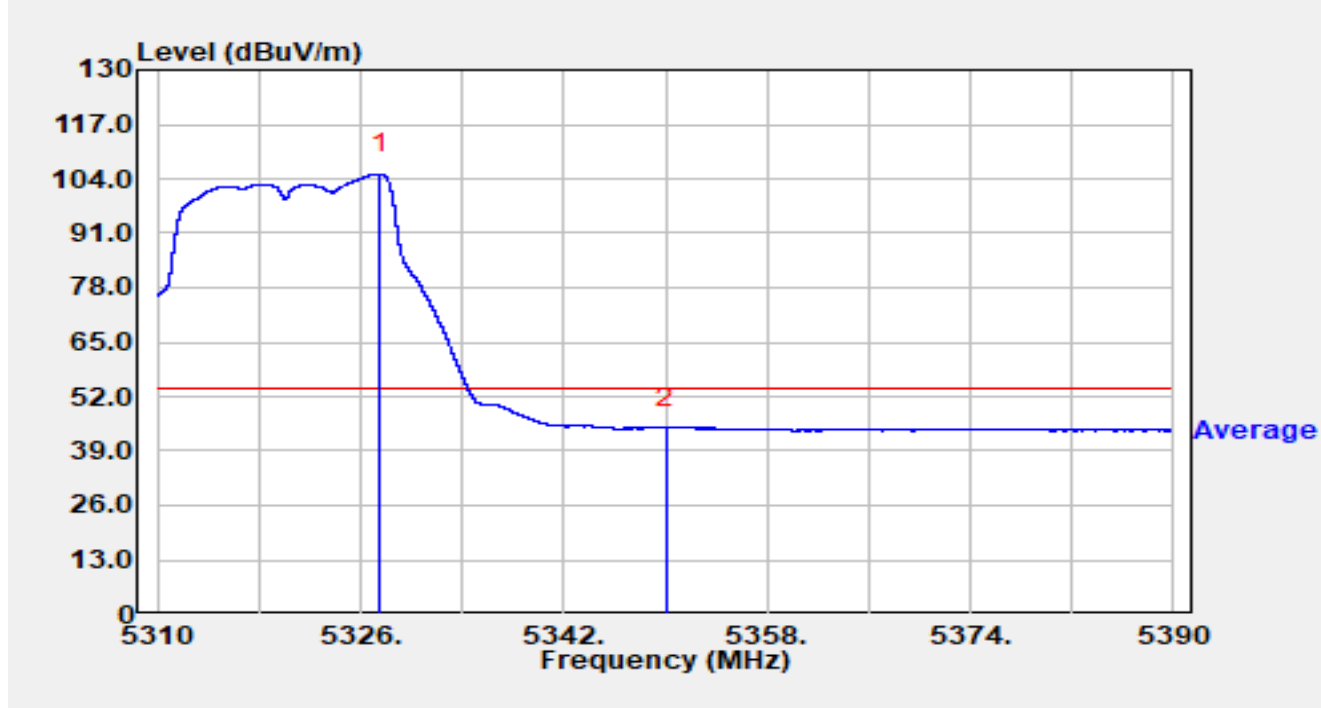


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.552	89.42	15.80	105.22	N/A	N/A	Average
2	*	5350.000	28.84	15.68	44.52	-9.48	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

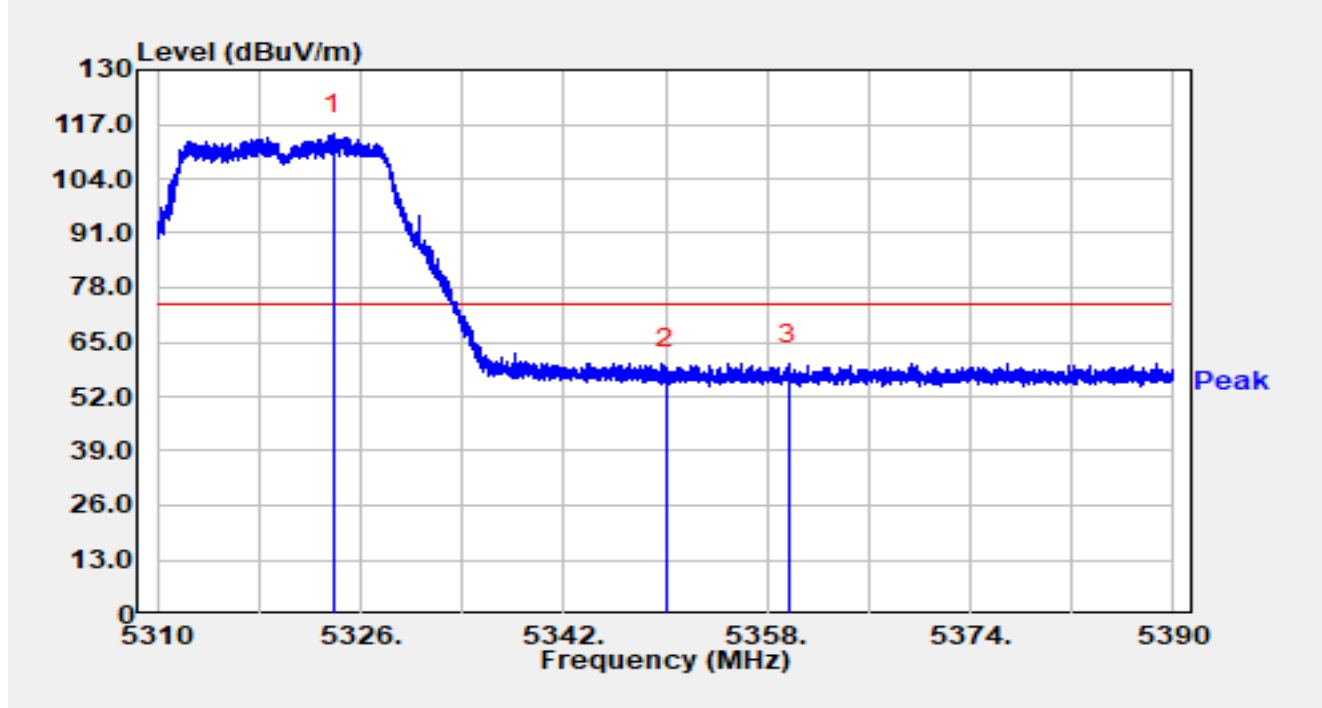


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.856	98.97	15.80	114.76	N/A	N/A	Peak
2		5350.000	43.08	15.68	58.76	-15.24	74.00	Peak
3	*	5359.720	44.13	15.65	59.78	-14.22	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

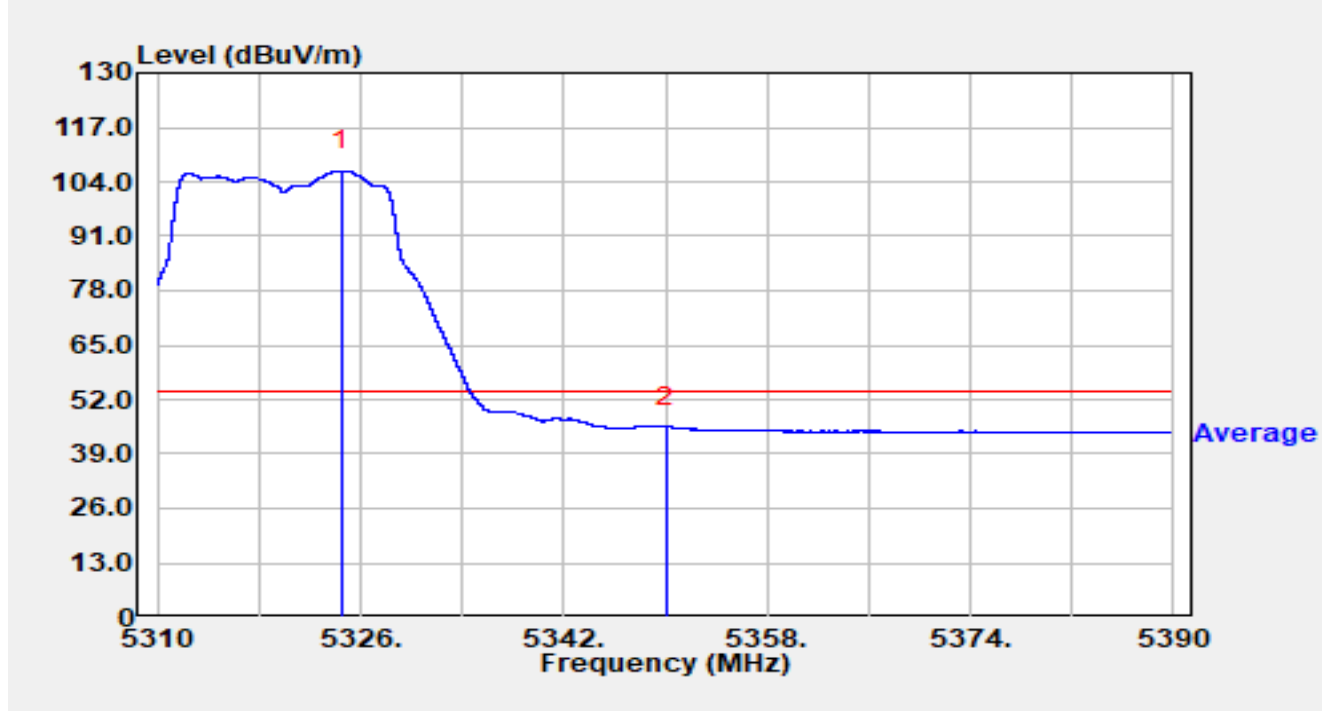


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.504	90.79	15.80	106.59	N/A	N/A	Average
2	*	5350.000	29.92	15.68	45.60	-8.40	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

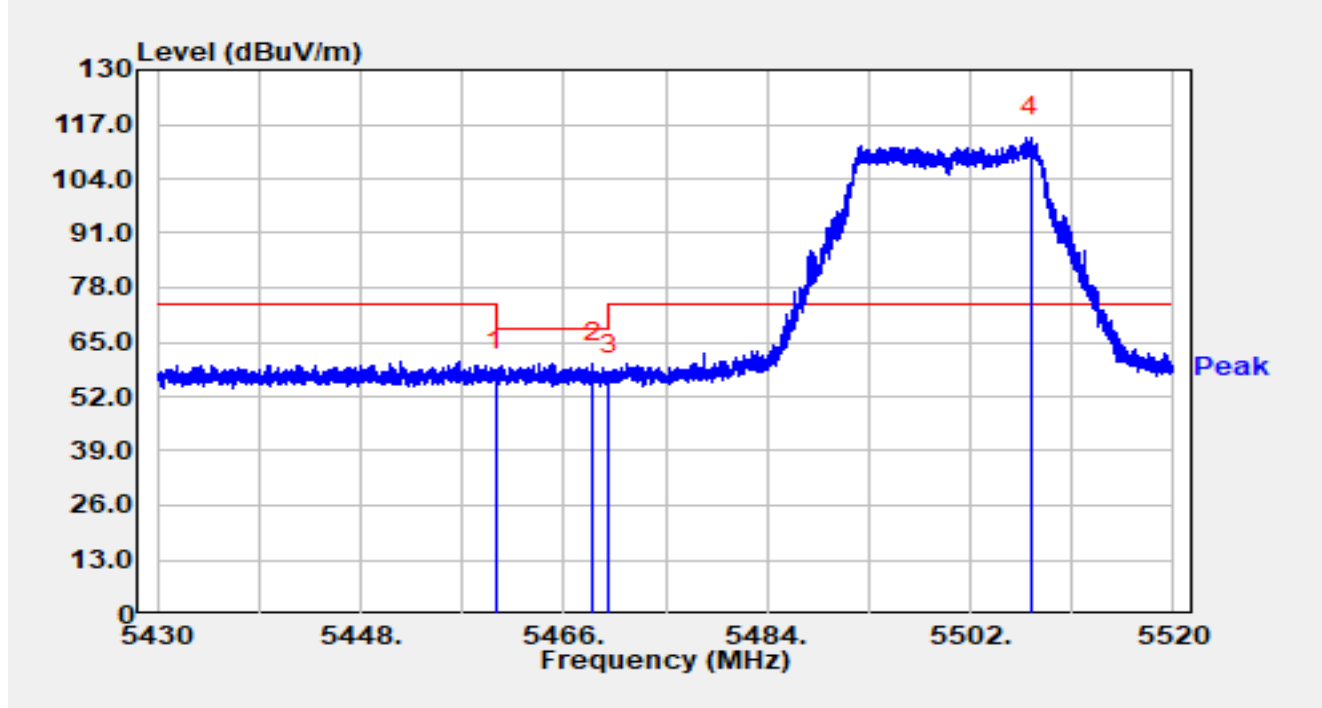


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	42.03	16.02	58.05	-10.15	68.20	Peak
2	*	5468.556	43.94	15.99	59.93	-8.27	68.20	Peak
3		5470.000	41.05	15.98	57.03	-11.17	68.20	Peak
4		5507.382	97.61	16.22	113.83	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

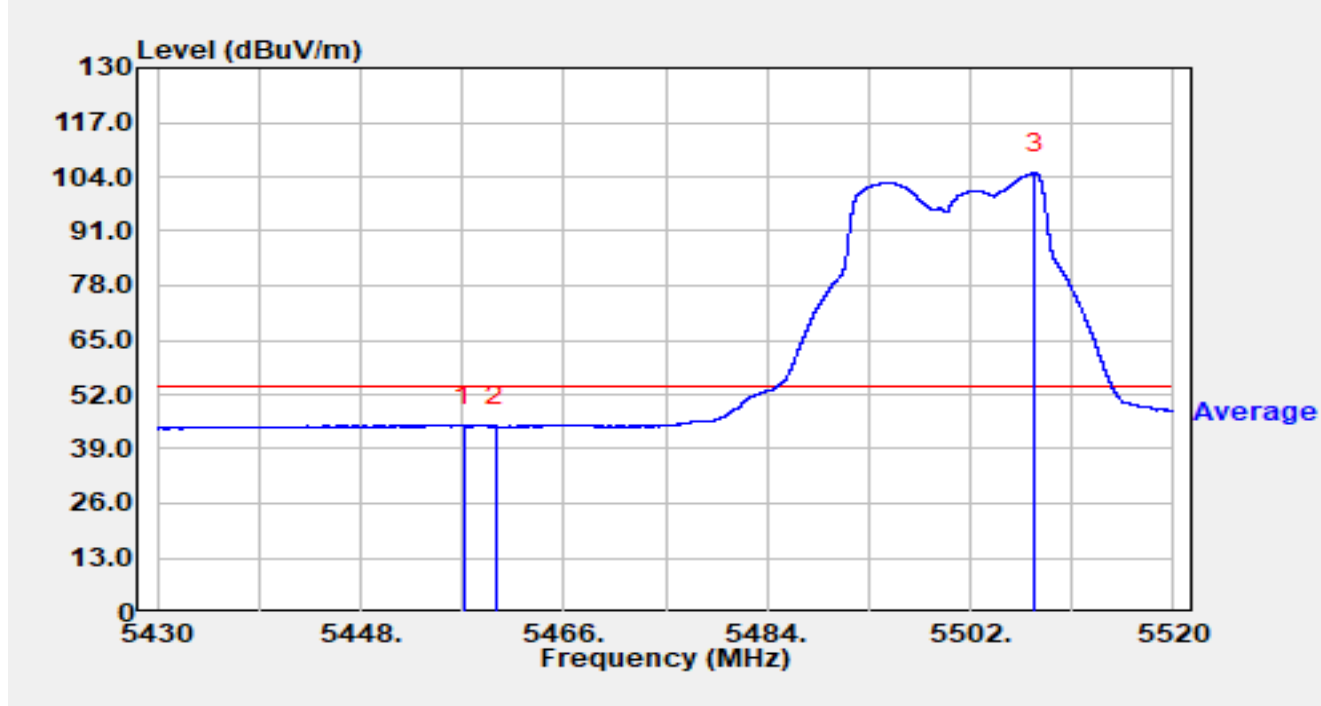


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.144	28.59	16.03	44.63	-9.37	54.00	Average
2		5460.000	28.38	16.02	44.40	-9.60	54.00	Average
3		5507.661	88.75	16.22	104.97	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

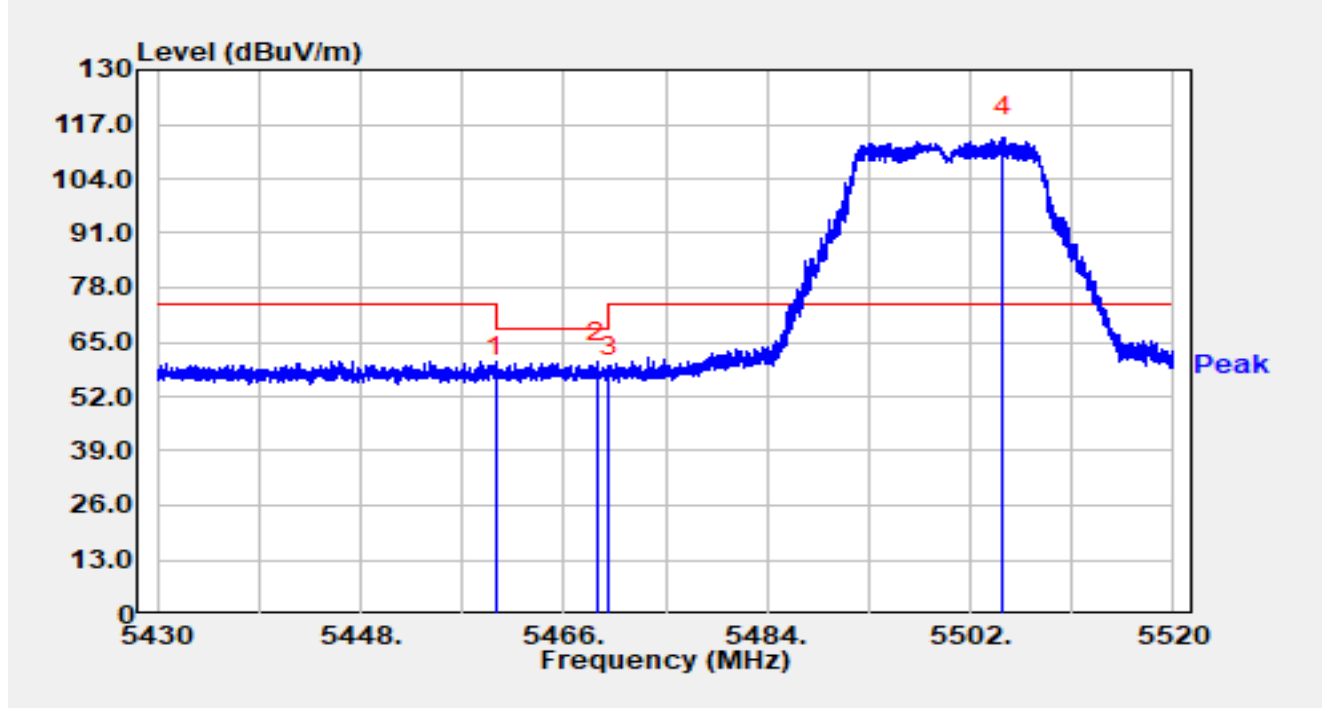


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	40.46	16.02	56.48	-11.72	68.20	Peak
2	*	5468.952	44.18	15.99	60.17	-8.03	68.20	Peak
3		5470.000	40.67	15.98	56.65	-11.55	68.20	Peak
4		5504.871	97.62	16.23	113.85	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

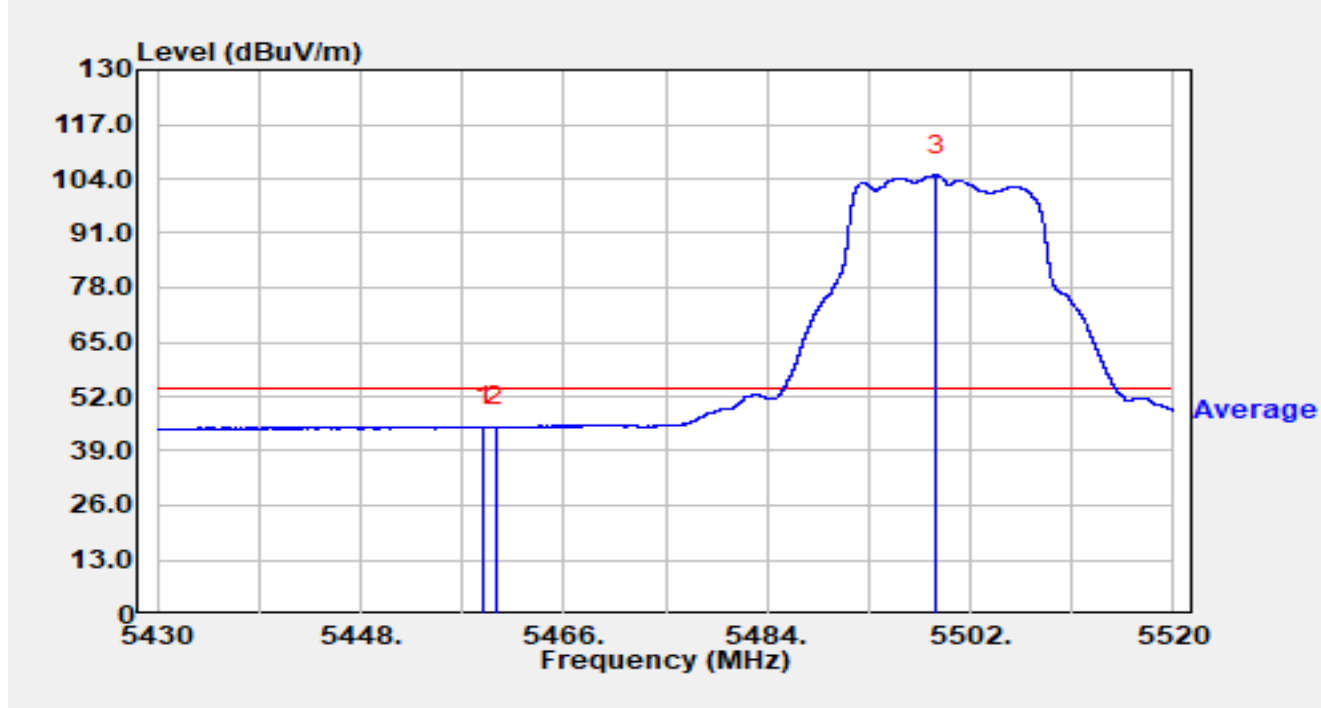


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.917	28.84	16.03	44.87	-9.13	54.00	Average
2		5460.000	28.73	16.02	44.75	-9.25	54.00	Average
3		5498.976	88.70	16.17	104.87	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5700MHz		

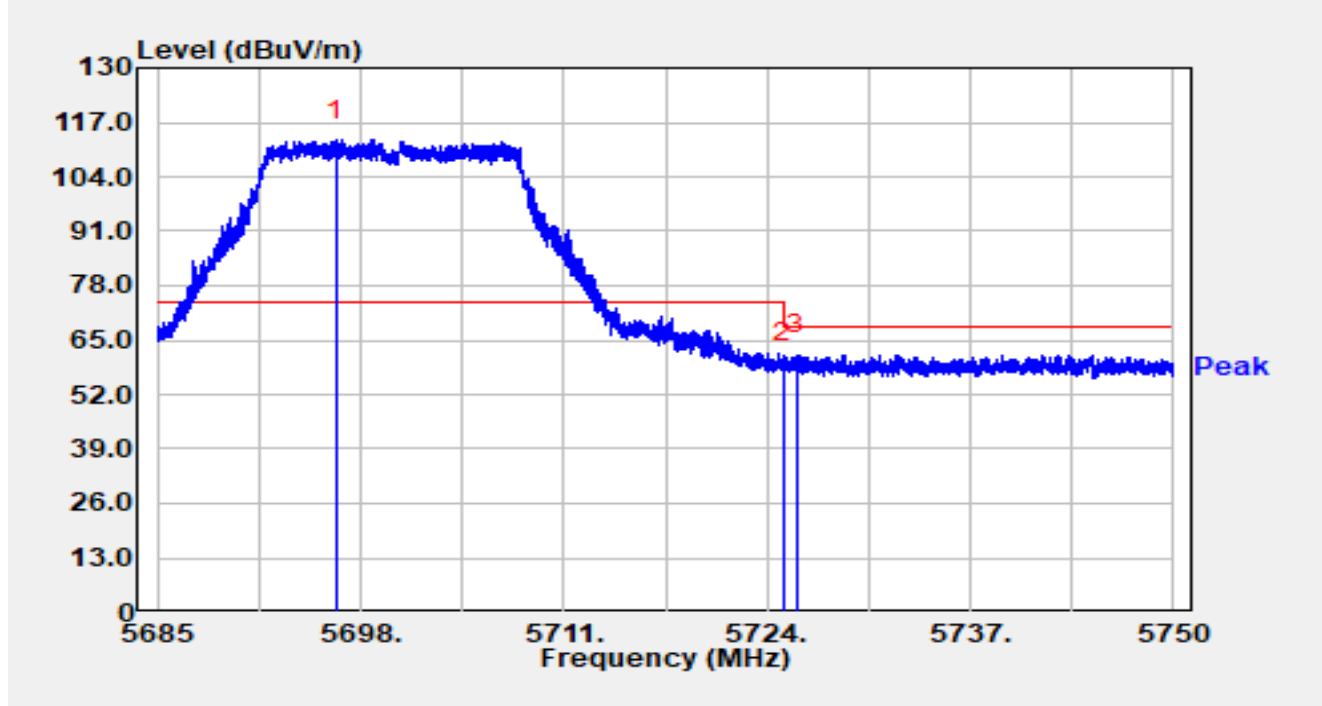


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5696.395	95.98	16.79	112.77	N/A	N/A	Peak
2		5725.000	42.79	16.92	59.72	-8.48	68.20	Peak
3	*	5725.853	44.61	16.93	61.53	-6.67	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5700MHz		

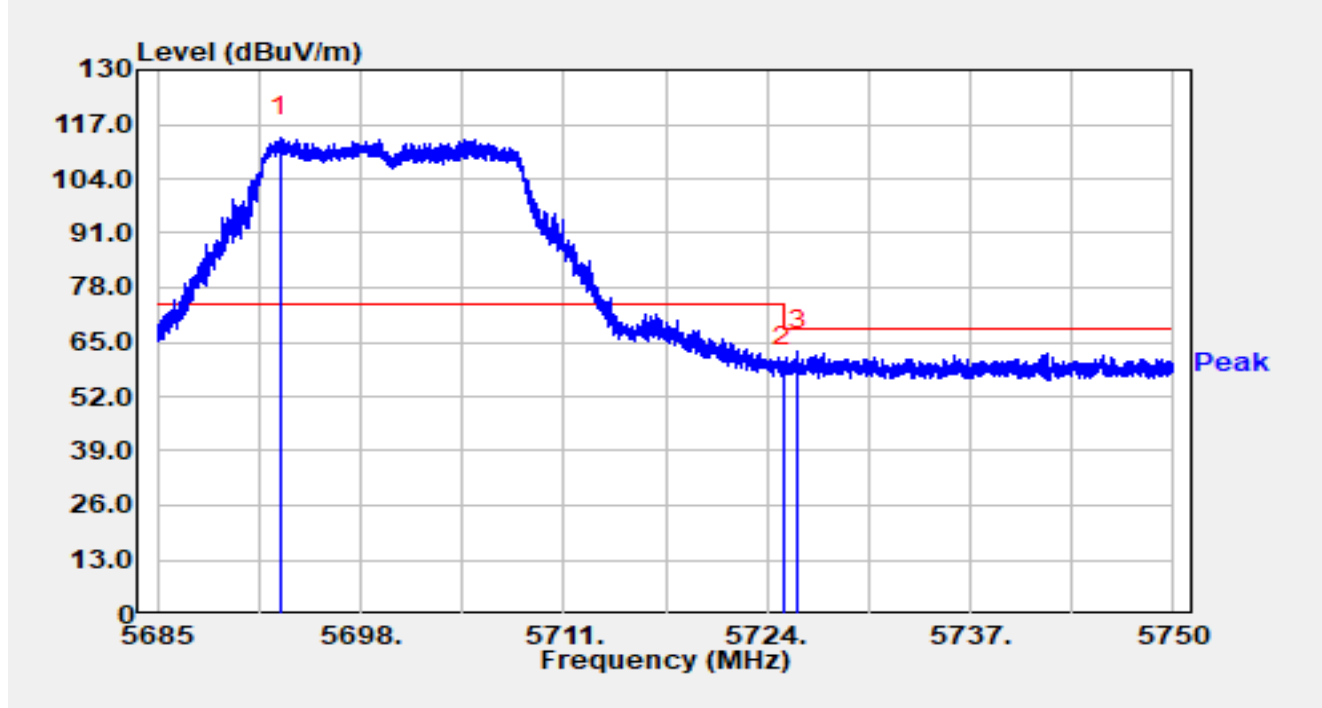


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.891	97.15	16.78	113.93	N/A	N/A	Peak
2		5725.000	42.05	16.92	58.97	-9.23	68.20	Peak
3	*	5725.976	45.91	16.93	62.84	-5.36	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5745MHz		

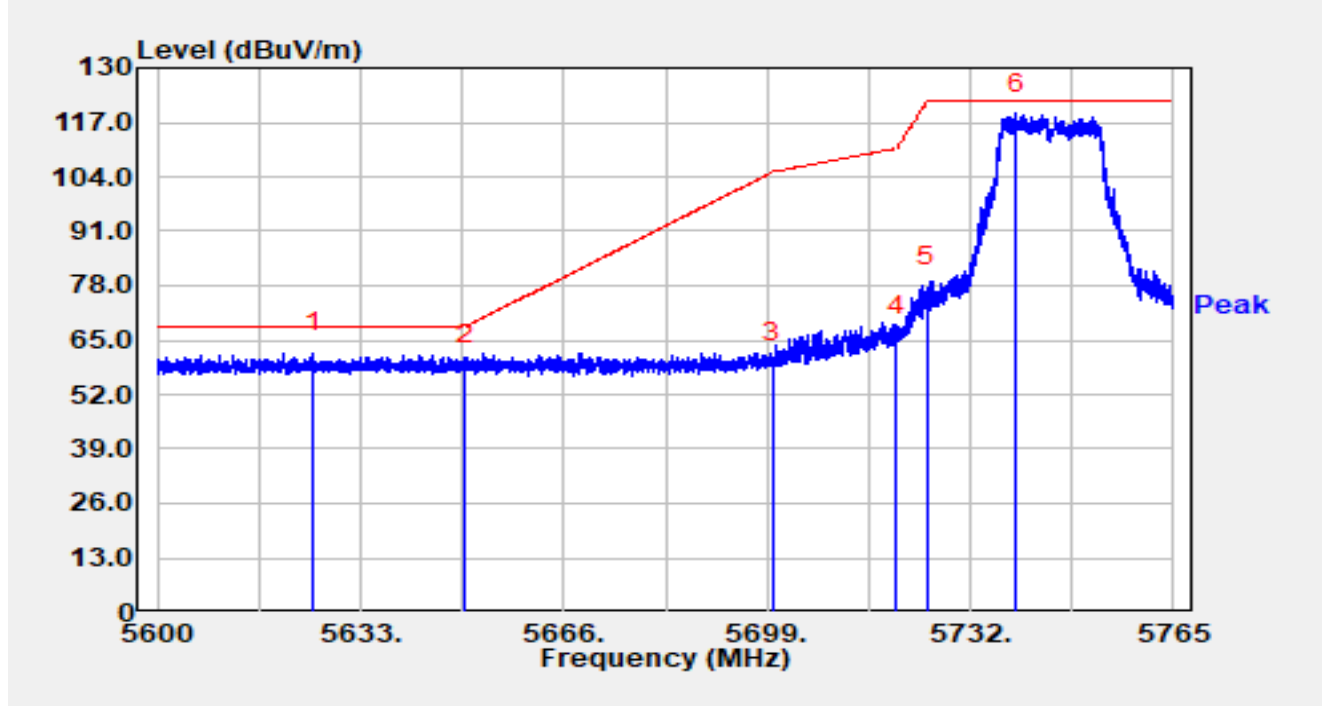


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5625.328	45.41	16.52	61.93	-6.27	68.20	Peak
2		5650.000	42.63	16.65	59.29	-8.91	68.20	Peak
3		5700.000	42.82	16.81	59.63	-45.57	105.20	Peak
4		5720.000	49.11	16.90	66.02	-44.78	110.80	Peak
5		5725.000	60.69	16.92	77.61	-44.59	122.20	Peak
6		5739.425	102.04	16.95	119.00	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5745MHz		

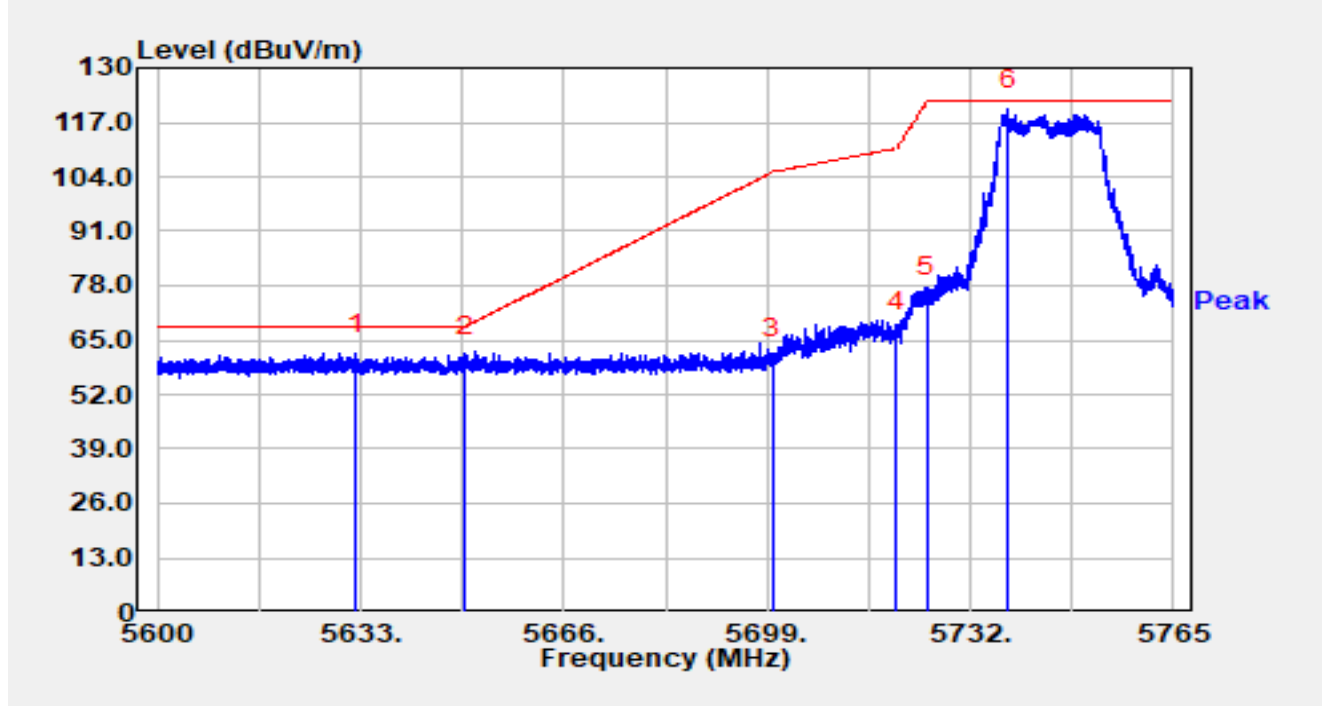


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.191	45.17	16.57	61.74	-6.46	68.20	Peak
2		5650.000	44.59	16.65	61.24	-6.96	68.20	Peak
3		5700.000	43.93	16.81	60.75	-44.45	105.20	Peak
4		5720.000	49.81	16.90	66.72	-44.08	110.80	Peak
5		5725.000	58.50	16.92	75.42	-46.78	122.20	Peak
6		5738.188	103.15	16.95	120.10	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5825MHz		

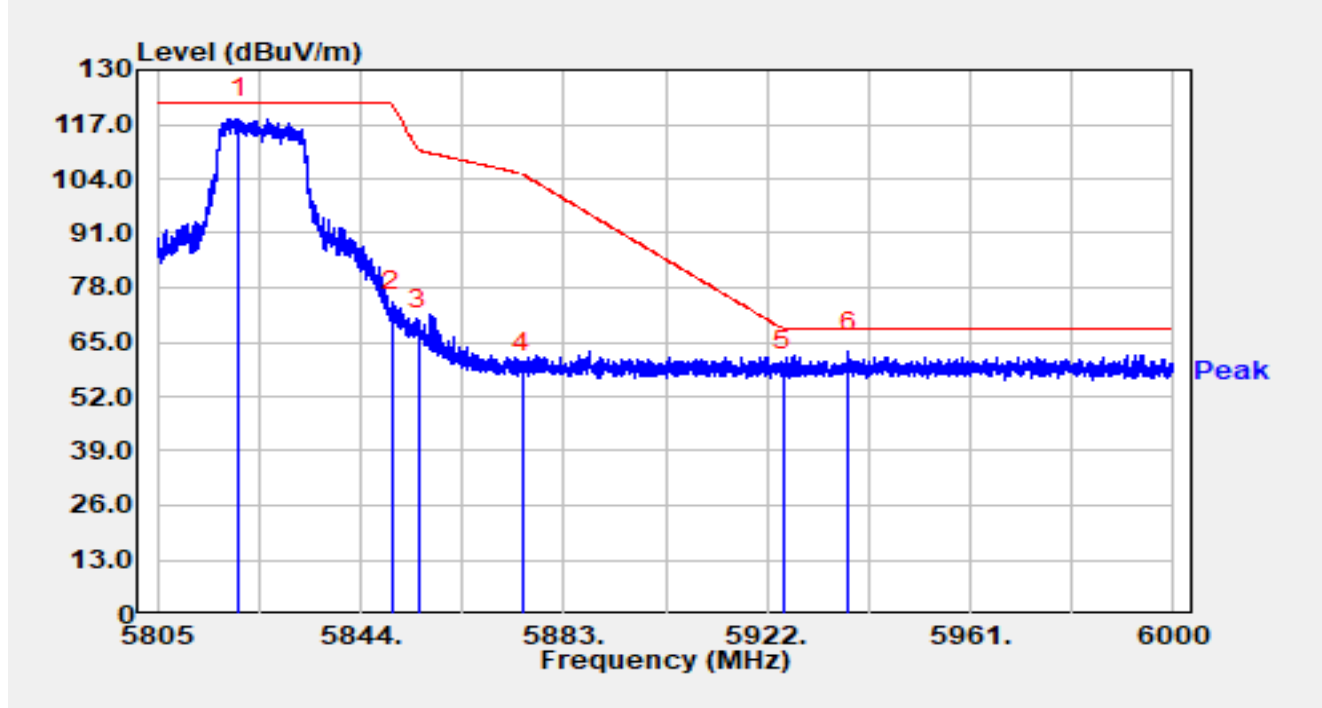


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.522	100.98	17.37	118.36	N/A	N/A	Peak
2		5850.000	55.14	17.31	72.45	-49.75	122.20	Peak
3		5855.000	50.38	17.32	67.71	-43.09	110.80	Peak
4		5875.000	40.38	17.38	57.76	-47.44	105.20	Peak
5		5925.000	40.58	17.36	57.94	-10.26	68.20	Peak
6	*	5937.561	45.18	17.41	62.59	-5.61	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5825MHz		

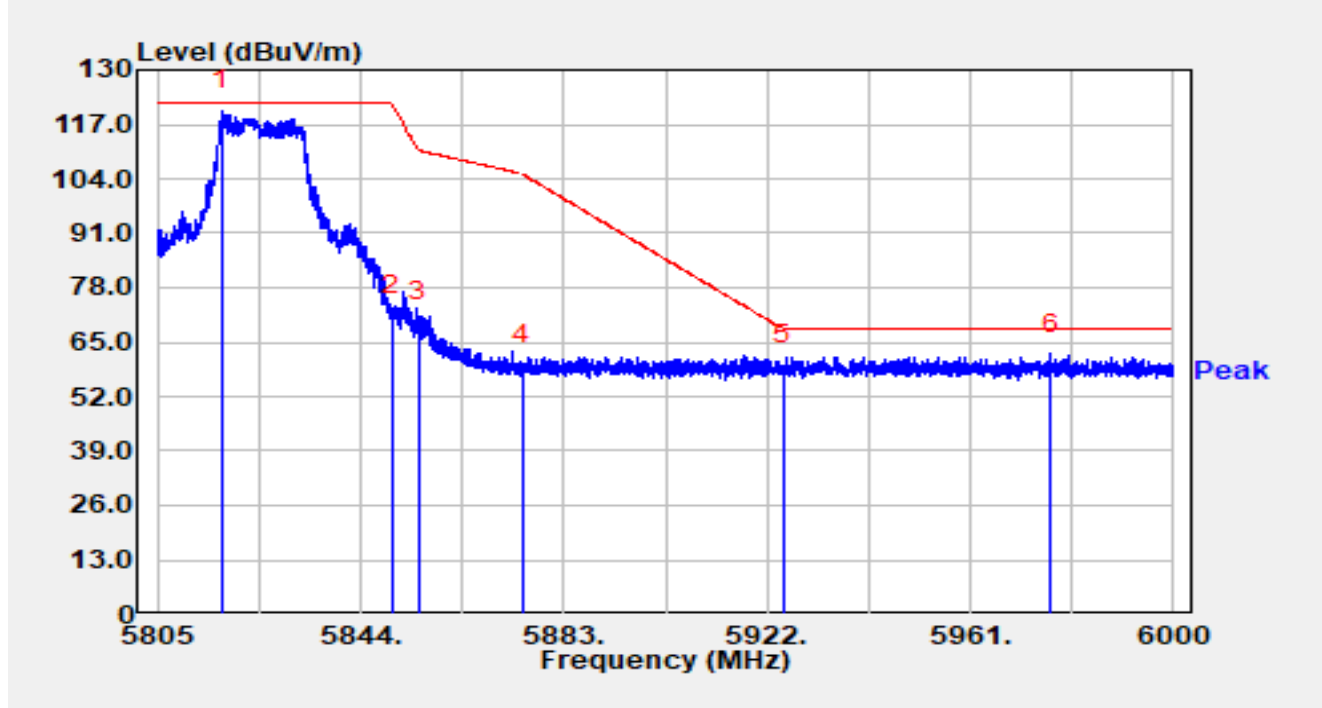


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5817.363	103.00	17.37	120.37	N/A	N/A	Peak
2		5850.000	53.95	17.31	71.26	-50.94	122.20	Peak
3		5855.000	52.77	17.32	70.10	-40.70	110.80	Peak
4		5875.000	42.44	17.38	59.81	-45.39	105.20	Peak
5		5925.000	42.01	17.36	59.37	-8.83	68.20	Peak
6	*	5976.424	44.55	17.57	62.12	-6.08	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

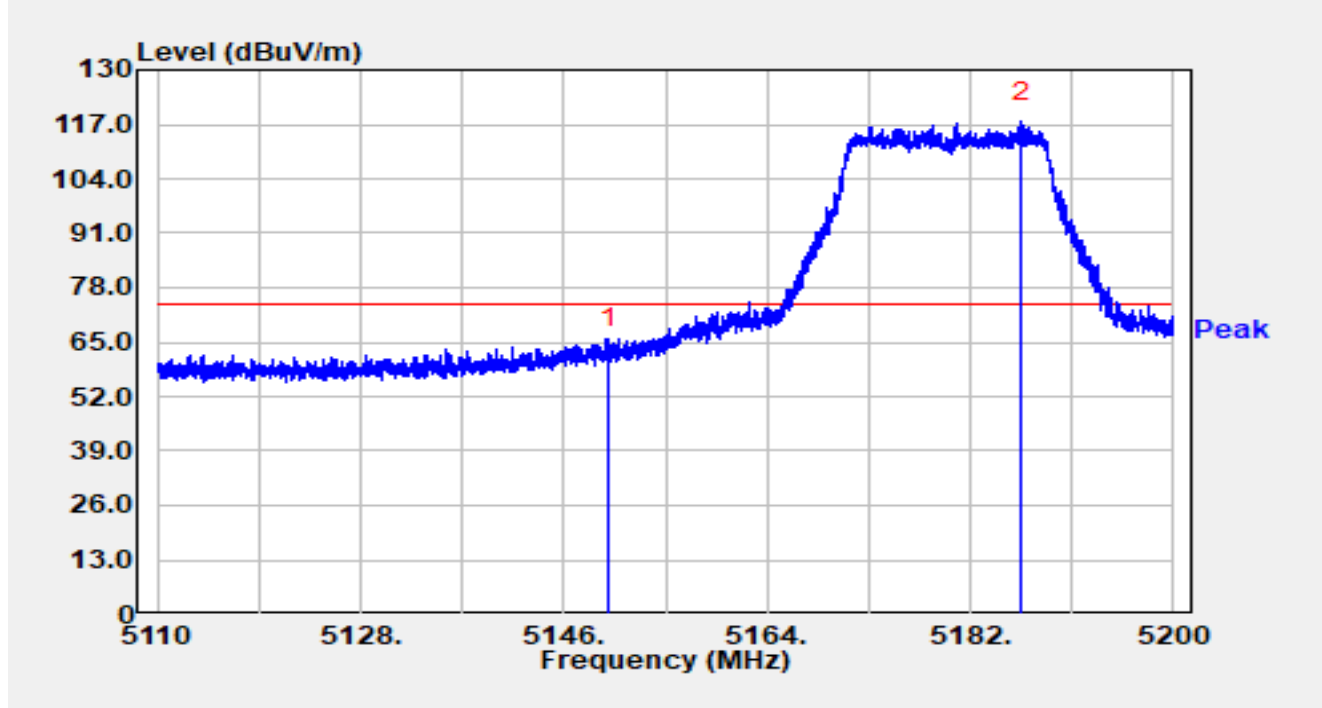


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	47.56	16.00	63.56	-10.44	74.00	Peak
2		5186.500	101.56	15.94	117.50	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

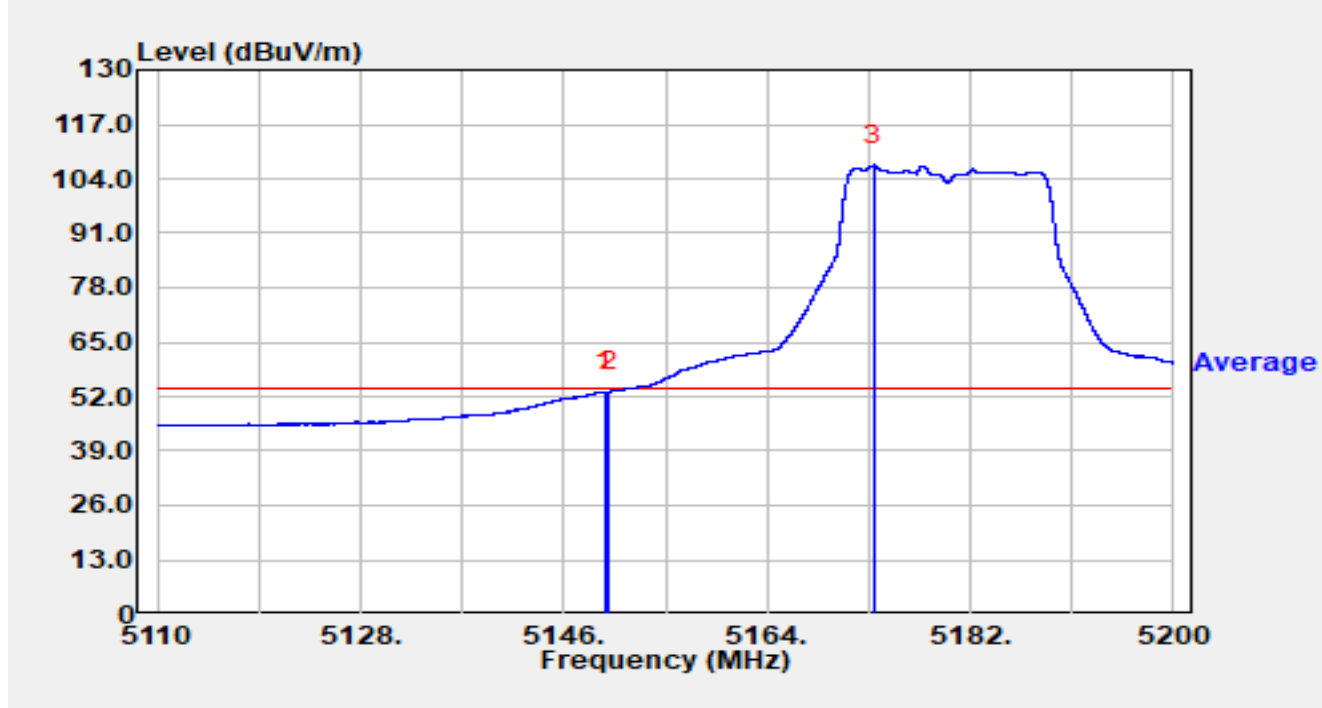


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.609	37.15	16.00	53.15	-0.85	54.00	Average
2		5150.000	37.12	16.00	53.11	-0.89	54.00	Average
3		5173.450	91.24	15.96	107.21	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

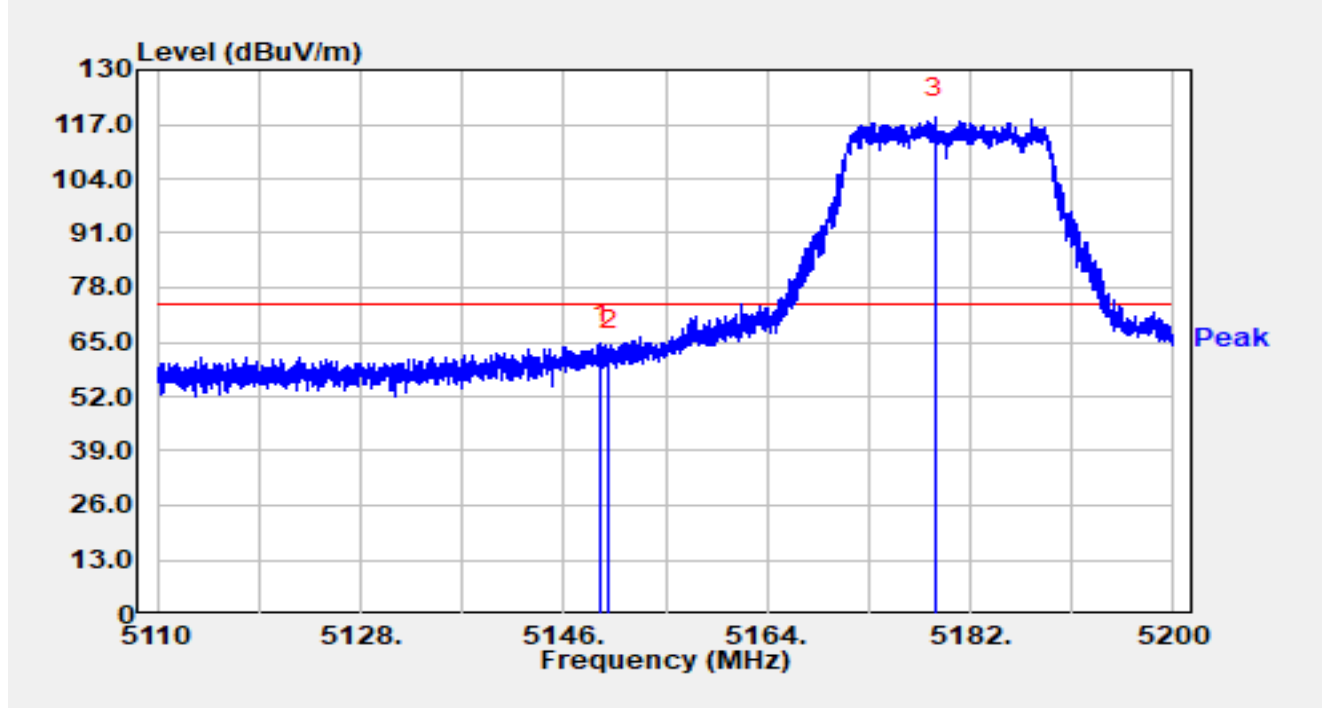


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.294	48.52	16.00	64.52	-9.48	74.00	Peak
2		5150.000	46.89	16.00	62.88	-11.12	74.00	Peak
3		5178.850	102.73	15.94	118.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

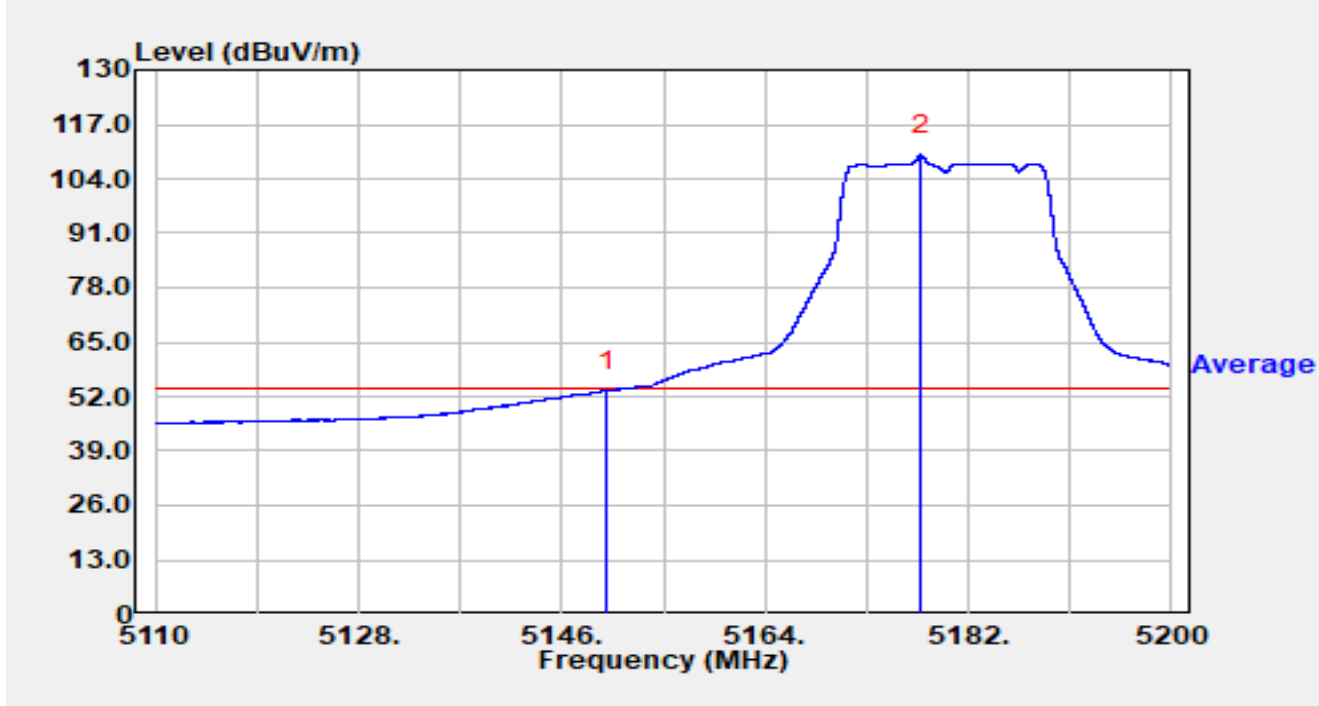


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.35	16.00	53.34	-0.66	54.00	Average
2		5177.797	93.78	15.94	109.72	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

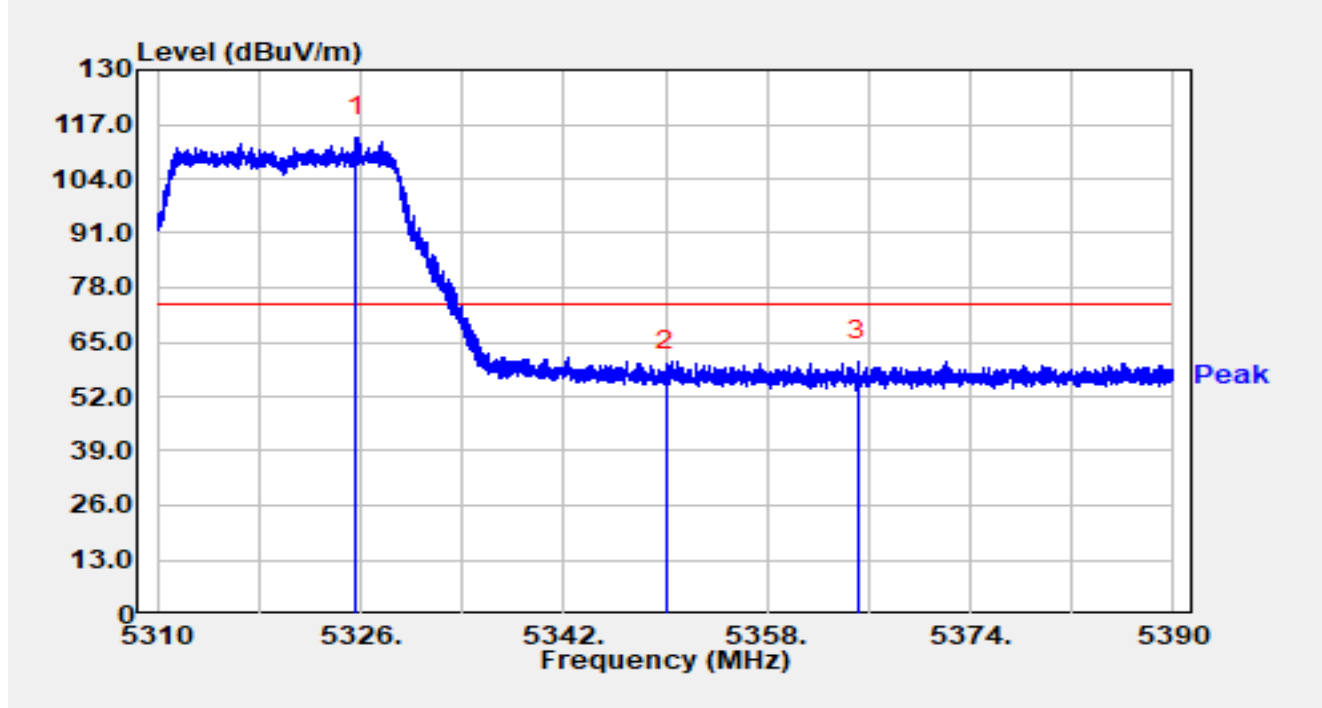


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.680	98.25	15.80	114.05	N/A	N/A	Peak
2		5350.000	42.53	15.68	58.21	-15.79	74.00	Peak
3	*	5365.160	44.87	15.63	60.50	-13.50	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

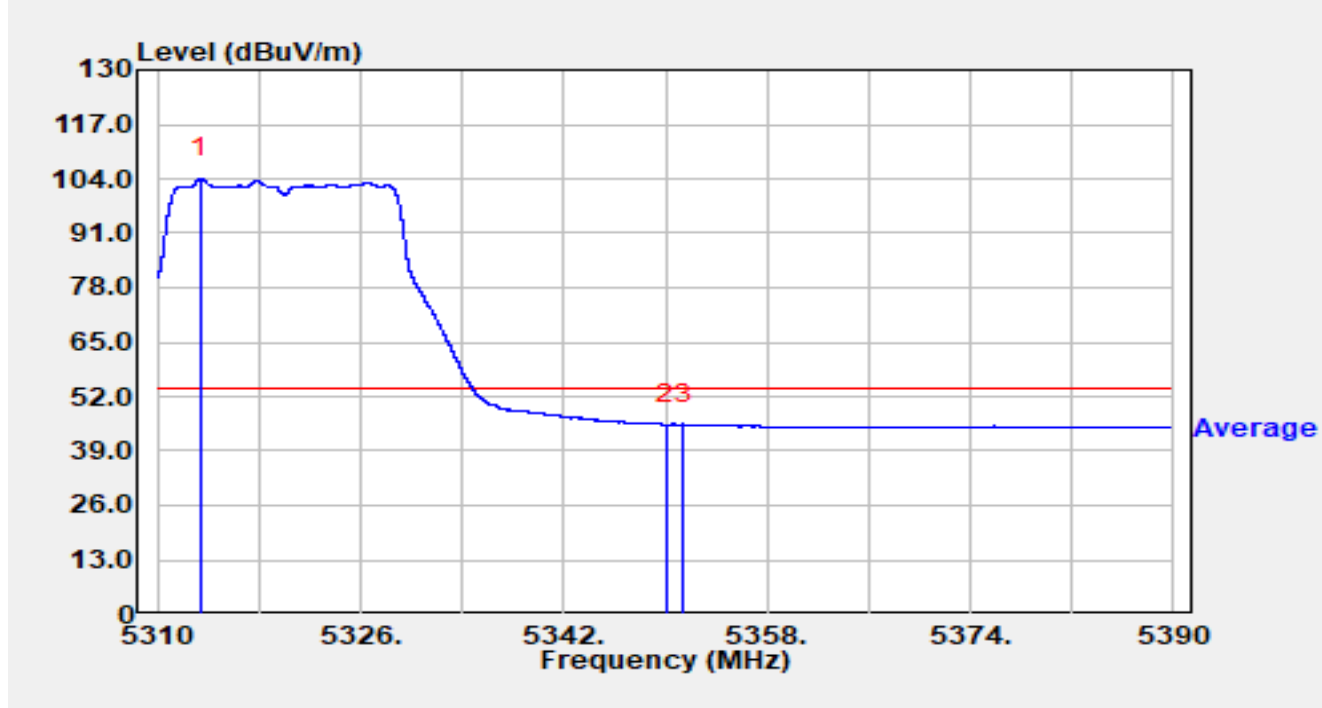


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.416	88.33	15.77	104.10	N/A	N/A	Average
2		5350.000	29.64	15.68	45.32	-8.68	54.00	Average
3	*	5351.408	29.74	15.68	45.41	-8.59	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

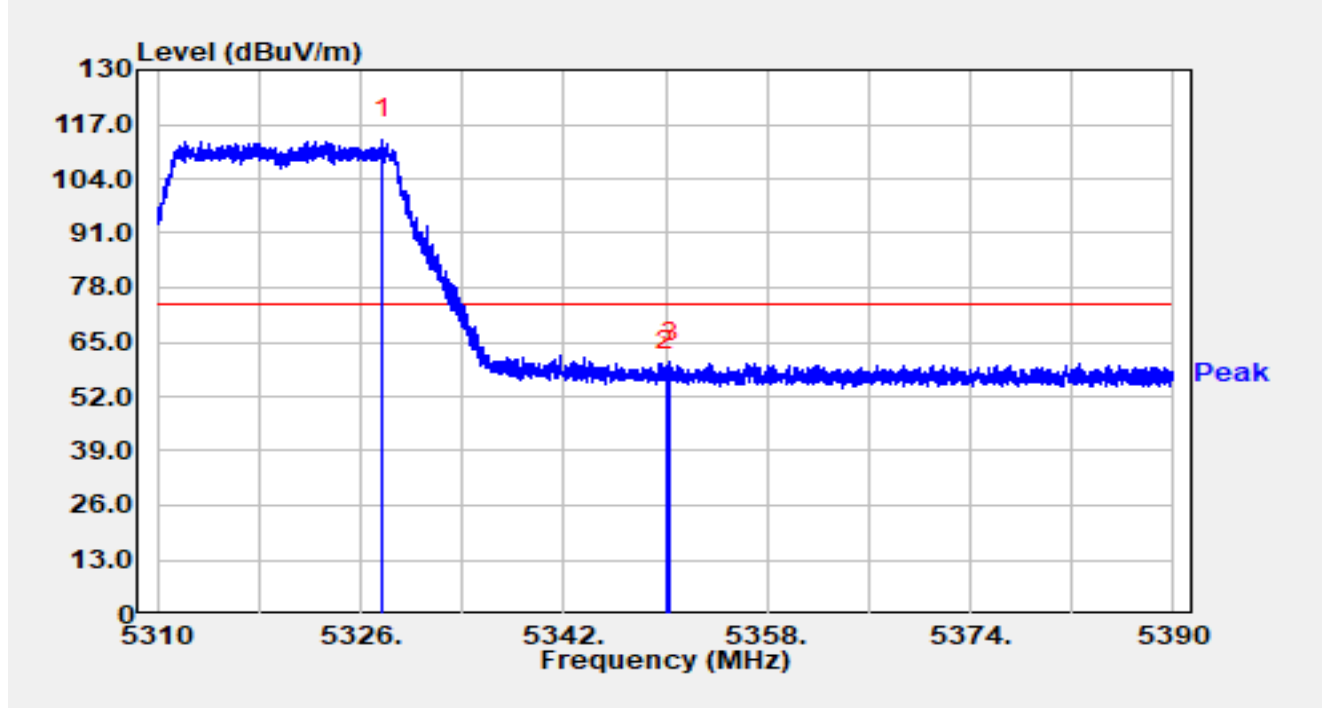


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.712	97.60	15.80	113.40	N/A	N/A	Peak
2		5350.000	42.31	15.68	57.99	-16.01	74.00	Peak
3	*	5350.328	44.61	15.68	60.29	-13.71	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

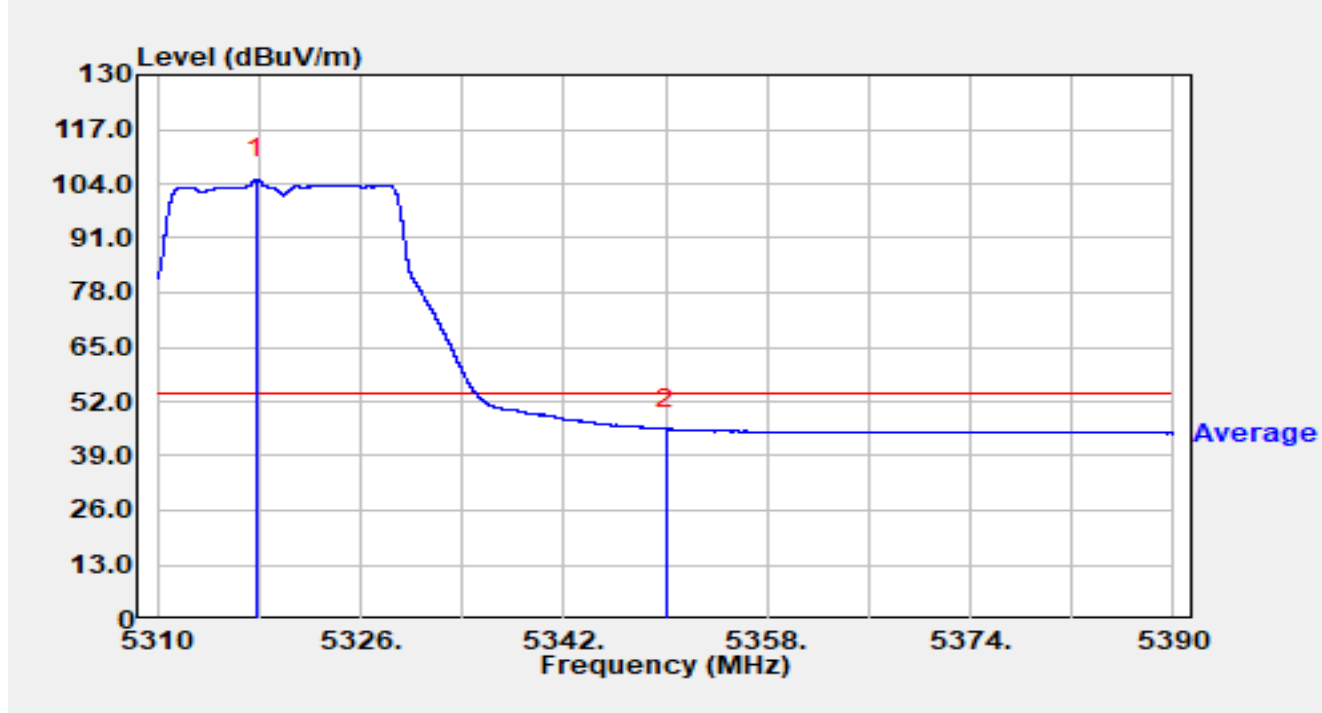


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.784	89.25	15.79	105.04	N/A	N/A	Average
2	*	5350.000	29.72	15.68	45.40	-8.60	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

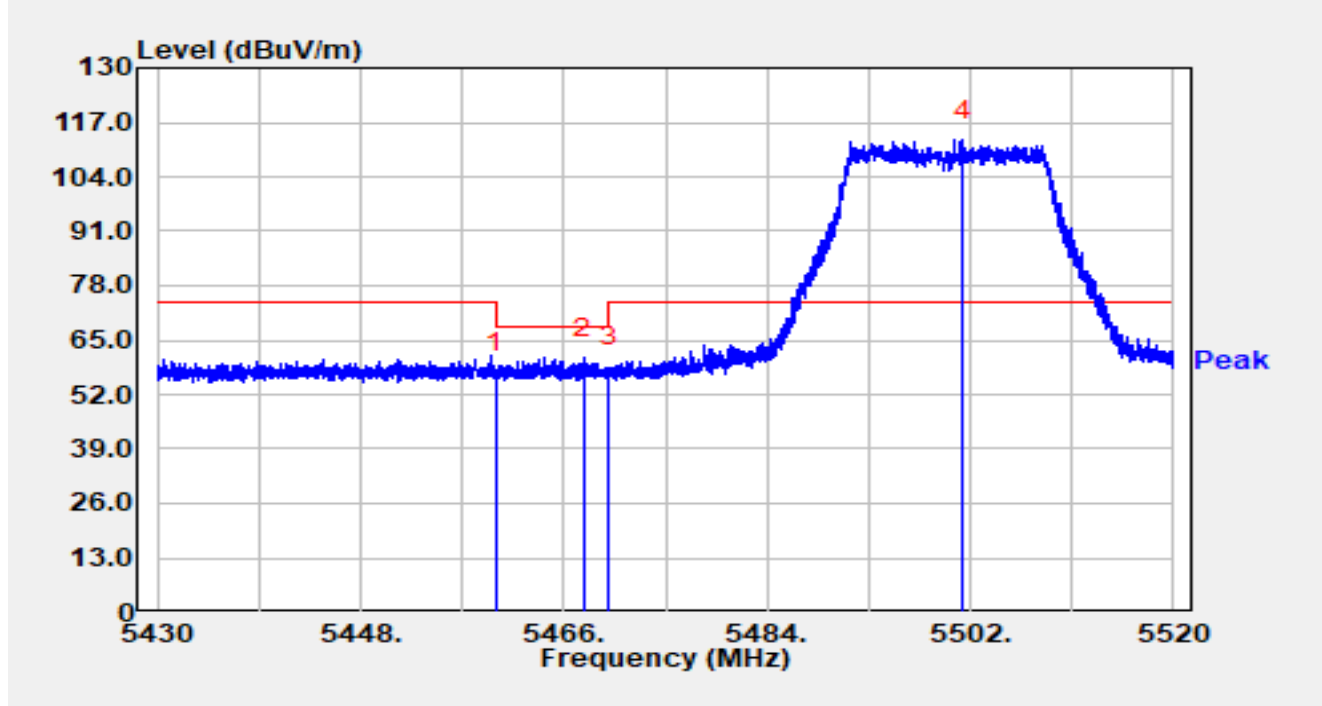


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	41.31	16.02	57.33	-10.87	68.20	Peak
2	*	5467.773	44.72	15.99	60.71	-7.49	68.20	Peak
3		5470.000	42.42	15.98	58.40	-9.80	68.20	Peak
4		5501.352	96.43	16.19	112.62	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

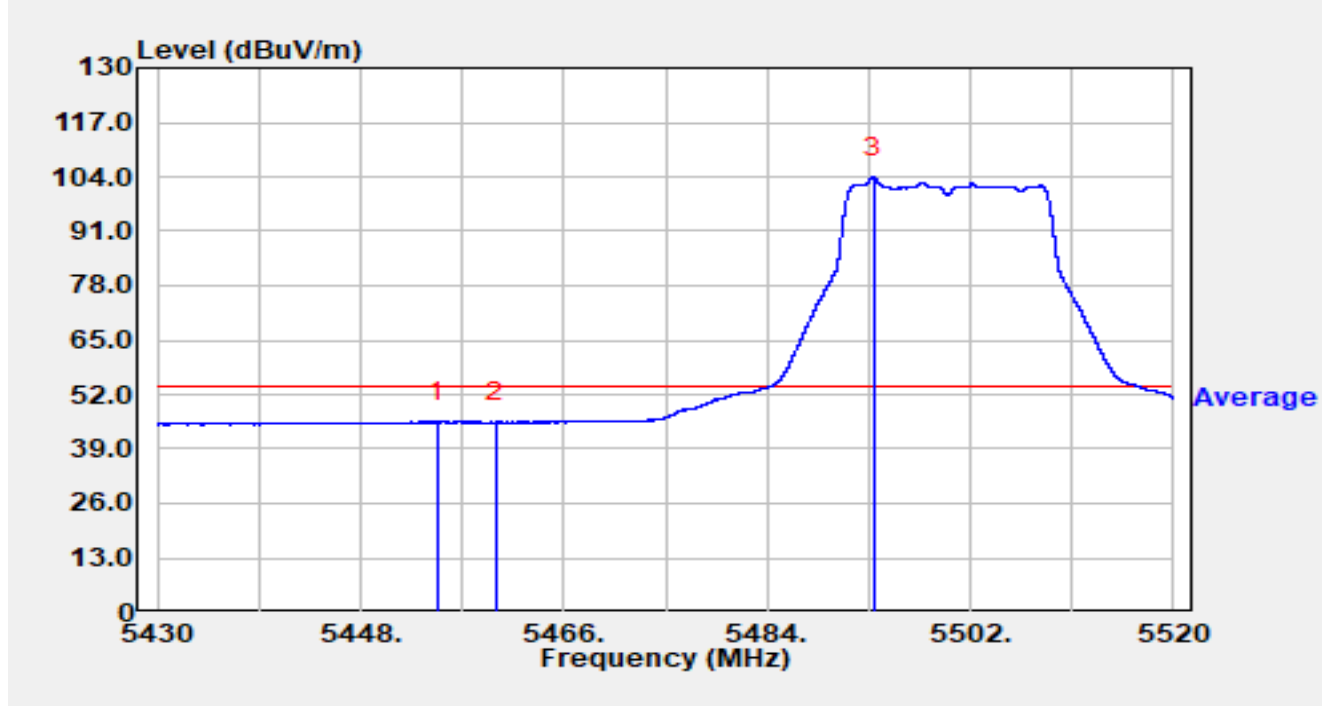


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.759	29.52	16.04	45.56	-8.44	54.00	Average
2		5460.000	29.32	16.02	45.35	-8.65	54.00	Average
3		5493.423	87.78	16.11	103.89	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

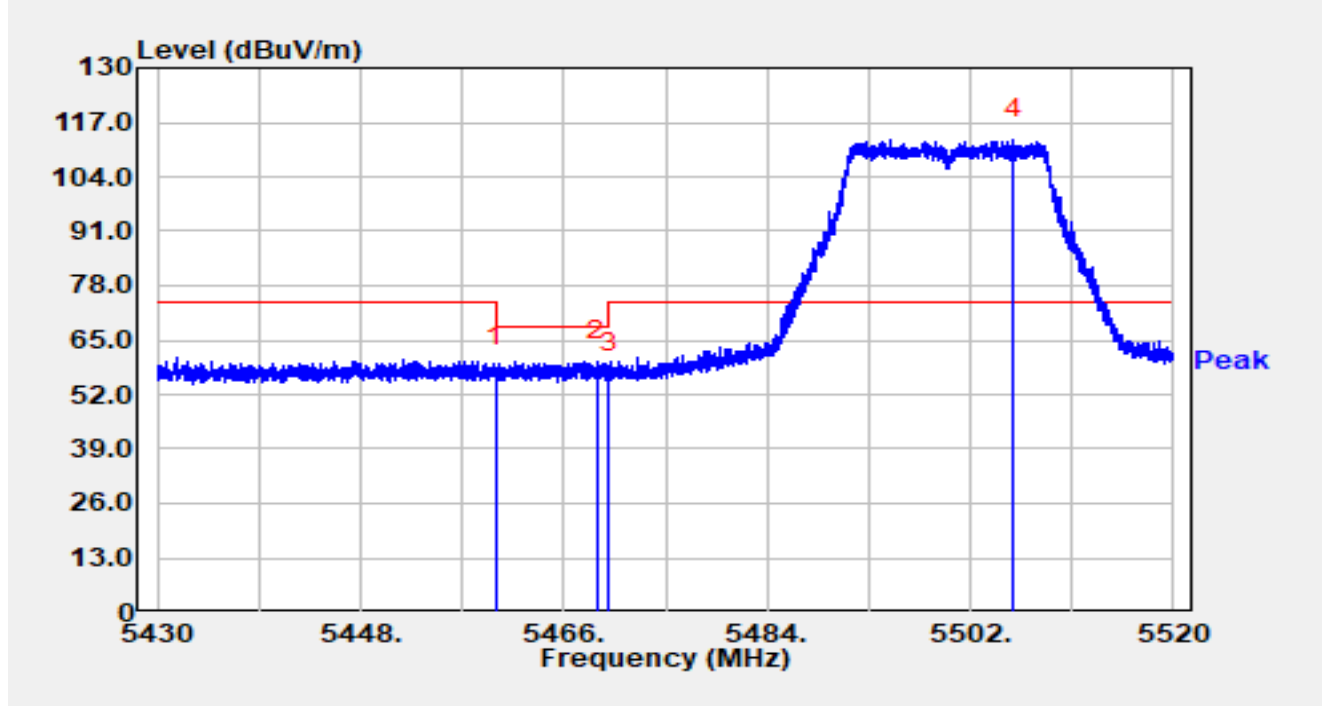


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	42.46	16.02	58.48	-9.72	68.20	Peak
2	*	5468.907	43.96	15.99	59.94	-8.26	68.20	Peak
3		5470.000	41.21	15.98	57.20	-11.00	68.20	Peak
4		5505.825	96.82	16.23	113.05	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

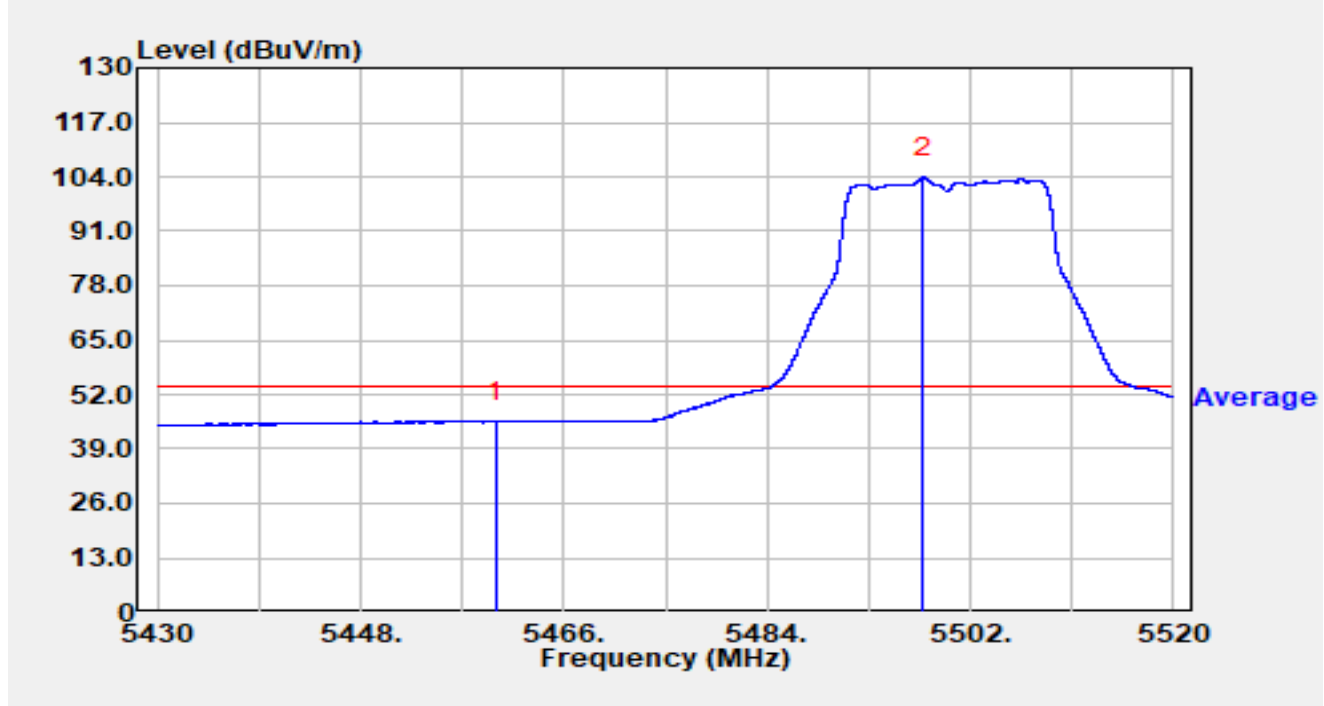


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	29.52	16.02	45.54	-8.46	54.00	Average
2		5497.779	87.80	16.15	103.96	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

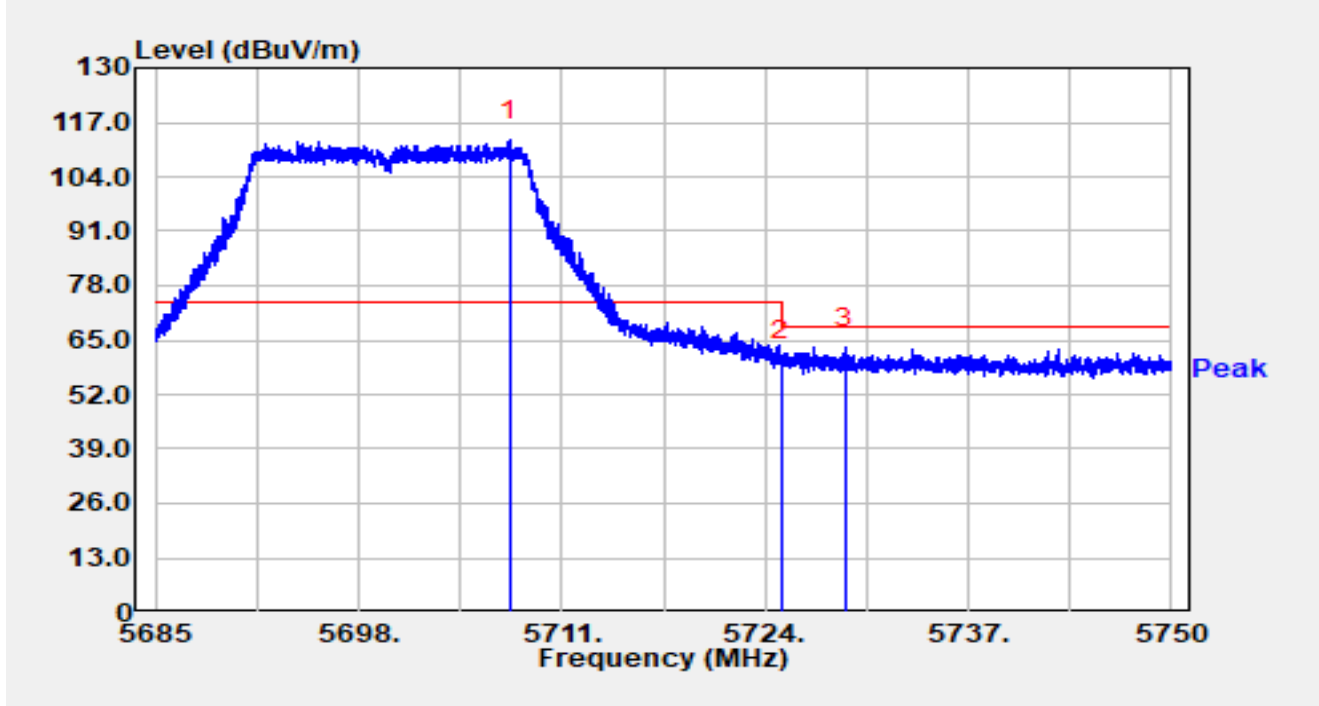


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5707.698	95.75	16.85	112.61	N/A	N/A	Peak
2		5725.000	43.15	16.92	60.07	-8.13	68.20	Peak
3	*	5729.122	46.30	16.93	63.23	-4.97	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

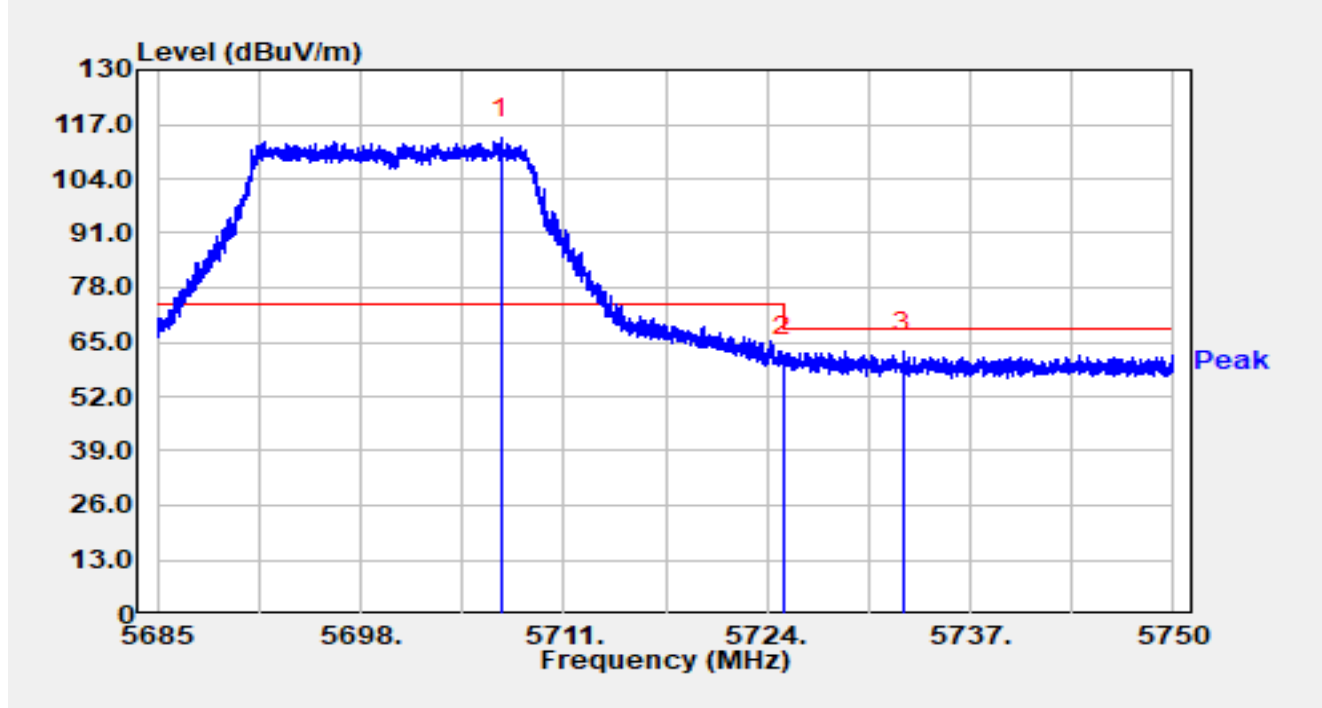


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5707.022	96.79	16.85	113.64	N/A	N/A	Peak
2		5725.000	44.52	16.92	61.45	-6.75	68.20	Peak
3	*	5732.723	45.77	16.94	62.71	-5.49	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

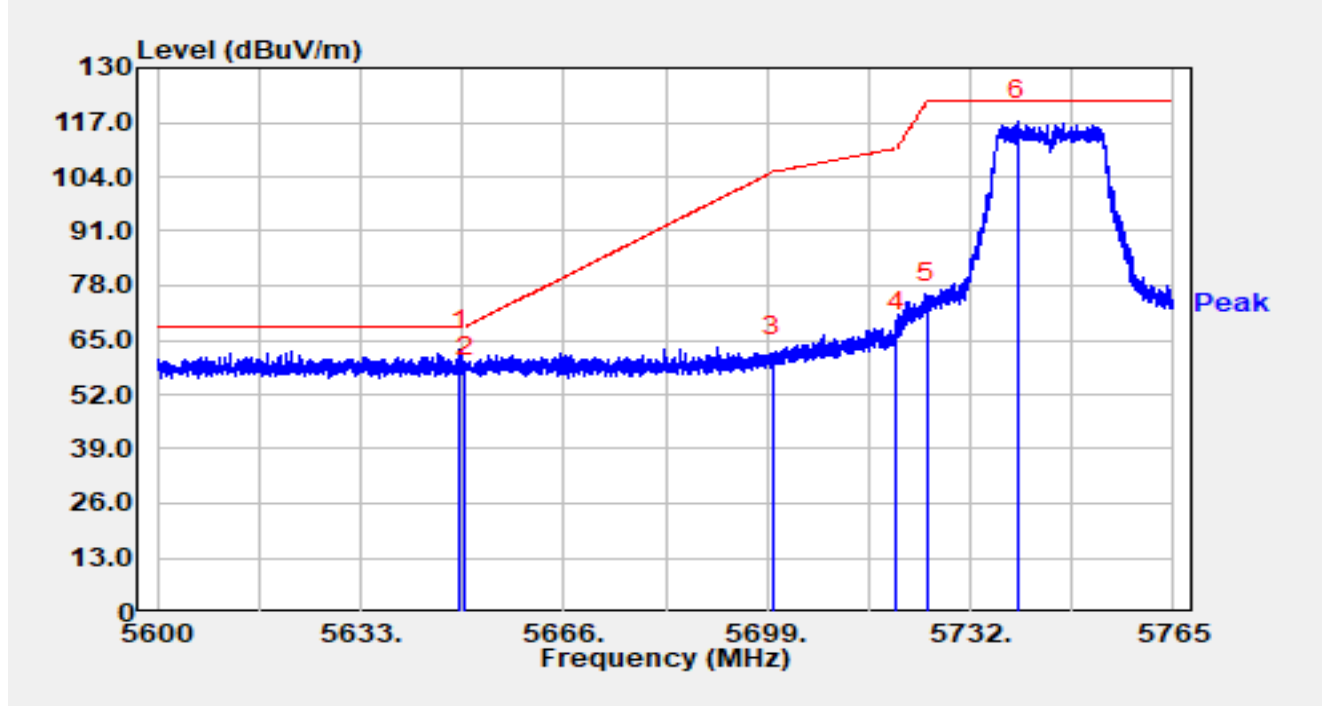


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5649.203	46.08	16.65	62.73	-5.47	68.20	Peak
2		5650.000	39.75	16.65	56.40	-11.80	68.20	Peak
3		5700.000	44.16	16.81	60.98	-44.22	105.20	Peak
4		5720.000	50.20	16.90	67.10	-43.70	110.80	Peak
5		5725.000	56.95	16.92	73.88	-48.32	122.20	Peak
6		5739.738	100.38	16.95	117.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

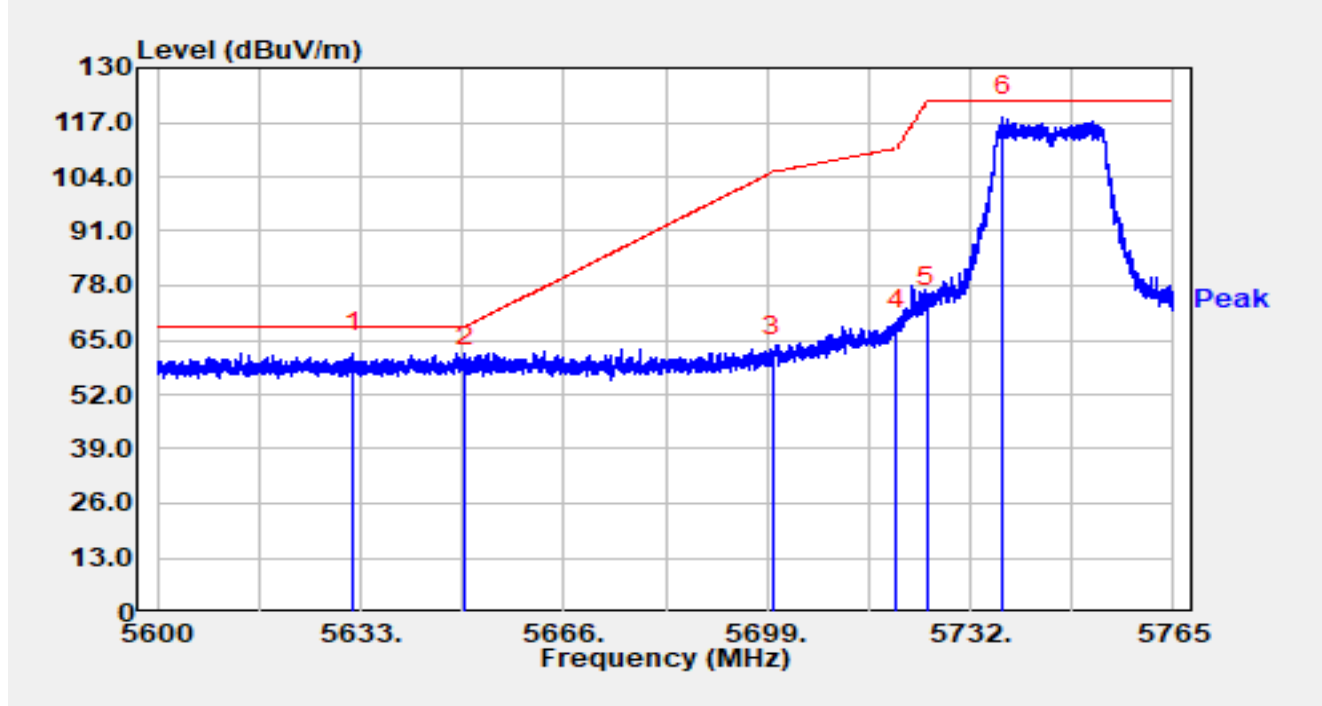


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5631.763	45.48	16.56	62.05	-6.15	68.20	Peak
2		5650.000	42.05	16.65	58.70	-9.50	68.20	Peak
3		5700.000	44.14	16.81	60.96	-44.24	105.20	Peak
4		5720.000	50.52	16.90	67.42	-43.38	110.80	Peak
5		5725.000	55.97	16.92	72.90	-49.30	122.20	Peak
6		5737.214	101.49	16.95	118.44	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

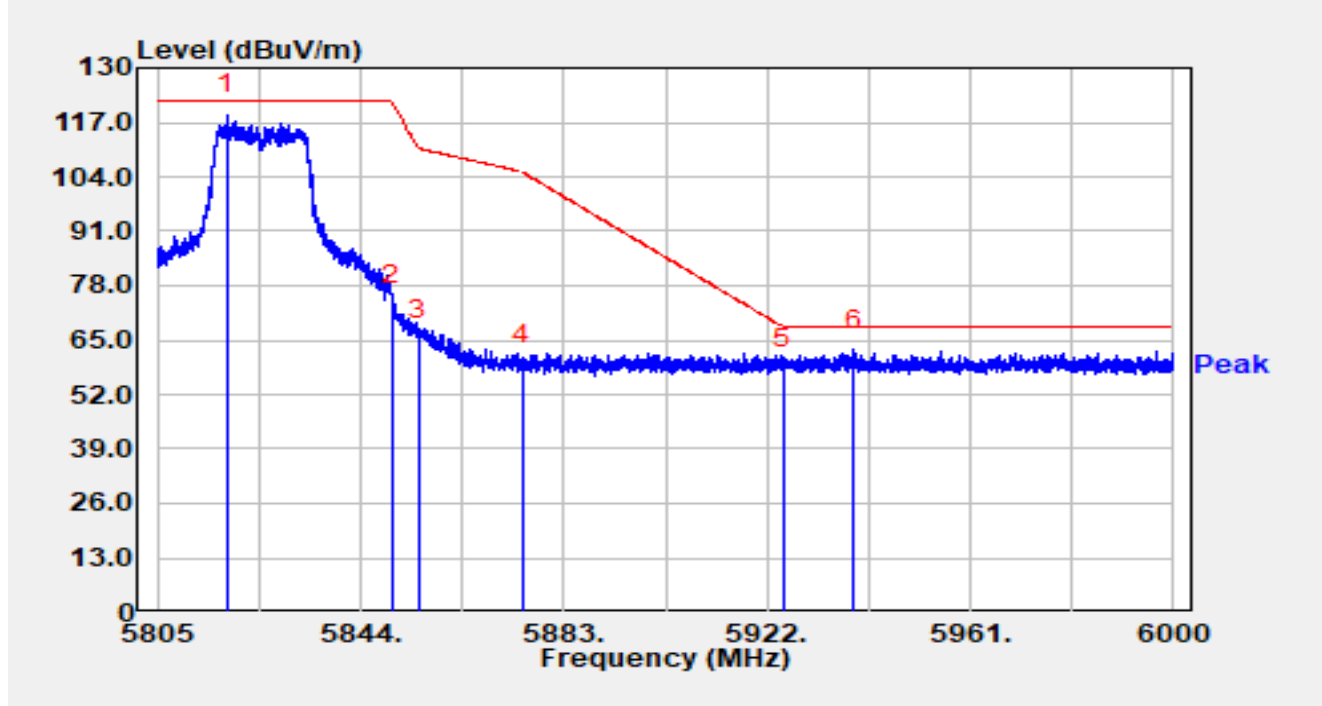


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.318	101.37	17.37	118.74	N/A	N/A	Peak
2		5850.000	56.01	17.31	73.32	-48.88	122.20	Peak
3		5855.000	47.86	17.32	65.18	-45.62	110.80	Peak
4		5875.000	41.56	17.38	58.94	-46.26	105.20	Peak
5		5925.000	40.75	17.36	58.11	-10.09	68.20	Peak
6	*	5938.633	45.33	17.41	62.75	-5.45	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

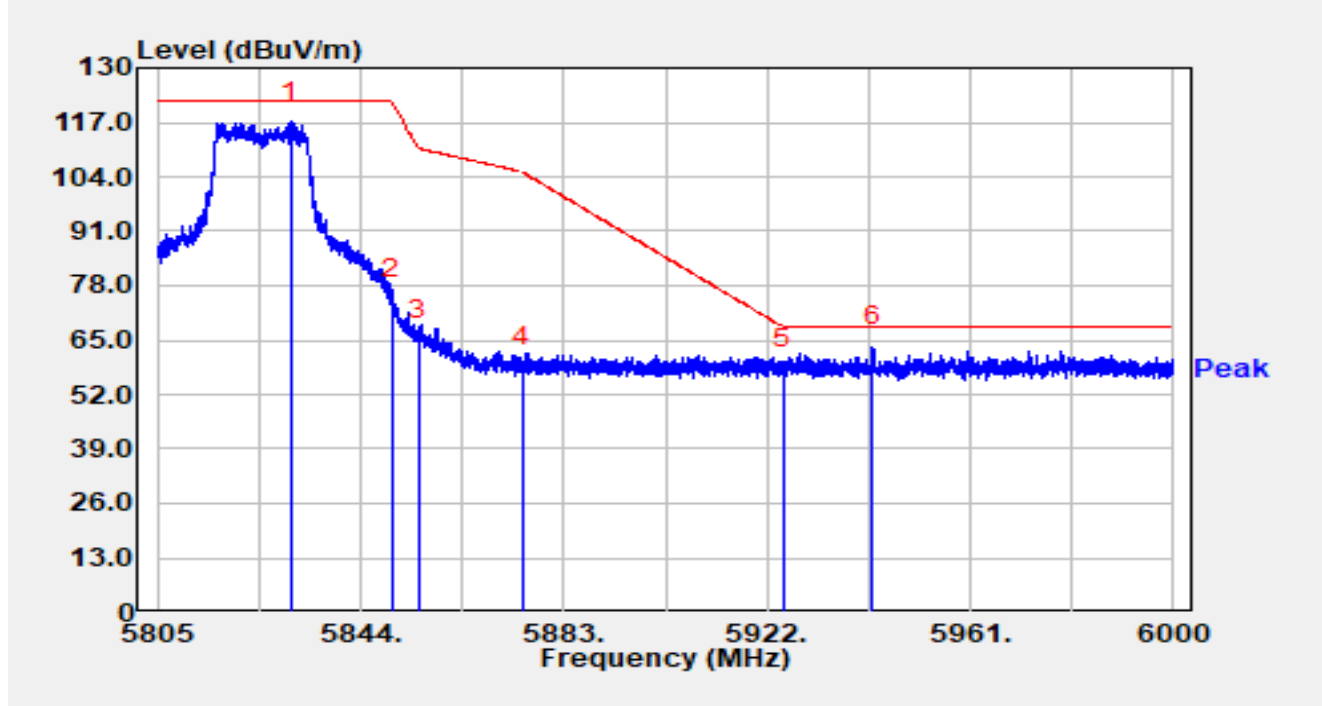


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5830.564	99.79	17.36	117.15	N/A	N/A	Peak
2		5850.000	57.64	17.31	74.95	-47.25	122.20	Peak
3		5855.000	47.61	17.32	64.93	-45.87	110.80	Peak
4		5875.000	41.10	17.38	58.47	-46.73	105.20	Peak
5		5925.000	40.92	17.36	58.29	-9.91	68.20	Peak
6	*	5942.319	46.08	17.43	63.51	-4.69	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

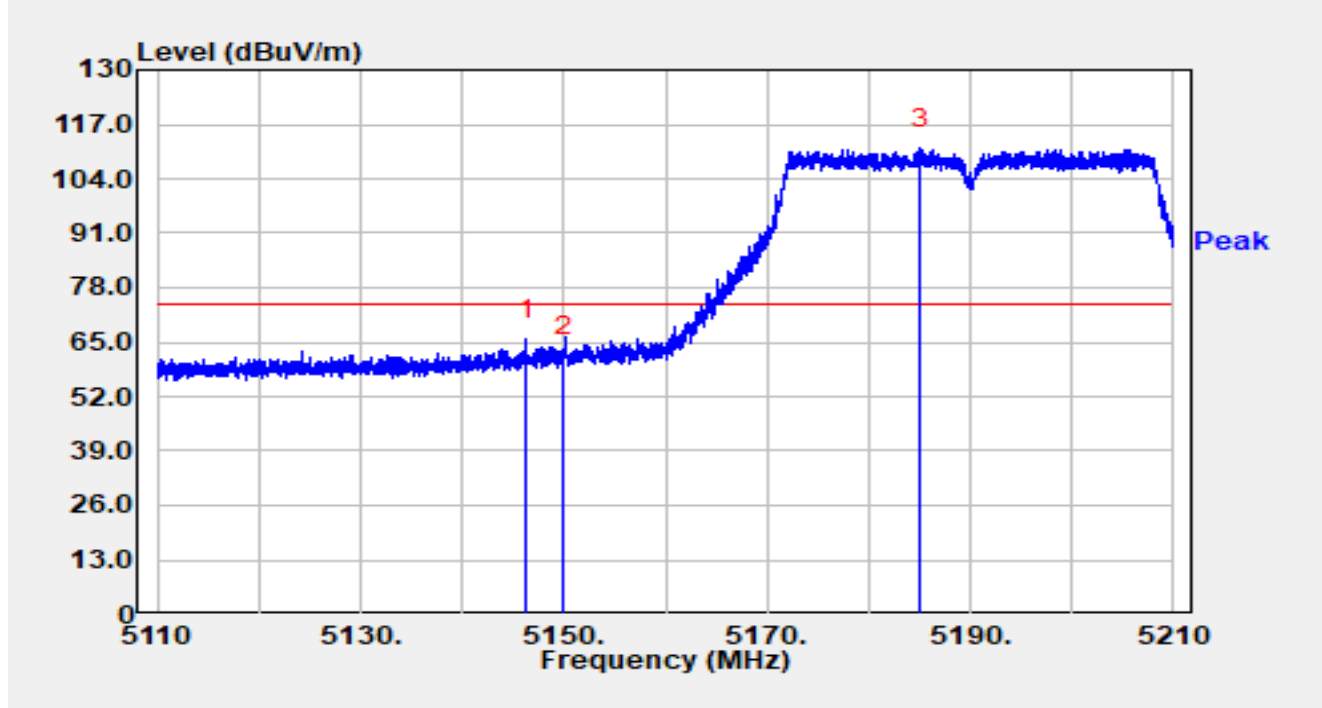


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.260	49.51	15.99	65.50	-8.50	74.00	Peak
2		5150.000	45.54	16.00	61.53	-12.47	74.00	Peak
3		5185.130	95.18	15.93	111.12	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

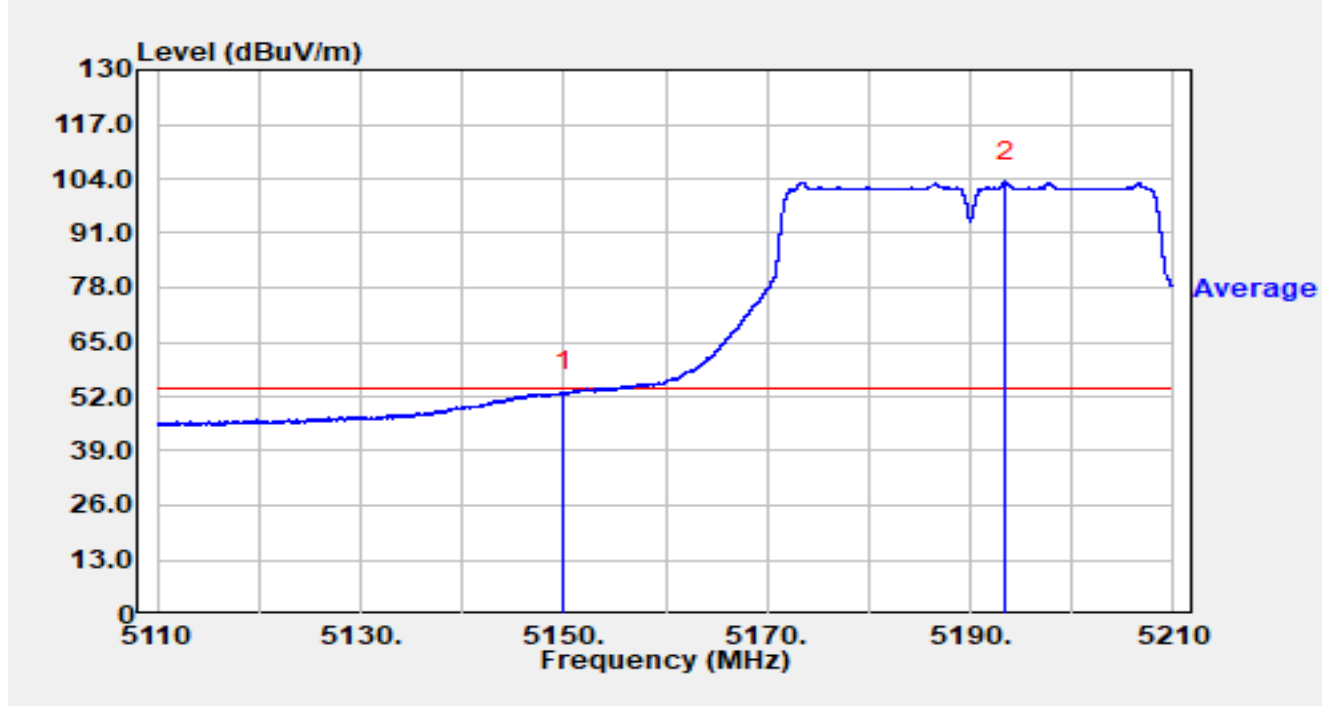


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.04	16.00	53.04	-0.96	54.00	Average
2		5193.440	87.37	15.96	103.33	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

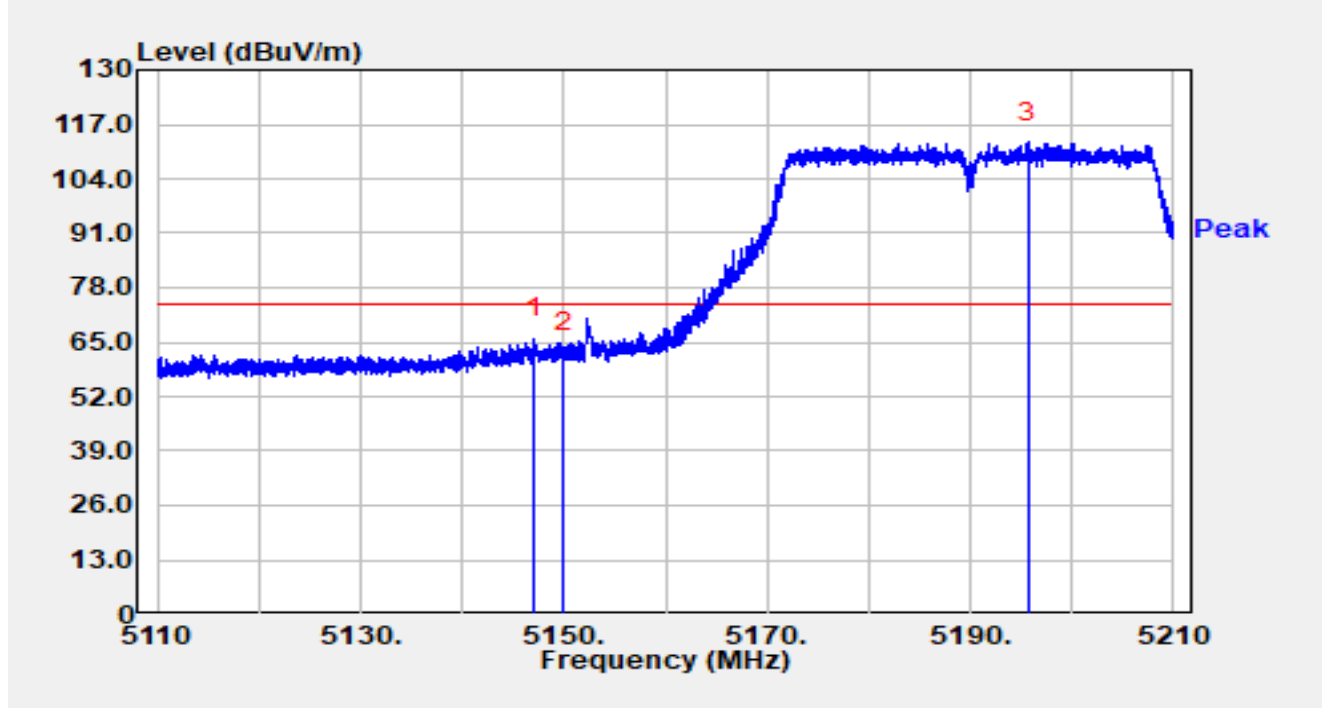


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.140	49.75	15.99	65.75	-8.25	74.00	Peak
2		5150.000	46.62	16.00	62.61	-11.39	74.00	Peak
3		5195.630	96.76	15.96	112.73	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

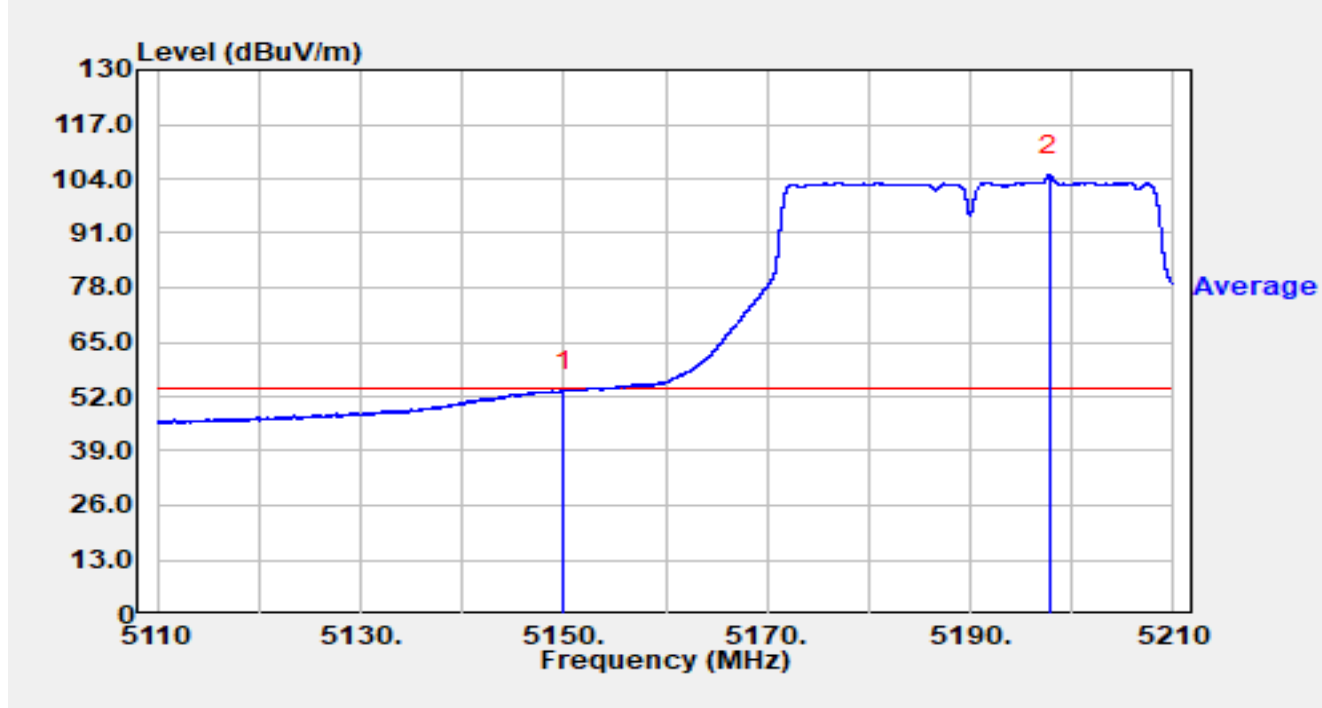


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.30	16.00	53.30	-0.70	54.00	Average
2		5197.810	89.00	15.97	104.96	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

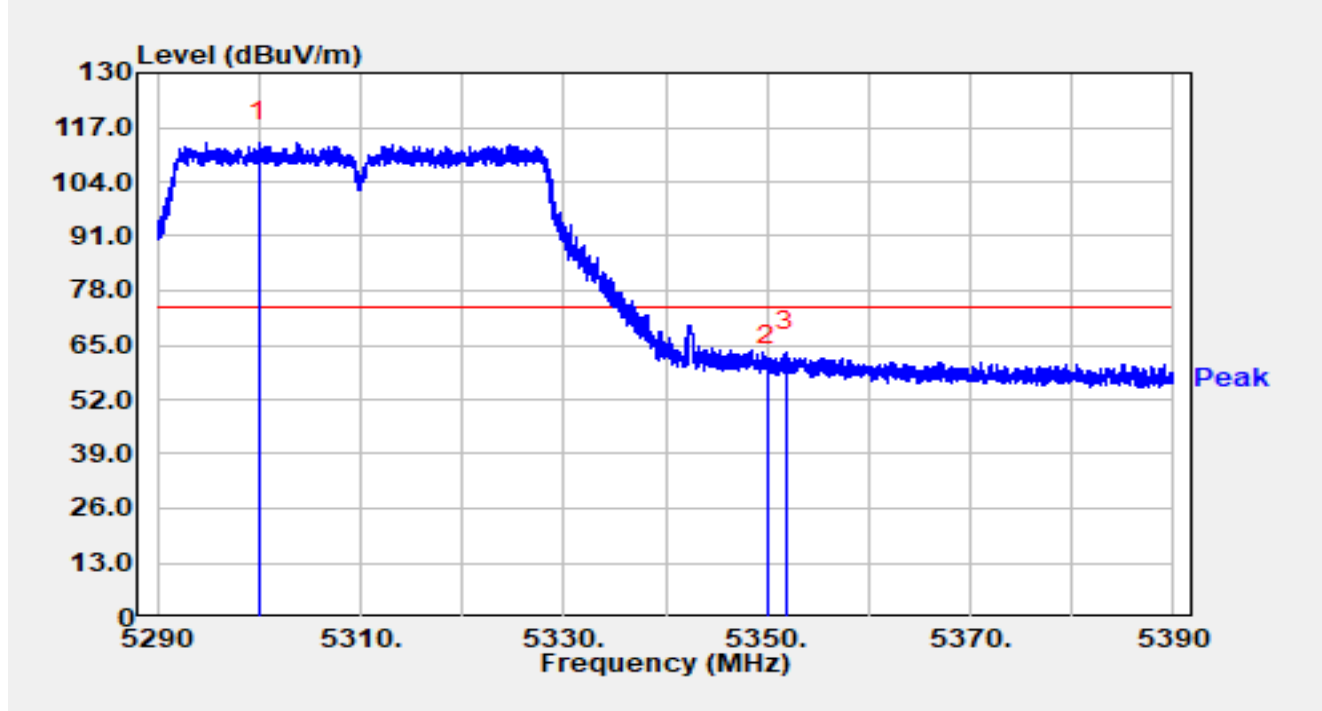


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5300.030	97.58	15.76	113.34	N/A	N/A	Peak
2		5350.000	44.21	15.68	59.89	-14.11	74.00	Peak
3	*	5351.910	47.62	15.68	63.30	-10.70	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

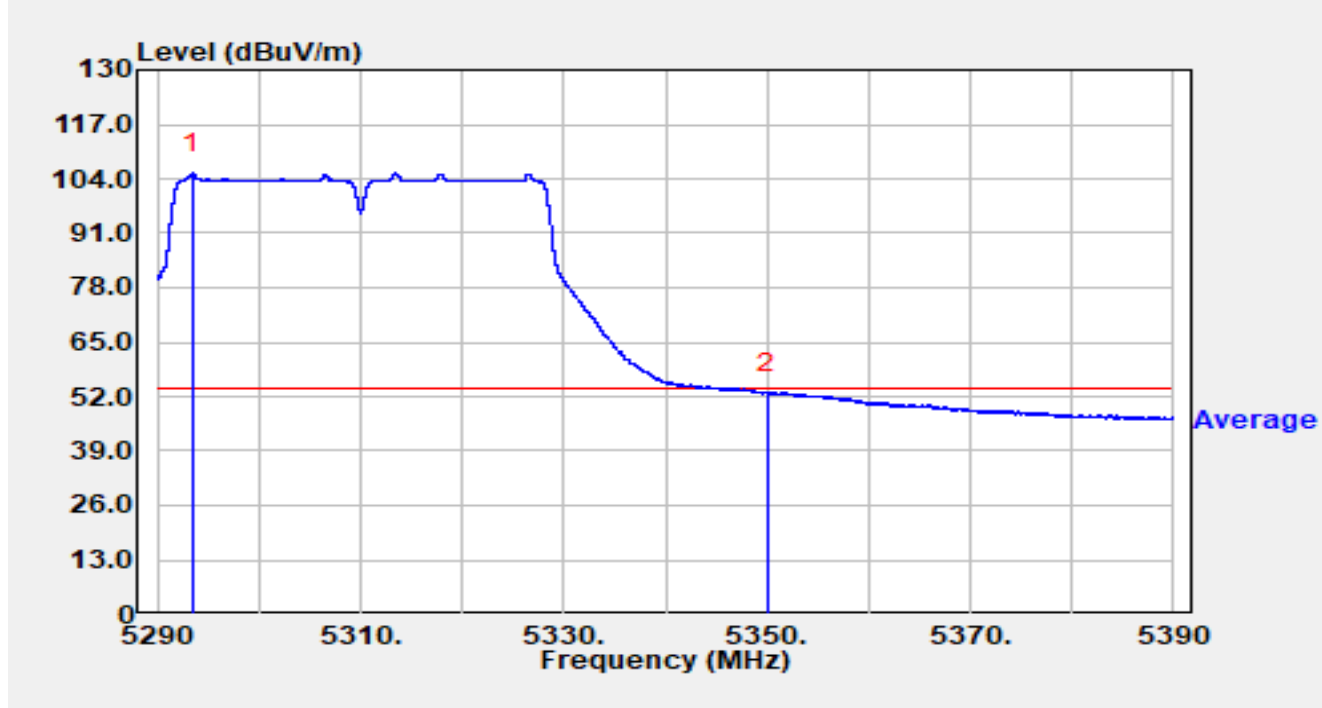


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.420	89.52	15.78	105.30	N/A	N/A	Average
2	*	5350.000	37.17	15.68	52.85	-1.15	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

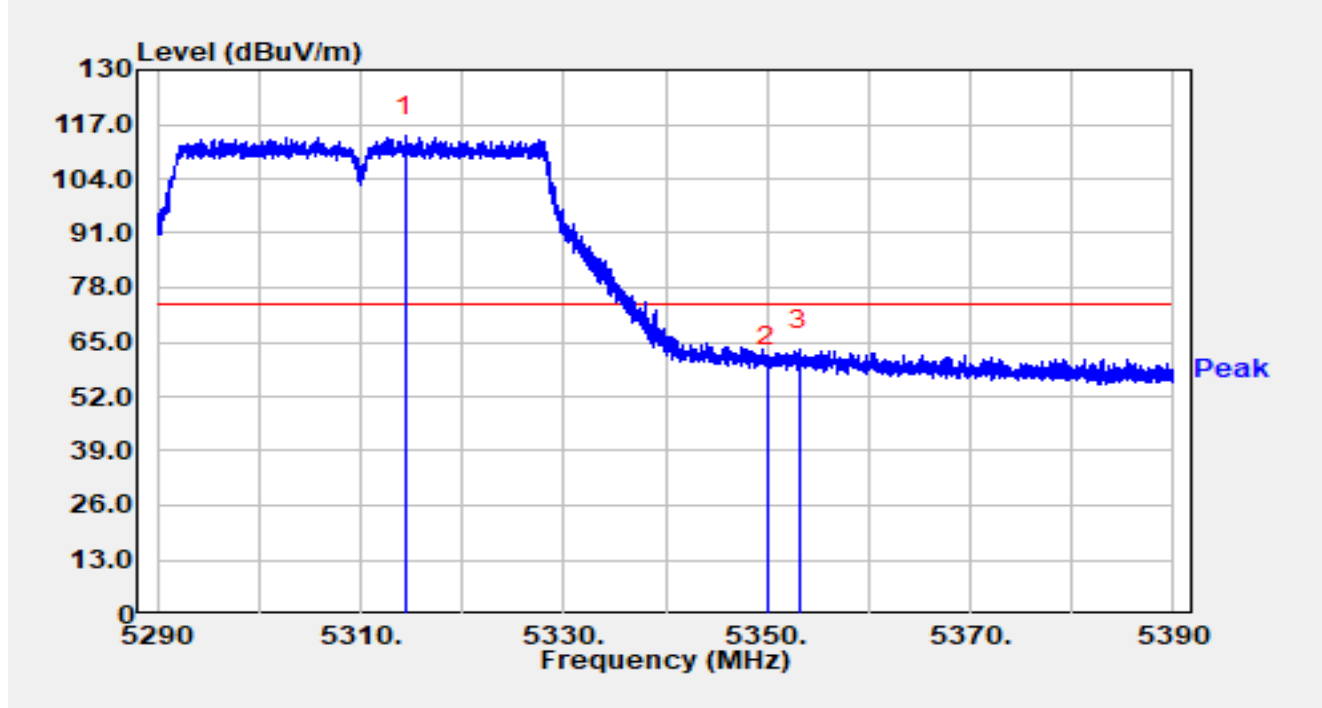


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.400	98.41	15.78	114.19	N/A	N/A	Peak
2		5350.000	43.48	15.68	59.16	-14.84	74.00	Peak
3	*	5353.190	47.44	15.67	63.12	-10.88	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

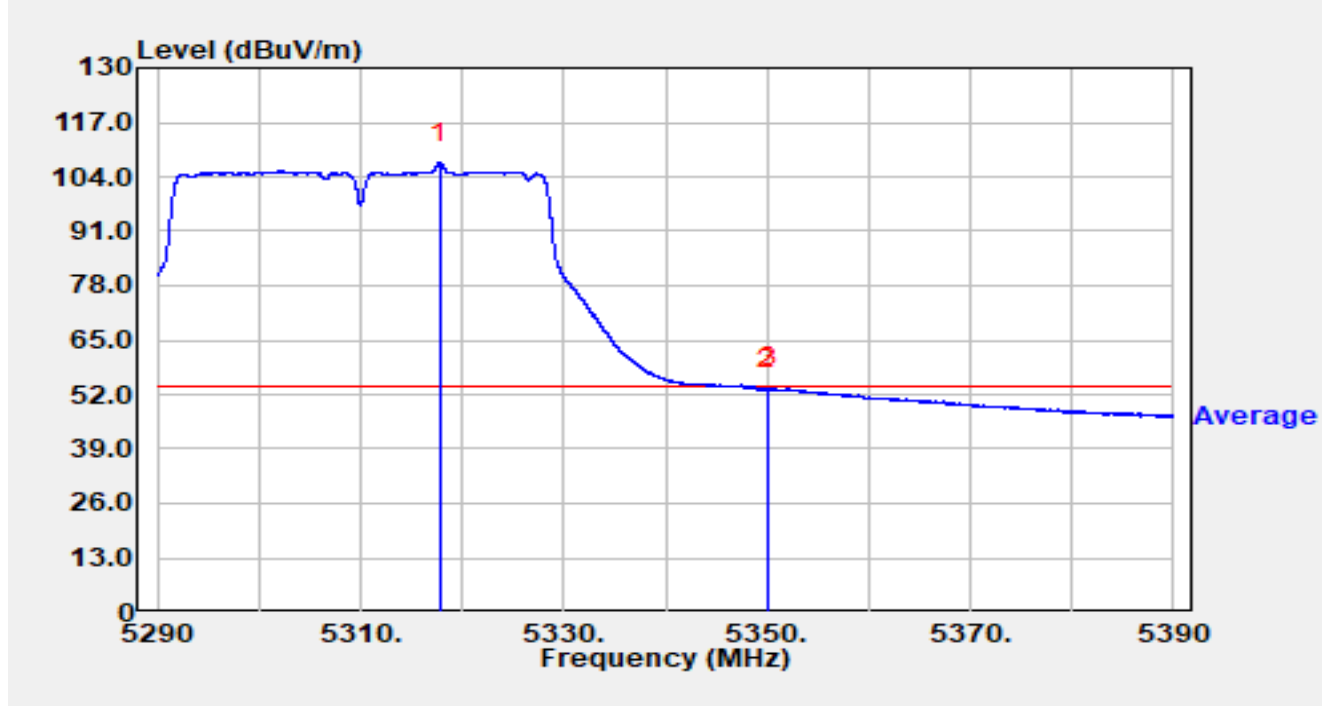


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.820	91.51	15.79	107.30	N/A	N/A	Average
2		5350.000	37.65	15.68	53.33	-0.67	54.00	Average
3	*	5350.140	37.85	15.68	53.53	-0.47	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

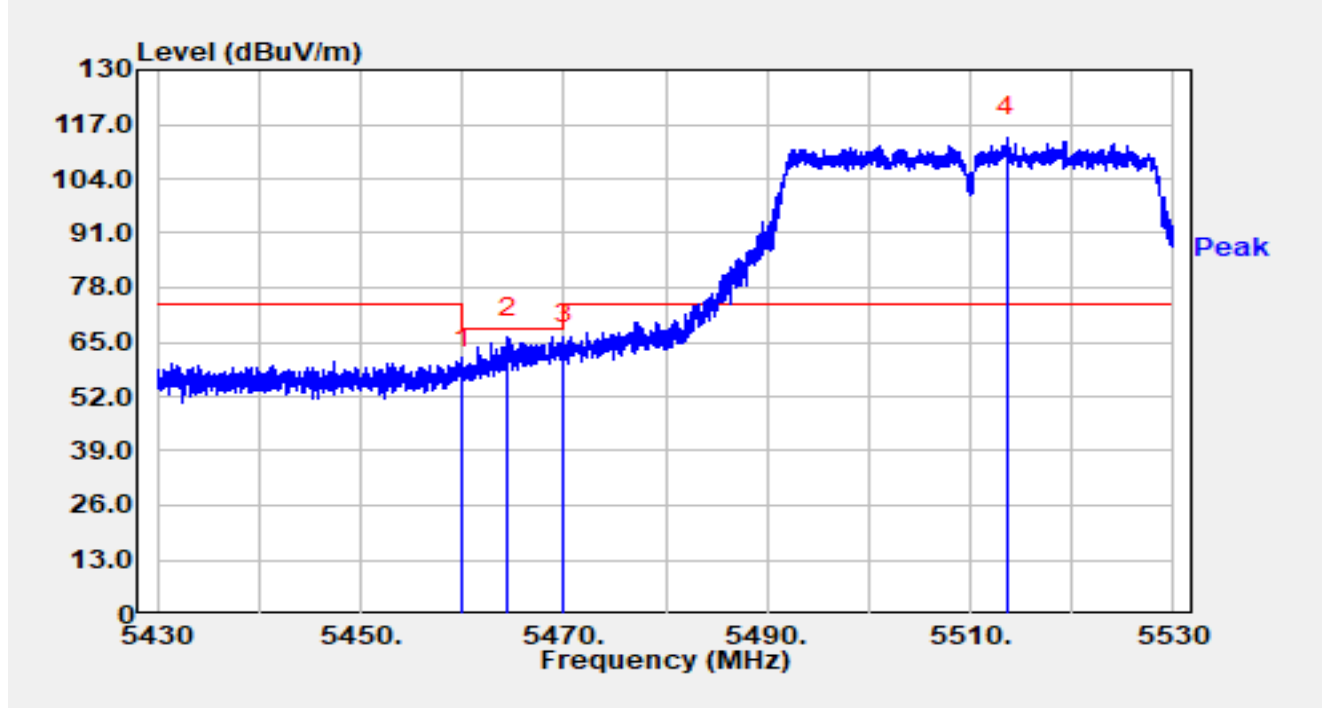


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	42.46	16.02	58.48	-9.72	68.20	Peak
2	*	5464.540	50.12	16.00	66.13	-2.07	68.20	Peak
3		5470.000	48.59	15.98	64.57	-3.63	68.20	Peak
4		5513.630	97.77	16.20	113.97	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

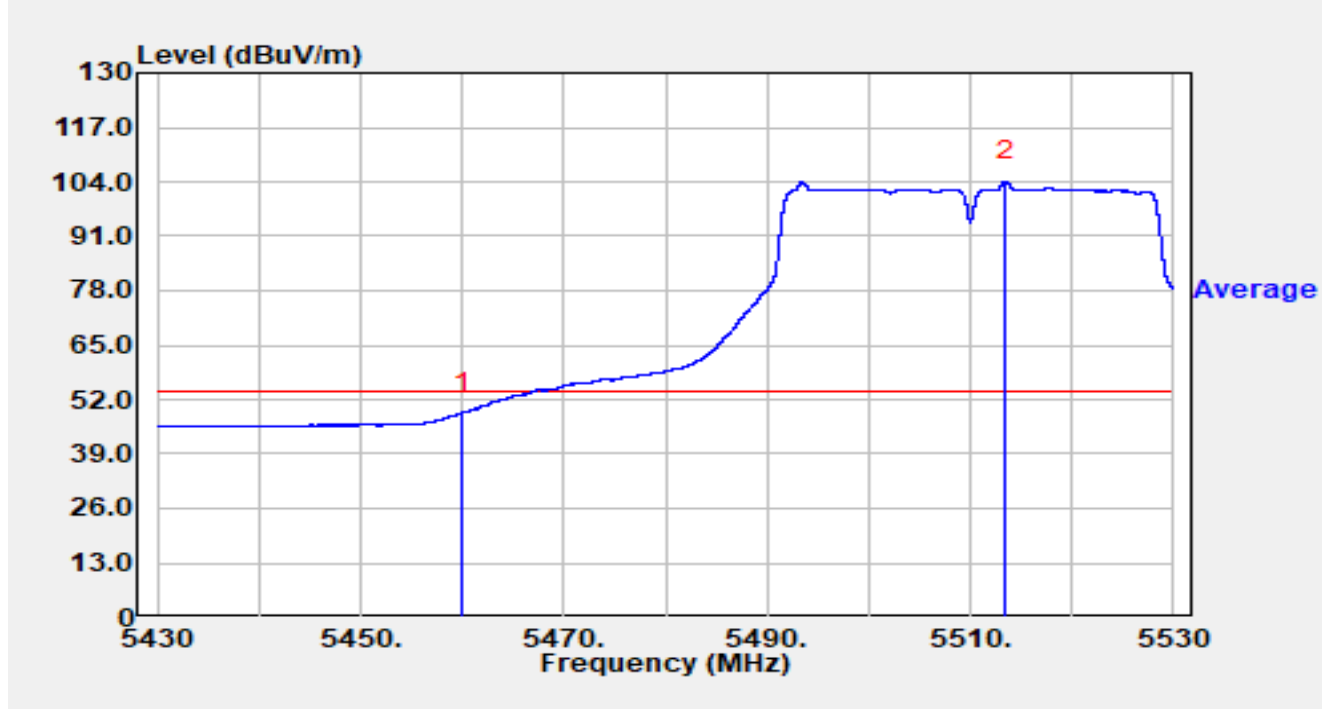


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	32.88	16.02	48.90	-5.10	54.00	Average
2		5513.440	87.94	16.20	104.14	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

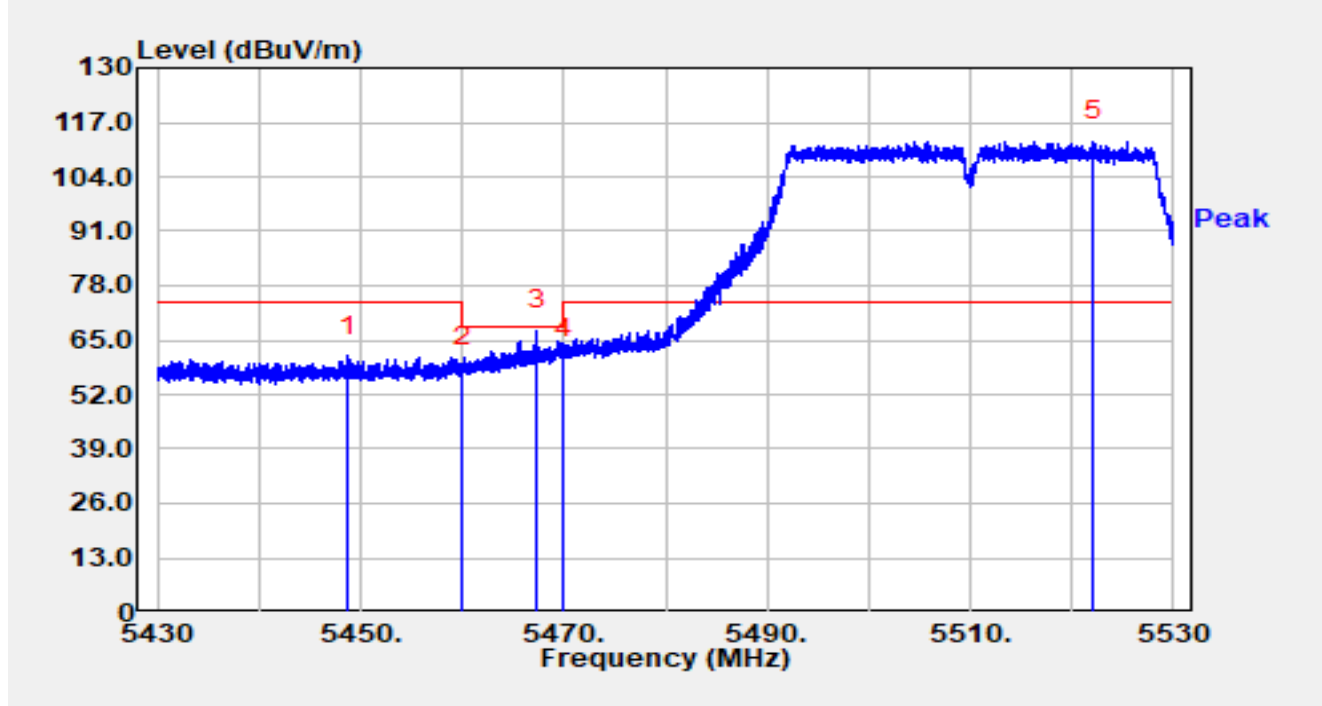


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.770	45.25	15.98	61.22	-12.78	74.00	Peak
2		5460.000	42.84	16.02	58.86	-9.34	68.20	Peak
3	*	5467.370	51.32	15.99	67.31	-0.89	68.20	Peak
4		5470.000	44.82	15.98	60.81	-7.39	68.20	Peak
5		5522.170	96.20	16.16	112.36	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

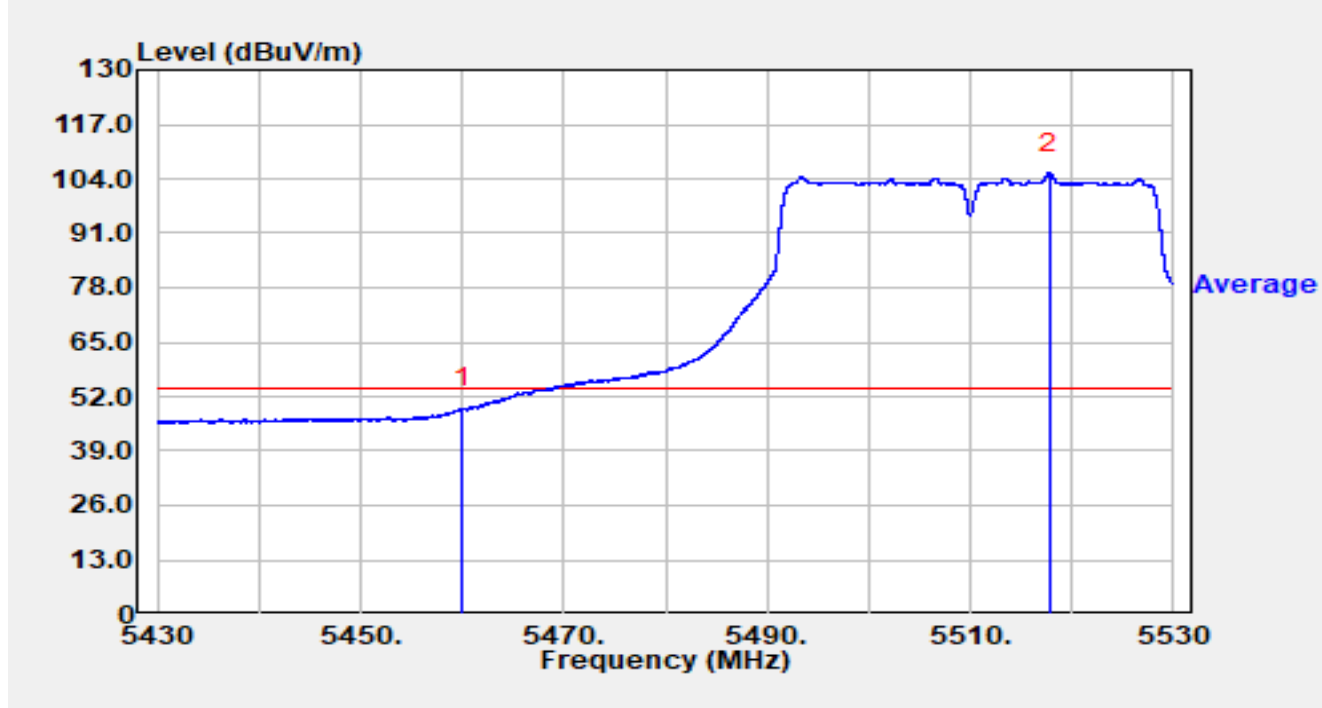


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	33.09	16.02	49.11	-4.89	54.00	Average
2		5517.790	89.22	16.18	105.41	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

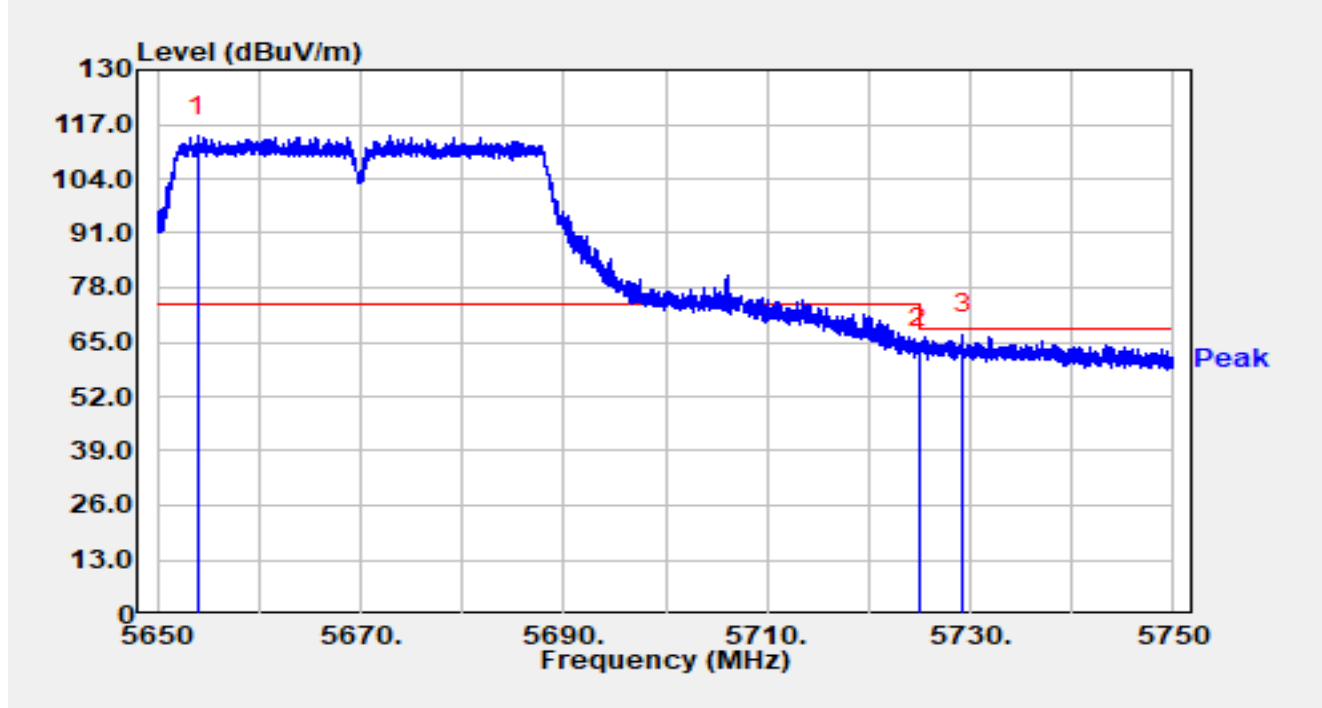


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5654.020	97.42	16.67	114.09	N/A	N/A	Peak
2		5725.000	46.81	16.92	63.74	-4.46	68.20	Peak
3	*	5729.310	49.86	16.93	66.80	-1.40	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

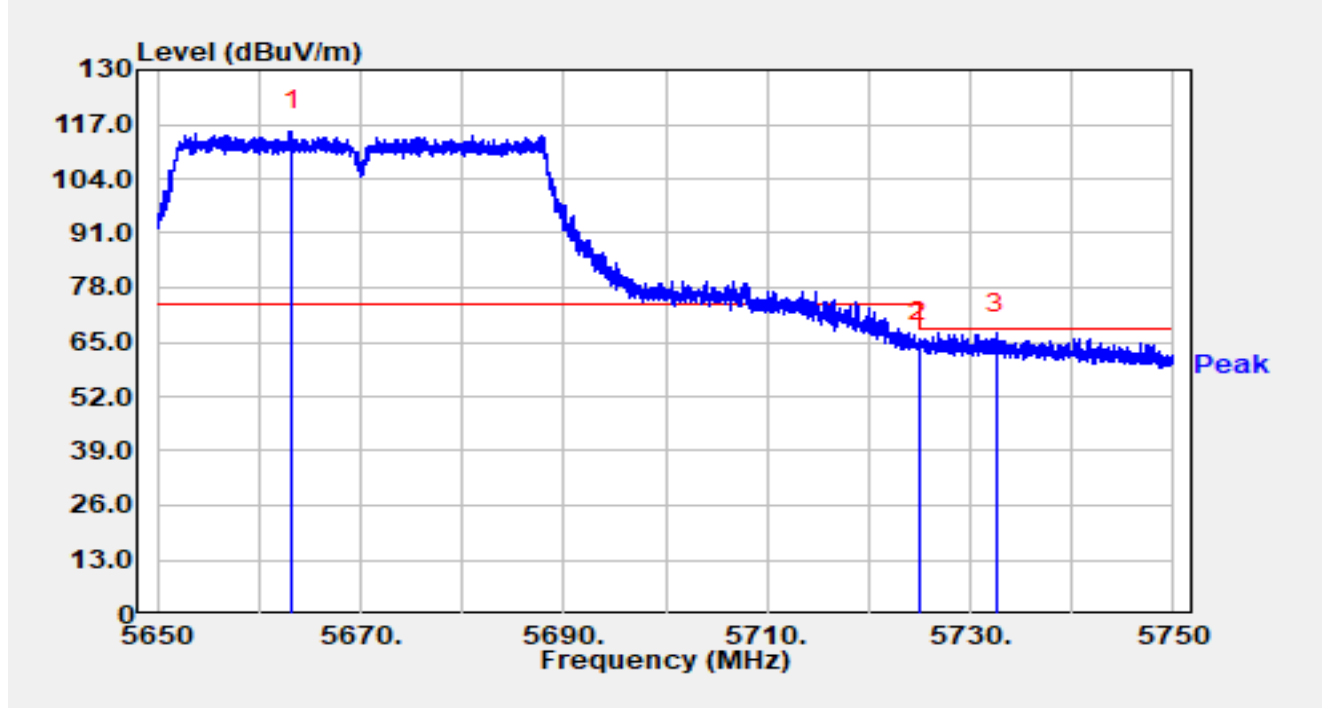


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5663.280	98.85	16.68	115.53	N/A	N/A	Peak
2		5725.000	48.04	16.92	64.96	-3.24	68.20	Peak
3	*	5732.550	50.15	16.94	67.09	-1.11	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

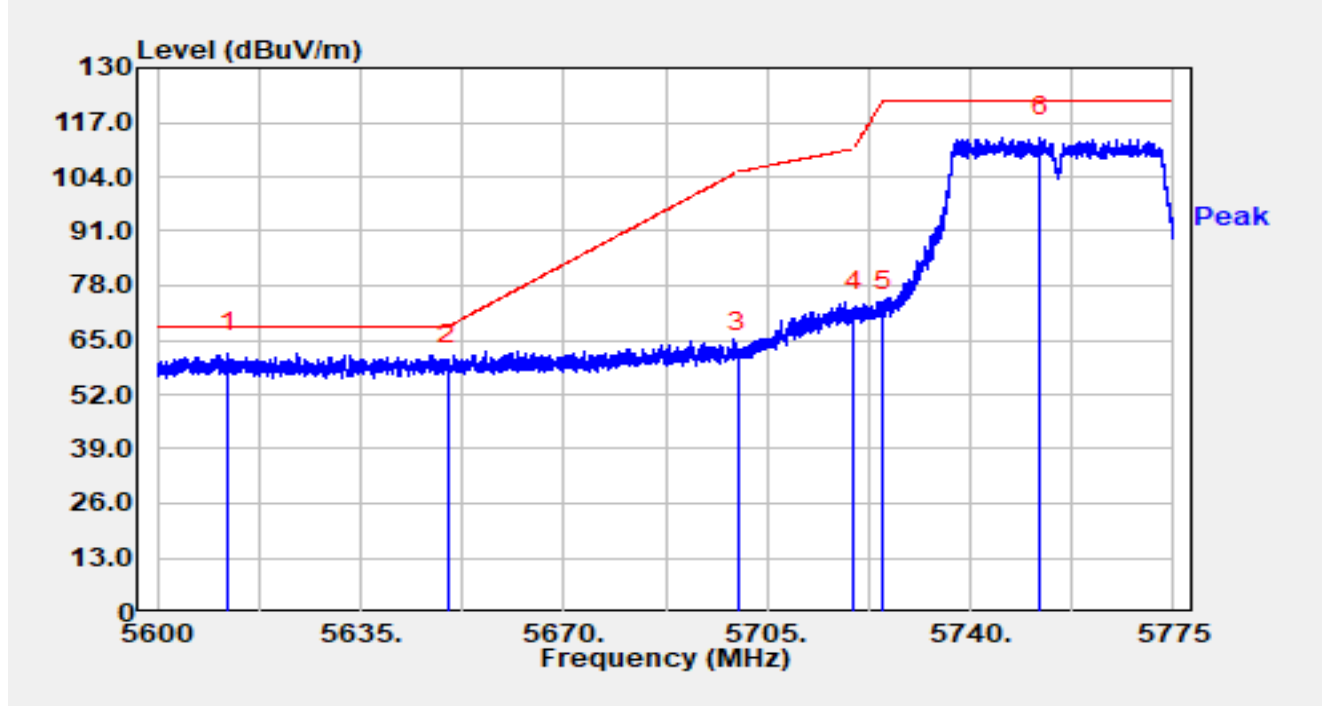


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5612.092	45.52	16.46	61.97	-6.23	68.20	Peak
2		5649.998	42.62	16.65	59.27	-8.93	68.20	Peak
3		5700.000	45.09	16.81	61.91	-43.29	105.20	Peak
4		5720.000	55.16	16.90	72.06	-38.74	110.80	Peak
5		5725.000	55.17	16.92	72.09	-50.11	122.20	Peak
6		5751.970	96.56	17.00	113.57	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

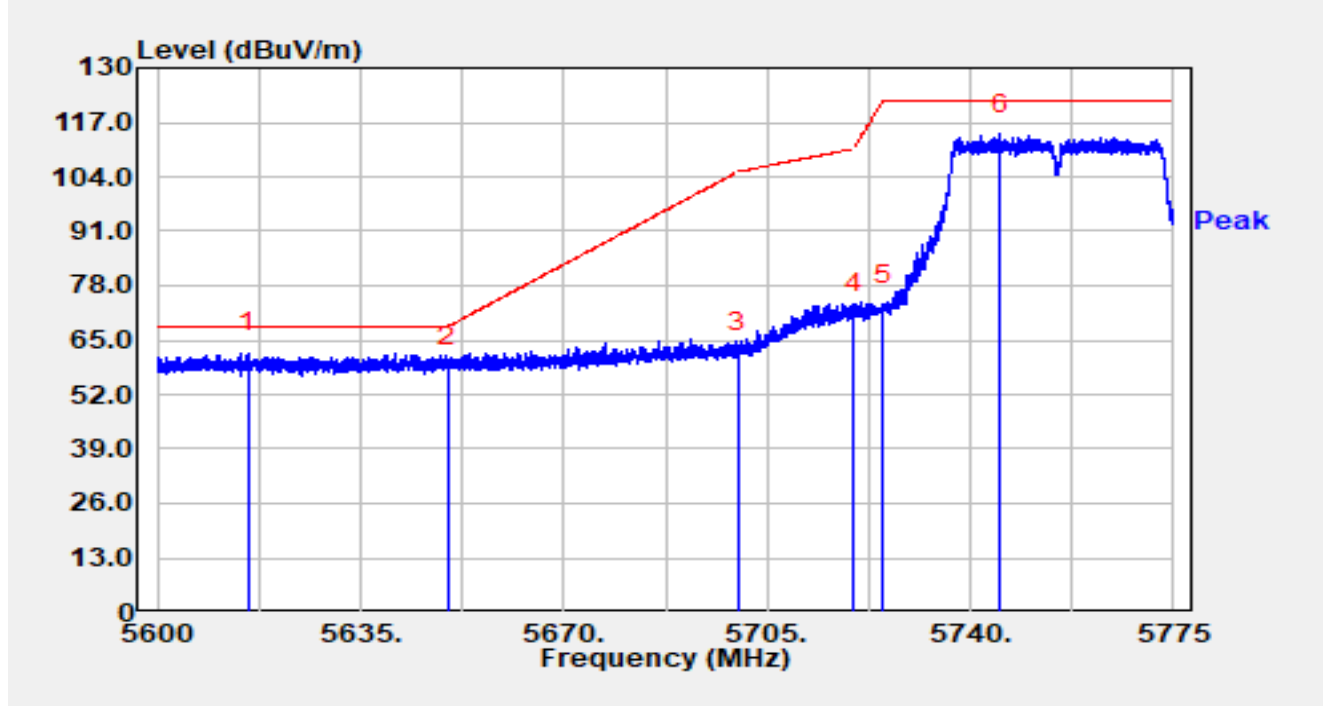


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.575	45.44	16.47	61.91	-6.29	68.20	Peak
2		5650.000	42.10	16.65	58.76	-9.44	68.20	Peak
3		5700.000	45.06	16.81	61.88	-43.32	105.20	Peak
4		5720.000	54.34	16.90	71.24	-39.56	110.80	Peak
5		5725.000	56.62	16.92	73.55	-48.65	122.20	Peak
6		5745.092	97.26	16.97	114.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

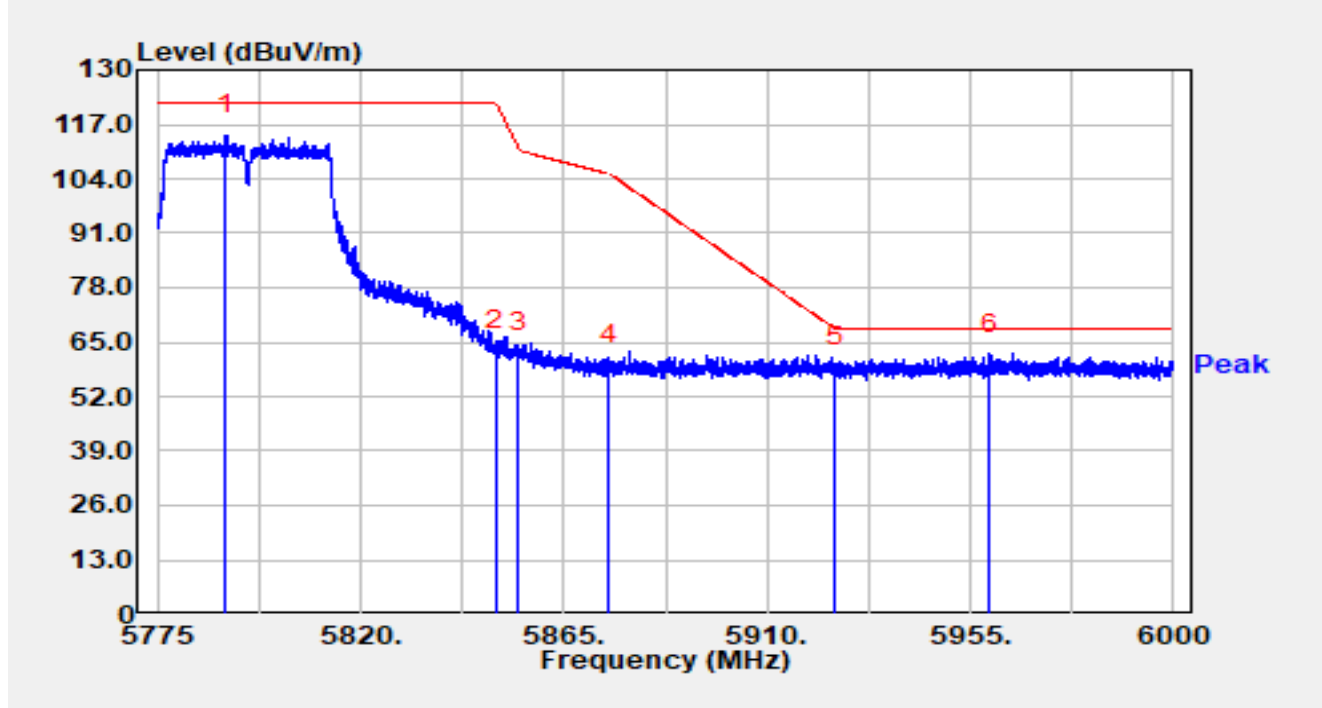


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5790.232	97.11	17.25	114.37	N/A	N/A	Peak
2		5850.000	45.75	17.31	63.07	-59.13	122.20	Peak
3		5855.000	45.14	17.32	62.47	-48.33	110.80	Peak
4		5875.000	42.39	17.38	59.76	-45.44	105.20	Peak
5		5925.000	41.83	17.36	59.19	-9.01	68.20	Peak
6	*	5959.365	44.75	17.46	62.21	-5.99	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

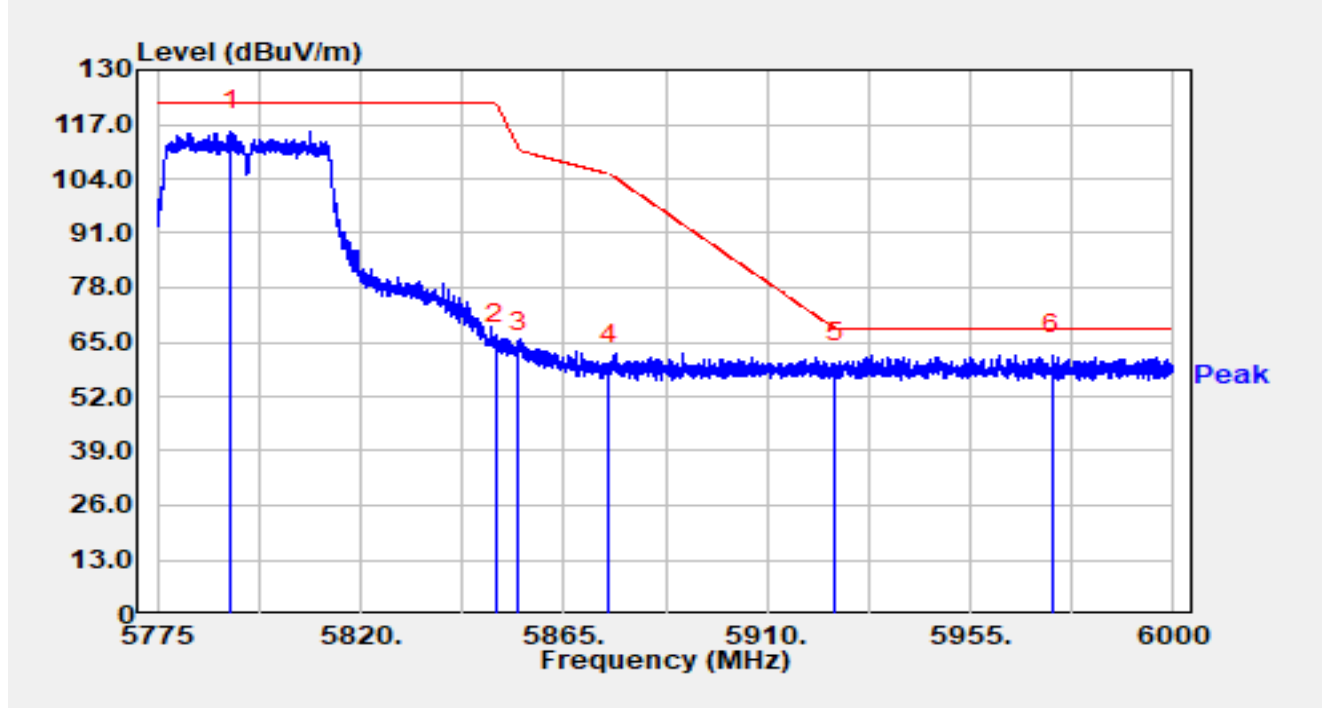


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.200	98.25	17.26	115.52	N/A	N/A	Peak
2		5850.000	47.03	17.31	64.34	-57.86	122.20	Peak
3		5855.000	45.22	17.32	62.55	-48.25	110.80	Peak
4		5875.000	42.07	17.38	59.45	-45.75	105.20	Peak
5		5925.000	42.53	17.36	59.90	-8.30	68.20	Peak
6	*	5973.067	44.44	17.54	61.99	-6.21	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

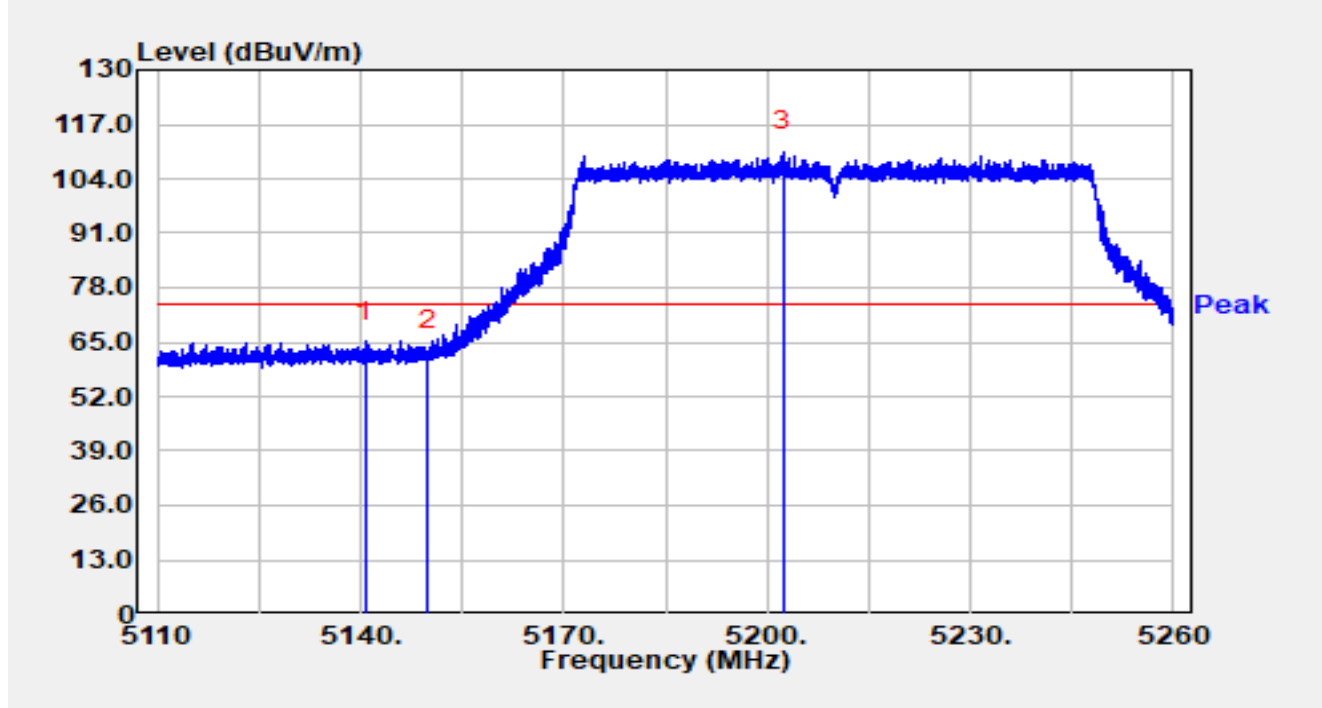


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5140.675	49.07	15.98	65.05	-8.95	74.00	Peak
2		5150.005	46.81	16.00	62.81	-11.19	74.00	Peak
3		5202.385	94.52	15.95	110.48	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

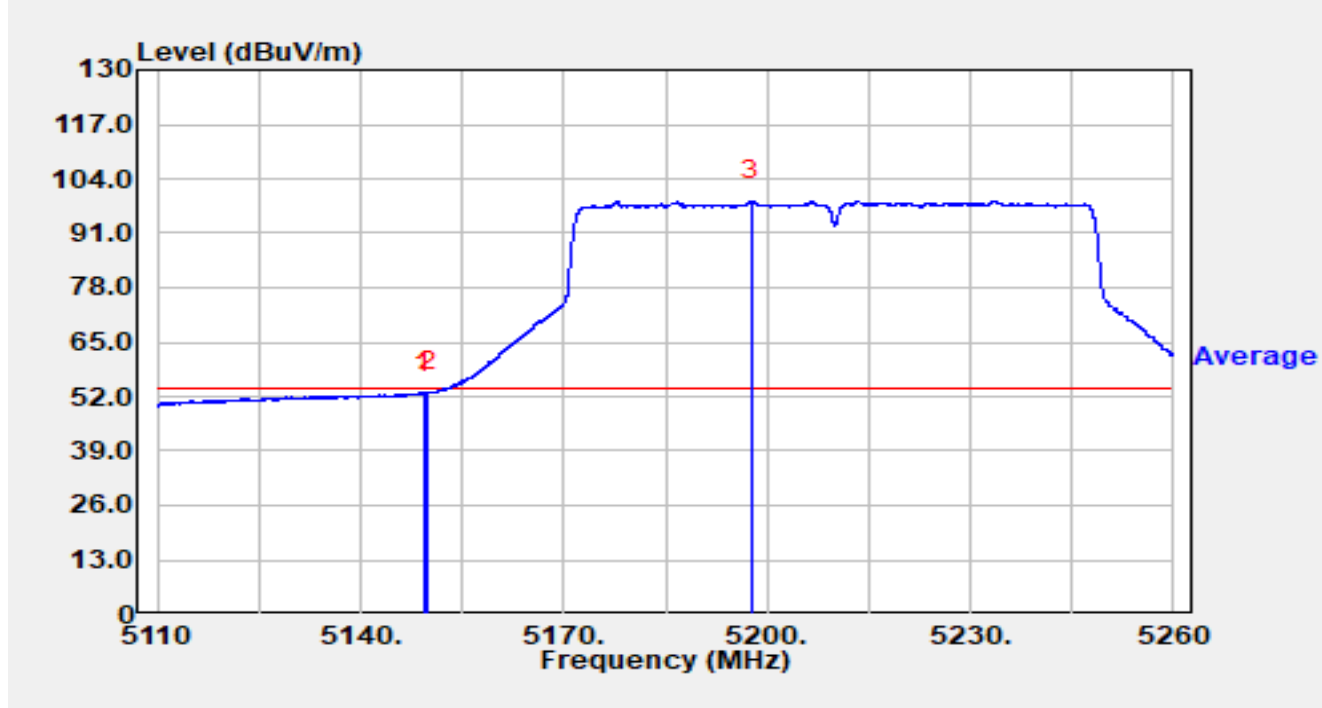


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.255	36.97	16.00	52.96	-1.04	54.00	Average
2	*	5150.000	37.01	16.00	53.01	-0.99	54.00	Average
3		5197.660	82.85	15.97	98.81	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

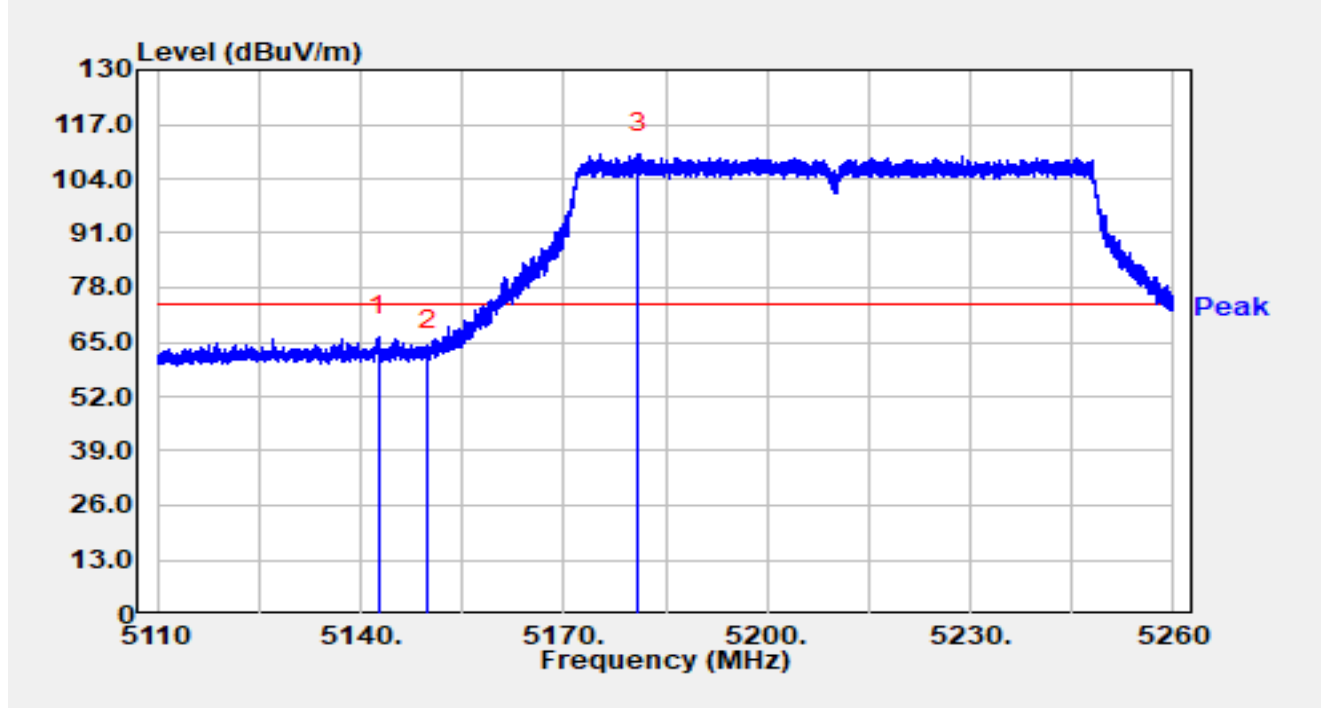


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.580	50.25	15.98	66.23	-7.77	74.00	Peak
2		5150.000	46.87	16.00	62.87	-11.13	74.00	Peak
3		5181.070	94.07	15.93	110.00	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

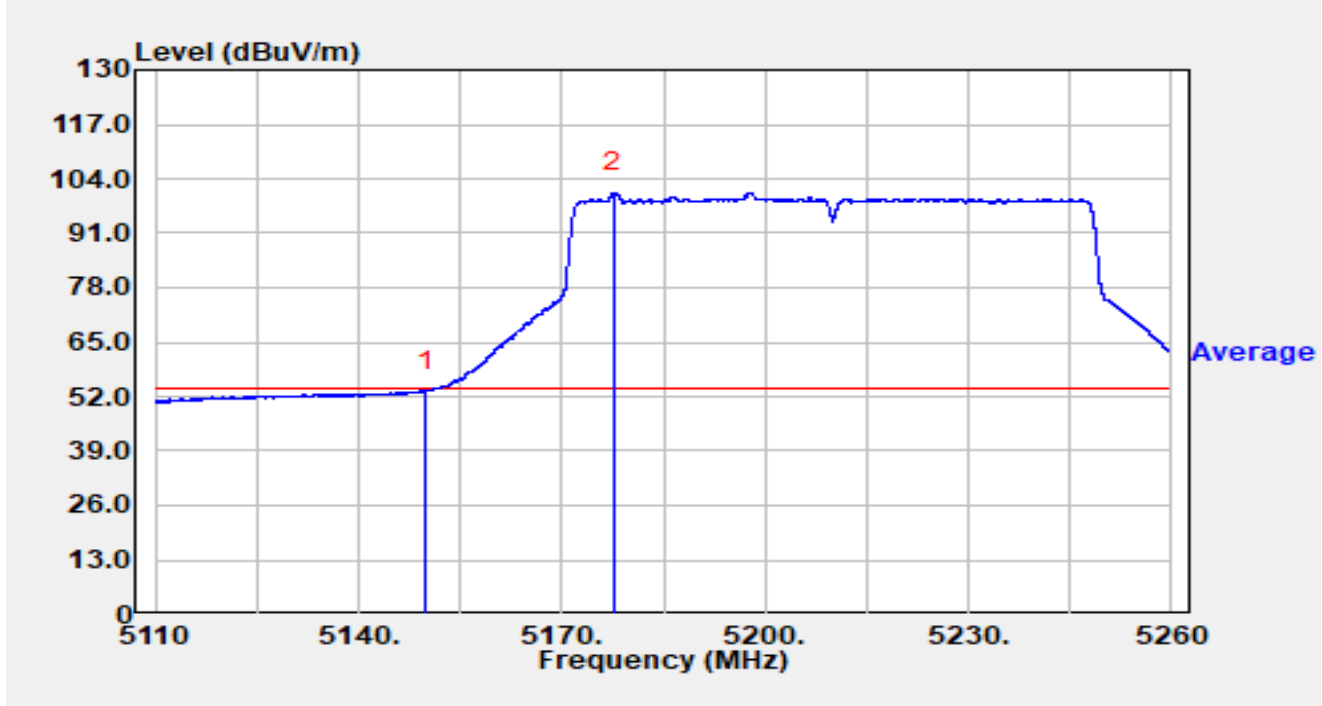


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.45	16.00	53.45	-0.55	54.00	Average
2		5177.695	84.80	15.94	100.75	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

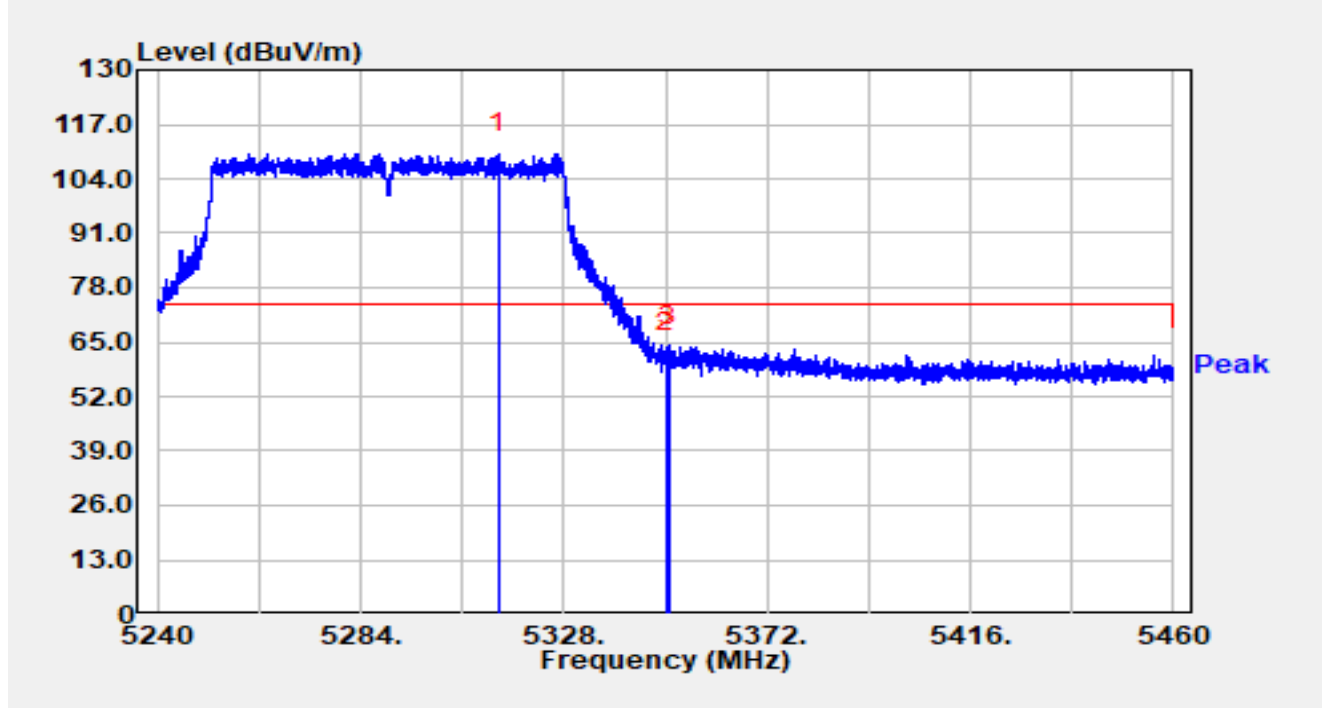


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.788	94.32	15.77	110.09	N/A	N/A	Peak
2		5350.000	46.72	15.68	62.40	-11.60	74.00	Peak
3	*	5350.594	48.53	15.68	64.21	-9.79	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

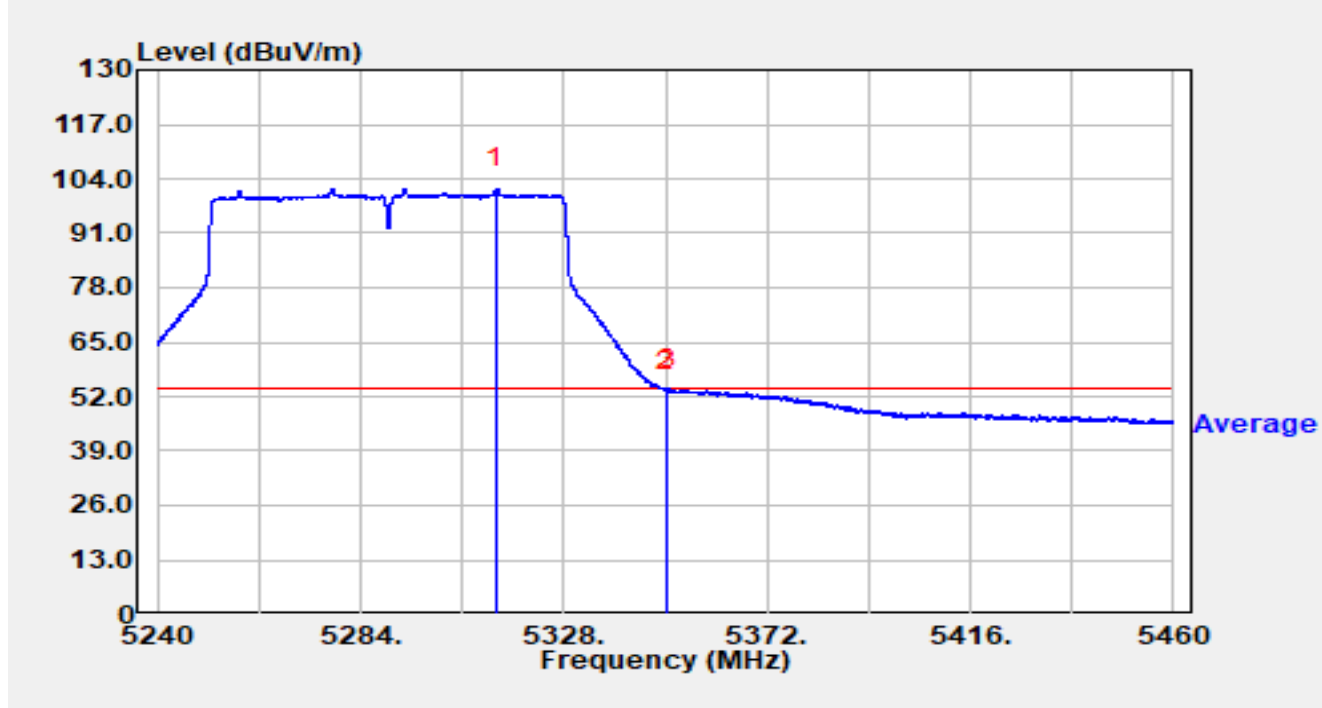


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.392	86.02	15.77	101.79	N/A	N/A	Average
2		5350.000	37.75	15.68	53.43	-0.57	54.00	Average
3	*	5350.308	38.16	15.68	53.84	-0.16	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

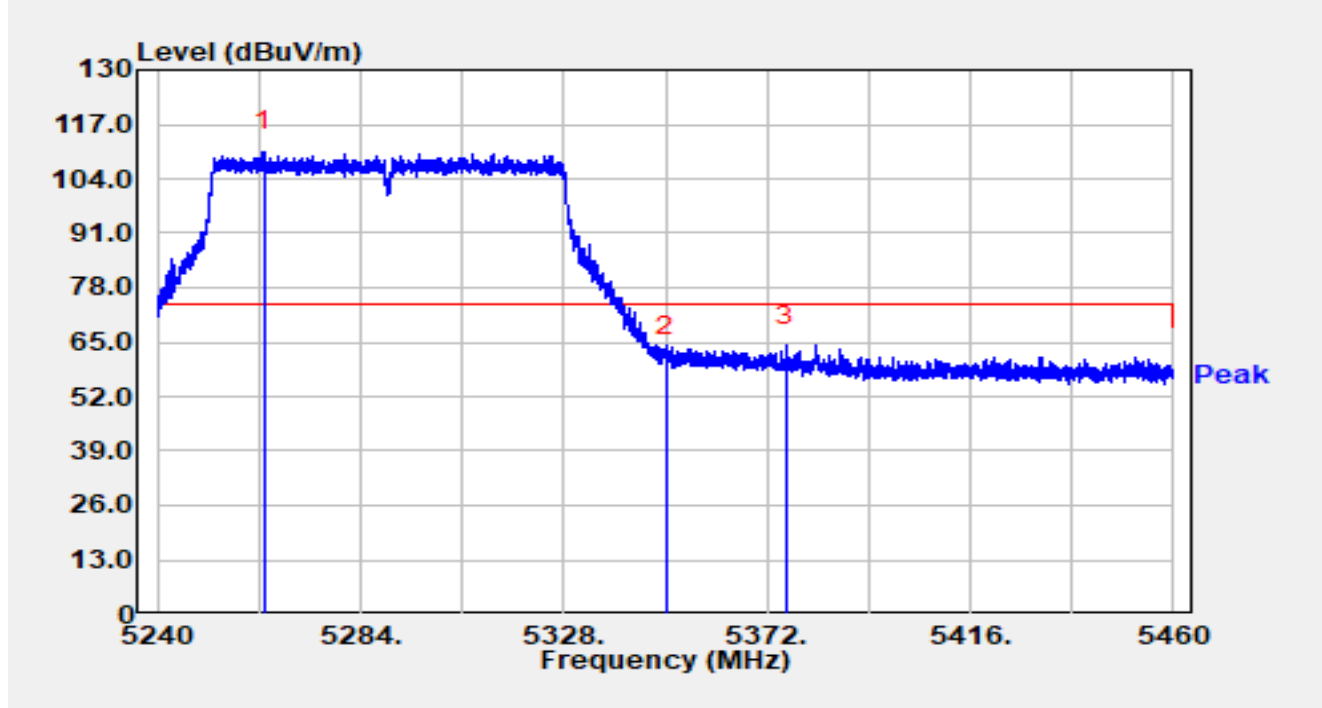


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5262.990	94.48	15.91	110.38	N/A	N/A	Peak
2		5350.000	45.83	15.68	61.51	-12.49	74.00	Peak
3	*	5376.092	48.45	15.63	64.08	-9.92	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

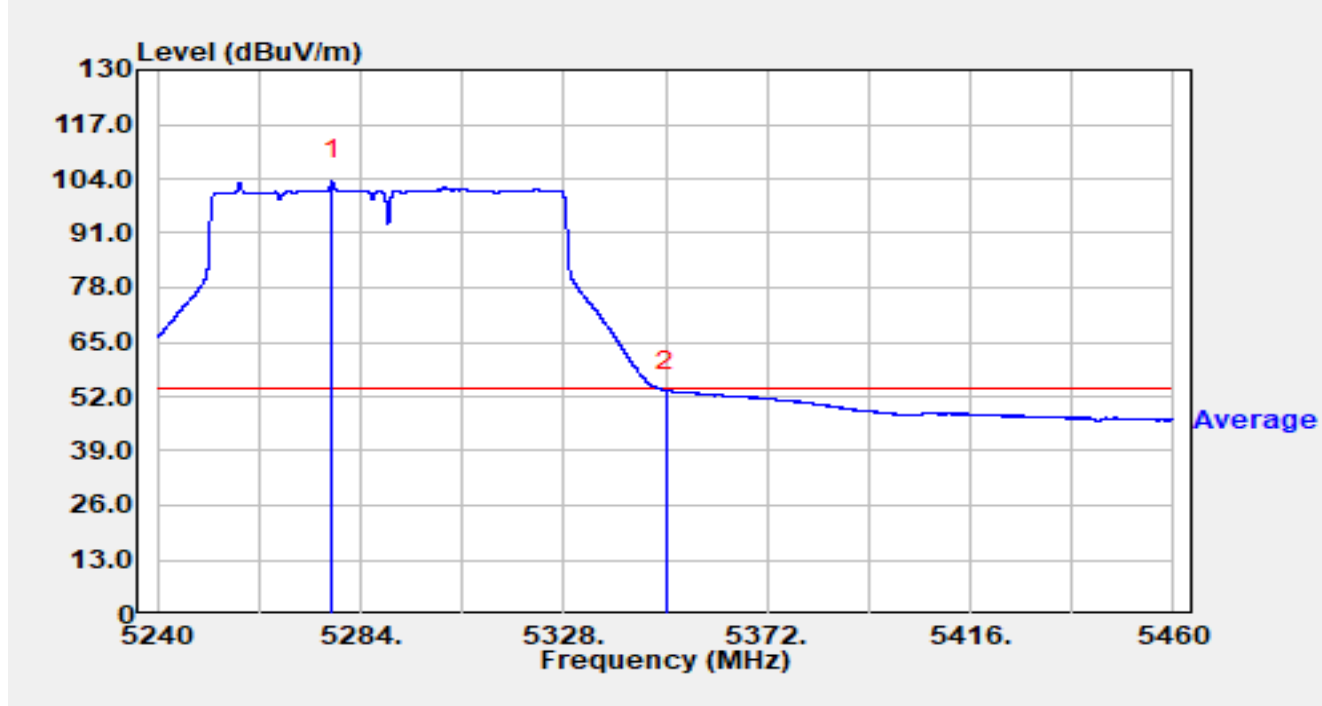


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5277.796	87.72	15.81	103.53	N/A	N/A	Average
2	*	5350.000	37.75	15.68	53.43	-0.57	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

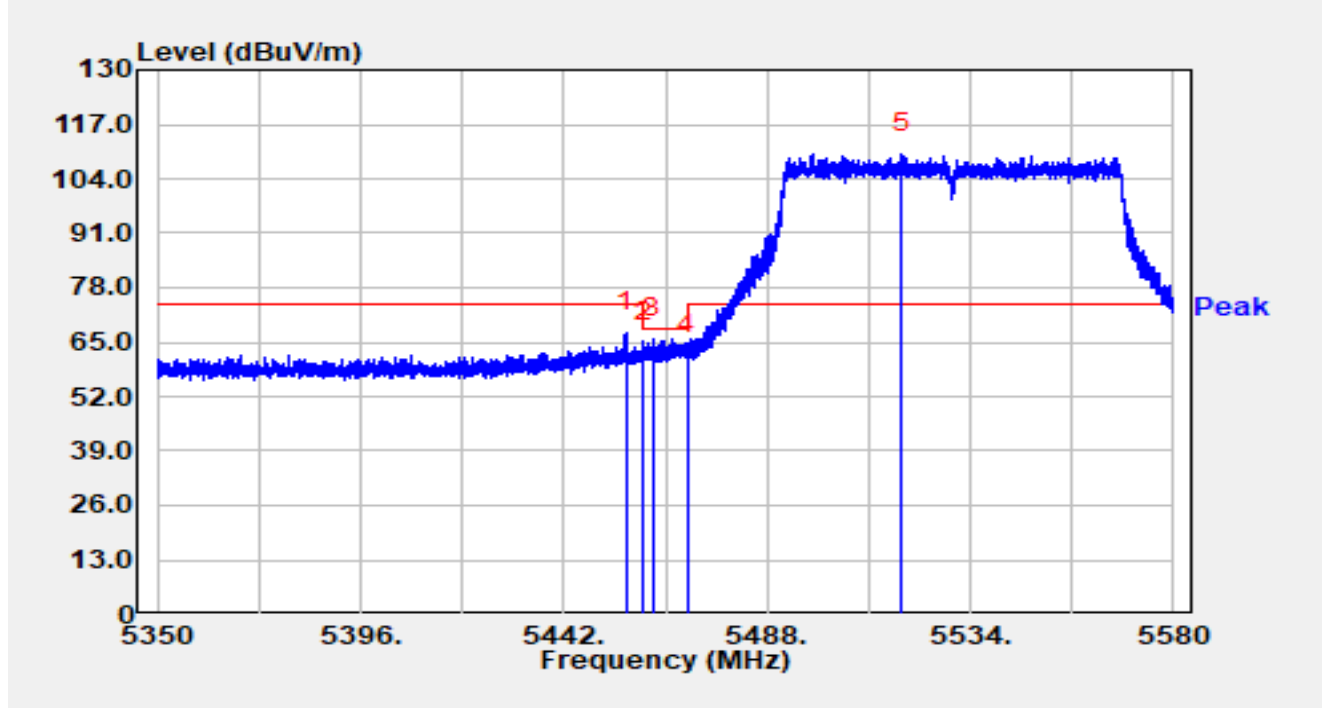


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.984	51.27	16.04	67.30	-6.70	74.00	Peak
2		5460.000	48.94	16.02	64.97	-3.23	68.20	Peak
3	*	5462.217	49.94	16.01	65.96	-2.24	68.20	Peak
4		5470.000	46.04	15.98	62.03	-6.17	68.20	Peak
5		5518.567	93.76	16.18	109.93	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9°C	Humidity	34.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

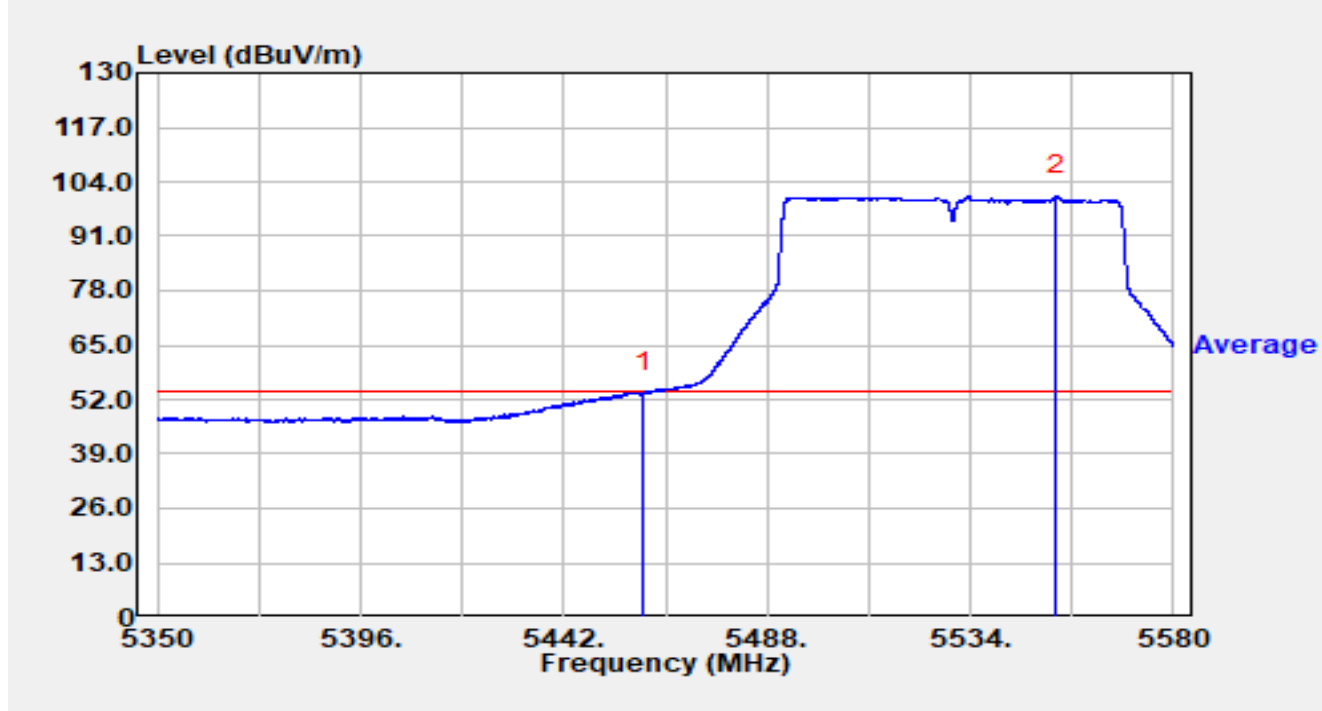


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	37.69	16.02	53.71	-0.29	54.00	Average
2		5553.412	84.36	16.28	100.63	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

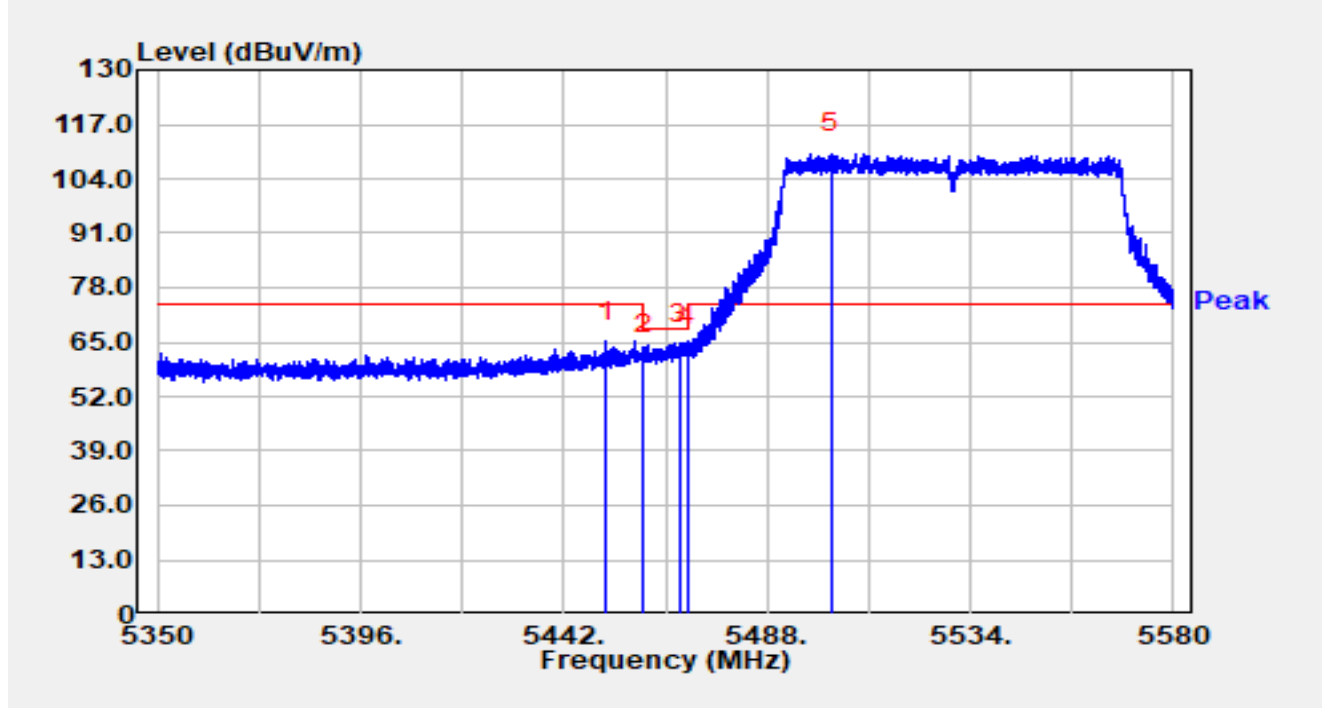


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.614	49.13	16.01	65.14	-8.86	74.00	Peak
2		5460.009	46.14	16.02	62.16	-6.04	68.20	Peak
3	*	5468.082	48.69	15.99	64.68	-3.52	68.20	Peak
4		5470.000	48.22	15.98	64.20	-4.00	68.20	Peak
5		5502.582	93.89	16.20	110.09	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

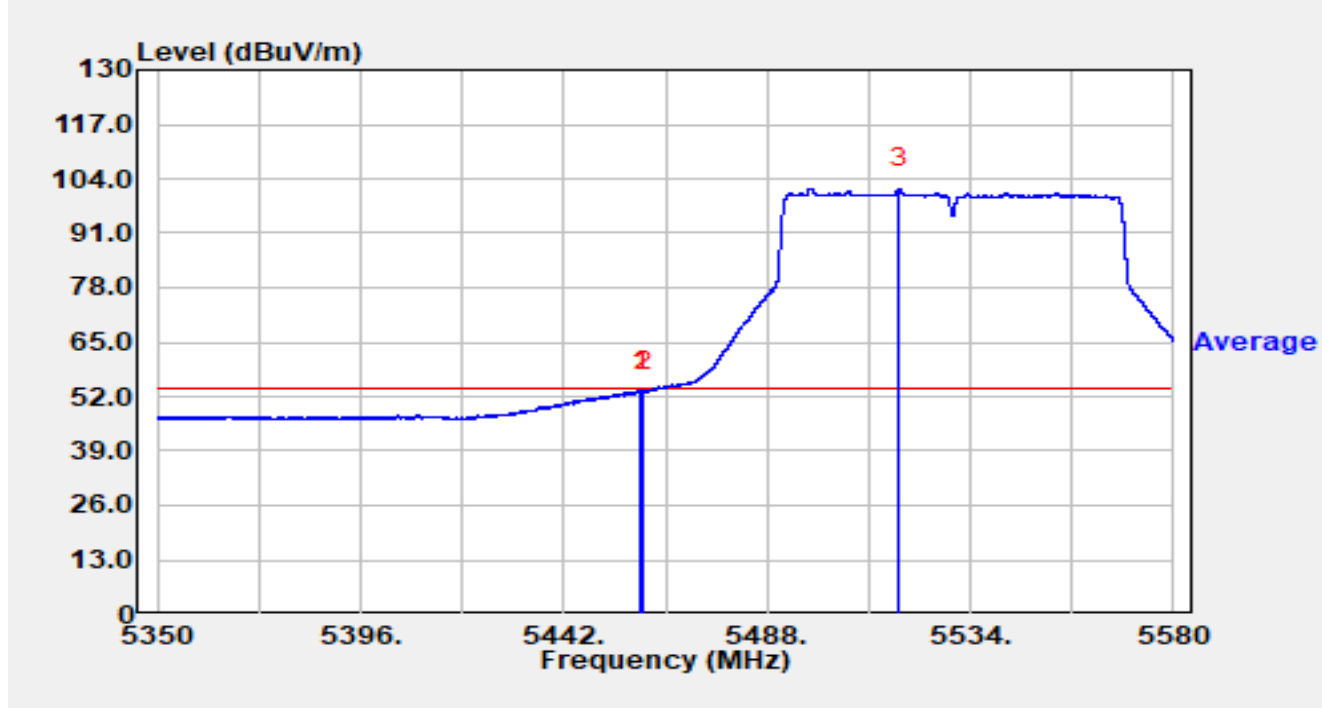


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.457	37.37	16.02	53.40	-0.60	54.00	Average
2		5460.000	37.16	16.02	53.19	-0.81	54.00	Average
3		5517.854	85.58	16.18	101.76	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

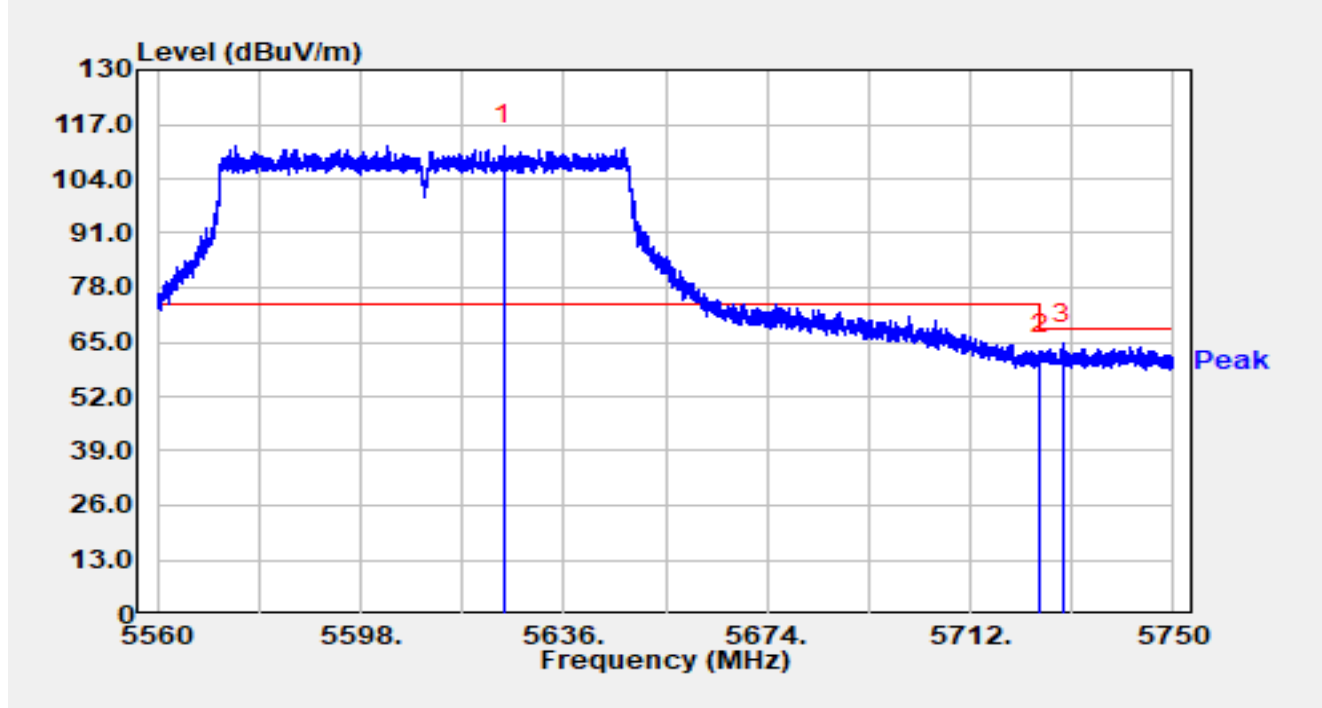


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5624.866	95.43	16.52	111.94	N/A	N/A	Peak
2		5725.000	44.90	16.92	61.83	-6.37	68.20	Peak
3	*	5729.271	47.58	16.93	64.52	-3.68	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

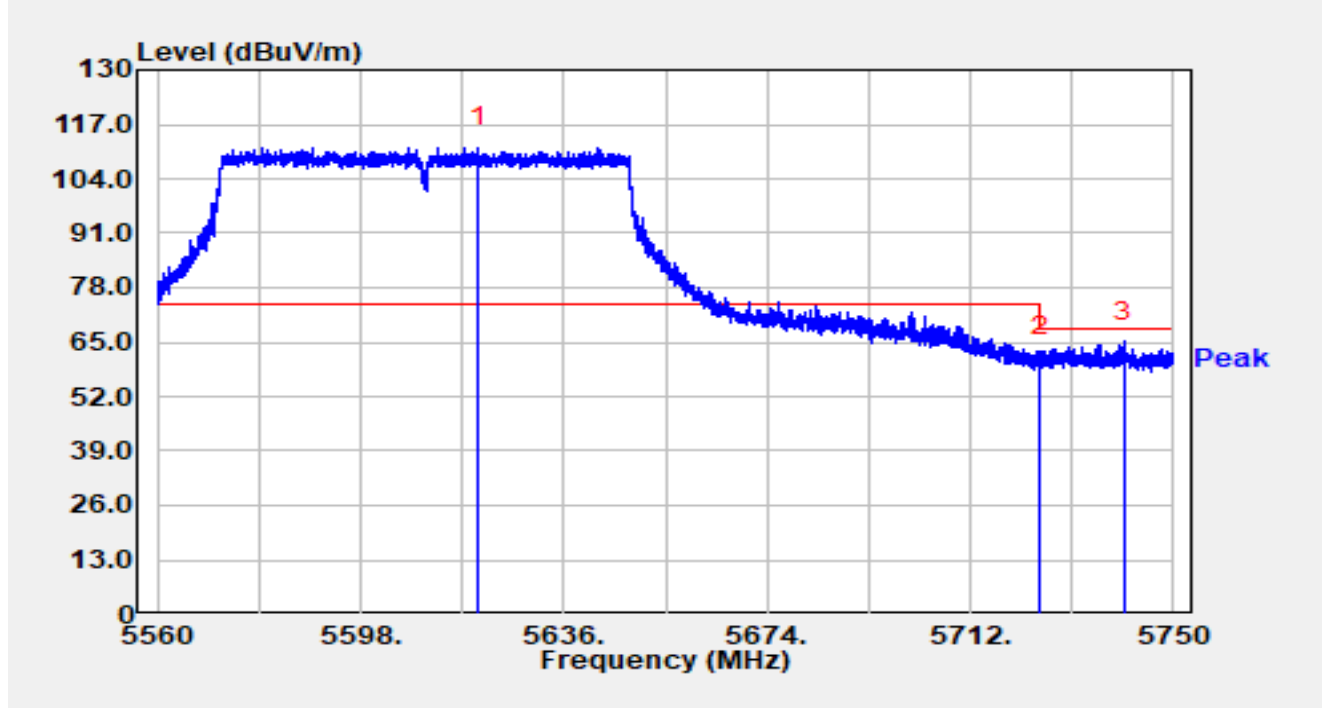


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5619.964	94.99	16.49	111.47	N/A	N/A	Peak
2		5725.000	44.67	16.92	61.60	-6.60	68.20	Peak
3	*	5740.652	48.17	16.96	65.13	-3.07	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

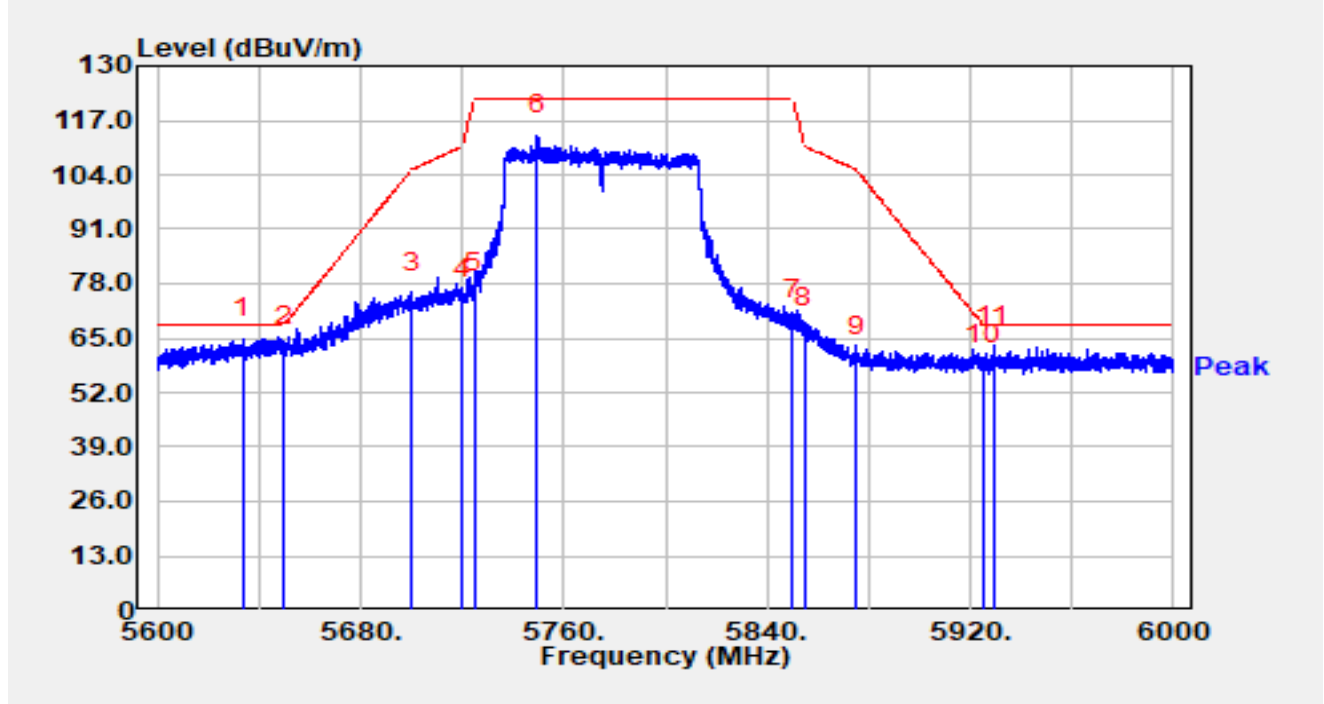


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5633.720	48.35	16.58	64.92	-3.28	68.20	Peak
2		5650.000	46.45	16.65	63.10	-5.10	68.20	Peak
3		5700.000	58.95	16.81	75.76	-29.44	105.20	Peak
4		5720.000	57.52	16.90	74.43	-36.37	110.80	Peak
5		5725.000	58.66	16.92	75.58	-46.62	122.20	Peak
6		5749.600	96.33	16.99	113.32	N/A	N/A	Peak
7		5850.000	52.35	17.31	69.66	-52.54	122.20	Peak
8		5855.000	49.95	17.32	67.28	-43.52	110.80	Peak
9		5875.000	43.01	17.38	60.39	-44.81	105.20	Peak
10		5925.000	41.31	17.36	58.67	-9.53	68.20	Peak
11		5929.160	45.75	17.38	63.13	-5.07	68.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

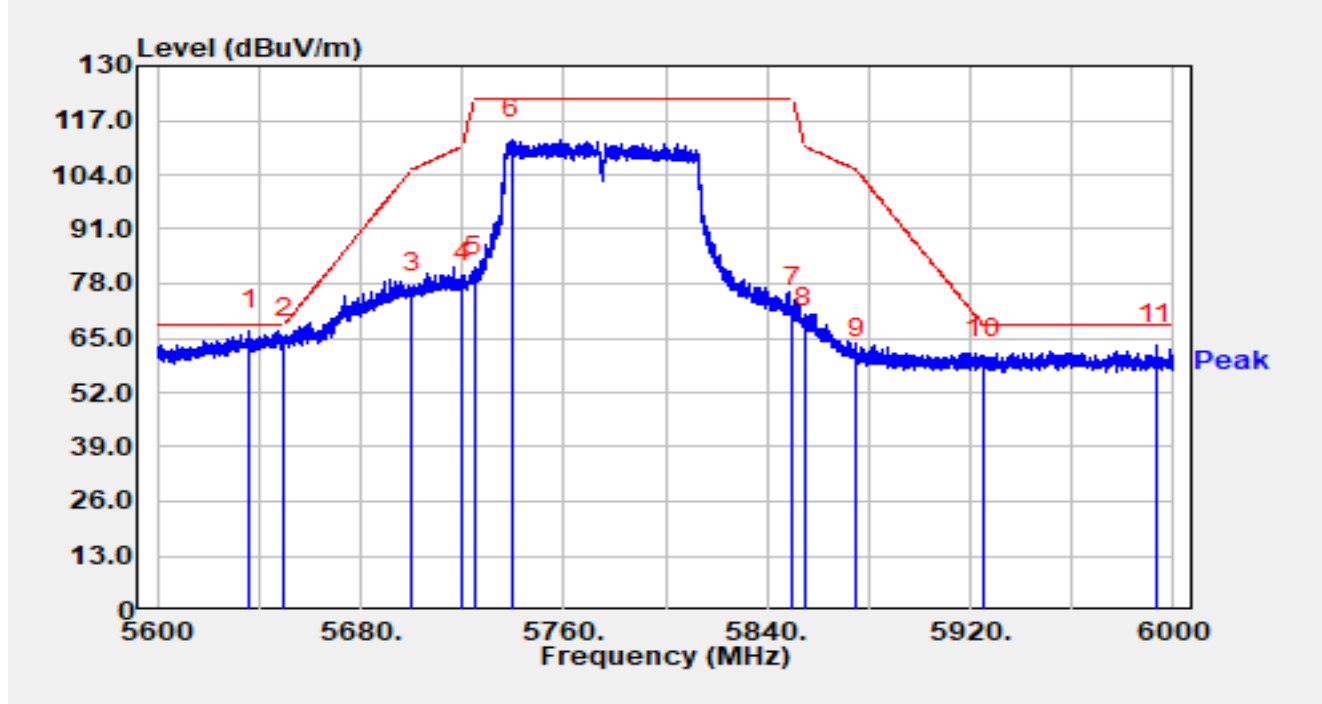


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5636.240	50.34	16.60	66.93	-1.27	68.20	Peak
2		5650.000	48.45	16.65	65.10	-3.10	68.20	Peak
3		5700.000	58.85	16.81	75.66	-29.54	105.20	Peak
4		5720.000	61.42	16.90	78.32	-32.48	110.80	Peak
5		5725.000	62.83	16.92	79.75	-42.45	122.20	Peak
6		5739.280	95.48	16.95	112.43	N/A	N/A	Peak
7		5850.000	55.02	17.31	72.34	-49.86	122.20	Peak
8		5855.000	50.10	17.32	67.43	-43.37	110.80	Peak
9		5875.000	42.70	17.38	60.08	-45.12	105.20	Peak
10		5925.000	42.60	17.36	59.97	-8.23	68.20	Peak
11		5993.160	46.06	17.40	63.46	-4.74	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

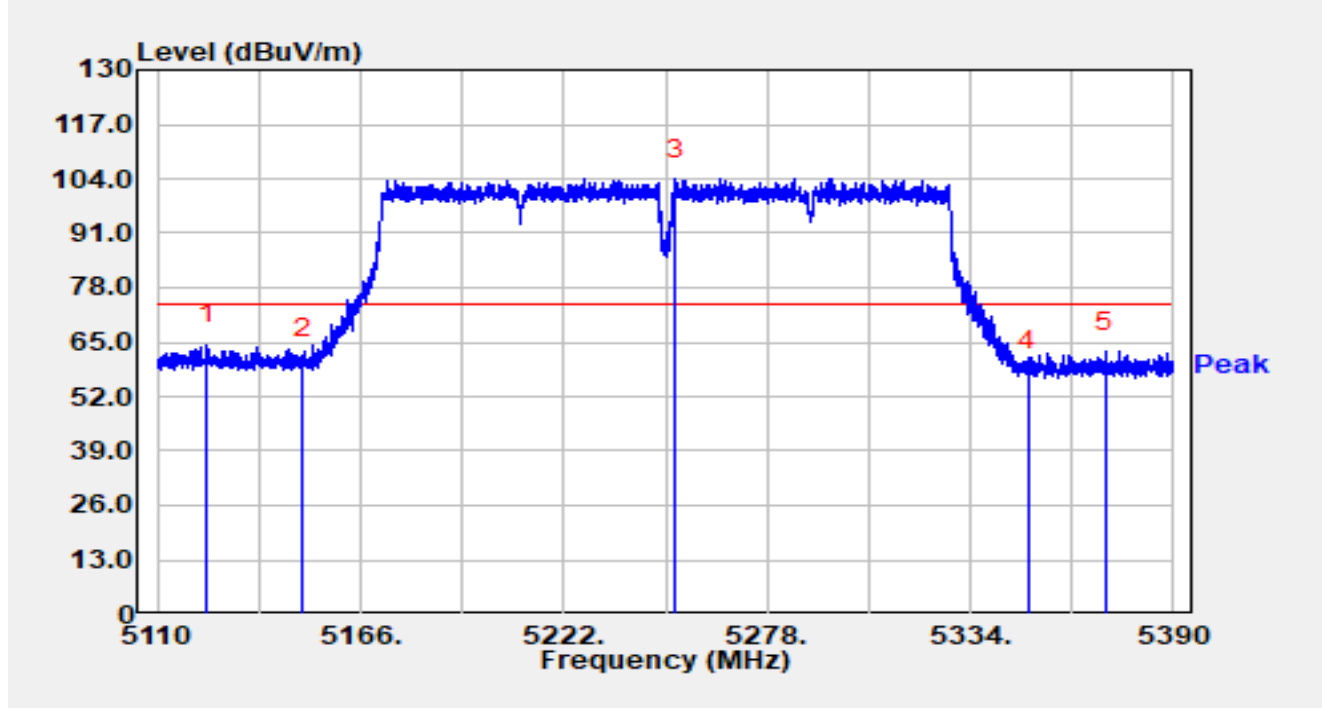


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.636	48.24	16.04	64.28	-9.72	74.00	Peak
2		5150.000	45.17	16.00	61.16	-12.84	74.00	Peak
3		5252.828	88.02	15.95	103.98	N/A	N/A	Peak
4		5350.000	42.35	15.68	58.03	-15.97	74.00	Peak
5		5371.100	46.98	15.62	62.60	-11.40	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

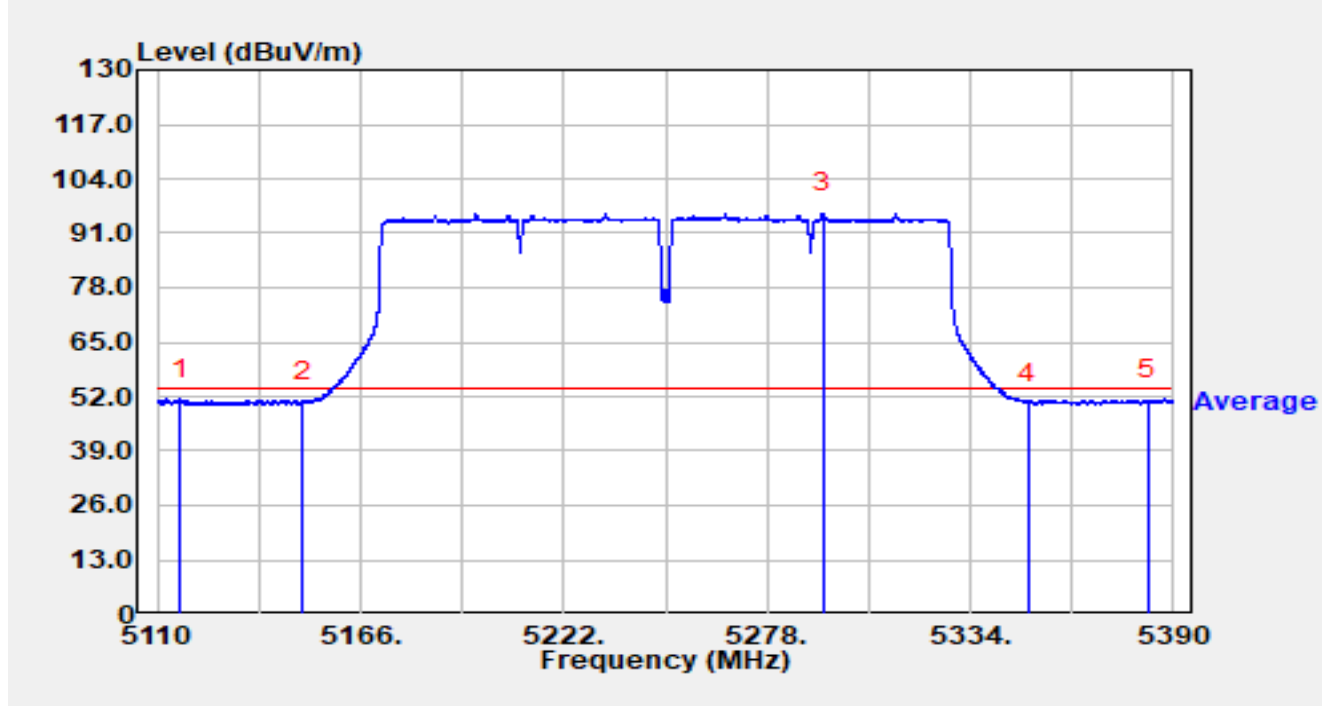


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5116.216	35.25	16.13	51.38	-2.62	54.00	Average
2		5150.000	34.56	16.00	50.56	-3.44	54.00	Average
3		5293.456	79.99	15.78	95.77	N/A	N/A	Average
4		5350.000	34.75	15.68	50.43	-3.57	54.00	Average
5		5382.860	35.56	15.65	51.21	-2.79	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

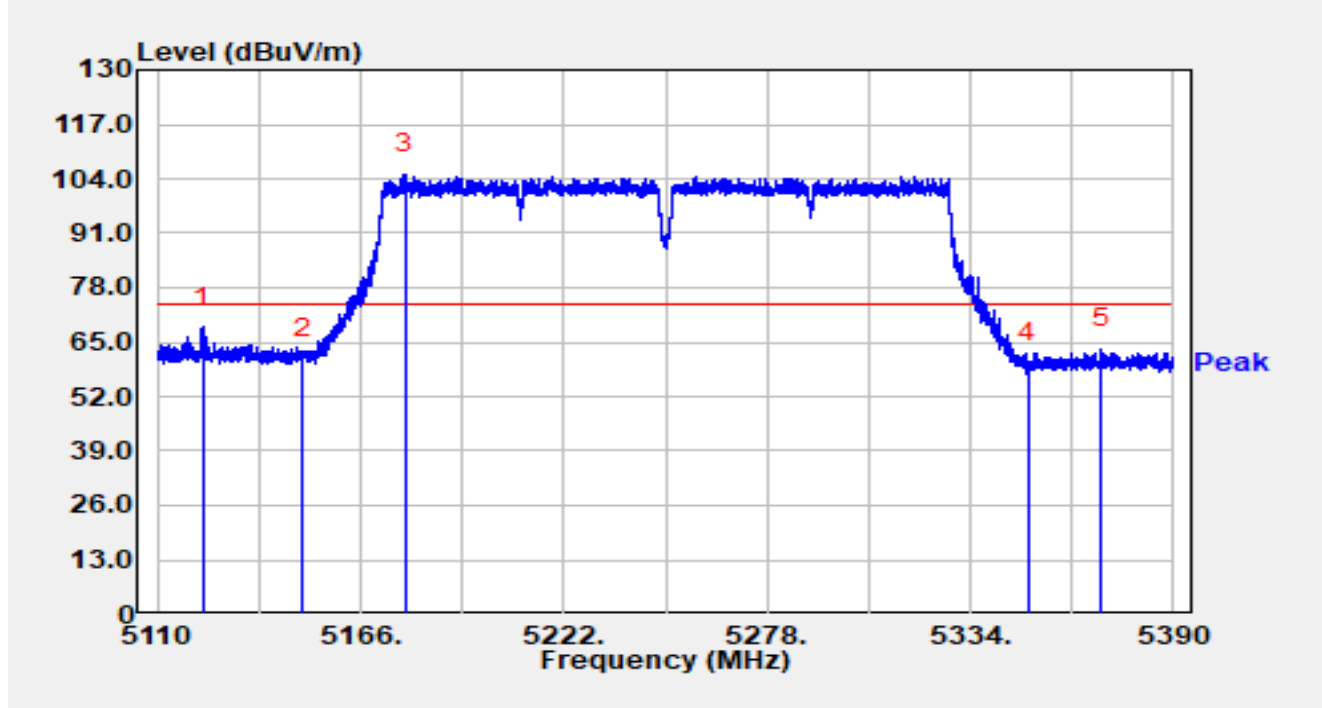


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5122.376	52.42	16.06	68.48	-5.52	74.00	Peak
2		5150.012	44.85	16.00	60.85	-13.15	74.00	Peak
3		5178.124	89.24	15.94	105.18	N/A	N/A	Peak
4		5350.000	44.30	15.68	59.98	-14.02	74.00	Peak
5		5370.008	47.86	15.62	63.48	-10.52	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

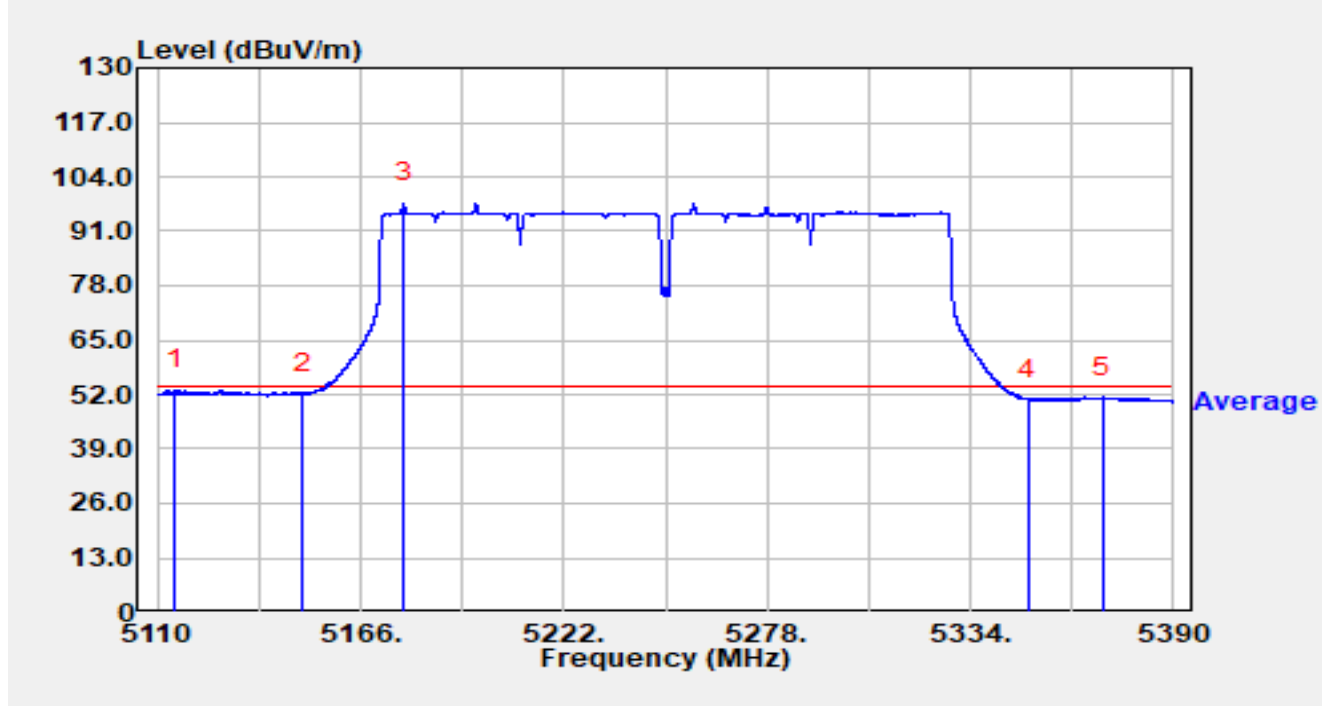


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5114.816	37.02	16.14	53.16	-0.84	54.00	Average
2		5150.000	36.36	16.00	52.36	-1.64	54.00	Average
3		5177.816	81.78	15.94	97.72	N/A	N/A	Average
4		5350.000	35.18	15.68	50.86	-3.14	54.00	Average
5		5370.596	35.71	15.62	51.32	-2.68	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

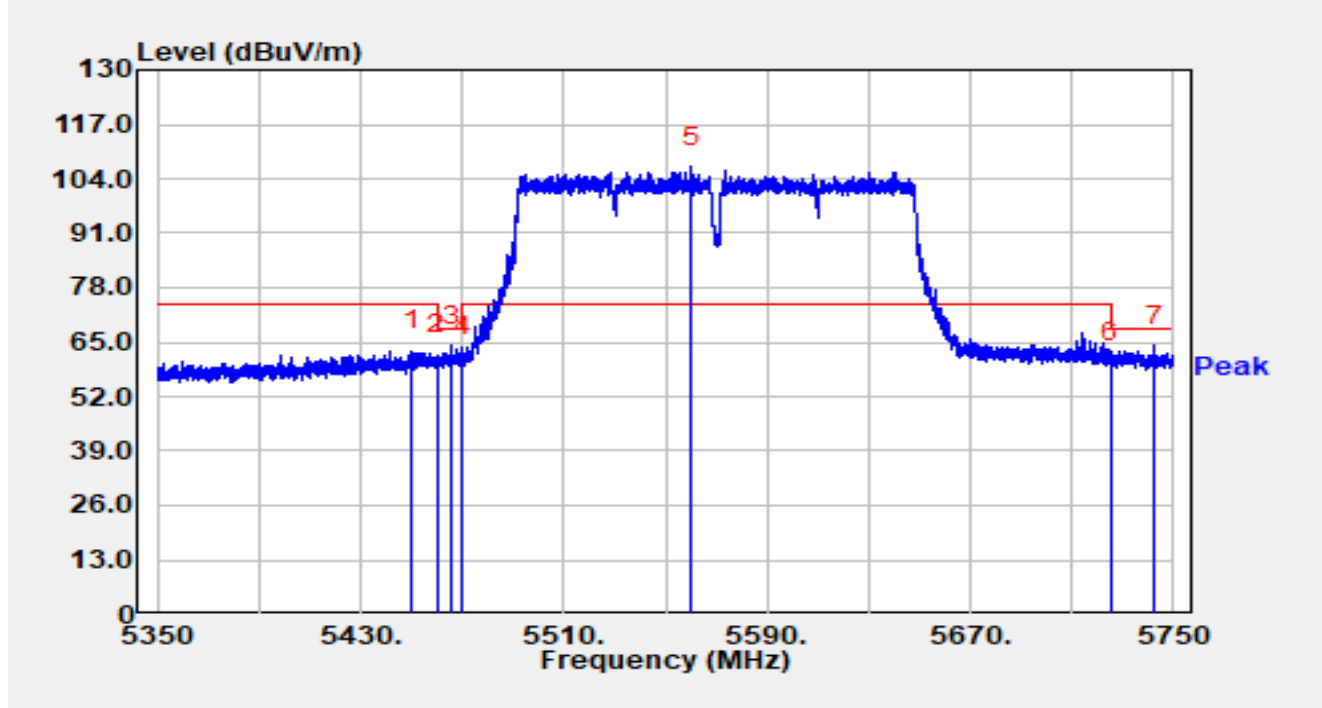


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.040	46.91	15.99	62.90	-11.10	74.00	Peak
2		5460.000	45.89	16.02	61.91	-6.29	68.20	Peak
3		5465.720	48.12	16.00	64.12	-4.08	68.20	Peak
4		5470.000	45.63	15.98	61.61	-6.59	68.20	Peak
5		5560.200	90.47	16.33	106.80	N/A	N/A	Peak
6		5725.000	43.30	16.92	60.23	-7.97	68.20	Peak
7	*	5742.600	47.28	16.96	64.24	-3.96	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

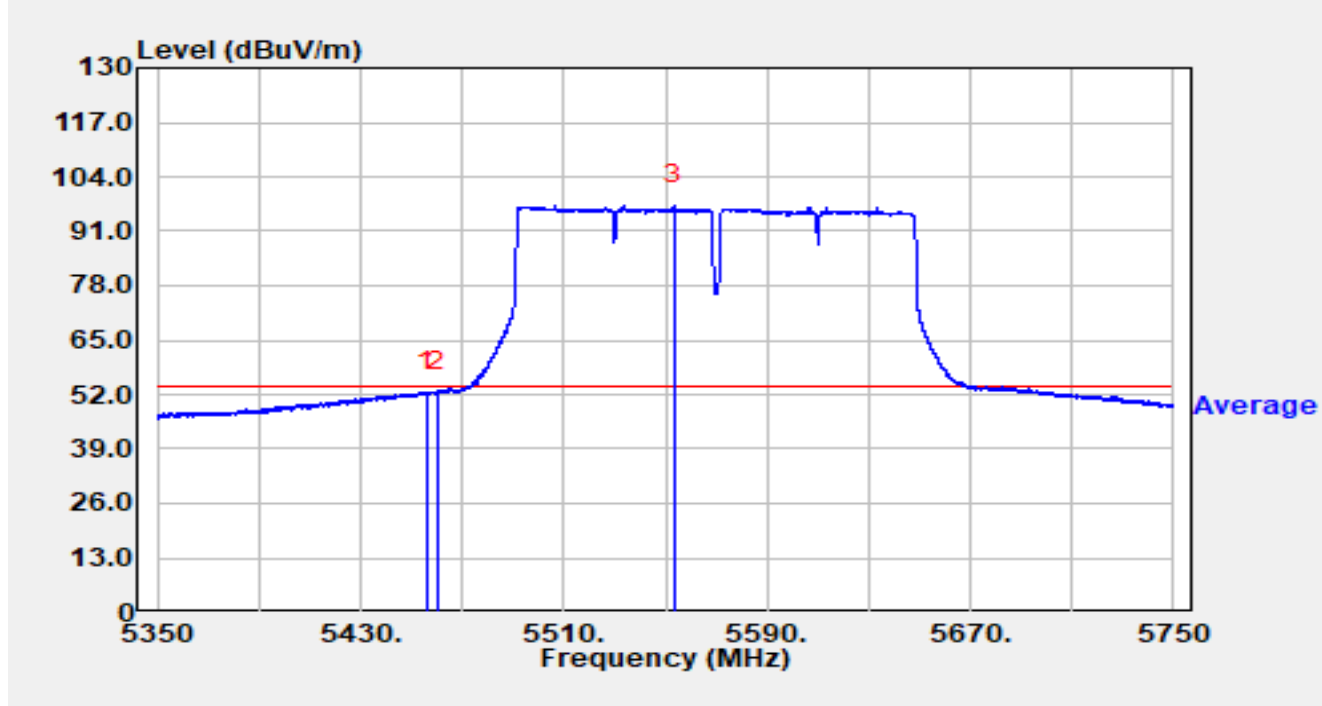


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.720	36.63	16.04	52.66	-1.34	54.00	Average
2		5460.000	36.48	16.02	52.51	-1.49	54.00	Average
3		5553.440	81.04	16.28	97.31	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

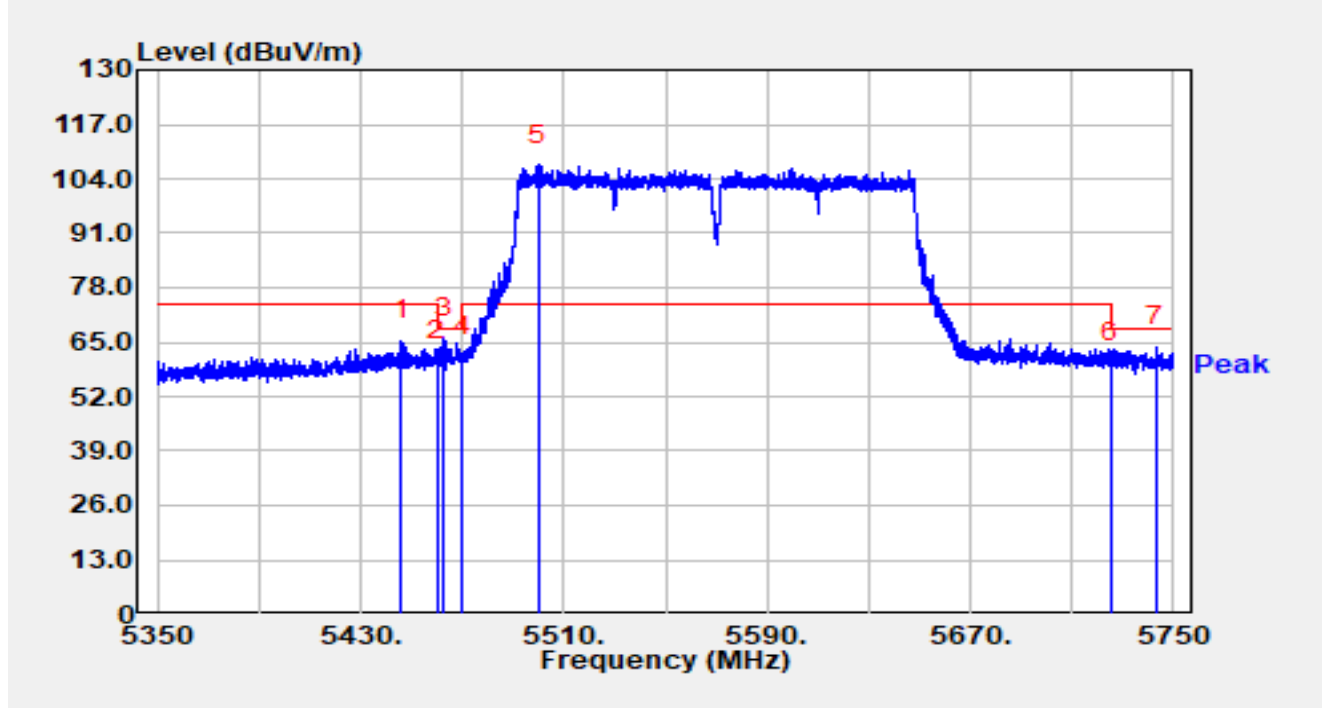


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.200	49.32	15.95	65.26	-8.74	74.00	Peak
2		5460.000	44.52	16.02	60.54	-7.66	68.20	Peak
3	*	5462.960	50.12	16.01	66.13	-2.07	68.20	Peak
4		5470.000	45.69	15.98	61.67	-6.53	68.20	Peak
5		5499.720	91.24	16.17	107.42	N/A	N/A	Peak
6		5725.000	43.33	16.92	60.25	-7.95	68.20	Peak
7		5743.280	46.96	16.96	63.92	-4.28	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

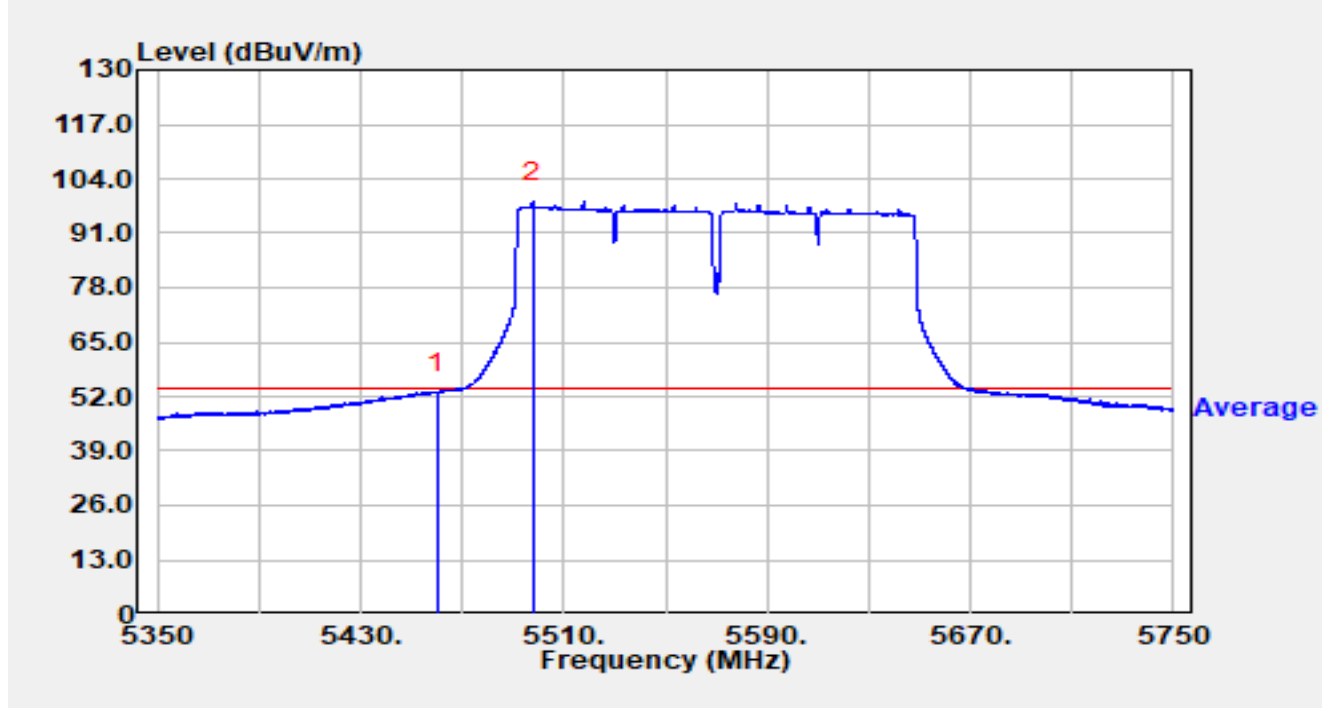


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	36.96	16.02	52.98	-1.02	54.00	Average
2		5497.840	82.28	16.16	98.44	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

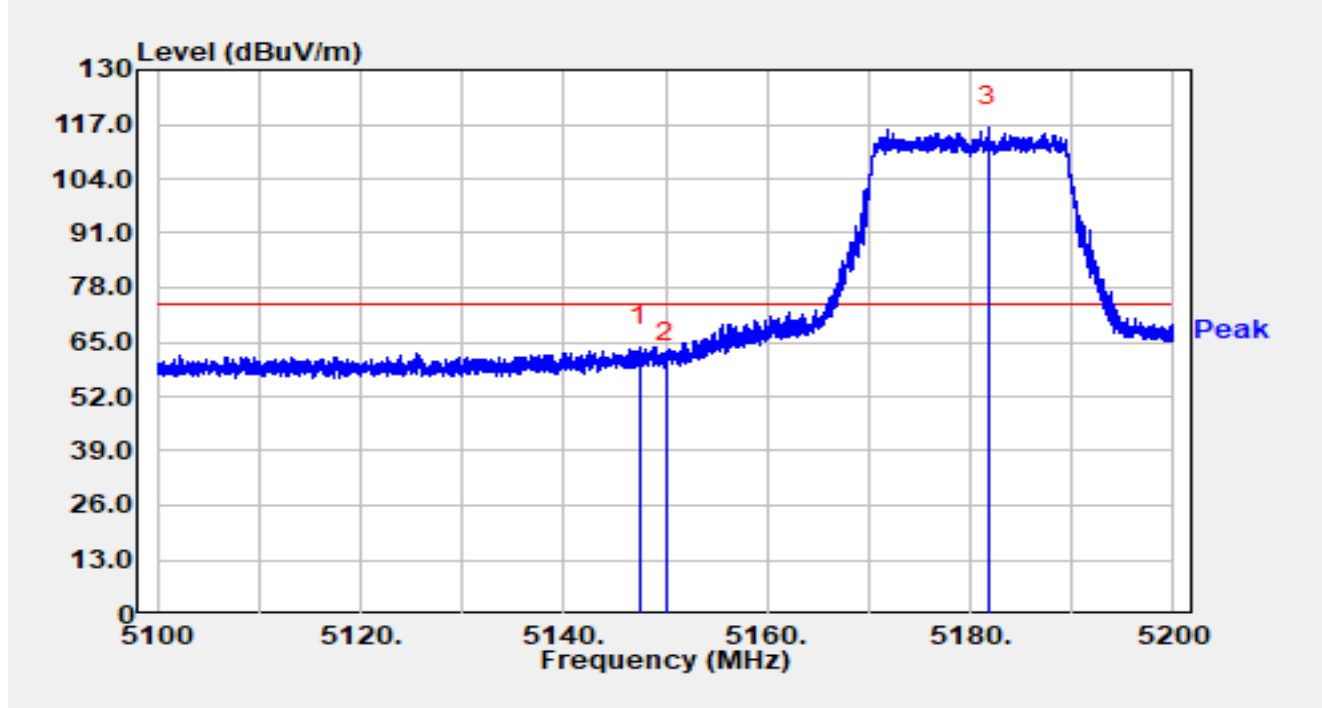


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.440	48.02	15.99	64.02	-9.98	74.00	Peak
2		5150.000	43.88	16.00	59.88	-14.12	74.00	Peak
3		5181.770	100.47	15.92	116.40	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

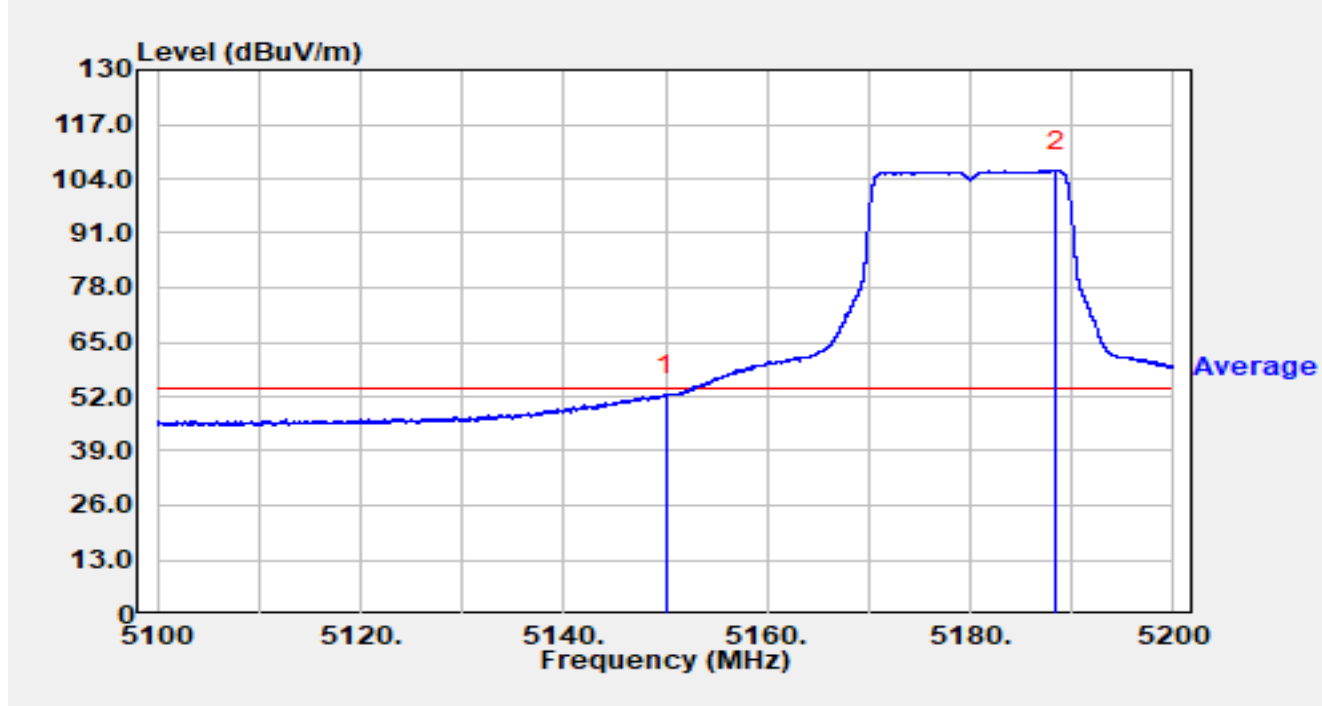


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	36.09	16.00	52.09	-1.91	54.00	Average
2		5188.500	90.01	15.94	105.95	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

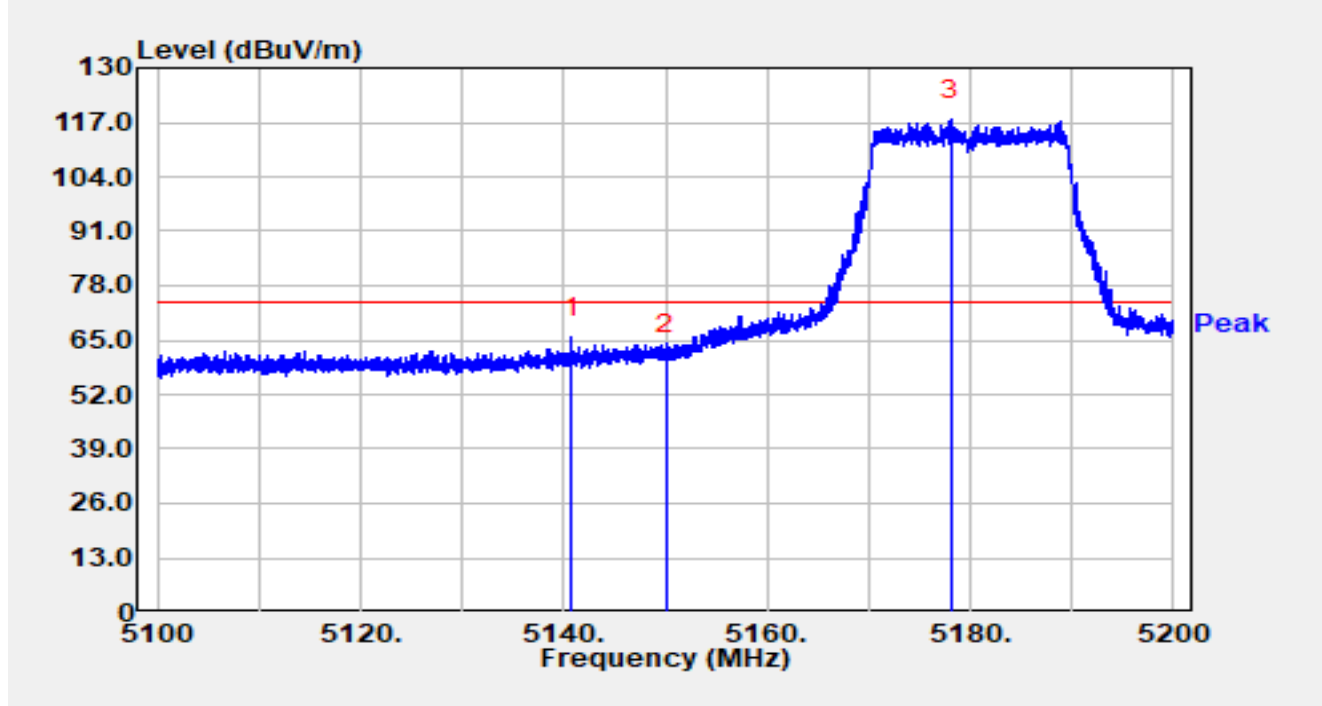


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5140.770	49.61	15.98	65.59	-8.41	74.00	Peak
2		5150.000	45.69	16.00	61.69	-12.31	74.00	Peak
3		5178.050	101.70	15.94	117.64	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

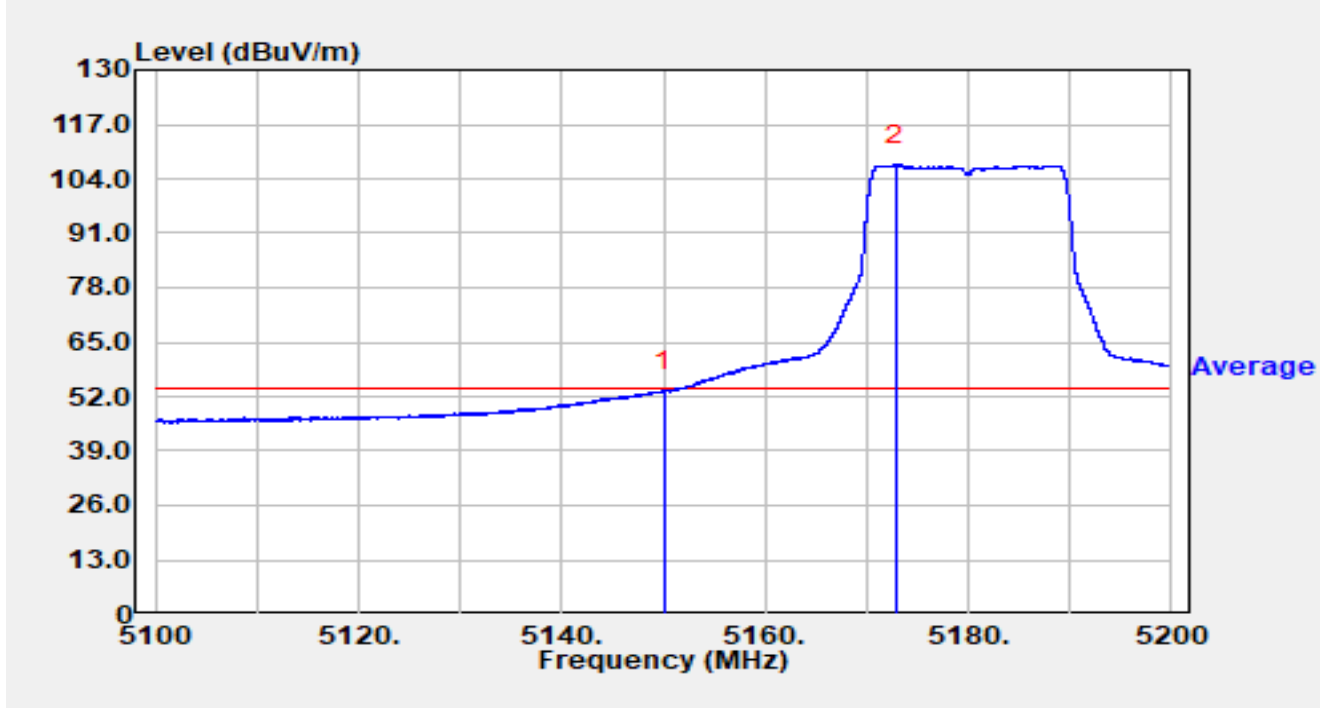


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.32	16.00	53.32	-0.68	54.00	Average
2		5172.870	91.40	15.97	107.37	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

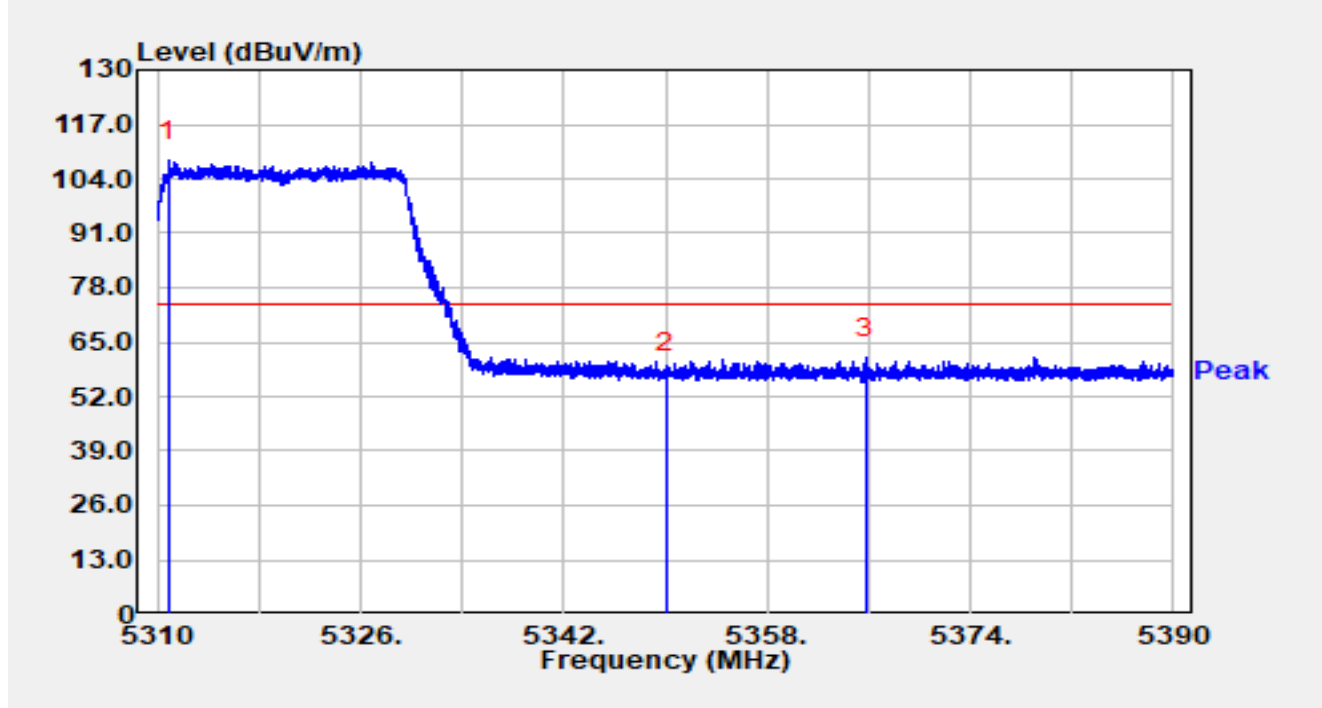


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.904	92.51	15.77	108.28	N/A	N/A	Peak
2		5350.000	41.94	15.68	57.62	-16.38	74.00	Peak
3	*	5365.816	45.69	15.63	61.31	-12.69	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

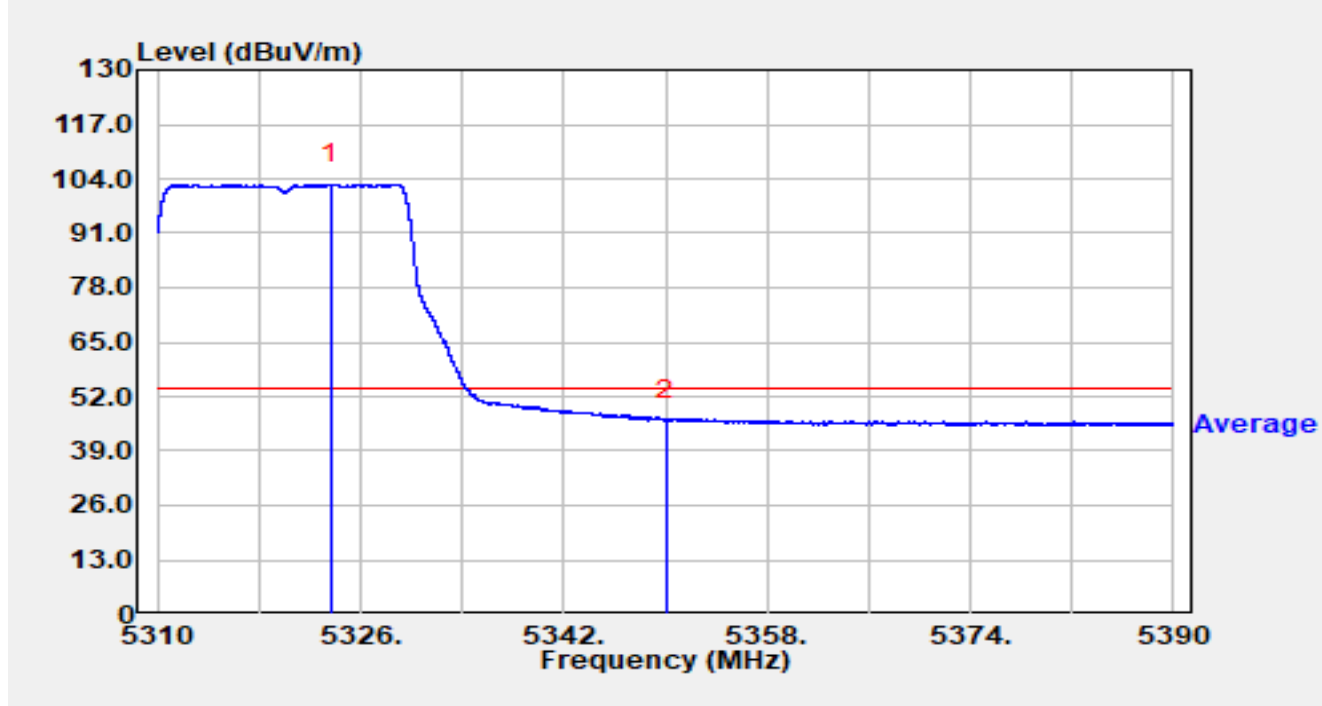


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.608	86.96	15.80	102.76	N/A	N/A	Average
2	*	5350.000	30.73	15.68	46.41	-7.59	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

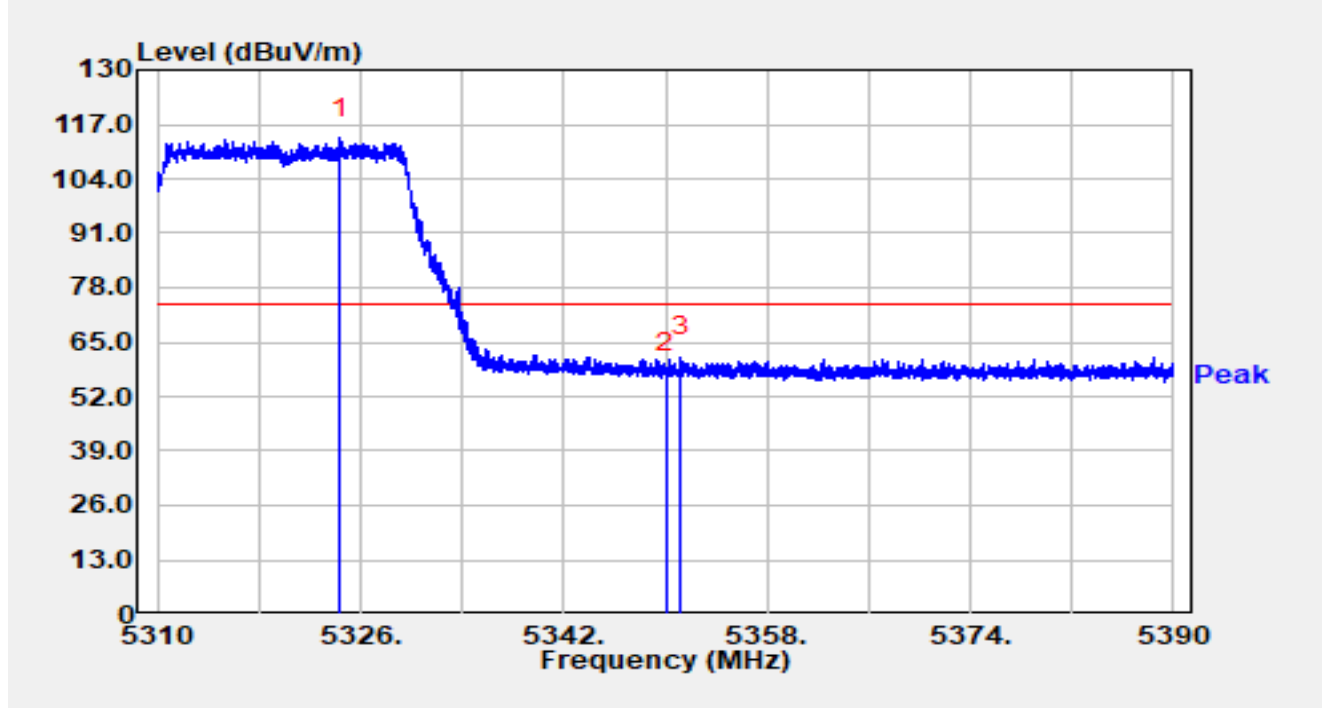


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.424	97.84	15.80	113.64	N/A	N/A	Peak
2		5350.000	42.15	15.68	57.83	-16.17	74.00	Peak
3	*	5351.240	45.82	15.68	61.49	-12.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

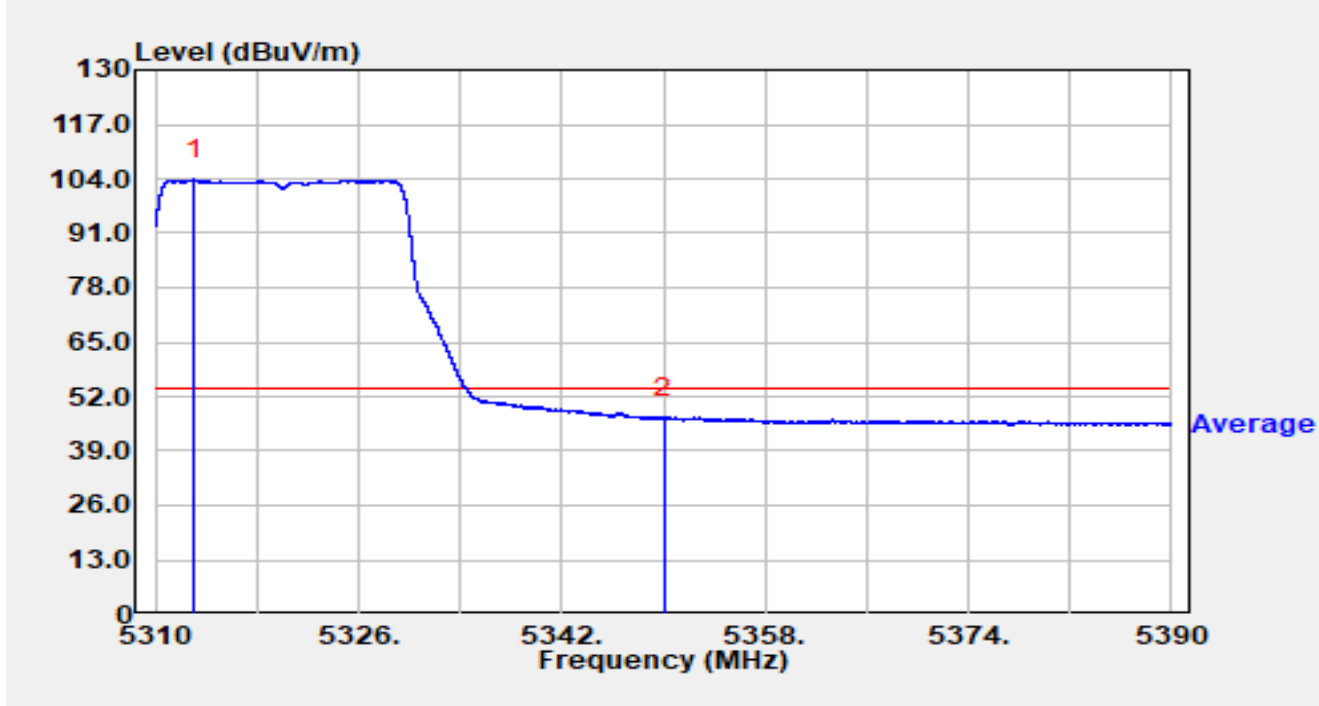


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.088	88.01	15.77	103.78	N/A	N/A	Average
2	*	5350.000	31.16	15.68	46.84	-7.16	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

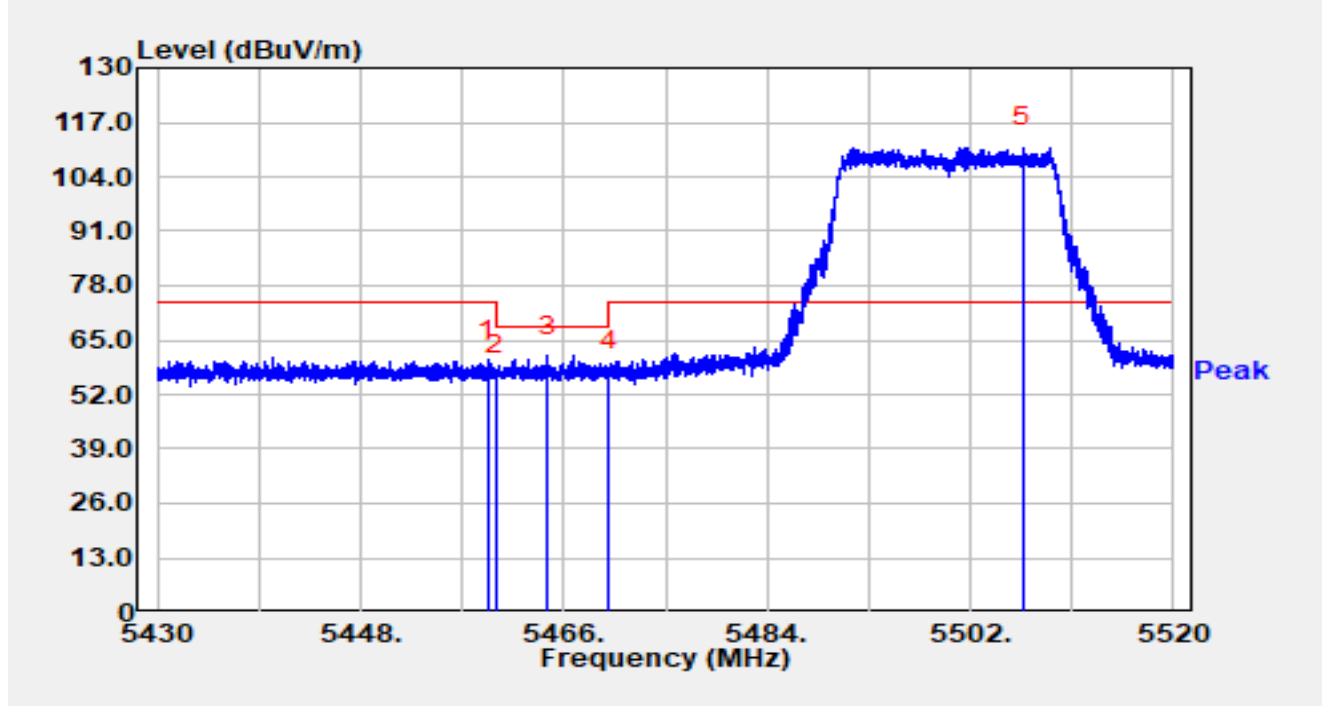


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.304	44.24	16.03	60.26	-13.74	74.00	Peak
2		5459.997	40.67	16.02	56.69	-17.31	74.00	Peak
3	*	5464.533	45.18	16.00	61.19	-7.01	68.20	Peak
4		5470.000	41.80	15.98	57.78	-10.42	68.20	Peak
5		5506.671	94.81	16.23	111.03	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

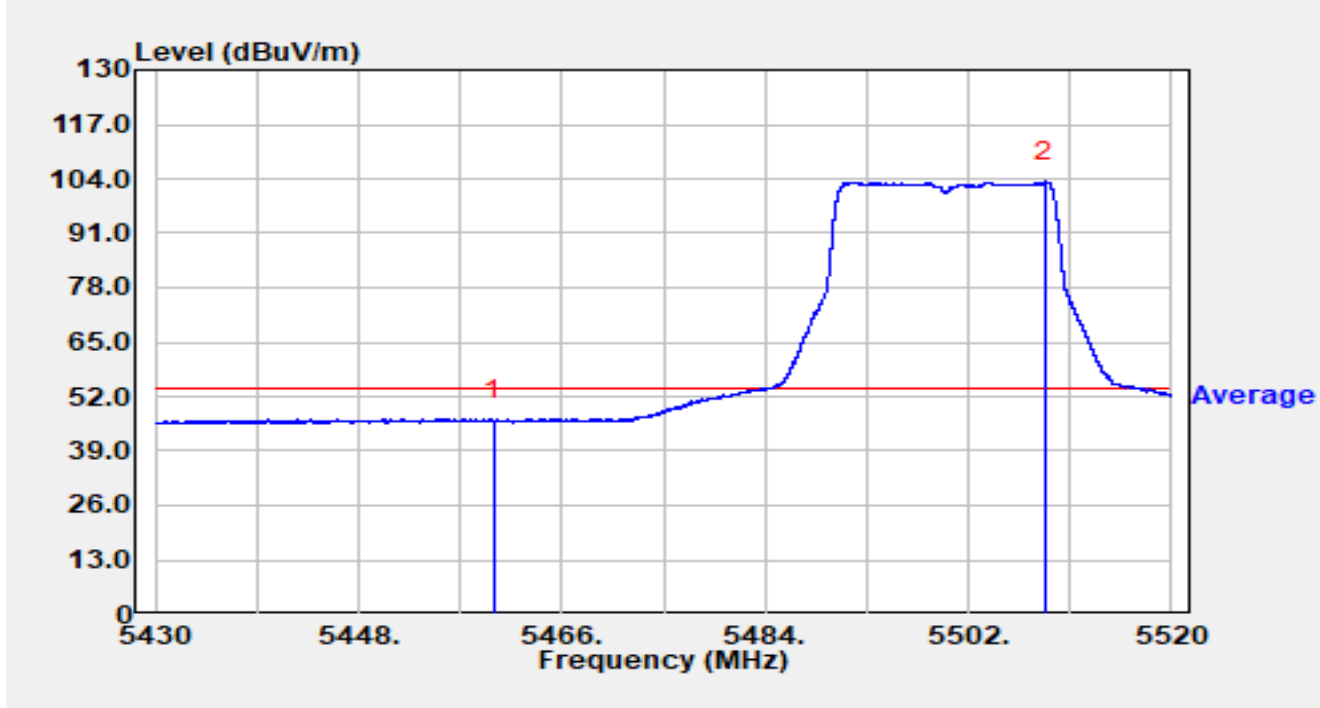


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5459.997	30.23	16.02	46.25	-7.75	54.00	Average
2		5508.804	87.05	16.22	103.27	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

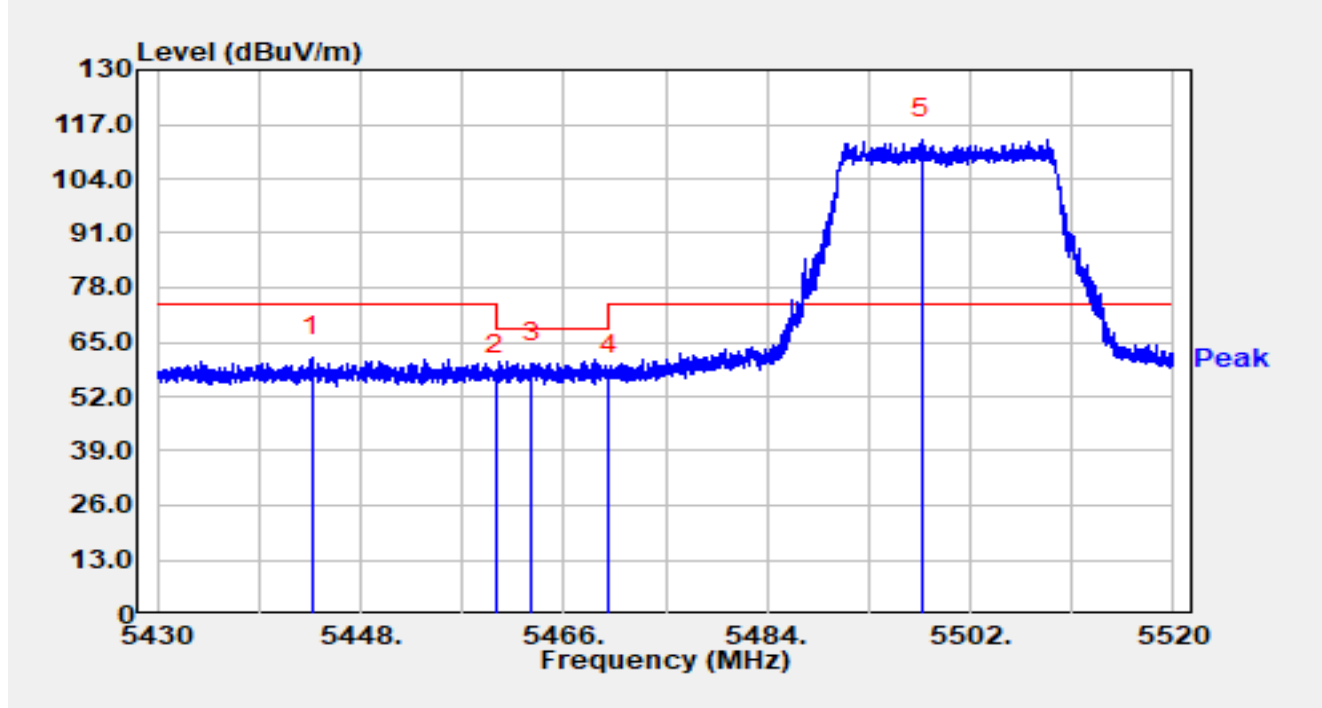


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5443.653	45.52	15.92	61.44	-12.56	74.00	Peak
2		5459.997	41.31	16.02	57.33	-16.67	74.00	Peak
3	*	5463.120	43.87	16.01	59.88	-8.32	68.20	Peak
4		5470.000	41.03	15.98	57.01	-11.19	68.20	Peak
5		5497.662	97.33	16.15	113.48	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

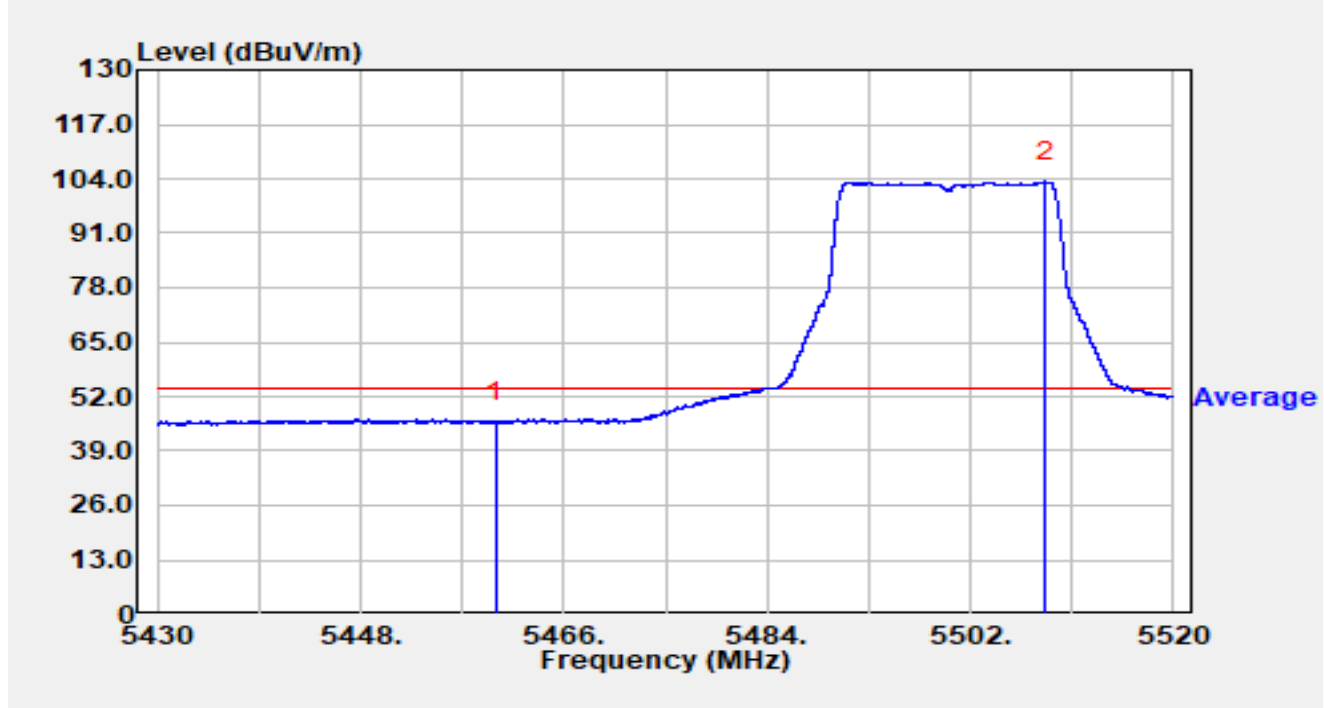


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	29.93	16.02	45.95	-8.05	54.00	Average
2		5508.669	87.07	16.22	103.29	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

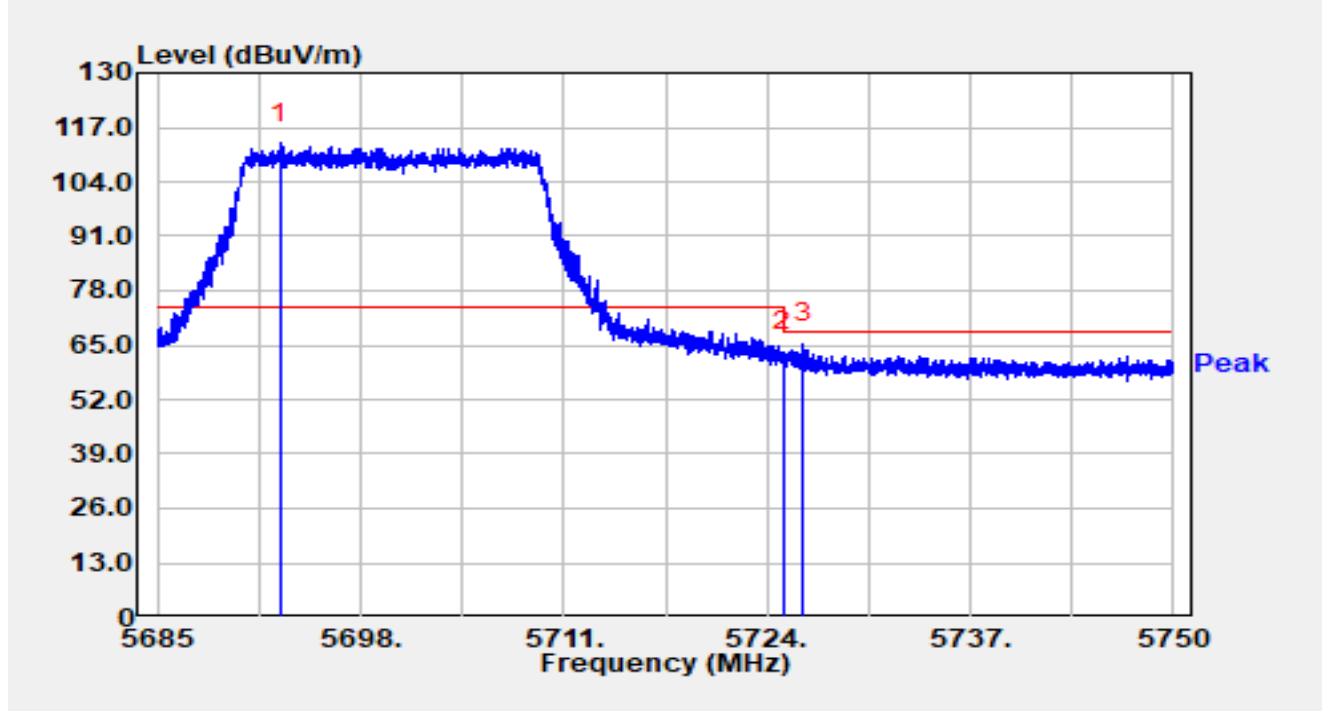


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.839	96.34	16.78	113.11	N/A	N/A	Peak
2		5725.000	46.36	16.92	63.29	-4.91	68.20	Peak
3	*	5726.314	48.37	16.93	65.30	-2.90	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

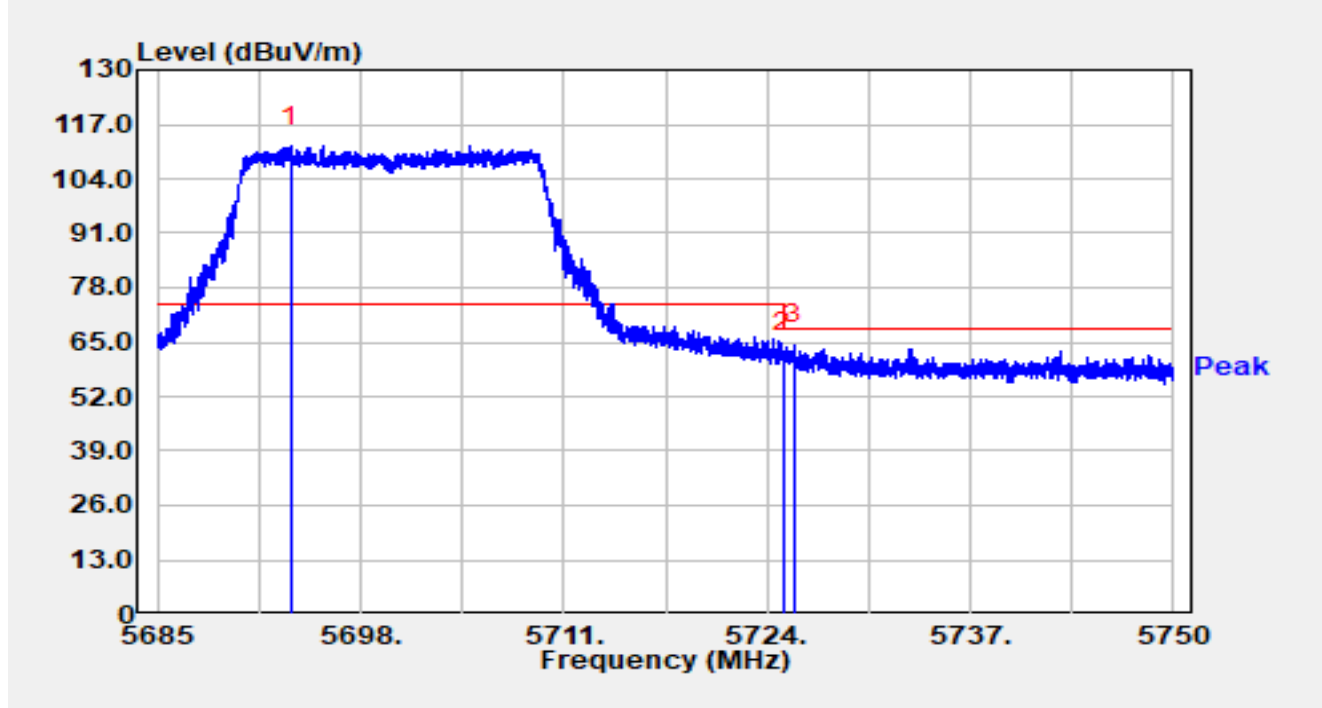


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5693.502	94.93	16.78	111.71	N/A	N/A	Peak
2		5725.000	45.72	16.92	62.64	-5.56	68.20	Peak
3	*	5725.690	47.45	16.93	64.38	-3.82	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

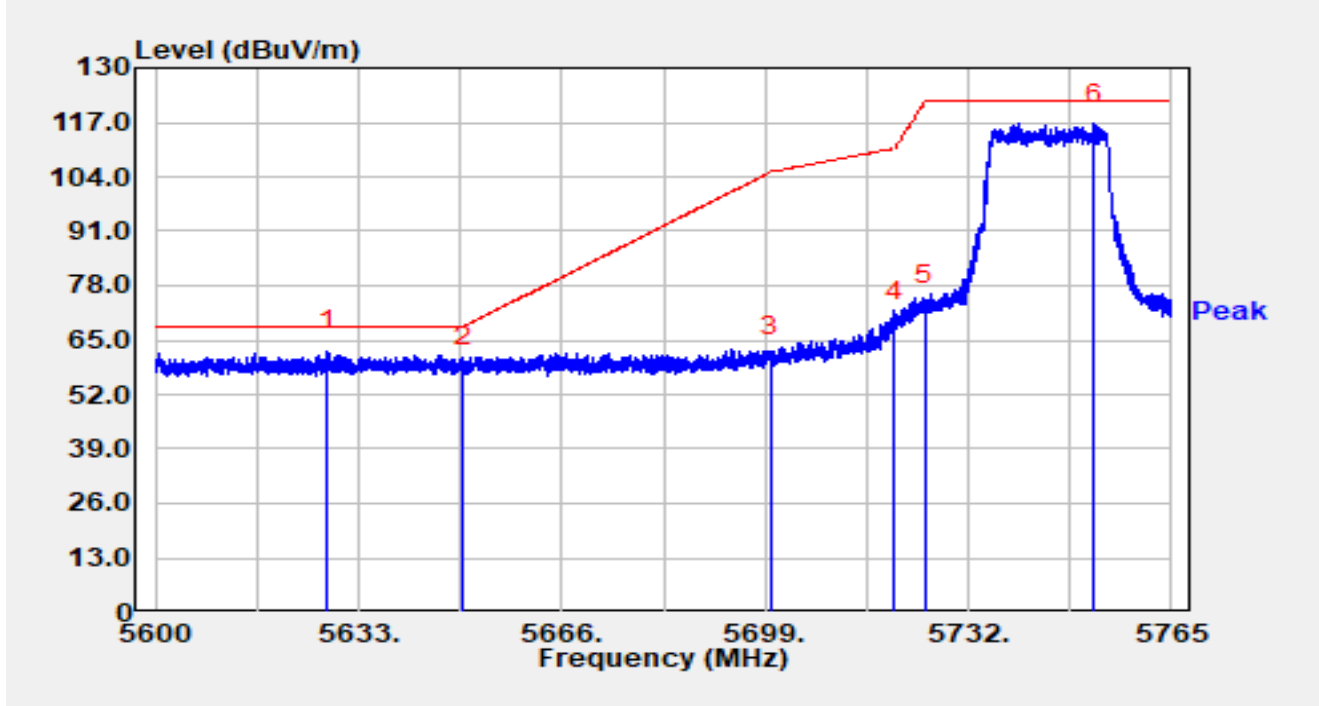


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5628.017	45.78	16.54	62.32	-5.88	68.20	Peak
2		5649.995	42.18	16.65	58.84	-9.36	68.20	Peak
3		5700.000	44.13	16.81	60.94	-44.26	105.20	Peak
4		5720.000	52.34	16.90	69.25	-41.55	110.80	Peak
5		5725.000	56.39	16.92	73.32	-48.88	122.20	Peak
6		5752.493	99.65	17.00	116.66	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

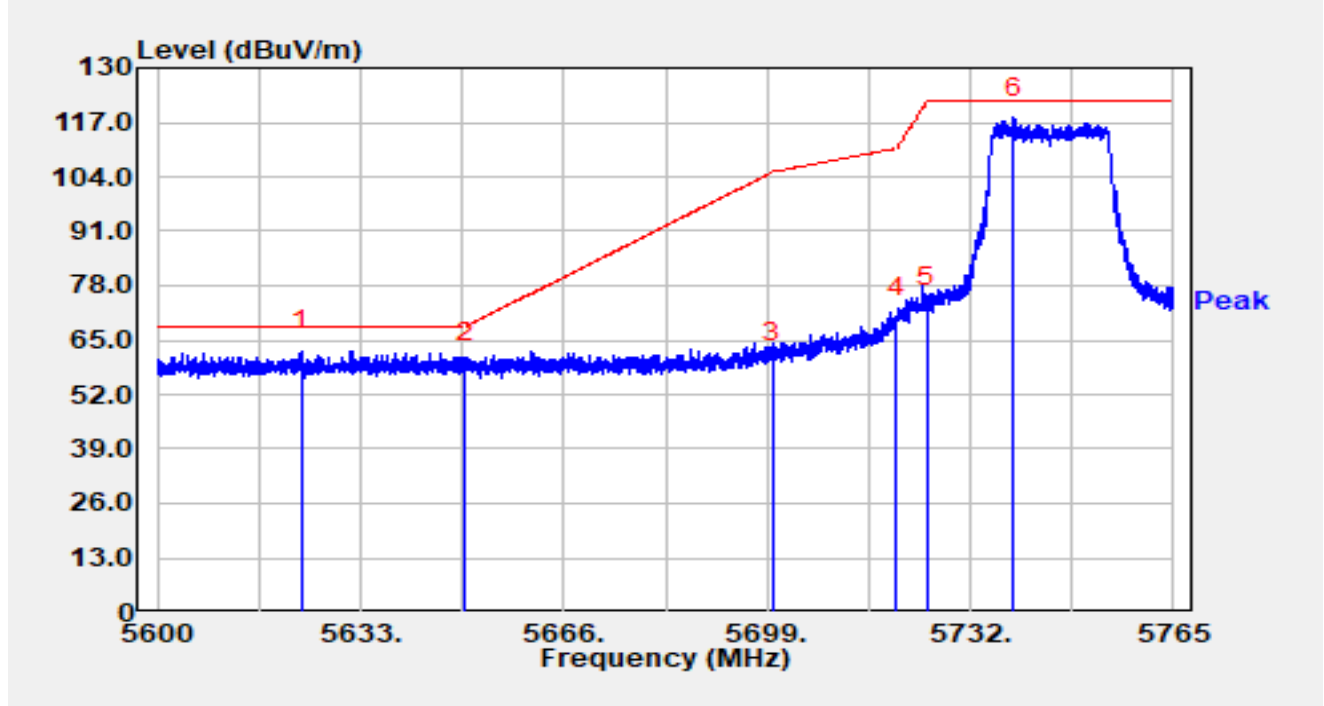


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5623.479	45.90	16.51	62.41	-5.79	68.20	Peak
2		5650.000	42.73	16.65	59.38	-8.82	68.20	Peak
3		5700.000	43.01	16.81	59.82	-45.38	105.20	Peak
4		5720.000	53.28	16.90	70.19	-40.61	110.80	Peak
5		5725.000	55.99	16.92	72.91	-49.29	122.20	Peak
6		5738.914	101.16	16.95	118.12	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

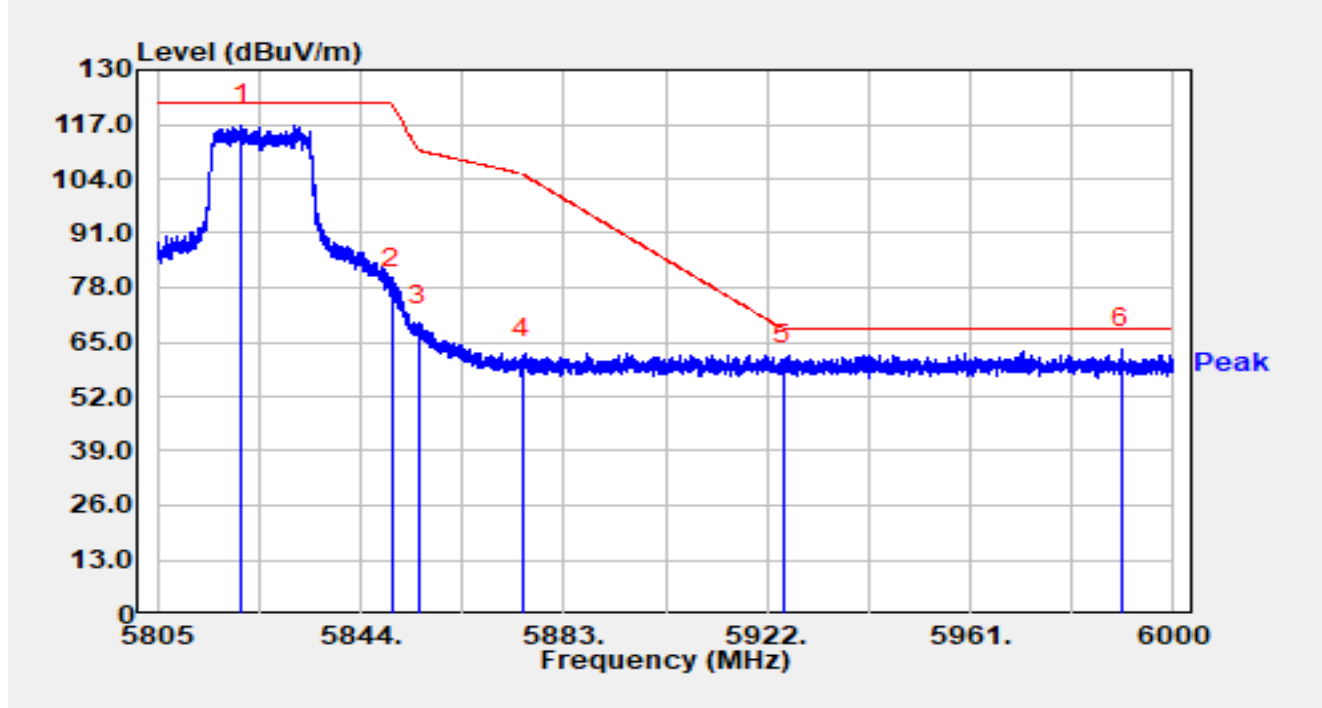


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.107	99.61	17.37	116.98	N/A	N/A	Peak
2		5850.000	60.25	17.31	77.56	-44.64	122.20	Peak
3		5855.000	51.44	17.32	68.77	-42.03	110.80	Peak
4		5875.000	43.59	17.38	60.97	-44.23	105.20	Peak
5		5925.000	42.06	17.36	59.43	-8.77	68.20	Peak
6	*	5989.997	45.87	17.45	63.32	-4.88	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

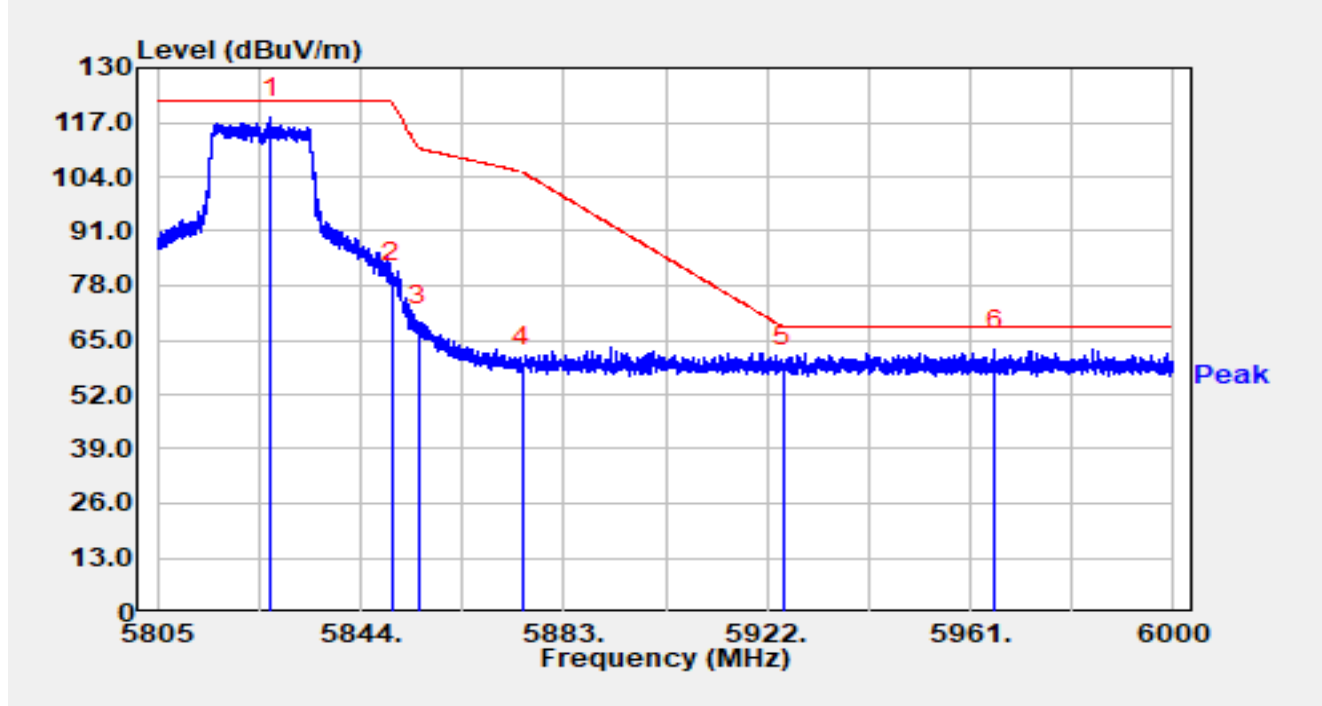


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.782	100.77	17.37	118.14	N/A	N/A	Peak
2		5850.000	61.53	17.31	78.84	-43.36	122.20	Peak
3		5855.000	51.30	17.32	68.63	-42.18	110.80	Peak
4		5875.000	41.18	17.38	58.56	-46.64	105.20	Peak
5		5925.000	41.06	17.36	58.42	-9.78	68.20	Peak
6	*	5965.777	45.10	17.49	62.58	-5.62	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

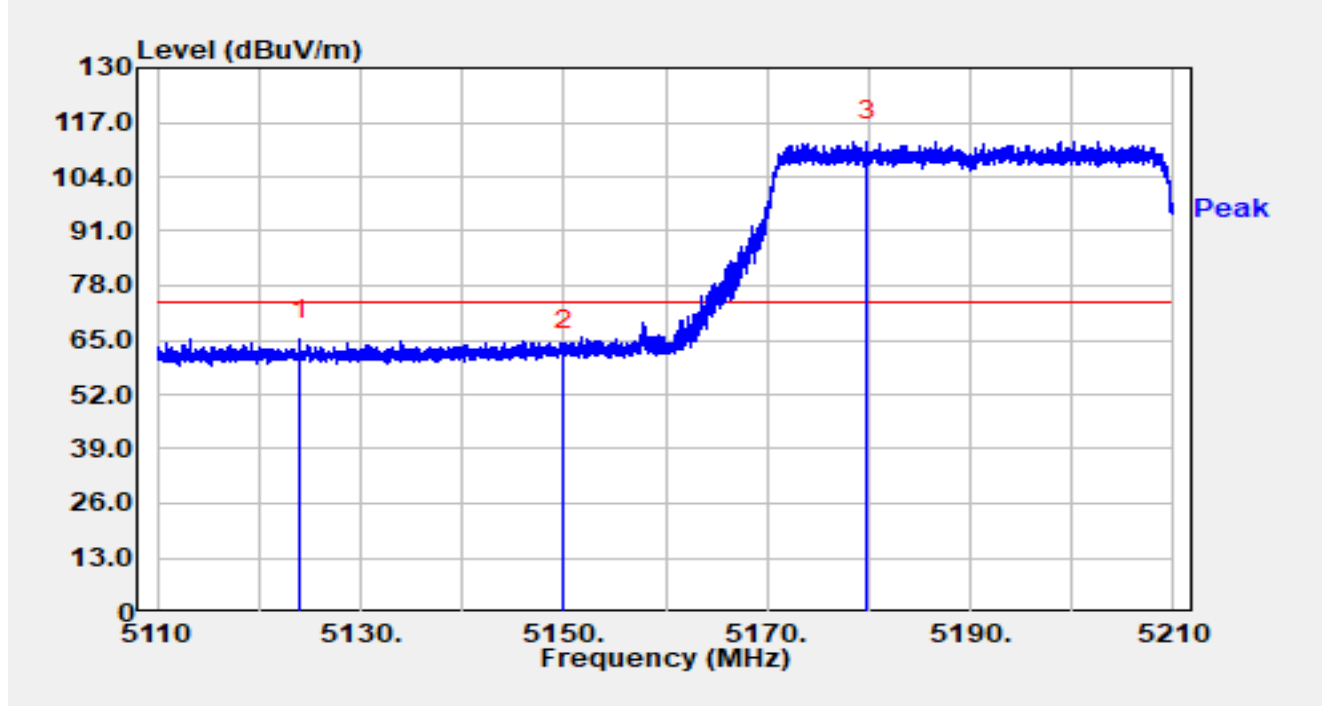


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5124.070	48.96	16.04	65.00	-9.00	74.00	Peak
2		5150.000	46.57	16.00	62.57	-11.43	74.00	Peak
3		5179.780	96.59	15.93	112.52	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

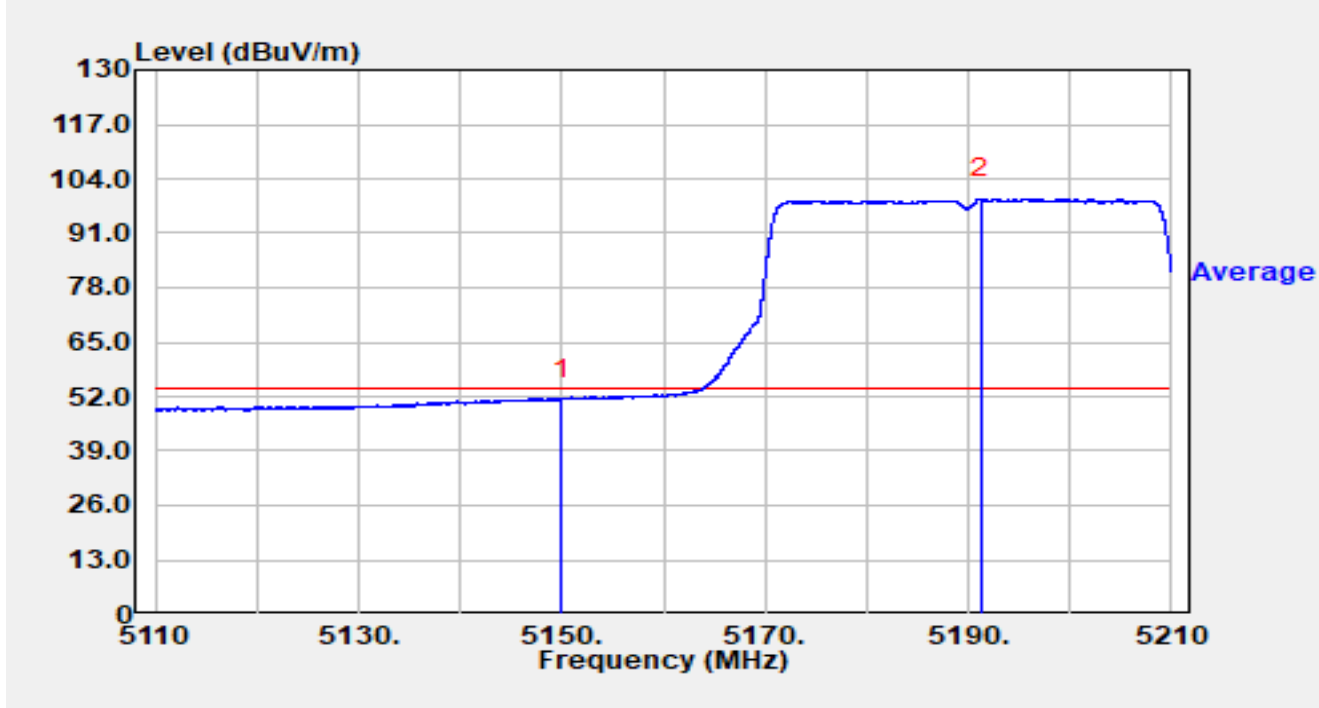


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	35.43	16.00	51.42	-2.58	54.00	Average
2		5191.230	83.28	15.95	99.23	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

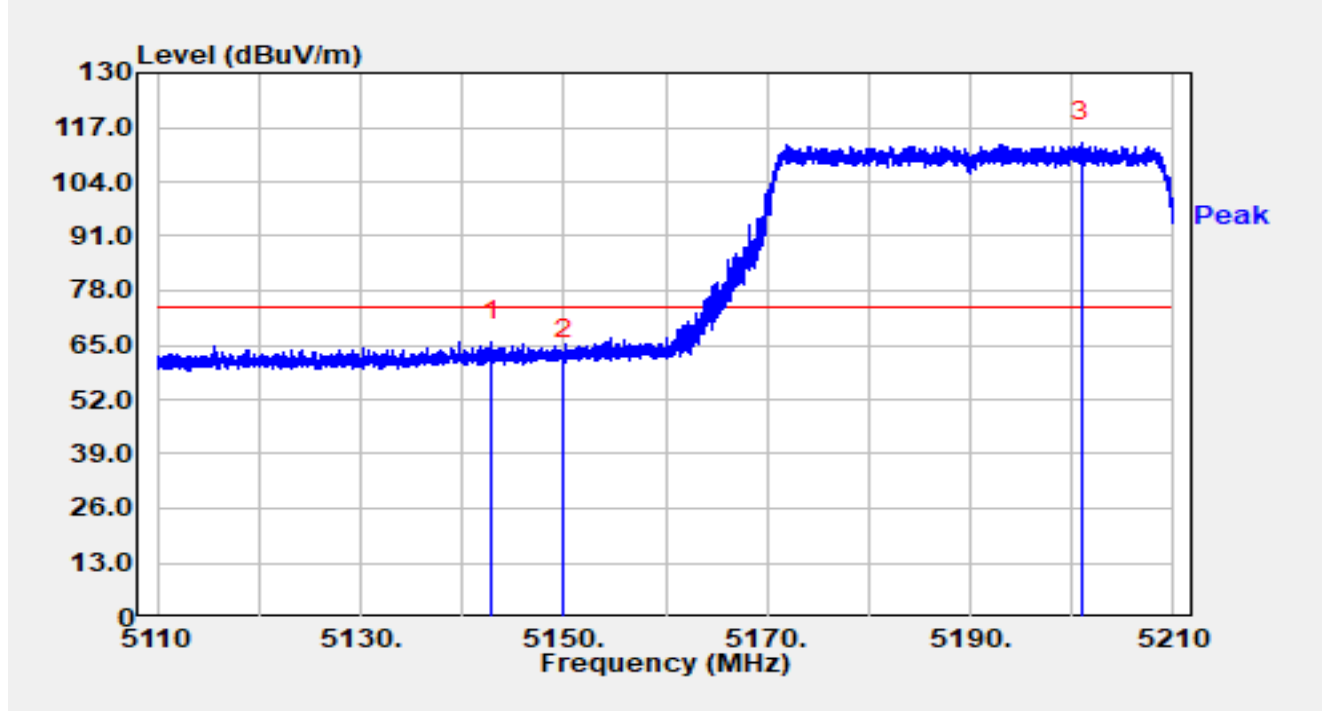


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.850	49.82	15.98	65.80	-8.20	74.00	Peak
2		5150.000	45.41	16.00	61.41	-12.59	74.00	Peak
3		5200.900	97.43	15.96	113.39	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

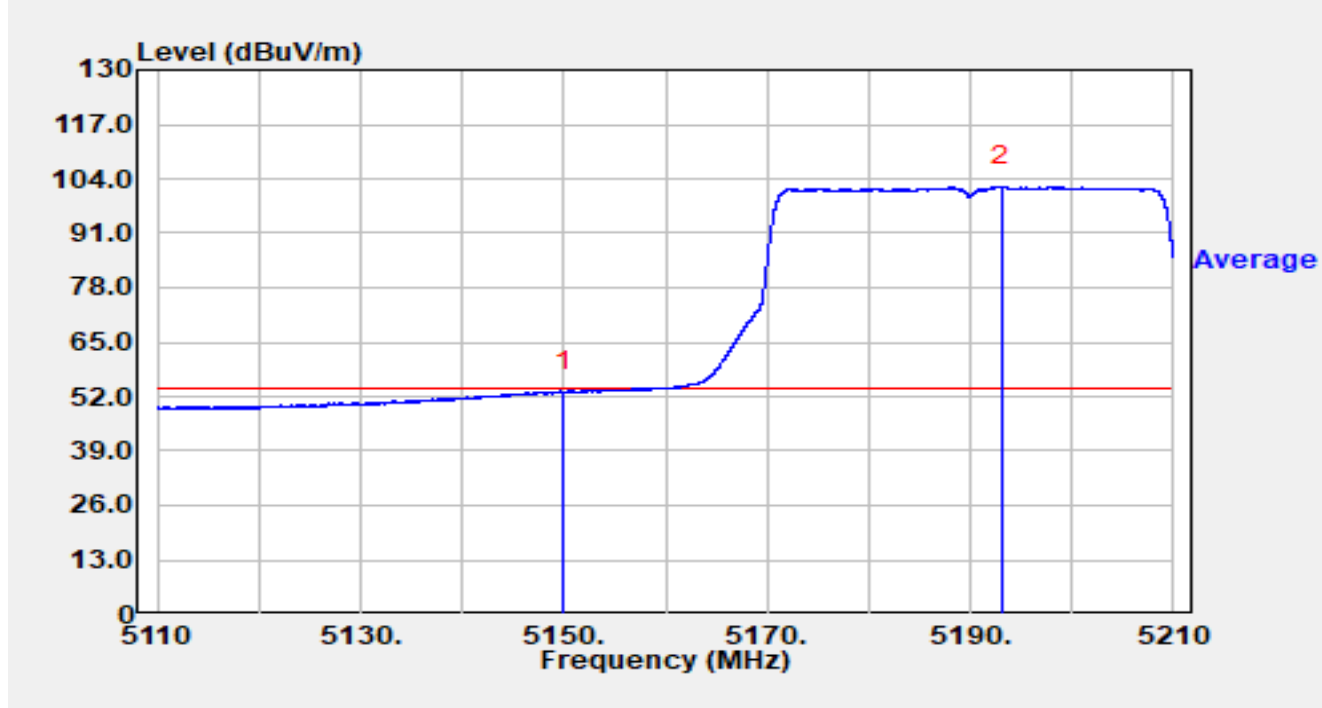


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.10	16.00	53.09	-0.91	54.00	Average
2		5193.100	86.23	15.96	102.18	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

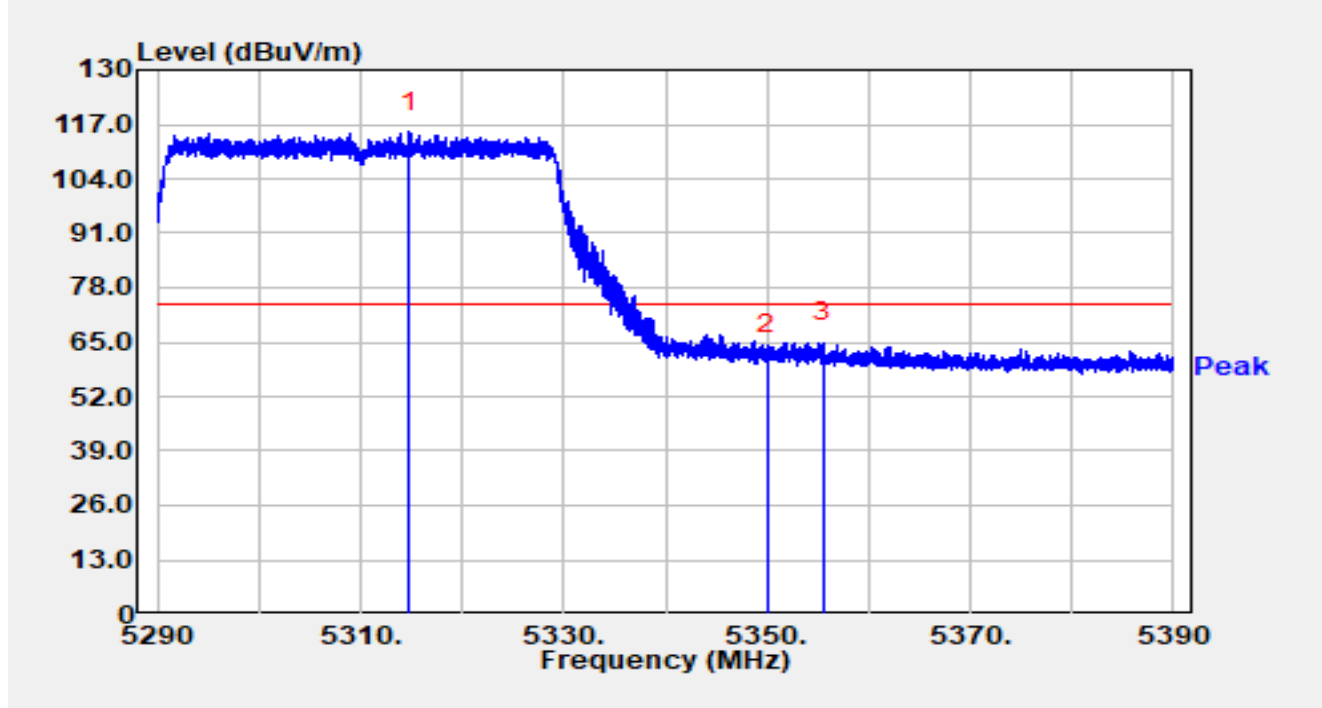


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.850	99.30	15.78	115.07	N/A	N/A	Peak
2		5350.000	46.31	15.68	61.99	-12.01	74.00	Peak
3	*	5355.470	49.15	15.66	64.81	-9.19	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

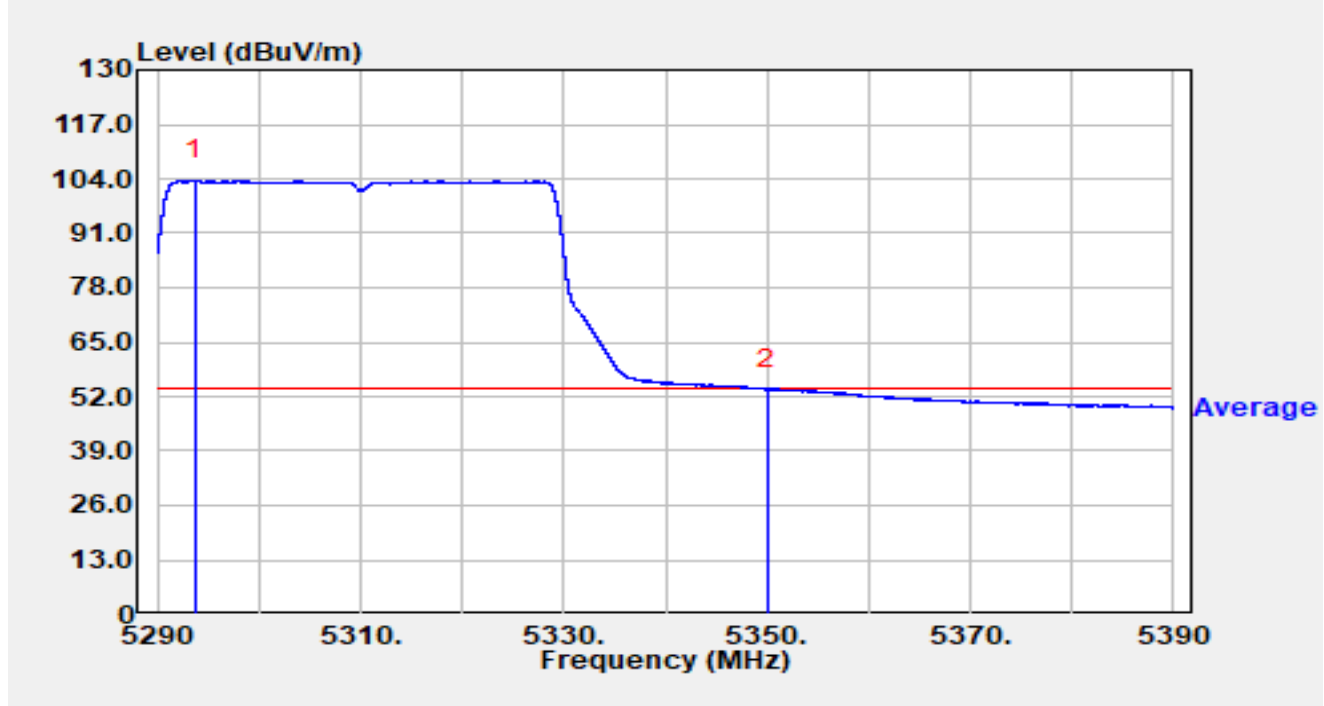


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.690	87.89	15.78	103.67	N/A	N/A	Average
2	*	5350.000	38.13	15.68	53.81	-0.19	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

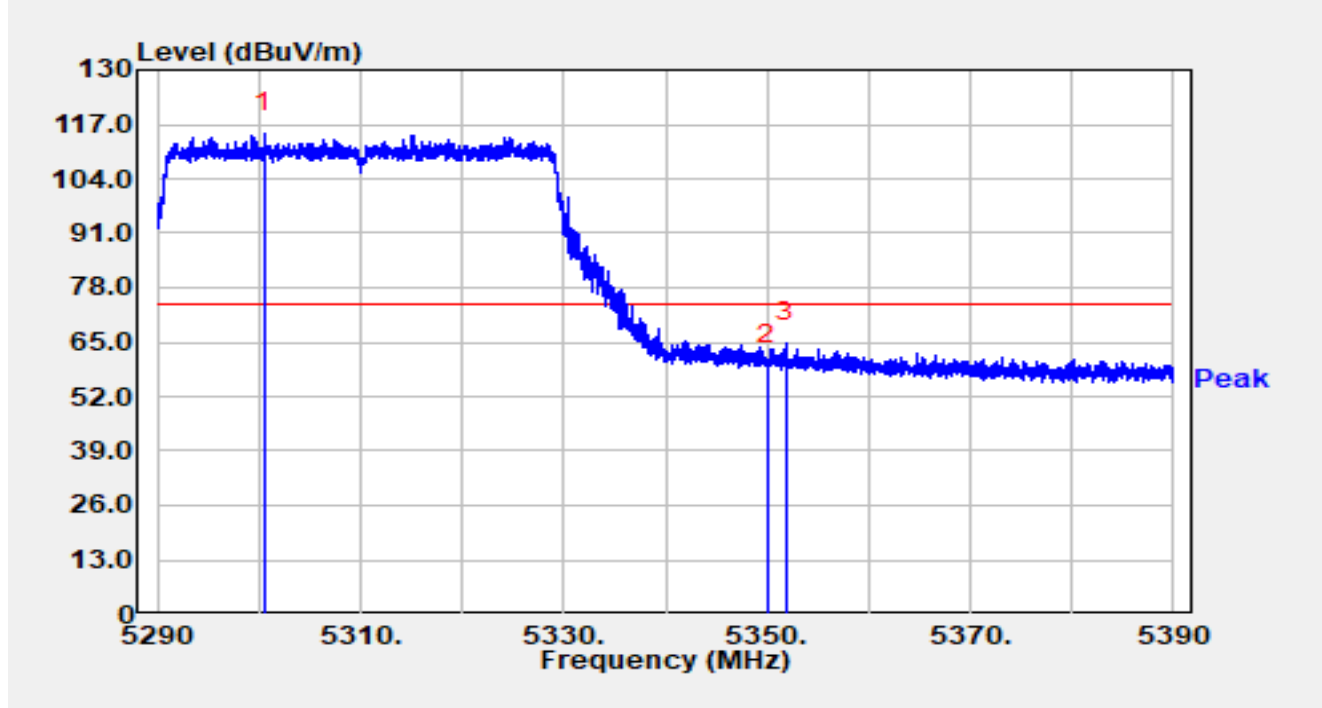


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5300.490	99.10	15.76	114.87	N/A	N/A	Peak
2		5350.000	43.80	15.68	59.48	-14.52	74.00	Peak
3	*	5351.820	49.22	15.68	64.90	-9.10	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

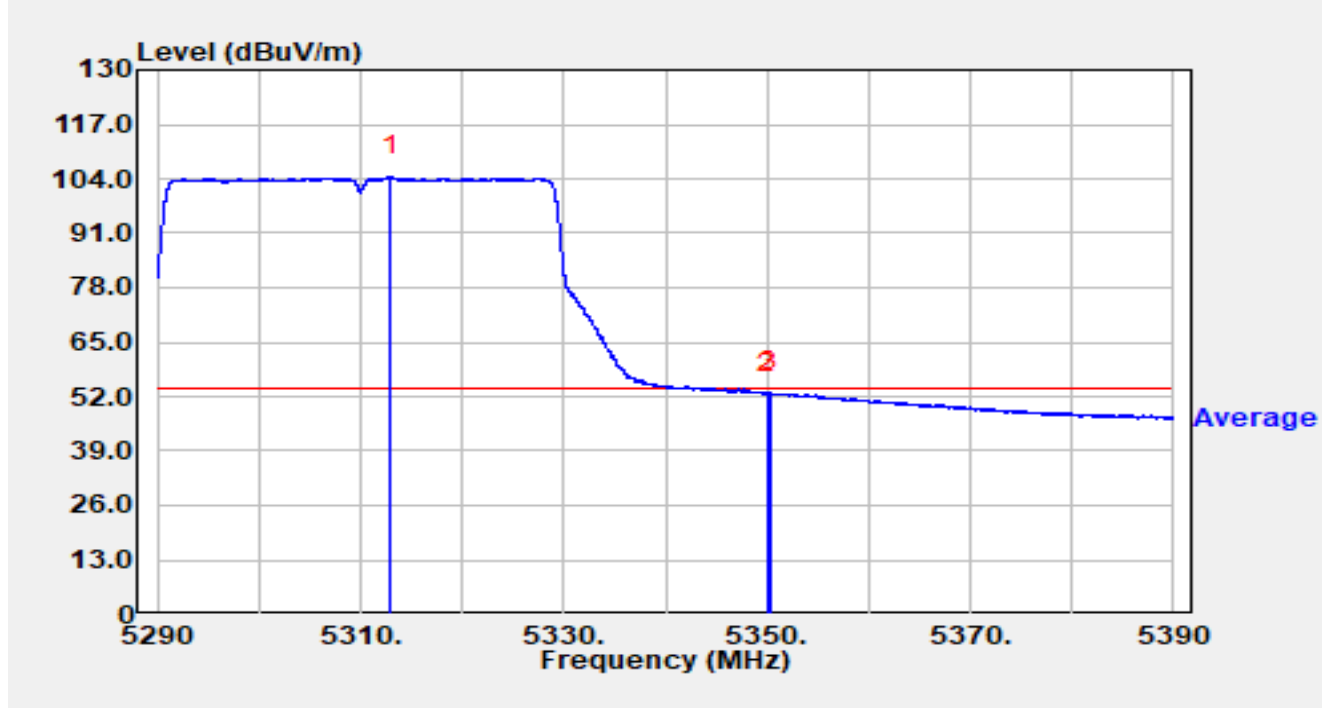


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.950	88.86	15.77	104.63	N/A	N/A	Average
2		5350.000	36.87	15.68	52.55	-1.45	54.00	Average
3	*	5350.250	37.33	15.68	53.01	-0.99	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

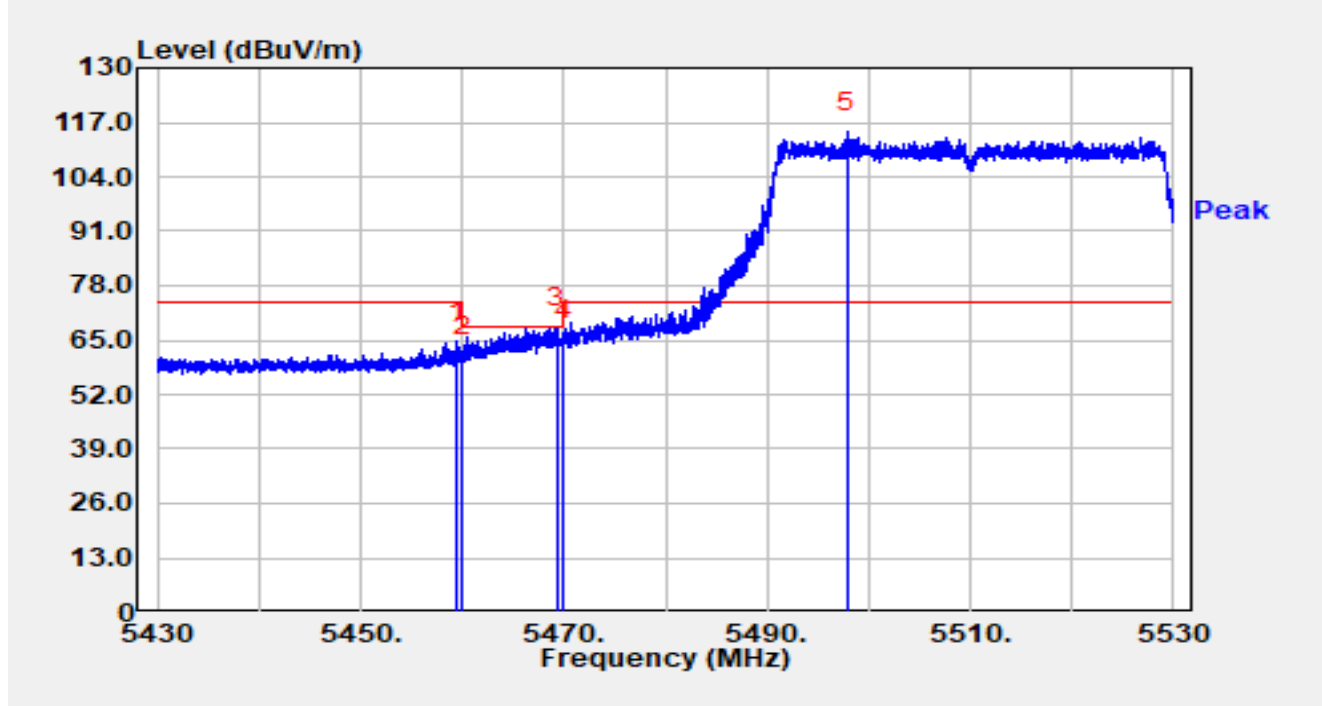


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.530	48.59	16.02	64.62	-9.38	74.00	Peak
2		5460.000	44.81	16.02	60.83	-7.37	68.20	Peak
3	*	5469.260	51.89	15.98	67.88	-0.32	68.20	Peak
4		5470.000	49.20	15.98	65.18	-3.02	68.20	Peak
5		5497.850	98.41	16.16	114.57	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

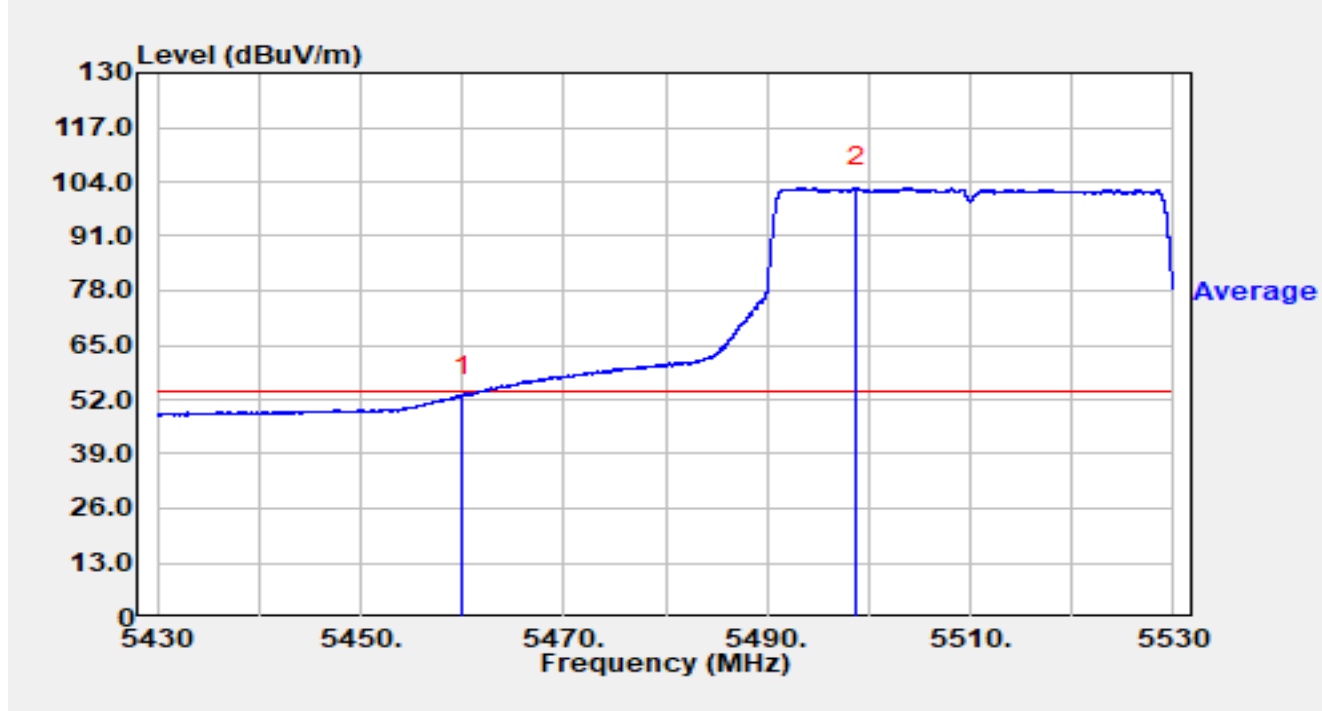


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.000	36.81	16.02	52.83	-1.17	54.00	Average
2		5498.830	86.59	16.17	102.76	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

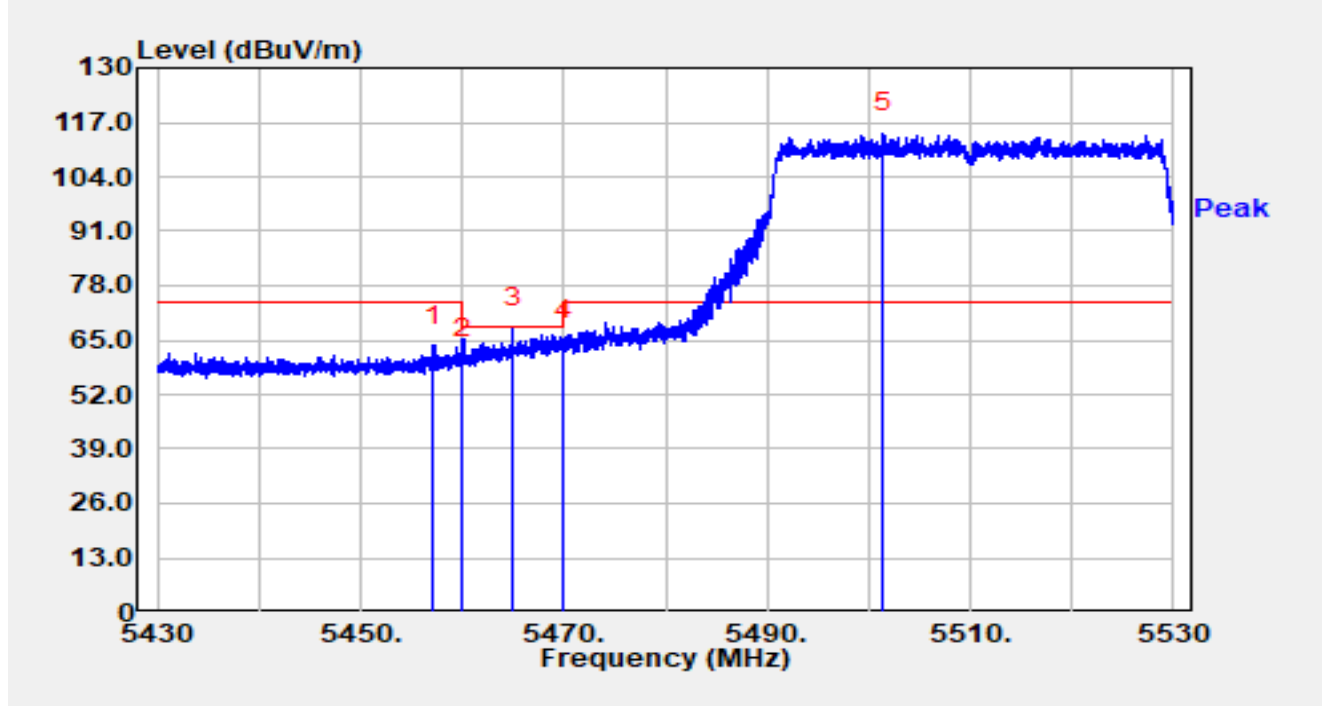


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.200	47.72	16.03	63.75	-10.25	74.00	Peak
2		5460.000	44.34	16.02	60.36	-7.84	68.20	Peak
3	*	5464.980	51.91	16.00	67.91	-0.29	68.20	Peak
4		5470.000	48.89	15.98	64.87	-3.33	68.20	Peak
5		5501.470	98.34	16.19	114.53	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

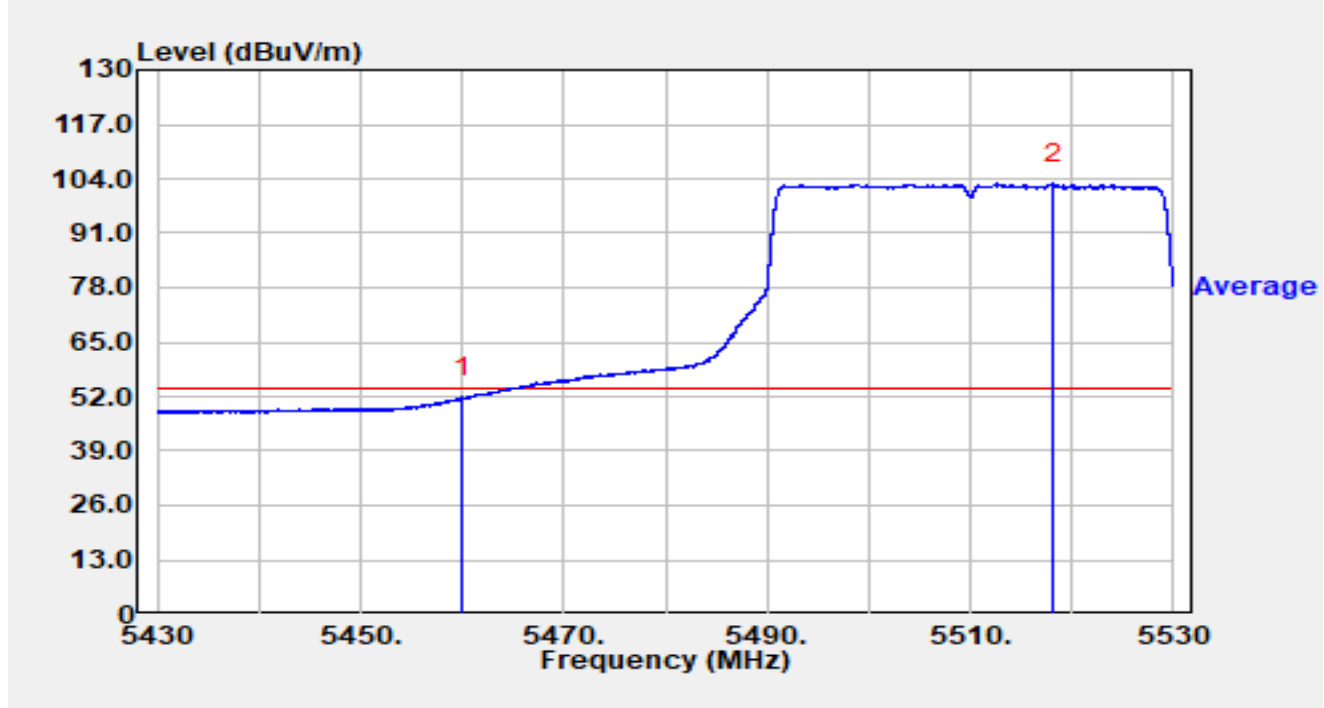


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	35.58	16.02	51.60	-2.40	54.00	Average
2		5518.120	86.67	16.18	102.85	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

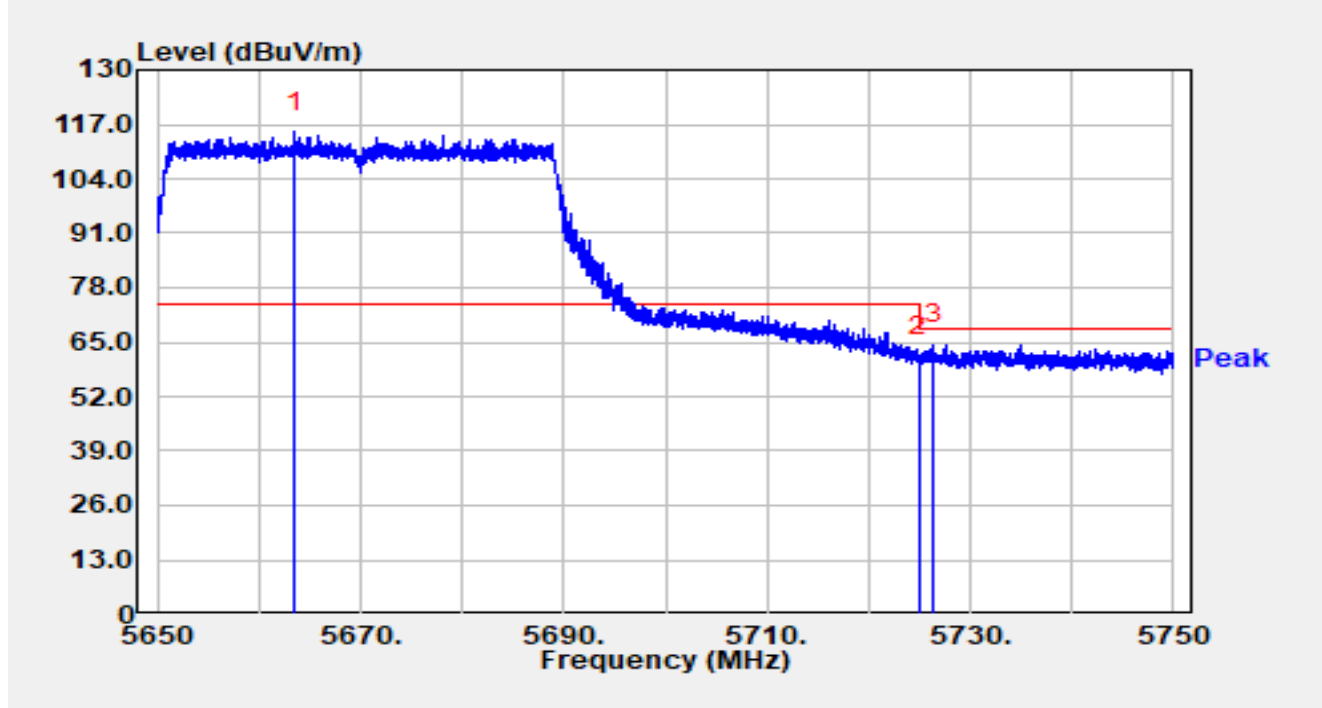


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5663.500	98.47	16.68	115.15	N/A	N/A	Peak
2		5725.000	44.77	16.92	61.70	-6.50	68.20	Peak
3	*	5726.340	47.36	16.93	64.29	-3.91	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

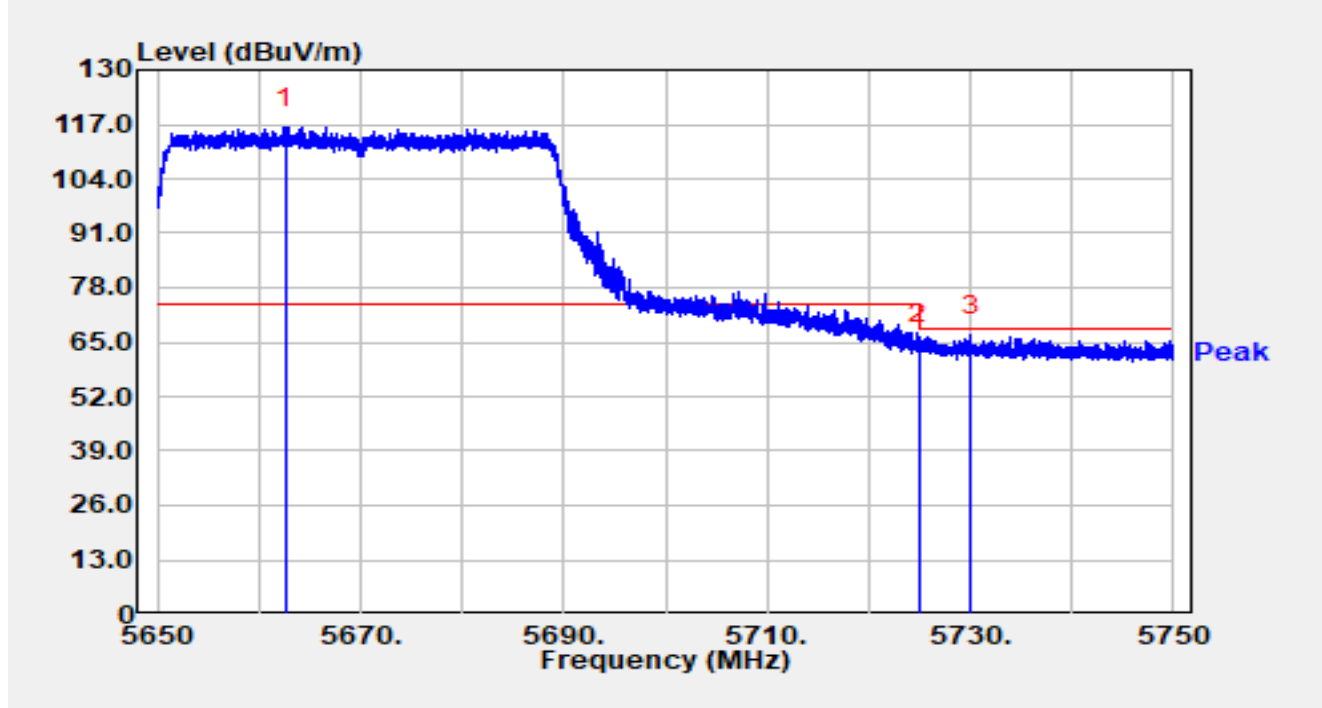


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5662.650	99.58	16.68	116.26	N/A	N/A	Peak
2		5725.000	47.52	16.92	64.44	-3.76	68.20	Peak
3	*	5730.010	49.55	16.94	66.49	-1.71	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

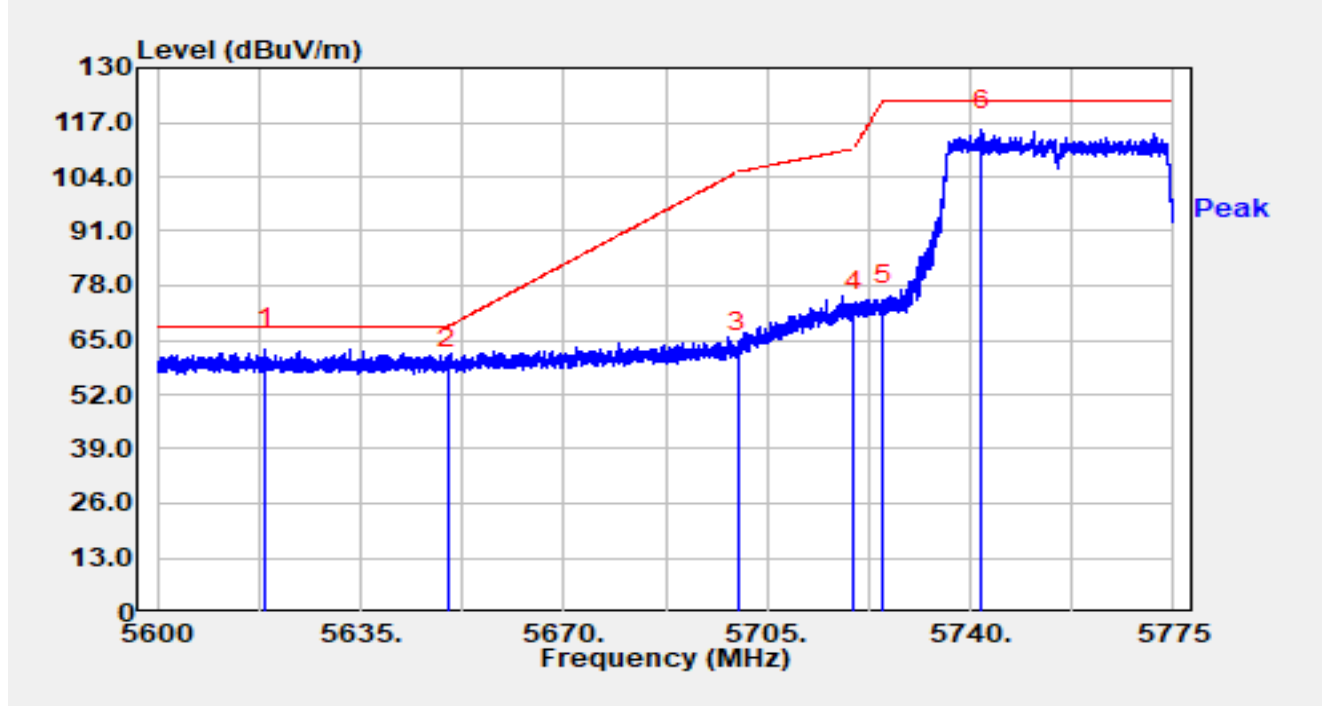


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5618.620	46.35	16.48	62.83	-5.37	68.20	Peak
2		5650.000	41.46	16.65	58.11	-10.09	68.20	Peak
3		5700.000	45.36	16.81	62.17	-43.03	105.20	Peak
4		5720.000	54.84	16.90	71.75	-39.05	110.80	Peak
5		5725.000	56.65	16.92	73.57	-48.63	122.20	Peak
6		5742.030	98.10	16.96	115.05	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

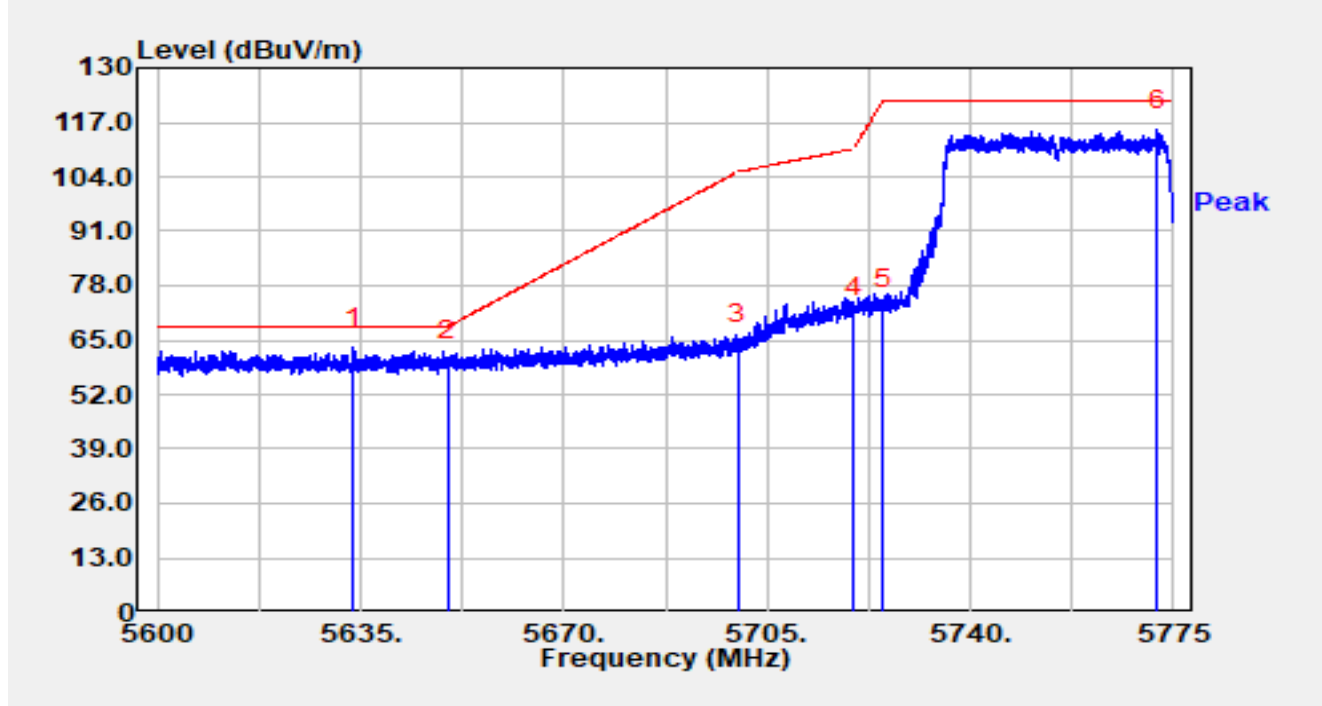


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5633.845	46.53	16.58	63.11	-5.09	68.20	Peak
2		5650.000	43.23	16.65	59.89	-8.31	68.20	Peak
3		5700.000	47.11	16.81	63.92	-41.28	105.20	Peak
4		5720.000	53.49	16.90	70.39	-40.41	110.80	Peak
5		5725.000	55.55	16.92	72.48	-49.72	122.20	Peak
6		5772.270	98.04	17.13	115.18	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

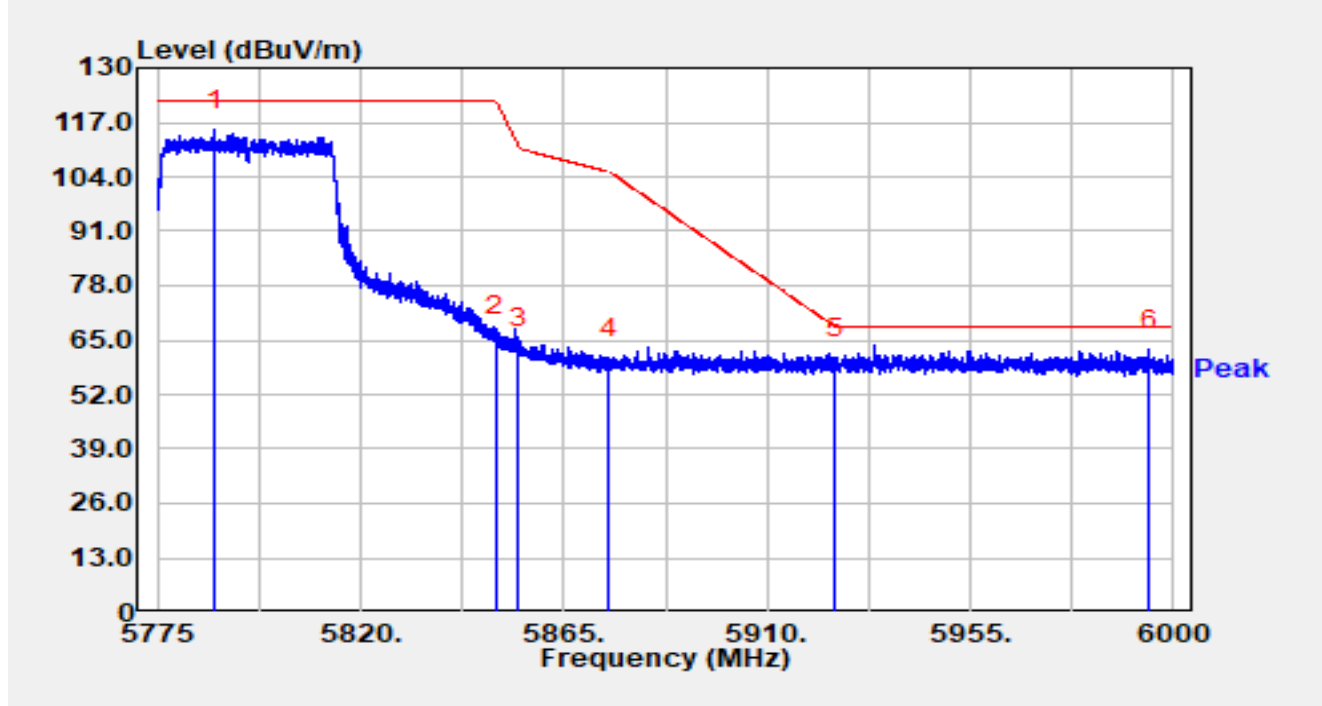


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5787.667	97.92	17.24	115.16	N/A	N/A	Peak
2		5849.993	48.67	17.31	65.98	-56.22	122.20	Peak
3		5855.000	45.93	17.32	63.26	-47.54	110.80	Peak
4		5875.000	43.29	17.38	60.67	-44.53	105.20	Peak
5		5925.000	43.00	17.36	60.36	-7.84	68.20	Peak
6	*	5994.578	45.32	17.38	62.71	-5.49	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

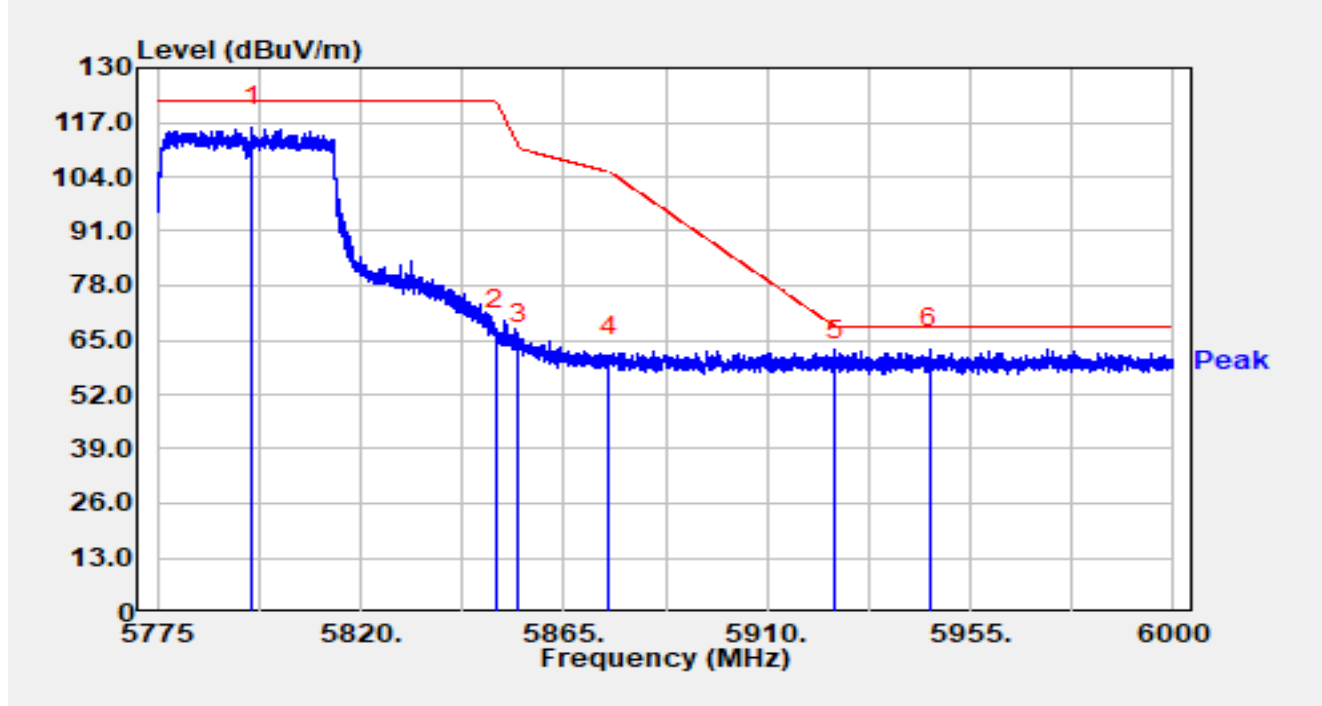


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5796.083	98.64	17.29	115.93	N/A	N/A	Peak
2		5849.993	50.07	17.31	67.38	-54.82	122.20	Peak
3		5855.000	46.72	17.32	64.04	-46.76	110.80	Peak
4		5875.000	43.49	17.38	60.87	-44.33	105.20	Peak
5		5925.000	42.58	17.36	59.94	-8.26	68.20	Peak
6	*	5946.067	45.50	17.44	62.94	-5.26	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

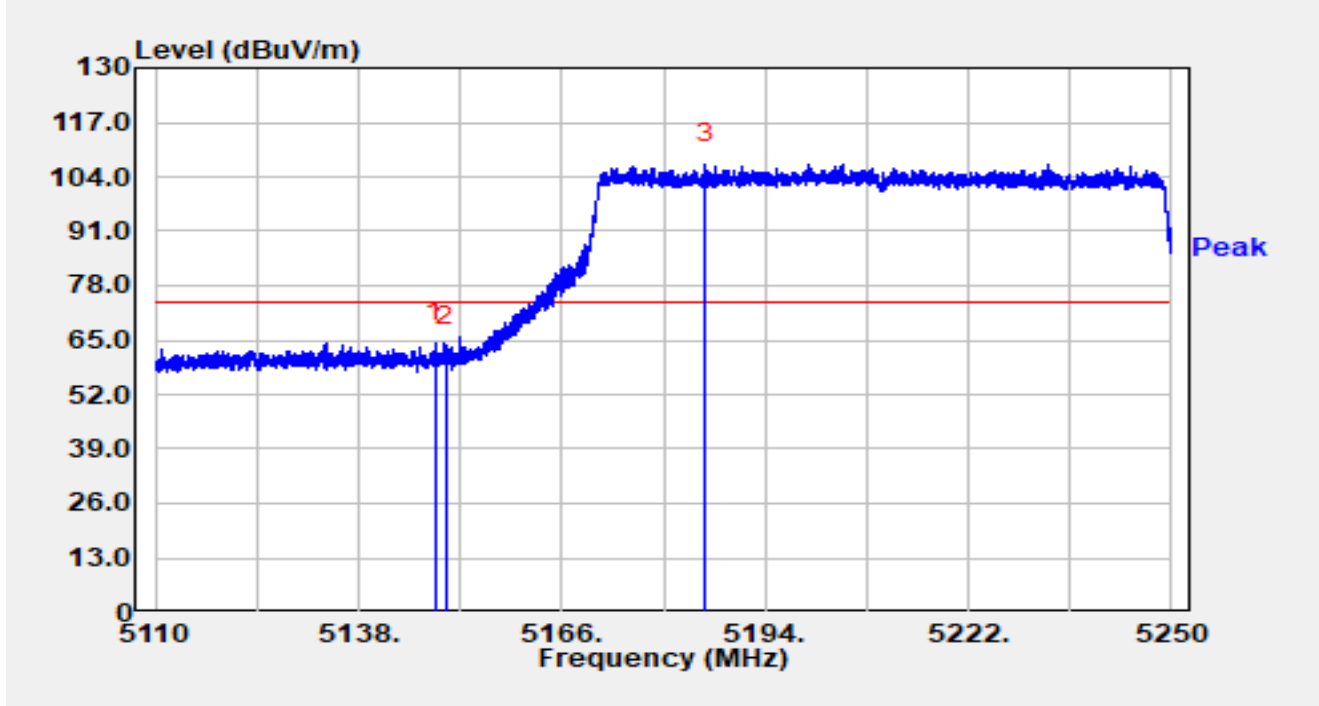


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.528	48.28	16.00	64.27	-9.73	74.00	Peak
2		5150.000	47.53	16.00	63.53	-10.47	74.00	Peak
3		5185.698	91.12	15.94	107.06	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

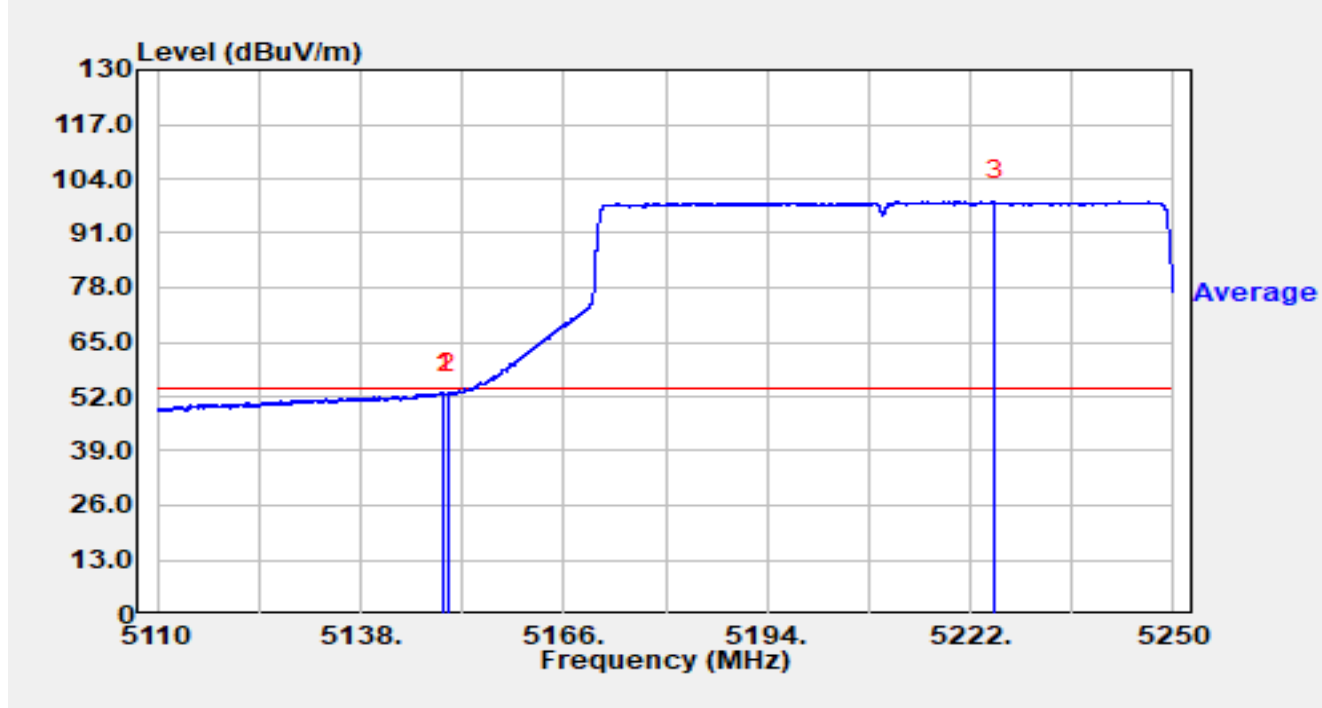


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.424	36.98	16.00	52.98	-1.02	54.00	Average
2		5149.998	36.77	16.00	52.77	-1.23	54.00	Average
3		5225.304	82.76	15.89	98.66	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

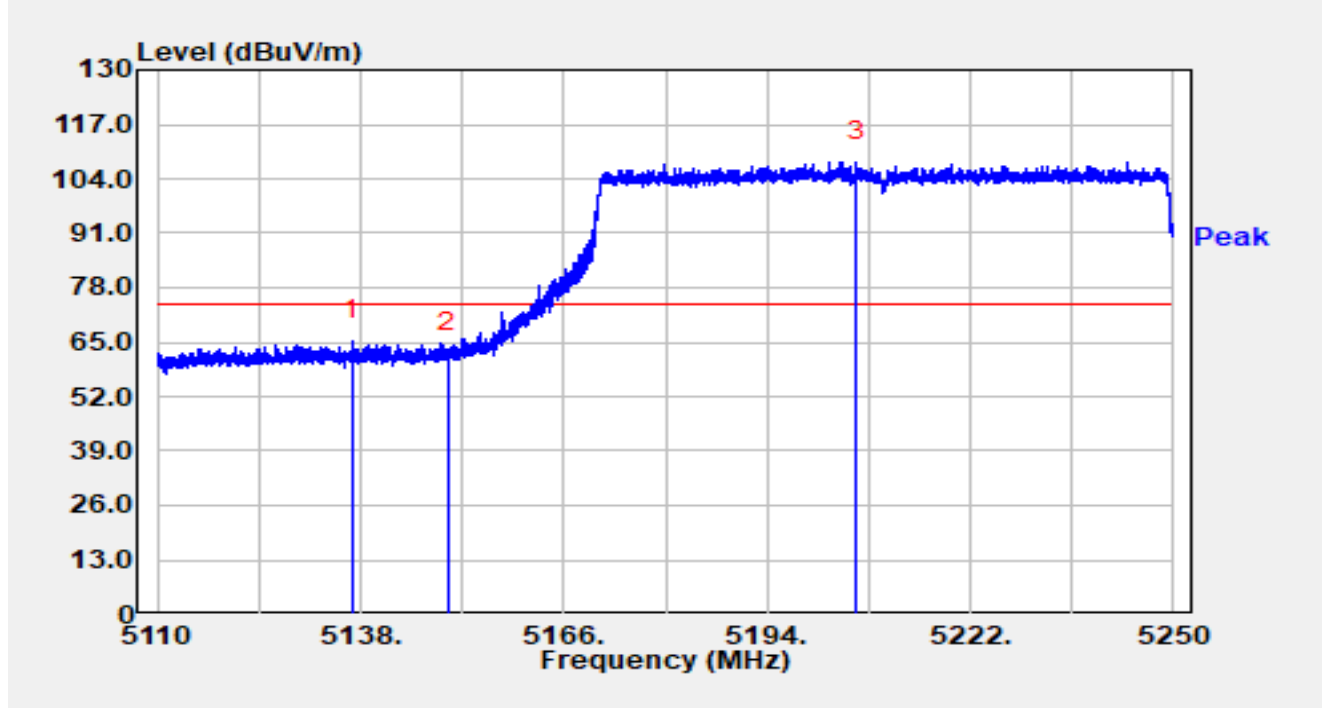


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5136.852	49.29	15.97	65.26	-8.74	74.00	Peak
2		5150.000	46.31	16.00	62.30	-11.70	74.00	Peak
3		5206.236	92.10	15.93	108.02	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

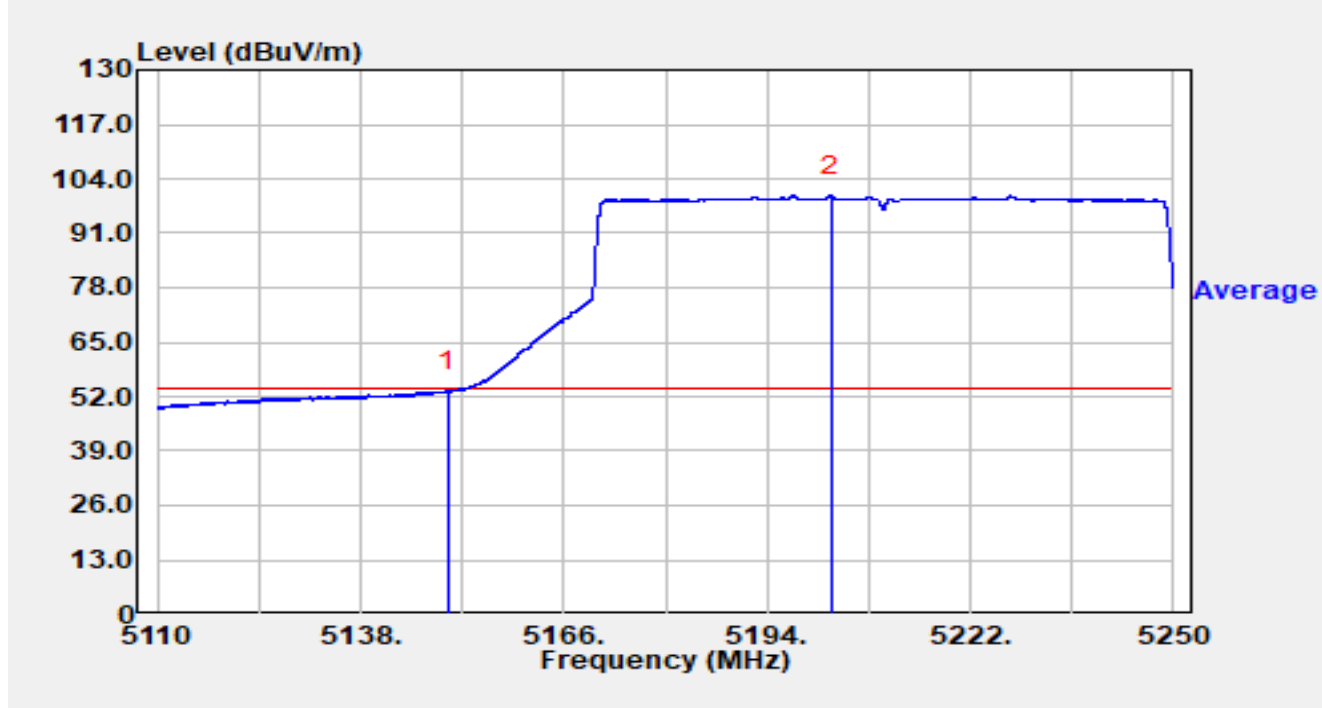


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.09	16.00	53.09	-0.91	54.00	Average
2		5202.848	84.09	15.95	100.04	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

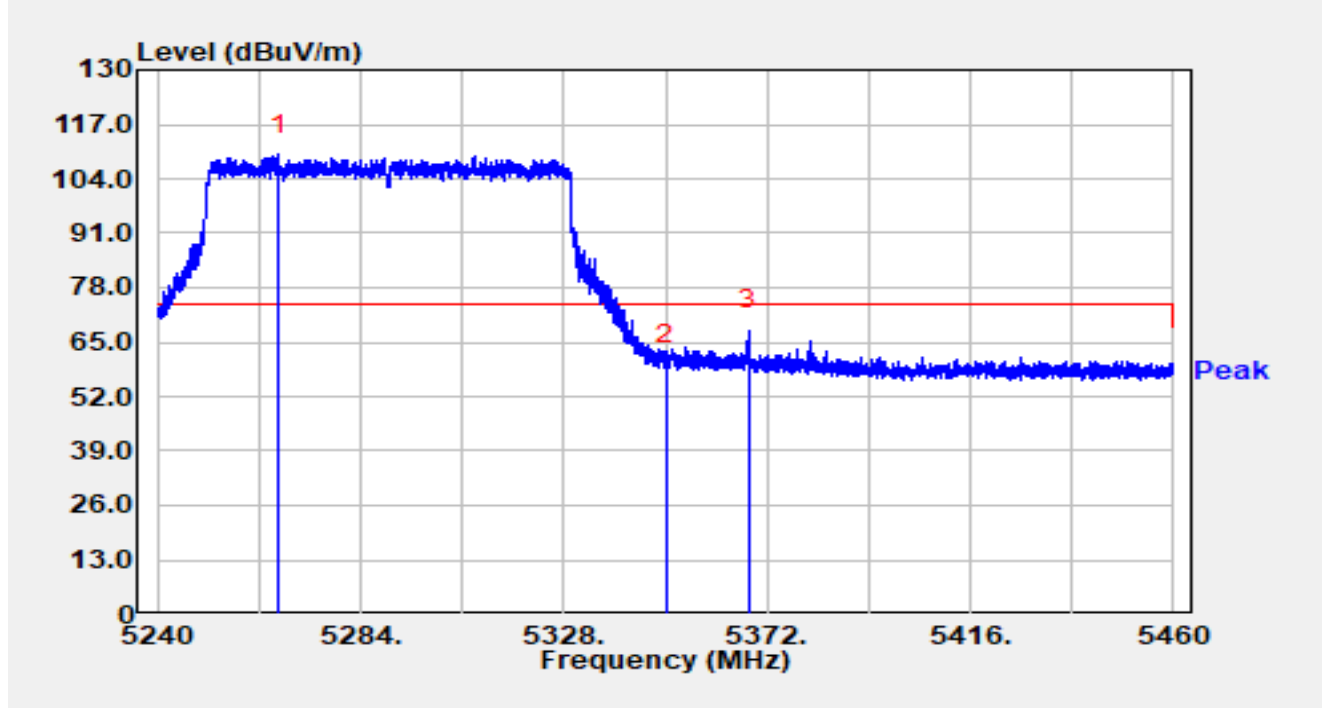


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5266.268	93.89	15.89	109.77	N/A	N/A	Peak
2		5350.000	43.96	15.68	59.64	-14.36	74.00	Peak
3	*	5367.952	52.21	15.62	67.82	-6.18	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

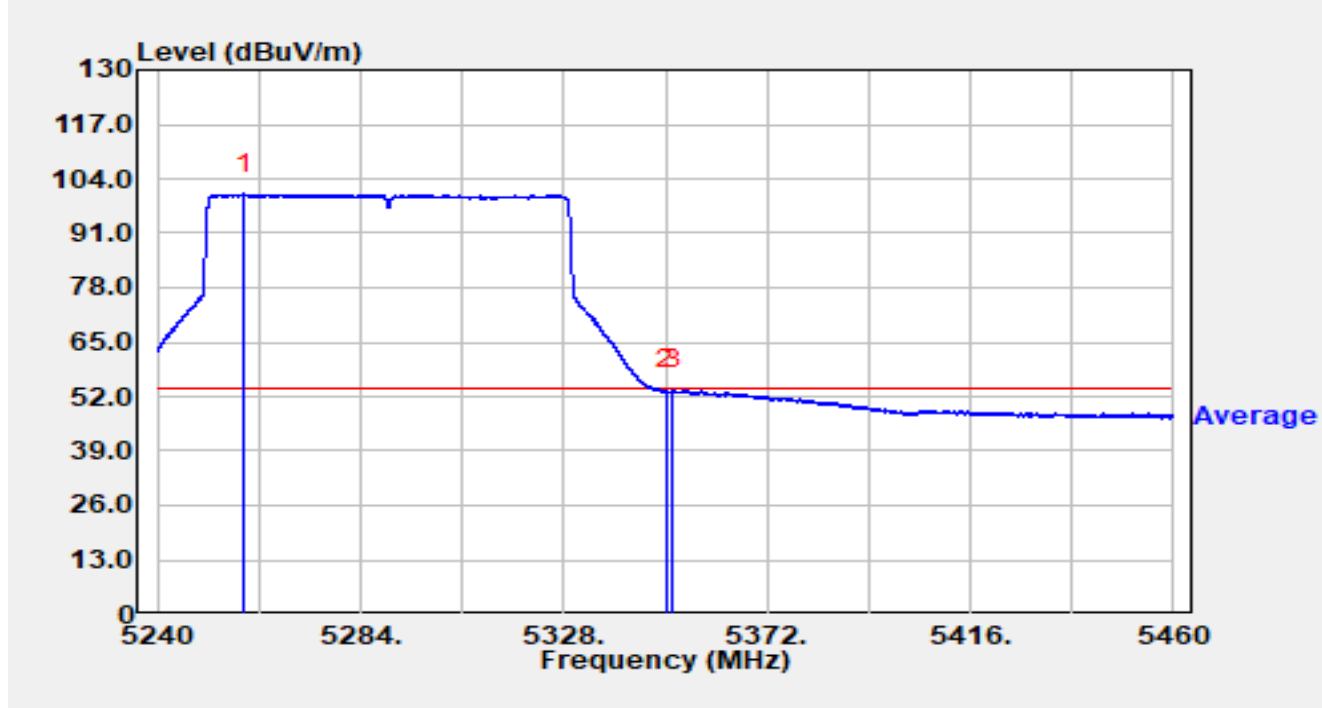


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5258.832	84.41	15.93	100.34	N/A	N/A	Average
2		5350.000	37.81	15.68	53.49	-0.51	54.00	Average
3	*	5351.474	37.83	15.68	53.51	-0.49	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9°C	Humidity	34.3%
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

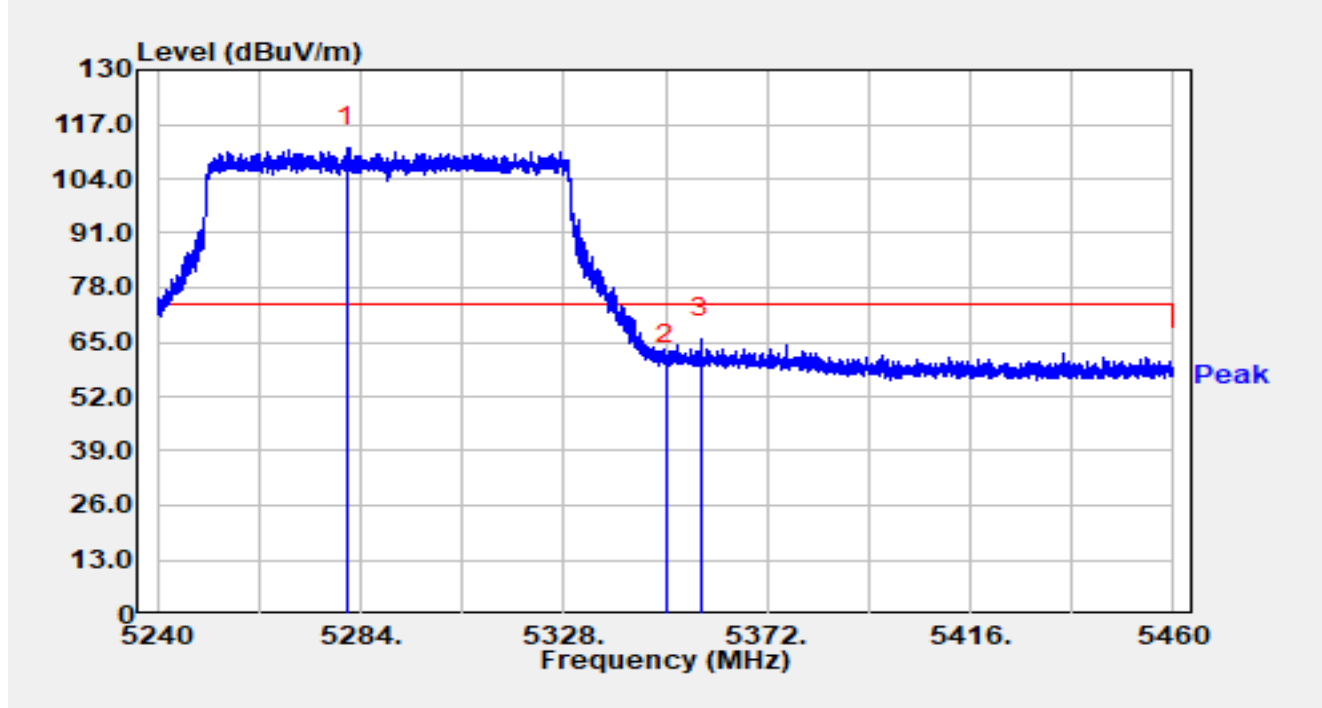


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.052	95.67	15.79	111.46	N/A	N/A	Peak
2		5350.000	44.15	15.68	59.83	-14.17	74.00	Peak
3	*	5357.590	50.28	15.66	65.94	-8.06	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

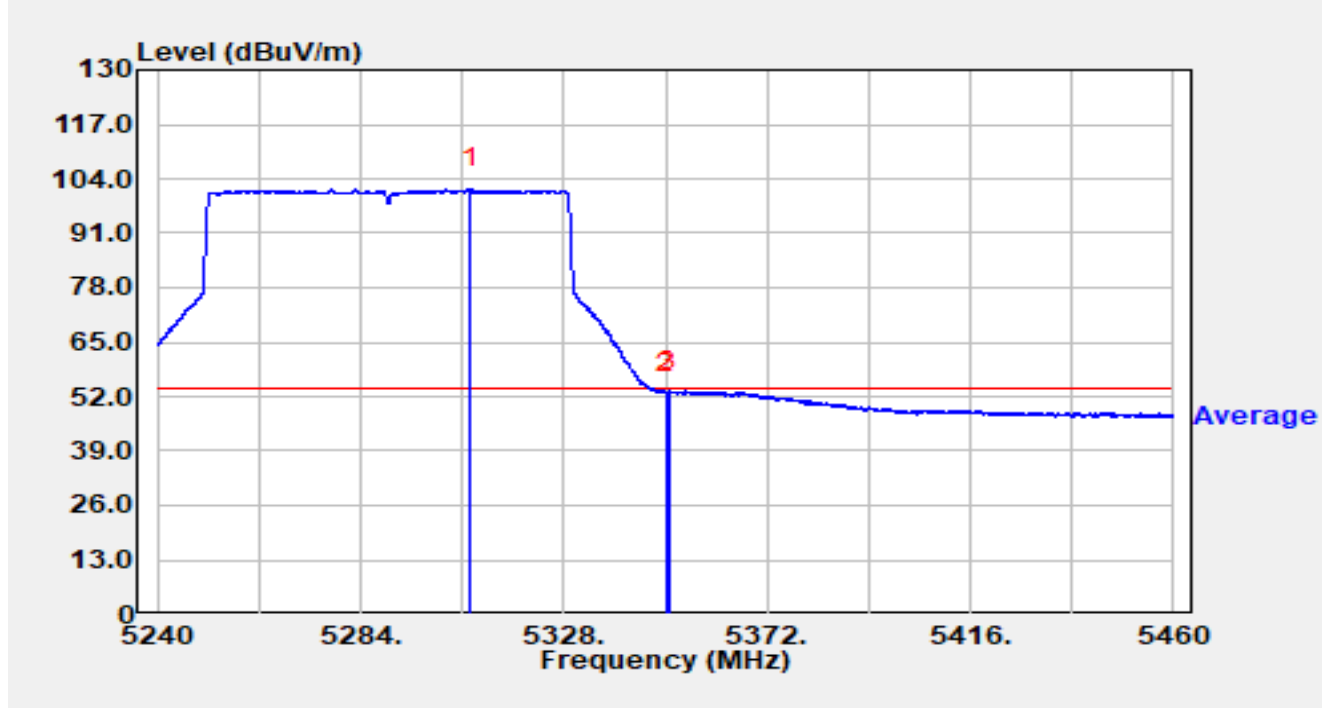


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.650	85.86	15.77	101.63	N/A	N/A	Peak
2		5350.000	37.24	15.68	52.93	-1.07	54.00	Peak
3	*	5350.704	37.66	15.68	53.34	-0.66	54.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

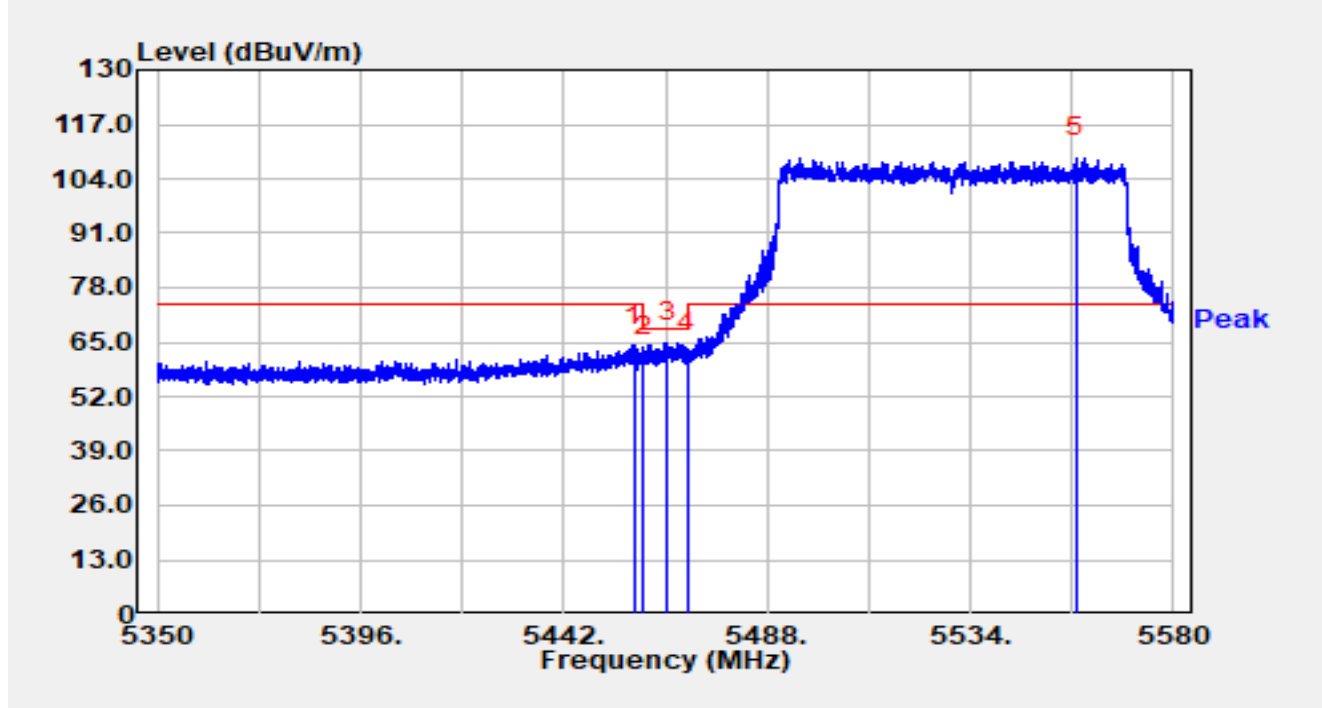


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.801	48.21	16.03	64.24	-9.76	74.00	Peak
2		5460.009	45.58	16.02	61.60	-6.60	68.20	Peak
3	*	5465.460	48.99	16.00	64.99	-3.21	68.20	Peak
4		5470.000	46.68	15.98	62.66	-5.54	68.20	Peak
5		5558.012	92.80	16.31	109.11	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

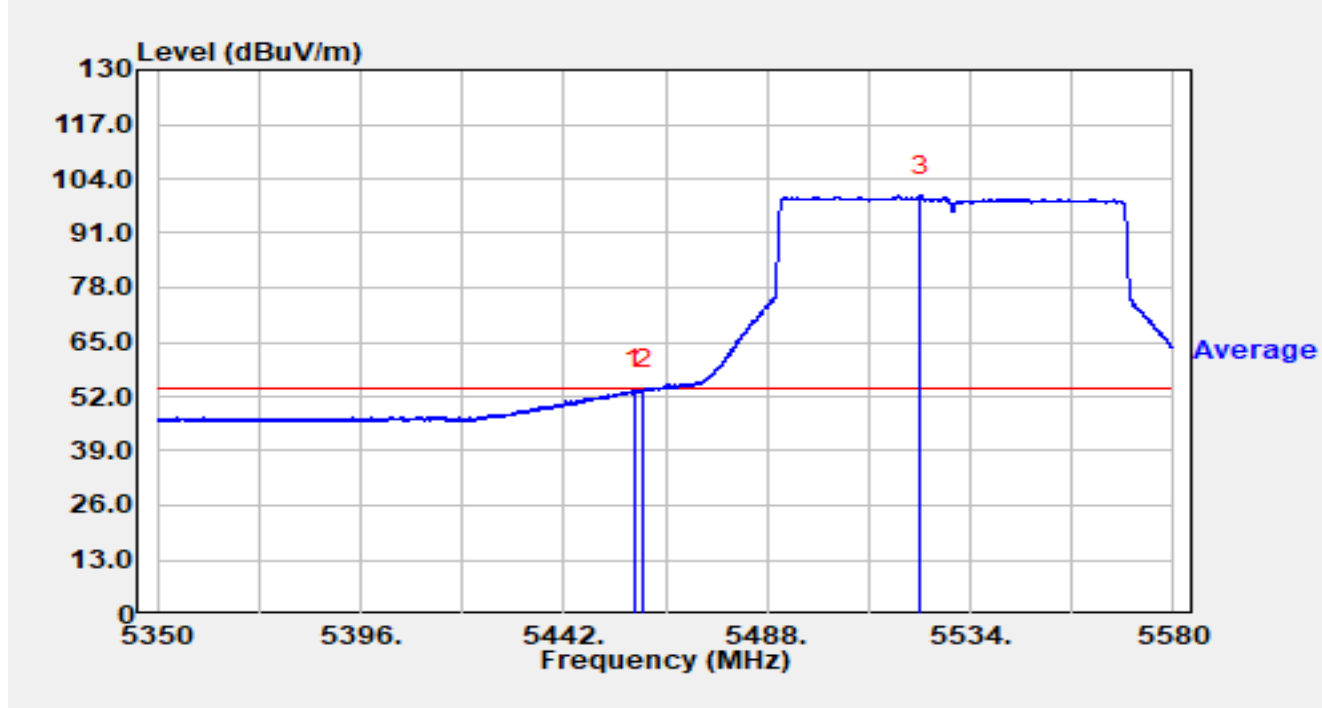


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.893	37.56	16.03	53.59	-0.41	54.00	Average
2		5460.009	37.52	16.02	53.54	-0.46	54.00	Average
3		5522.822	83.82	16.16	99.98	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

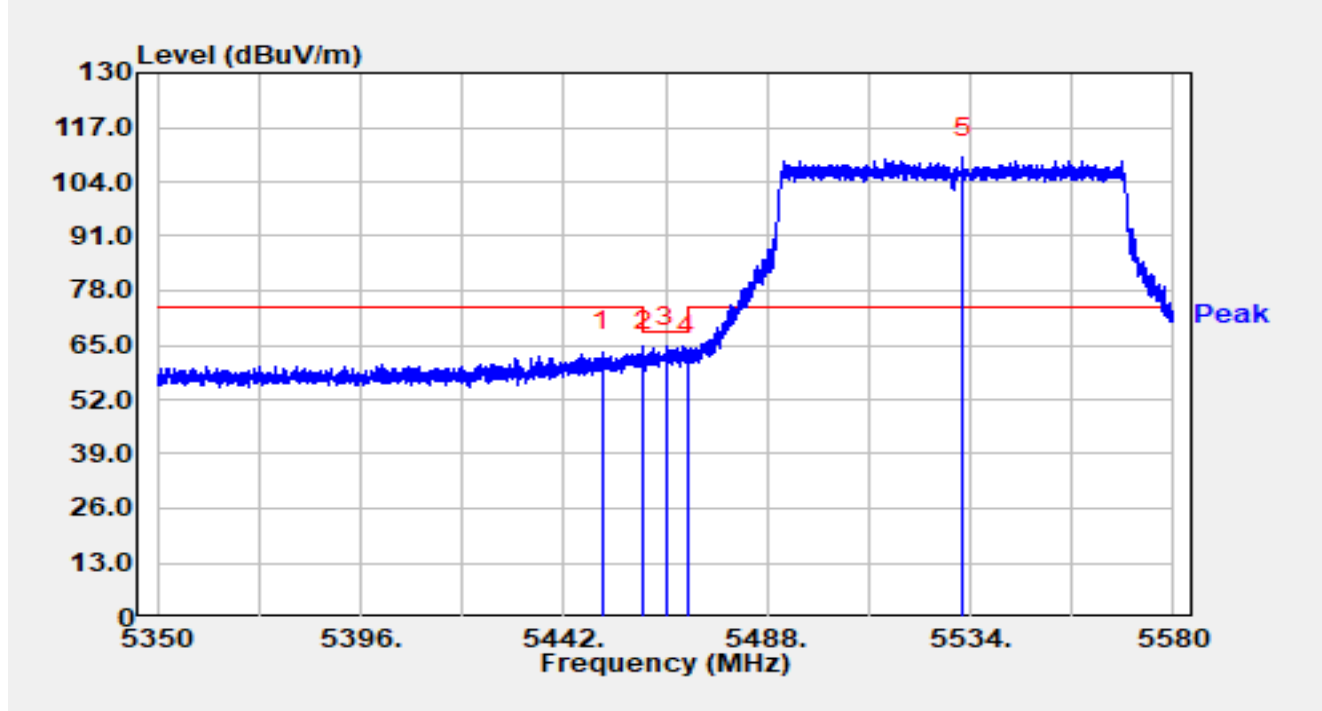


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.786	47.47	16.00	63.47	-10.53	74.00	Peak
2		5460.009	47.60	16.02	63.62	-4.58	68.20	Peak
3	*	5465.276	48.61	16.00	64.61	-3.59	68.20	Peak
4		5470.000	46.69	15.98	62.67	-5.53	68.20	Peak
5		5532.367	93.59	16.16	109.75	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

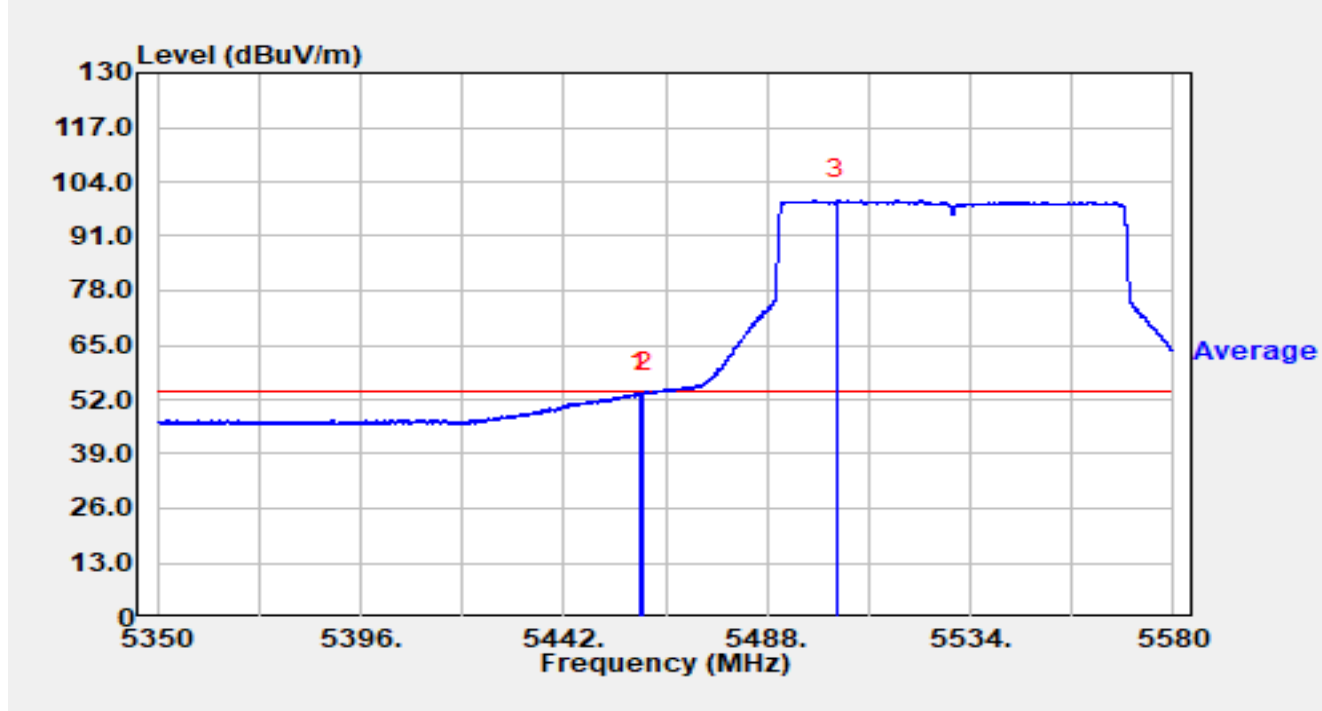


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.997	37.47	16.03	53.49	-0.51	54.00	Average
2	*	5460.000	37.63	16.02	53.66	-0.34	54.00	Average
3		5503.824	83.59	16.22	99.81	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

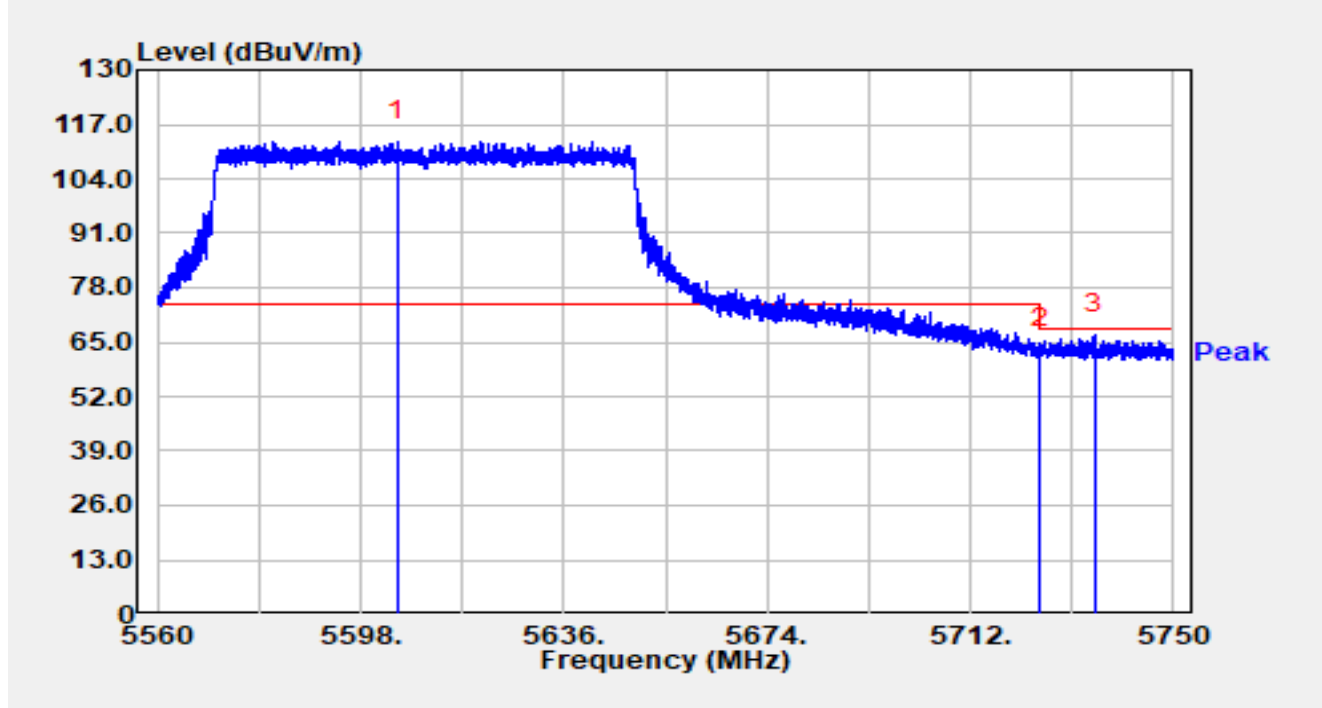


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5604.878	96.59	16.44	113.04	N/A	N/A	Peak
2		5725.000	46.49	16.92	63.41	-4.79	68.20	Peak
3	*	5735.142	49.80	16.95	66.75	-1.45	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

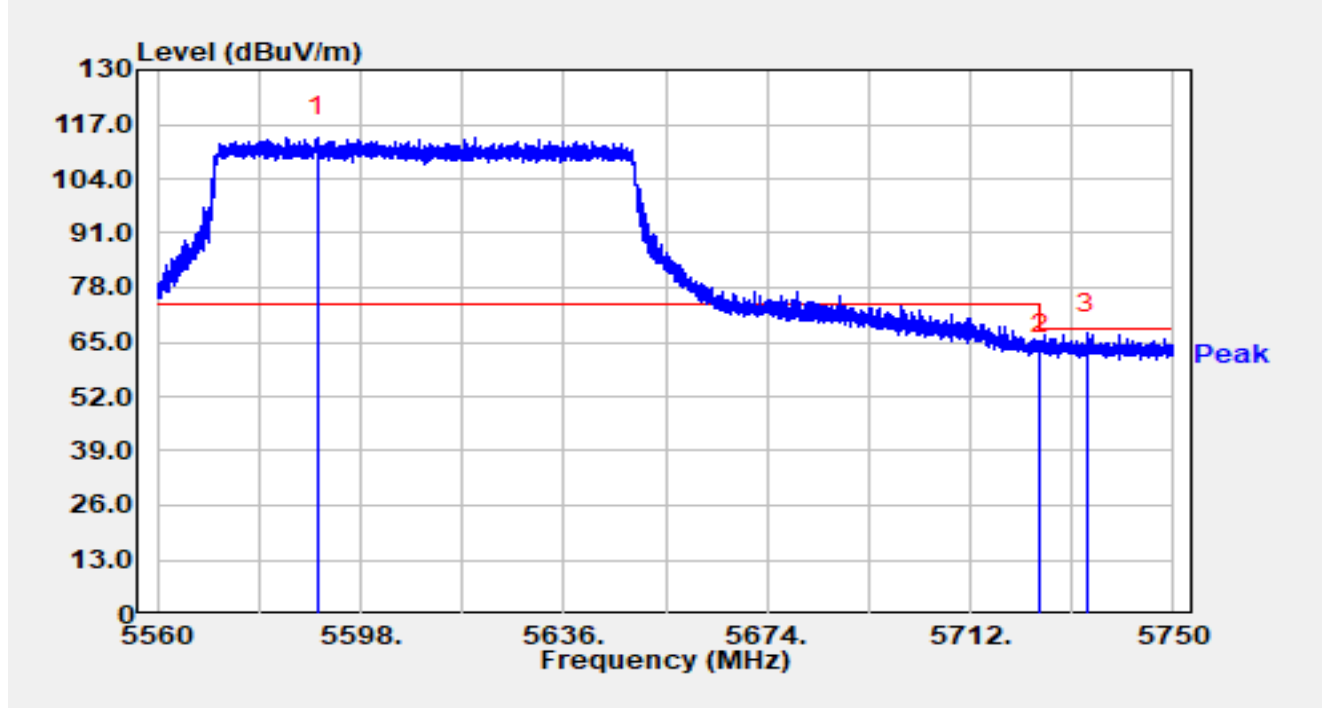


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5590.020	97.64	16.41	114.05	N/A	N/A	Peak
2		5725.000	45.21	16.92	62.13	-6.07	68.20	Peak
3	*	5733.812	50.10	16.94	67.05	-1.15	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

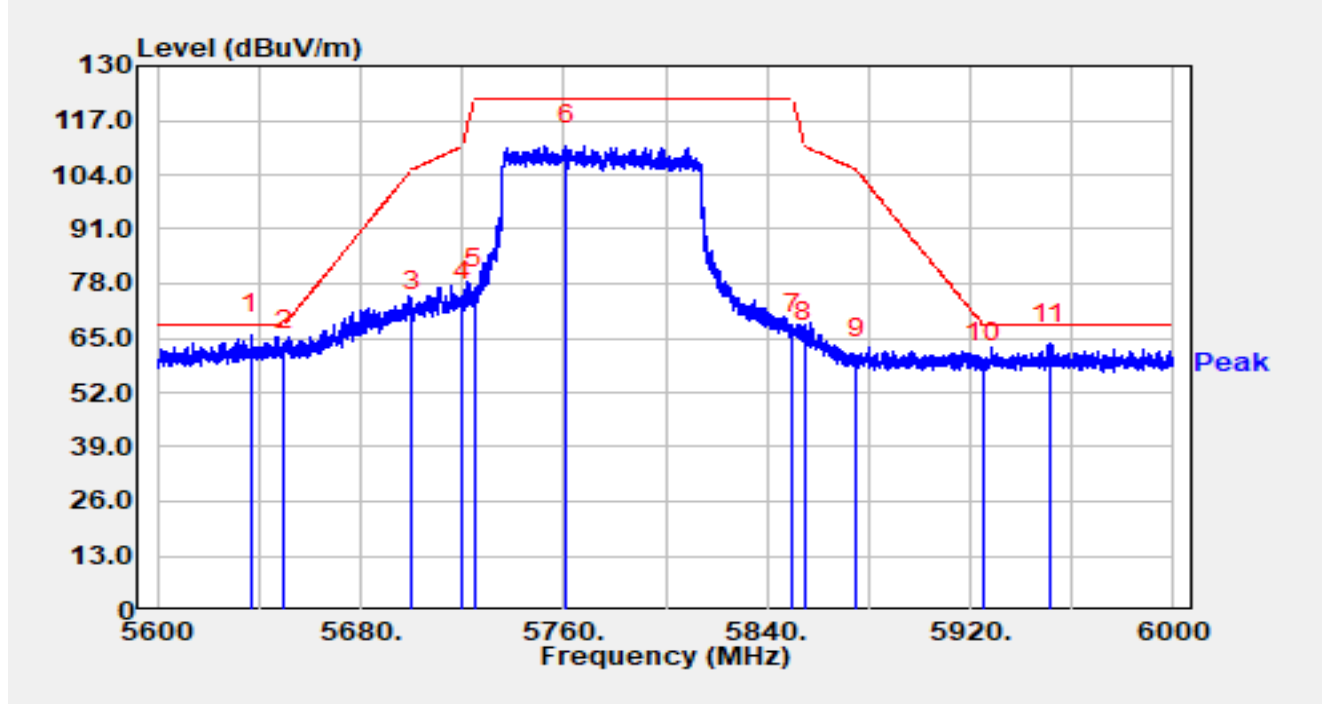


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.000	49.14	16.60	65.74	-2.46	68.20	Peak
2		5650.000	45.38	16.65	62.03	-6.17	68.20	Peak
3		5700.000	54.39	16.81	71.20	-34.00	105.20	Peak
4		5720.000	56.90	16.90	73.80	-37.00	110.80	Peak
5		5725.000	59.67	16.92	76.60	-45.60	122.20	Peak
6		5760.720	93.84	17.05	110.89	N/A	N/A	Peak
7		5850.000	48.74	17.31	66.05	-56.15	122.20	Peak
8		5855.000	46.84	17.32	64.17	-46.63	110.80	Peak
9		5875.000	42.61	17.38	59.99	-45.21	105.20	Peak
10		5925.000	41.94	17.36	59.30	-8.90	68.20	Peak
11		5951.200	46.18	17.45	63.63	-4.57	68.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

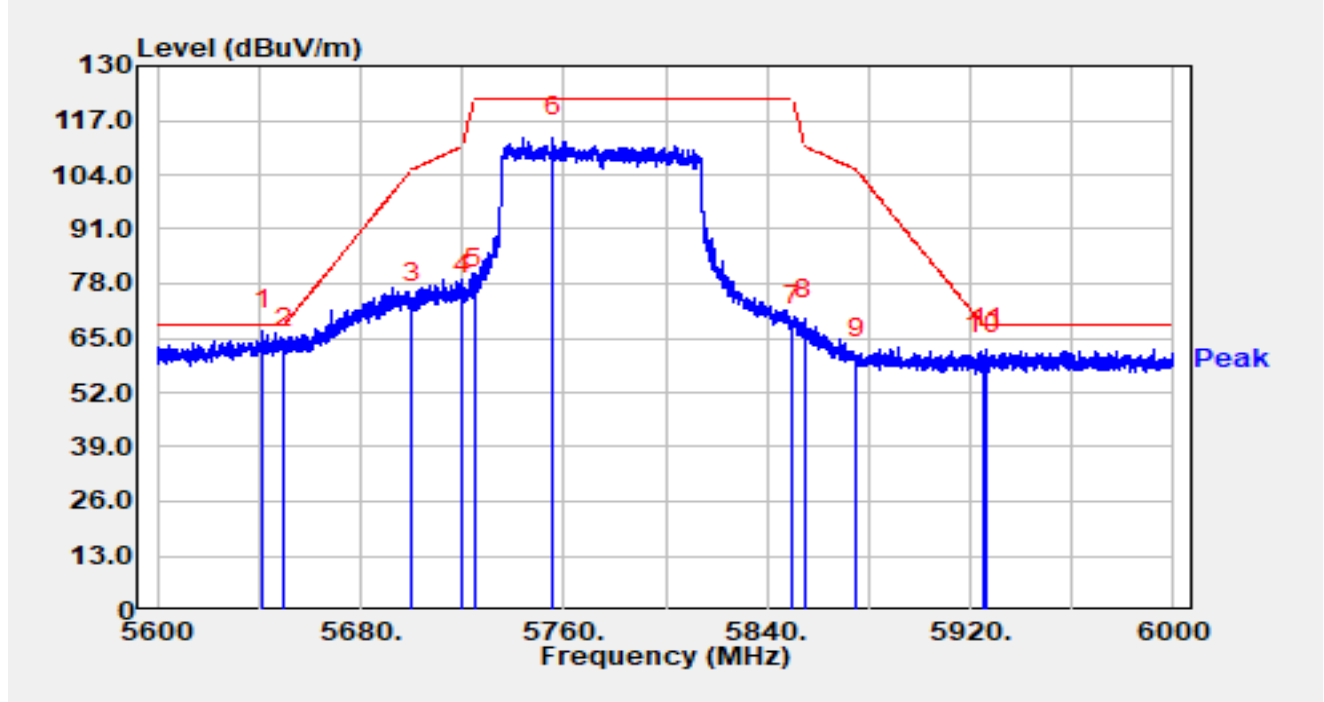


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.560	50.27	16.62	66.89	-1.31	68.20	Peak
2		5650.000	45.86	16.65	62.51	-5.69	68.20	Peak
3		5700.000	56.46	16.81	73.27	-31.93	105.20	Peak
4		5720.000	58.40	16.90	75.31	-35.49	110.80	Peak
5		5725.000	59.97	16.92	76.89	-45.31	122.20	Peak
6		5755.640	95.94	17.02	112.96	N/A	N/A	Peak
7		5850.000	50.81	17.31	68.12	-54.08	122.20	Peak
8		5855.000	52.18	17.32	69.50	-41.30	110.80	Peak
9		5875.000	42.96	17.38	60.33	-44.87	105.20	Peak
10		5925.000	43.62	17.36	60.98	-7.22	68.20	Peak
11		5926.360	45.14	17.37	62.51	-5.69	68.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

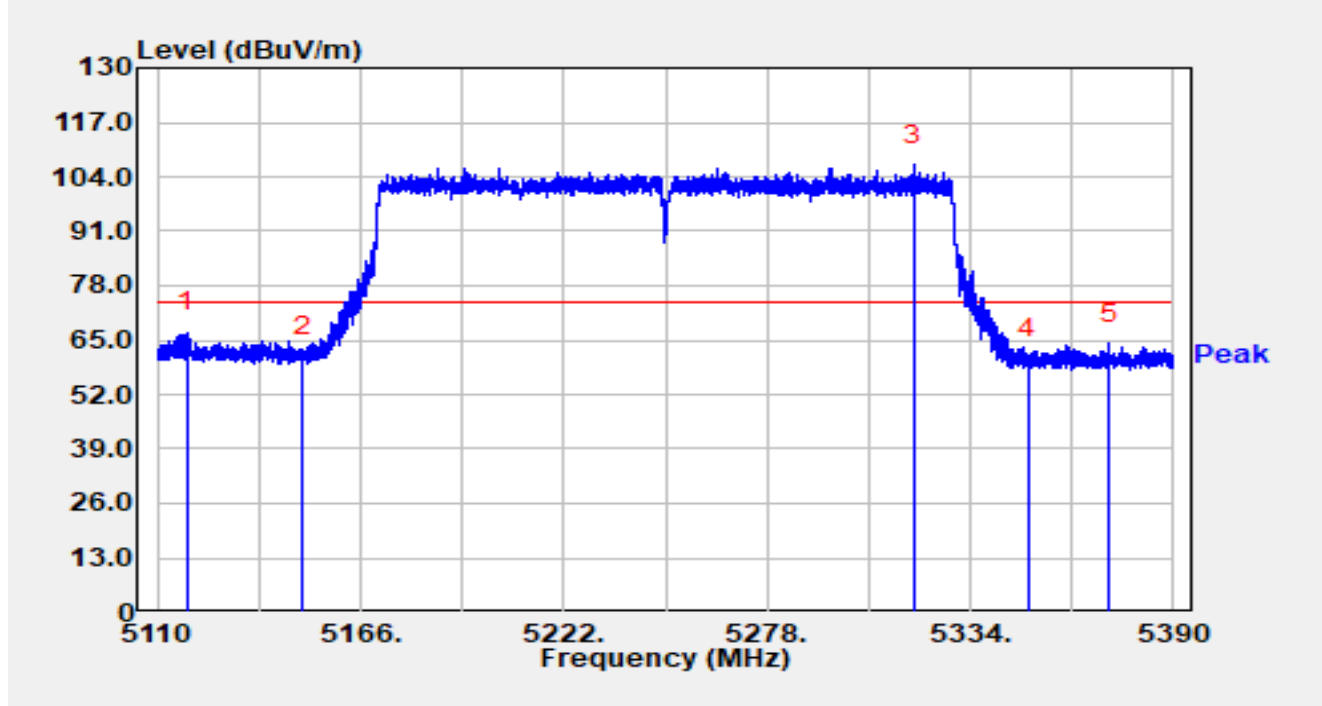


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5117.980	50.77	16.11	66.88	-7.12	74.00	Peak
2		5150.012	45.04	16.00	61.04	-12.96	74.00	Peak
3		5318.292	91.07	15.79	106.86	N/A	N/A	Peak
4		5350.000	44.91	15.68	60.59	-13.41	74.00	Peak
5		5372.192	48.40	15.62	64.02	-9.98	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

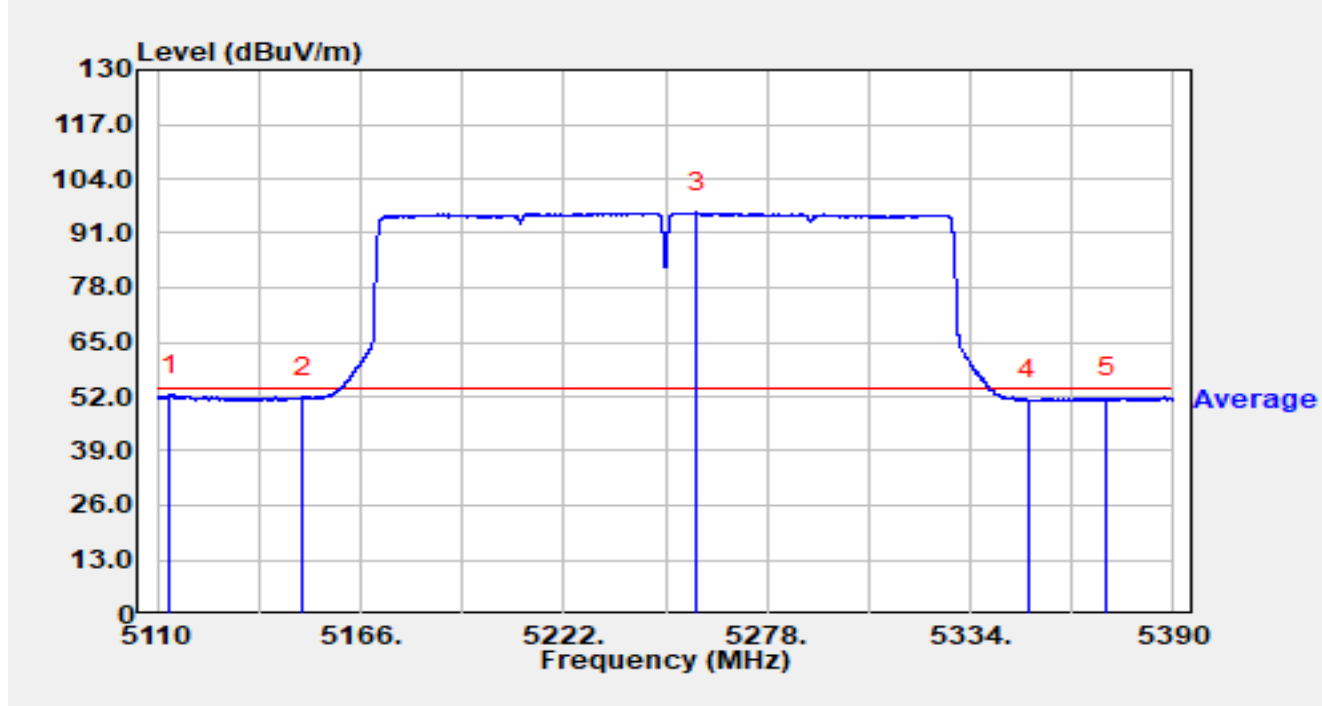


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5113.472	36.26	16.15	52.41	-1.59	54.00	Average
2		5150.000	35.70	16.00	51.70	-2.30	54.00	Average
3		5258.764	80.00	15.93	95.93	N/A	N/A	Average
4		5350.000	35.38	15.68	51.06	-2.94	54.00	Average
5		5371.744	36.05	15.62	51.67	-2.33	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

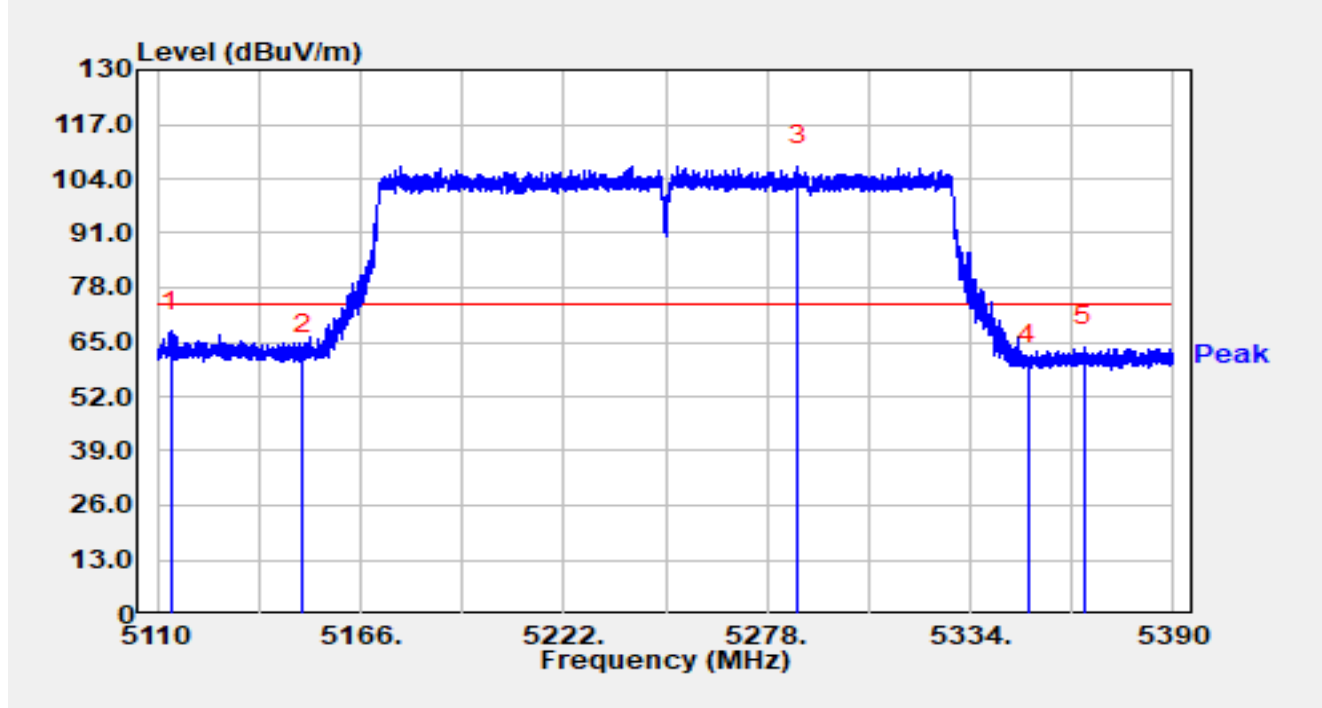


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5113.892	51.32	16.15	67.47	-6.53	74.00	Peak
2		5150.000	45.93	16.00	61.92	-12.08	74.00	Peak
3		5286.540	91.37	15.78	107.15	N/A	N/A	Peak
4		5350.000	44.06	15.68	59.74	-14.26	74.00	Peak
5		5365.472	48.37	15.63	64.00	-10.00	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

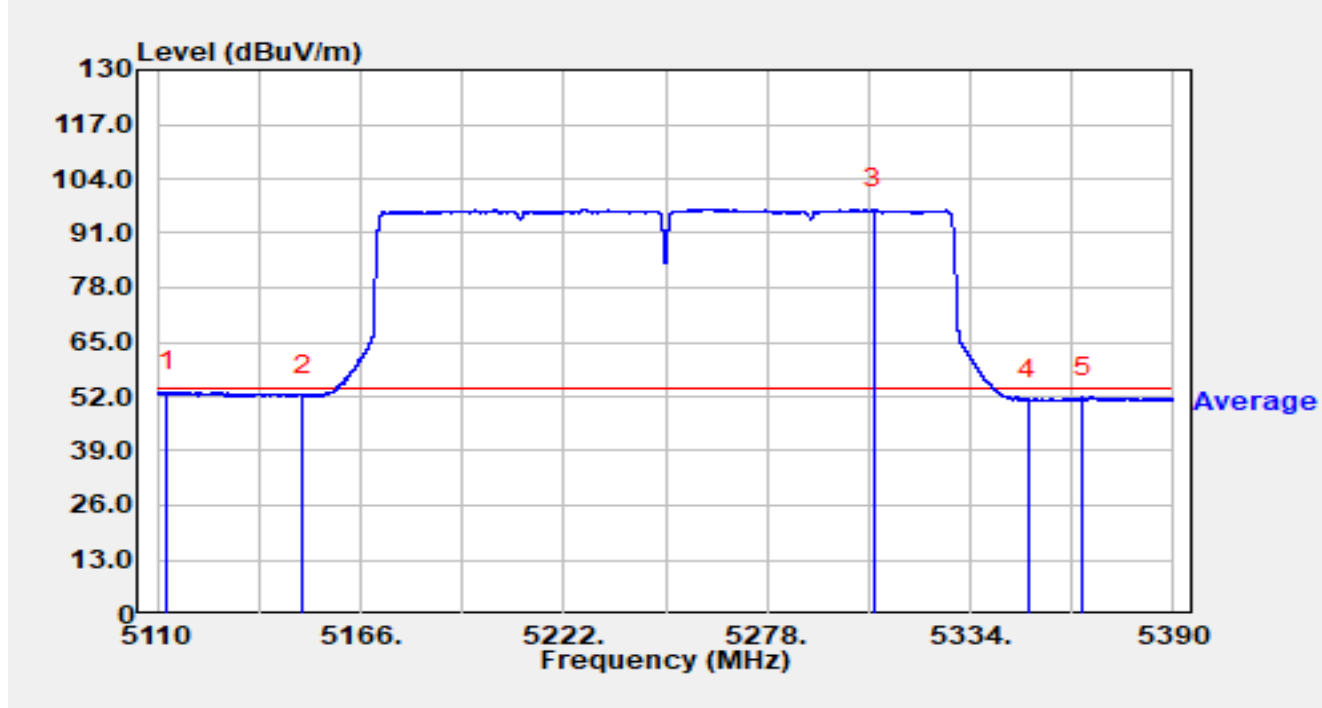


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5112.492	37.06	16.14	53.21	-0.79	54.00	Average
2		5150.000	36.23	16.00	52.22	-1.78	54.00	Average
3		5307.400	81.03	15.77	96.80	N/A	N/A	Average
4		5350.000	35.47	15.68	51.15	-2.85	54.00	Average
5		5365.024	36.18	15.63	51.81	-2.19	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

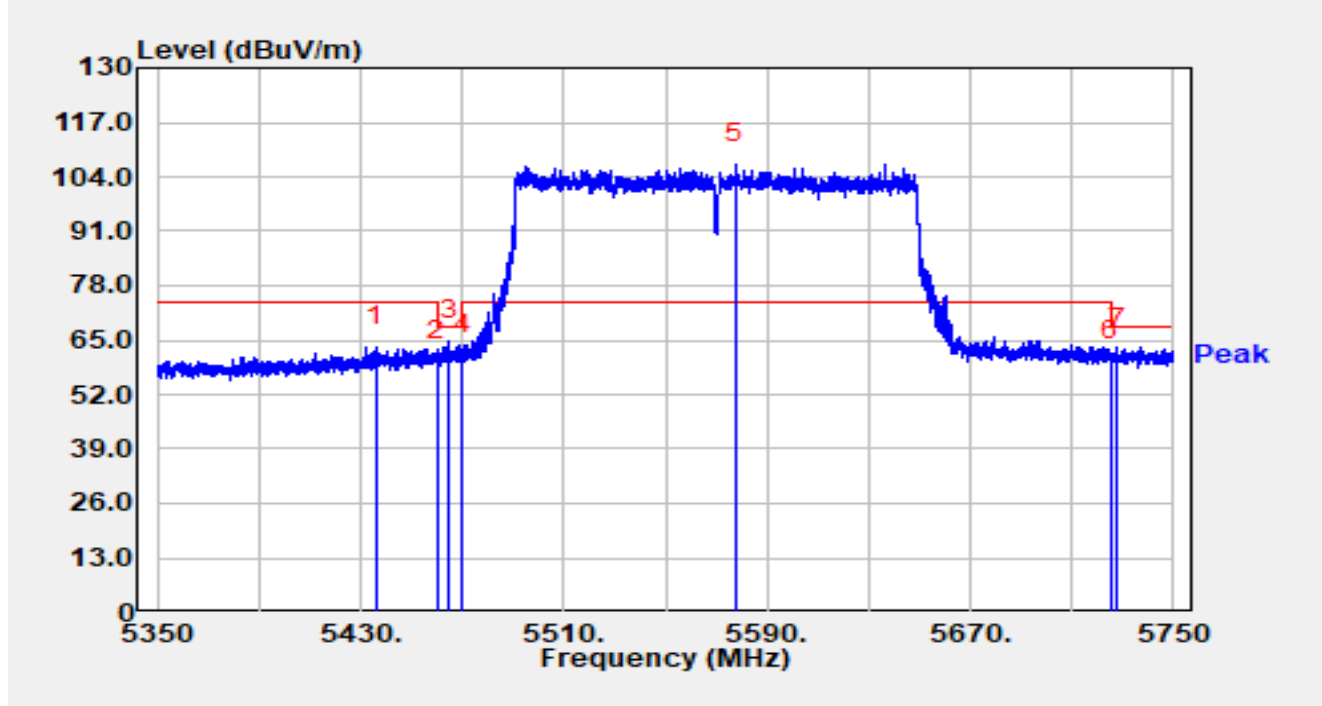


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5435.880	47.54	15.85	63.39	-10.61	74.00	Peak
2		5460.000	44.31	16.02	60.33	-7.87	68.20	Peak
3	*	5464.680	48.95	16.00	64.95	-3.25	68.20	Peak
4		5470.000	45.35	15.98	61.33	-6.87	68.20	Peak
5		5577.760	90.54	16.42	106.96	N/A	N/A	Peak
6		5725.000	43.20	16.92	60.12	-8.08	68.20	Peak
7		5727.960	46.30	16.93	63.24	-4.96	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

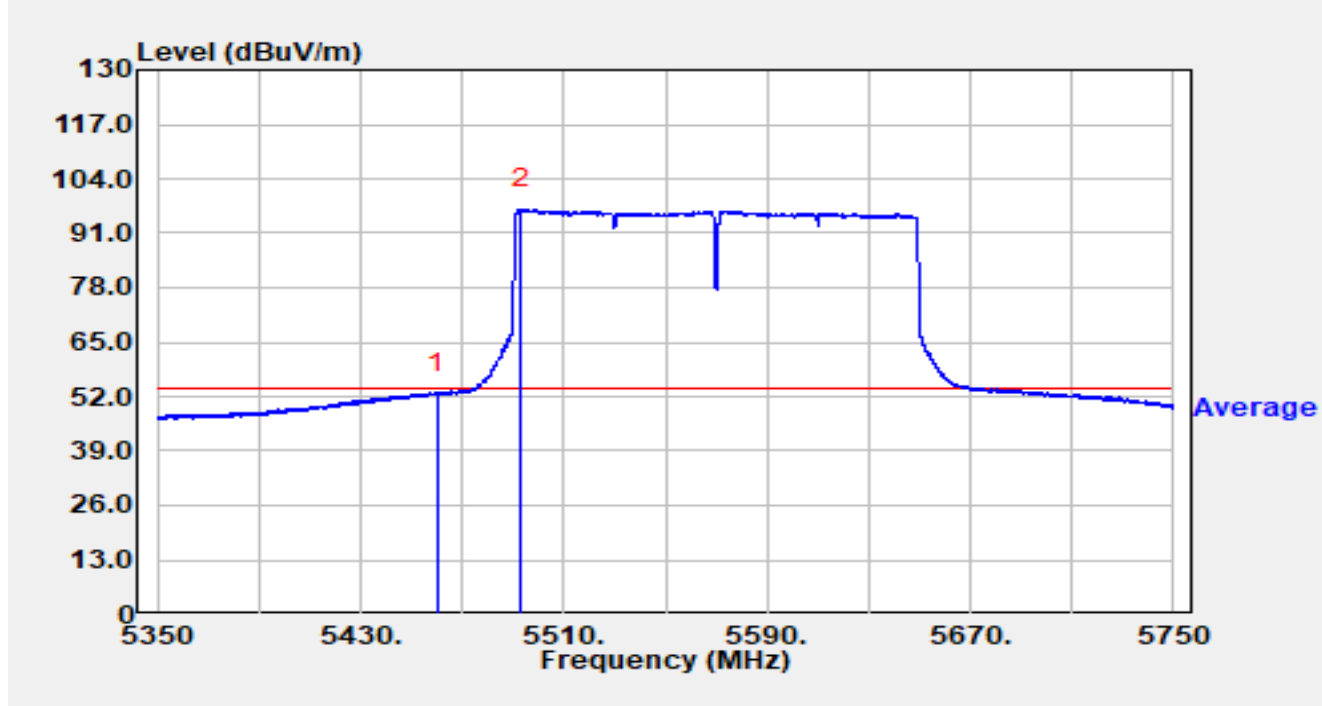


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	36.62	16.02	52.65	-1.35	54.00	Average
2		5493.360	80.64	16.11	96.75	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

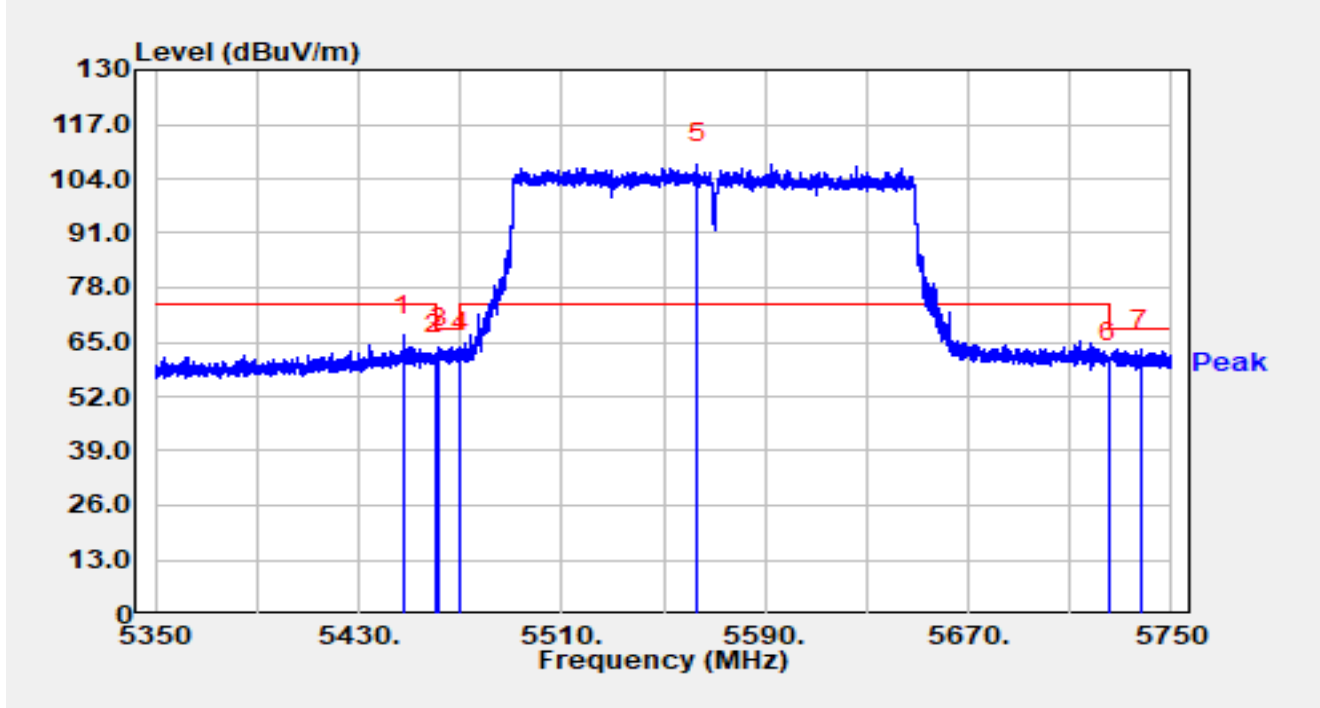


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.560	50.53	15.96	66.49	-7.51	74.00	Peak
2		5460.000	46.08	16.02	62.10	-6.10	68.20	Peak
3	*	5461.760	47.73	16.02	63.75	-4.45	68.20	Peak
4		5470.000	46.47	15.98	62.45	-5.75	68.20	Peak
5		5563.520	91.21	16.35	107.56	N/A	N/A	Peak
6		5725.000	43.35	16.92	60.27	-7.93	68.20	Peak
7		5737.680	46.25	16.95	63.20	-5.00	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9°C	Humidity	34.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

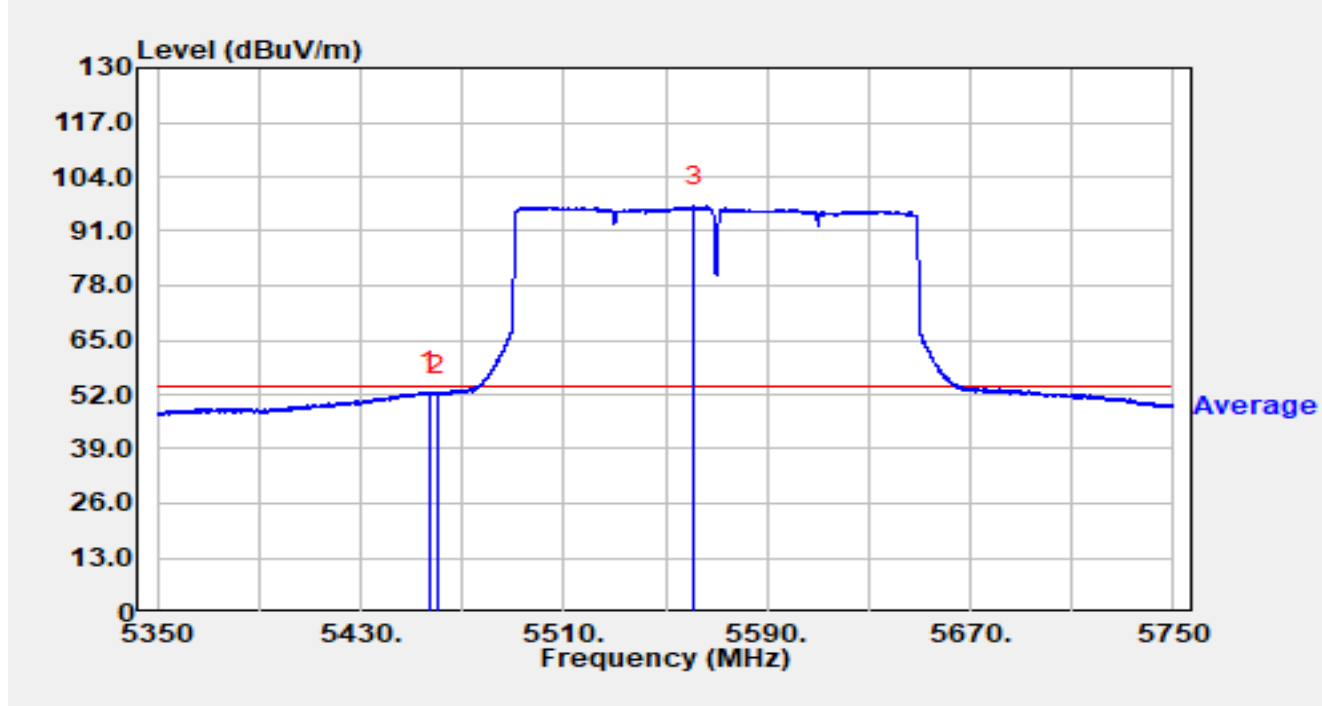


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.760	36.55	16.04	52.58	-1.42	54.00	Average
2		5460.000	35.94	16.02	51.96	-2.04	54.00	Average
3		5561.440	80.60	16.34	96.94	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

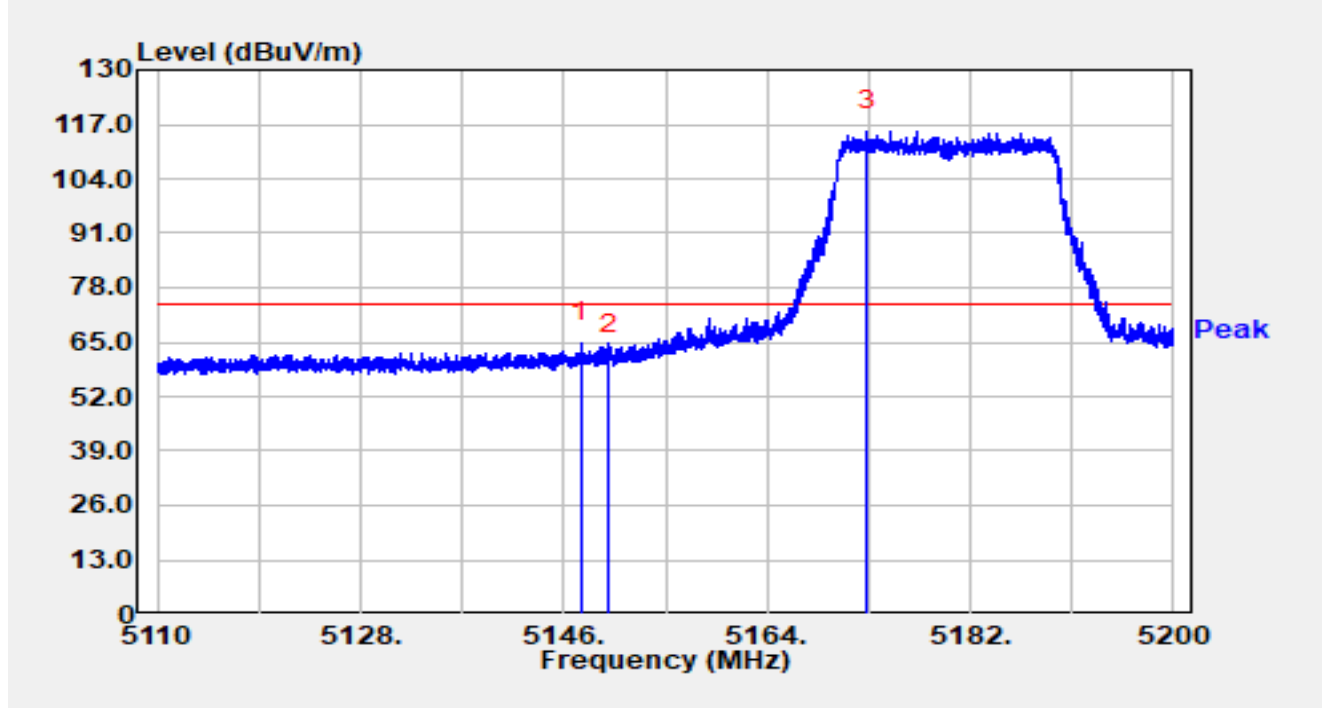


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.485	48.78	15.99	64.77	-9.23	74.00	Peak
2		5150.000	46.30	16.00	62.30	-11.70	74.00	Peak
3		5172.838	99.34	15.97	115.30	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

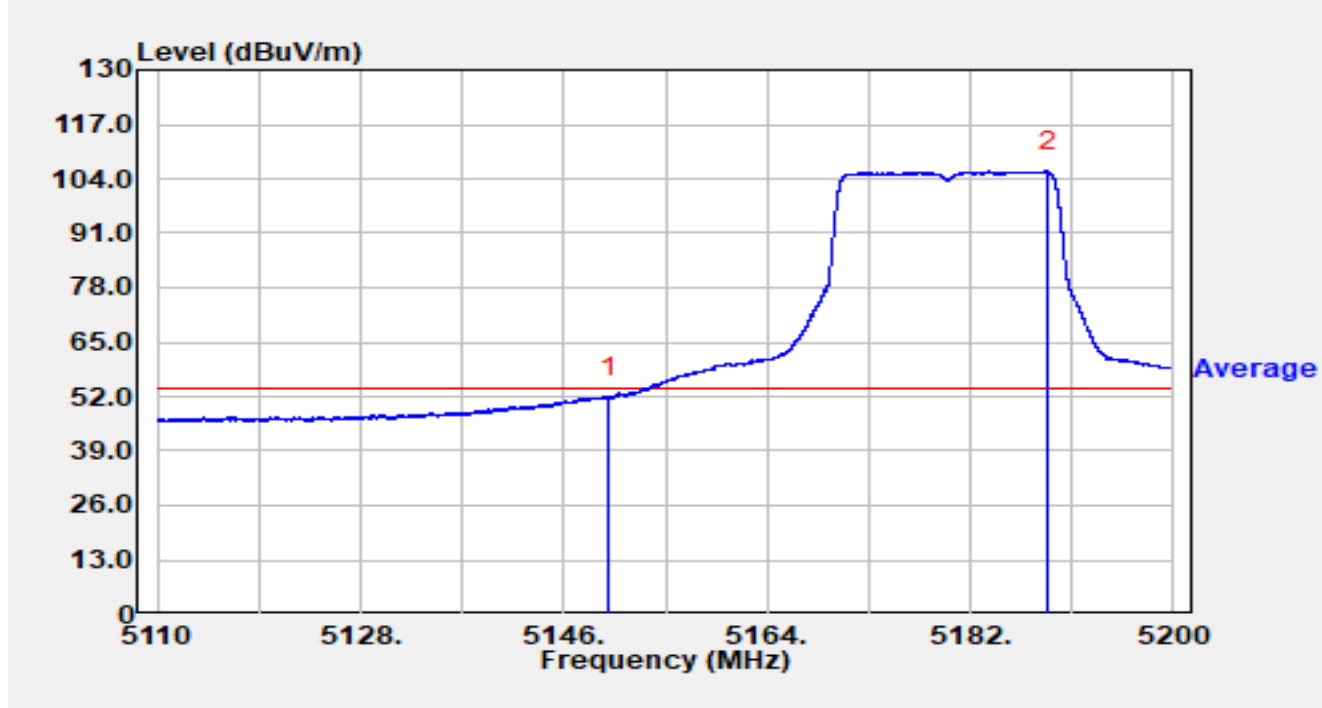


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	35.71	16.00	51.70	-2.30	54.00	Average
2		5188.849	89.84	15.95	105.79	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

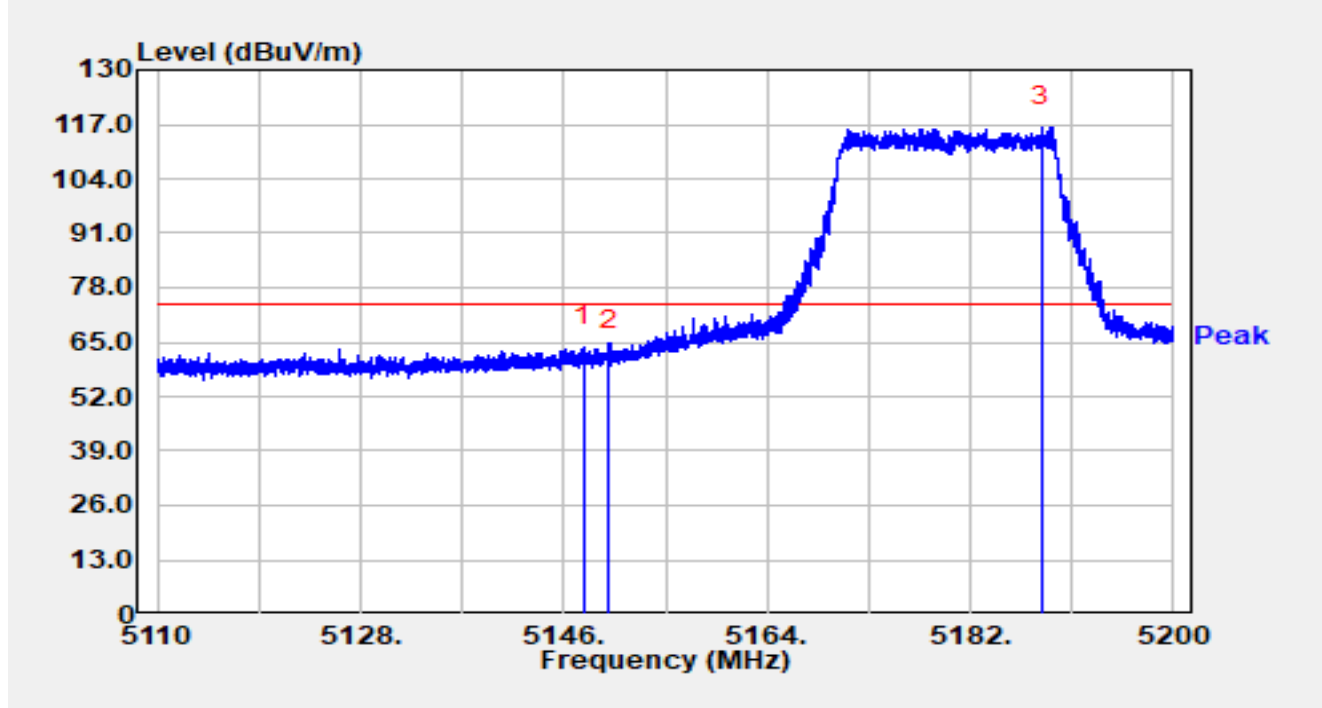


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.737	47.98	15.99	63.97	-10.03	74.00	Peak
2		5150.000	46.98	16.00	62.97	-11.03	74.00	Peak
3		5188.264	100.55	15.94	116.49	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

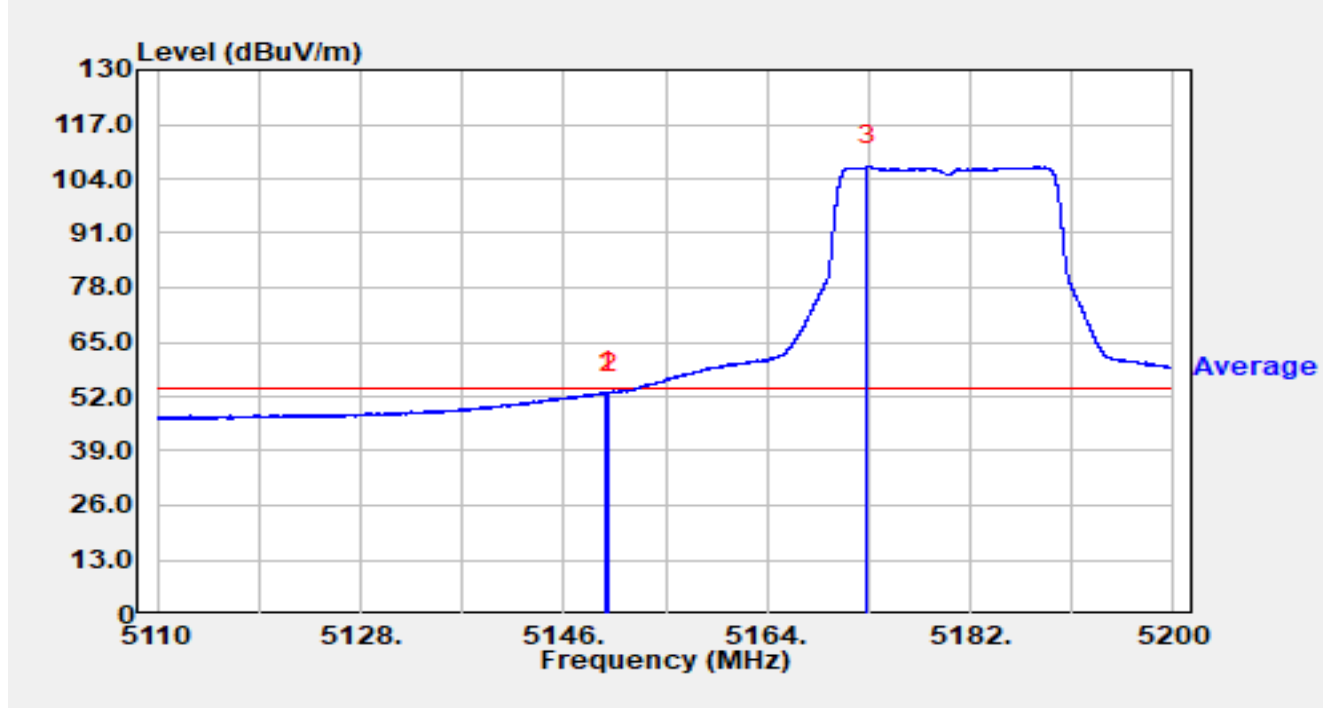


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.807	37.06	16.00	53.06	-0.94	54.00	Average
2		5150.000	36.94	16.00	52.93	-1.07	54.00	Average
3		5172.829	91.01	15.97	106.98	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

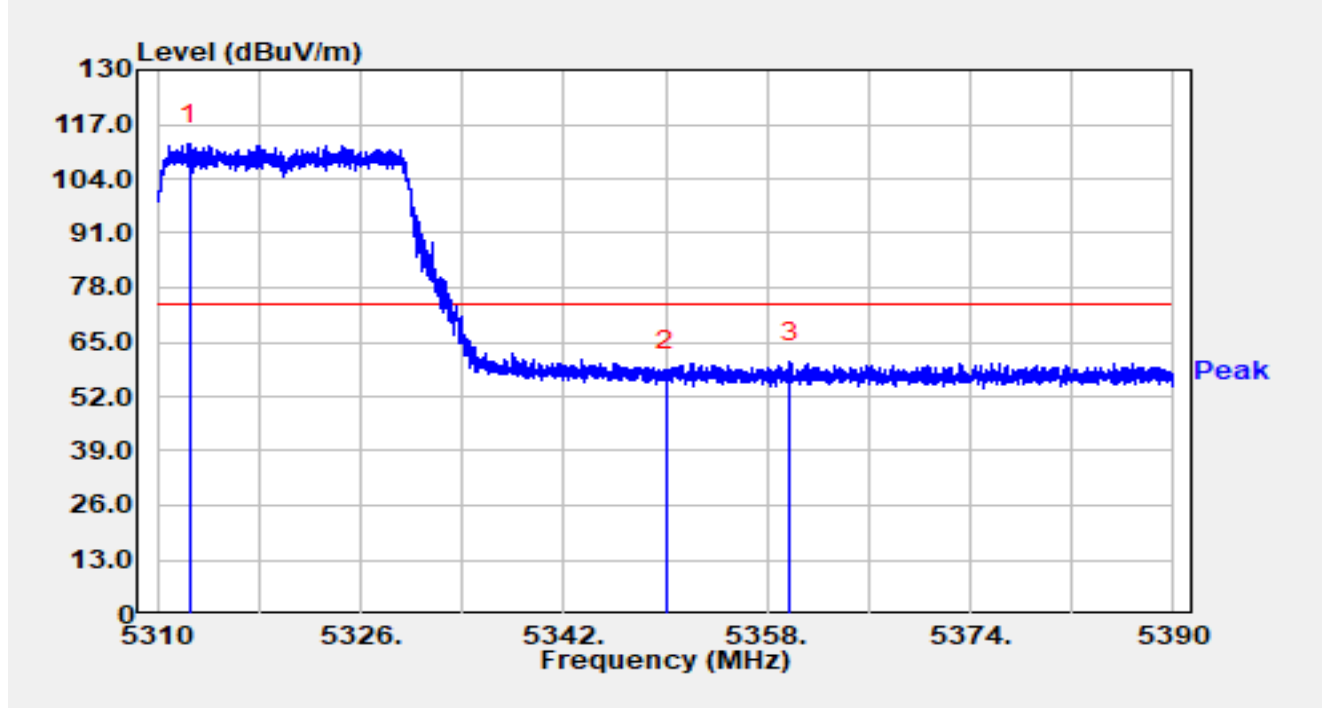


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.488	96.54	15.77	112.31	N/A	N/A	Peak
2		5350.000	42.68	15.68	58.36	-15.64	74.00	Peak
3	*	5359.848	44.45	15.65	60.10	-13.90	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

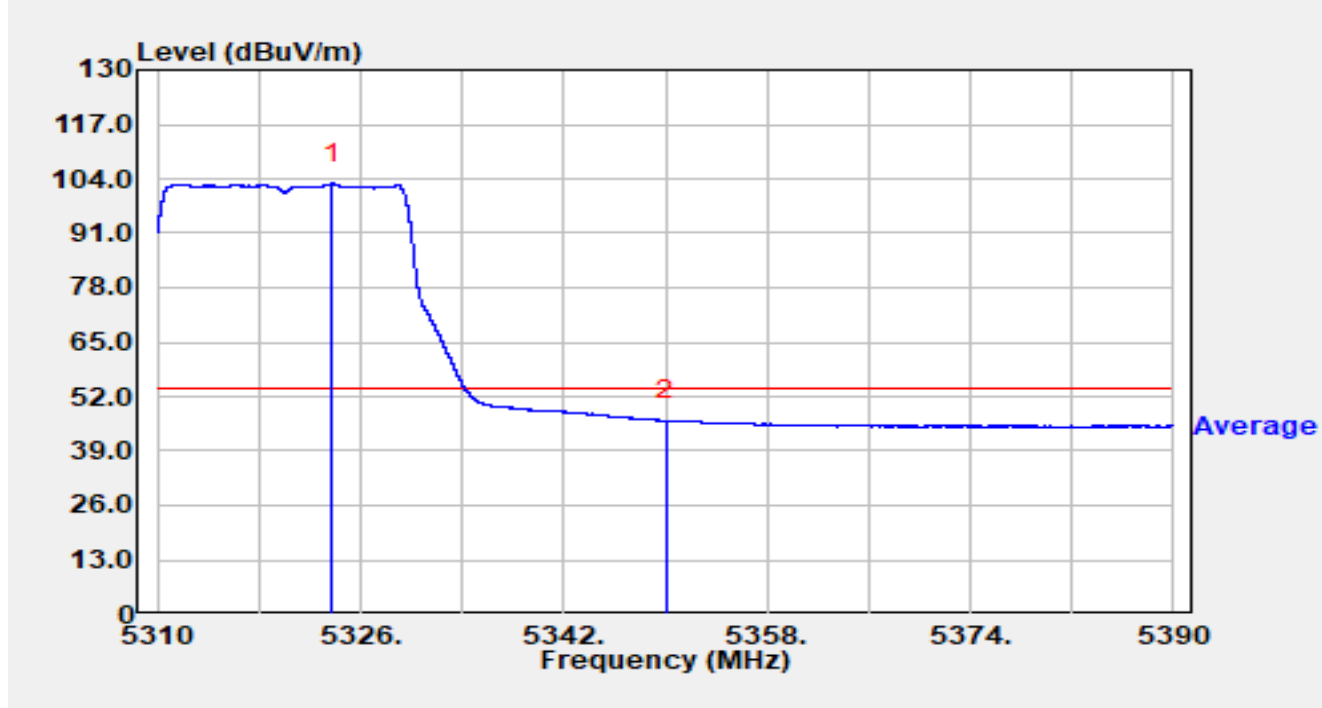


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.752	87.04	15.80	102.84	N/A	N/A	Average
2	*	5350.000	30.60	15.68	46.28	-7.72	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

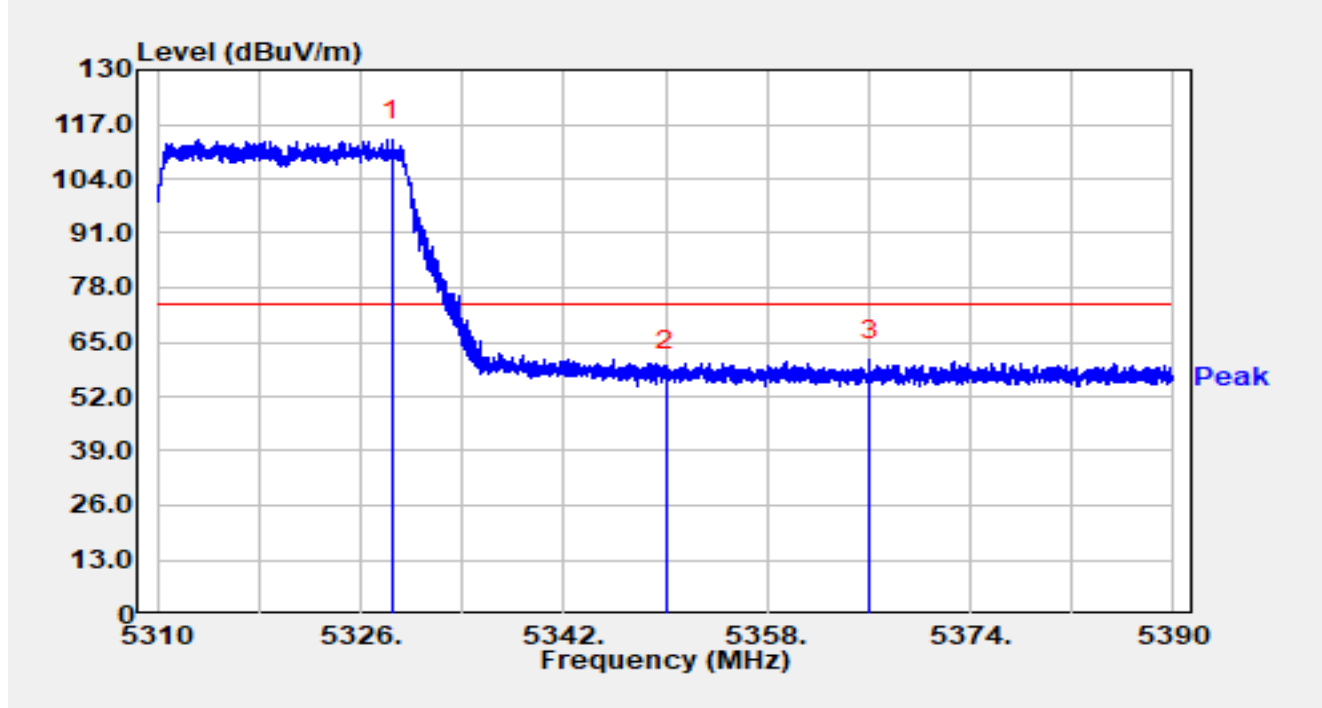


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.504	97.51	15.80	113.32	N/A	N/A	Peak
2		5350.000	42.56	15.68	58.24	-15.76	74.00	Peak
3	*	5366.064	45.02	15.63	60.65	-13.35	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

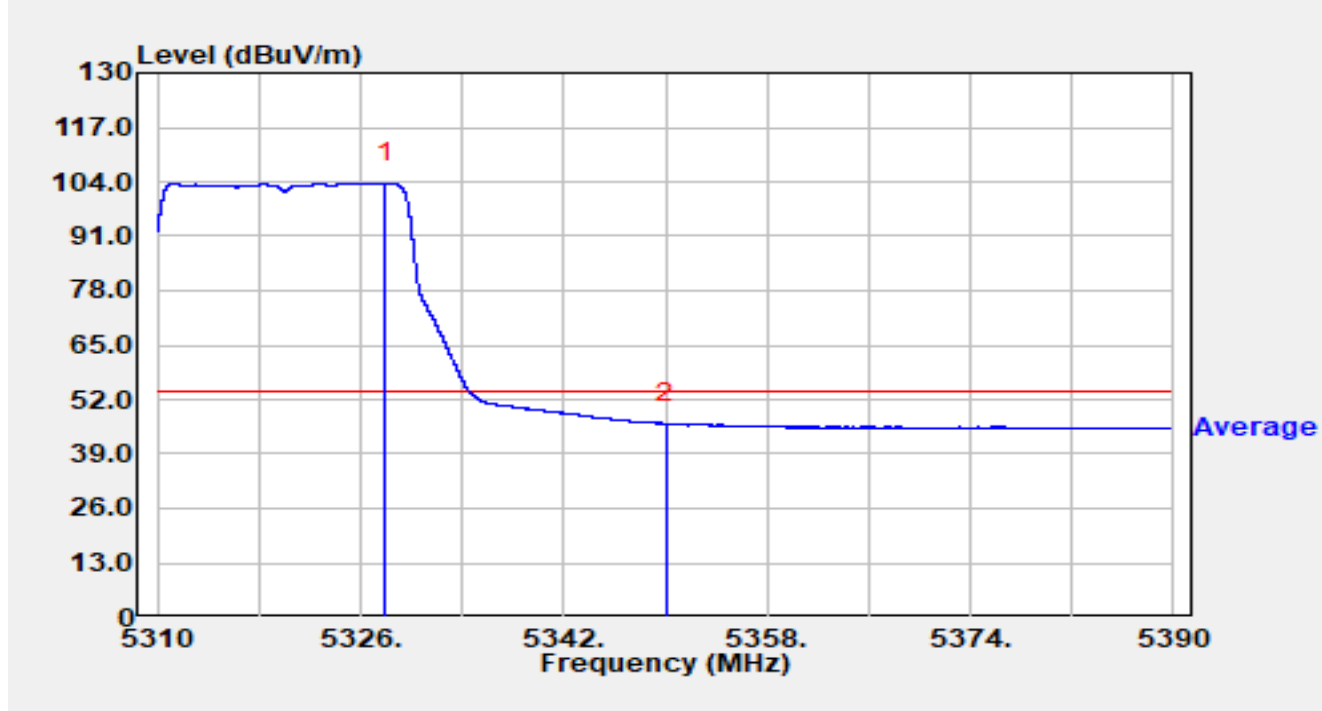


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.920	87.88	15.80	103.68	N/A	N/A	Average
2	*	5350.000	30.61	15.68	46.29	-7.71	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

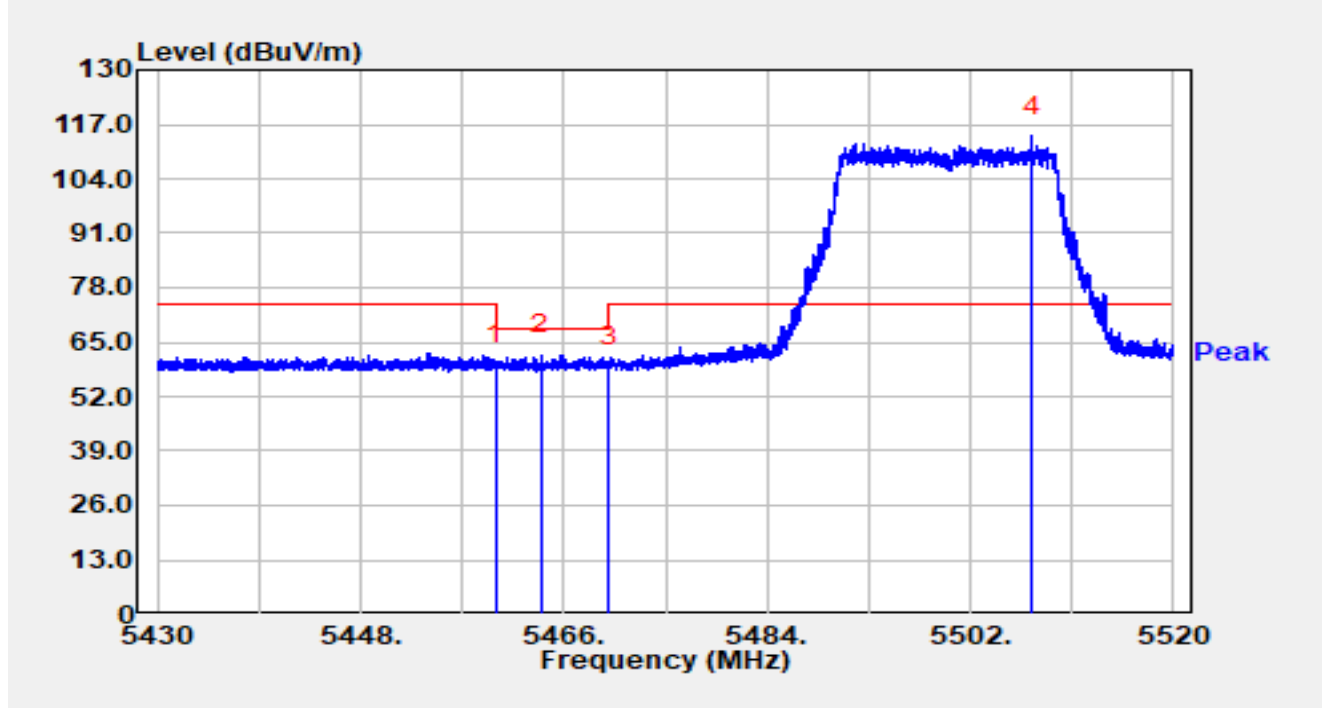


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	43.69	16.02	59.71	-8.49	68.20	Peak
2	*	5463.957	46.02	16.01	62.03	-6.17	68.20	Peak
3		5470.000	43.36	15.98	59.34	-8.86	68.20	Peak
4		5507.436	97.86	16.22	114.08	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

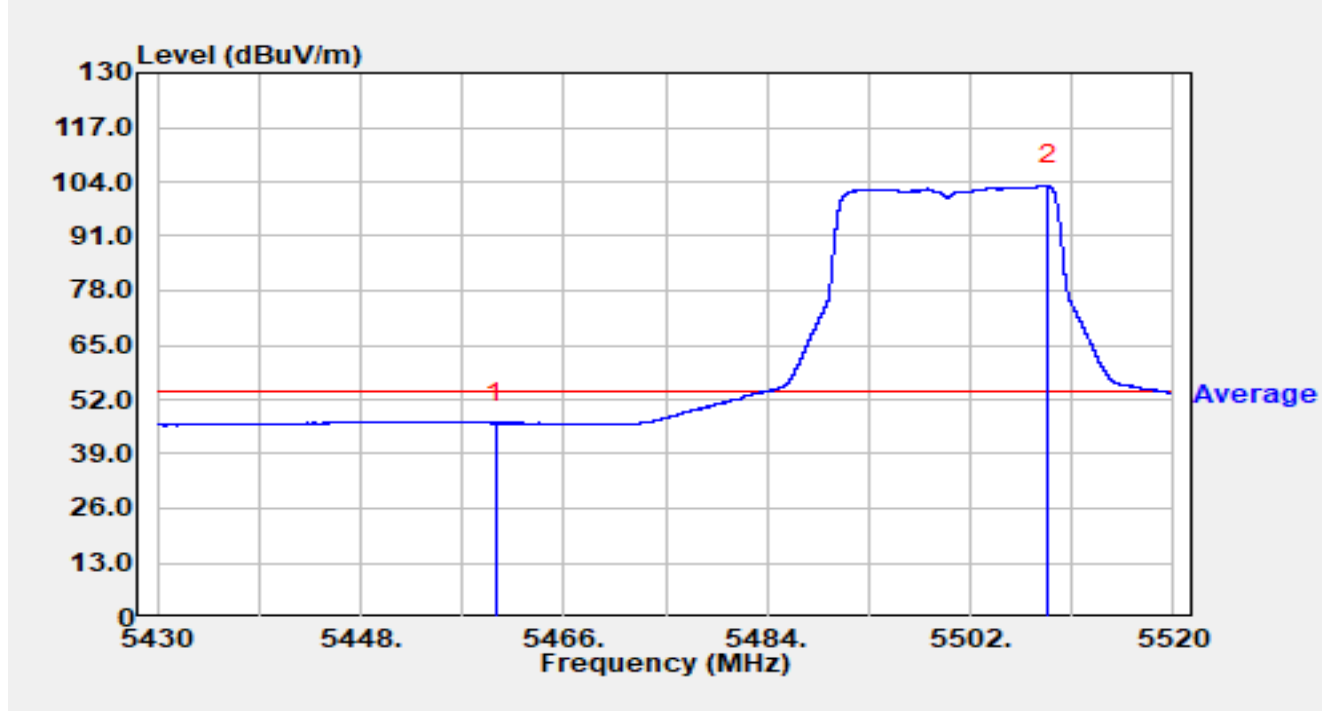


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	30.33	16.02	46.35	-7.65	54.00	Average
2		5508.885	86.92	16.22	103.14	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

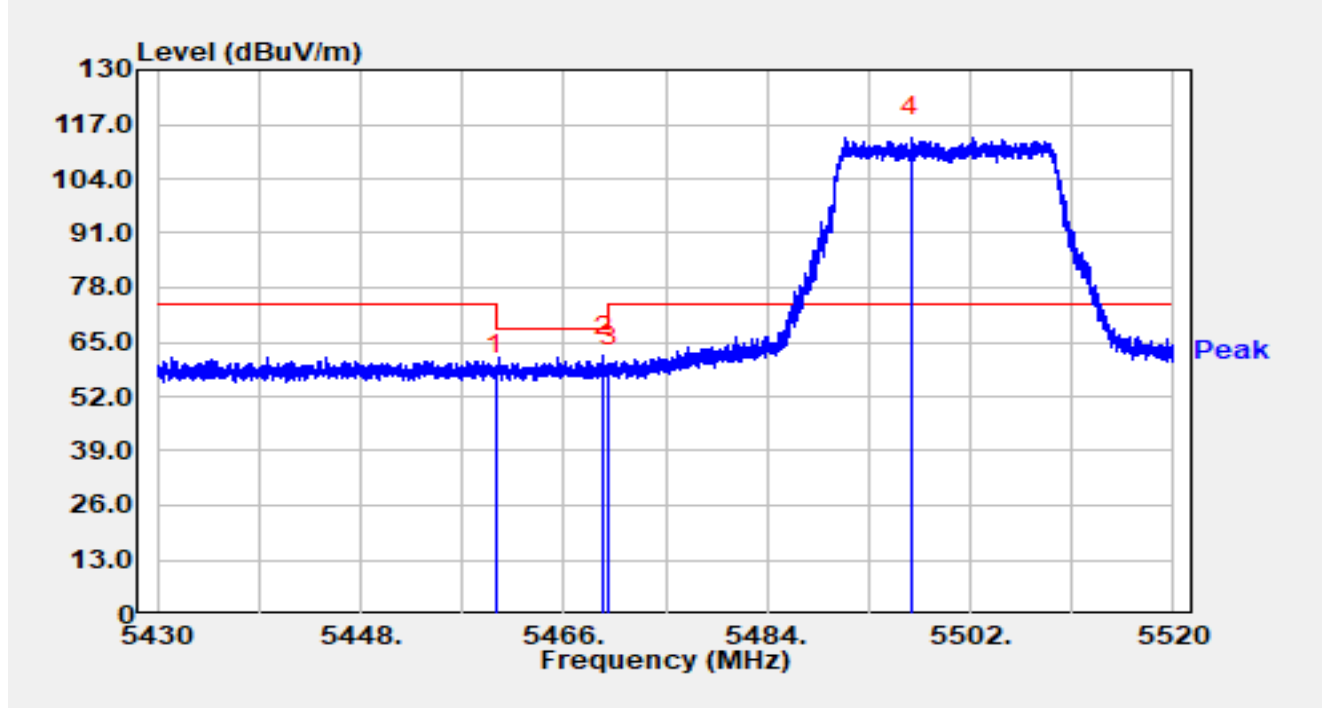


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	40.93	16.02	56.95	-11.25	68.20	Peak
2	*	5469.519	45.77	15.98	61.75	-6.45	68.20	Peak
3		5470.000	43.03	15.98	59.01	-9.19	68.20	Peak
4		5496.726	97.85	16.14	113.99	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

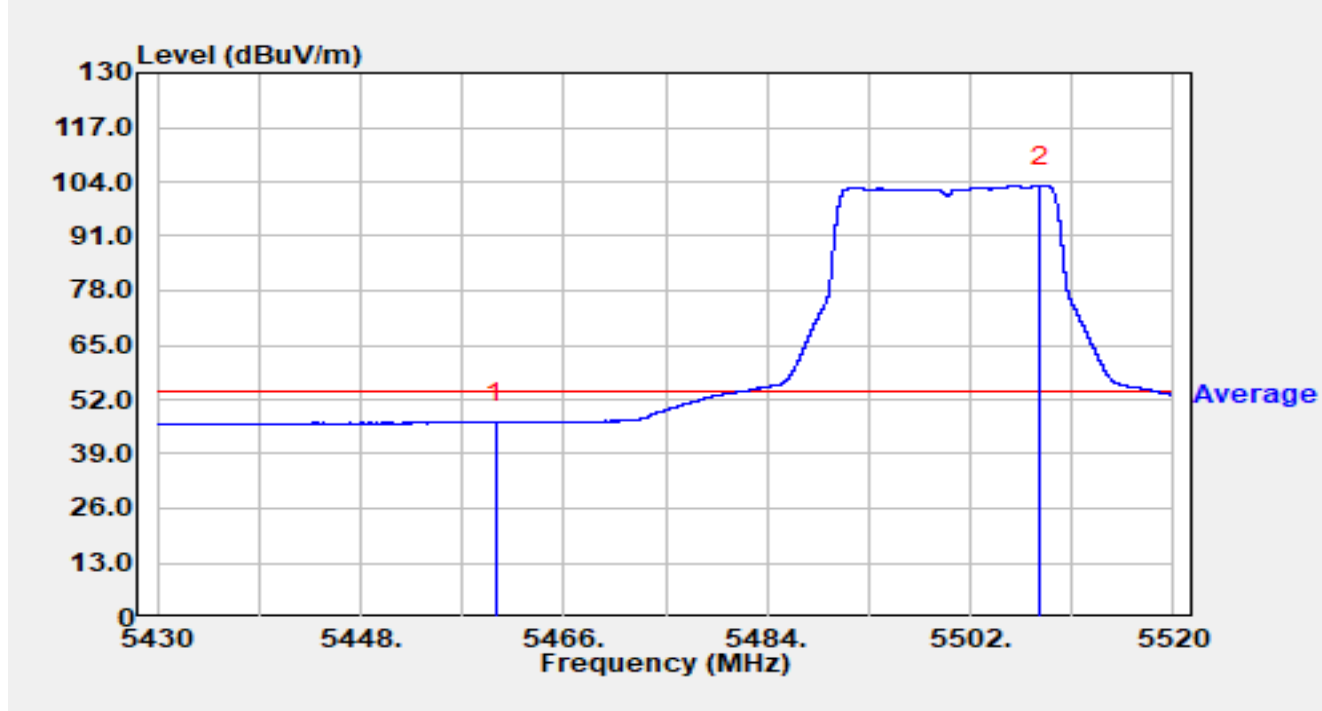


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	30.50	16.02	46.53	-7.47	54.00	Average
2		5508.165	86.78	16.22	103.00	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

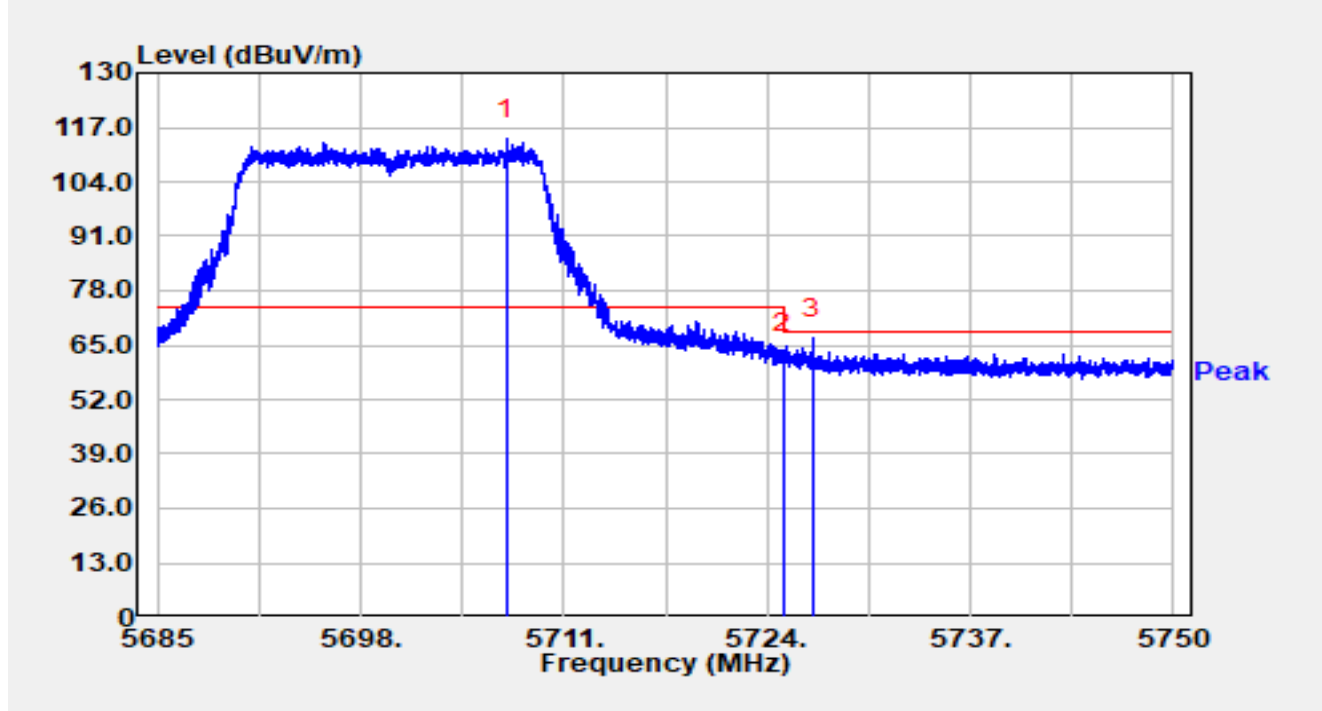


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5707.328	97.41	16.85	114.26	N/A	N/A	Peak
2		5725.000	46.30	16.92	63.22	-4.98	68.20	Peak
3	*	5726.938	49.59	16.93	66.52	-1.68	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5700MHz		

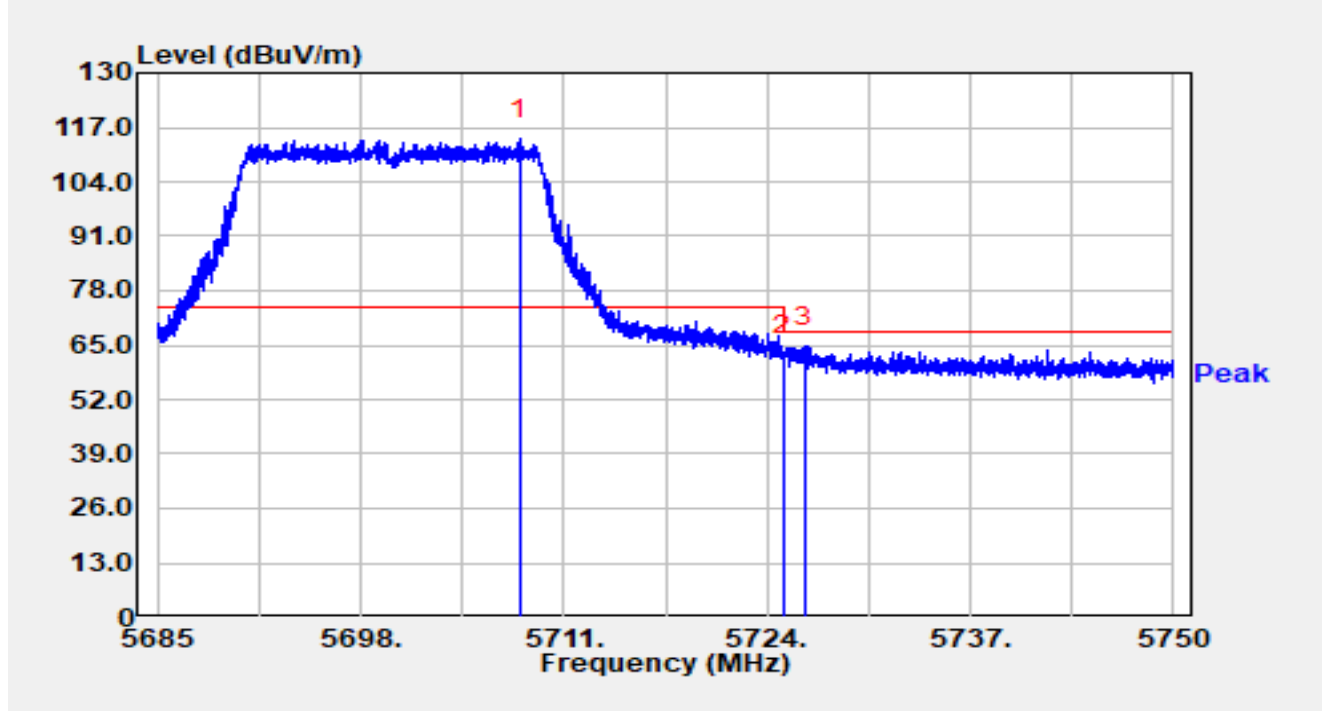


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5708.166	97.35	16.86	114.20	N/A	N/A	Peak
2		5725.000	45.47	16.92	62.40	-5.80	68.20	Peak
3	*	5726.418	47.62	16.93	64.55	-3.65	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

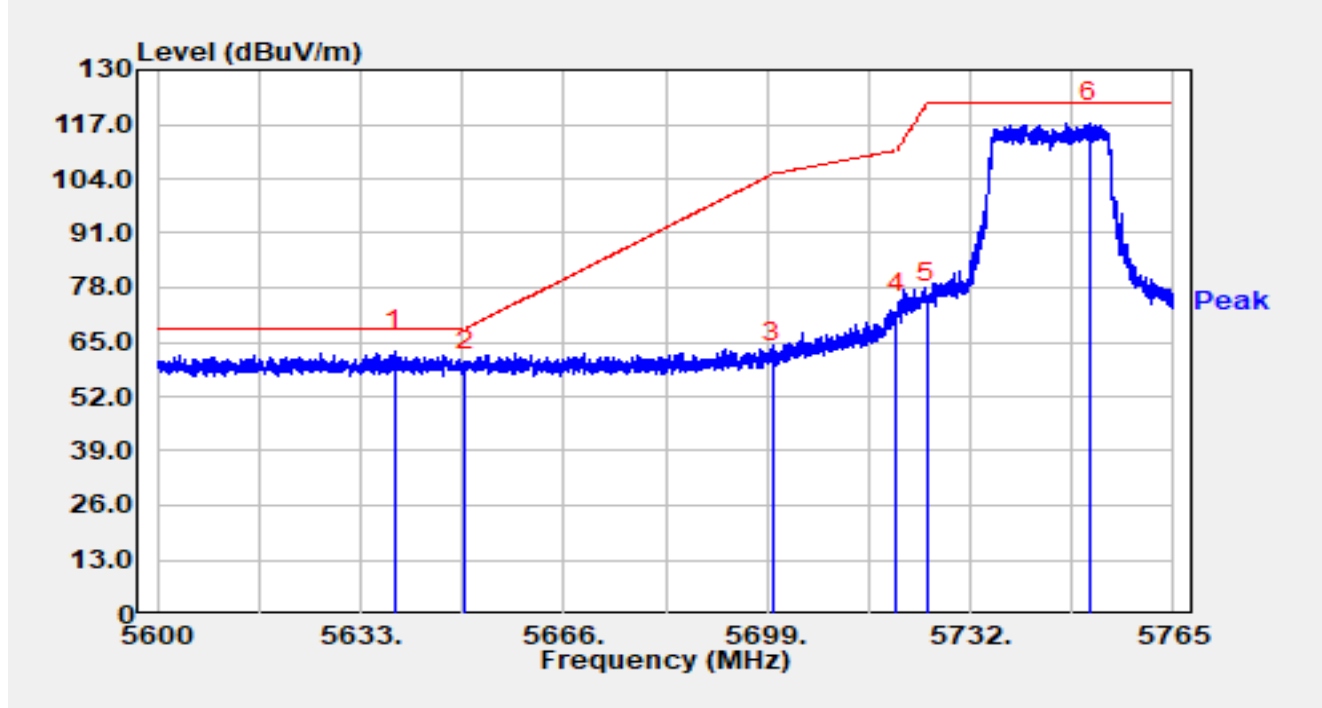


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5638.511	46.23	16.61	62.83	-5.37	68.20	Peak
2		5650.000	41.33	16.65	57.99	-10.21	68.20	Peak
3		5700.000	43.16	16.81	59.97	-45.23	105.20	Peak
4		5720.000	54.77	16.90	71.67	-39.13	110.80	Peak
5		5725.000	57.20	16.92	74.12	-48.08	122.20	Peak
6		5751.255	100.41	17.00	117.41	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

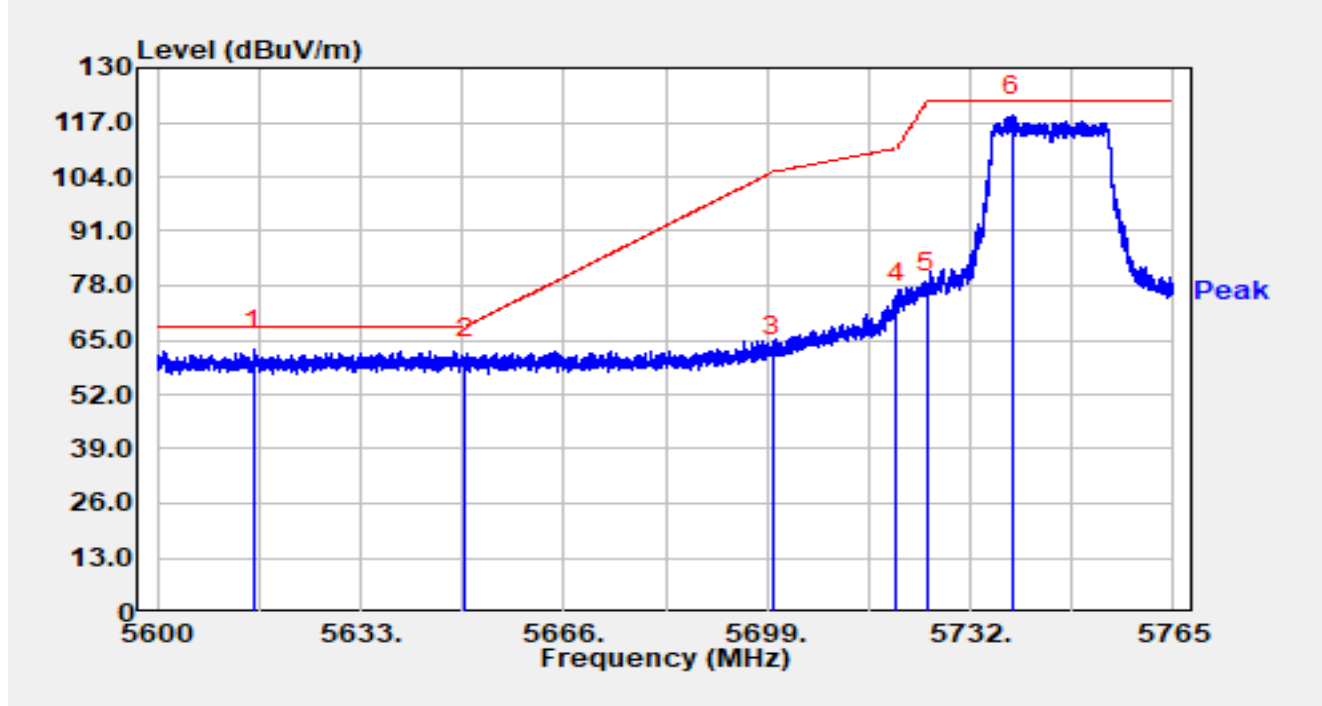


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.691	46.17	16.47	62.64	-5.56	68.20	Peak
2		5650.000	43.85	16.65	60.51	-7.69	68.20	Peak
3		5700.000	44.46	16.81	61.27	-43.93	105.20	Peak
4		5720.000	57.12	16.90	74.02	-36.78	110.80	Peak
5		5725.000	59.48	16.92	76.40	-45.80	122.20	Peak
6		5738.715	101.75	16.95	118.70	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

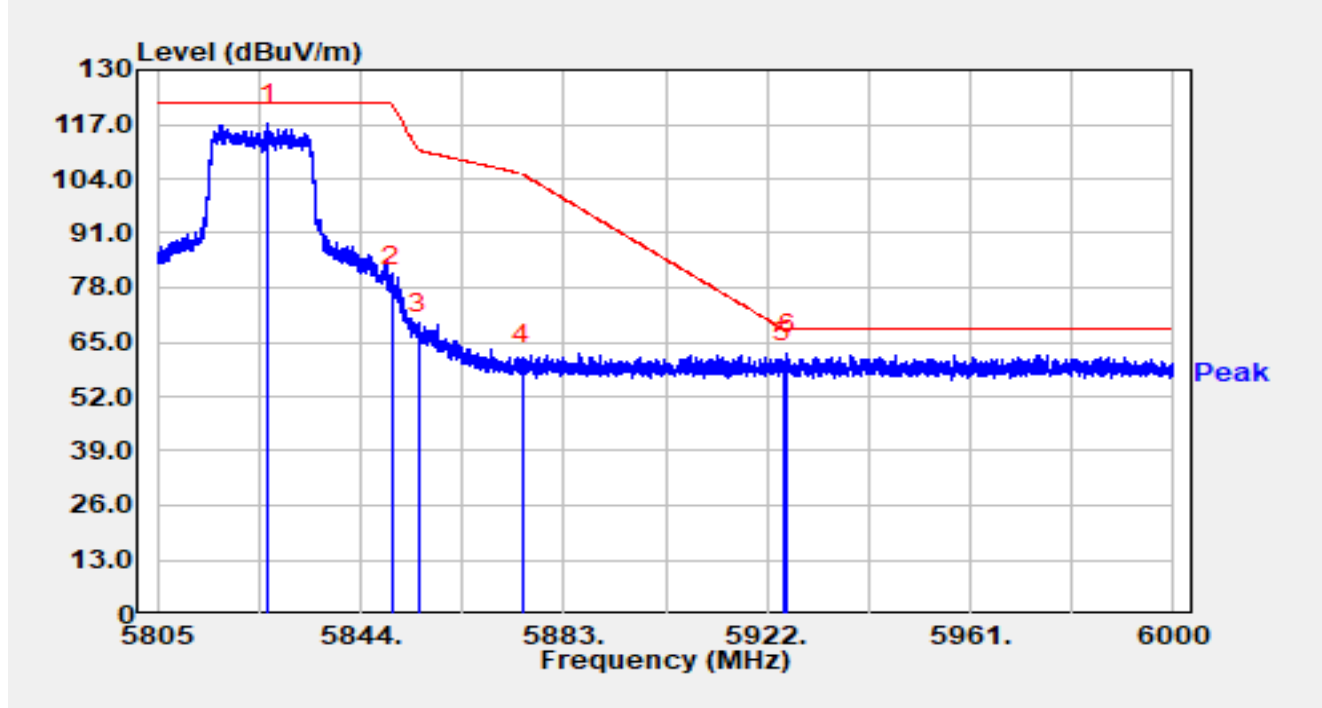


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.216	99.81	17.37	117.18	N/A	N/A	Peak
2		5850.000	60.86	17.31	78.18	-44.02	122.20	Peak
3		5855.000	49.61	17.32	66.94	-43.86	110.80	Peak
4		5875.000	42.37	17.38	59.74	-45.46	105.20	Peak
5		5925.000	42.59	17.36	59.95	-8.25	68.20	Peak
6	*	5925.939	44.74	17.37	62.11	-6.09	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

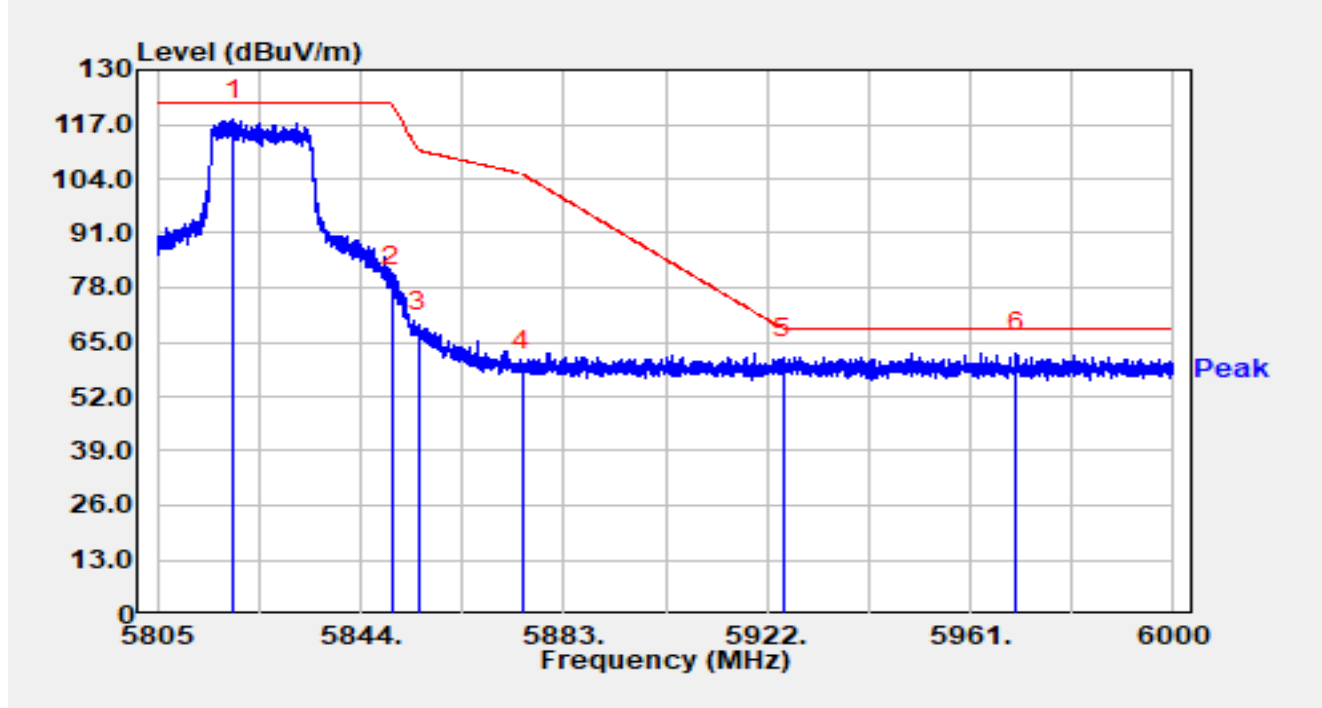


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.527	100.66	17.37	118.04	N/A	N/A	Peak
2		5850.000	61.08	17.31	78.39	-43.81	122.20	Peak
3		5855.000	50.04	17.32	67.37	-43.43	110.80	Peak
4		5875.000	40.84	17.38	58.21	-46.99	105.20	Peak
5		5925.000	43.60	17.36	60.97	-7.23	68.20	Peak
6	*	5969.873	44.99	17.52	62.51	-5.69	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

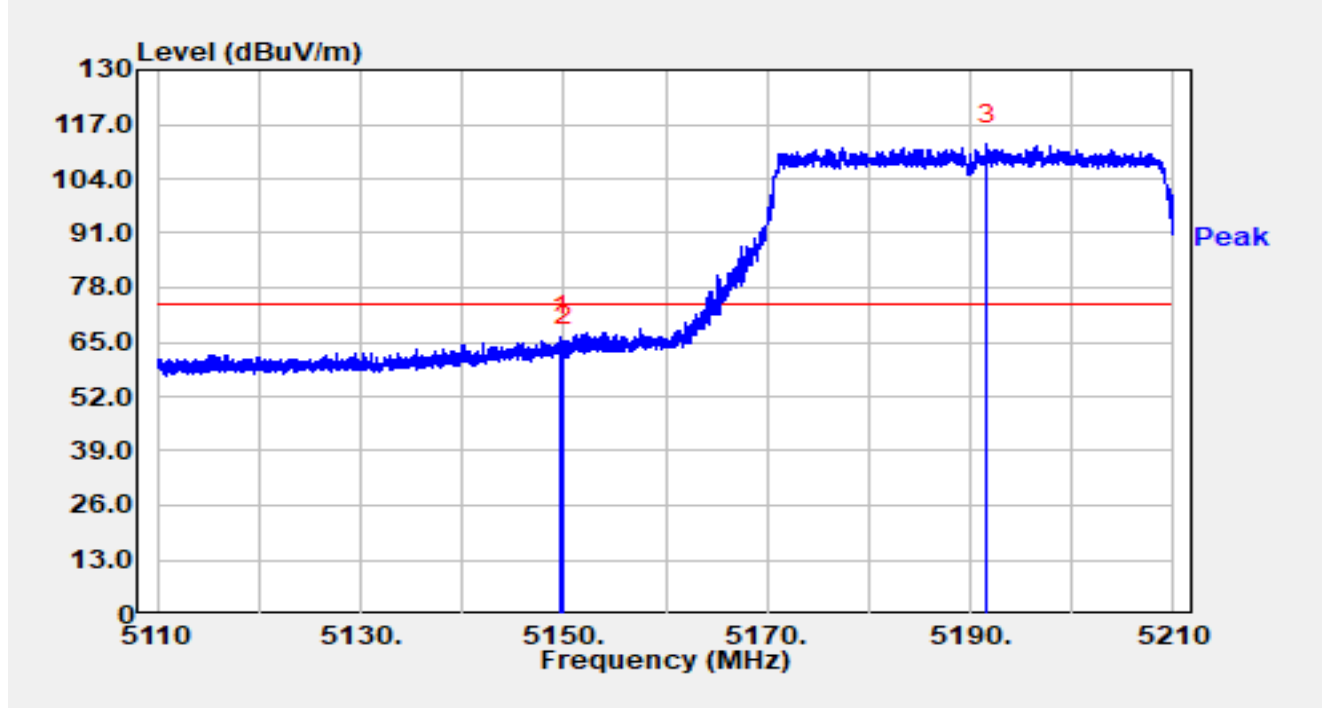


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.770	50.31	16.00	66.30	-7.70	74.00	Peak
2		5150.000	47.81	16.00	63.81	-10.19	74.00	Peak
3		5191.600	96.29	15.95	112.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

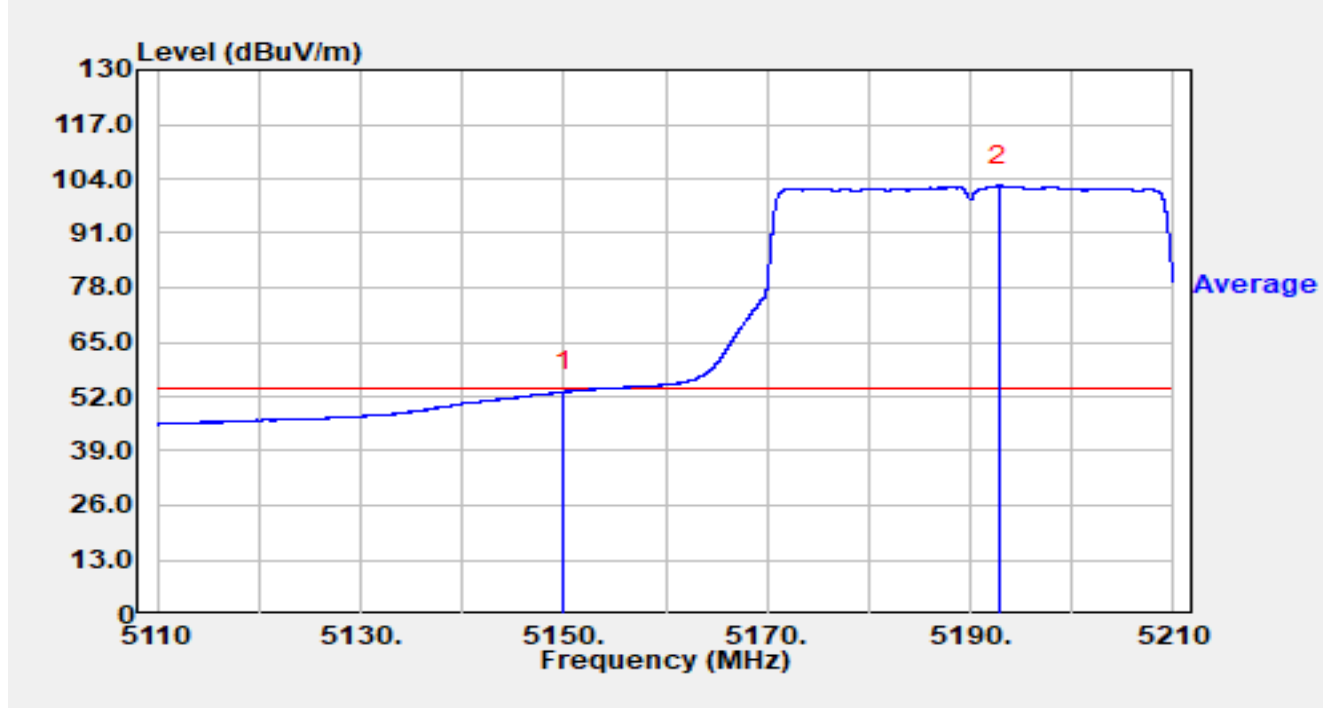


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.18	16.00	53.18	-0.82	54.00	Average
2		5192.810	86.54	15.96	102.49	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

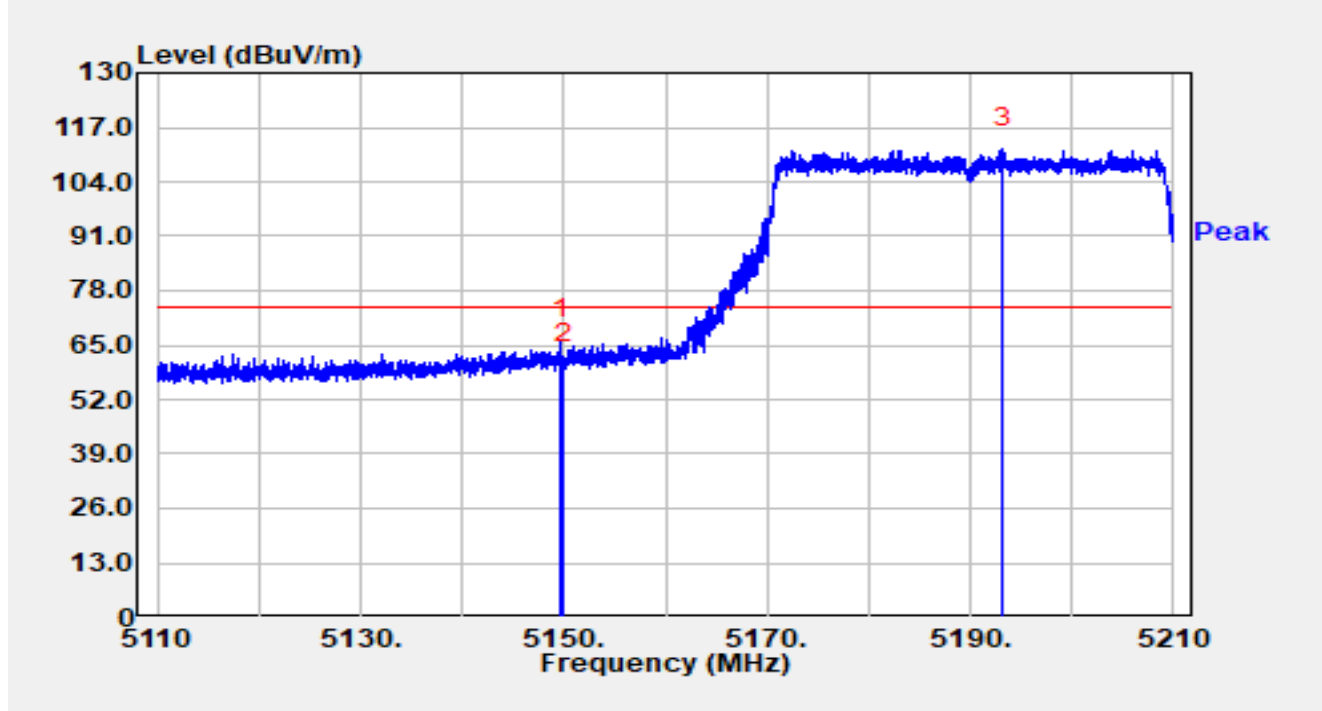


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.700	50.41	16.00	66.41	-7.59	74.00	Peak
2		5150.000	44.53	16.00	60.52	-13.48	74.00	Peak
3		5193.250	95.91	15.96	111.87	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-10
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

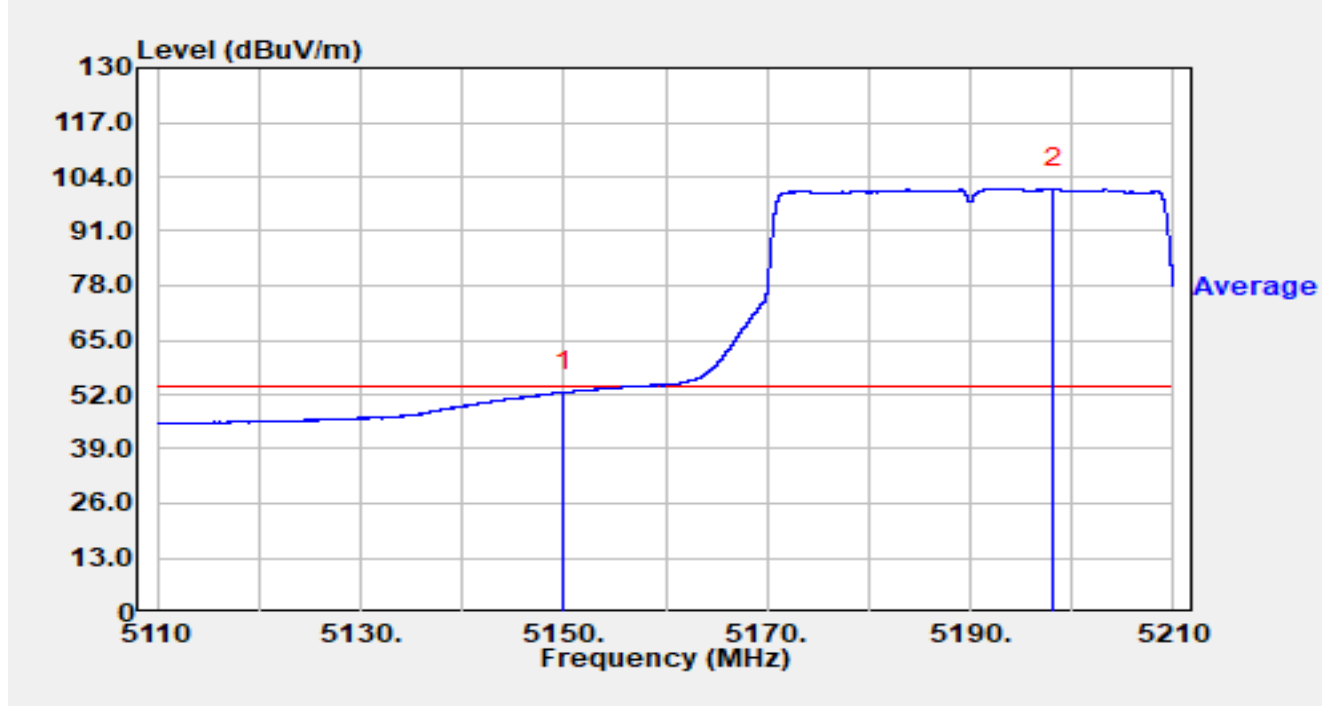


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	36.50	16.00	52.49	-1.51	54.00	Average
2		5198.130	85.29	15.97	101.26	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

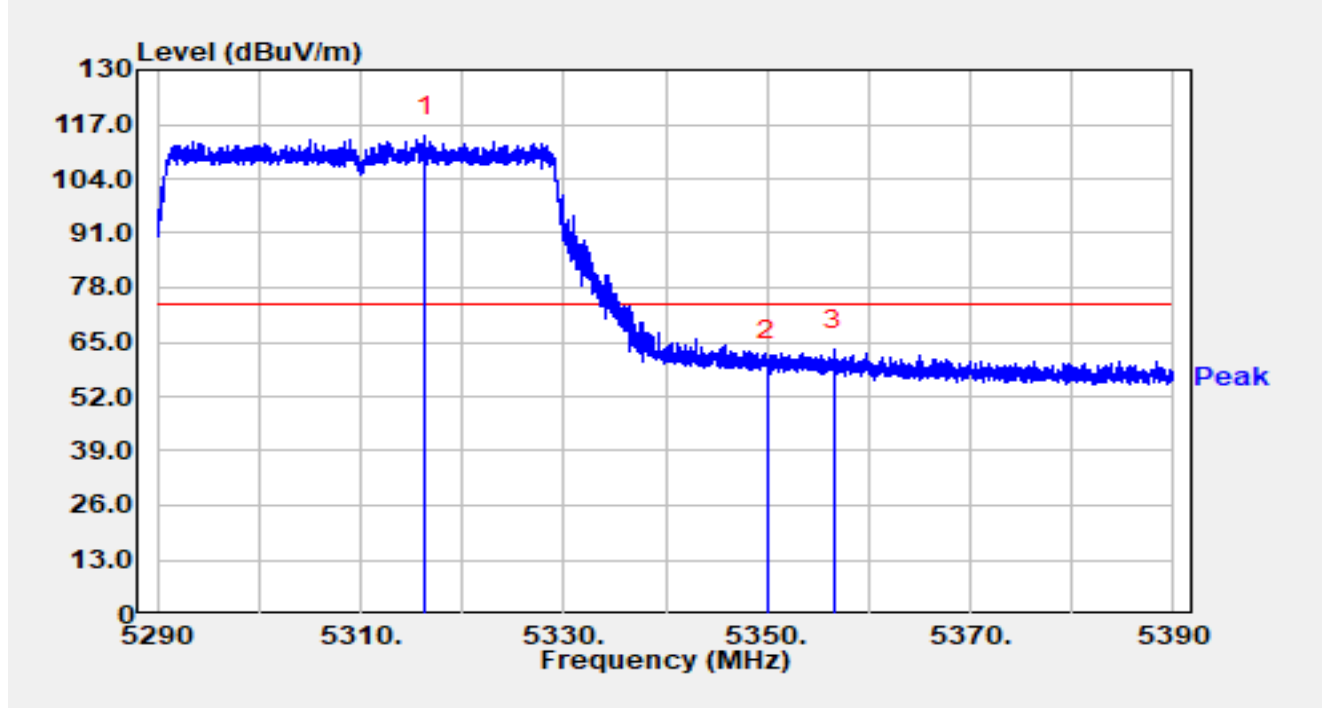


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.400	98.38	15.79	114.17	N/A	N/A	Peak
2		5350.000	44.82	15.68	60.50	-13.50	74.00	Peak
3	*	5356.550	47.43	15.66	63.09	-10.91	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

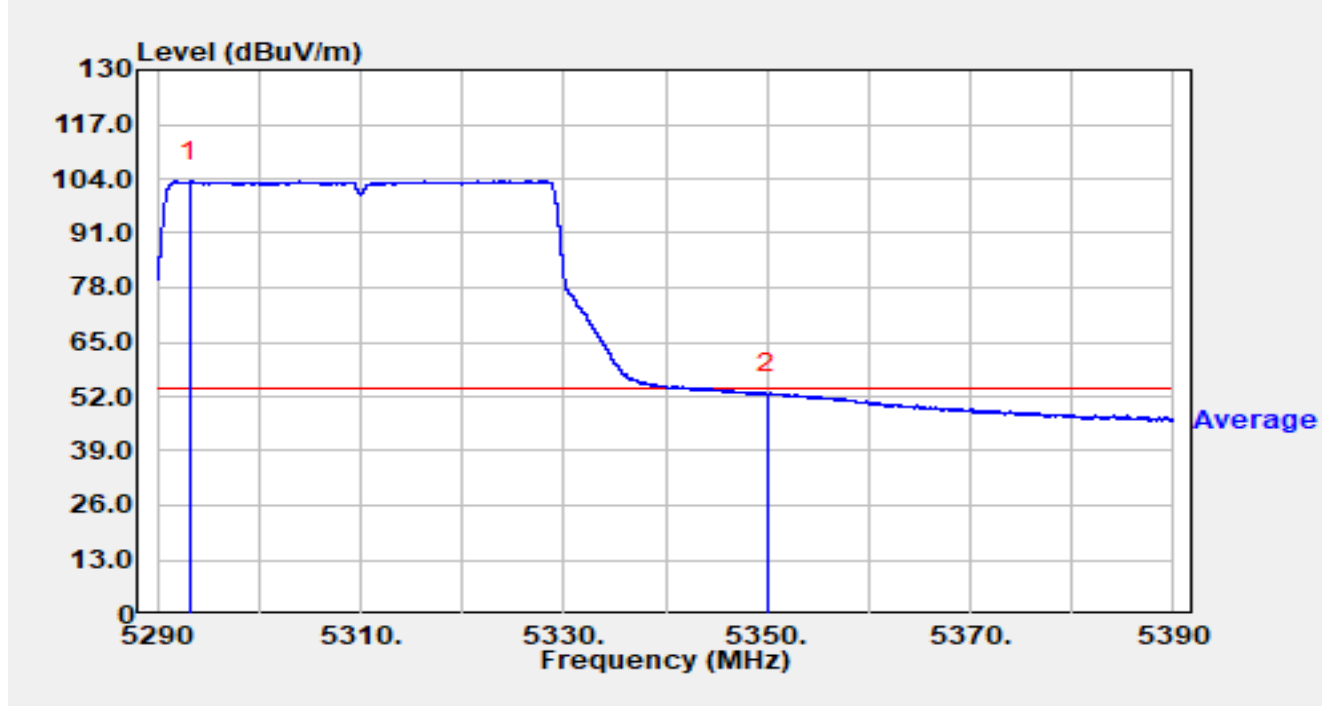


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.230	87.62	15.78	103.40	N/A	N/A	Average
2	*	5350.000	36.91	15.68	52.59	-1.41	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

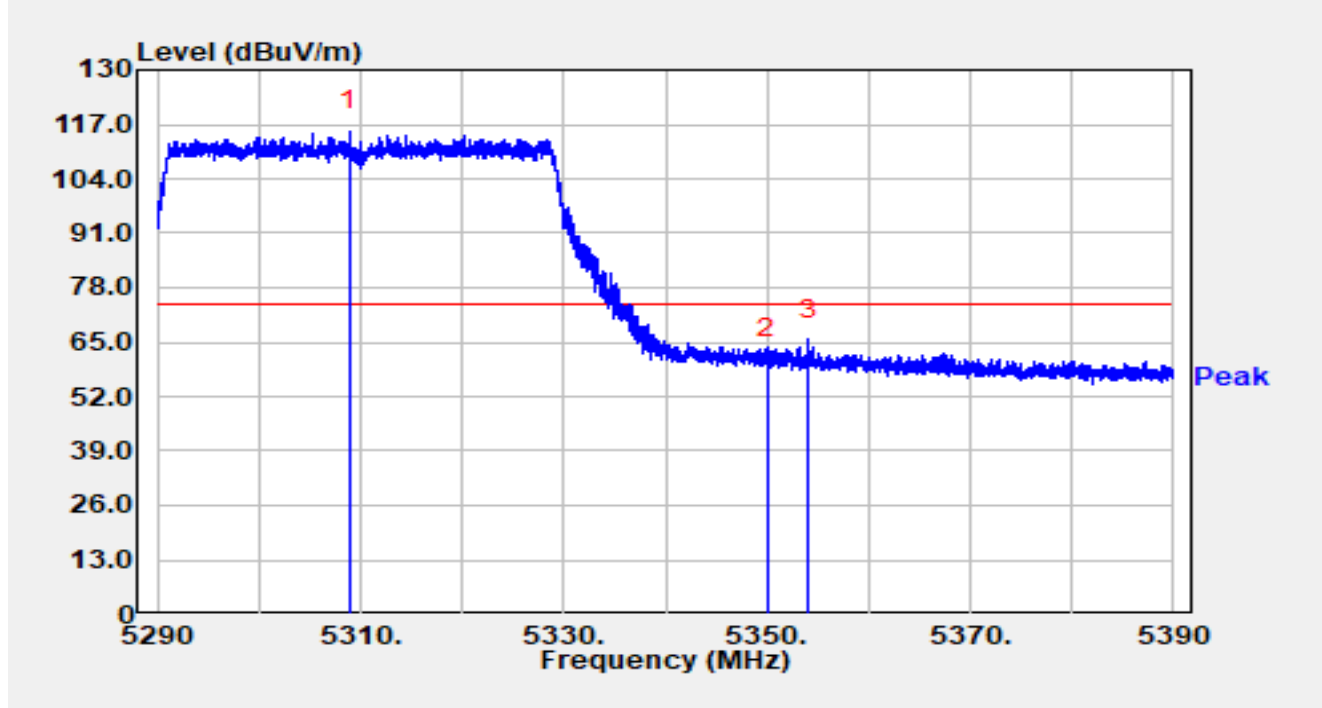


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.870	99.68	15.77	115.45	N/A	N/A	Peak
2		5350.000	45.35	15.68	61.03	-12.97	74.00	Peak
3	*	5354.110	49.96	15.67	65.63	-8.37	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9°C	Humidity	34.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

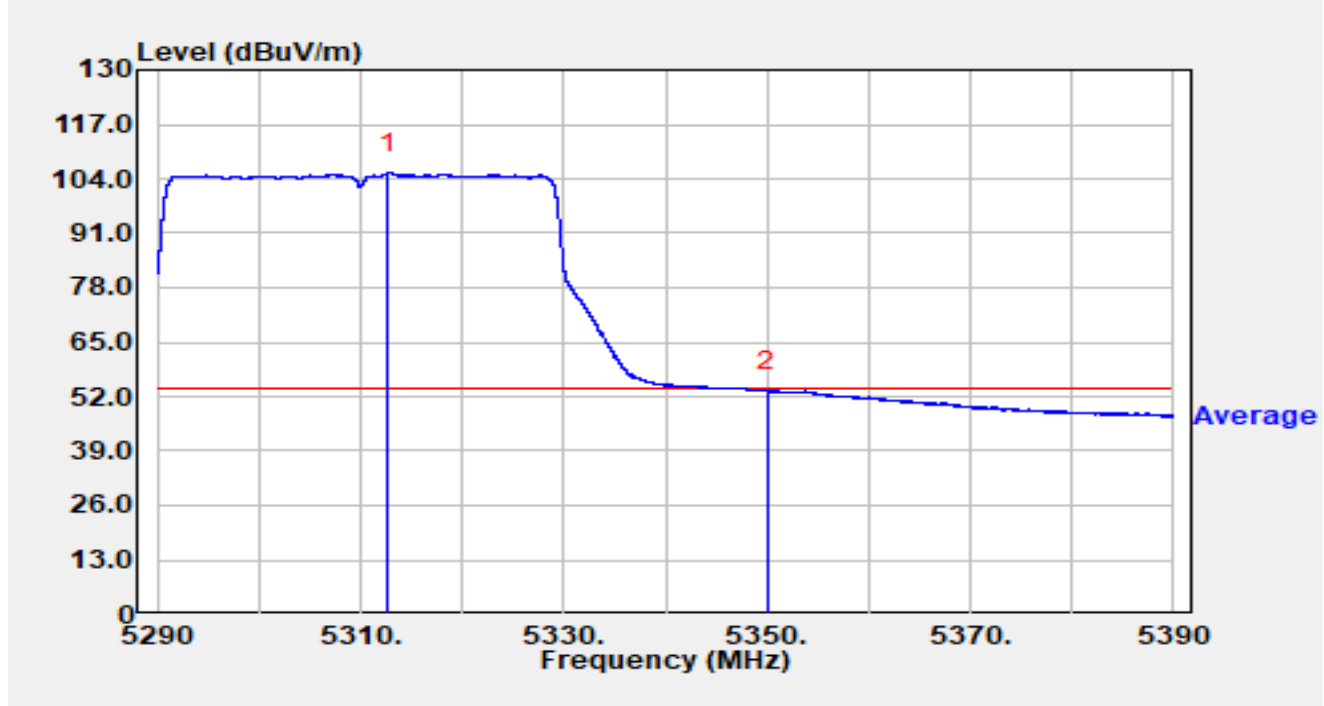


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.720	89.66	15.77	105.43	N/A	N/A	Average
2	*	5350.000	37.56	15.68	53.24	-0.76	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

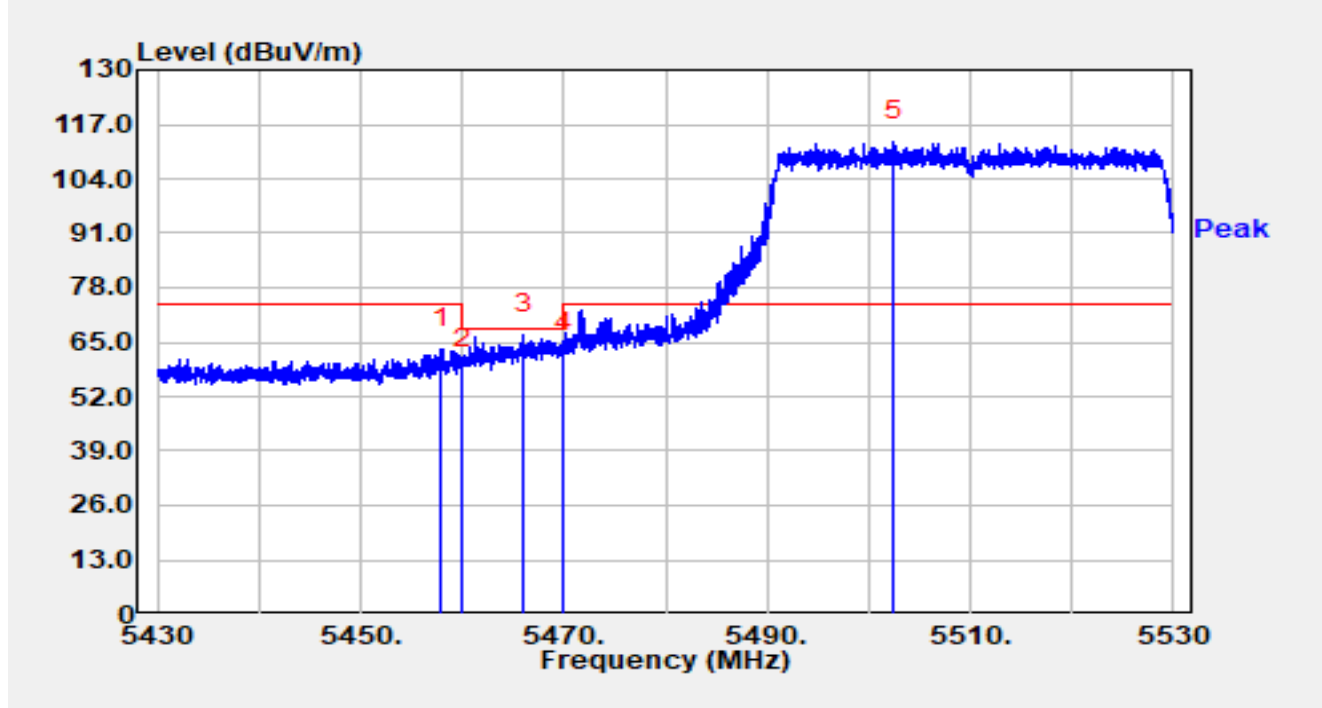


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.980	47.33	16.03	63.36	-10.64	74.00	Peak
2		5460.000	42.64	16.02	58.67	-9.53	68.20	Peak
3	*	5466.050	50.76	16.00	66.76	-1.44	68.20	Peak
4		5470.000	46.66	15.98	62.64	-5.56	68.20	Peak
5		5502.500	96.84	16.20	113.04	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

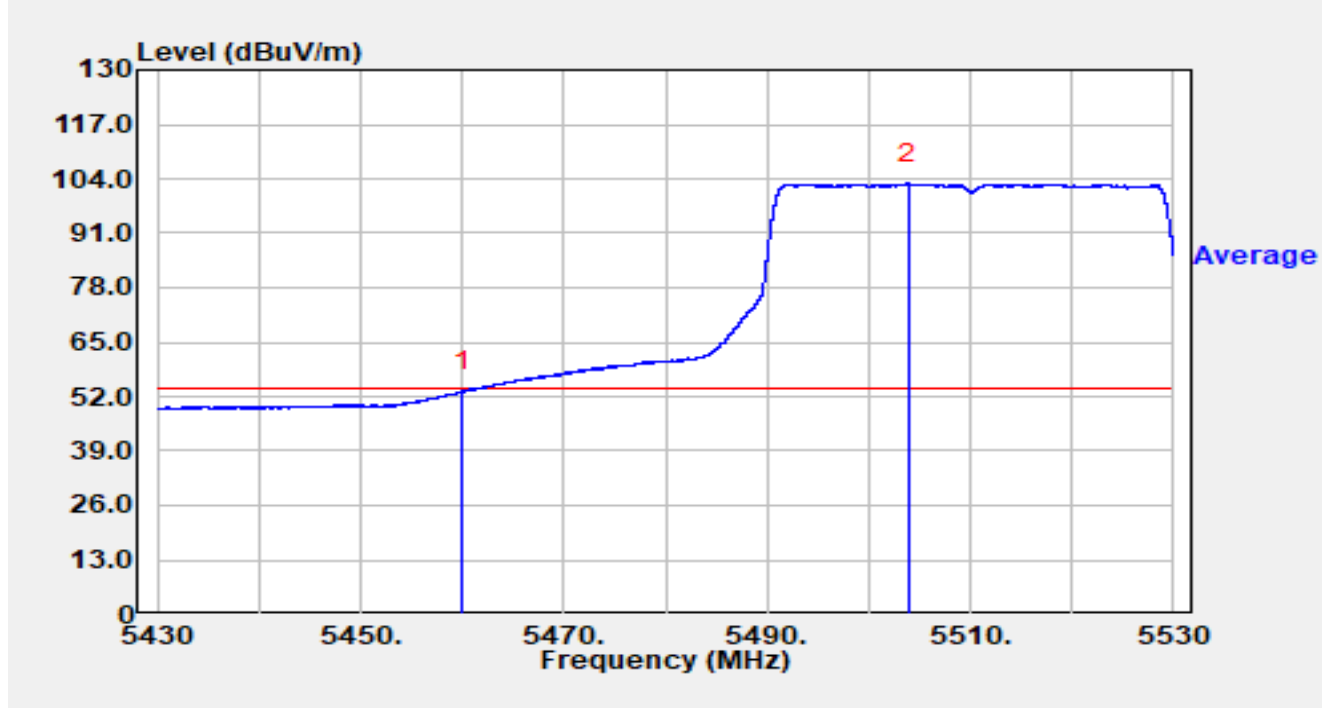


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	37.30	16.02	53.32	-0.68	54.00	Average
2		5503.900	86.66	16.22	102.88	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

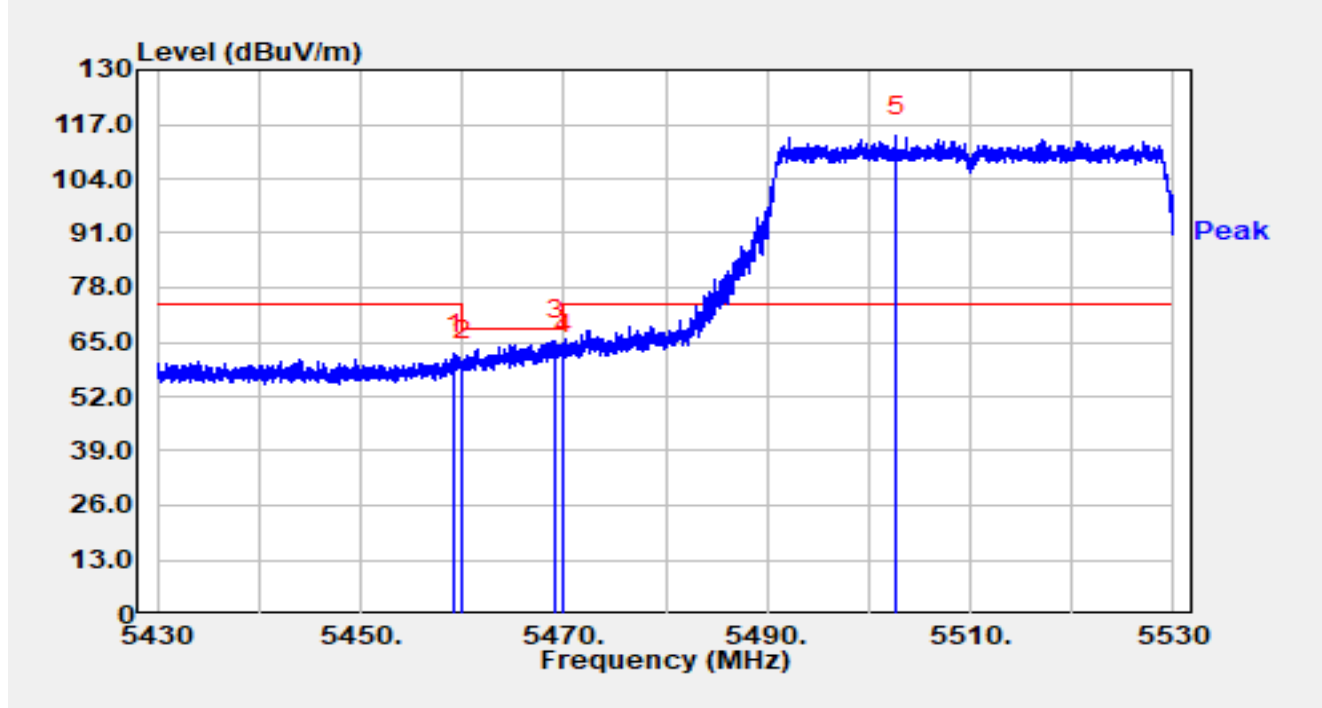


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.290	46.21	16.03	62.23	-11.77	74.00	Peak
2		5460.000	44.34	16.02	60.36	-7.84	68.20	Peak
3	*	5469.170	49.27	15.98	65.26	-2.94	68.20	Peak
4		5470.000	46.07	15.98	62.05	-6.15	68.20	Peak
5		5502.750	97.86	16.21	114.07	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

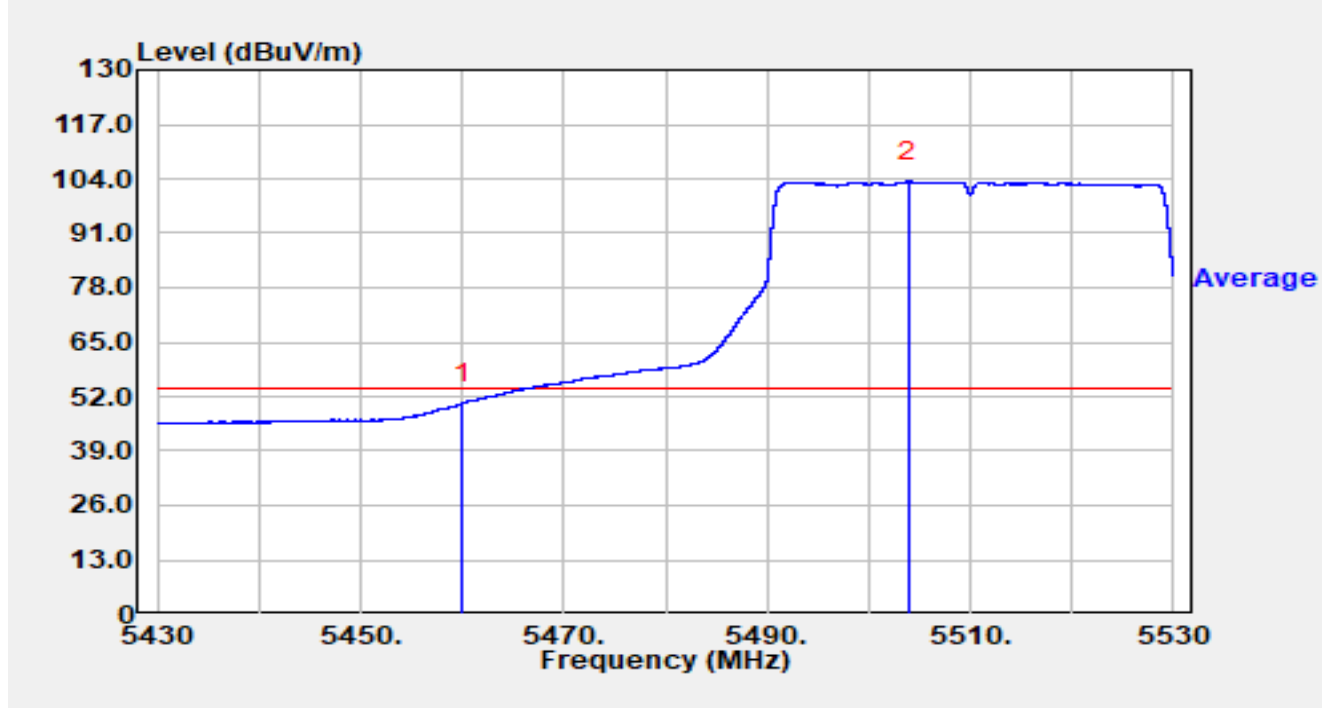


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	34.27	16.02	50.29	-3.71	54.00	Average
2		5503.880	87.18	16.22	103.40	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

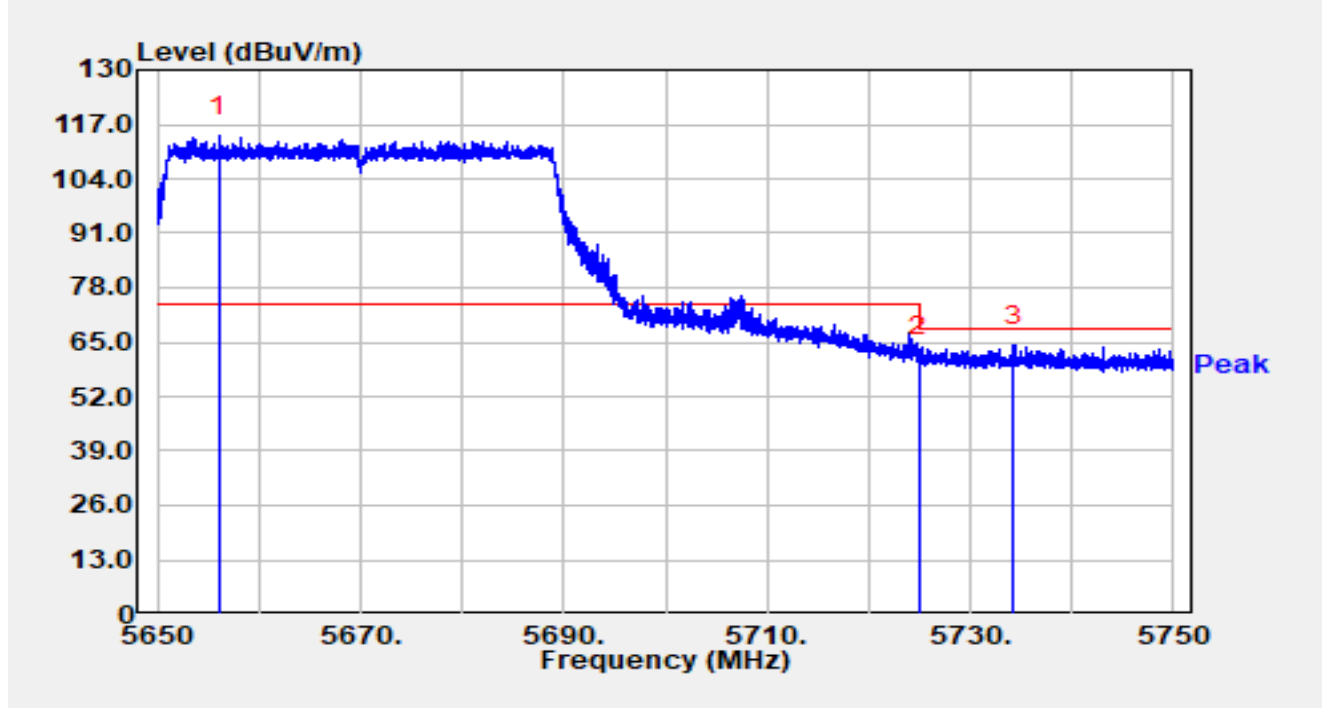


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5656.080	97.62	16.68	114.30	N/A	N/A	Peak
2		5725.000	44.51	16.92	61.44	-6.76	68.20	Peak
3	*	5734.310	47.28	16.94	64.23	-3.97	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

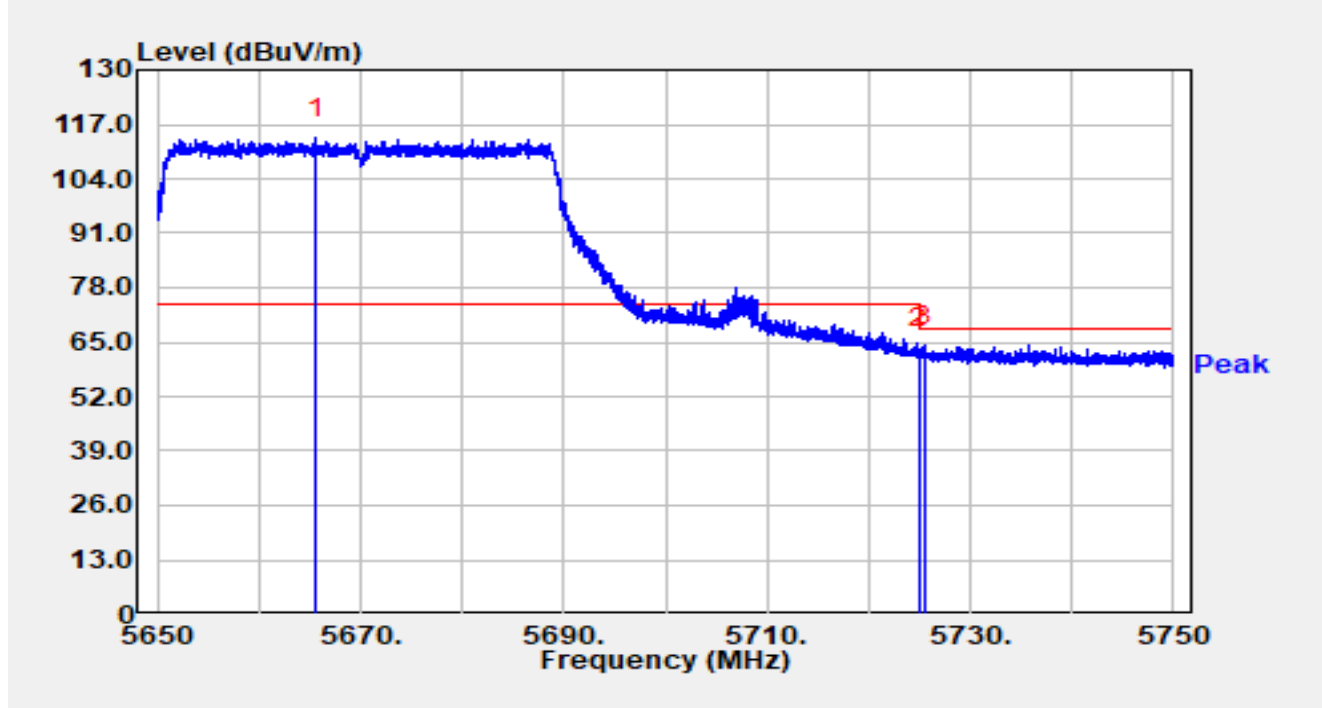


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.580	96.95	16.67	113.61	N/A	N/A	Peak
2		5725.000	46.45	16.92	63.37	-4.83	68.20	Peak
3	*	5725.430	47.32	16.93	64.25	-3.95	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

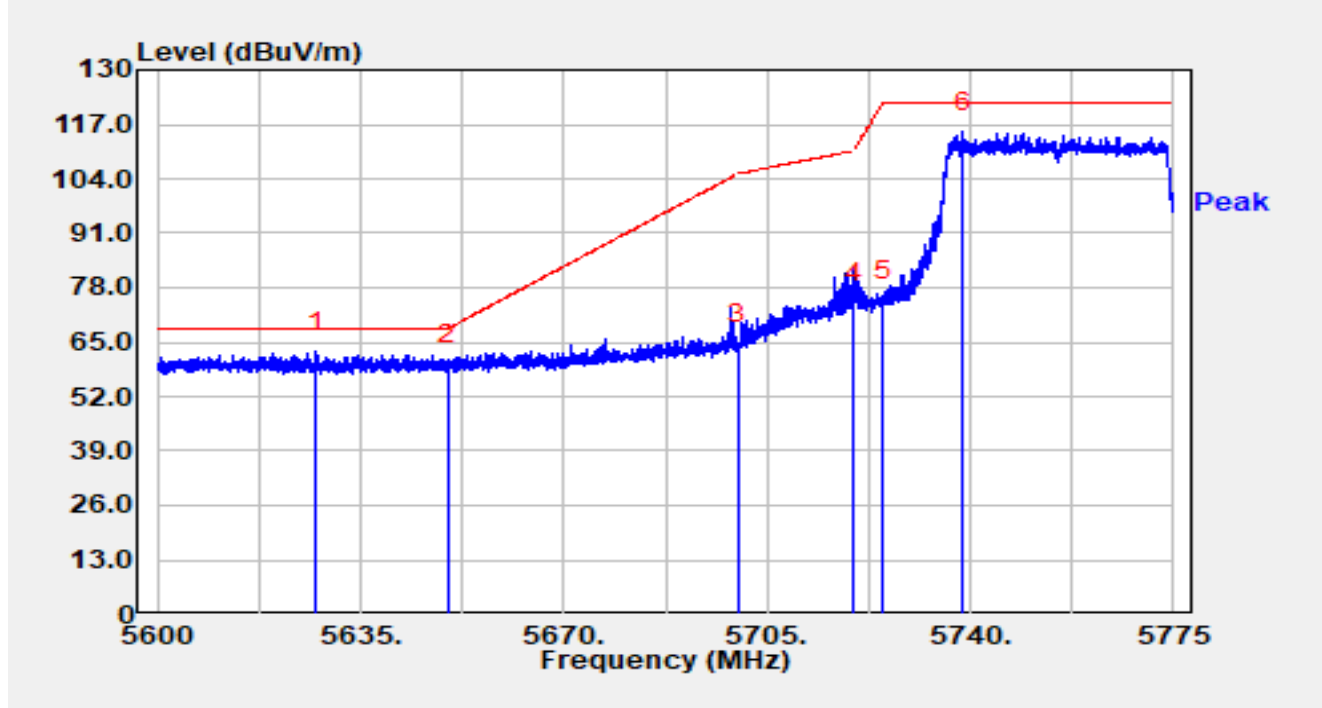


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5627.283	46.07	16.53	62.60	-5.60	68.20	Peak
2		5649.998	43.16	16.65	59.81	-8.39	68.20	Peak
3		5700.000	47.63	16.81	64.44	-40.76	105.20	Peak
4		5720.000	57.31	16.90	74.21	-36.59	110.80	Peak
5		5725.000	57.67	16.92	74.59	-47.61	122.20	Peak
6		5738.670	98.19	16.95	115.14	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

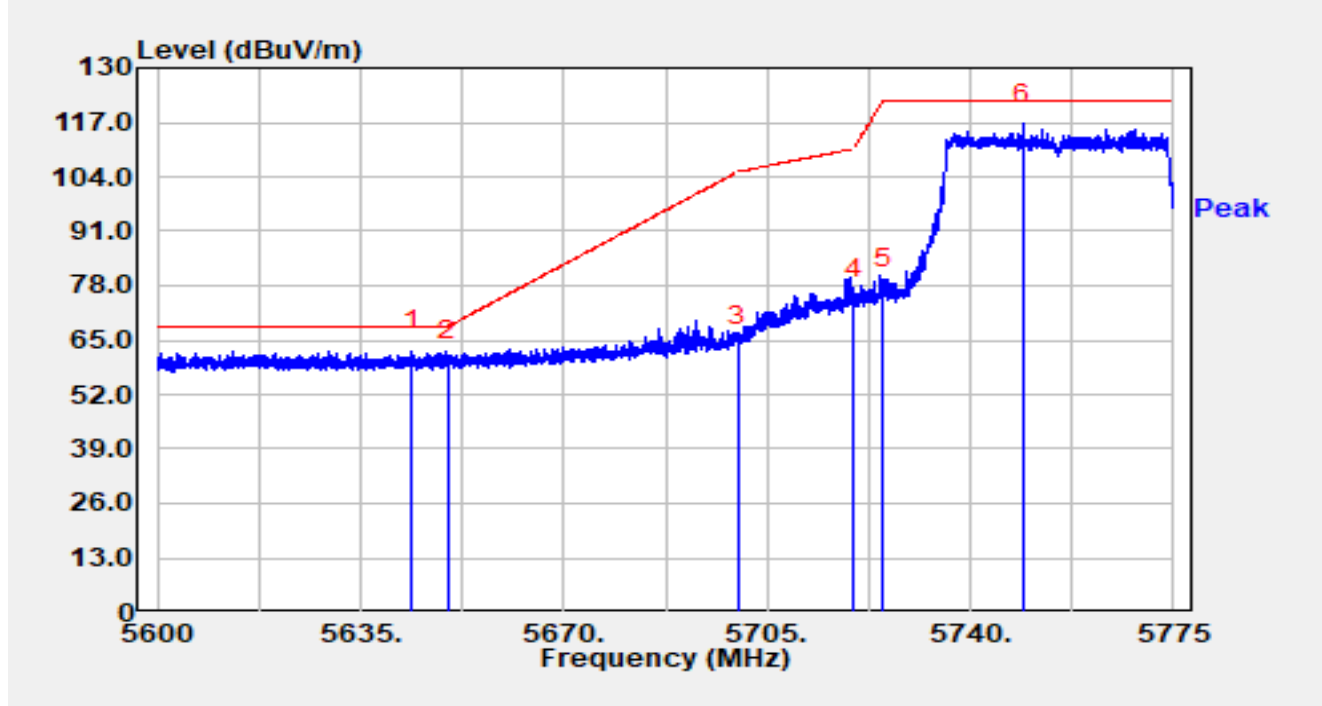


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5643.925	45.90	16.63	62.53	-5.67	68.20	Peak
2		5650.000	43.35	16.65	60.00	-8.20	68.20	Peak
3		5700.000	46.72	16.81	63.54	-41.66	105.20	Peak
4		5720.000	58.07	16.90	74.97	-35.83	110.80	Peak
5		5725.000	60.49	16.92	77.41	-44.79	122.20	Peak
6		5749.065	99.69	16.99	116.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

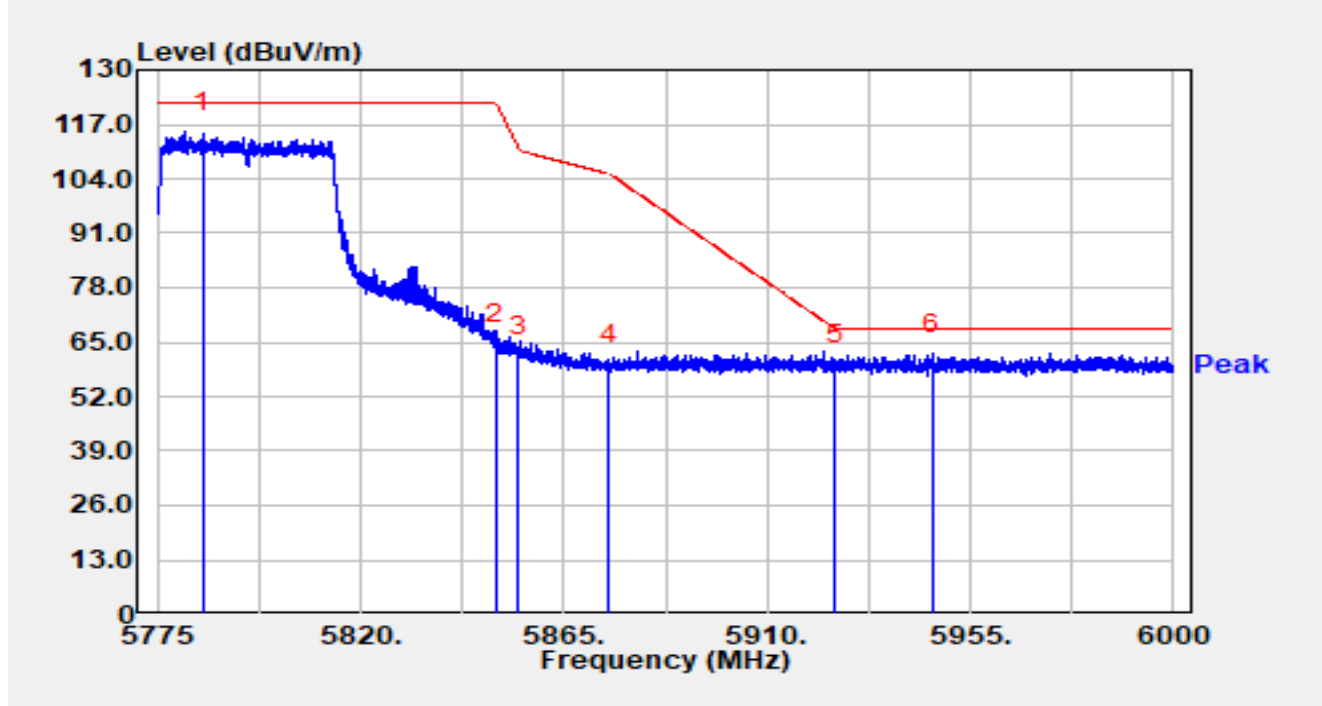


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5784.990	97.59	17.22	114.81	N/A	N/A	Peak
2		5849.993	47.31	17.31	64.63	-57.57	122.20	Peak
3		5855.000	44.07	17.32	61.39	-49.41	110.80	Peak
4		5875.000	42.19	17.38	59.57	-45.63	105.20	Peak
5		5925.000	42.44	17.36	59.81	-8.39	68.20	Peak
6	*	5946.697	44.73	17.44	62.17	-6.03	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

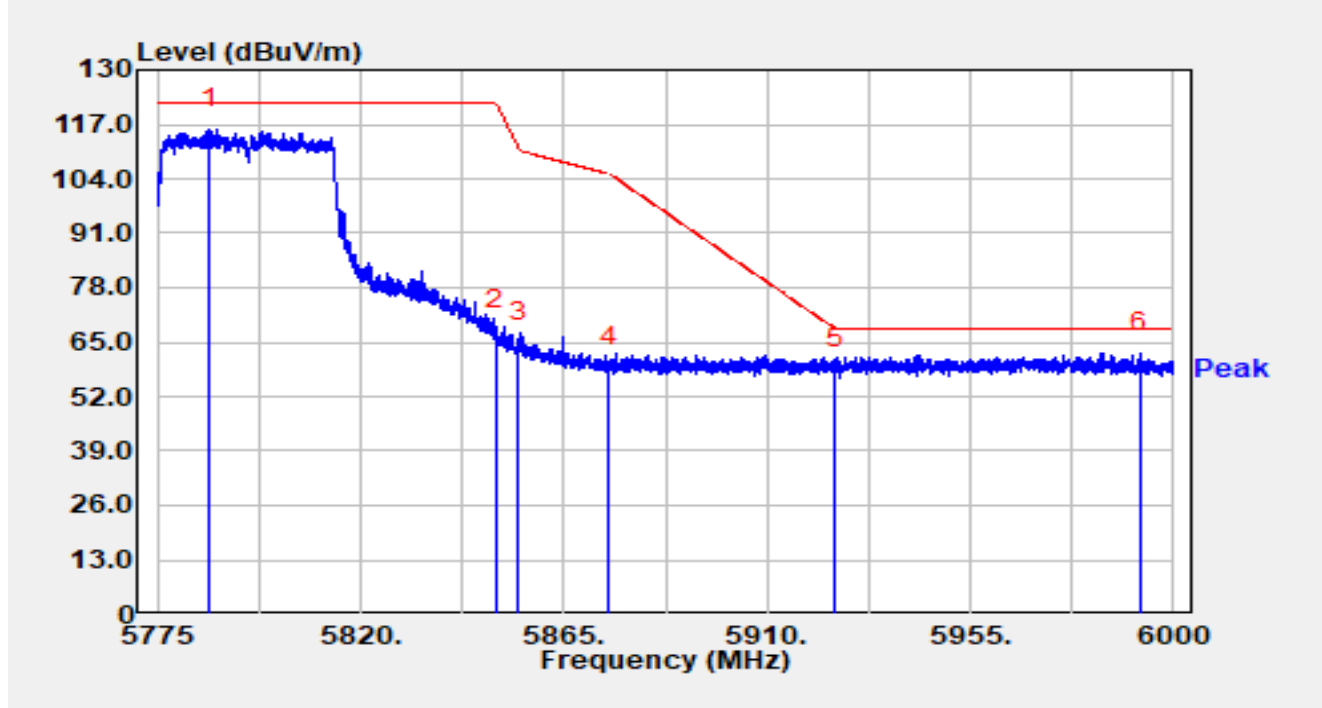


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5786.678	98.56	17.23	115.79	N/A	N/A	Peak
2		5849.993	50.63	17.31	67.94	-54.26	122.20	Peak
3		5855.000	47.58	17.32	64.91	-45.89	110.80	Peak
4		5875.000	41.70	17.38	59.08	-46.12	105.20	Peak
5		5925.000	41.48	17.36	58.84	-9.36	68.20	Peak
6	*	5992.530	45.03	17.41	62.44	-5.76	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

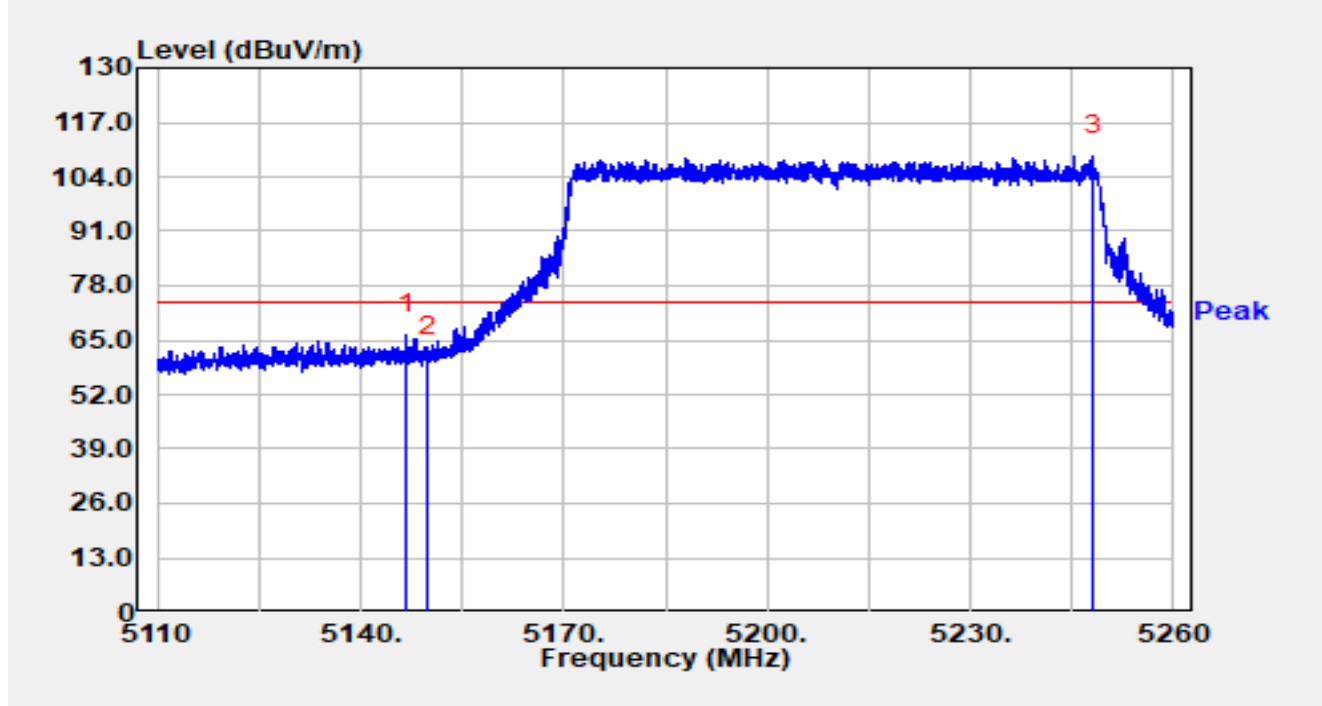


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.795	50.29	15.99	66.29	-7.71	74.00	Peak
2		5150.000	45.19	16.00	61.19	-12.81	74.00	Peak
3		5248.105	92.94	15.97	108.91	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

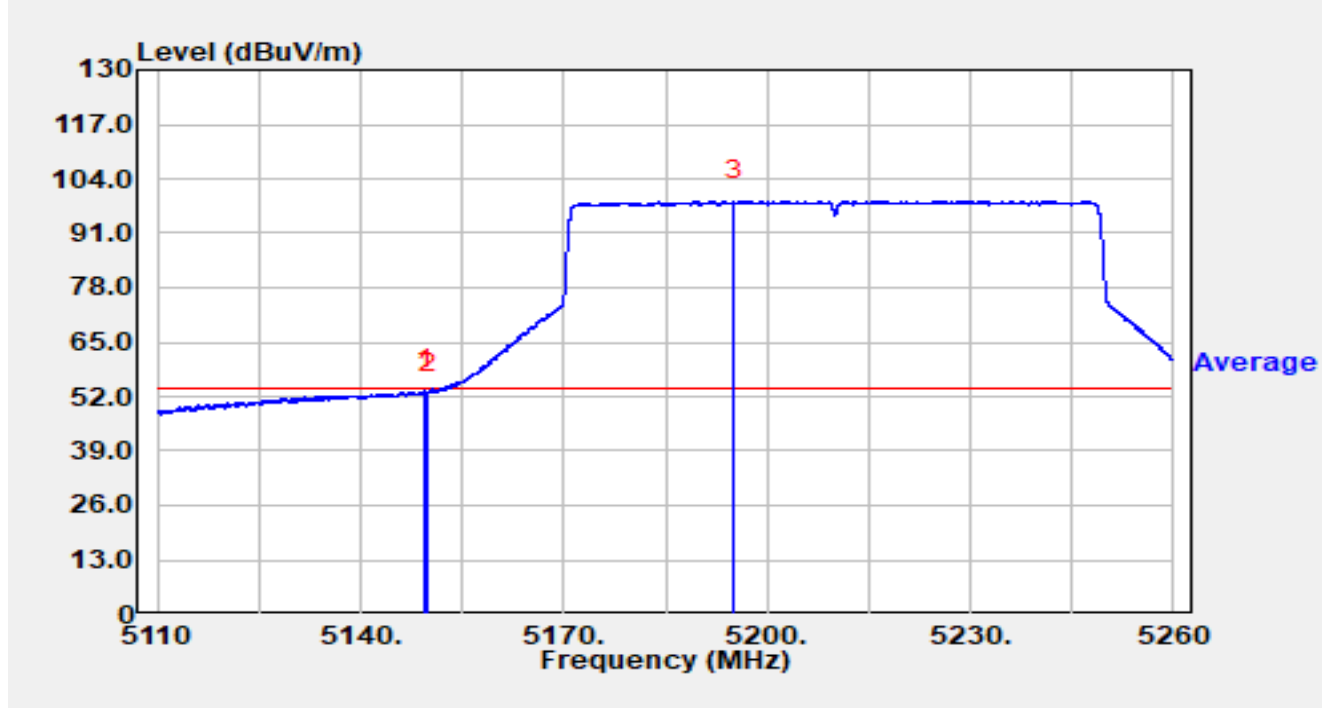


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.525	37.53	16.00	53.52	-0.48	54.00	Average
2		5150.005	36.60	16.00	52.60	-1.40	54.00	Average
3		5195.125	82.69	15.96	98.65	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

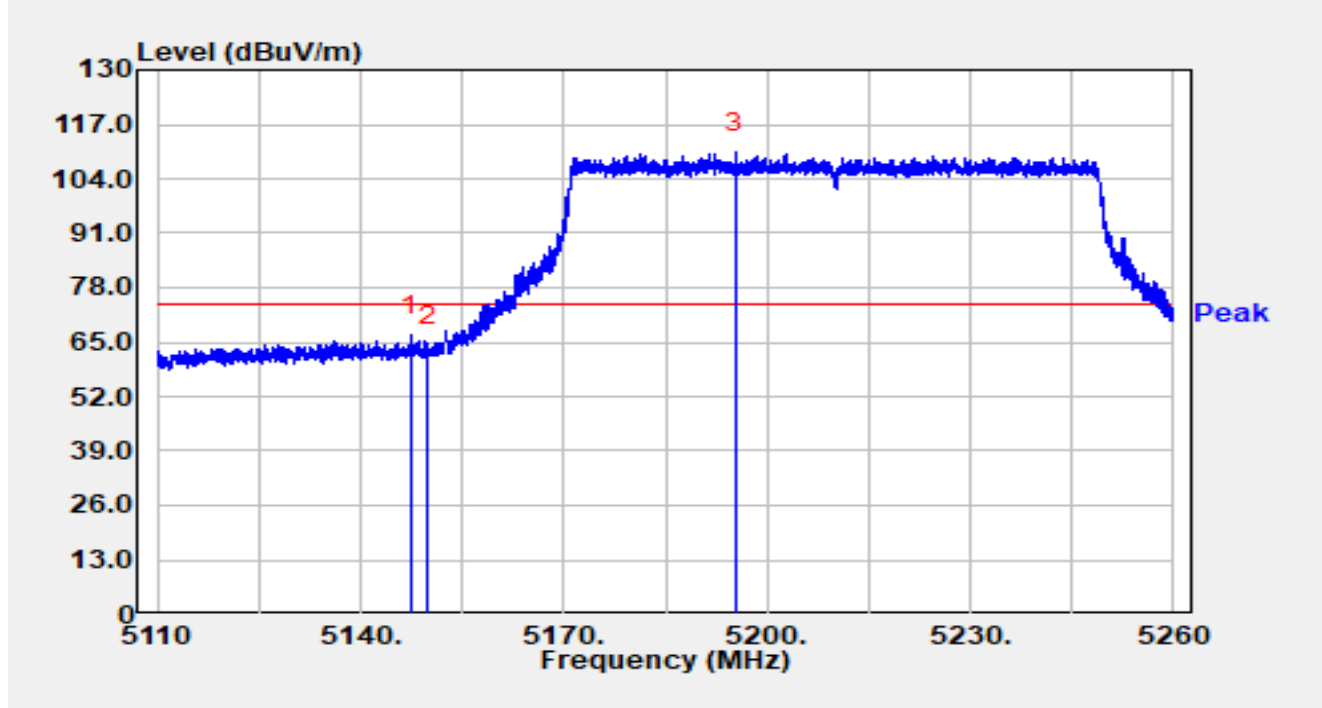


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.440	50.54	15.99	66.53	-7.47	74.00	Peak
2		5150.000	47.86	16.00	63.85	-10.15	74.00	Peak
3		5195.335	94.27	15.96	110.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

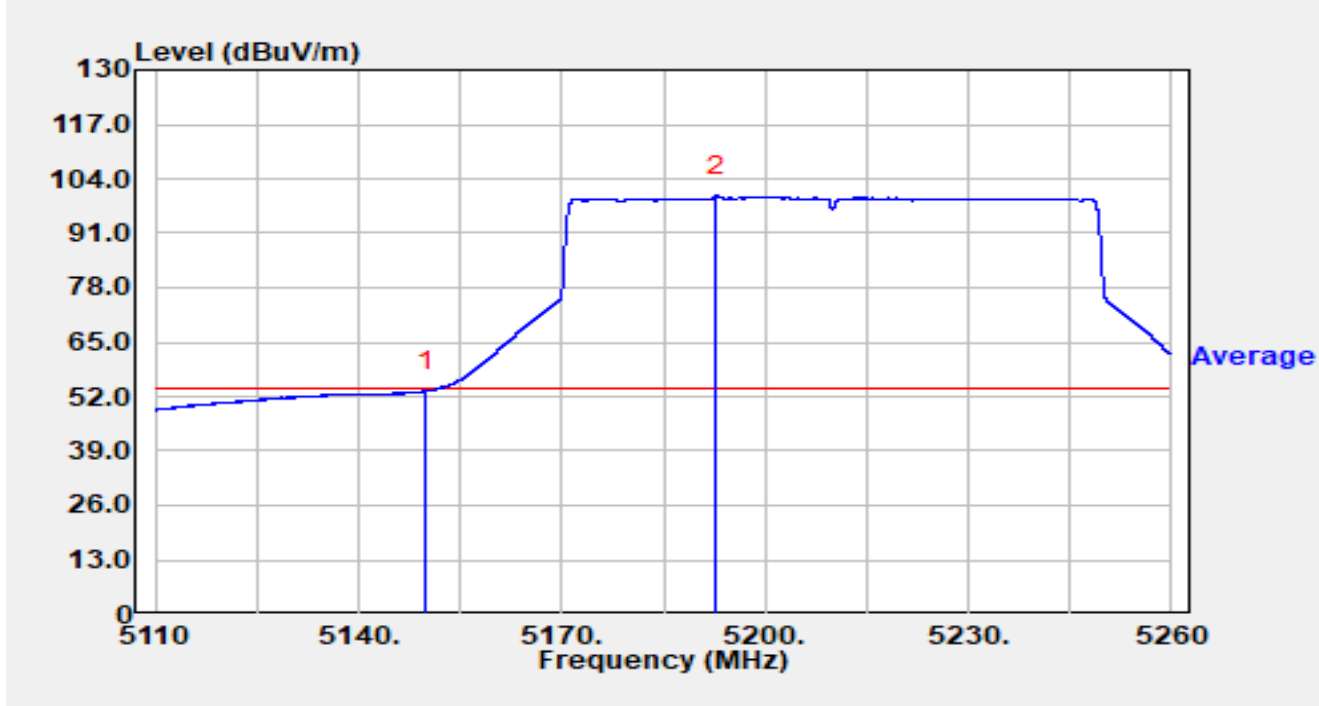


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	37.32	16.00	53.32	-0.68	54.00	Average
2		5192.785	84.05	15.96	100.00	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

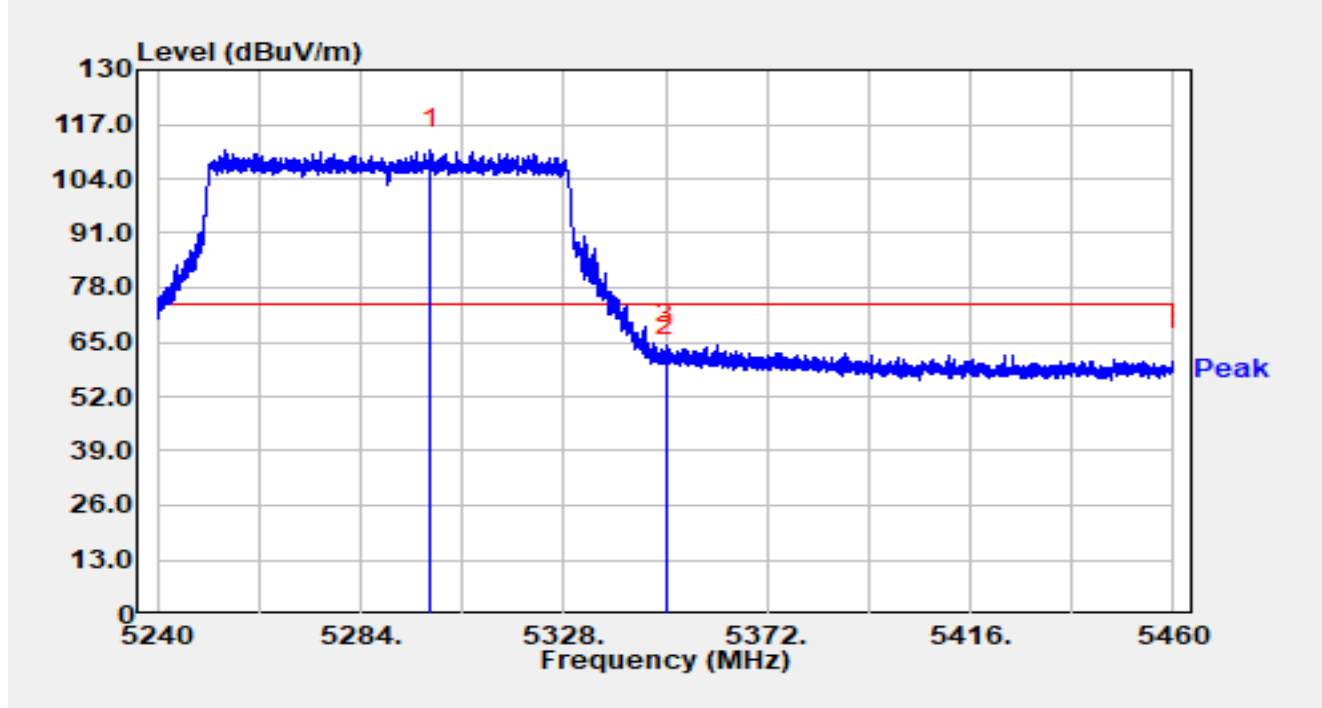


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5299.114	95.34	15.77	111.11	N/A	N/A	Peak
2		5350.000	45.80	15.68	61.48	-12.52	74.00	Peak
3	*	5350.242	48.59	15.68	64.27	-9.73	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

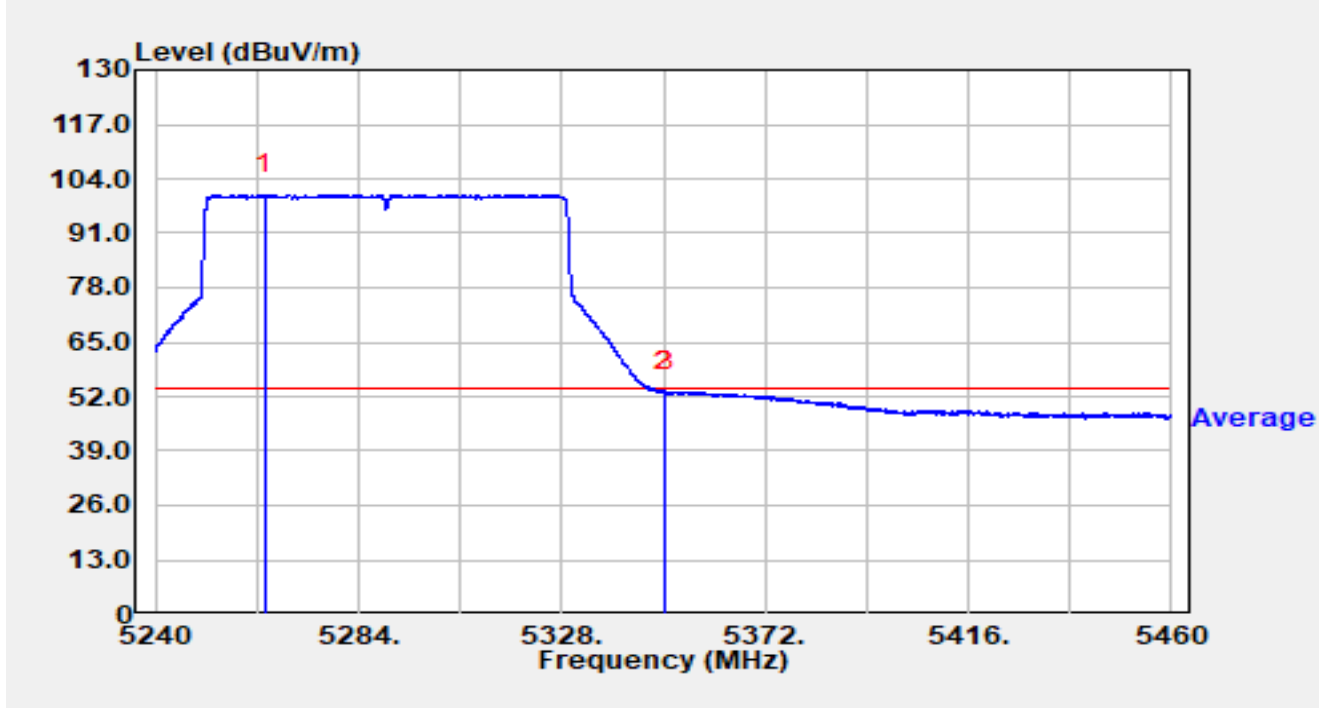


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5263.738	84.39	15.90	100.29	N/A	N/A	Average
2		5350.000	37.45	15.68	53.13	-0.87	54.00	Average
3	*	5350.352	37.59	15.68	53.27	-0.73	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

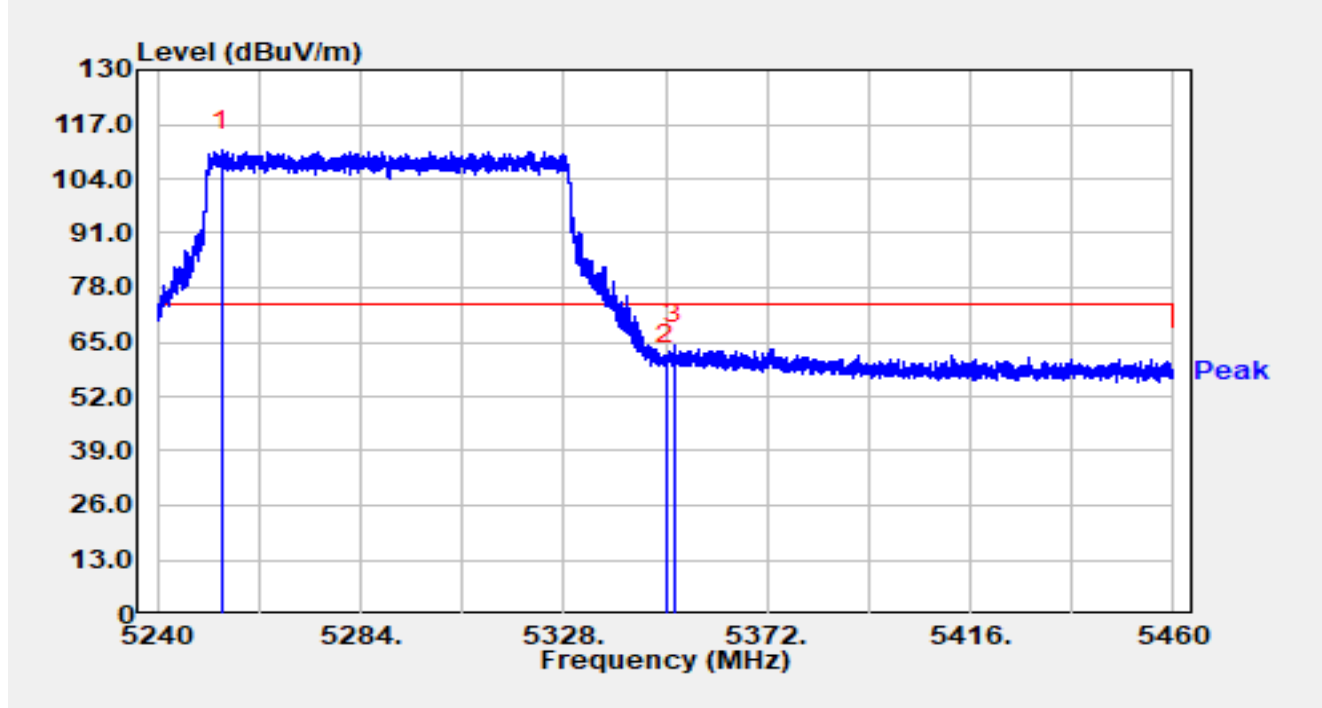


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5253.882	94.76	15.95	110.71	N/A	N/A	Peak
2		5350.000	44.01	15.68	59.69	-14.31	74.00	Peak
3	*	5351.870	48.59	15.68	64.27	-9.73	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

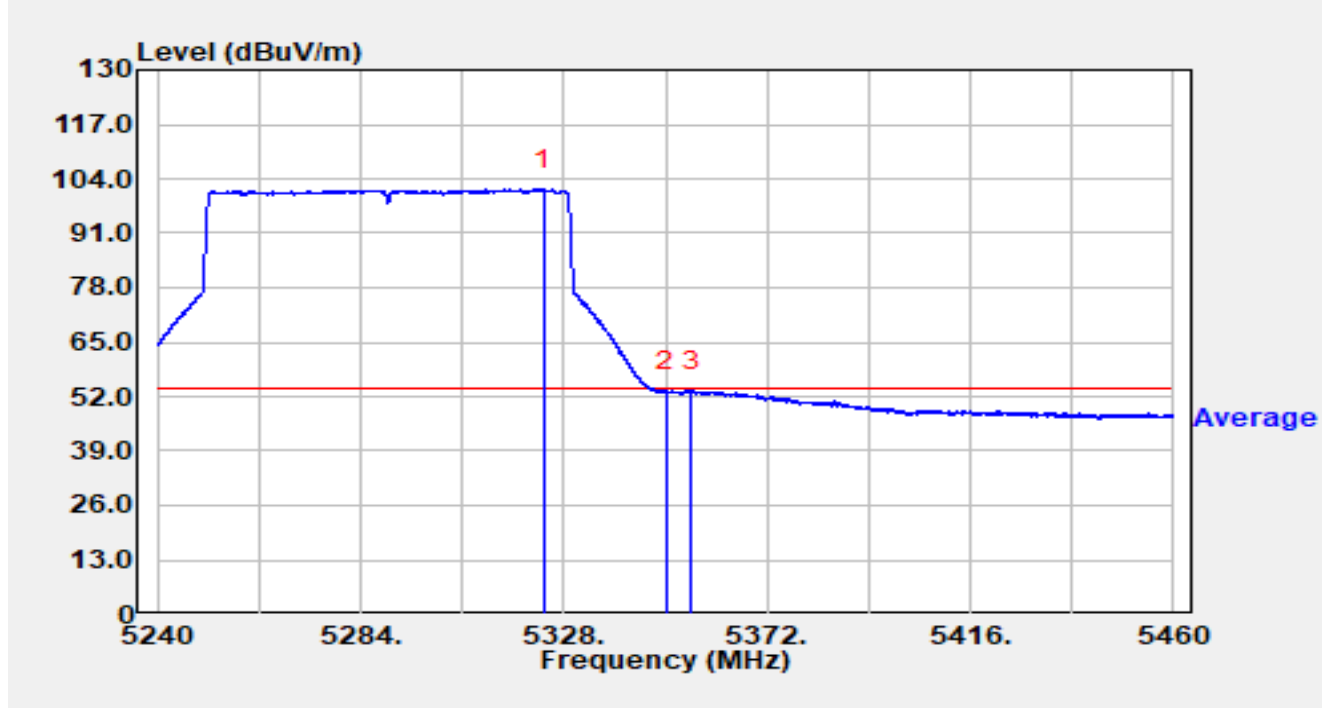


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.666	85.71	15.80	101.50	N/A	N/A	Average
2		5350.000	37.58	15.68	53.26	-0.74	54.00	Average
3	*	5355.676	37.72	15.66	53.38	-0.62	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

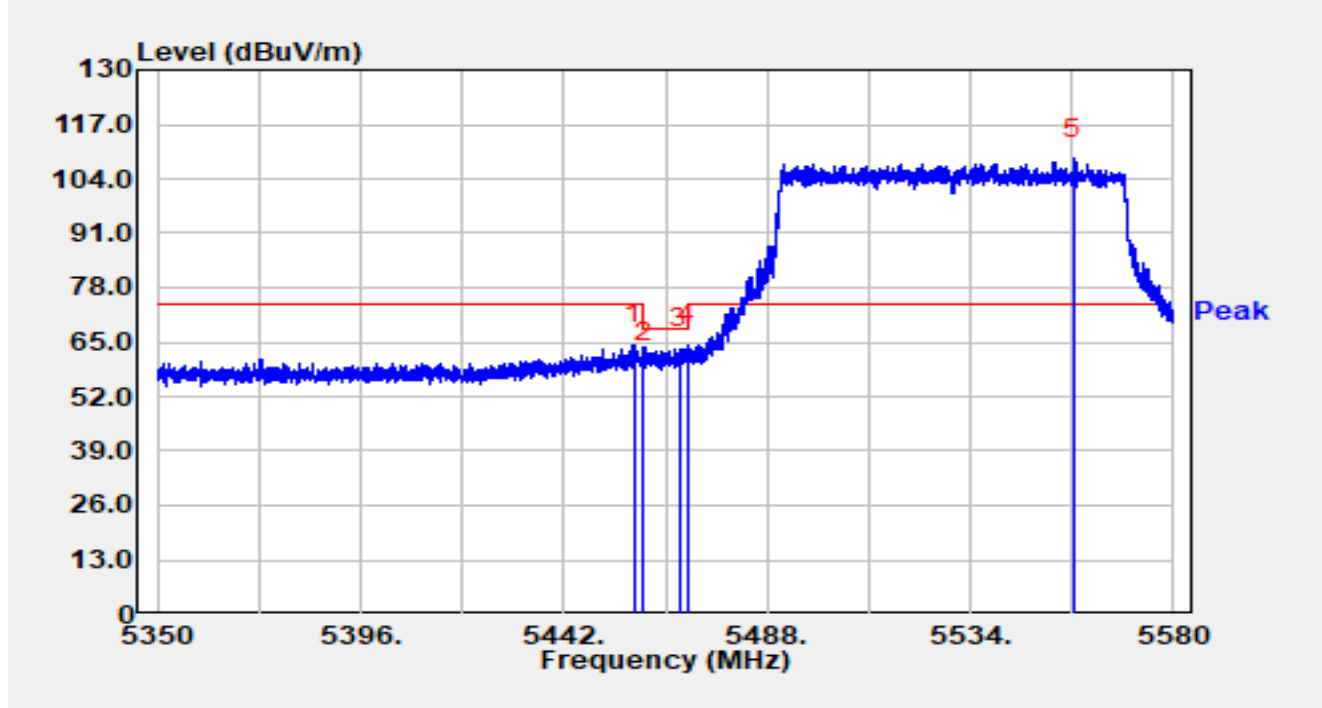


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.778	48.36	16.03	64.39	-9.61	74.00	Peak
2		5460.009	43.85	16.02	59.87	-8.33	68.20	Peak
3		5468.082	47.41	15.99	63.40	-4.80	68.20	Peak
4	*	5470.000	48.40	15.98	64.38	-3.82	68.20	Peak
5		5557.460	92.40	16.31	108.71	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

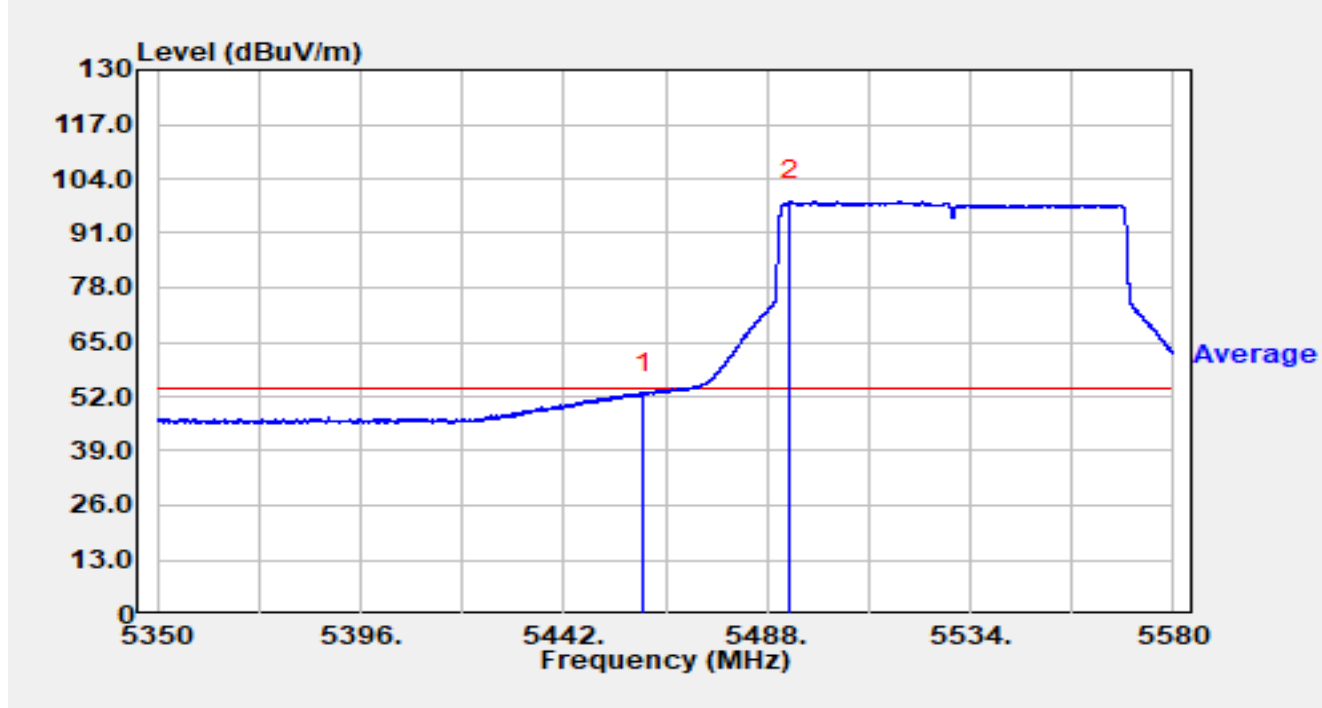


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.009	36.61	16.02	52.63	-1.37	54.00	Average
2		5493.290	82.57	16.11	98.68	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

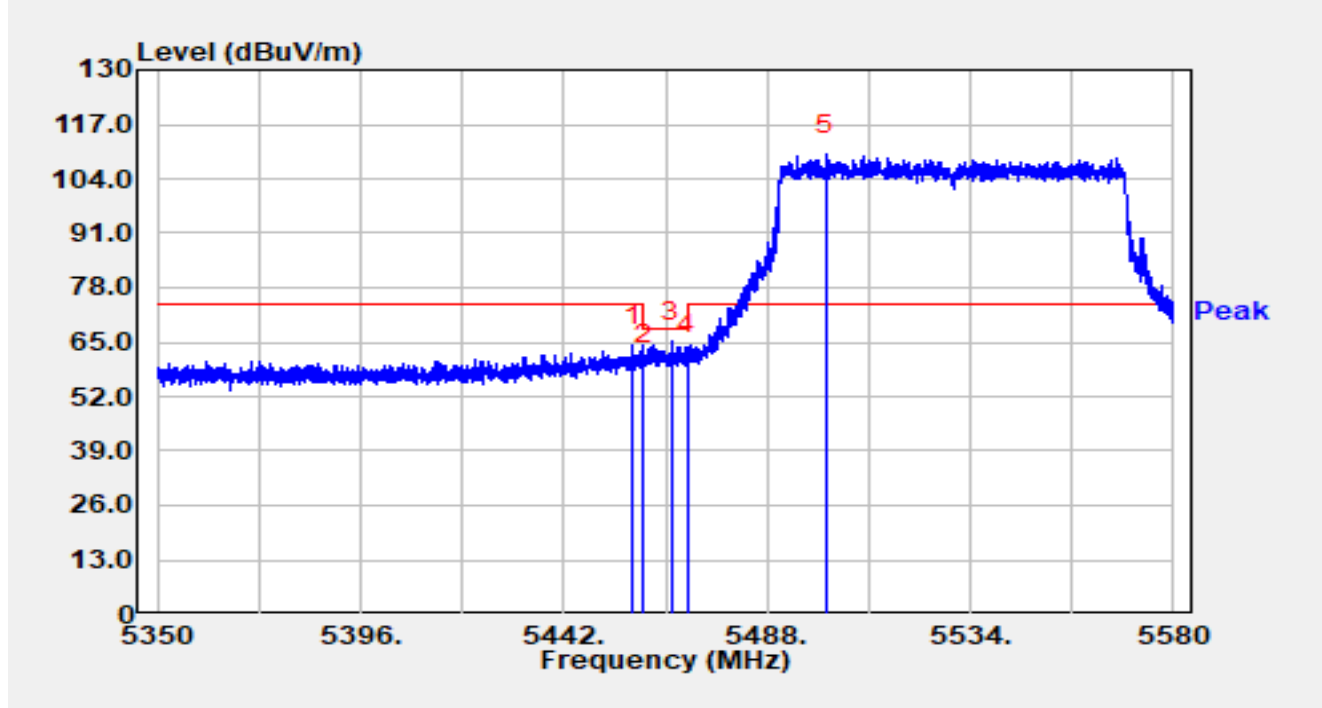


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.594	48.17	16.03	64.20	-9.80	74.00	Peak
2		5460.009	43.63	16.02	59.65	-8.55	68.20	Peak
3	*	5466.426	49.06	16.00	65.06	-3.14	68.20	Peak
4		5470.000	46.05	15.98	62.03	-6.17	68.20	Peak
5		5501.340	93.51	16.19	109.70	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5530MHz		

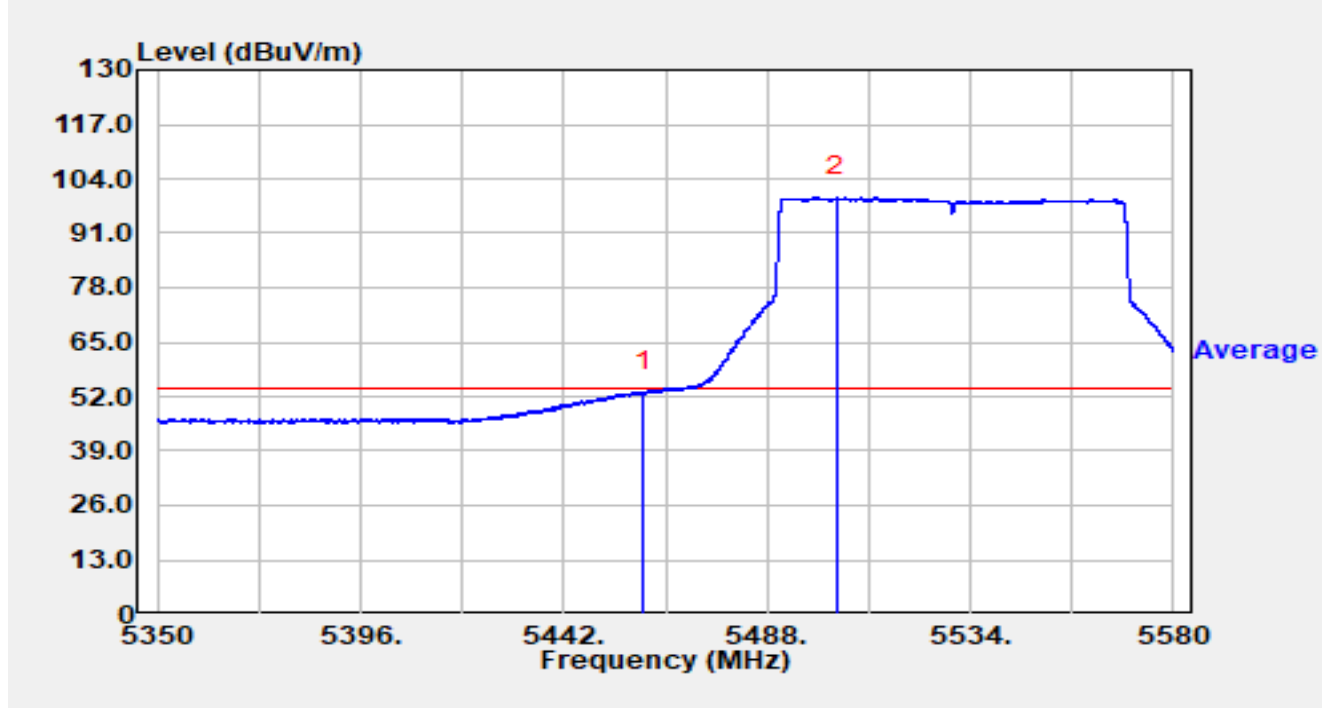


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.000	36.99	16.02	53.01	-0.99	54.00	Average
2		5503.709	83.50	16.22	99.72	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

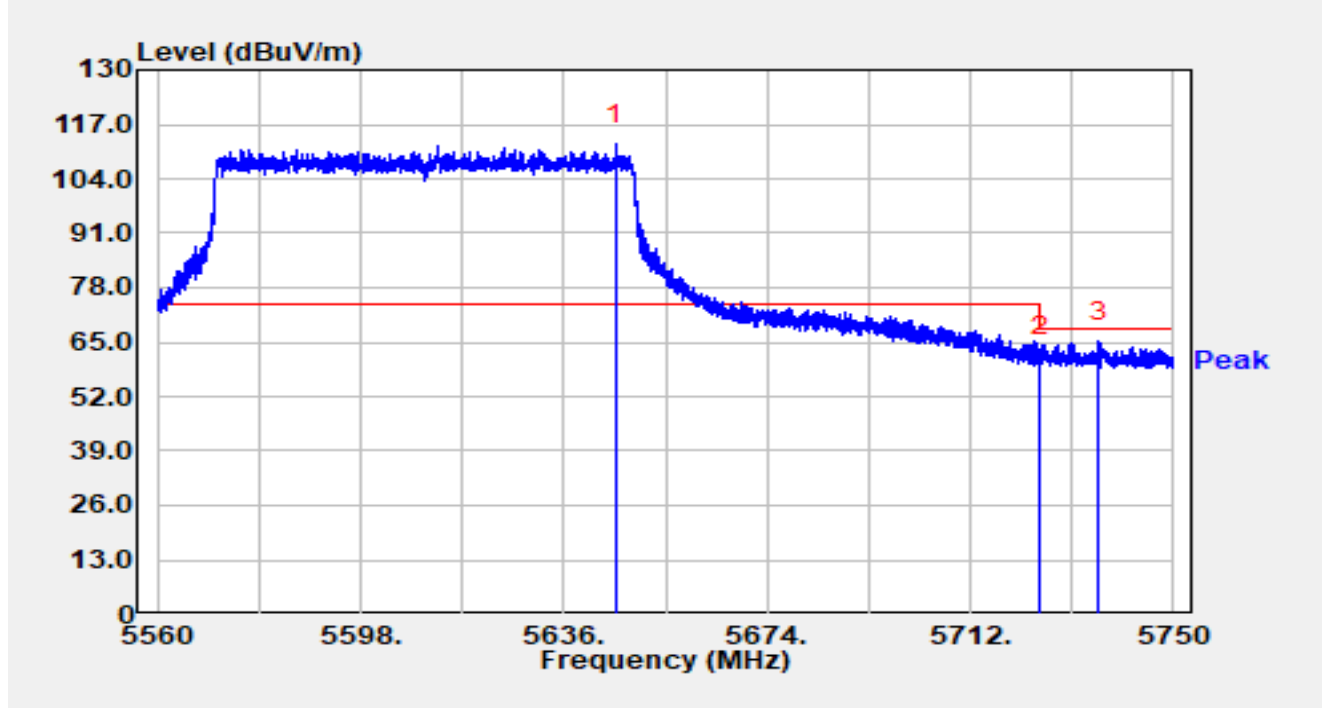


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5645.671	95.68	16.63	112.32	N/A	N/A	Peak
2		5724.996	44.60	16.92	61.52	-12.48	74.00	Peak
3	*	5736.111	48.07	16.95	65.01	-3.19	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

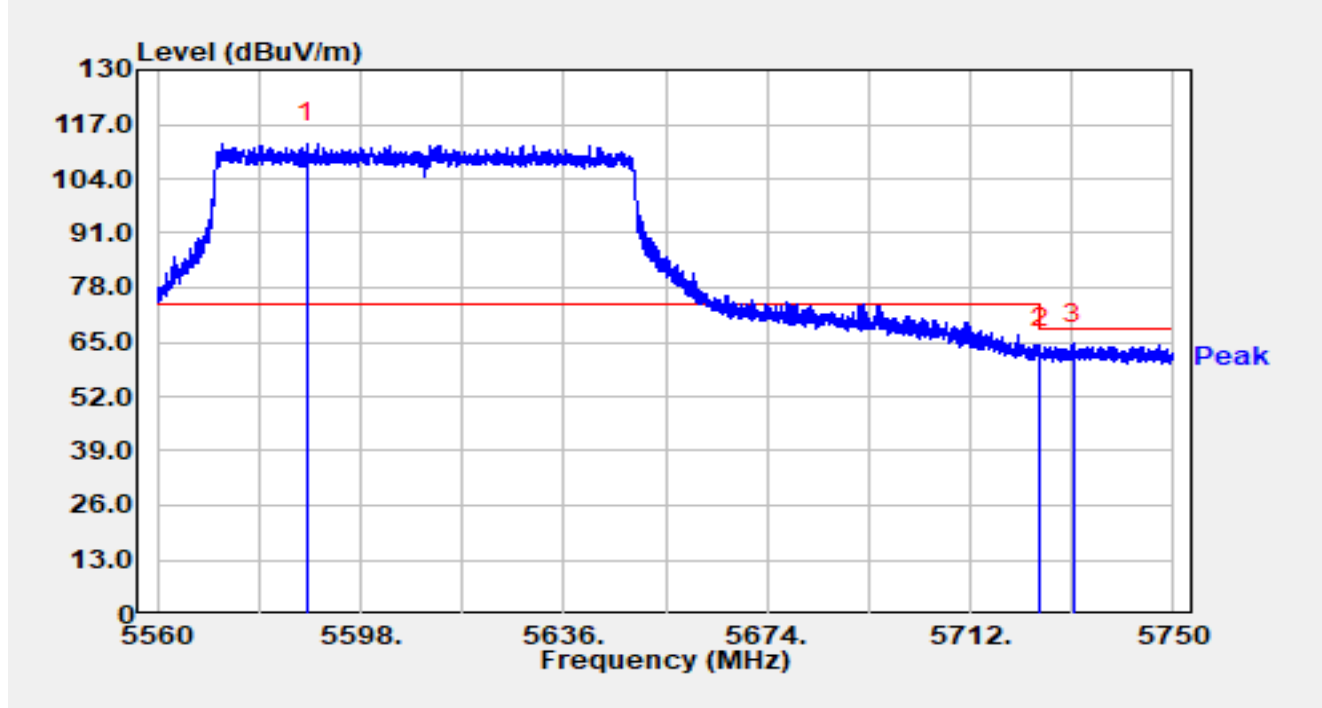


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5587.854	96.09	16.41	112.51	N/A	N/A	Peak
2		5725.000	46.70	16.92	63.62	-4.58	68.20	Peak
3	*	5731.304	47.80	16.94	64.74	-3.46	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

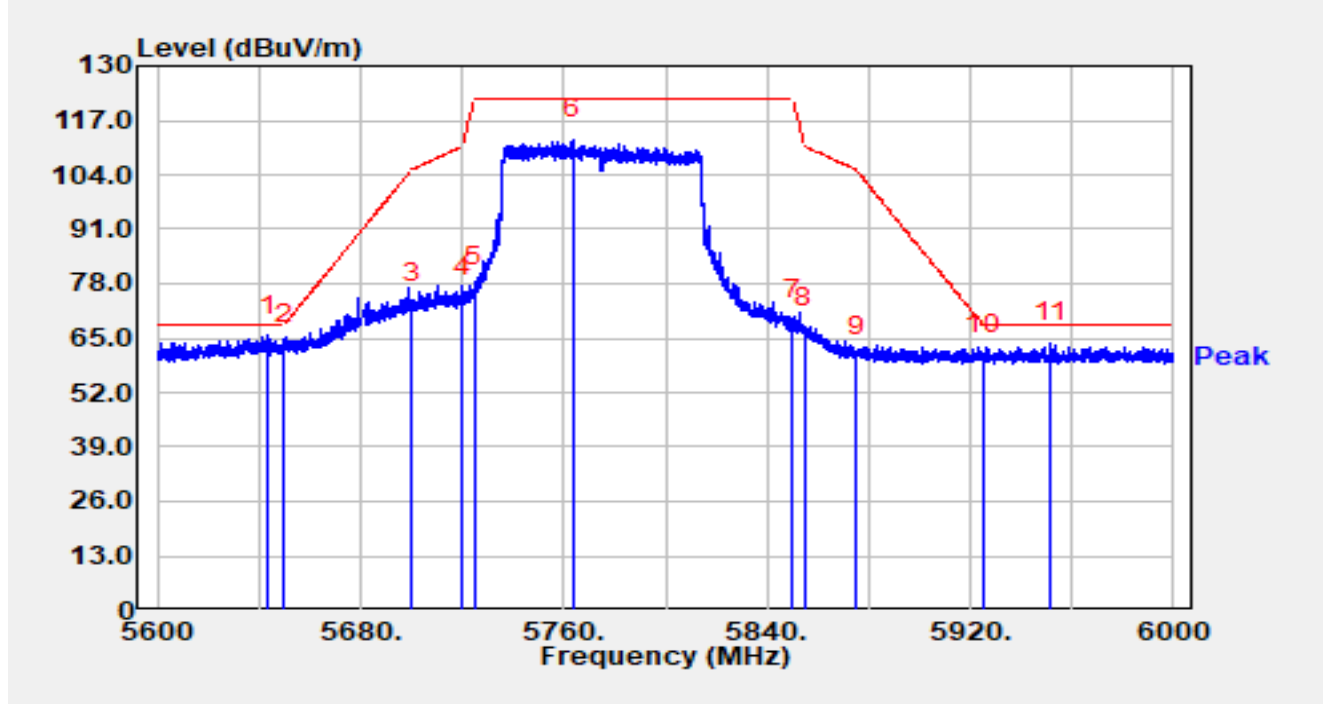


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5643.440	49.09	16.62	65.72	-2.48	68.20	Peak
2		5650.000	46.85	16.65	63.51	-4.69	68.20	Peak
3		5700.000	56.33	16.81	73.15	-32.05	105.20	Peak
4		5720.000	57.92	16.90	74.82	-35.98	110.80	Peak
5		5725.000	60.21	16.92	77.13	-45.07	122.20	Peak
6		5763.400	95.38	17.07	112.46	N/A	N/A	Peak
7		5850.000	51.86	17.31	69.17	-53.03	122.20	Peak
8		5855.000	50.10	17.32	67.42	-43.38	110.80	Peak
9		5875.000	43.36	17.38	60.74	-44.46	105.20	Peak
10		5925.000	43.61	17.36	60.97	-7.23	68.20	Peak
11		5951.840	46.39	17.45	63.84	-4.36	68.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

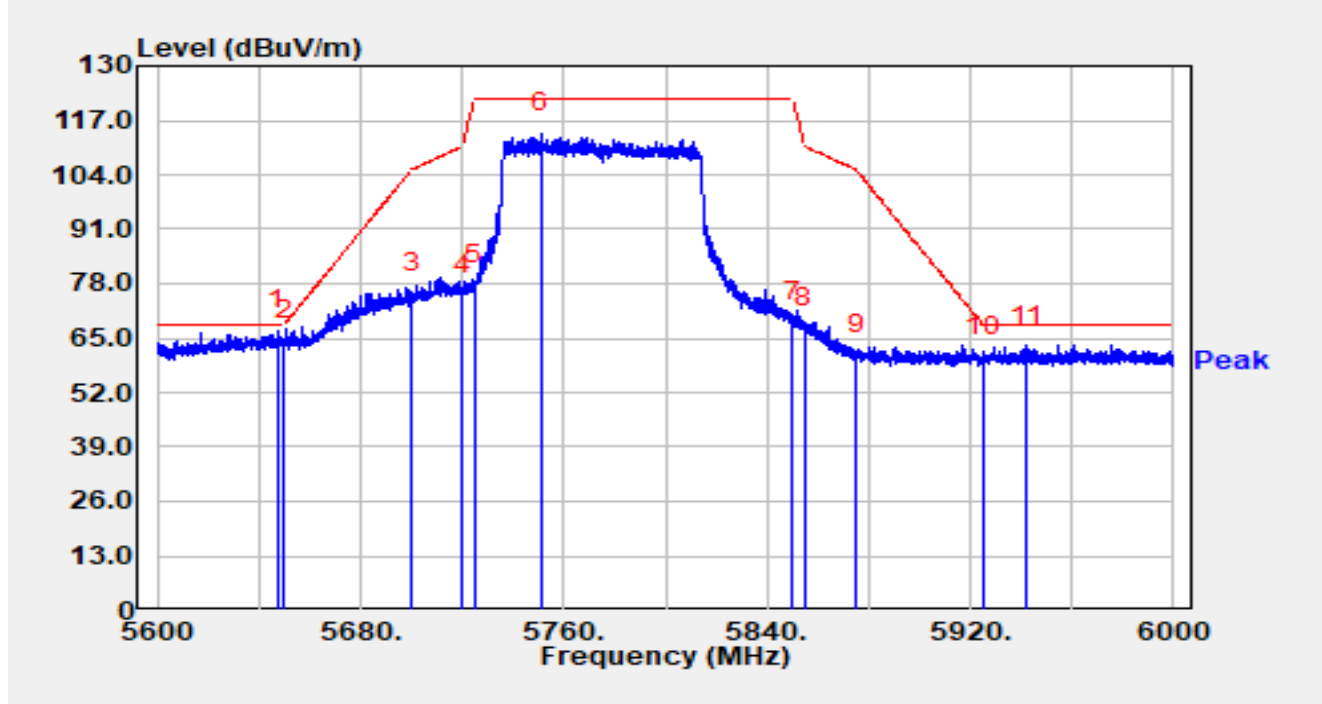


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.400	50.31	16.64	66.95	-1.25	68.20	Peak
2		5650.000	47.87	16.65	64.52	-3.68	68.20	Peak
3		5700.000	58.86	16.81	75.68	-29.52	105.20	Peak
4		5720.000	58.41	16.90	75.31	-35.49	110.80	Peak
5		5725.000	60.78	16.92	77.70	-44.50	122.20	Peak
6		5751.200	96.89	17.00	113.89	N/A	N/A	Peak
7		5850.000	51.66	17.31	68.98	-53.22	122.20	Peak
8		5855.000	49.90	17.32	67.23	-43.57	110.80	Peak
9		5875.000	43.55	17.38	60.93	-44.27	105.20	Peak
10		5925.000	43.27	17.36	60.64	-7.56	68.20	Peak
11		5942.000	45.73	17.43	63.15	-5.05	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5250MHz		

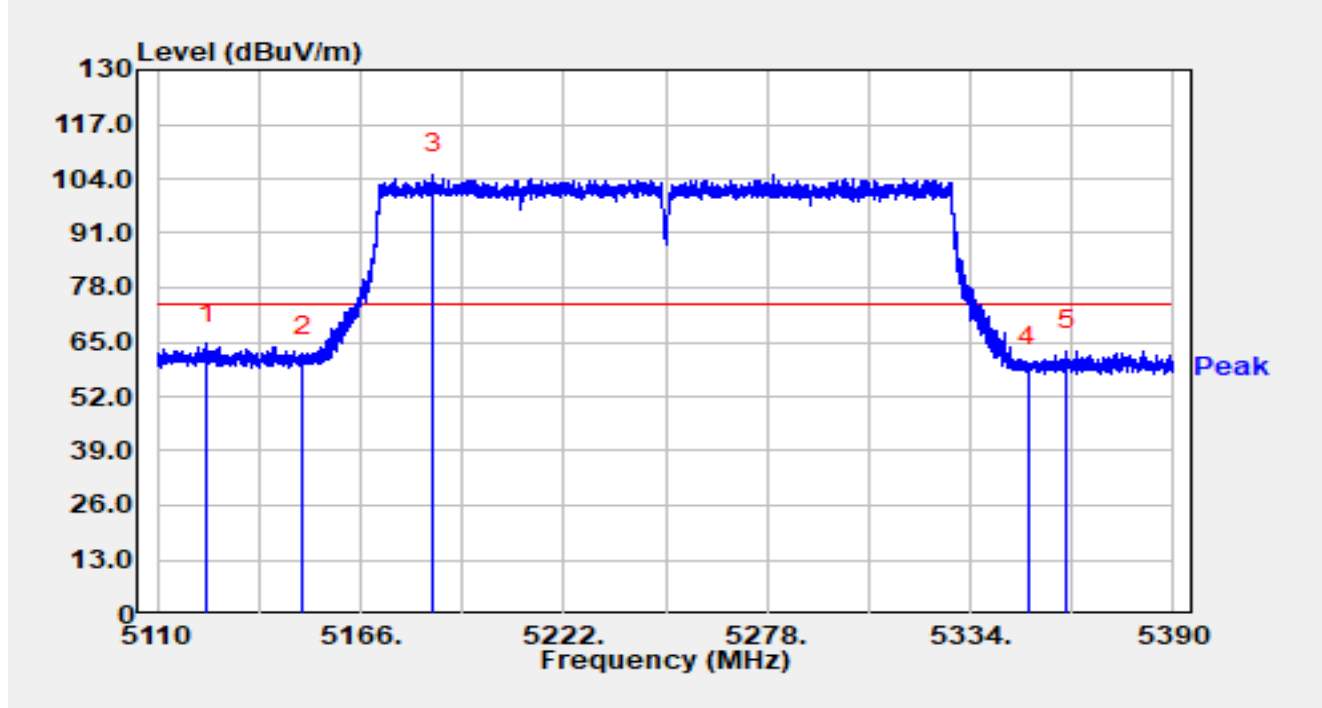


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.524	48.58	16.05	64.62	-9.38	74.00	Peak
2		5150.000	45.66	16.00	61.65	-12.35	74.00	Peak
3		5185.824	89.05	15.94	104.99	N/A	N/A	Peak
4		5350.000	43.67	15.68	59.35	-14.65	74.00	Peak
5		5360.544	47.32	15.65	62.96	-11.04	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5250MHz		

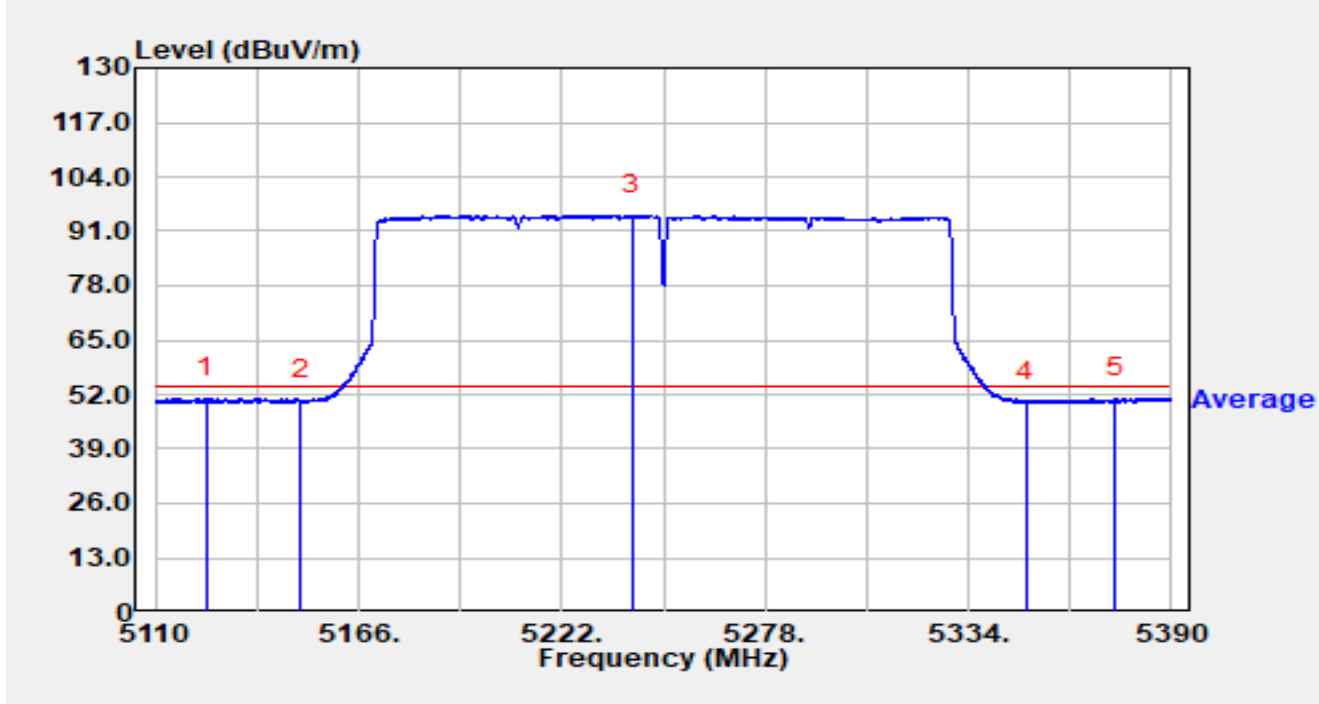


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.860	35.19	16.04	51.23	-2.77	54.00	Average
2		5150.000	34.68	16.00	50.68	-3.32	54.00	Average
3		5241.404	78.73	15.97	94.70	N/A	N/A	Average
4		5350.000	34.63	15.68	50.31	-3.69	54.00	Average
5		5374.348	35.48	15.63	51.11	-2.89	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5250MHz		

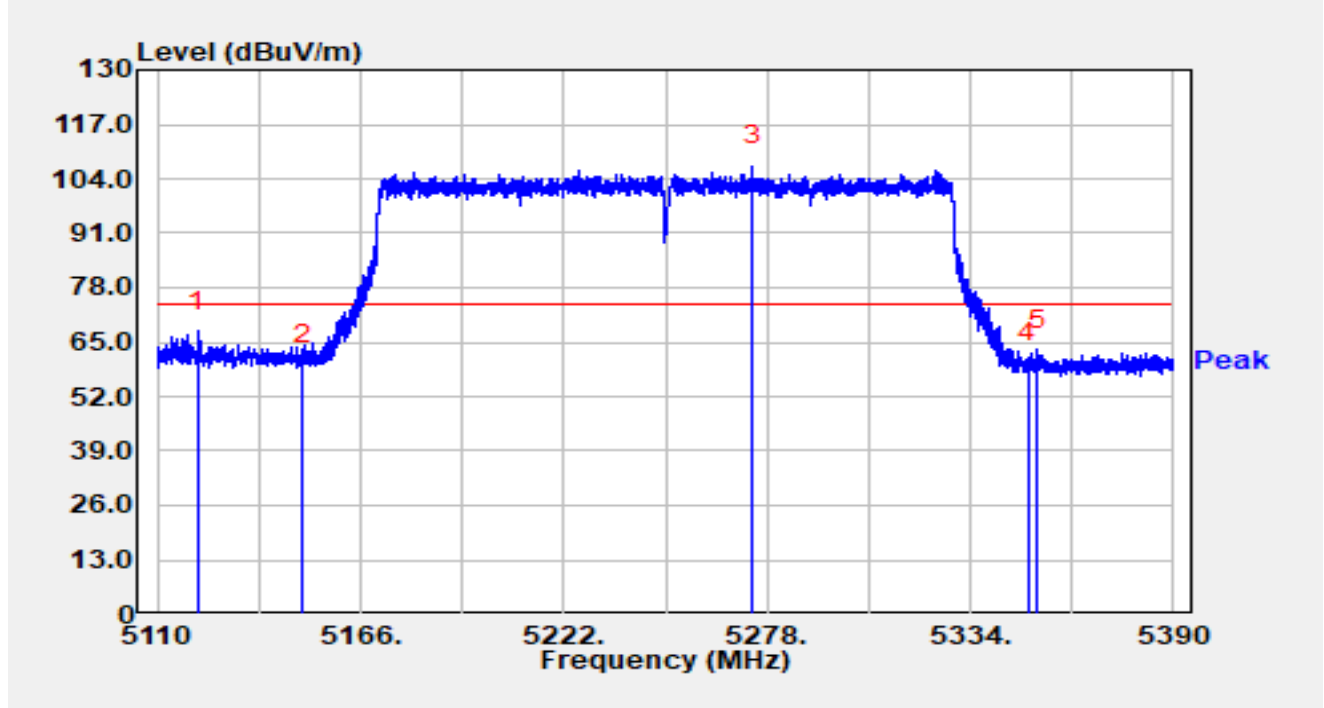


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5121.172	51.45	16.07	67.52	-6.48	74.00	Peak
2		5150.000	43.63	16.00	59.62	-14.38	74.00	Peak
3		5273.996	91.14	15.83	106.98	N/A	N/A	Peak
4		5350.000	44.52	15.68	60.20	-13.80	74.00	Peak
5		5352.480	47.58	15.68	63.25	-10.75	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5250MHz		

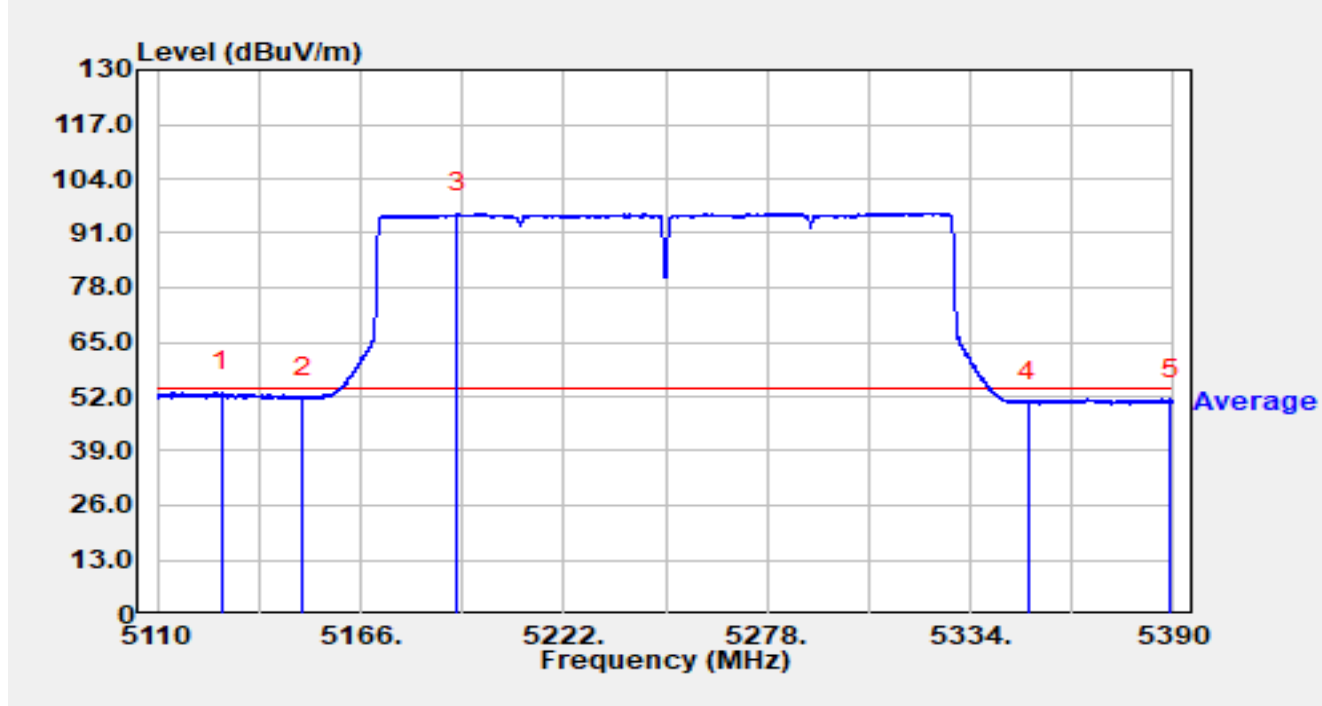


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5127.668	37.16	16.00	53.16	-0.84	54.00	Average
2		5150.000	35.81	16.00	51.81	-2.19	54.00	Average
3		5192.740	79.94	15.96	95.89	N/A	N/A	Average
4		5349.988	35.02	15.68	50.70	-3.30	54.00	Average
5		5389.188	35.68	15.67	51.35	-2.65	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5570MHz		

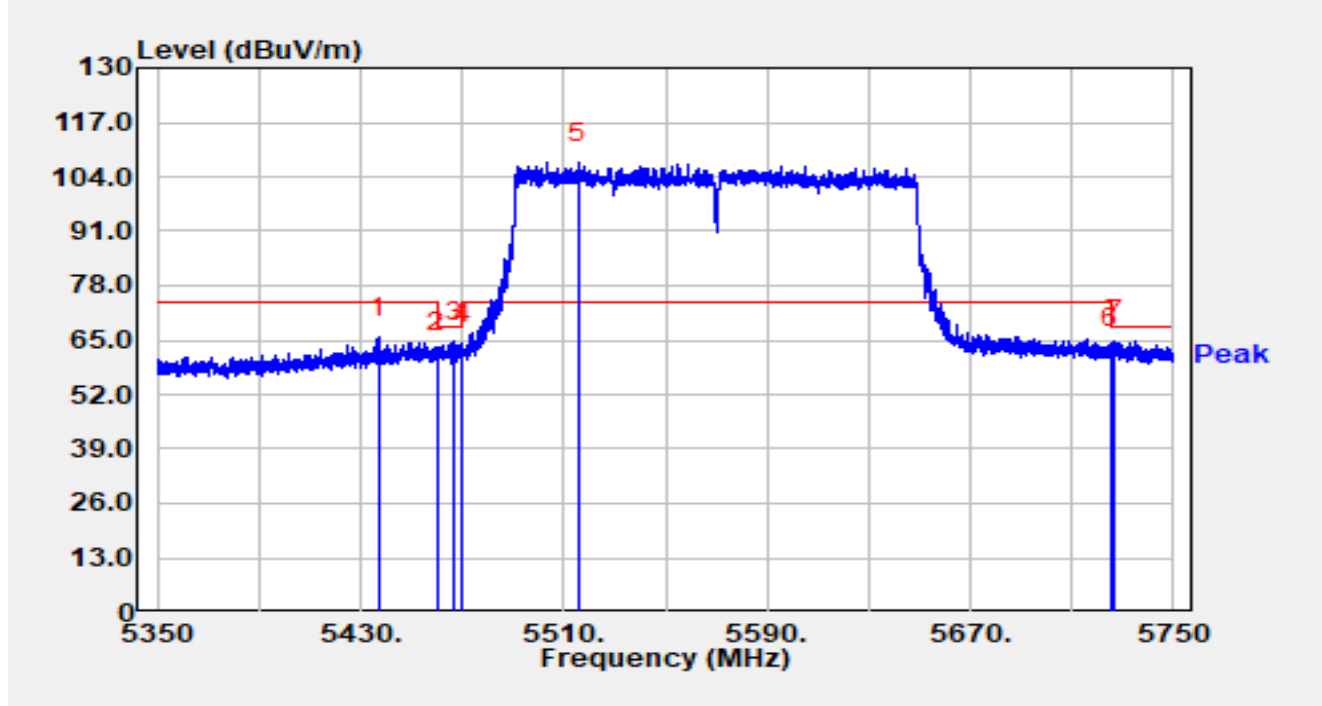


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.840	49.80	15.85	65.64	-8.36	74.00	Peak
2		5460.000	46.00	16.02	62.03	-6.17	68.20	Peak
3		5467.080	48.52	15.99	64.51	-3.69	68.20	Peak
4		5470.000	47.82	15.98	63.80	-4.40	68.20	Peak
5		5515.760	91.16	16.19	107.35	N/A	N/A	Peak
6		5725.000	46.26	16.92	63.19	-5.01	68.20	Peak
7	*	5726.840	47.84	16.93	64.77	-3.43	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5570MHz		

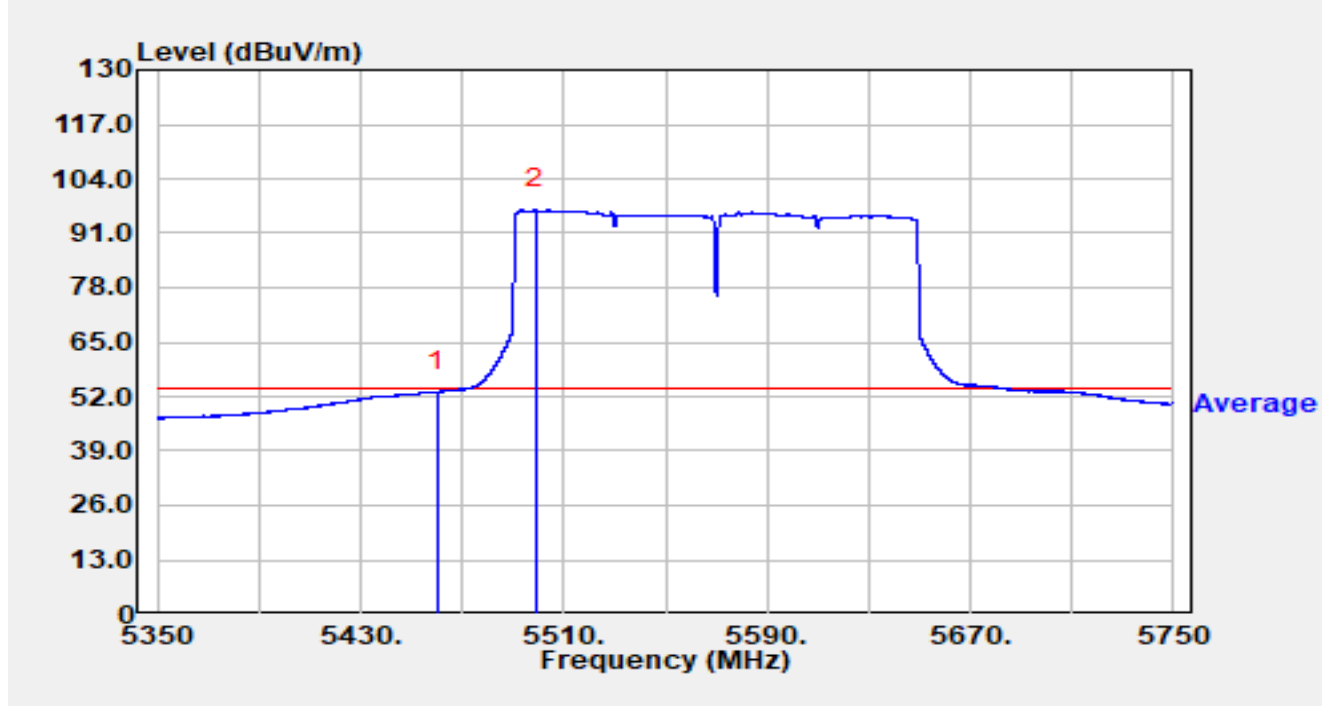


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	37.05	16.02	53.07	-0.93	54.00	Average
2		5498.680	80.48	16.16	96.64	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5570MHz		

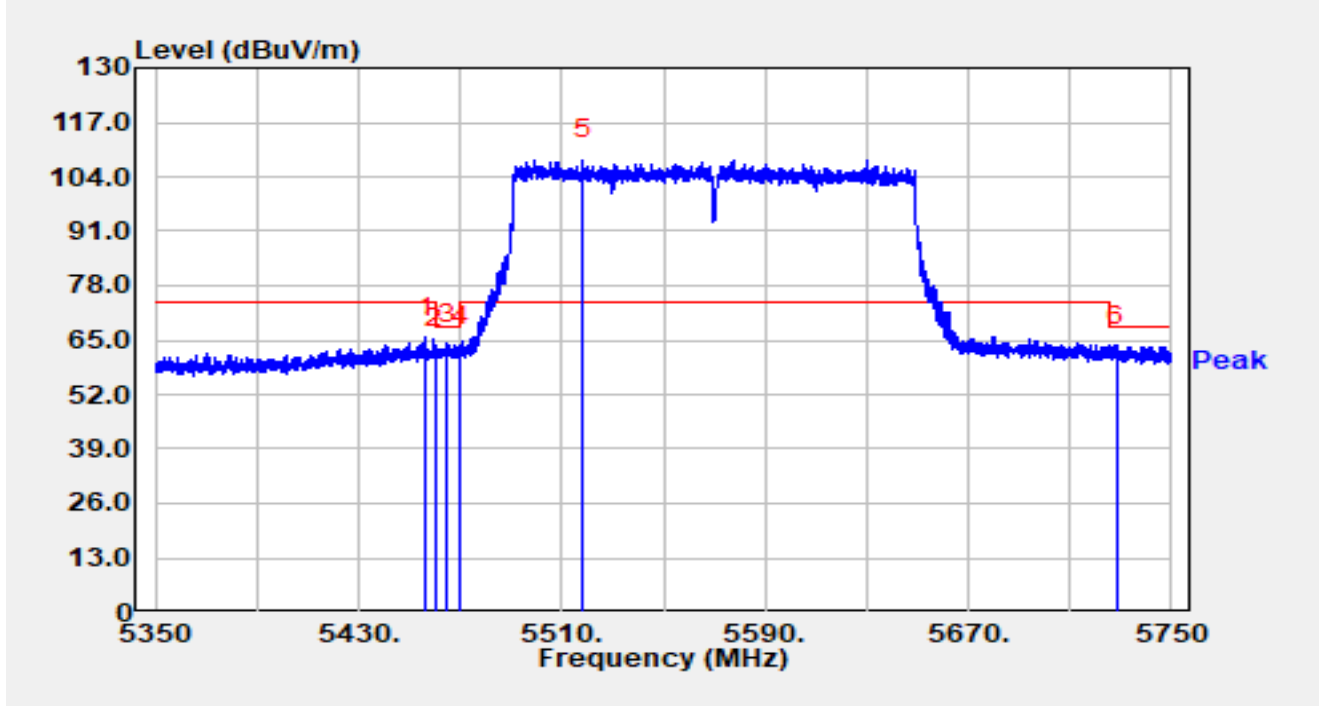


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.360	49.62	16.04	65.65	-8.35	74.00	Peak
2		5460.000	46.96	16.02	62.98	-5.22	68.20	Peak
3	*	5464.600	48.25	16.00	64.25	-3.95	68.20	Peak
4		5470.000	47.49	15.98	63.47	-4.73	68.20	Peak
5		5518.240	91.86	16.18	108.04	N/A	N/A	Peak
6		5728.240	46.79	16.93	63.72	-4.48	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-11
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5570MHz		

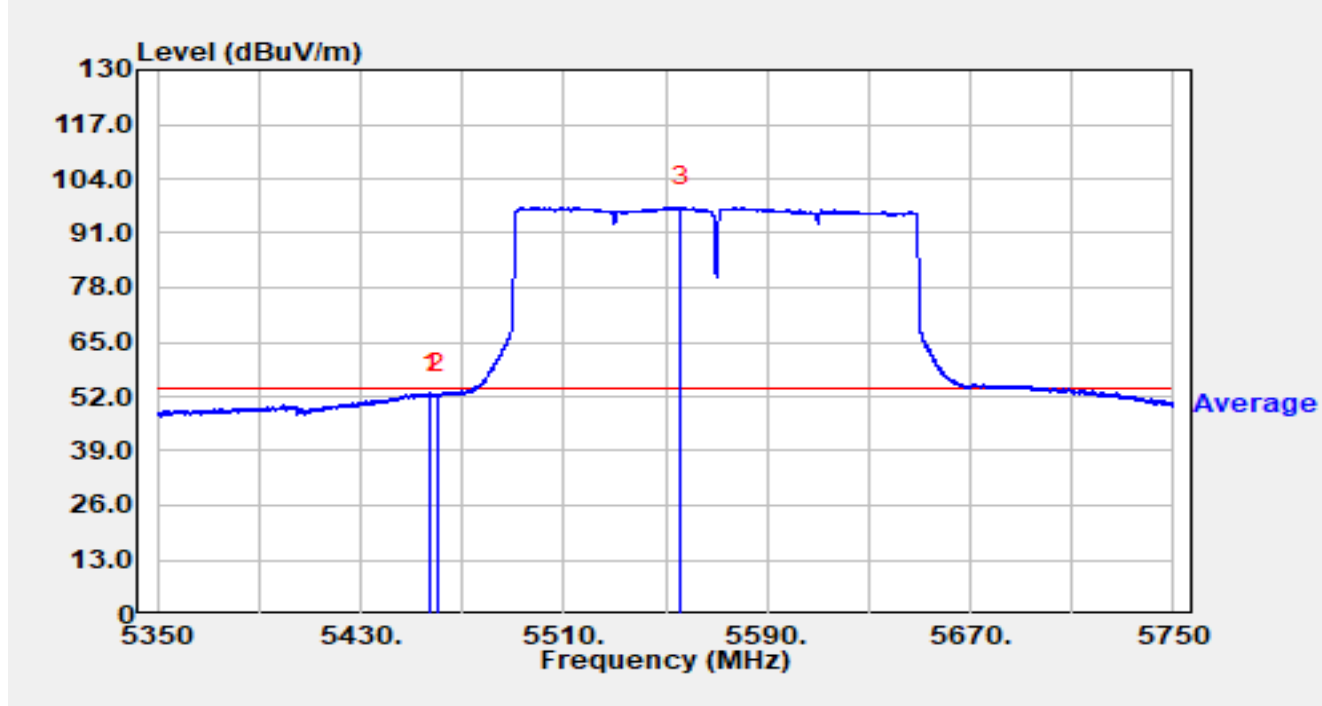


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.600	36.75	16.03	52.78	-1.22	54.00	Average
2		5460.000	36.53	16.02	52.55	-1.45	54.00	Average
3		5556.120	80.85	16.30	97.15	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WJ-SR5	Test Date	2025-03-19
Temperature	19.2 °C	Humidity	33.6 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_L1_Filter Off_E	Polarity	Line1
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

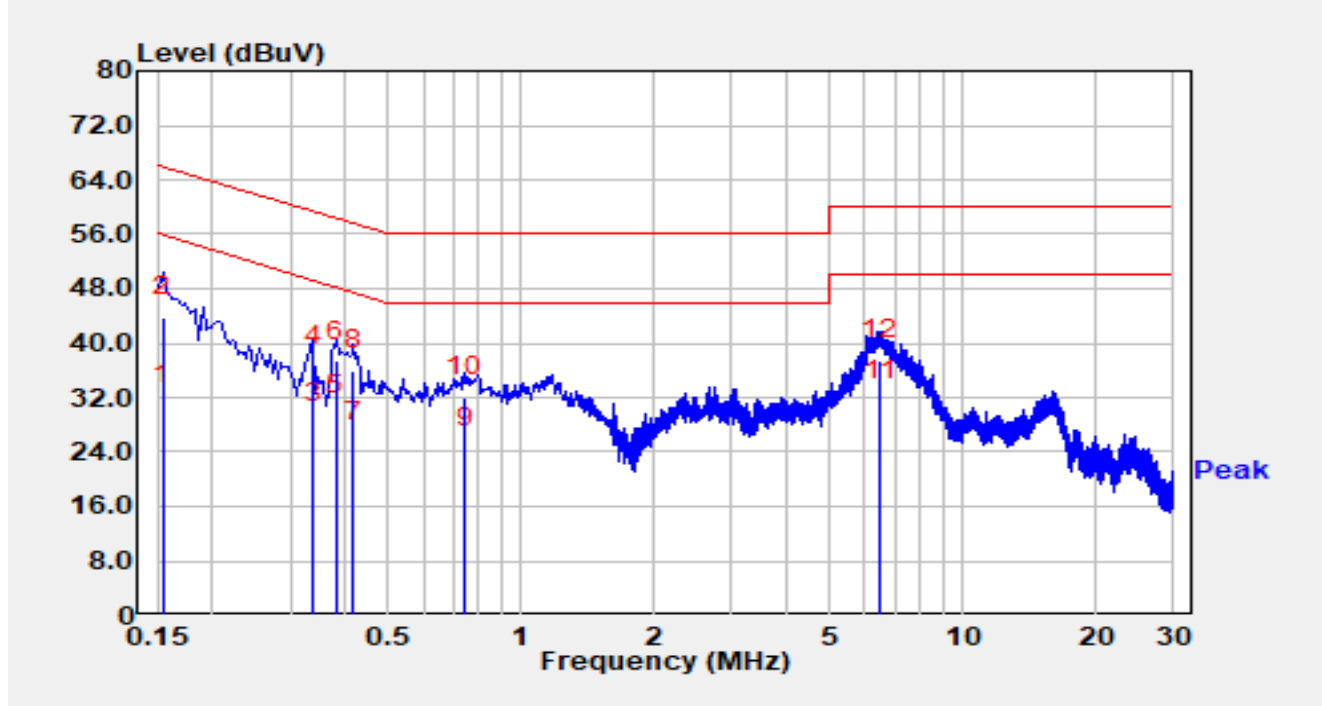


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	20.91	9.89	30.80	-24.98	55.78	Average
2		0.154	33.96	9.89	43.85	-21.93	65.78	QP
3		0.338	18.28	9.91	28.19	-21.06	49.25	Average
4		0.338	26.82	9.91	36.73	-22.52	59.25	QP
5		0.382	19.57	9.92	29.49	-18.74	48.24	Average
6		0.382	27.41	9.92	37.33	-20.90	58.24	QP
7		0.418	15.46	9.93	25.39	-22.09	47.49	Average
8		0.418	26.09	9.93	36.02	-21.46	57.49	QP
9		0.746	14.51	10.07	24.58	-21.42	46.00	Average
10		0.746	21.97	10.07	32.04	-23.96	56.00	QP
11	*	6.498	21.13	10.48	31.61	-18.39	50.00	Average
12		6.498	26.96	10.48	37.44	-22.56	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WJ-SR5	Test Date	2025-03-19
Temperature	19.2 °C	Humidity	33.6 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_N_Filter Off_E	Polarity	Neutral
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

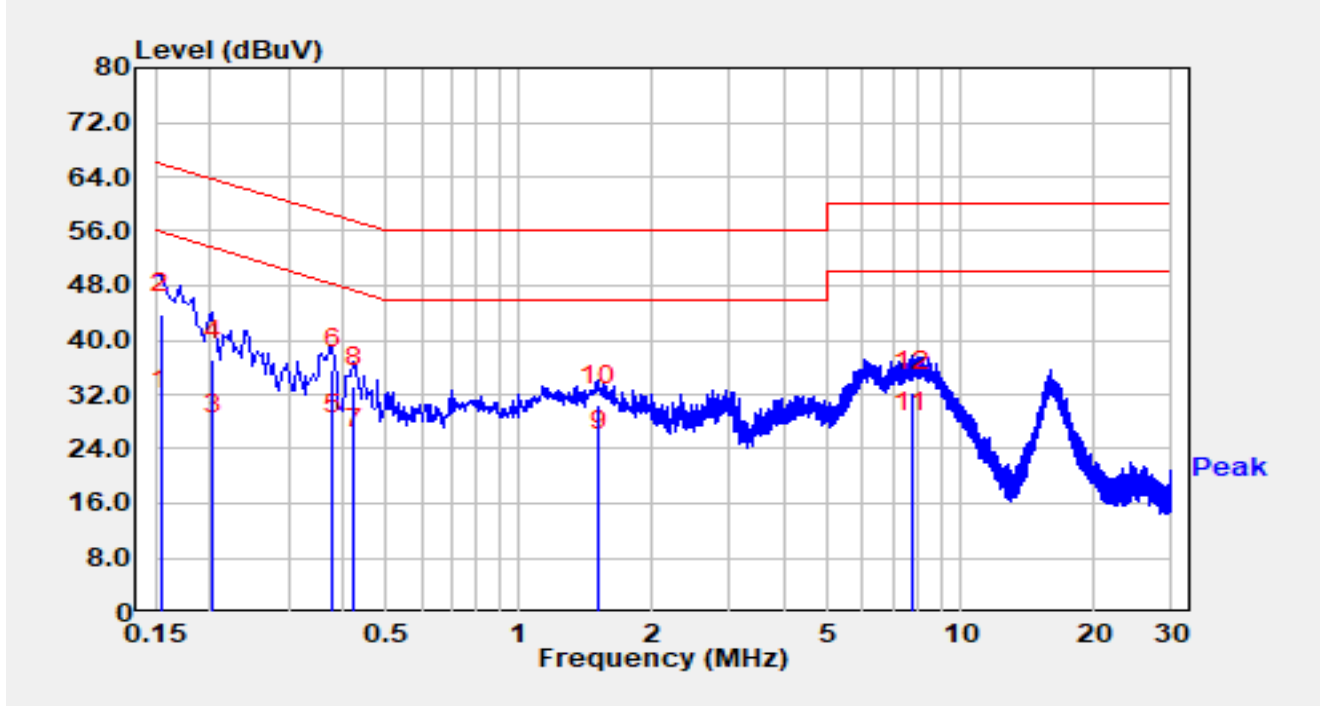

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	19.96	9.90	29.86	-25.92	55.78	Average
2	*	0.154	33.97	9.90	43.87	-21.91	65.78	QP
3		0.202	16.14	9.89	26.03	-27.50	53.53	Average
4		0.202	27.13	9.89	37.02	-26.51	63.53	QP
5		0.378	16.06	9.94	26.00	-22.33	48.32	Average
6		0.378	25.75	9.94	35.69	-22.64	58.32	QP
7		0.422	14.10	9.95	24.05	-23.36	47.41	Average
8		0.422	23.18	9.95	33.13	-24.28	57.41	QP
9		1.518	13.46	10.22	23.68	-22.32	46.00	Average
10		1.518	20.16	10.22	30.38	-25.62	56.00	QP
11		7.725	15.78	10.67	26.45	-23.55	50.00	Average
12		7.725	21.67	10.67	32.34	-27.66	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Appendix B – Test Setup Photograph

Refer to “R25S1037020-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1037020-UE” file.

The End
